



Operation Frequency Range of 20dB Bandwidth within Hopping Mode


DH5 - Channel 00 (2402MHz)

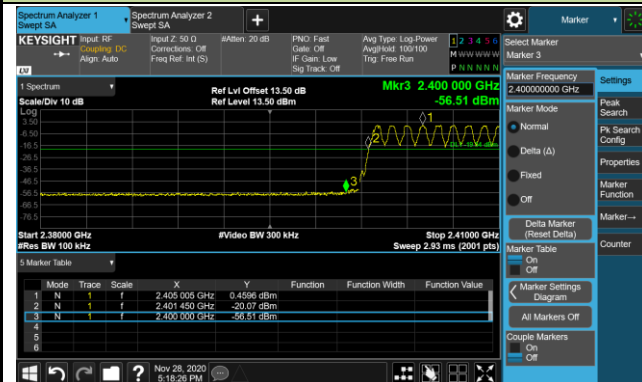


DH5 - Channel 78 (2480MHz)

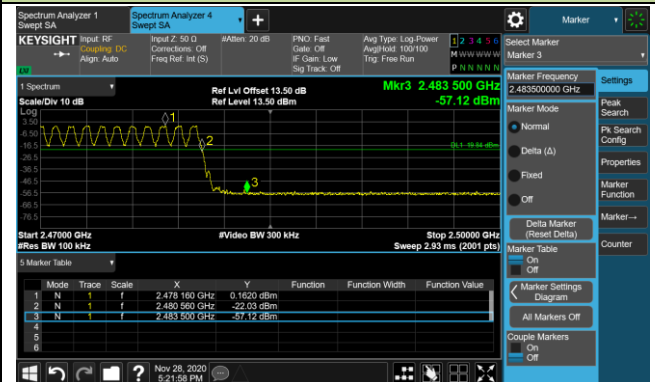


2DH5 - Channel 00 (2402MHz)

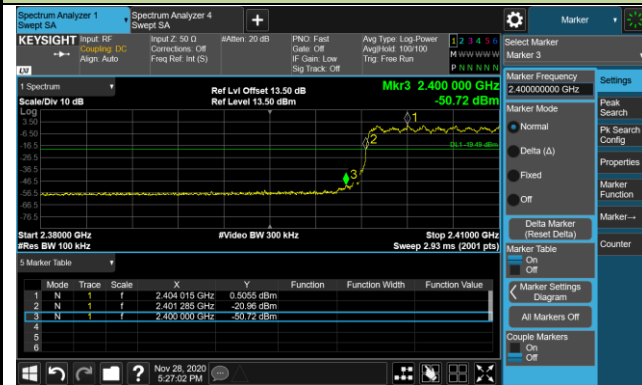


2DH5 - Channel 78 (2480MHz)

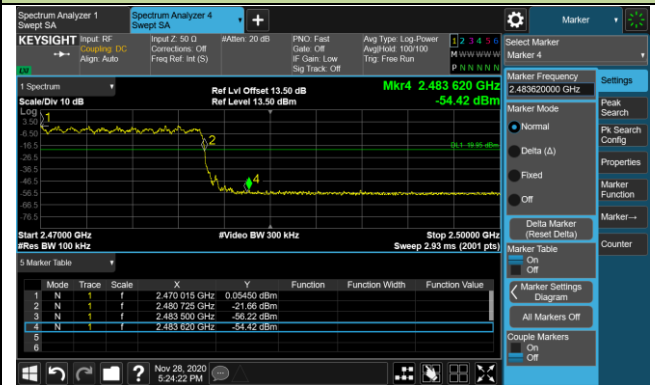

3DH5 - Channel 00 (2402MHz)

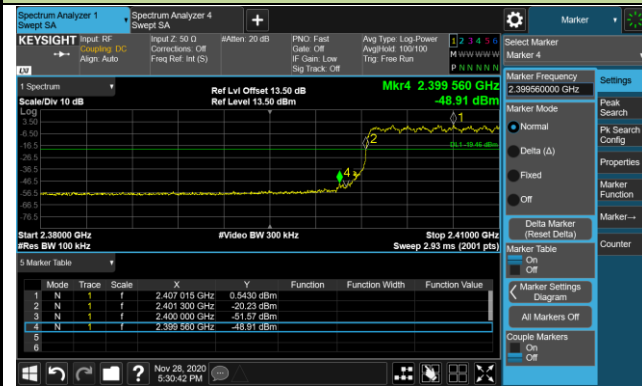

3DH5 - Channel 78 (2480MHz)

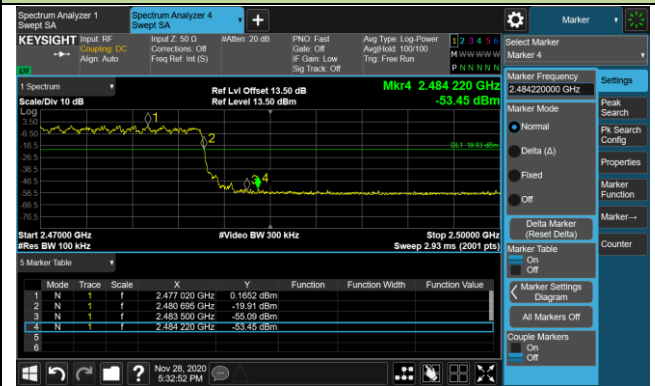

6.8. Conducted Spurious Emissions Measurement

6.8.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


6.8.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.8

6.8.3. Test Setting

1. Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize
8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

6.8.4. Test Setup

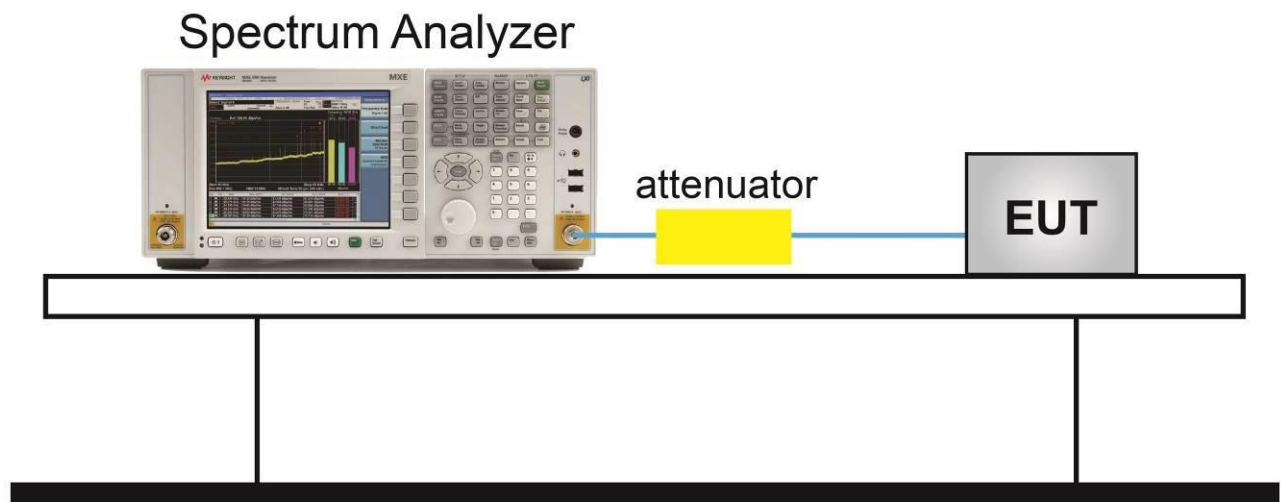


6.8.5. Test Result

Product	Bluetooth Stereo Headphones	Test Engineer	Amy Zhang
Test Site	TR3	Test Date	2020/11/28


Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass

DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

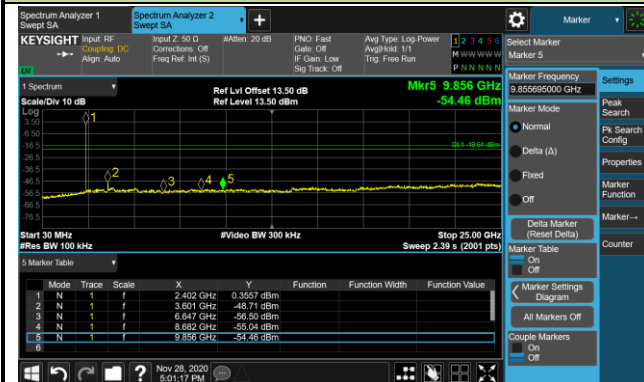

Channel 39 (2441MHz)

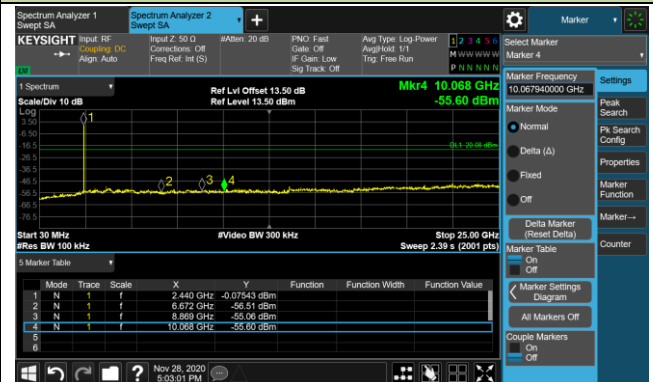


Channel 78 (2480MHz)

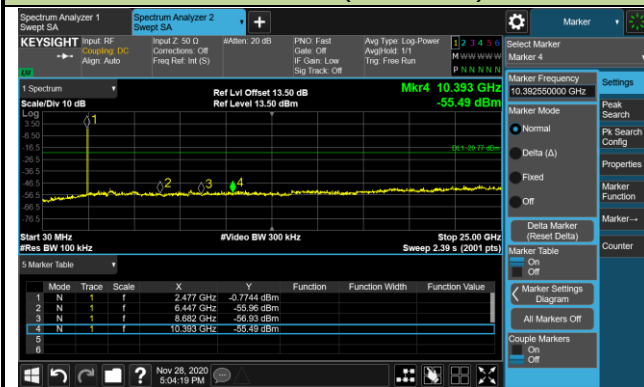


2DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

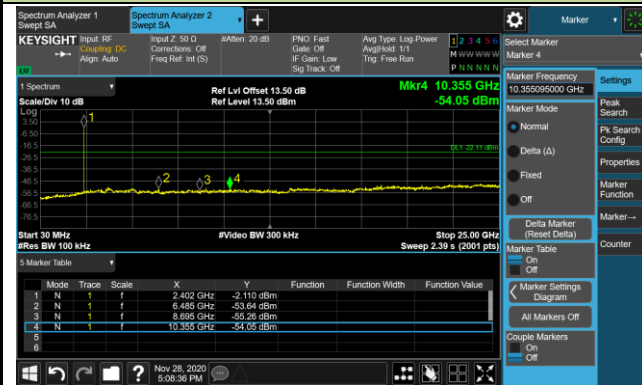

Channel 39 (2441MHz)

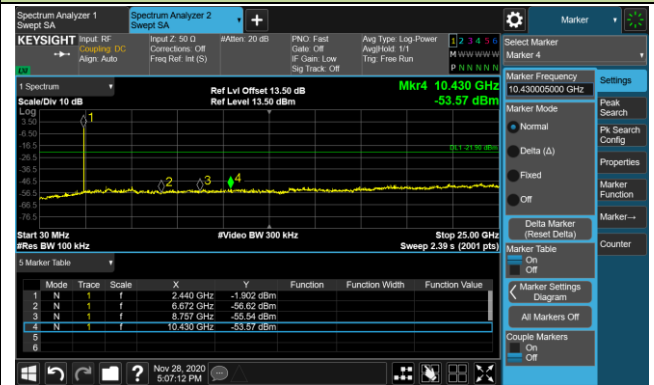


Channel 78 (2480MHz)

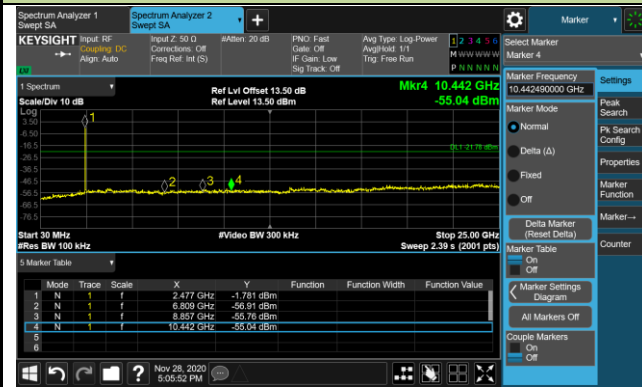


3DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

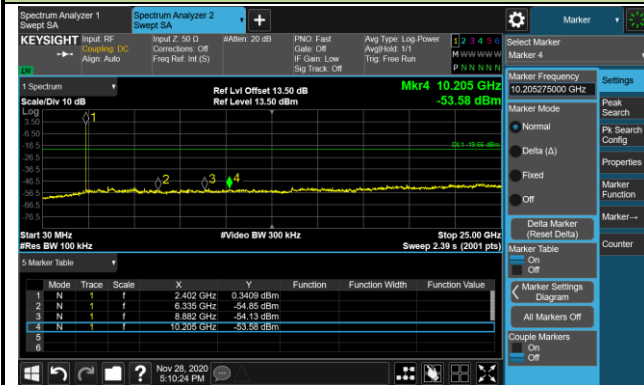

Channel 39 (2441MHz)

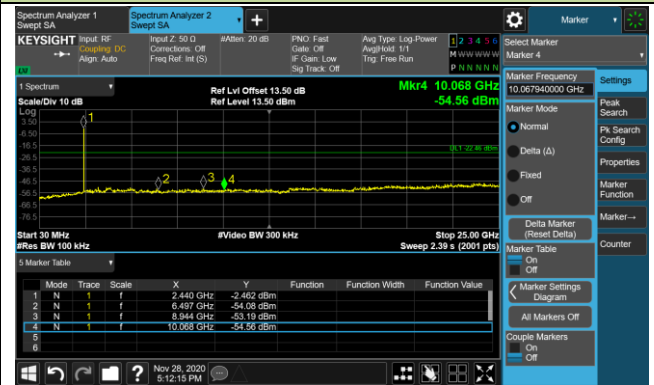

Channel 78 (2480MHz)

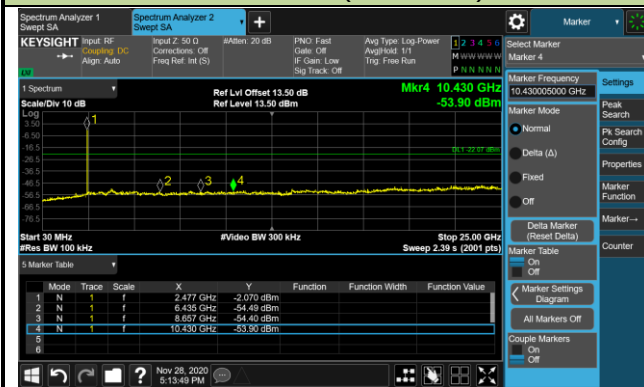

6.9. Radiated Spurious Emission Measurement

6.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measured Distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.3 & 6.4 & 6.5 & 6.6

6.9.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = As specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = Auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
4. Detector = Peak
5. Sweep time = Auto
6. Trace mode = Max hold
7. Trace was allowed to stabilize

6.9.4. Test Setup

Below 1GHz Test Setup:

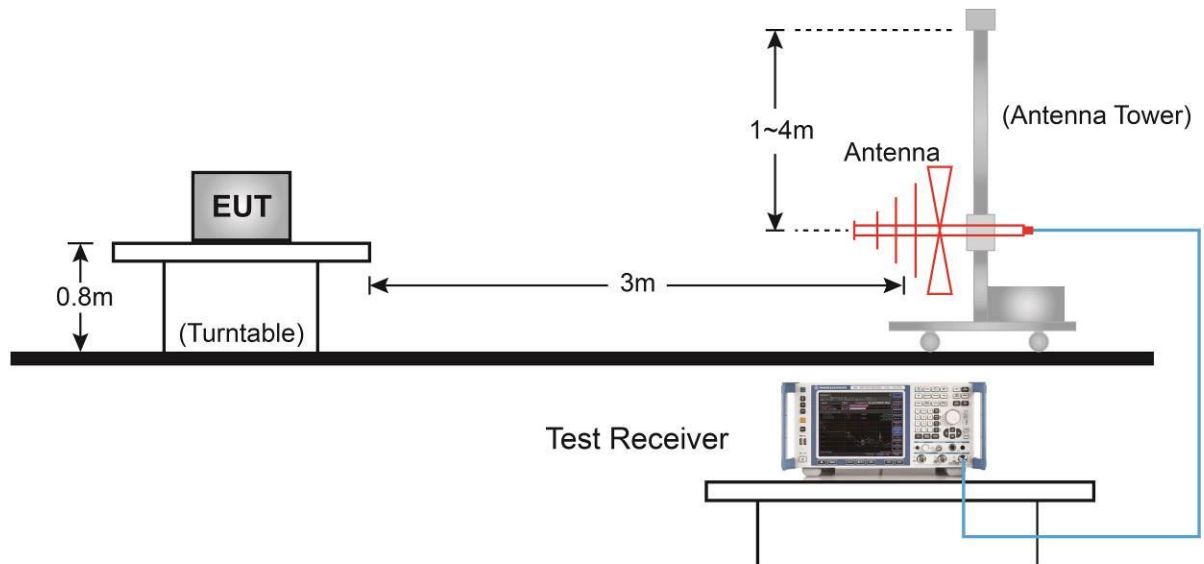

Above 1GHz Test Setup:

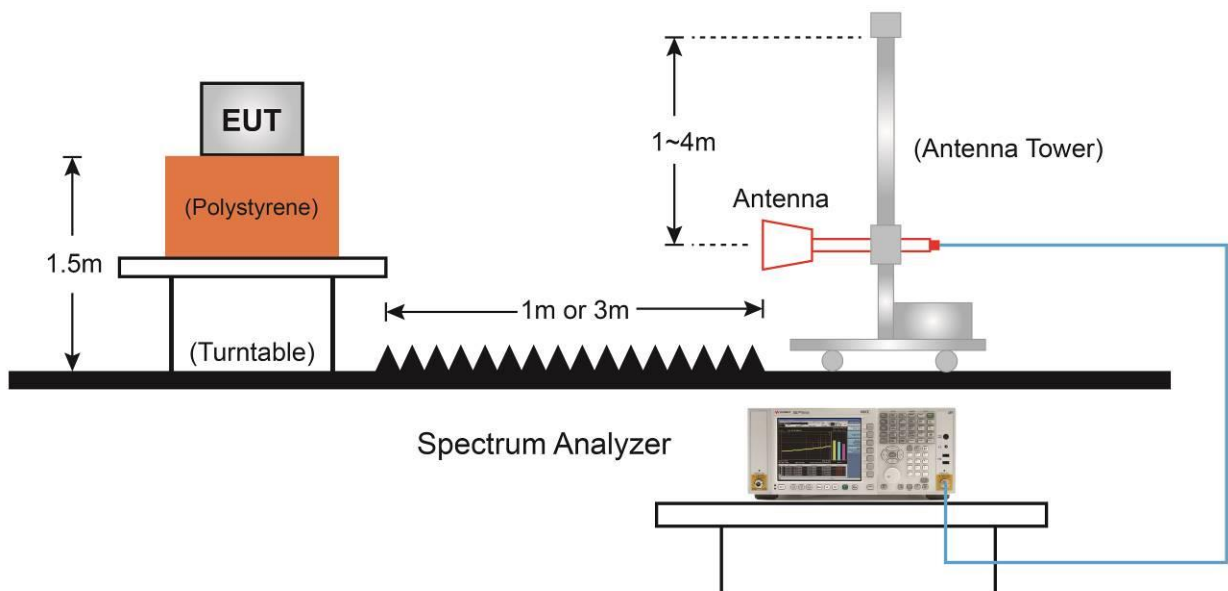

6.9.5. Test Result

Product	Bluetooth Stereo Headphones	Test Engineer	Buter Shi
Test Site	WZ-AC2	Test Date	2020/11/26
Test Mode	DH5	Test Channel	00
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4204.5	38.8	3.5	42.3	74.0	-31.7	Peak	Horizontal
	4995.0	41.7	5.7	47.4	74.0	-26.6	Peak	Horizontal
*	6448.5	38.4	7.8	46.2	74.0	-27.8	Peak	Horizontal
*	7919.0	37.7	10.7	48.4	74.0	-25.6	Peak	Horizontal
	3949.5	39.9	2.8	42.7	74.0	-31.3	Peak	Vertical
	4986.5	42.5	5.8	48.3	74.0	-25.7	Peak	Vertical
*	7205.0	38.7	10.1	48.8	74.0	-25.2	Peak	Vertical
*	8828.5	36.9	12.0	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Bluetooth Stereo Headphones	Test Engineer	Buter Shi
Test Site	WZ-AC2	Test Date	2020/11/26
Test Mode	DH5	Test Channel	39
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3924.0	41.3	2.6	43.9	74.0	-30.1	Peak	Horizontal
	4986.5	42.7	5.8	48.5	74.0	-25.5	Peak	Horizontal
*	6508.0	38.4	8.0	46.4	74.0	-27.6	Peak	Horizontal
*	8769.0	36.7	11.9	48.6	74.0	-25.4	Peak	Horizontal
	4978.0	40.8	5.7	46.5	74.0	-27.5	Peak	Vertical
	7468.5	40.9	10.4	51.3	74.0	-22.7	Peak	Vertical
*	8667.0	36.9	11.6	48.5	74.0	-25.5	Peak	Vertical
*	10392.5	36.8	14.9	51.7	74.0	-22.3	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Bluetooth Stereo Headphones	Test Engineer	Buter Shi
Test Site	WZ-AC2	Test Date	2020/11/26
Test Mode	DH5	Test Channel	78
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3703.0	43.3	2.2	45.5	74.0	-28.5	Peak	Horizontal
	4995.0	42.4	5.7	48.1	74.0	-25.9	Peak	Horizontal
*	6278.5	38.1	7.1	45.2	74.0	-28.8	Peak	Horizontal
*	6822.5	38.2	8.2	46.4	74.0	-27.6	Peak	Horizontal
	4009.0	39.7	2.8	42.5	74.0	-31.5	Peak	Vertical
	4978.0	41.4	5.7	47.1	74.0	-26.9	Peak	Vertical
*	6822.5	36.9	8.2	45.1	74.0	-28.9	Peak	Vertical
*	7910.5	36.7	10.7	47.4	74.0	-26.6	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Bluetooth Stereo Headphones	Test Engineer	Buter Shi
Test Site	WZ-AC2	Test Date	2020/11/26
Test Mode	2DH5	Test Channel	00
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3677.5	44.0	2.1	46.1	74.0	-27.9	Peak	Horizontal
	4978.0	42.9	5.7	48.6	74.0	-25.4	Peak	Horizontal
*	7120.0	37.6	10.1	47.7	74.0	-26.3	Peak	Horizontal
*	8650.0	38.3	11.9	50.2	74.0	-23.8	Peak	Horizontal
	4986.5	41.7	5.8	47.5	74.0	-26.5	Peak	Vertical
	5411.5	36.5	6.2	42.7	74.0	-31.3	Peak	Vertical
*	7205.0	39.5	10.1	49.6	74.0	-24.4	Peak	Vertical
*	9576.5	37.9	13.9	51.8	74.0	-22.2	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Bluetooth Stereo Headphones	Test Engineer	Buter Shi
Test Site	WZ-AC2	Test Date	2020/11/26
Test Mode	2DH5	Test Channel	39
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3677.5	44.8	2.1	46.9	74.0	-27.1	Peak	Horizontal
	4986.5	42.6	5.8	48.4	74.0	-25.6	Peak	Horizontal
*	7026.5	38.3	9.2	47.5	74.0	-26.5	Peak	Horizontal
*	9746.5	36.0	14.5	50.5	74.0	-23.5	Peak	Horizontal
	3669.0	44.7	2.1	46.8	74.0	-27.2	Peak	Vertical
	4978.0	41.6	5.7	47.3	74.0	-26.7	Peak	Vertical
*	6873.5	38.3	8.6	46.9	74.0	-27.1	Peak	Vertical
*	7885.0	36.7	10.7	47.4	74.0	-26.6	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Bluetooth Stereo Headphones	Test Engineer	Buter Shi
Test Site	WZ-AC2	Test Date	2020/11/26
Test Mode	2DH5	Test Channel	78
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3669.0	44.3	2.1	46.4	74.0	-27.6	Peak	Horizontal
	4986.5	42.2	5.8	48.0	74.0	-26.0	Peak	Horizontal
*	7154.0	38.5	10.0	48.5	74.0	-25.5	Peak	Horizontal
*	8684.0	37.0	11.9	48.9	74.0	-25.1	Peak	Horizontal
	3907.0	38.9	2.5	41.4	74.0	-32.6	Peak	Vertical
	4986.5	42.0	5.8	47.8	74.0	-26.2	Peak	Vertical
*	7196.5	37.8	10.0	47.8	74.0	-26.2	Peak	Vertical
*	10188.5	36.7	14.8	51.5	74.0	-22.5	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Bluetooth Stereo Headphones	Test Engineer	Buter Shi
Test Site	WZ-AC2	Test Date	2020/11/26
Test Mode	3DH5	Test Channel	00
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3813.5	42.3	2.5	44.8	74.0	-29.2	Peak	Horizontal
	4986.5	42.0	5.8	47.8	74.0	-26.2	Peak	Horizontal
*	7111.5	38.5	10.0	48.5	74.0	-25.5	Peak	Horizontal
*	10188.5	36.7	14.8	51.5	74.0	-22.5	Peak	Horizontal
	3839.0	41.0	2.5	43.5	74.0	-30.5	Peak	Vertical
	4995.0	41.9	5.7	47.6	74.0	-26.4	Peak	Vertical
*	7205.0	40.0	10.1	50.1	74.0	-23.9	Peak	Vertical
*	9738.0	36.4	14.4	50.8	74.0	-23.2	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Bluetooth Stereo Headphones	Test Engineer	Buter Shi
Test Site	WZ-AC2	Test Date	2020/11/26
Test Mode	3DH5	Test Channel	39
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3779.5	42.8	2.3	45.1	74.0	-28.9	Peak	Horizontal
	4978.0	42.1	5.7	47.8	74.0	-26.2	Peak	Horizontal
*	7953.0	37.8	10.9	48.7	74.0	-25.3	Peak	Horizontal
*	10469.0	36.3	15.1	51.4	74.0	-22.6	Peak	Horizontal
	3975.0	40.2	3.0	43.2	74.0	-30.8	Peak	Vertical
	4978.0	44.6	5.7	50.3	74.0	-23.7	Peak	Vertical
*	7910.5	37.5	10.7	48.2	74.0	-25.8	Peak	Vertical
*	10520.0	36.5	15.2	51.7	74.0	-22.3	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Bluetooth Stereo Headphones	Test Engineer	Buter Shi
Test Site	WZ-AC2	Test Date	2020/11/26
Test Mode	3DH5	Test Channel	78
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3669.0	44.0	2.1	46.1	74.0	-27.9	Peak	Horizontal
	4986.5	42.2	5.8	48.0	74.0	-26.0	Peak	Horizontal
*	7808.5	38.2	10.7	48.9	74.0	-25.1	Peak	Horizontal
*	9695.5	37.5	13.6	51.1	74.0	-22.9	Peak	Horizontal
	3677.5	45.3	2.1	47.4	74.0	-26.6	Peak	Vertical
	4986.5	41.0	5.8	46.8	74.0	-27.2	Peak	Vertical
*	8684.0	37.3	11.9	49.2	74.0	-24.8	Peak	Vertical
*	10146.0	37.0	14.4	51.4	74.0	-22.6	Peak	Vertical


Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: WZ-AC2	Time: 2020/11/27
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC2_VULB9162_0.03-7GHz	Polarity: Horizontal
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2402MHz	

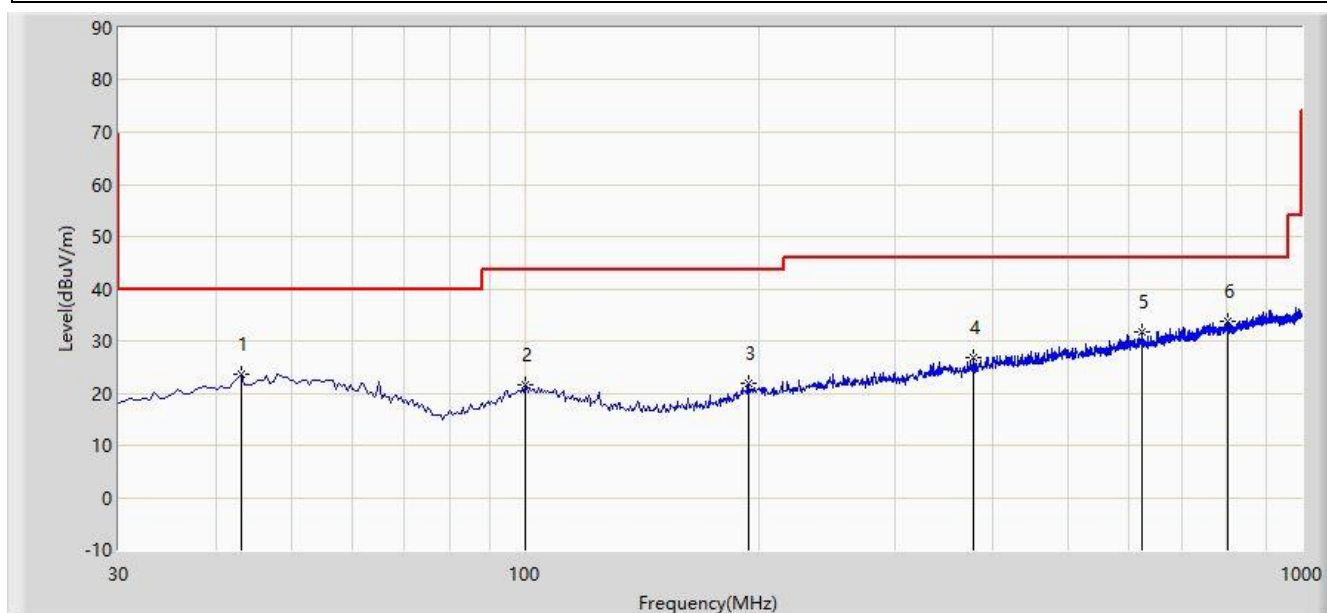

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			43.095	23.702	3.476	-16.298	40.000	20.227	PK
2			100.325	21.622	2.991	-21.878	43.500	18.630	PK
3			193.930	21.947	3.325	-21.553	43.500	18.622	PK
4			378.715	26.825	3.879	-19.175	46.000	22.946	PK
5			624.125	31.673	4.269	-14.327	46.000	27.404	PK
6		*	803.575	33.751	3.650	-12.249	46.000	30.101	PK


Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC2	Time: 2020/11/27
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC2_VULB9162_0.03-7GHz	Polarity: Vertical
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2402MHz	

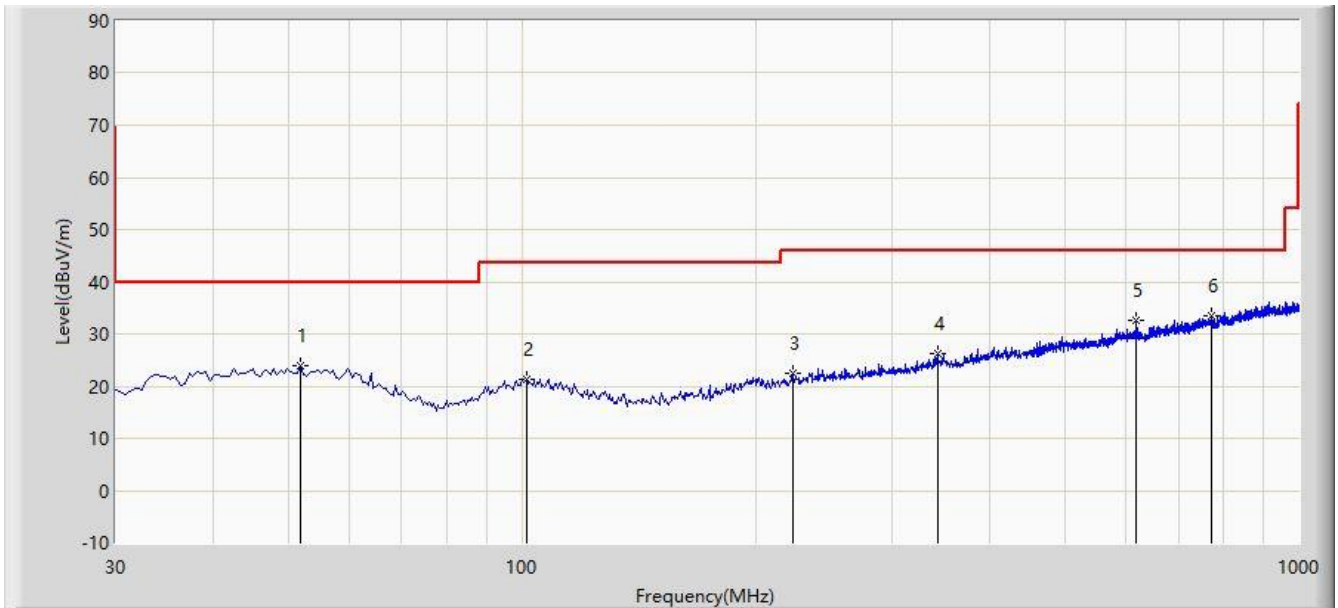

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			51.825	24.004	3.387	-15.996	40.000	20.617	PK
2			101.295	21.288	2.672	-22.212	43.500	18.616	PK
3			223.030	22.479	3.363	-23.521	46.000	19.116	PK
4			343.310	26.219	3.513	-19.781	46.000	22.706	PK
5			616.850	32.549	5.005	-13.451	46.000	27.544	PK
6		*	772.050	33.531	3.872	-12.469	46.000	29.659	PK

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

6.10. Radiated Restricted Band Edge Measurement

6.10.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measured Distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.10.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.3 & 6.6 & 6.10

6.10.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.10.4.Test Setup

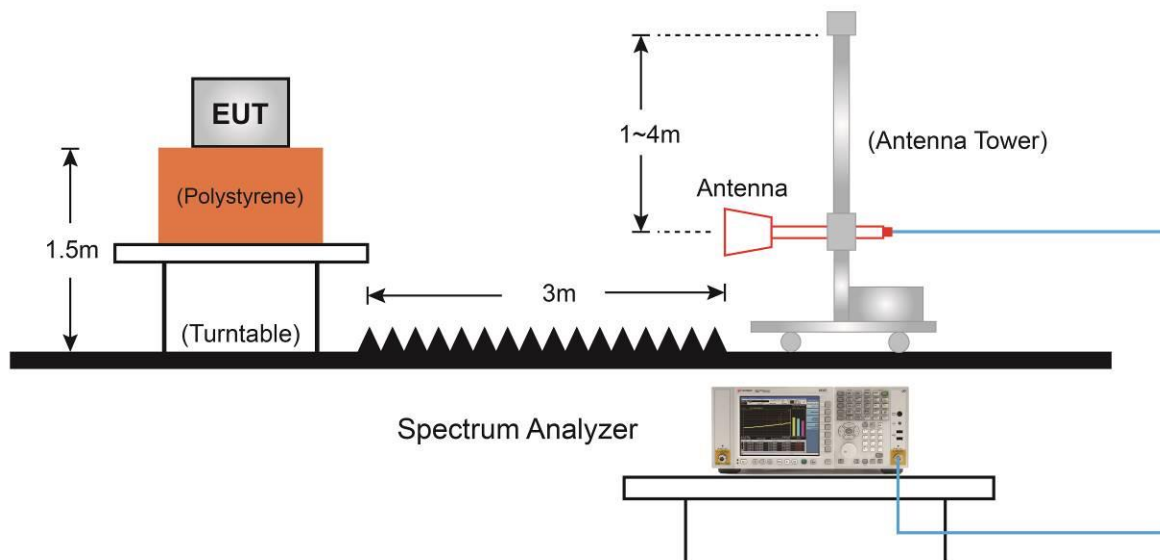

6.10.5.Test Result

Site: WZ-AC1	Time: 2020/11/29 - 14:28
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

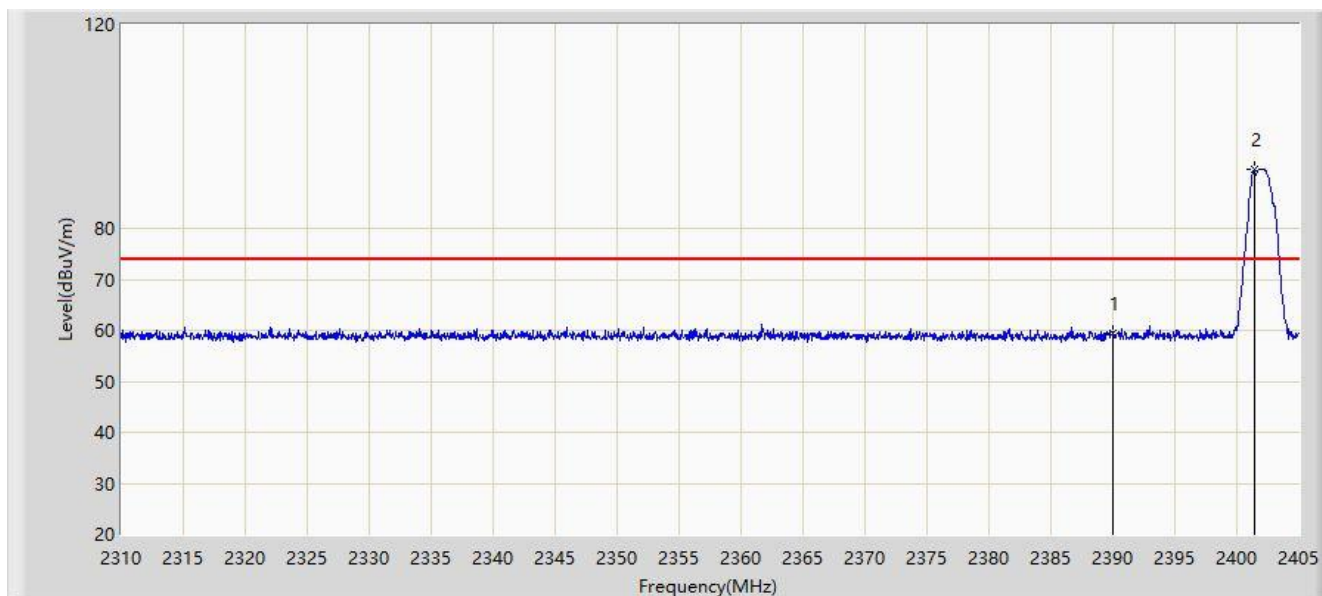


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	59.549	27.016	-14.451	74.000	32.533	PK
2		*	2401.390	91.603	59.060	N/A	N/A	32.543	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 14:33
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

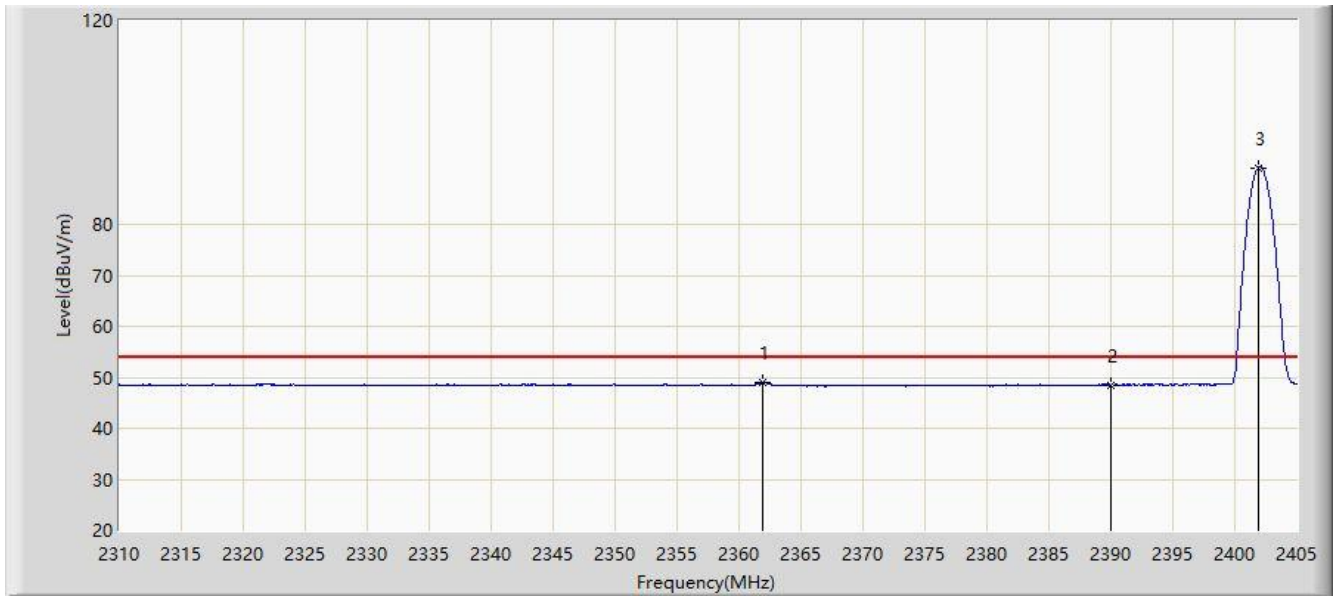


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2361.870	49.014	16.416	-4.986	54.000	32.598	AV
2			2390.000	48.450	15.917	-5.550	54.000	32.533	AV
3		*	2401.865	91.020	58.479	N/A	N/A	32.541	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 14:42
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

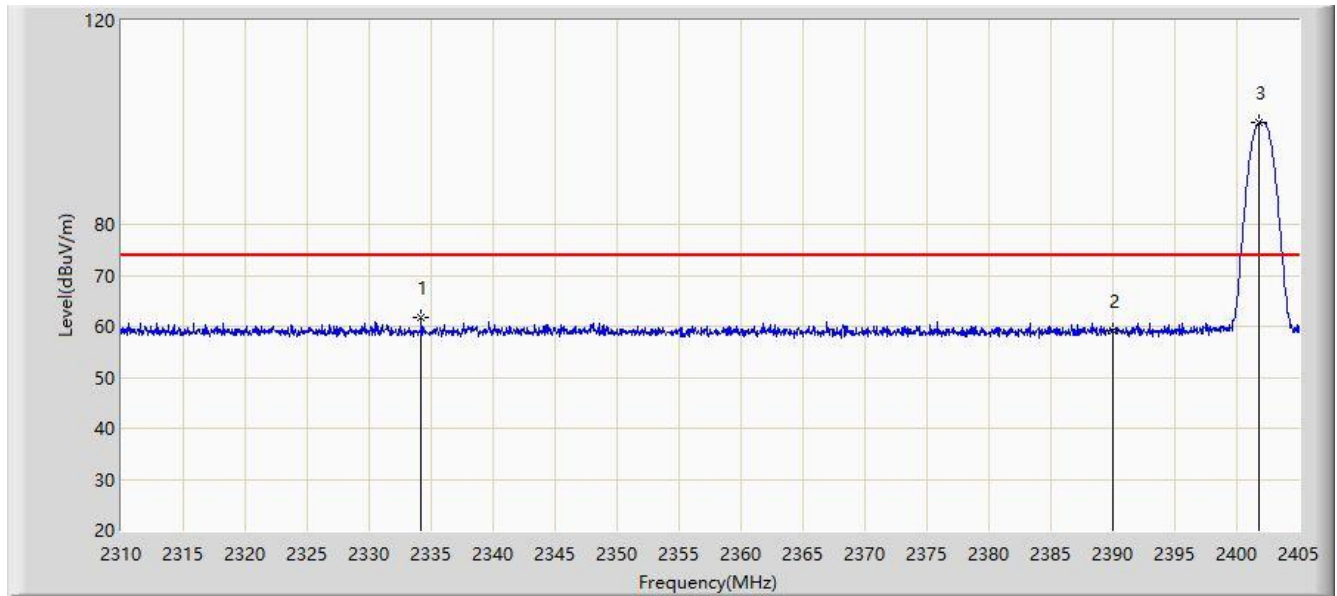


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2334.177	61.751	29.079	-12.249	74.000	32.672	PK
2			2390.000	59.153	26.620	-14.847	74.000	32.533	PK
3		*	2401.770	99.883	67.342	N/A	N/A	32.541	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 14:46
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

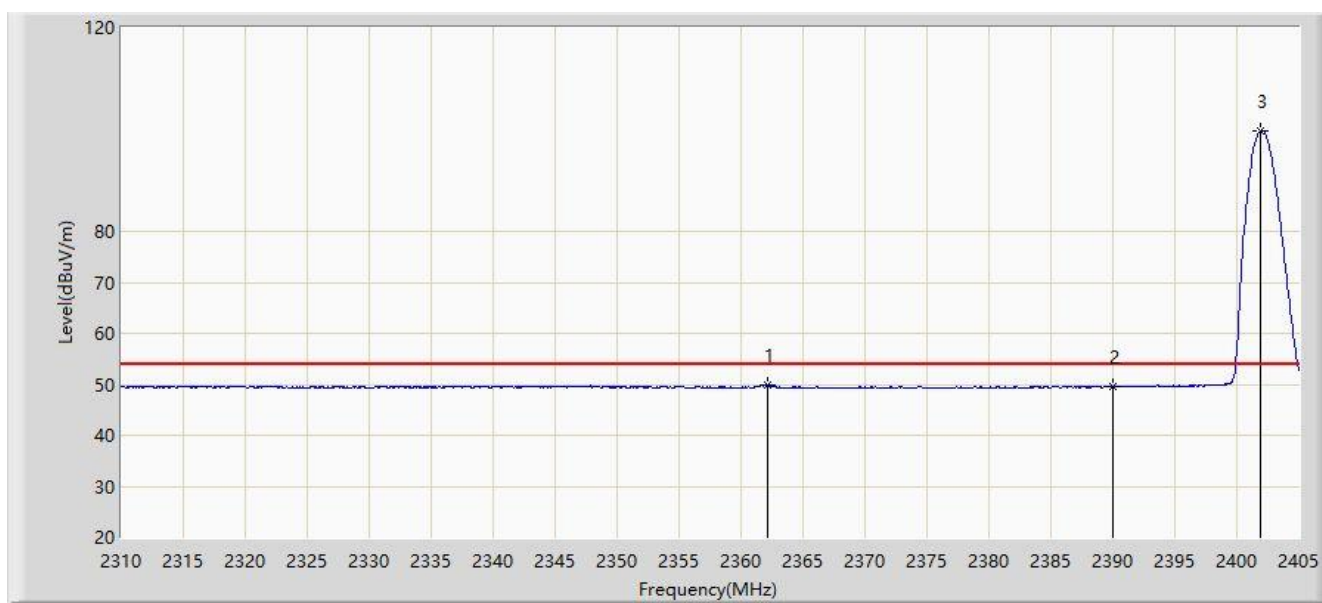


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2362.155	49.875	17.279	-4.125	54.000	32.596	AV
2			2390.000	49.510	16.977	-4.490	54.000	32.533	AV
3		*	2401.865	99.664	67.123	N/A	N/A	32.541	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 14:47
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

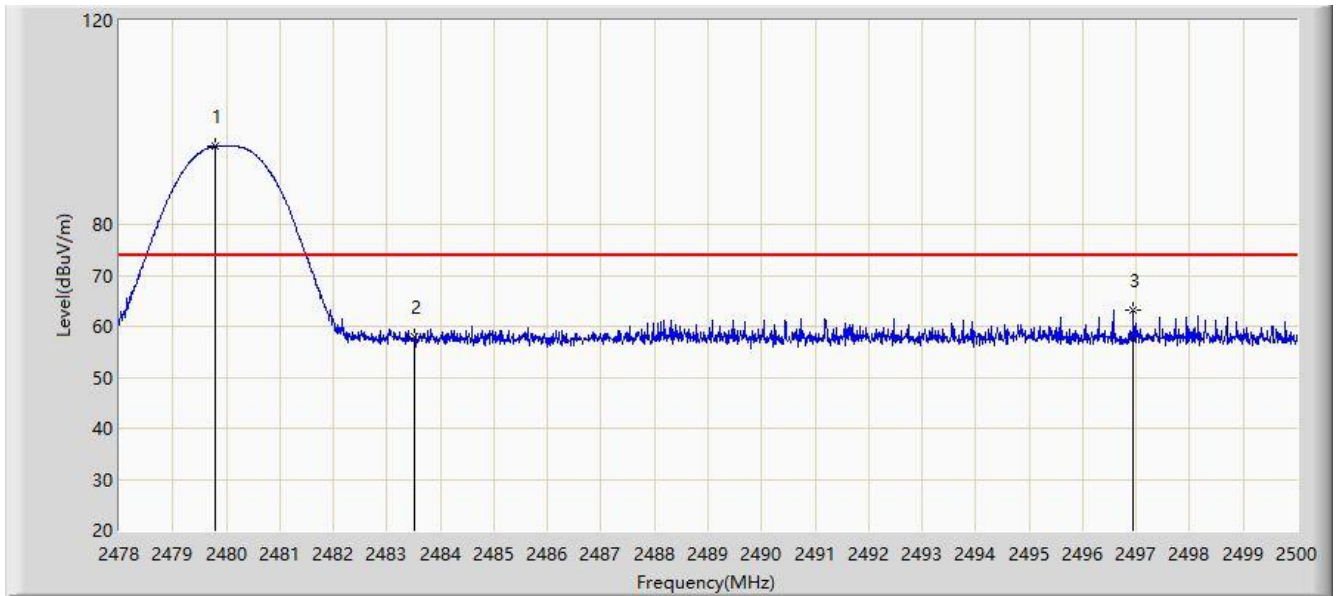


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.793	95.322	62.871	N/A	N/A	32.451	PK
2			2483.500	58.082	25.653	-15.918	74.000	32.429	PK
3			2496.953	63.144	30.712	-10.856	74.000	32.432	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 14:51
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

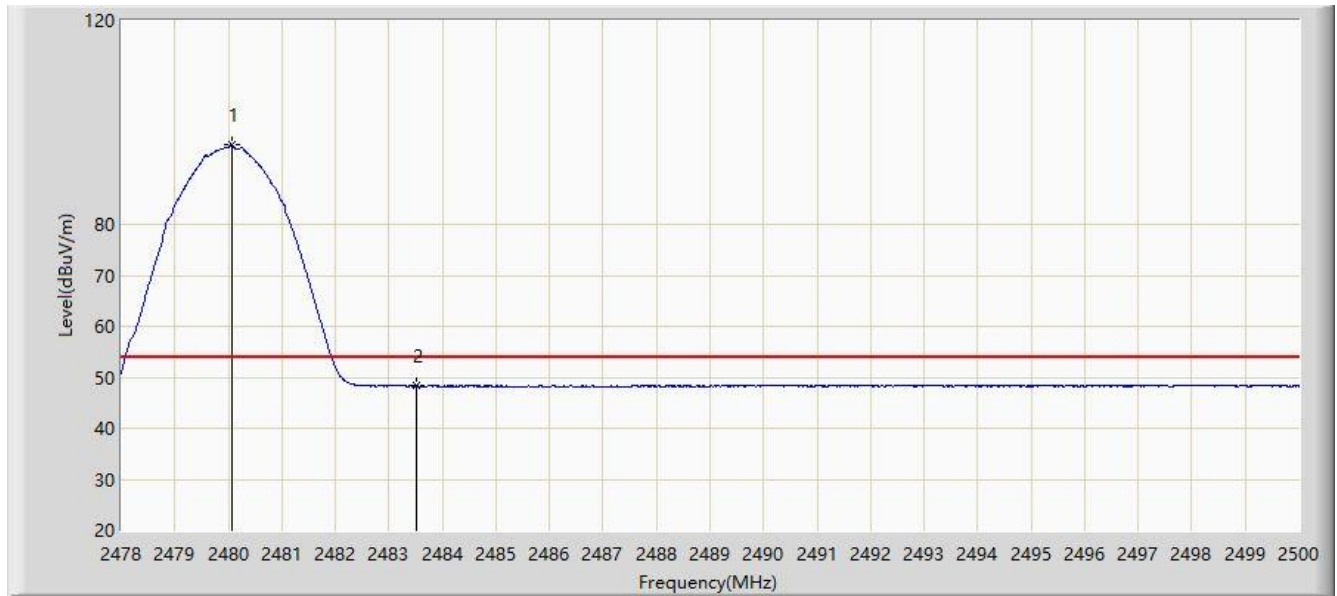


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.068	95.622	63.173	N/A	N/A	32.449	AV
2			2483.500	48.322	15.893	-5.678	54.000	32.429	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 14:52
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

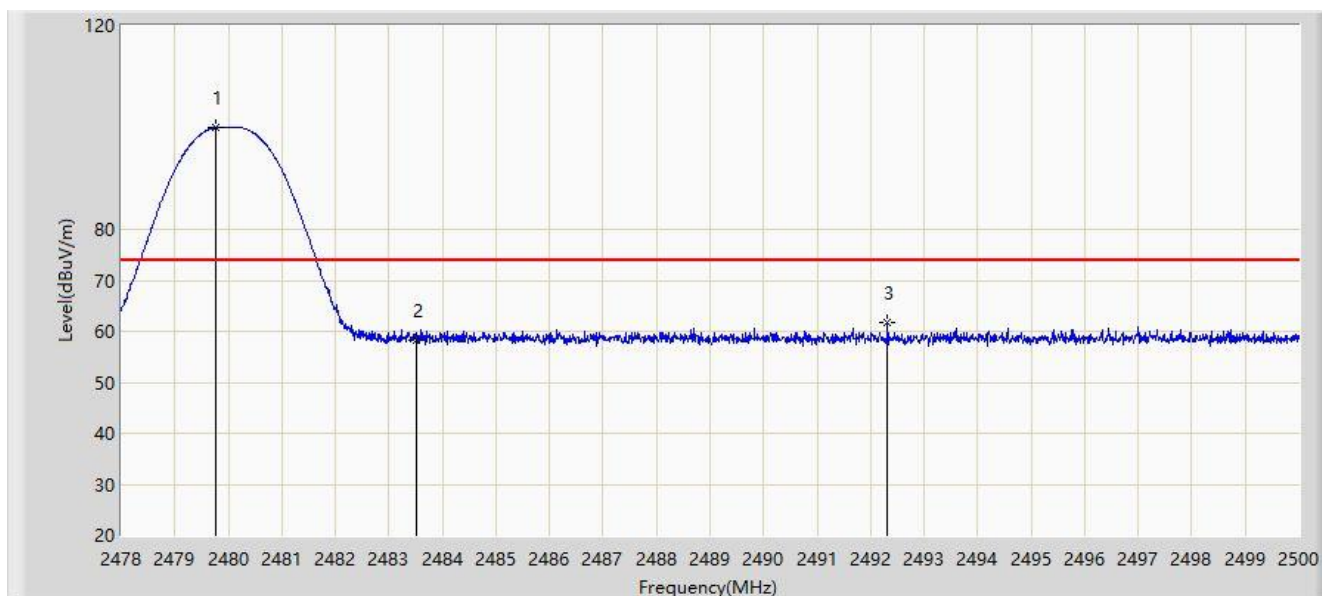


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.760	100.002	67.551	N/A	N/A	32.451	PK
2			2483.500	58.402	25.973	-15.598	74.000	32.429	PK
3			2492.322	61.661	29.242	-12.339	74.000	32.419	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 14:54
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

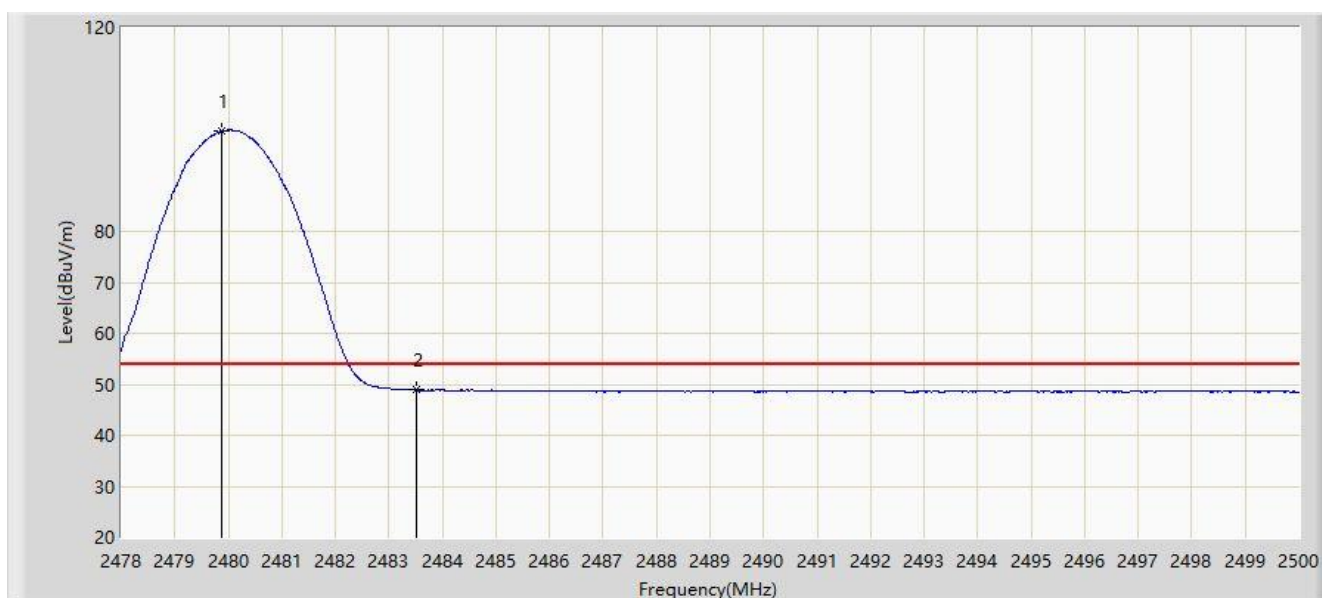


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.881	99.680	67.230	N/A	N/A	32.450	AV
2			2483.500	48.891	16.462	-5.109	54.000	32.429	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 14:54
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

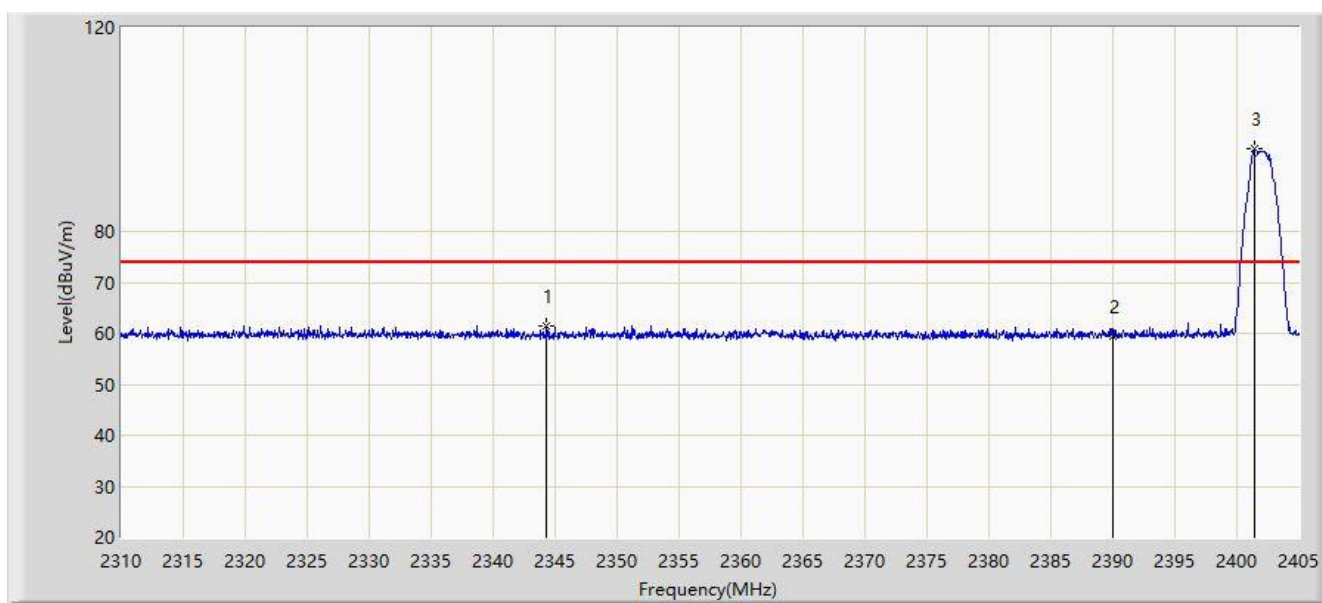


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2344.343	61.551	28.863	-12.449	74.000	32.689	PK
2			2390.000	59.537	27.004	-14.463	74.000	32.533	PK
3		*	2401.390	96.176	63.633	N/A	N/A	32.543	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 14:59
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

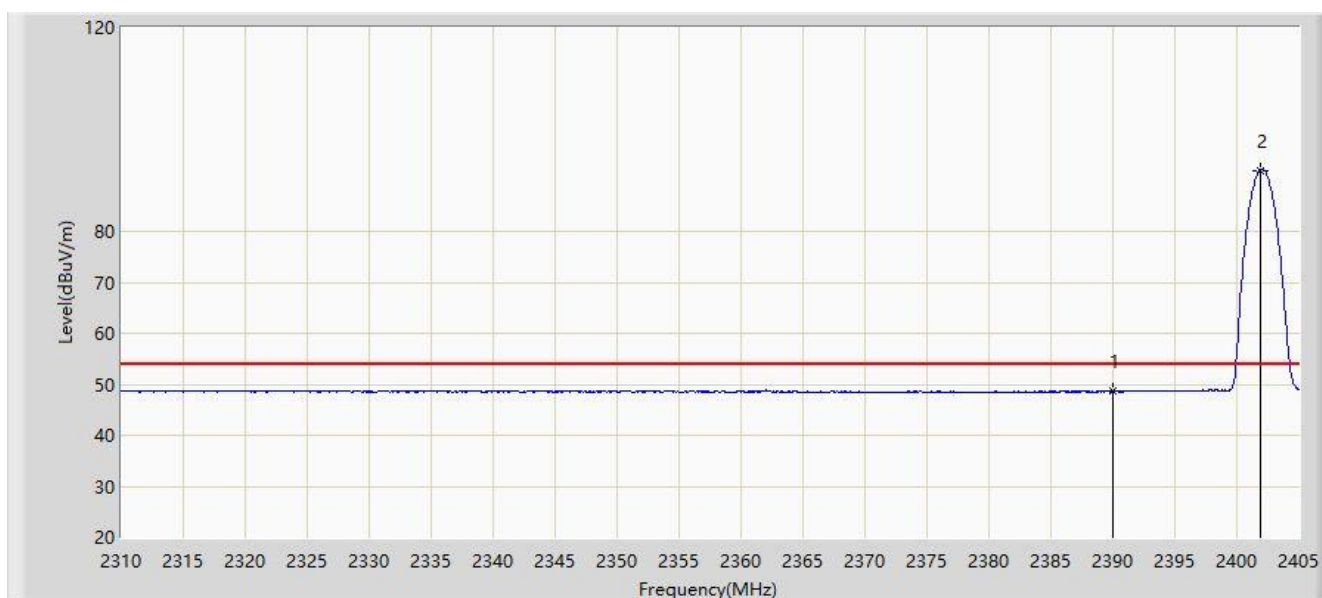


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.582	16.049	-5.418	54.000	32.533	AV
2		*	2401.865	91.975	59.434	N/A	N/A	32.541	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 15:00
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

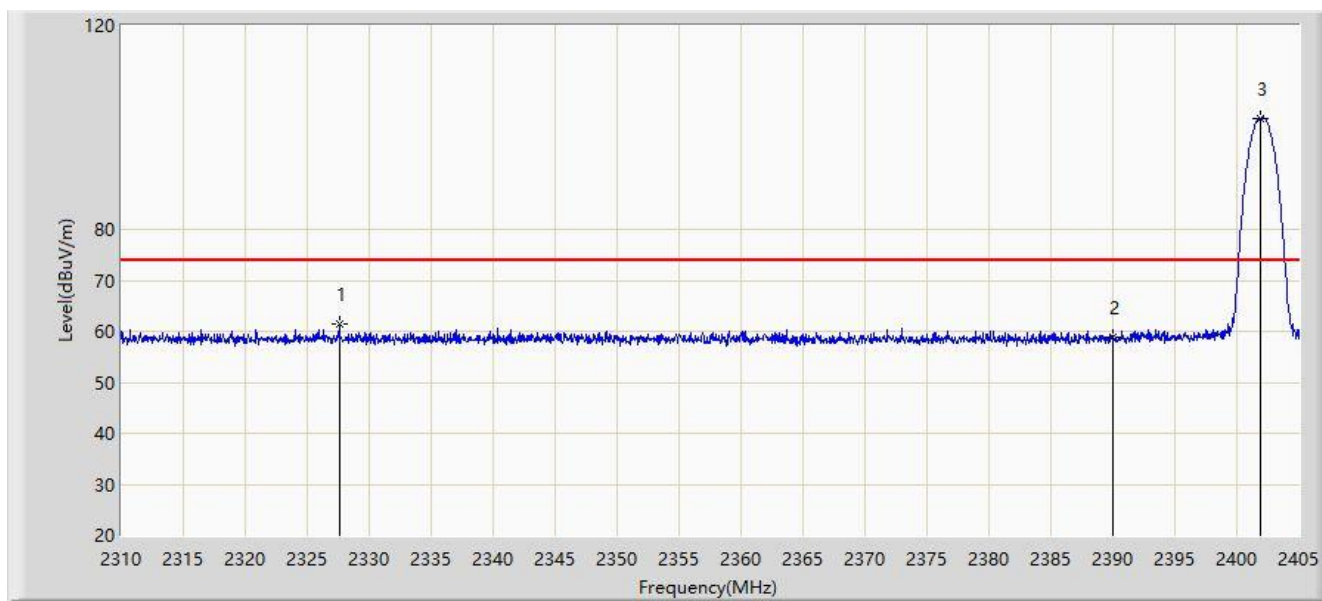


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2327.575	61.357	28.700	-12.643	74.000	32.658	PK
2			2390.000	58.836	26.303	-15.164	74.000	32.533	PK
3		*	2401.865	101.871	69.330	N/A	N/A	32.541	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 15:01
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

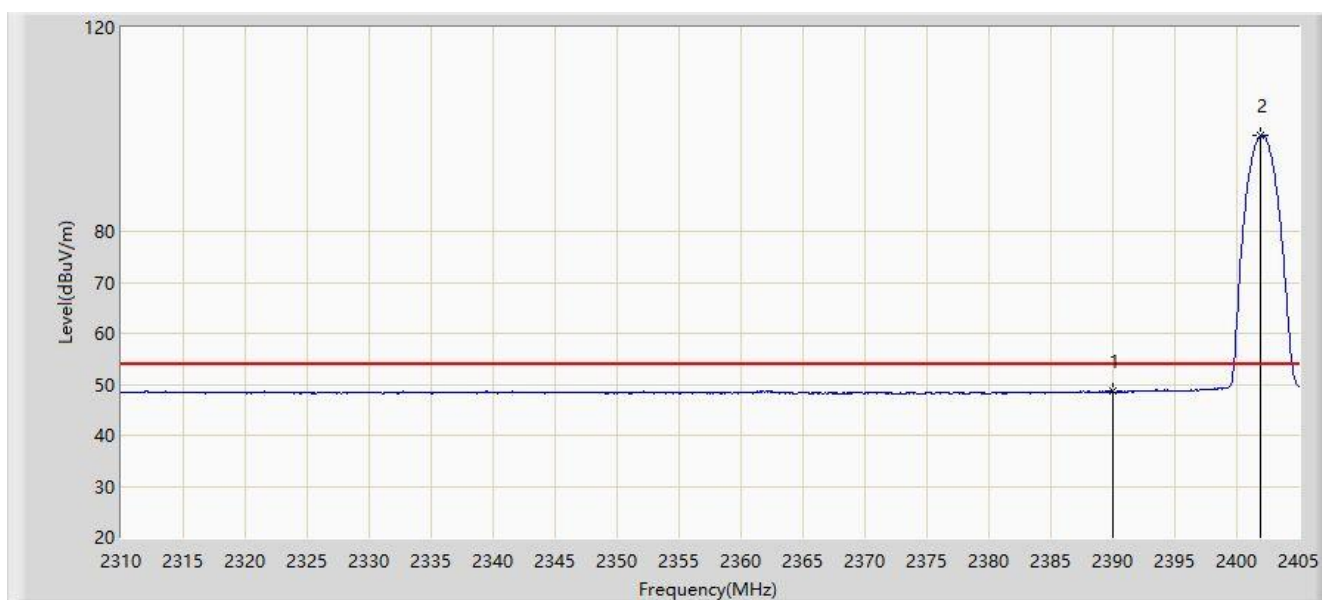


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.673	16.140	-5.327	54.000	32.533	AV
2		*	2401.913	98.772	66.231	N/A	N/A	32.541	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 15:02
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

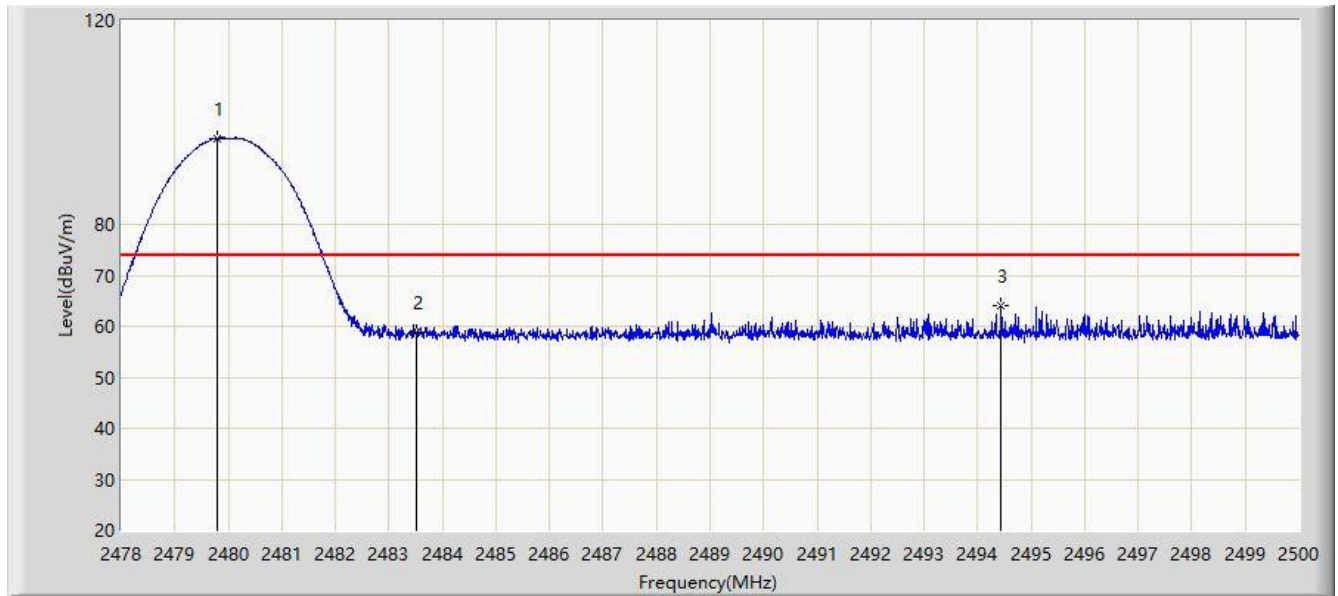


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.782	96.876	64.425	N/A	N/A	32.451	PK
2			2483.500	58.890	26.461	-15.110	74.000	32.429	PK
3			2494.434	64.173	31.747	-9.827	74.000	32.426	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 15:03
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

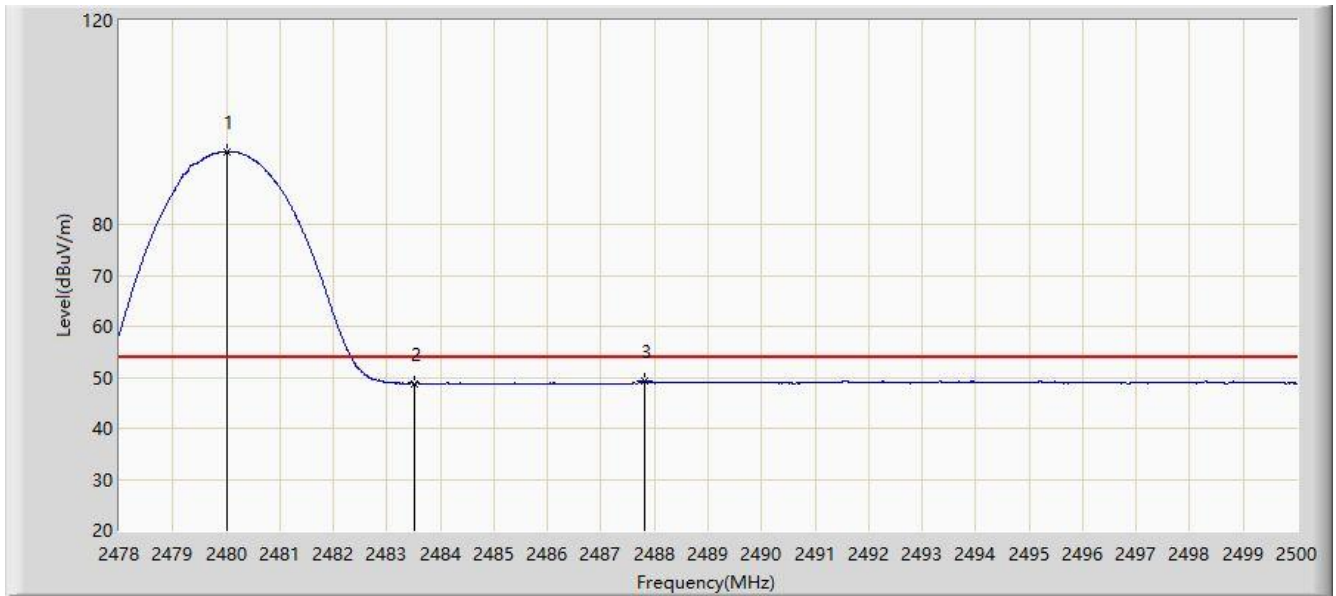


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.013	94.324	61.875	N/A	N/A	32.449	AV
2			2483.500	48.733	16.304	-5.267	54.000	32.429	AV
3			2487.801	49.324	16.919	-4.676	54.000	32.404	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 15:03
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

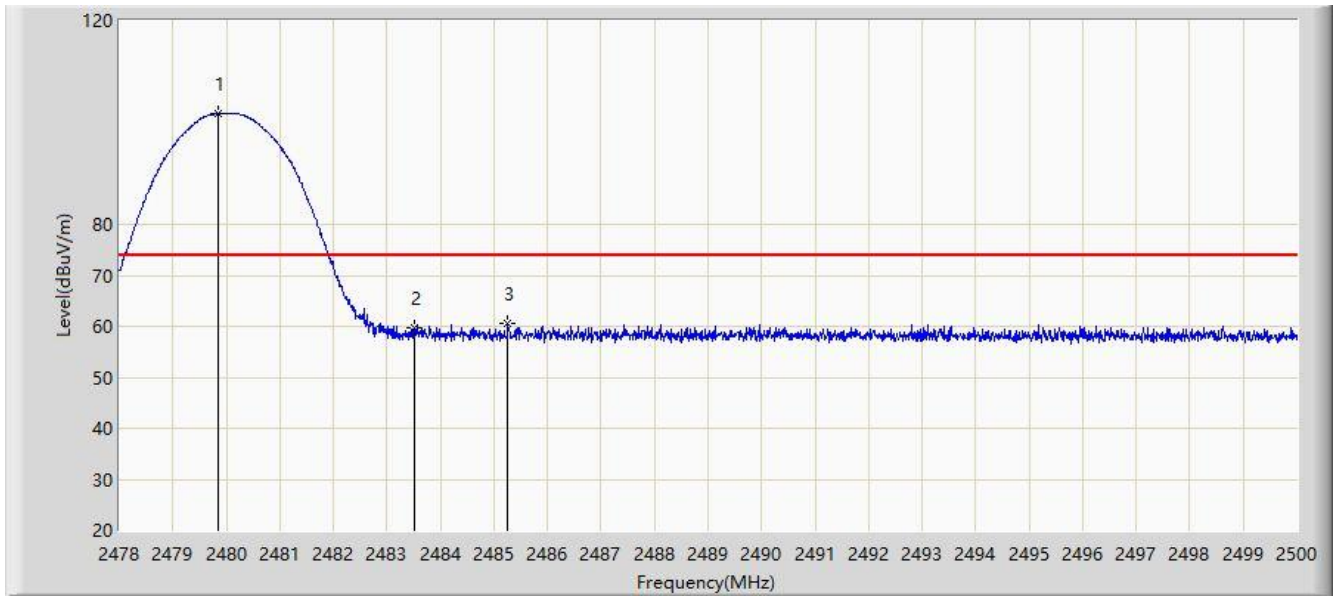


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.837	101.840	69.390	N/A	N/A	32.450	PK
2			2483.500	59.709	27.280	-14.291	74.000	32.429	PK
3			2485.260	60.691	28.273	-13.309	74.000	32.418	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 15:06
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

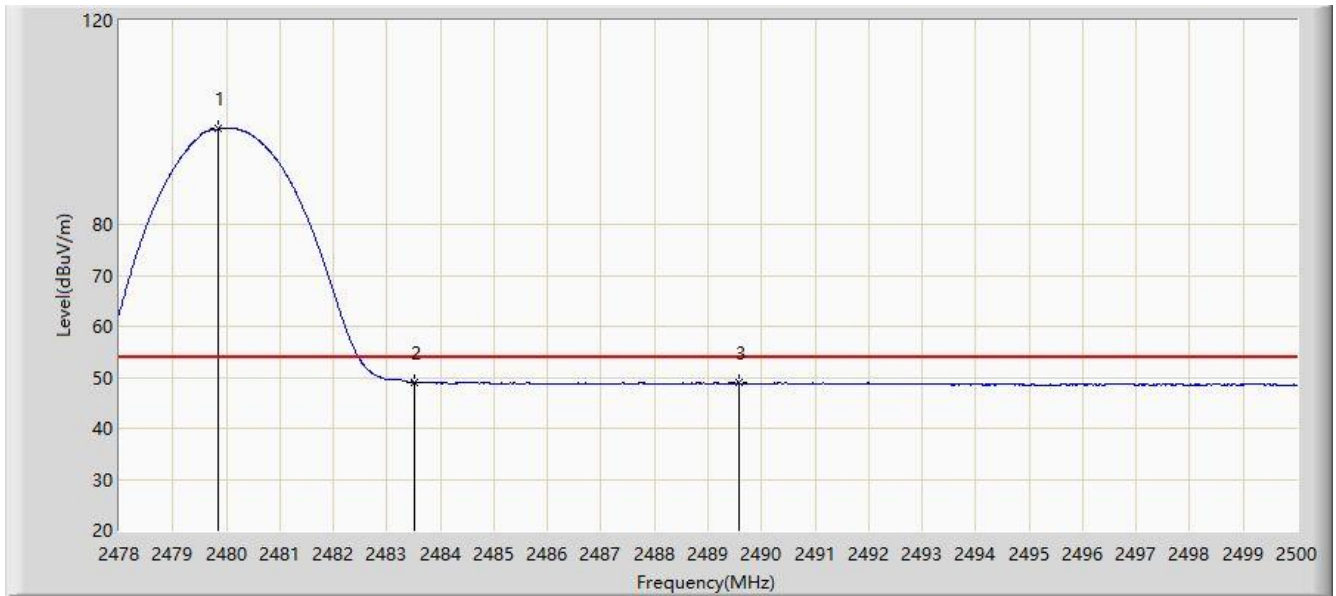


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.848	98.748	66.298	N/A	N/A	32.450	AV
2			2483.500	49.090	16.661	-4.910	54.000	32.429	AV
3			2489.572	48.909	16.499	-5.091	54.000	32.411	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 15:09
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

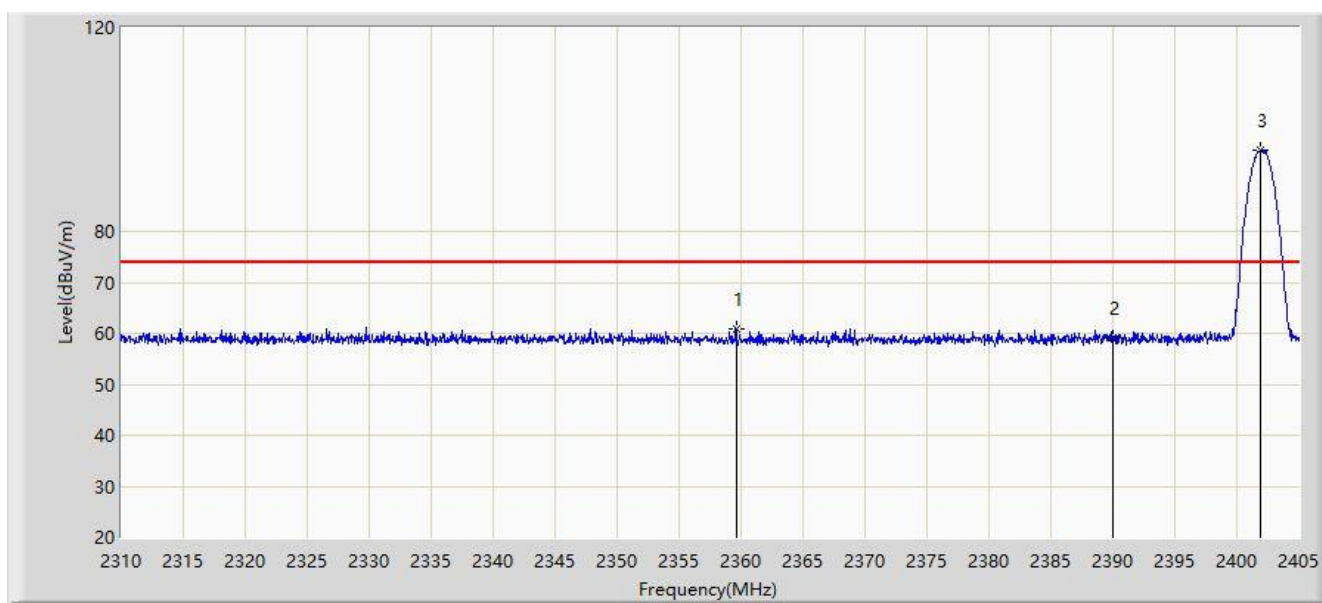


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2359.590	60.877	28.270	-13.123	74.000	32.608	PK
2			2390.000	59.006	26.473	-14.994	74.000	32.533	PK
3		*	2401.913	95.987	63.446	N/A	N/A	32.541	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 15:10
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

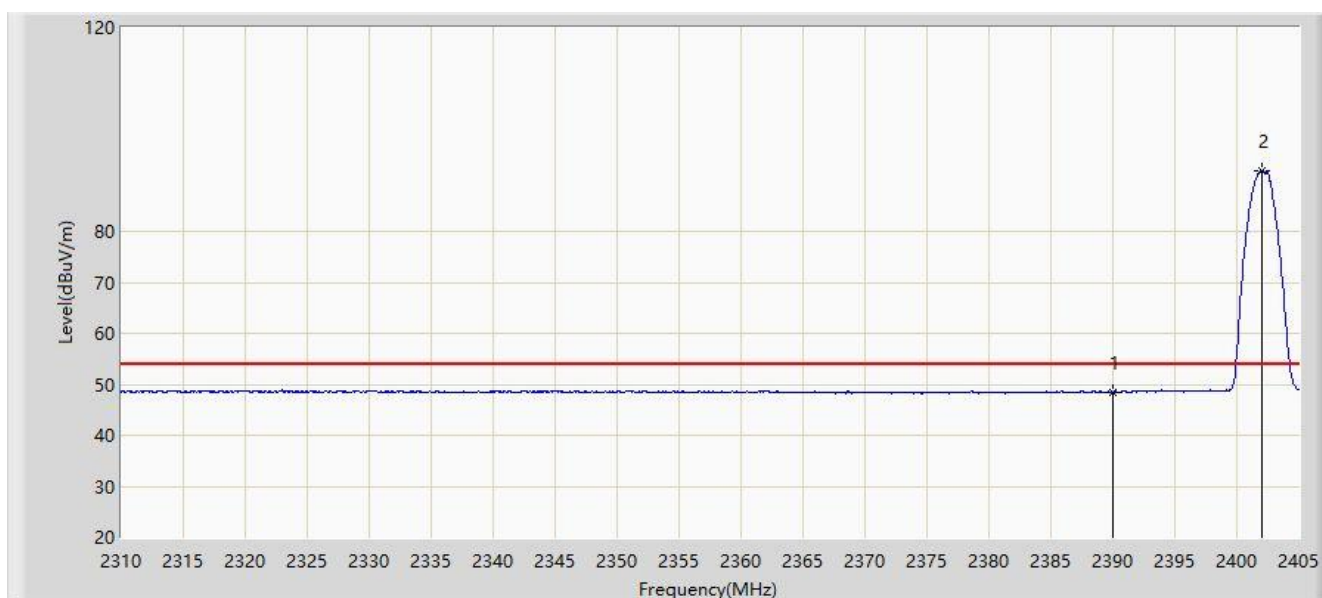


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.435	15.902	-5.565	54.000	32.533	AV
2		*	2402.008	91.906	59.366	N/A	N/A	32.540	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 15:11
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

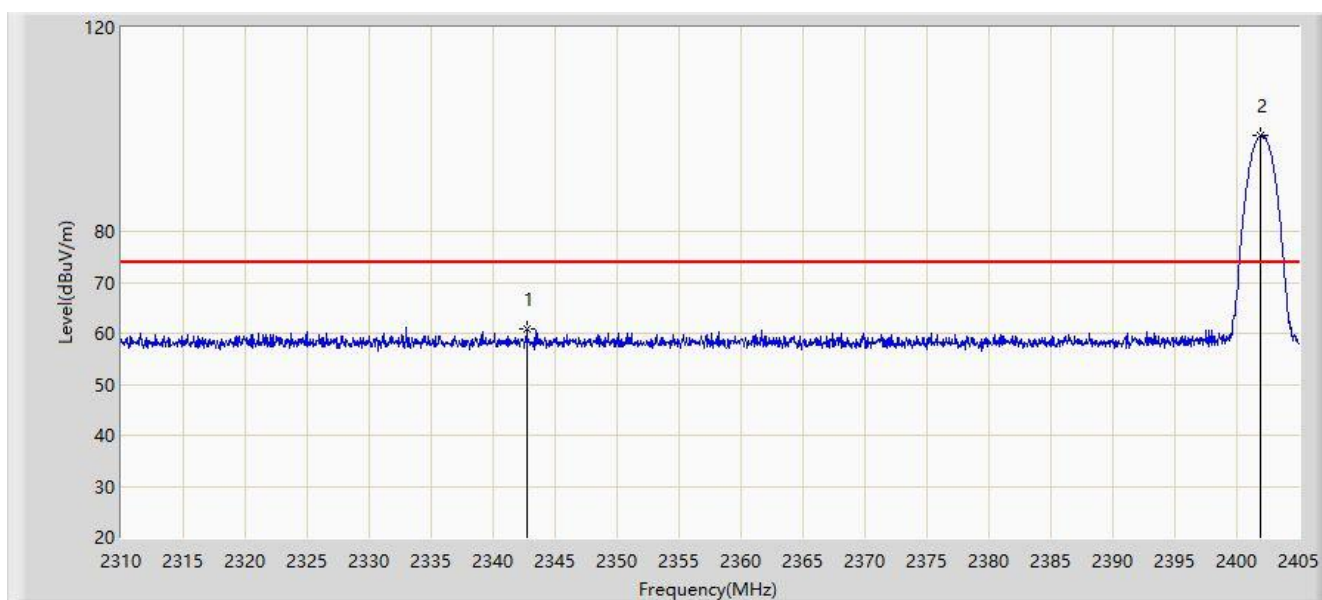


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2342.680	60.758	28.067	-13.242	74.000	32.691	PK
2		*	2401.865	98.736	66.195	N/A	N/A	32.541	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 15:11
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

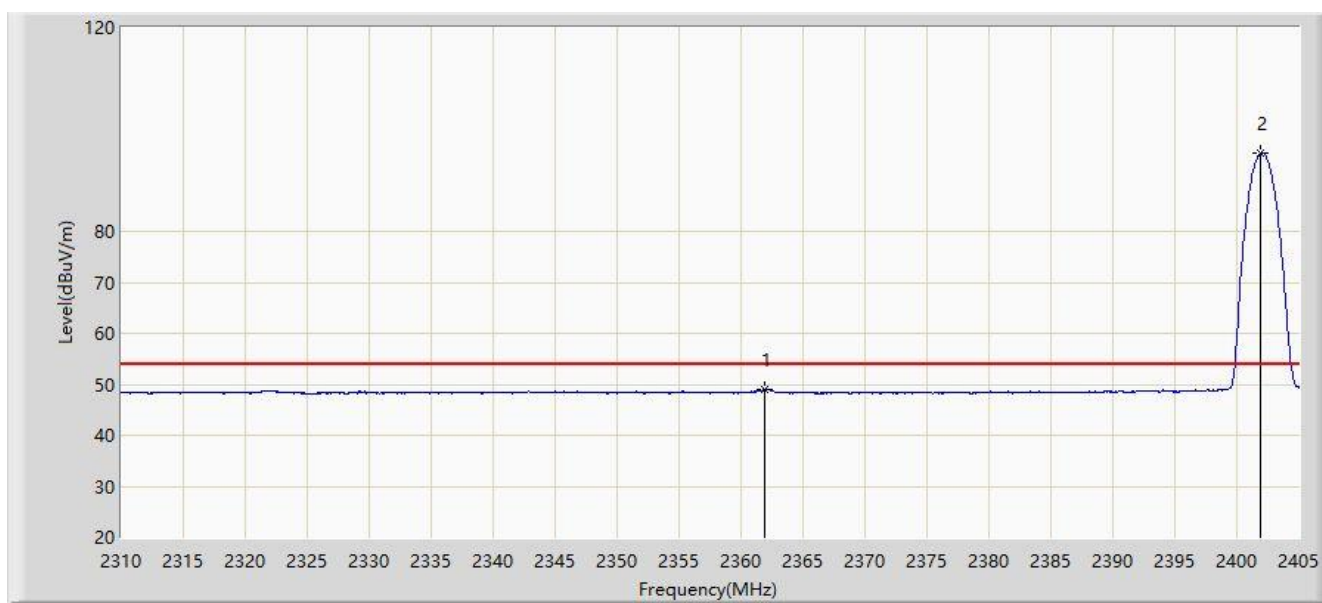


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2361.870	49.076	16.478	-4.924	54.000	32.598	AV
2		*	2401.960	95.351	62.811	N/A	N/A	32.540	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 15:13
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

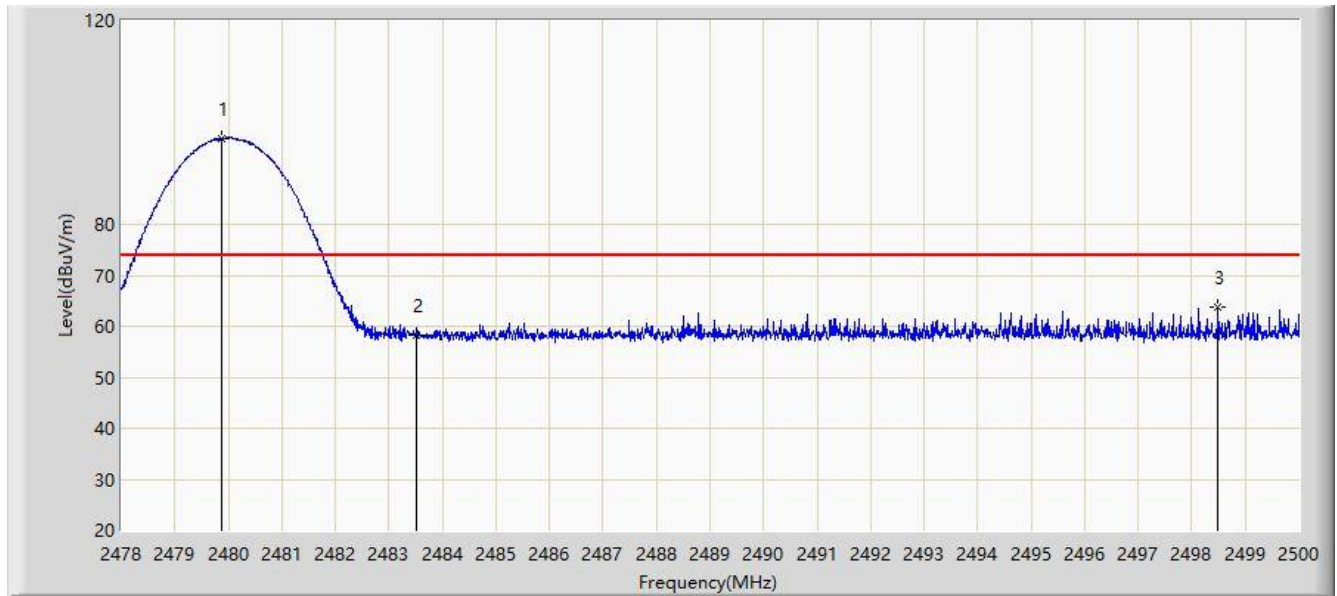


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.881	96.896	64.446	N/A	N/A	32.450	PK
2			2483.500	58.386	25.957	-15.614	74.000	32.429	PK
3			2498.493	63.669	31.234	-10.331	74.000	32.435	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 15:14
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

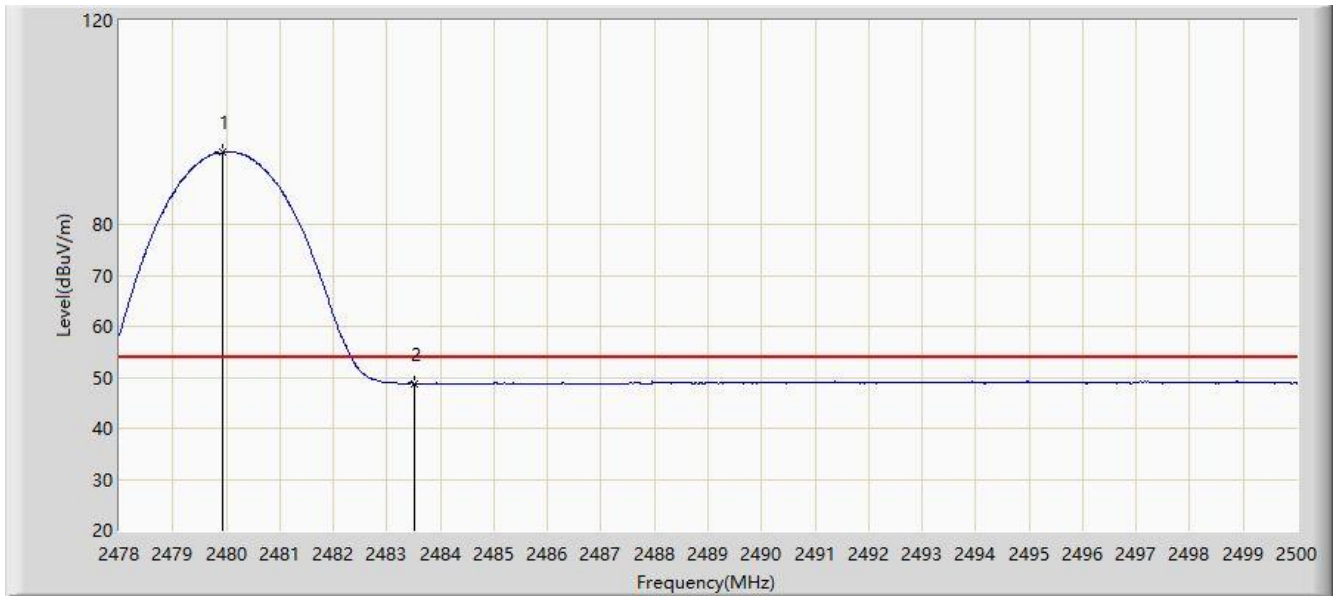


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.925	94.071	61.621	N/A	N/A	32.450	AV
2			2483.500	48.804	16.375	-5.196	54.000	32.429	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/29 - 15:14
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

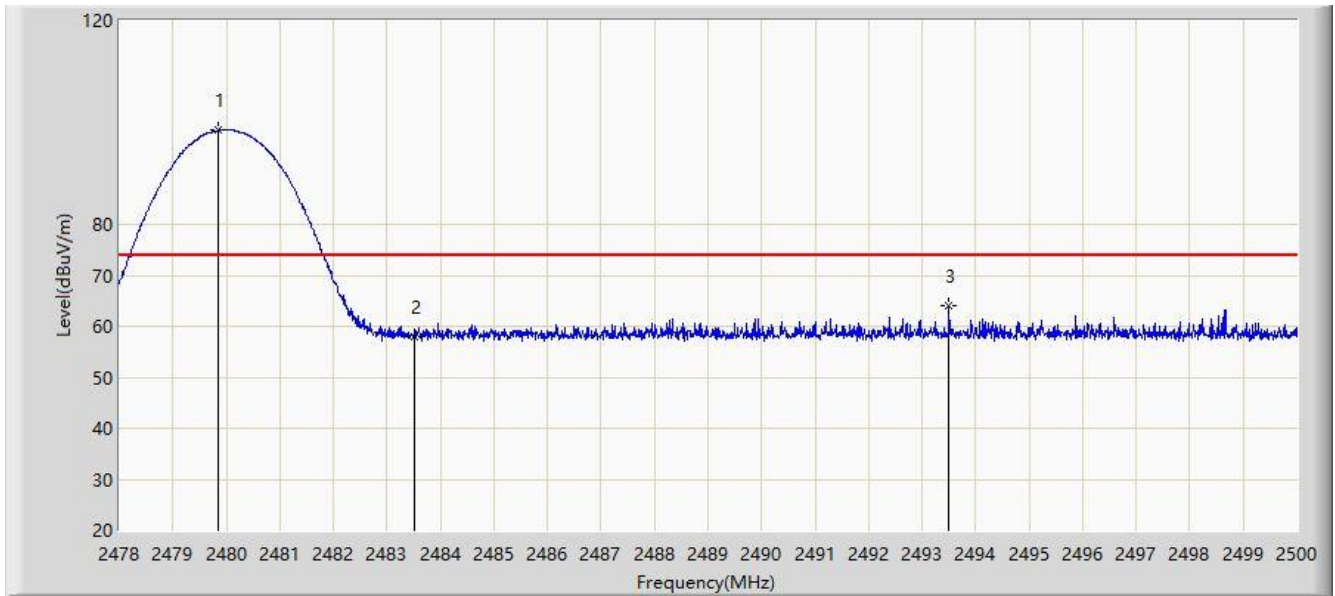


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.859	98.451	66.001	N/A	N/A	32.450	PK
2			2483.500	58.077	25.648	-15.923	74.000	32.429	PK
3			2493.499	64.070	31.647	-9.930	74.000	32.423	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/11/30 - 14:22
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

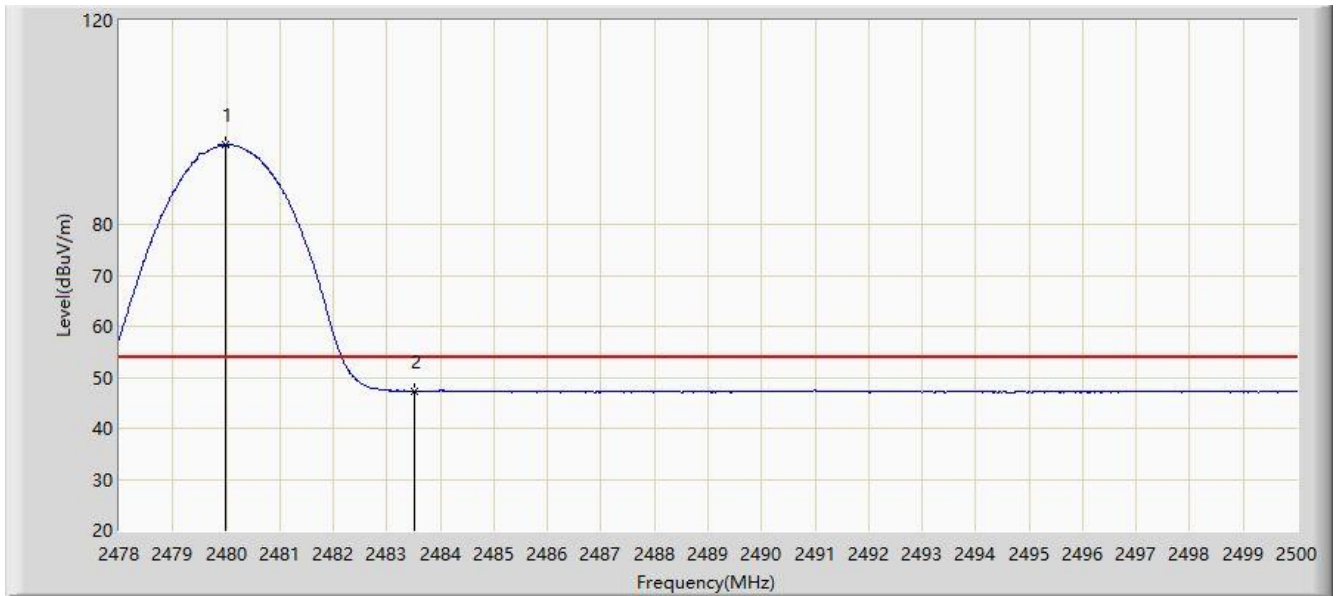

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.980	95.634	63.184	N/A	N/A	32.449	AV
2			2483.500	47.306	14.877	-6.694	54.000	32.429	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

6.11. AC Conducted Emissions Measurement


6.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.11.2. Test Setup

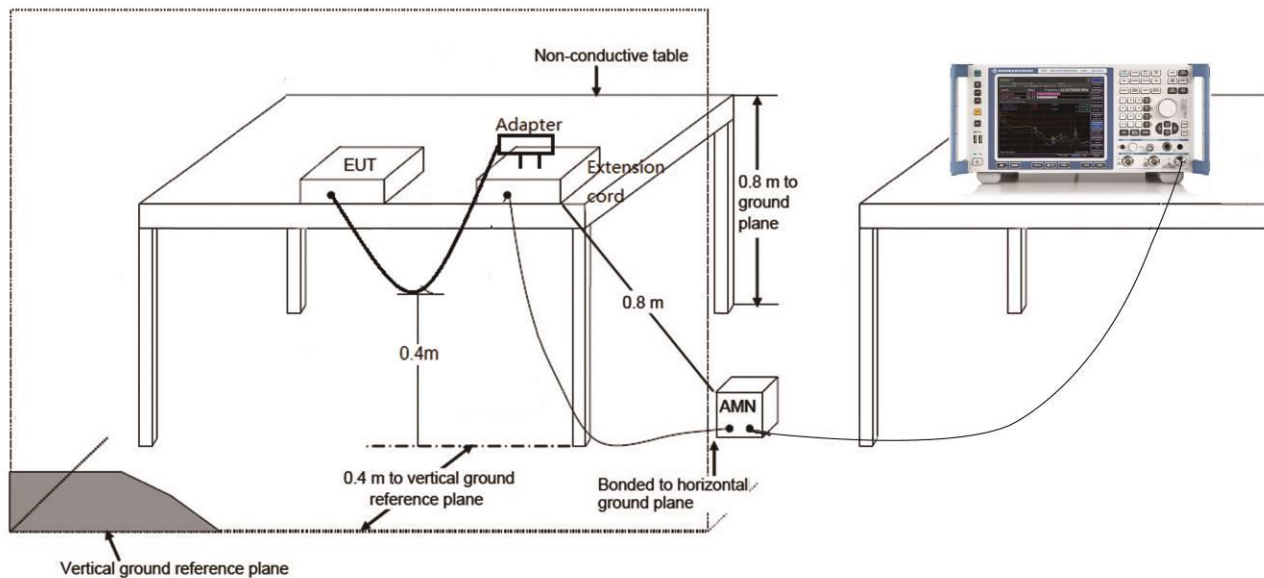

6.11.3.Test Result

Site: WZ-SR2	Time: 2020/12/02 - 13:18
Limit: FCC_Part15.207_CE_AC Power	Engineer: Dillon Diao
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2441MHz	

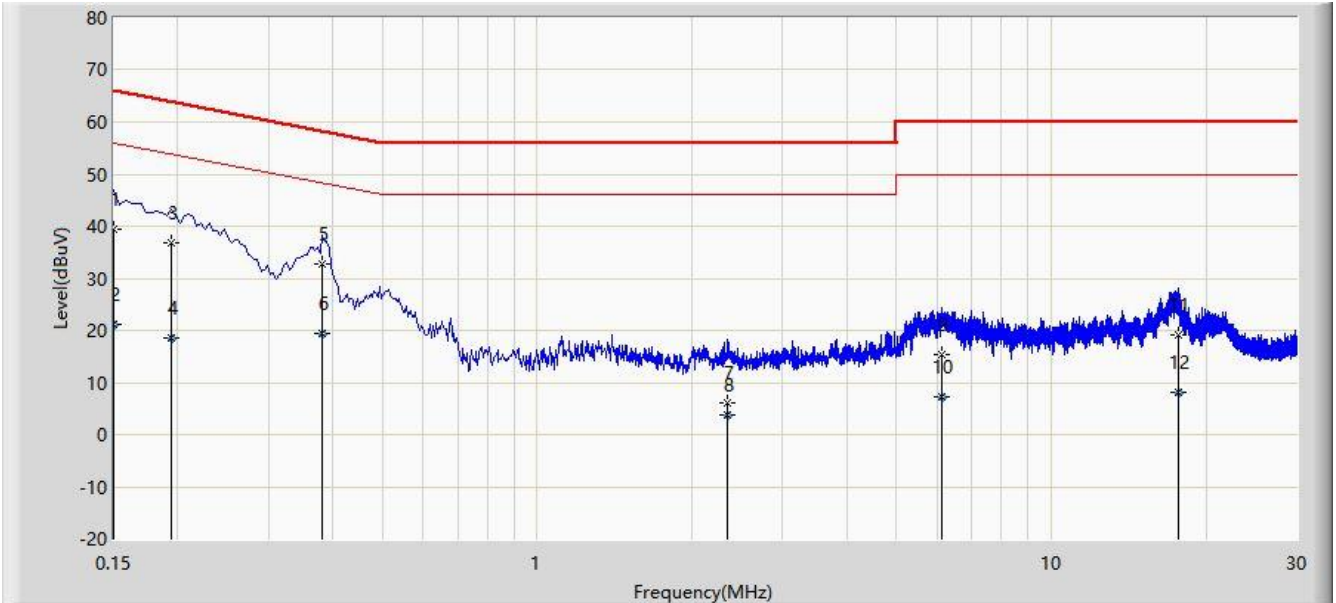


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	39.296	29.686	-26.704	66.000	9.610	QP
2			0.150	21.081	11.471	-34.919	56.000	9.610	AV
3			0.194	36.850	27.215	-27.013	63.864	9.635	QP
4			0.194	18.436	8.801	-35.428	53.864	9.635	AV
5		*	0.382	32.783	23.103	-25.453	58.236	9.680	QP
6			0.382	19.331	9.651	-28.905	48.236	9.680	AV
7			2.342	6.013	-3.767	-49.987	56.000	9.780	QP
8			2.342	3.911	-5.869	-42.089	46.000	9.780	AV
9			6.138	15.260	5.350	-44.740	60.000	9.910	QP
10			6.138	7.157	-2.753	-42.843	50.000	9.910	AV
11			17.618	19.084	8.794	-40.916	60.000	10.290	QP
12			17.618	8.235	-2.055	-41.765	50.000	10.290	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: WZ-SR2	Time: 2020/12/02 - 13:21
Limit: FCC_Part15.207_CE_AC Power	Engineer: Dillon Diao
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Bluetooth Stereo Headphones	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2441MHz	

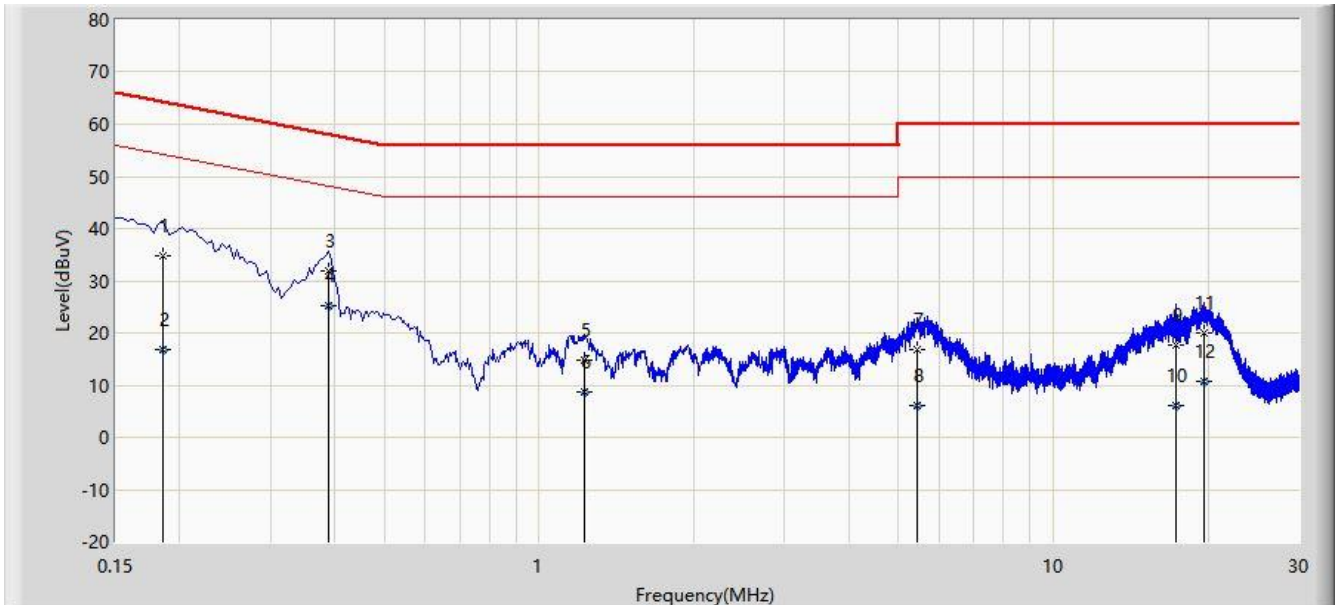

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.186	34.893	25.272	-29.321	64.213	9.621	QP
2			0.186	16.711	7.090	-37.502	54.213	9.621	AV
3			0.390	31.844	22.174	-26.219	58.064	9.670	QP
4		*	0.390	25.117	15.447	-22.946	48.064	9.670	AV
5			1.226	14.693	4.953	-41.307	56.000	9.740	QP
6			1.226	8.635	-1.105	-37.365	46.000	9.740	AV
7			5.426	16.769	6.899	-43.231	60.000	9.870	QP
8			5.426	6.196	-3.674	-43.804	50.000	9.870	AV
9			17.330	17.768	7.528	-42.232	60.000	10.240	QP
10			17.330	6.081	-4.159	-43.919	50.000	10.240	AV
11			19.658	19.967	9.687	-40.033	60.000	10.280	QP
12			19.658	10.784	0.504	-39.216	50.000	10.280	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

7. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC rules.

The End

Appendix A - Test Setup Photograph

Refer to “2011RSU058-UT” file.

Appendix B - EUT Photograph

Refer to "2011RSU058-UE" file.