




5.5 CARRIER FREQUENCIES SEPARATION

- Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)
RSS-247 Issue 2, Section 5.1(b)
- Test Method:** ANSI C63.10-2013 Section 7.8.2
- Limit:** Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.
Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
- Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
Use the following spectrum analyzer settings:
- a) Span: Wide enough to capture the peaks of two adjacent channels.
 - b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
 - c) Video (or average) bandwidth (VBW) $\geq$ RBW.
 - d) Sweep: Auto.
 - e) Detector function: Peak.
 - f) Trace: Max hold.
 - g) Allow the trace to stabilize.
 - h) Use the marker-delta function to determine the separation between the peaks of the adjacent channels.
- Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
- Test Setup:** Refer to section 4.5.3 for details.
- Instruments Used:** Refer to section 3 for details
- Test Results:** Pass

Type of Modulation	Adjacent Channel Separation (MHz)	Minimum Limit (MHz)
	Channel 39	Channel 39
GFSK	1.00	0.641
$\pi/4$ DQPSK	1.00	0.891
8DPSK	1.00	0.875

Note: The minimum limit is two-third 20 dB bandwidth.

The test plots as follows:

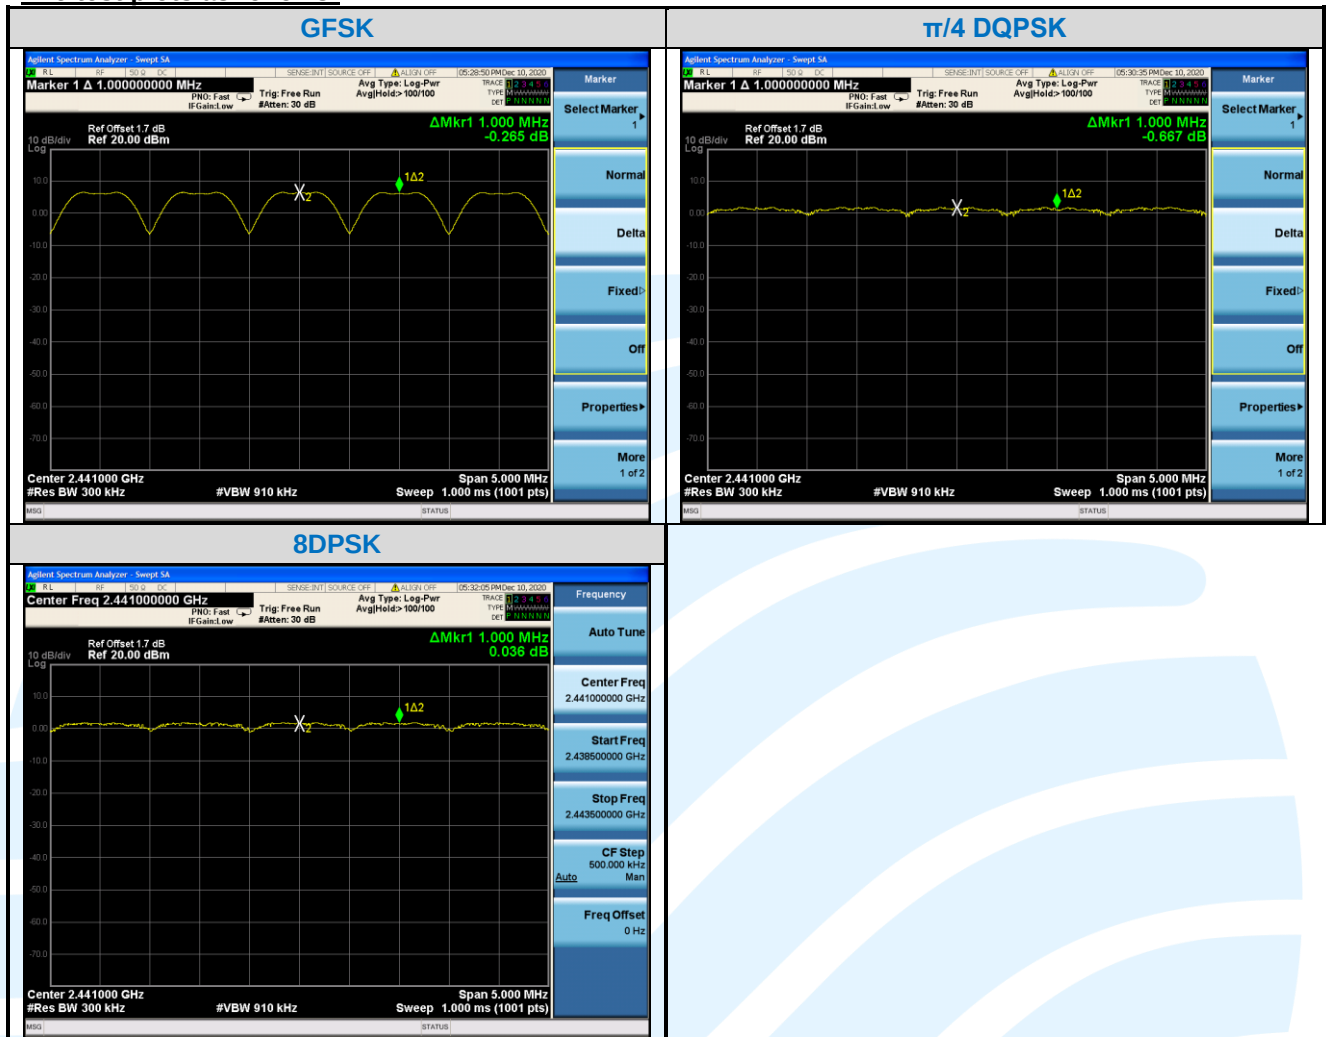

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

5.6 NUMBER OF HOPPING CHANNEL

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247(b)(1)
RSS-247 Issue 2, Section 5.1(d)

Test Method: ANSI C63.10-2013 Section 7.8.3

Limit: Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW < 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW ≥ RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results: Pass

Type of Modulation	Number of Hopping Channel
GFSK	79
$\pi/4$ DQPSK	79
8DPSK	79

The test plots as follows:

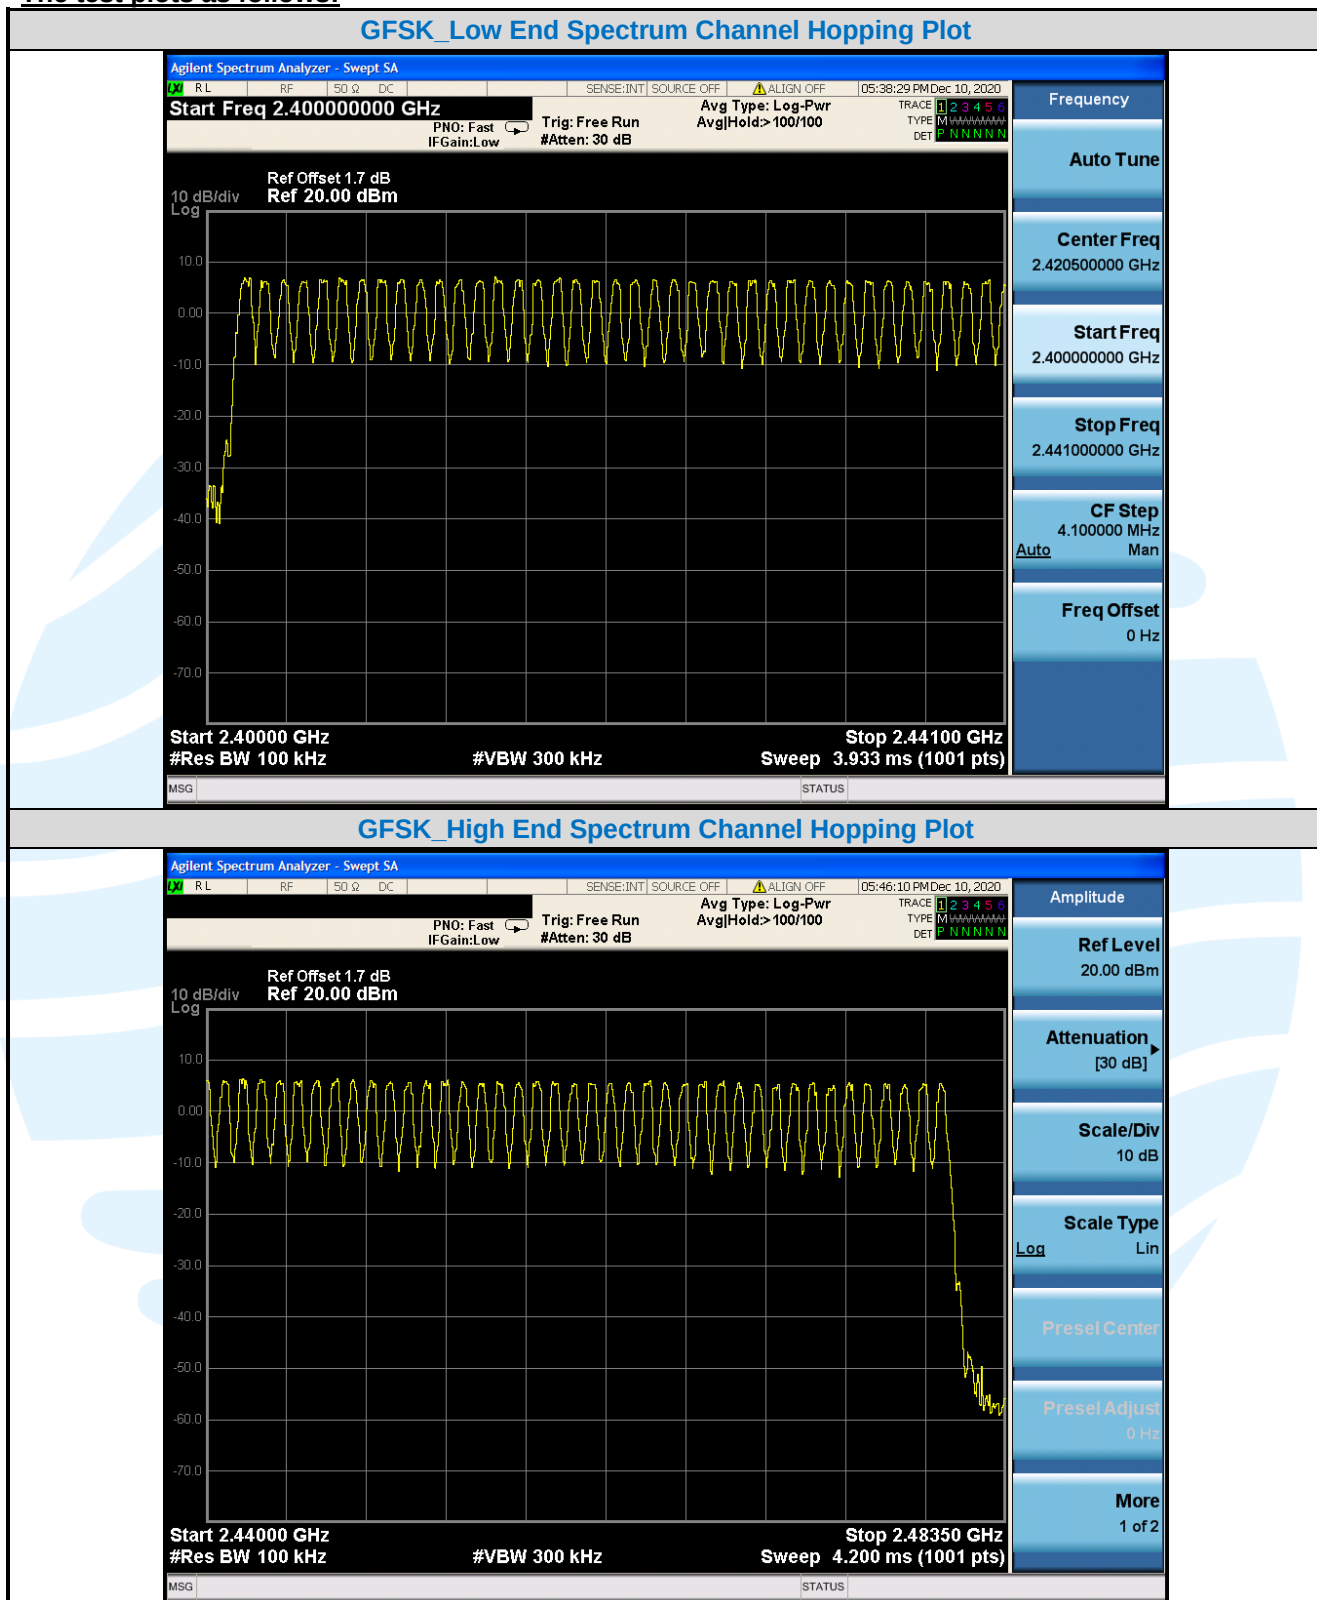

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

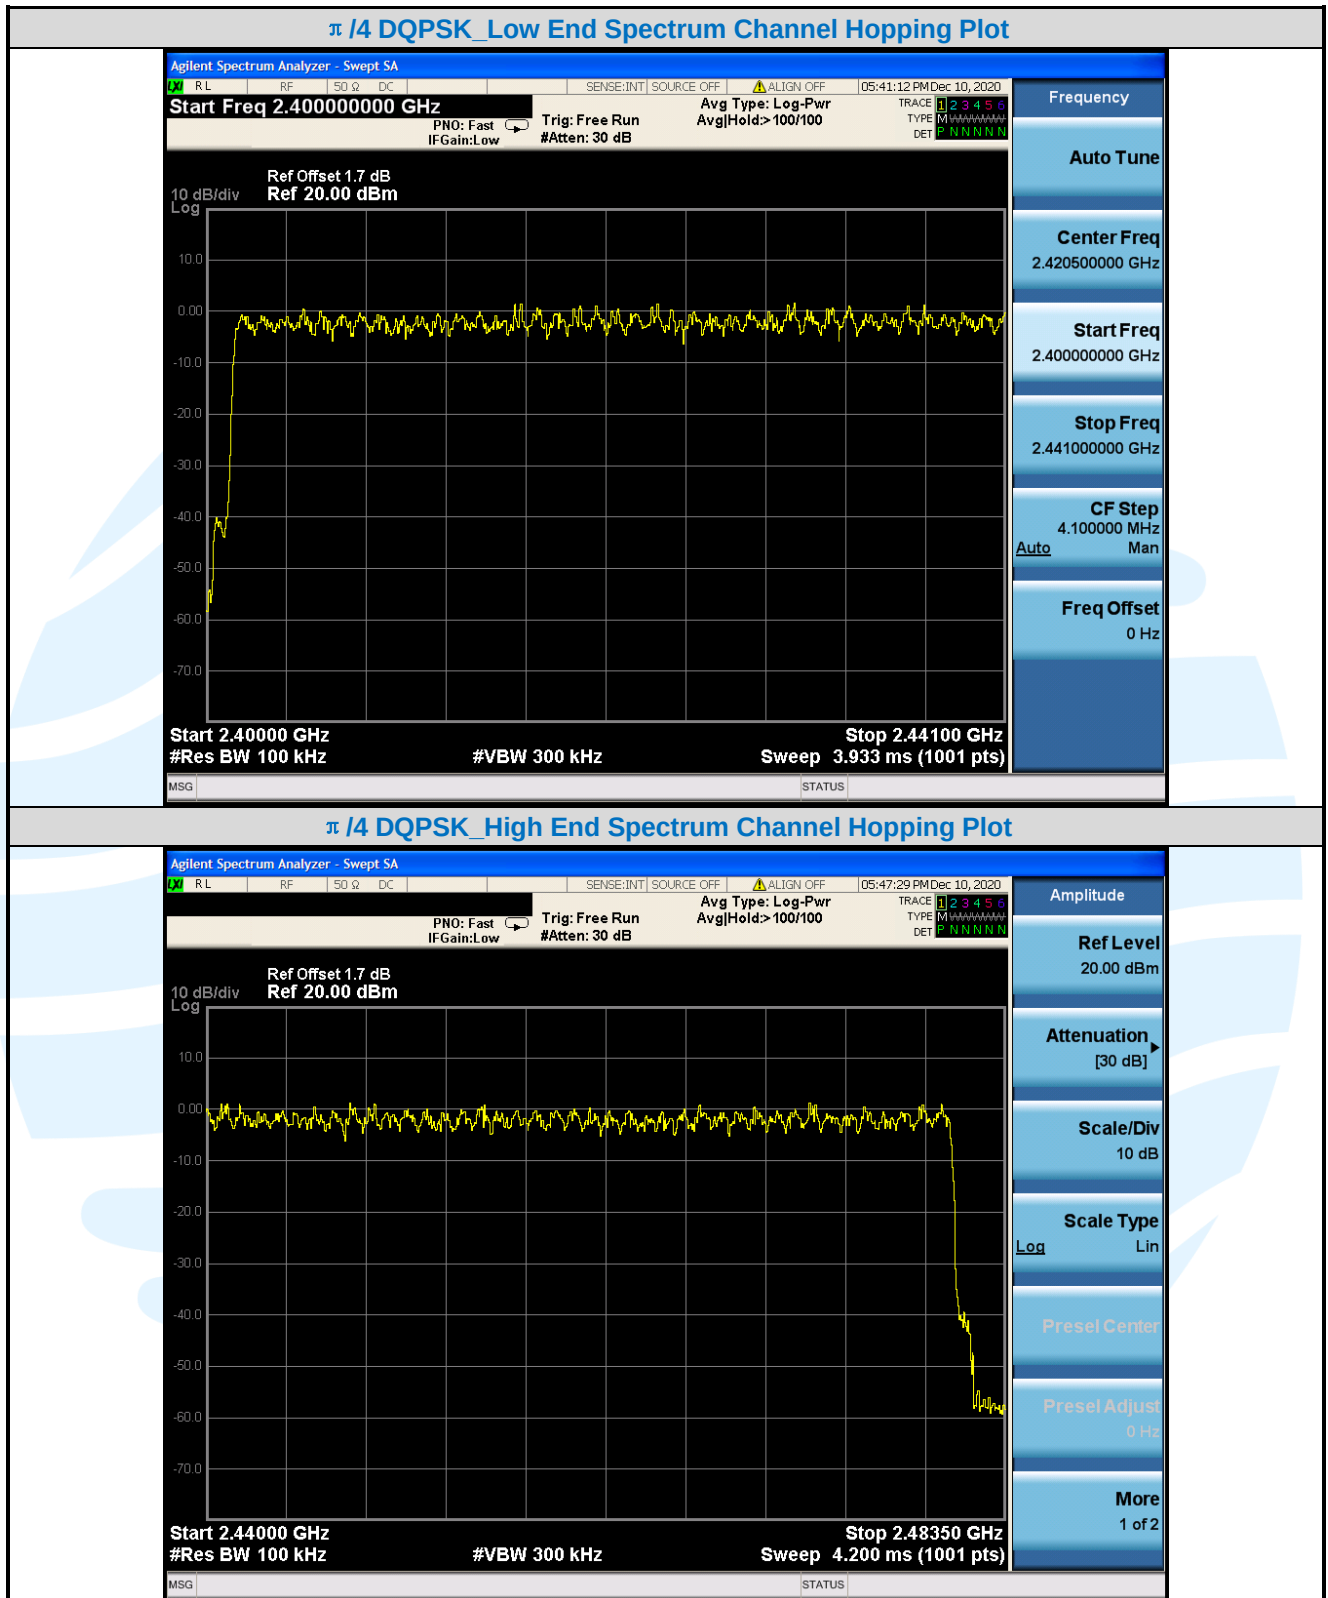

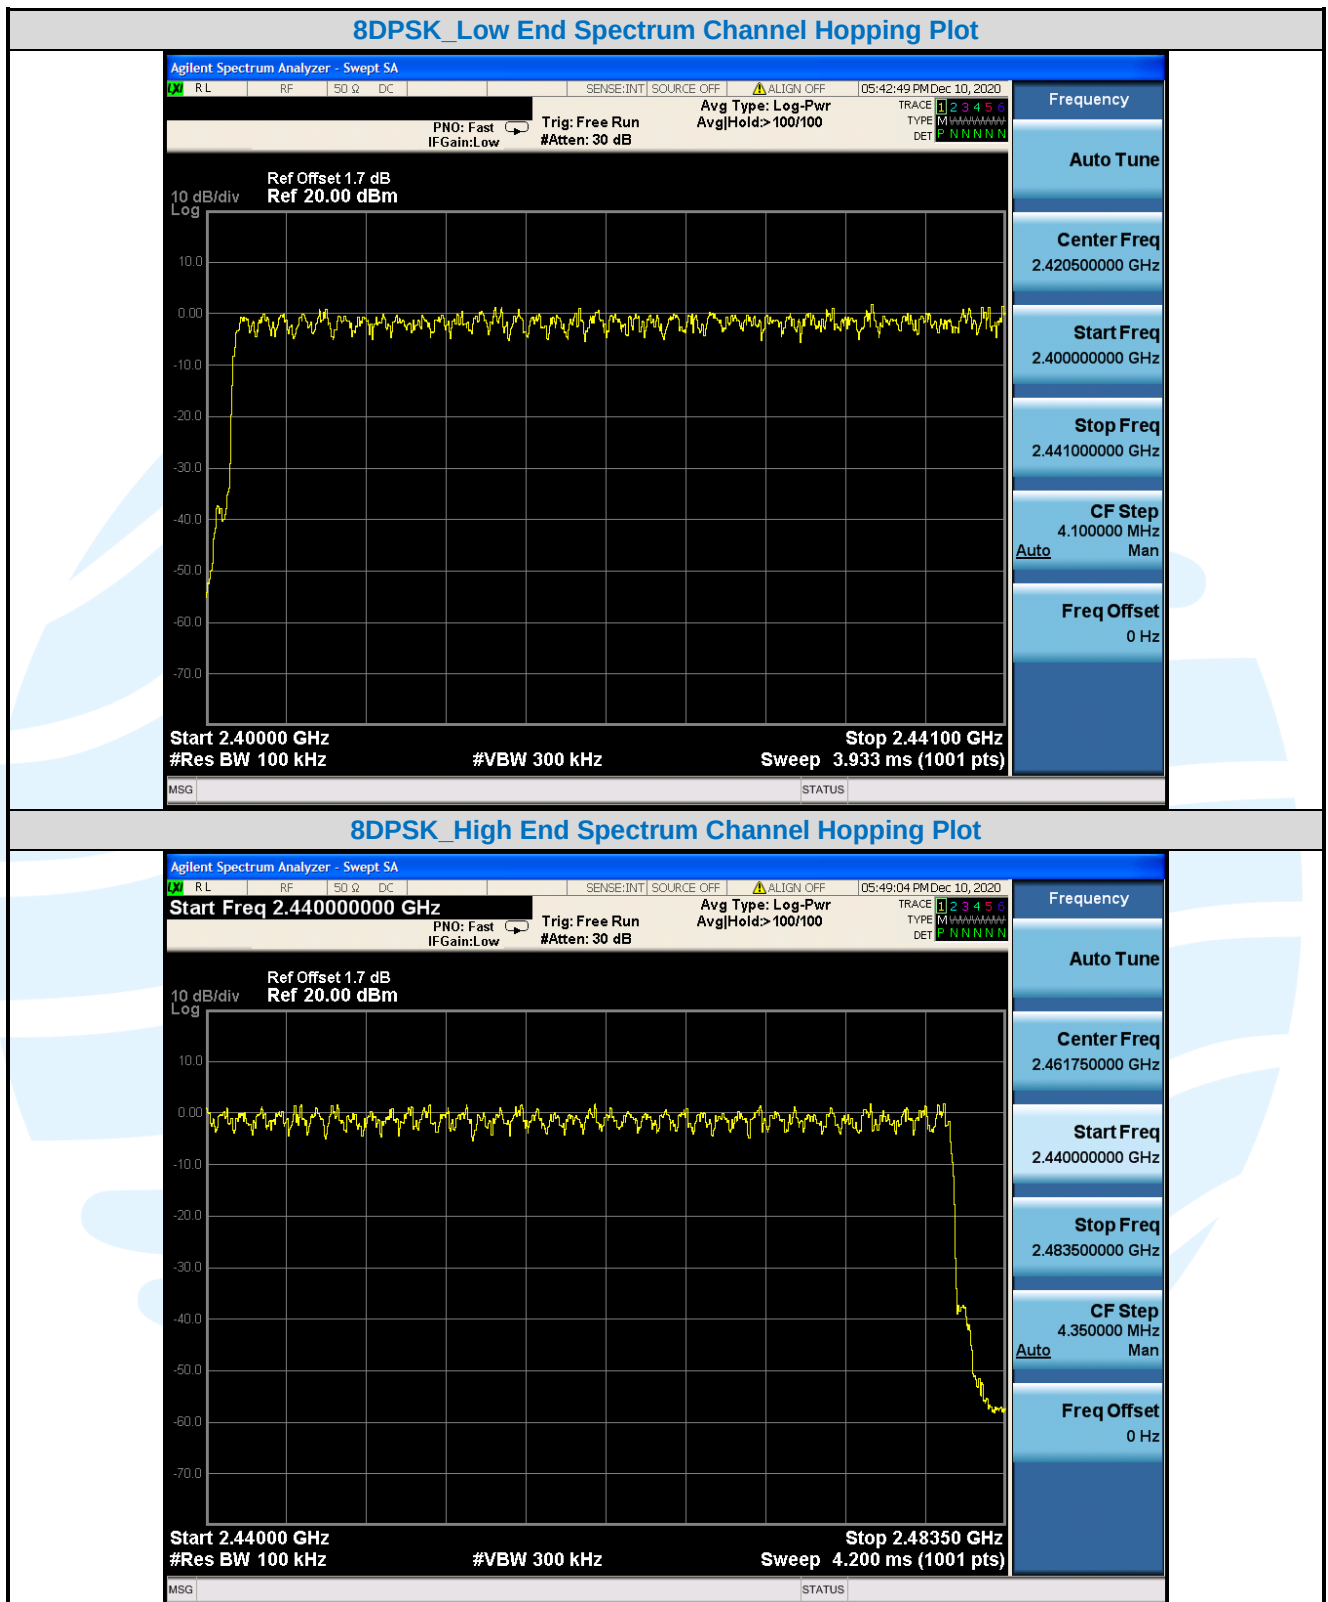


5.7 DWELL TIME

- Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247(a)(1)
RSS-247 Issue 2, Section 5.1(d)
- Test Method:** ANSI C63.10-2013 Section 7.8.4
- Limit:** Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
- Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
Use the following spectrum analyzer settings:
- Span = zero span, centered on a hopping channel
 - RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
 - Sweep = As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
 - Detector function = peak
 - Trace = max hold
 - Use the marker-delta function to determine the dwell time
- Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
- Test Setup:** Refer to section 4.5.3 for details.
- Instruments Used:** Refer to section 3 for details
- Test Results:** Pass

Type of Modulation	Test Frequency	Packet	Pulse Width	Number of Pulses in 31.6 seconds	Dwell Time	Limit
			ms		ms	ms
GFSK	2441MHz	1-DH1	0.380	316.000	120.08	< 400
		1-DH3	1.636	162.000	265.03	< 400
		1-DH5	2.884	108.000	311.47	< 400
$\pi/4$ DQPSK	2441MHz	2-DH1	0.368	312.000	114.82	< 400
		2-DH3	1.640	158.000	259.12	< 400
		2-DH5	2.880	102.000	293.76	< 400
8DPSK	2441MHz	3-DH1	0.488	318.000	155.18	< 400
		3-DH3	1.624	153.000	248.47	< 400
		3-DH5	2.880	105.000	302.40	< 400

The test plots as follows:

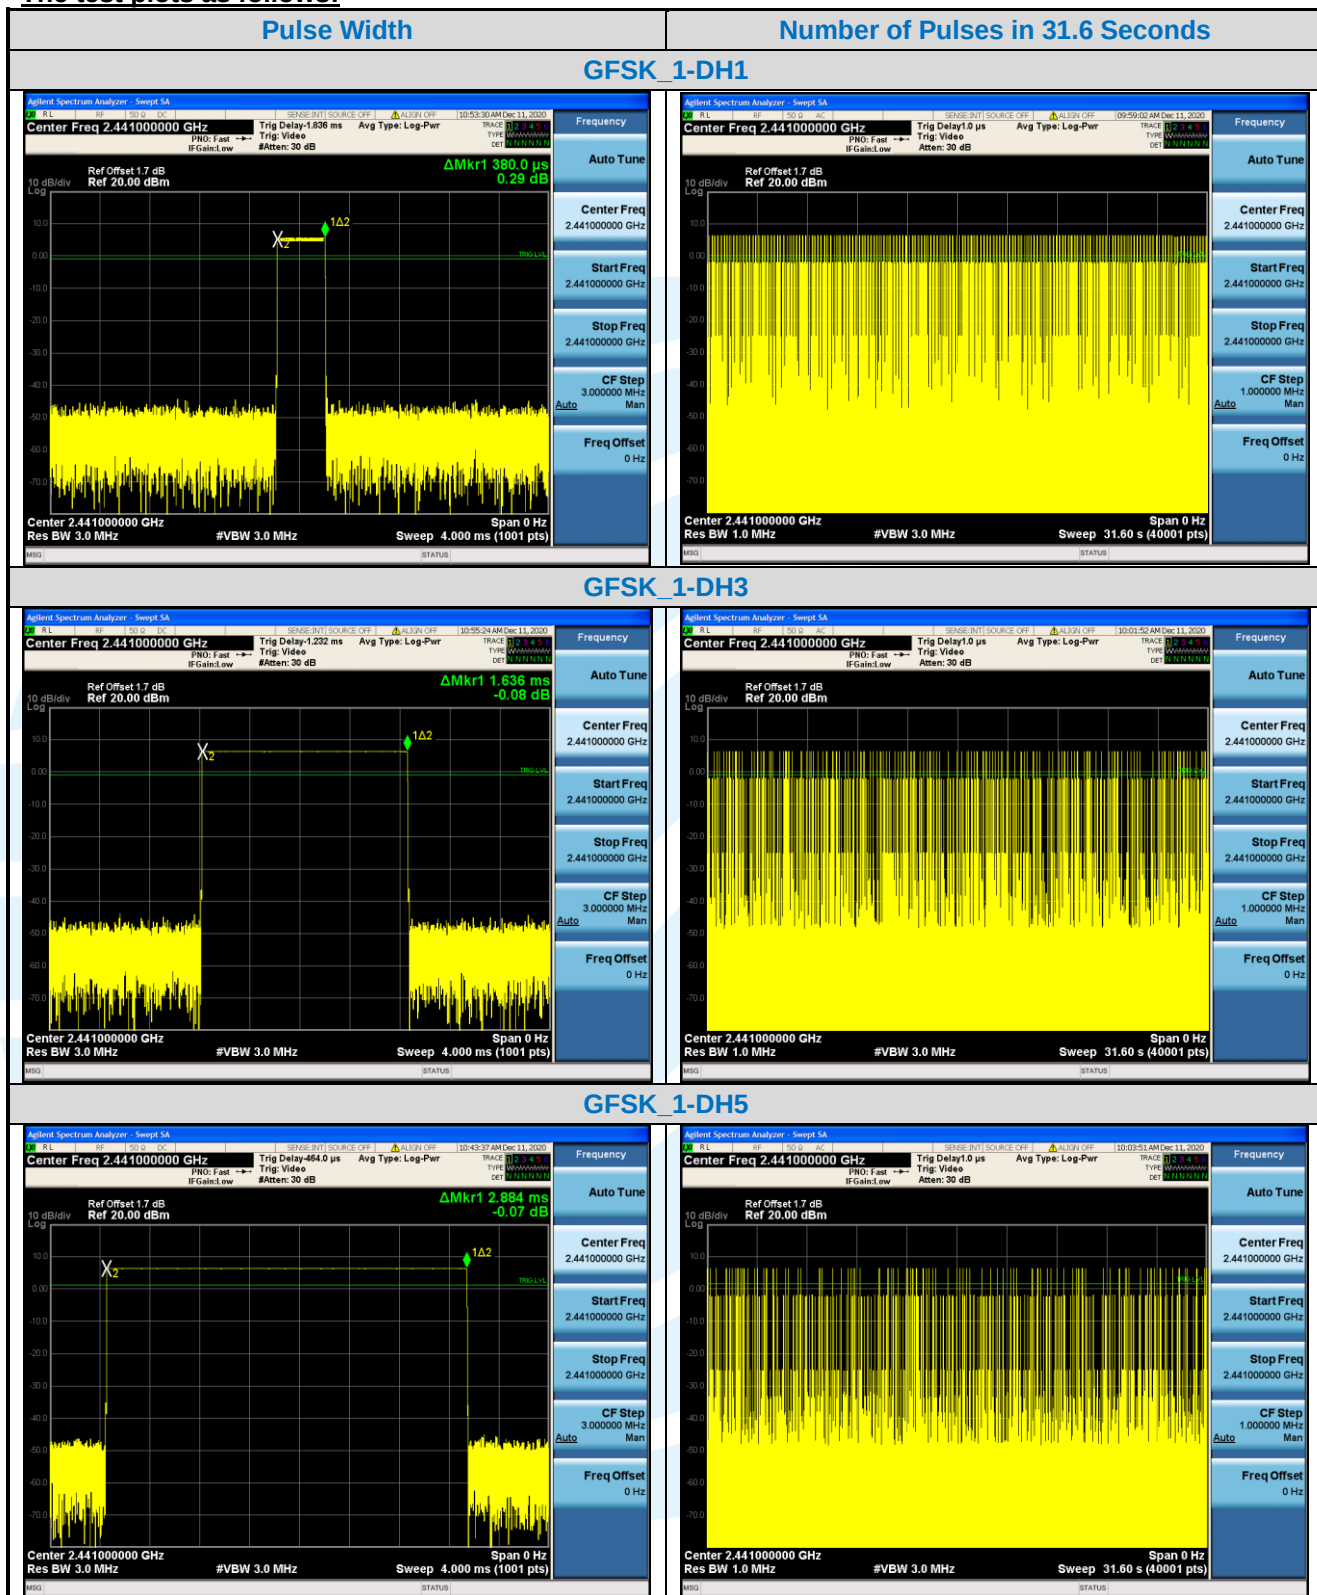

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

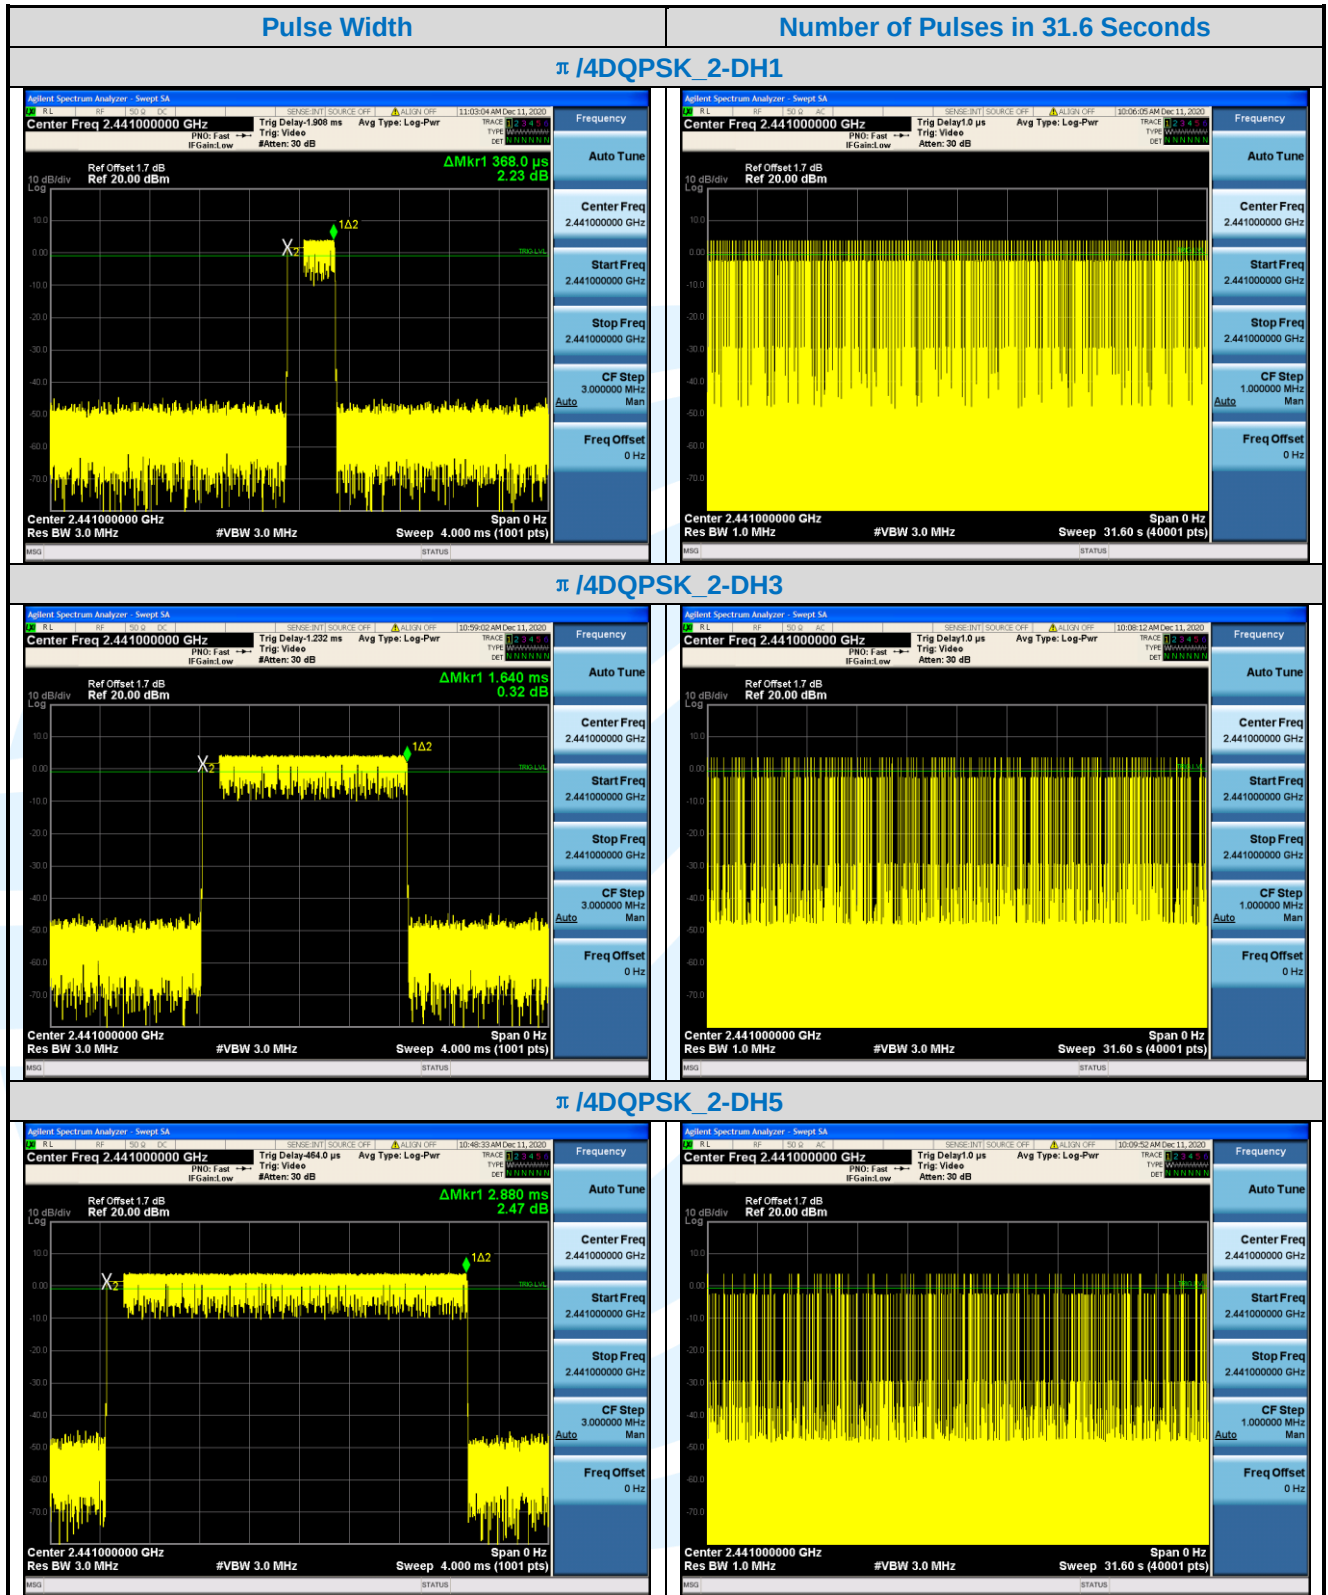

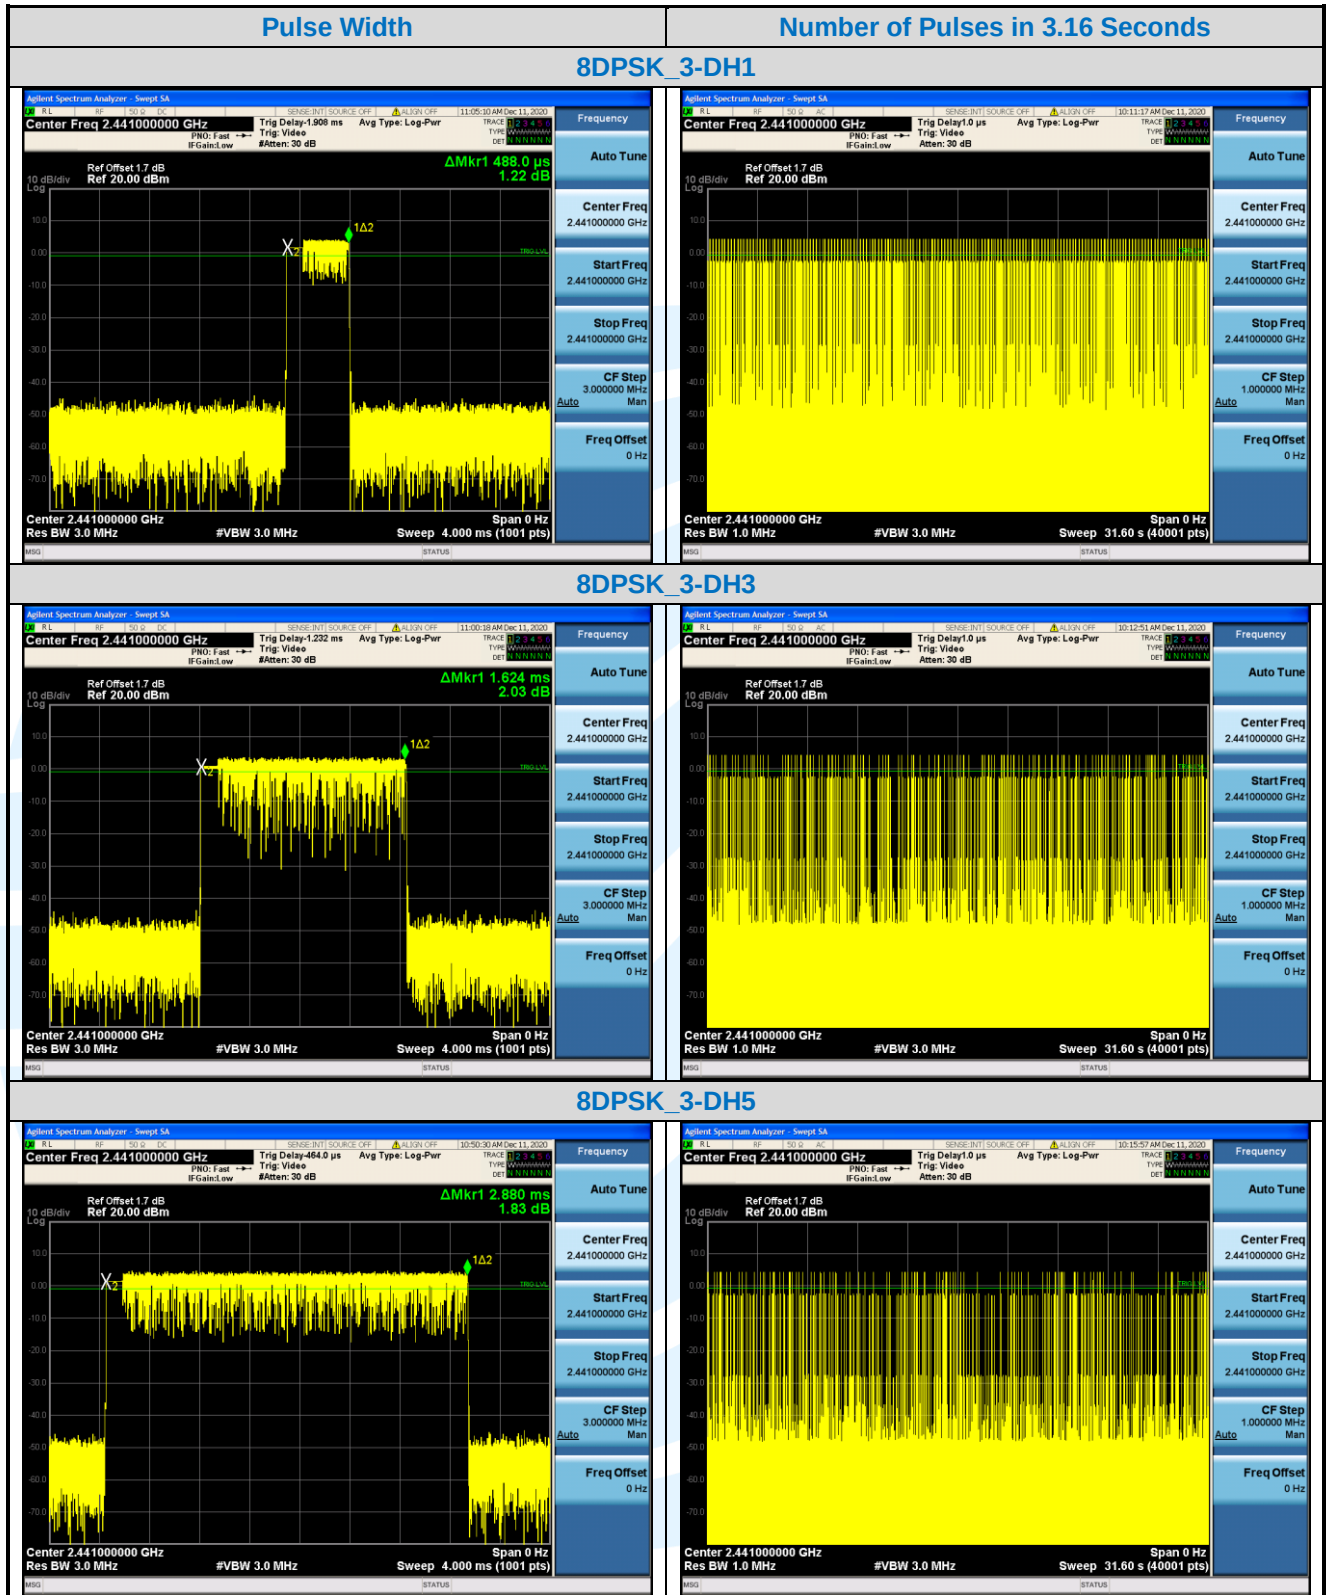

5.8 CONDUCTED OUT OF BAND EMISSION

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 2, Section 5.5
Test Method:	ANSI C63.10-2013 Section 6.10.4 & Section 7.8.8
Limit:	In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings:

Step 1: Measurement Procedure REF

- a) Set instrument center frequency to 2400 MHz or 2483.5 MHz.
- b) Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Sweep points $\geq 2 \times$ Span/RBW
- h) Trace mode = max hold.
- i) Allow the trace to stabilize.
- j) Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.


Step 2: Measurement Procedure OOB

- a) Set RBW = 100 kHz.
- b) Set VBW ≥ 300 kHz.
- c) Detector = peak.
- d) Sweep = auto couple.
- e) Trace Mode = max hold.
- f) Allow trace to fully stabilize.
- g) Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Mode:	Hopping Frequencies Transmitter mode
Test Results:	Pass
Test Data:	

The test plots as follows:

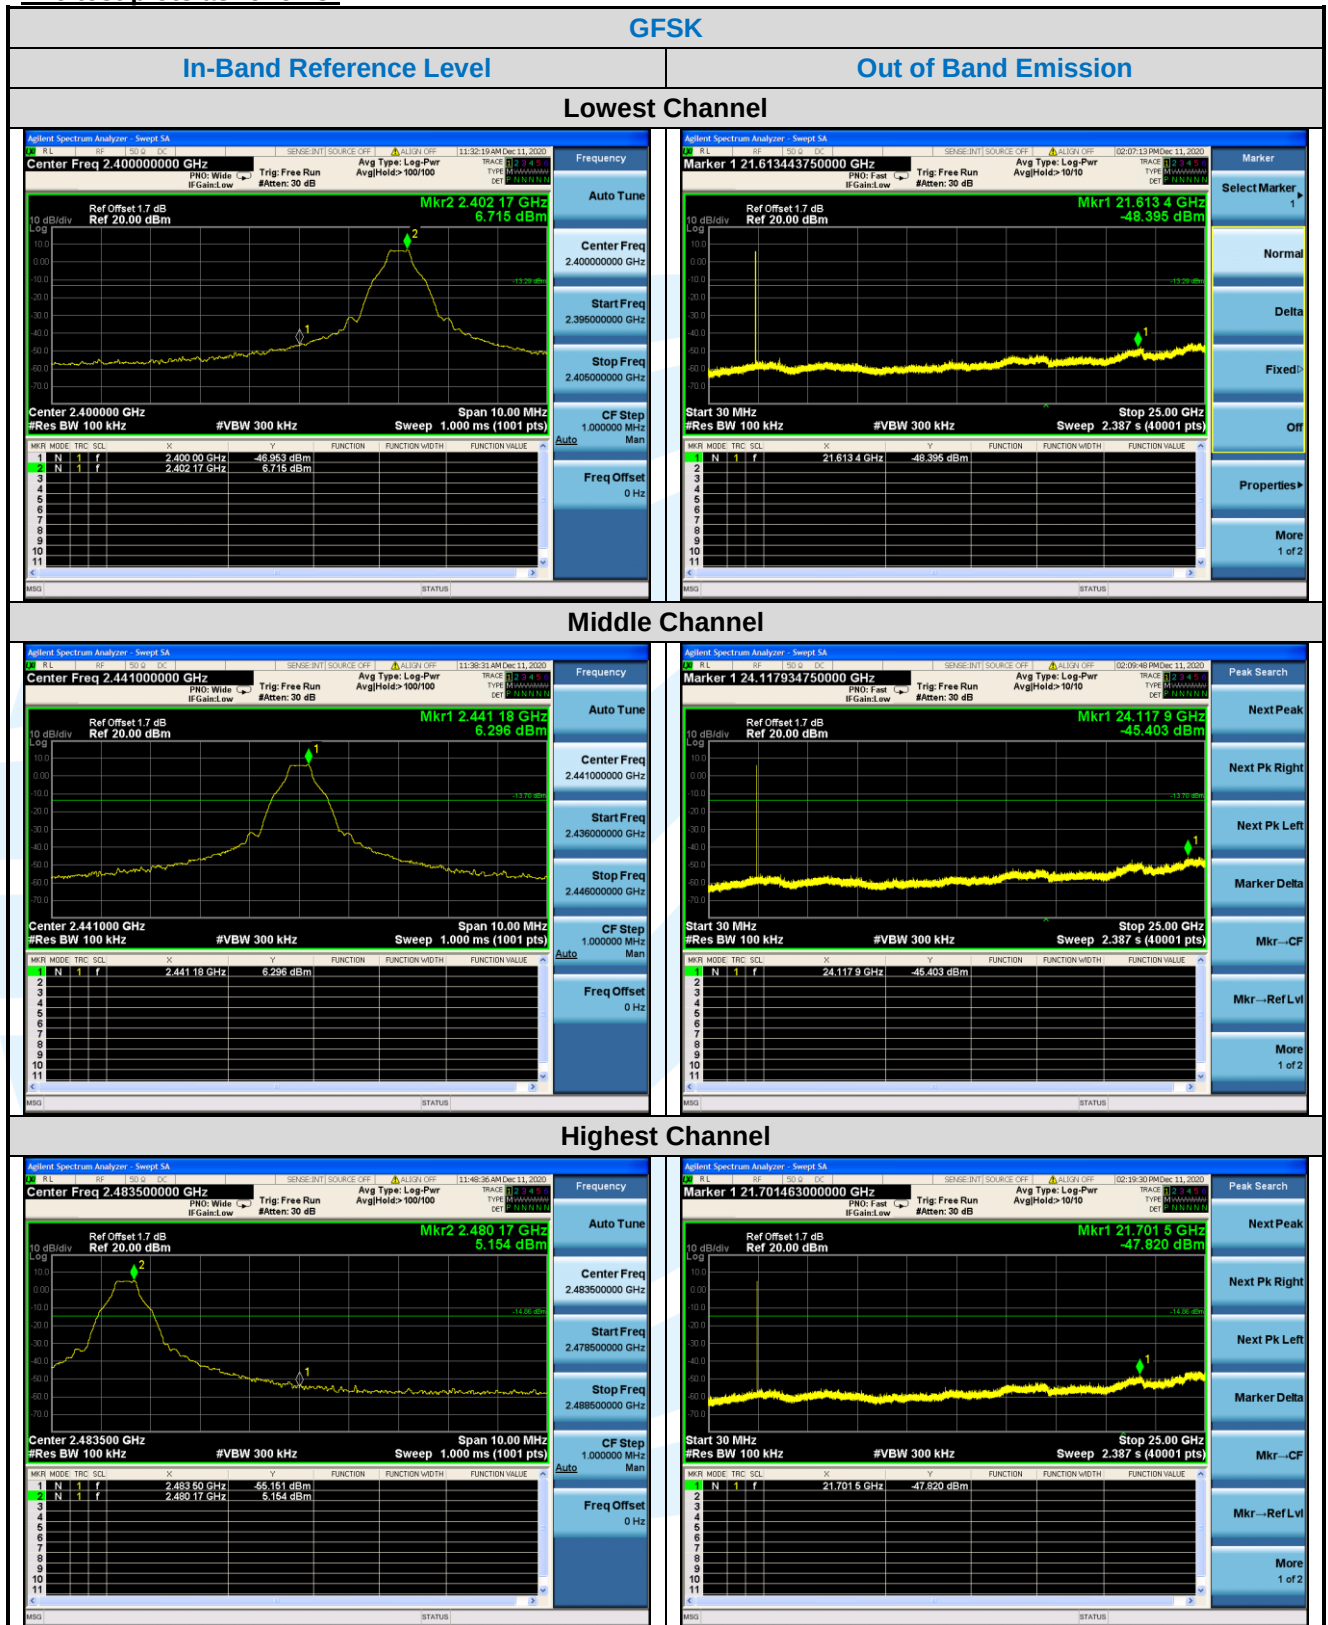

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

