

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
INTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 15 SUBPART C REQUIREMENT**

OF

**Multimedia speaker**

**Model No.: e10BT, Exclaim Connect**

**Brand Name: EDIFIER**

**FCC ID: Z9G-EDF17**

**Report No.: KAD140624120E**

**Issue Date: July 16, 2014**

*Prepared for*

**Edifier International Limited  
Room 2207-9, Tower Two, Lippo Centre 89 Queensway, HongKong**

*Prepared by*

**DONGGUAN EMTEK CO., LTD.**

**No.281, Guantai Road, Nancheng District,  
Dongguan, Guangdong, China  
TEL: 86-769-22807078  
FAX: 86-769-22807079**

## VERIFICATION OF COMPLIANCE

Applicant:	Edifier International Limited Room 2207-9, Tower Two, Lippo Centre 89 Queensway, HongKong
Manufacturer:	Beijing Edifier Technology Co., Ltd. 8th floor, ZuoAn Building, NO.68 BeiSiHuanXiLu, Haidian District, Beijing 100080, China
Product Description:	Multimedia speaker
Brand Name:	EDIFIER
Model Number:	e10BT, Exclaim Connect
File Number:	KAD140624120E
Date of Test:	June 24, 2014 to July 04, 2014

### We hereby certify that:

The above equipment was tested by DONGGUAN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2013).

The test results of this report relate only to the tested sample identified in this report.

*Approved By*



---

**Sam.Lv / Q.A. Manager  
DONGGUAN EMTEK CO., LTD.**

## Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	KAD140624120E

## Table of Contents

<b>1. GENERAL INFORMATION.....</b>	<b>6</b>
1.1 PRODUCT DESCRIPTION.....	6
1.2 TEST METHODOLOGY .....	7
1.3 SPECIAL ACCESSORIES.....	7
1.4 EQUIPMENT MODIFICATIONS .....	7
1.5 TEST FACILITY .....	7
<b>2. SYSTEM TEST CONFIGURATION.....</b>	<b>8</b>
2.1 EUT CONFIGURATION.....	8
2.2 EUT EXERCISE .....	8
2.3 TEST PROCEDURE .....	8
2.4 CONFIGURATION OF TESTED SYSTEM .....	9
<b>3. DESCRIPTION OF TEST MODES.....</b>	<b>10</b>
<b>4. CONDUCTED EMISSIONS TEST .....</b>	<b>11</b>
4.1 MEASUREMENT PROCEDURE: .....	11
4.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	11
4.3 MEASUREMENT EQUIPMENT USED: .....	11
4.4 CONDUCTED EMISSION LIMIT.....	12
4.5 MEASUREMENT RESULT:.....	12
4.6 CONDUCTED MEASUREMENT PHOTOS:.....	15
<b>5. RADIATED EMISSION TEST .....</b>	<b>16</b>
5.1 MEASUREMENT PROCEDURE .....	16
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	17
5.3 MEASUREMENT EQUIPMENT USED: .....	18
5.4 RADIATED EMISSION LIMIT .....	19
5.5 MEASUREMENT RESULT.....	20
5.6 RADIATED MEASUREMENT PHOTOS: .....	26
<b>6. 6DB BANDWIDTH MEASUREMENT .....</b>	<b>27</b>
6.1 MEASUREMENT PROCEDURE .....	27
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	27
6.3 MEASUREMENT EQUIPMENT USED: .....	27
6.4 LIMIT .....	27
6.5 MEASUREMENT RESULTS:.....	28
<b>7. MAXIMUM PEAK OUTPUT POWER TEST .....</b>	<b>30</b>
7.1 MEASUREMENT PROCEDURE .....	30
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	30
7.3 MEASUREMENT EQUIPMENT USED: .....	30
7.4 PEAK POWER OUTPUT LIMIT .....	30

7.5	MEASUREMENT RESULTS:.....	31
<b>8.</b>	<b>POWER SPECTRAL DENSITY MEASUREMENT .....</b>	<b>33</b>
8.1	MEASUREMENT PROCEDURE .....	33
8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	33
8.3	MEASUREMENT EQUIPMENT USED:.....	33
8.4	MEASUREMENT PROCEDURE .....	33
8.5	MEASUREMENT RESULTS:.....	34
<b>9.</b>	<b>BAND EDGE TEST .....</b>	<b>38</b>
9.1	MEASUREMENT PROCEDURE .....	38
9.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	38
9.3	MEASUREMENT RESULTS:.....	39
<b>10</b>	<b>ANTENNA APPLICATION .....</b>	<b>40</b>
10.1	ANTENNA REQUIREMENT .....	40
10.2	RESULT.....	40

## 1. GENERAL INFORMATION

### 1.1 Product Description

The Edifier International Limited, Model: e10BT (referred to as the EUT in this report)

The EUT is an short range, lower power transmitter as an Input Device. It is designed by way of utilizing the following modulation achieves the system operating.

- A). Operation Frequency: 2402-2480MHz
- B). Kind of device: Bluetooth 4.0
- C). Modulation: GFSK
- D). Number of Channel: 40
- E). Channel space: 2MHz
- F). Rated RF Output Power: 2.44dBm
- G). Antenna Type: Internal chip antenna
- H). Antenna GAIN: 2.5 dBi
- I). Input Rating: DC 12V, 1.65A Come from Adapter
- J). Information of Adapter:
  - Model No.: ADT-20120 US
  - Input: AC 100-240V, 50/60Hz, 0.7A
  - Output: DC 12V, 1.65A

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	<b>2402</b>	15	2430	29	2458
02	2404	16	2432	30	2460
03	2406	17	2434	31	2462
04	2408	18	2436	32	2464
05	2410	19	2438	33	2466
06	2412	20	2440	34	2468
07	2414	21	<b>2442</b>	35	2470
08	2416	22	2444	36	2472
09	2418	23	2446	37	2474
10	2420	24	2448	38	2476
11	2422	25	2450	39	2478
12	2424	26	2452	40	<b>2480</b>
13	2426	27	2454		
14	2428	28	2456		

Note:

1. Test of channel was included the lowest 2402MHz, middle 2442MHz and highest frequency 2480MHz in highest data rate and to perform the test, then record on this report.

## 1.2 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03 (April 2013) for compliance to FCC 47CFR 15.247 requirements.

## 1.3 Special Accessories

Not available for this EUT intended for grant.

## 1.4 Equipment Modifications

Not available for this EUT intended for grant.

## 1.5 Test Facility

### Site Description

EMC Lab. : Accredited by FCC, June 18, 2014  
The Certificate Number is 247565

Accredited by Industry Canada, February 19, 2014  
The Certificate Number is 9444A.

Name of Firm : DONGGUAN EMTEK CO., LTD

Site Location : No.281, Guantai Road, Nancheng District,  
Dongguan, Guangdong, China

## 2. System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous transmission application.

### 2.2 EUT Exercise

The Transmitter was operated in the transmission operating mode. the Tx frequency was fixed which was for the purpose of the measurements.

### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions


The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

#### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. Emission was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

## 2.4 Configuration of Tested System

**Fig. 2-1 Configuration of Tested System**



**Table 2-1 Equipment Used in Tested System**

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	Multimedia speaker	EDIFIER	e10BT	Z9G-EDF17	N/A	<b>EUT</b>

**Note:**

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.
- (2) All cases of EUT are tested, only the result of the worst case was recorded in the report.

### 3. Description of test modes

This is Digital Transmission system(DTS) and have one type of modulation GFSK.

The 3 channels of lower, middle and higher were chosen for test.


1. For lowest channel : 2402MHz(Channel 01)
2. For middle channel : 2442MHz(Channel 21)
3. For highest channel: 2480MHz(Channel 40)

## 4. Conducted Emissions Test

### 4.1 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 4.2 Test SET-UP (Block Diagram of Configuration)

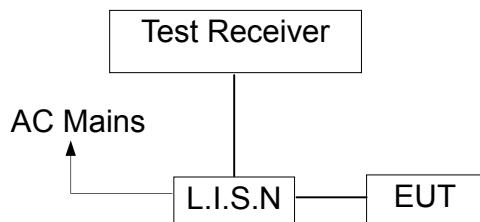

### 4.3 Measurement Equipment Used:

Conducted Emission Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Last Cal.	Due date
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/16/2014	05/15/2015
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/16/2014	05/15/2015
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/16/2014	05/15/2015
50ΩCoaxial Switch	Anritsu	MP59B	M20531	05/16/2014	05/15/2015

#### 4.4 Conducted Emission Limit


##### (7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

**Note:**

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


#### 4.5 Measurement Result:

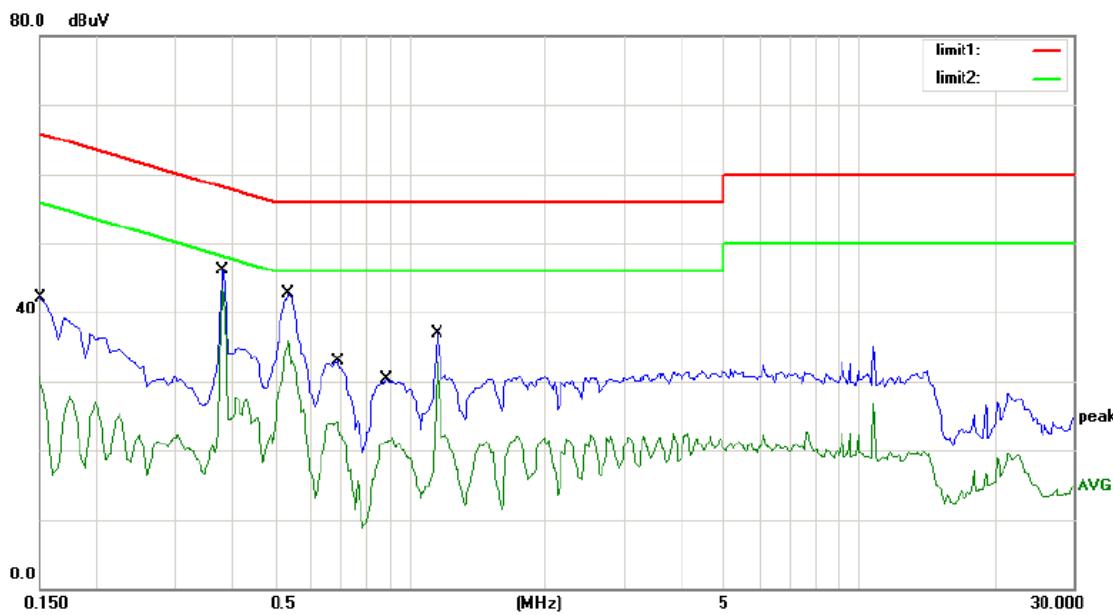

Site site #1 Phase: **L1** Temperature: 24  
 Limit: (CE)FCC PART 15 class C\_QP Power: AC 120V/60Hz Humidity: 55 %  
 Mode: BT Link  
 Note:

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level dBuV	Factor dB	ment dBuV				
1		0.1500	39.50	0.00	39.50	66.00	-26.50	QP	
2		0.1500	30.67	0.00	30.67	56.00	-25.33	AVG	
3		0.3850	44.30	0.00	44.30	58.17	-13.87	QP	
4	*	0.3850	43.27	0.00	43.27	48.17	-4.90	AVG	
5		0.5400	39.40	0.00	39.40	56.00	-16.60	QP	
6		0.5400	35.81	0.00	35.81	46.00	-10.19	AVG	
7		0.6900	29.80	0.00	29.80	56.00	-26.20	QP	
8		0.6900	24.13	0.00	24.13	46.00	-21.87	AVG	
9		0.8850	27.60	0.00	27.60	56.00	-28.40	QP	
10		0.8850	21.82	0.00	21.82	46.00	-24.18	AVG	
11		1.1500	35.10	0.00	35.10	56.00	-20.90	QP	
12		1.1500	32.63	0.00	32.63	46.00	-13.37	AVG	

\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.

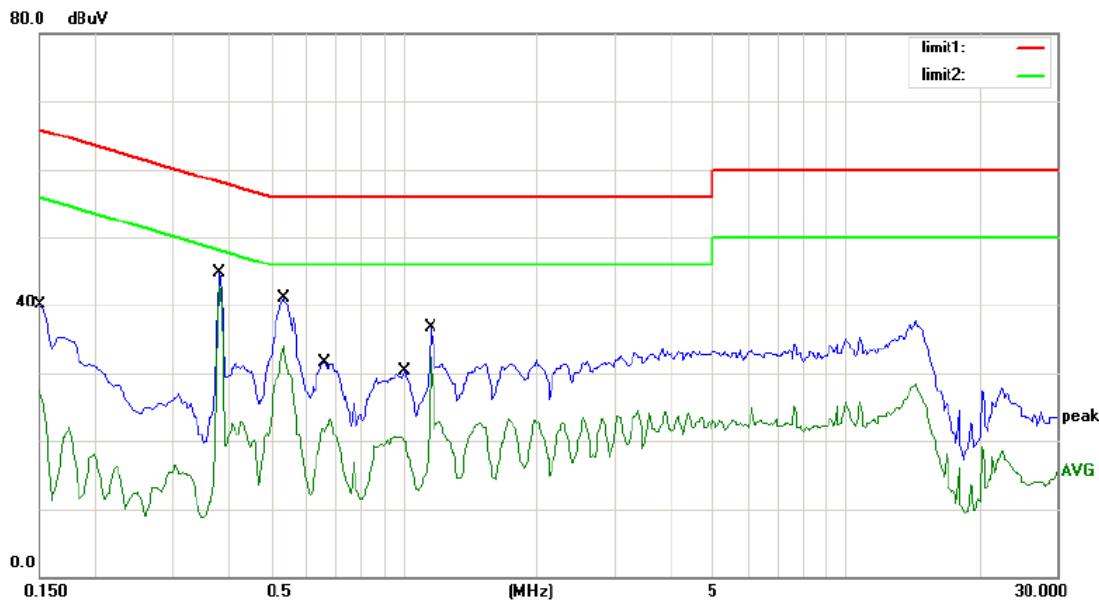

Site site #1 Phase: **N** Temperature: 24

Limit: (CE)FCC PART 15 class C\_QP Power: AC 120V/60Hz Humidity: 55 %

Mode: BT Link

Note:

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level dBuV	Factor dB	ment dBuV				
1		0.1500	37.10	0.00	37.10	66.00	-28.90	QP	
2		0.1500	27.67	0.00	27.67	56.00	-28.33	AVG	
3		0.3850	42.60	0.00	42.60	58.17	-15.57	QP	
4	*	0.3850	42.85	0.00	42.85	48.17	-5.32	AVG	
5		0.5350	38.60	0.00	38.60	56.00	-17.40	QP	
6		0.5350	34.13	0.00	34.13	46.00	-11.87	AVG	
7		0.6650	28.90	0.00	28.90	56.00	-27.10	QP	
8		0.6650	23.30	0.00	23.30	46.00	-22.70	AVG	
9		1.0100	27.40	0.00	27.40	56.00	-28.60	QP	
10		1.0100	20.59	0.00	20.59	46.00	-25.41	AVG	
11		1.1500	34.40	0.00	34.40	56.00	-21.60	QP	
12		1.1500	32.27	0.00	32.27	46.00	-13.73	AVG	

\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.

#### 4.6 Conducted Measurement Photos:




## 5. Radiated Emission Test

### 5.1 Measurement Procedure


- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
- 2 Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3 And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4 Repeat above procedures until all frequency measured were complete.

## 5.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

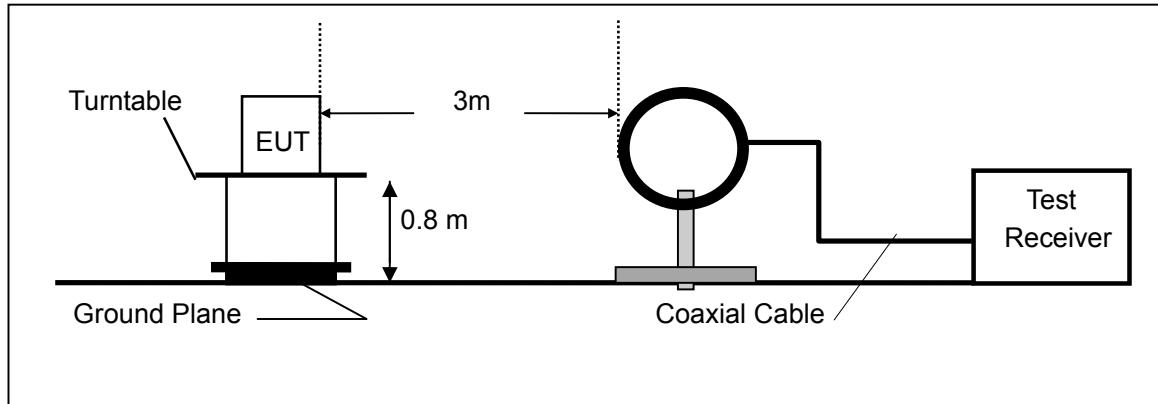

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

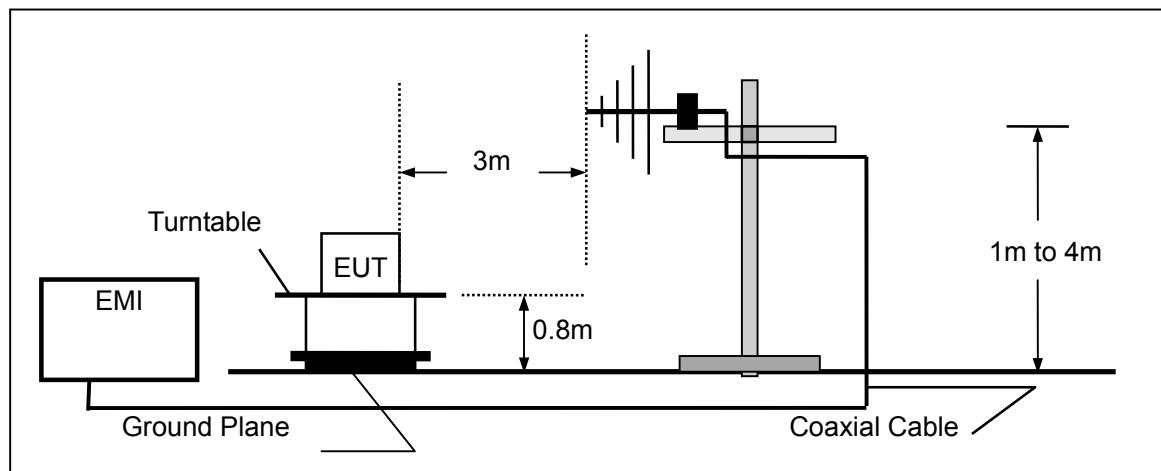

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

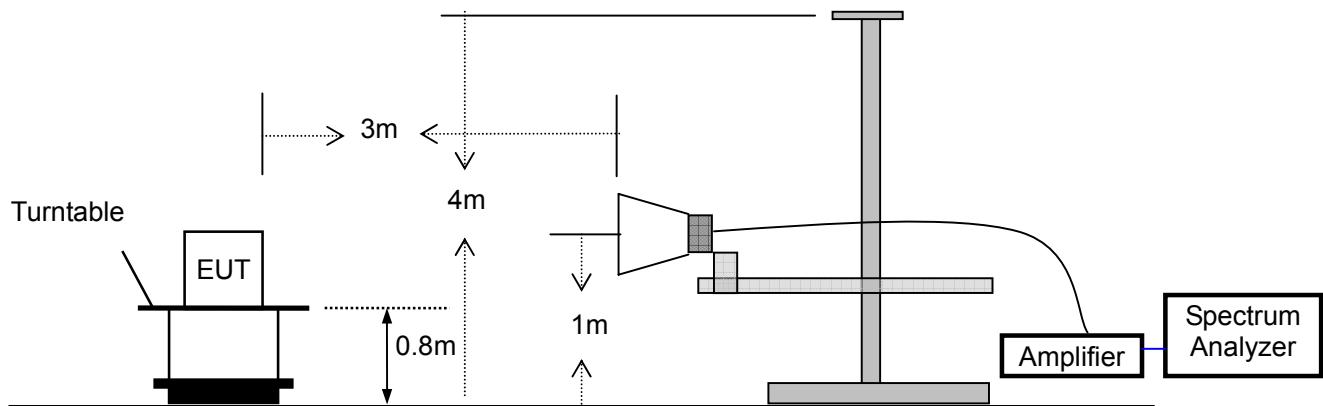

**5.3 Measurement Equipment Used:**

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/16/2014	05/15/2015
Pre-Amplifier	HP	8447D	2944A07999	05/16/2014	05/15/2015
Bilog Antenna	SCHWARZBECK	VULB9163	142	05/16/2014	05/15/2015
Loop Antenna	ARA	PLA-1030/B	1029	05/16/2014	05/15/2015
Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170399	05/16/2014	05/15/2015
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/16/2014	05/15/2015
Cable	Schwarzbeck	AK9513	ACRX1	05/19/2014	05/18/2015
Cable	Schwarzbeck	N/A	FP2RX2	05/19/2014	05/18/2015
Cable	Schwarzbeck	AK9513	CRPX1	05/19/2014	05/18/2015
Cable	Schwarzbeck	AK9513	CRRX2	05/19/2014	05/18/2015

#### 5.4 Radiated emission limit

Frequency MHz	Distance Meter	Field Strength	
		uV/m	dBuV/m
0.009 – 0.490	300	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 – 1.705	30	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 – 30.00	30	100* 30	20log 30 + 40
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
Above 960	3	500	54.0

Note: The frequencies above 1000MHz, as measured using instrumentation with a peak detector function was corresponding to 20dB above maximum permitted average limit.

## 5.5 Measurement Result

Operation Mode:	TX	Test Date :	June 28, 2014
Frequency Range:	9KHz~30MHz	Temperature :	28°C
Test Result:	PASS	Humidity :	65 %
Measured Distance:	3m	Test By:	Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Operation Mode:	TX Mode(Channel 01)	Test Date :	June 28, 2014
Frequency Range:	30~1000MHz	Temperature :	25 °C
Test Result:	PASS	Humidity :	50%
Measured Distance:	3m	Test By:	Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Note
61.0400	V	32.77	40.00	-7.23	PK
66.8600	V	34.16	40.00	-5.84	PK
103.7200	V	34.67	43.50	-8.83	PK
110.5100	V	32.91	43.50	-10.59	PK
200.7200	V	36.93	43.50	-6.57	PK
232.7300	V	30.17	46.00	-15.83	PK
103.7200	H	24.57	43.50	-18.93	PK
110.5100	H	25.11	43.50	-18.39	PK
203.6300	H	33.48	43.50	-10.02	PK
232.7300	H	27.07	46.00	-18.93	PK
257.9500	H	28.64	46.00	-17.36	PK
386.9600	H	29.29	46.00	-16.71	PK

**Note:** (1) All Readings are Peak Value.  
 (2) Emission Level= Reading Level+ Probe Factor +Cable Loss  
 (3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: TX Mode(Channel 21) Test Date : June 28, 2014  
Frequency Range: 30~1000MHz Temperature : 25 °C  
Test Result: PASS Humidity : 50 %  
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Note
61.1300	V	32.54	40.00	-7.46	PK
86.1200	V	34.15	40.00	-5.85	PK
103.7200	V	34.63	43.50	-8.87	PK
110.4500	V	32.56	43.50	-10.94	PK
200.3300	V	36.12	43.50	-7.38	PK
232.5400	V	31.36	46.00	-14.64	PK
103.2300	H	26.56	43.50	-16.94	PK
110.4100	H	25.78	43.50	-17.72	PK
203.6700	H	33.31	43.50	-10.19	PK
232.5300	H	37.27	46.00	-8.73	PK
277.7800	H	28.67	46.00	-17.33	PK
366.3600	H	29.22	46.00	-16.78	PK

**Note:** (1) All Readings are Peak Value and AV.  
(2) Emission Level= Reading Level+ Probe Factor +Cable Loss.  
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: TX Mode(Channel 40) Test Date : June 28, 2014  
Frequency Range: 30~1000MHz Temperature : 25 °C  
Test Result: PASS Humidity : 50 %  
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Note
51.1200	V	32.67	40.00	-7.33	PK
69.4600	V	34.22	40.00	-5.78	PK
103.4400	V	33.67	43.50	-9.83	PK
110.3100	V	32.11	43.50	-11.39	PK
200.6700	V	36.67	43.50	-6.83	PK
232.2300	V	31.17	46.00	-14.83	PK
113.5600	H	29.51	43.50	-13.99	PK
142.2100	H	28.51	43.50	-14.99	PK
203.5600	H	33.33	43.50	-10.17	PK
232.2300	H	28.07	46.00	-17.93	PK
287.5600	H	29.14	46.00	-16.86	PK
366.4600	H	30.29	46.00	-15.71	PK

**Note:** (1) All Readings are Peak Value and AV.  
(2) Emission Level= Reading Level+ Probe Factor +Cable Loss  
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: TX Mode (CH01: 2402MHz) Test Date : June 28, 2014  
Frequency Range: 1-25GHz Temperature : 25 °C  
Test Result: PASS Humidity : 50 %  
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2402	V	64.25	47.22	74	54	-9.75	-6.78
4804	V	63.11	46.95	74	54	-10.89	-7.05
7206	V	62.08	45.25	74	54	-11.92	-8.75
9608	V	61.46	44.13	74	54	-12.54	-9.87
12010	V	60.75	43.27	74	54	-13.25	-10.73
2402	H	65.25	45.53	74	54	-8.75	-8.47
4804	H	64.72	44.28	74	54	-9.28	-9.72
7206	H	63.85	43.95	74	54	-10.15	-10.05
9608	H	62.11	42.11	74	54	-11.89	-11.89
12010	H	61.95	41.27	74	54	-12.05	-12.73

Other harmonics emissions are lower than 20dB below the allowable limit.

**Note:** (1) All Readings are Peak Value and AV.  
(2) Emission Level= Reading Level+ Probe Factor +Cable Loss.  
(3) The average measurement was not performed when the peak measured data under the limit of average detection.  
(4) These test result outsourced to SHENZHEN EMTEK CO., LTD

Operation Mode: TX Mode (CH21: 2442MHz) Test Date : June 28, 2014  
Frequency Range: 1-25GHz Temperature : 25 °C  
Test Result: PASS Humidity : 50 %  
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2442	V	64.27	47.62	74	54	-9.73	-6.38
4884	V	63.12	46.21	74	54	-10.88	-7.79
7326	V	62.75	45.37	74	54	-11.25	-8.63
9768	V	61.79	44.22	74	54	-12.21	-9.78
12210	V	60.44	43.95	74	54	-13.56	-10.05
2442	H	65.74	46.22	74	54	-8.26	-7.78
4884	H	64.25	45.75	74	54	-9.75	-8.25
7326	H	63.84	44.19	74	54	-10.16	-9.81
9768	H	62.11	43.95	74	54	-11.89	-10.05
12210	H	61.75	42.75	74	54	-12.25	-11.25

Other harmonics emissions are lower than 20dB below the allowable limit.

**Note:** (1) All Readings are Peak Value and AV.  
(2) Emission Level= Reading Level+ Probe Factor +Cable Loss.  
(3) The average measurement was not performed when the peak measured data under the limit of average detection.  
(4) These test result outsourced to SHENZHEN EMTEK CO., LTD

Operation Mode: TX Mode (CH40: 2480MHz) Test Date : June 28, 2014  
Frequency Range: 1-25GHz Temperature : 25 °C  
Test Result: PASS Humidity : 50 %  
Measured Distance: 3m Test By: Andy



Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2480	V	65.12	46.25	74	54	-8.88	-7.75
4960	V	64.52	45.13	74	54	-9.48	-8.87
7440	V	63.48	44.08	74	54	-10.52	-9.92
9920	V	62.14	43.79	74	54	-11.86	-10.21
12400	V	61.38	42.37	74	54	-12.62	-11.63
2480	H	64.05	45.16	74	54	-9.95	-8.84
4960	H	63.19	44.21	74	54	-10.81	-9.79
7440	H	62.48	43.84	74	54	-11.52	-10.16
9920	H	61.24	42.37	74	54	-12.76	-11.63
12400	H	60.27	41.27	74	54	-13.73	-12.73

**Other harmonics emissions are lower than 20dB below the allowable limit.**

**Note:**

- (1) All Readings are Peak Value and AV.
- (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
- (3) The average measurement was not performed when the peak measured data under the limit of average detection.
- (4) These test result outsourced to SHENZHEN EMTEK CO., LTD

## 5.6 Radiated Measurement Photos:

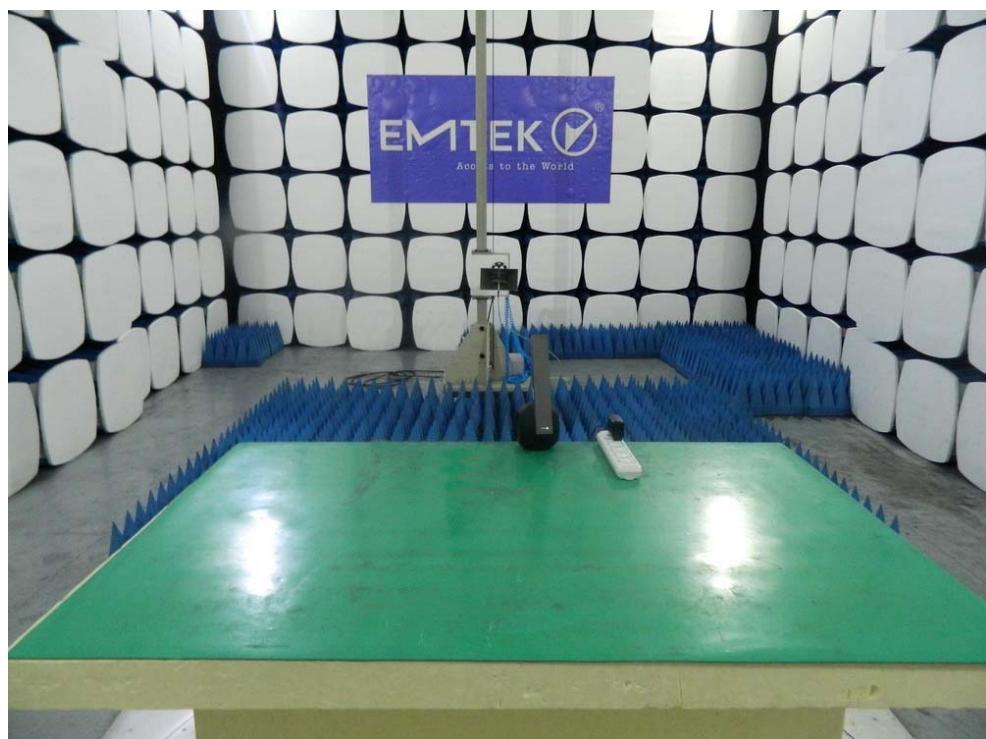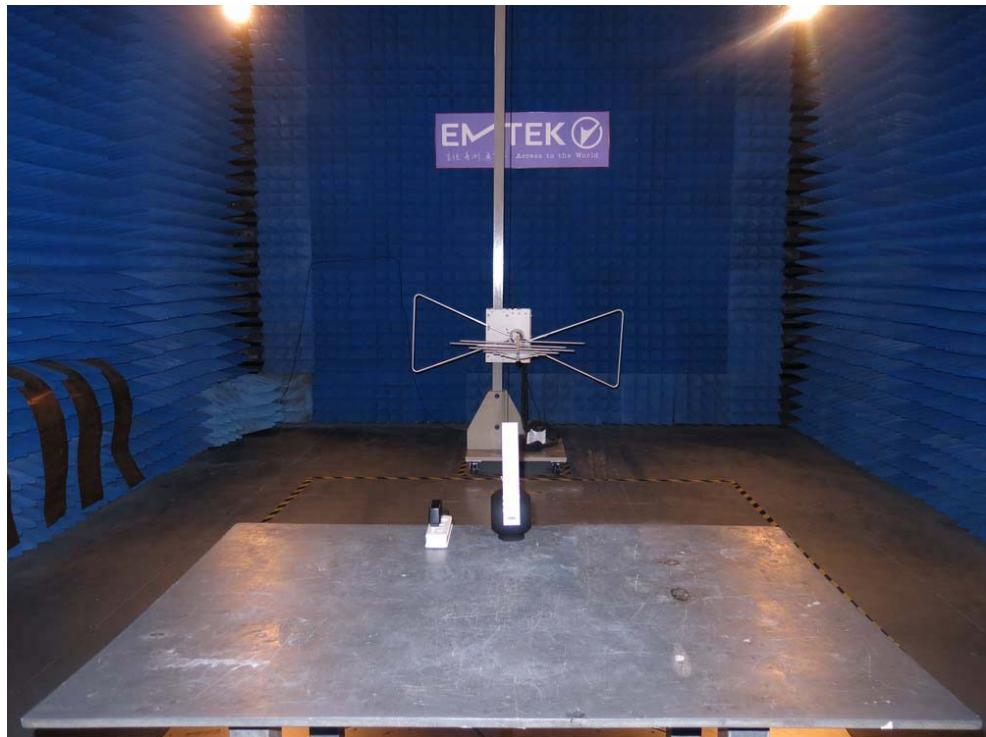


## 6. 6dB Bandwidth Measurement

### 6.1 Measurement Procedure

The EUT was operating in Bluetooth mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 6.2 Test SET-UP (Block Diagram of Configuration)



### 6.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	05/16/2014	05/15/2015

### 6.4 Limit

The minimum 6dB bandwidth shall be at least 500kHz.


## 6.5 Measurement Results:

Refer to attached data chart.


Spectrum Detector:	PK	Test Date :	June 28, 2014
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

Channel number	Channel frequency (MHz)	Measurement level (KHz)	Required Limit (KHz)
01	2402	706	>500
21	2442	700	>500
40	2480	712	>500


Channel 01:

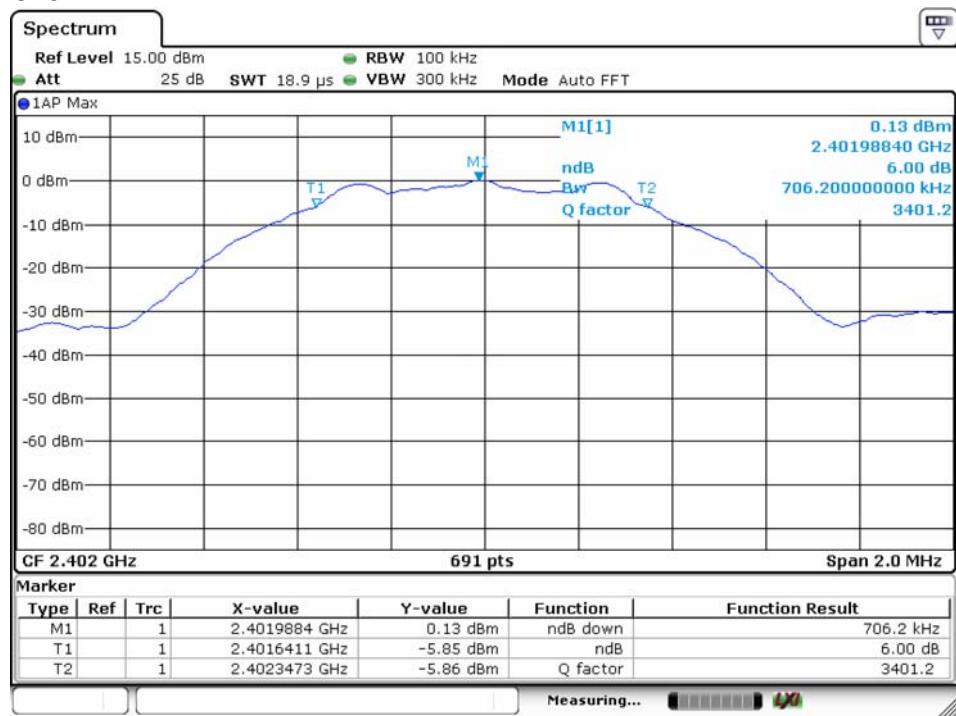

Channel 21:

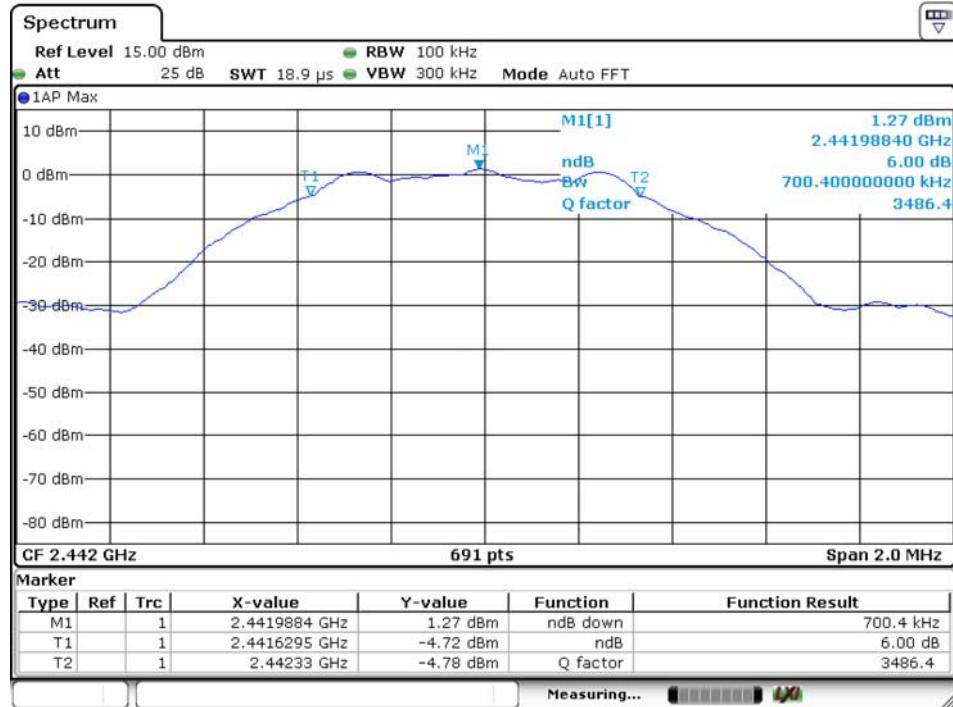

Channel 40:

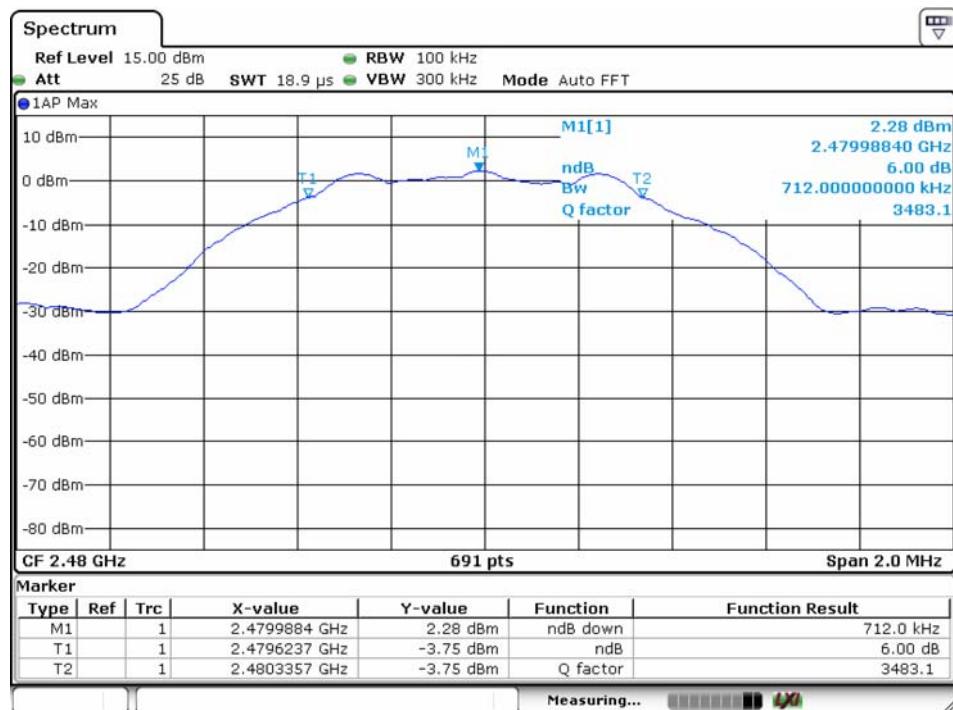


## 7. MAXIMUM PEAK OUTPUT POWER TEST

### 7.1 Measurement Procedure

- a. The Transmitter output (antenna port) was connected to the spectrum Analyzer.
- b. Turn on the EUT and then record the peak power value.
- c. Repeat above procedures on all channels needed to be tested.

### 7.2 Test SET-UP (Block Diagram of Configuration)



### 7.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	05/16/2014	05/15/2015

### 7.4 Peak Power output limit

The maximum peak power shall be less 1Watt.


## 7.5 Measurement Results:

Refer to attached data chart.


Spectrum Detector: PK      Test Date : June 28, 2014  
Test By: Andy      Temperature : 25 °C  
Test Result: PASS      Humidity : 50 %

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
01	2402	0.50	1W(30dBm)	PASS
21	2442	1.57	1W(30dBm)	PASS
40	2480	<b>2.44</b>	1W(30dBm)	PASS


Channel 01

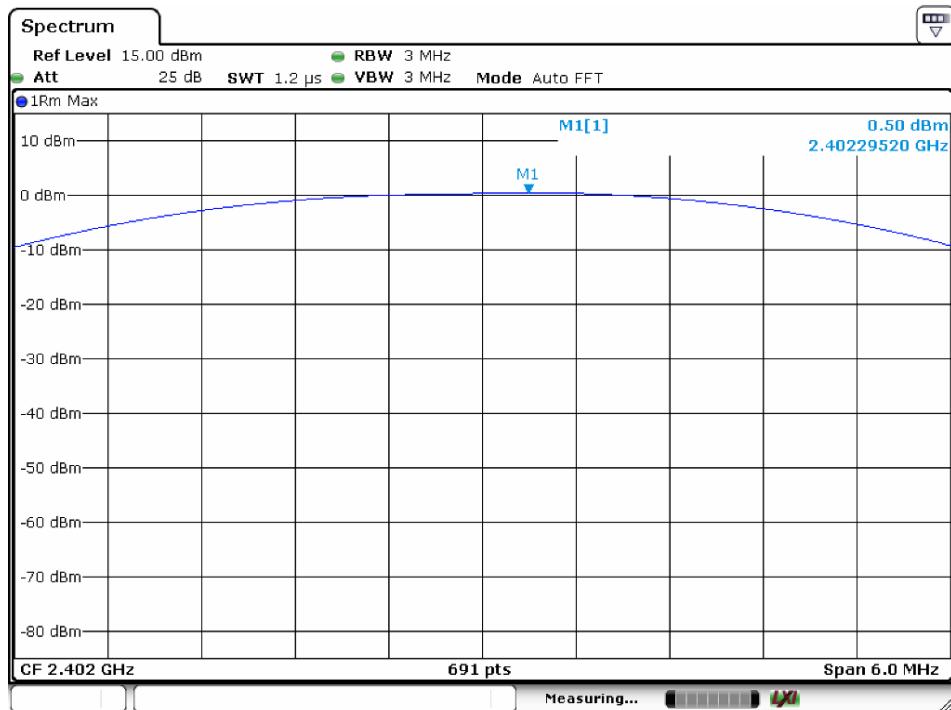

## Channel 21

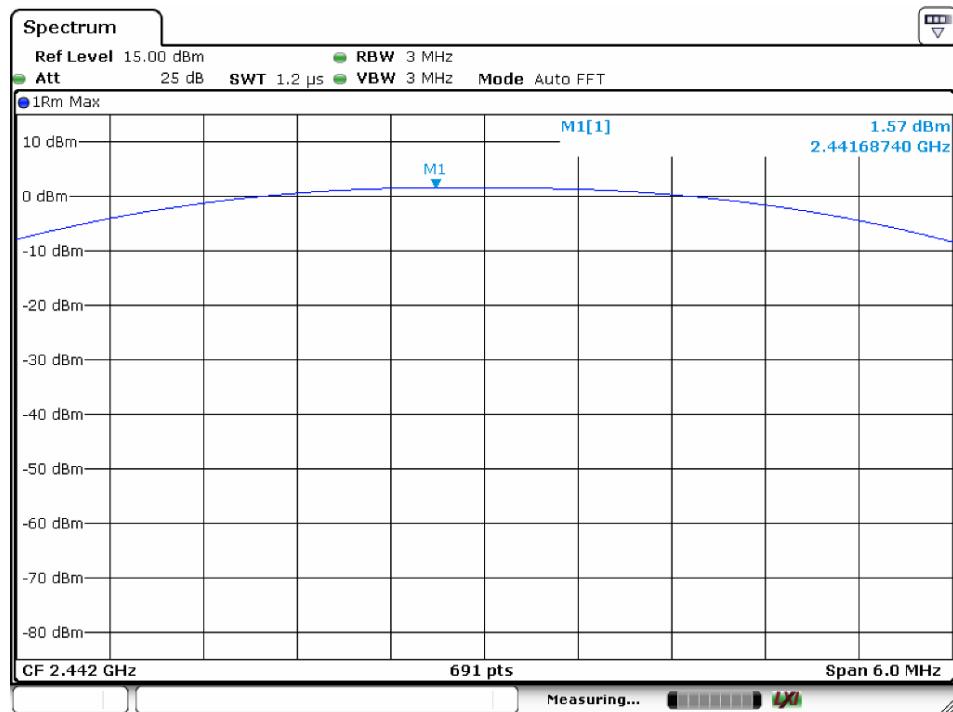

## Channel 40

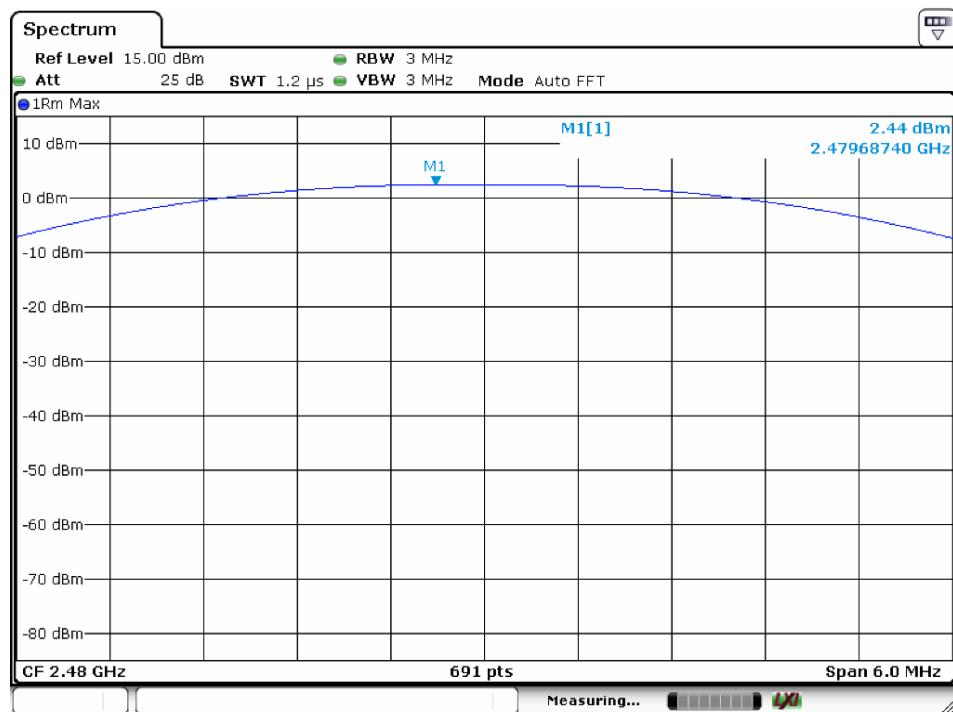


## 8. Power Spectral Density Measurement

### 8.1 Measurement Procedure

The EUT was operating in Bluetooth mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 8.2 Test SET-UP (Block Diagram of Configuration)



### 8.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	05/16/2014	05/15/2015

### 8.4 Measurement Procedure

8.4.1 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

8.4.2. Set to the maximum power setting and enable the EUT transmit continuously.

8.4.3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)

8.4.4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.

8.4.5. Measure and record the results in the test report.

8.4.6. The Measured power density (dBm)/ 100KHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

## 8.5 Measurement Results:


Refer to attached data chart.

Spectrum Detector: PK      Test Date : June 28, 2014  
Test By: Andy      Temperature : 25 °C  
Test Result: PASS      Humidity : 50 %


Channel number	Channel frequency (MHz)	Measurement level (dBm)		Required Limit (dBm)	Pass/Fail
01	2402	0.08	-15.45	8	PASS
21	2442	1.35	-14.01	8	PASS
40	2480	2.33	-12.78	8	PASS

PSD 100kHz Plot:


Channel 01

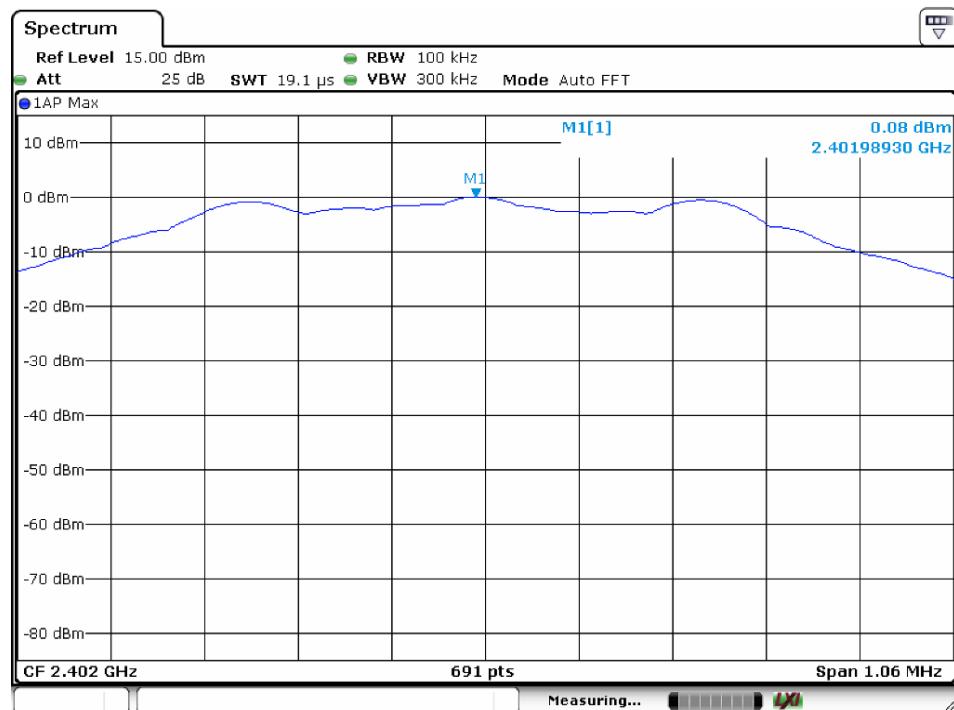

## Channel 21

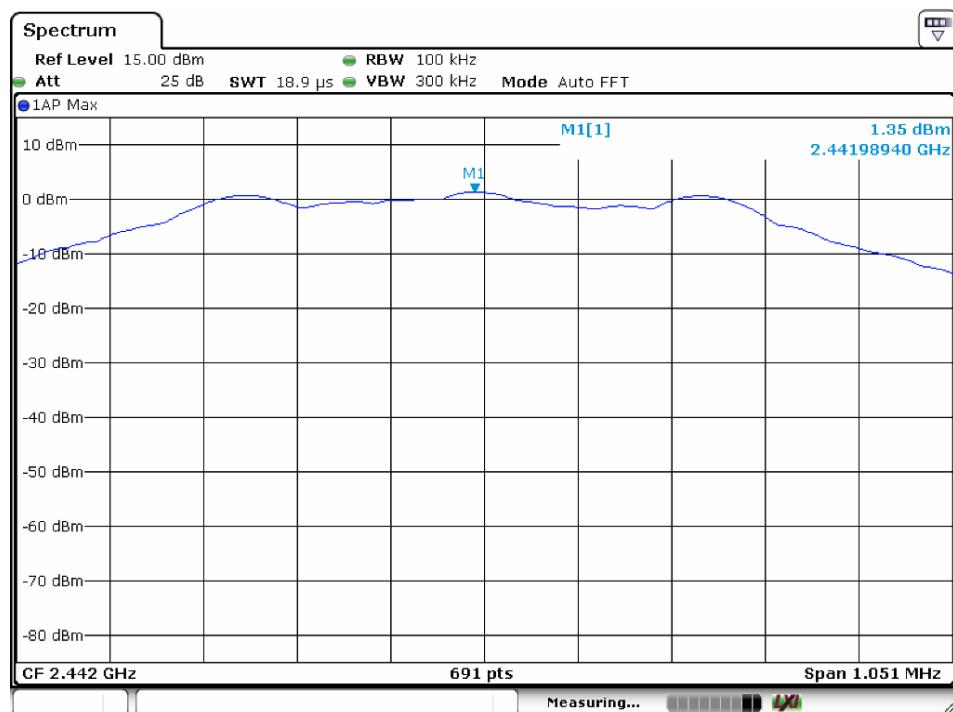


## Channel 40

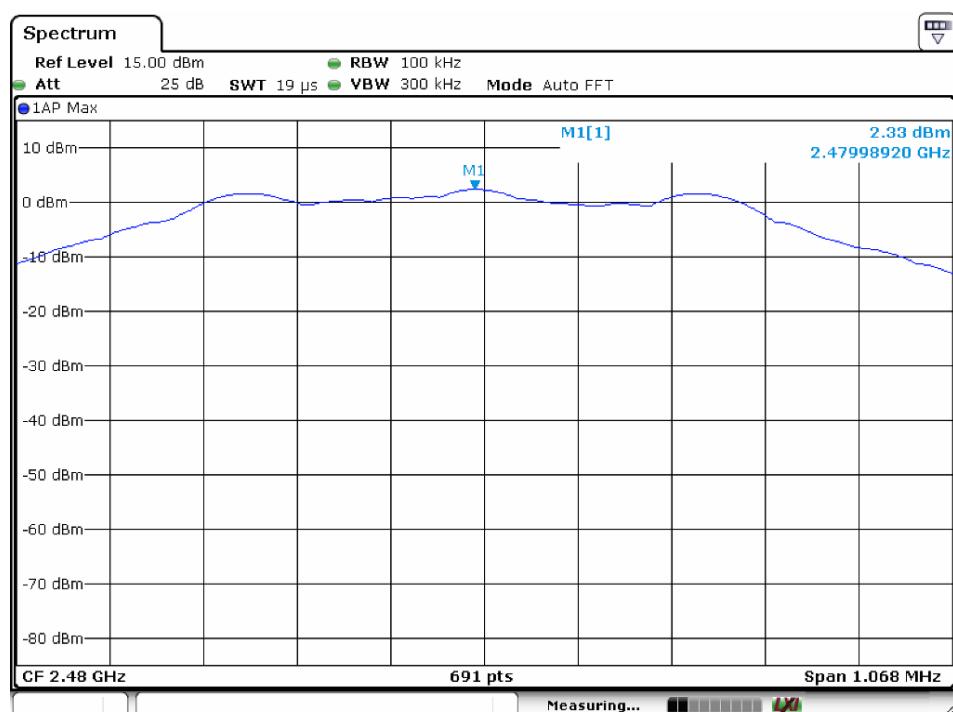


### PSD 3KHz Plot:


#### Channel 01

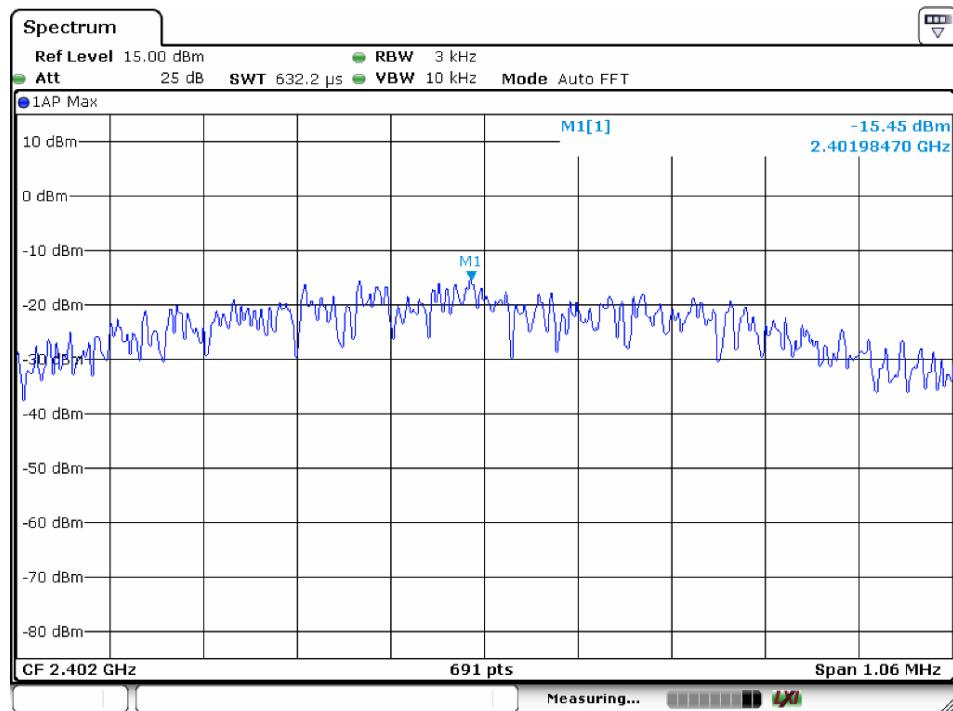

#### Channel 21

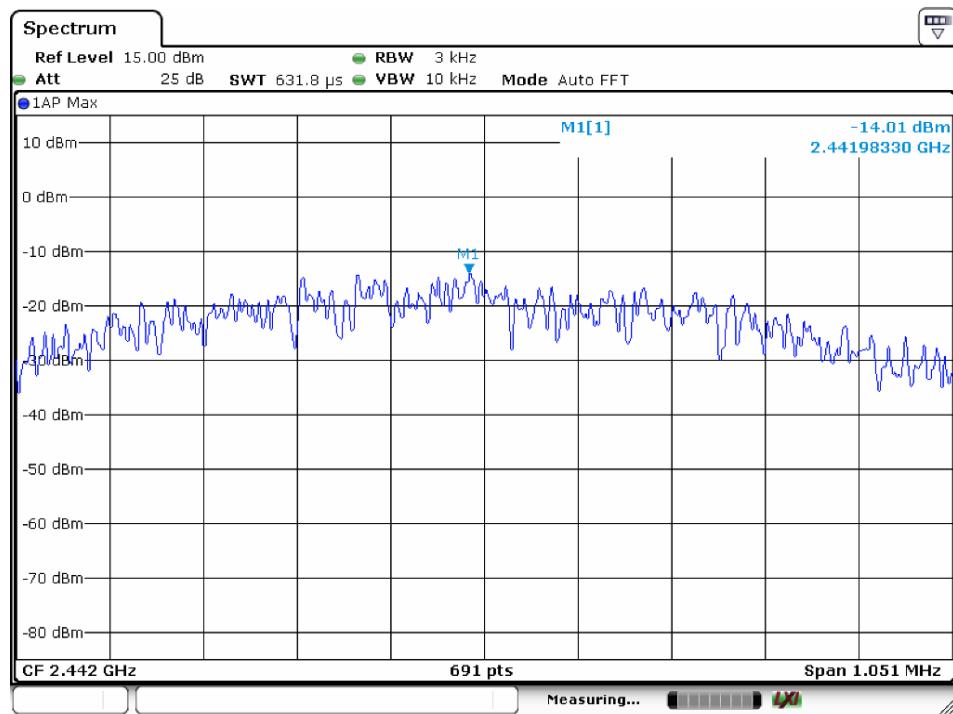

## Channel 40

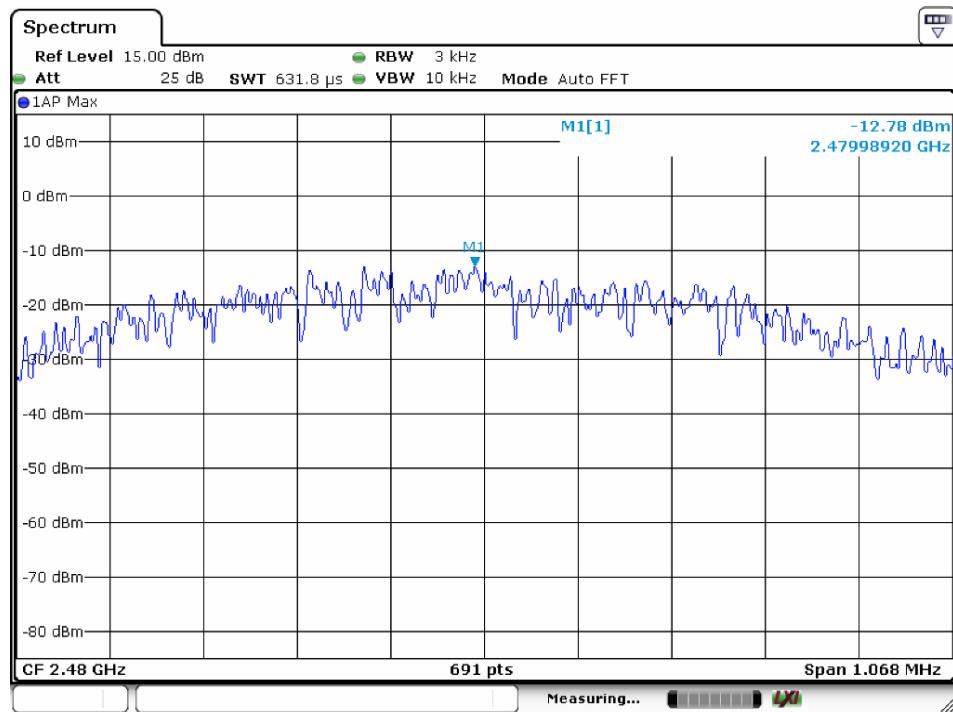

## 9. Band EDGE test

### 9.1 Measurement Procedure

#### For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.
3. Preliminary tests on individual chains, and on all chains with a combiner, were performed. The worst-case configuration was with a combiner, therefore final test were preformed with all chains feeding a combiner.

#### For Radiated emission Test


1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

### 9.2 Test SET-UP (Block Diagram of Configuration)

#### For Conducted Test



## For Radiated emission Test

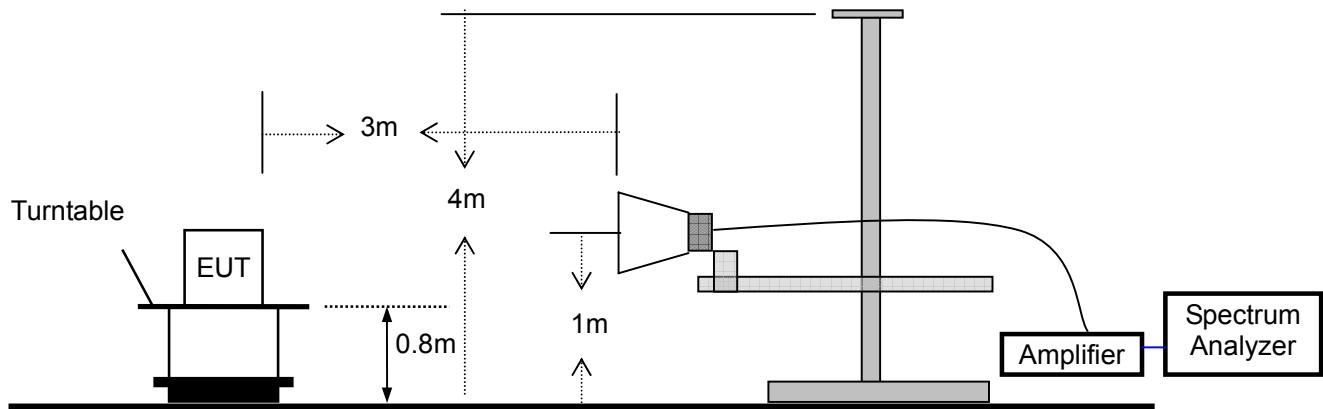

### 9.3 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	June 28, 2014
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

#### 1. Conducted Test

Frequency (MHz)	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
<2400	0.50	-43.46	43.96	>20dBc
>2483.5	2.44	-53.53	55.97	>20dBc

#### 2. Radiated emission Test

Frequency (MHz)	Antenna polarization (H/V)	Emission (dB <sub>UV</sub> /m)		Band edge Limit (dB <sub>UV</sub> /m)	
		PK	AV	PK	AV
<2400	H	53.12	35.34	74.00	54.00
<2400	V	56.55	33.67	74.00	54.00
>2483.5	H	54.34	37.22	74.00	54.00
>2483.5	V	55.78	36.75	74.00	54.00

## 10 Antenna Application

### 10.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 10.2 Result

The EUT's antenna is a chip antenna and integrated on PCB, The antenna's gain is 2.5 dBi and meets the requirement.

Dongguan EMTEK Co., Ltd.  
No.281, Guantai Road, Nancheng District, Dongguan, Guangdong, China  
www.emtek.com.cn Tel:+86-769-2280 7078 Fax:+86-769-2280 7079



# APPENDIX I (PHOTOS OF EUT)

Dongguan EMTEK Co., Ltd.  
No.281, Guantai Road, Nancheng District, Dongguan, Guangdong, China  
www.emtek.com.cn Tel:+86-769-2280 7078 Fax:+86-769-2280 7079

**EMTEK**  
Access to the World



