



FCC AND ISED CERTIFICATION TEST REPORT

Applicant	:	Edifier International Limited
Address of Applicant	:	P.O. Box 6264 General Post Office, Hong kong
Manufacturer	:	Beijing Edifier Technology Co., Ltd.
Address of Manufacturer	:	815, Floor 8, Shuangqiao Building, No.68, North Fourth Ring West Road, Haidian District, 100080 Beijing, P.R. China
Equipment under Test	:	True Wireless Earbuds with Active Noise Cancellation
Model No.	:	EDF200182
FCC ID	:	Z9G-EDF267
IC	:	10004A-EDF267
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023, ANSI C63.10:2020, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
Report No.	:	DDT-RE24102916-1E01
Issue Date	:	2024/12/25
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test	9
2.4.	Decision of final test mode	9
2.5.	Deviations of test standard	10
2.6.	Test environment conditions	10
2.7.	Test laboratory	10
2.8.	Measurement uncertainty	11
3.	Equipment Used During Conductive Test	12
4.	20 dB Bandwidth	13
4.1.	Block diagram of test setup	13
4.2.	Limits	13
4.3.	Test procedure	13
4.4.	Test result	14
4.5.	Test graphs	15
5.	99% Bandwidth	19
5.1.	Block diagram of test setup	19
5.2.	Limits	19
5.3.	Test procedure	19
5.4.	Test result	20
5.5.	Test graphs	21
6.	Maximum Peak Output Power	25
6.1.	Block diagram of test setup	25
6.2.	Limits	25
6.3.	Test procedure	25
6.4.	Test result	26
6.5.	Test graphs	27
7.	Carrier Frequency Separation	31
7.1.	Block diagram of test setup	31
7.2.	Limits	31
7.3.	Test procedure	31
7.4.	Test result	32
7.5.	Test graphs	33
8.	Dwell Time	35

8.1.	Block diagram of test setup	35
8.2.	Limits.....	35
8.3.	Test procedure.....	35
8.4.	Test result	36
8.5.	Test graphs.....	37
9.	Number of Hopping Channel.....	45
9.1.	Block diagram of test setup	45
9.2.	Limits.....	45
9.3.	Test procedure.....	45
9.4.	Test result	46
9.5.	Test graphs.....	47
10.	Band Edge Compliance (Conducted Method).....	49
10.1.	Block diagram of test setup	49
10.2.	Limit.....	49
10.3.	Test procedure.....	49
10.4.	Test result	50
10.5.	Test graphs.....	51
11.	RF Conducted Spurious Emissions.....	57
11.1.	Block diagram of test setup	57
11.2.	Limits.....	57
11.3.	Test procedure.....	57
11.4.	Test result	58
11.5.	Test graphs.....	59
12.	Duty cycle	71
12.1.	Block diagram of test setup	71
12.2.	Limit.....	71
12.3.	Test procedure.....	71
12.4.	Test result	72
12.5.	Test graphs.....	73
13.	Antenna Requirements	77
13.1.	Limit.....	77
13.2.	Result.....	77
14.	Radiated Emission.....	78
14.1.	Test equipment	78
14.2.	Block diagram of test setup	79
14.3.	Limits.....	80
14.4.	Assistant equipment used for test	82
14.5.	Test procedure.....	82

14.6.	Test result	84
14.7.	Test data	85
15.	Band Edge Compliance	101
15.1.	Test equipment	101
15.2.	Block diagram of test setup	102
15.3.	Limits	102
15.4.	Assistant equipment used for test	102
15.5.	Test procedure	102
15.6.	Test result	102
15.7.	Test data	103
16.	Power Line Conducted Emissions	111
16.1.	Test equipment	111
16.2.	Block diagram of test setup	111
16.3.	Limits	111
16.4.	Assistant equipment used for test	112
16.5.	Test procedure	112
16.6.	Test result	112
16.7.	Test data	113
17.	Test Setup Photograph	115
18.	Photos of the EUT	117

Test Report Declare

Applicant	:	Edifier International Limited
Address of Applicant	:	P.O. Box 6264 General Post Office, Hong kong
Equipment under Test	:	True Wireless Earbuds with Active Noise Cancellation
Model No.	:	EDF200182
Manufacturer	:	Beijing Edifier Technology Co., Ltd.
Address of Manufacturer	:	815, Floor 8, Shuangqiao Building, No.68, North Fourth Ring West Road, Haidian District, 100080 Beijing, P.R. China

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,

RSS-247 Issue 3 August 2023,

ANSI C63.10:2020,

RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE24102916-1E01		
Date of Receipt:	2024/12/04	Date of Test:	2024/12/09 - 2024/12/25

Prepared By:**Jacky Huang/Engineer****Approved By:****Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	2024/12/25	

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	Maximum Peak Output Power	FCC Part 15: 15.247(b)(1), RSS-247 Issue 3 clause 5.4(b)	/	Pass
2	20 dB Bandwidth	FCC Part 15: 15.247(a)(1), RSS-247 Issue 3 clause 5.1(a)	/	Pass
3	99% Bandwidth	RSS-Gen Issue 5 clause 6.7	/	Pass
4	Carrier Frequency Separation	FCC Part 15: 15.247(a)(1), RSS-247 Issue 3 clause 5.1(b)	/	Pass
5	Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii), RSS-247 Issue 3 clause 5.1(d)	/	Pass
6	Dwell Time	FCC Part 15: 15.247(a)(1)(iii), RSS-247 Issue 3 clause 5.1(d)	/	Pass
7	RF Conducted Spurious Emissions	FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5	/	Pass
8	Radiated Emission	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
9	Band Edge Compliance	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
10	Power Line Conducted Emissions	FCC Part 15: 15.207(a), RSS-Gen Issue 5 clause 8.8	/	Pass
11	Antenna Requirement	FCC Part 15: 15.203, RSS-Gen Issue 5 clause 6.8	/	Pass
Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.				

2. General Test Information

2.1. Description of EUT

EUT Name	: True Wireless Earbuds with Active Noise Cancellation
Model Number	: EDF200182
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 3.8V, 50mAh via built-in lithium-ion battery, DC 5V, 200mA*2 via charging case
Antenna Type	: FPC antenna
Max Antenna Gain (dBi)	: L ear: -3.36 R ear: -2.90

Note: This EUT support Bluetooth BR/EDR/LE, this report only for Bluetooth BR/EDR.

Radio Specification	: Bluetooth BR/EDR
Operation Frequency	: 2402 MHz-2480 MHz
Modulation	: GFSK, $\pi/4$ -DQPSK

Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473


18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
/	/	/	/

2.3. Block diagram of EUT configuration for test

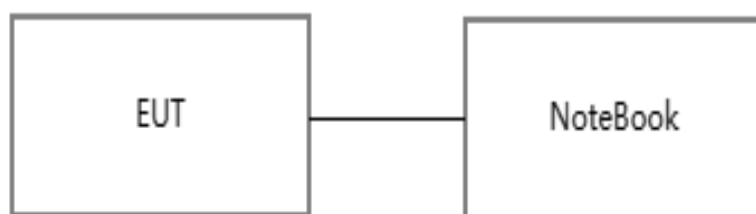

2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: FCC_assist 1.0 .4.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5 dB (According to the manufacturer's claims)

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK hopping on Tx mode	6	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	6	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	6	CH0	2402
	6	CH39	2441
	6	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	6	CH0	2402
	6	CH39	2441
	6	CH78	2480
Worst-case data rates were: GFSK mode: DH5, $\pi/4$ -DQPSK mode: 2DH5			

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method)
	5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
	1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date	Cal. Interval
☑RF Connected Test (RF Measurement System 4#)					
Signal & Spectrum Analyzer	R&S	FSV3044	101173	2025/03/31	1 Year
Wideband Radio Communication Tester	R&S	CMW500	168801	2025/03/31	1 Year
MXG Vector Signal Generator	Agilent	N5182A	MY48180737	2025/03/31	1 Year
PSG Vector Signal Generator	Agilent	E8267D	US49060192	2025/08/25	1 Year
RF Control Unit	Tonsend	JS0806-2	21I8060485	2025/03/31	1 Year
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2025/04/22	1 Year
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A	N/A

4. 20 dB Bandwidth

4.1. Block diagram of test setup

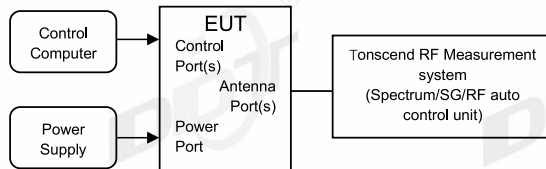

4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 6.9.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 20 dB bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 2 times and 5 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold

- (5) Measure and record the results in the report.

4.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 4#
Ambient Condition:	25.8℃, 46.2%RH	Test Date:	2024.12.16-2024.12.16
Test Power Supply:	DC 5V	Sample Number:	S24102916-006

L ear:

Test Mode	Antenna	Frequency [MHz]	20dB EBW [MHz]
DH5	Ant1	2402	0.97
		2441	1.01
		2480	0.98
2DH5	Ant1	2402	1.30
		2441	1.32
		2480	1.32


R ear:

Test Mode	Antenna	Frequency [MHz]	20dB EBW [MHz]
DH5	Ant1	2402	1.02
		2441	1.01
		2480	0.99
2DH5	Ant1	2402	1.34
		2441	1.30
		2480	1.33

4.5. Test graphs


L ear:



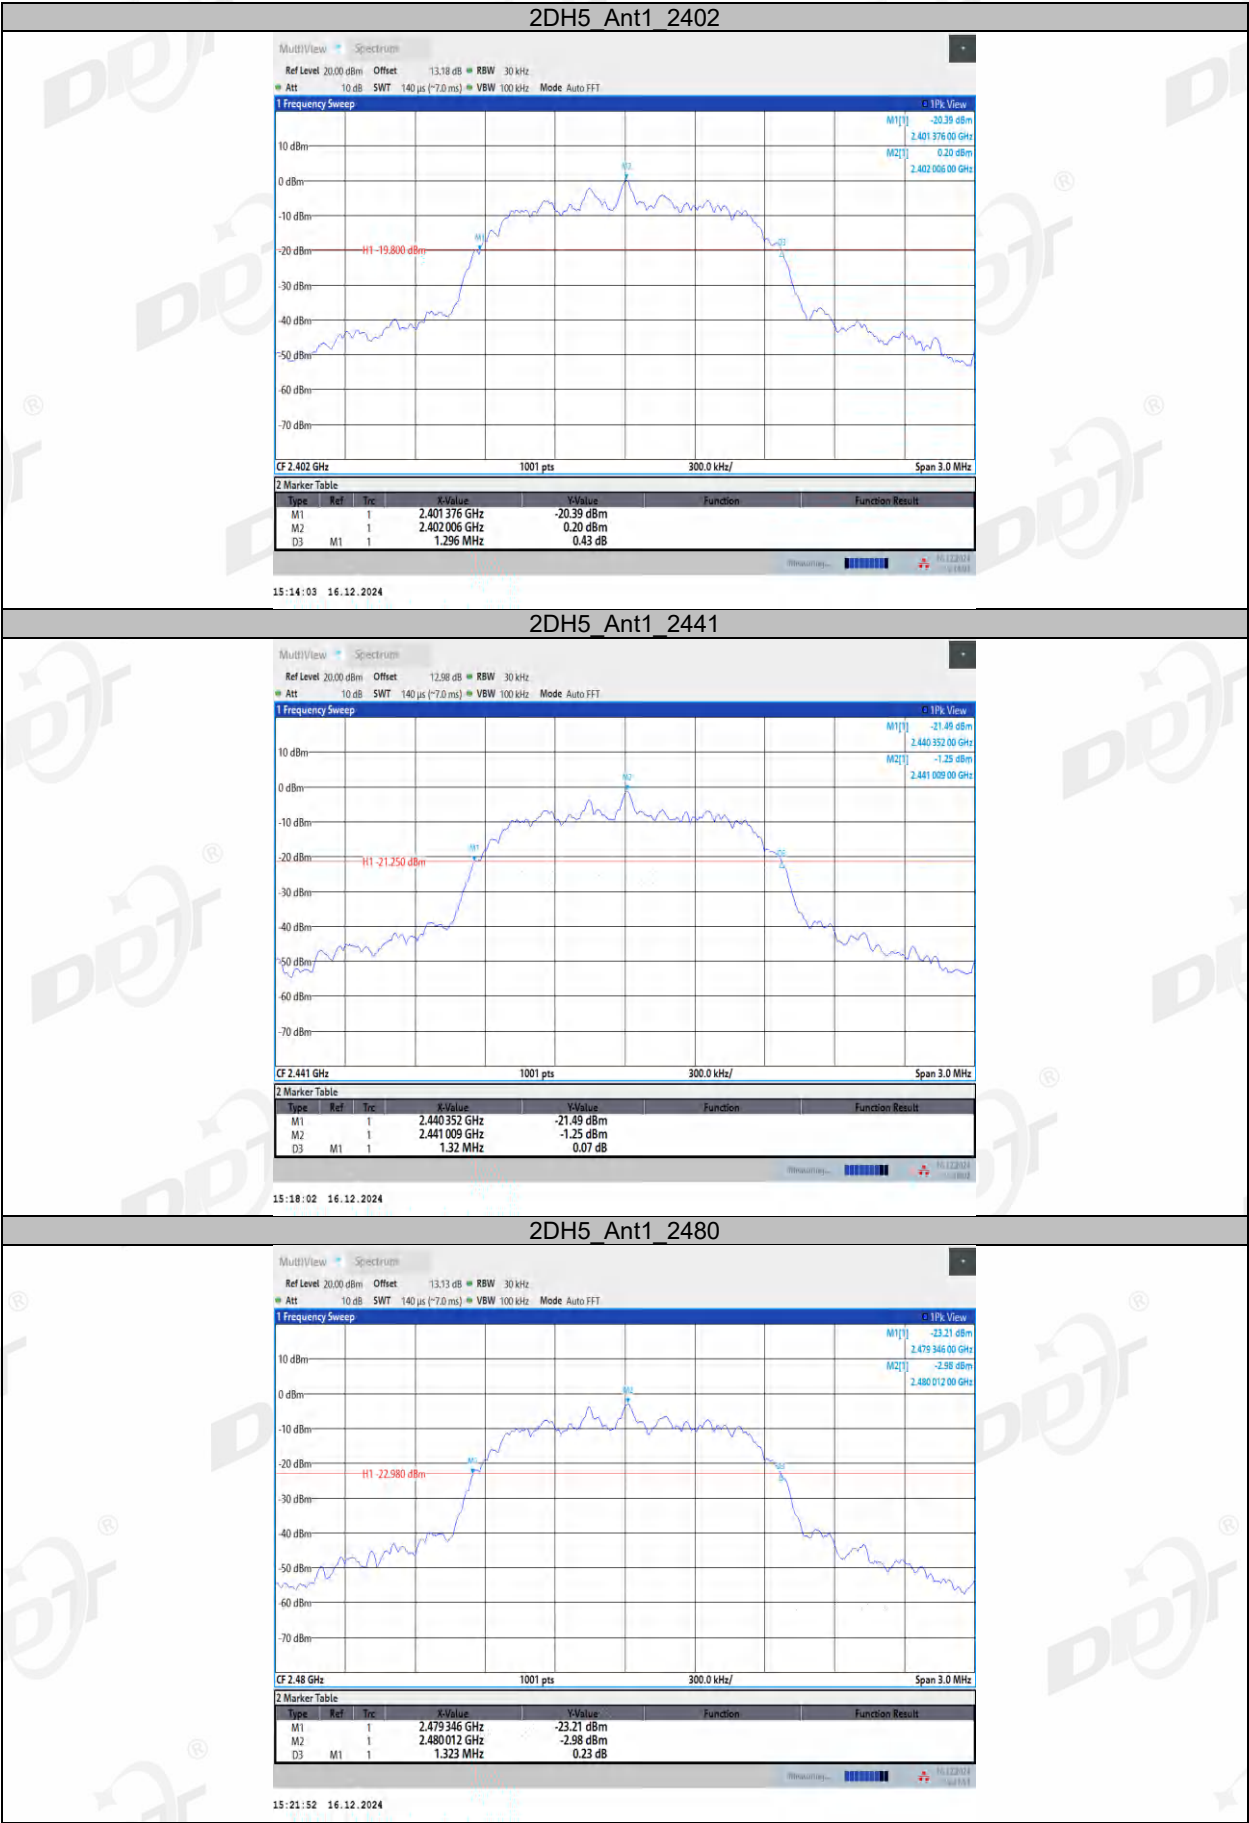


R ear:



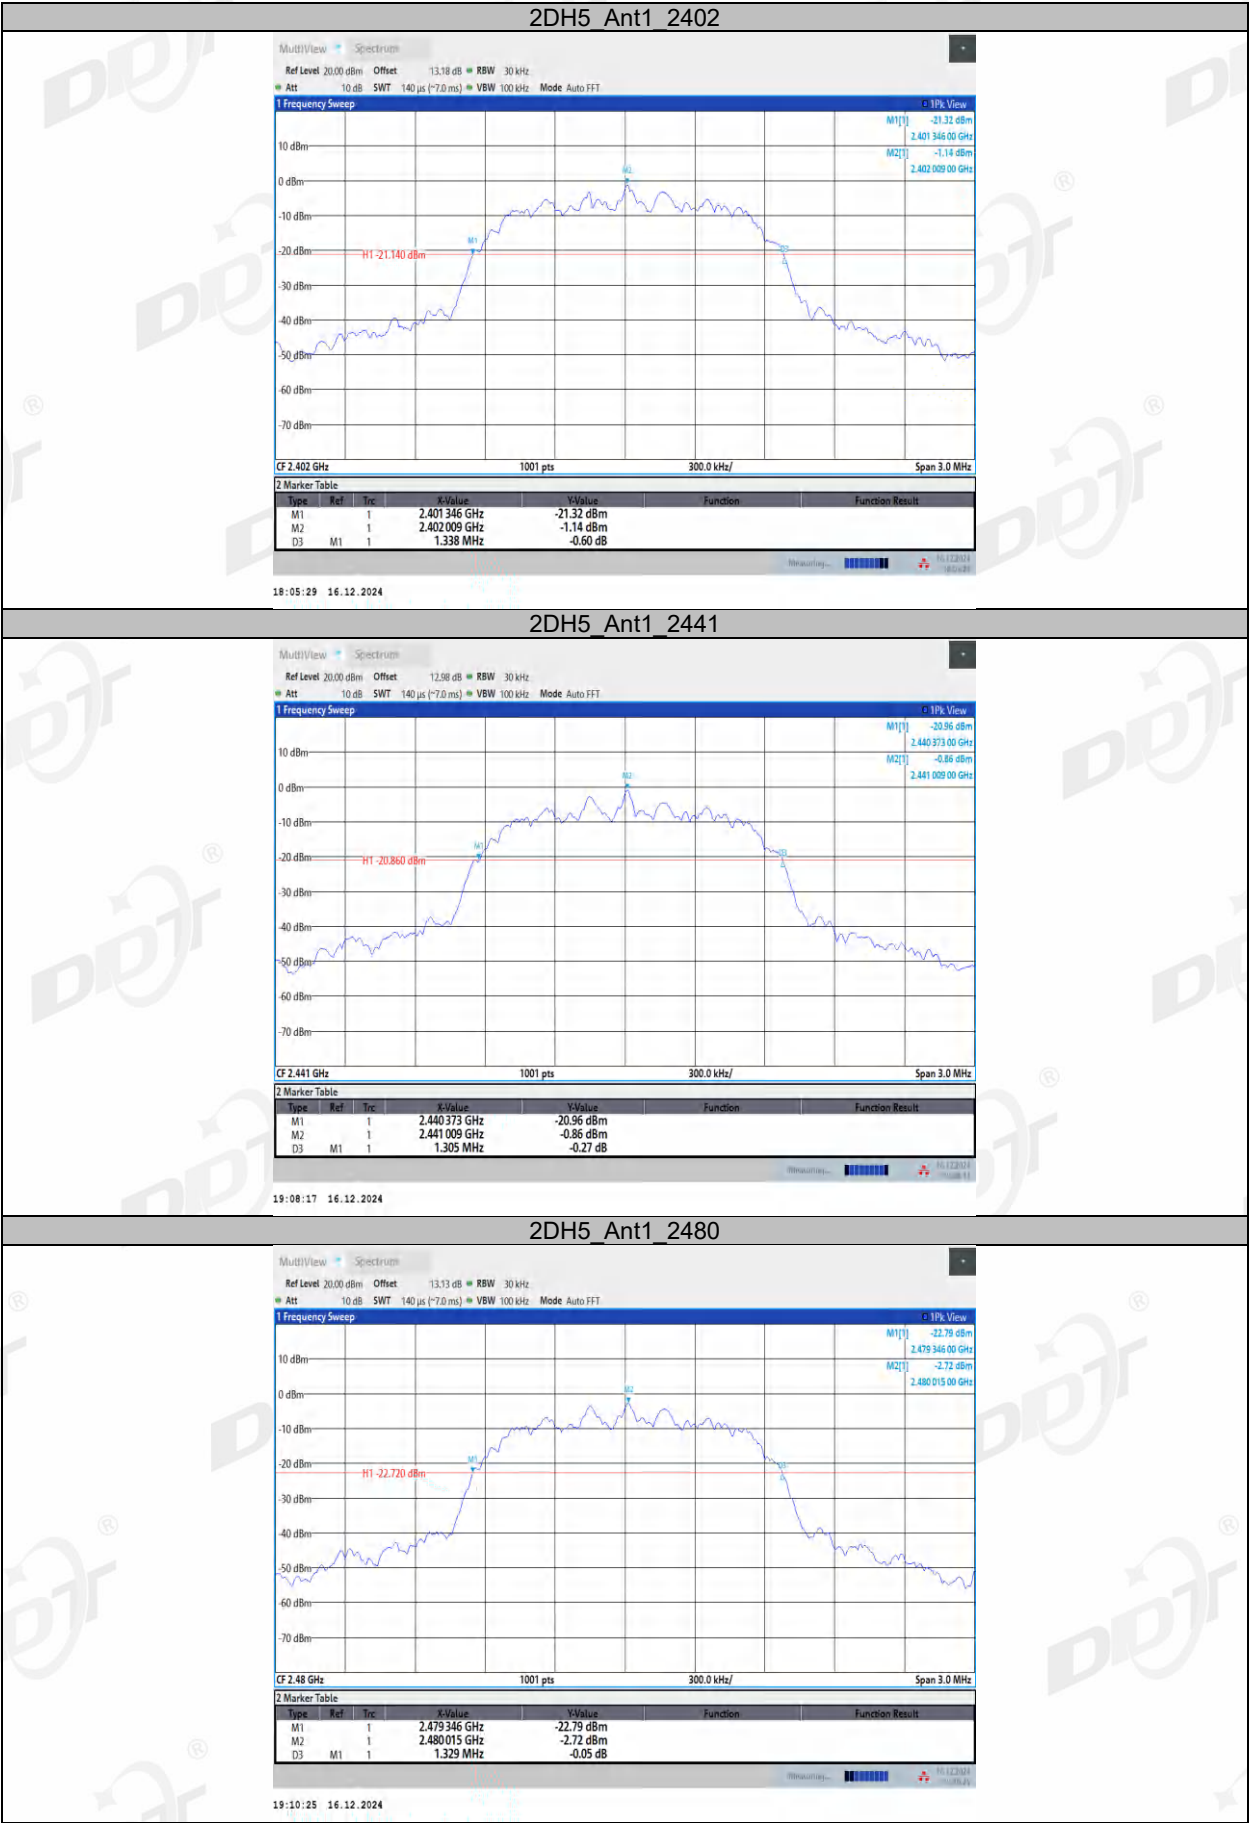

5. 99% Bandwidth

5.1. Block diagram of test setup

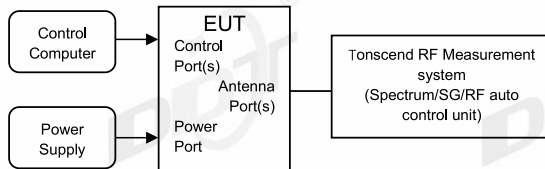

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure and record the results in the report.

5.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 4#
Ambient Condition:	25.8℃, 46.2%RH	Test Date:	2024.12.16-2024.12.16
Test Power Supply:	DC 5V	Sample Number:	S24102916-006

L ear:

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]
DH5	Ant1	2402	0.898	2401.5645	2402.4622
		2441	0.914	2440.5565	2441.4705
		2480	0.900	2479.5657	2480.4654
2DH5	Ant1	2402	1.196	2401.4156	2402.6116
		2441	1.193	2440.4174	2441.6100
		2480	1.189	2479.4175	2480.6068


R ear:

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]
DH5	Ant1	2402	0.903	2401.5636	2402.4666
		2441	0.901	2440.5644	2441.4657
		2480	0.885	2479.5693	2480.4543
2DH5	Ant1	2402	1.213	2401.4095	2402.6229
		2441	1.202	2440.4124	2441.6147
		2480	1.200	2479.4143	2480.6146

5.5. Test graphs


L ear:



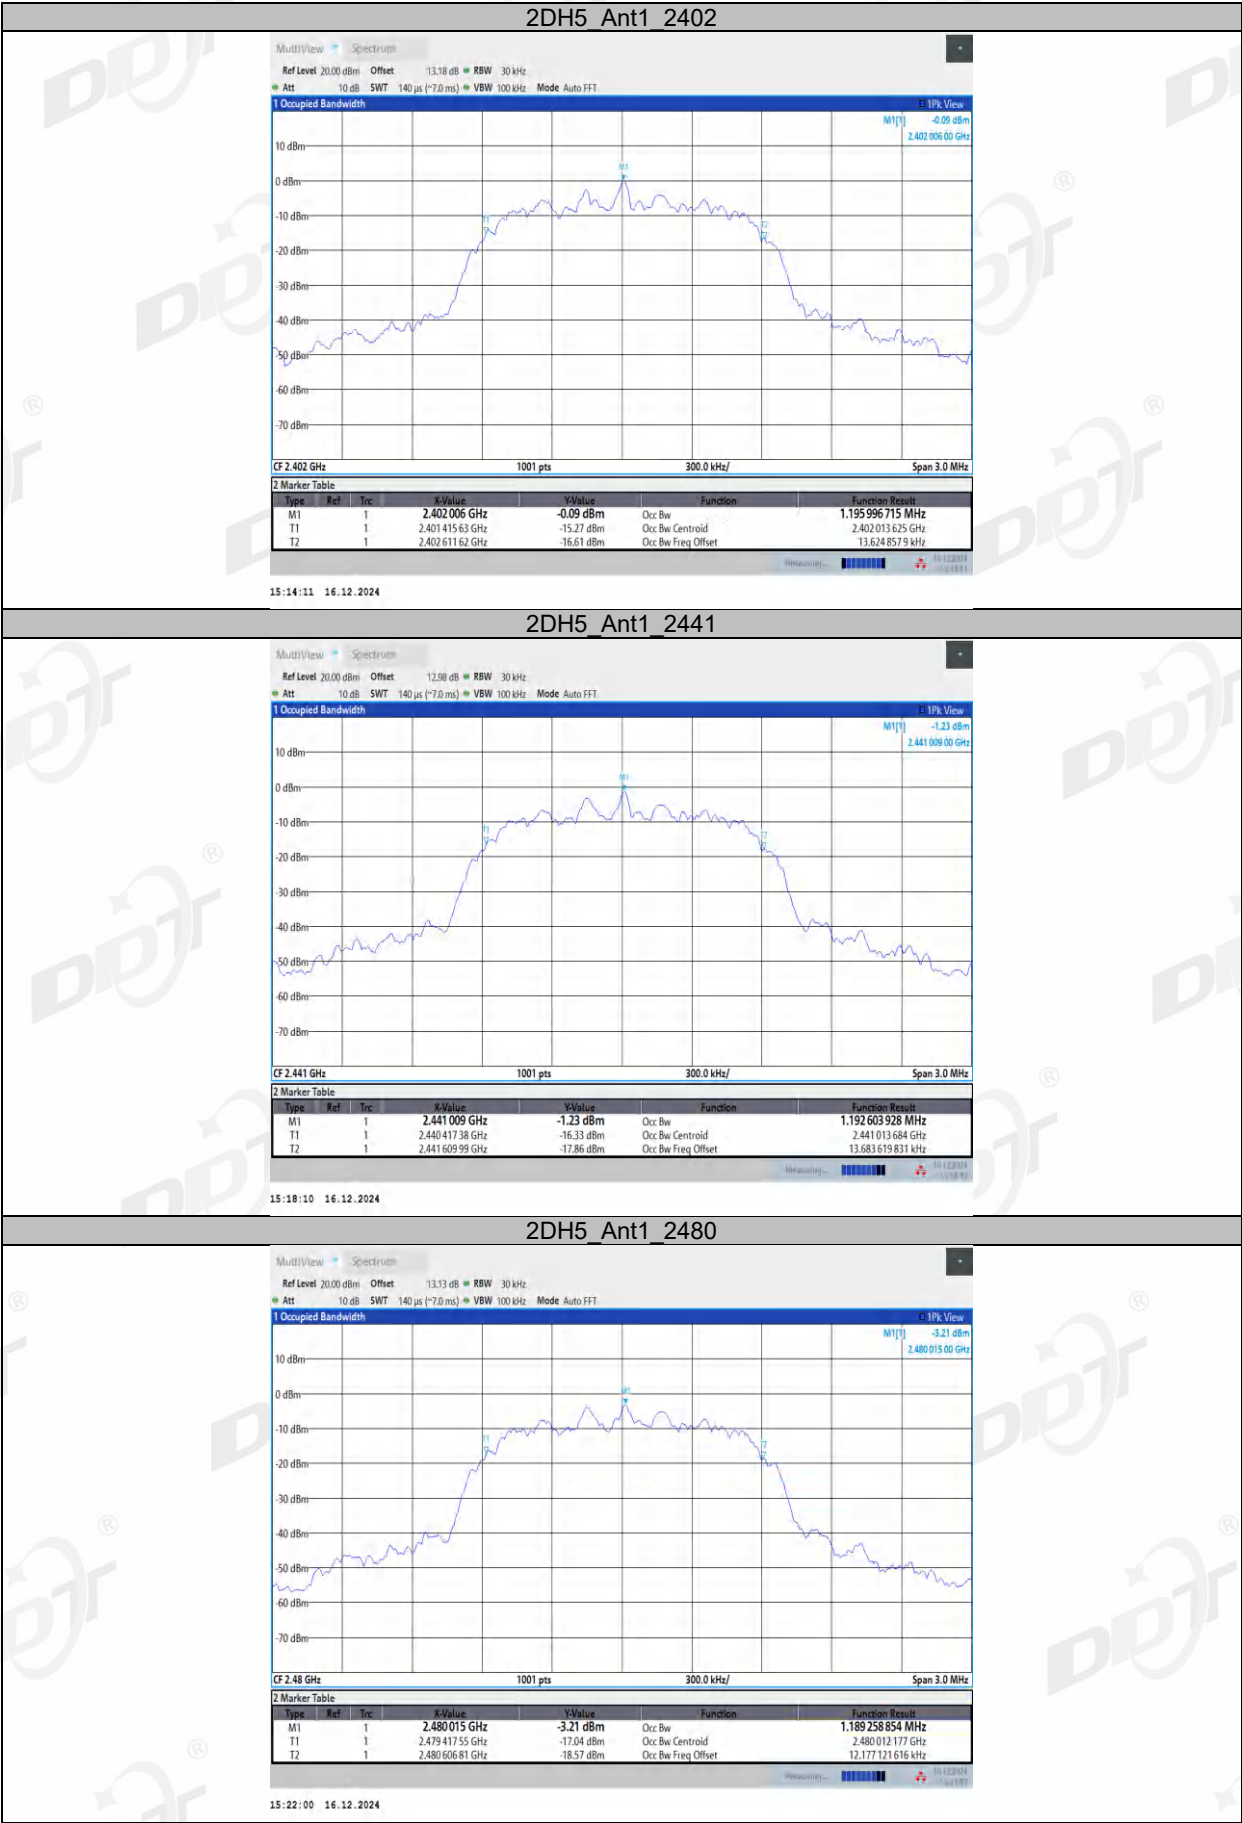


R ear:



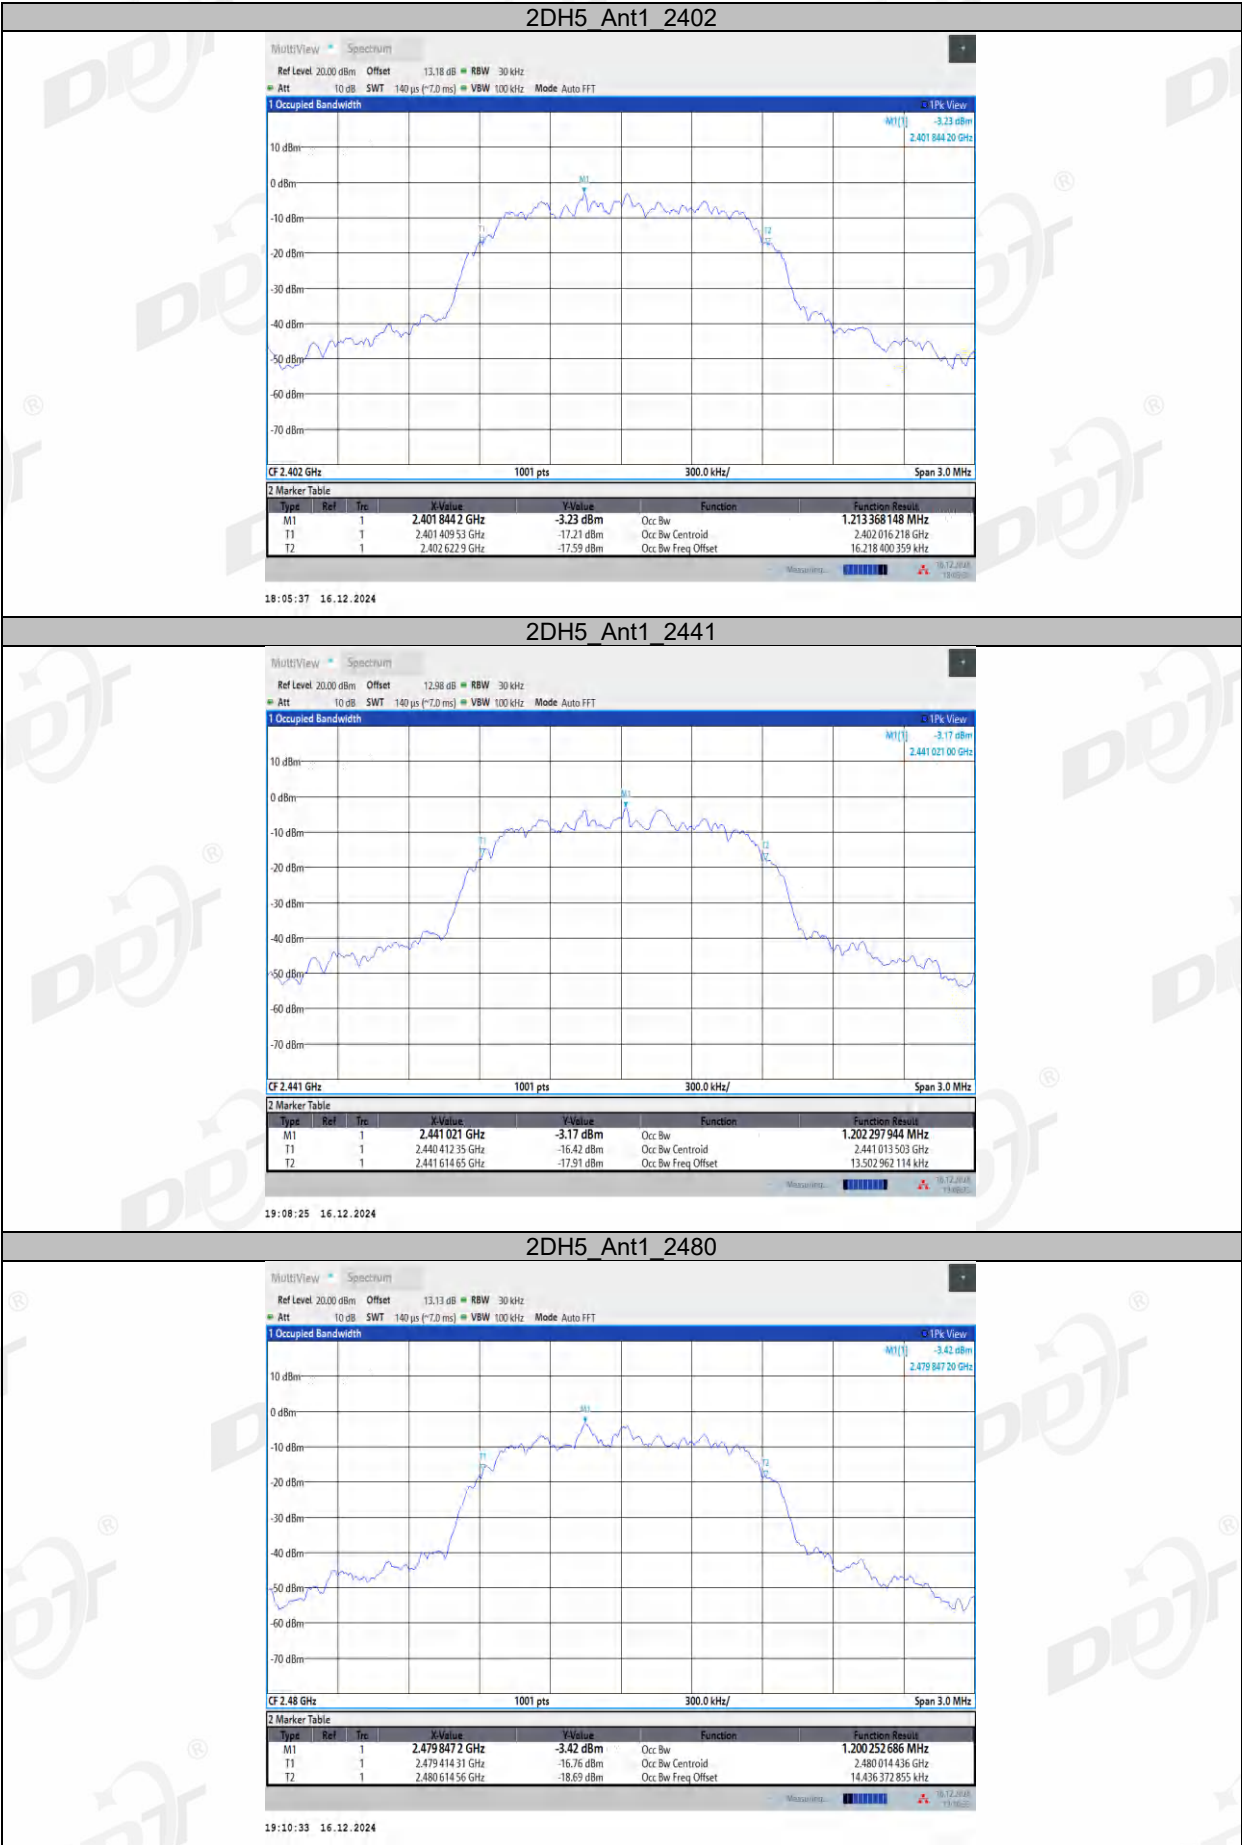

6. Maximum Peak Output Power

6.1. Block diagram of test setup

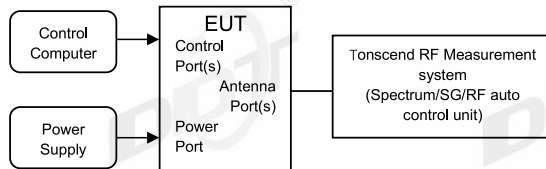

6.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 7.8.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:
 - RBW: > 20 dB bandwidth of the emission being measured.
 - VBW: VBW $\geq$ RBW.
 - Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - Detector Mode: Peak
 - Sweep time: Auto
 - Trace mode: Max hold
- (5) Use the marker-to-peak function to set the marker to the peak of the emission and record the results in the report.

6.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 4#
Ambient Condition:	25.8℃, 46.2%RH	Test Date:	2024.12.16-2024.12.16
Test Power Supply:	DC 5V	Sample Number:	S24102916-006

L ear:


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
DH5	Ant1	2402	2.80	≤20.97	-0.56	≤30	PASS
		2441	1.93	≤20.97	-1.43	≤30	PASS
		2480	1.07	≤20.97	-2.29	≤30	PASS
2DH5	Ant1	2402	3.66	≤20.97	0.30	≤30	PASS
		2441	2.82	≤20.97	-0.54	≤30	PASS
		2480	1.97	≤20.97	-1.39	≤30	PASS


R ear:

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
DH5	Ant1	2402	2.86	≤20.97	-0.04	≤30	PASS
		2441	2.21	≤20.97	-0.69	≤30	PASS
		2480	1.51	≤20.97	-1.39	≤30	PASS
2DH5	Ant1	2402	3.76	≤20.97	0.86	≤30	PASS
		2441	3.16	≤20.97	0.26	≤30	PASS
		2480	2.49	≤20.97	-0.41	≤30	PASS

6.5.Test graphs




L ear:

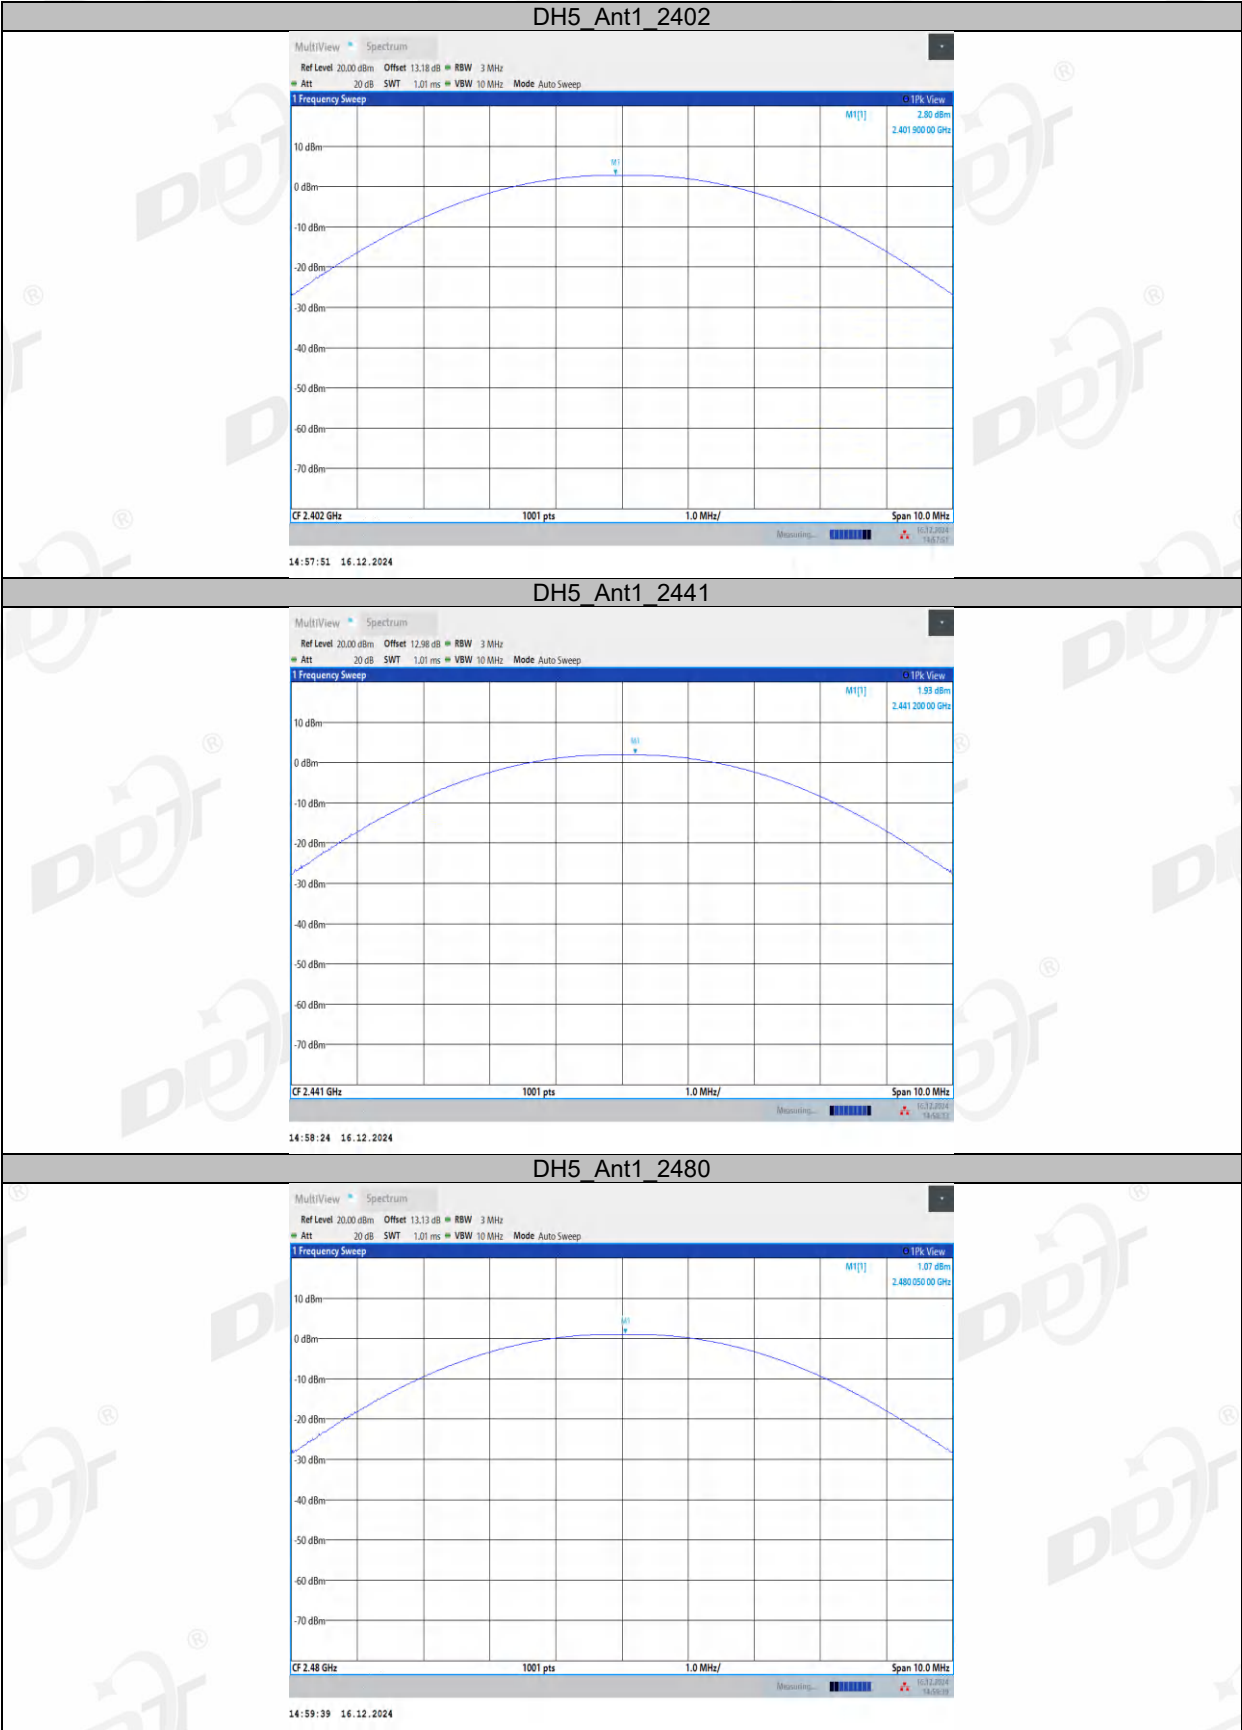

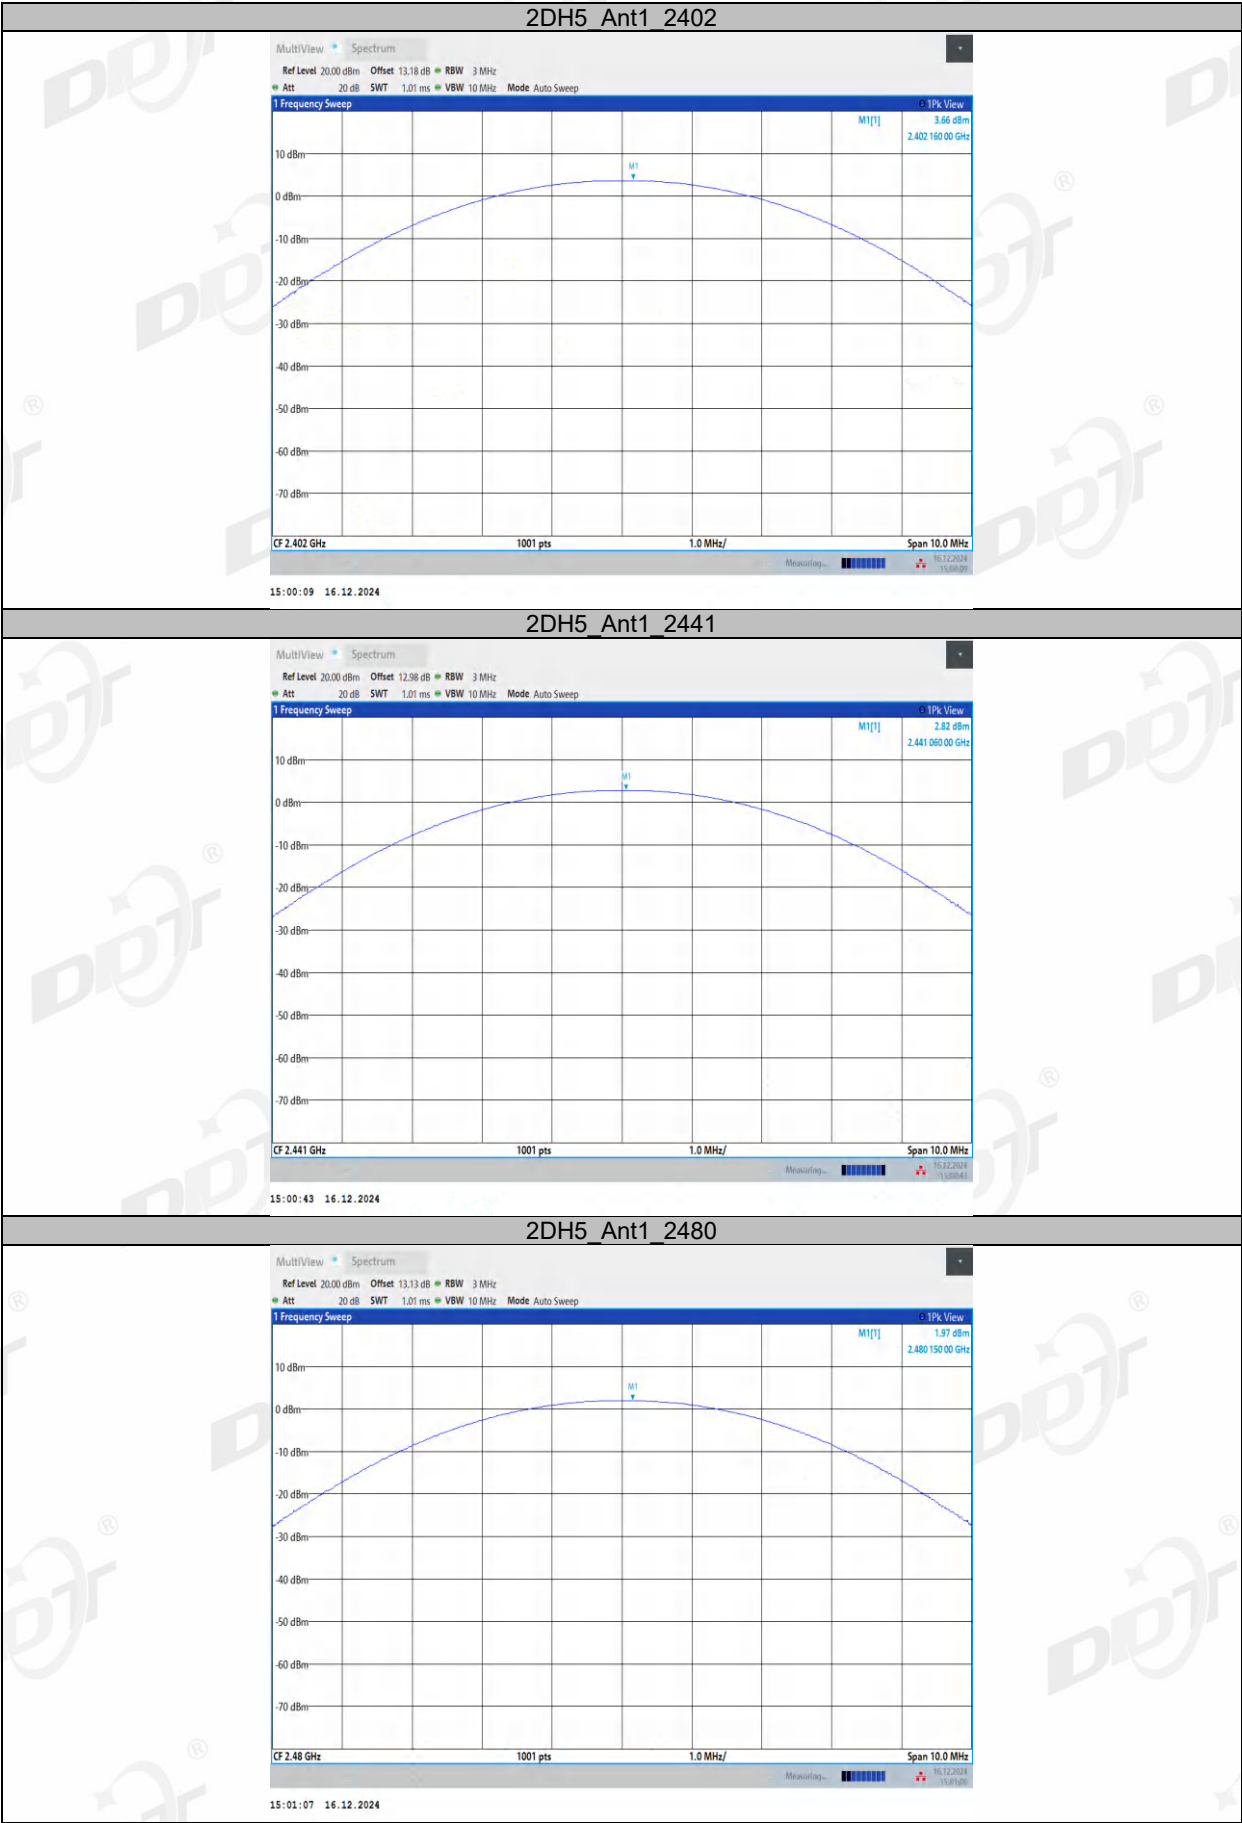


R ear:



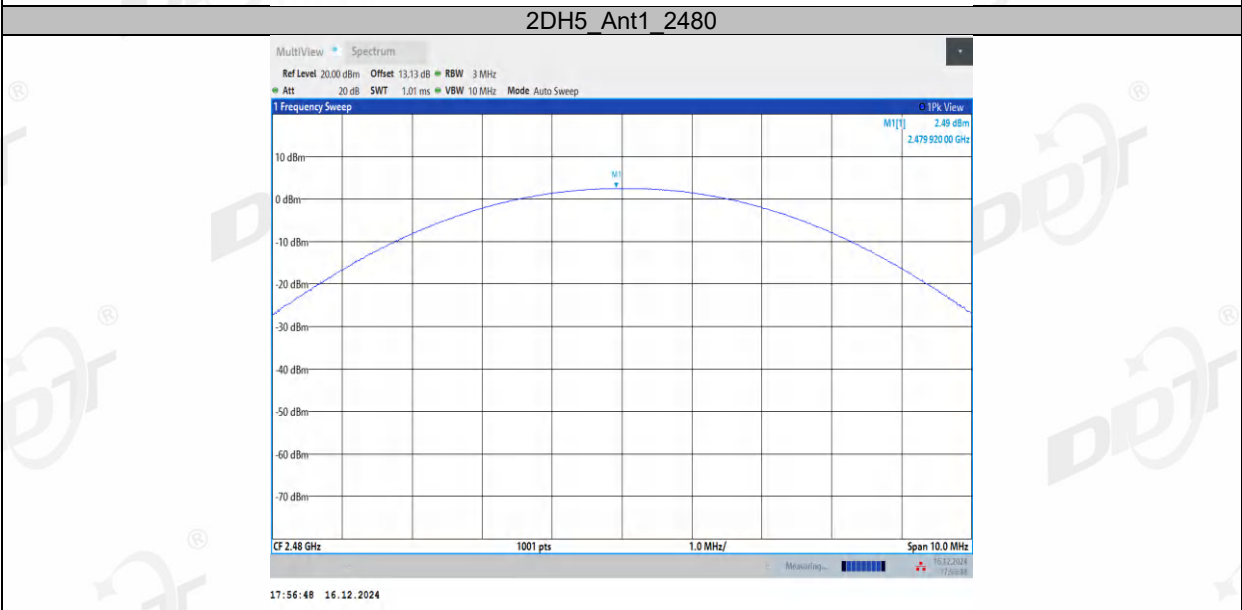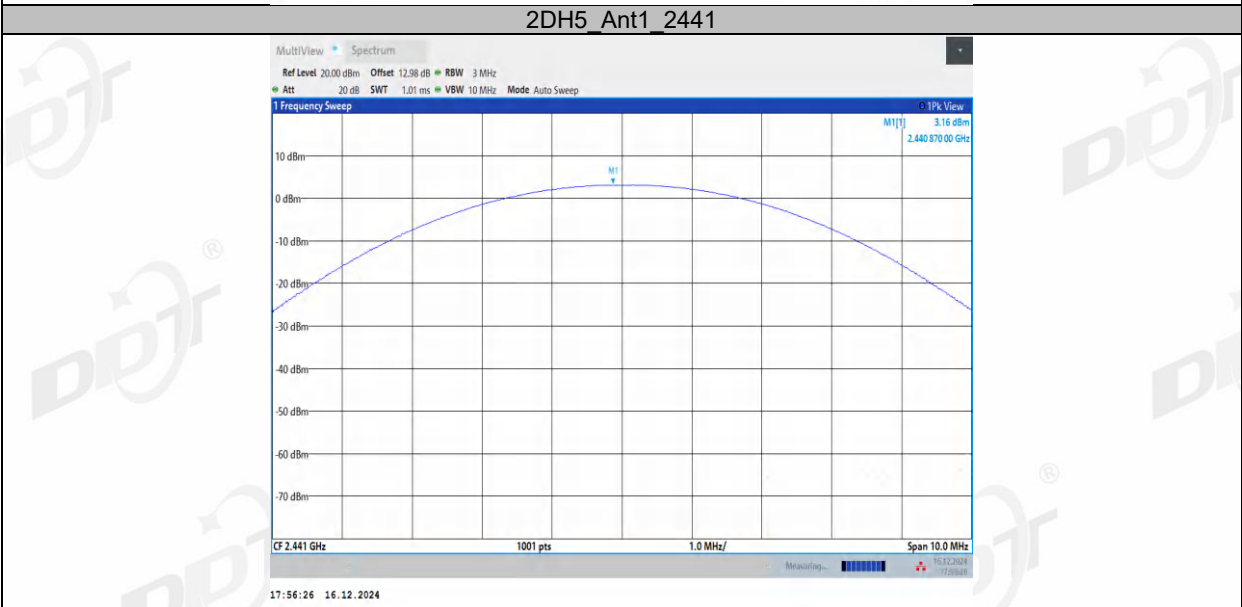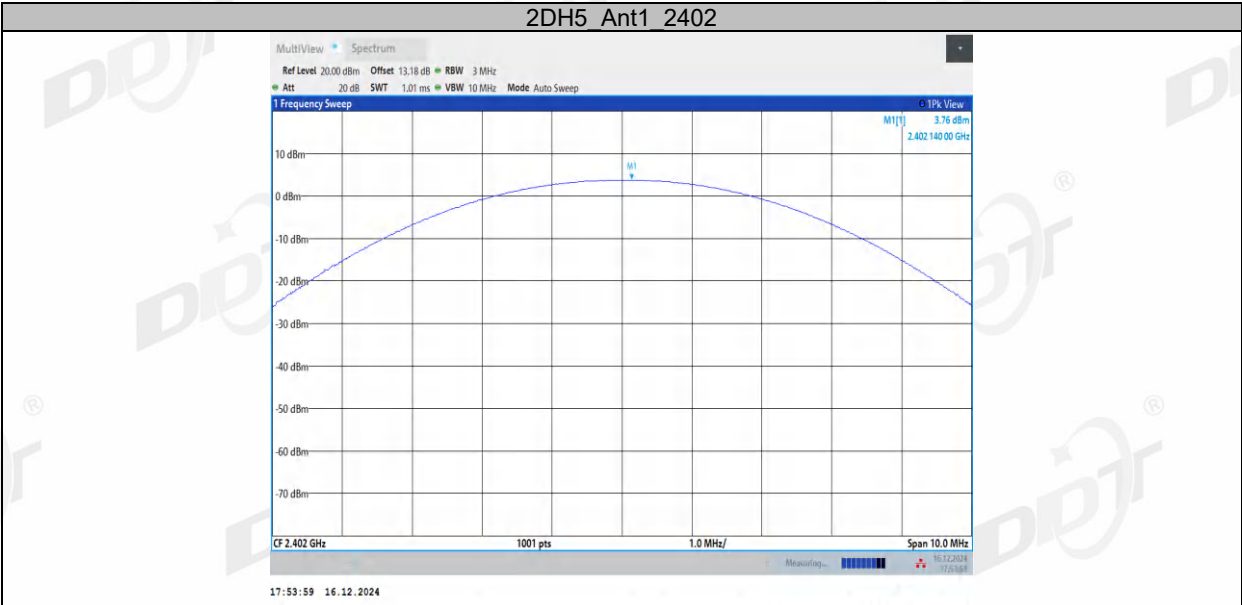

7. Carrier Frequency Separation

7.1. Block diagram of test setup

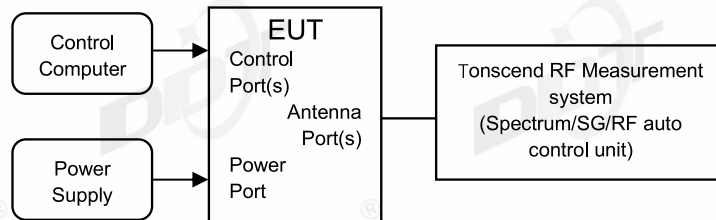

7.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 7.8.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	approximately 30% of the channel spacing
VBW:	$VBW \geq RBW$.
Span:	Wide enough to capture the peaks of two adjacent channels.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-delta function to determine the separation between the peaks of the adjacent channels and record the results in the report.

7.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 4#
Ambient Condition:	25.8℃, 46.2%RH	Test Date:	2024.12.16-2024.12.16
Test Power Supply:	DC 5V	Sample Number:	S24102916-006

L ear:


Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	1.002	≥0.673	PASS
2DH5	Ant1	Hop	0.992	≥0.880	PASS

R ear:


Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	1.002	≥0.680	PASS
2DH5	Ant1	Hop	1.006	≥0.893	PASS

7.5. Test graphs

L ear:

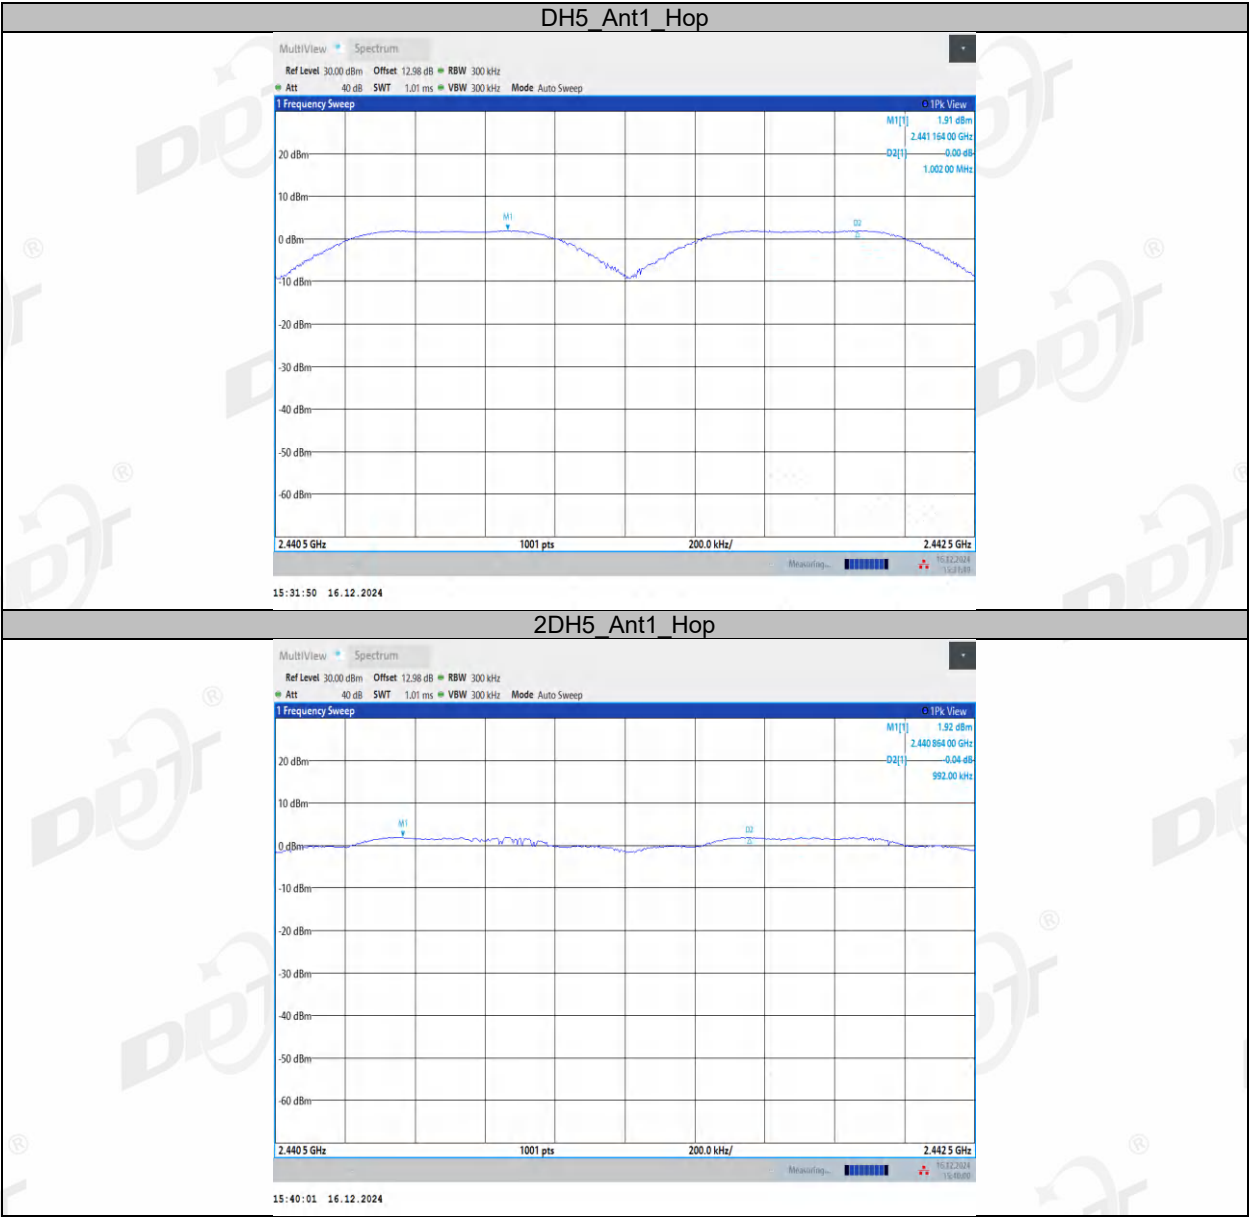


R ear:

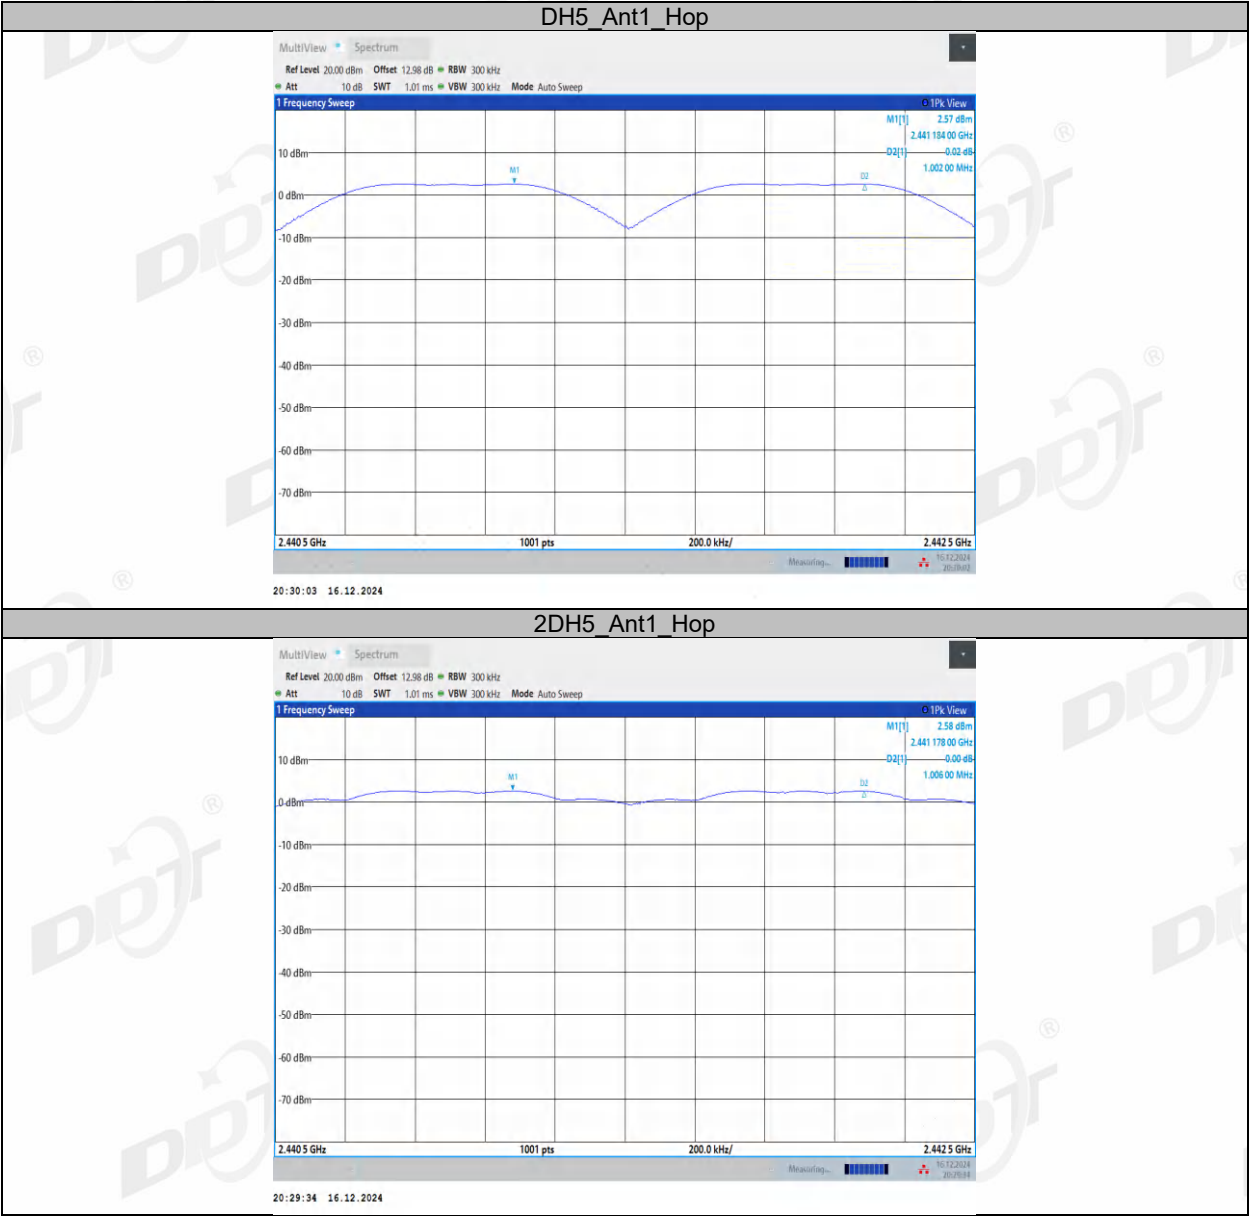

8. Dwell Time

8.1. Block diagram of test setup



8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 7.8.4.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	$\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$
VBW:	$VBW \geq RBW$.
Span:	Zero span, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Clear Write.
- (5) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (6) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops * pulse's on time.
- (7) Measure and record the results in the report.

8.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 4#
Ambient Condition:	25.8℃, 46.2%RH	Test Date:	2024.12.16-2024.12.16
Test Power Supply:	DC 5V	Sample Number:	S24102916-006

L ear:


Test Mode	Antenna	Frequency [MHz]	Burst Width [ms]	Total Hops [Num]	Result [s]	Limit [s]	Verdict
DH1	Ant1	Hop	0.360	320	0.115	≤0.4	PASS
DH3	Ant1	Hop	1.630	160	0.261	≤0.4	PASS
DH5	Ant1	Hop	2.870	100	0.287	≤0.4	PASS
2DH1	Ant1	Hop	0.370	321	0.119	≤0.4	PASS
2DH3	Ant1	Hop	1.630	165	0.269	≤0.4	PASS
2DH5	Ant1	Hop	2.870	115	0.33	≤0.4	PASS


R ear:


Test Mode	Antenna	Frequency [MHz]	Burst Width [ms]	Total Hops [Num]	Result [s]	Limit [s]	Verdict
DH1	Ant1	Hop	0.360	320	0.118	≤0.4	PASS
DH3	Ant1	Hop	1.630	151	0.245	≤0.4	PASS
DH5	Ant1	Hop	2.870	119	0.342	≤0.4	PASS
2DH1	Ant1	Hop	0.370	319	0.118	≤0.4	PASS
2DH3	Ant1	Hop	1.630	160	0.261	≤0.4	PASS
2DH5	Ant1	Hop	2.870	107	0.308	≤0.4	PASS


8.5. Test graphs

L ear:


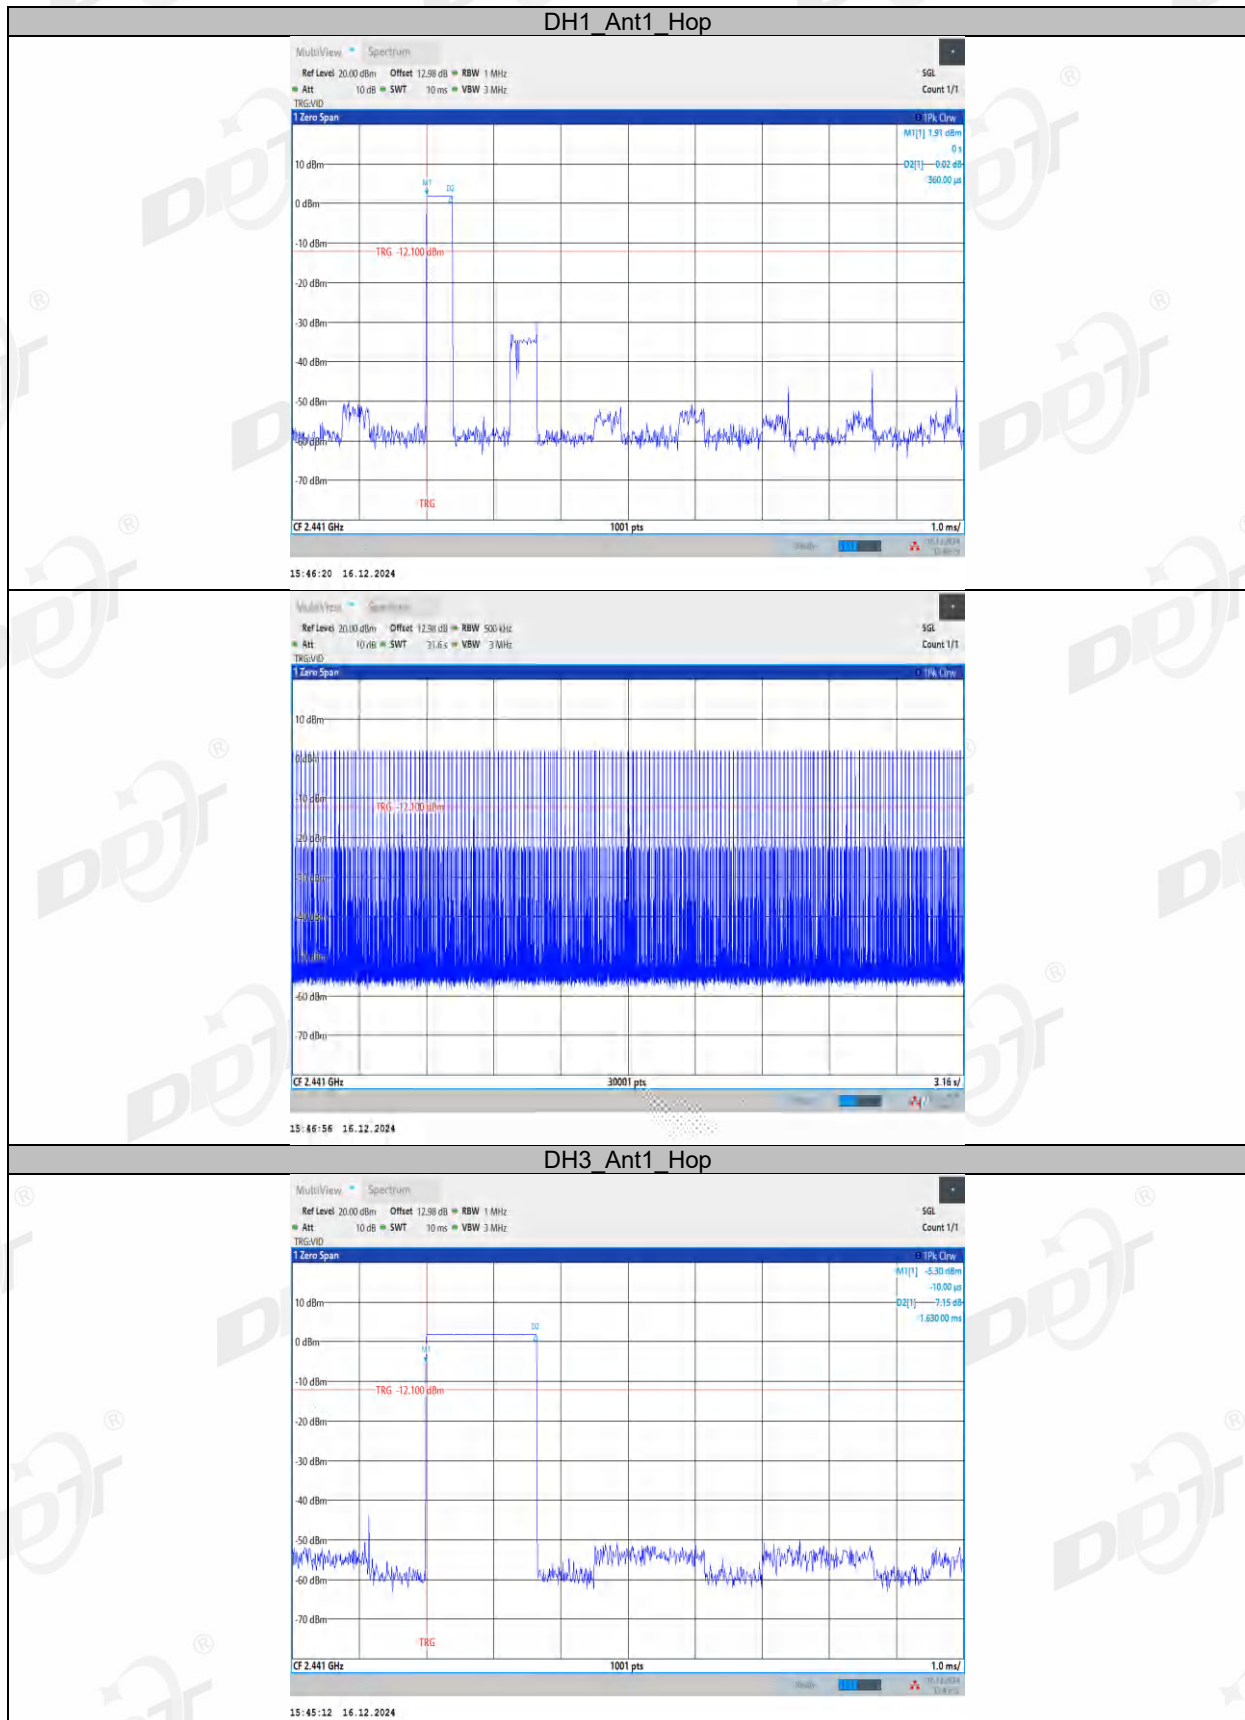


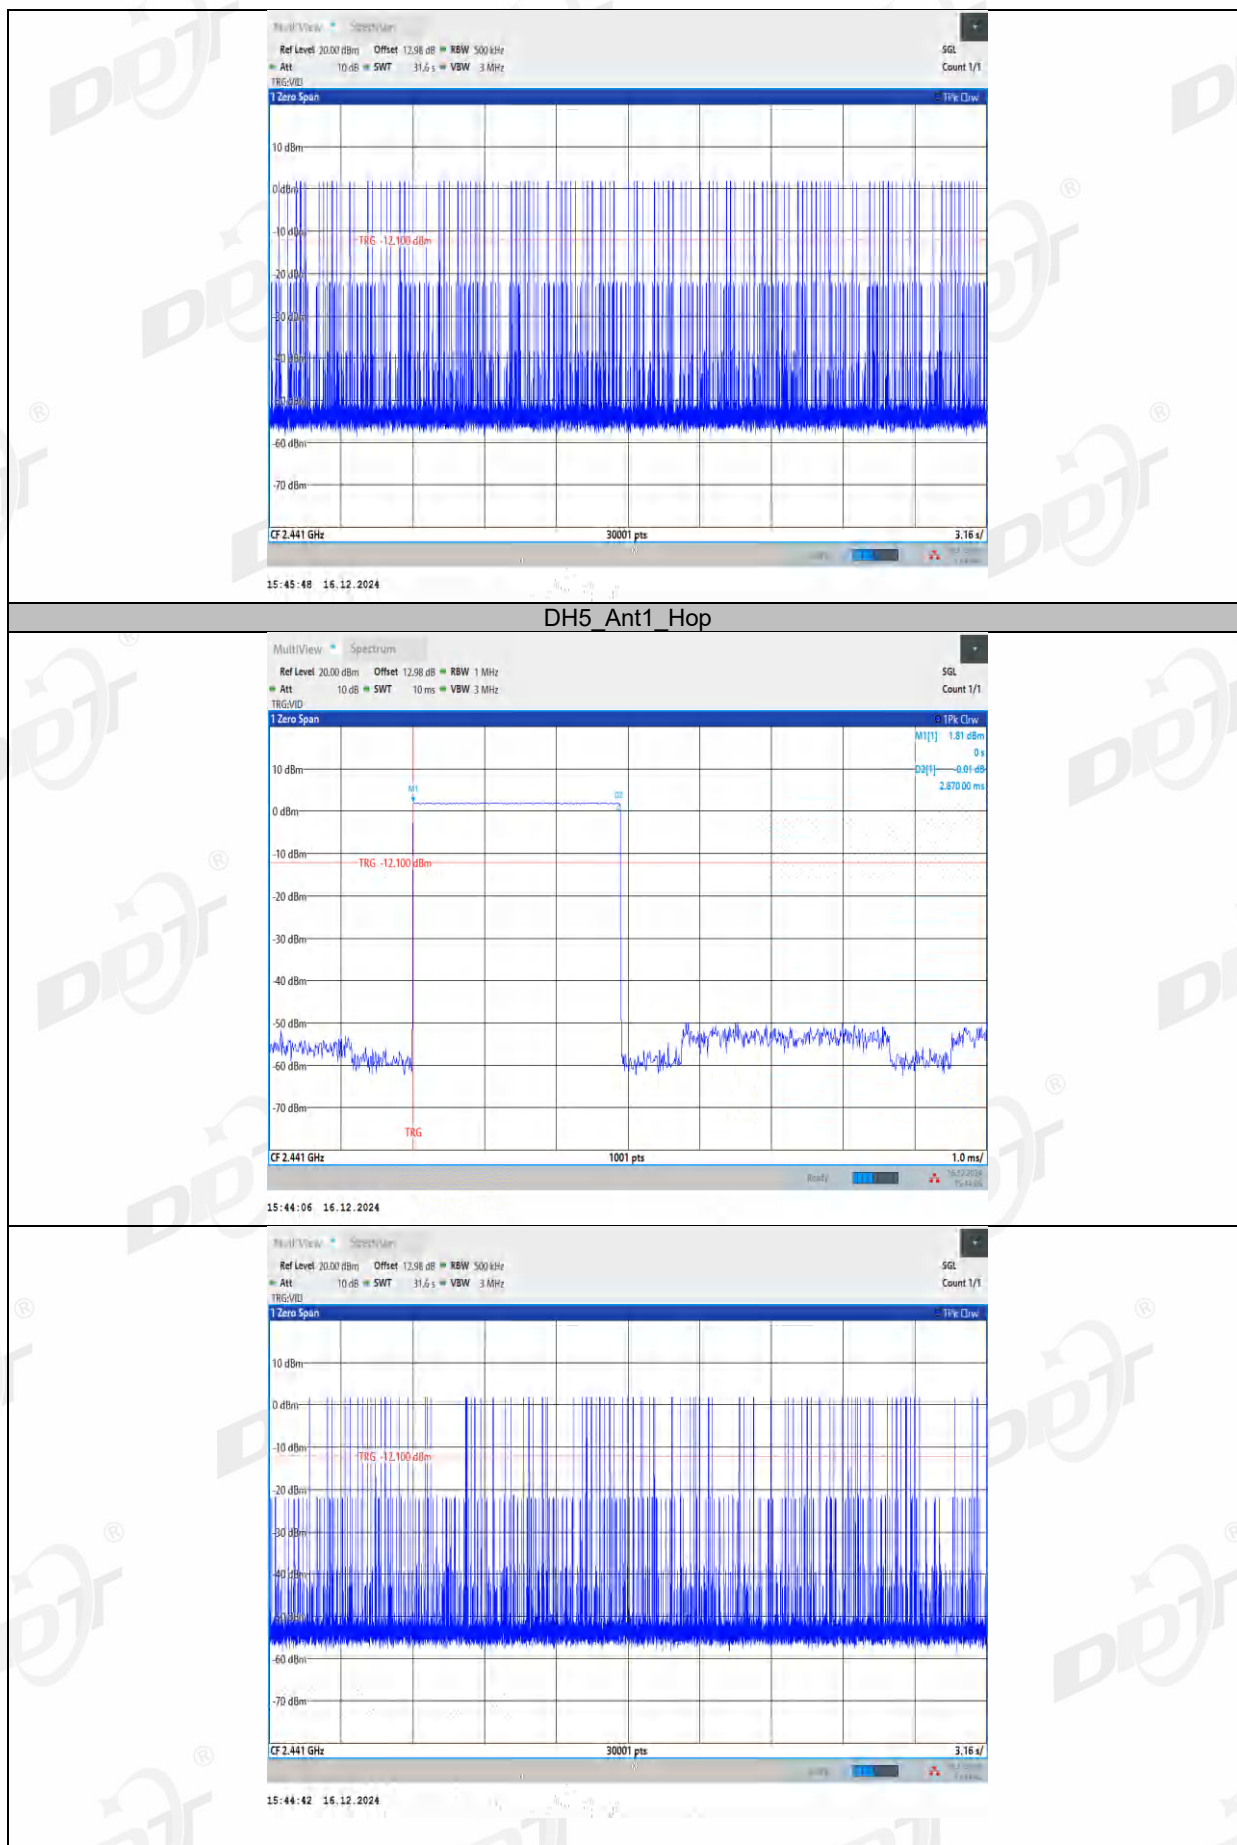

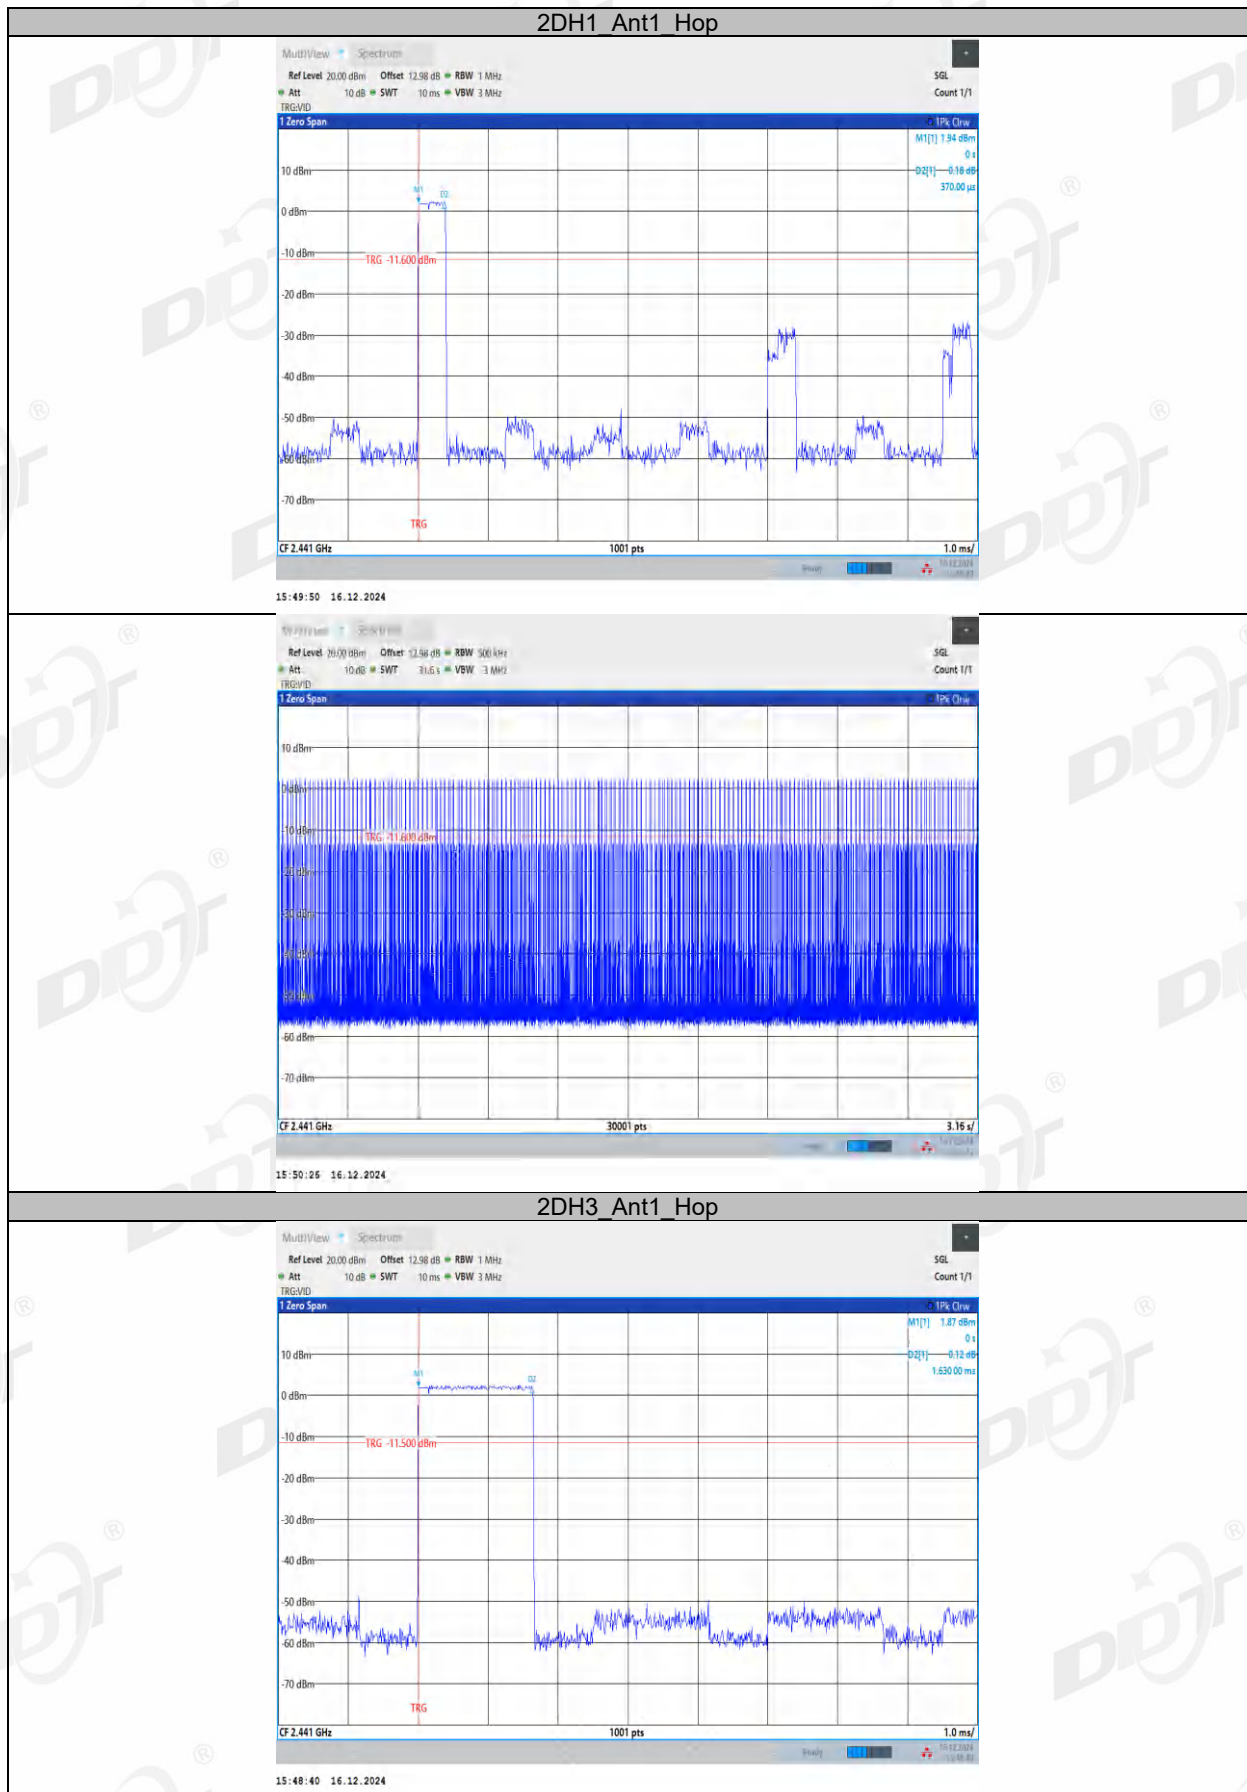


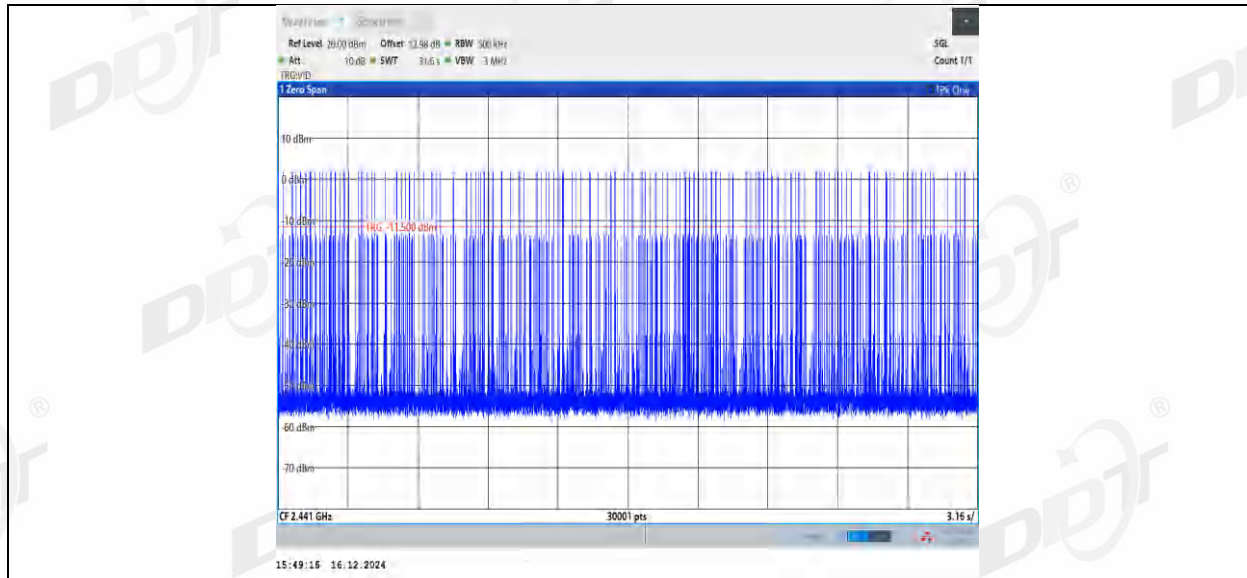



2DH5_Ant1_Hop

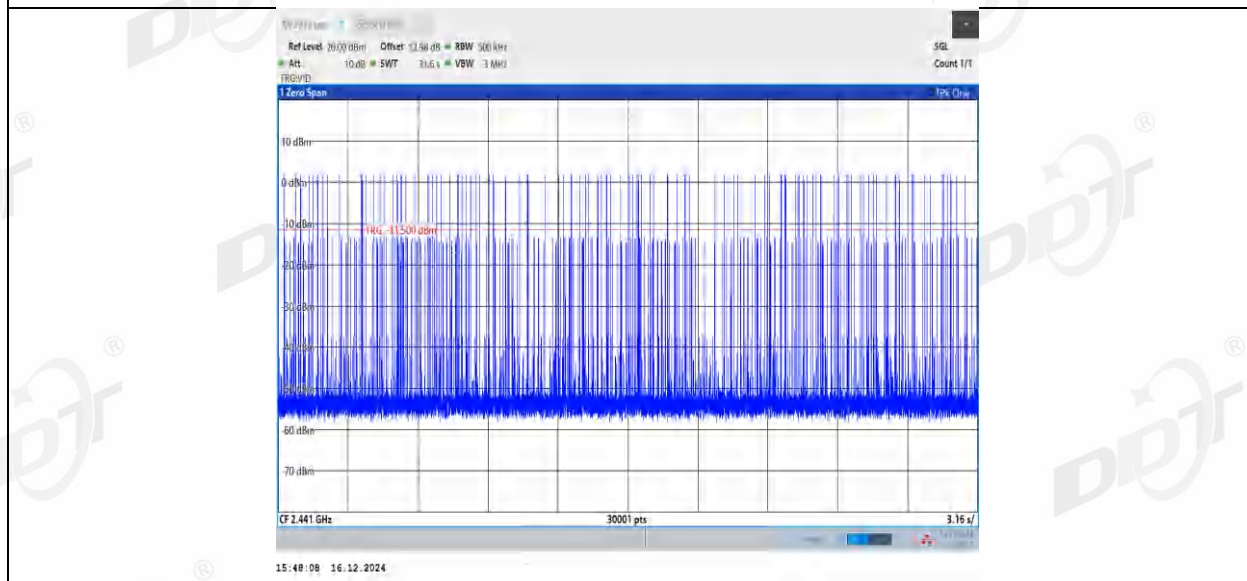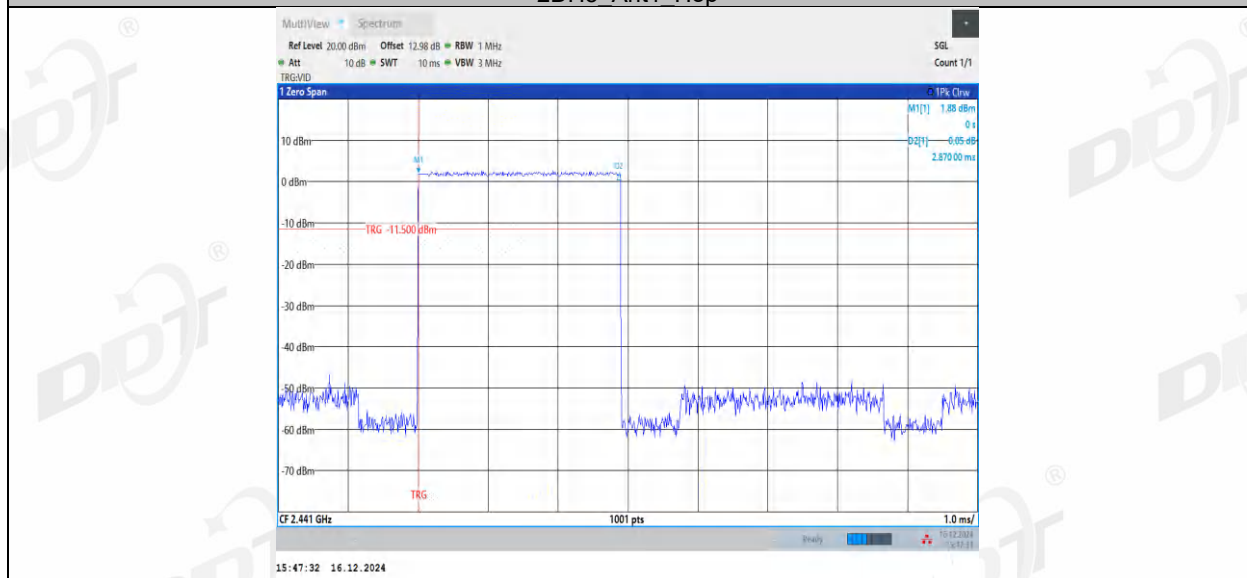


R ear:


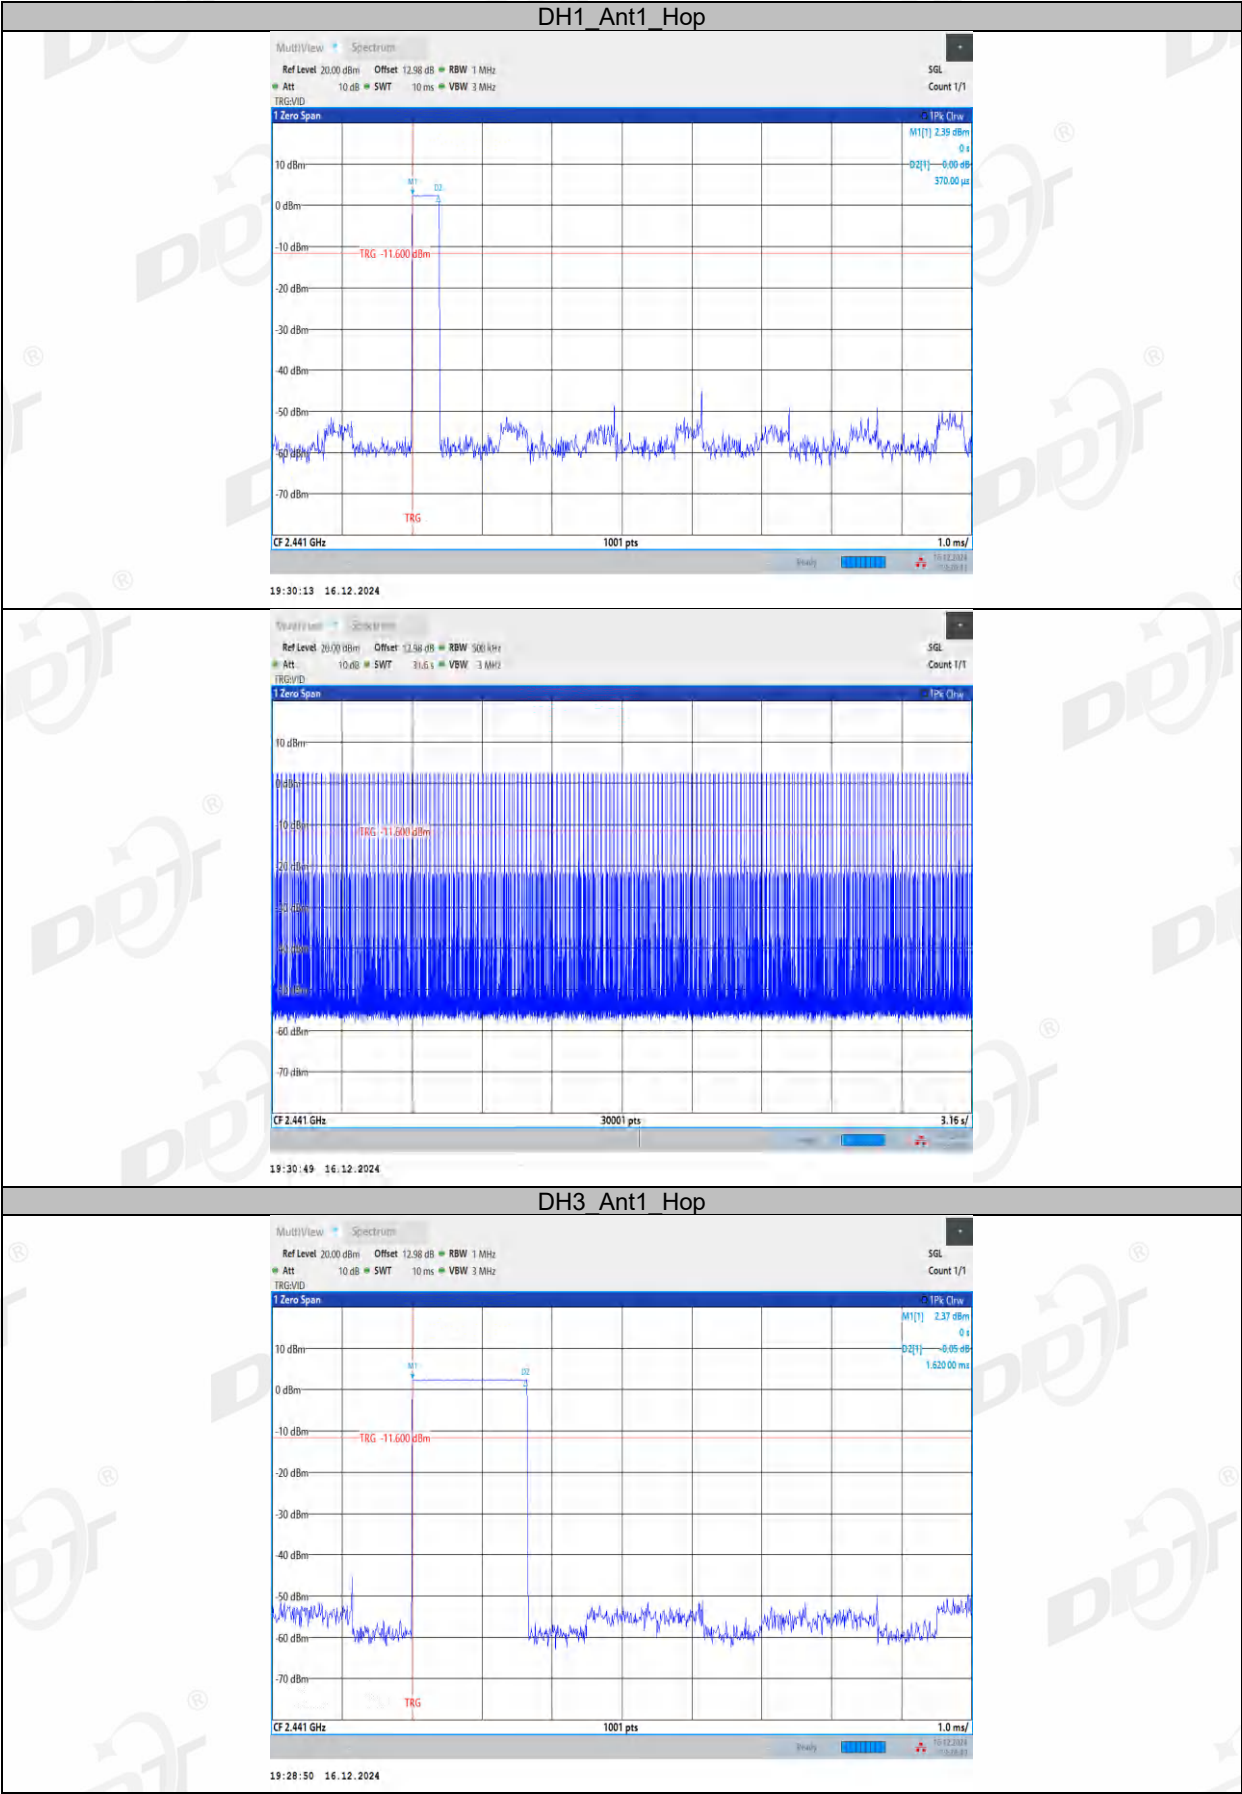


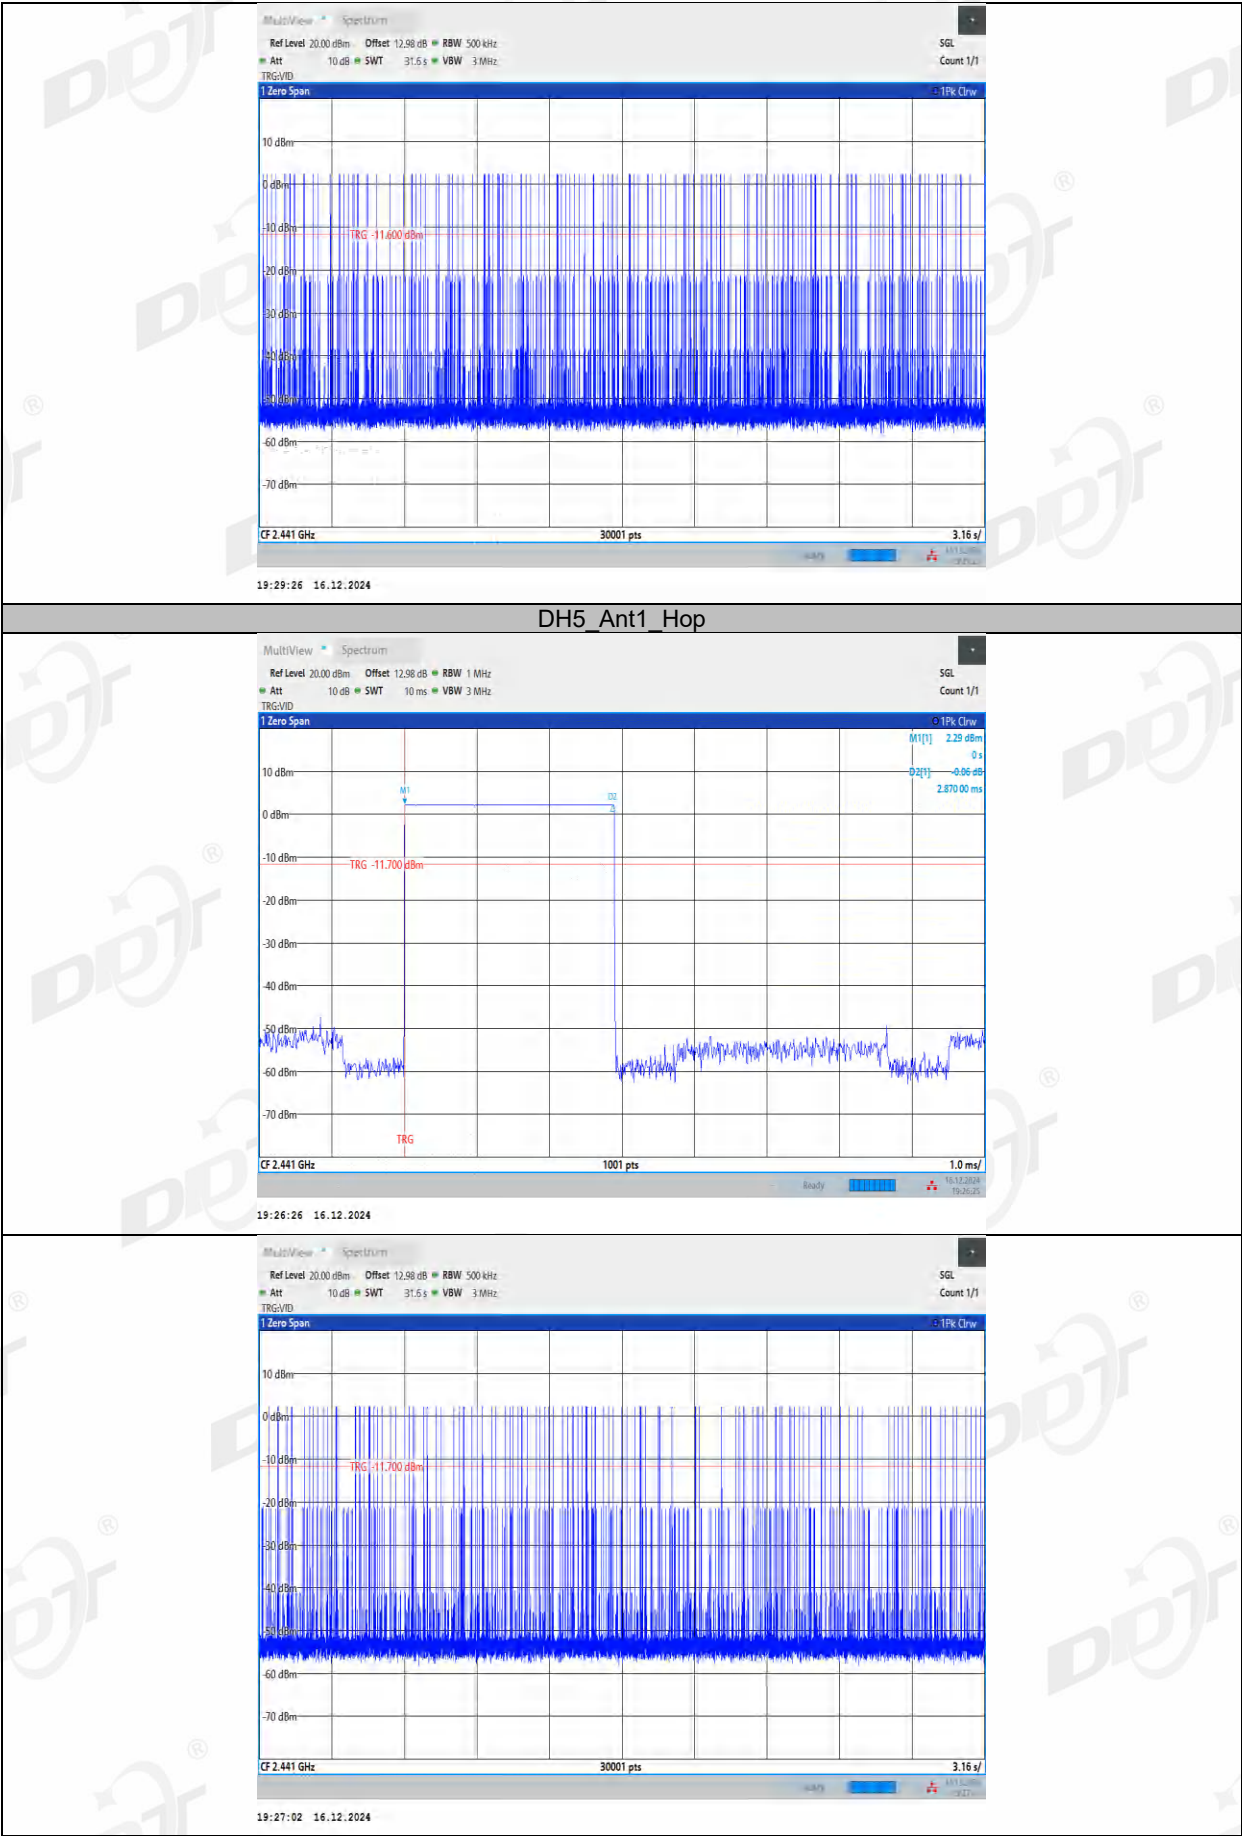

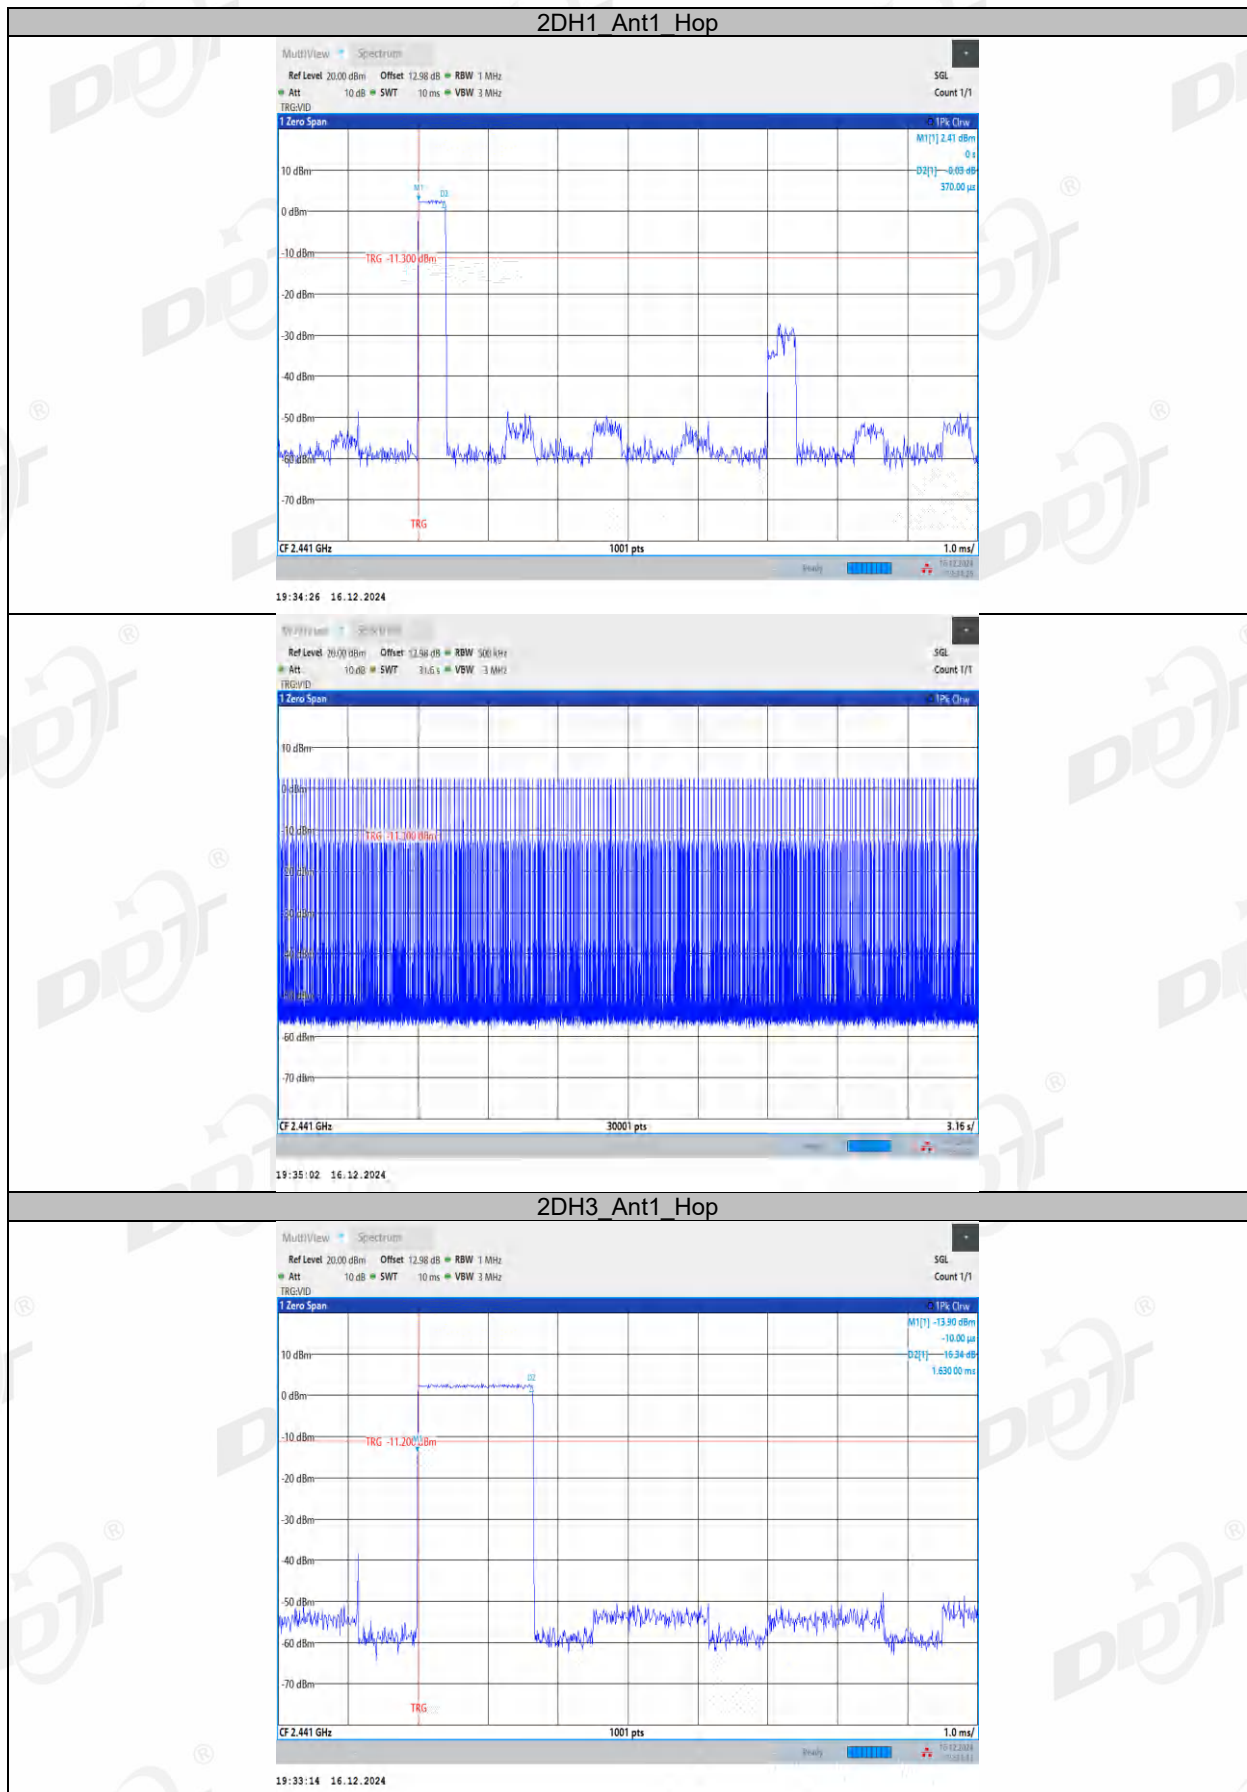

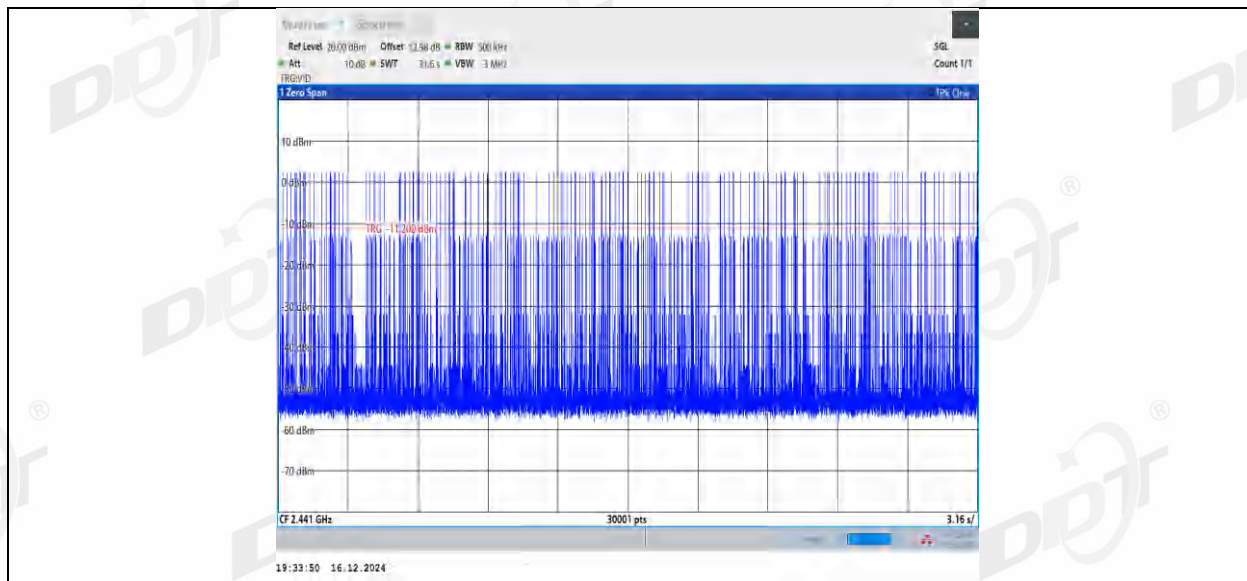


2DH5_Ant1_Hop

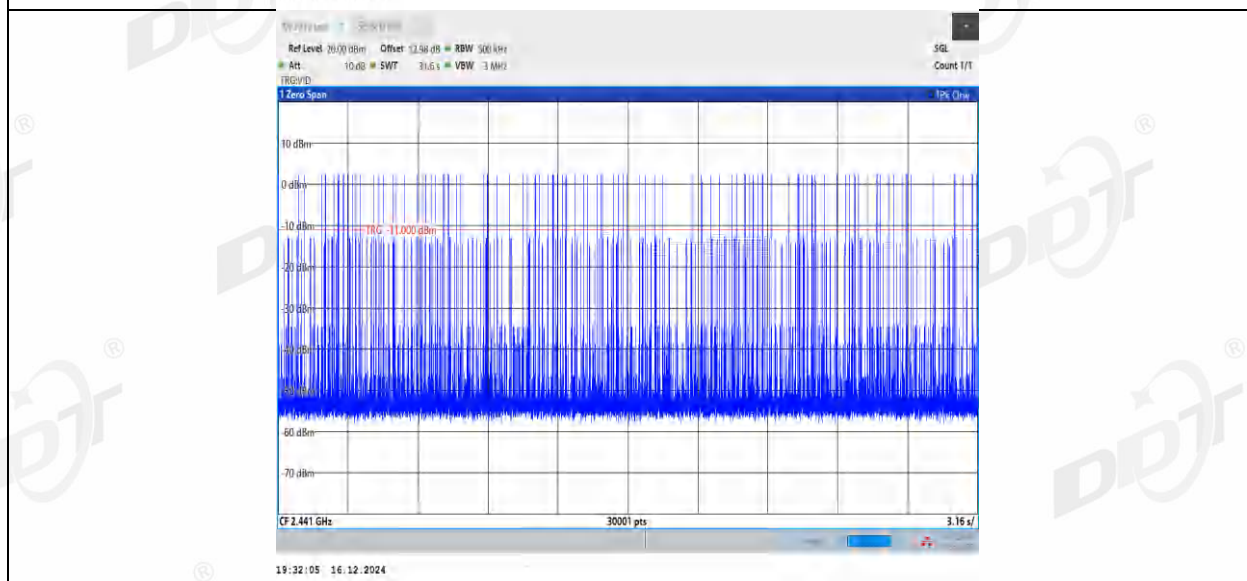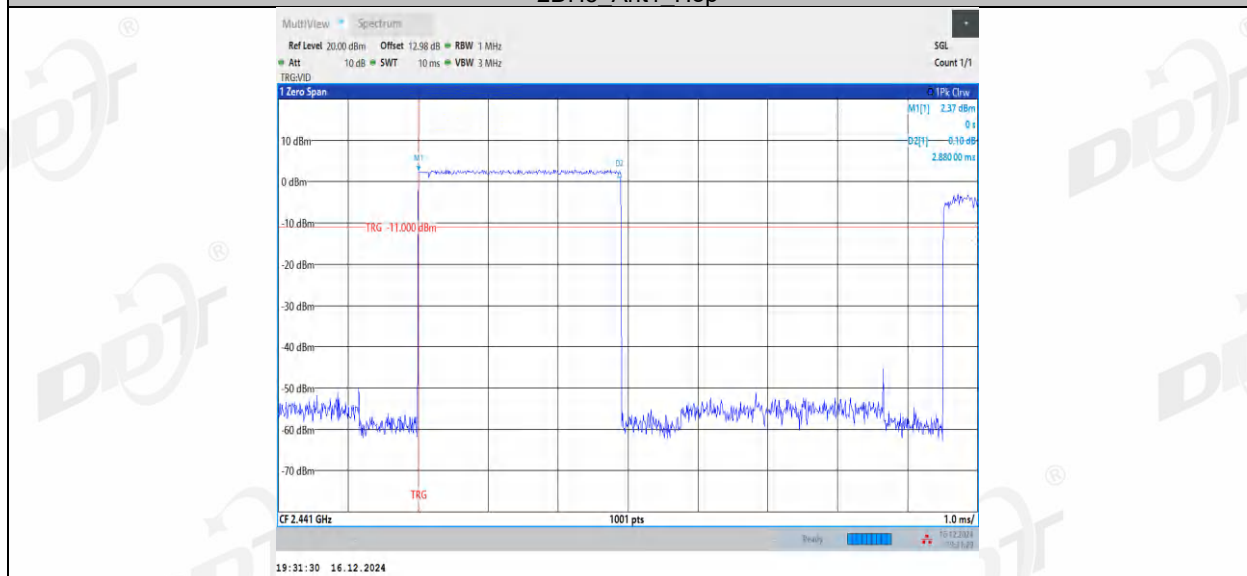

9. Number of Hopping Channel

9.1. Block diagram of test setup



9.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

9.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 7.8.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW: RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW: $VBW \geq RBW$.

Span: The frequency band of operation

Detector Mode: Peak

Sweep time: Auto

Trace mode: Max hold

- (5) Measure the hopping number and record the results in the report.
- (6) Measure and record the results in the report.

9.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 4#
Ambient Condition:	25.8℃, 46.2%RH	Test Date:	2024.12.16-2024.12.16
Test Power Supply:	DC 5V	Sample Number:	S24102916-006

L ear:


Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS

R ear:


Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS

9.5. Test graphs

L ear:

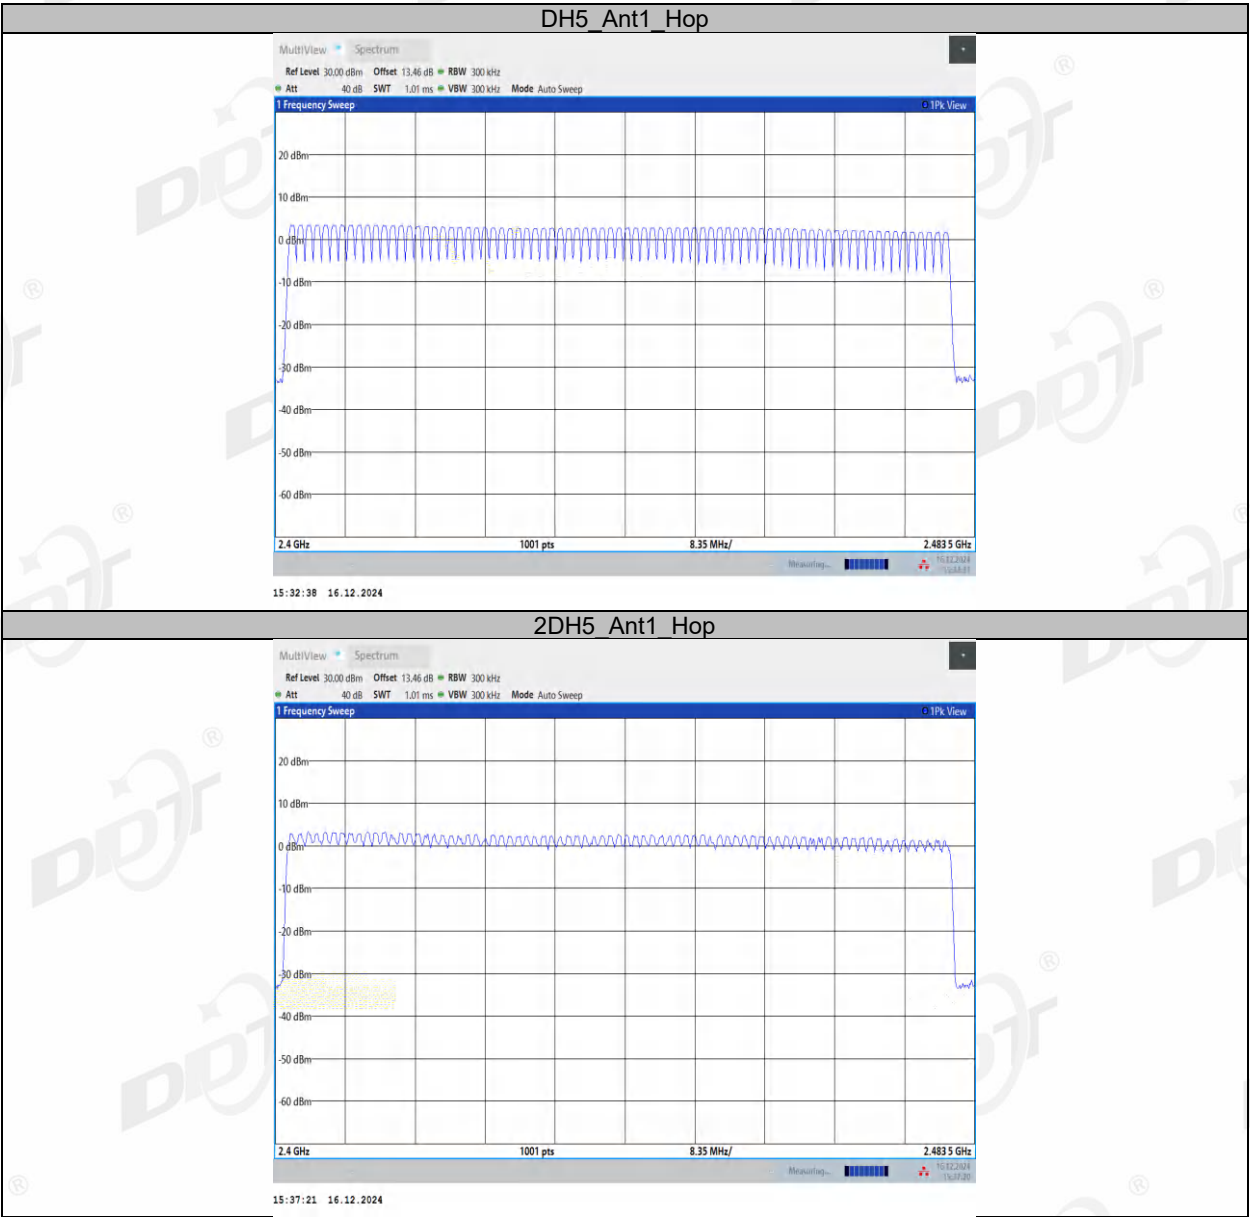


R ear:

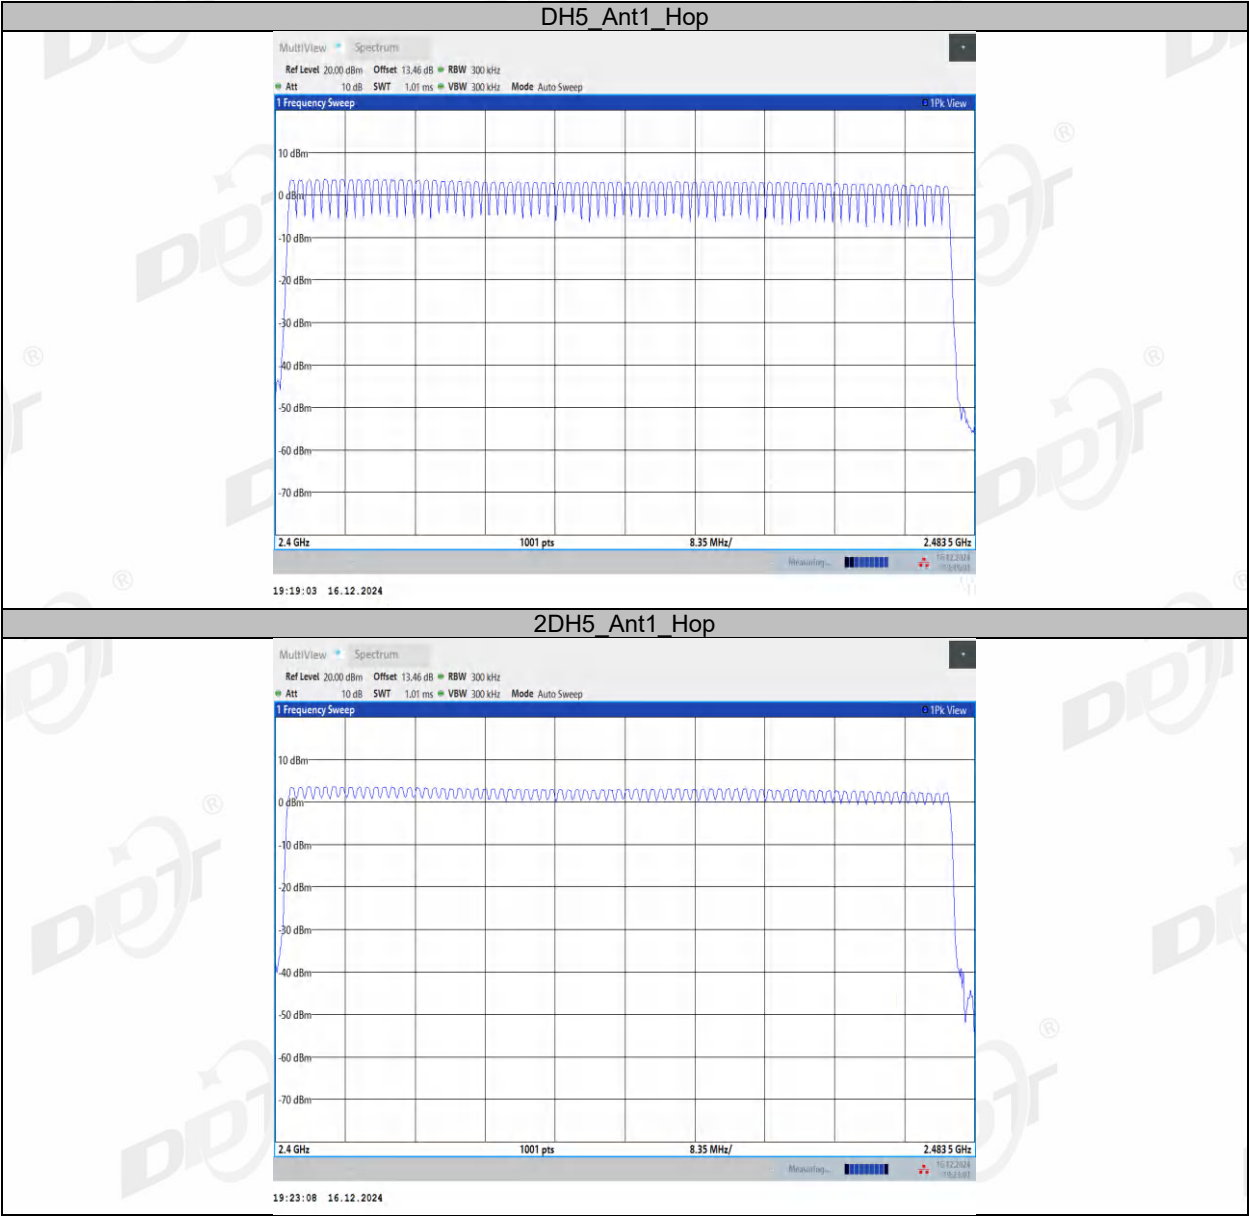

10. Band Edge Compliance (Conducted Method)

10.1. Block diagram of test setup



10.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

10.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.

10.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 4#
Ambient Condition:	25.8℃, 46.2%RH	Test Date:	2024.12.16-2024.12.16
Test Power Supply:	DC 5V	Sample Number:	S24102916-006

L ear:


Mode	Frequency (MHz)	Verdict
DH5	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
2DH5	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass


R ear:


Mode	Frequency (MHz)	Verdict
DH5	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
2DH5	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass

10.5. Test graphs

L ear:

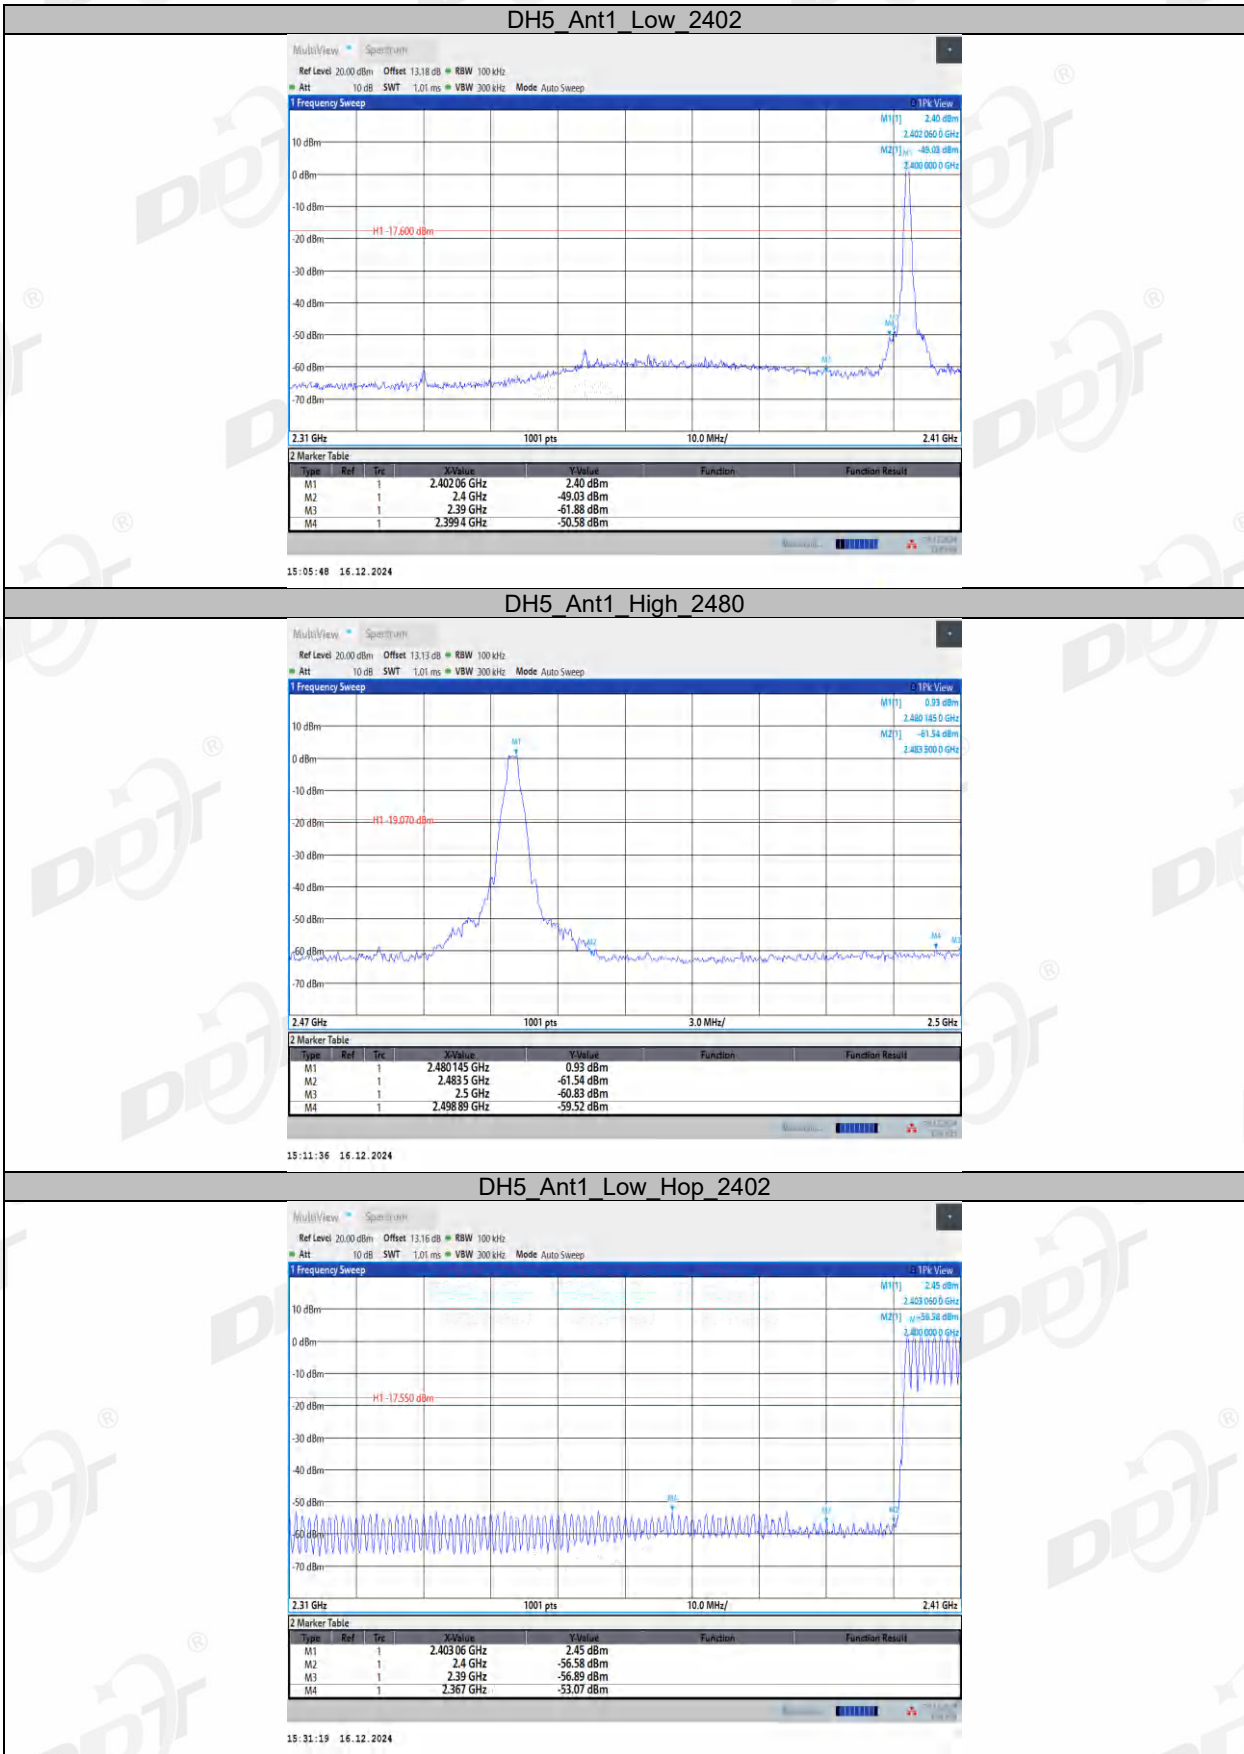


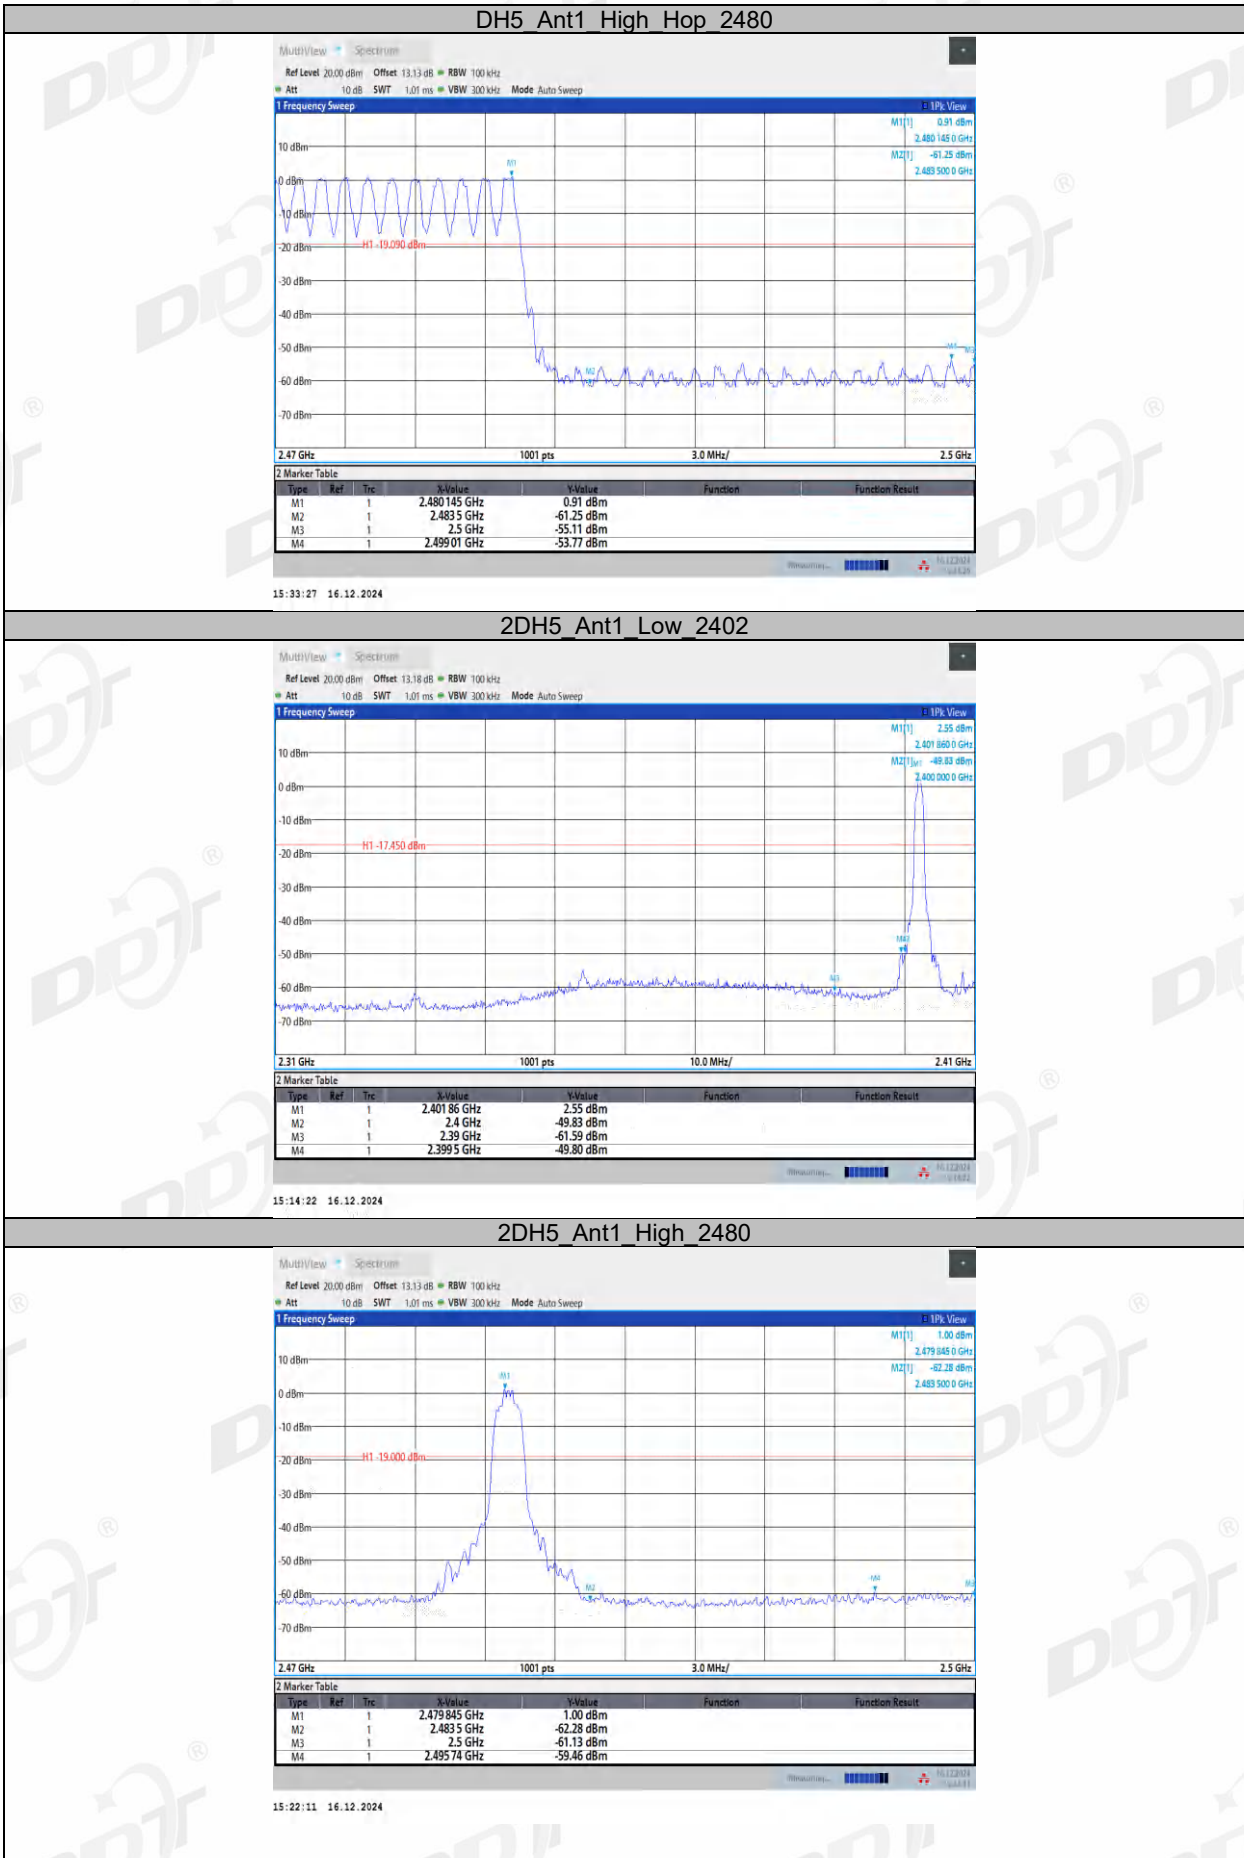


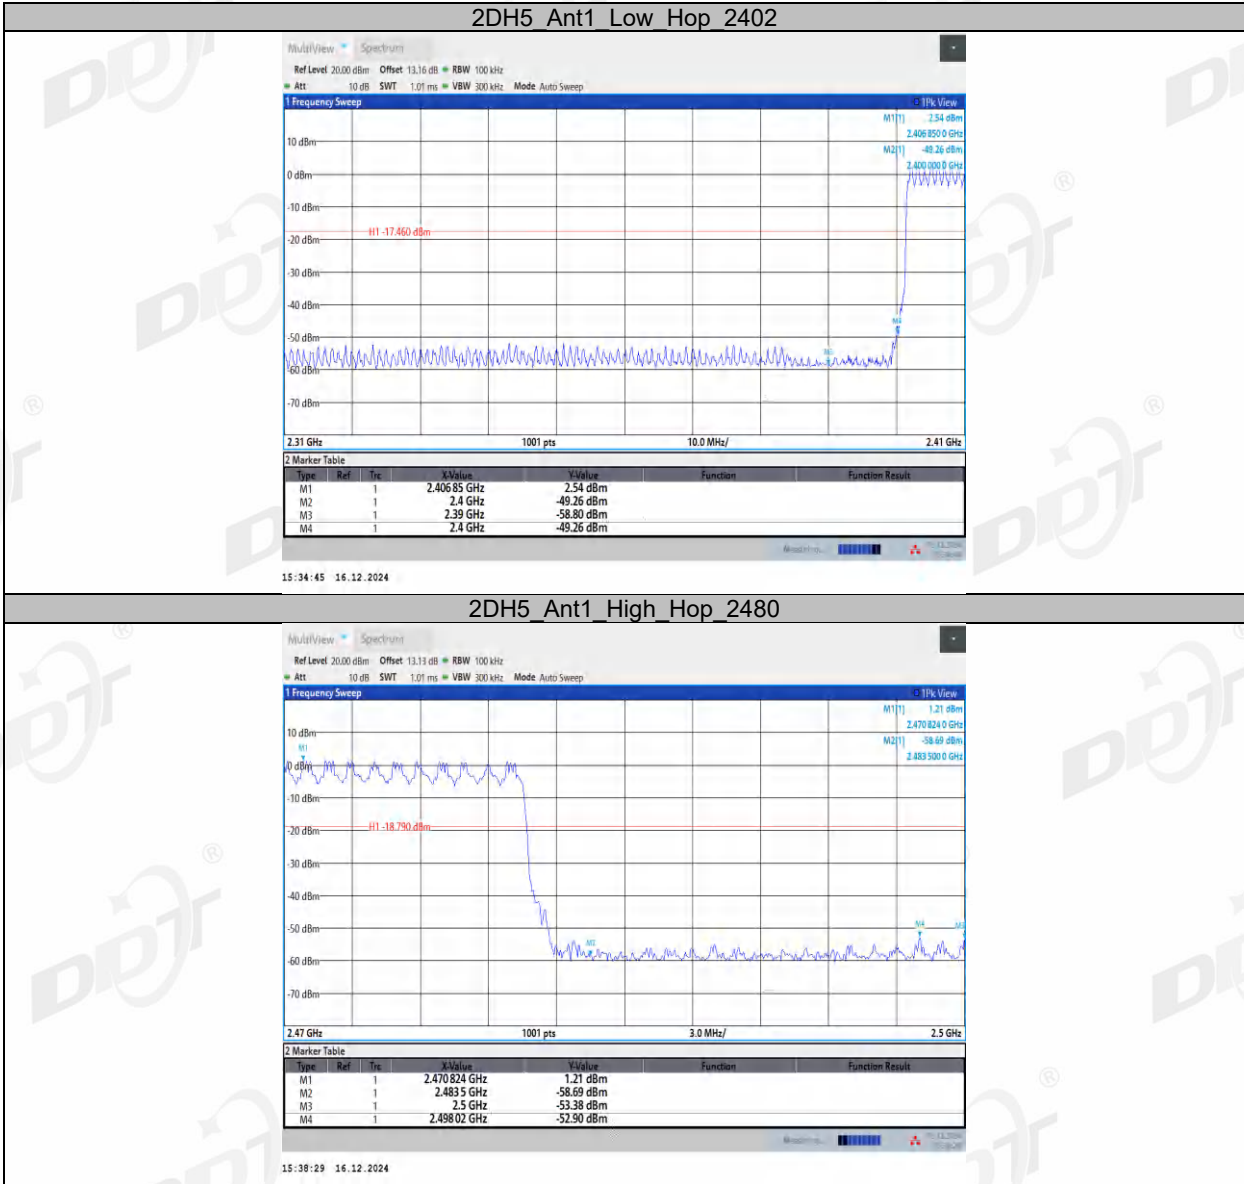



2DH5 Ant1 High Hop 2480

R ear:

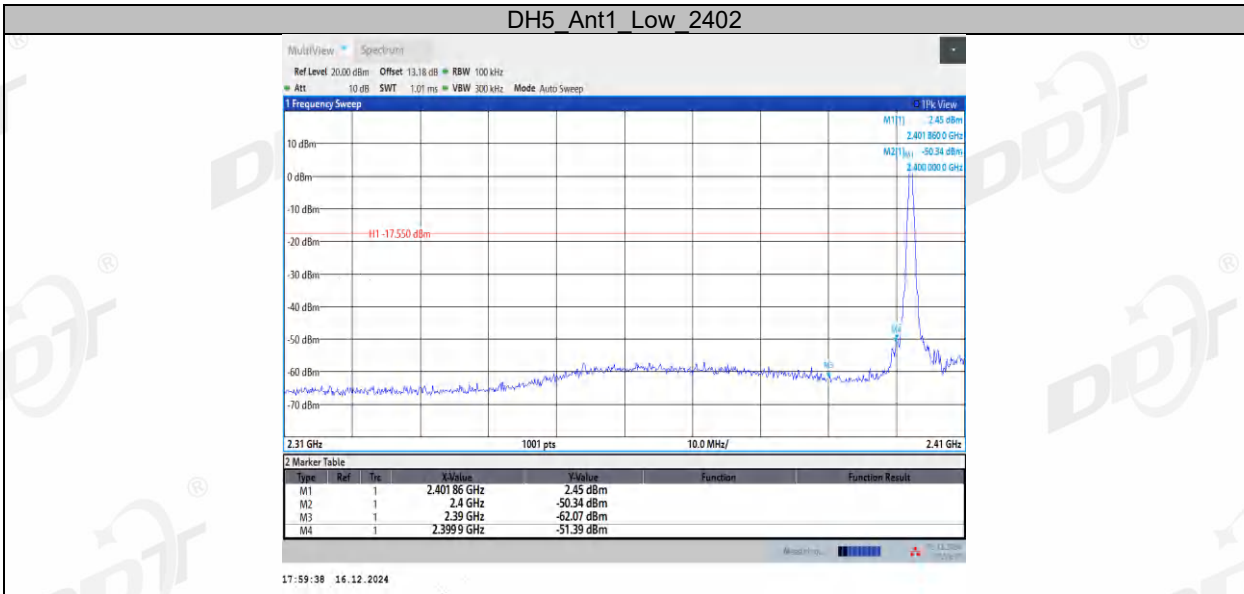

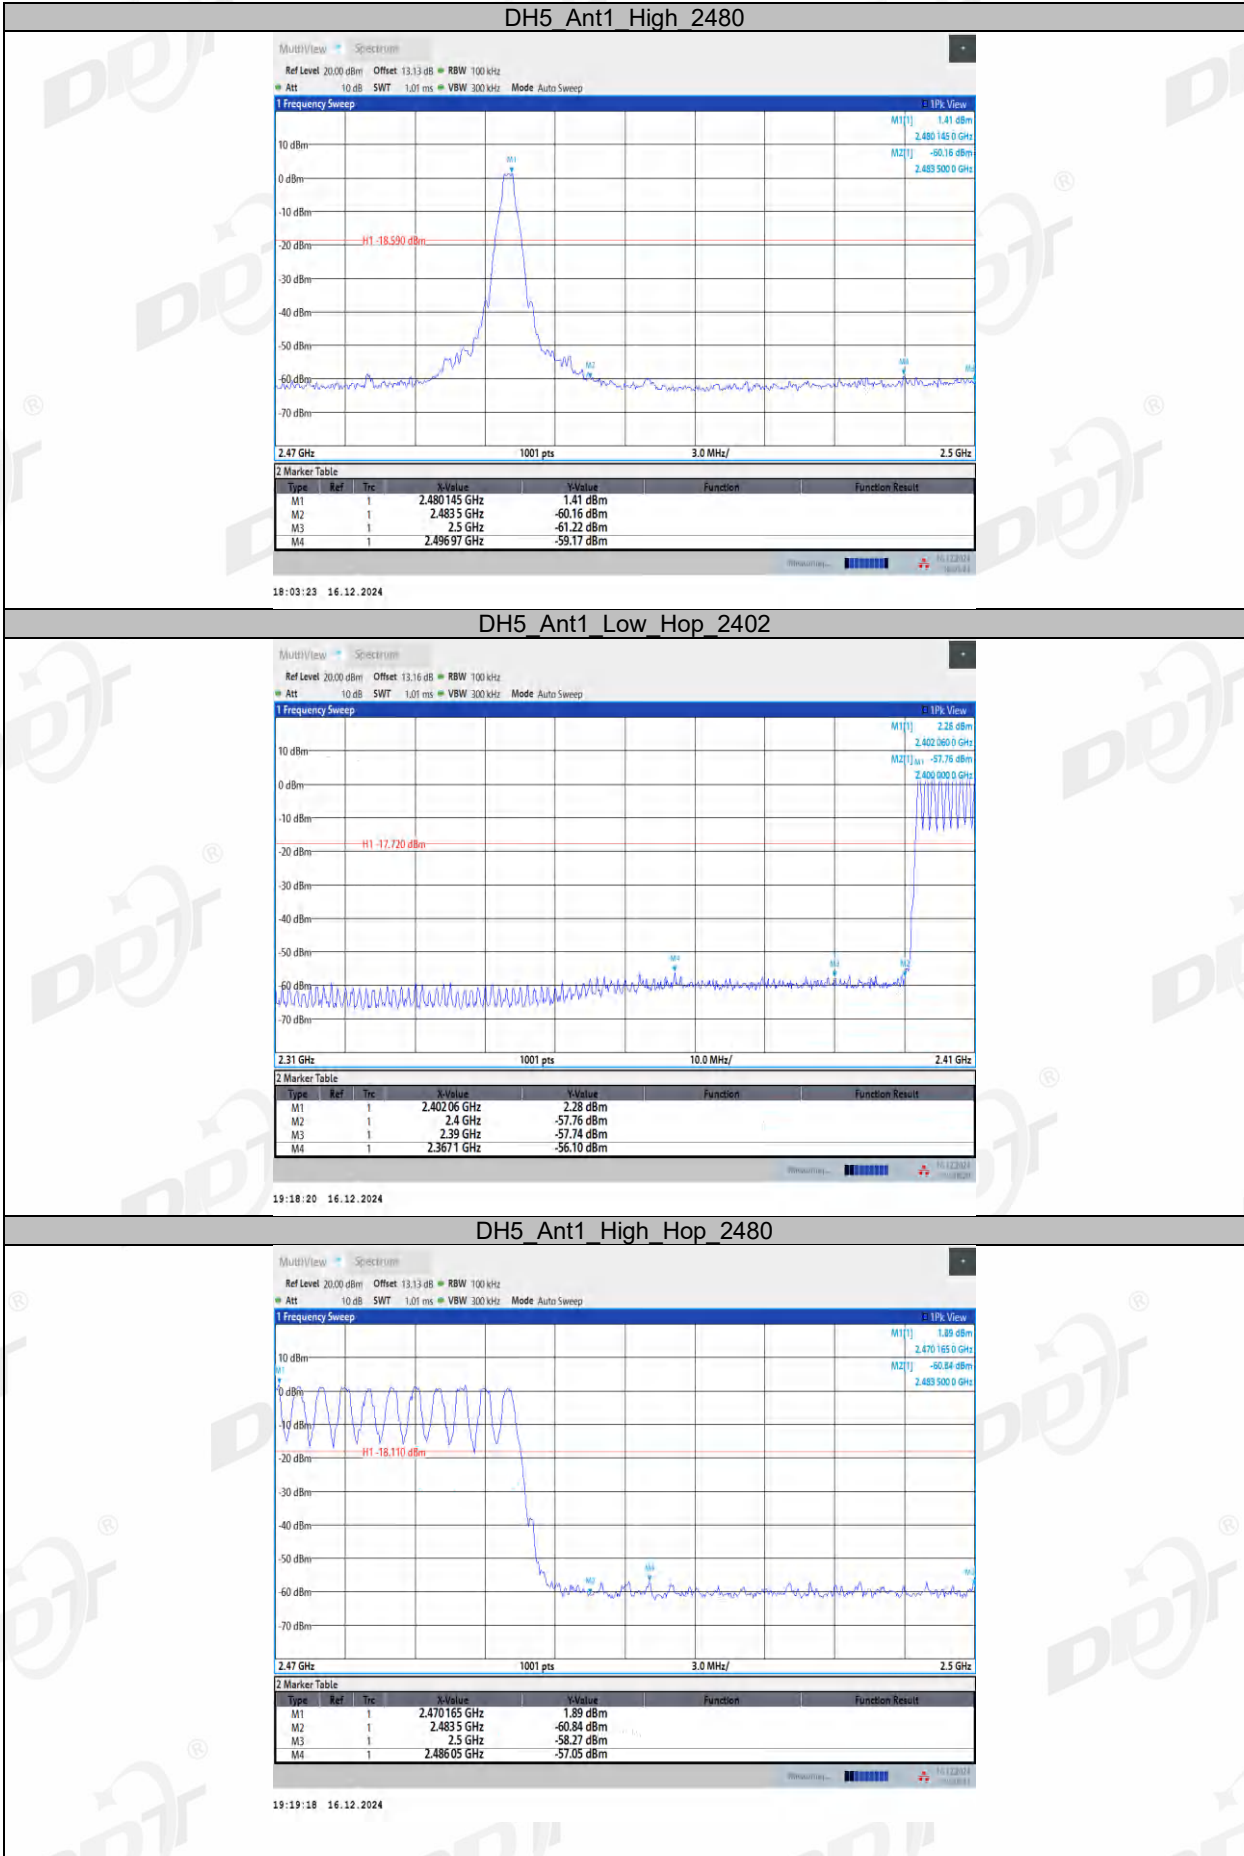

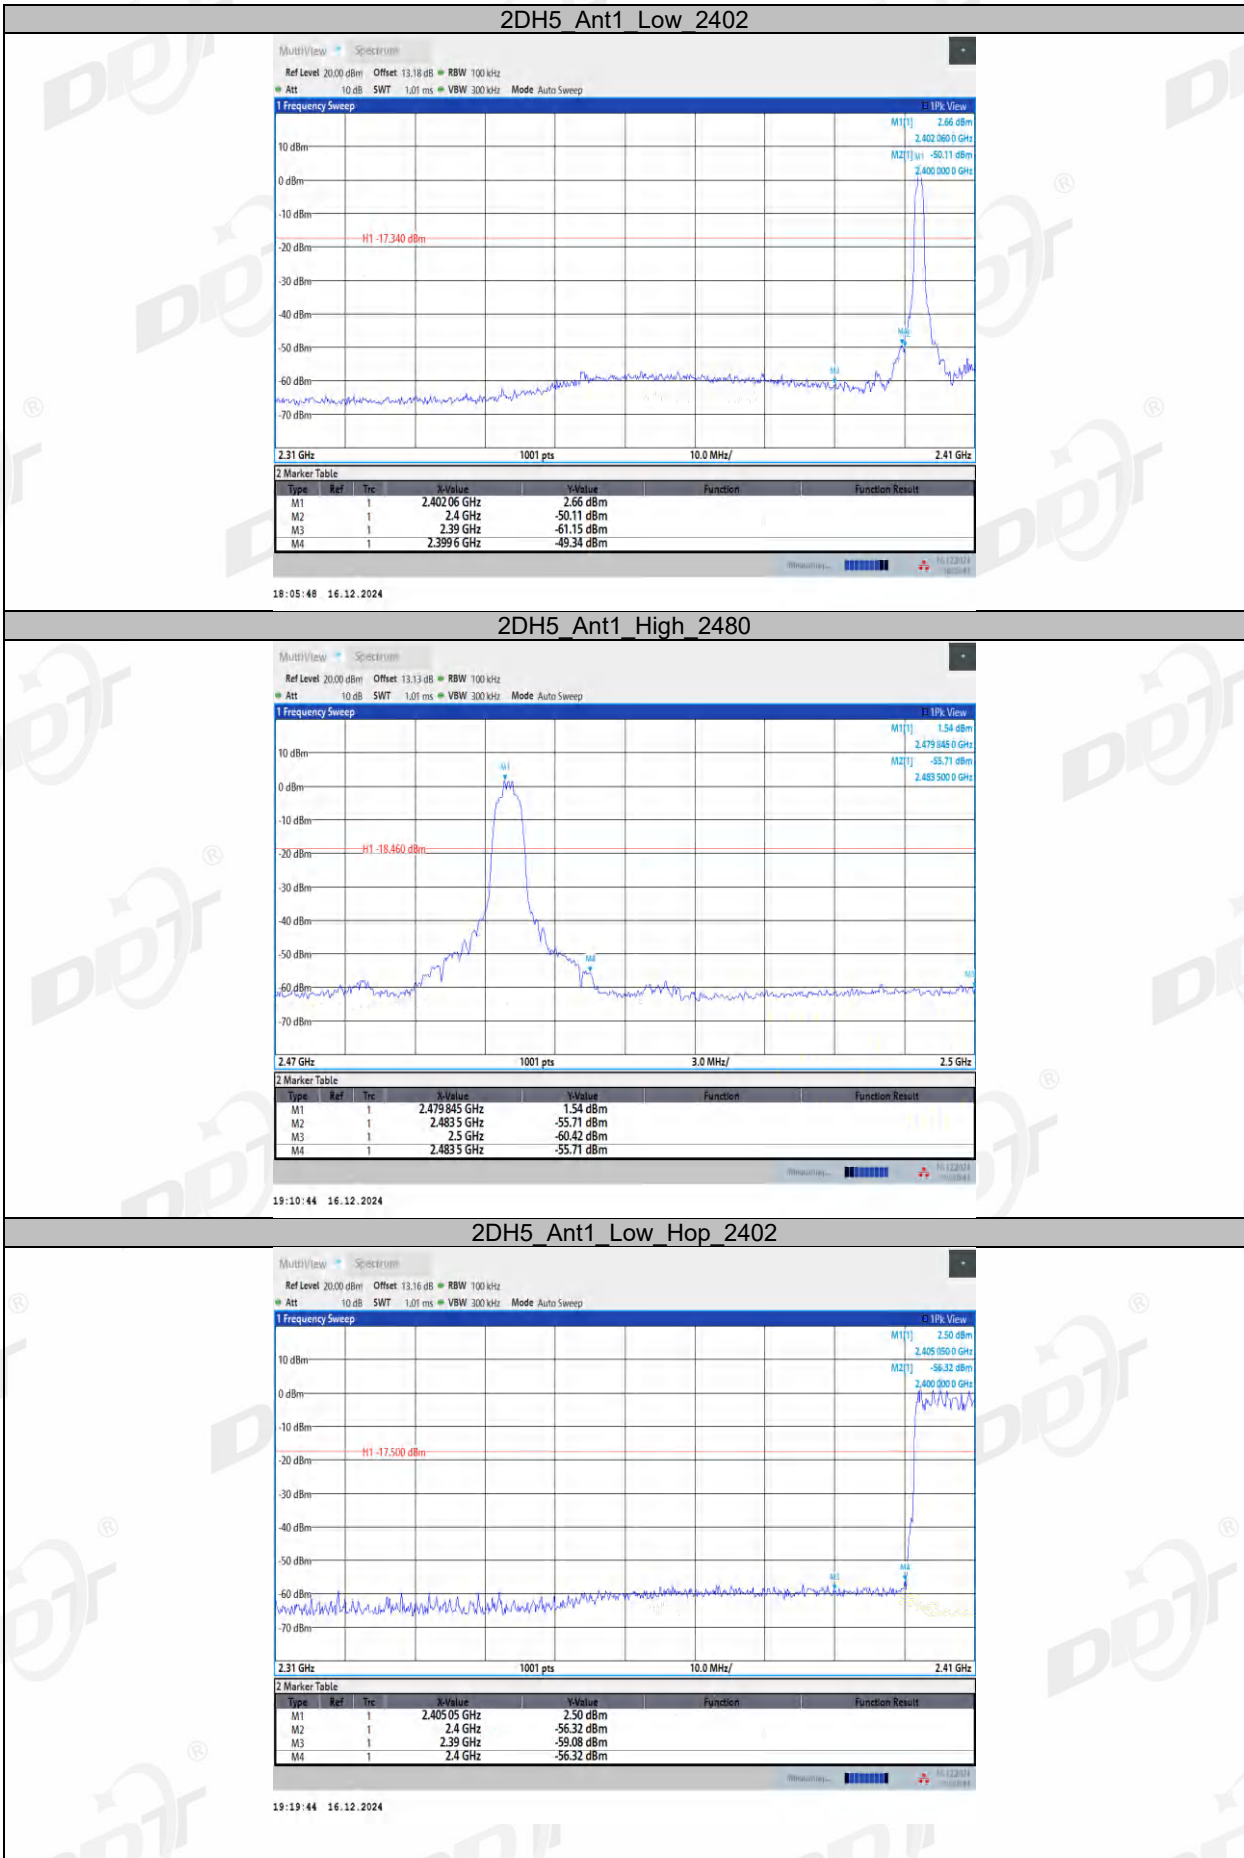

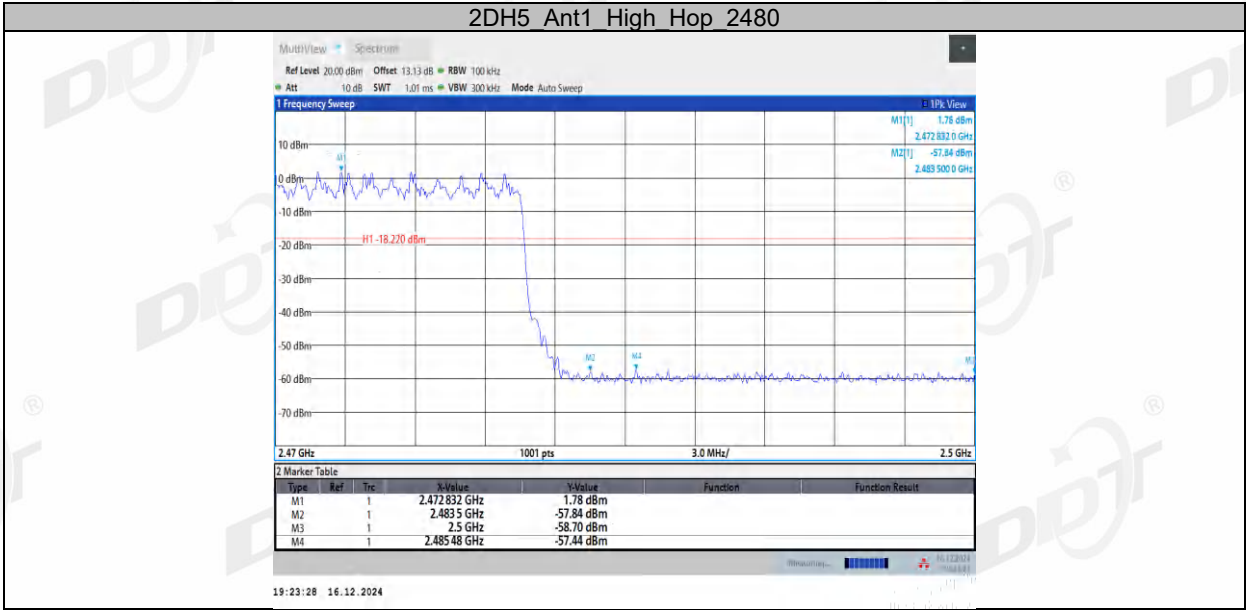

11. RF Conducted Spurious Emissions

11.1. Block diagram of test setup

Same as 10.1

11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{Span/RBW}$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

11.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 4#
Ambient Condition:	25.8℃, 46.2%RH	Test Date:	2024.12.16-2024.12.16
Test Power Supply:	DC 5V	Sample Number:	S24102916-006

L ear:


Mode	Frequency (MHz)	Verdict
DH5	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
2DH5	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass


R ear:


Mode	Frequency (MHz)	Verdict
DH5	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
2DH5	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass


11.5. Test graphs


L ear:

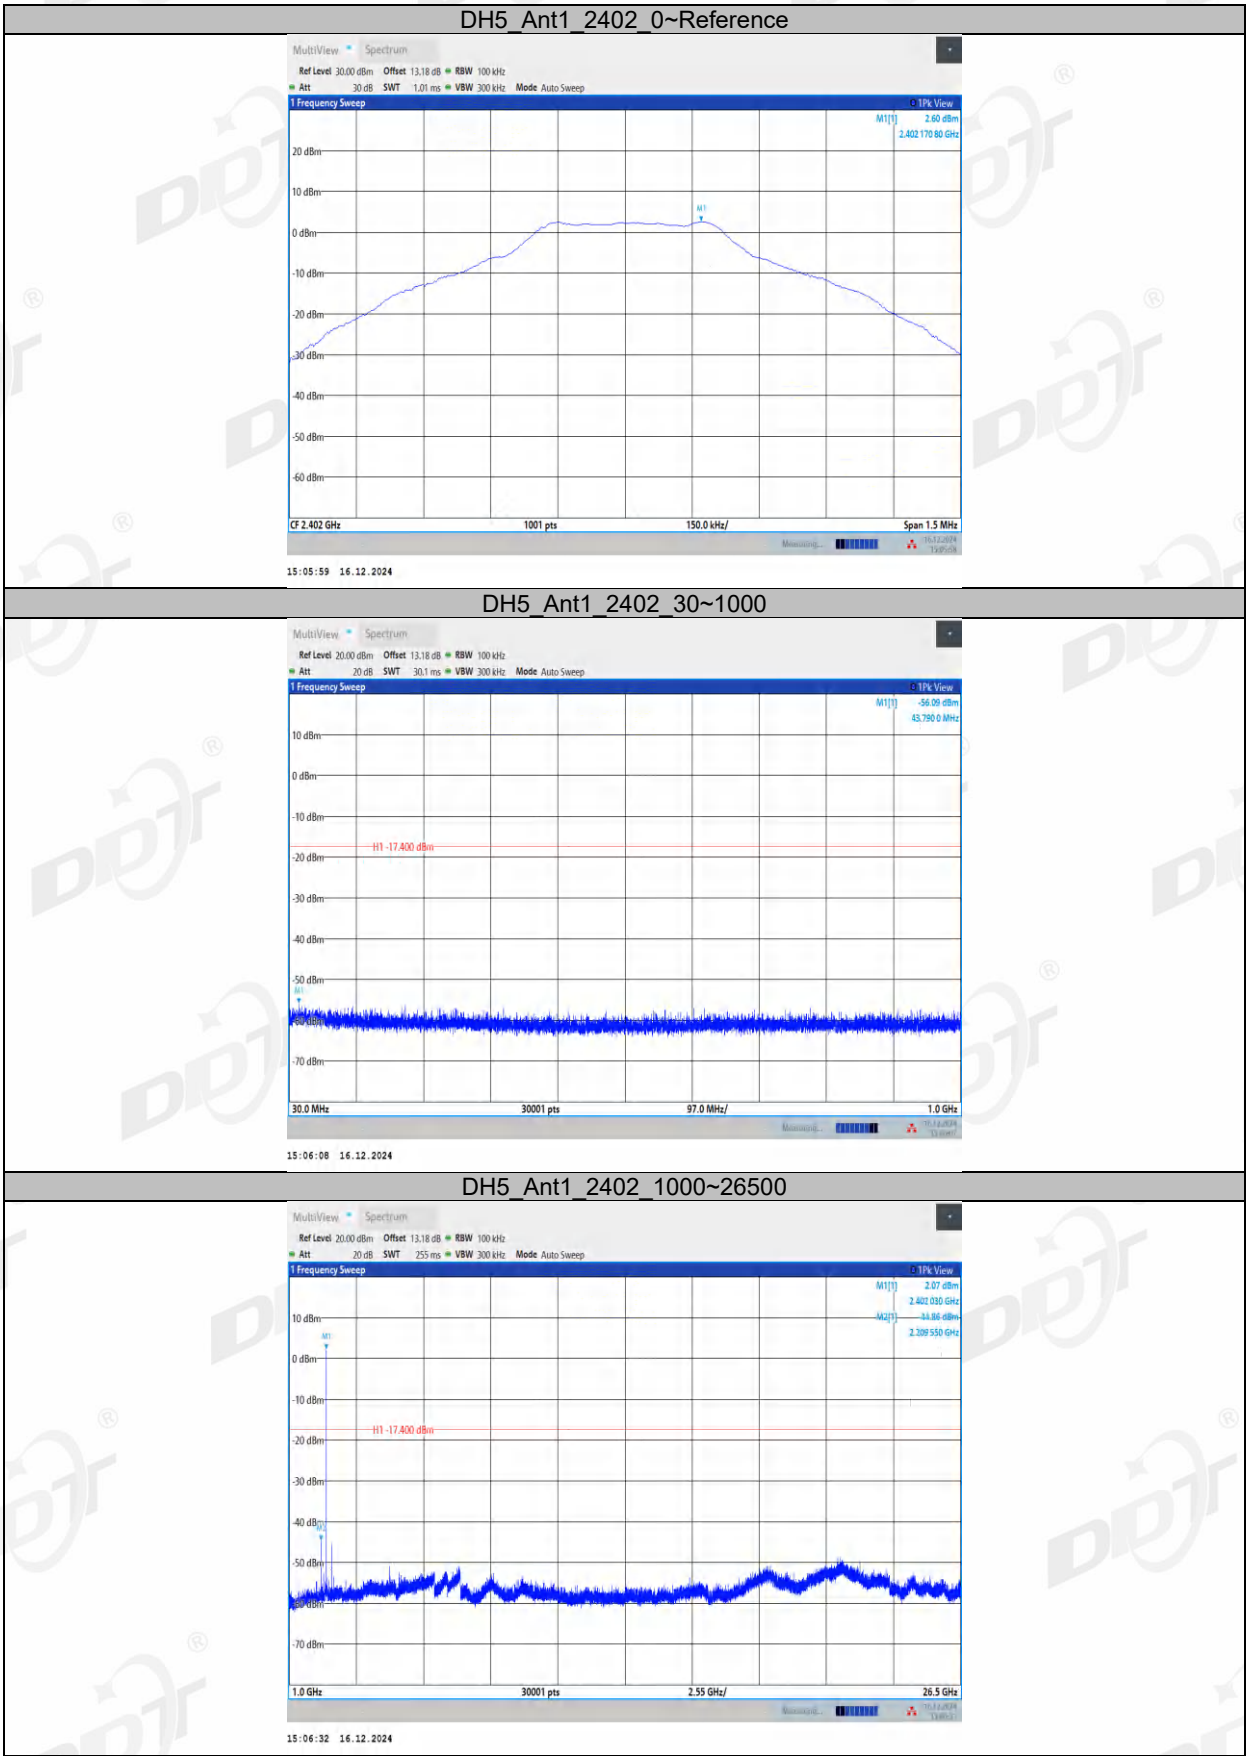


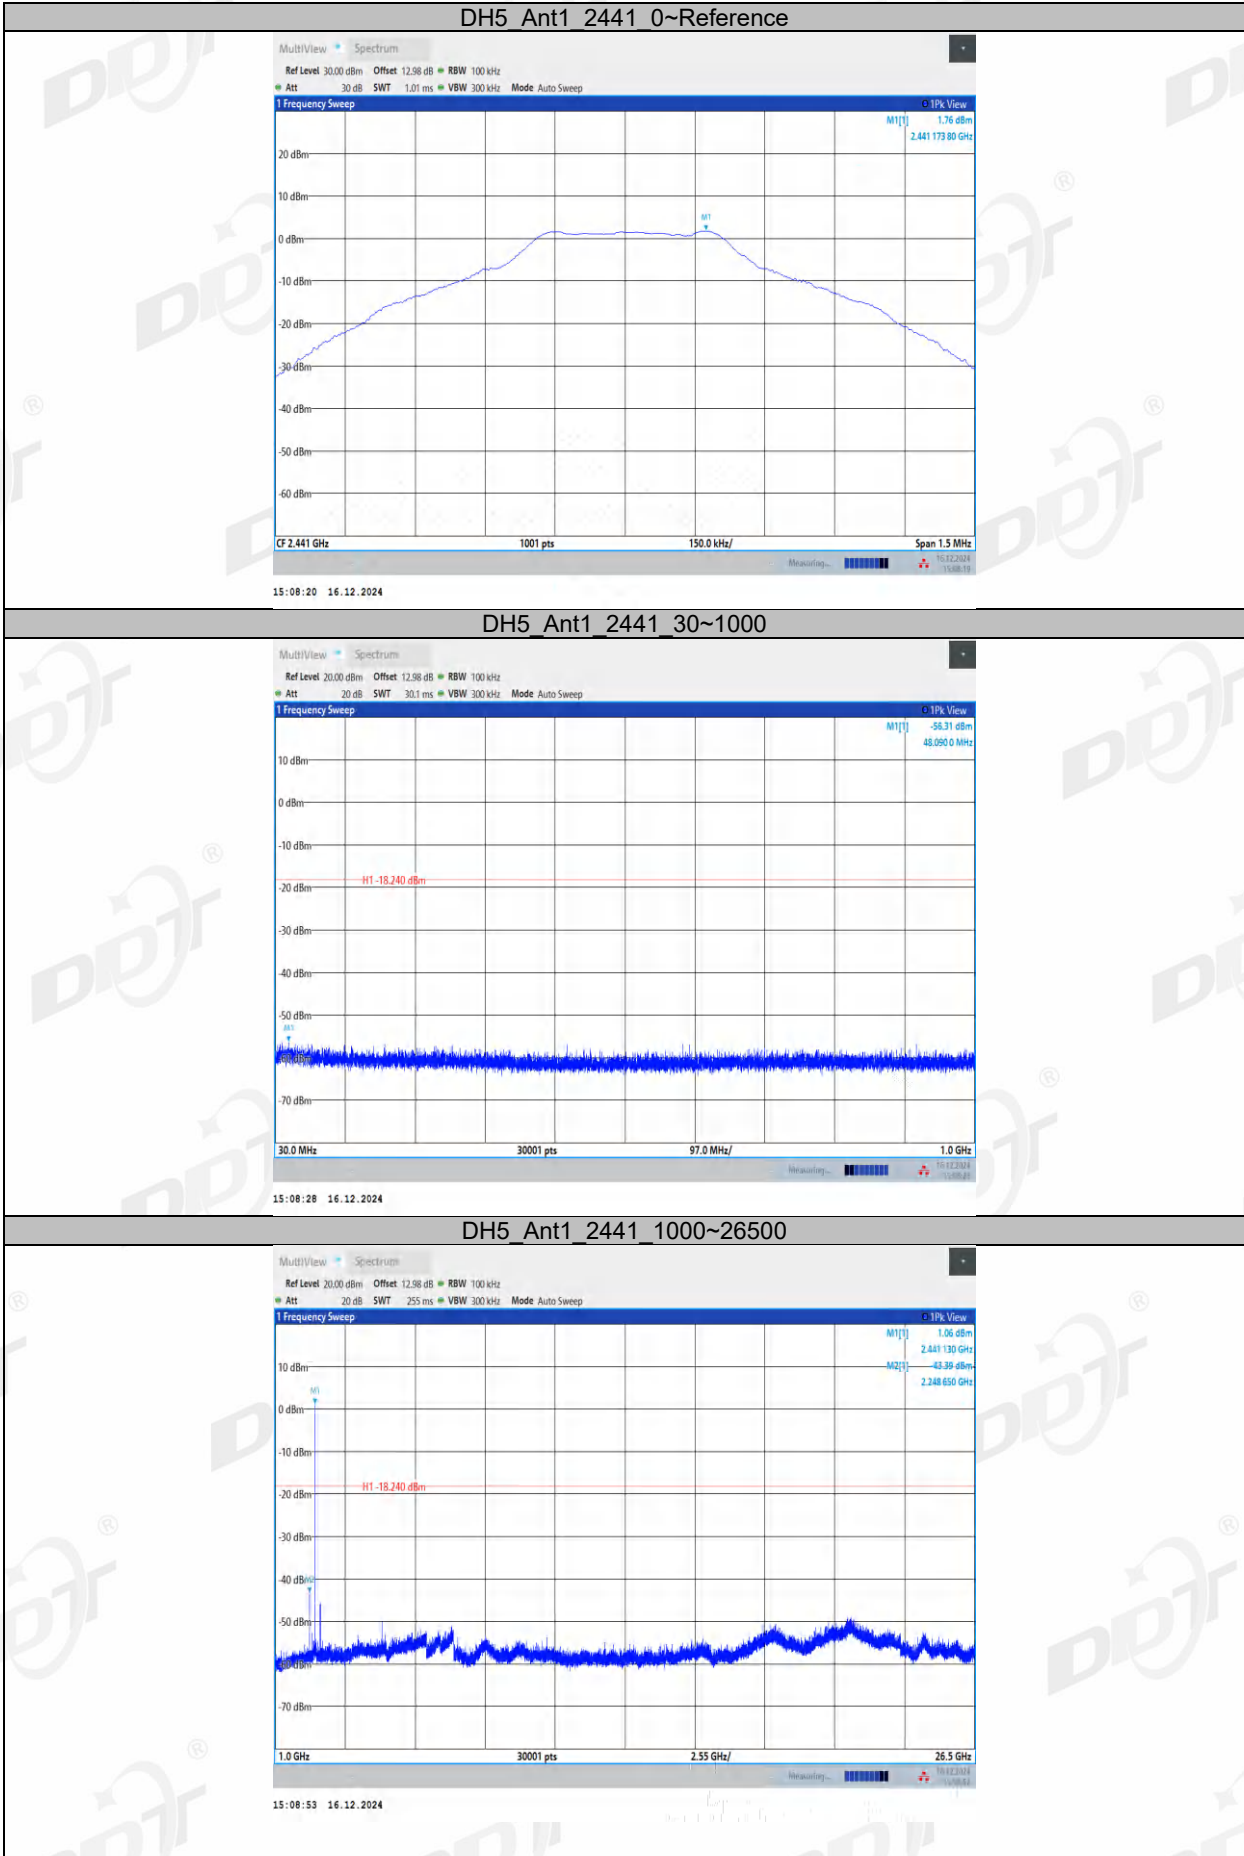

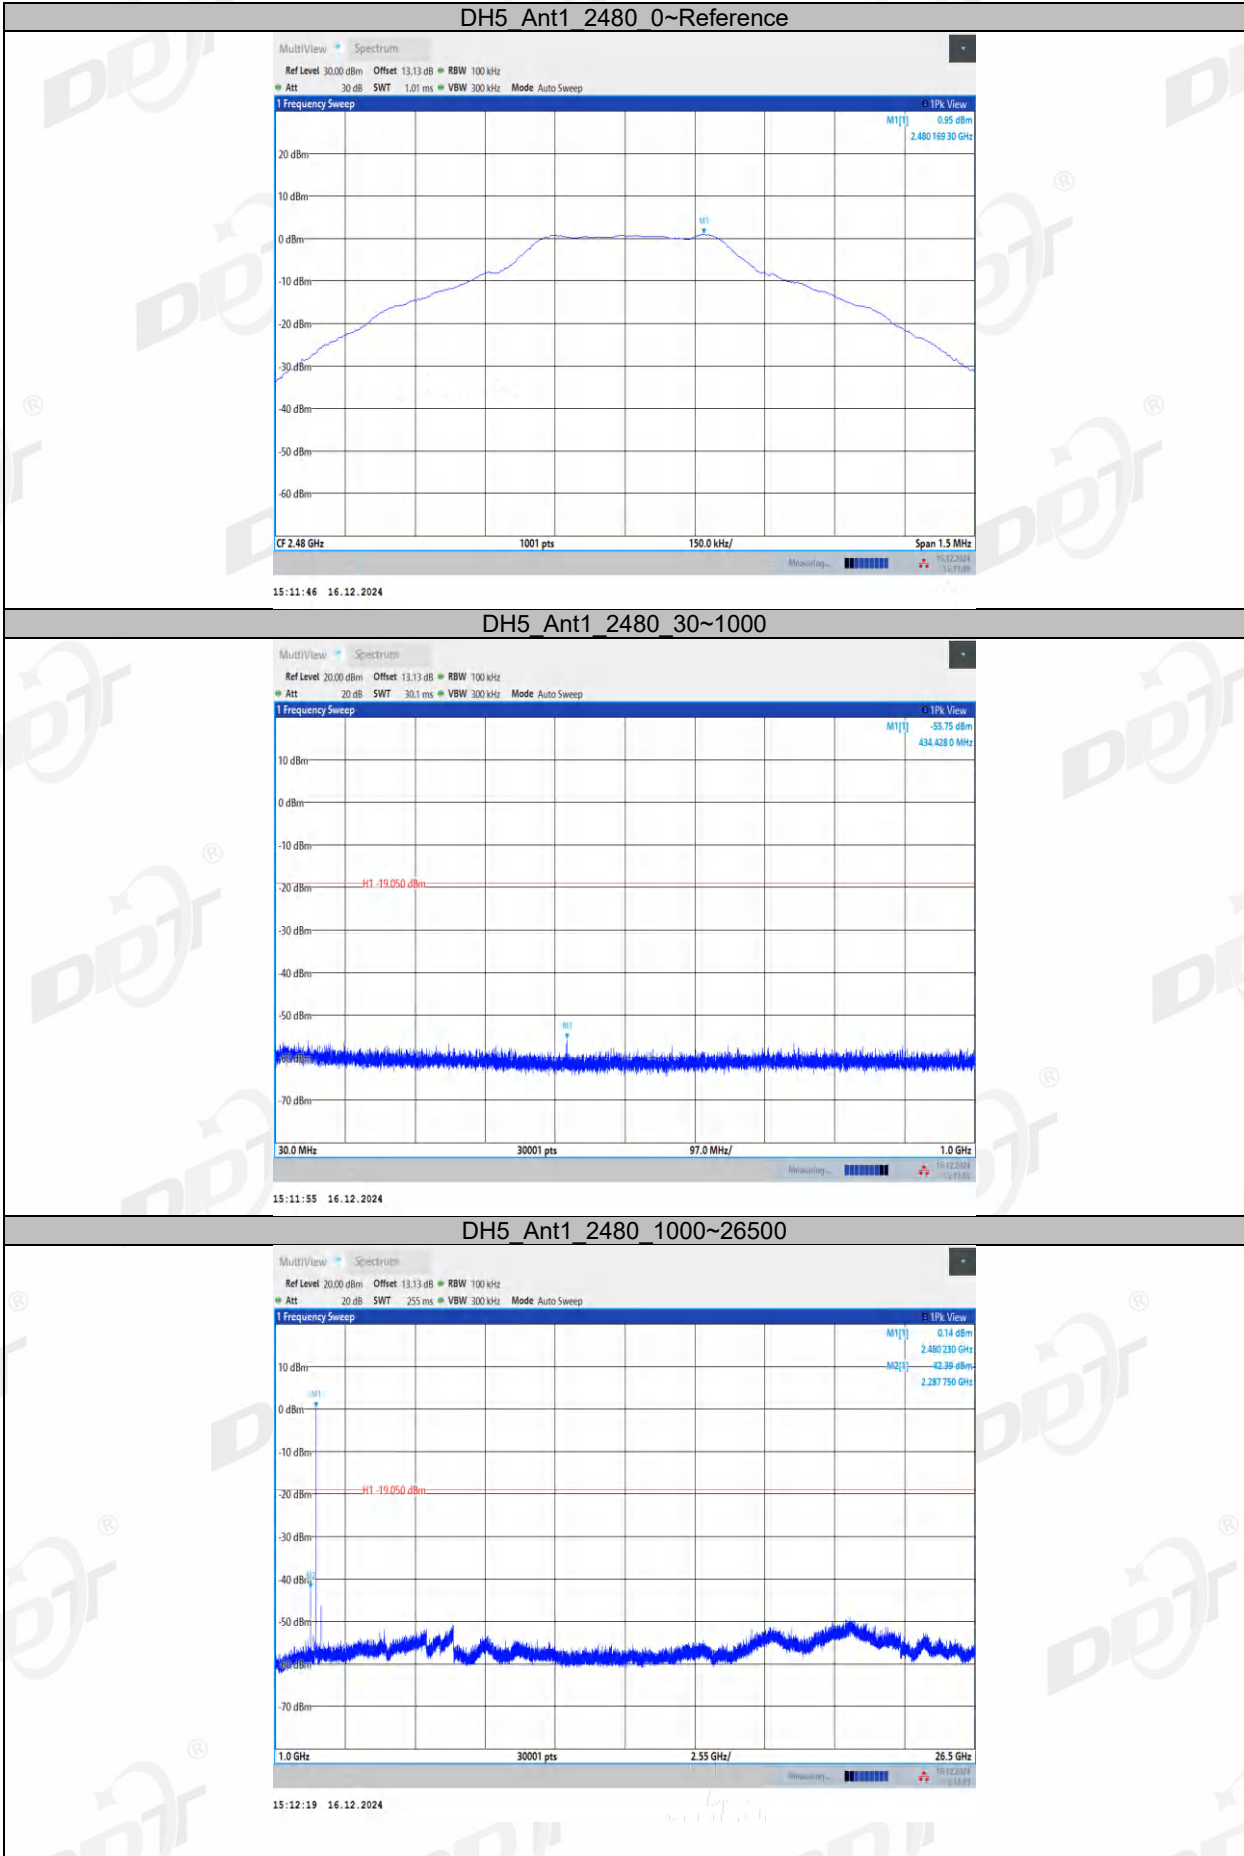


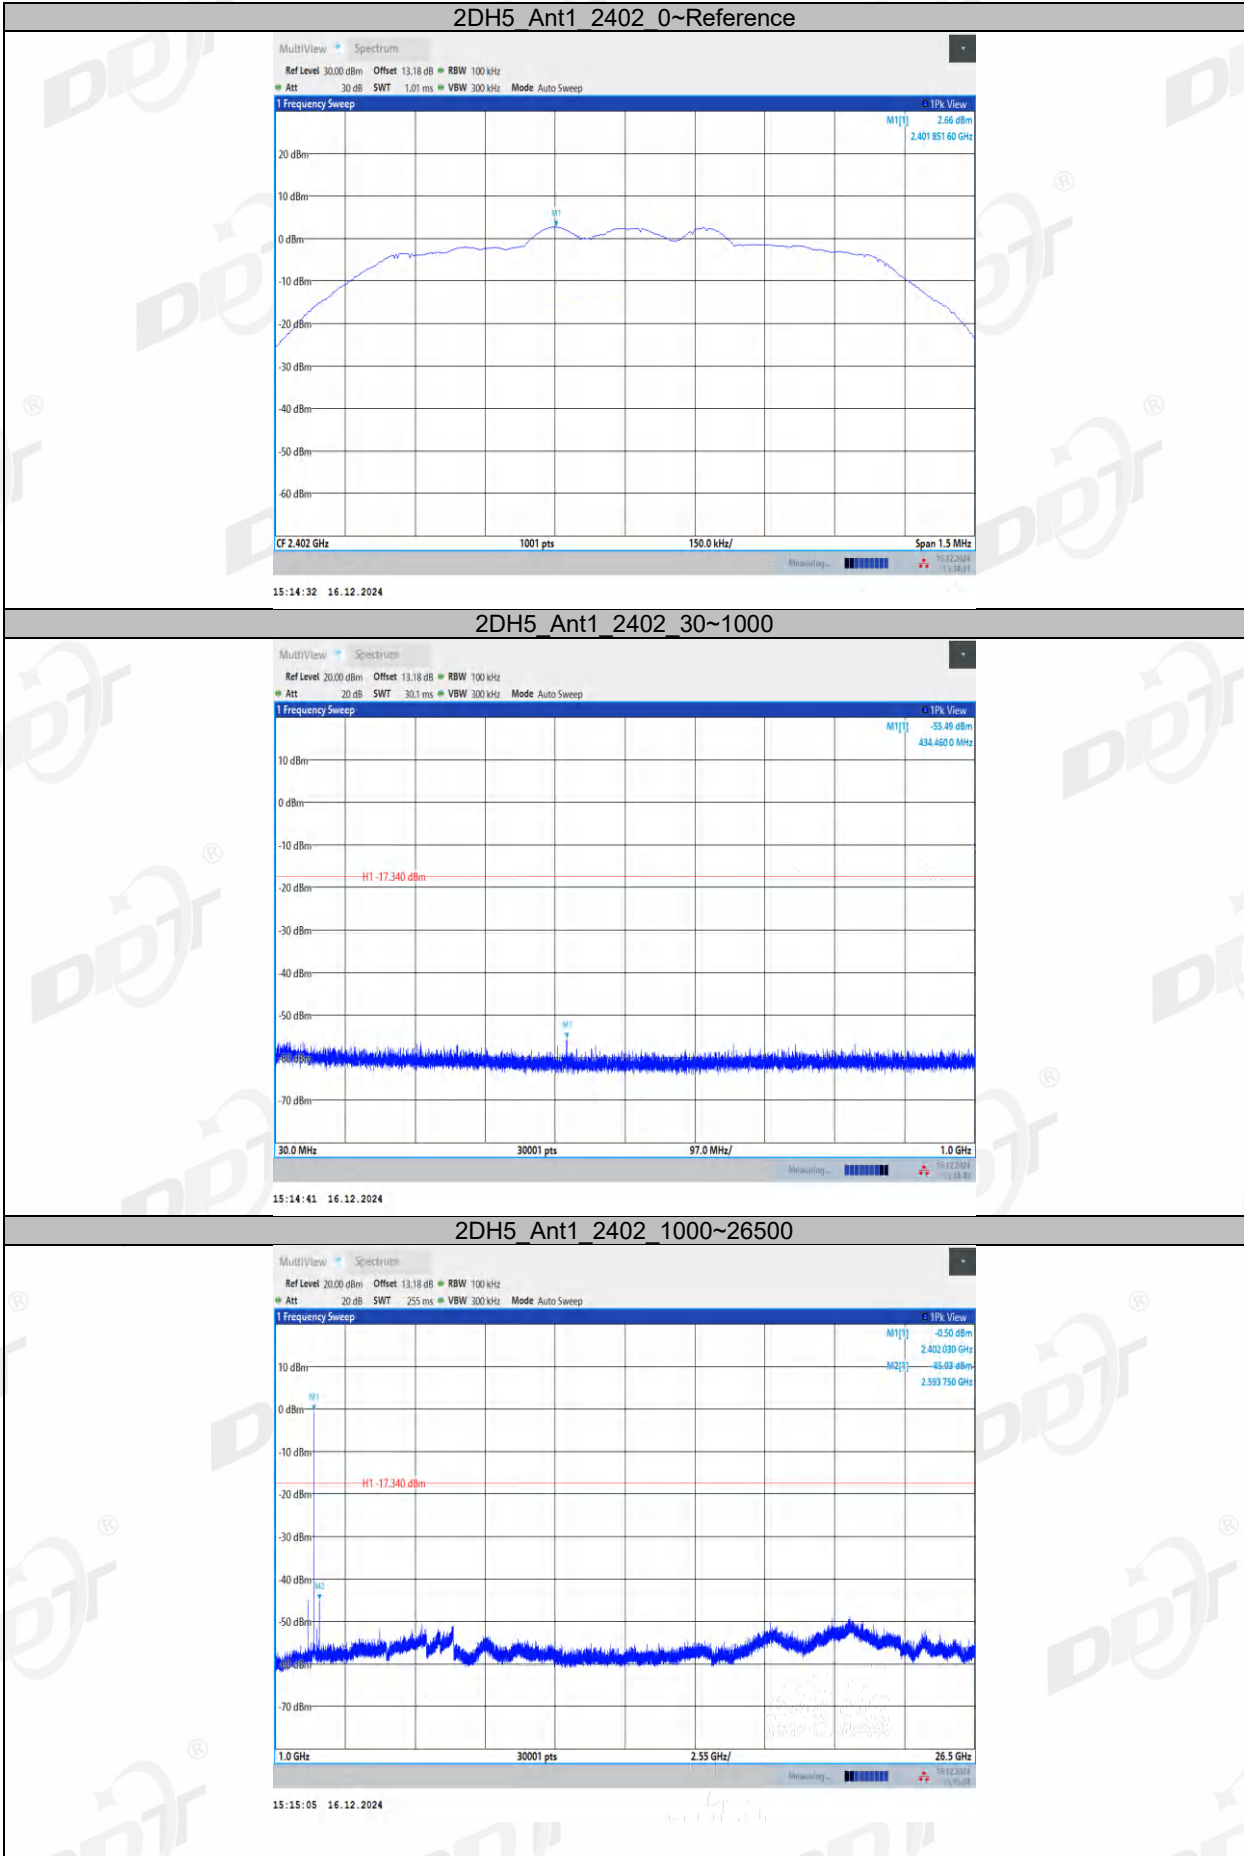


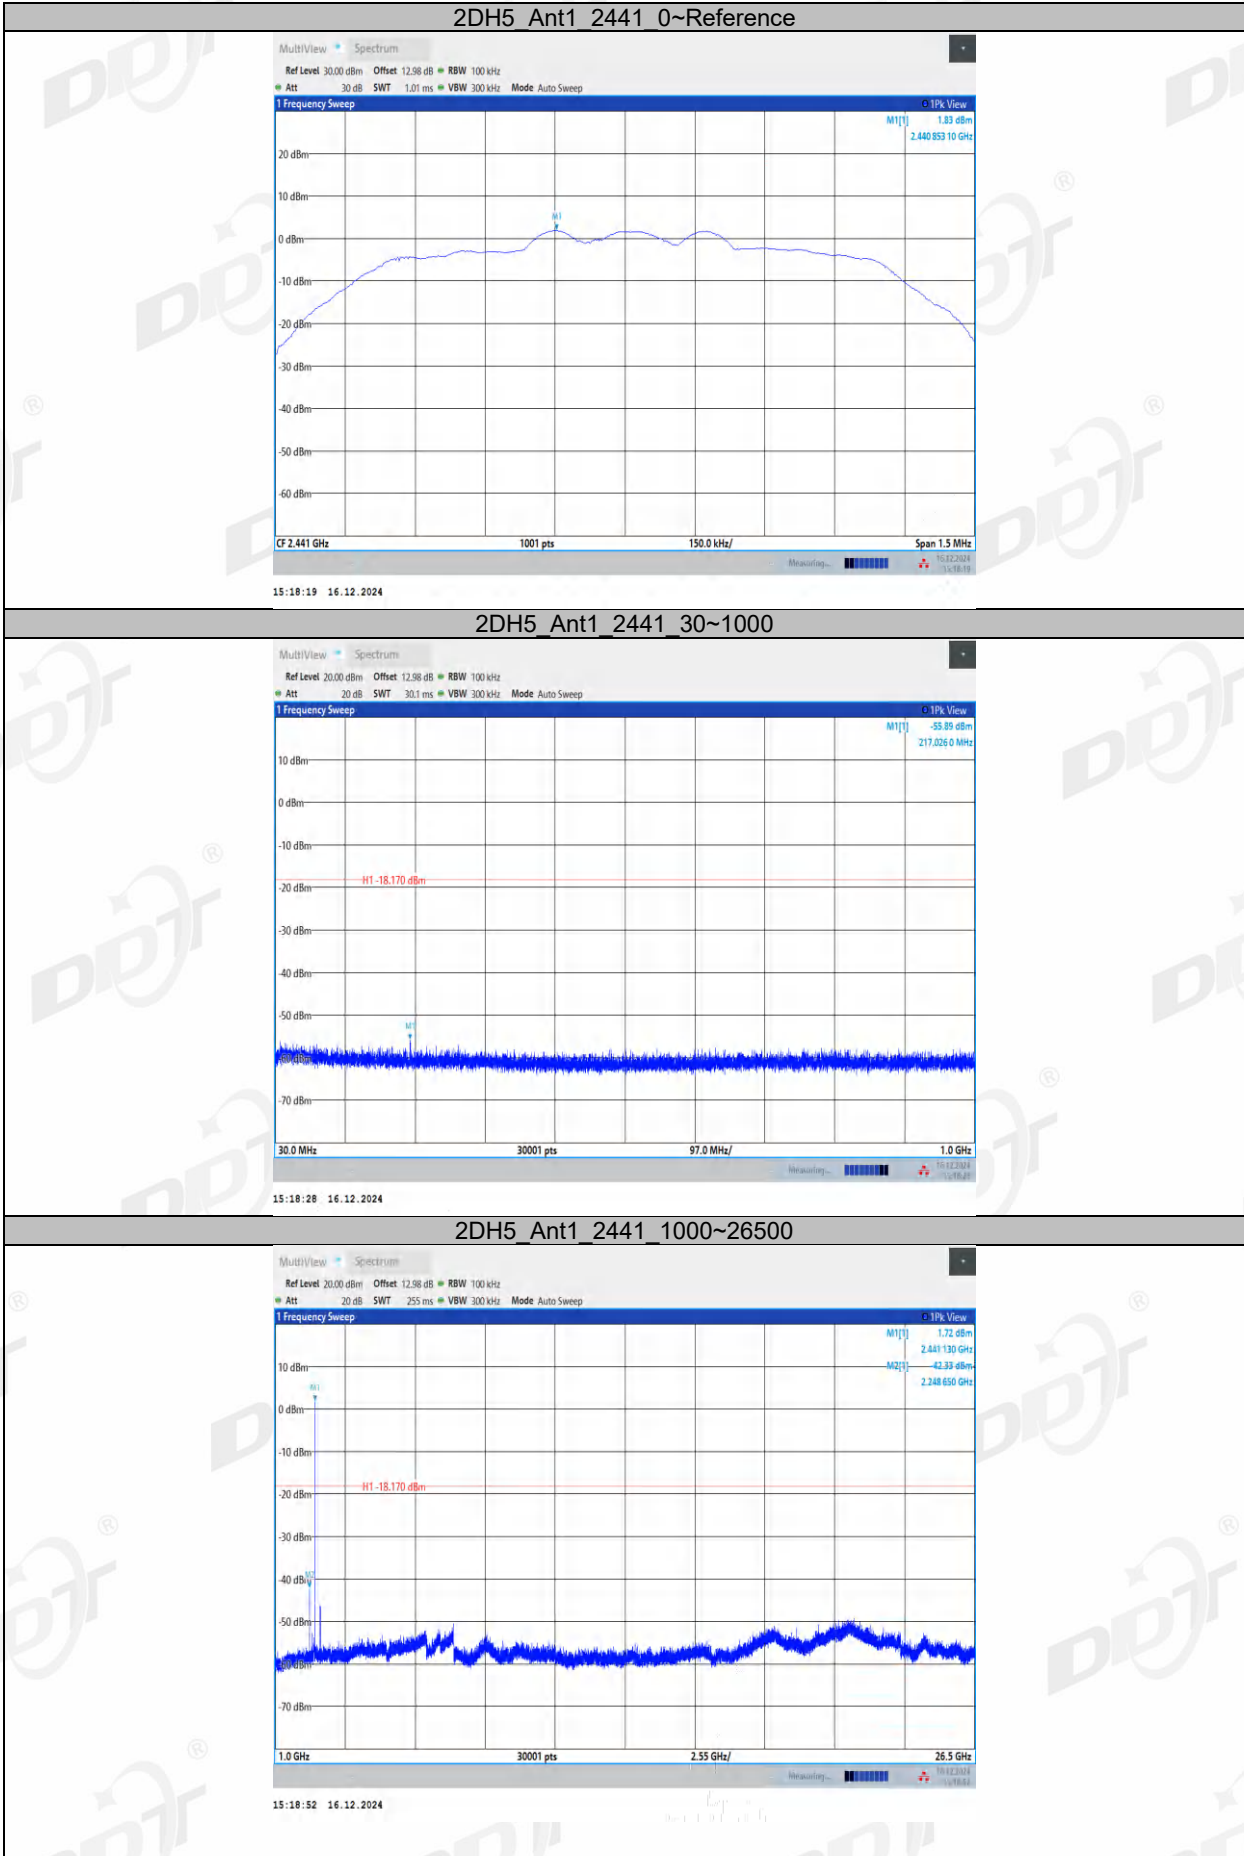


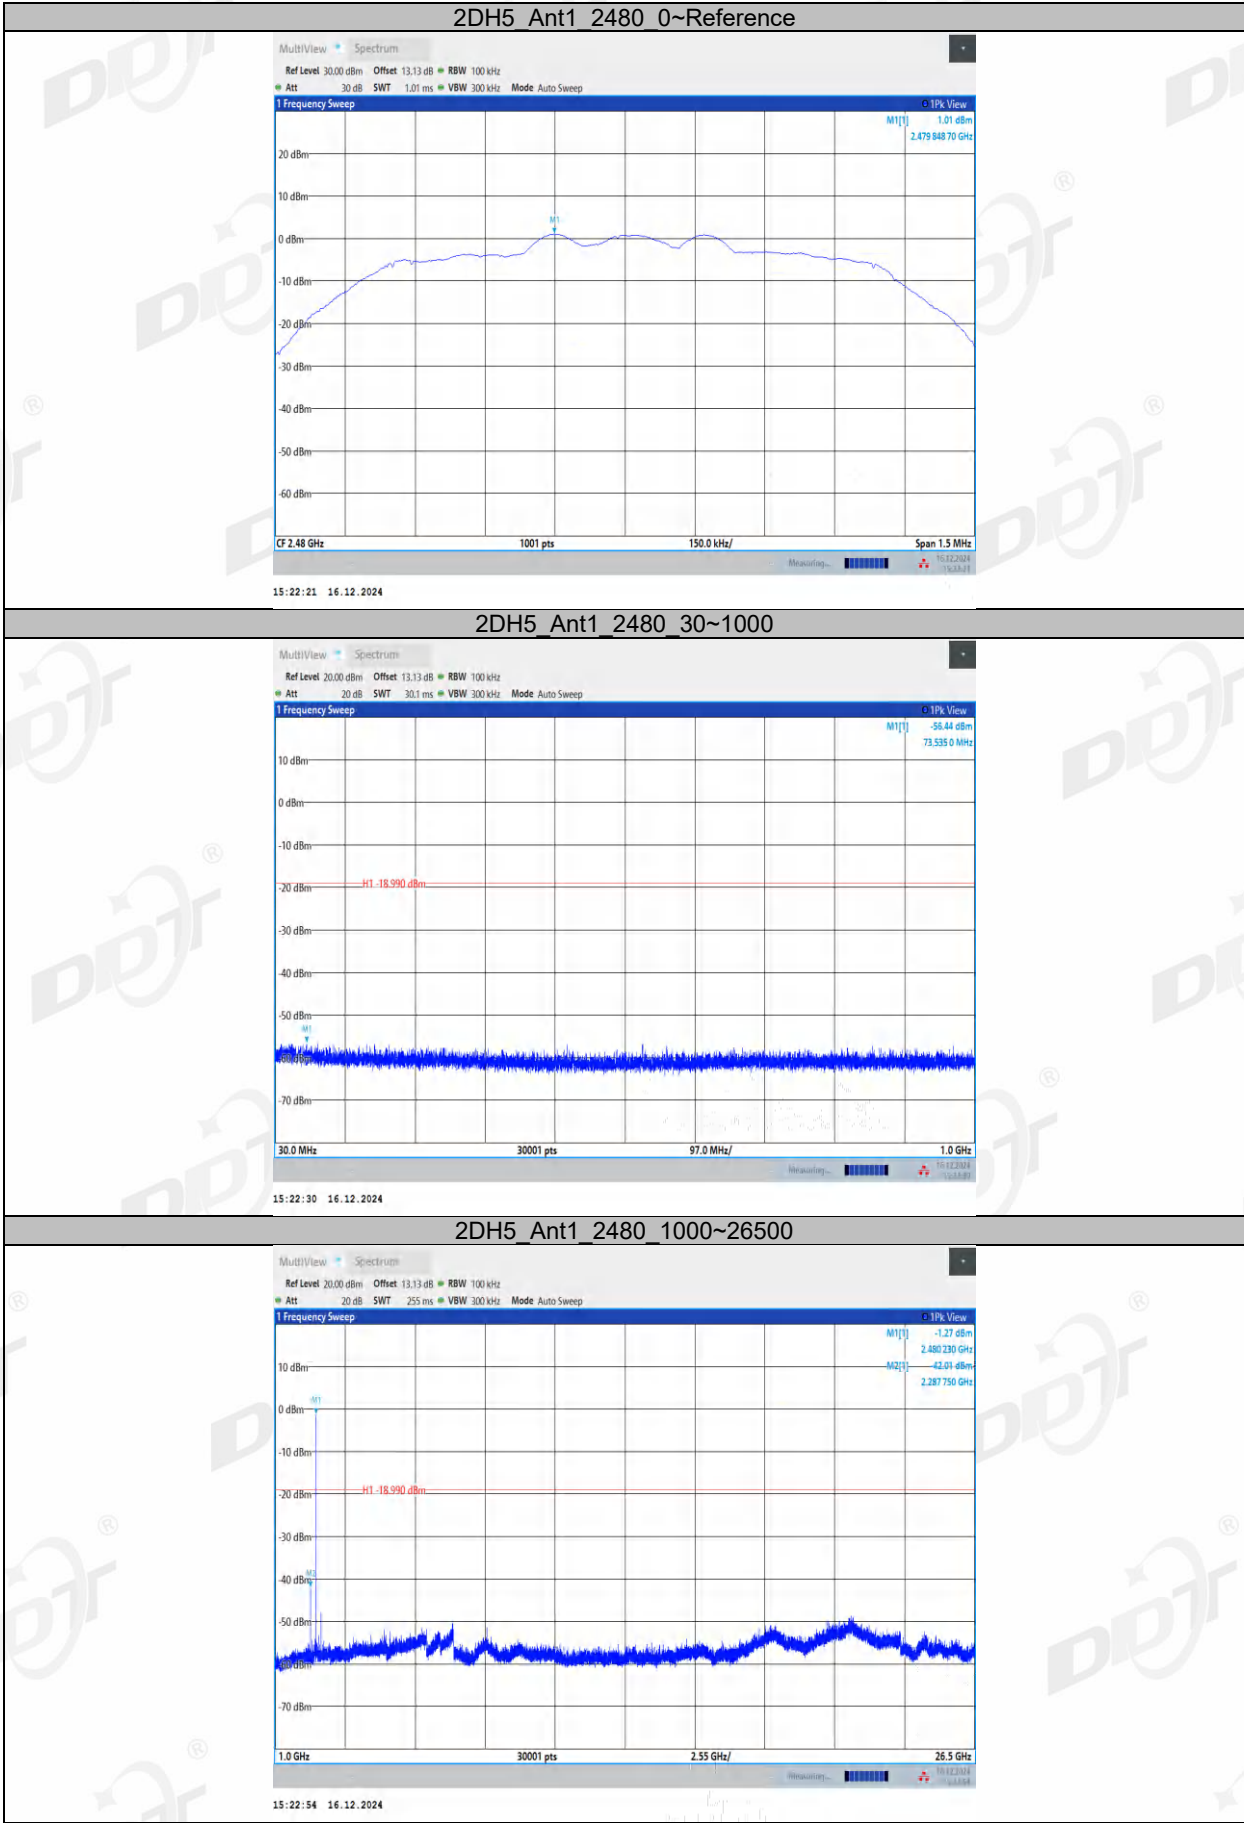



R ear:

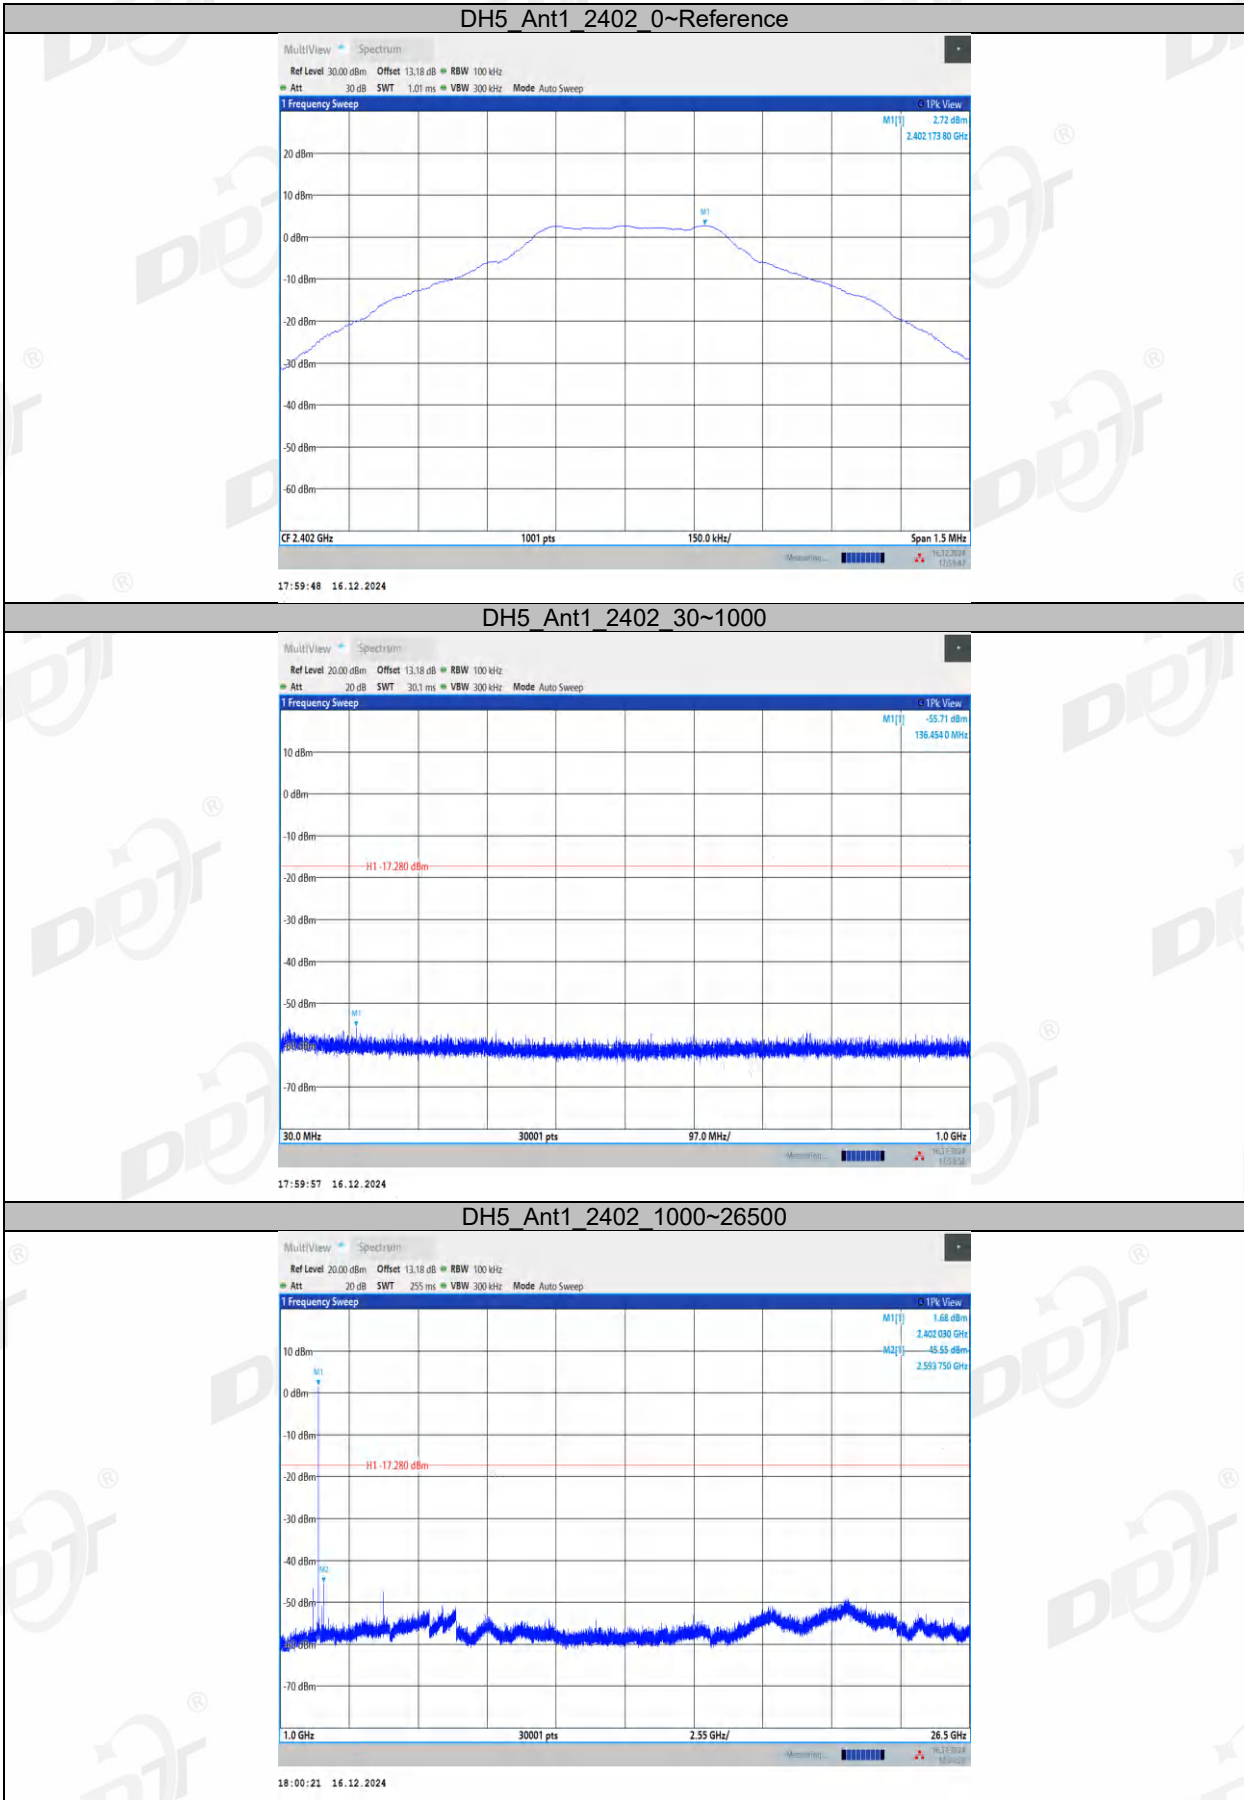


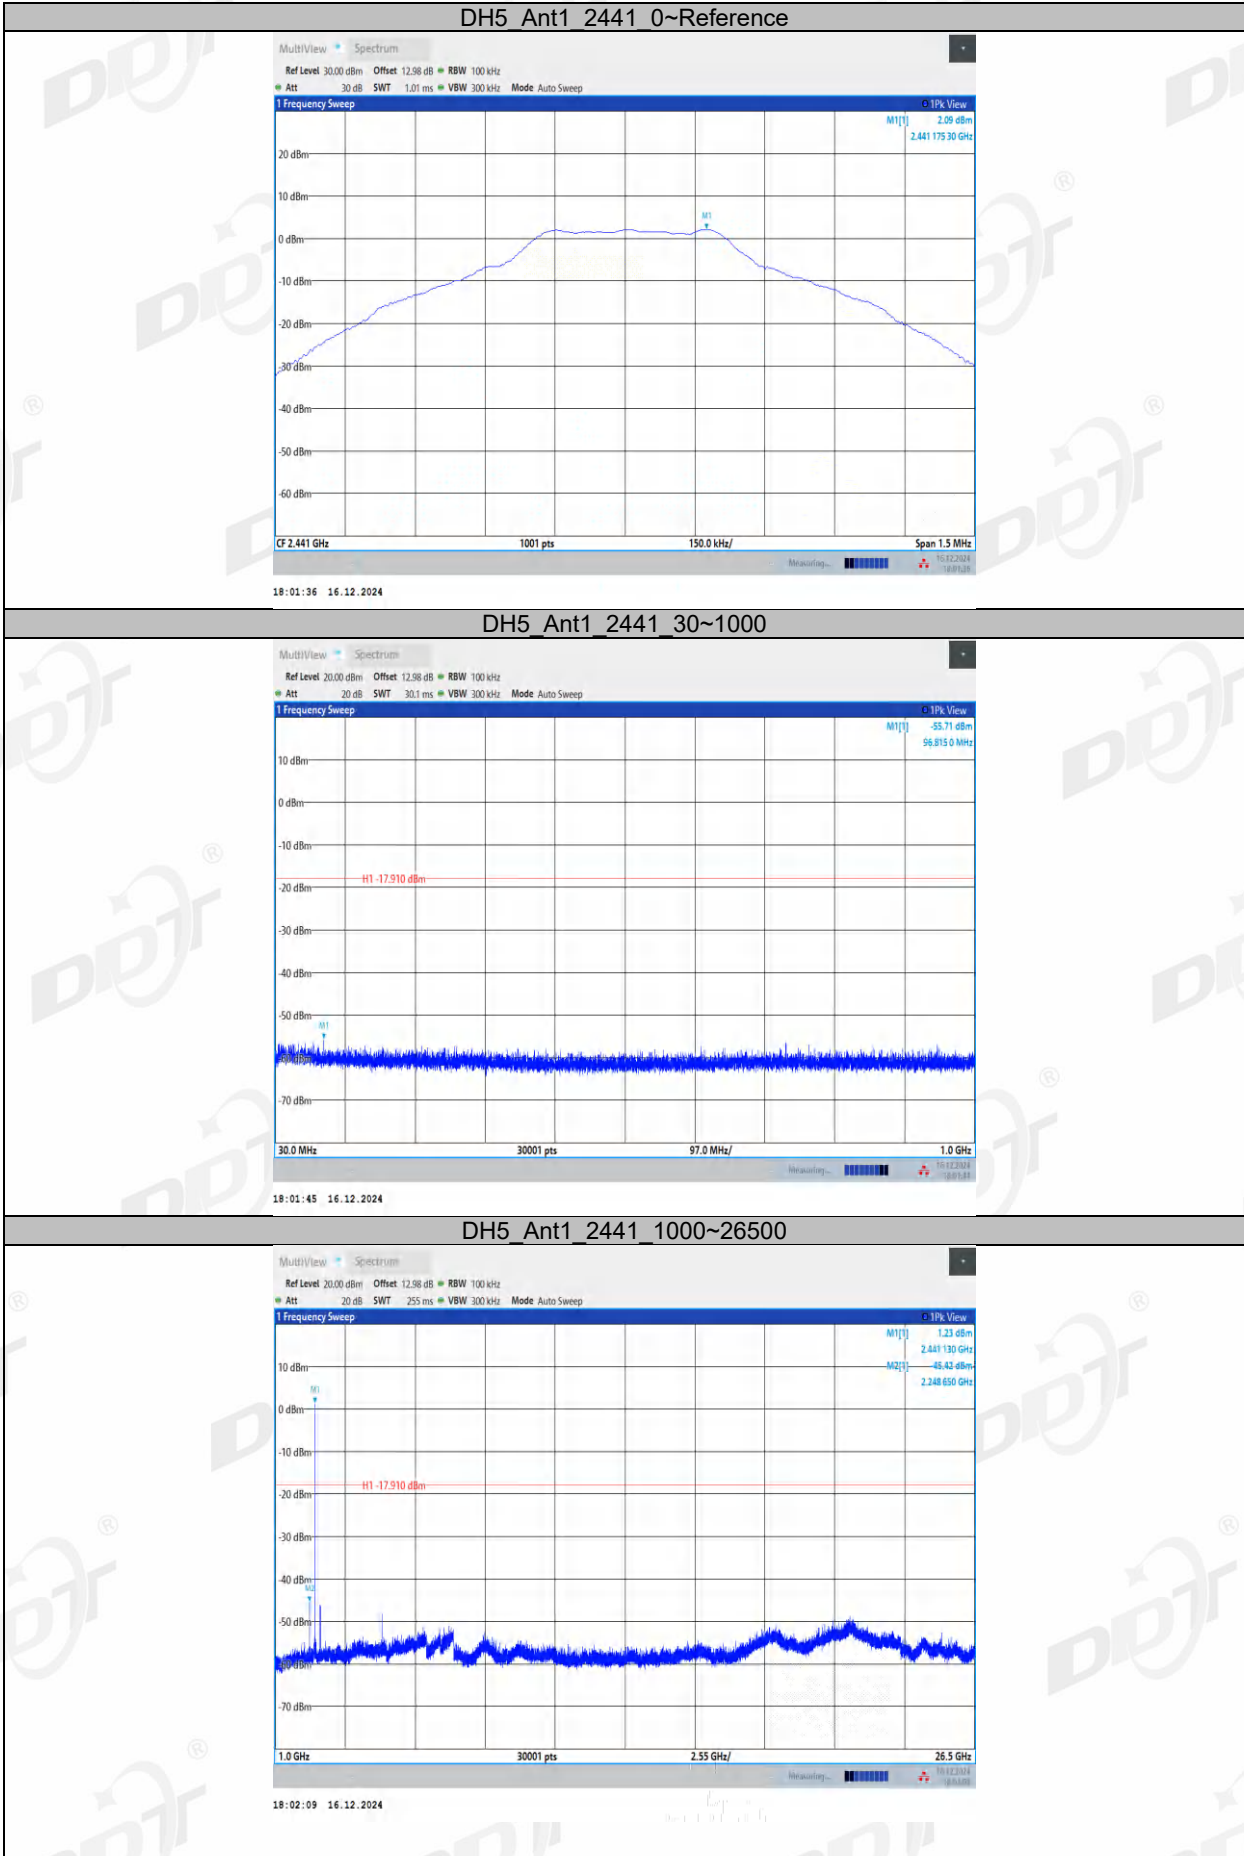

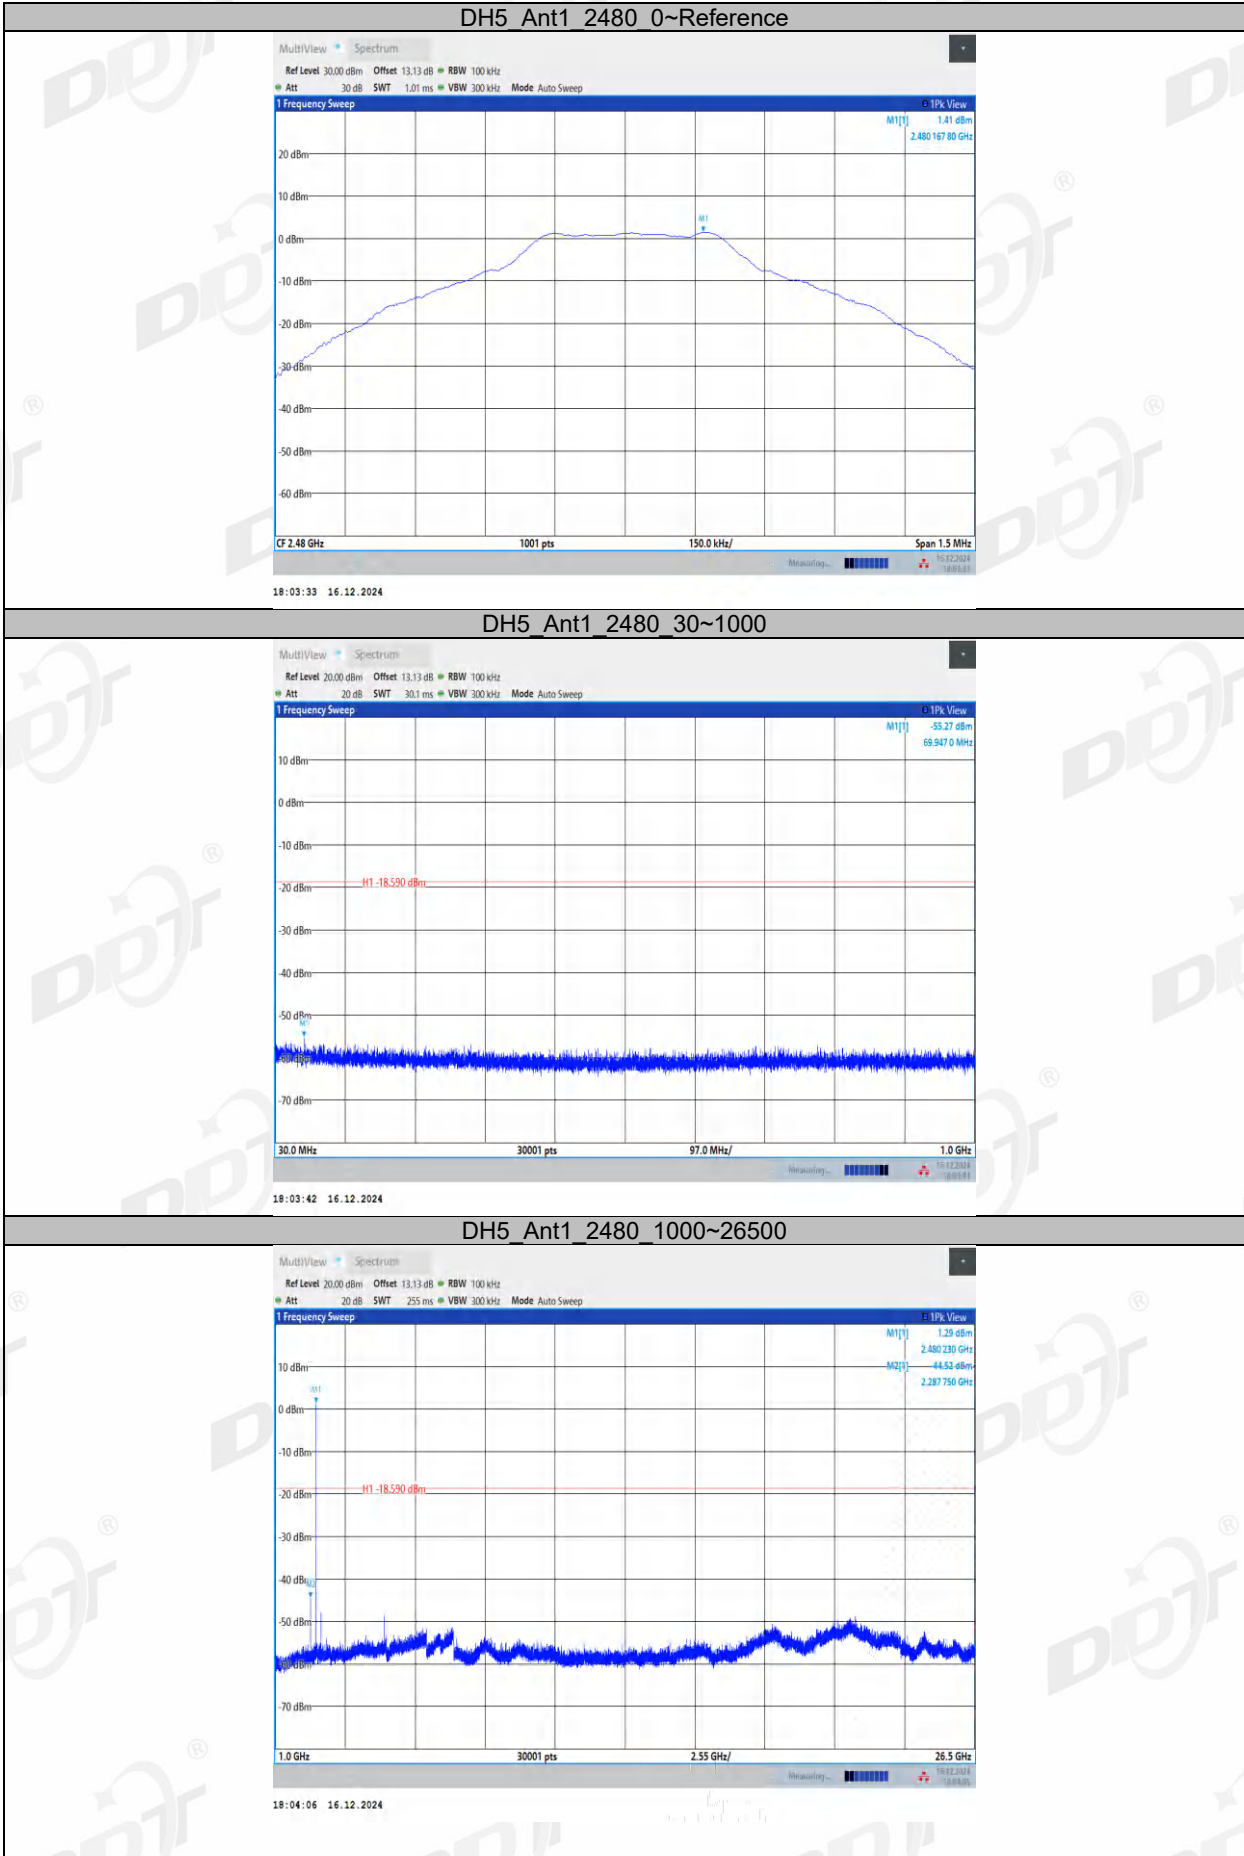

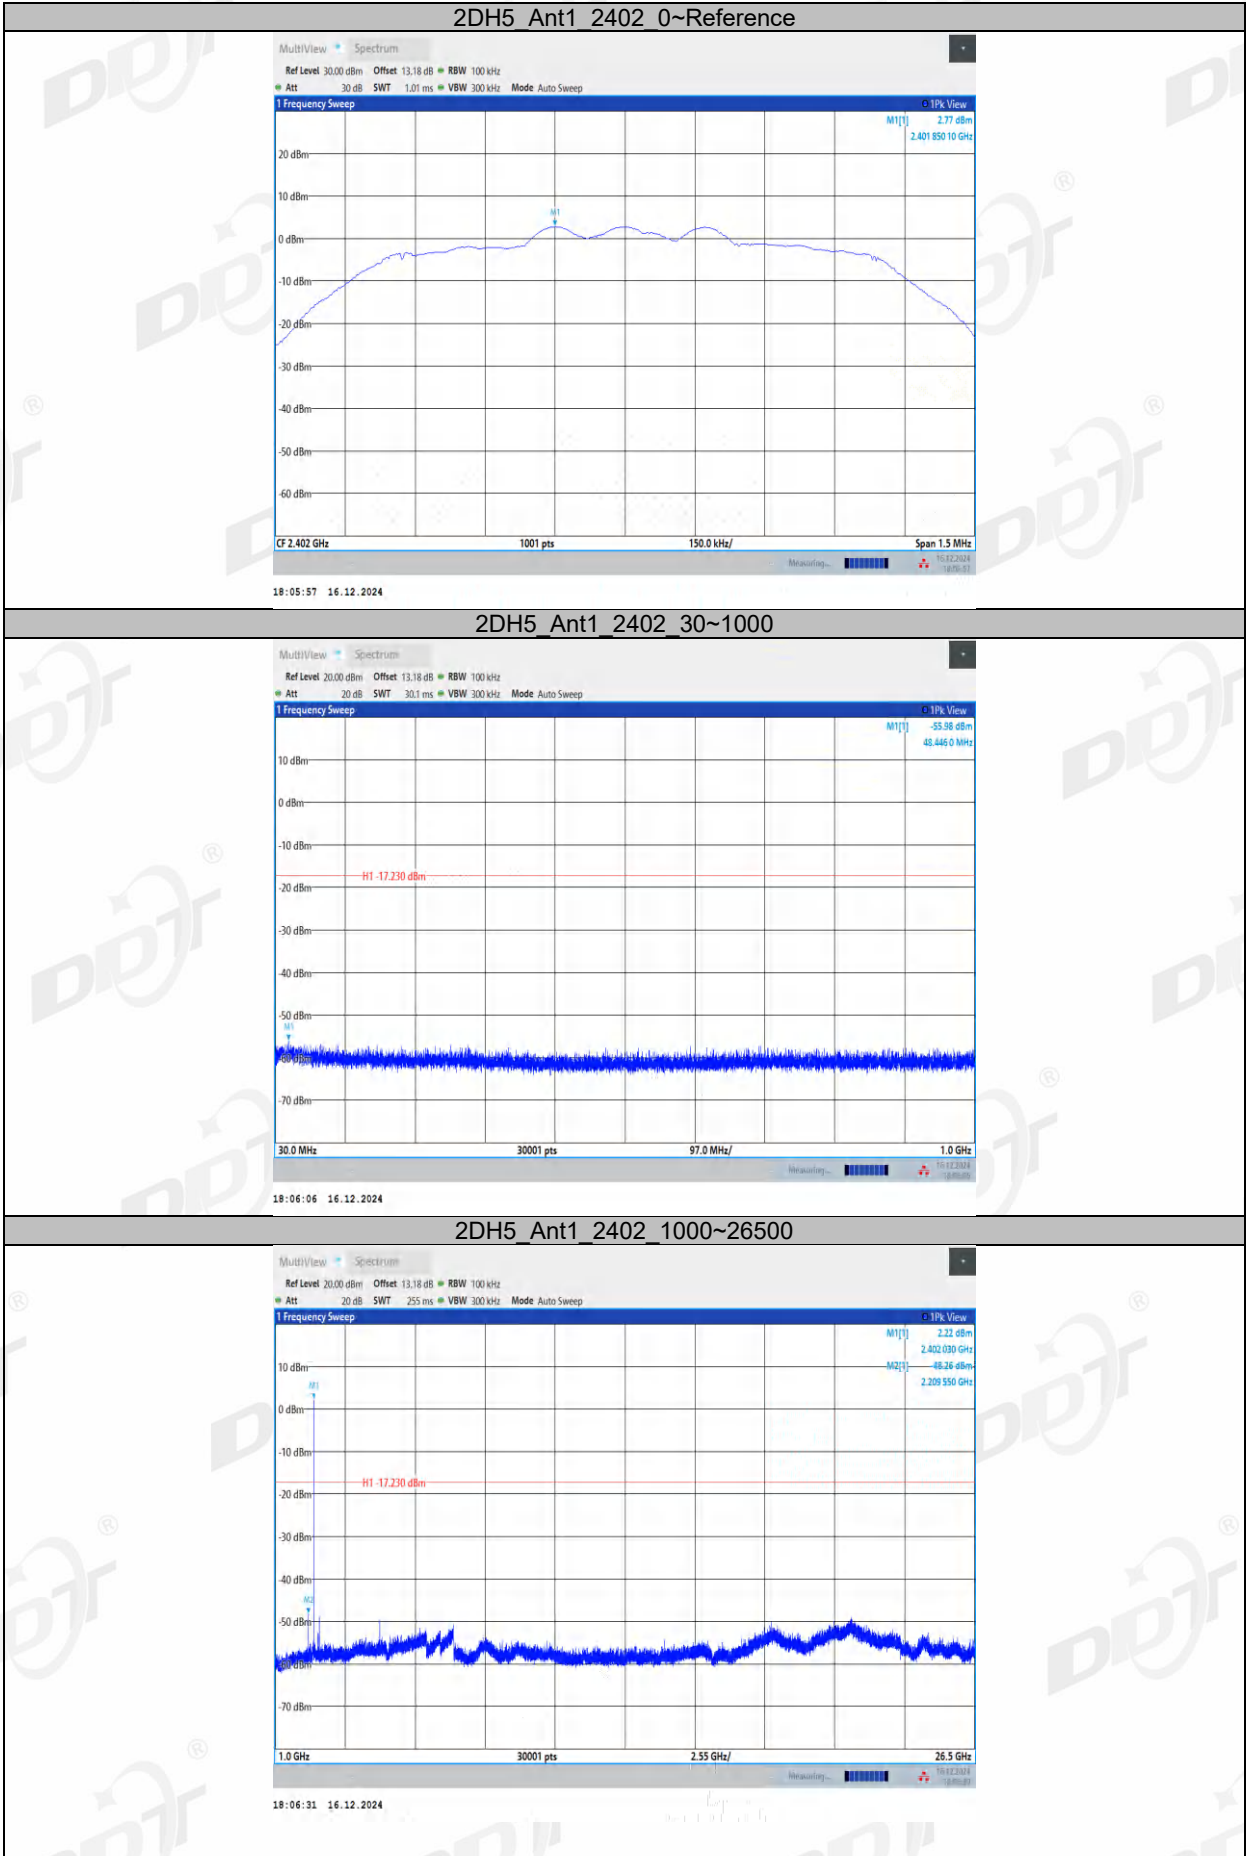


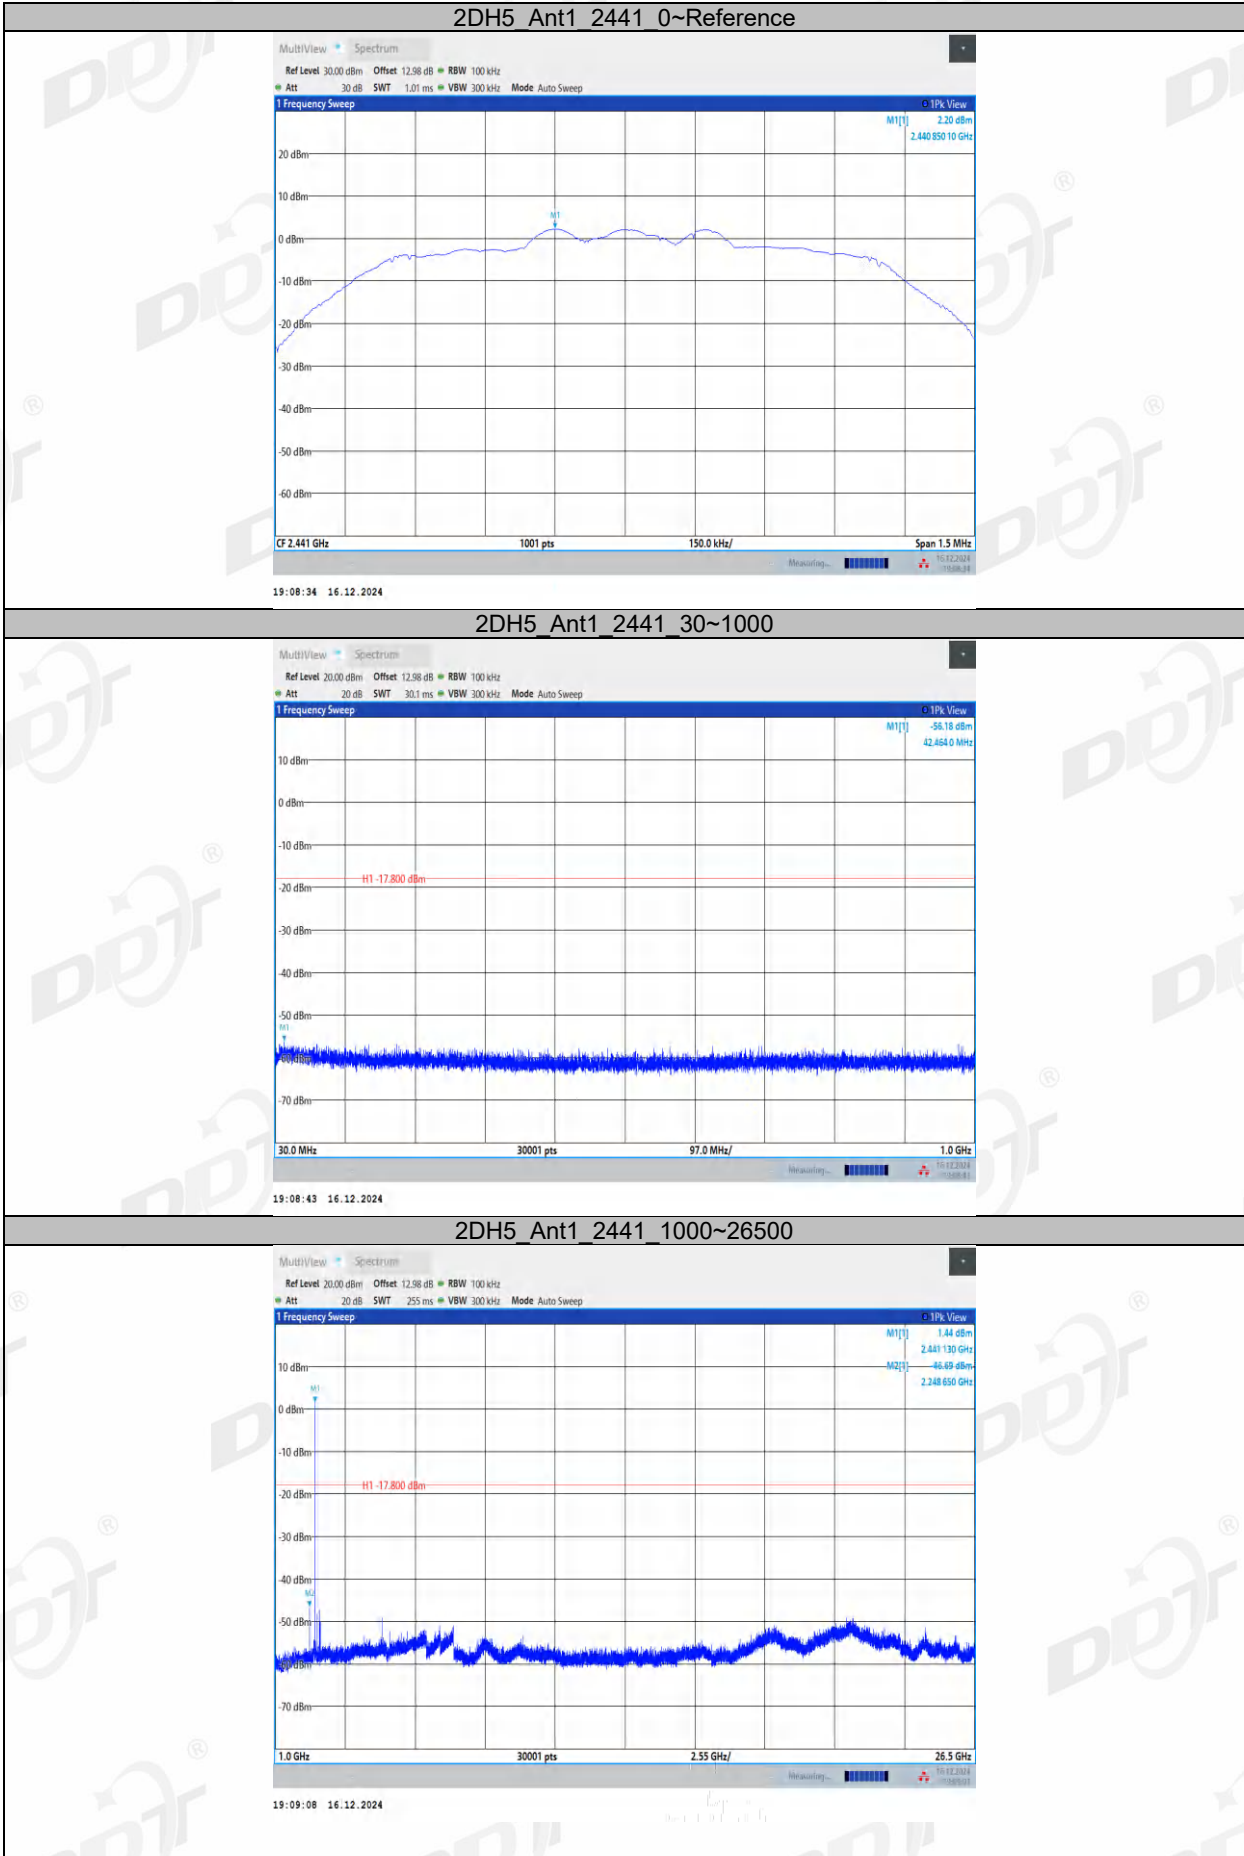

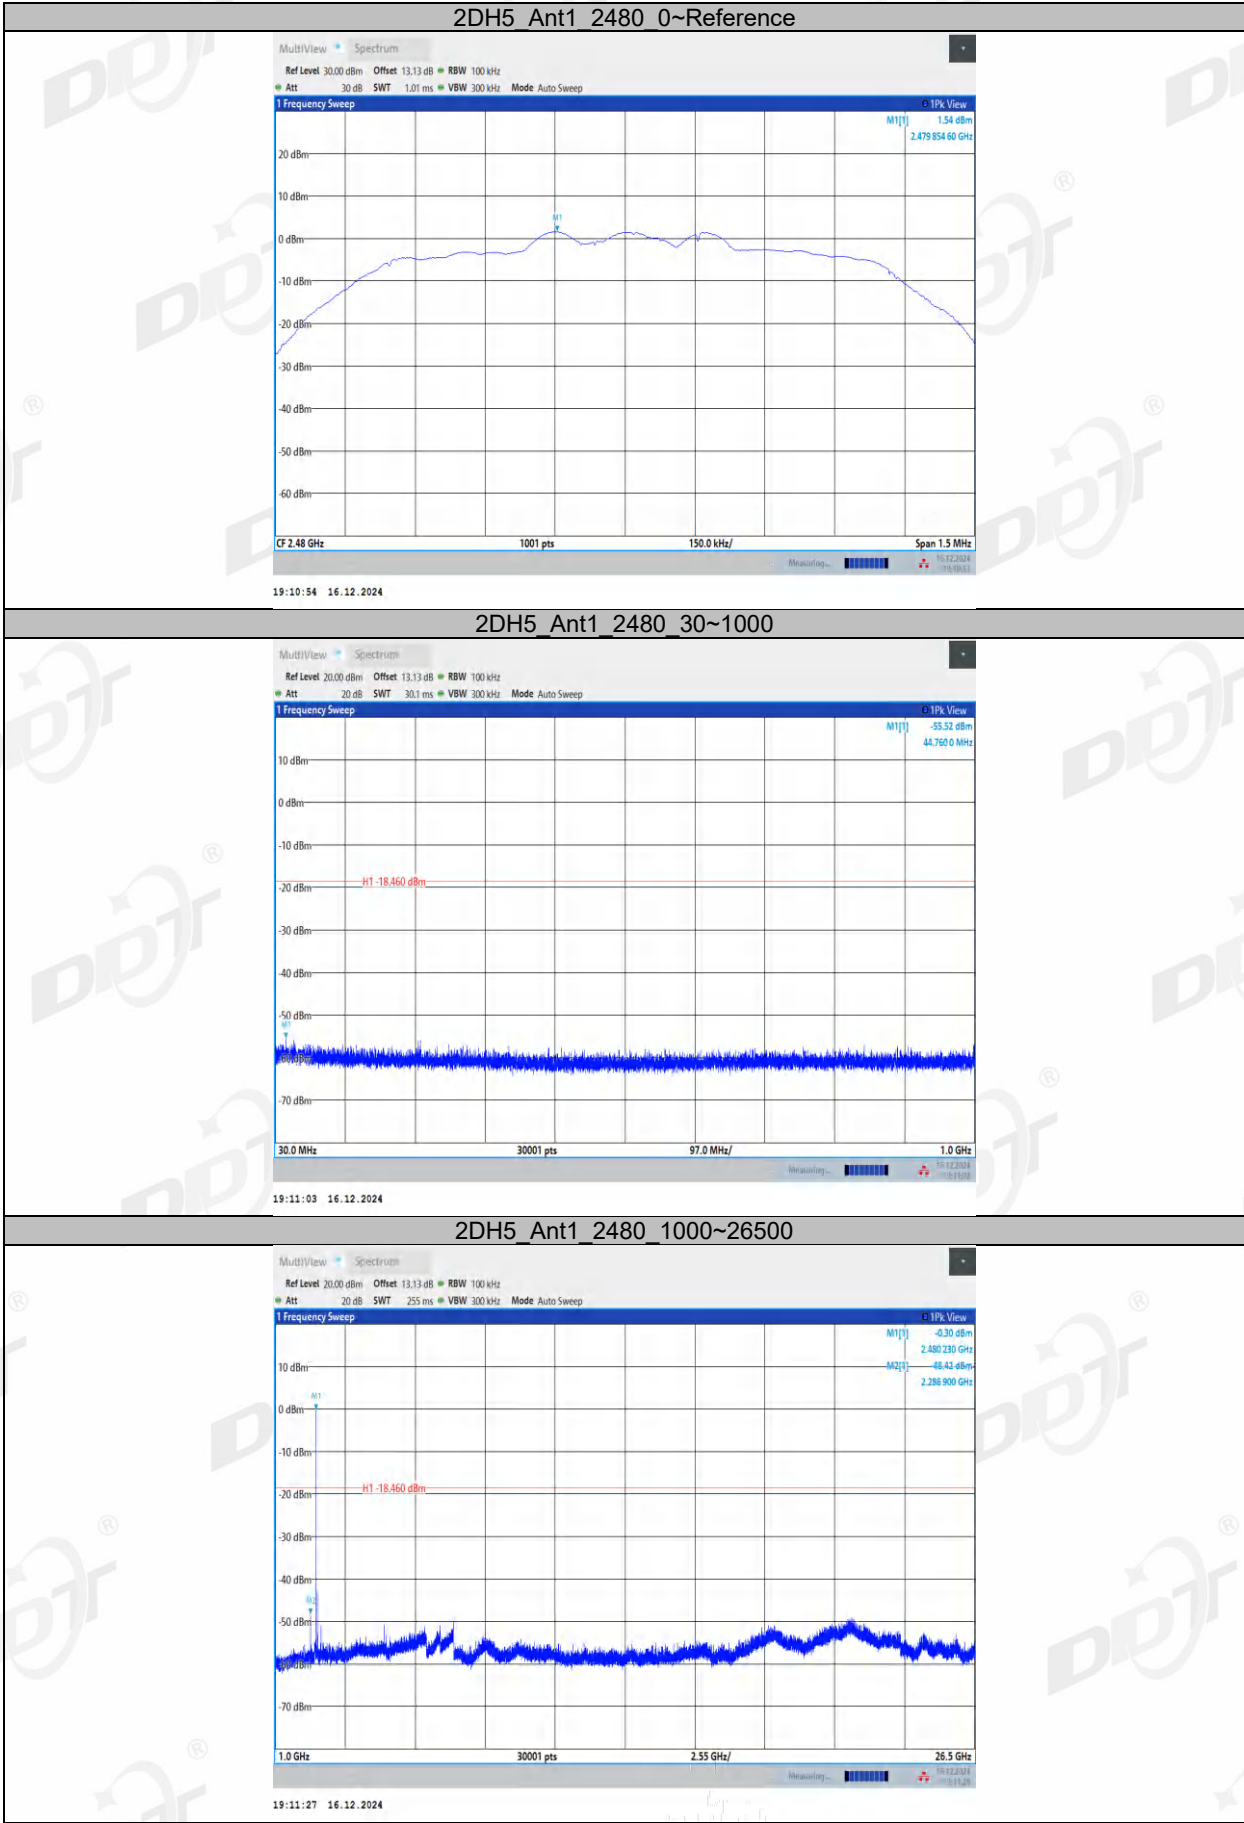

12. Duty cycle

12.1. Block diagram of test setup



12.2. Limit

Just for Report.

12.3. Test procedure

- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.

set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the middle hopping channel.

Resolution BW: 10 MHz.

Video BW: 10 MHz.

Span: Zero span.

Detector: Peak.

Trace Mode: Clear Write.

Sweep: Video Trigger

- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.

- (3) Calculate dwell time follow below formula:

Duty cycle= Pulse's on time / Burst cycle

12.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 4#
Ambient Condition:	25.8℃, 46.2%RH	Test Date:	2024.12.16-2024.12.16
Test Power Supply:	DC 5V	Sample Number:	S24102916-006

L ear:


Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
DH5	Ant1	2402	2.90	3.75	77.33	1.12
		2441	2.89	3.75	77.07	1.13
		2480	2.89	3.75	77.07	1.13
2DH5	Ant1	2402	2.90	3.76	77.13	1.13
		2441	2.89	3.75	77.07	1.13
		2480	2.89	3.75	77.07	1.13


R ear:

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
DH5	Ant1	2402	2.89	3.75	77.07	1.13
		2441	2.89	3.75	77.07	1.13
		2480	2.90	3.75	77.33	1.12
2DH5	Ant1	2402	2.90	3.75	77.33	1.12
		2441	2.90	3.75	77.33	1.12
		2480	2.90	3.75	77.33	1.12


12.5. Test graphs


Learn:

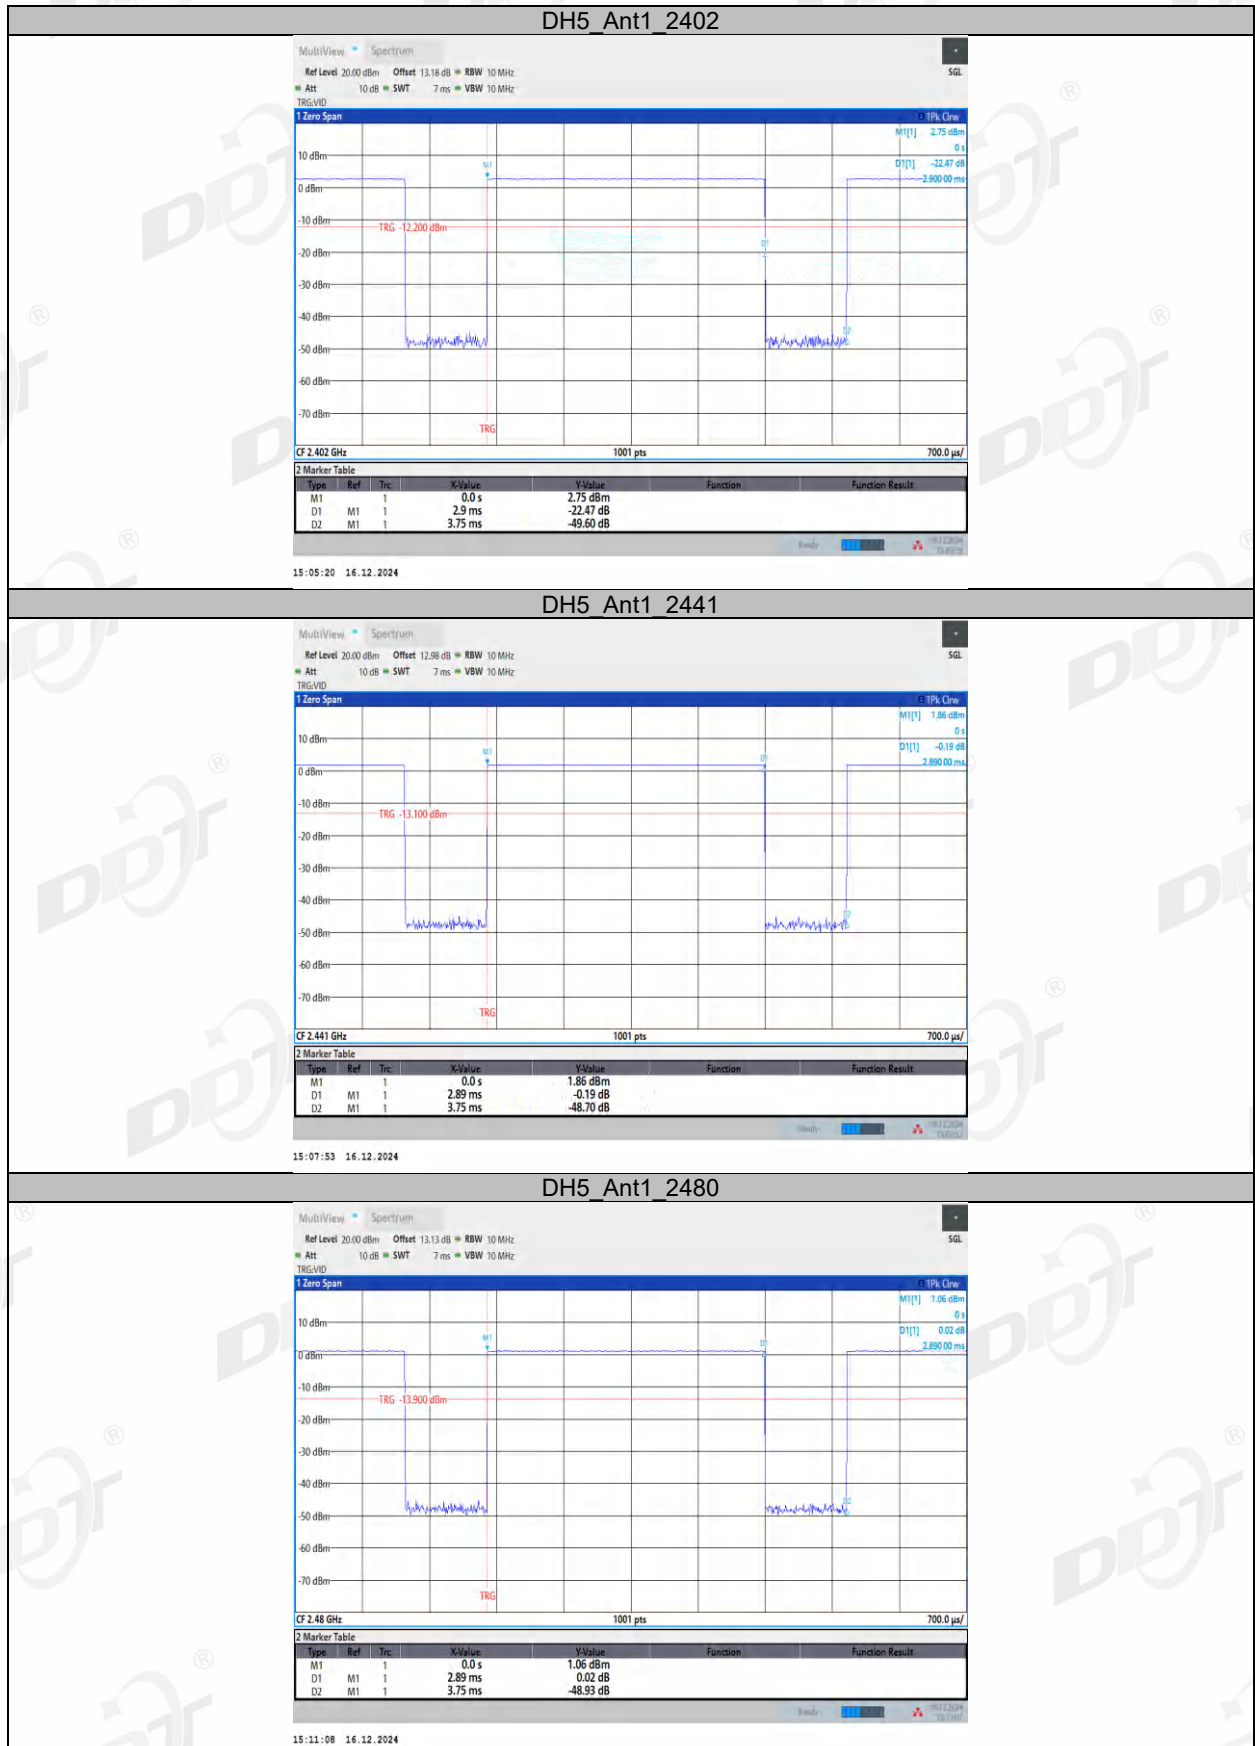

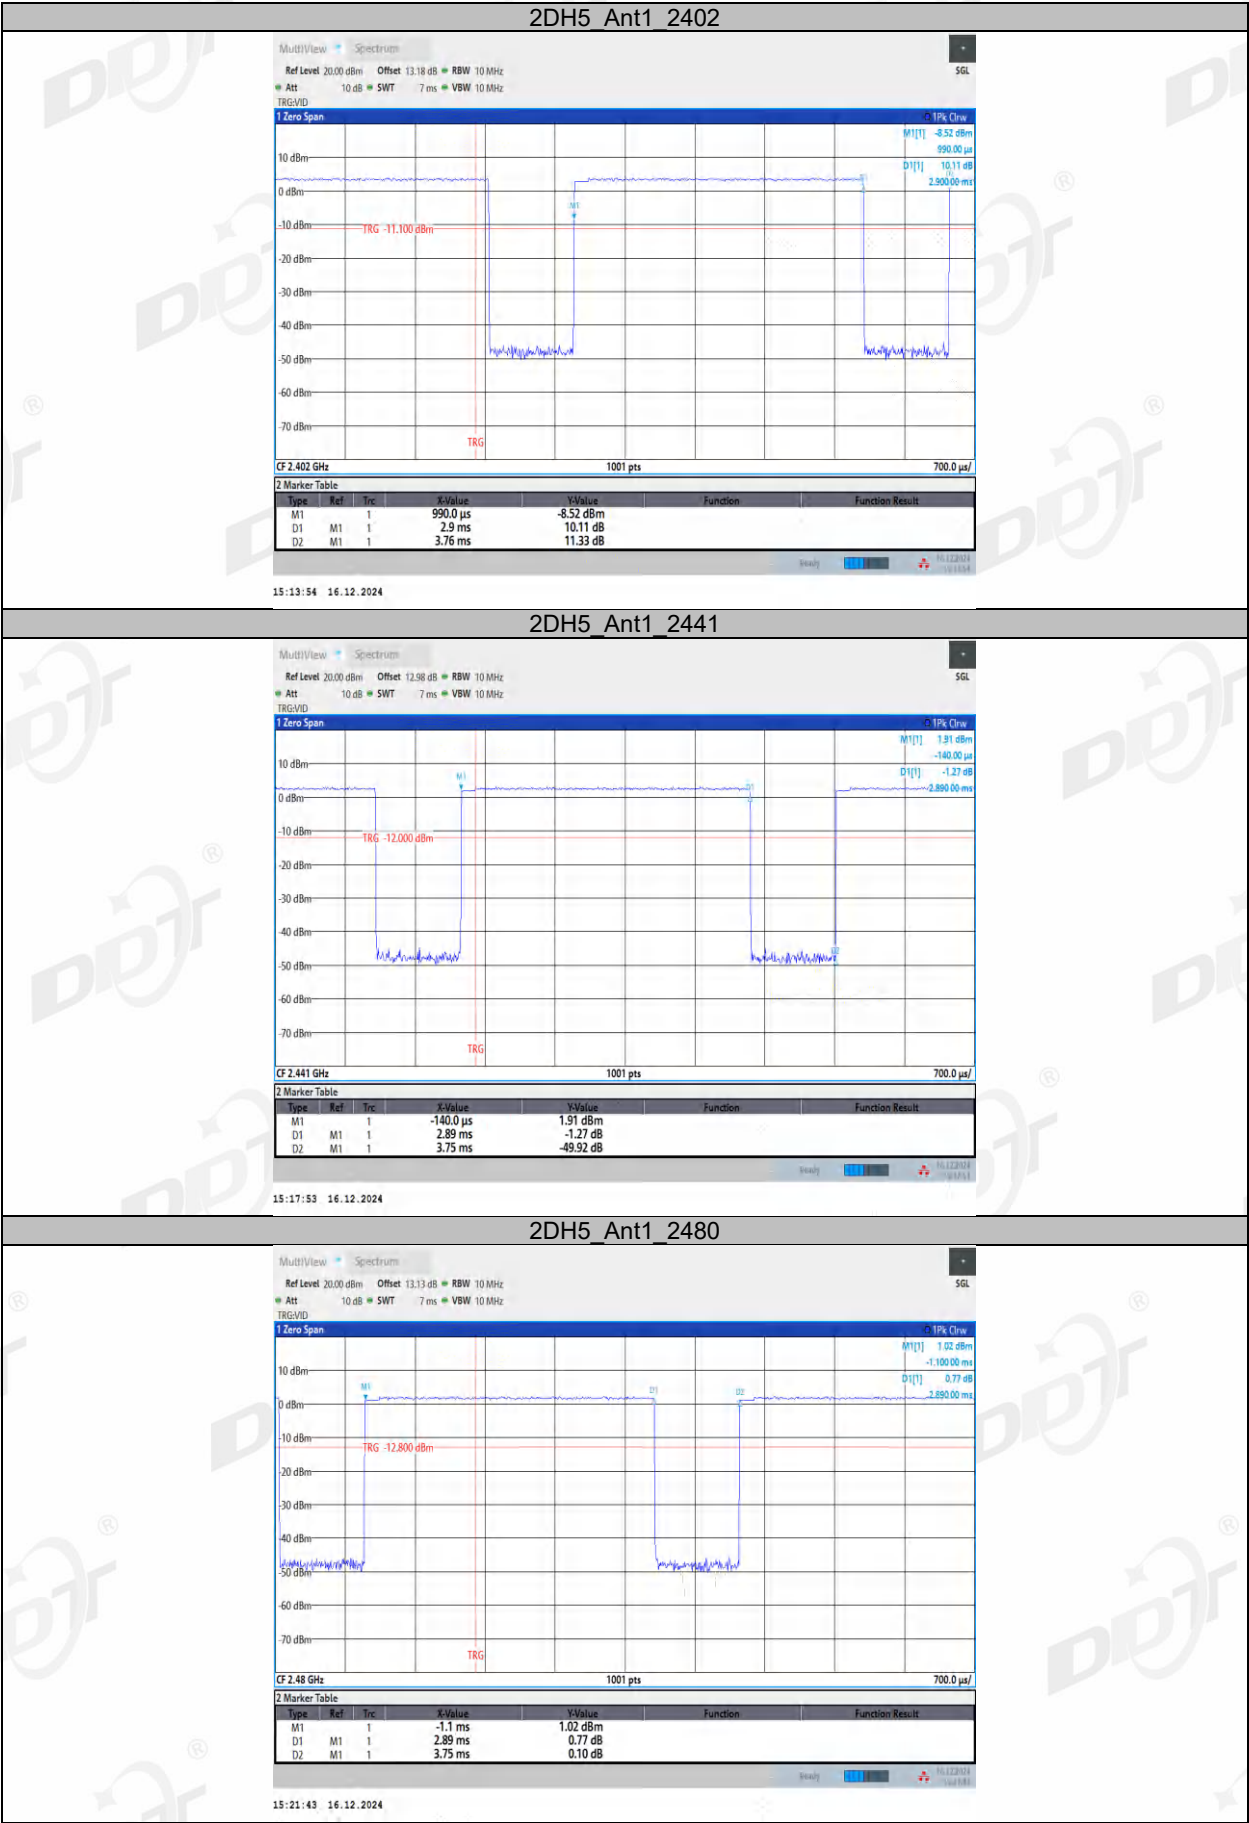

R ear:

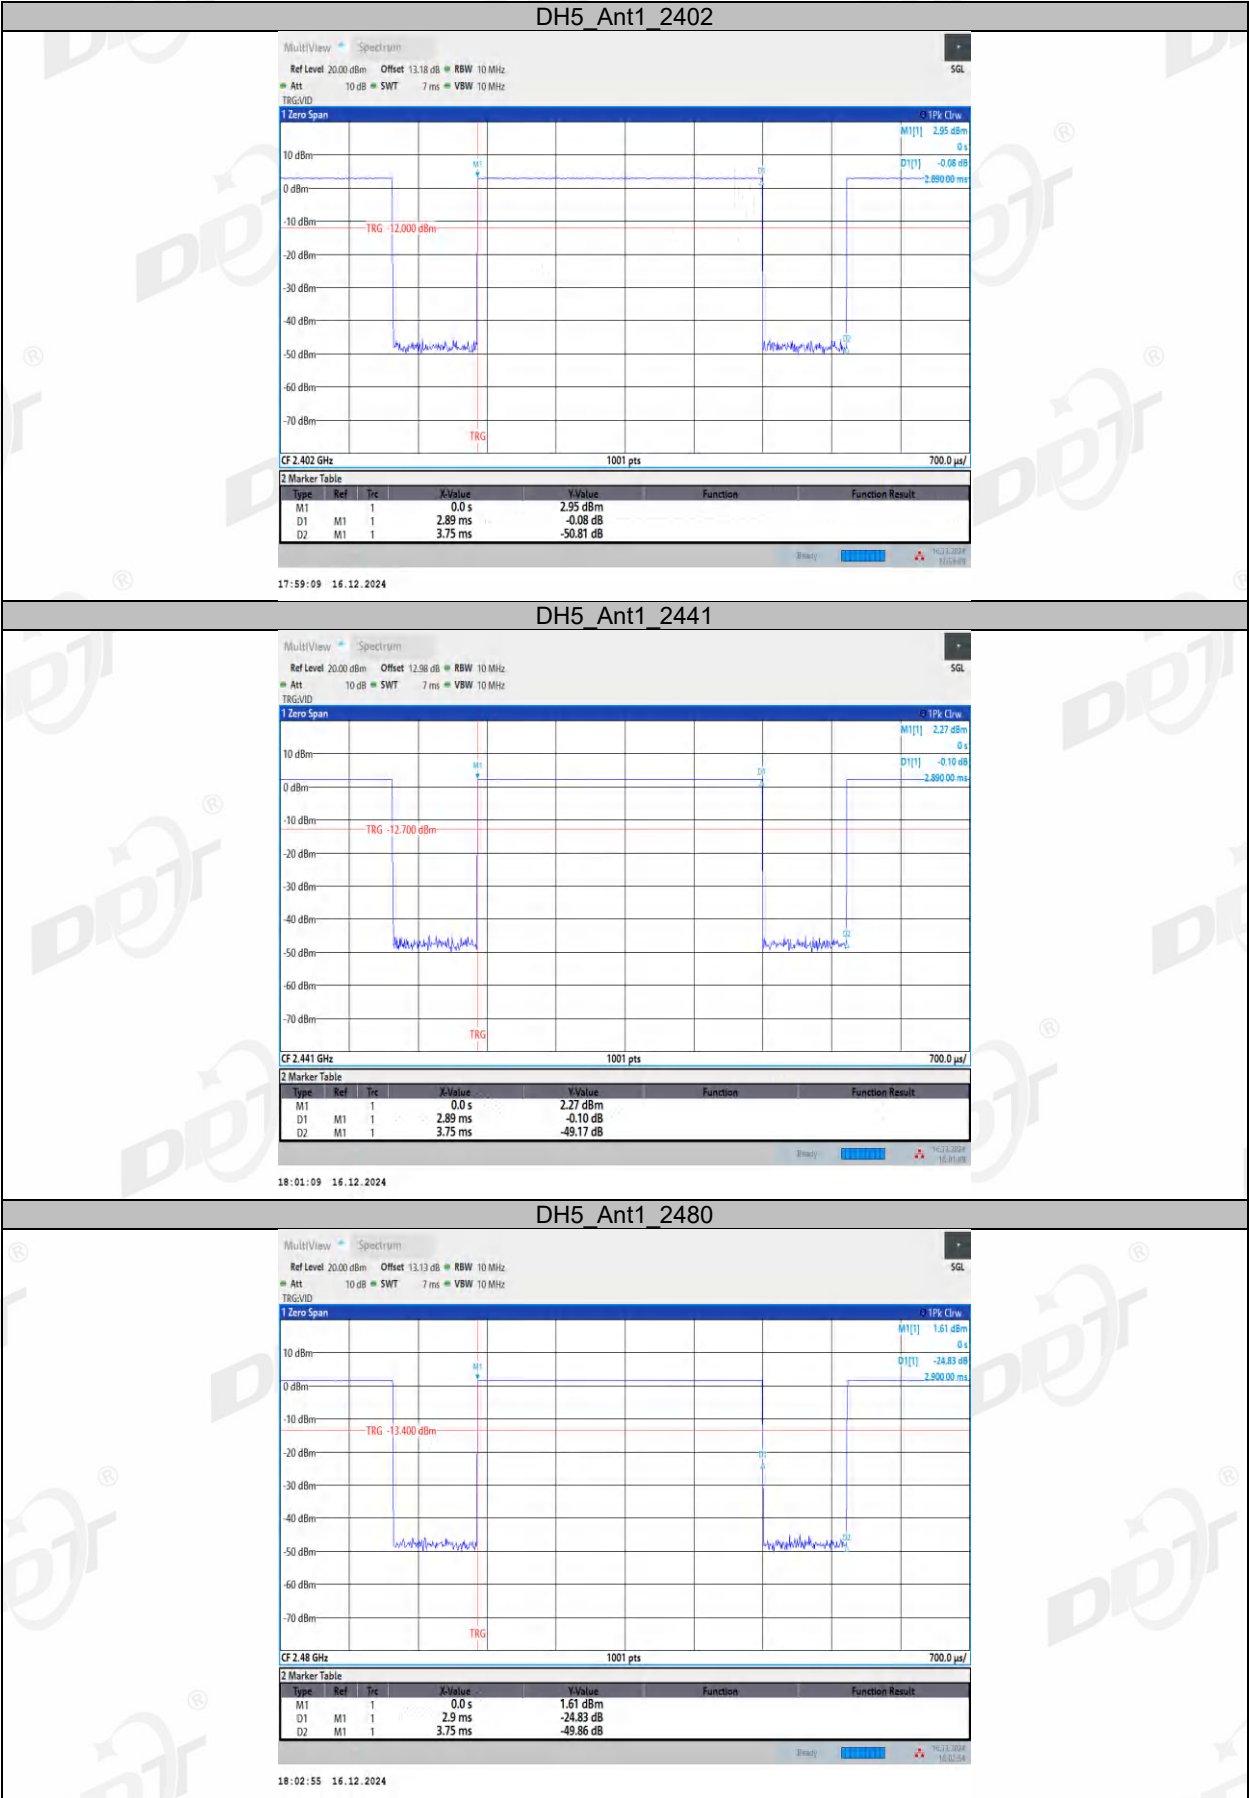

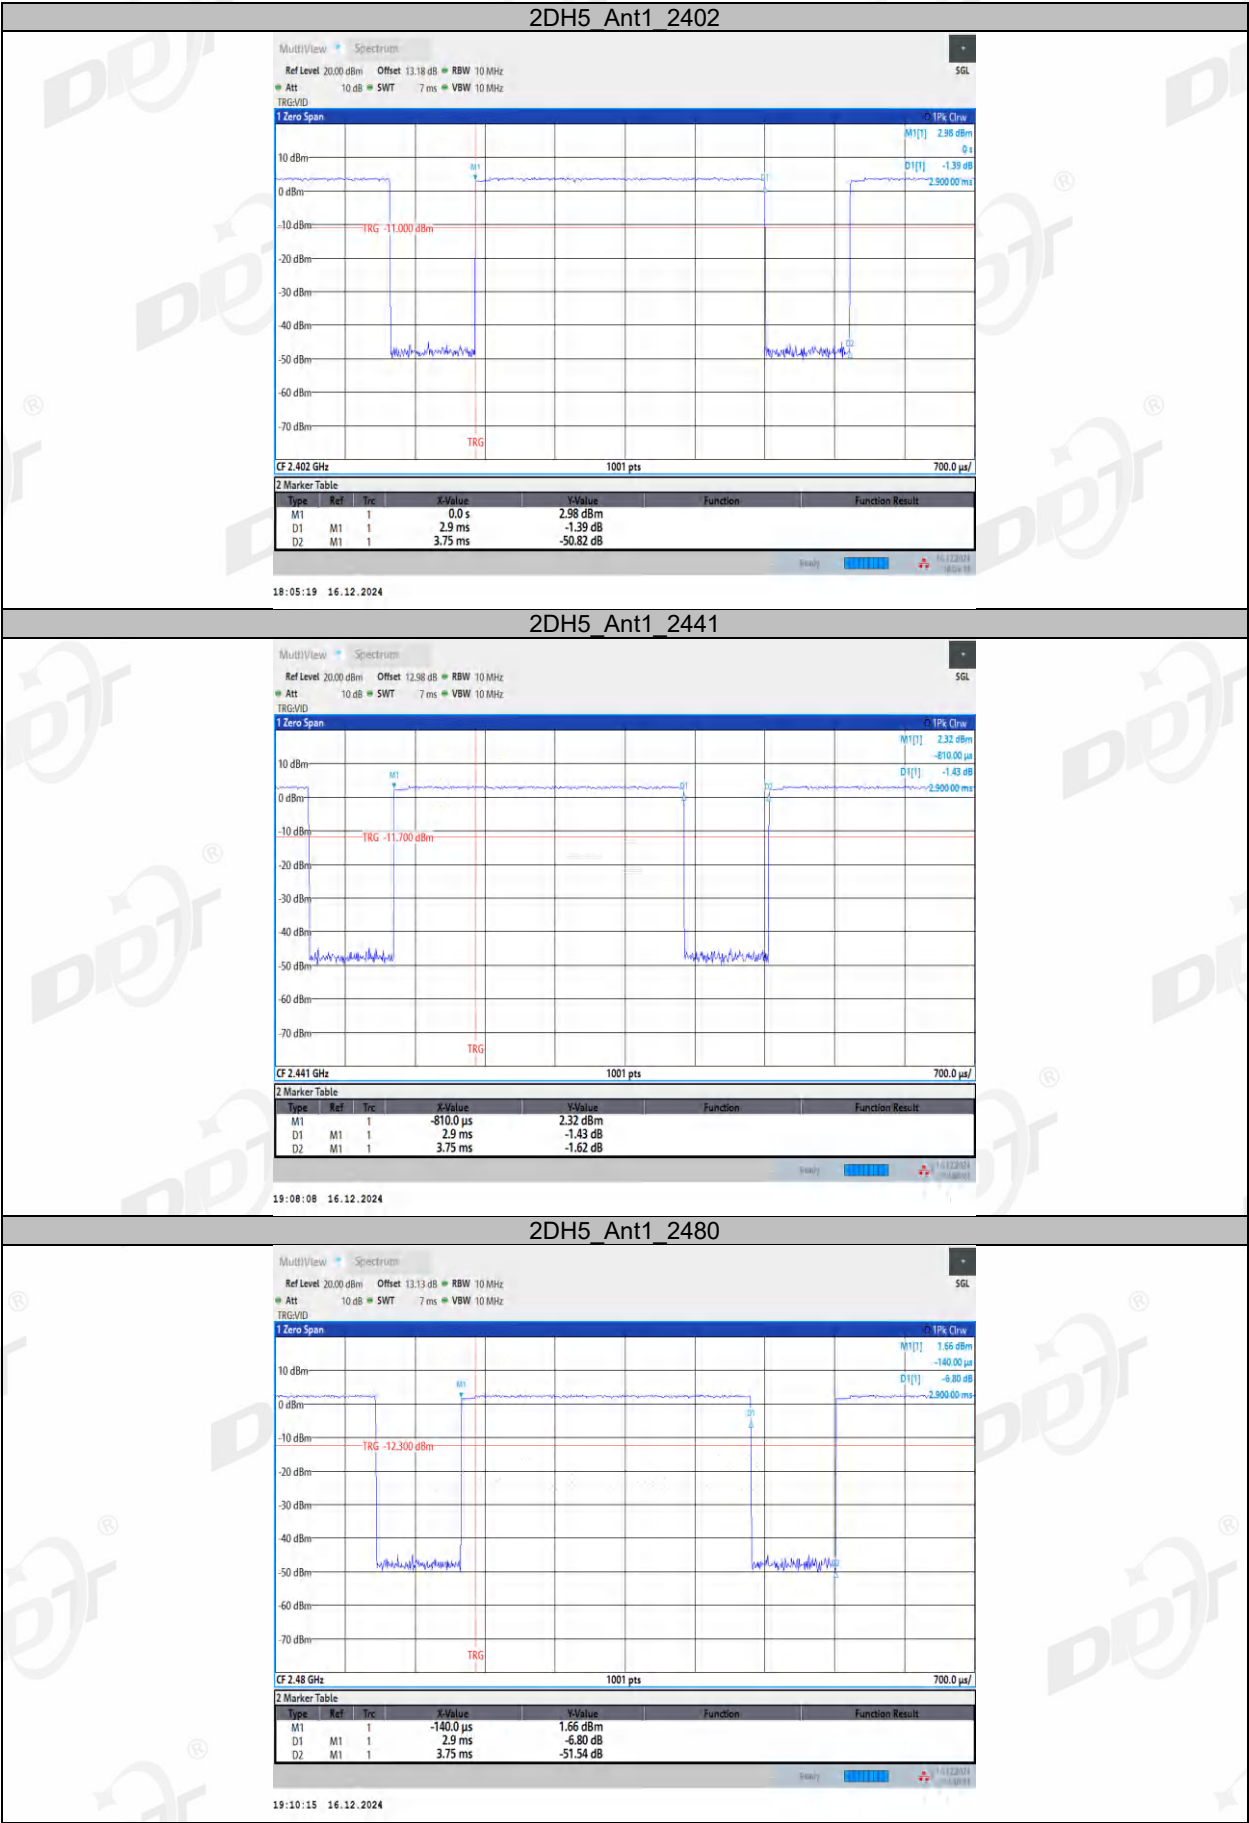

13. Antenna Requirements

13.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

13.2. Result



The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


14. Radiated Emission

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31	1 Year
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22	1 Year
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2025/09/18	2 Year
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/03/31	1 Year
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/03/31	1 Year
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/03/31	1 Year
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/	/
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31	1 Year
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31	1 Year
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22	1 Year
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11	2 Year
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/	/
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22	1 Year
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31	1 Year
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26	1 Year
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11	1 Year
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/08/25	1 Year

14.2. Block diagram of test setup

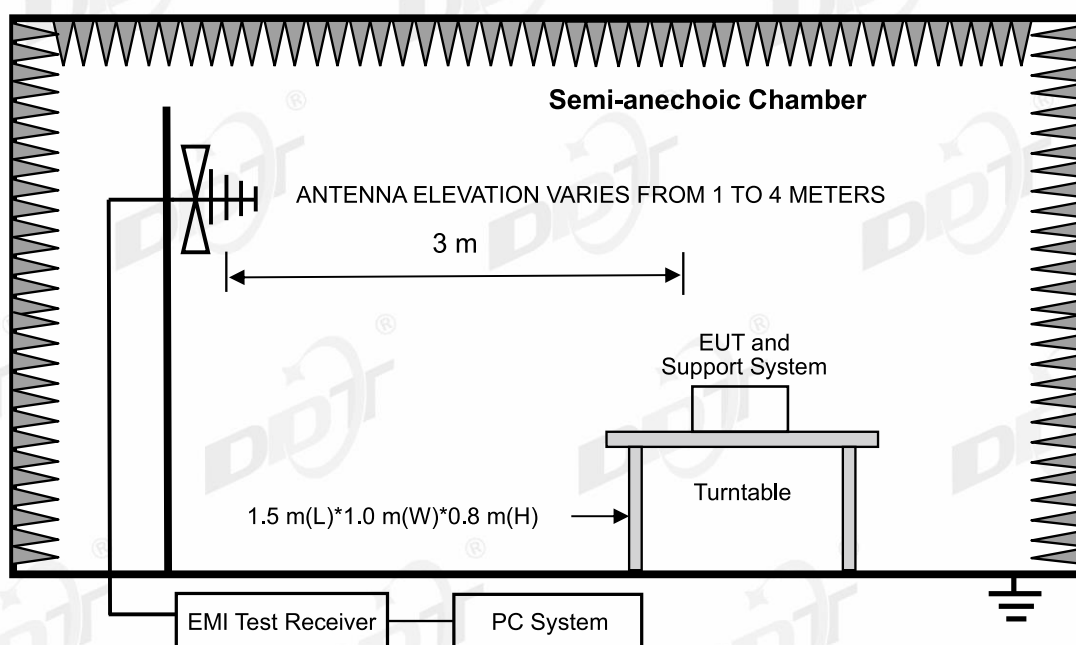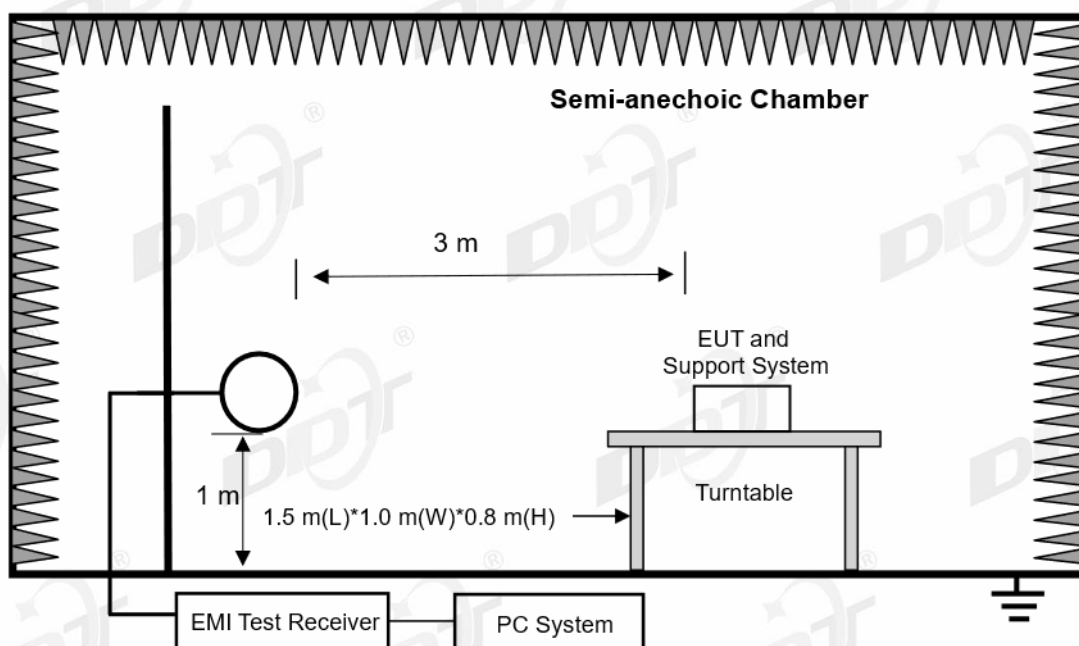

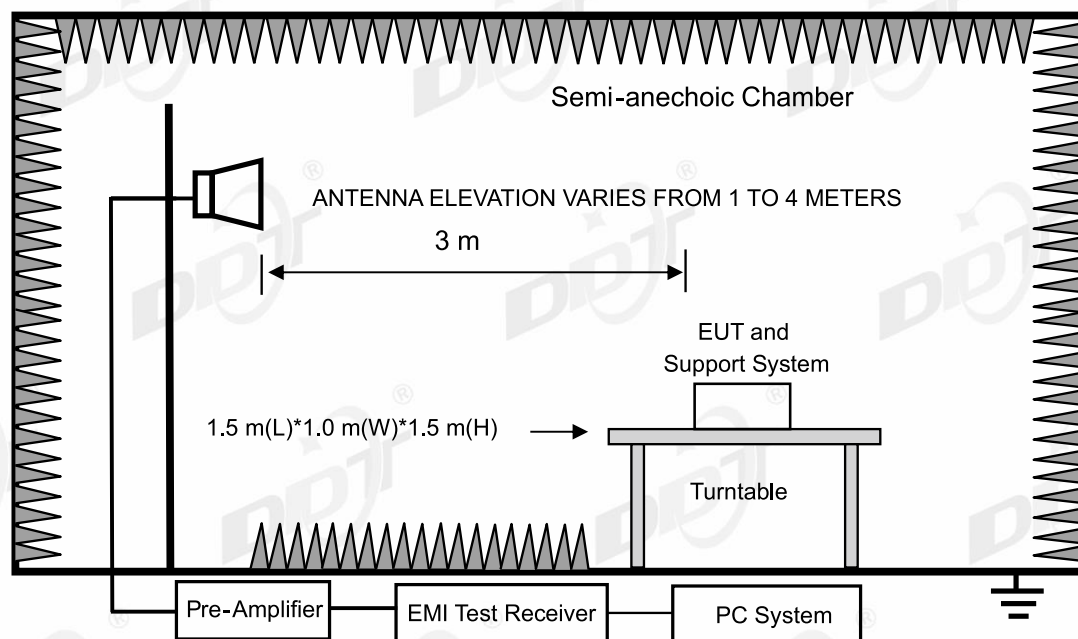

14.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

²Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		uV/m	dBuV/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dBuV/m (Peak) 54.0 dBuV/m (Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz,

radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dBuV/m}) = \text{Limit}_{30\text{m}}(\text{dBuV/m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz-40 GHz)	1 m

According ANSI C63.10:2020 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2020 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2020 clause 4.1.4.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) For 30 MHz ~ 25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, the worst case is record and reported)

(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in worst mode.

14.6. Test result

PASS. (See below detailed test result)

14.7. Test data

L ear:

TR-4-E-009 Radiated Emission Test Result

Test Date:2024-12-16

Tested By:Zhong Nan

EUT:True Wireless Earbuds with Active Noise Cancellation

Model Number:EDF200182

Test Mode:DH5 TX Mode

Power Supply:DC 5V


Condition:Temp:23.3°C;Humi:44.2%

Test Site:DDT 3# Chamber

File Path:d:\ts\2024 report data\Q24102916-1E\FCC BELOW1G\20241216-074733_H

Memo:Sample Number:S24102916-007

Power Setting:6, L ear

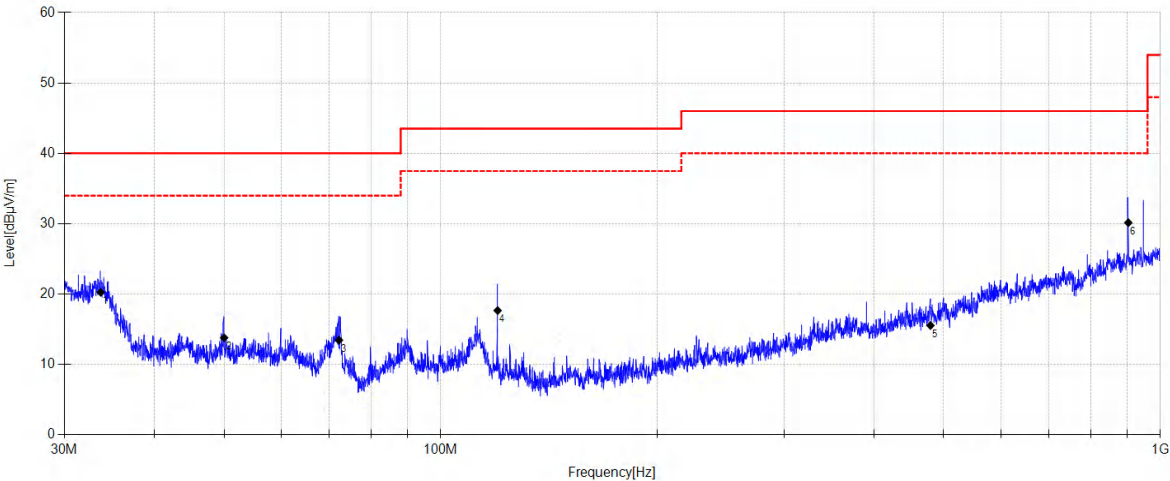

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	33.703	36.21	11.36	3.78	20.25	40.00	19.75	QP	Horizontal
2	50.016	28.02	12.99	3.88	13.79	40.00	26.21	QP	Horizontal
3	72.223	31	9.51	4.04	13.45	40.00	26.55	QP	Horizontal
4	119.991	34.45	10.00	4.33	17.66	43.50	25.84	QP	Horizontal
5	479.252	24.64	16.47	5.92	15.54	46.00	30.46	QP	Horizontal
6	902.695	31.58	21.90	7.21	30.14	46.00	15.86	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

DH5 TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24102916-1E\FCC BELOW1G\20241216-074817_V

Memo:

Sample Number:S24102916-007 Power Setting:6, L ear

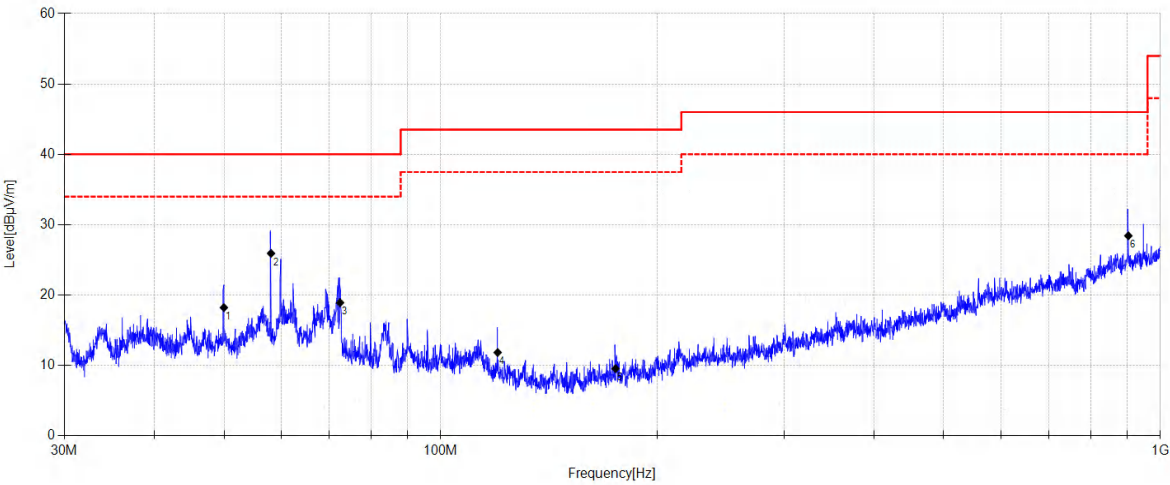

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	49.981	32.45	12.99	3.88	18.22	40.00	21.78	QP	Vertical
2	58.114	40.35	12.74	3.94	25.93	40.00	14.07	QP	Vertical
3	72.477	36.57	9.41	4.04	18.92	40.00	21.08	QP	Vertical
4	119.991	28.63	10.00	4.33	11.84	43.50	31.66	QP	Vertical
5	174.975	26.89	9.20	4.62	9.54	43.50	33.96	QP	Vertical
6	902.695	29.87	21.90	7.21	28.43	46.00	17.57	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

R ear:

TR-4-E-009 Radiated Emission Test Result

Test Date:2024-12-16

Tested By:Zhong Nan

EUT:True Wireless Earbuds with Active Noise Cancellation

Model Number:EDF200182

Test Mode:DH5 TX Mode

Power Supply:DC 5V


Condition:Temp:23.3°C;Humi:44.2%

Test Site:DDT 3# Chamber

File Path:d:\ts\2024 report data\Q24102916-1E\FCC BELOW1G\20241216-080309_H

Memo:Sample Number:S24102916-007

Power Setting:6, R ear

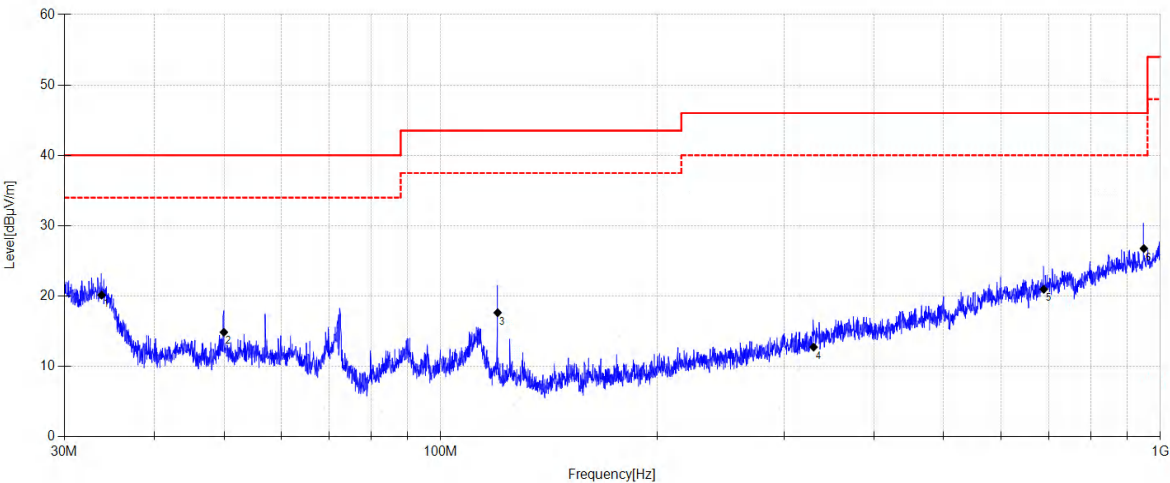

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	33.798	36.05	11.42	3.78	20.15	40.00	19.85	QP	Horizontal
2	49.981	29.09	12.99	3.88	14.86	40.00	25.14	QP	Horizontal
3	119.991	34.43	10.00	4.33	17.64	43.50	25.86	QP	Horizontal
4	329.805	24.55	14.27	5.34	12.75	46.00	33.25	QP	Horizontal
5	688.649	26.39	19.42	6.65	20.96	46.00	25.04	QP	Horizontal
6	948.771	27.36	22.41	7.33	26.76	46.00	19.24	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

DH5 TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24102916-1E\FCC BELOW1G\20241216-080353_V

Memo:

Sample Number:S24102916-007 Power Setting:6, R ear

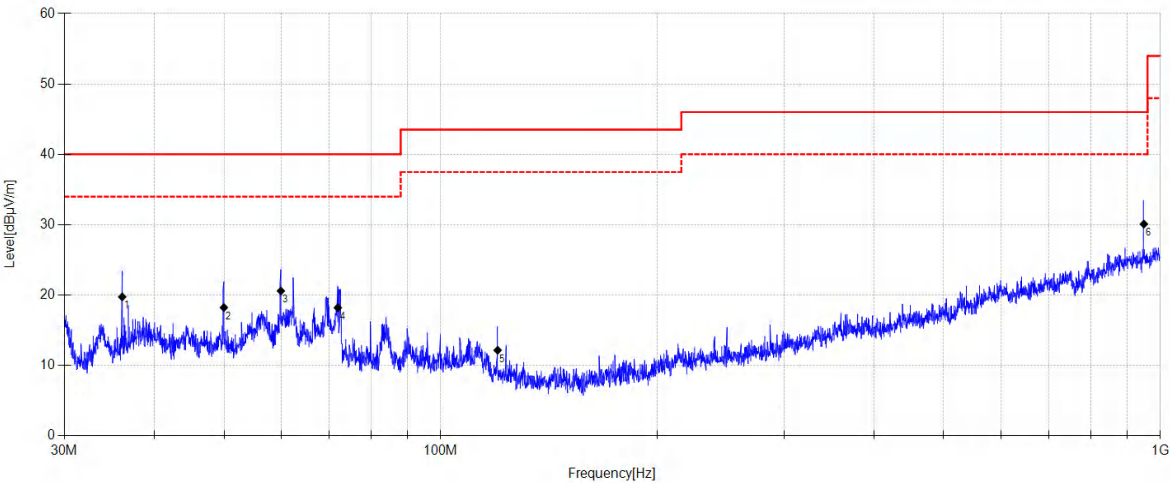

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36.100	35.16	11.88	3.80	19.74	40.00	20.26	QP	Vertical
2	49.981	32.46	12.99	3.88	18.23	40.00	21.77	QP	Vertical
3	59.977	34.94	12.79	3.96	20.59	40.00	19.41	QP	Vertical
4	71.971	35.67	9.60	4.03	18.20	40.00	21.80	QP	Vertical
5	119.991	28.95	10.00	4.33	12.16	43.50	31.34	QP	Vertical
6	948.771	30.69	22.41	7.33	30.09	46.00	15.91	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

L ear:

TR-4-E-009 Radiated Emission Test Result

Test Date:2024-12-15

Tested By:Zhong Nan

EUT:True Wireless Earbuds with Active Noise Cancellation

Model Number:EDF200182

Test Mode:DH5 2402MHz TX Mode

Power Supply:DC 5V

Condition:Temp:23.3°C;Humi:44.2%


Test Site:DDT 3# Chamber

File Path:d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\1

Memo:Sample Number:S24102916-007

Power Setting:6, L ear

Test Graph

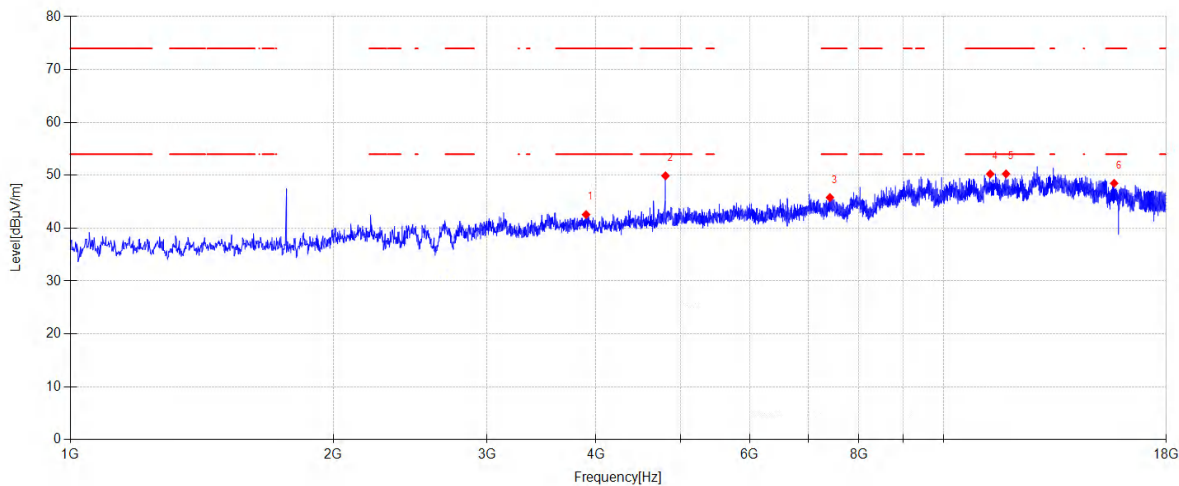

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3896.800	45.98	31.18	5.07	-39.66	42.57	74.00	31.43	PK	Horizontal
2	4804.600	51.38	32.62	5.53	-39.62	49.91	74.00	24.09	PK	Horizontal
3	7412.400	43.09	36.68	6.66	-40.63	45.80	74.00	28.20	PK	Horizontal
4	11313.900	42.02	39.21	8.33	-39.31	50.25	74.00	23.75	PK	Horizontal
5	11795.000	42.53	38.91	8.63	-39.80	50.27	74.00	23.73	PK	Horizontal
6	15686.300	39.44	38.51	9.94	-39.40	48.49	74.00	25.51	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- For the highest point, is the harmonic, falling within the unrestricted band, only 20dB below the fundamental emissions is required. It can be seen from the data in section 15.7 that this fully complies with the standard requirements

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-15

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

DH5 2402MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\2

Memo:

Sample Number:S24102916-007 Power Setting:6, L ear

Test Graph

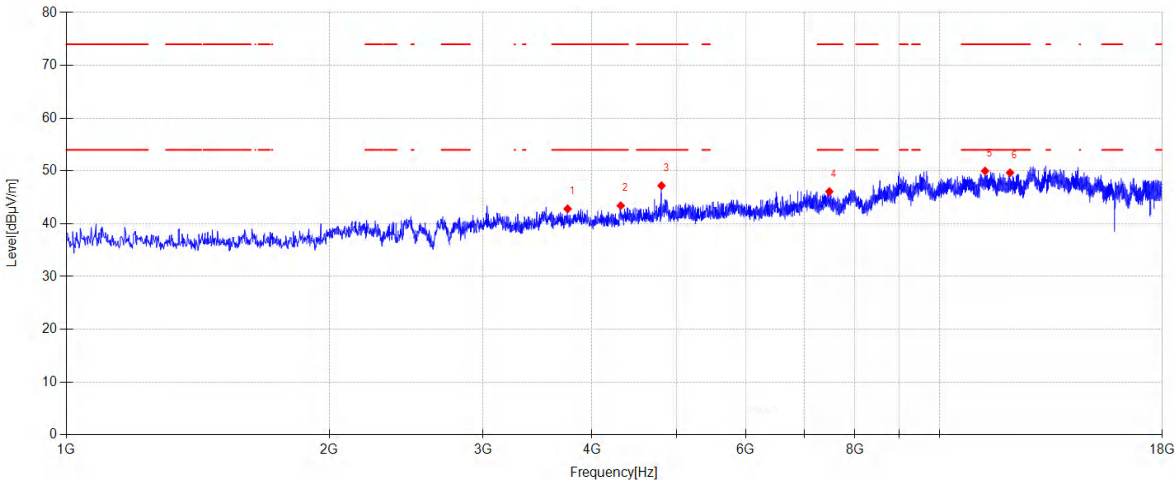

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3750.600	46.85	30.50	5.09	-39.62	42.82	74.00	31.18	PK	Vertical
2	4315.000	46.22	31.60	5.24	-39.65	43.41	74.00	30.59	PK	Vertical
3	4804.600	48.68	32.62	5.53	-39.62	47.21	74.00	26.79	PK	Vertical
4	7480.400	43.43	36.54	6.69	-40.57	46.09	74.00	27.91	PK	Vertical
5	11278.200	41.76	39.20	8.31	-39.28	49.99	74.00	24.01	PK	Vertical
6	12044.900	41.64	39.24	8.78	-39.99	49.67	74.00	24.33	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

DH5 2441MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\3

Memo:

Sample Number:S24102916-007 Power Setting:6, L ear

Test Graph

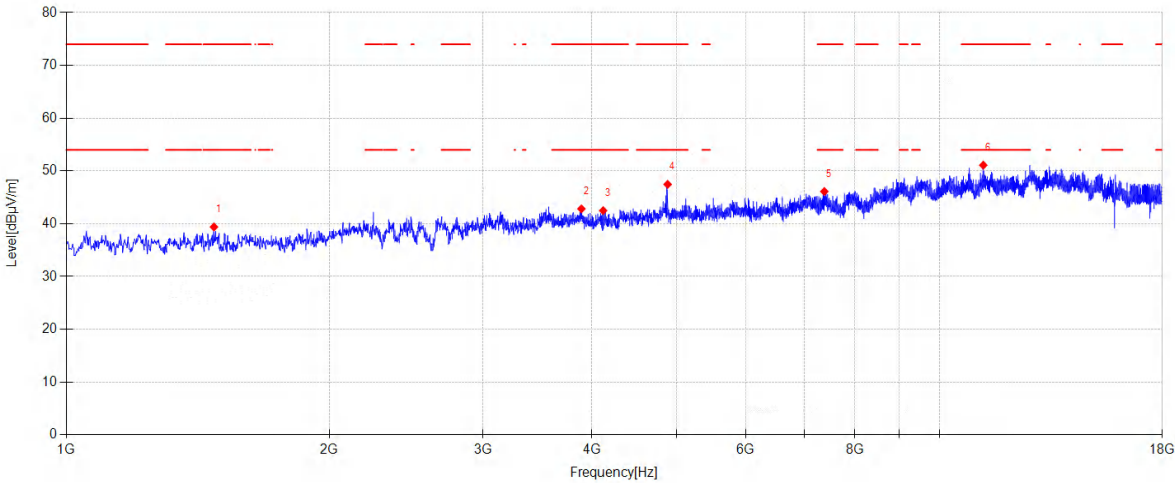

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1476.000	47.72	25.40	3.69	-37.43	39.38	74.00	34.62	PK	Horizontal
2	3890.000	46.26	31.14	5.07	-39.65	42.82	74.00	31.18	PK	Horizontal
3	4119.500	45.90	31.14	5.12	-39.67	42.49	74.00	31.51	PK	Horizontal
4	4882.800	48.21	33.28	5.58	-39.61	47.46	74.00	26.54	PK	Horizontal
5	7381.800	43.39	36.74	6.64	-40.66	46.11	74.00	27.89	PK	Horizontal
6	11225.500	42.85	39.20	8.27	-39.23	51.09	74.00	22.91	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

DH5 2441MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\4

Memo:

Sample Number:S24102916-007 Power Setting:6, L ear

Test Graph

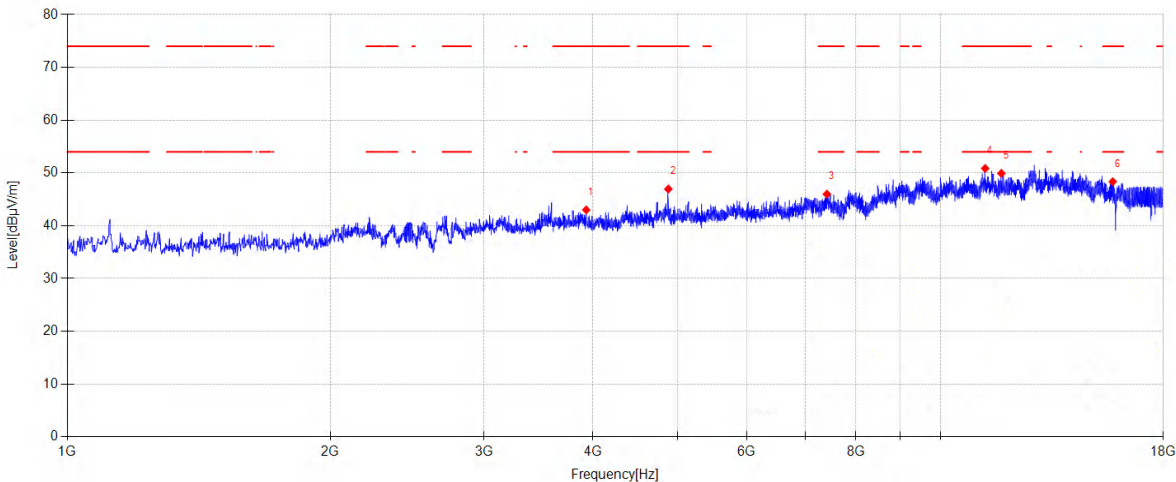

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3929.100	46.46	31.14	5.06	-39.66	43.00	74.00	31.00	PK	Vertical
2	4879.400	47.65	33.33	5.58	-39.61	46.95	74.00	27.05	PK	Vertical
3	7412.400	43.28	36.68	6.66	-40.63	45.99	74.00	28.01	PK	Vertical
4	11252.700	42.62	39.20	8.29	-39.25	50.86	74.00	23.14	PK	Vertical
5	11742.300	42.11	38.96	8.60	-39.74	49.93	74.00	24.07	PK	Vertical
6	15750.900	39.37	38.40	9.98	-39.40	48.35	74.00	25.65	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. For the highest point, is the harmonic, falling within the unrestricted band, only 20dB below the fundamental emissions is required. It can be seen from the data in section 15.7 that this fully complies with the standard requirements

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

DH5 2480MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\5

Memo:

Sample Number:S24102916-007 Power Setting:6, L ear

Test Graph

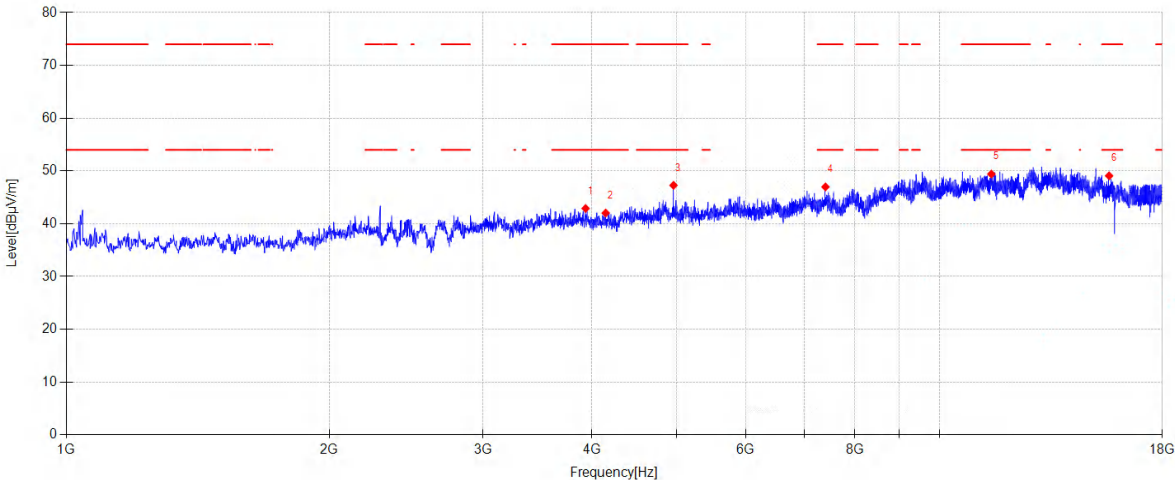

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3932.500	46.35	31.14	5.06	-39.66	42.89	74.00	31.11	PK	Horizontal
2	4146.700	45.37	31.19	5.14	-39.67	42.03	74.00	31.97	PK	Horizontal
3	4959.300	48.12	33.12	5.63	-39.60	47.27	74.00	26.73	PK	Horizontal
4	7403.900	44.28	36.69	6.65	-40.64	46.98	74.00	27.02	PK	Horizontal
5	11466.900	41.23	39.23	8.42	-39.47	49.41	74.00	24.59	PK	Horizontal
6	15642.100	40.01	38.56	9.91	-39.40	49.08	74.00	24.92	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- For the highest point, is the harmonic, falling within the unrestricted band, only 20dB below the fundamental emissions is required. It can be seen from the data in section 15.7 that this fully complies with the standard requirements

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

DH5 2480MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\6

Memo:

Sample Number:S24102916-007 Power Setting:6, L ear

Test Graph

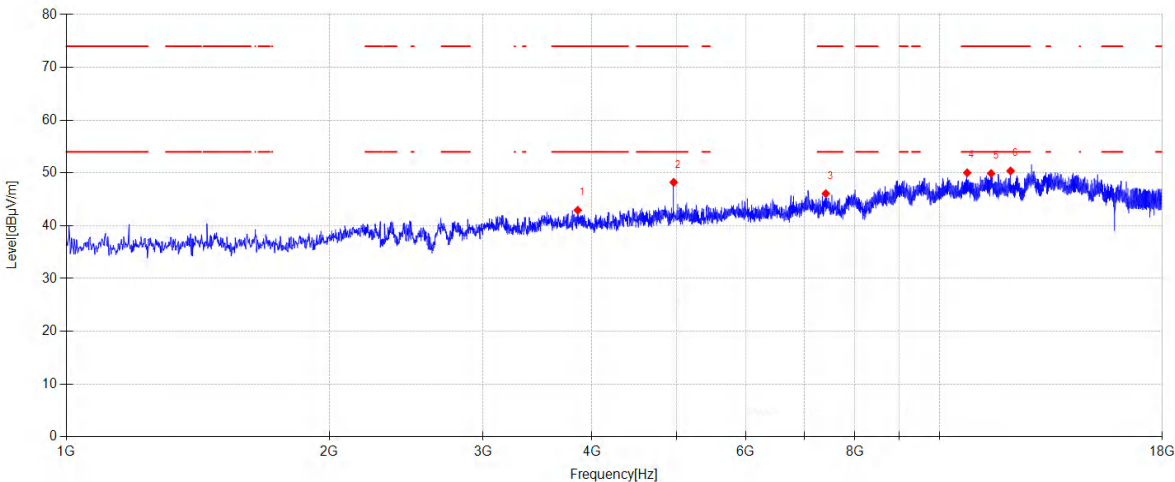

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3852.600	46.58	30.92	5.08	-39.64	42.94	74.00	31.06	PK	Vertical
2	4961.000	49.07	33.12	5.63	-39.60	48.22	74.00	25.78	PK	Vertical
3	7410.700	43.38	36.68	6.66	-40.63	46.09	74.00	27.91	PK	Vertical
4	10758.000	41.78	39.40	8.01	-39.15	50.04	74.00	23.96	PK	Vertical
5	11460.100	41.71	39.24	8.42	-39.46	49.91	74.00	24.09	PK	Vertical
6	12063.600	42.32	39.26	8.79	-39.99	50.38	74.00	23.62	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. For the highest point, is the harmonic, falling within the unrestricted band, only 20dB below the fundamental emissions is required. It can be seen from the data in section 15.7 that this fully complies with the standard requirements.

R ear:

TR-4-E-009 Radiated Emission Test Result

Test Date:2024-12-16

Tested By:Zhong Nan

EUT:True Wireless Earbuds with Active Noise Cancellation

Model Number:EDF200182

Test Mode:DH5 2402MHz TX Mode

Power Supply:DC 5V

Condition:Temp:23.3°C;Humi:44.2%


Test Site:DDT 3# Chamber

File Path:d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\19

Memo:Sample Number:S24102916-007

Power Setting:6, R ear

Test Graph

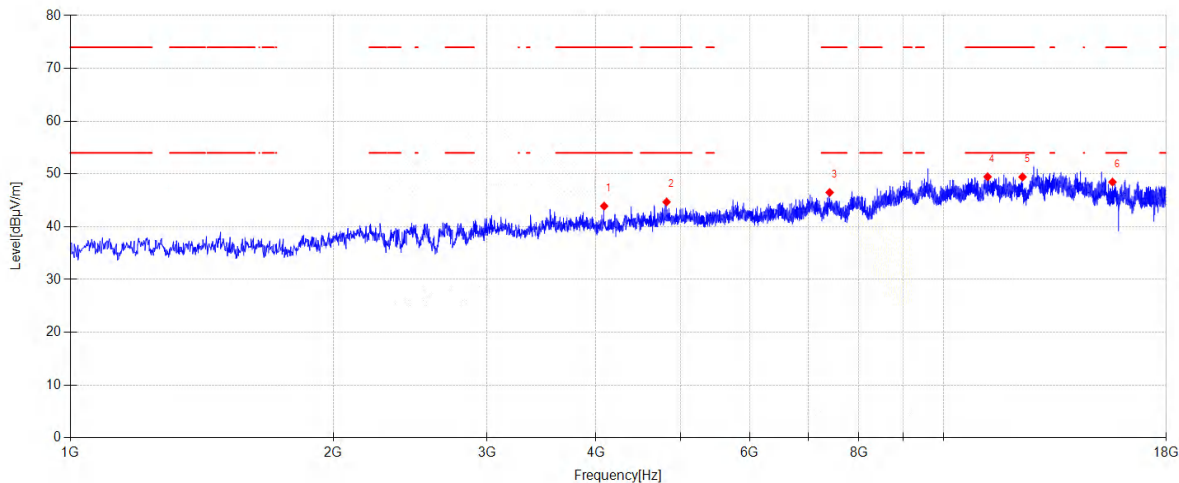

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4087.200	47.41	31.07	5.10	-39.67	43.91	74.00	30.09	PK	Horizontal
2	4818.200	45.79	32.97	5.54	-39.61	44.69	74.00	29.31	PK	Horizontal
3	7407.300	43.77	36.69	6.66	-40.63	46.49	74.00	27.51	PK	Horizontal
4	11234.000	41.22	39.20	8.28	-39.23	49.47	74.00	24.53	PK	Horizontal
5	12320.300	41.15	39.30	8.92	-39.94	49.43	74.00	24.57	PK	Horizontal
6	15618.300	39.40	38.58	9.89	-39.40	48.47	74.00	25.53	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. For the highest point, is the harmonic, falling within the unrestricted band, only 20dB below the fundamental emissions is required. It can be seen from the data in section 15.7 that this fully complies with the standard requirements

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

DH5 2402MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\20

Memo:

Sample Number:S24102916-007 Power Setting:6, R ear

Test Graph

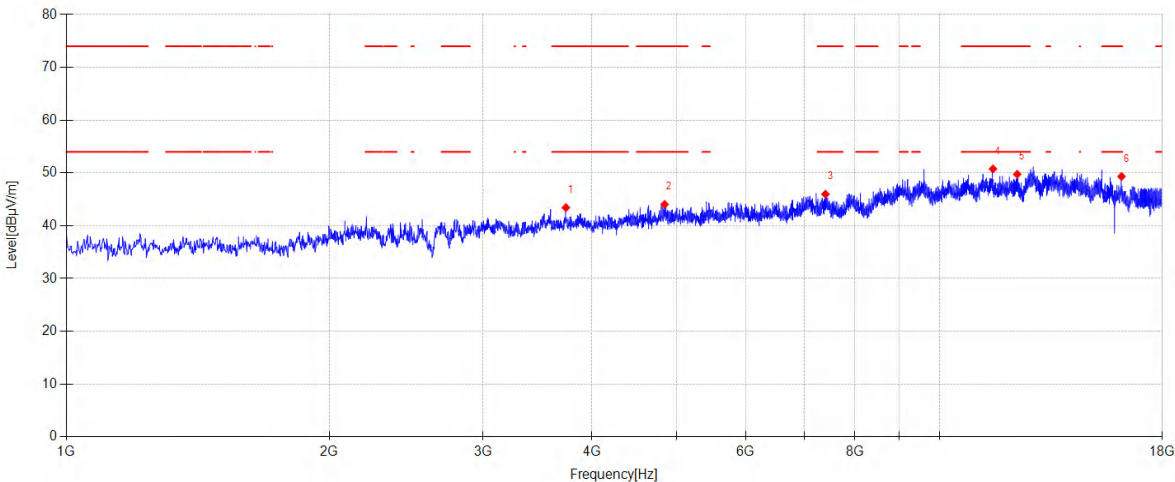

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3733.600	47.48	30.47	5.10	-39.62	43.43	74.00	30.57	PK	Vertical
2	4843.700	44.45	33.64	5.56	-39.61	44.04	74.00	29.96	PK	Vertical
3	7403.900	43.28	36.69	6.65	-40.64	45.98	74.00	28.02	PK	Vertical
4	11516.200	42.66	39.17	8.46	-39.52	50.77	74.00	23.23	PK	Vertical
5	12276.100	41.49	39.30	8.90	-39.94	49.75	74.00	24.25	PK	Vertical
6	16164.000	40.83	37.84	10.18	-39.51	49.34	74.00	24.66	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. For the highest point, is the harmonic, falling within the unrestricted band, only 20dB below the fundamental emissions is required. It can be seen from the data in section 15.7 that this fully complies with the standard requirements

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

DH5 2441MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\23

Memo:

Sample Number:S24102916-007 Power Setting:6, R ear

Test Graph

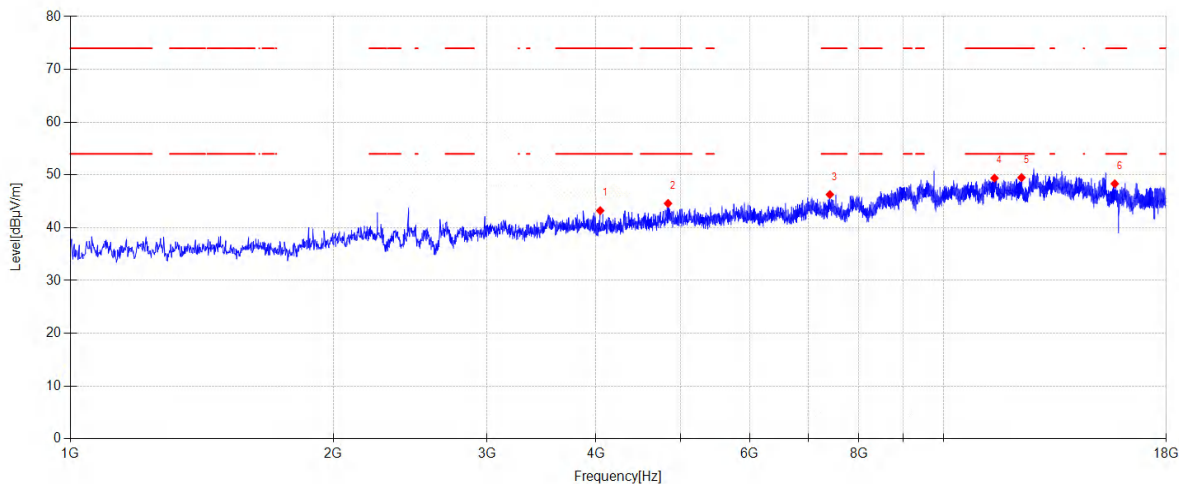

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	4044.700	46.85	30.99	5.08	-39.68	43.24	74.00	30.76	PK	Horizontal
2	4836.900	45.20	33.46	5.55	-39.61	44.60	74.00	29.40	PK	Horizontal
3	7412.400	43.58	36.68	6.66	-40.63	46.29	74.00	27.71	PK	Horizontal
4	11441.400	41.17	39.26	8.41	-39.44	49.40	74.00	24.60	PK	Horizontal
5	12286.300	41.23	39.30	8.91	-39.94	49.50	74.00	24.50	PK	Horizontal
6	15711.800	39.29	38.48	9.96	-39.40	48.33	74.00	25.67	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. For the highest point, is the harmonic, falling within the unrestricted band, only 20dB below the fundamental emissions is required. It can be seen from the data in section 15.7 that this fully complies with the standard requirements.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

DH5 2441MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\24

Memo:

Sample Number:S24102916-007 Power Setting:6, R ear

Test Graph

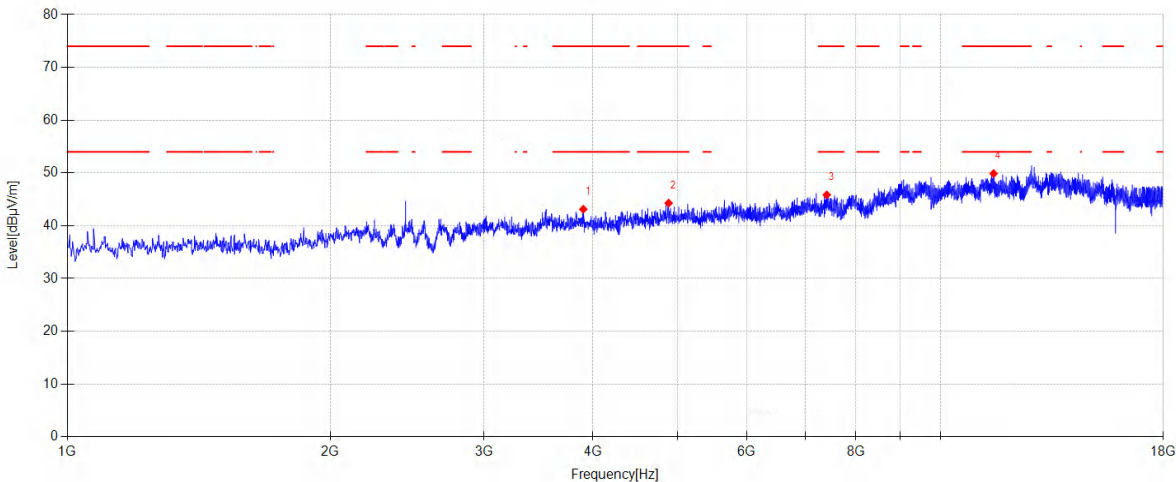

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3898.500	46.52	31.19	5.07	-39.66	43.12	74.00	30.88	PK	Vertical
2	4882.800	45.03	33.28	5.58	-39.61	44.28	74.00	29.72	PK	Vertical
3	7409.000	43.13	36.68	6.66	-40.63	45.84	74.00	28.16	PK	Vertical
4	11506.000	41.75	39.19	8.45	-39.51	49.88	74.00	24.12	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. For the highest point, is the harmonic, falling within the unrestricted band, only 20dB below the fundamental emissions is required. It can be seen from the data in section 15.7 that this fully complies with the standard requirements

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

DH5 2480MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\25

Memo:

Sample Number:S24102916-007 Power Setting:6, R ear

Test Graph

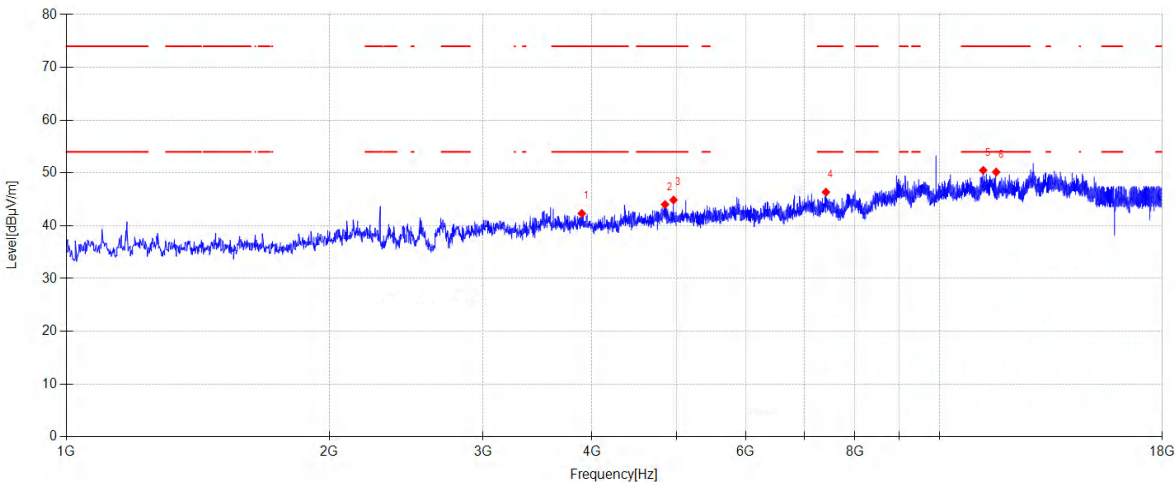

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3893.400	45.74	31.16	5.07	-39.65	42.32	74.00	31.68	PK	Horizontal
2	4848.800	44.30	33.77	5.56	-39.61	44.02	74.00	29.98	PK	Horizontal
3	4959.300	45.73	33.12	5.63	-39.60	44.88	74.00	29.12	PK	Horizontal
4	7412.400	43.65	36.68	6.66	-40.63	46.36	74.00	27.64	PK	Horizontal
5	11223.800	42.25	39.20	8.27	-39.22	50.50	74.00	23.50	PK	Horizontal
6	11613.100	42.26	39.00	8.52	-39.61	50.17	74.00	23.83	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. For the highest point, is the harmonic, falling within the unrestricted band, only 20dB below the fundamental emissions is required. It can be seen from the data in section 15.7 that this fully complies with the standard requirements.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

DH5 2480MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\26

Memo:

Sample Number:S24102916-007 Power Setting:6, R ear

Test Graph

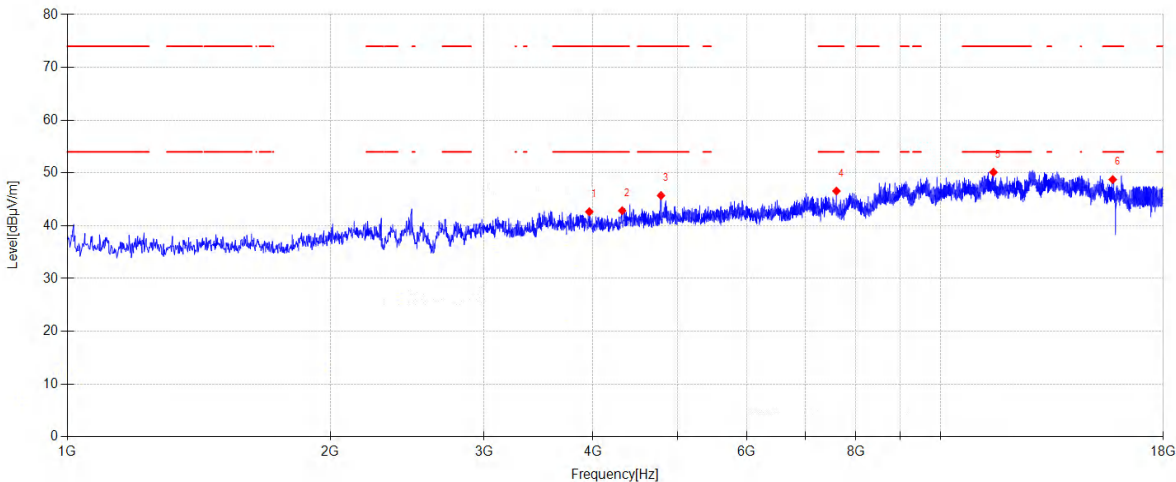

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3961.400	46.20	31.05	5.06	-39.67	42.64	74.00	31.36	PK	Vertical
2	4320.100	45.66	31.60	5.24	-39.65	42.85	74.00	31.15	PK	Vertical
3	4785.900	47.38	32.44	5.52	-39.62	45.72	74.00	28.28	PK	Vertical
4	7601.100	43.77	36.50	6.76	-40.46	46.57	74.00	27.43	PK	Vertical
5	11499.200	42.01	39.20	8.44	-39.50	50.15	74.00	23.85	PK	Vertical
6	15752.600	39.78	38.39	9.98	-39.40	48.75	74.00	25.25	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

15. Band Edge Compliance

15.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2025/09/18	2 Year
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22	1 Year
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31	1 Year
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31	1 Year
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22	1 Year
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11	2 Year
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/08/25	1 Year
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22	1 Year
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26	1 Year
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/03/31	1 Year
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31	1 Year
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/03/31	1 Year
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/	/
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31	1 Year
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/	/
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/03/31	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11	1 Year
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31	1 Year

15.2. Block diagram of test setup

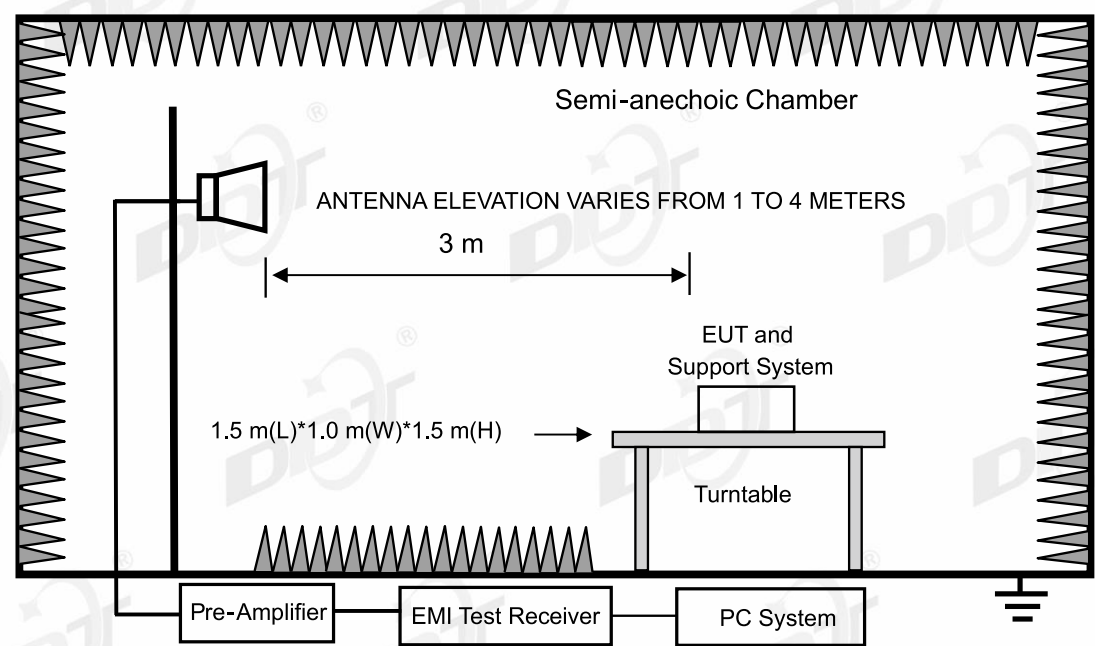

15.3. Limits

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

15.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

15.5. Test procedure

Same with Radiated Emission except change investigated frequency range.
Remark: All restriction band have been tested, and only the worst case is shown in report.

15.6. Test result

PASS. (See below detailed test result)

Note: Both Horizontal and Vertical Polarity have been tested, only recorded the worst case in this report.


15.7. Test data

L ear:

TR-4-E-009 Radiated Emission Test Result

Test Date:	2024-12-16	Tested By:	Zhong Nan
EUT:	True Wireless Earbuds with Active Noise Cancellation	Model Number:	EDF200182
Test Mode:	DH5 2402MHz TX Mode	Power Supply:	DC 5V
Condition:	Temp:23.3°C;Humi:44.2%	Test Site:	DDT 3# Chamber
File Path:	d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\8		
Memo:	Sample Number:S24102916-007 Power Setting:6, L ear		

Test Graph

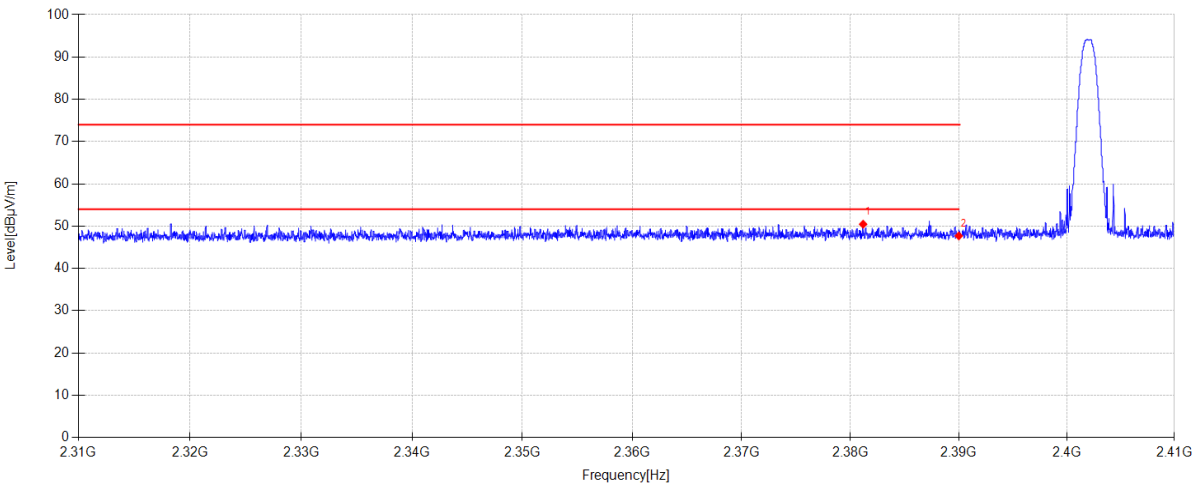

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2381.170	19.68	27.22	3.56	0.00	50.46	74.00	23.54	PK	Vertical
2	2390.000	16.86	27.26	3.57	0.00	47.69	74.00	26.31	PK	Vertical

- Note:
- 1. Level = Reading + Cable loss + Antenna Factor + AMP
 - 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

DH5 2480MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\10

Memo:

Sample Number:S24102916-007 Power Setting:6, L ear

Test Graph

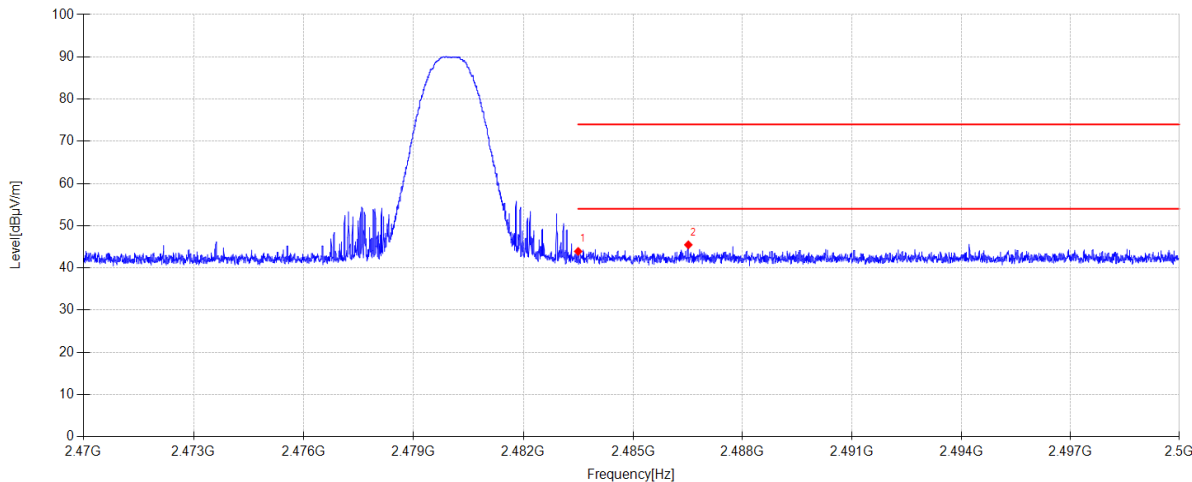

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	12.77	27.53	3.62	0.00	43.92	74.00	30.08	PK	Vertical
2	2486.515	14.31	27.55	3.62	0.00	45.48	74.00	28.52	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

2DH5 2480MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\12

Memo:

Sample Number:S24102916-007 Power Setting:6, L ear

Test Graph

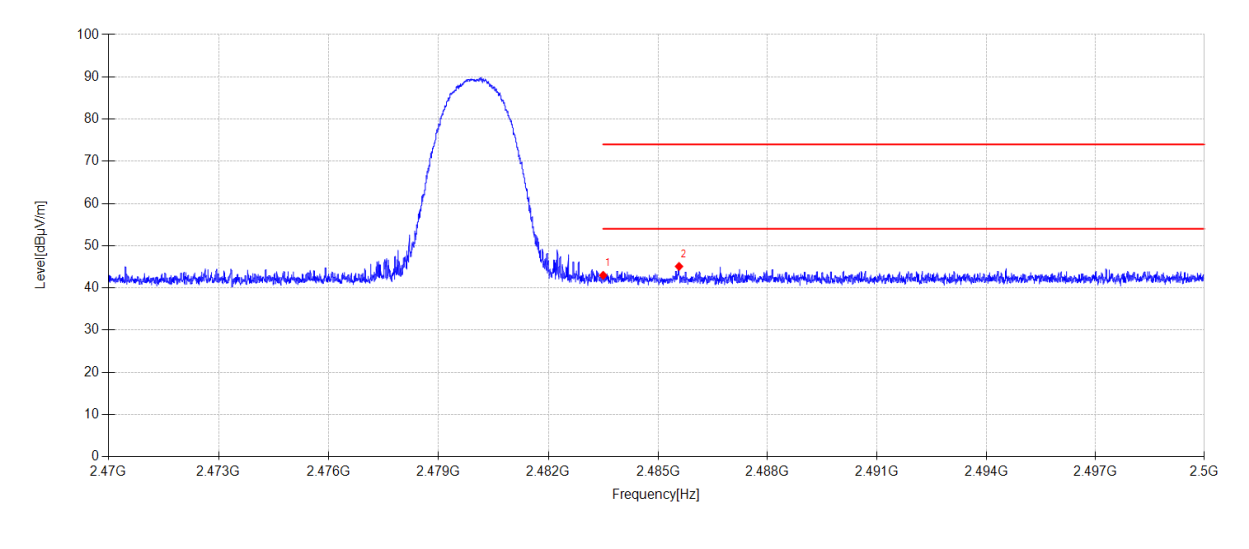

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.84	27.53	3.62	0.00	42.99	74.00	31.01	PK	Vertical
2	2485.576	13.93	27.54	3.62	0.00	45.09	74.00	28.91	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

2DH5 2402MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\14

Memo:

Sample Number:S24102916-007 Power Setting:6, L ear

Test Graph

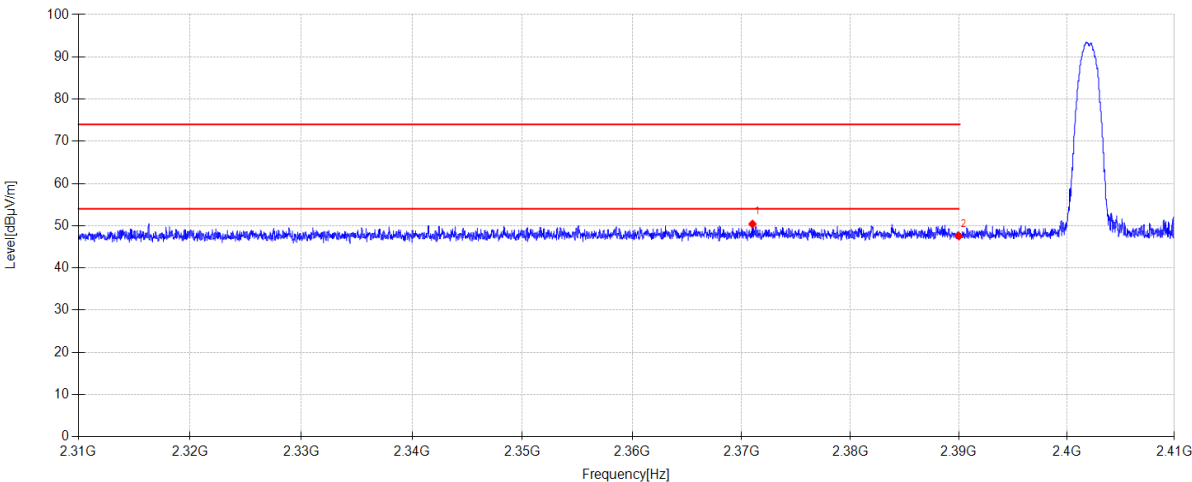

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2371.010	19.66	27.18	3.56	0.00	50.40	74.00	23.60	PK	Vertical
2	2390.000	16.72	27.26	3.57	0.00	47.55	74.00	26.45	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

R ear:

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

DH5 2402MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\21

Memo:

Sample Number:S24102916-007 Power Setting:6, R ear

Test Graph

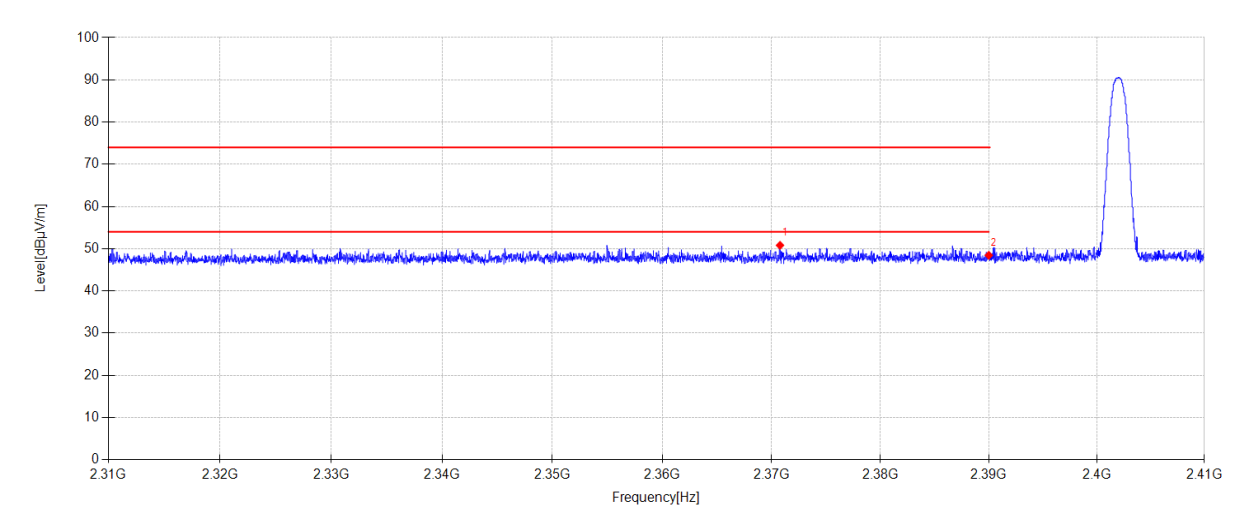

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2370.780	20.07	27.18	3.56	0.00	50.81	74.00	23.19	PK	Horizontal
2	2390.000	17.61	27.26	3.57	0.00	48.44	74.00	25.56	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

DH5 2480MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\27

Memo:

Sample Number:S24102916-007 Power Setting:6, R ear

Test Graph

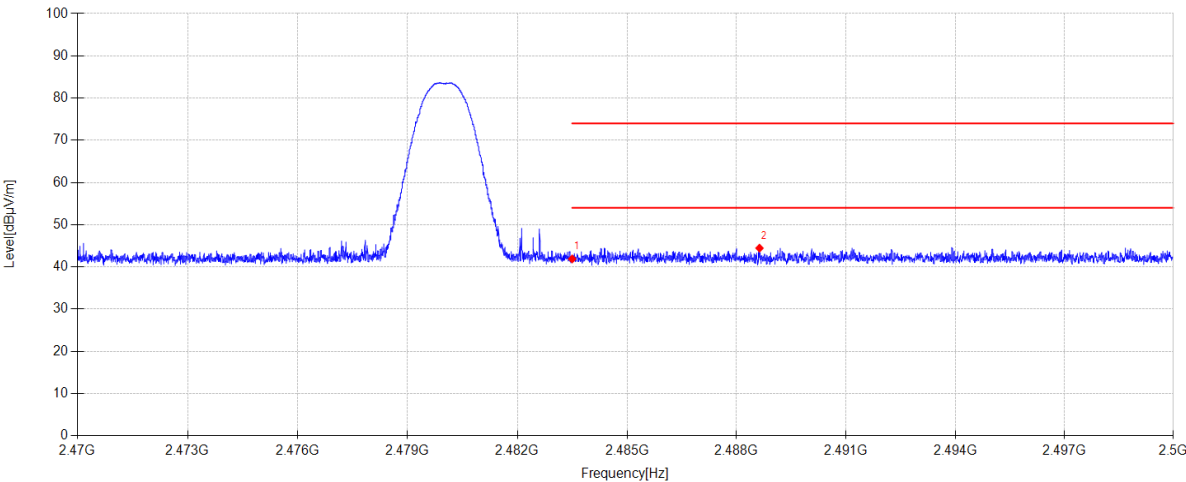

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	10.75	27.53	3.62	0.00	41.90	74.00	32.10	PK	Horizontal
2	2488.630	13.28	27.55	3.62	0.00	44.45	74.00	29.55	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

2DH5 2480MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\29

Memo:

Sample Number:S24102916-007 Power Setting:6, R ear

Test Graph

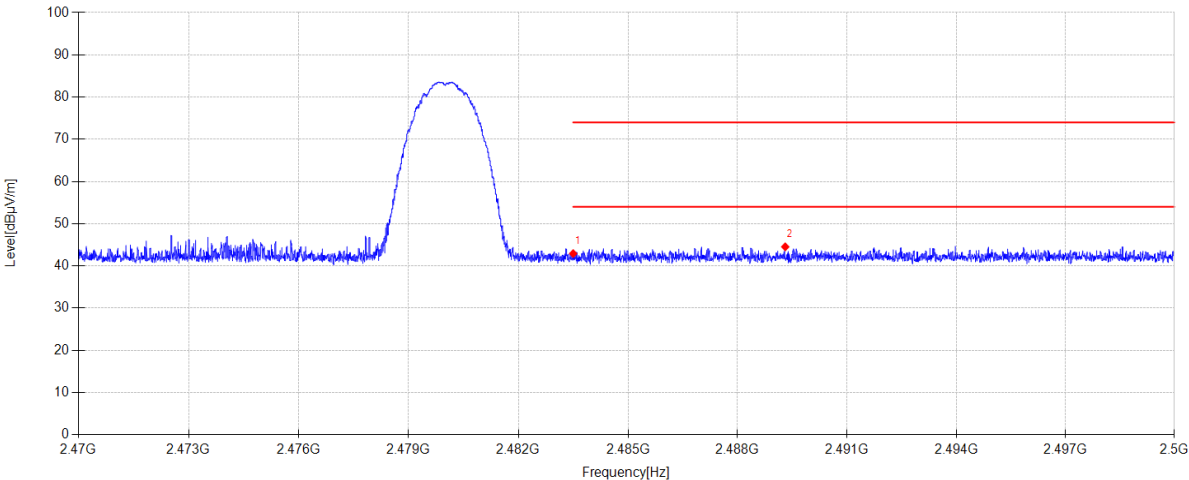

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.78	27.53	3.62	0.00	42.93	74.00	31.07	PK	Horizontal
2	2489.308	13.35	27.56	3.62	0.00	44.53	74.00	29.47	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-16

Tested By:

Zhong Nan

EUT:

True Wireless Earbuds with Active Noise Cancellation

Model Number:

EDF200182

Test Mode:

2DH5 2402MHz TX Mode

Power Supply:

DC 5V

Condition:

Temp:23.3°C;Humi:44.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24102916-1E\FCC ABOVE1G\31

Memo:

Sample Number:S24102916-007 Power Setting:6, R ear

Test Graph

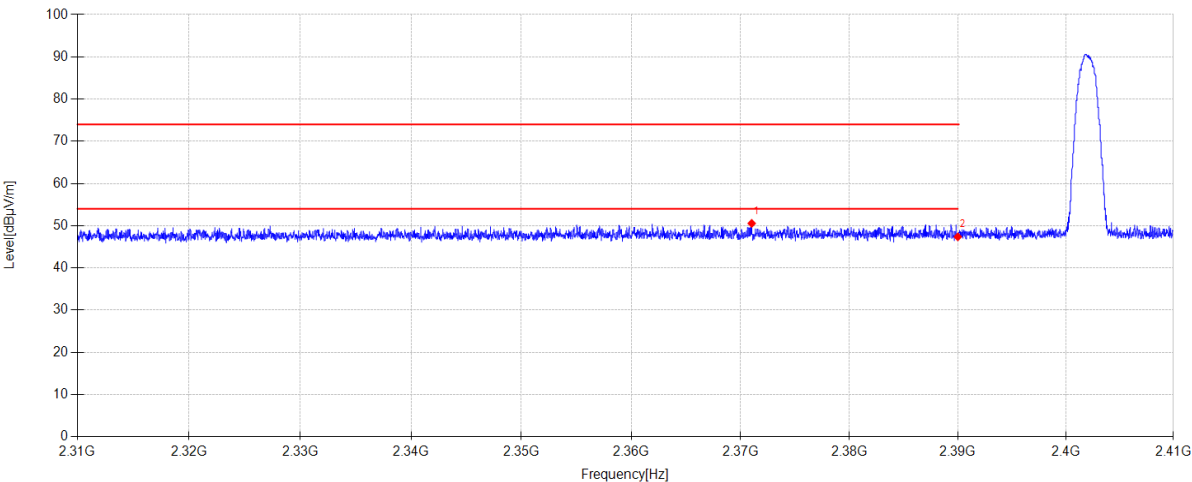

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2371.030	19.81	27.18	3.56	0.00	50.55	74.00	23.45	PK	Horizontal
2	2390.000	16.53	27.26	3.57	0.00	47.36	74.00	26.64	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

16. Power Line Conducted Emissions

16.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
EMI Test Receiver	R&S	ESCI	DDT-ZC01972	2025/03/31	1 Year
Two Line V-Network	R&S	ENV216	DDT-ZC00586	2025/07/08	1 Year
Pulse Limiter	R&S	KH43101	DDT-ZC00747	2025/04/22	1 Year
Copper shaft signal cable	H&S	RG214-5	DDT-ZC01817	2025/03/31	1 Year
Conducted Radiated Software	Audix	E3	DDT-ZC00562	/	/
Two Line V-Network	R&S	ENV216	DDT-ZC02058	2025/07/08	1 Year

16.2. Block diagram of test setup

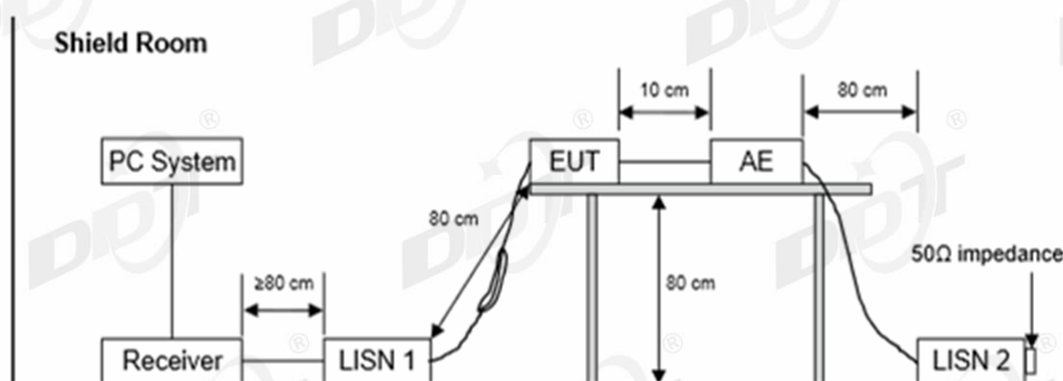

16.3. Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

16.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

16.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

16.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “----” means Average detection.


Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

16.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 5# Shield Room D:\2024 report data\Q24102916-2E\1225 CE.EM6
Test Date : 2024-12-25 Tested By : Nelson Peng
EUT : True Wireless Earbuds with Active Noise Model Number : EDF200182
Power Supply : AC 120V/60Hz Test Mode : External charging mode
Condition : Temp:23.9°C,Humi:55.5% LISN : 2023 ENV216 2#/LINE

Data: 2

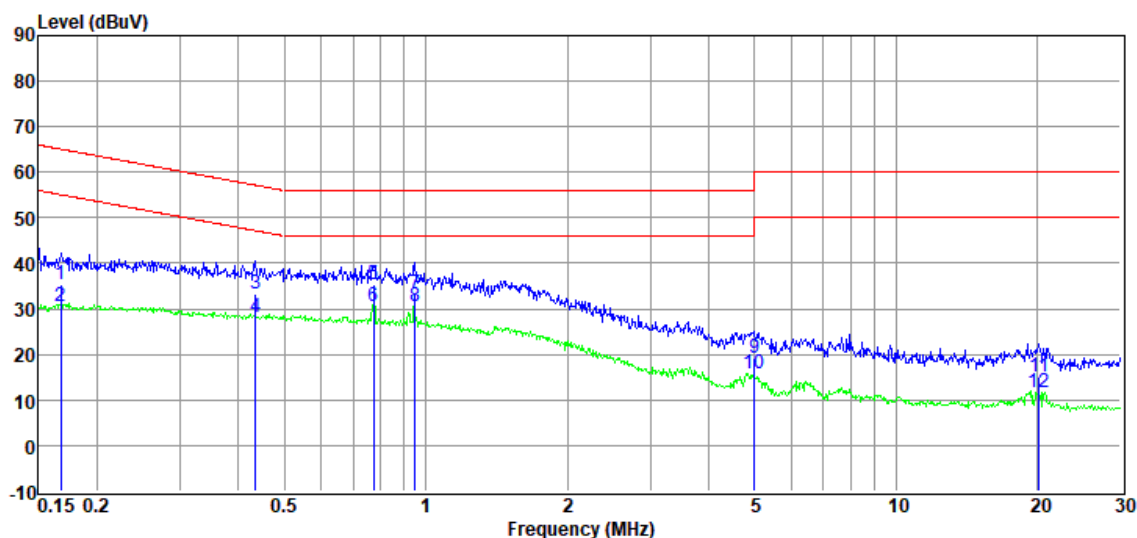

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	15.40	9.96	0.09	10.06	35.51	65.08	-29.57	QP	LINE
2	0.17	10.38	9.96	0.09	10.06	30.49	55.08	-24.59	Average	LINE
3	0.44	13.08	10.00	0.10	10.07	33.25	57.15	-23.90	QP	LINE
4	0.44	7.85	10.00	0.10	10.07	28.02	47.15	-19.13	Average	LINE
5	0.78	15.07	9.97	0.10	10.06	35.20	56.00	-20.80	QP	LINE
6	0.78	10.43	9.97	0.10	10.06	30.56	46.00	-15.44	Average	LINE
7	0.95	13.04	9.94	0.11	10.05	33.14	56.00	-22.86	QP	LINE
8	0.95	10.46	9.94	0.11	10.05	30.56	46.00	-15.44	Average	LINE
9	5.01	-0.84	9.89	0.19	10.06	19.30	60.00	-40.70	QP	LINE
10	5.01	-4.34	9.89	0.19	10.06	15.80	50.00	-34.20	Average	LINE
11	20.16	-5.38	9.88	0.36	10.07	14.93	60.00	-45.07	QP	LINE
12	20.16	-8.80	9.88	0.36	10.07	11.51	50.00	-38.49	Average	LINE

Note:

- Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
- If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
- Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 5# Shield Room

D:\2024 report data\Q24102916-2E\1225 CE.EM6

Test Date : 2024-12-25

Tested By : Nelson Peng

EUT : True Wireless Earbuds with Active Noise

Model Number : EDF200182

Power Supply : AC 120V/60Hz


Test Mode : External charging mode

Condition : Temp:23.9°C,Humi:55.5%

LISN : 2023 ENV216 2##/NEUTRAL

Memo :

Data: 4

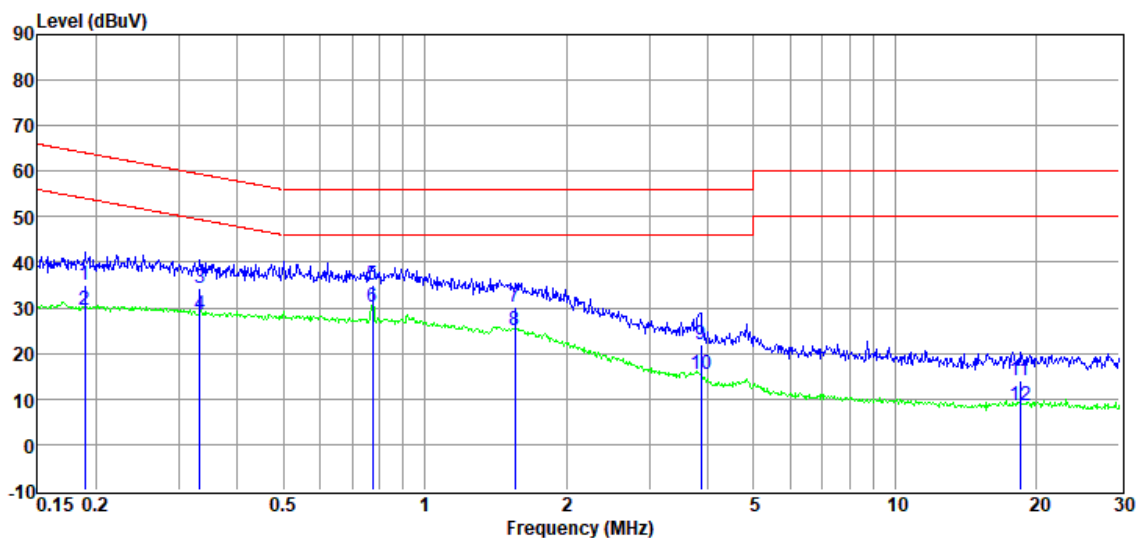

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.19	15.00	9.94	0.09	10.06	35.09	64.06	-28.97	QP	NEUTRAL
2	0.19	9.56	9.94	0.09	10.06	29.65	54.06	-24.41	Average	NEUTRAL
3	0.33	14.06	10.04	0.09	10.07	34.26	59.40	-25.14	QP	NEUTRAL
4	0.33	8.44	10.04	0.09	10.07	28.64	49.40	-20.76	Average	NEUTRAL
5	0.78	14.80	9.97	0.10	10.06	34.93	56.00	-21.07	QP	NEUTRAL
6	0.78	10.17	9.97	0.10	10.06	30.30	46.00	-15.70	Average	NEUTRAL
7	1.55	9.91	9.96	0.13	10.06	30.06	56.00	-25.94	QP	NEUTRAL
8	1.55	4.76	9.96	0.13	10.06	24.91	46.00	-21.09	Average	NEUTRAL
9	3.86	1.71	10.06	0.18	10.06	22.01	56.00	-33.99	QP	NEUTRAL
10	3.86	-5.00	10.06	0.18	10.06	15.30	46.00	-30.70	Average	NEUTRAL
11	18.43	-6.50	10.01	0.34	10.07	13.92	60.00	-46.08	QP	NEUTRAL
12	18.43	-11.74	10.01	0.34	10.07	8.68	50.00	-41.32	Average	NEUTRAL

Note:

- Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
- If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
- Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

18. Photos of the EUT

Please refer to appendix I

-----End Report-----