


2.4GHz 3216 Chip Antenna: ANT3216R24003KLA**Application:**

WLAN, 802.11b/g, Bluetooth, etc...

Features

SMD, high reliability, ultra compact, Omni-directional...

**Part number**


ANT 3216 R 2400 3K LA
 (1) (2) (3) (4) (5)

(1)Size Code	3.2x1.6mm
(2) Packing	Tape and reel
(3) Frequency	2.4GHz
(4) Packing Number	3K
(5)Code	LA

Electrical Specification

Working Frequency Range	2402 ~2480 MHz
Peak Gain	0.95dBi (Typ.)
Impedance	50 Ohm
VSWR	2.5(Max)
Polarization	Linear
Azimuth Beamwidth	Omni-directional
Operation Temperature(°C)	-40~85°C


The specification is defined on HEK EVB.

Dimension and Terminal Configuration

Dimension (mm)	
L	3.20+/-0.15
W	1.60+/-0.15
T	0.60+/-0.10
D1	0.50+/-0.15
D2	1.30+/-0.15


No.	Terminal Name
1	Feeding
2	Ground

btm




Evaluation Board Reference

PCB Dimension

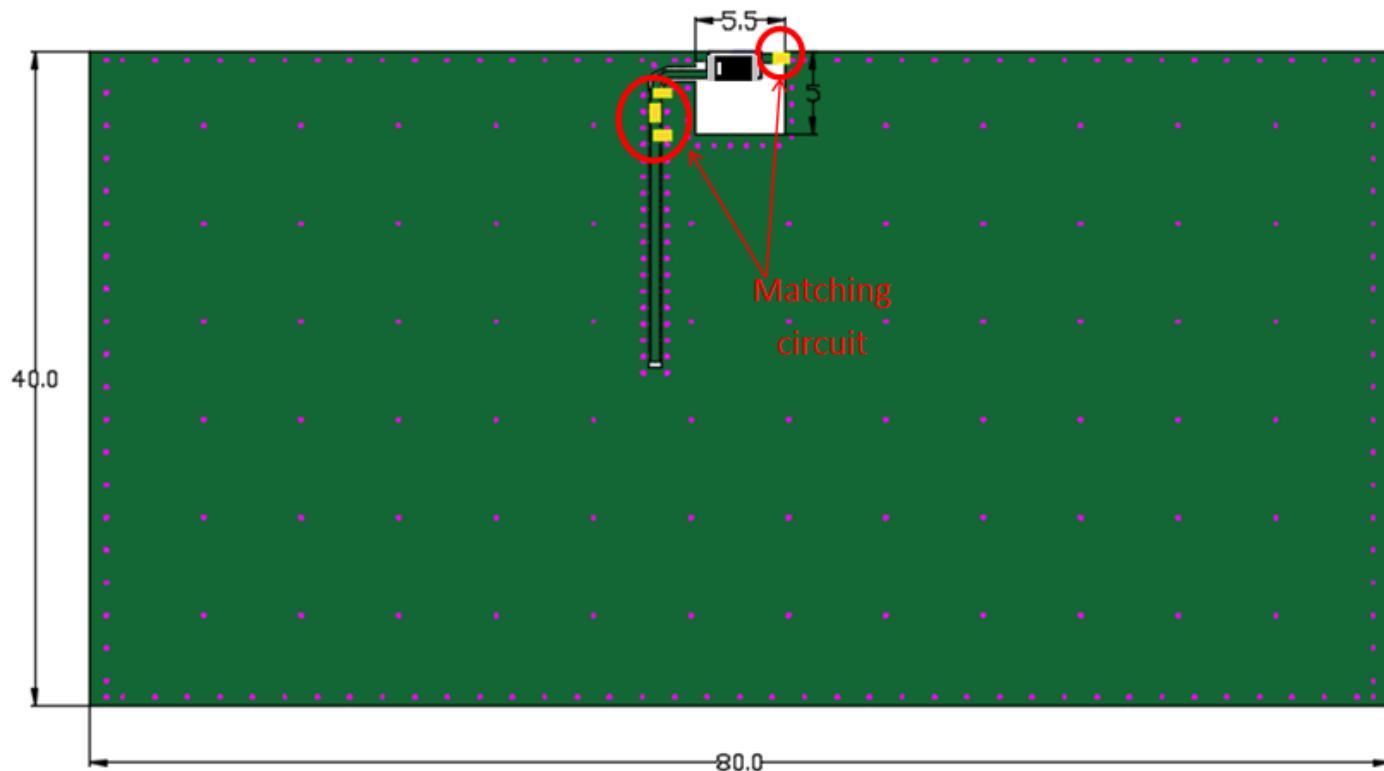




Antenna Layout Reference

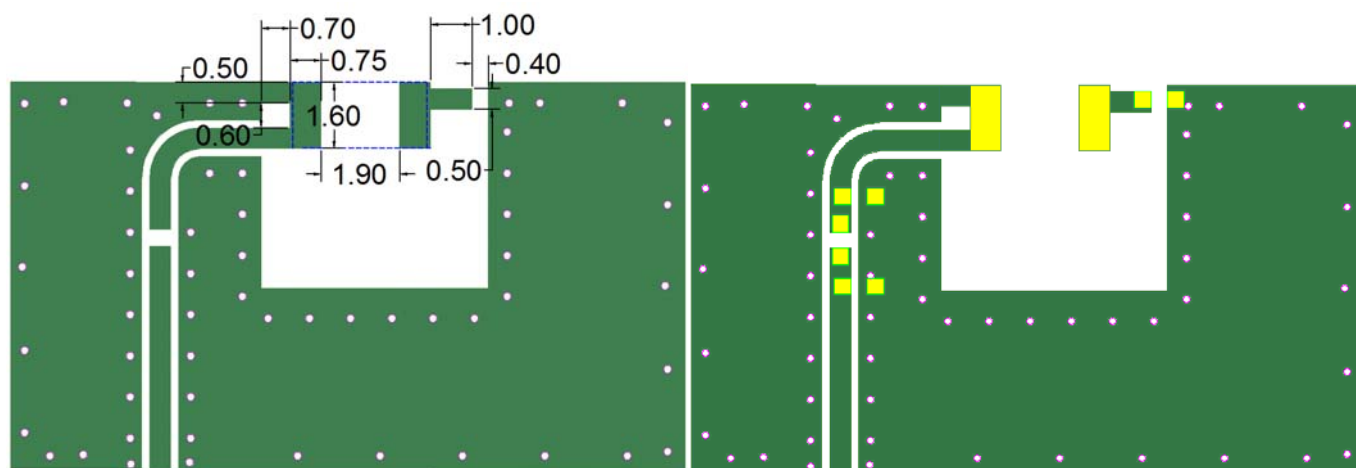

Unit : mm


Electrical Characteristics

VSWR

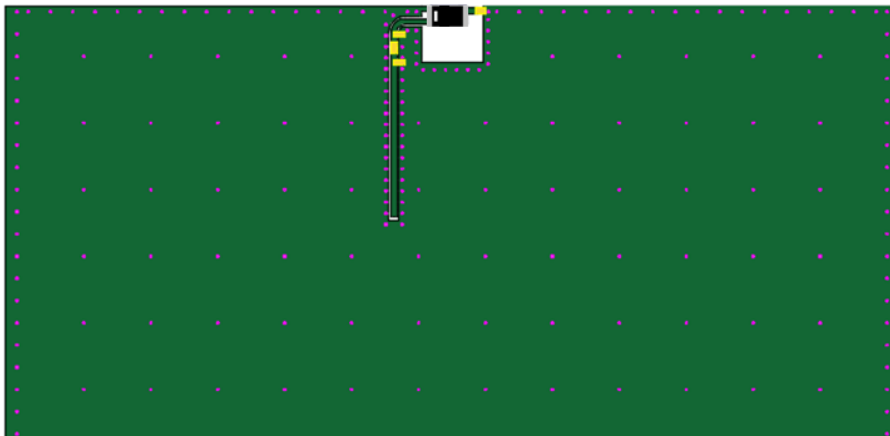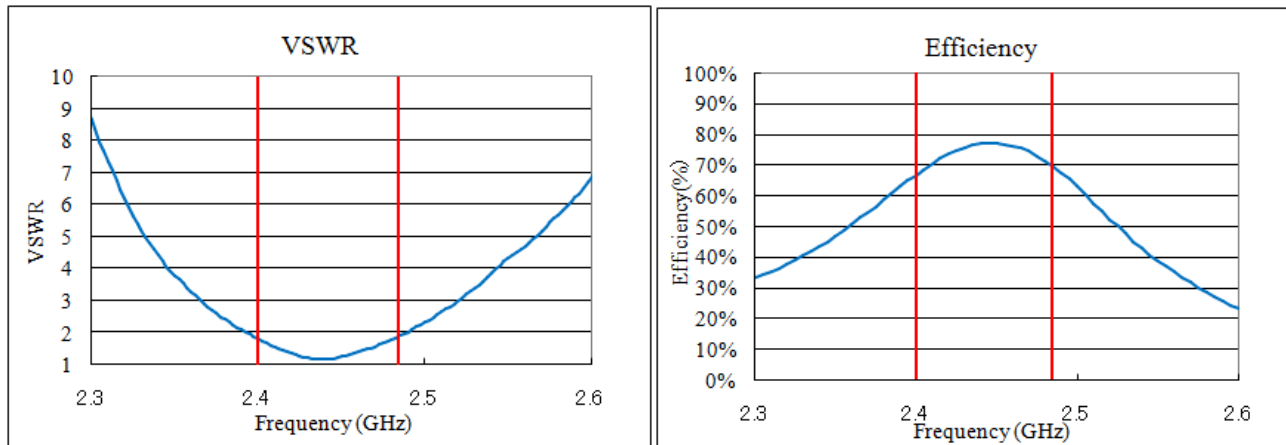


unit:dBi


2441.000MHz H

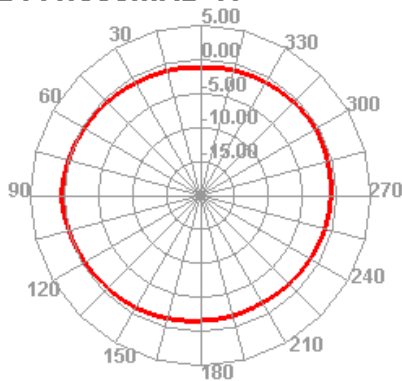

2441.000MHz E1

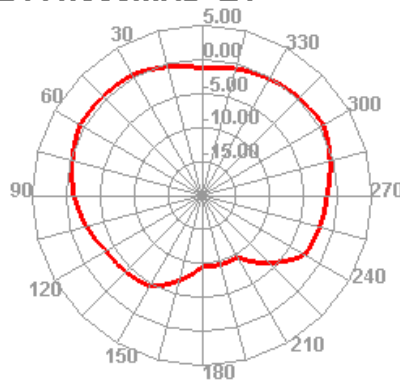


2441.000MHz E2

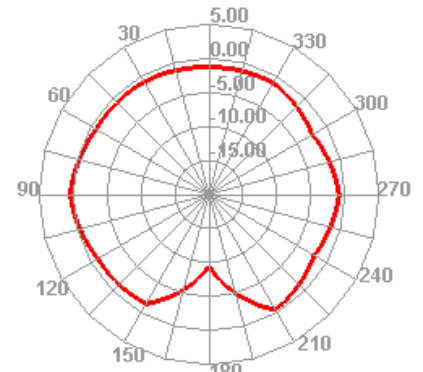

Taping Specifications


Reel and Taping Specification

Reel Specification

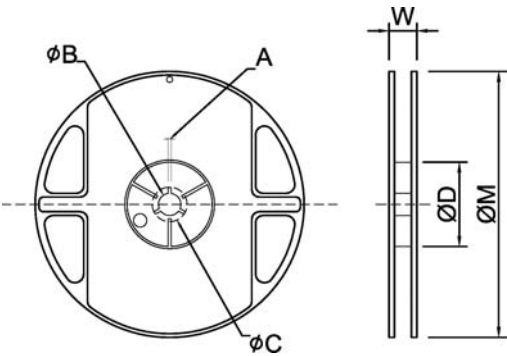

TYPE	SIZE		A	ψB	ψC	ψD	W	ψM
3216	7"	3K/Reel	2.0±0.5	13.5±1.0	21±1.0	60±1.0	11.5±2.0	178±2.0

Taping Specification

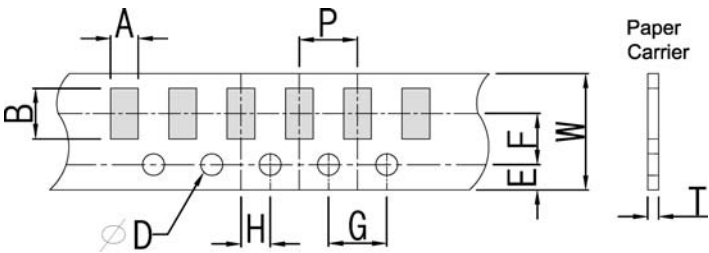


Packaging	Type	A	B	W	E	F	G	H	T	ψD	P
Paper Type	3216	1.90±0.20	3.50±0.20	8.0±0.20	1.75±0.10	3.5±0.05	4.0±0.10	2.0±0.05	0.75±0.10	1.50 +0.10 -0	4.0±0.1

2.4GHz 3216 Chip Antenna: ANT3216R24003KLA

Recommended Reflow Profile

Pb free solder

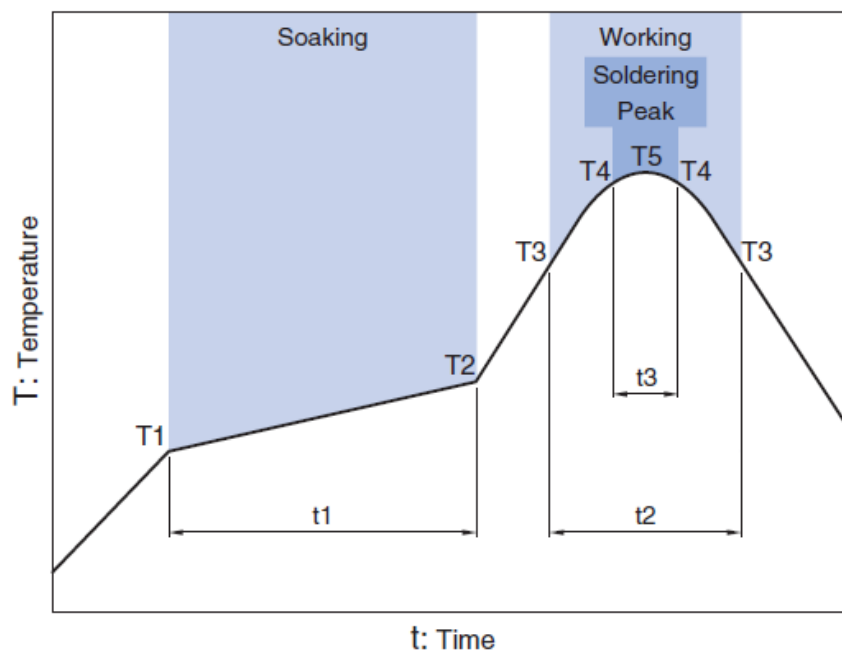

Soaking			Working		Soldering		Peak
Temp.		Time	Temp.	Time	Temp.	Time	Temp.
T1	T2	t1	T3	t2	T4	t3	T5
150°C	180°C	60 to 120sec	230°C	more than 30sec	247 to 253°C	within 10sec	260°C Max.

Sept. 2022 Ver.H01

Manufacturer : Dongguan Hekang Electronics Co., Ltd

Address : Floor 3, Gate 1, Building 7, Times Zhihui Industrial Development Center,
Luwu Sanlian Middle Road, changping town City, Dongguan City