



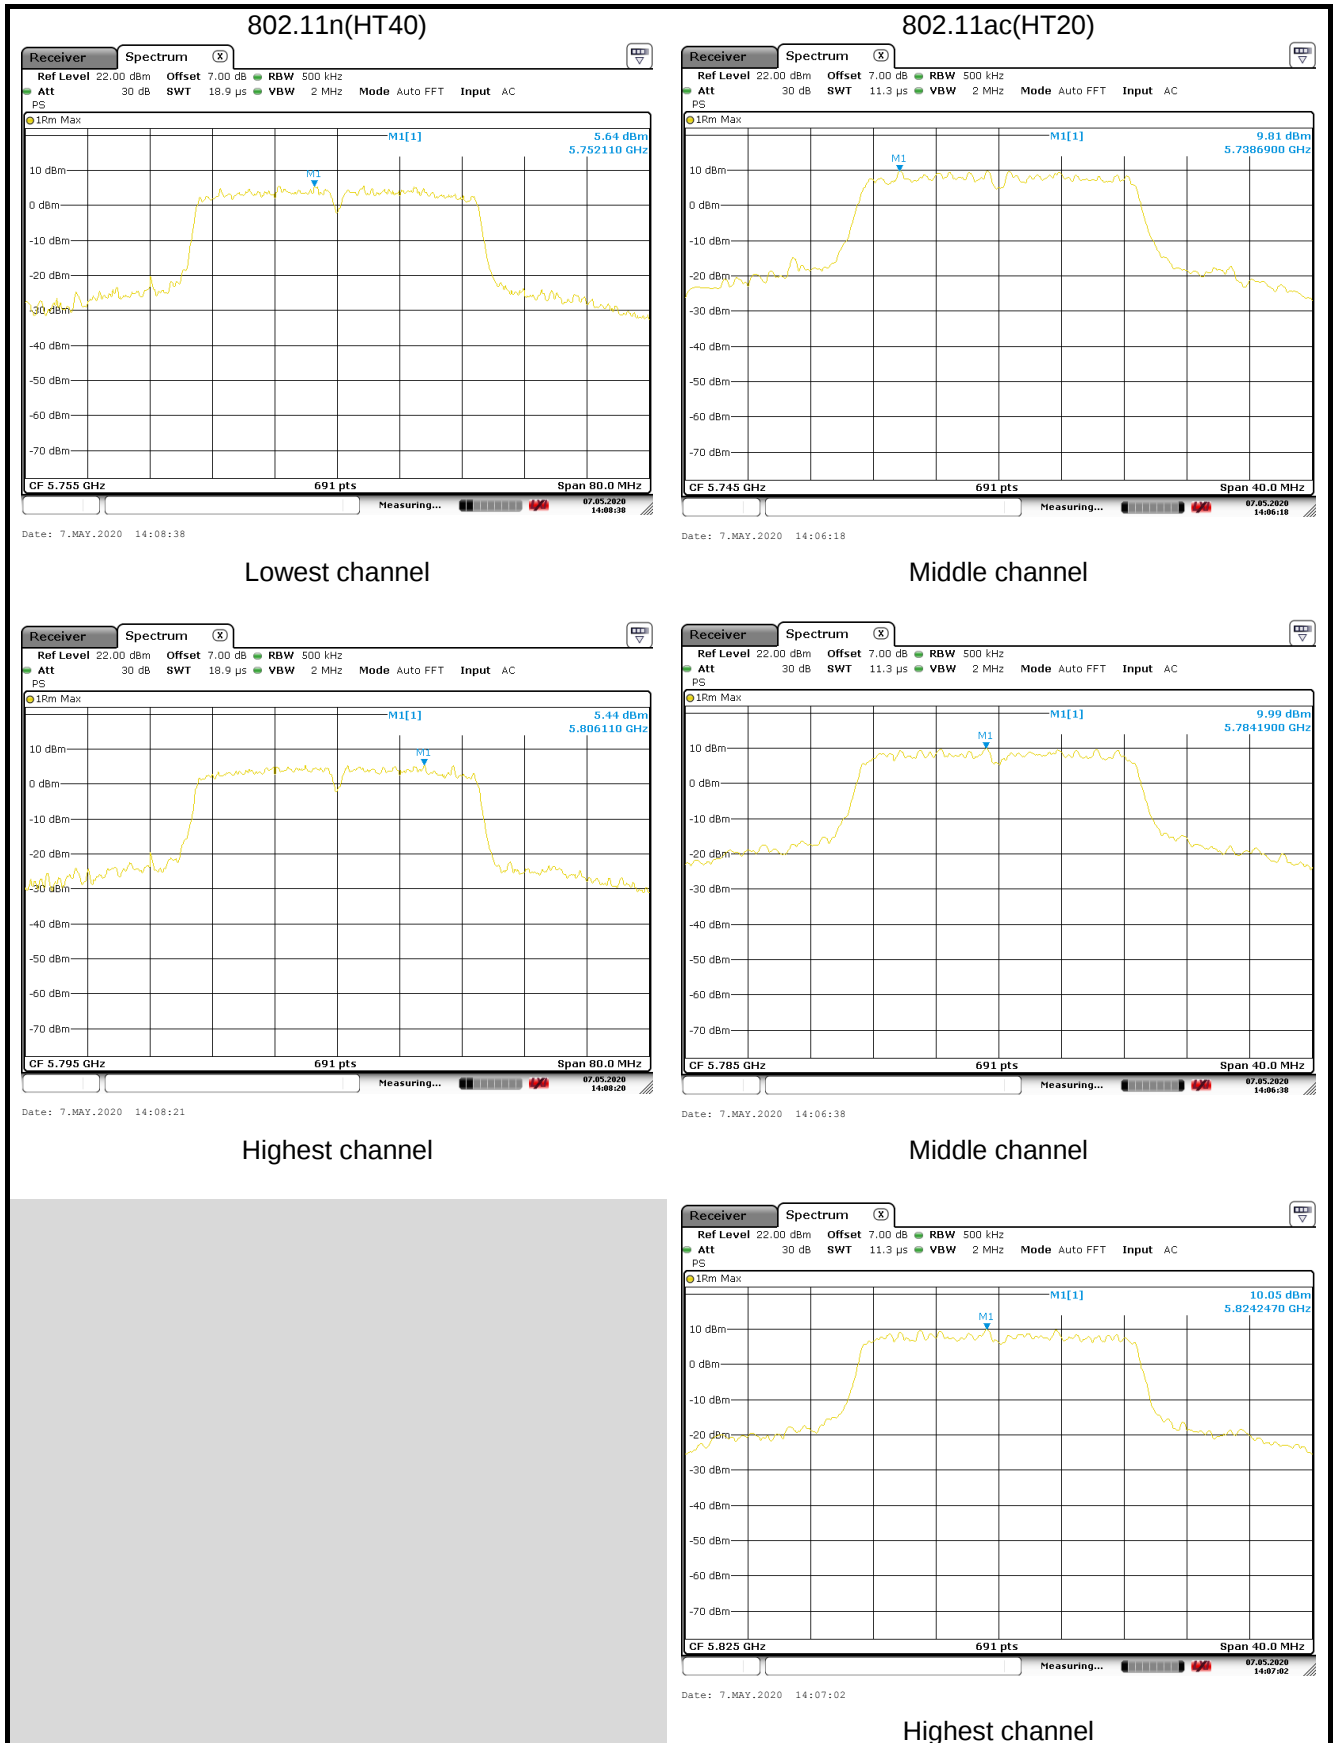


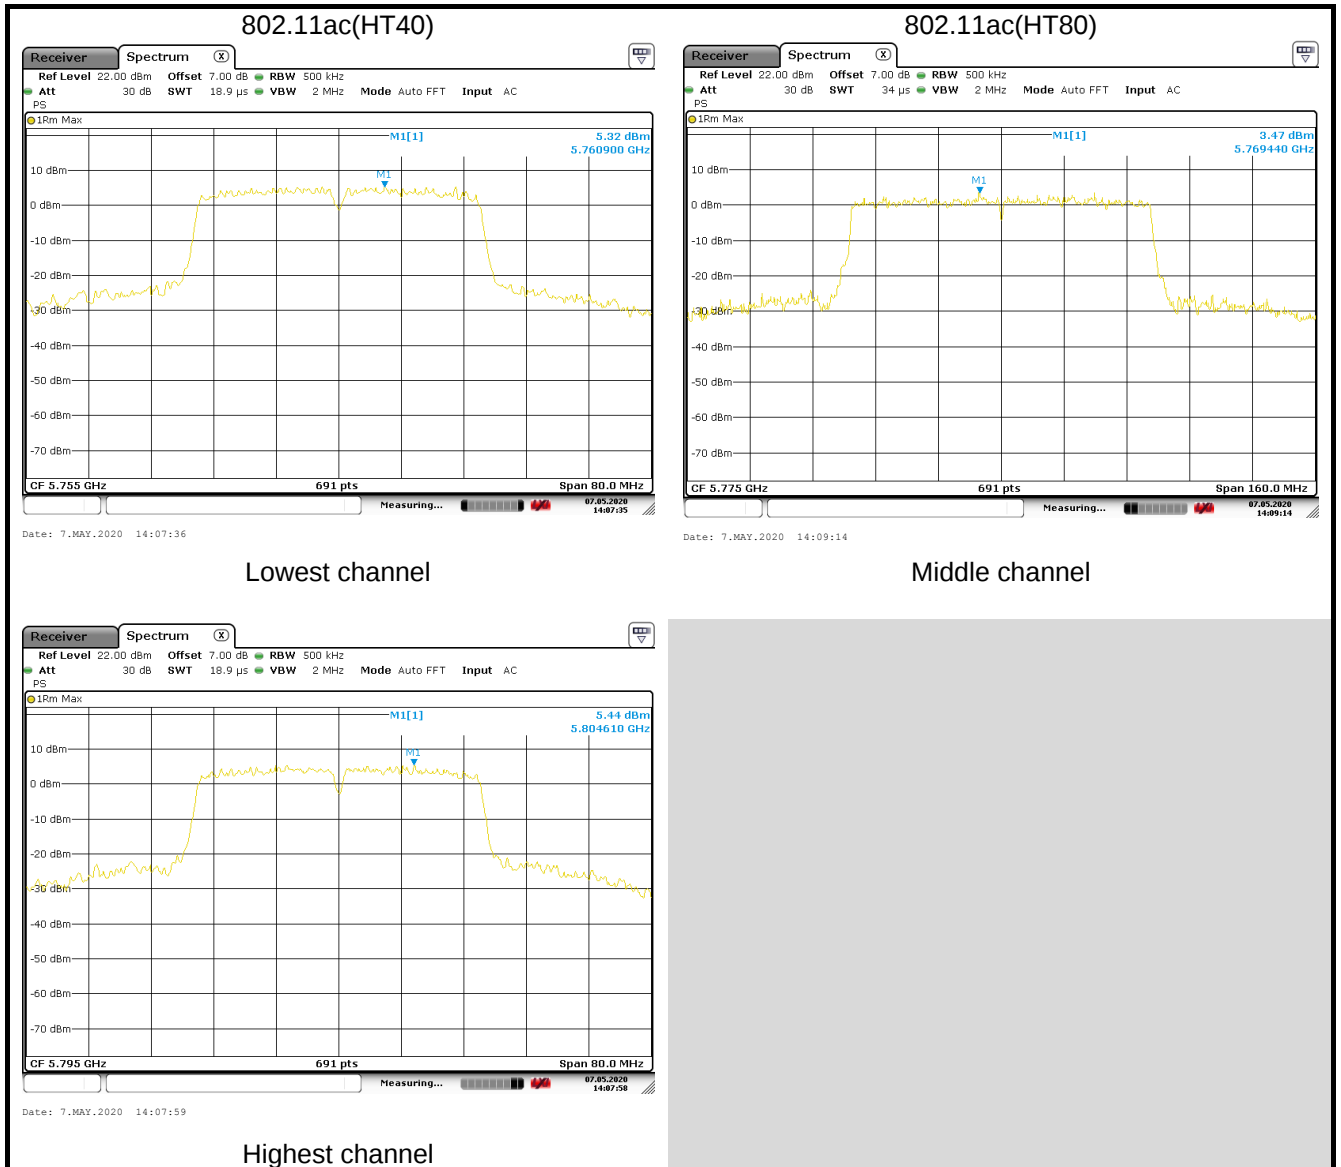

ANT1


Band 1

802.11a

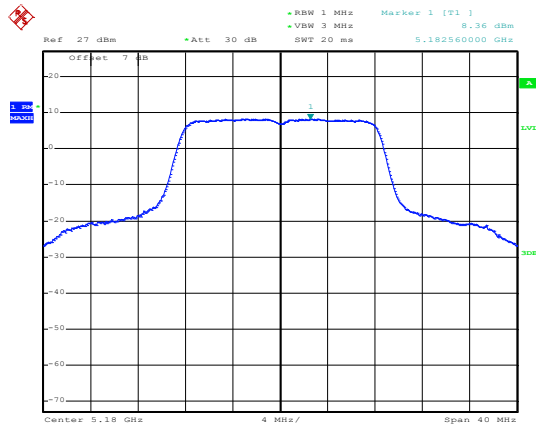


Date: 6.MAY.2020 10:25:36

802.11n(HT20)

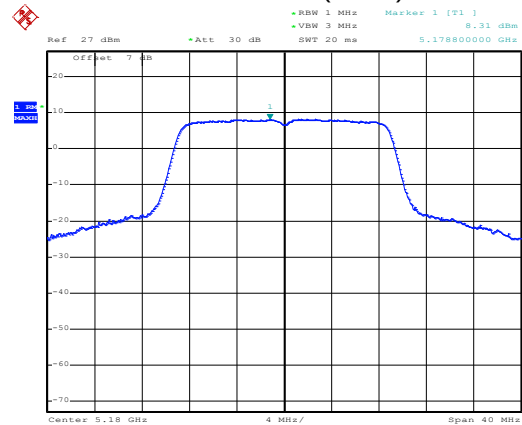


Date: 6.MAY.2020 10:24:06

Lowest channel

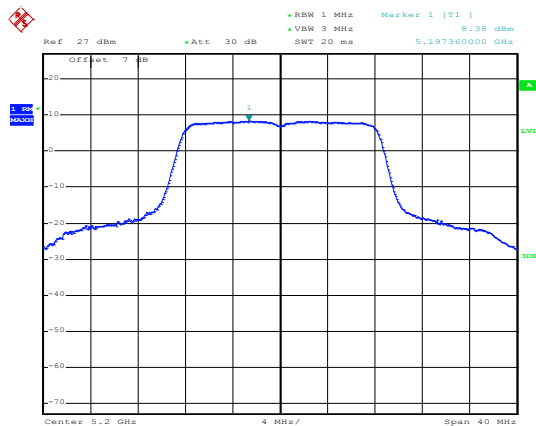


Date: 6.MAY.2020 10:25:48

Middle channel

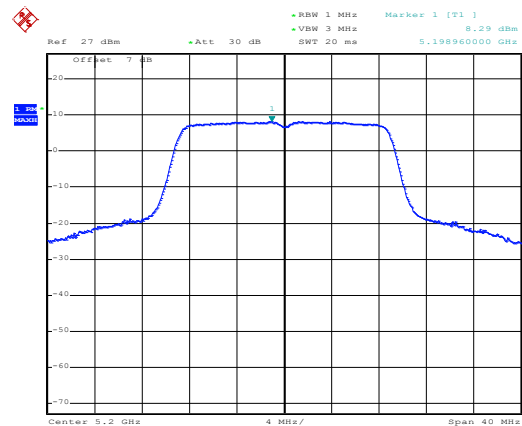


Date: 6.MAY.2020 10:24:19

Middle channel

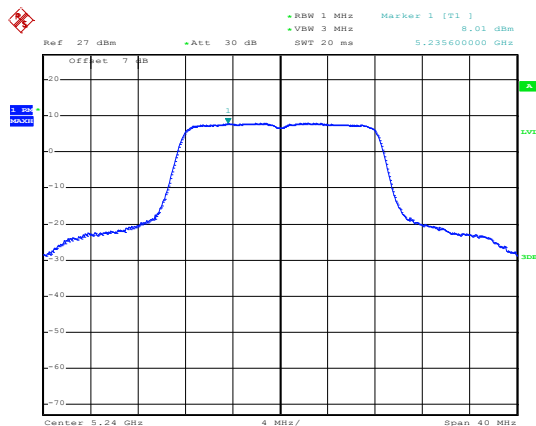

Date: 6.MAY.2020 10:26:00


Middle channel

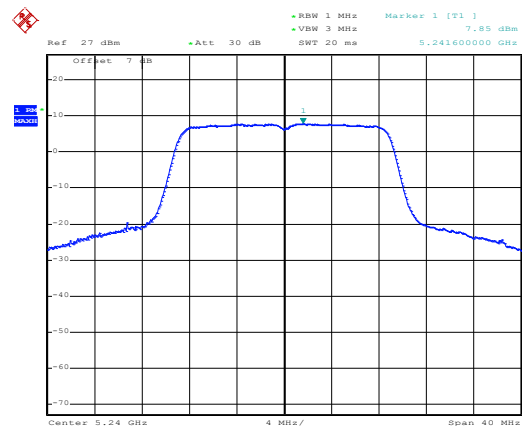

Date: 6.MAY.2020 10:24:32


Highest channel

Highest channel

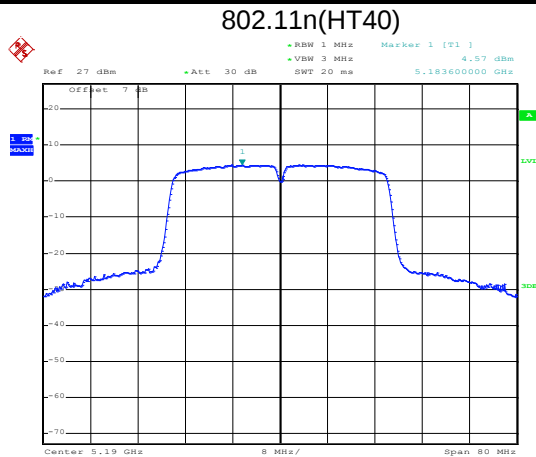


Date: 6.MAY.2020 10:38:55

Lowest channel

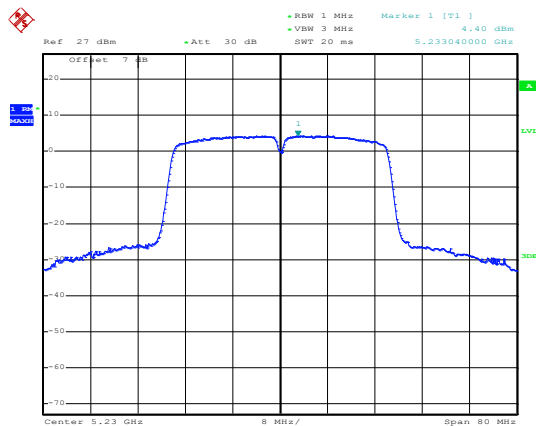


Date: 6.MAY.2020 10:38:42

Highest channel

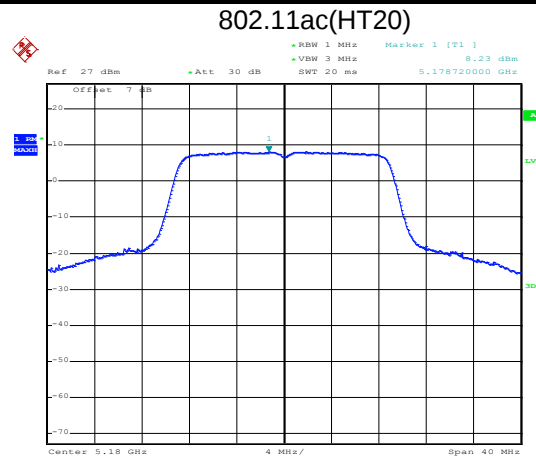


Date: 6.MAY.2020 10:25:23

Middle channel

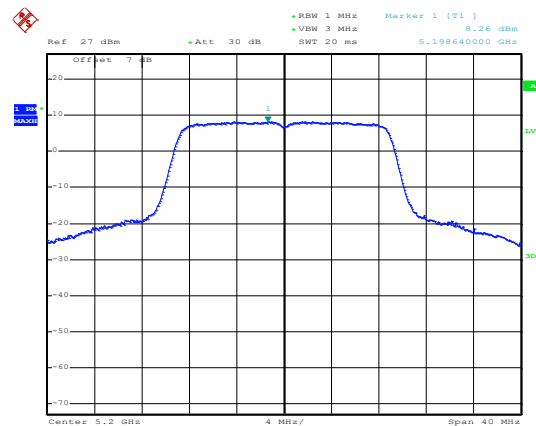

Date: 6.MAY.2020 10:25:12


Middle channel

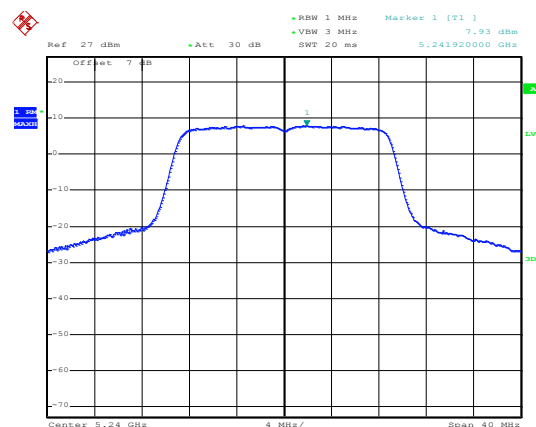

Date: 6.MAY.2020 10:24:55


Highest channel

802.11ac(HT40)

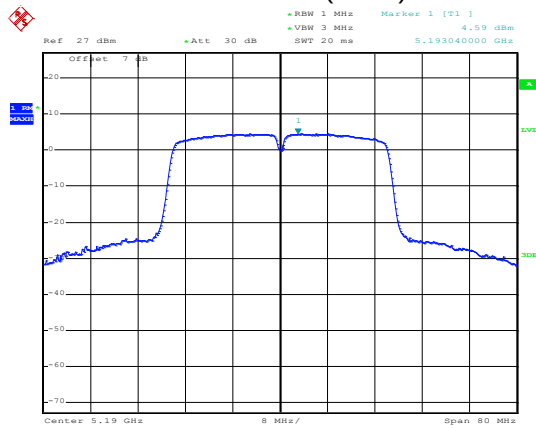

Date: 6.MAY.2020 10:38:14


Lowest channel

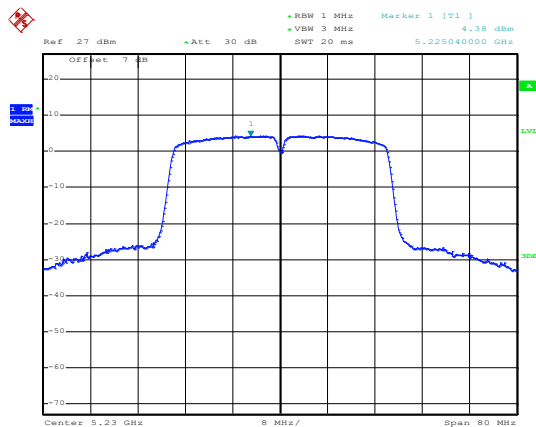

Date: 6.MAY.2020 10:38:25


Highest channel

802.11ac(HT80)

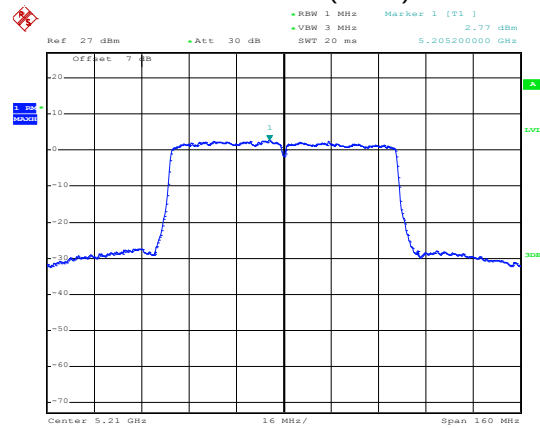

Date: 6.MAY.2020 10:37:51


Middle channel



Band 4


802.11a

802.11n(HT20)

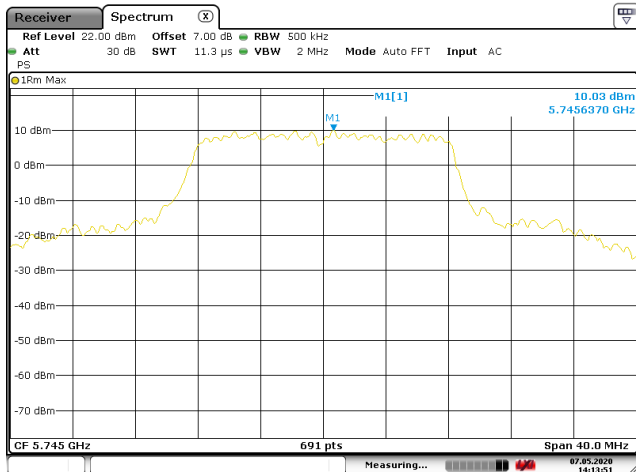


Date: 7.MAY.2020 14:13:51

Lowest channel

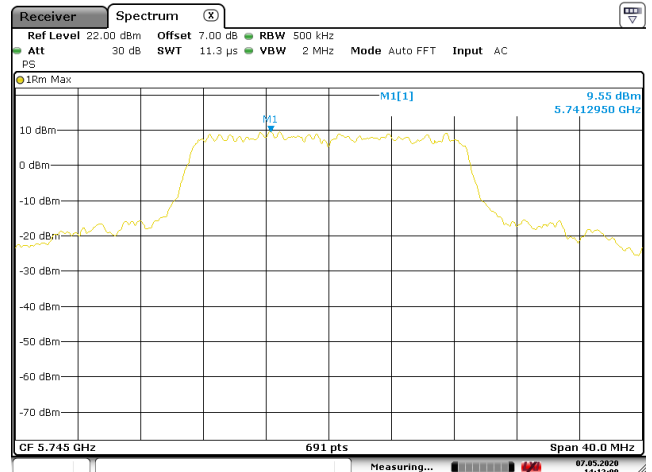


Date: 7.MAY.2020 14:12:09

Middle channel

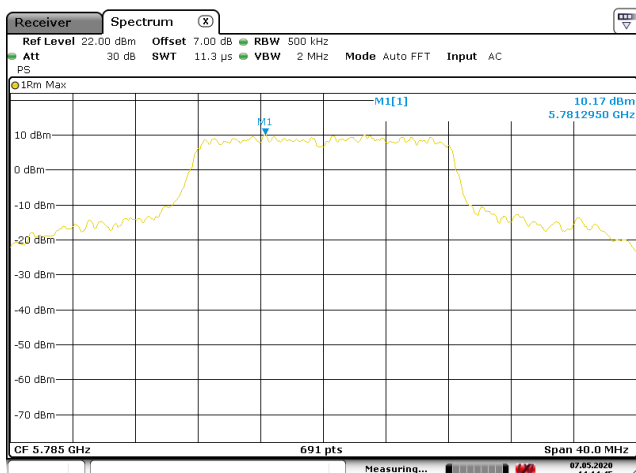


Date: 7.MAY.2020 14:14:46

Middle channel

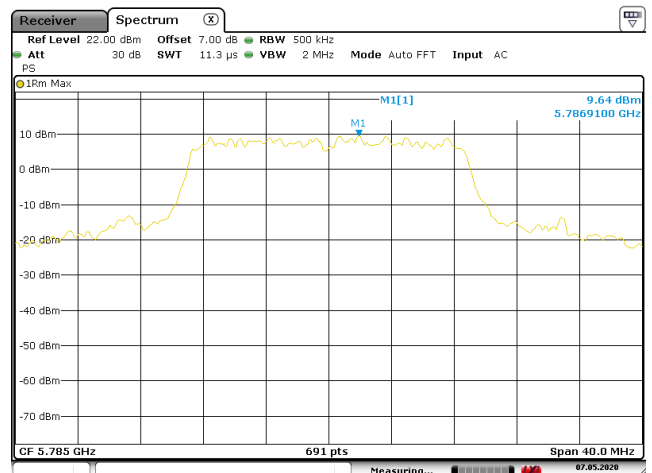


Date: 7.MAY.2020 14:12:26

Middle channel

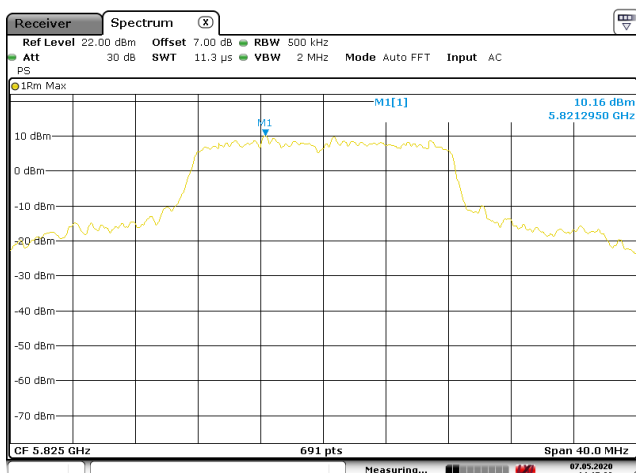


Date: 7.MAY.2020 14:15:04


Highest channel

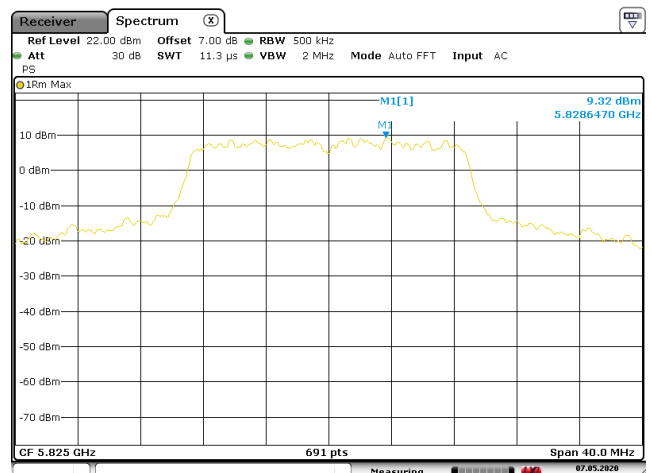


Date: 7.MAY.2020 14:12:43

Highest channel

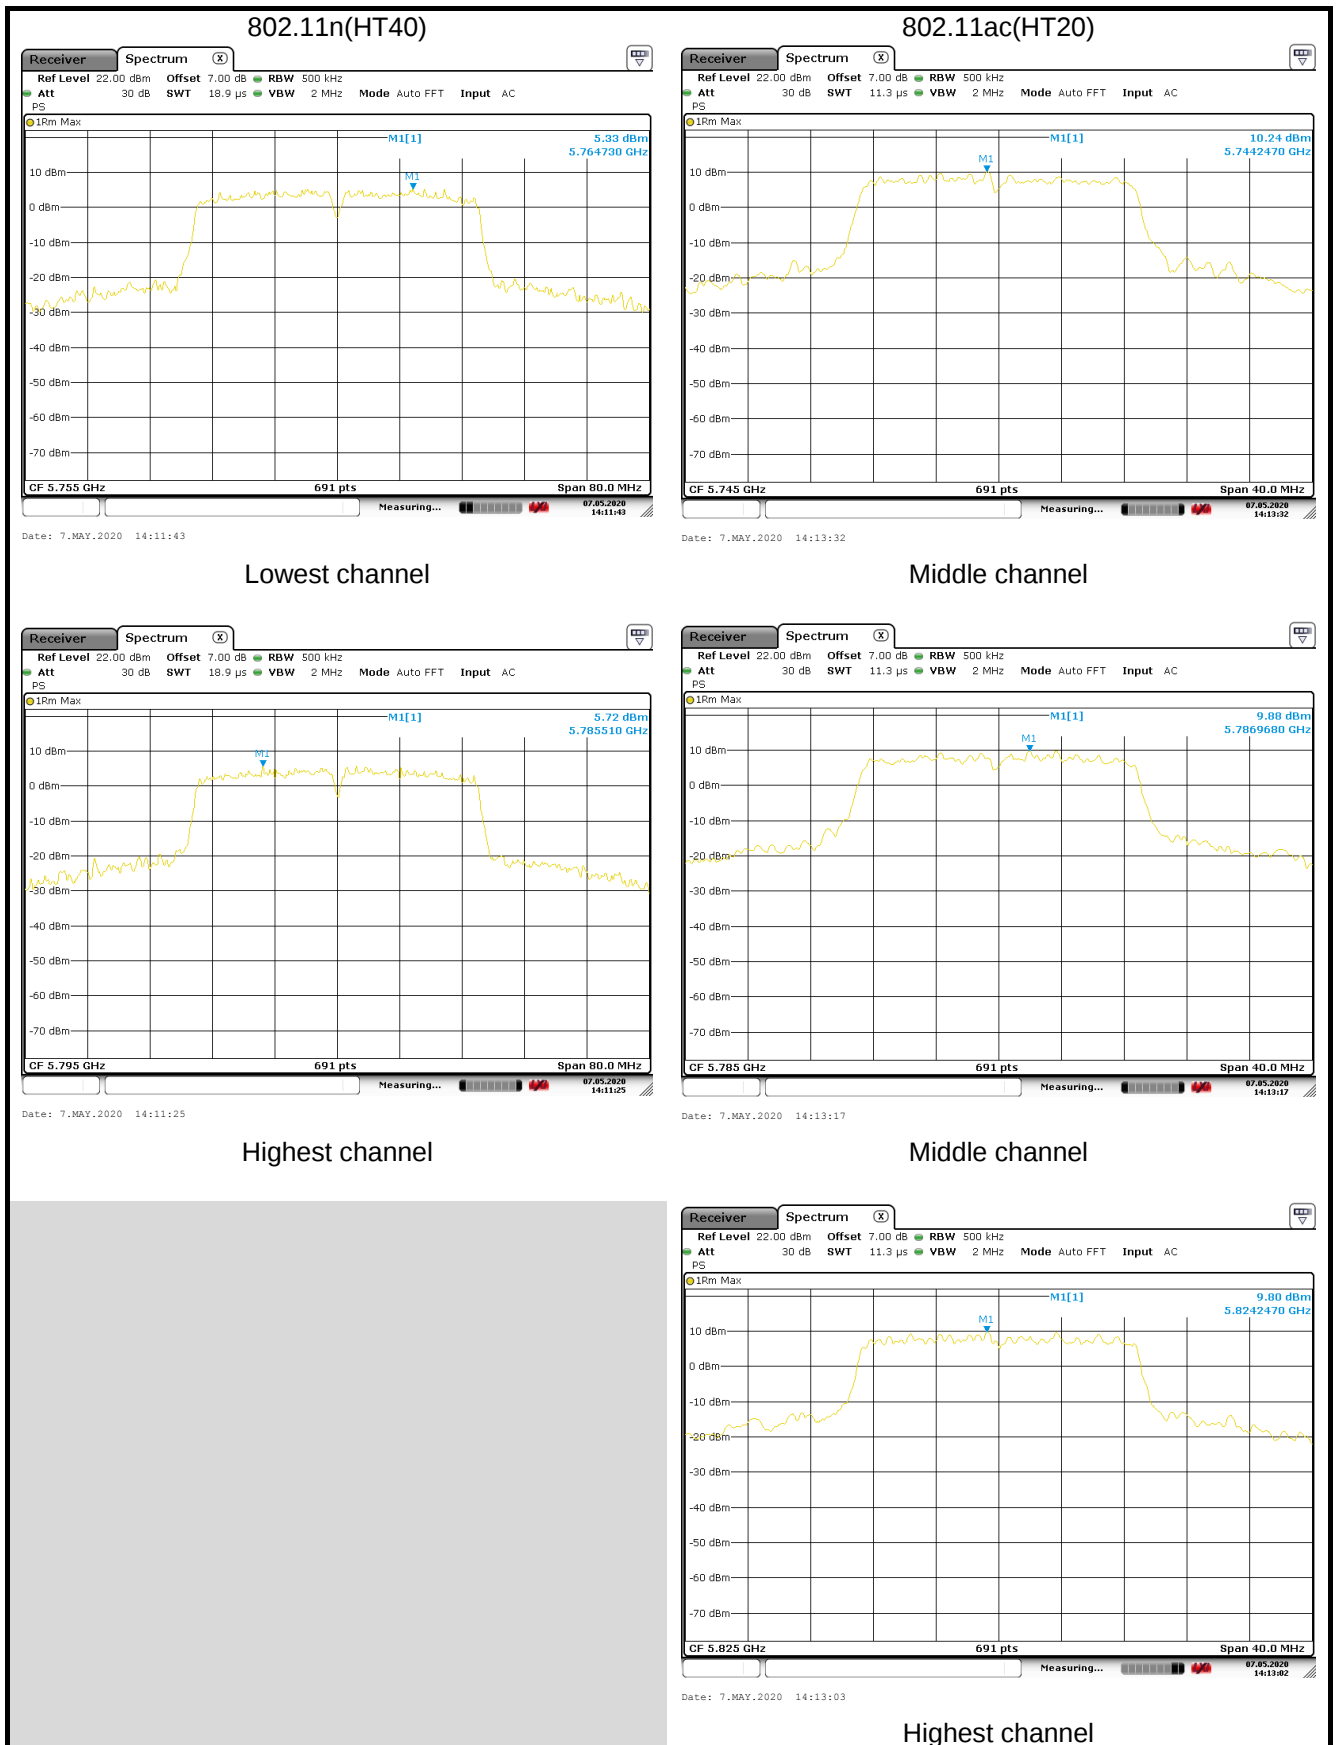

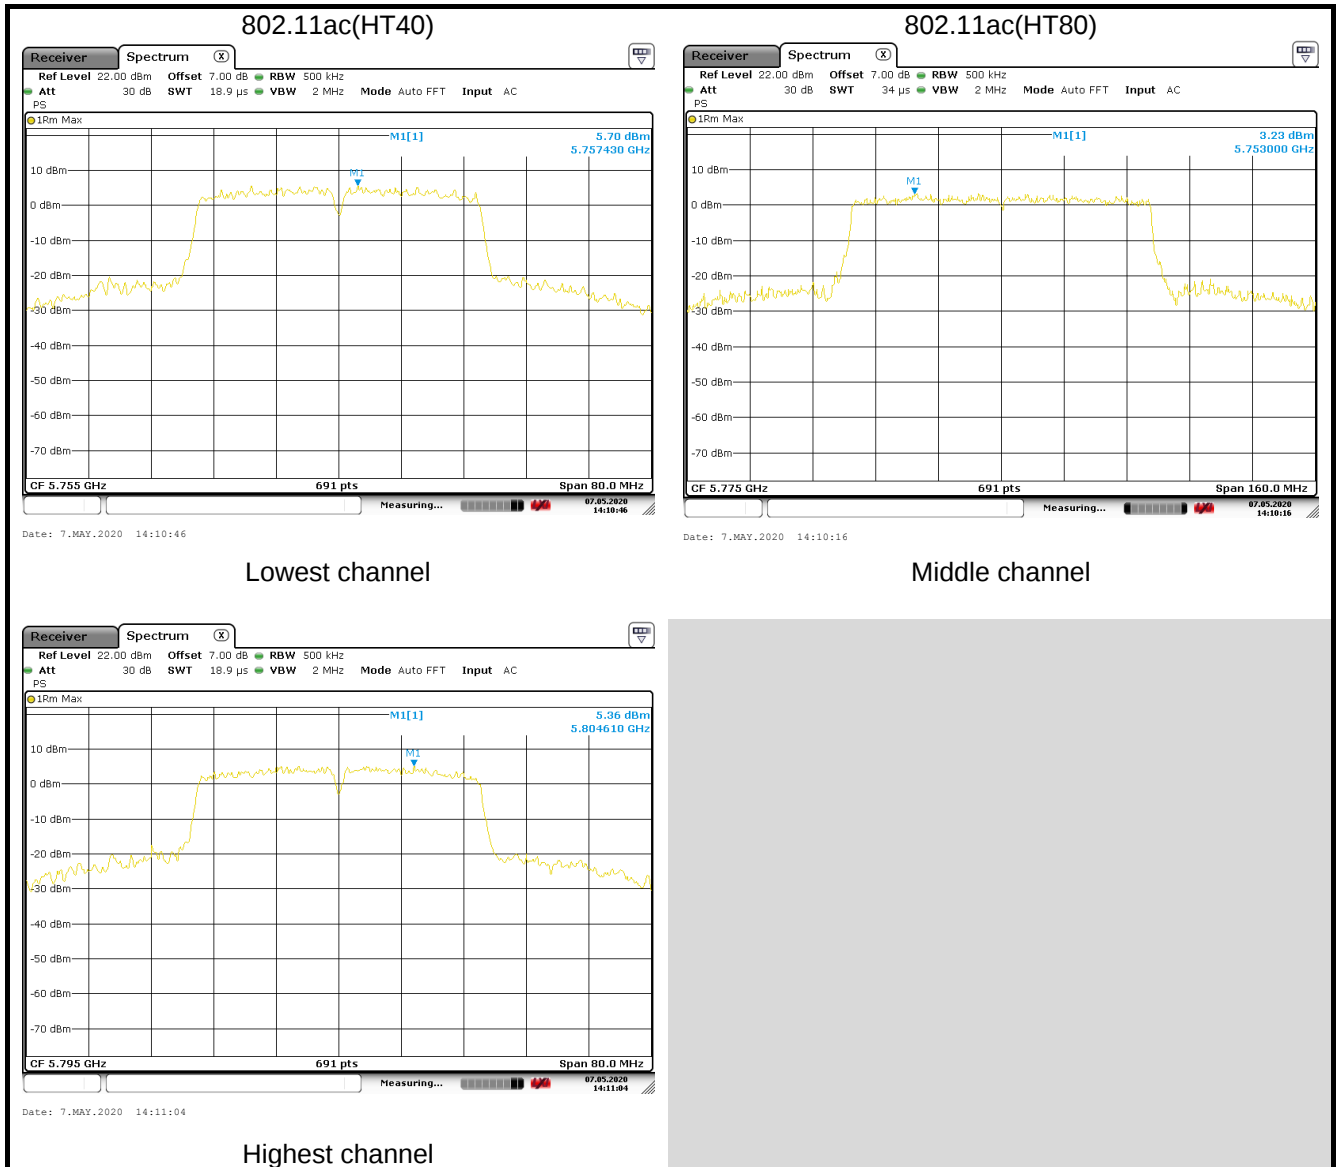

6.6 Band Edge

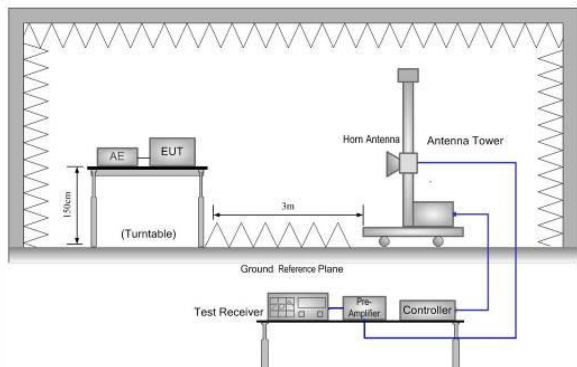Test Requirement:	FCC Part 15 E Section 15.407 (b)			
Receiver setup:	Detector	RBW	VBW	Remark
	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	RMS	1MHz	3MHz	Average Value
Limit:	Band	Limit (dBuV/m @3m)		Remark
	Band 1/2/3	68.20		Peak Value
		54.00		Average Value
		Band 4 limit: For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. Remark: 1. Band 1/2/3 limit: $E[dB\mu V/m] = EIRP[dBm] + 95.2 = 68.2 \text{ dBuV/m}$, for $EIRP[dBm] = -27 \text{ dBm}$. 2. Band 4 limit: $E[dB\mu V/m] = EIRP[dBm] + 95.2 = 68.2 \text{ dBuV/m}$, for $EIRP[dBm] = -27 \text{ dBm}$. $E[dB\mu V/m] = EIRP[dBm] + 95.2 = 105.2 \text{ dBuV/m}$, for $EIRP[dBm] = 10 \text{ dBm}$. $E[dB\mu V/m] = EIRP[dBm] + 95.2 = 110.8 \text{ dBuV/m}$, for $EIRP[dBm] = 15.6 \text{ dBm}$. $E[dB\mu V/m] = EIRP[dBm] + 95.2 = 122.2 \text{ dBuV/m}$, for $EIRP[dBm] = 27 \text{ dBm}$.		
	Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.		
Test setup:				
Test Instruments:	Refer to section 5.10 for details			
Test mode:	Refer to section 5.3 for details			
Test results:	Passed			

Measurement Data (worst case):

Ceramic Antenna

Band 1:

Band 1 – 802.11a(ANT 0)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	50.52	31.77	7.05	2.54	41.93	49.95	68.20	-18.25	Horizontal
5150.00	51.39	31.77	7.05	2.54	41.93	50.82	68.20	-17.38	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	46.62	31.77	7.05	2.54	41.93	46.05	54.00	-7.95	Horizontal
5150.00	45.81	31.77	7.05	2.54	41.93	45.24	54.00	-8.76	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	51.25	32.24	7.11	2.61	41.89	51.32	68.20	-16.88	Horizontal
5350.00	53.62	32.24	7.11	2.61	41.89	53.69	68.20	-14.51	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	47.52	32.24	7.11	2.61	41.89	47.59	54.00	-6.41	Horizontal
5350.00	44.62	32.24	7.11	2.61	41.89	44.69	54.00	-9.31	Vertical
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11a(ANT 1)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	50.26	31.77	7.05	2.54	41.93	49.69	68.20	-18.51	Horizontal
5150.00	49.62	31.77	7.05	2.54	41.93	49.05	68.20	-19.15	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	47.52	31.77	7.05	2.54	41.93	46.95	54.00	-7.05	Horizontal
5150.00	46.37	31.77	7.05	2.54	41.93	45.80	54.00	-8.20	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	50.52	32.24	7.11	2.61	41.89	50.59	68.20	-17.61	Horizontal
5350.00	52.17	32.24	7.11	2.61	41.89	52.24	68.20	-15.96	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.62	32.24	7.11	2.61	41.89	46.69	54.00	-7.31	Horizontal
5350.00	48.76	32.24	7.11	2.61	41.89	48.83	54.00	-5.17	Vertical
Remark: 3. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 4. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	51.25	31.77	7.05	2.54	41.93	50.68	68.20	-17.52	Horizontal
5150.00	50.39	31.77	7.05	2.54	41.93	49.82	68.20	-18.38	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	47.52	31.77	7.05	2.54	41.93	46.95	54.00	-7.05	Horizontal
5150.00	46.37	31.77	7.05	2.54	41.93	45.80	54.00	-8.20	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	52.25	32.24	7.11	2.61	41.89	52.32	68.20	-15.88	Horizontal
5350.00	53.11	32.24	7.11	2.61	41.89	53.18	68.20	-15.02	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.62	32.24	7.11	2.61	41.89	46.69	54.00	-7.31	Horizontal
5350.00	45.76	32.24	7.11	2.61	41.89	45.83	54.00	-8.17	Vertical
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	51.32	31.77	7.05	2.54	41.93	50.75	68.20	-17.45	Horizontal
5150.00	50.79	31.77	7.05	2.54	41.93	50.22	68.20	-17.98	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	46.62	31.77	7.05	2.54	41.93	46.05	54.00	-7.95	Horizontal
5150.00	47.18	31.77	7.05	2.54	41.93	46.61	54.00	-7.39	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	52.25	32.02	7.09	2.54	41.93	51.97	68.20	-16.23	Horizontal
5350.00	53.33	32.02	7.09	2.54	41.93	53.05	68.20	-15.15	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	47.52	32.02	7.09	2.54	41.93	47.24	54.00	-6.76	Horizontal
5350.00	46.67	32.02	7.09	2.54	41.93	46.39	54.00	-7.61	Vertical
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	51.25	31.77	7.05	2.54	41.93	50.68	68.20	-17.52	Horizontal
5150.00	50.33	31.77	7.05	2.54	41.93	49.76	68.20	-18.44	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	46.62	31.77	7.05	2.54	41.93	46.05	54.00	-7.95	Horizontal
5150.00	47.18	31.77	7.05	2.54	41.93	46.61	54.00	-7.39	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	50.25	32.24	7.11	2.61	41.89	50.32	68.20	-17.88	Horizontal
5350.00	51.74	32.24	7.11	2.61	41.89	51.81	68.20	-16.39	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	47.52	32.24	7.11	2.61	41.89	47.59	54.00	-6.41	Horizontal
5350.00	46.91	32.24	7.11	2.61	41.89	46.98	54.00	-7.02	Vertical
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	50.36	31.77	7.05	2.54	41.93	49.79	68.20	-18.41	Horizontal
5150.00	48.47	31.77	7.05	2.54	41.93	47.90	68.20	-20.30	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	46.62	31.77	7.05	2.54	41.93	46.05	54.00	-7.95	Horizontal
5150.00	45.19	31.77	7.05	2.54	41.93	44.62	54.00	-9.38	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	50.22	32.24	7.11	2.61	41.89	50.29	68.20	-17.91	Horizontal
5350.00	51.46	32.24	7.11	2.61	41.89	51.53	68.20	-16.67	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.35	32.24	7.11	2.61	41.89	46.42	54.00	-7.58	Horizontal
5350.00	45.17	32.24	7.11	2.61	41.89	45.24	54.00	-8.76	Vertical
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT80) MIMO									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	51.45	31.77	7.05	2.54	41.93	50.88	68.20	-17.32	Horizontal
5150.00	49.93	31.77	7.05	2.54	41.93	49.36	68.20	-18.84	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	46.52	31.77	7.05	2.54	41.93	45.95	54.00	-8.05	Horizontal
5150.00	47.15	31.77	7.05	2.54	41.93	46.58	54.00	-7.42	Vertical
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	50.53	32.24	7.11	2.61	41.89	50.60	68.20	-17.60	Horizontal
5350.00	51.39	32.24	7.11	2.61	41.89	51.46	68.20	-16.74	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	47.51	32.24	7.11	2.61	41.89	47.58	54.00	-6.42	Horizontal
5350.00	46.28	32.24	7.11	2.61	41.89	46.35	54.00	-7.65	Vertical
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4:

Band 4 – 802.11a (ANT 0)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	51.52	32.63	7.45	2.69	41.85	52.44	68.20	-15.76	Horizontal
5700.00	50.98	32.64	7.60	2.72	41.90	52.04	105.20	-53.16	Horizontal
5720.00	53.62	32.65	7.64	2.72	41.92	54.71	110.80	-56.09	Horizontal
5725.00	59.95	32.65	7.69	2.72	41.94	61.07	122.20	-61.13	Horizontal
5650.00	52.51	32.63	7.45	2.69	41.85	53.43	68.20	-14.77	Vertical
5700.00	53.62	32.64	7.60	2.72	41.90	54.68	105.20	-50.52	Vertical
5720.00	52.74	32.65	7.64	2.72	41.92	53.83	110.80	-56.97	Vertical
5725.00	53.33	32.65	7.69	2.72	41.94	54.45	122.20	-67.75	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	54.56	32.67	7.90	2.69	42.03	55.79	122.20	-66.41	Horizontal
5855.00	58.19	32.67	7.90	2.72	42.03	59.45	110.80	-51.35	Horizontal
5875.00	52.62	32.68	7.91	2.72	42.03	53.90	105.20	-51.30	Horizontal
5925.00	53.47	32.69	7.92	2.72	42.04	54.76	68.20	-13.44	Horizontal
5850.00	55.04	32.67	7.90	2.69	42.03	56.27	122.20	-65.93	Vertical
5855.00	56.62	32.67	7.90	2.72	42.03	57.88	110.80	-52.92	Vertical
5875.00	54.14	32.68	7.91	2.72	42.03	55.42	105.20	-49.78	Vertical
5925.00	52.44	32.69	7.92	2.72	42.04	53.73	68.20	-14.47	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11a (ANT 1)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	53.62	32.63	7.45	2.69	41.85	54.54	68.20	-13.66	Horizontal
5700.00	52.52	32.64	7.60	2.72	41.90	53.58	105.20	-51.62	Horizontal
5720.00	54.15	32.65	7.64	2.72	41.92	55.24	110.80	-55.56	Horizontal
5725.00	58.62	32.65	7.69	2.72	41.94	59.74	122.20	-62.46	Horizontal
5650.00	53.25	32.63	7.45	2.69	41.85	54.17	68.20	-14.03	Vertical
5700.00	54.15	32.64	7.60	2.72	41.90	55.21	105.20	-49.99	Vertical
5720.00	52.44	32.65	7.64	2.72	41.92	53.53	110.80	-57.27	Vertical
5725.00	53.69	32.65	7.69	2.72	41.94	54.81	122.20	-67.39	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	55.52	32.67	7.90	2.69	42.03	56.75	122.20	-65.45	Horizontal
5855.00	57.15	32.67	7.90	2.72	42.03	58.41	110.80	-52.39	Horizontal
5875.00	53.62	32.68	7.91	2.72	42.03	54.90	105.20	-50.30	Horizontal
5925.00	54.52	32.69	7.92	2.72	42.04	55.81	68.20	-12.39	Horizontal
5850.00	55.99	32.67	7.90	2.69	42.03	57.22	122.20	-64.98	Vertical
5855.00	54.15	32.67	7.90	2.72	42.03	55.41	110.80	-55.39	Vertical
5875.00	53.33	32.68	7.91	2.72	42.03	54.61	105.20	-50.59	Vertical
5925.00	51.27	32.69	7.92	2.72	42.04	52.56	68.20	-15.64	Vertical
Remark: 3. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 4. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	53.23	32.63	7.45	2.69	41.85	54.15	68.20	-14.05	Horizontal
5700.00	54.25	32.64	7.60	2.72	41.90	55.31	105.20	-49.89	Horizontal
5720.00	50.25	32.65	7.64	2.72	41.92	51.34	110.80	-59.46	Horizontal
5725.00	54.66	32.65	7.69	2.72	41.94	55.78	122.20	-66.42	Horizontal
5650.00	53.32	32.63	7.45	2.69	41.85	54.24	68.20	-13.96	Vertical
5700.00	50.15	32.64	7.60	2.72	41.90	51.21	105.20	-53.99	Vertical
5720.00	49.99	32.65	7.64	2.72	41.92	51.08	110.80	-59.72	Vertical
5725.00	50.25	32.65	7.69	2.72	41.94	51.37	122.20	-70.83	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	53.25	32.67	7.90	2.69	42.03	54.48	122.20	-67.72	Horizontal
5855.00	57.15	32.67	7.90	2.72	42.03	58.41	110.80	-52.39	Horizontal
5875.00	56.62	32.68	7.91	2.72	42.03	57.90	105.20	-47.30	Horizontal
5925.00	55.32	32.69	7.92	2.72	42.04	56.61	68.20	-11.59	Horizontal
5850.00	54.15	32.67	7.90	2.69	42.03	55.38	122.20	-66.82	Vertical
5855.00	53.25	32.67	7.90	2.72	42.03	54.51	110.80	-56.29	Vertical
5875.00	52.48	32.68	7.91	2.72	42.03	53.76	105.20	-51.44	Vertical
5925.00	50.19	32.69	7.92	2.72	42.04	51.48	68.20	-16.72	Vertical
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	53.62	32.63	7.45	2.69	41.85	54.54	68.20	-13.66	Horizontal
5700.00	55.15	32.64	7.60	2.72	41.90	56.21	105.20	-48.99	Horizontal
5720.00	49.62	32.65	7.64	2.72	41.92	50.71	110.80	-60.09	Horizontal
5725.00	53.25	32.65	7.69	2.72	41.94	54.37	122.20	-67.83	Horizontal
5650.00	54.15	32.63	7.45	2.69	41.85	55.07	68.20	-13.13	Vertical
5700.00	50.48	32.64	7.60	2.72	41.90	51.54	105.20	-53.66	Vertical
5720.00	48.75	32.65	7.64	2.72	41.92	49.84	110.80	-60.96	Vertical
5725.00	50.44	32.65	7.69	2.72	41.94	51.56	122.20	-70.64	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	54.15	32.67	7.90	2.69	42.03	55.38	122.20	-66.82	Horizontal
5855.00	56.62	32.67	7.90	2.72	42.03	57.88	110.80	-52.92	Horizontal
5875.00	57.54	32.68	7.91	2.72	42.03	58.82	105.20	-46.38	Horizontal
5925.00	54.15	32.69	7.92	2.72	42.04	55.44	68.20	-12.76	Horizontal
5850.00	53.62	32.67	7.90	2.69	42.03	54.85	122.20	-67.35	Vertical
5855.00	52.45	32.67	7.90	2.72	42.03	53.71	110.80	-57.09	Vertical
5875.00	51.45	32.68	7.91	2.72	42.03	52.73	105.20	-52.47	Vertical
5925.00	49.99	32.69	7.92	2.72	42.04	51.28	68.20	-16.92	Vertical
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	54.26	32.63	7.45	2.69	41.85	55.18	68.20	-13.02	Horizontal
5700.00	56.32	32.64	7.60	2.72	41.90	57.38	105.20	-47.82	Horizontal
5720.00	54.15	32.65	7.64	2.72	41.92	55.24	110.80	-55.56	Horizontal
5725.00	51.35	32.65	7.69	2.72	41.94	52.47	122.20	-69.73	Horizontal
5650.00	52.45	32.63	7.45	2.69	41.85	53.37	68.20	-14.83	Vertical
5700.00	53.66	32.64	7.60	2.72	41.90	54.72	105.20	-50.48	Vertical
5720.00	54.14	32.65	7.64	2.72	41.92	55.23	110.80	-55.57	Vertical
5725.00	50.78	32.65	7.69	2.72	41.94	51.90	122.20	-70.30	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	53.25	32.67	7.90	2.69	42.03	54.48	122.20	-67.72	Horizontal
5855.00	51.43	32.67	7.90	2.72	42.03	52.69	110.80	-58.11	Horizontal
5875.00	53.62	32.68	7.91	2.72	42.03	54.90	105.20	-50.30	Horizontal
5925.00	56.69	32.69	7.92	2.72	42.04	57.98	68.20	-10.22	Horizontal
5850.00	52.45	32.67	7.90	2.69	42.03	53.68	122.20	-68.52	Vertical
5855.00	55.19	32.67	7.90	2.72	42.03	56.45	110.80	-54.35	Vertical
5875.00	51.52	32.68	7.91	2.72	42.03	52.80	105.20	-52.40	Vertical
5925.00	50.44	32.69	7.92	2.72	42.04	51.73	68.20	-16.47	Vertical
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	53.62	32.63	7.45	2.69	41.85	54.54	68.20	-13.66	Horizontal
5700.00	51.42	32.64	7.60	2.72	41.90	52.48	105.20	-52.72	Horizontal
5720.00	55.52	32.65	7.64	2.72	41.92	56.61	110.80	-54.19	Horizontal
5725.00	57.46	32.65	7.69	2.72	41.94	58.58	122.20	-63.62	Horizontal
5650.00	52.52	32.63	7.45	2.69	41.85	53.44	68.20	-14.76	Vertical
5700.00	53.66	32.64	7.60	2.72	41.90	54.72	105.20	-50.48	Vertical
5720.00	51.45	32.65	7.64	2.72	41.92	52.54	110.80	-58.26	Vertical
5725.00	53.97	32.65	7.69	2.72	41.94	55.09	122.20	-67.11	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	53.62	32.67	7.90	2.69	42.03	54.85	122.20	-67.35	Horizontal
5855.00	56.58	32.67	7.90	2.72	42.03	57.84	110.80	-52.96	Horizontal
5875.00	54.15	32.68	7.91	2.72	42.03	55.43	105.20	-49.77	Horizontal
5925.00	53.25	32.69	7.92	2.72	42.04	54.54	68.20	-13.66	Horizontal
5850.00	54.78	32.67	7.90	2.69	42.03	56.01	122.20	-66.19	Vertical
5855.00	53.35	32.67	7.90	2.72	42.03	54.61	110.80	-56.19	Vertical
5875.00	52.11	32.68	7.91	2.72	42.03	53.39	105.20	-51.81	Vertical
5925.00	50.26	32.69	7.92	2.72	42.04	51.55	68.20	-16.65	Vertical
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac(HT80) MIMO									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	54.15	32.63	7.45	2.69	41.85	55.07	68.20	-13.13	Horizontal
5700.00	52.62	32.64	7.60	2.72	41.90	53.68	105.20	-51.52	Horizontal
5720.00	53.62	32.65	7.64	2.72	41.92	54.71	110.80	-56.09	Horizontal
5725.00	54.15	32.65	7.69	2.72	41.94	55.27	122.20	-66.93	Horizontal
5650.00	51.47	32.63	7.45	2.69	41.85	52.39	68.20	-15.81	Vertical
5700.00	52.56	32.64	7.60	2.72	41.90	53.62	105.20	-51.58	Vertical
5720.00	50.21	32.65	7.64	2.72	41.92	51.30	110.80	-59.50	Vertical
5725.00	54.87	32.65	7.69	2.72	41.94	55.99	122.20	-66.21	Vertical
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	52.36	32.67	7.90	2.69	42.03	53.59	122.20	-68.61	Horizontal
5855.00	54.15	32.67	7.90	2.72	42.03	55.41	110.80	-55.39	Horizontal
5875.00	53.62	32.68	7.91	2.72	42.03	54.90	105.20	-50.30	Horizontal
5925.00	52.48	32.69	7.92	2.72	42.04	53.77	68.20	-14.43	Horizontal
5850.00	55.52	32.67	7.90	2.69	42.03	56.75	122.20	-65.45	Vertical
5855.00	52.15	32.67	7.90	2.72	42.03	53.41	110.80	-57.39	Vertical
5875.00	51.45	32.68	7.91	2.72	42.03	52.73	105.20	-52.47	Vertical
5925.00	49.97	32.69	7.92	2.72	42.04	51.26	68.20	-16.94	Vertical
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Whip Antenne

Band 1:

Band 1 – 802.11a (ANT 0)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	50.52	31.77	7.05	2.54	41.93	49.95	68.20	-18.25	Horizontal
5150.00	51.39	31.77	7.05	2.54	41.93	50.82	68.20	-17.38	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	46.62	31.77	7.05	2.54	41.93	46.05	54.00	-7.95	Horizontal
5150.00	45.81	31.77	7.05	2.54	41.93	45.24	54.00	-8.76	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	51.25	32.24	7.11	2.61	41.89	51.32	68.20	-16.88	Horizontal
5350.00	53.62	32.24	7.11	2.61	41.89	53.69	68.20	-14.51	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	47.52	32.24	7.11	2.61	41.89	47.59	54.00	-6.41	Horizontal
5350.00	44.62	32.24	7.11	2.61	41.89	44.69	54.00	-9.31	Vertical
Remark:									
5. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
6. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11a (ANT 1)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	51.29	31.77	7.05	2.54	41.93	50.72	68.20	-17.48	Horizontal
5150.00	48.75	31.77	7.05	2.54	41.93	48.18	68.20	-20.02	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	46.62	31.77	7.05	2.54	41.93	46.05	54.00	-7.95	Horizontal
5150.00	45.11	31.77	7.05	2.54	41.93	44.54	54.00	-9.46	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	50.22	32.24	7.11	2.61	41.89	50.29	68.20	-17.91	Horizontal
5350.00	51.43	32.24	7.11	2.61	41.89	51.50	68.20	-16.70	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	47.15	32.24	7.11	2.61	41.89	47.22	54.00	-6.78	Horizontal
5350.00	49.32	32.24	7.11	2.61	41.89	49.39	54.00	-4.61	Vertical
Remark: 7. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 8. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	50.62	31.77	7.05	2.54	41.93	50.05	68.20	-18.15	Horizontal
5150.00	51.34	31.77	7.05	2.54	41.93	50.77	68.20	-17.43	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	48.85	31.77	7.05	2.54	41.93	48.28	54.00	-5.72	Horizontal
5150.00	47.10	31.77	7.05	2.54	41.93	46.53	54.00	-7.47	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	51.52	32.24	7.11	2.61	41.89	51.59	68.20	-16.61	Horizontal
5350.00	53.65	32.24	7.11	2.61	41.89	53.72	68.20	-14.48	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	47.45	32.24	7.11	2.61	41.89	47.52	54.00	-6.48	Horizontal
5350.00	46.69	32.24	7.11	2.61	41.89	46.76	54.00	-7.24	Vertical
Remark: 3. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 4. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	52.25	31.77	7.05	2.54	41.93	51.68	68.20	-16.52	Horizontal
5150.00	49.62	31.77	7.05	2.54	41.93	49.05	68.20	-19.15	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	47.15	31.77	7.05	2.54	41.93	46.58	54.00	-7.42	Horizontal
5150.00	46.35	31.77	7.05	2.54	41.93	45.78	54.00	-8.22	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	51.52	32.02	7.09	2.54	41.93	51.24	68.20	-16.96	Horizontal
5350.00	52.47	32.02	7.09	2.54	41.93	52.19	68.20	-16.01	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.62	32.02	7.09	2.54	41.93	46.34	54.00	-7.66	Horizontal
5350.00	48.87	32.02	7.09	2.54	41.93	48.59	54.00	-5.41	Vertical
Remark: 3. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 4. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	50.25	31.77	7.05	2.54	41.93	49.68	68.20	-18.52	Horizontal
5150.00	49.62	31.77	7.05	2.54	41.93	49.05	68.20	-19.15	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	47.15	31.77	7.05	2.54	41.93	46.58	54.00	-7.42	Horizontal
5150.00	46.63	31.77	7.05	2.54	41.93	46.06	54.00	-7.94	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	49.65	32.24	7.11	2.61	41.89	49.72	68.20	-18.48	Horizontal
5350.00	52.22	32.24	7.11	2.61	41.89	52.29	68.20	-15.91	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.52	32.24	7.11	2.61	41.89	46.59	54.00	-7.41	Horizontal
5350.00	48.17	32.24	7.11	2.61	41.89	48.24	54.00	-5.76	Vertical
Remark: 3. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 4. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	51.52	31.77	7.05	2.54	41.93	50.95	68.20	-17.25	Horizontal
5150.00	47.15	31.77	7.05	2.54	41.93	46.58	68.20	-21.62	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	48.72	31.77	7.05	2.54	41.93	48.15	54.00	-5.85	Horizontal
5150.00	46.62	31.77	7.05	2.54	41.93	46.05	54.00	-7.95	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	49.62	32.24	7.11	2.61	41.89	49.69	68.20	-18.51	Horizontal
5350.00	50.22	32.24	7.11	2.61	41.89	50.29	68.20	-17.91	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.35	32.24	7.11	2.61	41.89	46.42	54.00	-7.58	Horizontal
5350.00	45.17	32.24	7.11	2.61	41.89	45.24	54.00	-8.76	Vertical
Remark: 3. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 4. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT80) MIMO									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	52.26	31.77	7.05	2.54	41.93	51.69	68.20	-16.51	Horizontal
5150.00	48.15	31.77	7.05	2.54	41.93	47.58	68.20	-20.62	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	48.63	31.77	7.05	2.54	41.93	48.06	54.00	-5.94	Horizontal
5150.00	47.54	31.77	7.05	2.54	41.93	46.97	54.00	-7.03	Vertical
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	50.53	32.24	7.11	2.61	41.89	50.60	68.20	-17.60	Horizontal
5350.00	51.39	32.24	7.11	2.61	41.89	51.46	68.20	-16.74	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	47.51	32.24	7.11	2.61	41.89	47.58	54.00	-6.42	Horizontal
5350.00	46.28	32.24	7.11	2.61	41.89	46.35	54.00	-7.65	Vertical
Remark: 3. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 4. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4:

Band 4 – 802.11a (ANT 0)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBUV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization
5650.00	50.25	32.63	7.45	2.69	41.85	51.17	68.20	-17.03	Horizontal
5700.00	49.62	32.64	7.60	2.72	41.90	50.68	105.20	-54.52	Horizontal
5720.00	53.32	32.65	7.64	2.72	41.92	54.41	110.80	-56.39	Horizontal
5725.00	60.15	32.65	7.69	2.72	41.94	61.27	122.20	-60.93	Horizontal
5650.00	51.45	32.63	7.45	2.69	41.85	52.37	68.20	-15.83	Vertical
5700.00	52.15	32.64	7.60	2.72	41.90	53.21	105.20	-51.99	Vertical
5720.00	56.65	32.65	7.64	2.72	41.92	57.74	110.80	-53.06	Vertical
5725.00	54.18	32.65	7.69	2.72	41.94	55.30	122.20	-66.90	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBUV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization
5850.00	53.62	32.67	7.90	2.69	42.03	54.85	122.20	-67.35	Horizontal
5855.00	59.15	32.67	7.90	2.72	42.03	60.41	110.80	-50.39	Horizontal
5875.00	51.47	32.68	7.91	2.72	42.03	52.75	105.20	-52.45	Horizontal
5925.00	52.53	32.69	7.92	2.72	42.04	53.82	68.20	-14.38	Horizontal
5850.00	56.62	32.67	7.90	2.69	42.03	57.85	122.20	-64.35	Vertical
5855.00	55.84	32.67	7.90	2.72	42.03	57.10	110.80	-53.70	Vertical
5875.00	55.17	32.68	7.91	2.72	42.03	56.45	105.20	-48.75	Vertical
5925.00	51.19	32.69	7.92	2.72	42.04	52.48	68.20	-15.72	Vertical
Remark:									
5. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
6. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11a (ANT 1)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	52.62	32.63	7.45	2.69	41.85	53.54	68.20	-14.66	Horizontal
5700.00	53.65	32.64	7.60	2.72	41.90	54.71	105.20	-50.49	Horizontal
5720.00	55.45	32.65	7.64	2.72	41.92	56.54	110.80	-54.26	Horizontal
5725.00	59.62	32.65	7.69	2.72	41.94	60.74	122.20	-61.46	Horizontal
5650.00	51.45	32.63	7.45	2.69	41.85	52.37	68.20	-15.83	Vertical
5700.00	53.25	32.64	7.60	2.72	41.90	54.31	105.20	-50.89	Vertical
5720.00	51.47	32.65	7.64	2.72	41.92	52.56	110.80	-58.24	Vertical
5725.00	52.19	32.65	7.69	2.72	41.94	53.31	122.20	-68.89	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	56.62	32.67	7.90	2.69	42.03	57.85	122.20	-64.35	Horizontal
5855.00	55.35	32.67	7.90	2.72	42.03	56.61	110.80	-54.19	Horizontal
5875.00	54.15	32.68	7.91	2.72	42.03	55.43	105.20	-49.77	Horizontal
5925.00	52.52	32.69	7.92	2.72	42.04	53.81	68.20	-14.39	Horizontal
5850.00	56.99	32.67	7.90	2.69	42.03	58.22	122.20	-63.98	Vertical
5855.00	56.62	32.67	7.90	2.72	42.03	57.88	110.80	-52.92	Vertical
5875.00	54.15	32.68	7.91	2.72	42.03	55.43	105.20	-49.77	Vertical
5925.00	50.04	32.69	7.92	2.72	42.04	51.33	68.20	-16.87	Vertical
Remark: 7. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 8. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	56.32	32.63	7.45	2.69	41.85	57.24	68.20	-10.96	Horizontal
5700.00	54.15	32.64	7.60	2.72	41.90	55.21	105.20	-49.99	Horizontal
5720.00	49.65	32.65	7.64	2.72	41.92	50.74	110.80	-60.06	Horizontal
5725.00	53.62	32.65	7.69	2.72	41.94	54.74	122.20	-67.46	Horizontal
5650.00	55.52	32.63	7.45	2.69	41.85	56.44	68.20	-11.76	Vertical
5700.00	49.65	32.64	7.60	2.72	41.90	50.71	105.20	-54.49	Vertical
5720.00	48.15	32.65	7.64	2.72	41.92	49.24	110.80	-61.56	Vertical
5725.00	49.99	32.65	7.69	2.72	41.94	51.11	122.20	-71.09	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	56.62	32.67	7.90	2.69	42.03	57.85	122.20	-64.35	Horizontal
5855.00	55.41	32.67	7.90	2.72	42.03	56.67	110.80	-54.13	Horizontal
5875.00	54.25	32.68	7.91	2.72	42.03	55.53	105.20	-49.67	Horizontal
5925.00	56.62	32.69	7.92	2.72	42.04	57.91	68.20	-10.29	Horizontal
5850.00	53.25	32.67	7.90	2.69	42.03	54.48	122.20	-67.72	Vertical
5855.00	54.18	32.67	7.90	2.72	42.03	55.44	110.80	-55.36	Vertical
5875.00	51.47	32.68	7.91	2.72	42.03	52.75	105.20	-52.45	Vertical
5925.00	49.98	32.69	7.92	2.72	42.04	51.27	68.20	-16.93	Vertical
Remark: 3. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 4. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	54.25	32.63	7.45	2.69	41.85	55.17	68.20	-13.03	Horizontal
5700.00	56.63	32.64	7.60	2.72	41.90	57.69	105.20	-47.51	Horizontal
5720.00	50.25	32.65	7.64	2.72	41.92	51.34	110.80	-59.46	Horizontal
5725.00	51.45	32.65	7.69	2.72	41.94	52.57	122.20	-69.63	Horizontal
5650.00	53.66	32.63	7.45	2.69	41.85	54.58	68.20	-13.62	Vertical
5700.00	49.98	32.64	7.60	2.72	41.90	51.04	105.20	-54.16	Vertical
5720.00	50.05	32.65	7.64	2.72	41.92	51.14	110.80	-59.66	Vertical
5725.00	49.96	32.65	7.69	2.72	41.94	51.08	122.20	-71.12	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	53.62	32.67	7.90	2.69	42.03	54.85	122.20	-67.35	Horizontal
5855.00	55.45	32.67	7.90	2.72	42.03	56.71	110.80	-54.09	Horizontal
5875.00	56.98	32.68	7.91	2.72	42.03	58.26	105.20	-46.94	Horizontal
5925.00	55.15	32.69	7.92	2.72	42.04	56.44	68.20	-11.76	Horizontal
5850.00	54.74	32.67	7.90	2.69	42.03	55.97	122.20	-66.23	Vertical
5855.00	53.62	32.67	7.90	2.72	42.03	54.88	110.80	-55.92	Vertical
5875.00	52.25	32.68	7.91	2.72	42.03	53.53	105.20	-51.67	Vertical
5925.00	50.99	32.69	7.92	2.72	42.04	52.28	68.20	-15.92	Vertical
Remark: 3. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 4. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	56.62	32.63	7.45	2.69	41.85	57.54	68.20	-10.66	Horizontal
5700.00	57.15	32.64	7.60	2.72	41.90	58.21	105.20	-46.99	Horizontal
5720.00	53.63	32.65	7.64	2.72	41.92	54.72	110.80	-56.08	Horizontal
5725.00	52.45	32.65	7.69	2.72	41.94	53.57	122.20	-68.63	Horizontal
5650.00	51.45	32.63	7.45	2.69	41.85	52.37	68.20	-15.83	Vertical
5700.00	56.63	32.64	7.60	2.72	41.90	57.69	105.20	-47.51	Vertical
5720.00	56.60	32.65	7.64	2.72	41.92	57.69	110.80	-53.11	Vertical
5725.00	49.98	32.65	7.69	2.72	41.94	51.10	122.20	-71.10	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	54.15	32.67	7.90	2.69	42.03	55.38	122.20	-66.82	Horizontal
5855.00	52.32	32.67	7.90	2.72	42.03	53.58	110.80	-57.22	Horizontal
5875.00	54.15	32.68	7.91	2.72	42.03	55.43	105.20	-49.77	Horizontal
5925.00	56.79	32.69	7.92	2.72	42.04	58.08	68.20	-10.12	Horizontal
5850.00	53.66	32.67	7.90	2.69	42.03	54.89	122.20	-67.31	Vertical
5855.00	54.17	32.67	7.90	2.72	42.03	55.43	110.80	-55.37	Vertical
5875.00	52.58	32.68	7.91	2.72	42.03	53.86	105.20	-51.34	Vertical
5925.00	49.98	32.69	7.92	2.72	42.04	51.27	68.20	-16.93	Vertical
Remark: 3. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 4. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	52.62	32.63	7.45	2.69	41.85	53.54	68.20	-14.66	Horizontal
5700.00	53.64	32.64	7.60	2.72	41.90	54.70	105.20	-50.50	Horizontal
5720.00	54.15	32.65	7.64	2.72	41.92	55.24	110.80	-55.56	Horizontal
5725.00	56.98	32.65	7.69	2.72	41.94	58.10	122.20	-64.10	Horizontal
5650.00	56.56	32.63	7.45	2.69	41.85	57.48	68.20	-10.72	Vertical
5700.00	54.15	32.64	7.60	2.72	41.90	55.21	105.20	-49.99	Vertical
5720.00	52.78	32.65	7.64	2.72	41.92	53.87	110.80	-56.93	Vertical
5725.00	54.74	32.65	7.69	2.72	41.94	55.86	122.20	-66.34	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	54.26	32.67	7.90	2.69	42.03	55.49	122.20	-66.71	Horizontal
5855.00	56.63	32.67	7.90	2.72	42.03	57.89	110.80	-52.91	Horizontal
5875.00	55.95	32.68	7.91	2.72	42.03	57.23	105.20	-47.97	Horizontal
5925.00	52.26	32.69	7.92	2.72	42.04	53.55	68.20	-14.65	Horizontal
5850.00	53.14	32.67	7.90	2.69	42.03	54.37	122.20	-67.83	Vertical
5855.00	54.15	32.67	7.90	2.72	42.03	55.41	110.80	-55.39	Vertical
5875.00	52.17	32.68	7.91	2.72	42.03	53.45	105.20	-51.75	Vertical
5925.00	49.98	32.69	7.92	2.72	42.04	51.27	68.20	-16.93	Vertical
Remark: 3. <i>Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.</i> 4. <i>The emission levels of other frequencies are very lower than the limit and not show in test report.</i>									

Band 4 – 802.11ac(HT80) MIMO									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	56.62	32.63	7.45	2.69	41.85	57.54	68.20	-10.66	Horizontal
5700.00	53.35	32.64	7.60	2.72	41.90	54.41	105.20	-50.79	Horizontal
5720.00	54.15	32.65	7.64	2.72	41.92	55.24	110.80	-55.56	Horizontal
5725.00	55.95	32.65	7.69	2.72	41.94	57.07	122.20	-65.13	Horizontal
5650.00	52.48	32.63	7.45	2.69	41.85	53.40	68.20	-14.80	Vertical
5700.00	51.78	32.64	7.60	2.72	41.90	52.84	105.20	-52.36	Vertical
5720.00	49.98	32.65	7.64	2.72	41.92	51.07	110.80	-59.73	Vertical
5725.00	55.66	32.65	7.69	2.72	41.94	56.78	122.20	-65.42	Vertical
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	53.65	32.67	7.90	2.69	42.03	54.88	122.20	-67.32	Horizontal
5855.00	54.15	32.67	7.90	2.72	42.03	55.41	110.80	-55.39	Horizontal
5875.00	56.25	32.68	7.91	2.72	42.03	57.53	105.20	-47.67	Horizontal
5925.00	51.48	32.69	7.92	2.72	42.04	52.77	68.20	-15.43	Horizontal
5850.00	55.98	32.67	7.90	2.69	42.03	57.21	122.20	-64.99	Vertical
5855.00	53.65	32.67	7.90	2.72	42.03	54.91	110.80	-55.89	Vertical
5875.00	57.45	32.68	7.91	2.72	42.03	58.73	105.20	-46.47	Vertical
5925.00	50.02	32.69	7.92	2.72	42.04	51.31	68.20	-16.89	Vertical
Remark: 3. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 4. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Planare WLAN Antenne

Band 1:

Band 1 – 802.11a (ANT 0)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	52.15	31.77	7.05	2.54	41.93	51.58	68.20	-16.62	Horizontal
5150.00	53.33	31.77	7.05	2.54	41.93	52.76	68.20	-15.44	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	47.15	31.77	7.05	2.54	41.93	46.58	54.00	-7.42	Horizontal
5150.00	46.66	31.77	7.05	2.54	41.93	46.09	54.00	-7.91	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	52.25	32.24	7.11	2.61	41.89	52.32	68.20	-15.88	Horizontal
5350.00	51.45	32.24	7.11	2.61	41.89	51.52	68.20	-16.68	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	48.15	32.24	7.11	2.61	41.89	48.22	54.00	-5.78	Horizontal
5350.00	46.63	32.24	7.11	2.61	41.89	46.70	54.00	-7.30	Vertical
Remark: 9. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 10. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11a (ANT 1)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	52.25	31.77	7.05	2.54	41.93	51.68	68.20	-16.52	Horizontal
5150.00	49.32	31.77	7.05	2.54	41.93	48.75	68.20	-19.45	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	47.98	31.77	7.05	2.54	41.93	47.41	54.00	-6.59	Horizontal
5150.00	46.31	31.77	7.05	2.54	41.93	45.74	54.00	-8.26	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	49.62	32.24	7.11	2.61	41.89	49.69	68.20	-18.51	Horizontal
5350.00	48.72	32.24	7.11	2.61	41.89	48.79	68.20	-19.41	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	45.52	32.24	7.11	2.61	41.89	45.59	54.00	-8.41	Horizontal
5350.00	44.11	32.24	7.11	2.61	41.89	44.18	54.00	-9.82	Vertical
Remark: 11. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 12. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	51.26	31.77	7.05	2.54	41.93	50.69	68.20	-17.51	Horizontal
5150.00	52.34	31.77	7.05	2.54	41.93	51.77	68.20	-16.43	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	49.52	31.77	7.05	2.54	41.93	48.95	54.00	-5.05	Horizontal
5150.00	46.85	31.77	7.05	2.54	41.93	46.28	54.00	-7.72	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	52.15	32.24	7.11	2.61	41.89	52.22	68.20	-15.98	Horizontal
5350.00	51.47	32.24	7.11	2.61	41.89	51.54	68.20	-16.66	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	45.25	32.24	7.11	2.61	41.89	45.32	54.00	-8.68	Horizontal
5350.00	44.31	32.24	7.11	2.61	41.89	44.38	54.00	-9.62	Vertical
Remark: 5. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 6. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	51.26	31.77	7.05	2.54	41.93	50.69	68.20	-17.51	Horizontal
5150.00	48.15	31.77	7.05	2.54	41.93	47.58	68.20	-20.62	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	48.65	31.77	7.05	2.54	41.93	48.08	54.00	-5.92	Horizontal
5150.00	47.33	31.77	7.05	2.54	41.93	46.76	54.00	-7.24	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	52.52	32.02	7.09	2.54	41.93	52.24	68.20	-15.96	Horizontal
5350.00	51.43	32.02	7.09	2.54	41.93	51.15	68.20	-17.05	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	48.25	32.02	7.09	2.54	41.93	47.97	54.00	-6.03	Horizontal
5350.00	47.19	32.02	7.09	2.54	41.93	46.91	54.00	-7.09	Vertical
Remark: 5. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 6. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	51.52	31.77	7.05	2.54	41.93	50.95	68.20	-17.25	Horizontal
5150.00	50.36	31.77	7.05	2.54	41.93	49.79	68.20	-18.41	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	45.52	31.77	7.05	2.54	41.93	44.95	54.00	-9.05	Horizontal
5150.00	44.19	31.77	7.05	2.54	41.93	43.62	54.00	-10.38	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	50.52	32.24	7.11	2.61	41.89	50.59	68.20	-17.61	Horizontal
5350.00	51.75	32.24	7.11	2.61	41.89	51.82	68.20	-16.38	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	45.52	32.24	7.11	2.61	41.89	45.59	54.00	-8.41	Horizontal
5350.00	44.69	32.24	7.11	2.61	41.89	44.76	54.00	-9.24	Vertical
Remark: 5. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 6. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	52.25	31.77	7.05	2.54	41.93	51.68	68.20	-16.52	Horizontal
5150.00	48.62	31.77	7.05	2.54	41.93	48.05	68.20	-20.15	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	49.32	31.77	7.05	2.54	41.93	48.75	54.00	-5.25	Horizontal
5150.00	45.15	31.77	7.05	2.54	41.93	44.58	54.00	-9.42	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	50.51	32.24	7.11	2.61	41.89	50.58	68.20	-17.62	Horizontal
5350.00	51.74	32.24	7.11	2.61	41.89	51.81	68.20	-16.39	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.62	32.24	7.11	2.61	41.89	46.69	54.00	-7.31	Horizontal
5350.00	45.88	32.24	7.11	2.61	41.89	45.95	54.00	-8.05	Vertical
Remark:									
5. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
6. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT80) MIMO									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	51.36	31.77	7.05	2.54	41.93	50.79	68.20	-17.41	Horizontal
5150.00	49.98	31.77	7.05	2.54	41.93	49.41	68.20	-18.79	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	47.15	31.77	7.05	2.54	41.93	46.58	54.00	-7.42	Horizontal
5150.00	46.65	31.77	7.05	2.54	41.93	46.08	54.00	-7.92	Vertical
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	49.62	32.24	7.11	2.61	41.89	49.69	68.20	-18.51	Horizontal
5350.00	50.15	32.24	7.11	2.61	41.89	50.22	68.20	-17.98	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.25	32.24	7.11	2.61	41.89	46.32	54.00	-7.68	Horizontal
5350.00	47.18	32.24	7.11	2.61	41.89	47.25	54.00	-6.75	Vertical
Remark: 5. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 6. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4:

Band 4 – 802.11a (ANT 0)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	51.25	32.63	7.45	2.69	41.85	52.17	68.20	-16.03	Horizontal
5700.00	48.52	32.64	7.60	2.72	41.90	49.58	105.20	-55.62	Horizontal
5720.00	56.63	32.65	7.64	2.72	41.92	57.72	110.80	-53.08	Horizontal
5725.00	62.22	32.65	7.69	2.72	41.94	63.34	122.20	-58.86	Horizontal
5650.00	52.46	32.63	7.45	2.69	41.85	53.38	68.20	-14.82	Vertical
5700.00	53.66	32.64	7.60	2.72	41.90	54.72	105.20	-50.48	Vertical
5720.00	54.15	32.65	7.64	2.72	41.92	55.24	110.80	-55.56	Vertical
5725.00	51.48	32.65	7.69	2.72	41.94	52.60	122.20	-69.60	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	54.26	32.67	7.90	2.69	42.03	55.49	122.20	-66.71	Horizontal
5855.00	60.35	32.67	7.90	2.72	42.03	61.61	110.80	-49.19	Horizontal
5875.00	52.15	32.68	7.91	2.72	42.03	53.43	105.20	-51.77	Horizontal
5925.00	51.48	32.69	7.92	2.72	42.04	52.77	68.20	-15.43	Horizontal
5850.00	54.25	32.67	7.90	2.69	42.03	55.48	122.20	-66.72	Vertical
5855.00	55.98	32.67	7.90	2.72	42.03	57.24	110.80	-53.56	Vertical
5875.00	54.21	32.68	7.91	2.72	42.03	55.49	105.20	-49.71	Vertical
5925.00	52.23	32.69	7.92	2.72	42.04	53.52	68.20	-14.68	Vertical
Remark:									
9. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
10. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11a (ANT 1)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	53.16	32.63	7.45	2.69	41.85	54.08	68.20	-14.12	Horizontal
5700.00	54.15	32.64	7.60	2.72	41.90	55.21	105.20	-49.99	Horizontal
5720.00	56.63	32.65	7.64	2.72	41.92	57.72	110.80	-53.08	Horizontal
5725.00	60.36	32.65	7.69	2.72	41.94	61.48	122.20	-60.72	Horizontal
5650.00	52.25	32.63	7.45	2.69	41.85	53.17	68.20	-15.03	Vertical
5700.00	54.15	32.64	7.60	2.72	41.90	55.21	105.20	-49.99	Vertical
5720.00	53.62	32.65	7.64	2.72	41.92	54.71	110.80	-56.09	Vertical
5725.00	51.48	32.65	7.69	2.72	41.94	52.60	122.20	-69.60	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	55.25	32.67	7.90	2.69	42.03	56.48	122.20	-65.72	Horizontal
5855.00	54.16	32.67	7.90	2.72	42.03	55.42	110.80	-55.38	Horizontal
5875.00	53.62	32.68	7.91	2.72	42.03	54.90	105.20	-50.30	Horizontal
5925.00	51.84	32.69	7.92	2.72	42.04	53.13	68.20	-15.07	Horizontal
5850.00	57.98	32.67	7.90	2.69	42.03	59.21	122.20	-62.99	Vertical
5855.00	56.32	32.67	7.90	2.72	42.03	57.58	110.80	-53.22	Vertical
5875.00	53.25	32.68	7.91	2.72	42.03	54.53	105.20	-50.67	Vertical
5925.00	51.12	32.69	7.92	2.72	42.04	52.41	68.20	-15.79	Vertical
Remark: 11. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 12. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	55.25	32.63	7.45	2.69	41.85	56.17	68.20	-12.03	Horizontal
5700.00	53.62	32.64	7.60	2.72	41.90	54.68	105.20	-50.52	Horizontal
5720.00	47.15	32.65	7.64	2.72	41.92	48.24	110.80	-62.56	Horizontal
5725.00	52.25	32.65	7.69	2.72	41.94	53.37	122.20	-68.83	Horizontal
5650.00	56.36	32.63	7.45	2.69	41.85	57.28	68.20	-10.92	Vertical
5700.00	48.84	32.64	7.60	2.72	41.90	49.90	105.20	-55.30	Vertical
5720.00	47.15	32.65	7.64	2.72	41.92	48.24	110.80	-62.56	Vertical
5725.00	50.29	32.65	7.69	2.72	41.94	51.41	122.20	-70.79	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	56.63	32.67	7.90	2.69	42.03	57.86	122.20	-64.34	Horizontal
5855.00	54.52	32.67	7.90	2.72	42.03	55.78	110.80	-55.02	Horizontal
5875.00	53.33	32.68	7.91	2.72	42.03	54.61	105.20	-50.59	Horizontal
5925.00	58.48	32.69	7.92	2.72	42.04	59.77	68.20	-8.43	Horizontal
5850.00	54.25	32.67	7.90	2.69	42.03	55.48	122.20	-66.72	Vertical
5855.00	53.97	32.67	7.90	2.72	42.03	55.23	110.80	-55.57	Vertical
5875.00	52.41	32.68	7.91	2.72	42.03	53.69	105.20	-51.51	Vertical
5925.00	48.77	32.69	7.92	2.72	42.04	50.06	68.20	-18.14	Vertical
Remark: 5. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 6. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	56.63	32.63	7.45	2.69	41.85	57.55	68.20	-10.65	Horizontal
5700.00	57.15	32.64	7.60	2.72	41.90	58.21	105.20	-46.99	Horizontal
5720.00	49.98	32.65	7.64	2.72	41.92	51.07	110.80	-59.73	Horizontal
5725.00	53.62	32.65	7.69	2.72	41.94	54.74	122.20	-67.46	Horizontal
5650.00	55.85	32.63	7.45	2.69	41.85	56.77	68.20	-11.43	Vertical
5700.00	50.15	32.64	7.60	2.72	41.90	51.21	105.20	-53.99	Vertical
5720.00	49.98	32.65	7.64	2.72	41.92	51.07	110.80	-59.73	Vertical
5725.00	50.33	32.65	7.69	2.72	41.94	51.45	122.20	-70.75	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	54.15	32.67	7.90	2.69	42.03	55.38	122.20	-66.82	Horizontal
5855.00	56.69	32.67	7.90	2.72	42.03	57.95	110.80	-52.85	Horizontal
5875.00	56.63	32.68	7.91	2.72	42.03	57.91	105.20	-47.29	Horizontal
5925.00	58.84	32.69	7.92	2.72	42.04	60.13	68.20	-8.07	Horizontal
5850.00	57.15	32.67	7.90	2.69	42.03	58.38	122.20	-63.82	Vertical
5855.00	52.25	32.67	7.90	2.72	42.03	53.51	110.80	-57.29	Vertical
5875.00	53.66	32.68	7.91	2.72	42.03	54.94	105.20	-50.26	Vertical
5925.00	49.87	32.69	7.92	2.72	42.04	51.16	68.20	-17.04	Vertical
Remark: 5. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 6. The emission levels of other frequencies are very lower than the limit and not show in test report.									


Band 4 – 802.11ac(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	59.62	32.63	7.45	2.69	41.85	60.54	68.20	-7.66	Horizontal
5700.00	57.15	32.64	7.60	2.72	41.90	58.21	105.20	-46.99	Horizontal
5720.00	54.52	32.65	7.64	2.72	41.92	55.61	110.80	-55.19	Horizontal
5725.00	53.65	32.65	7.69	2.72	41.94	54.77	122.20	-67.43	Horizontal
5650.00	52.14	32.63	7.45	2.69	41.85	53.06	68.20	-15.14	Vertical
5700.00	57.84	32.64	7.60	2.72	41.90	58.90	105.20	-46.30	Vertical
5720.00	55.59	32.65	7.64	2.72	41.92	56.68	110.80	-54.12	Vertical
5725.00	49.32	32.65	7.69	2.72	41.94	50.44	122.20	-71.76	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	53.62	32.67	7.90	2.69	42.03	54.85	122.20	-67.35	Horizontal
5855.00	51.45	32.67	7.90	2.72	42.03	52.71	110.80	-58.09	Horizontal
5875.00	55.25	32.68	7.91	2.72	42.03	56.53	105.20	-48.67	Horizontal
5925.00	54.78	32.69	7.92	2.72	42.04	56.07	68.20	-12.13	Horizontal
5850.00	56.63	32.67	7.90	2.69	42.03	57.86	122.20	-64.34	Vertical
5855.00	54.15	32.67	7.90	2.72	42.03	55.41	110.80	-55.39	Vertical
5875.00	52.11	32.68	7.91	2.72	42.03	53.39	105.20	-51.81	Vertical
5925.00	49.68	32.69	7.92	2.72	42.04	50.97	68.20	-17.23	Vertical
Remark: 5. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 6. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	53.62	32.63	7.45	2.69	41.85	54.54	68.20	-13.66	Horizontal
5700.00	54.15	32.64	7.60	2.72	41.90	55.21	105.20	-49.99	Horizontal
5720.00	53.22	32.65	7.64	2.72	41.92	54.31	110.80	-56.49	Horizontal
5725.00	54.48	32.65	7.69	2.72	41.94	55.60	122.20	-66.60	Horizontal
5650.00	55.98	32.63	7.45	2.69	41.85	56.90	68.20	-11.30	Vertical
5700.00	56.68	32.64	7.60	2.72	41.90	57.74	105.20	-47.46	Vertical
5720.00	51.45	32.65	7.64	2.72	41.92	52.54	110.80	-58.26	Vertical
5725.00	53.25	32.65	7.69	2.72	41.94	54.37	122.20	-67.83	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	57.15	32.67	7.90	2.69	42.03	58.38	122.20	-63.82	Horizontal
5855.00	52.25	32.67	7.90	2.72	42.03	53.51	110.80	-57.29	Horizontal
5875.00	56.63	32.68	7.91	2.72	42.03	57.91	105.20	-47.29	Horizontal
5925.00	59.62	32.69	7.92	2.72	42.04	60.91	68.20	-7.29	Horizontal
5850.00	54.15	32.67	7.90	2.69	42.03	55.38	122.20	-66.82	Vertical
5855.00	53.33	32.67	7.90	2.72	42.03	54.59	110.80	-56.21	Vertical
5875.00	51.74	32.68	7.91	2.72	42.03	53.02	105.20	-52.18	Vertical
5925.00	48.72	32.69	7.92	2.72	42.04	50.01	68.20	-18.19	Vertical
Remark: 5. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 6. The emission levels of other frequencies are very lower than the limit and not show in test report.									


Band 4 – 802.11ac(HT80) MIMO									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	55.25	32.63	7.45	2.69	41.85	56.17	68.20	-12.03	Horizontal
5700.00	53.65	32.64	7.60	2.72	41.90	54.71	105.20	-50.49	Horizontal
5720.00	54.15	32.65	7.64	2.72	41.92	55.24	110.80	-55.56	Horizontal
5725.00	56.85	32.65	7.69	2.72	41.94	57.97	122.20	-64.23	Horizontal
5650.00	51.25	32.63	7.45	2.69	41.85	52.17	68.20	-16.03	Vertical
5700.00	52.43	32.64	7.60	2.72	41.90	53.49	105.20	-51.71	Vertical
5720.00	48.89	32.65	7.64	2.72	41.92	49.98	110.80	-60.82	Vertical
5725.00	54.73	32.65	7.69	2.72	41.94	55.85	122.20	-66.35	Vertical
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	53.62	32.67	7.90	2.69	42.03	54.85	122.20	-67.35	Horizontal
5855.00	53.65	32.67	7.90	2.72	42.03	54.91	110.80	-55.89	Horizontal
5875.00	54.15	32.68	7.91	2.72	42.03	55.43	105.20	-49.77	Horizontal
5925.00	52.48	32.69	7.92	2.72	42.04	53.77	68.20	-14.43	Horizontal
5850.00	55.58	32.67	7.90	2.69	42.03	56.81	122.20	-65.39	Vertical
5855.00	53.24	32.67	7.90	2.72	42.03	54.50	110.80	-56.30	Vertical
5875.00	56.62	32.68	7.91	2.72	42.03	57.90	105.20	-47.30	Vertical
5925.00	49.99	32.69	7.92	2.72	42.04	51.28	68.20	-16.92	Vertical
Remark: 5. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 6. The emission levels of other frequencies are very lower than the limit and not show in test report.									


6.7 Spurious Emission

6.7.1 Restricted Band

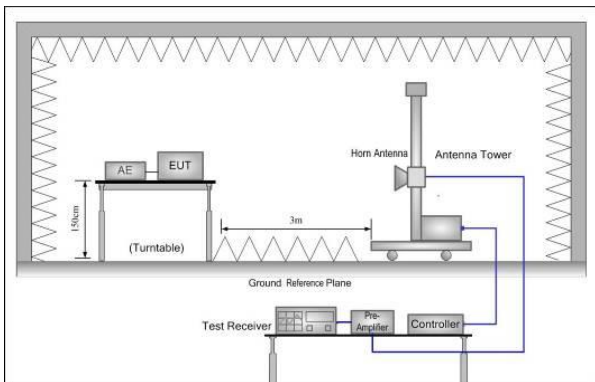Test Requirement:	FCC Part15 E Section 15.407(b)				
Test Frequency Range:	4.5 GHz to 5.15 GHz and 5.35GHz to 5.46GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	Above 1GHz	74.00		Peak Value	
		54.00		Average Value	
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test setup:					
Test Instruments:	Refer to section 5.10 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Passed(Refer to section 6.6)				

6.7.2 Unwanted Emissions out of the Restricted Bands

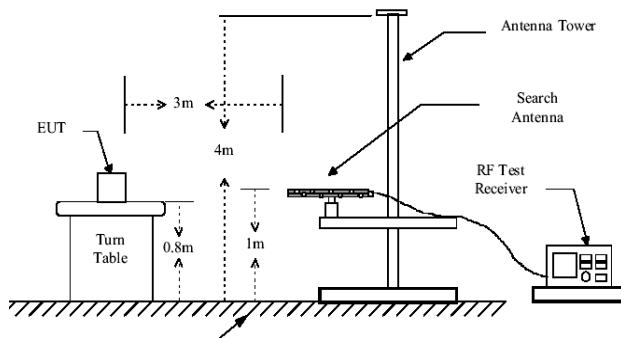
Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		68.20		Peak Value
			54.00		Average Value
	Remark:				
	Above 1GHz limit:				
$E[dB\mu V/m] = EIRP[dBm] + 95.2=68.2 \text{ dBuV/m}$, for $EIPR[dBm]=-27dBm$.					
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.				
	2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.				
	3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.				
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.				
	5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.				
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test setup:	Below 1GHz				
					
	Above 1GHz				

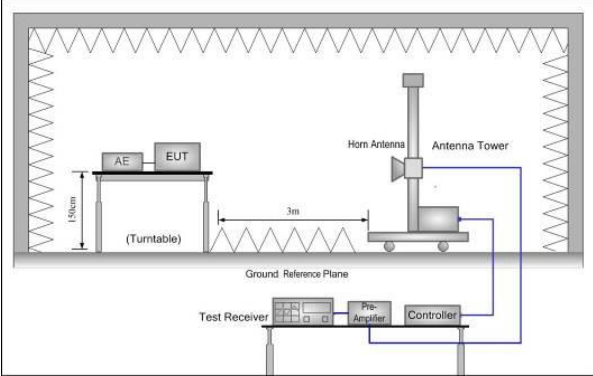	
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (worst case):

Below 1GHz

Product Name:	Habanero	Product Model:	Habanero
Test By:	Mike	Test mode:	5G Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

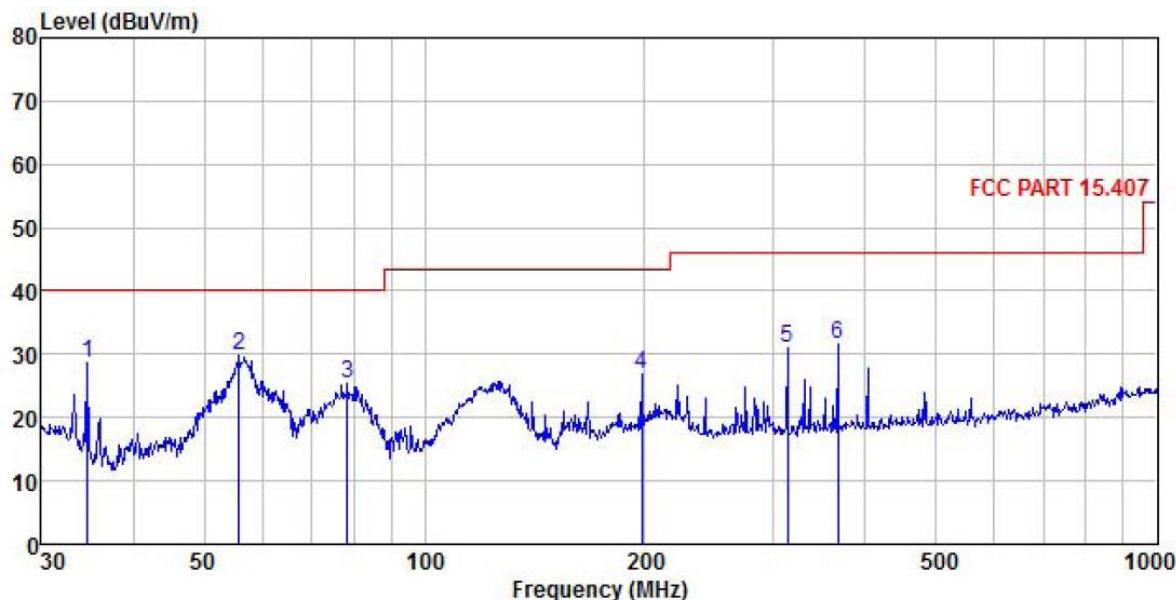


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	34.639	45.60	12.55	0.34	0.00	29.95	28.54	40.00	-11.46 QP
2	55.805	47.90	11.22	0.41	0.00	29.80	29.73	40.00	-10.27 QP
3	78.413	42.04	12.39	0.47	0.00	29.65	25.25	40.00	-14.75 QP
4	197.893	36.87	18.09	0.72	0.00	28.84	26.84	43.50	-16.66 QP
5	313.276	39.73	18.73	0.88	0.00	28.48	30.86	46.00	-15.14 QP
6	366.823	40.50	18.90	0.95	0.00	28.64	31.71	46.00	-14.29 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Habanero	Product Model:	Habanero
Test By:	Mike	Test mode:	5G Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

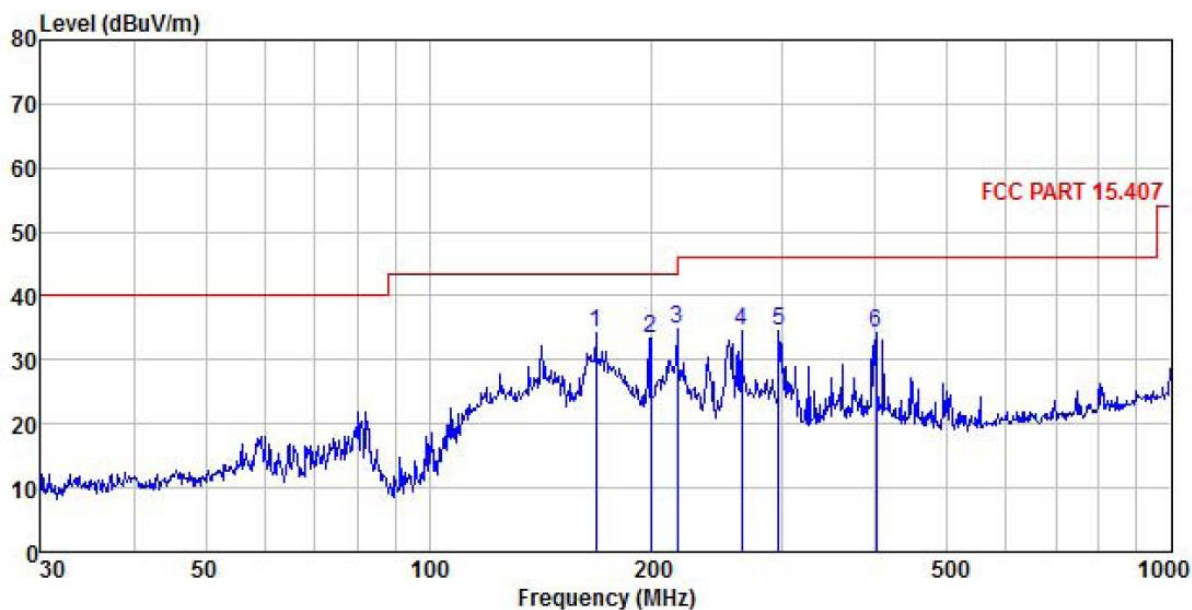

	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	167.824	46.54	16.10	0.65	0.00	29.07	34.22	43.50	-9.28	QP
2	199.286	43.22	18.23	0.72	0.00	28.83	33.34	43.50	-10.16	QP
3	216.024	44.48	18.37	0.74	0.00	28.73	34.86	46.00	-11.14	QP
4	263.819	43.53	18.56	0.81	0.00	28.51	34.39	46.00	-11.61	QP
5	296.184	43.38	18.68	0.86	0.00	28.46	34.46	46.00	-11.54	QP
6	400.432	43.02	19.10	0.99	0.00	28.78	34.33	46.00	-11.67	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Above 1GHz:
Ceramic Antenna
Band 1:

Band 1 – 802.11a (ANT 0)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	49.95	38.83	9.82	3.95	41.97	60.58	68.20	-7.62	Vertical
10360.00	48.71	38.83	9.82	3.95	41.97	59.34	68.20	-8.86	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	38.85	38.83	9.82	3.95	41.97	49.48	54.00	-4.52	Vertical
10360.00	39.02	38.83	9.82	3.95	41.97	49.65	54.00	-4.35	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	50.51	38.87	9.85	3.98	41.95	61.26	68.20	-6.94	Vertical
10400.00	49.72	38.87	9.85	3.98	41.95	60.47	68.20	-7.73	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	37.79	38.87	9.85	3.98	41.95	48.54	54.00	-5.46	Vertical
10400.00	36.84	38.87	9.85	3.98	41.95	47.59	54.00	-6.41	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	48.26	38.94	9.96	4.02	41.88	59.30	68.20	-8.90	Vertical
10480.00	49.17	38.94	9.96	4.02	41.88	60.21	68.20	-7.99	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	36.67	38.94	9.96	4.02	41.88	47.71	54.00	-6.29	Vertical
10480.00	35.19	38.94	9.96	4.02	41.88	46.23	54.00	-7.77	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11a (ANT 1)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	49.25	38.83	9.82	3.95	41.97	59.88	68.20	-8.32	Vertical
10360.00	48.71	38.83	9.82	3.95	41.97	59.34	68.20	-8.86	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	35.62	38.83	9.82	3.95	41.97	46.25	54.00	-7.75	Vertical
10360.00	36.48	38.83	9.82	3.95	41.97	47.11	54.00	-6.89	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	48.85	38.87	9.85	3.98	41.95	59.60	68.20	-8.60	Vertical
10400.00	49.56	38.87	9.85	3.98	41.95	60.31	68.20	-7.89	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	38.52	38.87	9.85	3.98	41.95	49.27	54.00	-4.73	Vertical
10400.00	38.79	38.87	9.85	3.98	41.95	49.54	54.00	-4.46	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	48.16	38.94	9.96	4.02	41.88	59.20	68.20	-9.00	Vertical
10480.00	49.72	38.94	9.96	4.02	41.88	60.76	68.20	-7.44	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	39.05	38.94	9.96	4.02	41.88	50.09	54.00	-3.91	Vertical
10480.00	38.41	38.94	9.96	4.02	41.88	49.45	54.00	-4.55	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	48.52	38.83	9.82	3.95	41.97	59.15	68.20	-9.05	Vertical
10360.00	48.97	38.83	9.82	3.95	41.97	59.60	68.20	-8.60	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	38.78	38.83	9.82	3.95	41.97	49.41	54.00	-4.59	Vertical
10360.00	40.19	38.83	9.82	3.95	41.97	50.82	54.00	-3.18	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	50.56	38.87	9.85	3.98	41.95	61.31	68.20	-6.89	Vertical
10400.00	49.37	38.87	9.85	3.98	41.95	60.12	68.20	-8.08	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	36.65	38.87	9.85	3.98	41.95	47.40	54.00	-6.60	Vertical
10400.00	37.84	38.87	9.85	3.98	41.95	48.59	54.00	-5.41	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	48.59	38.94	9.96	4.02	41.88	59.63	68.20	-8.57	Vertical
10480.00	49.71	38.94	9.96	4.02	41.88	60.75	68.20	-7.45	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	37.52	38.94	9.96	4.02	41.88	48.56	54.00	-5.44	Vertical
10480.00	38.96	38.94	9.96	4.02	41.88	50.00	54.00	-4.00	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	48.15	38.25	9.85	3.95	41.95	58.25	68.20	-9.95	Vertical
10380.00	47.61	38.25	9.85	3.95	41.95	57.71	68.20	-10.49	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	39.62	38.25	9.85	3.95	41.95	49.72	54.00	-4.28	Vertical
10380.00	38.48	38.25	9.85	3.95	41.95	48.58	54.00	-5.42	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	50.14	38.92	9.92	3.98	41.90	61.06	68.20	-7.14	Vertical
10460.00	48.37	38.92	9.92	3.98	41.90	59.29	68.20	-8.91	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	37.85	38.92	9.92	3.98	41.90	48.77	54.00	-5.23	Vertical
10460.00	38.41	38.92	9.92	3.98	41.90	49.33	54.00	-4.67	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	50.45	38.83	9.82	3.95	41.97	61.08	68.20	-7.12	Vertical
10360.00	51.26	38.83	9.82	3.95	41.97	61.89	68.20	-6.31	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	40.25	38.83	9.82	3.95	41.97	50.88	54.00	-3.12	Vertical
10360.00	39.62	38.83	9.82	3.95	41.97	50.25	54.00	-3.75	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	49.65	38.87	9.85	3.98	41.95	60.40	68.20	-7.80	Vertical
10400.00	48.71	38.87	9.85	3.98	41.95	59.46	68.20	-8.74	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	41.15	38.87	9.85	3.98	41.95	51.90	54.00	-2.10	Vertical
10400.00	39.78	38.87	9.85	3.98	41.95	50.53	54.00	-3.47	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	50.25	38.94	9.96	4.02	41.88	61.29	68.20	-6.91	Vertical
10480.00	51.33	38.94	9.96	4.02	41.88	62.37	68.20	-5.83	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	39.60	38.94	9.96	4.02	41.88	50.64	54.00	-3.36	Vertical
10480.00	40.15	38.94	9.96	4.02	41.88	51.19	54.00	-2.81	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	49.25	38.25	9.85	3.95	41.95	59.35	68.20	-8.85	Vertical
10380.00	48.17	38.25	9.85	3.95	41.95	58.27	68.20	-9.93	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	36.62	38.25	9.85	3.95	41.95	46.72	54.00	-7.28	Vertical
10380.00	35.78	38.25	9.85	3.95	41.95	45.88	54.00	-8.12	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	49.62	38.92	9.92	3.98	41.90	60.54	68.20	-7.66	Vertical
10460.00	49.71	38.92	9.92	3.98	41.90	60.63	68.20	-7.57	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	38.85	38.92	9.92	3.98	41.90	49.77	54.00	-4.23	Vertical
10460.00	39.20	38.92	9.92	3.98	41.90	50.12	54.00	-3.88	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT80) MIMO									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10420.00	48.62	38.89	9.89	3.98	41.93	59.45	68.20	-8.75	Vertical
10420.00	49.21	38.89	9.89	3.98	41.93	60.04	68.20	-8.16	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10420.00	39.60	38.89	9.89	3.98	41.93	50.43	54.00	-3.57	Vertical
10420.00	38.87	38.89	9.89	3.98	41.93	49.70	54.00	-4.30	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4:

Band 4 – 802.11a (ANT 0)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	46.52	39.50	10.81	4.21	42.29	54.54	74.00	-19.46	Vertical
11490.00	48.14	39.50	10.81	4.21	42.29	56.16	74.00	-17.84	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	39.25	39.50	10.81	4.21	42.29	47.27	54.00	-6.73	Vertical
11490.00	40.02	39.50	10.81	4.21	42.29	48.04	54.00	-5.96	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	47.52	39.52	10.78	4.21	42.27	55.55	74.00	-18.45	Vertical
11570.00	49.56	39.52	10.78	4.21	42.27	57.59	74.00	-16.41	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	40.52	39.52	10.78	4.21	42.27	48.55	54.00	-5.45	Vertical
11570.00	39.97	39.52	10.78	4.21	42.27	48.00	54.00	-6.00	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	46.62	39.53	10.76	4.21	42.26	54.65	74.00	-19.35	Vertical
11650.00	48.12	39.53	10.76	4.21	42.26	56.15	74.00	-17.85	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	39.62	39.53	10.76	4.21	42.26	47.65	54.00	-6.35	Vertical
11650.00	38.81	39.53	10.76	4.21	42.26	46.84	54.00	-7.16	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11a (ANT 1)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	47.52	39.50	10.81	4.21	42.29	55.54	74.00	-18.46	Vertical
11490.00	48.62	39.50	10.81	4.21	42.29	56.64	74.00	-17.36	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	40.36	39.50	10.81	4.21	42.29	48.38	54.00	-5.62	Vertical
11490.00	39.62	39.50	10.81	4.21	42.29	47.64	54.00	-6.36	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	49.75	39.52	10.78	4.21	42.27	57.78	74.00	-16.22	Vertical
11570.00	48.12	39.52	10.78	4.21	42.27	56.15	74.00	-17.85	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	41.52	39.52	10.78	4.21	42.27	49.55	54.00	-4.45	Vertical
11570.00	39.78	39.52	10.78	4.21	42.27	47.81	54.00	-6.19	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	48.52	39.53	10.76	4.21	42.26	56.55	74.00	-17.45	Vertical
11650.00	47.71	39.53	10.76	4.21	42.26	55.74	74.00	-18.26	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	38.52	39.53	10.76	4.21	42.26	46.55	54.00	-7.45	Vertical
11650.00	38.73	39.53	10.76	4.21	42.26	46.76	54.00	-7.24	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	47.52	39.50	10.81	4.21	42.29	55.54	74.00	-18.46	Vertical
11490.00	46.62	39.50	10.81	4.21	42.29	54.64	74.00	-19.36	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	40.25	39.50	10.81	4.21	42.29	48.27	54.00	-5.73	Vertical
11490.00	41.36	39.50	10.81	4.21	42.29	49.38	54.00	-4.62	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	46.62	39.52	10.78	4.21	42.27	54.65	74.00	-19.35	Vertical
11570.00	48.15	39.52	10.78	4.21	42.27	56.18	74.00	-17.82	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	39.62	39.52	10.78	4.21	42.27	47.65	54.00	-6.35	Vertical
11570.00	40.18	39.52	10.78	4.21	42.27	48.21	54.00	-5.79	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	47.52	39.53	10.76	4.21	42.26	55.55	74.00	-18.45	Vertical
11650.00	46.62	39.53	10.76	4.21	42.26	54.65	74.00	-19.35	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	40.15	39.53	10.76	4.21	42.26	48.18	54.00	-5.82	Vertical
11650.00	39.97	39.53	10.76	4.21	42.26	48.00	54.00	-6.00	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	48.62	39.50	10.81	4.21	42.29	56.64	74.00	-17.36	Vertical
11510.00	47.15	39.50	10.81	4.21	42.29	55.17	74.00	-18.83	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	39.98	39.50	10.81	4.21	42.29	48.00	54.00	-6.00	Vertical
11510.00	40.02	39.50	10.81	4.21	42.29	48.04	54.00	-5.96	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	49.62	39.52	10.77	4.21	42.27	57.64	74.00	-16.36	Vertical
11590.00	47.18	39.52	10.77	4.21	42.27	55.20	74.00	-18.80	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	40.25	39.52	10.77	4.21	42.27	48.27	54.00	-5.73	Vertical
11590.00	39.99	39.52	10.77	4.21	42.27	48.01	54.00	-5.99	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	46.62	39.50	10.81	4.21	42.29	54.64	74.00	-19.36	Vertical
11490.00	47.15	39.50	10.81	4.21	42.29	55.17	74.00	-18.83	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	40.25	39.50	10.81	4.21	42.29	48.27	54.00	-5.73	Vertical
11490.00	39.99	39.50	10.81	4.21	42.29	48.01	54.00	-5.99	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	45.52	39.52	10.78	4.21	42.27	53.55	74.00	-20.45	Vertical
11570.00	47.15	39.52	10.78	4.21	42.27	55.18	74.00	-18.82	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	38.65	39.52	10.78	4.21	42.27	46.68	54.00	-7.32	Vertical
11570.00	39.99	39.52	10.78	4.21	42.27	48.02	54.00	-5.98	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	47.15	39.53	10.76	4.21	42.26	55.18	74.00	-18.82	Vertical
11650.00	48.27	39.53	10.76	4.21	42.26	56.30	74.00	-17.70	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	39.62	39.53	10.76	4.21	42.26	47.65	54.00	-6.35	Vertical
11650.00	40.15	39.53	10.76	4.21	42.26	48.18	54.00	-5.82	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	46.62	39.50	10.81	4.21	42.29	54.64	74.00	-19.36	Vertical
11510.00	48.25	39.50	10.81	4.21	42.29	56.27	74.00	-17.73	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	39.65	39.50	10.81	4.21	42.29	47.67	54.00	-6.33	Vertical
11510.00	38.12	39.50	10.81	4.21	42.29	46.14	54.00	-7.86	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	48.52	39.52	10.77	4.21	42.27	56.54	74.00	-17.46	Vertical
11590.00	47.19	39.52	10.77	4.21	42.27	55.21	74.00	-18.79	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	40.01	39.52	10.77	4.21	42.27	48.03	54.00	-5.97	Vertical
11590.00	39.65	39.52	10.77	4.21	42.27	47.67	54.00	-6.33	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac(HT80) MIMO									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11550.00	47.15	39.51	10.80	4.21	42.28	55.18	74.00	-18.82	Vertical
11550.00	49.25	39.51	10.80	4.21	42.28	57.28	74.00	-16.72	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11550.00	40.52	39.51	10.80	4.21	42.28	48.55	54.00	-5.45	Vertical
11550.00	39.92	39.51	10.80	4.21	42.28	47.95	54.00	-6.05	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Whip Antenne
Band 1:

Band 1 – 802.11a (ANT 0)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	48.52	38.83	9.82	3.95	41.97	59.15	68.20	-9.05	Vertical
10360.00	49.33	38.83	9.82	3.95	41.97	59.96	68.20	-8.24	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	39.60	38.83	9.82	3.95	41.97	50.23	54.00	-3.77	Vertical
10360.00	40.11	38.83	9.82	3.95	41.97	50.74	54.00	-3.26	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	49.95	38.87	9.85	3.98	41.95	60.70	68.20	-7.50	Vertical
10400.00	48.21	38.87	9.85	3.98	41.95	58.96	68.20	-9.24	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	36.62	38.87	9.85	3.98	41.95	47.37	54.00	-6.63	Vertical
10400.00	38.12	38.87	9.85	3.98	41.95	48.87	54.00	-5.13	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	47.52	38.94	9.96	4.02	41.88	58.56	68.20	-9.64	Vertical
10480.00	49.88	38.94	9.96	4.02	41.88	60.92	68.20	-7.28	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	36.62	38.94	9.96	4.02	41.88	47.66	54.00	-6.34	Vertical
10480.00	35.57	38.94	9.96	4.02	41.88	46.61	54.00	-7.39	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11a (ANT 1)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	49.52	38.83	9.82	3.95	41.97	60.15	68.20	-8.05	Vertical
10360.00	48.21	38.83	9.82	3.95	41.97	58.84	68.20	-9.36	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	36.62	38.83	9.82	3.95	41.97	47.25	54.00	-6.75	Vertical
10360.00	35.55	38.83	9.82	3.95	41.97	46.18	54.00	-7.82	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	47.52	38.87	9.85	3.98	41.95	58.27	68.20	-9.93	Vertical
10400.00	46.63	38.87	9.85	3.98	41.95	57.38	68.20	-10.82	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	39.62	38.87	9.85	3.98	41.95	50.37	54.00	-3.63	Vertical
10400.00	37.81	38.87	9.85	3.98	41.95	48.56	54.00	-5.44	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	49.62	38.94	9.96	4.02	41.88	60.66	68.20	-7.54	Vertical
10480.00	48.17	38.94	9.96	4.02	41.88	59.21	68.20	-8.99	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	38.62	38.94	9.96	4.02	41.88	49.66	54.00	-4.34	Vertical
10480.00	37.15	38.94	9.96	4.02	41.88	48.19	54.00	-5.81	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	49.85	38.83	9.82	3.95	41.97	60.48	68.20	-7.72	Vertical
10360.00	48.11	38.83	9.82	3.95	41.97	58.74	68.20	-9.46	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	39.62	38.83	9.82	3.95	41.97	50.25	54.00	-3.75	Vertical
10360.00	40.15	38.83	9.82	3.95	41.97	50.78	54.00	-3.22	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	49.95	38.87	9.85	3.98	41.95	60.70	68.20	-7.50	Vertical
10400.00	48.72	38.87	9.85	3.98	41.95	59.47	68.20	-8.73	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	36.62	38.87	9.85	3.98	41.95	47.37	54.00	-6.63	Vertical
10400.00	35.51	38.87	9.85	3.98	41.95	46.26	54.00	-7.74	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	49.52	38.94	9.96	4.02	41.88	60.56	68.20	-7.64	Vertical
10480.00	48.14	38.94	9.96	4.02	41.88	59.18	68.20	-9.02	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	36.62	38.94	9.96	4.02	41.88	47.66	54.00	-6.34	Vertical
10480.00	37.84	38.94	9.96	4.02	41.88	48.88	54.00	-5.12	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	47.15	38.25	9.85	3.95	41.95	57.25	68.20	-10.95	Vertical
10380.00	46.66	38.25	9.85	3.95	41.95	56.76	68.20	-11.44	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	40.52	38.25	9.85	3.95	41.95	50.62	54.00	-3.38	Vertical
10380.00	39.32	38.25	9.85	3.95	41.95	49.42	54.00	-4.58	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	50.22	38.92	9.92	3.98	41.90	61.14	68.20	-7.06	Vertical
10460.00	49.32	38.92	9.92	3.98	41.90	60.24	68.20	-7.96	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	36.62	38.92	9.92	3.98	41.90	47.54	54.00	-6.46	Vertical
10460.00	37.81	38.92	9.92	3.98	41.90	48.73	54.00	-5.27	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	50.25	38.83	9.82	3.95	41.97	60.88	68.20	-7.32	Vertical
10360.00	49.62	38.83	9.82	3.95	41.97	60.25	68.20	-7.95	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	39.60	38.83	9.82	3.95	41.97	50.23	54.00	-3.77	Vertical
10360.00	40.15	38.83	9.82	3.95	41.97	50.78	54.00	-3.22	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	50.25	38.87	9.85	3.98	41.95	61.00	68.20	-7.20	Vertical
10400.00	48.89	38.87	9.85	3.98	41.95	59.64	68.20	-8.56	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	39.60	38.87	9.85	3.98	41.95	50.35	54.00	-3.65	Vertical
10400.00	40.15	38.87	9.85	3.98	41.95	50.90	54.00	-3.10	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	50.55	38.94	9.96	4.02	41.88	61.59	68.20	-6.61	Vertical
10480.00	49.37	38.94	9.96	4.02	41.88	60.41	68.20	-7.79	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	40.15	38.94	9.96	4.02	41.88	51.19	54.00	-2.81	Vertical
10480.00	39.67	38.94	9.96	4.02	41.88	50.71	54.00	-3.29	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	50.52	38.25	9.85	3.95	41.95	60.62	68.20	-7.58	Vertical
10380.00	48.19	38.25	9.85	3.95	41.95	58.29	68.20	-9.91	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	36.63	38.25	9.85	3.95	41.95	46.73	54.00	-7.27	Vertical
10380.00	35.14	38.25	9.85	3.95	41.95	45.24	54.00	-8.76	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	48.52	38.92	9.92	3.98	41.90	59.44	68.20	-8.76	Vertical
10460.00	47.15	38.92	9.92	3.98	41.90	58.07	68.20	-10.13	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	39.62	38.92	9.92	3.98	41.90	50.54	54.00	-3.46	Vertical
10460.00	38.84	38.92	9.92	3.98	41.90	49.76	54.00	-4.24	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT80) MIMO									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10420.00	49.62	38.89	9.89	3.98	41.93	60.45	68.20	-7.75	Vertical
10420.00	48.15	38.89	9.89	3.98	41.93	58.98	68.20	-9.22	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10420.00	40.15	38.89	9.89	3.98	41.93	50.98	54.00	-3.02	Vertical
10420.00	39.97	38.89	9.89	3.98	41.93	50.80	54.00	-3.20	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4:

Band 4 – 802.11a(ANT 0)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	47.15	39.50	10.81	4.21	42.29	55.17	74.00	-18.83	Vertical
11490.00	48.33	39.50	10.81	4.21	42.29	56.35	74.00	-17.65	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	40.25	39.50	10.81	4.21	42.29	48.27	54.00	-5.73	Vertical
11490.00	39.96	39.50	10.81	4.21	42.29	47.98	54.00	-6.02	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	46.25	39.52	10.78	4.21	42.27	54.28	74.00	-19.72	Vertical
11570.00	48.15	39.52	10.78	4.21	42.27	56.18	74.00	-17.82	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	39.62	39.52	10.78	4.21	42.27	47.65	54.00	-6.35	Vertical
11570.00	40.22	39.52	10.78	4.21	42.27	48.25	54.00	-5.75	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	45.52	39.53	10.76	4.21	42.26	53.55	74.00	-20.45	Vertical
11650.00	47.18	39.53	10.76	4.21	42.26	55.21	74.00	-18.79	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	40.25	39.53	10.76	4.21	42.26	48.28	54.00	-5.72	Vertical
11650.00	39.98	39.53	10.76	4.21	42.26	48.01	54.00	-5.99	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11a(ANT 1)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	46.62	39.50	10.81	4.21	42.29	54.64	74.00	-19.36	Vertical
11490.00	47.25	39.50	10.81	4.21	42.29	55.27	74.00	-18.73	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	39.62	39.50	10.81	4.21	42.29	47.64	54.00	-6.36	Vertical
11490.00	40.15	39.50	10.81	4.21	42.29	48.17	54.00	-5.83	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	48.52	39.52	10.78	4.21	42.27	56.55	74.00	-17.45	Vertical
11570.00	47.16	39.52	10.78	4.21	42.27	55.19	74.00	-18.81	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	42.25	39.52	10.78	4.21	42.27	50.28	54.00	-3.72	Vertical
11570.00	40.36	39.52	10.78	4.21	42.27	48.39	54.00	-5.61	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	48.52	39.53	10.76	4.21	42.26	56.55	74.00	-17.45	Vertical
11650.00	46.18	39.53	10.76	4.21	42.26	54.21	74.00	-19.79	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	39.62	39.53	10.76	4.21	42.26	47.65	54.00	-6.35	Vertical
11650.00	38.74	39.53	10.76	4.21	42.26	46.77	54.00	-7.23	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	47.15	39.50	10.81	4.21	42.29	55.17	74.00	-18.83	Vertical
11490.00	45.62	39.50	10.81	4.21	42.29	53.64	74.00	-20.36	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	39.62	39.50	10.81	4.21	42.29	47.64	54.00	-6.36	Vertical
11490.00	40.58	39.50	10.81	4.21	42.29	48.60	54.00	-5.40	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	46.56	39.52	10.78	4.21	42.27	54.59	74.00	-19.41	Vertical
11570.00	47.18	39.52	10.78	4.21	42.27	55.21	74.00	-18.79	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	39.62	39.52	10.78	4.21	42.27	47.65	54.00	-6.35	Vertical
11570.00	40.33	39.52	10.78	4.21	42.27	48.36	54.00	-5.64	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	48.52	39.53	10.76	4.21	42.26	56.55	74.00	-17.45	Vertical
11650.00	47.15	39.53	10.76	4.21	42.26	55.18	74.00	-18.82	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	39.62	39.53	10.76	4.21	42.26	47.65	54.00	-6.35	Vertical
11650.00	38.55	39.53	10.76	4.21	42.26	46.58	54.00	-7.42	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	49.35	39.50	10.81	4.21	42.29	57.37	74.00	-16.63	Vertical
11510.00	48.11	39.50	10.81	4.21	42.29	56.13	74.00	-17.87	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	40.15	39.50	10.81	4.21	42.29	48.17	54.00	-5.83	Vertical
11510.00	41.33	39.50	10.81	4.21	42.29	49.35	54.00	-4.65	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	50.25	39.52	10.77	4.21	42.27	58.27	74.00	-15.73	Vertical
11590.00	46.62	39.52	10.77	4.21	42.27	54.64	74.00	-19.36	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	39.62	39.52	10.77	4.21	42.27	47.64	54.00	-6.36	Vertical
11590.00	40.15	39.52	10.77	4.21	42.27	48.17	54.00	-5.83	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	48.52	39.50	10.81	4.21	42.29	56.54	74.00	-17.46	Vertical
11490.00	46.62	39.50	10.81	4.21	42.29	54.64	74.00	-19.36	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	39.62	39.50	10.81	4.21	42.29	47.64	54.00	-6.36	Vertical
11490.00	38.14	39.50	10.81	4.21	42.29	46.16	54.00	-7.84	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	45.15	39.52	10.78	4.21	42.27	53.18	74.00	-20.82	Vertical
11570.00	46.32	39.52	10.78	4.21	42.27	54.35	74.00	-19.65	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	39.62	39.52	10.78	4.21	42.27	47.65	54.00	-6.35	Vertical
11570.00	40.02	39.52	10.78	4.21	42.27	48.05	54.00	-5.95	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	46.62	39.53	10.76	4.21	42.26	54.65	74.00	-19.35	Vertical
11650.00	47.81	39.53	10.76	4.21	42.26	55.84	74.00	-18.16	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	38.25	39.53	10.76	4.21	42.26	46.28	54.00	-7.72	Vertical
11650.00	39.62	39.53	10.76	4.21	42.26	47.65	54.00	-6.35	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	47.51	39.50	10.81	4.21	42.29	55.53	74.00	-18.47	Vertical
11510.00	48.33	39.50	10.81	4.21	42.29	56.35	74.00	-17.65	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	40.25	39.50	10.81	4.21	42.29	48.27	54.00	-5.73	Vertical
11510.00	39.62	39.50	10.81	4.21	42.29	47.64	54.00	-6.36	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	48.52	39.52	10.77	4.21	42.27	56.54	74.00	-17.46	Vertical
11590.00	47.11	39.52	10.77	4.21	42.27	55.13	74.00	-18.87	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	39.65	39.52	10.77	4.21	42.27	47.67	54.00	-6.33	Vertical
11590.00	40.24	39.52	10.77	4.21	42.27	48.26	54.00	-5.74	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac(HT80) MIMO									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11550.00	46.62	39.51	10.80	4.21	42.28	54.65	74.00	-19.35	Vertical
11550.00	50.52	39.51	10.80	4.21	42.28	58.55	74.00	-15.45	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11550.00	39.65	39.51	10.80	4.21	42.28	47.68	54.00	-6.32	Vertical
11550.00	40.15	39.51	10.80	4.21	42.28	48.18	54.00	-5.82	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Planare WLAN Antenne

Band 1:

Band 1 – 802.11a (ANT 0)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	49.11	38.83	9.82	3.95	41.97	59.74	68.20	-8.46	Vertical
10360.00	48.52	38.83	9.82	3.95	41.97	59.15	68.20	-9.05	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	40.25	38.83	9.82	3.95	41.97	50.88	54.00	-3.12	Vertical
10360.00	39.62	38.83	9.82	3.95	41.97	50.25	54.00	-3.75	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	48.45	38.87	9.85	3.98	41.95	59.20	68.20	-9.00	Vertical
10400.00	49.31	38.87	9.85	3.98	41.95	60.06	68.20	-8.14	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	37.52	38.87	9.85	3.98	41.95	48.27	54.00	-5.73	Vertical
10400.00	36.62	38.87	9.85	3.98	41.95	47.37	54.00	-6.63	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	48.50	38.94	9.96	4.02	41.88	59.54	68.20	-8.66	Vertical
10480.00	46.62	38.94	9.96	4.02	41.88	57.66	68.20	-10.54	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	36.62	38.94	9.96	4.02	41.88	47.66	54.00	-6.34	Vertical
10480.00	35.51	38.94	9.96	4.02	41.88	46.55	54.00	-7.45	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11a (ANT 1)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	50.25	38.83	9.82	3.95	41.97	60.88	68.20	-7.32	Vertical
10360.00	49.33	38.83	9.82	3.95	41.97	59.96	68.20	-8.24	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	37.15	38.83	9.82	3.95	41.97	47.78	54.00	-6.22	Vertical
10360.00	36.63	38.83	9.82	3.95	41.97	47.26	54.00	-6.74	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	49.65	38.87	9.85	3.98	41.95	60.40	68.20	-7.80	Vertical
10400.00	47.12	38.87	9.85	3.98	41.95	57.87	68.20	-10.33	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	40.25	38.87	9.85	3.98	41.95	51.00	54.00	-3.00	Vertical
10400.00	36.69	38.87	9.85	3.98	41.95	47.44	54.00	-6.56	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	48.72	38.94	9.96	4.02	41.88	59.76	68.20	-8.44	Vertical
10480.00	47.15	38.94	9.96	4.02	41.88	58.19	68.20	-10.01	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	39.60	38.94	9.96	4.02	41.88	50.64	54.00	-3.36	Vertical
10480.00	40.27	38.94	9.96	4.02	41.88	51.31	54.00	-2.69	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	49.06	38.83	9.82	3.95	41.97	59.69	68.20	-8.51	Vertical
10360.00	47.15	38.83	9.82	3.95	41.97	57.78	68.20	-10.42	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	40.15	38.83	9.82	3.95	41.97	50.78	54.00	-3.22	Vertical
10360.00	39.62	38.83	9.82	3.95	41.97	50.25	54.00	-3.75	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	48.58	38.87	9.85	3.98	41.95	59.33	68.20	-8.87	Vertical
10400.00	49.96	38.87	9.85	3.98	41.95	60.71	68.20	-7.49	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	37.15	38.87	9.85	3.98	41.95	47.90	54.00	-6.10	Vertical
10400.00	36.32	38.87	9.85	3.98	41.95	47.07	54.00	-6.93	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	50.52	38.94	9.96	4.02	41.88	61.56	68.20	-6.64	Vertical
10480.00	47.11	38.94	9.96	4.02	41.88	58.15	68.20	-10.05	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	36.62	38.94	9.96	4.02	41.88	47.66	54.00	-6.34	Vertical
10480.00	35.59	38.94	9.96	4.02	41.88	46.63	54.00	-7.37	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	48.25	38.25	9.85	3.95	41.95	58.35	68.20	-9.85	Vertical
10380.00	46.32	38.25	9.85	3.95	41.95	56.42	68.20	-11.78	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	39.62	38.25	9.85	3.95	41.95	49.72	54.00	-4.28	Vertical
10380.00	40.71	38.25	9.85	3.95	41.95	50.81	54.00	-3.19	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	49.62	38.92	9.92	3.98	41.90	60.54	68.20	-7.66	Vertical
10460.00	48.87	38.92	9.92	3.98	41.90	59.79	68.20	-8.41	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	37.85	38.92	9.92	3.98	41.90	48.77	54.00	-5.23	Vertical
10460.00	36.71	38.92	9.92	3.98	41.90	47.63	54.00	-6.37	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	50.15	38.83	9.82	3.95	41.97	60.78	68.20	-7.42	Vertical
10360.00	49.62	38.83	9.82	3.95	41.97	60.25	68.20	-7.95	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	38.62	38.83	9.82	3.95	41.97	49.25	54.00	-4.75	Vertical
10360.00	36.41	38.83	9.82	3.95	41.97	47.04	54.00	-6.96	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	48.25	38.87	9.85	3.98	41.95	59.00	68.20	-9.20	Vertical
10400.00	47.66	38.87	9.85	3.98	41.95	58.41	68.20	-9.79	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	39.60	38.87	9.85	3.98	41.95	50.35	54.00	-3.65	Vertical
10400.00	38.41	38.87	9.85	3.98	41.95	49.16	54.00	-4.84	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	46.52	38.94	9.96	4.02	41.88	57.56	68.20	-10.64	Vertical
10480.00	47.11	38.94	9.96	4.02	41.88	58.15	68.20	-10.05	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	38.74	38.94	9.96	4.02	41.88	49.78	54.00	-4.22	Vertical
10480.00	39.62	38.94	9.96	4.02	41.88	50.66	54.00	-3.34	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	50.25	38.25	9.85	3.95	41.95	60.35	68.20	-7.85	Vertical
10380.00	49.63	38.25	9.85	3.95	41.95	59.73	68.20	-8.47	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	37.15	38.25	9.85	3.95	41.95	47.25	54.00	-6.75	Vertical
10380.00	36.63	38.25	9.85	3.95	41.95	46.73	54.00	-7.27	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	48.25	38.92	9.92	3.98	41.90	59.17	68.20	-9.03	Vertical
10460.00	46.61	38.92	9.92	3.98	41.90	57.53	68.20	-10.67	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	40.15	38.92	9.92	3.98	41.90	51.07	54.00	-2.93	Vertical
10460.00	39.97	38.92	9.92	3.98	41.90	50.89	54.00	-3.11	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac(HT80) MIMO									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10420.00	50.52	38.89	9.89	3.98	41.93	61.35	68.20	-6.85	Vertical
10420.00	49.77	38.89	9.89	3.98	41.93	60.60	68.20	-7.60	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10420.00	39.65	38.89	9.89	3.98	41.93	50.48	54.00	-3.52	Vertical
10420.00	40.11	38.89	9.89	3.98	41.93	50.94	54.00	-3.06	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4:

Band 4 – 802.11a(ANT 0)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	49.62	39.50	10.81	4.21	42.29	57.64	74.00	-16.36	Vertical
11490.00	48.15	39.50	10.81	4.21	42.29	56.17	74.00	-17.83	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	39.62	39.50	10.81	4.21	42.29	47.64	54.00	-6.36	Vertical
11490.00	40.15	39.50	10.81	4.21	42.29	48.17	54.00	-5.83	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	47.52	39.52	10.78	4.21	42.27	55.55	74.00	-18.45	Vertical
11570.00	49.32	39.52	10.78	4.21	42.27	57.35	74.00	-16.65	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	40.15	39.52	10.78	4.21	42.27	48.18	54.00	-5.82	Vertical
11570.00	39.33	39.52	10.78	4.21	42.27	47.36	54.00	-6.64	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	46.62	39.53	10.76	4.21	42.26	54.65	74.00	-19.35	Vertical
11650.00	47.85	39.53	10.76	4.21	42.26	55.88	74.00	-18.12	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	39.62	39.53	10.76	4.21	42.26	47.65	54.00	-6.35	Vertical
11650.00	40.18	39.53	10.76	4.21	42.26	48.21	54.00	-5.79	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11a(ANT 1)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	47.15	39.50	10.81	4.21	42.29	55.17	74.00	-18.83	Vertical
11490.00	48.95	39.50	10.81	4.21	42.29	56.97	74.00	-17.03	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	40.15	39.50	10.81	4.21	42.29	48.17	54.00	-5.83	Vertical
11490.00	39.66	39.50	10.81	4.21	42.29	47.68	54.00	-6.32	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	49.62	39.52	10.78	4.21	42.27	57.65	74.00	-16.35	Vertical
11570.00	48.15	39.52	10.78	4.21	42.27	56.18	74.00	-17.82	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	43.62	39.52	10.78	4.21	42.27	51.65	54.00	-2.35	Vertical
11570.00	41.18	39.52	10.78	4.21	42.27	49.21	54.00	-4.79	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	48.52	39.53	10.76	4.21	42.26	56.55	74.00	-17.45	Vertical
11650.00	46.65	39.53	10.76	4.21	42.26	54.68	74.00	-19.32	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	40.15	39.53	10.76	4.21	42.26	48.18	54.00	-5.82	Vertical
11650.00	39.75	39.53	10.76	4.21	42.26	47.78	54.00	-6.22	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	48.25	39.50	10.81	4.21	42.29	56.27	74.00	-17.73	Vertical
11490.00	46.62	39.50	10.81	4.21	42.29	54.64	74.00	-19.36	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	40.15	39.50	10.81	4.21	42.29	48.17	54.00	-5.83	Vertical
11490.00	39.63	39.50	10.81	4.21	42.29	47.65	54.00	-6.35	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	47.15	39.52	10.78	4.21	42.27	55.18	74.00	-18.82	Vertical
11570.00	48.26	39.52	10.78	4.21	42.27	56.29	74.00	-17.71	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	40.15	39.52	10.78	4.21	42.27	48.18	54.00	-5.82	Vertical
11570.00	41.98	39.52	10.78	4.21	42.27	50.01	54.00	-3.99	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	47.15	39.53	10.76	4.21	42.26	55.18	74.00	-18.82	Vertical
11650.00	46.37	39.53	10.76	4.21	42.26	54.40	74.00	-19.60	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	40.15	39.53	10.76	4.21	42.26	48.18	54.00	-5.82	Vertical
11650.00	40.33	39.53	10.76	4.21	42.26	48.36	54.00	-5.64	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									


Band 4 – 802.11n(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	48.15	39.50	10.81	4.21	42.29	56.17	74.00	-17.83	Vertical
11510.00	47.16	39.50	10.81	4.21	42.29	55.18	74.00	-18.82	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	39.62	39.50	10.81	4.21	42.29	47.64	54.00	-6.36	Vertical
11510.00	40.15	39.50	10.81	4.21	42.29	48.17	54.00	-5.83	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	49.62	39.52	10.77	4.21	42.27	57.64	74.00	-16.36	Vertical
11590.00	47.88	39.52	10.77	4.21	42.27	55.90	74.00	-18.10	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	40.15	39.52	10.77	4.21	42.27	48.17	54.00	-5.83	Vertical
11590.00	41.36	39.52	10.77	4.21	42.27	49.38	54.00	-4.62	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac(HT20) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	49.03	39.50	10.81	4.21	42.29	57.05	74.00	-16.95	Vertical
11490.00	48.15	39.50	10.81	4.21	42.29	56.17	74.00	-17.83	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	40.02	39.50	10.81	4.21	42.29	48.04	54.00	-5.97	Vertical
11490.00	39.37	39.50	10.81	4.21	42.29	47.39	54.00	-6.61	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	46.62	39.52	10.78	4.21	42.27	54.65	74.00	-19.35	Vertical
11570.00	48.52	39.52	10.78	4.21	42.27	56.55	74.00	-17.45	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	39.15	39.52	10.78	4.21	42.27	47.18	54.00	-6.82	Vertical
11570.00	38.47	39.52	10.78	4.21	42.27	46.50	54.00	-7.50	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	47.15	39.53	10.76	4.21	42.26	55.18	74.00	-18.82	Vertical
11650.00	48.26	39.53	10.76	4.21	42.26	56.29	74.00	-17.71	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	39.62	39.53	10.76	4.21	42.26	47.65	54.00	-6.35	Vertical
11650.00	38.14	39.53	10.76	4.21	42.26	46.17	54.00	-7.83	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac(HT40) MIMO									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	46.62	39.50	10.81	4.21	42.29	54.64	74.00	-19.36	Vertical
11510.00	48.11	39.50	10.81	4.21	42.29	56.13	74.00	-17.87	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	39.65	39.50	10.81	4.21	42.29	47.67	54.00	-6.33	Vertical
11510.00	40.78	39.50	10.81	4.21	42.29	48.80	54.00	-5.20	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	49.65	39.52	10.77	4.21	42.27	57.67	74.00	-16.33	Vertical
11590.00	48.11	39.52	10.77	4.21	42.27	56.13	74.00	-17.87	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	40.15	39.52	10.77	4.21	42.27	48.17	54.00	-5.83	Vertical
11590.00	39.67	39.52	10.77	4.21	42.27	47.69	54.00	-6.31	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac(HT80) MIMO									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11550.00	48.52	39.51	10.80	4.21	42.28	56.55	74.00	-17.45	Vertical
11550.00	49.66	39.51	10.80	4.21	42.28	57.69	74.00	-16.31	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11550.00	40.51	39.51	10.80	4.21	42.28	48.54	54.00	-5.46	Vertical
11550.00	41.39	39.51	10.80	4.21	42.28	49.42	54.00	-4.58	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

6.8 Frequency stability

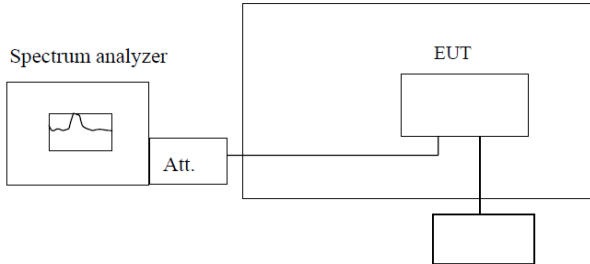Test Requirement:	FCC Part15 E Section 15.407 (g)
Limit:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
Test setup:	Temperature Chamber  Variable Power Supply Note : Measurement setup for testing on Antenna connector
Test procedure:	1. The EUT is installed in an environment test chamber with external power source. 2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT. 3. A sufficient stabilization period at each temperature is used prior to each frequency measurement. 4. When temperature is stabled, measure the frequency stability. 5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (the worst channel):

Band 1:

Voltage vs. Frequency Stability (Lowest channel=5180MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Temp(°C)	Voltage(dc)		
20	3.0V	5179.997473	0.49
	3.3V	5179.974569	4.91
	3.6V	5179.963951	6.96

Temperature vs. Frequency Stability (Lowest channel=5180MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Voltage(dc)	Temp(°C)		
3.3V	-20	5179.987346	2.44
	-10	5179.995478	0.87
	0	5179.984621	2.97
	10	5179.989456	2.04
	20	5179.995643	0.84
	30	5179.986412	2.62
	40	5179.978943	4.07
	50	5179.986246	2.66

Band 4:

Voltage vs. Frequency Stability (Lowest channel=5745MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Temp(°C)	Voltage(dc)		
20	3.0V	5744.984764	2.65
	3.3V	5744.998973	0.18
	3.6V	5744.996489	0.61

Temperature vs. Frequency Stability (Lowest channel=5745MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Voltage(dc)	Temp(°C)		
3.3V	-20	5744.995642	0.76
	-10	5744.989468	1.83
	0	5744.991443	1.45
	10	5744.989476	1.83
	20	5744.995647	0.76
	30	5744.998634	0.24
	40	5744.988641	1.98
	50	5744.989768	1.78