

TEST REPORT

Applicant: 8devices

Address: FCC: Antakalnio 17 - 6 Vilnius Lithuania
IC: Antakalnio g. 17-6 Vilnius Vilnius County LT-10312 Lithuania

Product Name: Noni56M2-I

FCC ID: Z9W-NON56

IC: 11468A-NON56

HVIN: NON_100

47 CFR Part 15, Subpart E(15.407)
RSS-248 Issue 3, October 11, 2024

Standard(s): RSS-Gen, Issue 5, February 2021 Amendment 2
ANSI C63.10-2013
KDB 987594 D02 U-NII 6 GHz EMC Measurement v03

Report Number: 2402Z106133E-RF-00B

Report Date: 2025/6/20

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Pedro Yun

Gavin Xu

Reviewed By: Pedro Yun
Title: Project Engineer

Approved By: Gavin Xu
Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888
Fax: +86-769-86858891
www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 ACCESSORY INFORMATION.....	5
1.3 ANTENNA INFORMATION DETAIL▲.....	6
1.4 EQUIPMENT MODIFICATIONS	6
2. SUMMARY OF TEST RESULTS	7
3. DESCRIPTION OF TEST CONFIGURATION	8
3.1 OPERATION FREQUENCY DETAIL.....	8
3.2 EUT EXERCISE SOFTWARE.....	10
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	12
3.4 SUPPORT CABLE LIST AND DETAILS	12
3.5 BLOCK DIAGRAM OF TEST SETUP	12
3.6 TEST FACILITY.....	14
3.7 MEASUREMENT UNCERTAINTY	14
4. REQUIREMENTS AND TEST PROCEDURES	15
4.1 AC LINE CONDUCTED EMISSIONS	15
4.1.1 Applicable Standard.....	15
4.1.2 EUT Setup.....	17
4.1.3 EMI Test Receiver Setup	17
4.1.4 Test Procedure	18
4.1.5 Corrected Amplitude & Margin Calculation	18
4.1.6 Test Result	18
4.2 RADIATION SPURIOUS EMISSIONS	19
4.2.1 Applicable Standard.....	19
4.2.2 EUT Setup.....	20
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup	22
4.2.4 Test Procedure	22
4.2.5 Corrected Result & Margin Calculation	23
4.2.6 Test Result	23
4.3 26 dB EMISSION BANDWIDTH	24
4.3.1 Applicable Standard.....	24
4.3.2 EUT Setup.....	24
4.3.3 Test Procedure	24
4.3.4 Test Result	24
4.4 99% OCCUPIED BANDWIDTH	25
4.4.1 Applicable Standard.....	25
4.4.2 EUT Setup.....	25
4.4.3 Test Procedure	26
4.4.4 Test Result	26
4.5 MAXIMUM EIRP	27
4.5.1 Applicable Standard.....	27

4.5.2 EUT Setup.....	27
4.5.3 Test Procedure	27
4.5.4 Test Result	27
4.6 MAXIMUM POWER SPECTRAL DENSITY	28
4.6.1 Applicable Standard.....	28
4.6.2 EUT Setup.....	28
4.6.3 Test Procedure	28
4.6.4 Test Result	28
4.7 IN-BAND EMISSION	29
4.7.1 Applicable Standard.....	29
4.7.2 EUT Setup.....	29
4.7.3 Test Procedure	29
4.7.4 Test Result	30
4.8 DUTY CYCLE	31
4.8.1 EUT Setup.....	31
4.8.2 Test Procedure	31
4.8.3 Judgment.....	31
4.9 CONTENTION BASED PROTOCOL.....	32
4.9.1 Applicable Standard.....	32
4.9.2 EUT Setup.....	33
4.9.3 Test Procedure	33
4.9.4 Test Result	34
4.10 ANTENNA REQUIREMENT.....	35
4.10.1 Applicable Standard.....	35
4.10.2 Judgment.....	35
4.11 OPERATIONAL REQUIREMENTS	36
4.11.1 Applicable Standard.....	36
4.11.2 Judgment.....	36
5. Test DATA AND RESULTS	37
5.1 AC LINE CONDUCTED EMISSIONS.....	37
5.2 RADIATION SPURIOUS EMISSIONS	42
5.3 26dB EMISSION BANDWIDTH	106
5.4 99% OCCUPIED BANDWIDTH	118
5.5 MAXIMUM CONDUCTED OUTPUT POWER.....	130
5.6 MAXIMUM POWER SPECTRAL DENSITY	137
5.7 IN-BAND EMISSION.....	181
5.8 DUTY CYCLE:.....	216
5.9 CONTENTION BASED PROTOCOL:	218
EXHIBIT A - EUT PHOTOGRAPHS.....	239
EXHIBIT B - TEST SETUP PHOTOGRAPHS	240
EXHIBIT C - RF EXPOSURE EVALUATION	241
MAXIMUM PERMISSIBLE EXPOSURE (MPE)	241
EXEMPTION LIMITS FOR ROUTINE EVALUATION-RF EXPOSURE EVALUATION.....	243

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2402Z106133E-RF-00B	Original Report	2025/6/20

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Noni56M2-I
EUT Model:	NON_100
Equipment Type:	Low-power indoor client devices(6XD)
Operation Frequency:	U-NII 5(5925-6425 MHz Band): 5955-6415 MHz (802.11ax he20/be eht20) 5965-6405 MHz(802.11ax he40/be eht40) 5985-6385 MHz(802.11ax he80/be eht80) 6025-6345 MHz(802.11ax he160/be eht160) 6105-6265 MHz(802.11be eht320)
	U-NII 6(6425-6525 MHz Band): 6435-6515 MHz (802.11ax he20/be eht20) 6445-6525 MHz(802.11ax he40/be eht40) 6465-6545 MHz(802.11ax he80/be eht80) 6505 MHz(802.11ax he160/be eht160) 6425 MHz(802.11be eht320)
	U-NII 7(6525-6875 MHz Band): 6535-6855 MHz (802.11ax he20/be eht20) 6565-6845 MHz(802.11ax he40/be eht40) 6625-6865 MHz(802.11ax he80/be eht80) 6665-6825 MHz(802.11ax he160/be eht160) 6585-6745 MHz(802.11be eht320)
	U-NII 8(6875-7125 MHz Band): 6875-7095 MHz (802.11ax he20/be eht20) 6885-7085 MHz(802.11ax he40/be eht40) 6945-7025 MHz(802.11ax he80/be eht80) 6985 MHz(802.11ax he160/be eht160) 6905MHz(802.11be eht320)
Maximum Average Output Power (EIRP):	13.43dBm (5925-6425 MHz) 14.88dBm (6425-6525 MHz) 15.87dBm (6525-6875MHz) 15.38dBm (6875-7125 MHz)
Modulation Type:	OFDMA-BPSK,QPSK,16QAM,64QAM,256QAM,1024QAM,4096QAM
Rated Input Voltage:	DC 3.3V
Serial Number:	2UUQ-1(For RF Conducted Test) 2UUQ-2(For Radiated spurious emission and AC line conducted emission tests)
EUT Received Date:	2024/11/21
EUT Received Status:	Good

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.3 Antenna Information Detail▲

Antenna	Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Chain 0 &Chain 1 &Chain 2 &Chain 3	ABRACON	FPC	50	5925-6425 MHz	3.8 dBi
				6425-6525 MHz	3.8 dBi
				6525-6875 MHz	3.8 dBi
				6875-7125 MHz	3.8 dBi

Note:
The system supports maximum 4T4R CDD modes for 802.11ax/be modes.
Per KDB 662911 D01 Multiple Transmitter Output v02r01:

For power measurements:
CDD Mode:
Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$
directional gain=3.8 dBi +0dB =3.8 dBi

For power spectral density (PSD) measurements:
Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.
directional gain=3.8 dBi +6.02 dB =9.82 dBi

The design of compliance with §15.203:

Unit uses a permanently attached antenna.

Unit uses a unique coupling to the intentional radiator.

Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a) RSS-Gen Clause 8.8	AC line conducted emissions	Compliant
FCC§15.205& §15.209 &§15.407(b) RSS-248 Clause 4.6.2	Radiation Spurious Emissions	Compliant
§15.407(b)(7) RSS-248 Clause 4.6.2 b	In-band Emission	Compliant
§15.407(a) (11) RSS-248 Clause 4.4	26 dB Emission Bandwidth	Compliant
RSS-Gen Clause 6.7	99% Occupied bandwidth	Compliant
§15.407(a) (8) RSS-248 Clause 4.5.3	Maximum E.I.R.P.	Compliant
§15.407(a) (8) RSS-248 Clause 4.5.3	Maximum Power Spectral Density	Compliant
§15.407 (d) (6) RSS-248 Clause 4.7	Contention Based Protocol	Compliant
§15.203 RSS-Gen Clause 6.8	Antenna Requirement	Compliant
RSS-248 Clause 4.8	Operational requirements	Compliant
FCC §1.1310&§2.1091&§15.407 (f)	Maximum Permissible Exposure (MPE)	Compliant
RSS-102 Clause 6.6	Exemption Limits For Routine Evaluation-RF Exposure Evaluation	Compliant

Note 1: For AC line conducted emissions, the maximum output power mode and channel was tested.
 Note 2: For Radiated Spurious Emissions 9kHz~1GHz and 18~40GHz, the maximum output power mode and channel was tested.

3. DESCRIPTION OF TEST CONFIGURATION

3.1 Operation Frequency Detail

U-NII 5 Band(5925-6425 MHz):

802.11ax he20/be eht20		802.11ax he40/be eht40		802.11ax he80/be eht80		802.11ax he160/ be eht160	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	3	5965	7	5985	15	6025
5	5975	11	6005	23	6065	/	/
~	~	~	~	/	/	/	/
45	6175	43	6165	39	6145	47	6185
~	~	~	~	~	~	/	/
89	6395	83	6365	71	6305	/	/
93	6415	91	6405	87	6385	79	6345

802.1be eht320	
Channel	Frequency (MHz)
31	6105
63	6265

Crossed U-NII 5 and U-NII 6:

802.1be eht320	
Channel	Frequency (MHz)
95	6425

U-NII 6 Band(6425-6525 MHz):

802.11ax he20/be eht20		802.11ax he40/be eht40		802.11ax he80/be eht80		802.11ax he160/ be eht160	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
97	6435	99	6445	/	/	/	/
101	6455	/	/	/	/	/	/
105	6475	/	/	103	6465	/	/
109	6495	107	6485	/	/	/	/
113	6515	/	/	/	/	/	/

Crossed U-NII 6 and U-NII 7:

802.11ax he20/be eht20		802.11ax he40/be eht40		802.11ax he80/be eht80		802.11ax he160/ be eht160	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
/	/	115	6525	119	6545	111	6505

802.1be eht320	
Channel	Frequency (MHz)
127	6585

U-NII 7 Band(6525-6875 MHz):

802.11ax he20/be eht20		802.11ax he40/be eht40		802.11ax he80/be eht80		802.11ax he160/ be eht160	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
117	6535	123	6565	135	6625	/	/
121	6555	131	6605	/	/	/	/
~	~	~	~	/	/	/	/
149	6695	147	6685	151	6705	143	6665
~	~	~	~	/	/	/	/
177	6835	171	6805	/	/	/	/
181	6855	179	6845	167	6785	/	/

Crossed U-NII 7 and U-NII 8:

802.11ax he20/be eht20		802.11ax he40/be eht40		802.11ax he80/ be eht80		802.11ax he160/ be eht160	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
185	6875	187	6885	183	6865	175	6825

802.1be eht320	
Channel	Frequency (MHz)
159	6745
191	6905

U-NII 8 Band(6875-7125 MHz):

802.11ax he20/be eht20		802.11ax he40/be eht40		802.11ax he80/be eht80		802.11ax he160/ be eht160	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
189	6895	195	6925	199	6945	/	/
193	6915	~	~	/	/	/	/
~	~	~	~	/	/	/	/
209	6995	211	7005	/	/	207	6985
~	~	~	~	/	/	/	/
225	7075	~	~	/	/	/	/
229	7095	227	7085	215	7025	/	/

Note: The above frequencies in bold were performed the test.

3.2 EUT Exercise Software

EUT Operation Mode:		The system was configured for testing in Engineering Mode, which was provided by the manufacturer.					
Equipment Modifications:		No					
EUT Exercise Software:		QRCT4					
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:							
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting			
				Chain 0	Chain 1	Chain 2	Chain 3
U-NII 5 Band(5925-6425 MHz):							
802.11be20	Lowest	5955	MCS0	-7	-5	-8	-6
	Middle	6175	MCS0	-7	-5	-8	-6
	Highest	6415	MCS0	-7	-5	-5	-6
802.11be40	Lowest	5965	MCS0	-5	-2	-5	-4
	Middle	6165	MCS0	-5	-2	-5	-4
	Highest	6405	MCS0	-5	-2	-2	-4
802.11be80	Lowest	5985	MCS0	-1	2	-1	0
	Middle	6145	MCS0	-1	2	0	0
	Highest	6385	MCS0	-1	2	0	0
802.11be160	Lowest	6025	MCS0	1	4	1	2
	Middle	6185	MCS0	1	4	2	2
	Highest	6345	MCS0	1	4	2	4
802.11be320	Lowest	6105	MCS0	4	5	4	4
	Highest	6265	MCS0	2	5	4	4
Crossed U-NII 5 and U-NII 6:							
802.11be320	Additional	6425	MCS0	4	5	5	5
U-NII 6 Band(6425-6525 MHz):							
802.11 be20	Lowest	6435	MCS0	-7	-5	-5	-5
	Middle	6475	MCS0	-7	-5	-5	-5
	Highest	6515	MCS0	-7	-5	-5	-5
802.11 be40	Lowest	6445	MCS0	-5	-2	-2	-3
	Highest	6485	MCS0	-5	-2	-2	-3
802.11 be80	Middle	6465	MCS0	-1	2	2	1
Crossed U-NII 6 and U-NII 7:							
802.11 be40	Additional	6525	MCS0	-5	-2	-2	-3
802.11be80	Additional	6545	MCS0	-1	2	2	1
802.11be160	Additional	6505	MCS0	2	4	4	3
802.11be320	Additional	6585	MCS0	5	7	5	6

U-NII 7 Band(6525-6875 MHz):

802.11be20	Lowest	6535	MCS0	-7	-4	-3	-5
	Middle	6695	MCS0	-7	-6	-6	-5
	Highest	6855	MCS0	-7	-6	-5	-5
802.11be40	Lowest	6565	MCS0	-5	-2	-2	-2
	Middle	6685	MCS0	-5	-3	-4	-2
	Highest	6845	MCS0	-5	-3	-4	-2
802.11be80	Lowest	6625	MCS0	-2	0	-1	1
	Middle	6705	MCS0	-1	0	-1	1
	Highest	6785	MCS0	0	0	-1	1
802.11be160	Middle	6665	MCS0	3	3	3	4

Crossed U-NII 7 and U-NII 8:

802.11 be20	Additional	6875	MCS0	-5	-6	-6	-5
802.11be40	Additional	6885	MCS0	-2	-3	-1	-1
802.11 be80	Additional	6865	MCS0	0	2	1	2
802.11be160	Additional	6825	MCS0	1	4	3	2
802.11be320	Additional	6745	MCS0	4	6	5	6
	Additional	6905	MCS0	5	6	5	6

U-NII 8 Band(6875-7125 MHz):

802.11be20	Lowest	6895	MCS0	-4	-6	-4	-4
	Middle	6995	MCS0	-6	-5	-4	-4
	Highest	7095	MCS0	-5	-4	-3	-4
802.11be40	Lowest	6925	MCS0	-2	-2	-1	-1
	Middle	7005	MCS0	-3	-2	-1	-1
	Highest	7085	MCS0	-2	-1	0	-1
802.11be80	Lowest	6945	MCS0	1	1	2	2
	Highest	7025	MCS0	0	1	2	2
802.11 be160	Middle	6985	MCS0	3	3	4	4

Note:

1. The system support 802.11ax he20/ax he40/ax he80/ax he160/be eht20/be eht40/be eht80/be eht160/be eht320, ax he20/ax he40/ax he80/ax he160 were reduced since the identical parameters with be eht20/be eht40/be eht80/be eht160.
2. The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.
3. The device supports SISO and MIMO in all modes, per pretest, 4T4R mode was the worst mode and reported for 802.11ax/be mode.
4. For 802.11ax/be mode, the device not support partial RU mode.
5. The device both support 4*4 MIMO and 2*2 MIMO function, the power setting are the same.

3.3 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
ZIONCOM	Router	MB-R210-00	EMZBWR21103002
Bacl	RJ45 Load	RJ45X1	F-EM-PHRJ45X1001
Lenovo	Laptop	G510	CB30920865
GlobTek	Adapter	GT-46240-2412-T2	SAA-210577-EA
Kingston	USB Flash Disk	32G	EMZBUD21103001
8devices	Debug Board	Unknown	2UUQ-5

3.4 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DC Cable	No	No	1.2	Adapter	Debug Board
RJ45 Cable	Yes	No	10	Router	Debug Board
RJ45 Cable	Yes	No	10	RJ45 Load	Debug Board
RJ45 Cable	Yes	No	10	Laptop	Debug Board


3.5 Block Diagram of Test Setup

AC line conducted emissions:

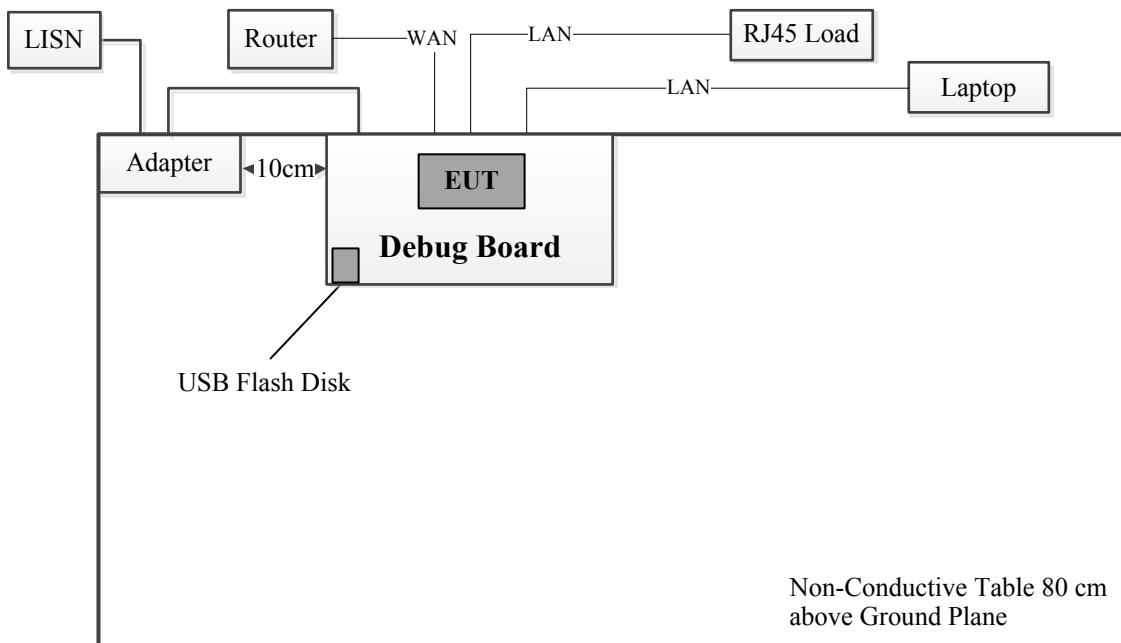


Spurious Emissions:

Below 1GHz:

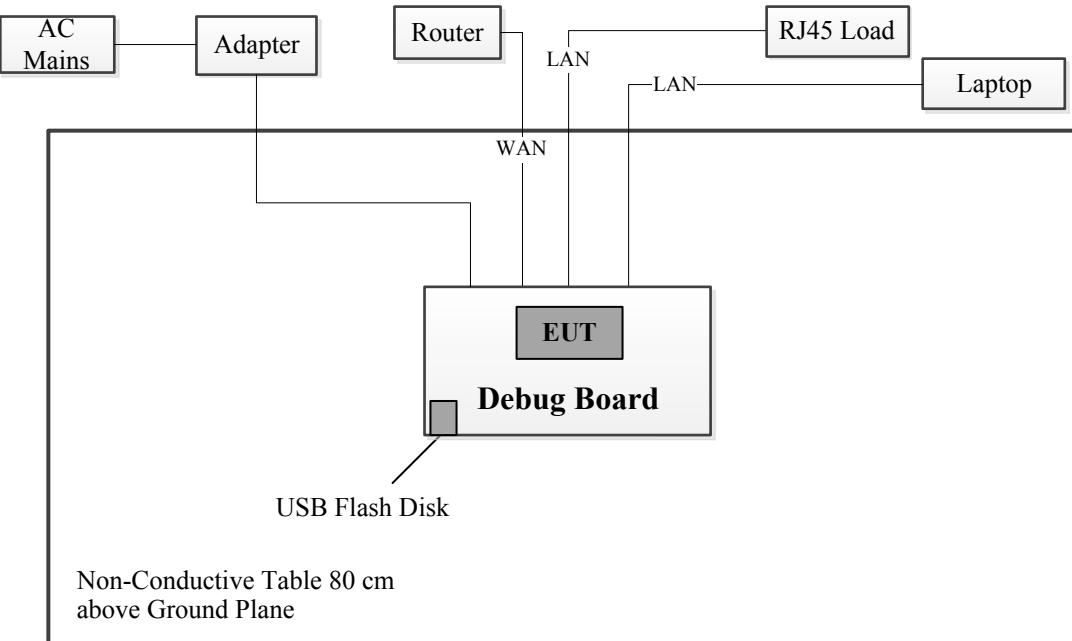

Above 1GHz:

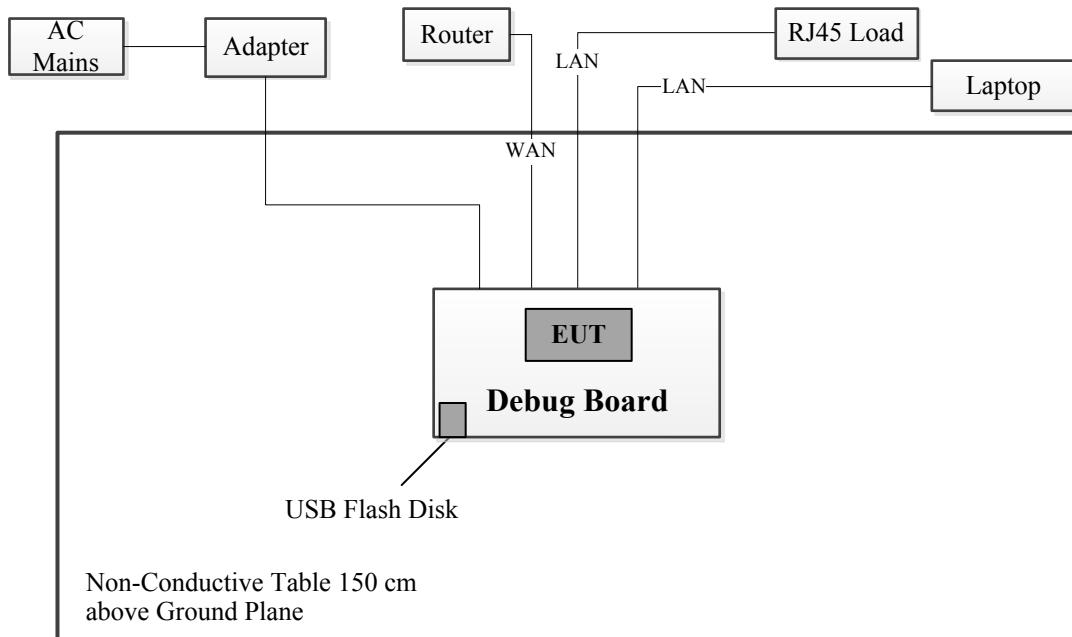

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz: 5.47 dB, 26.5GHz~40GHz: 5.63 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST PROCEDURES

4.1 AC Line Conducted Emissions

4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

RSS-Gen Clause 8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT. For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50


Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

(a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.

(b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

4.1.2 EUT Setup

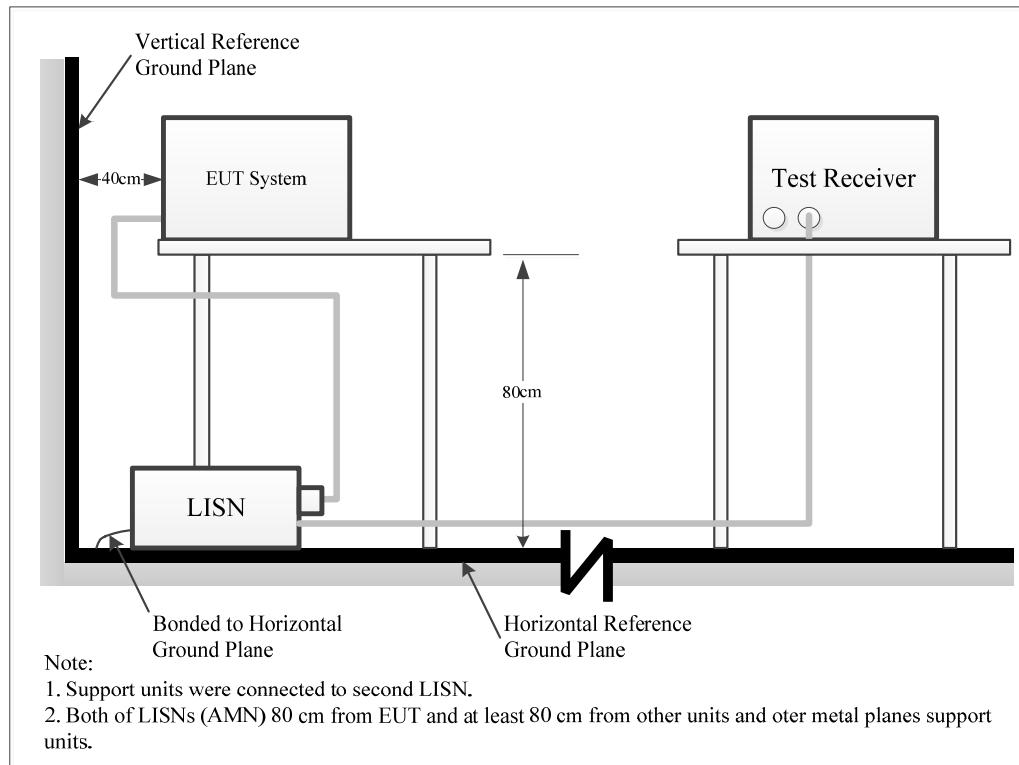

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207, RSS-Gen limits.

The spacing between the peripherals was 10cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground[protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor=attenuation caused by cable loss + voltage division factor of AMN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Result

Please refer to section 5.1.

4.2 Radiation Spurious Emissions

4.2.1 Applicable Standard

FCC §15.407 (b);

- (6) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.
- (9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.
- (10) The provisions of § 15.205 apply to intentional radiators operating under this section.

RSS-248 Clause 4.6.1 This section specifies measurement requirements for unwanted emission limits for RLAN devices. Measurement requirements

The power of the unwanted emissions shall be measured in terms of average value.

Measurements shall employ a resolution bandwidth of 1 MHz. A narrower resolution bandwidth may be used, provided the measured power is integrated over 1 MHz. Measurements of the unwanted emissions shall be performed and reported using the lowest and highest channels that the device supports.

For purposes of this section, the channel bandwidth is identical to the occupied bandwidth or the 26 dB emission bandwidth, whereas the channel edges are the outermost frequency points that define the channel bandwidth.

If the transmission is in bursts, the provisions for pulsed operation in RSS-Gen shall apply.


RSS-248 Clause 4.6. 2 Unwanted emission limits

The following unwanted emission limits shall apply:


- a. Any emissions outside of the 5925-7125 MHz frequency band shall not exceed -27 dbm/MHz e.i.r.p.
Spectral density



4.2.2 EUT Setup

9kHz~30MHz:

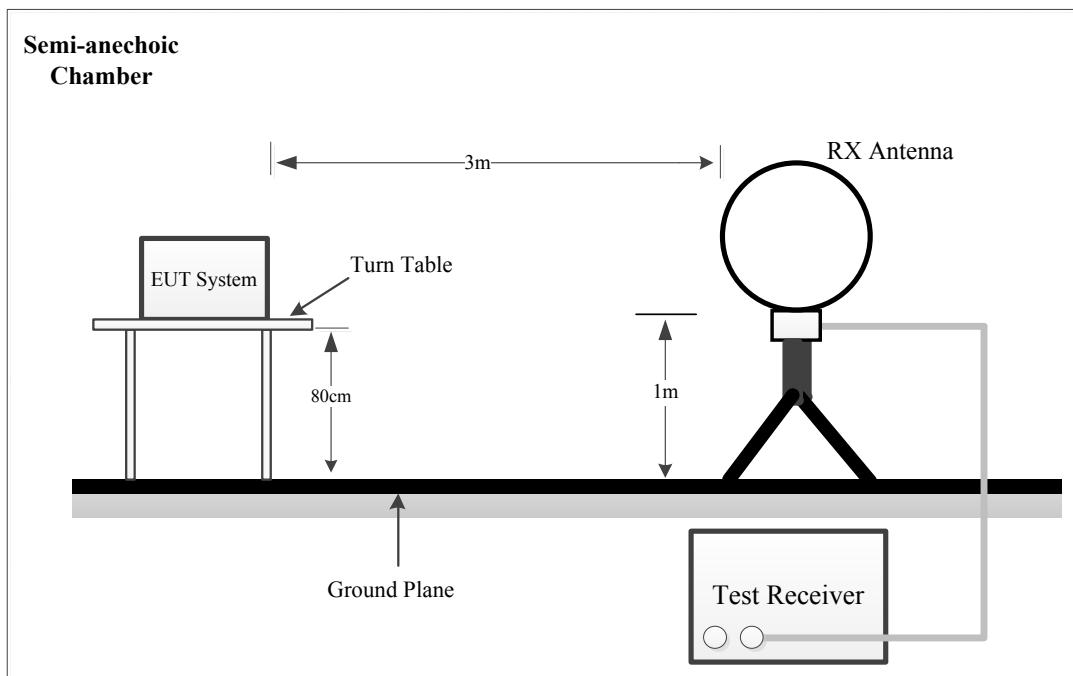

30MHz~1GHz:

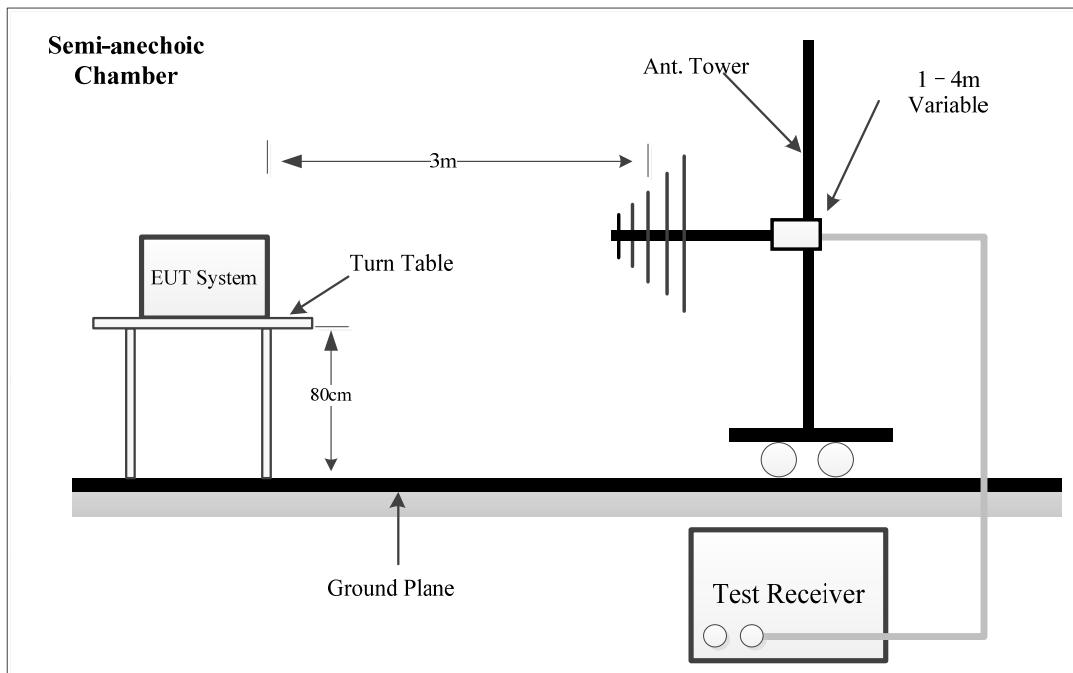

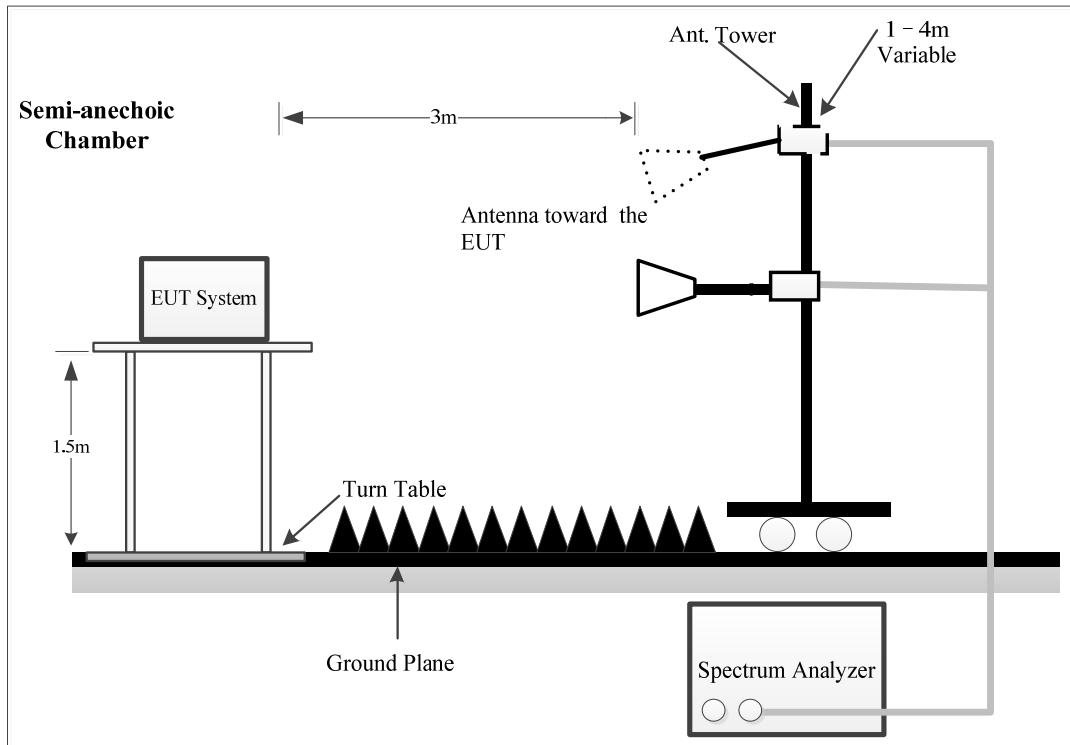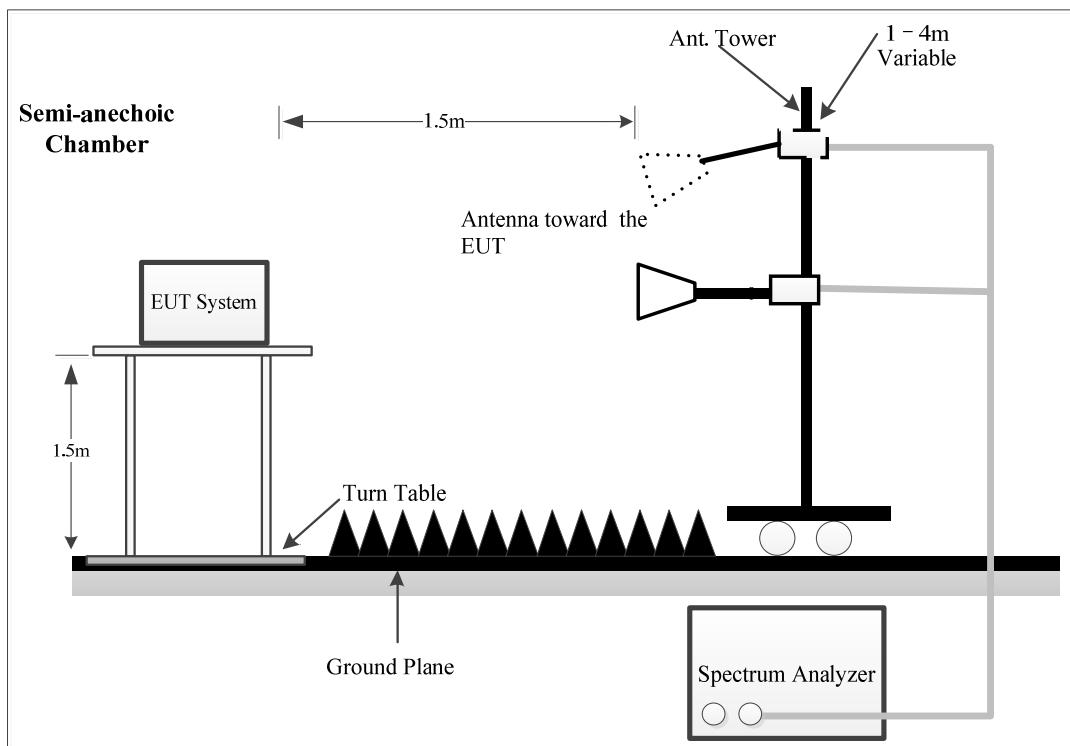1-26.5GHz:**26.5-40GHz:**

The radiated emission tests were performed in the semi-anechoic chamber, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407, RSS-248 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	QP/AV	300Hz	1 kHz	200 Hz	QP/AV
150 kHz – 30 MHz	QP/AV	10 kHz	30 kHz	9 kHz	QP/AV
30MHz – 1000 MHz	PK	100 kHz	300 kHz	/	PK
	QP	/	/	120kHz	QP

1GHz- 40GHz:

Pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
Above 1 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	5kHz	PK

Final measurement for emission identified during the pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
Above 1 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	$\geq 1/T$	PK

Note: T is minimum transmission duration

If the maximized peak measured value is under the QP limit by more than 6dB, then it is unnecessary to perform an QP measurement.

If the maximized peak measured value is under the average limit, then it is unnecessary to perform an QP measurement.

Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

4.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for d = 3 meters.

All emissions under the average limit and under the noise floor have not recorded in the report.

For Radiated 26.5-40GHz test, which was performed at 1.5 m distance, according to C63.10, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB = 6.0 dB

4.2.5 Corrected Result & Margin Calculation

The basic equation except 26.5-40GHz test is as follows:
Factor = Antenna Factor + Cable Loss- Amplifier Gain

For Radiated 26.5-40GHz test:
Factor = Antenna Factor + Cable Loss- Distance extrapolation Factor

Result = Reading + Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

For the spurious emission below 30MHz, the limit was convert from dB μ A/m to dB μ V/m by adding 51.5 dB

4.2.6 Test Result

Please refer to section 5.2.

4.3 26 dB Emission Bandwidth

4.3.1 Applicable Standard


FCC§15.407(a)(11)

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

RSS-248 Clause 4.4

The occupied bandwidth of an RLAN device shall not exceed 320 MHz.

4.3.2 EUT Setup

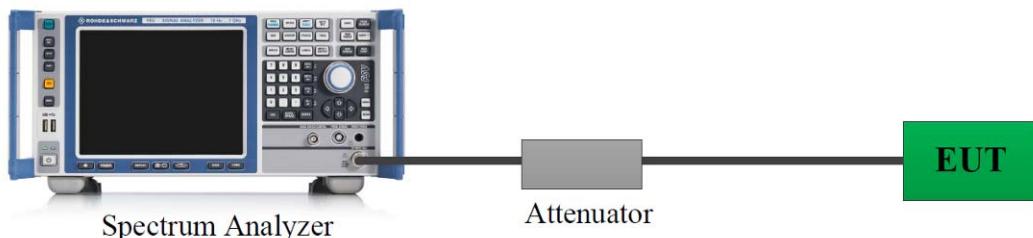

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer.

4.3.3 Test Procedure

Test Method: KDB789033 D02 Clause II.C

Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
- f) For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 \times$ RBW.
- g) Measure and record the results in the test report.

4.3.4 Test Result

Please refer to section 5.3.

4.4 99% Occupied Bandwidth

4.4.1 Applicable Standard

RSS-Gen Clause 6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs. In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth: The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.


The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

4.4.2 EUT Setup

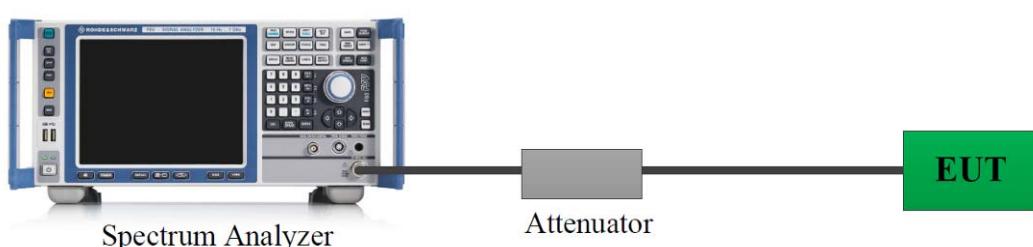

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer.

4.4.3 Test Procedure

According to ANSI C63.10-2013 Section 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

4.4.4 Test Result

Please refer to section 5.4.

4.5 Maximum EIRP

4.5.1 Applicable Standard

FCC §15.407(a) (8)


For client devices operating under the control of an indoor access point in the 5.925–7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

RSS-248 Clause 4.5.3 Power limits for low-power client devices

The following limits shall apply to low-power client devices:

- a. the maximum e.i.r.p. spectral density shall not exceed -1 dBm/MHz and
- b. the maximum e.i.r.p. over the 5925-7125 MHz frequency band shall not exceed 24 dBm

4.5.2 EUT Setup

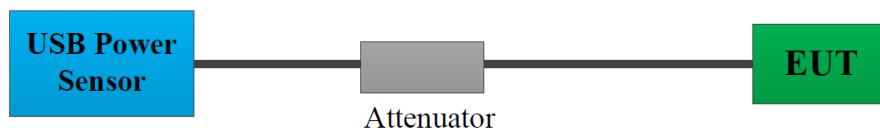

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The cable loss of this RF cable was offset into the setting of test equipment, which was provided by manufacturer ▲.

4.5.3 Test Procedure

Test Method: KDB789033 D02 Clause II.E.3 b)

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

4.5.4 Test Result

Please refer to section 5.5.

4.6 Maximum power spectral density

4.6.1 Applicable Standard

FCC §15.407(a) (8)


For client devices operating under the control of an indoor access point in the 5.925–7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

RSS-248 Clause 4.5.3 Power limits for low-power client devices

The following limits shall apply to low-power client devices:

- a. the maximum e.i.r.p. spectral density shall not exceed -1 dBm/MHz and
- b. the maximum e.i.r.p. over the 5925-7125 MHz frequency band shall not exceed 24 dBm

4.6.2 EUT Setup

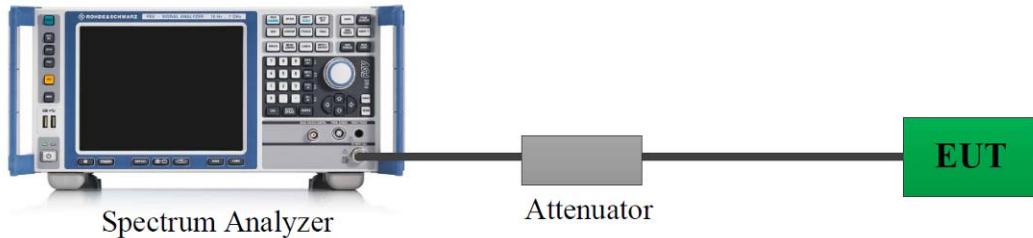

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The cable loss of this RF cable was offset into the setting of test equipment, which was provided by manufacturer▲.

4.6.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

4.6.4 Test Result

Please refer to section 5.6.

4.7 In-Band Emission

4.7.1 Applicable Standard

FCC§15.407(b) (7)


For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

RSS-248 Clause 4.6.2 b

the e.i.r.p. spectral density of unwanted emissions falling into the 5925-7125 MHz frequency band shall be attenuated below the reference power spectral density by:

- i. 20 dB at 1 MHz away from the channel edges
- ii. a value, linearly interpolated in a dB scale, between 20 dB and 28 dB at frequencies between 1 MHz outside of channel edges and 1 channel bandwidth away from the operating channel centre, respectively
- iii. 28 dB at 1 channel bandwidth away from the operating channel centre
- iv. a value, linearly interpolated in a dB scale, between 28 dB and 40 dB at frequencies between 1 channel bandwidth away from the operating channel centre and 1.5 times the channel bandwidth away from the operating channel centre, respectively
- v. 40 dB at 1.5 times the channel bandwidth away from the operating channel centre
- vi. a minimum of 40 dB at frequencies that are further away than 1.5 times the channel bandwidth from the operating channel centre

4.7.2 EUT Setup

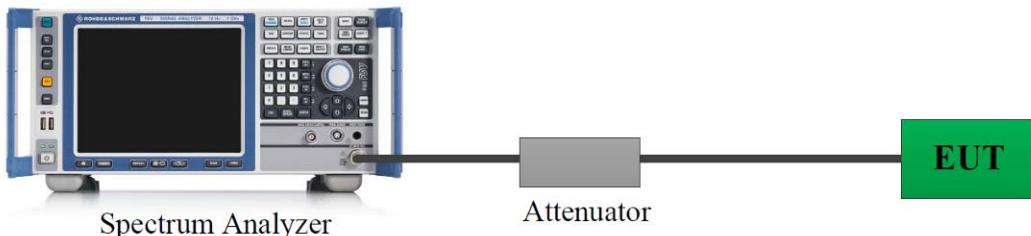

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer.

4.7.3 Test Procedure

According to KDB 987594 D02 U-NII 6 GHz EMC Measurement v03 Clause J

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10-2013.
3. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth.
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:

- a) Set the span to encompass the entire 26 dB EBW of the signal.
- b) Set RBW = same RBW used for 26 dB EBW measurement.
- c) Set VBW \geq 3 X RBW
- d) Number of points in sweep \geq [2 X span / RBW].
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging)
- g) Trace average at least 100 traces in power averaging (rms) mode.
- h) Use the peak search function on the instrument to find the peak of the spectrum.

5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.

6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:

- a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
- b. Suppressed by 28 dB at one channel bandwidth from the channel center.
- c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.

7. Adjust the span to encompass the entire mask as necessary.

8. Clear trace.

9. Trace average at least 100 traces in power averaging (rms) mode.


10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

4.7.4 Test Result

Please refer to section 5.7.

4.8 Duty Cycle

4.8.1 EUT Setup

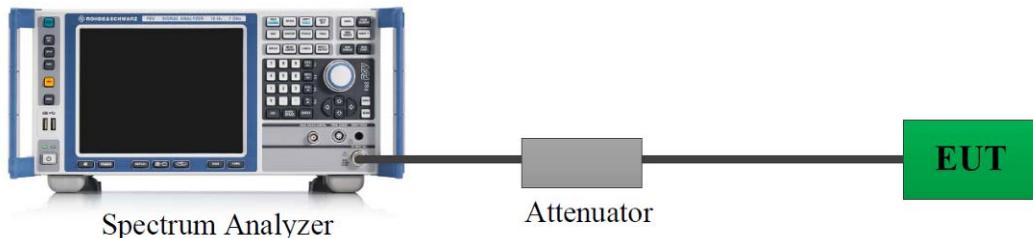

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer.

4.8.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

4.8.3 Judgment

Report Only. Please refer to section 5.8.

4.9 Contention Based Protocol

4.9.1 Applicable Standard

FCC 15.407(d) (6) &KDB 987594 D02.

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band . To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least-62 dBm or lower. Upon detection of energy in the band , unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold(-62dBm). The -62dBm(or lower)

Threshold is referenced to a 0dBi antenna gain.

To ensure incumbent operations are reliably detected in the band , low power indoor devices must detect RF energy throughout intended operating channel . For example , an 802 .device that plans to transmit a 40 MHz-wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally , low-power indoor devices must detect co-channel energy with 90% or greater certainty .

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel

where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

A RSS-248 Clause 4.7

This section sets out the requirements for the use of a contention-based protocol. Low-power indoor access points, indoor subordinate devices, and low-power client devices shall employ a contention-based protocol.

The FCC's accepted KDB procedures listed on ISED's Certification and Engineering Bureau website (see the Normative Test Standards and Acceptable Alternate Procedures page) shall be used to demonstrate the compliance of a device with the contention-based protocol requirements set out in this section.

The minimum detection threshold power is the received power referenced to a 0 dBi antenna. Devices shall use a contention-based protocol to detect the presence of any emissions on the channel that the device intends to occupy. The device shall be able to detect, within its entire occupied bandwidth, a radio frequency power of at least -62 dBm or lower.

If an emission is detected on a channel, the device shall cease transmissions and shall not resume transmissions on this channel while the detected radio frequency power is at or above the -62 dBm threshold.

4.9.2 EUT Setup

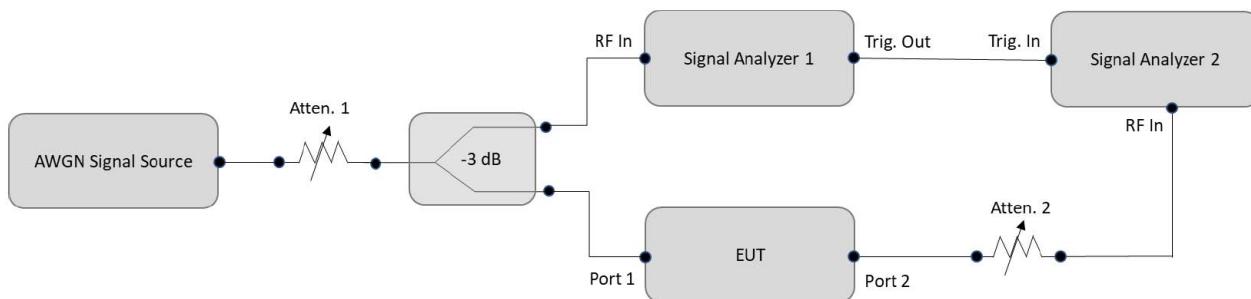


Figure 2. Contention-based protocol test setup, conducted method Step-by-Step Procedure, Conducted Setup

4.9.3 Test Procedure

According to KDB 987594 D02 U-NII 6 GHz EMC Measurement v03 Clause I

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EEUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has

ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.

9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

4.9.4 Test Result

Please refer to section 5.9.

4.10 Antenna Requirement

4.10.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or§15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

RSS-Gen Clause 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

4.10.2 Judgment

Result: Compliant. Please refer to the Antenna Information detail in Section 1.

4.11 Operational requirements

4.11.1 Applicable Standard

RSS-248 Clause 4.8.1 Operational requirements

This section sets out operational requirements for RLAN devices. The following operational requirements shall apply to RLAN devices:

- a. Devices shall automatically stop transmitting if there is an absence of information to transmit or an operational failure. Note that the intention is not to prohibit either the transmission of control or signalling information, or the use of repetitive codes, where one or both are required by the technology. An explanation of how to stop transmitting shall be included in the certification filing.
- b. Devices shall not be used for control of or communications with unmanned aircraft systems.
- c. Devices shall not be used on oil platforms.
- d. Devices shall not be used on aircraft.
- e. Except for very low-power devices, devices shall not be used on automobiles.
- f. Except for very low-power devices, devices shall not be used on trains.
- g. Except for very low-power devices, devices shall not be used on maritime vessels.
- h. Client devices shall not be capable of initiating a network.

RSS-248 Clause 4.8.2 Standard client devices and low-power client devices

For standard client devices and low-power client devices, the following requirements shall apply:

- a. devices shall not connect directly to another standard client device or low-power client device
- b. these devices may transmit brief messages to an access point after detecting a signal confirming that the access point is operating on a particular frequency, in order to join the access point's network

4.11.2 Judgment

Result: Compliant.

The device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. Please refer to the declaration.

The devices are not be used for control of or communications with unmanned aircraft systems.

No devices can connect directly to this device. Please refer to the declaration.

These devices may transmit brief messages to an access point after detecting a signal confirming that the access point is operating on a particular frequency, in order to join the access point's network.

5. Test DATA AND RESULTS

5.1 AC Line Conducted Emissions

Serial Number:	2UUQ-2	Test Date:	2024/12/04
Test Site:	CE	Test Mode:	Transmitting
Tester:	Yukin Qiu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3	Relative Humidity: (%)	57	ATM Pressure: (kPa)	101.7
-------------------	------	------------------------	----	---------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2024/9/5	2025/9/4
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2024/9/5	2025/9/4
R&S	EMI Test Receiver	ESCI	100035	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A


* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Note: 802.11be320 6745MHz was tested.

Project No.: 2402Z106133E-RF
 Port: Line
 Test Mode: Transmitting
 IF B/W 9kHz PK/AV


Serial No.: 2UUQ-2
 Tester: Yukin Qiu

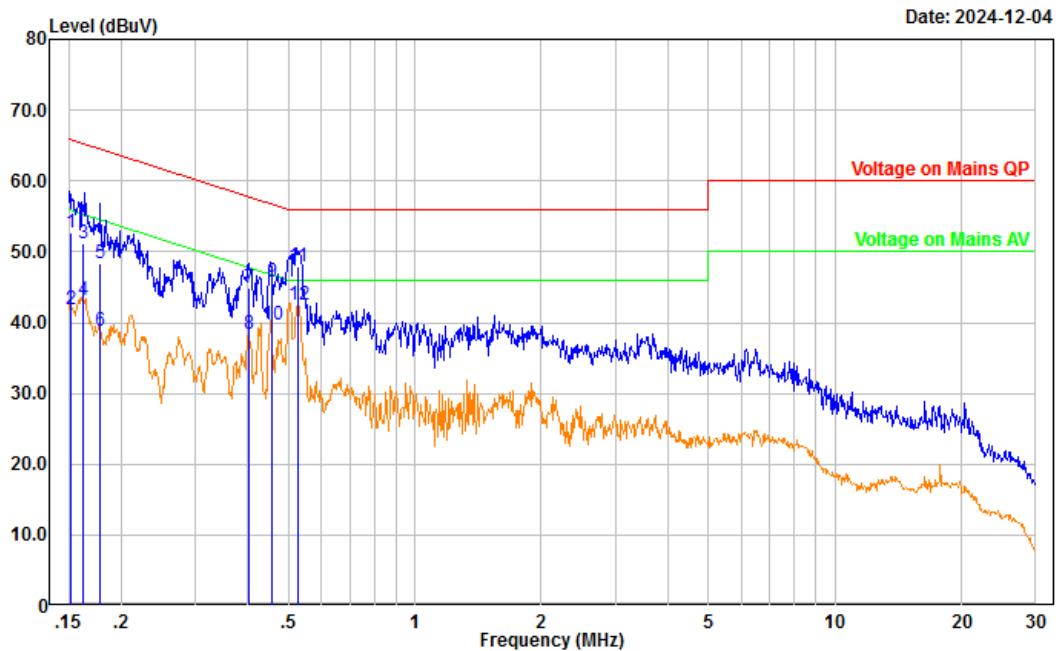

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector
1	0.152	41.85	10.75	52.60	65.92	13.32	QP
2	0.152	31.18	10.75	41.93	55.92	13.99	Average
3	0.163	40.30	10.78	51.08	65.31	14.23	QP
4	0.163	32.44	10.78	43.22	55.31	12.09	Average
5	0.178	37.47	10.81	48.28	64.59	16.31	QP
6	0.178	27.98	10.81	38.79	54.59	15.80	Average
7	0.404	33.95	10.84	44.79	57.77	12.98	QP
8	0.404	27.64	10.84	38.48	47.77	9.29	Average
9	0.455	34.96	10.84	45.80	56.77	10.97	QP
10	0.455	28.86	10.84	39.70	46.77	7.07	Average
11	0.527	37.16	10.83	47.99	56.00	8.01	QP
12	0.527	31.63	10.83	42.46	46.00	3.54	Average

Project No.: 2402Z106133E-RF
 Port: neutral
 Test Mode: Transmitting
 IF B/W 9kHz PK/AV

Serial No.: 2UUQ-2
 Tester: Yukin Qiu

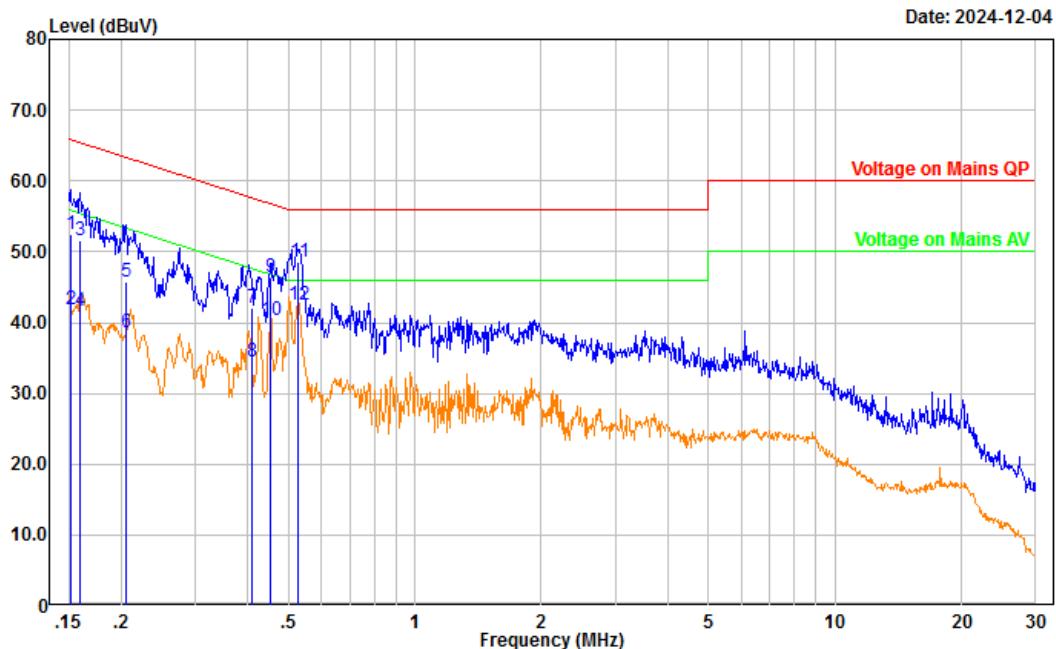


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector
1	0.152	41.71	10.85	52.56	65.88	13.32	QP
2	0.152	30.95	10.85	41.80	55.88	14.08	Average
3	0.160	40.64	10.85	51.49	65.45	13.96	QP
4	0.160	30.70	10.85	41.55	55.45	13.90	Average
5	0.206	35.00	10.85	45.85	63.37	17.52	QP
6	0.206	27.76	10.85	38.61	53.37	14.76	Average
7	0.410	31.37	10.77	42.14	57.65	15.51	QP
8	0.410	23.62	10.77	34.39	47.65	13.26	Average
9	0.454	35.67	10.76	46.43	56.79	10.36	QP
10	0.454	29.66	10.76	40.42	46.79	6.37	Average
11	0.529	37.74	10.73	48.47	56.00	7.53	QP
12	0.529	31.82	10.73	42.55	46.00	3.45	Average

5G Wifi is transmitted simultaneously with 6G Wifi:
802.11a 5785MHz+802.11be80 6625MHz was tested:

Project No.: 2402Z106133E-RF
Port: Line
Test Mode: Transmitting
Note: IF B/W 9kHz PK/AV


Serial No.: 2UUQ-2
Tester: Yukin Qiu

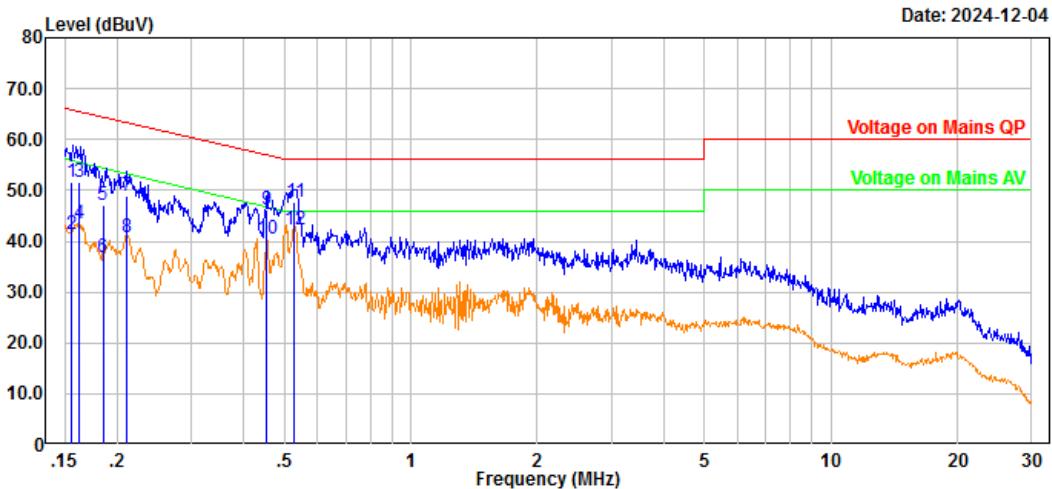

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Measurement
1	0.155	40.77	10.76	51.53	65.71	14.18	QP
2	0.155	30.51	10.76	41.27	55.71	14.44	Average
3	0.162	40.81	10.77	51.58	65.35	13.77	QP
4	0.162	32.57	10.77	43.34	55.35	12.01	Average
5	0.185	36.35	10.82	47.17	64.26	17.09	QP
6	0.185	26.08	10.82	36.90	54.26	17.36	Average
7	0.211	38.17	10.85	49.02	63.16	14.14	QP
8	0.211	30.04	10.85	40.89	53.16	12.27	Average
9	0.454	35.42	10.84	46.26	56.80	10.54	QP
10	0.454	29.58	10.84	40.42	46.80	6.38	Average
11	0.528	37.00	10.83	47.83	56.00	8.17	QP
12	0.528	31.42	10.83	42.25	46.00	3.75	Average

Project No.: 2402Z106133E-RF
 Port: neutral
 Test Mode: Transmitting
 Note: IF B/W 9kHz PK/AV

Serial No.: 2UUQ-2
 Tester: Yukin Qiu

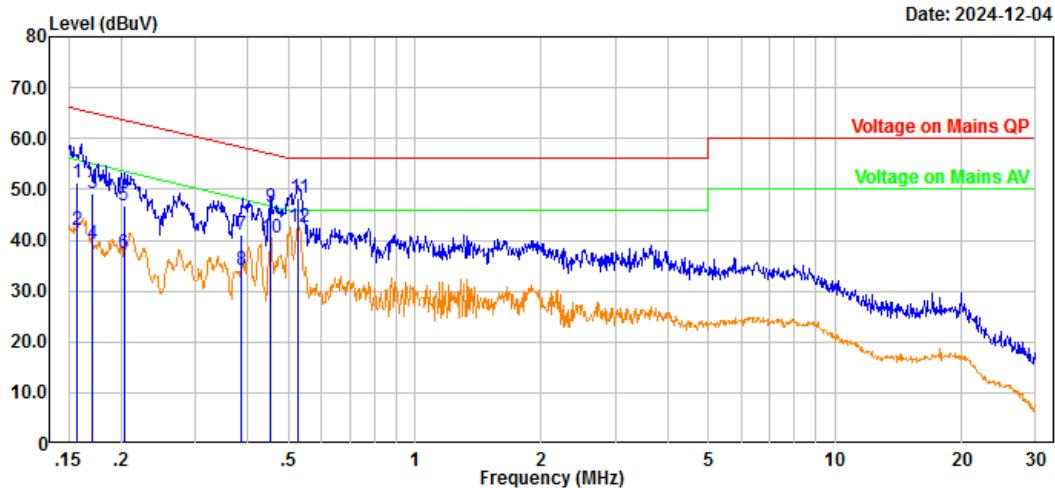

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Measurement
1	0.157	40.51	10.85	51.36	65.64	14.28	QP
2	0.157	30.99	10.85	41.84	55.64	13.80	Average
3	0.171	38.25	10.85	49.10	64.92	15.82	QP
4	0.171	28.32	10.85	39.17	54.92	15.75	Average
5	0.203	35.81	10.85	46.66	63.49	16.83	QP
6	0.203	26.59	10.85	37.44	53.49	16.05	Average
7	0.385	30.40	10.78	41.18	58.17	16.99	QP
8	0.385	23.36	10.78	34.14	48.17	14.03	Average
9	0.455	35.70	10.76	46.46	56.79	10.33	QP
10	0.455	29.74	10.76	40.50	46.79	6.29	Average
11	0.529	37.62	10.73	48.35	56.00	7.65	QP
12	0.529	31.75	10.73	42.48	46.00	3.52	Average

5.2 Radiation Spurious Emissions

Serial Number:	2UUQ-2	Test Date:	Below 1GHz: 2024/12/18 Above 1GHz: 2025/1/2~2025/6/18
Test Site:	Chamber A, Chamber B	Test Mode:	Transmitting
Tester:	Alan Xie, Colin Yang, Leo Xiao	Test Result:	Pass

Environmental Conditions:			
Temperature: (°C)	21.1~27.8	Relative Humidity: (%)	27~51
		ATM Pressure: (kPa)	100.1~102.3

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
9kHz~1000MHz					
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Sunol Sciences	Hybrid Antenna	JB3	A060611-2	2024/4/16	2027/4/15
Narda	Coaxial Attenuator	757C-6dB	34010	2024/4/16	2027/4/15
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	372193	2024/8/16	2025/8/15
R&S	EMI Test Receiver	ESR3	102453	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A
Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2024/11/17	2025/11/16
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2024/12/9	2025/12/8
AH	Preamplifier	PAM-0118P	469	2024/4/15	2025/4/14
AH	Preamplifier	PAM-0118P	469	2025/4/11	2026/4/10
AH	Preamplifier	PAM-1840VH	191	2024/9/5	2025/9/4
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5
Audix	Test Software	E3	191218 V9	N/A	N/A
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2024/8/27	2025/8/26

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is referred to table and plots.

1) 9kHz~30MHz(802.11be320 6745MHz was tested)

Three antenna orientations (parallel, perpendicular, and ground-parallel) was measured, the worst orientations was below:


Project No.: 240ZT106133E-RF Serial No.: 2UUQ-2
Polarization: Parallel Tester: Alan Xie
Test Mode: Transmitting
: RBW:300Hz VBW:1kHz

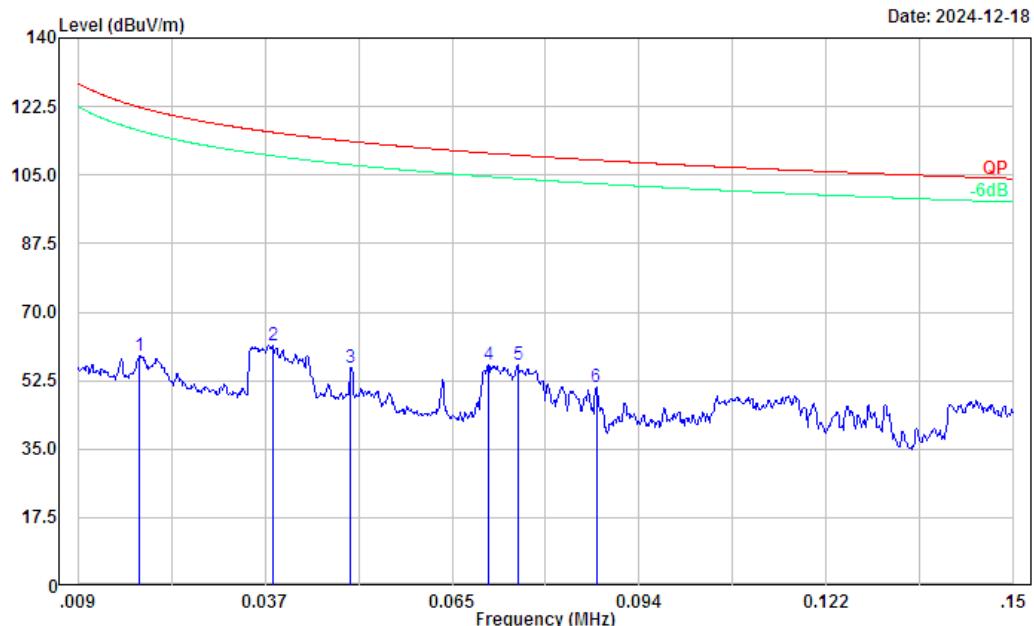

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	0.018	9.51	49.43	58.94	122.35	63.41	Peak
2	0.038	16.21	45.23	61.44	115.93	54.49	Peak
3	0.050	12.40	43.41	55.81	113.60	57.79	Peak
4	0.071	16.61	40.01	56.62	110.59	53.97	Peak
5	0.075	17.37	39.21	56.58	110.07	53.49	Peak
6	0.087	13.93	37.02	50.95	108.80	57.85	Peak

Project No.: 2402Z106133E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: RBW:10kHz VBW:30kHz

Serial No.: 2UUQ-2
Tester: Alan Xie

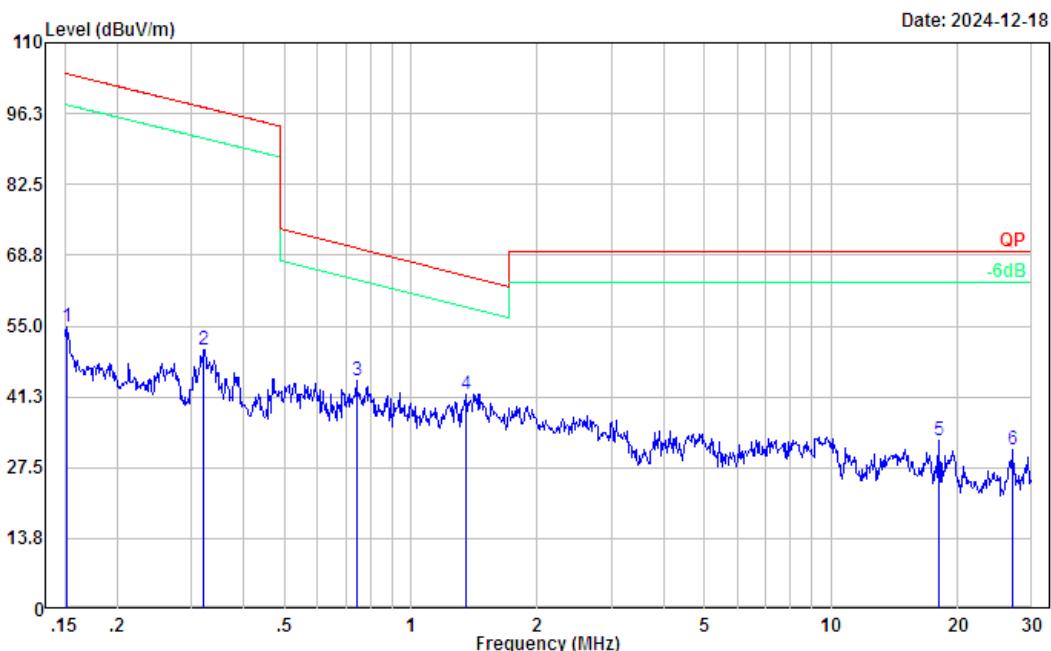


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement
1	0.152	22.91	32.03	54.94	103.99	49.05	Peak
2	0.322	27.11	23.19	50.30	97.46	47.16	Peak
3	0.743	24.15	20.23	44.38	70.11	25.73	Peak
4	1.352	27.77	14.04	41.81	64.80	22.99	Peak
5	18.039	28.91	3.78	32.69	69.54	36.85	Peak
6	27.127	27.61	3.47	31.08	69.54	38.46	Peak

2) 30MHz-1GHz
(802.11be320 6745MHz was tested)

Project No.: 2402Z106133E-RF
Polarization: Horizontal
Test Mode: Transmitting
: RBW:100kHz VBW:300kHz


Serial No.: 2UUQ-2
Tester: Alan Xie

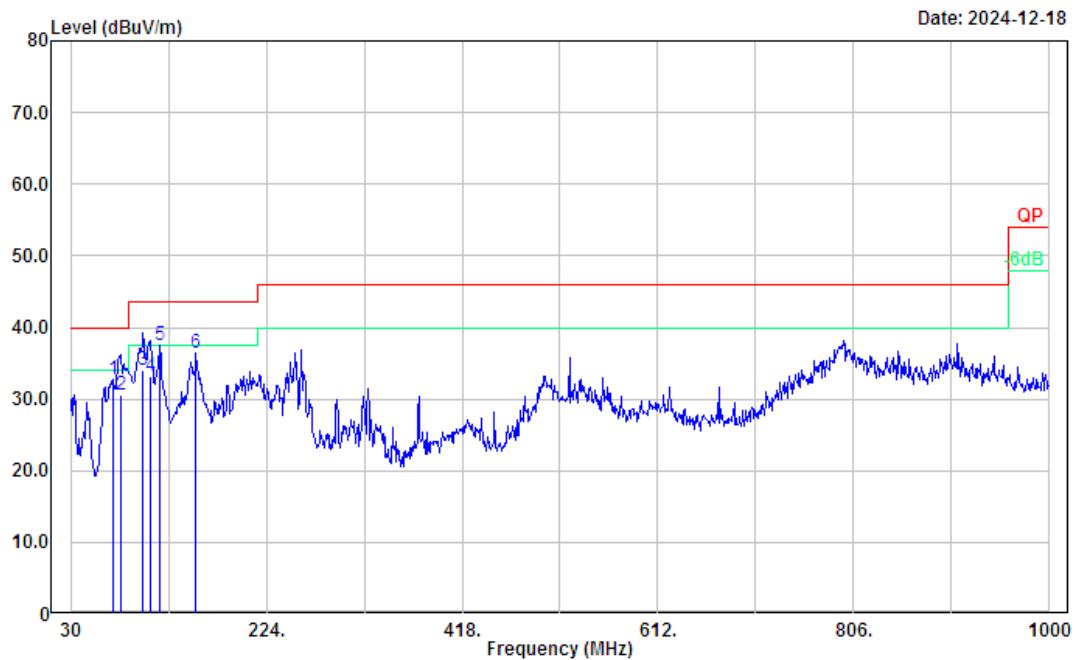

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	72.68	49.45	-16.63	32.82	40.00	7.18	Peak
2	79.47	47.22	-16.58	30.64	40.00	9.36	QP
3	101.78	47.13	-13.19	33.94	43.50	9.56	QP
4	108.57	44.67	-11.41	33.26	43.50	10.24	QP
5	118.27	47.65	-10.19	37.46	43.50	6.04	Peak
6	154.16	47.97	-11.49	36.48	43.50	7.02	Peak

Project No.: 2402Z106133E-RF
Polarization: Vertical
Test Mode: Transmitting
: RBW:100kHz VBW:300kHz

Serial No.: 2UUQ-2
Tester: Alan Xie

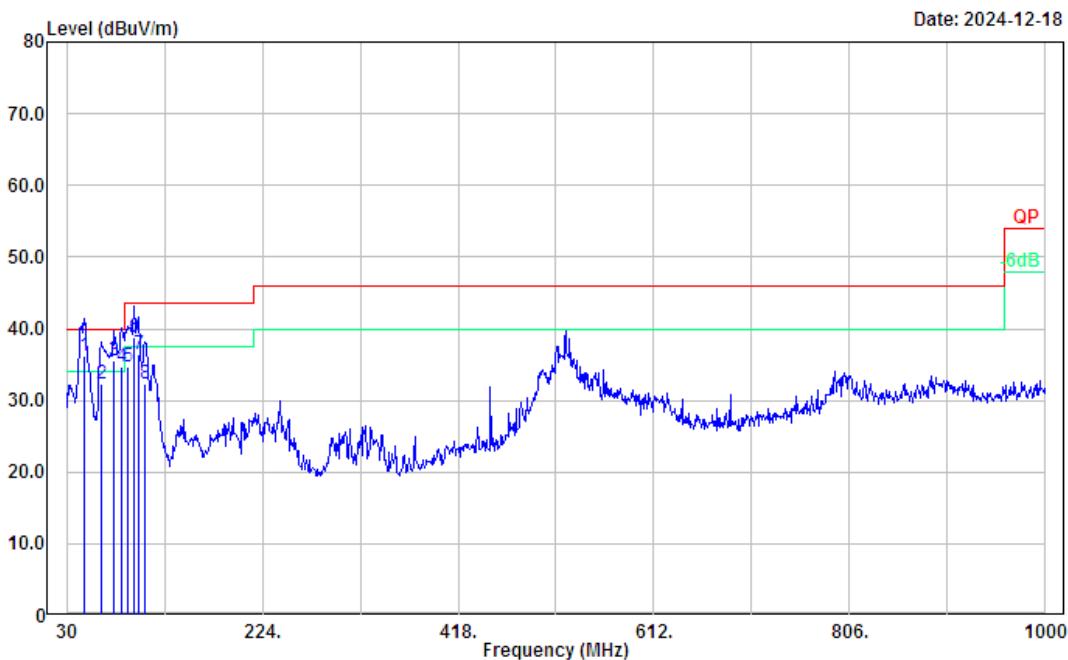


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	47.46	51.00	-14.87	36.13	40.00	3.87	QP
2	63.95	48.92	-16.67	32.25	40.00	7.75	QP
3	76.56	52.13	-16.63	35.50	40.00	4.50	QP
4	85.29	51.36	-16.64	34.72	40.00	5.28	QP
5	90.14	51.54	-16.75	34.79	43.50	8.71	QP
6	96.93	53.38	-14.60	38.78	43.50	4.72	QP
7	100.81	49.92	-13.44	36.48	43.50	7.02	QP
8	107.60	43.87	-11.67	32.20	43.50	11.30	QP


3) 1-18GHz: U-NII 5


802.11be20, Low Channel, Horizontal


802.11be20, Low Channel, Vertical




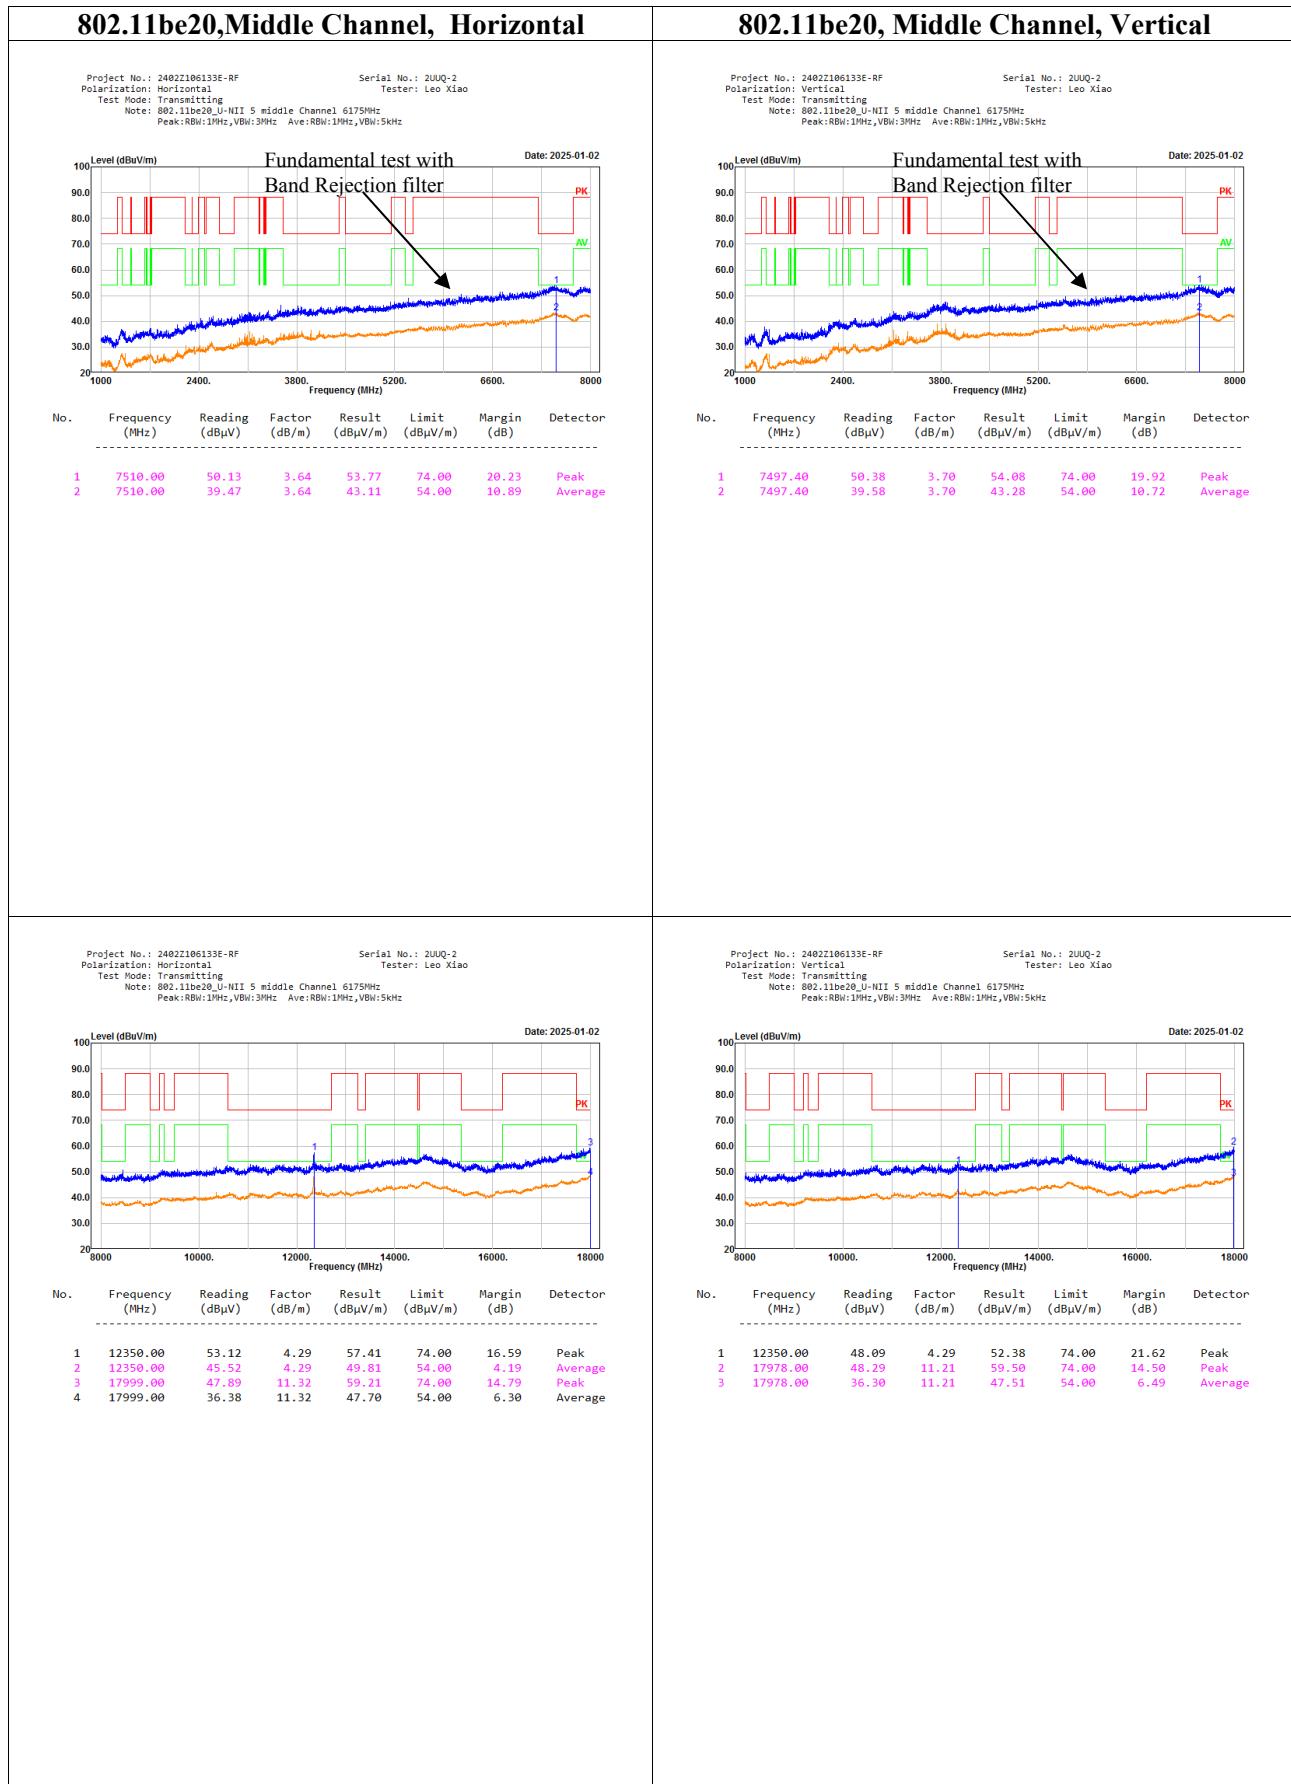


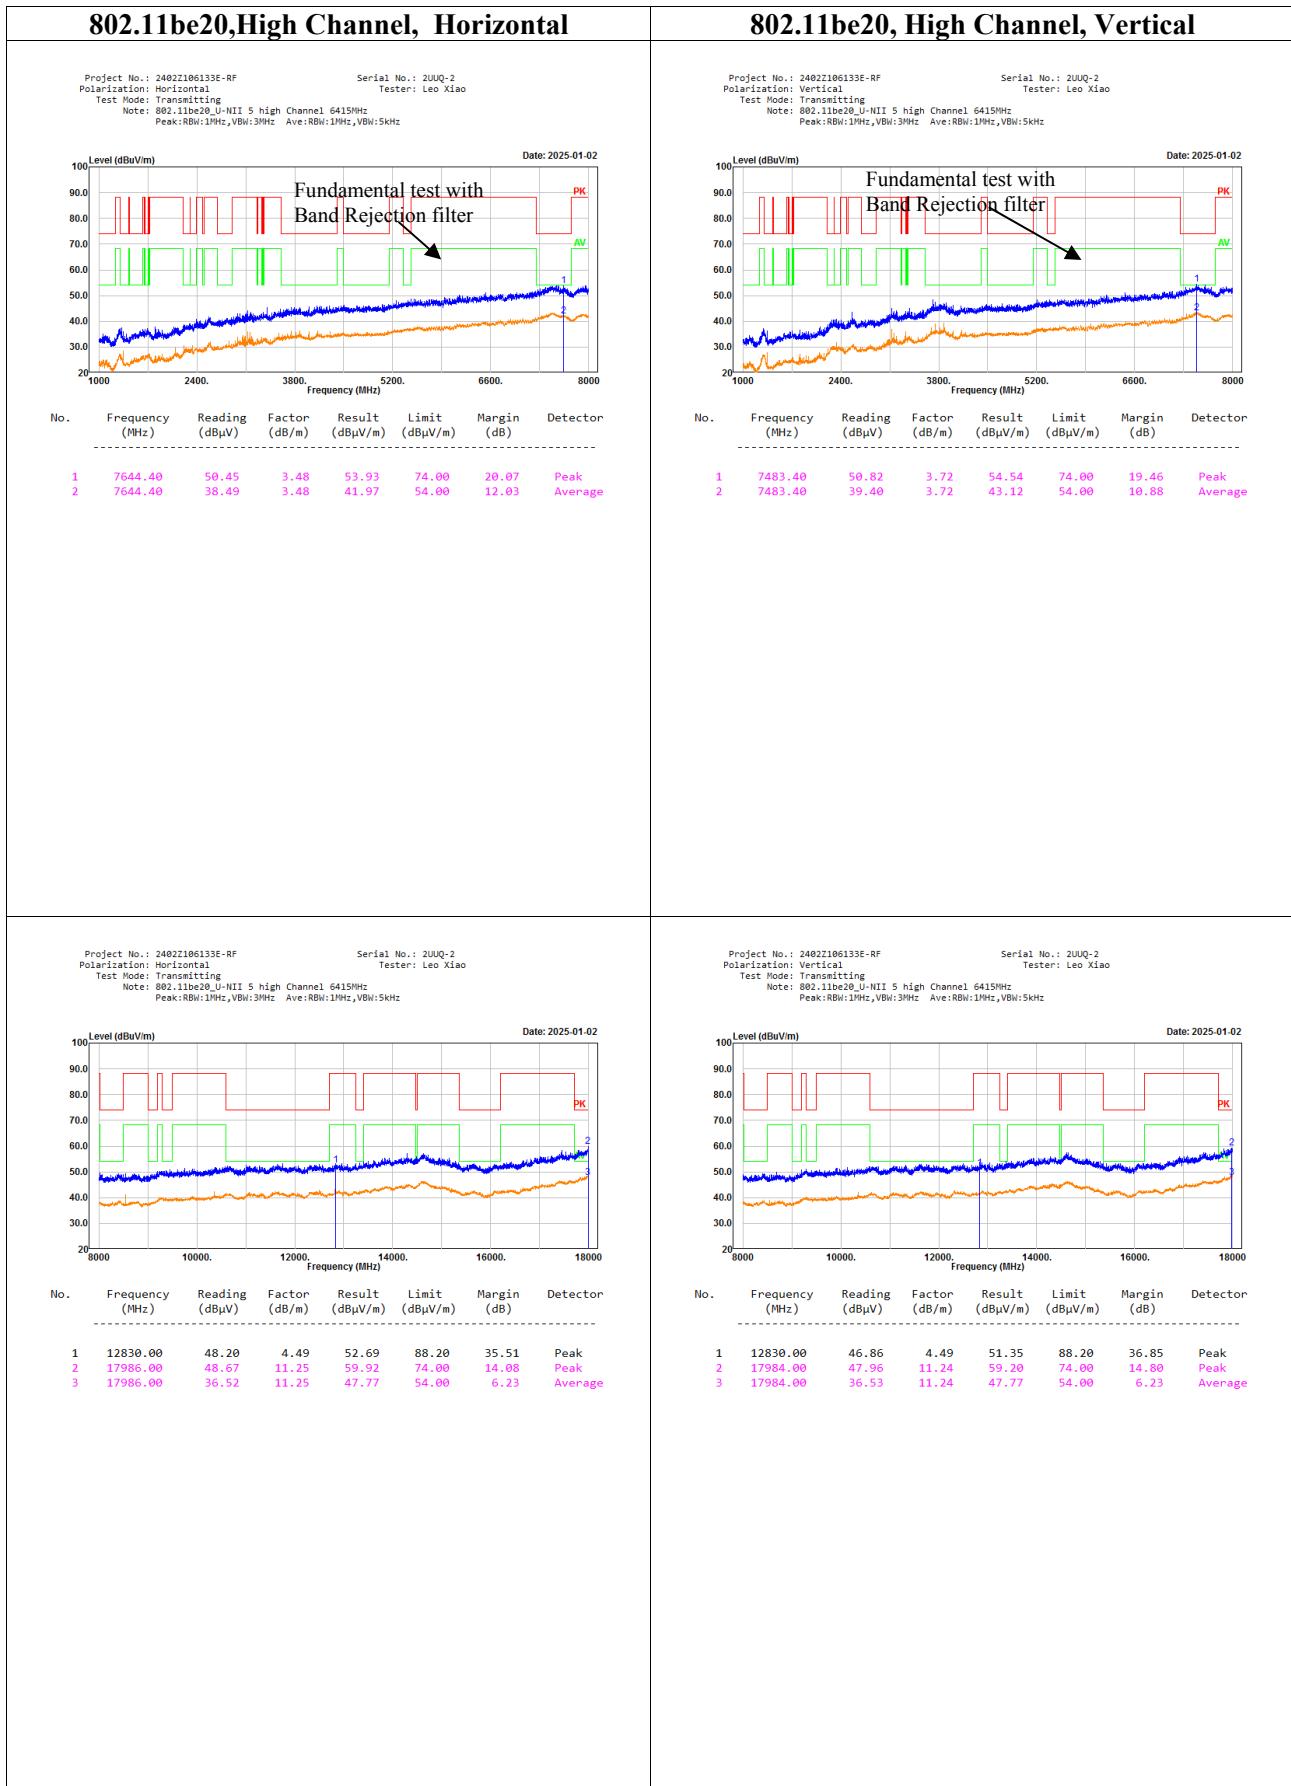


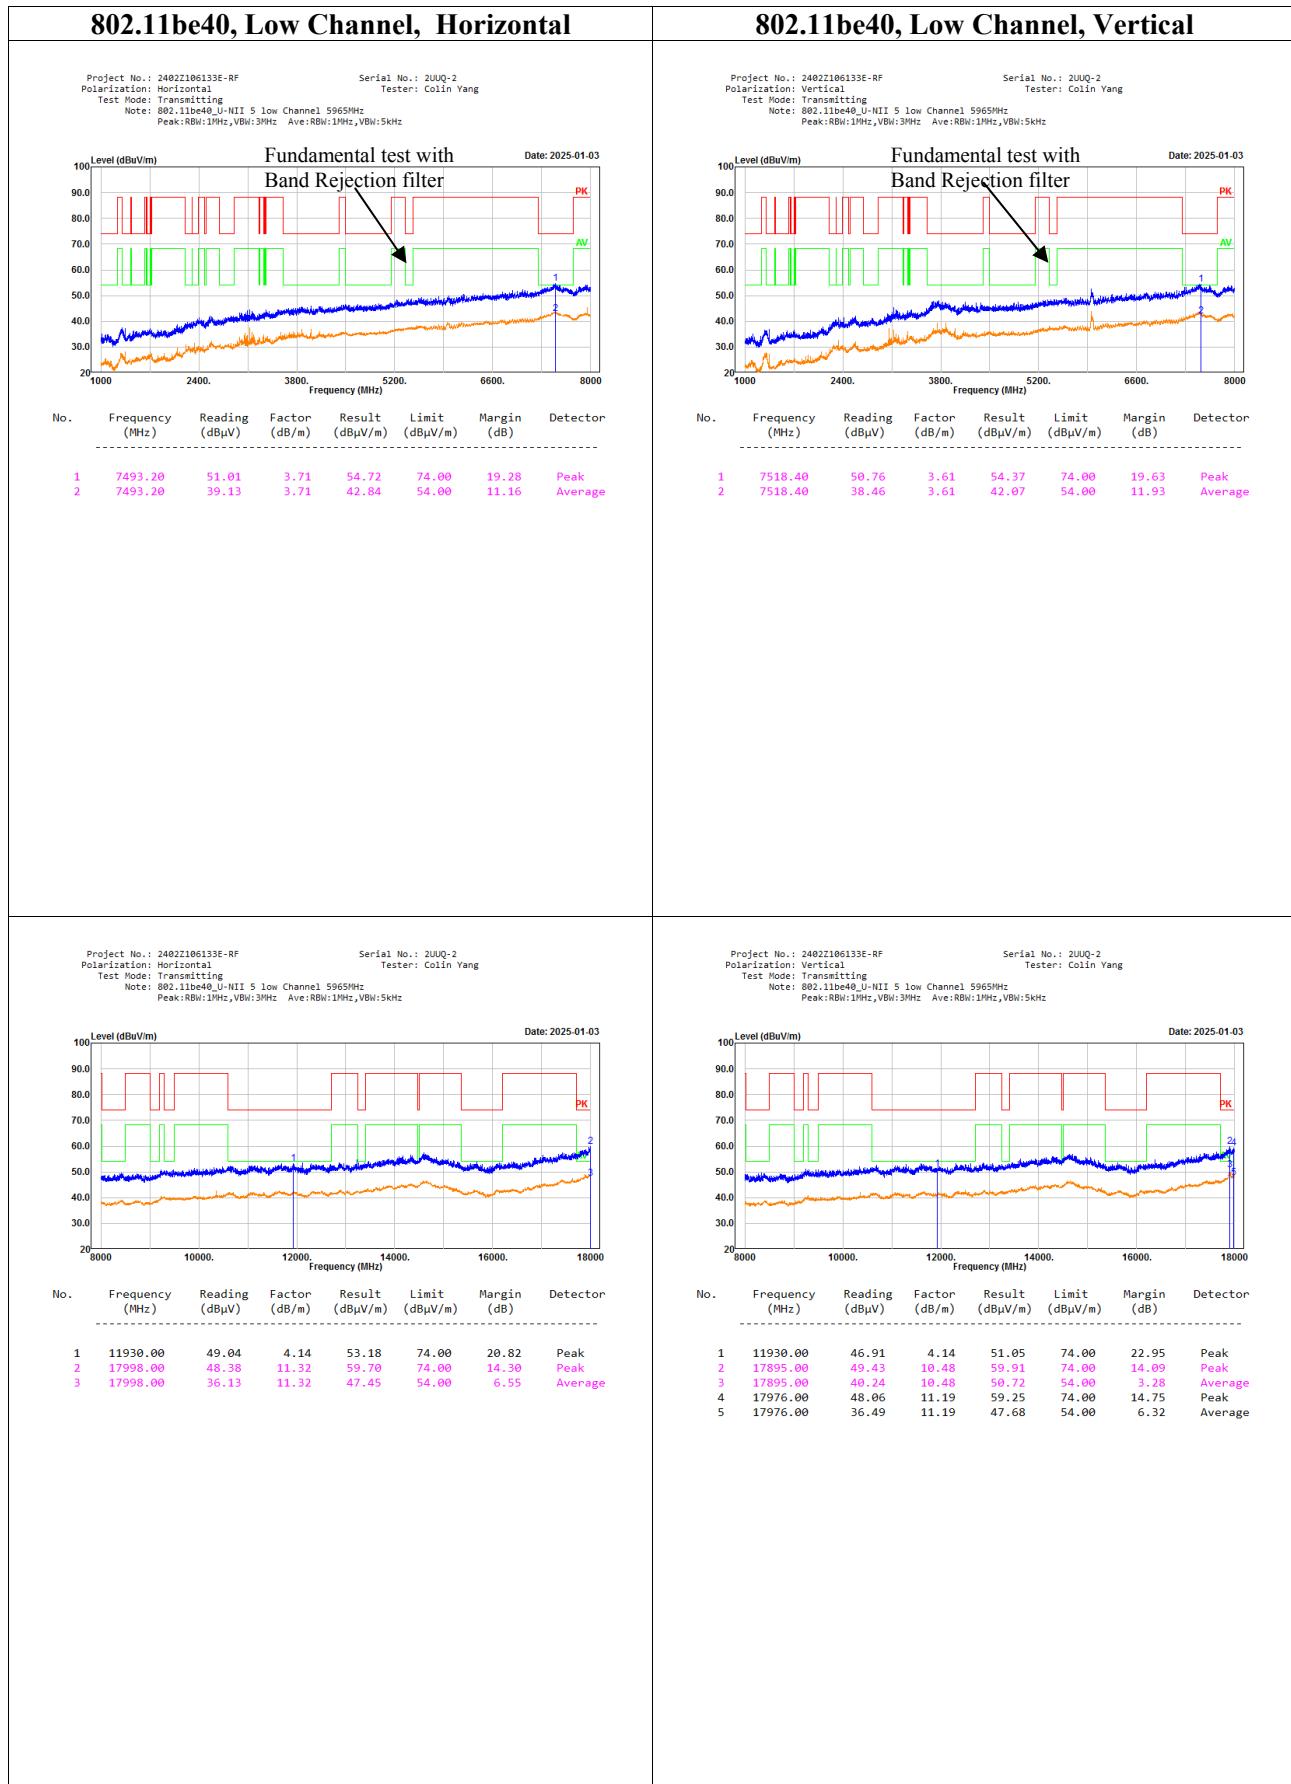


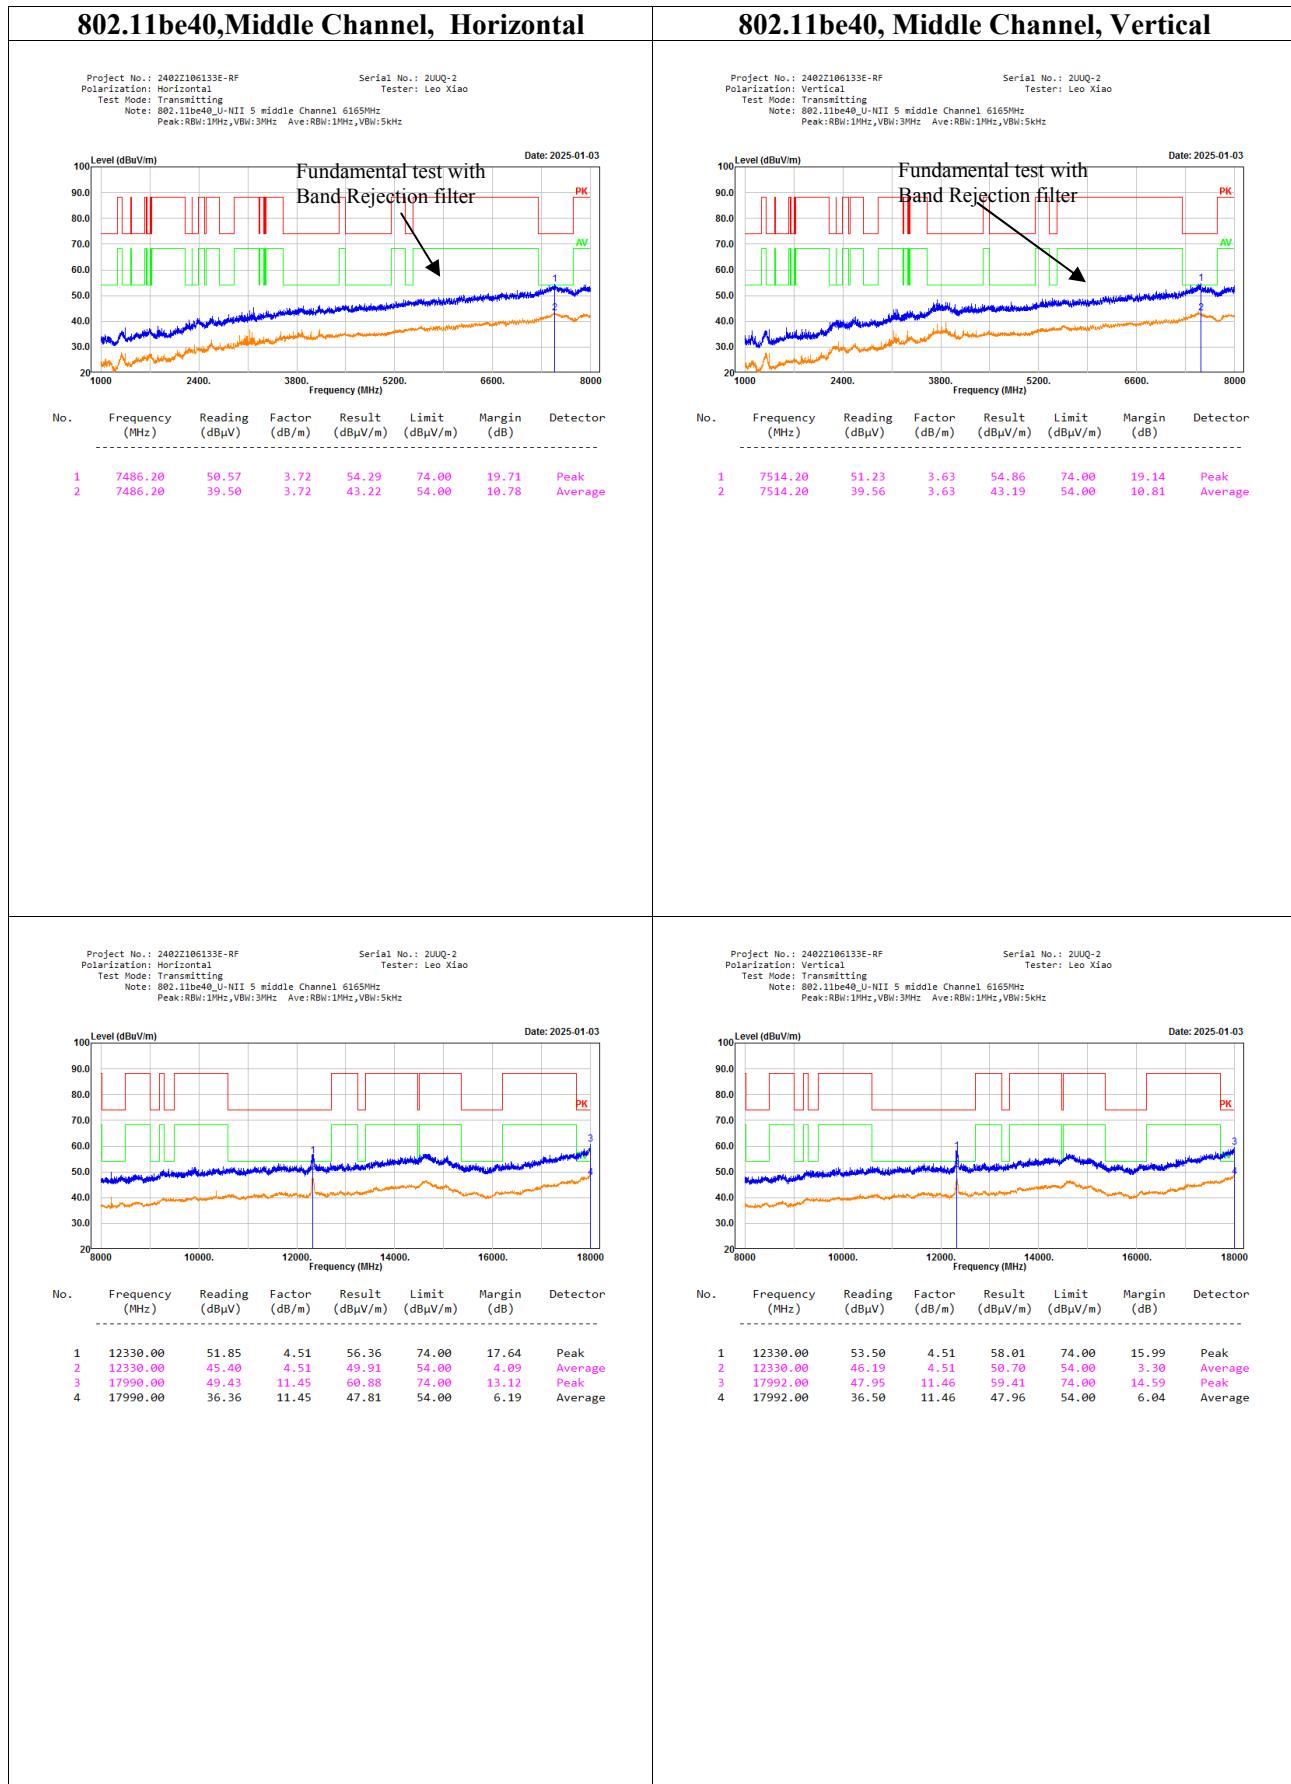


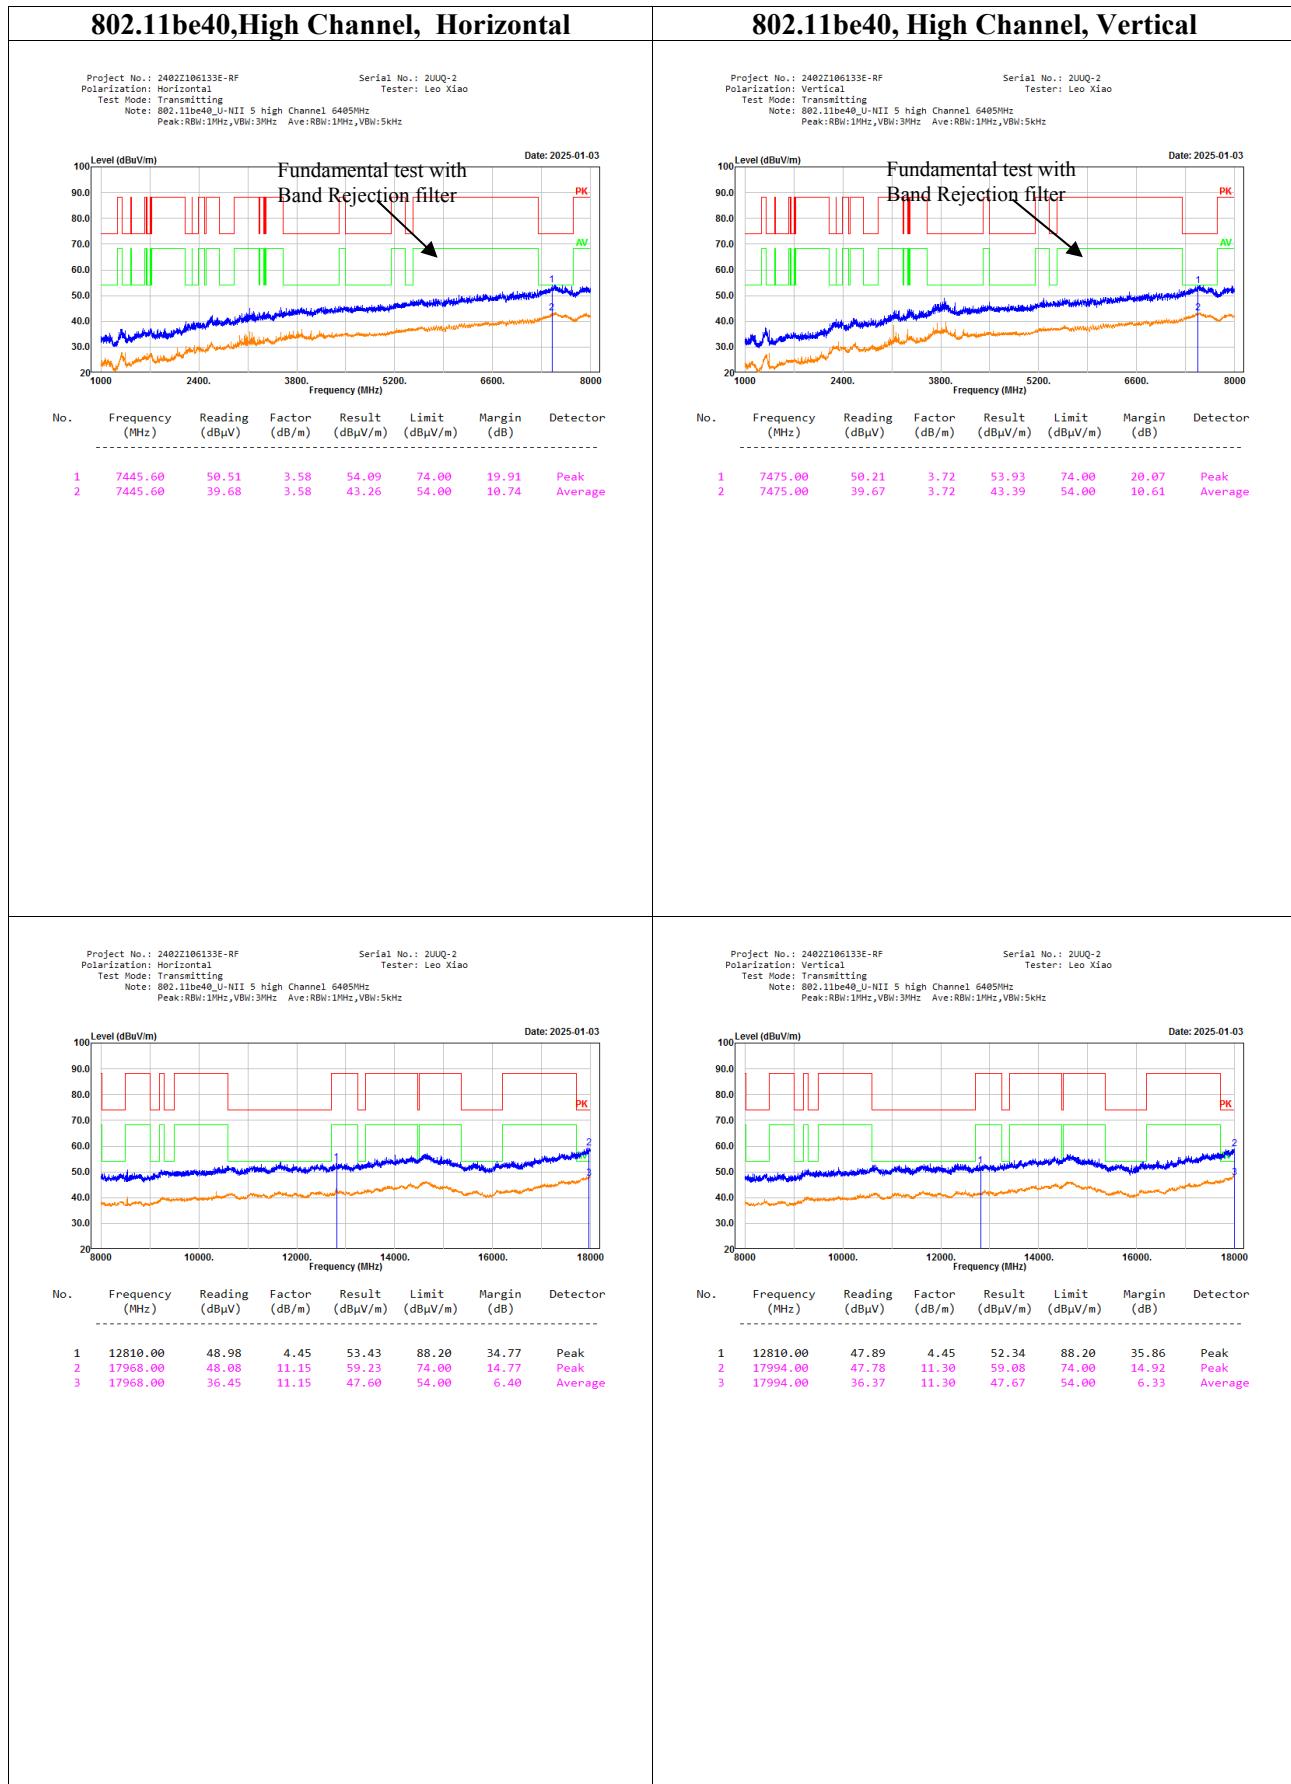


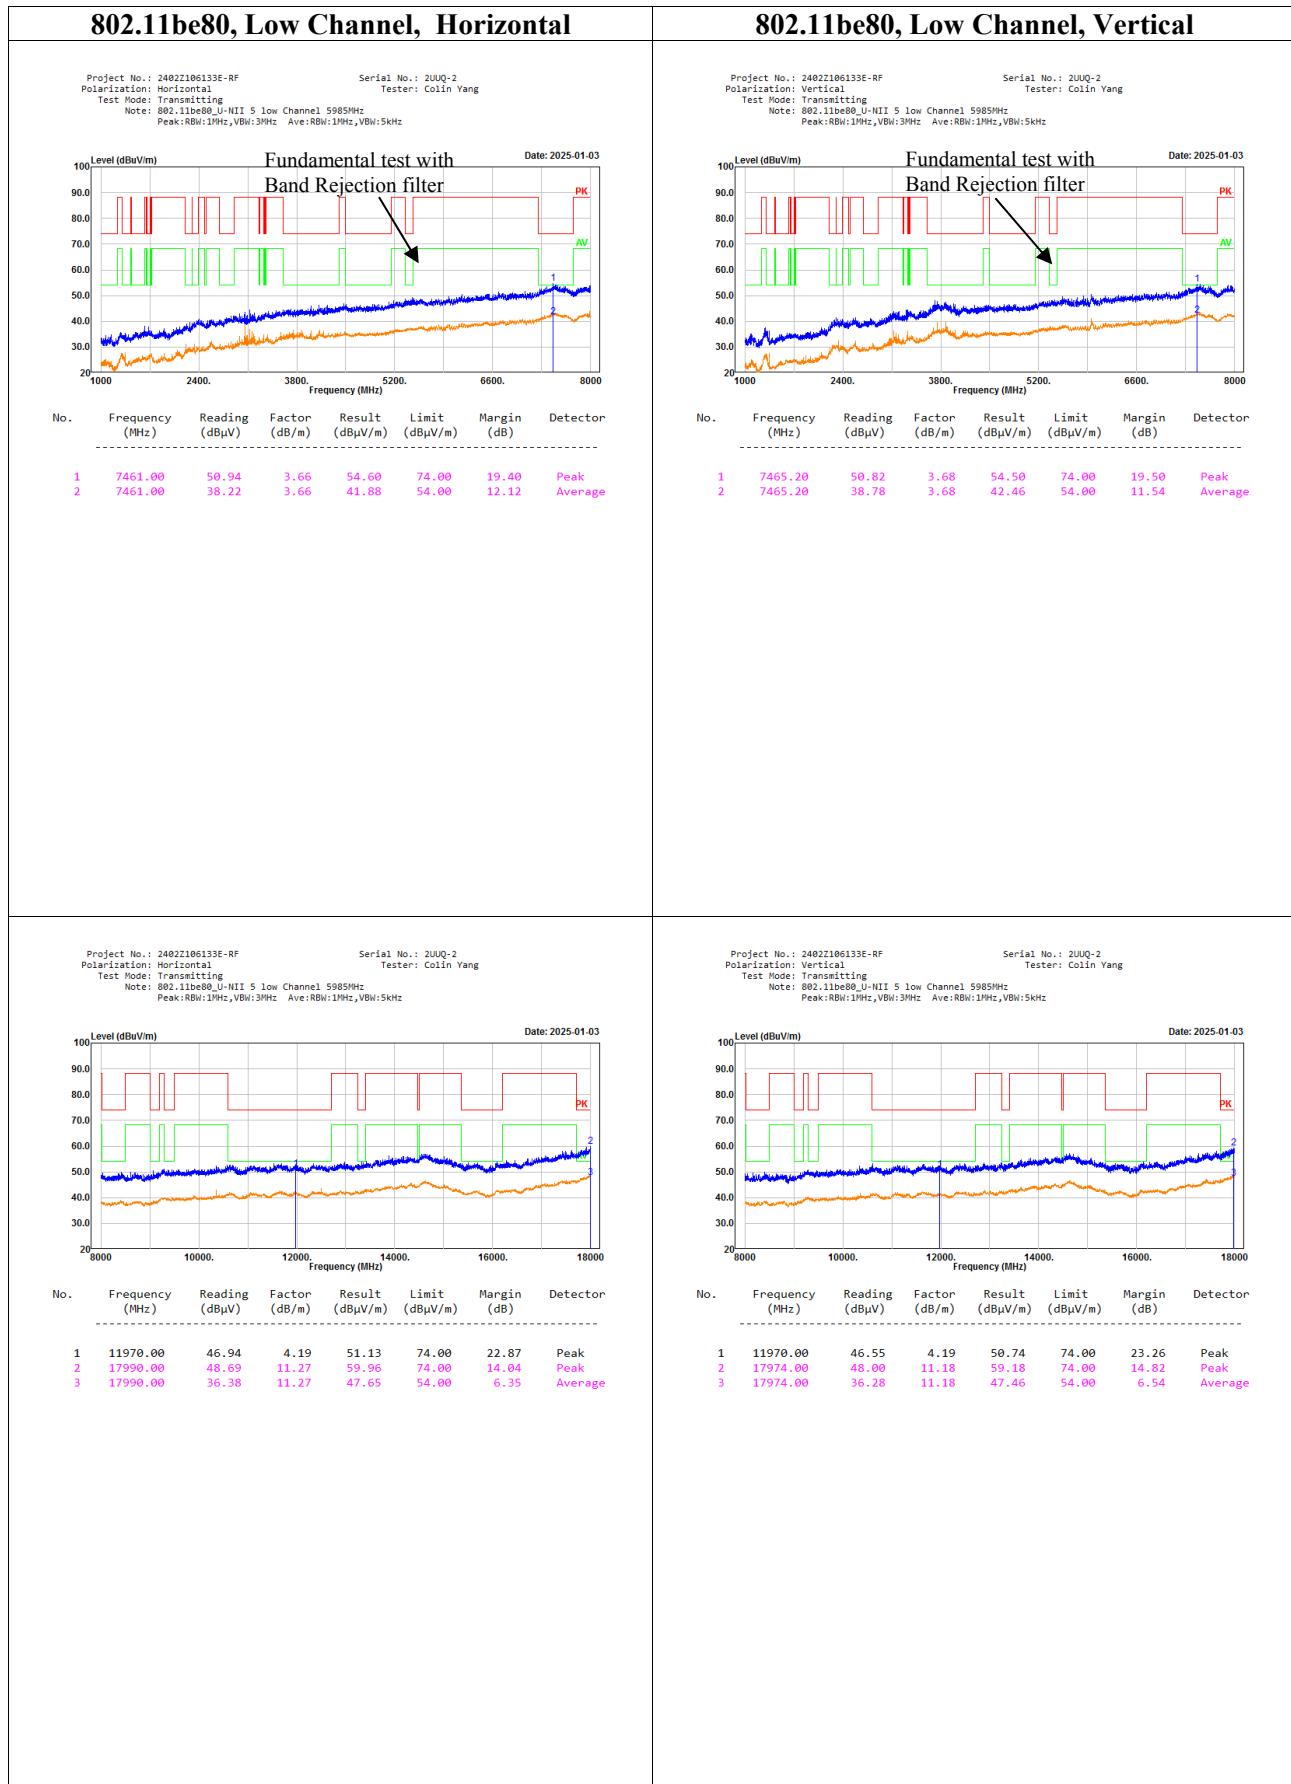


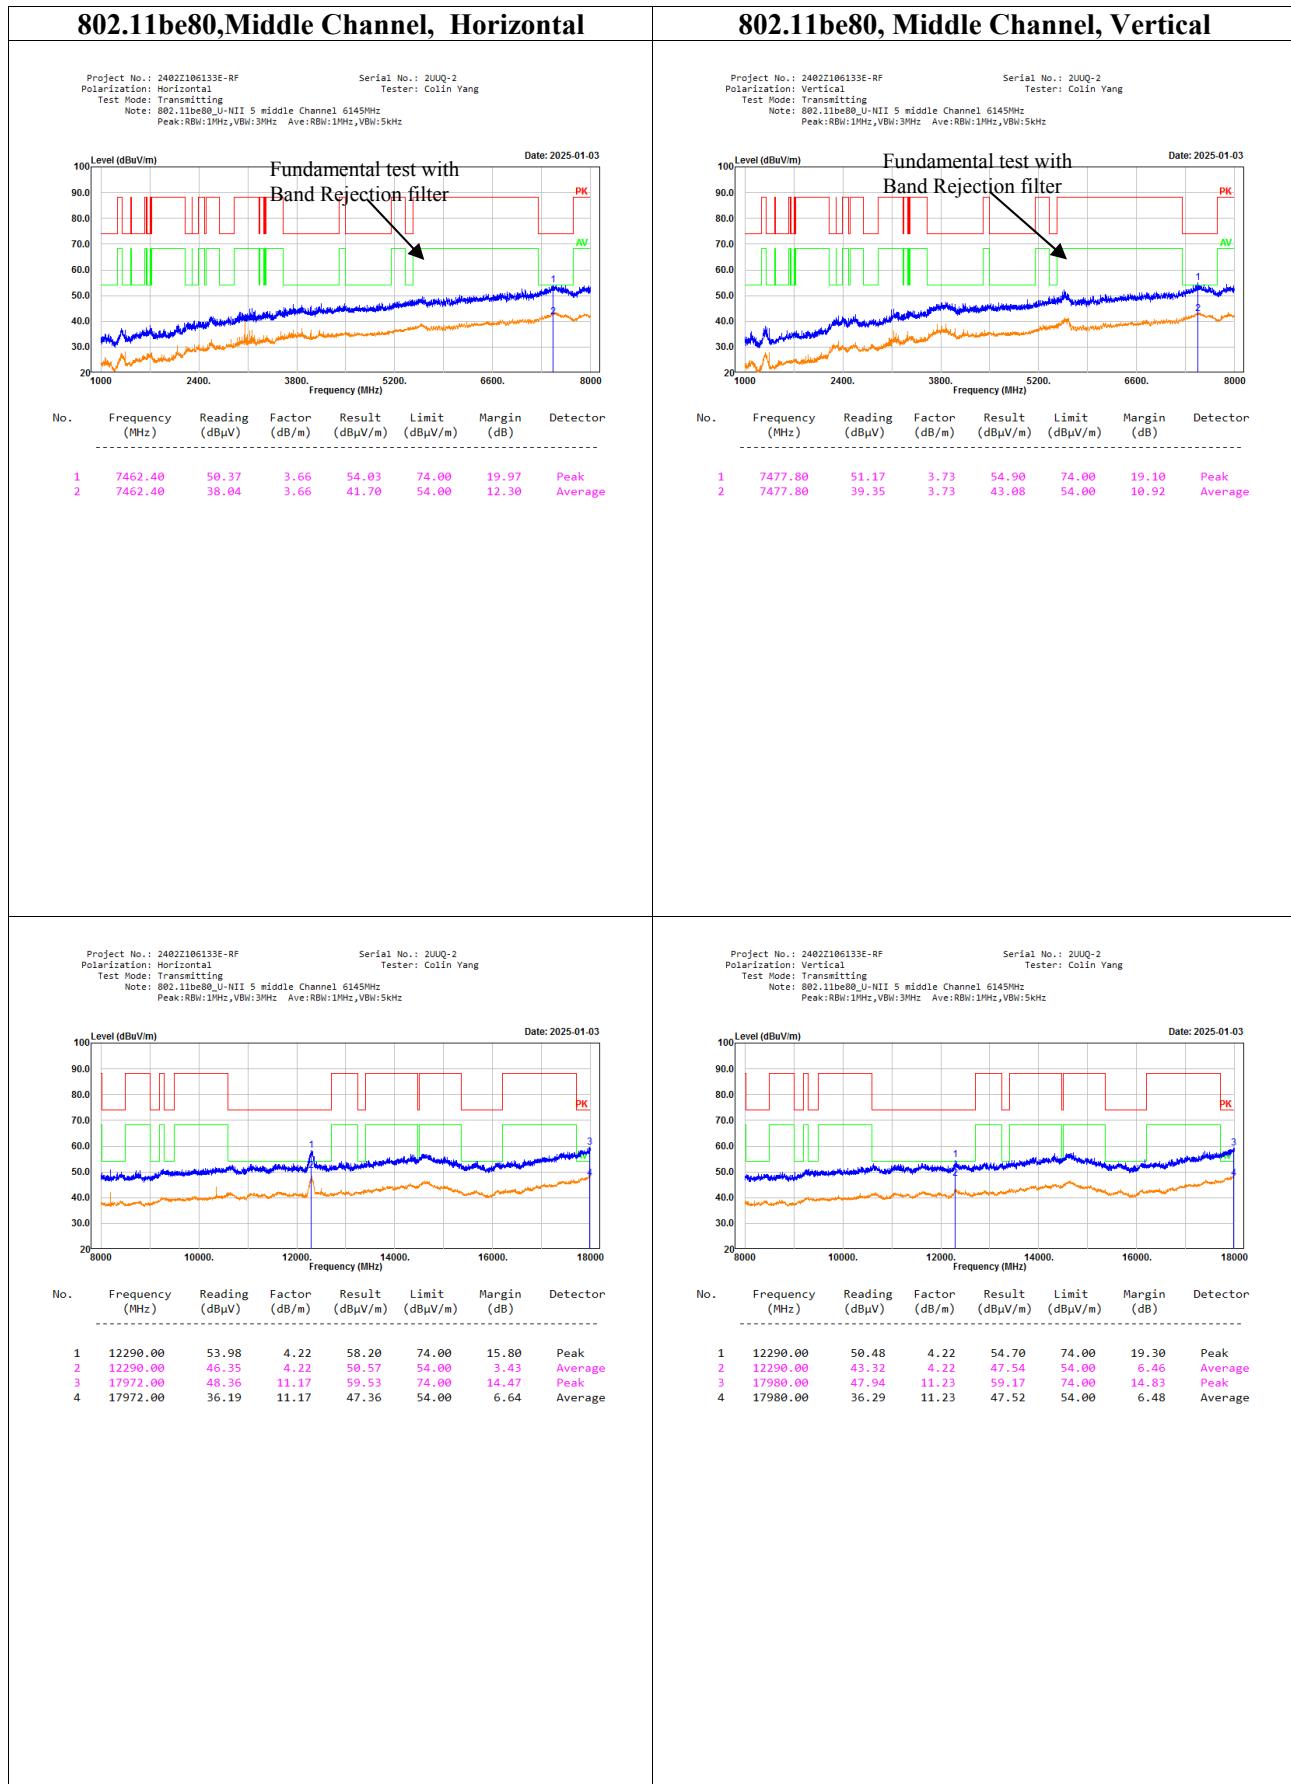


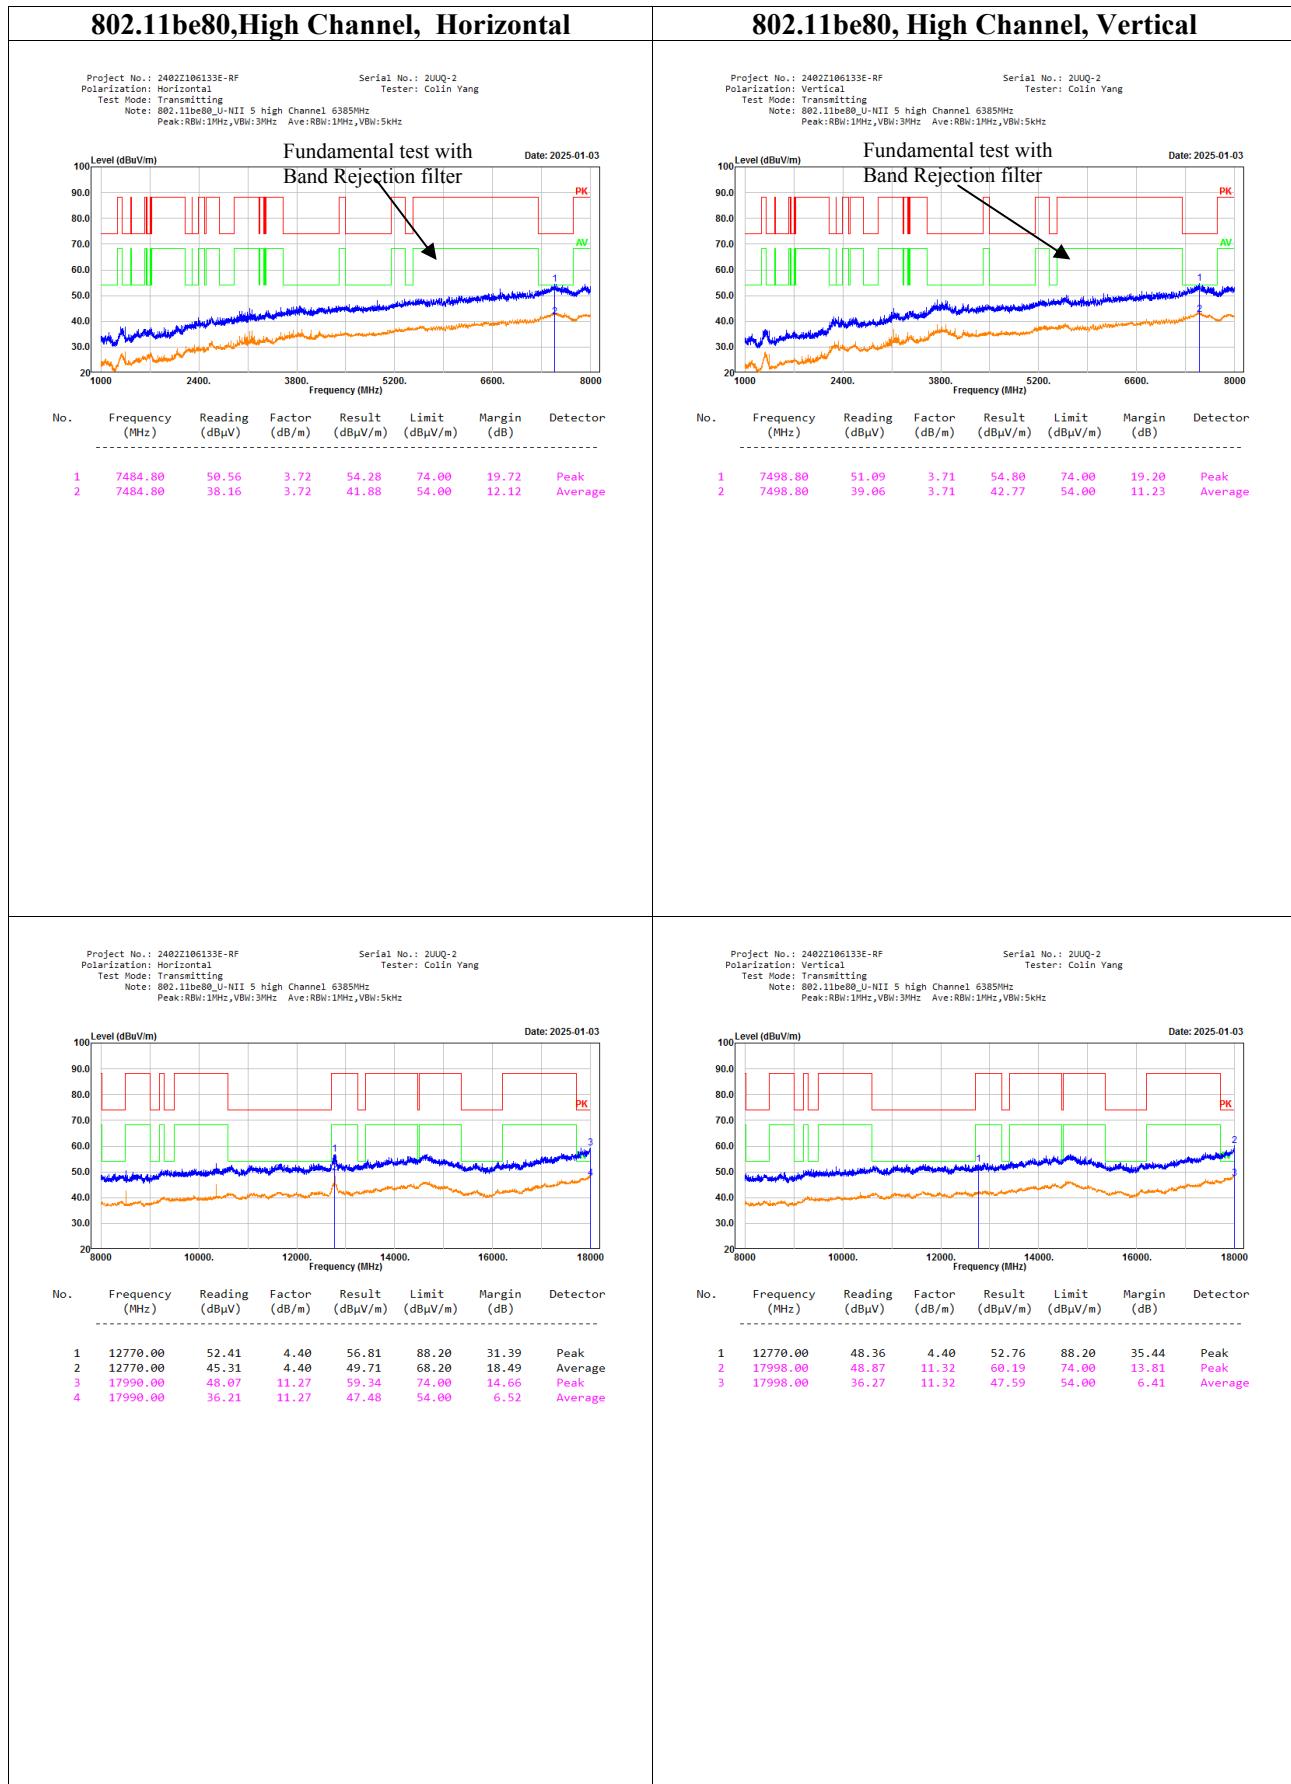


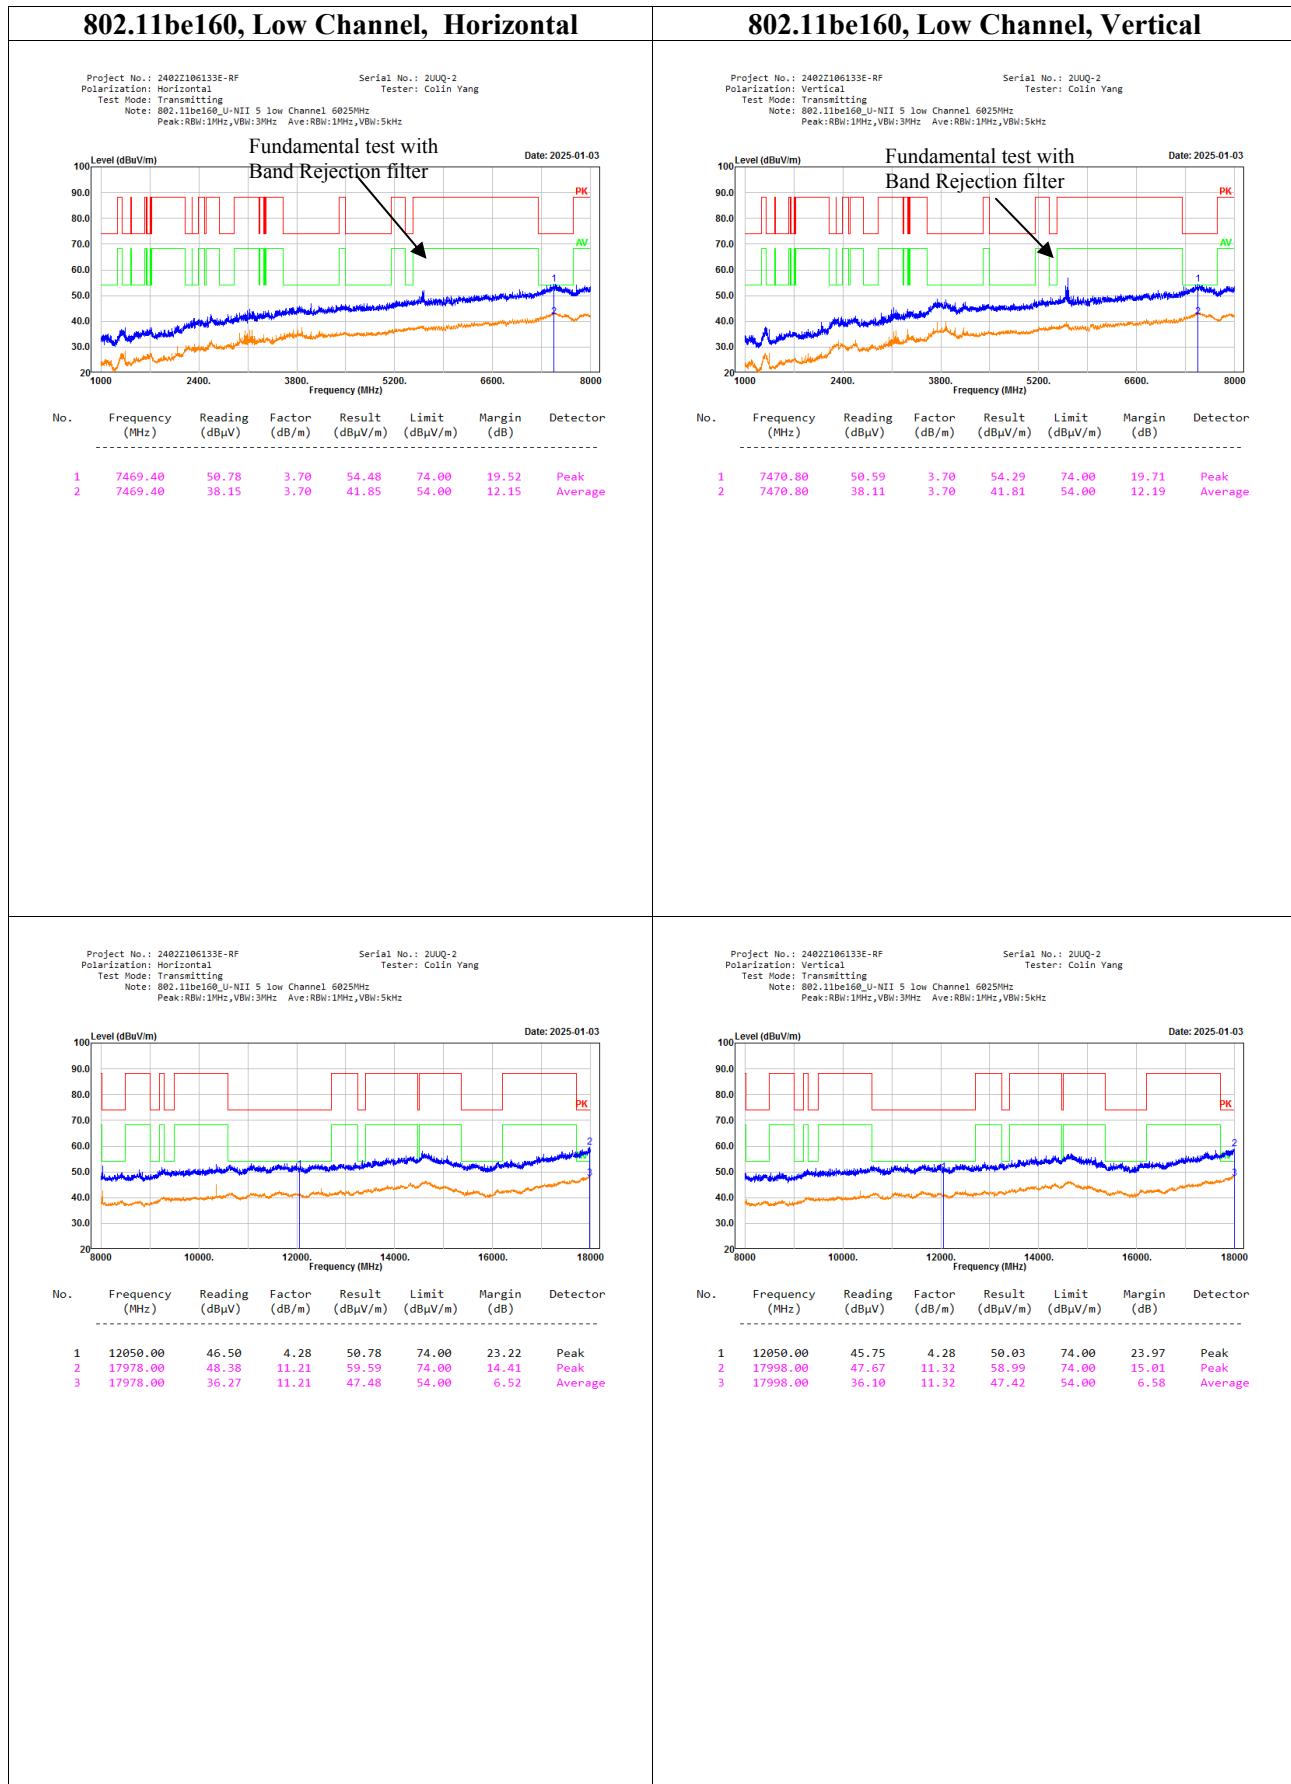

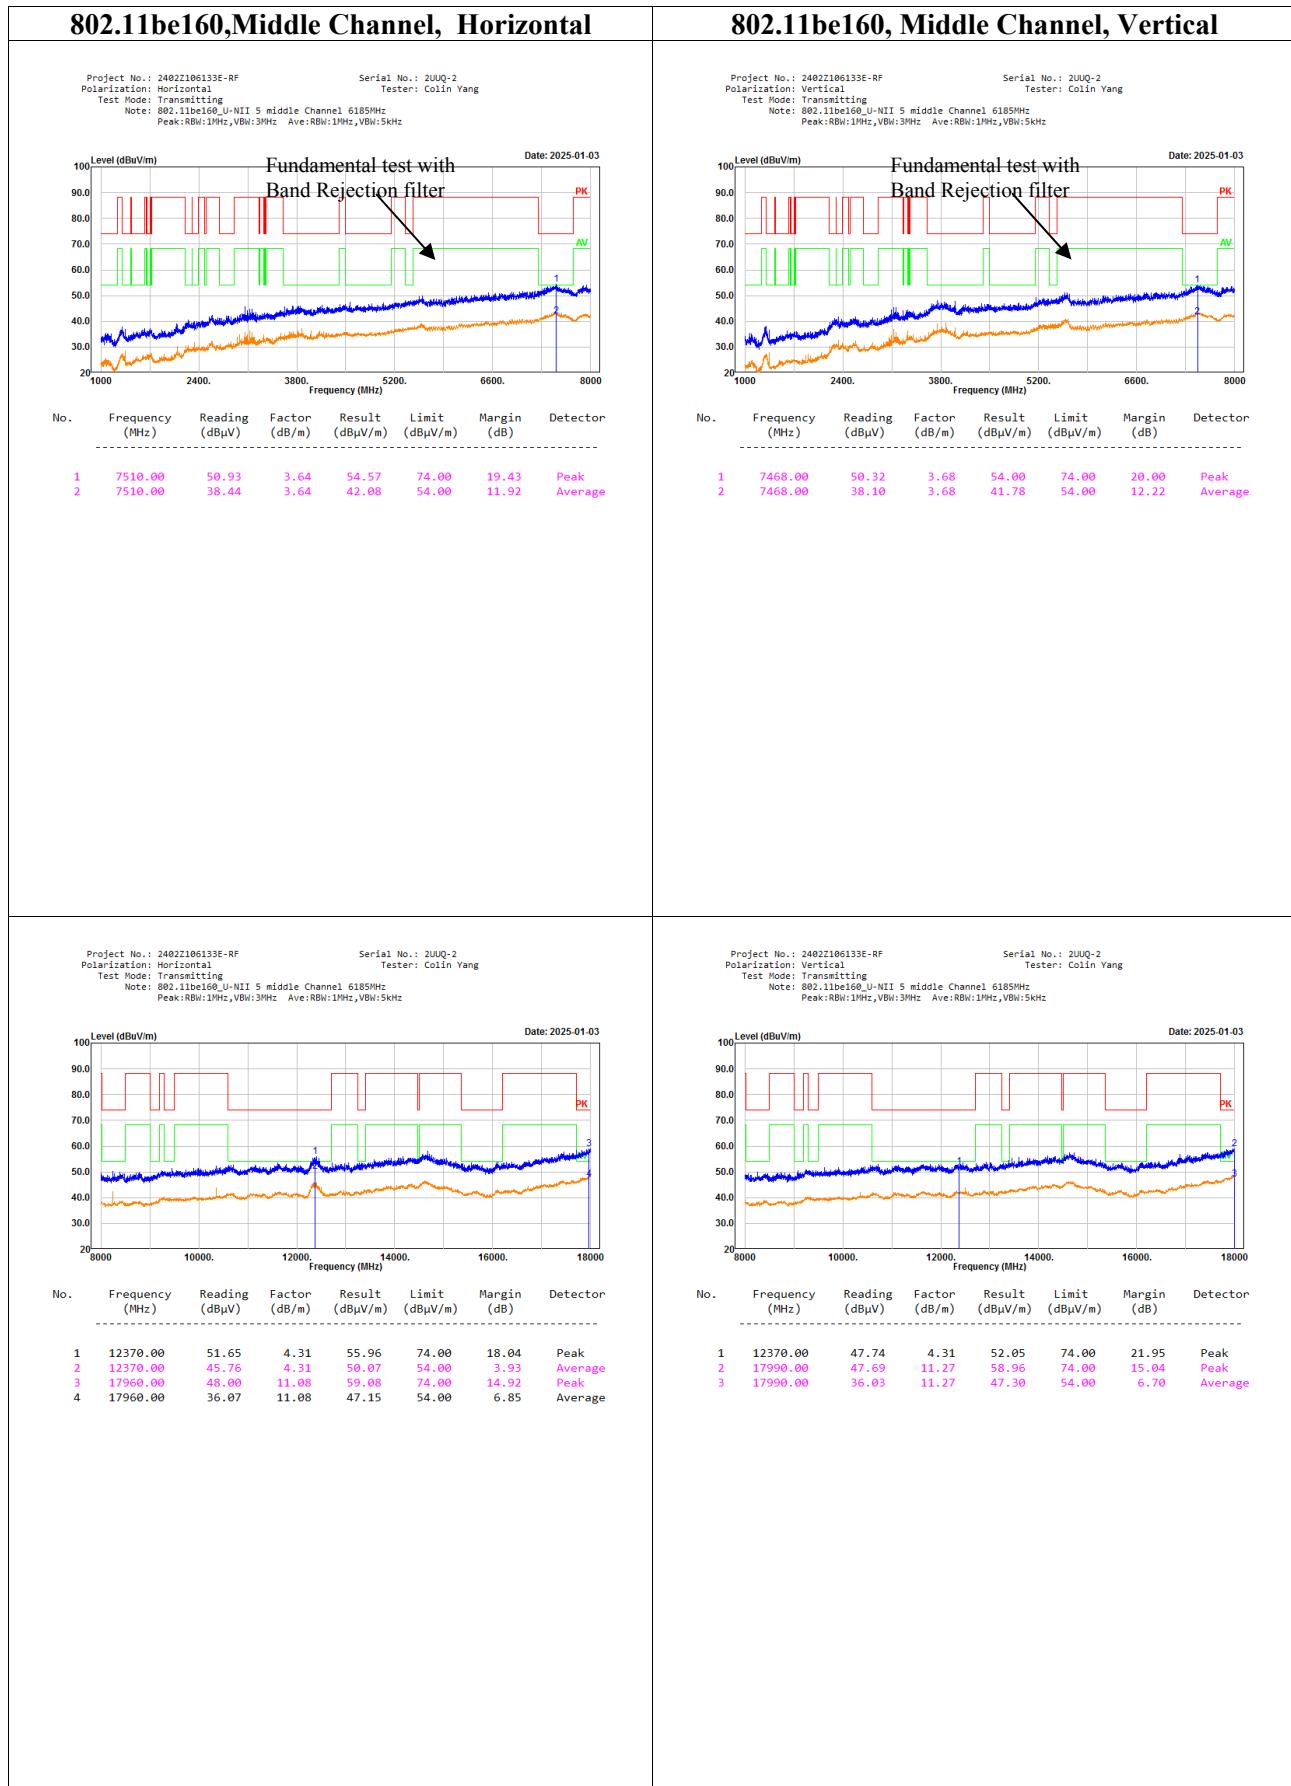

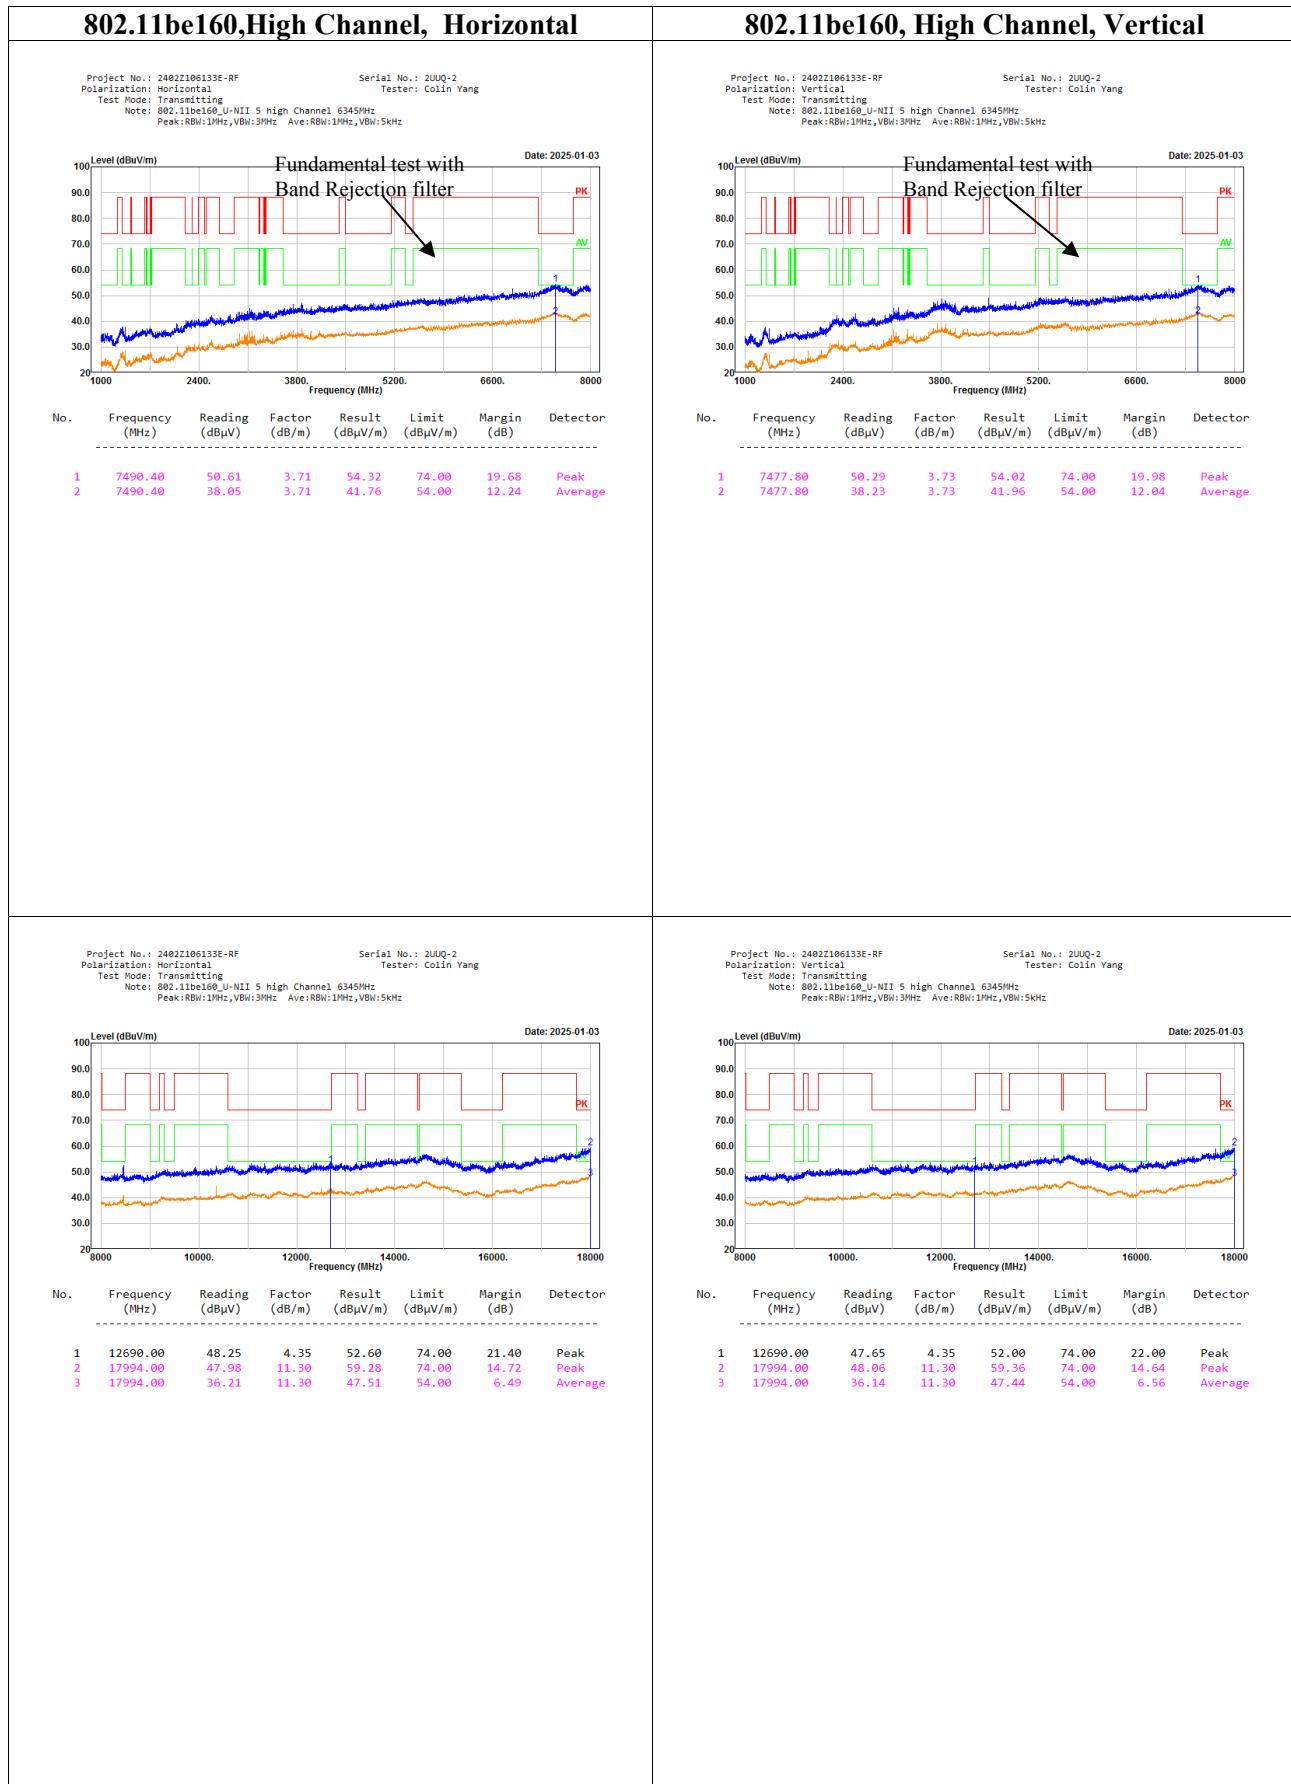

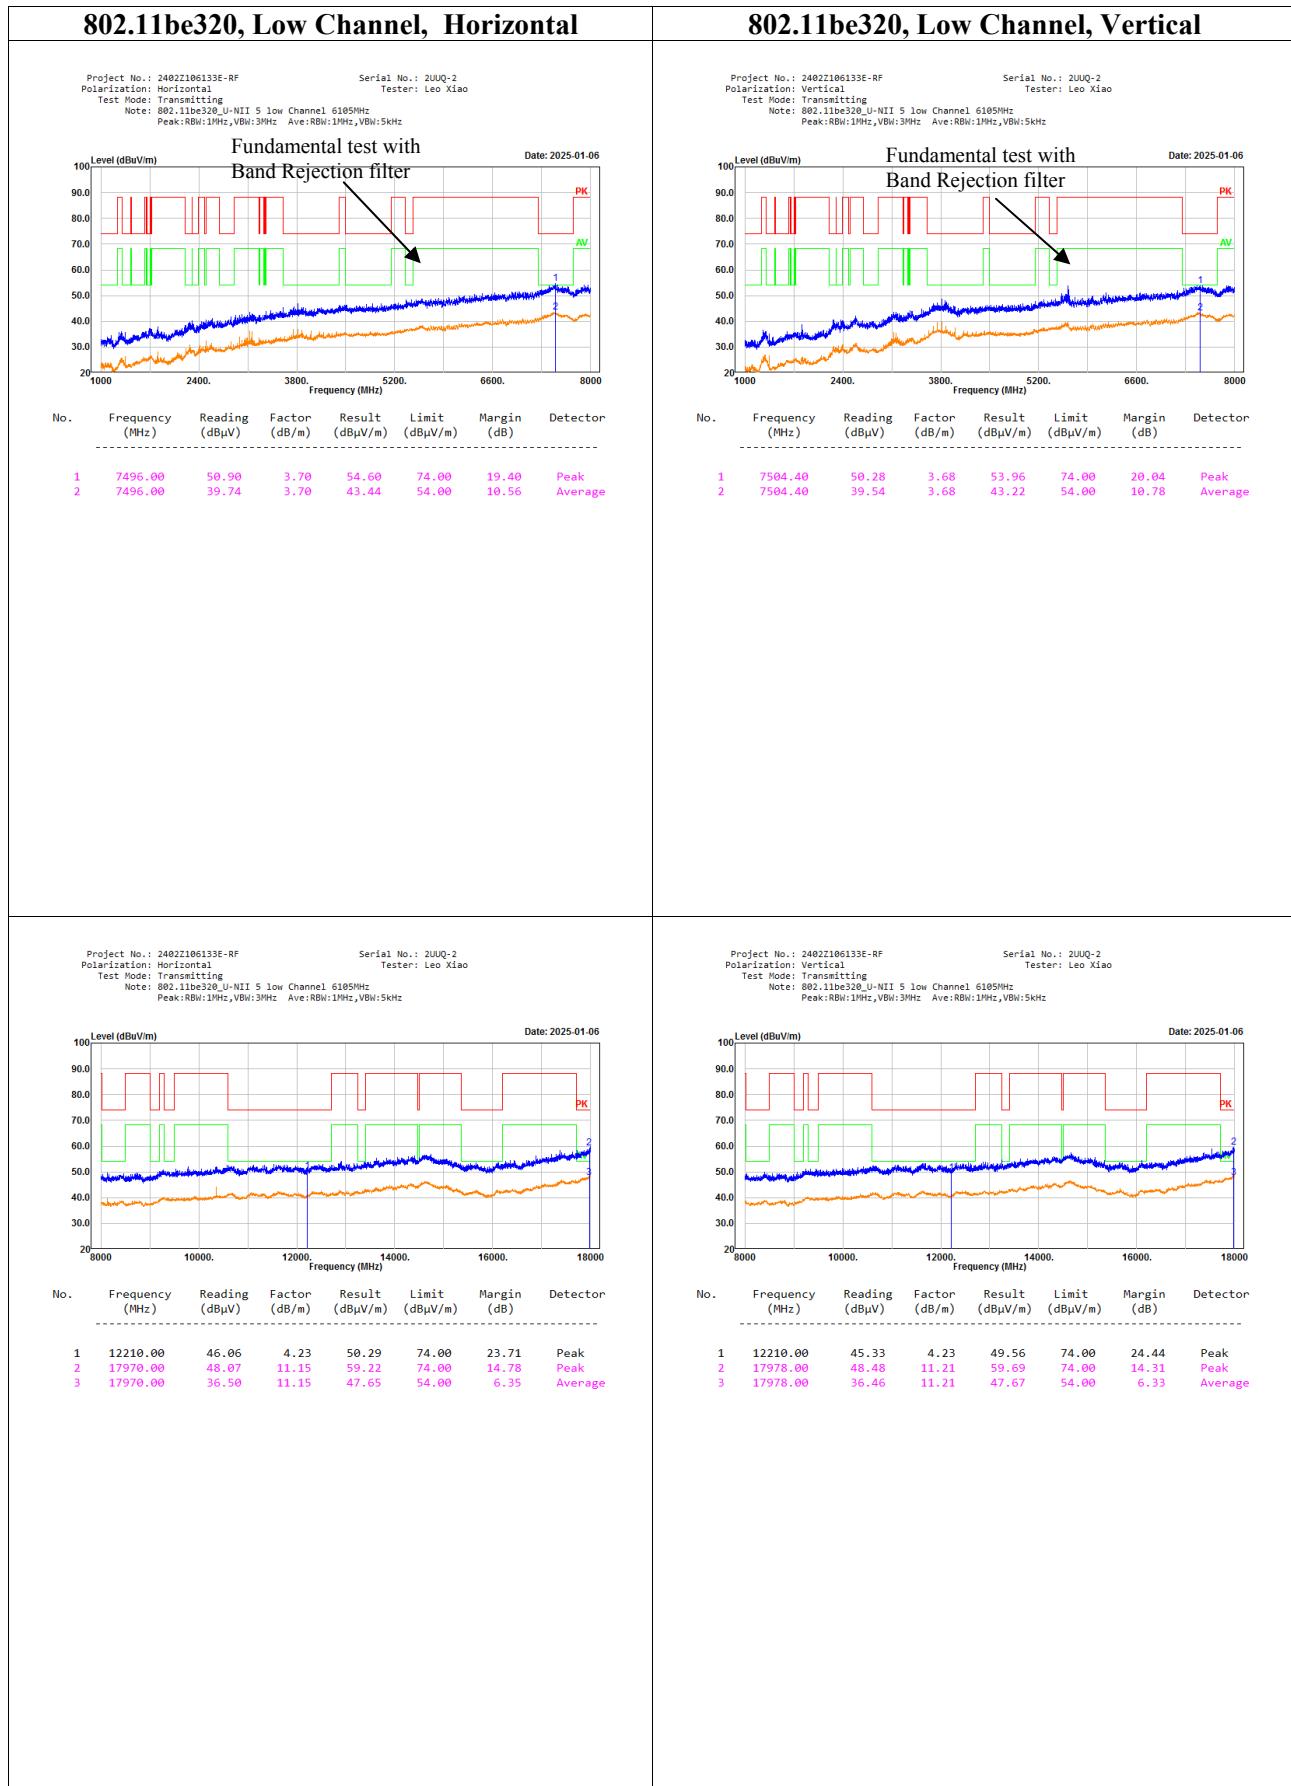

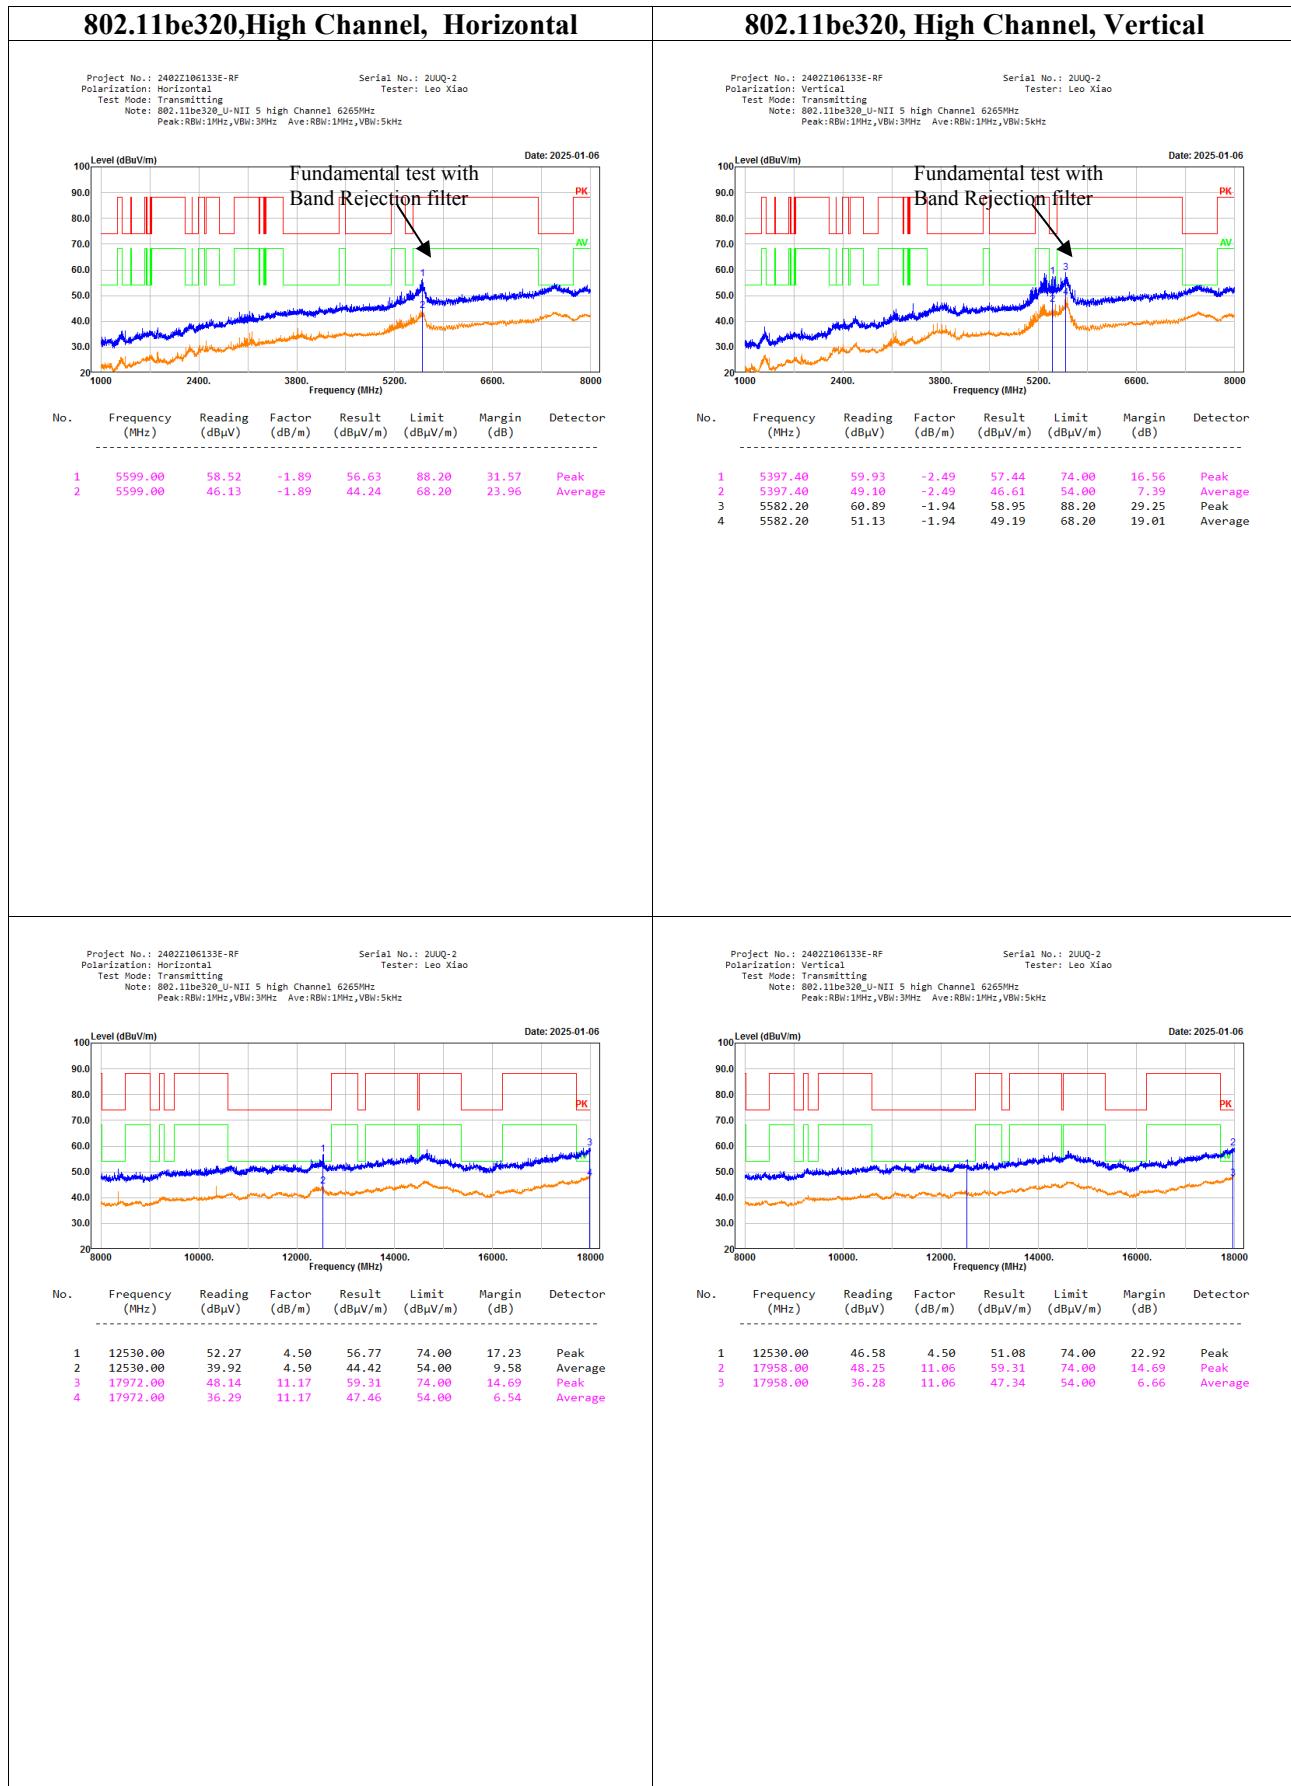


U-NII 6

802.11be20, Low Channel, Horizontal

Project No.: 2402Z106133E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11be20_U-NII 6 low Channel 6435MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2UUQ-2
Tester: Colin Yang

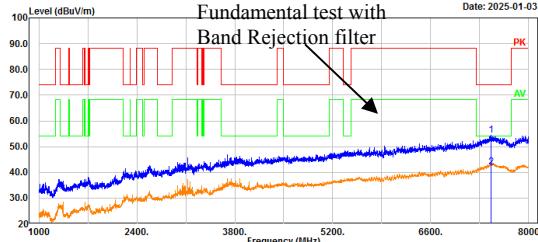


No.	Frequency (MHz)	Reading (dB _{uV})	Factor (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Detector
1	7466.60	50.66	3.68	54.34	74.00	19.66	Peak
2	7466.60	38.23	3.68	41.91	54.00	12.09	Average

802.11be20, Low Channel, Vertical

Project No.: 2402Z106133E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11be20_U-NII 6 low Channel 6435MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 2UUQ-2
Tester: Colin Yang

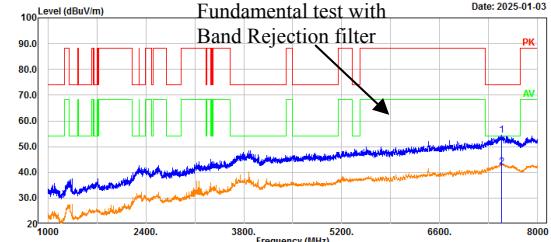

No.	Frequency (MHz)	Reading (dB _{uV})	Factor (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Detector
1	7482.00	50.61	3.73	54.34	74.00	19.66	Peak
2	7482.00	38.33	3.73	42.06	54.00	11.94	Average

Project No.: 2402Z106133E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11be20_U-NII 6 low Channel 6435MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 2UUQ-2
Tester: Colin Yang

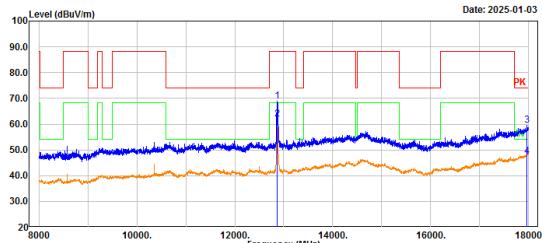


No.	Frequency (MHz)	Reading (dB _{uV})	Factor (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Detector
1	12872.00	64.36	4.58	68.94	88.20	19.26	Peak
2	12872.00	57.24	4.58	61.82	68.20	6.38	Average
3	17960.00	48.57	11.08	59.65	74.00	14.35	Peak
4	17960.00	36.29	11.08	47.37	54.00	6.63	Average


Project No.: 2402Z106133E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11be20_U-NII 6 low Channel 6435MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 2UUQ-2
Tester: Colin Yang

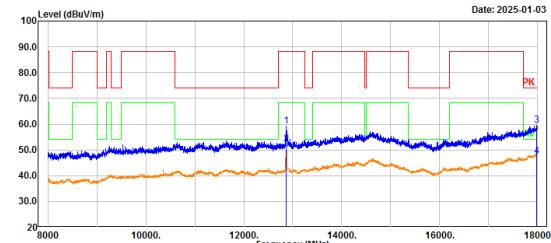



No.	Frequency (MHz)	Reading (dB _{uV})	Factor (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Detector
1	12864.00	54.71	4.56	59.27	88.20	28.93	Peak
2	12864.00	47.89	4.56	52.45	68.20	15.75	Average
3	17974.00	48.25	11.18	59.43	74.00	14.57	Peak
4	17974.00	36.34	11.18	47.52	54.00	6.48	Average

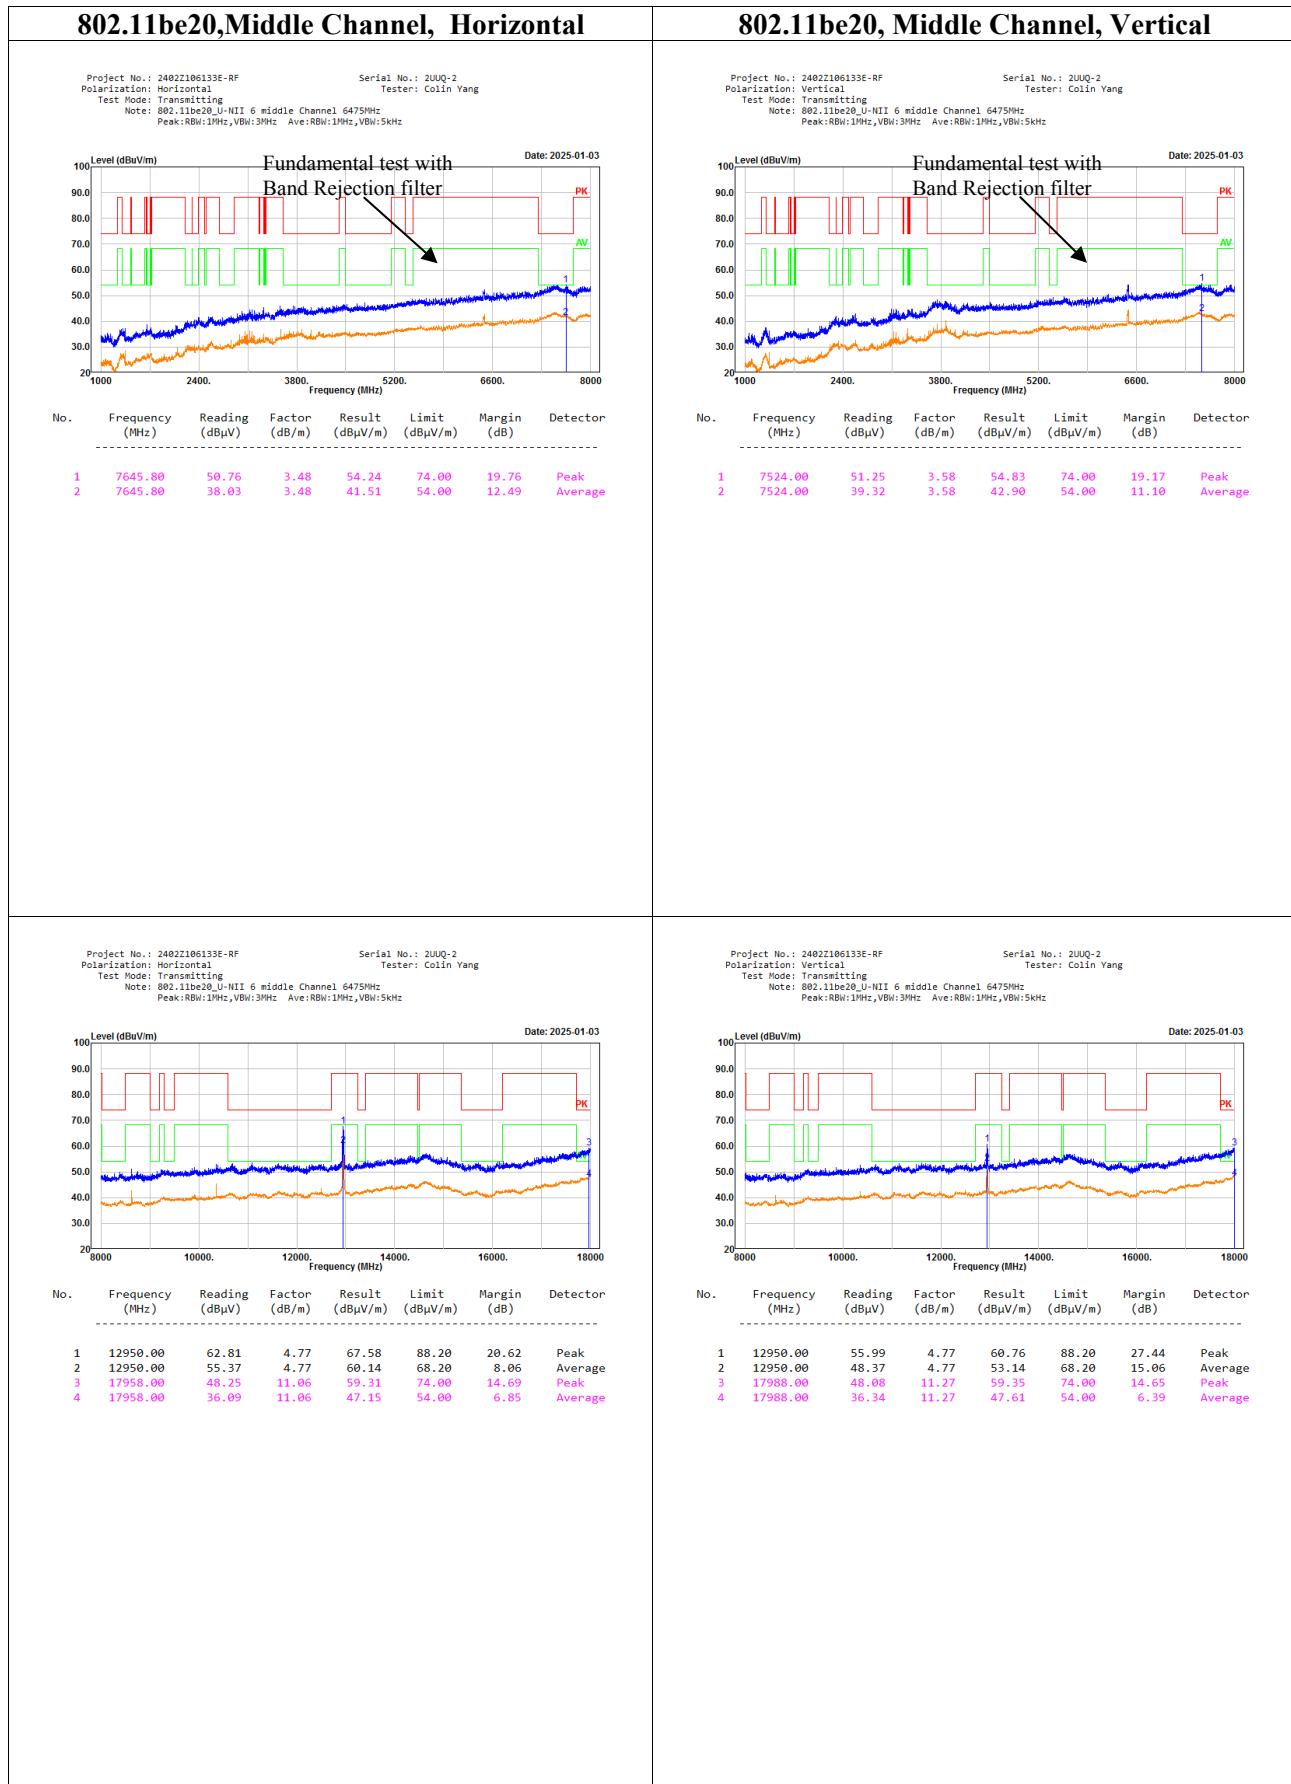

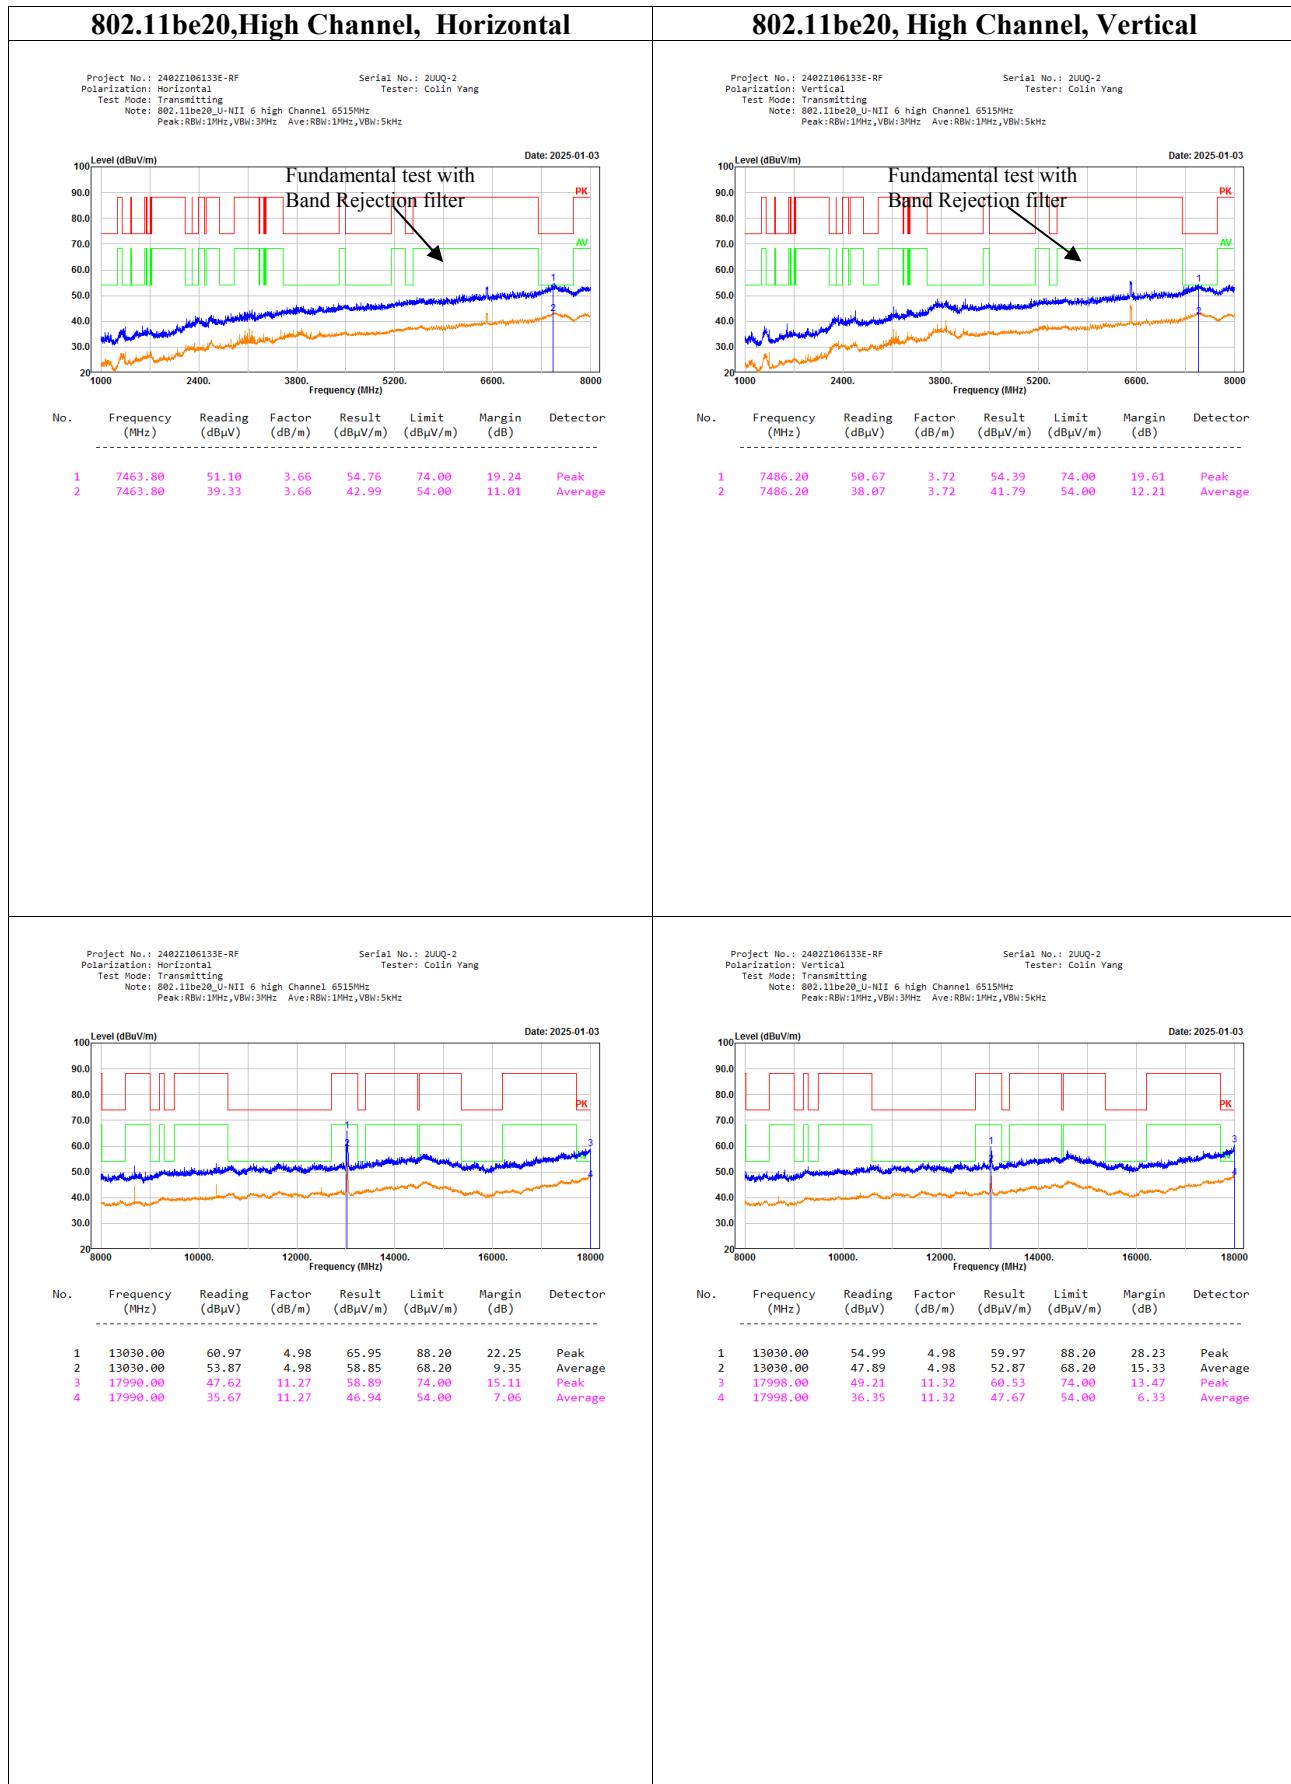

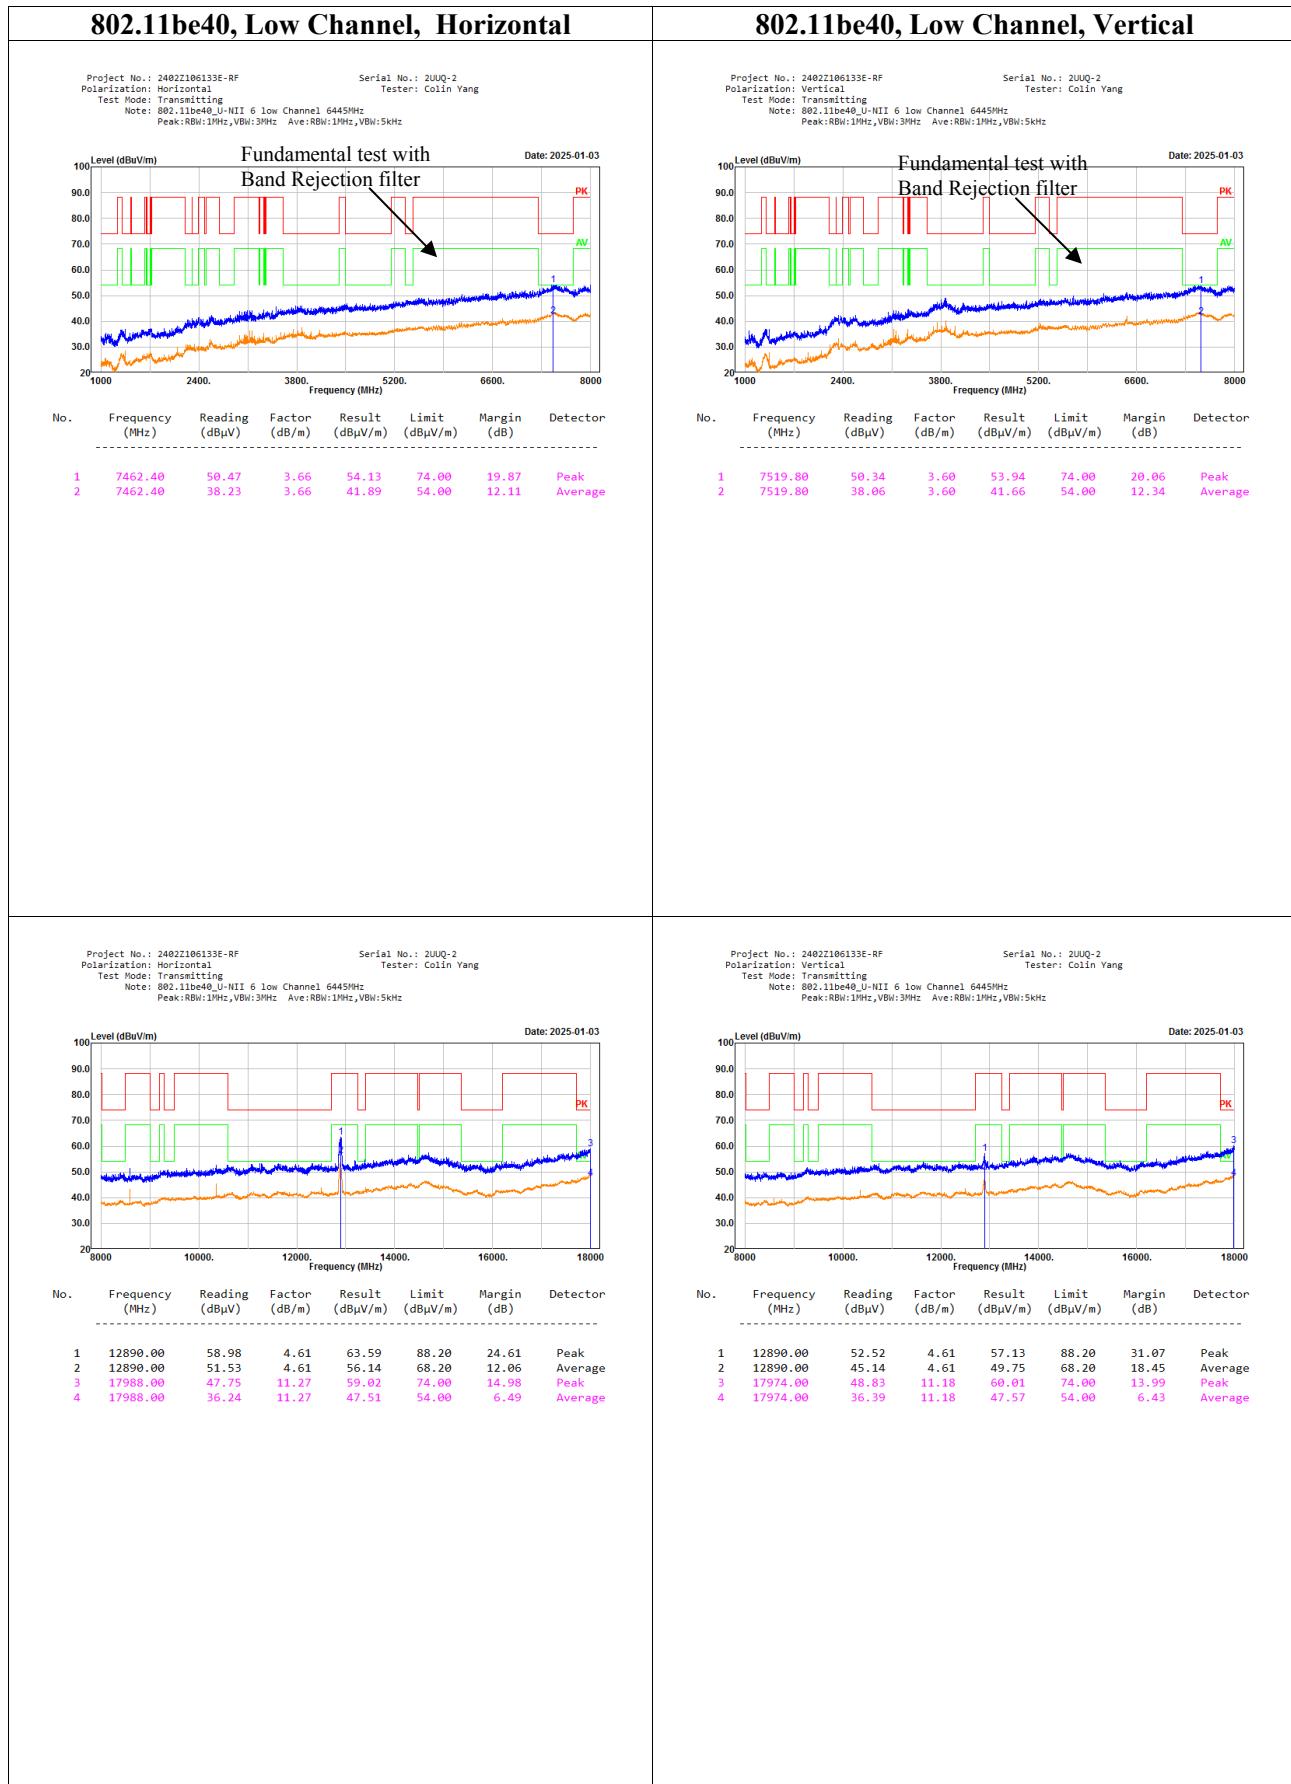

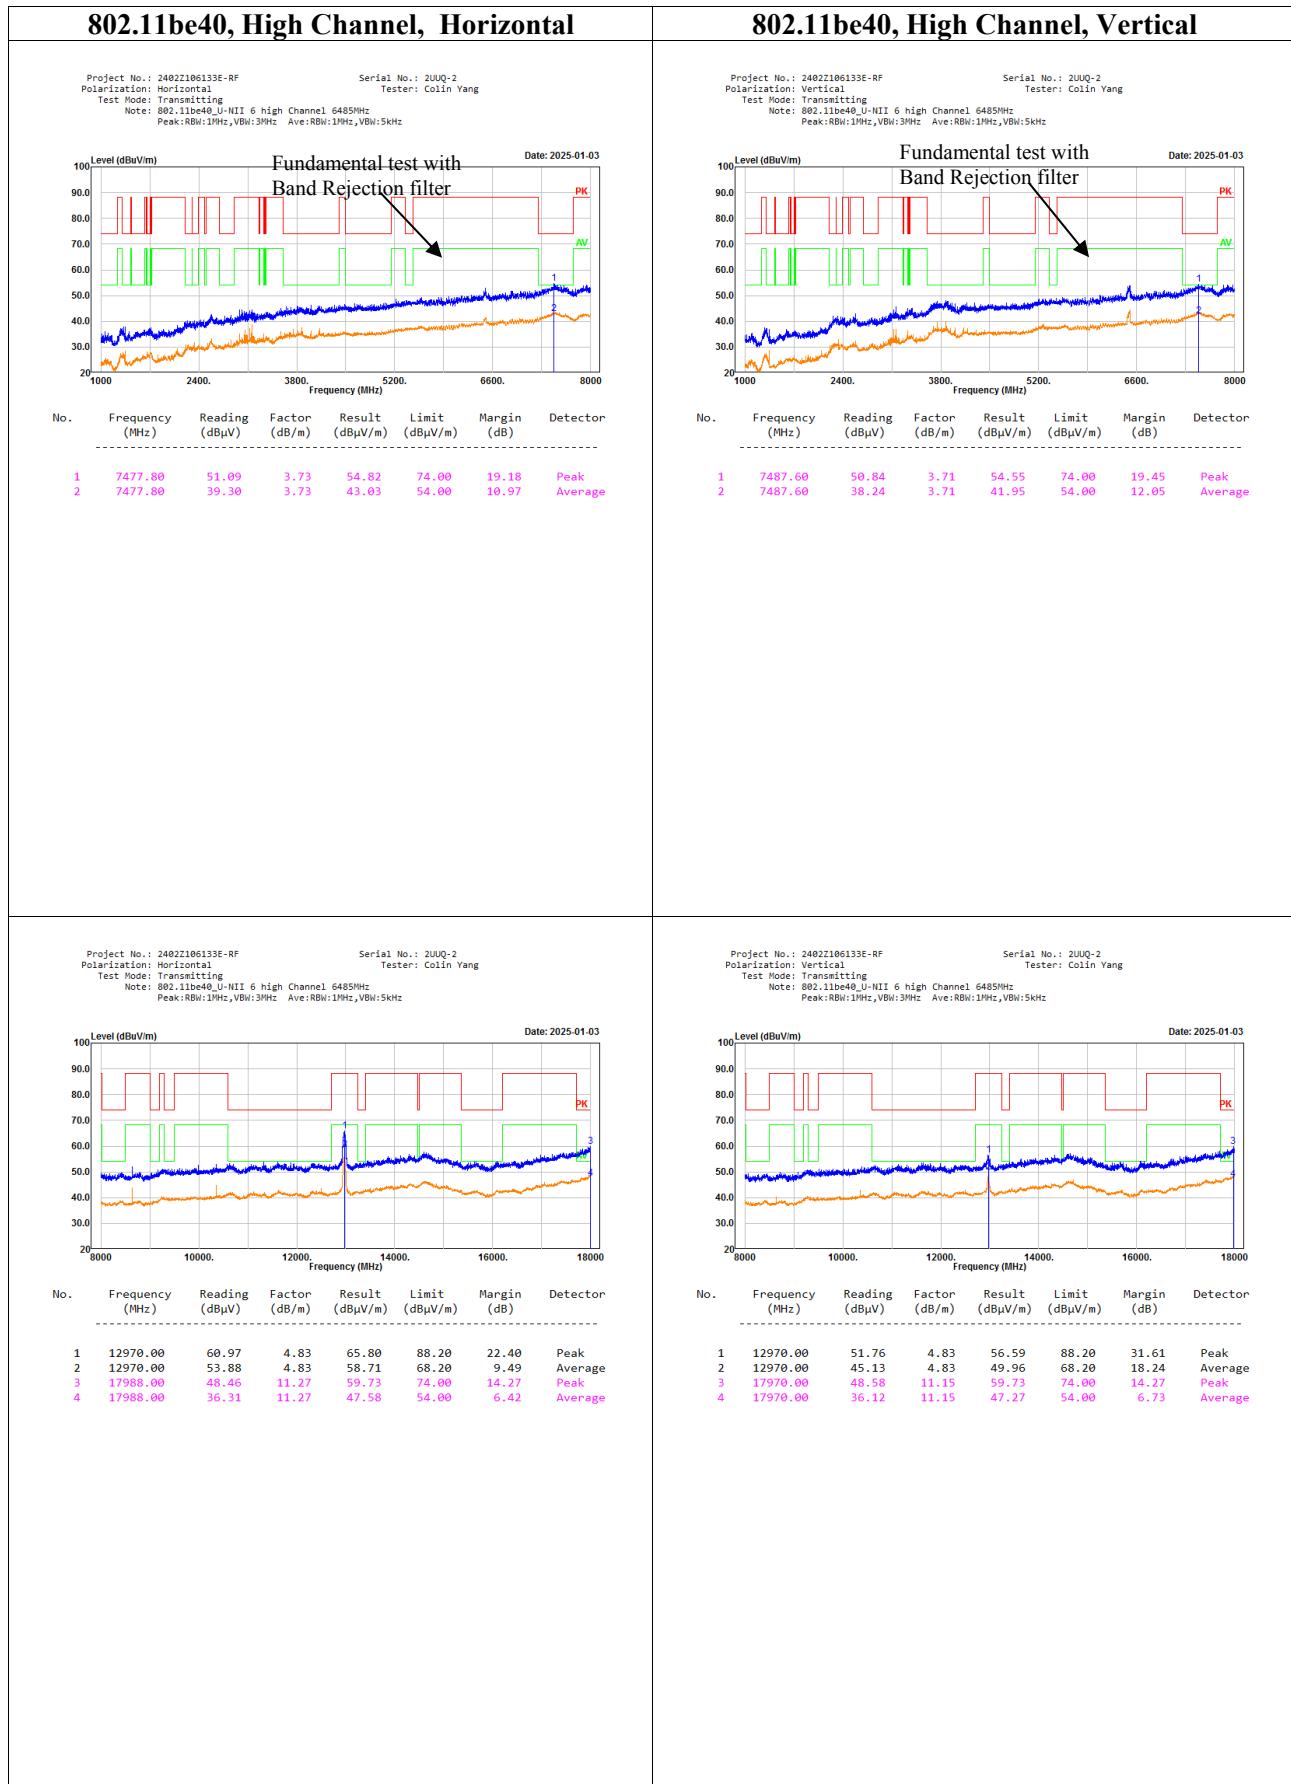

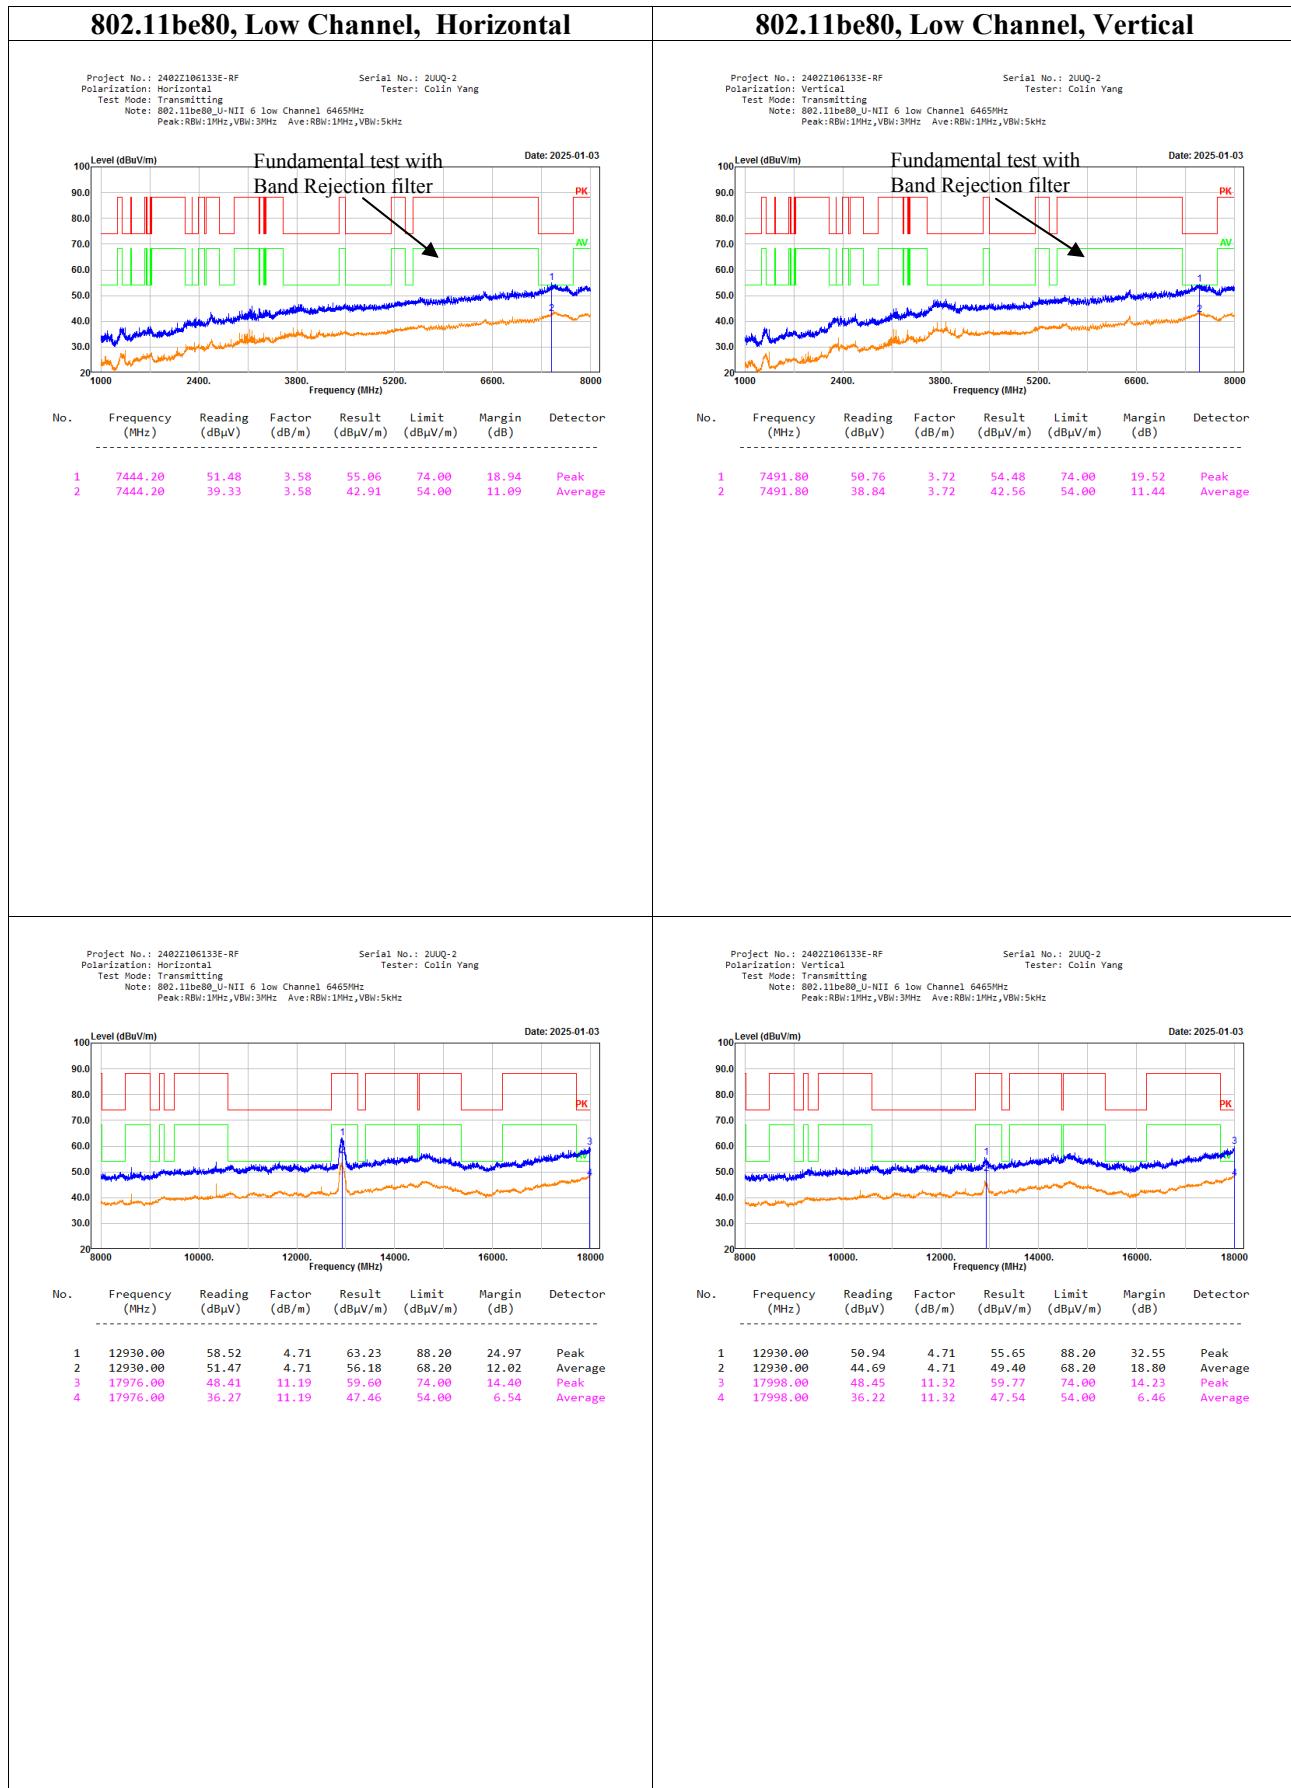


U-NII 7

802.11be20, Low Channel, Horizontal

802.11be20, Low Channel, Vertical

Project No.: 2402Z106133E-RF
 Polarization: Horizontal
 Test Mode: Transmitting
 Note: 802.11be20_U-NII 7 low Channel 6535MHz
 Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 2UUQ-2
 Tester: Colin Yang

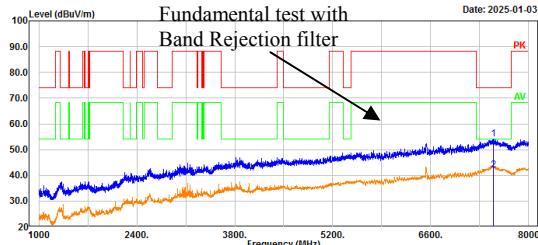

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	7500.20	50.50	3.70	54.20	74.00	19.80	Peak
2	7500.20	38.21	3.70	41.91	54.00	12.09	Average

Project No.: 2402Z106133E-RF
 Polarization: Vertical
 Test Mode: Transmitting
 Note: 802.11be20_U-NII 7 low Channel 6535MHz
 Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 2UUQ-2
 Tester: Colin Yang

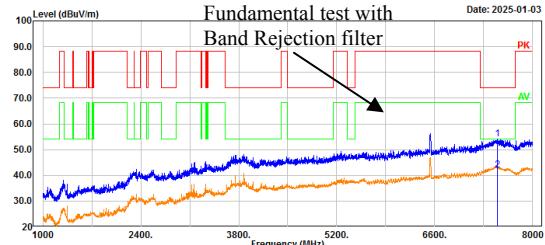

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	7491.80	50.40	3.72	54.12	74.00	19.88	Peak
2	7491.80	38.22	3.72	41.94	54.00	12.06	Average

Project No.: 2402Z106133E-RF
 Polarization: Horizontal
 Test Mode: Transmitting
 Note: 802.11be20_U-NII 7 low Channel 6535MHz
 Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 2UUQ-2
 Tester: Colin Yang

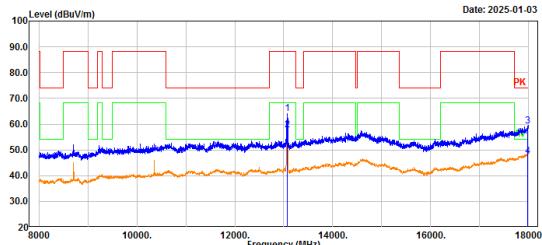


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	13070.00	59.19	4.94	64.13	88.20	24.07	Peak
2	13070.00	52.89	4.94	57.83	68.20	10.37	Average
3	17984.00	47.99	11.24	59.23	74.00	14.77	Peak
4	17984.00	36.38	11.24	47.62	54.00	6.38	Average


Project No.: 2402Z106133E-RF
 Polarization: Vertical
 Test Mode: Transmitting
 Note: 802.11be20_U-NII 7 low Channel 6535MHz
 Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 2UUQ-2
 Tester: Colin Yang

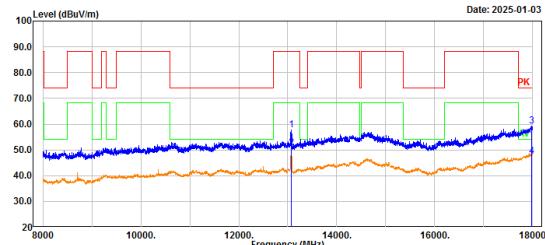



No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	13070.00	52.87	4.94	57.81	88.20	30.39	Peak
2	13070.00	45.96	4.94	50.90	68.20	17.30	Average
3	17982.00	47.94	11.24	59.18	74.00	14.82	Peak
4	17982.00	36.15	11.24	47.39	54.00	6.61	Average

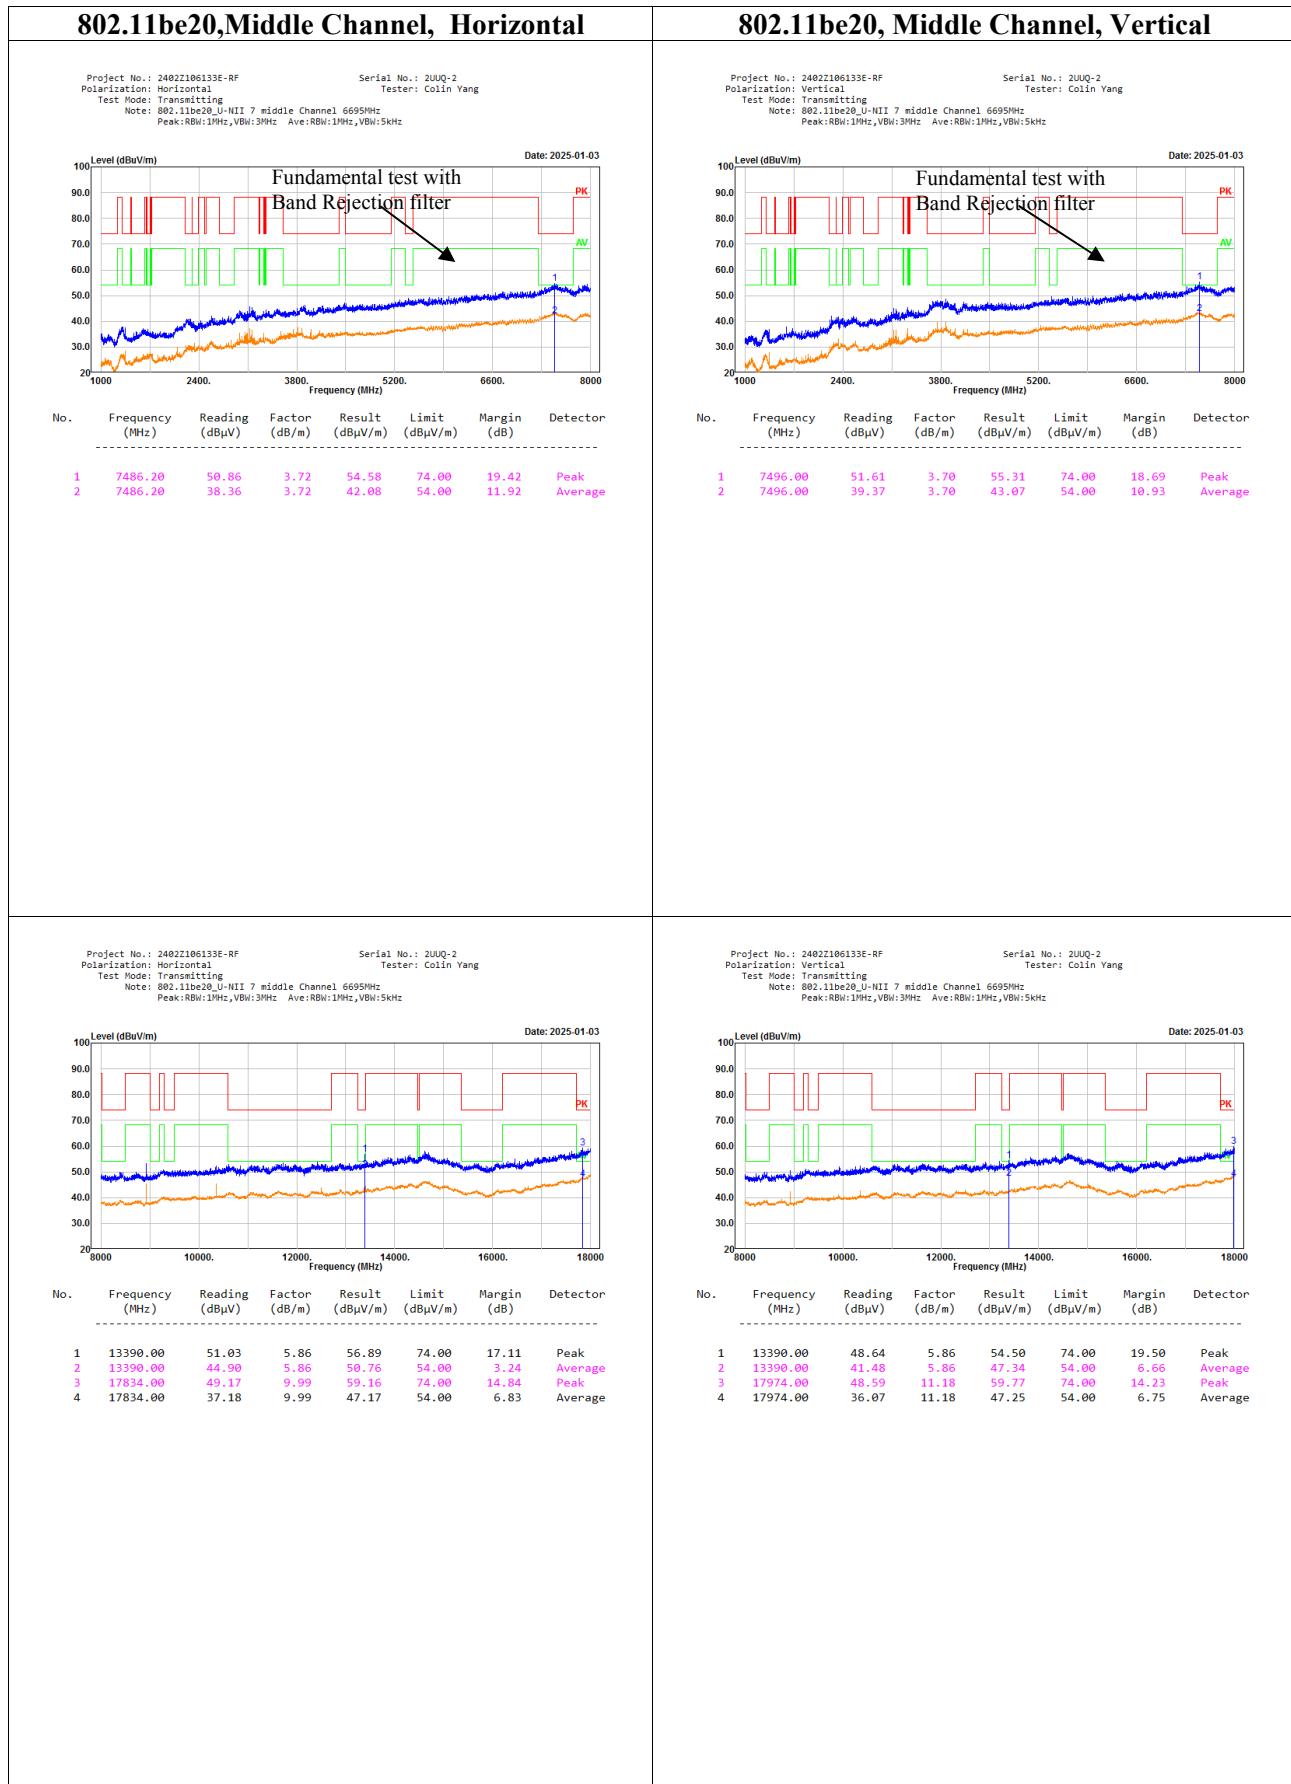


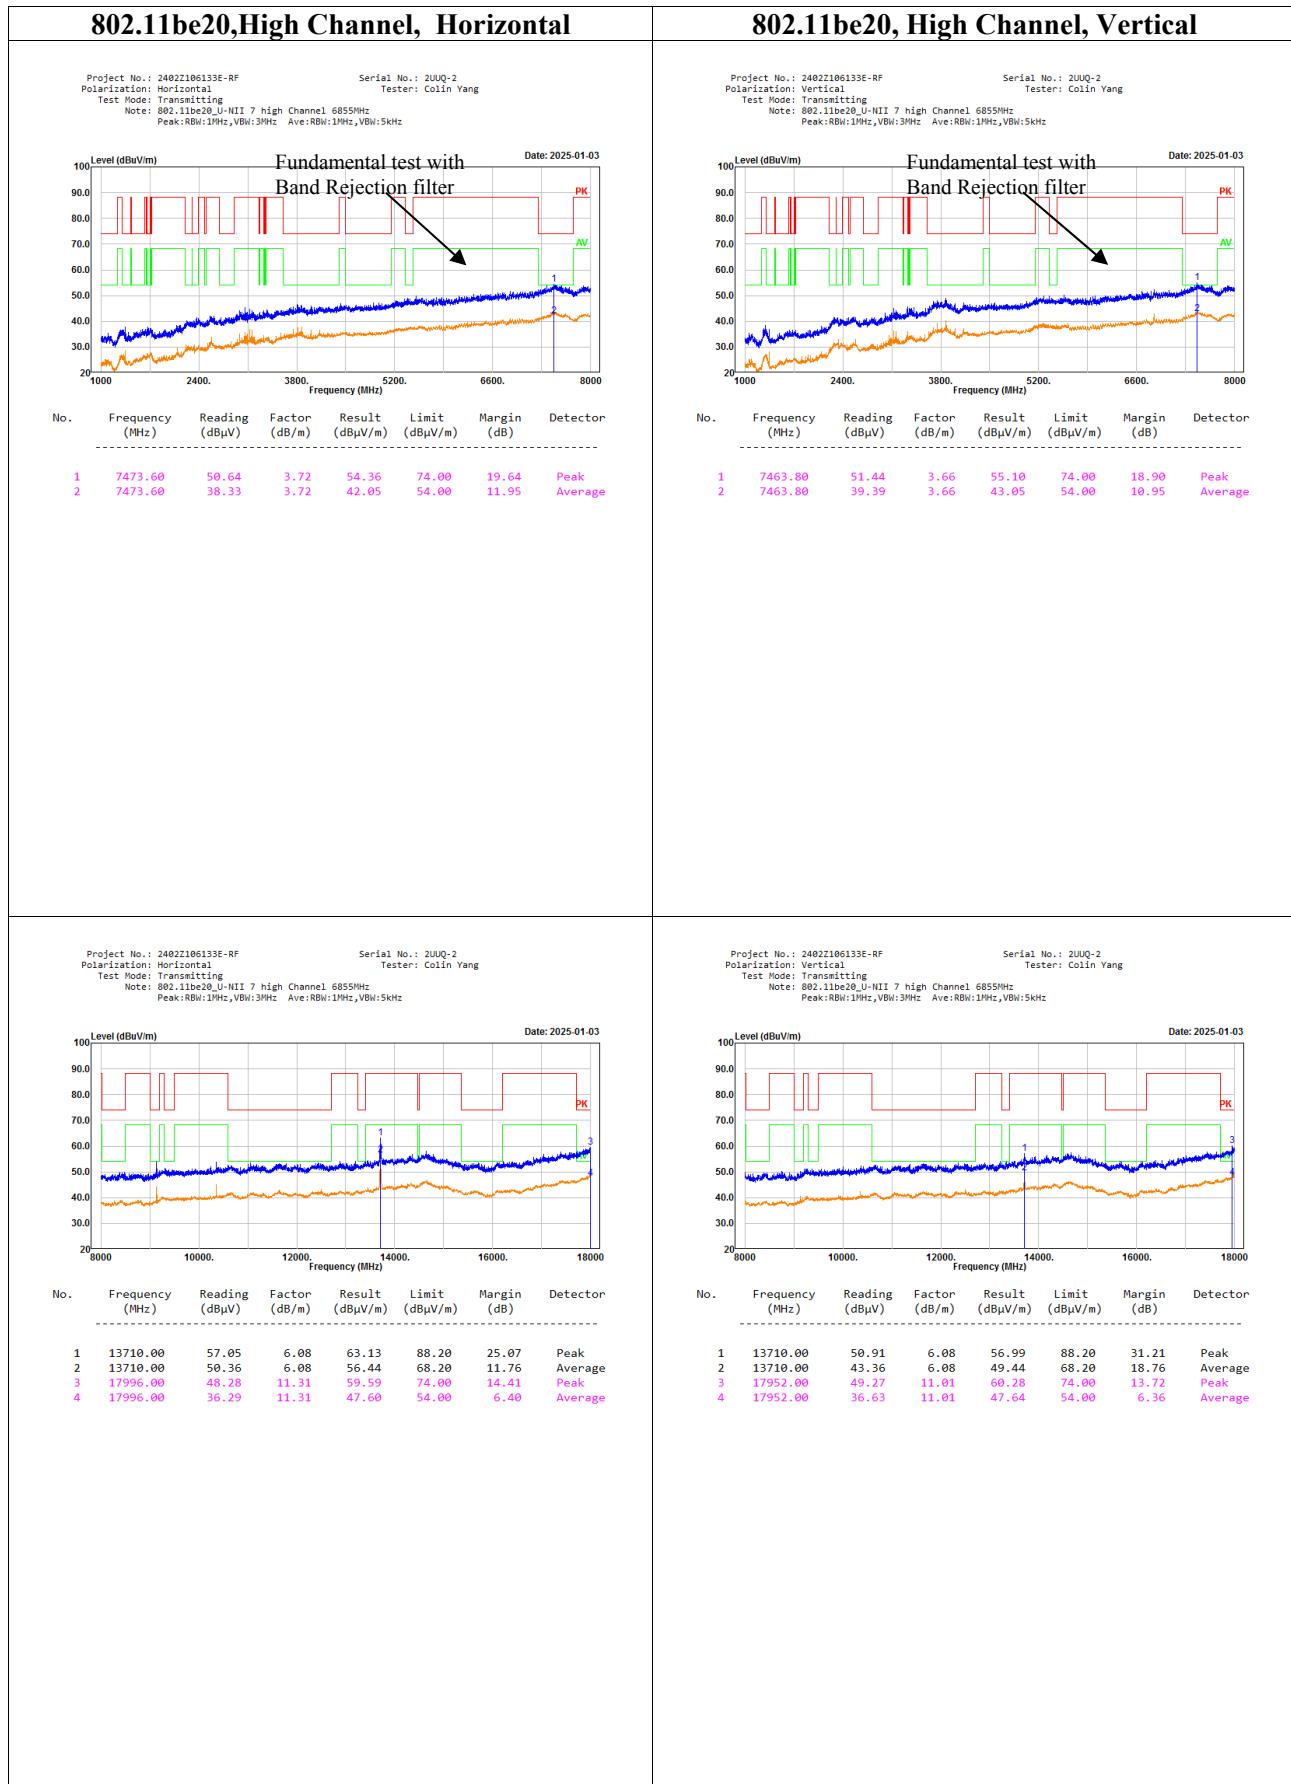


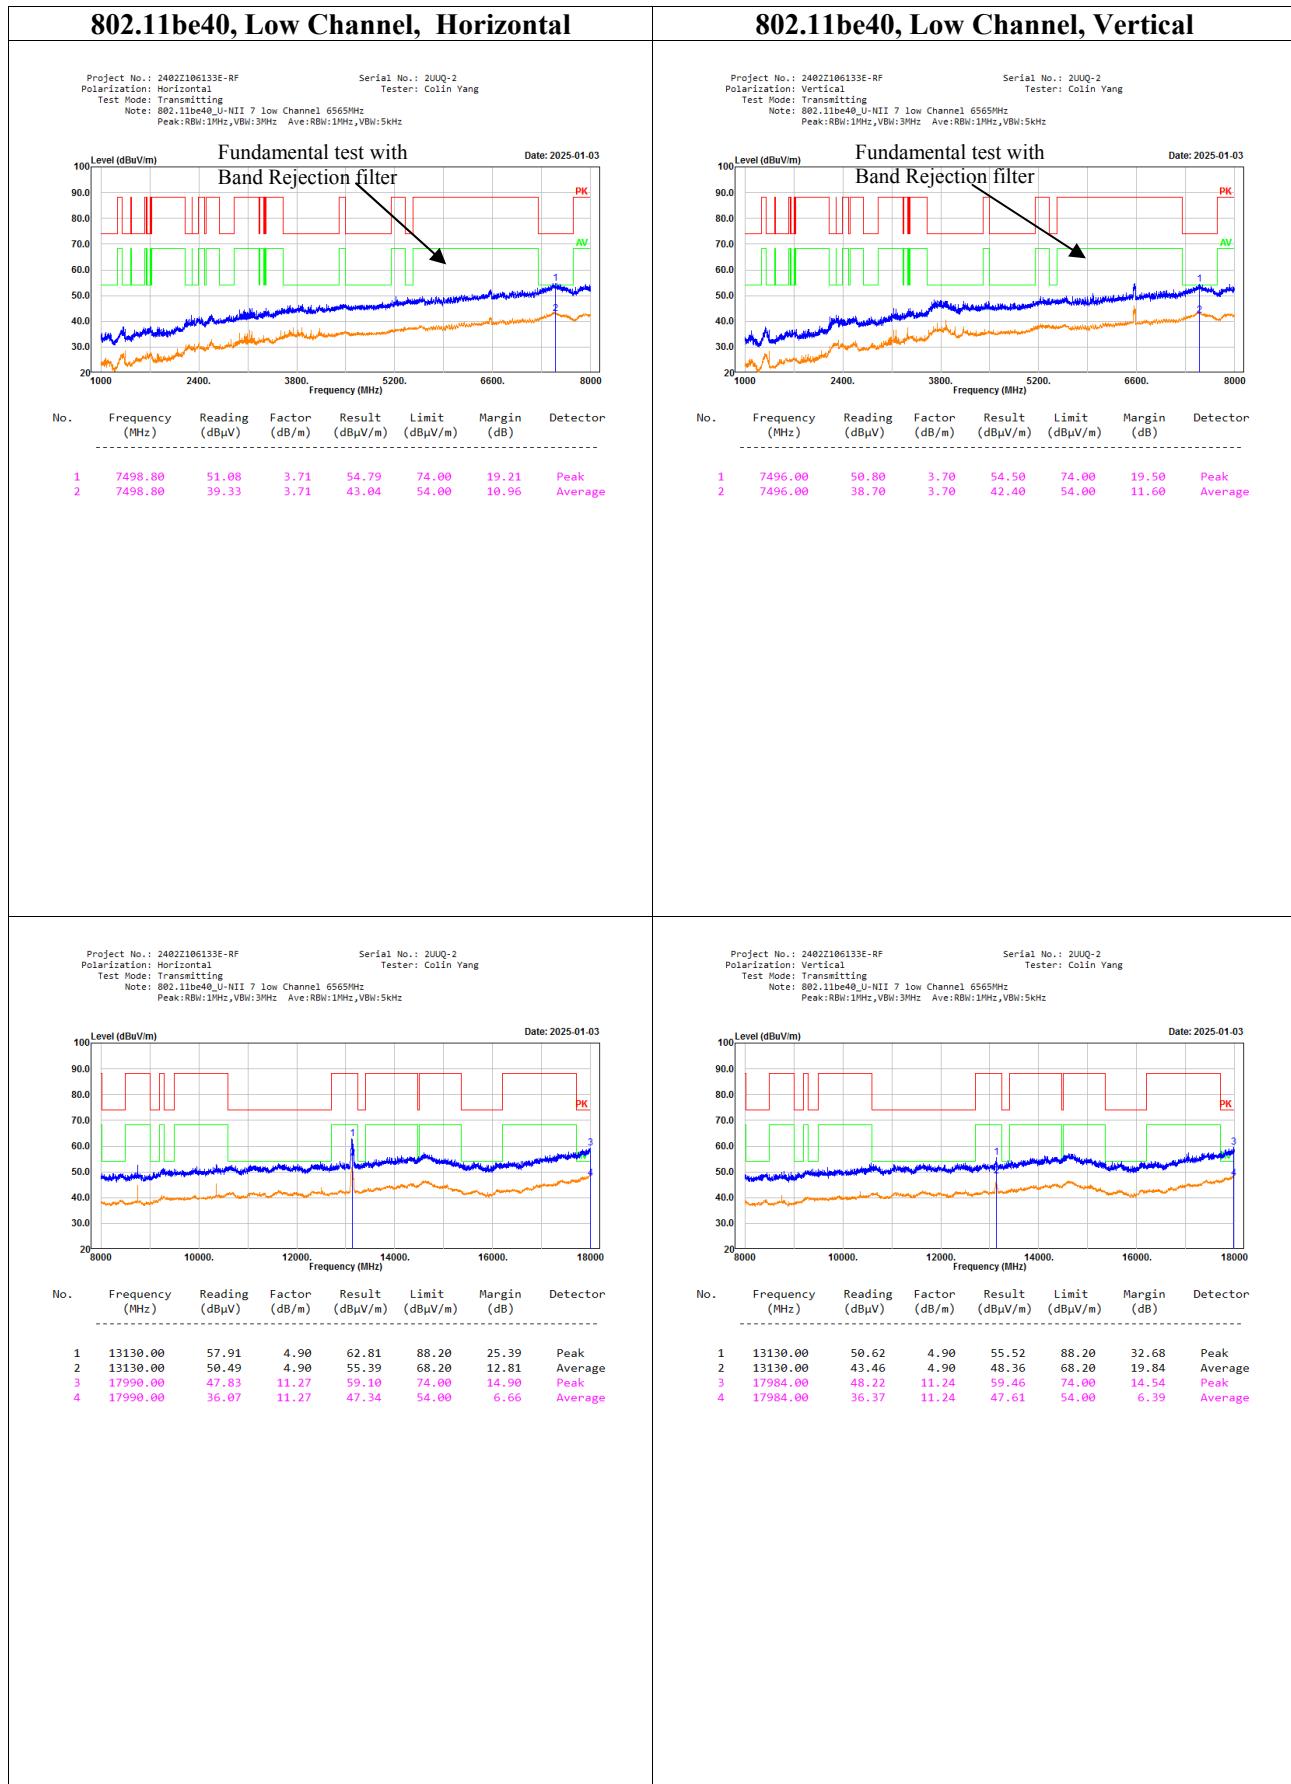


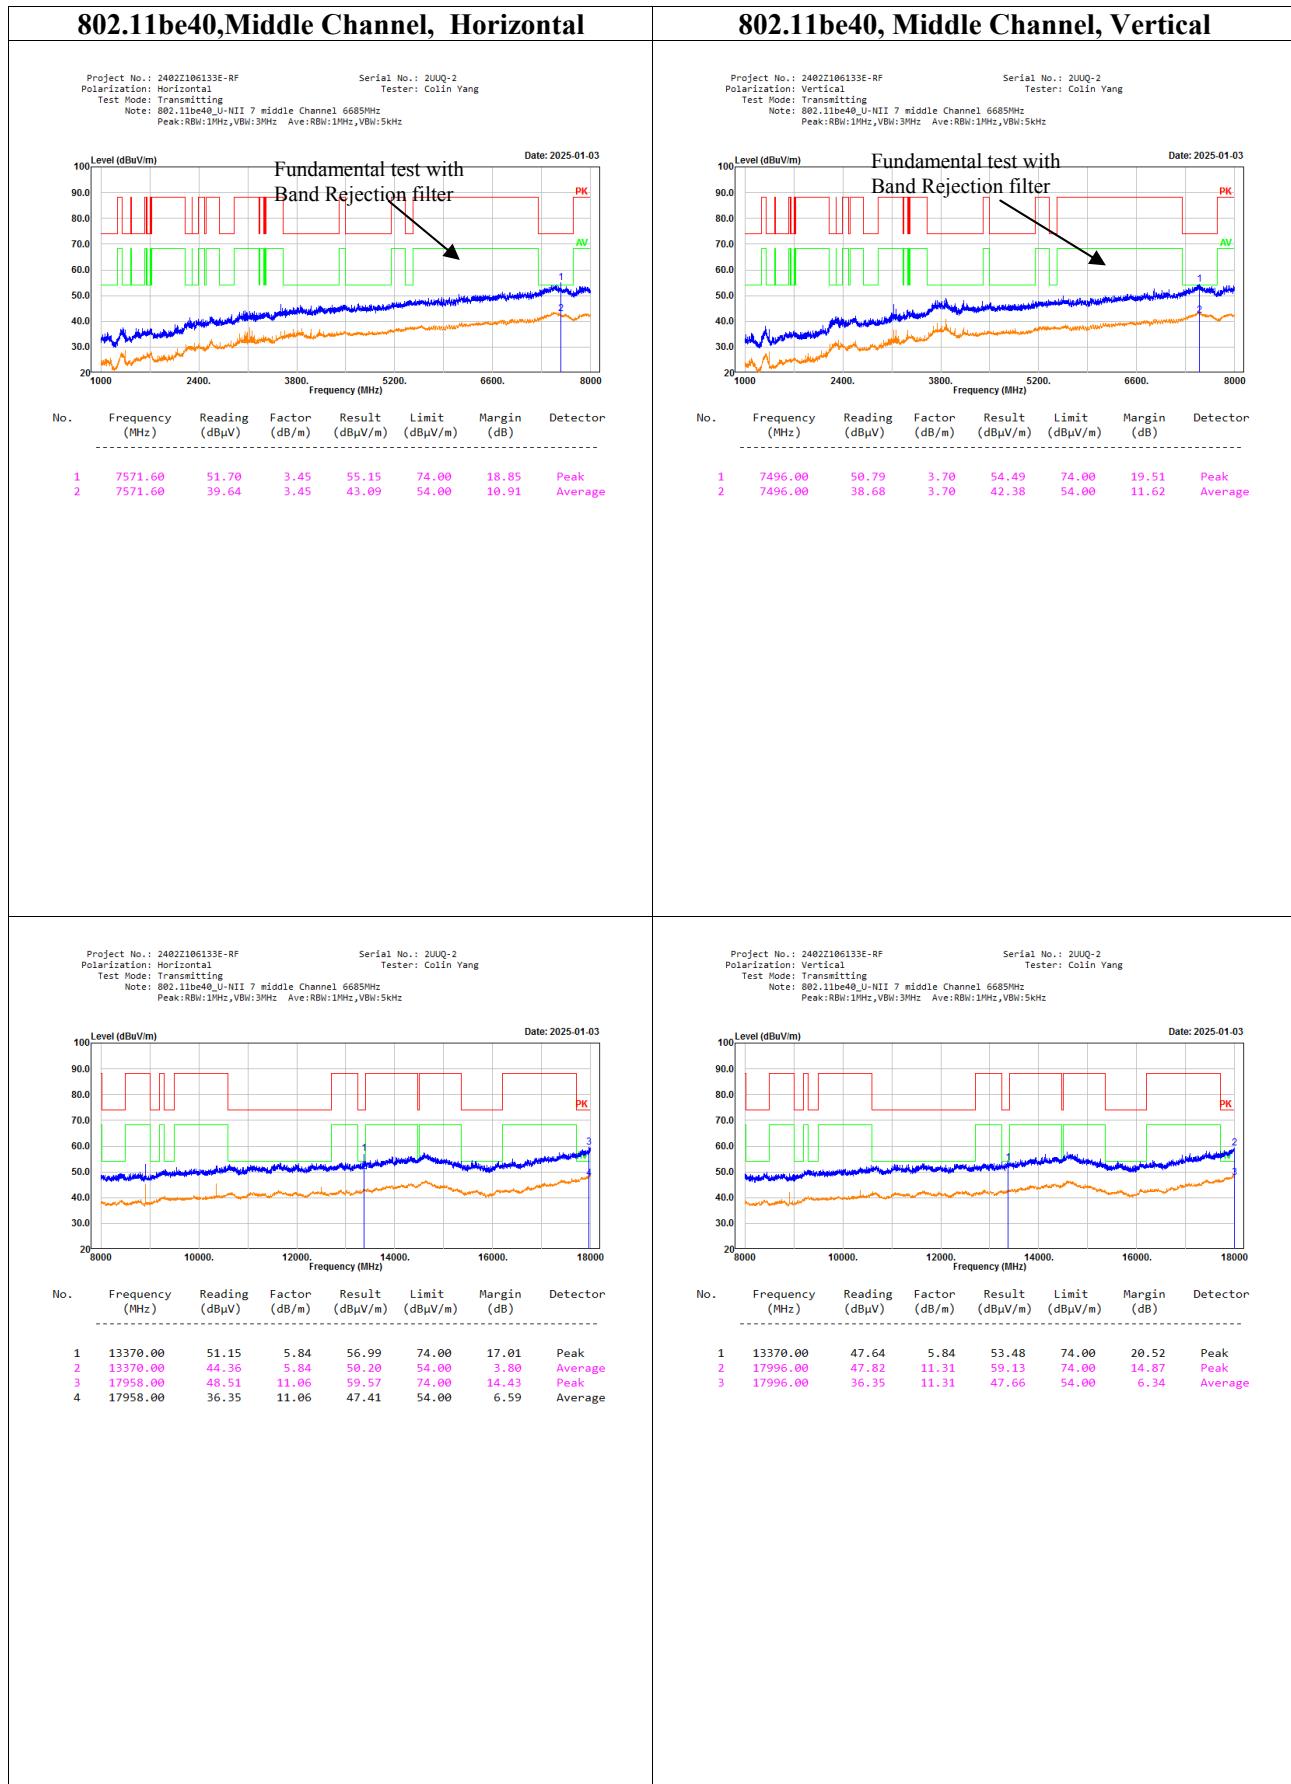


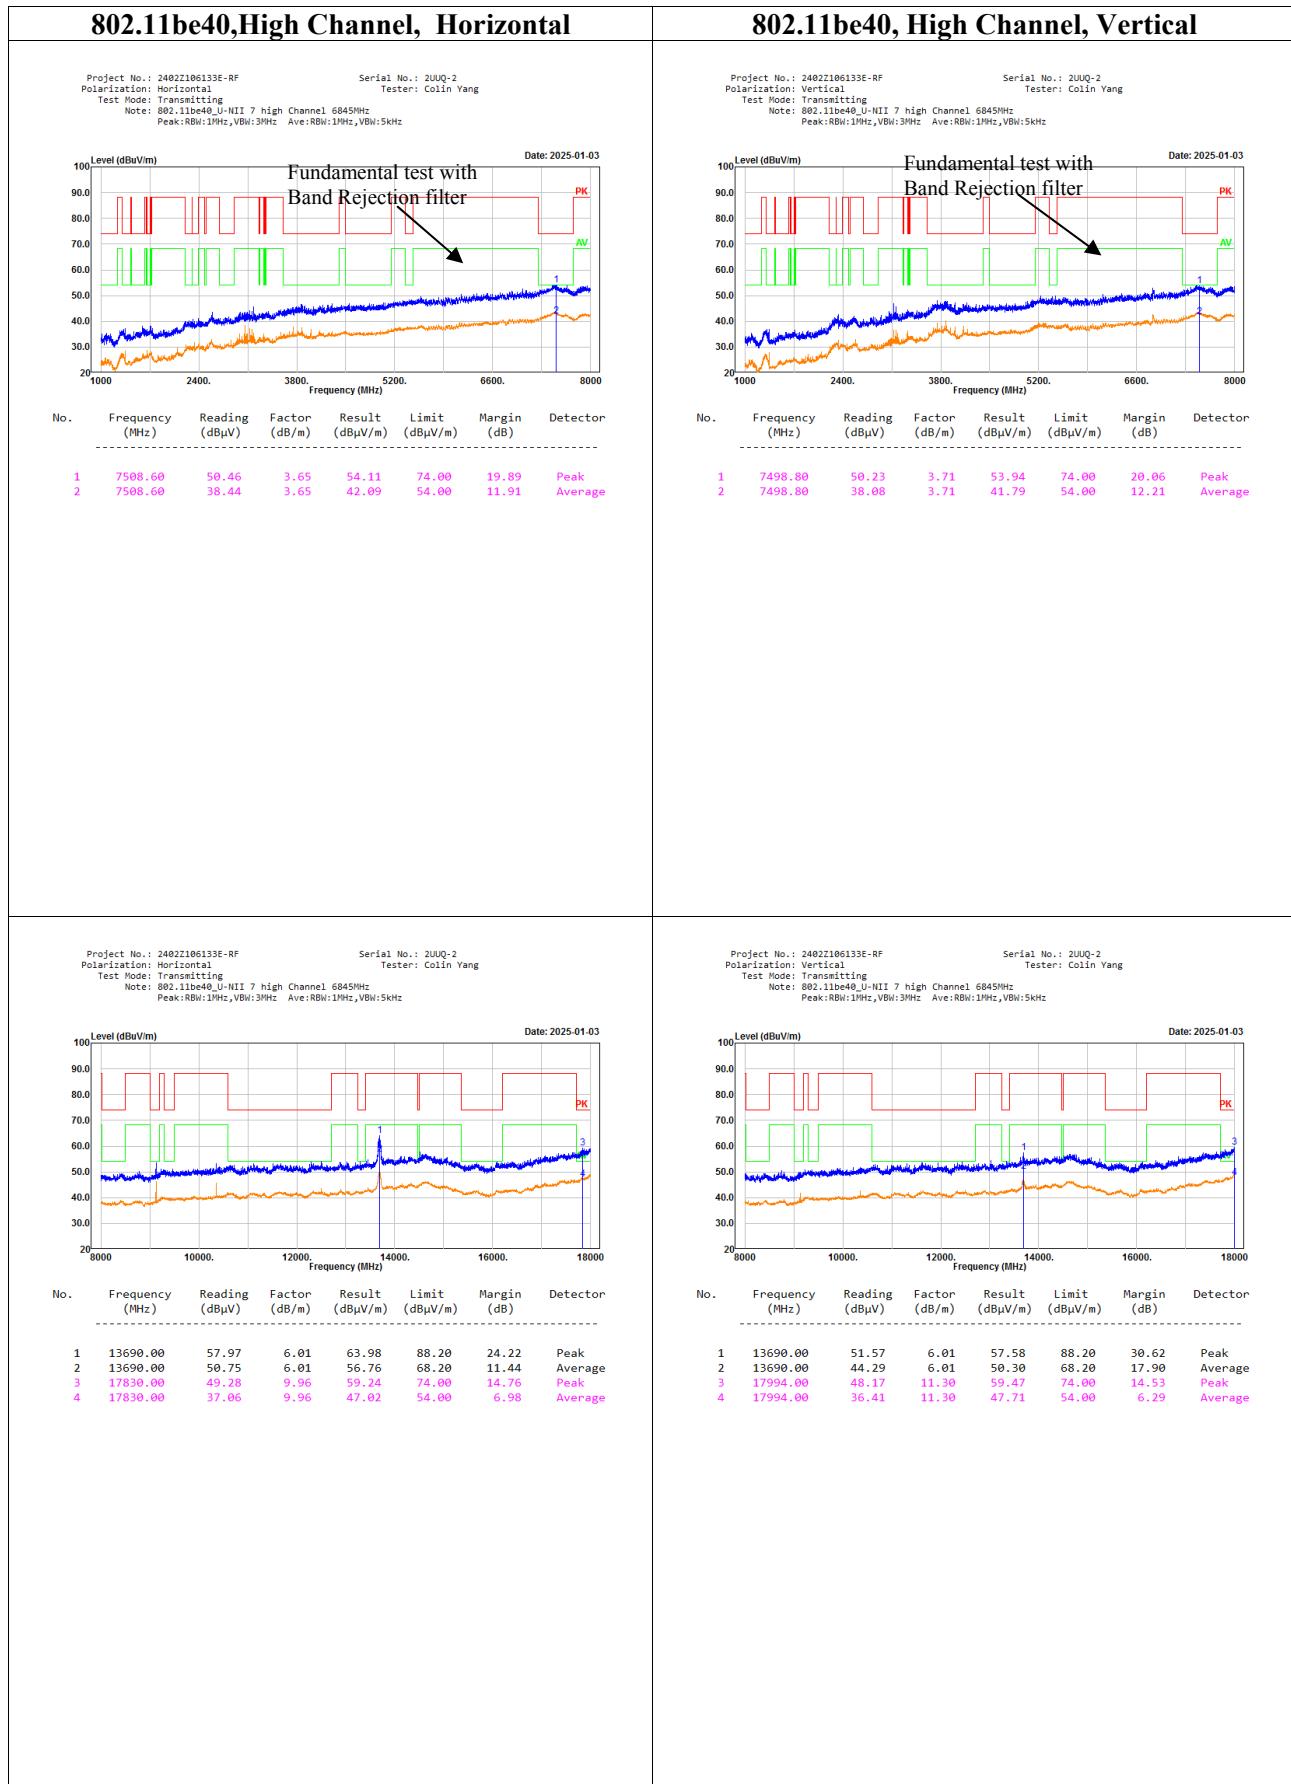

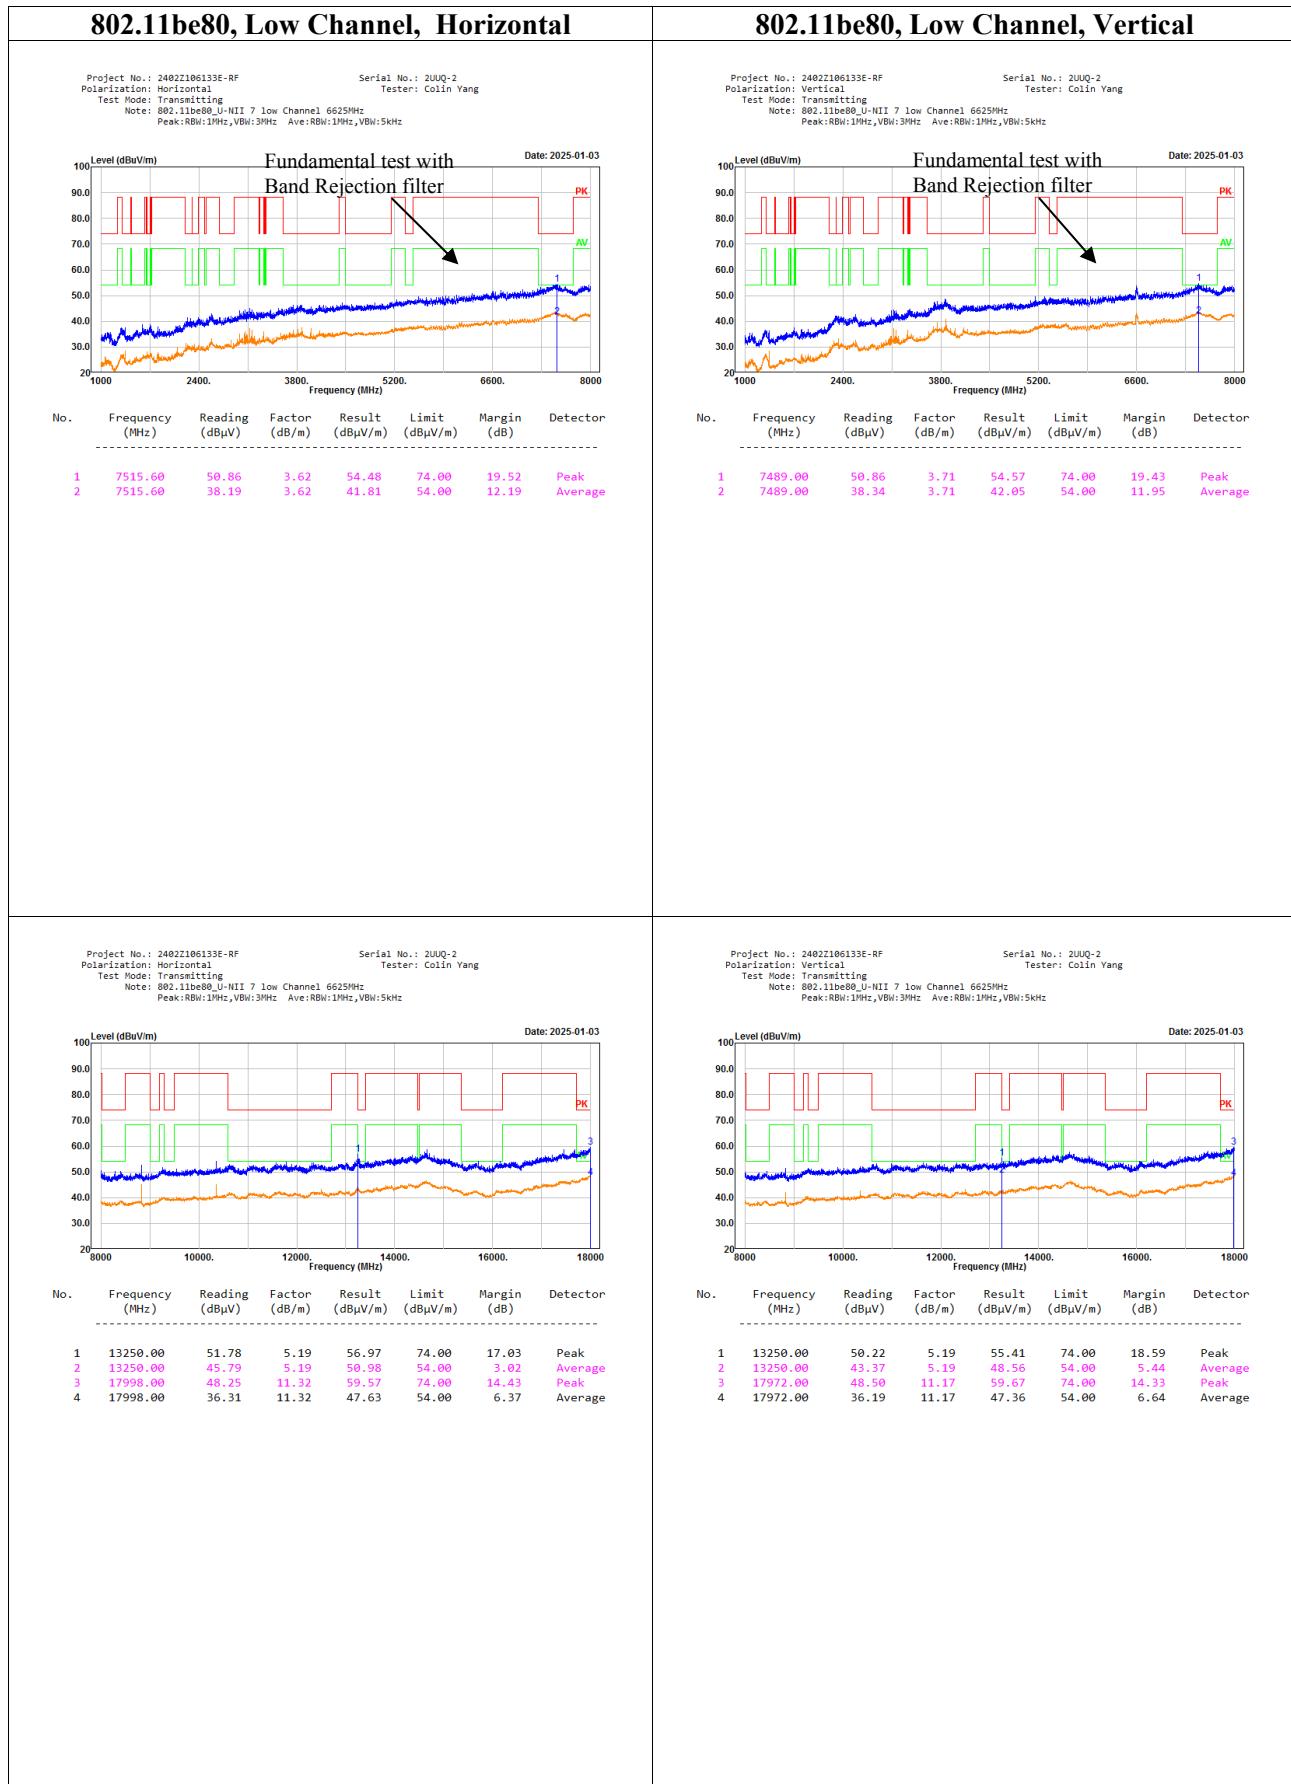

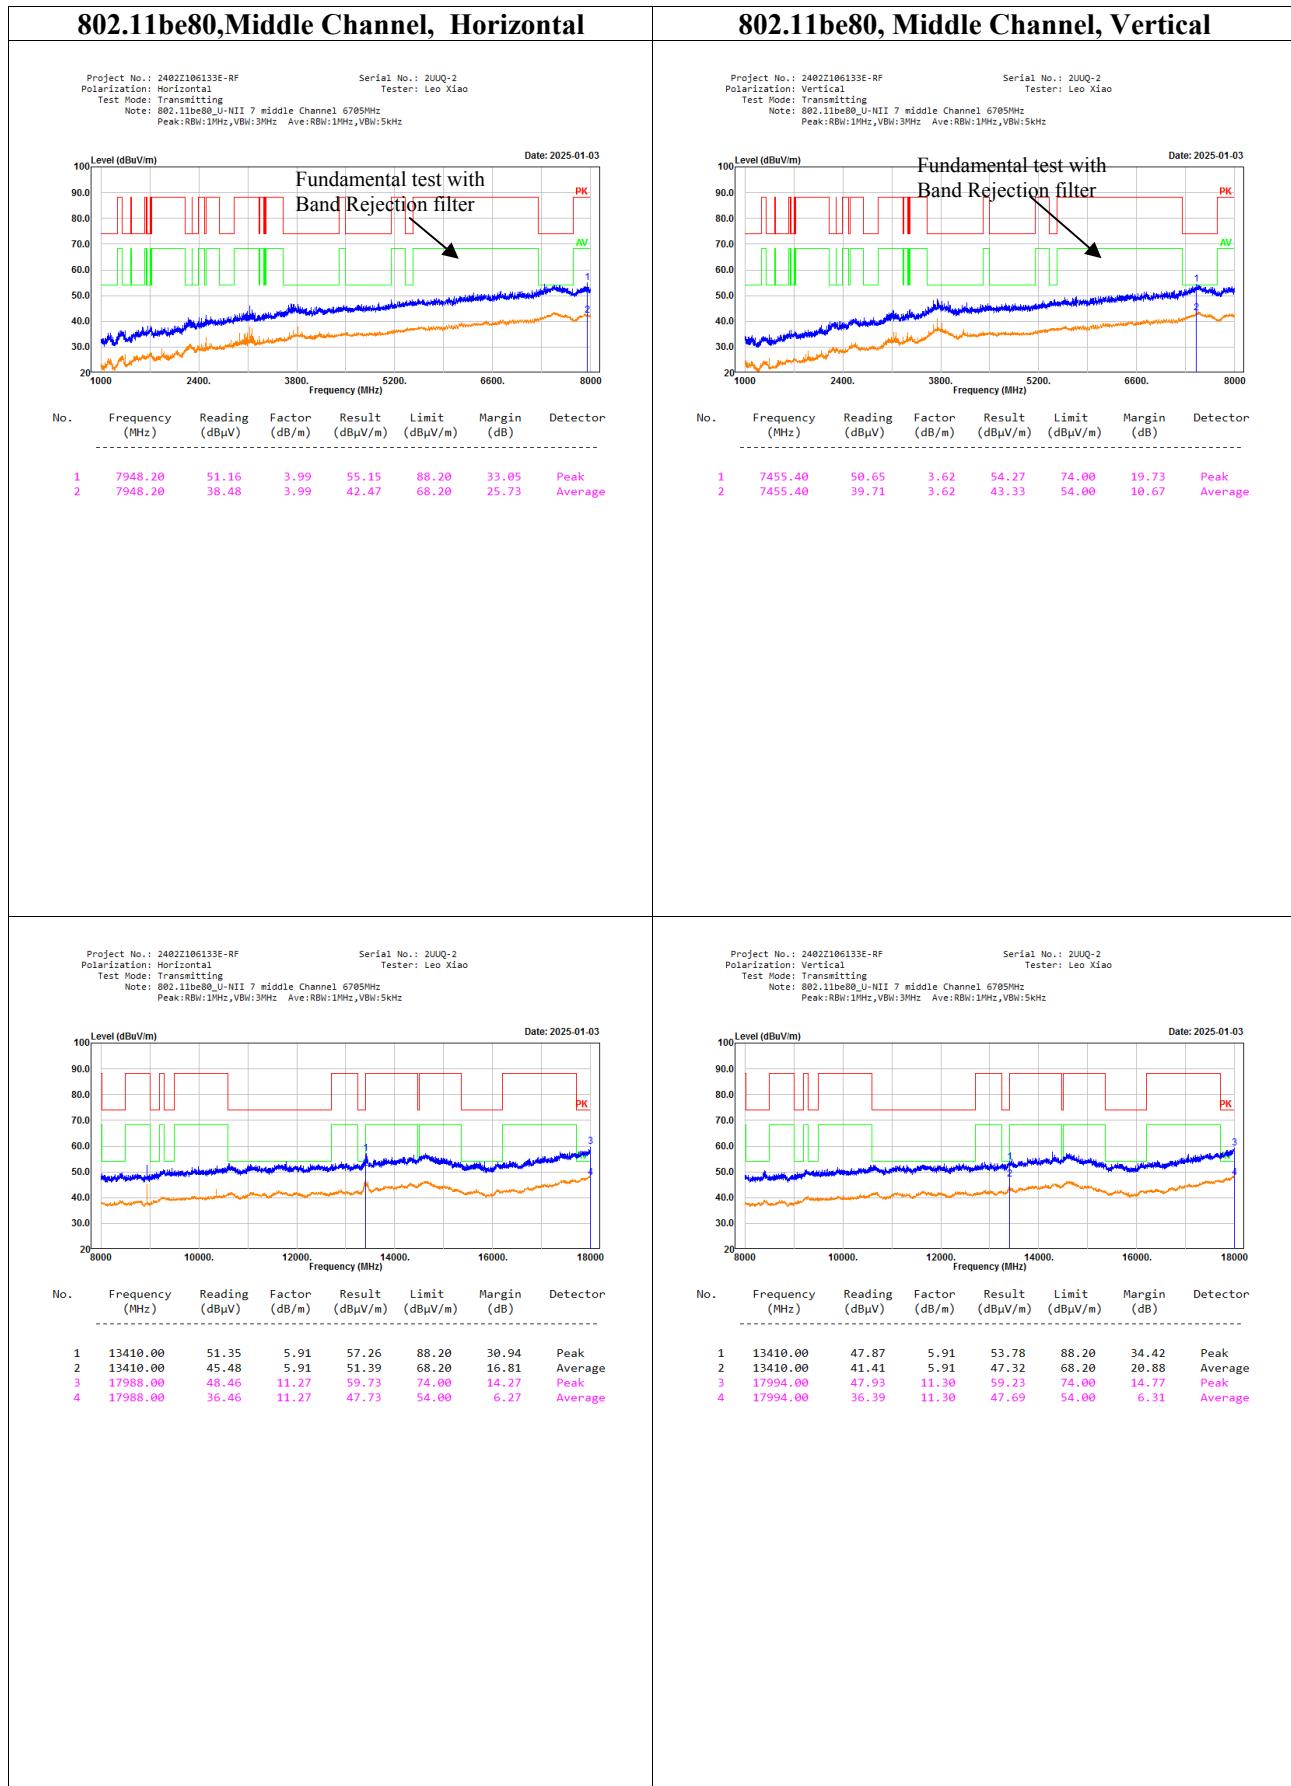


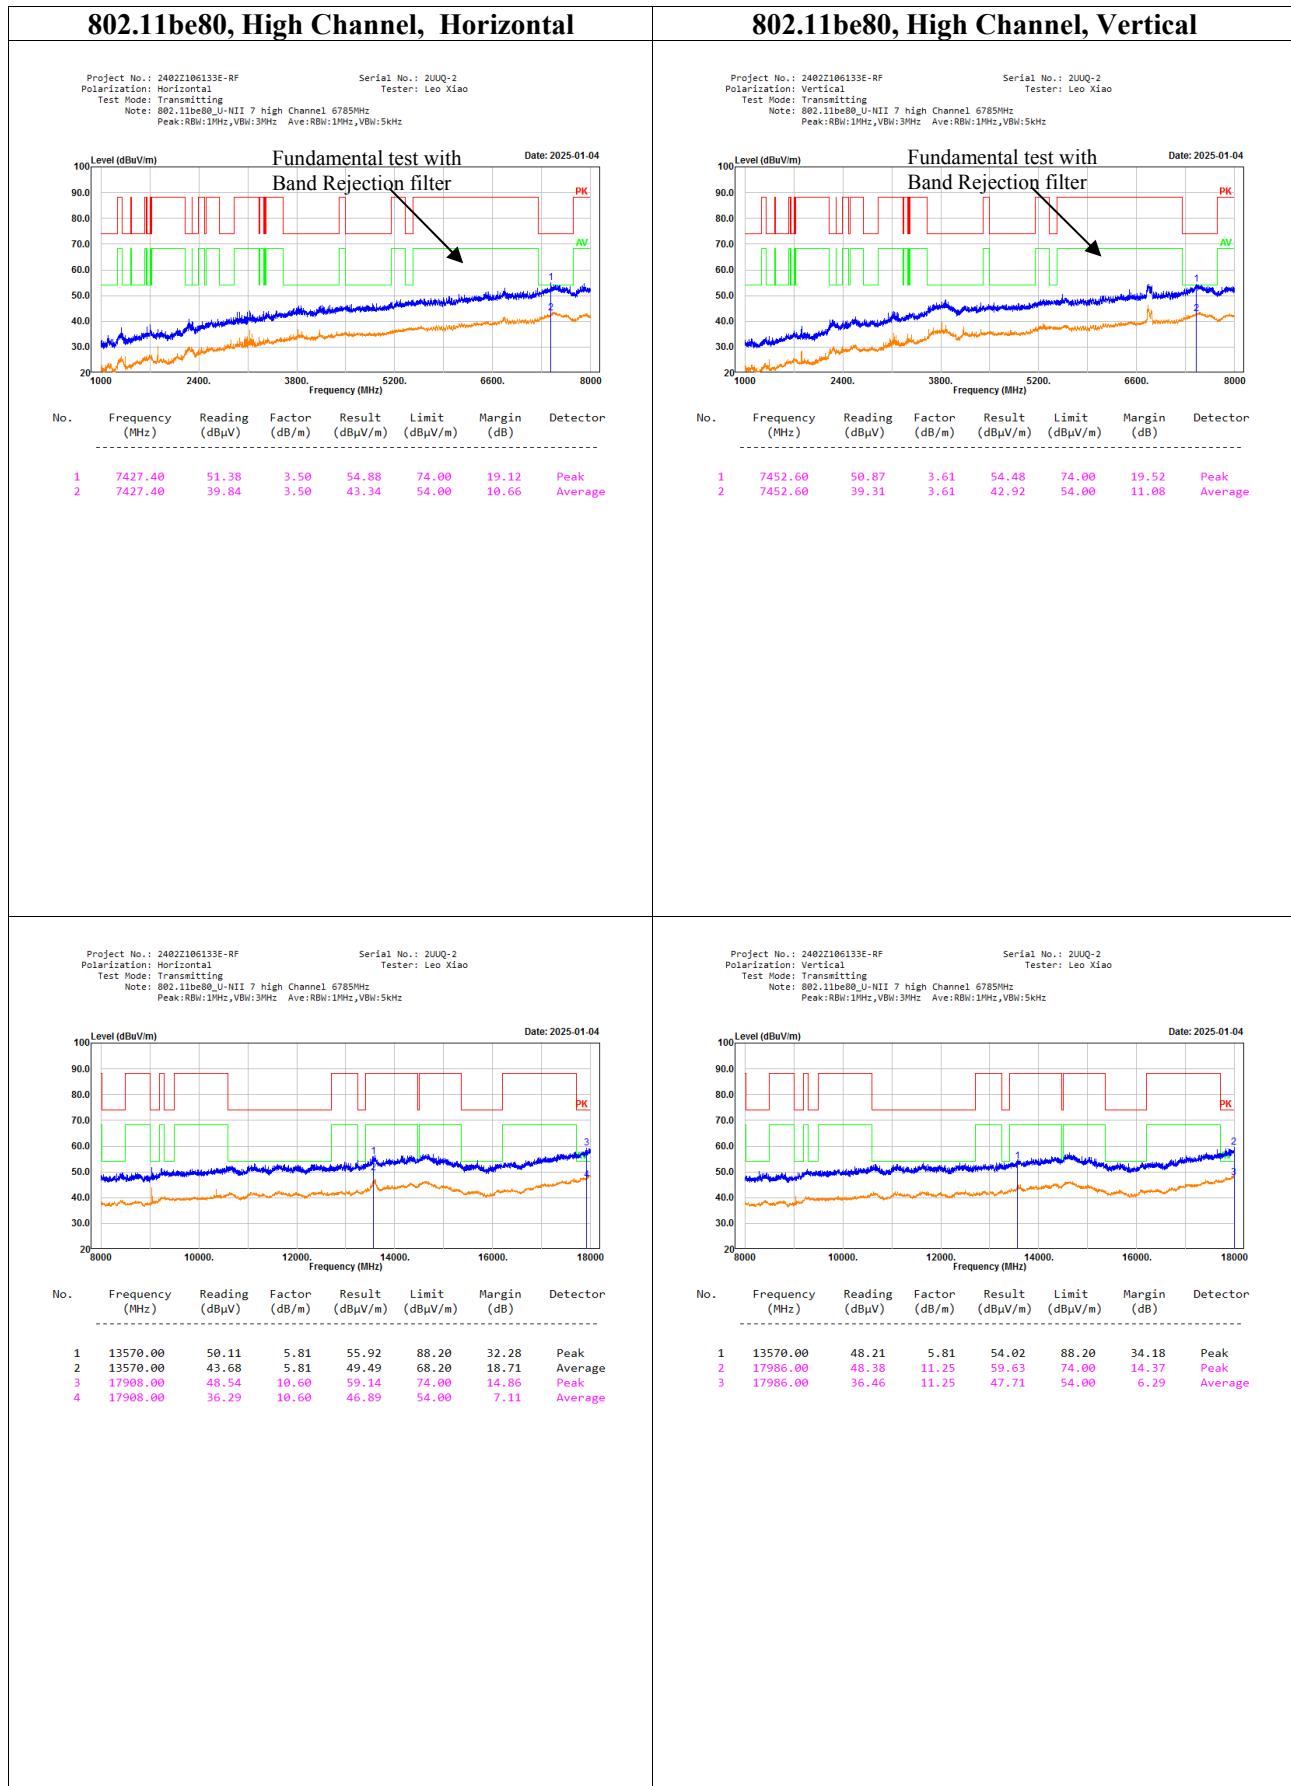



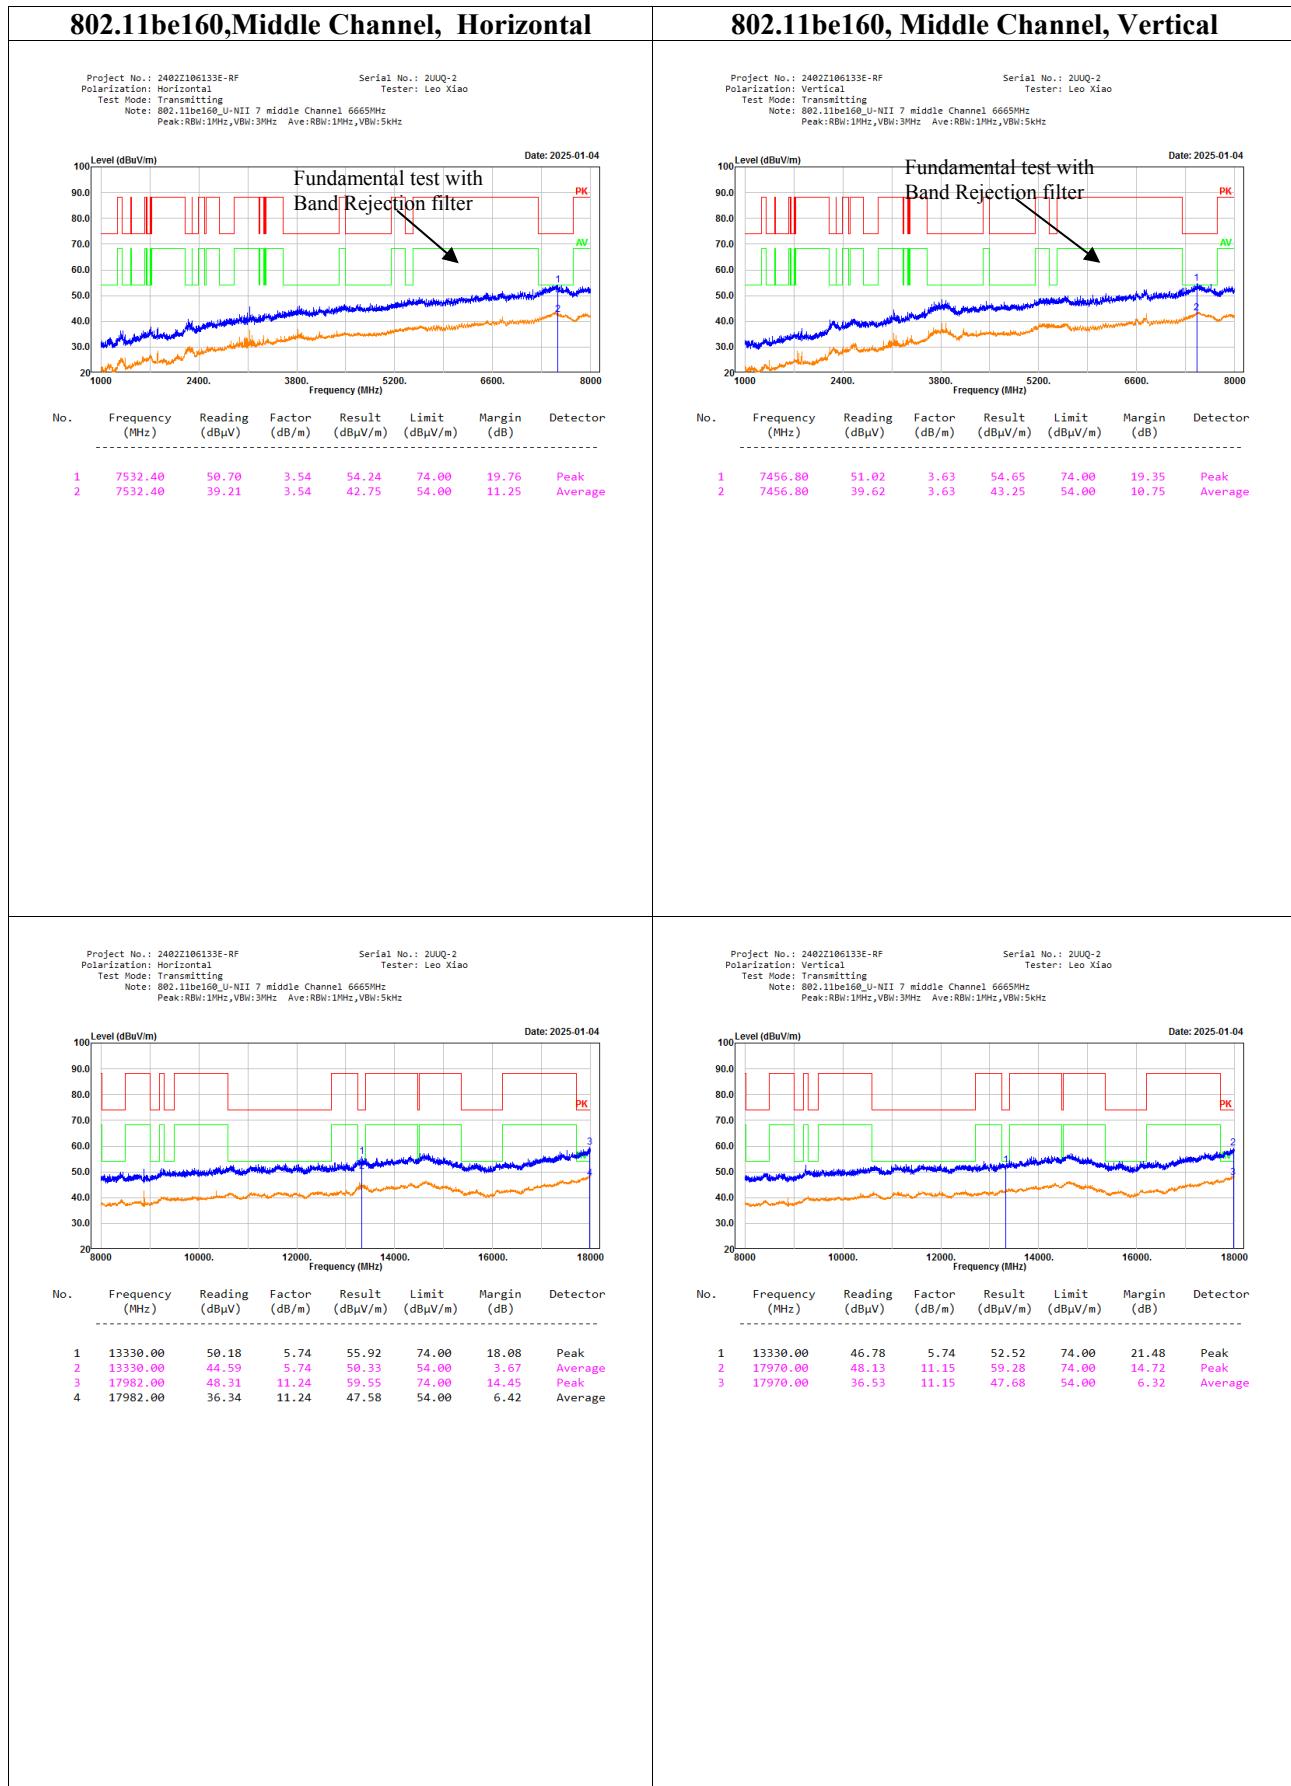



U-NII 8


802.11be20, Low Channel, Horizontal

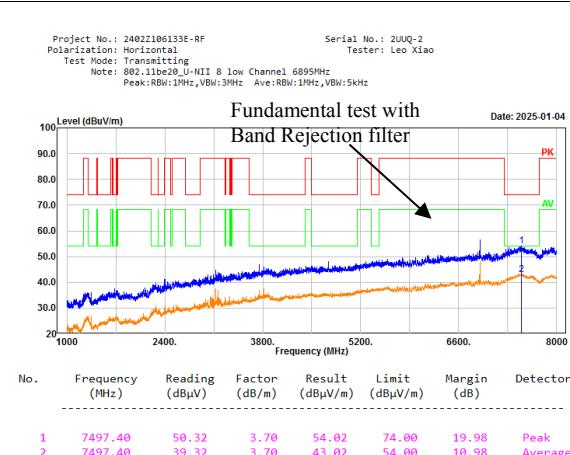



802.11be20, Low Channel, Vertical

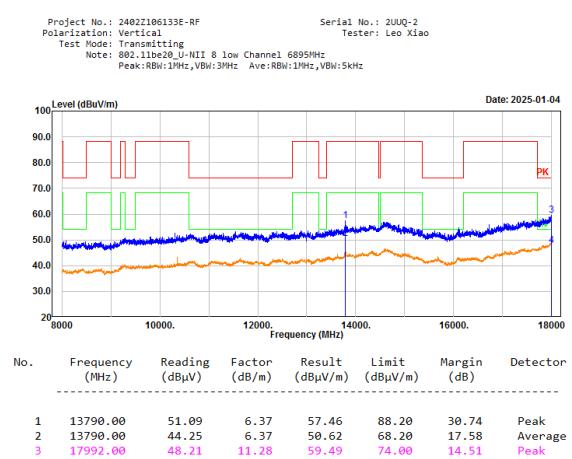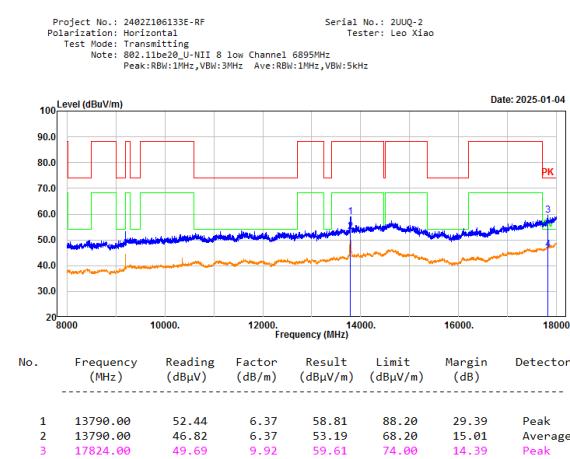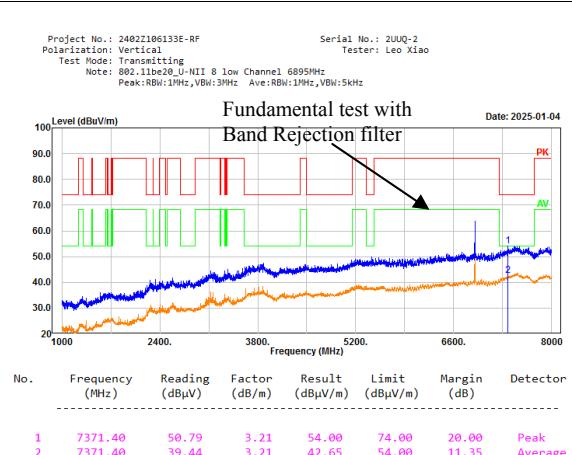


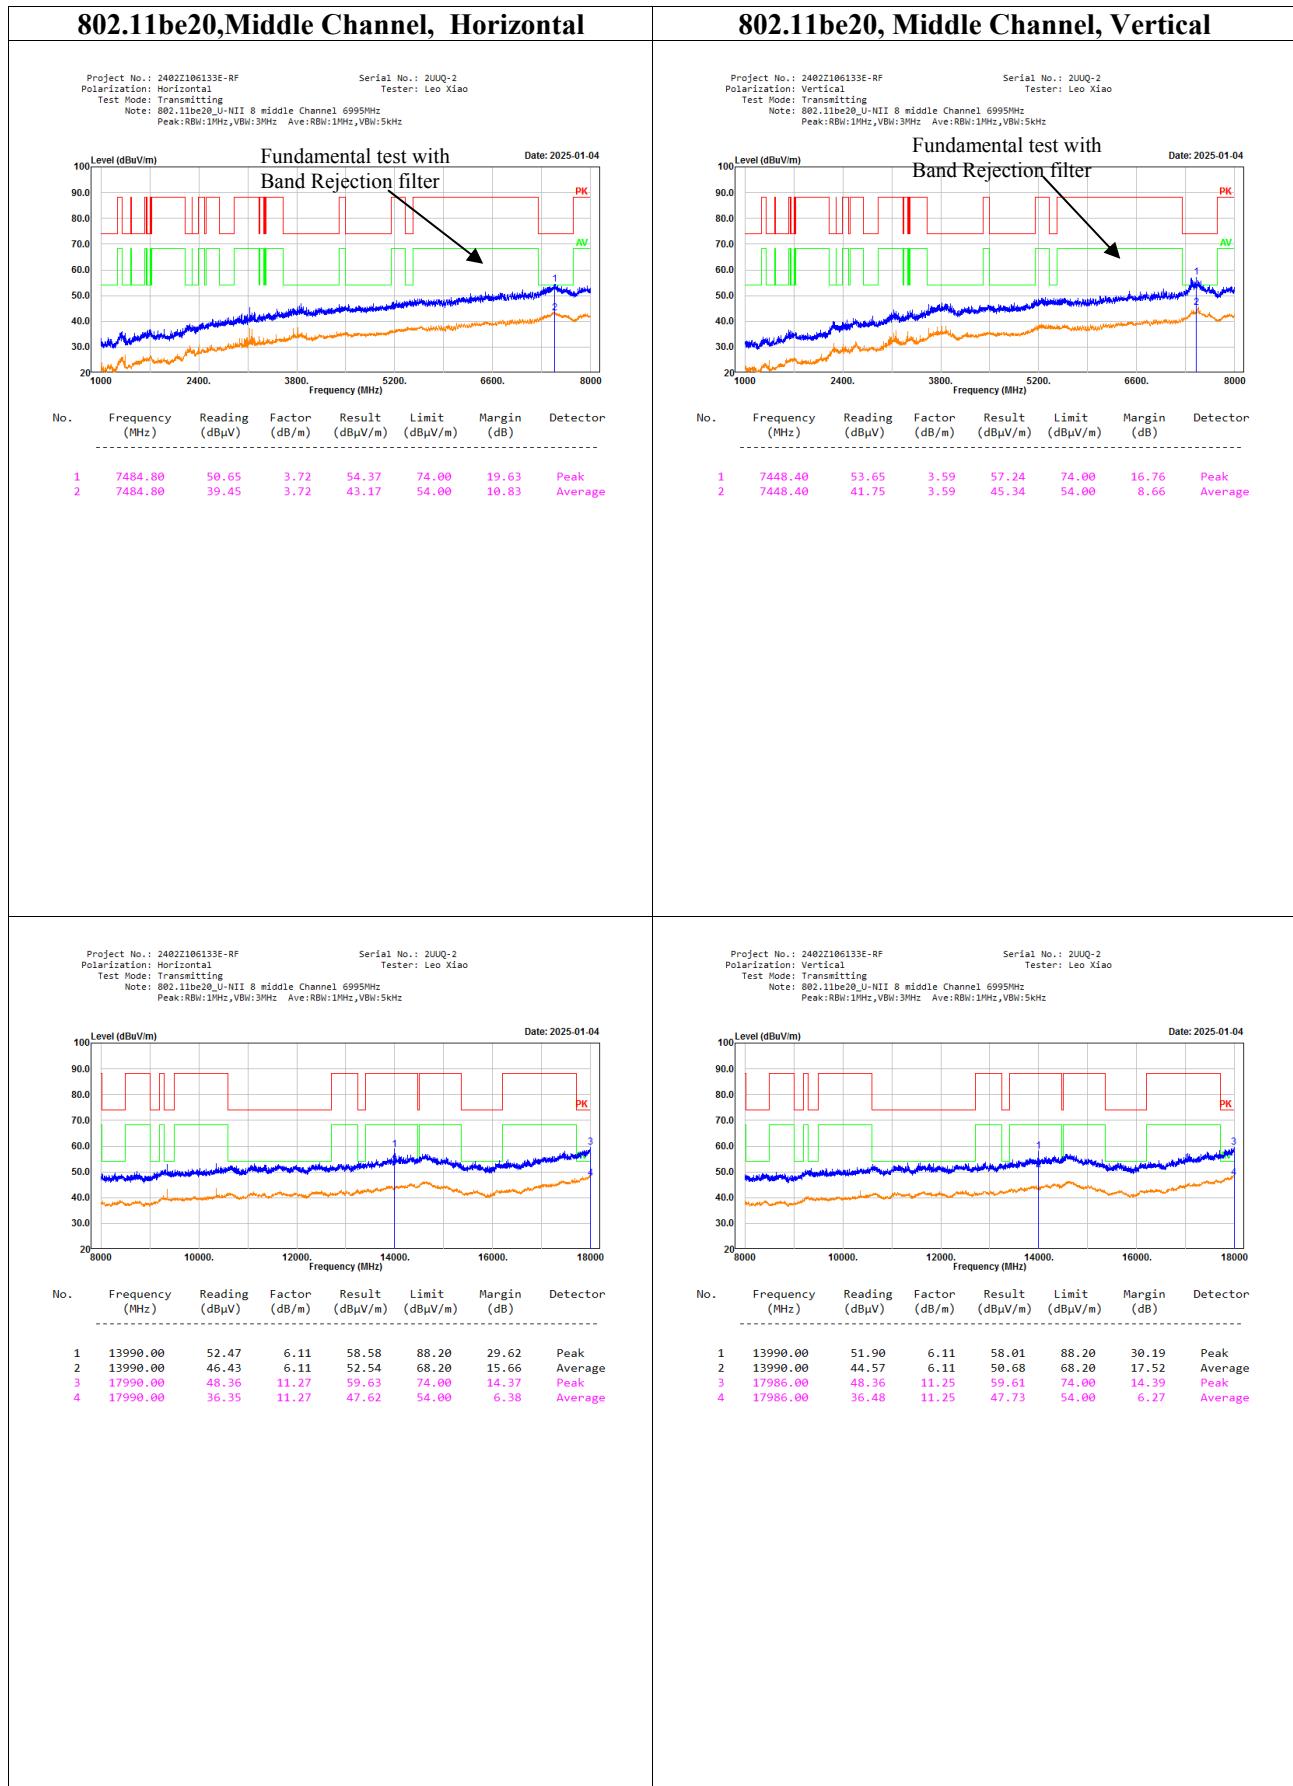


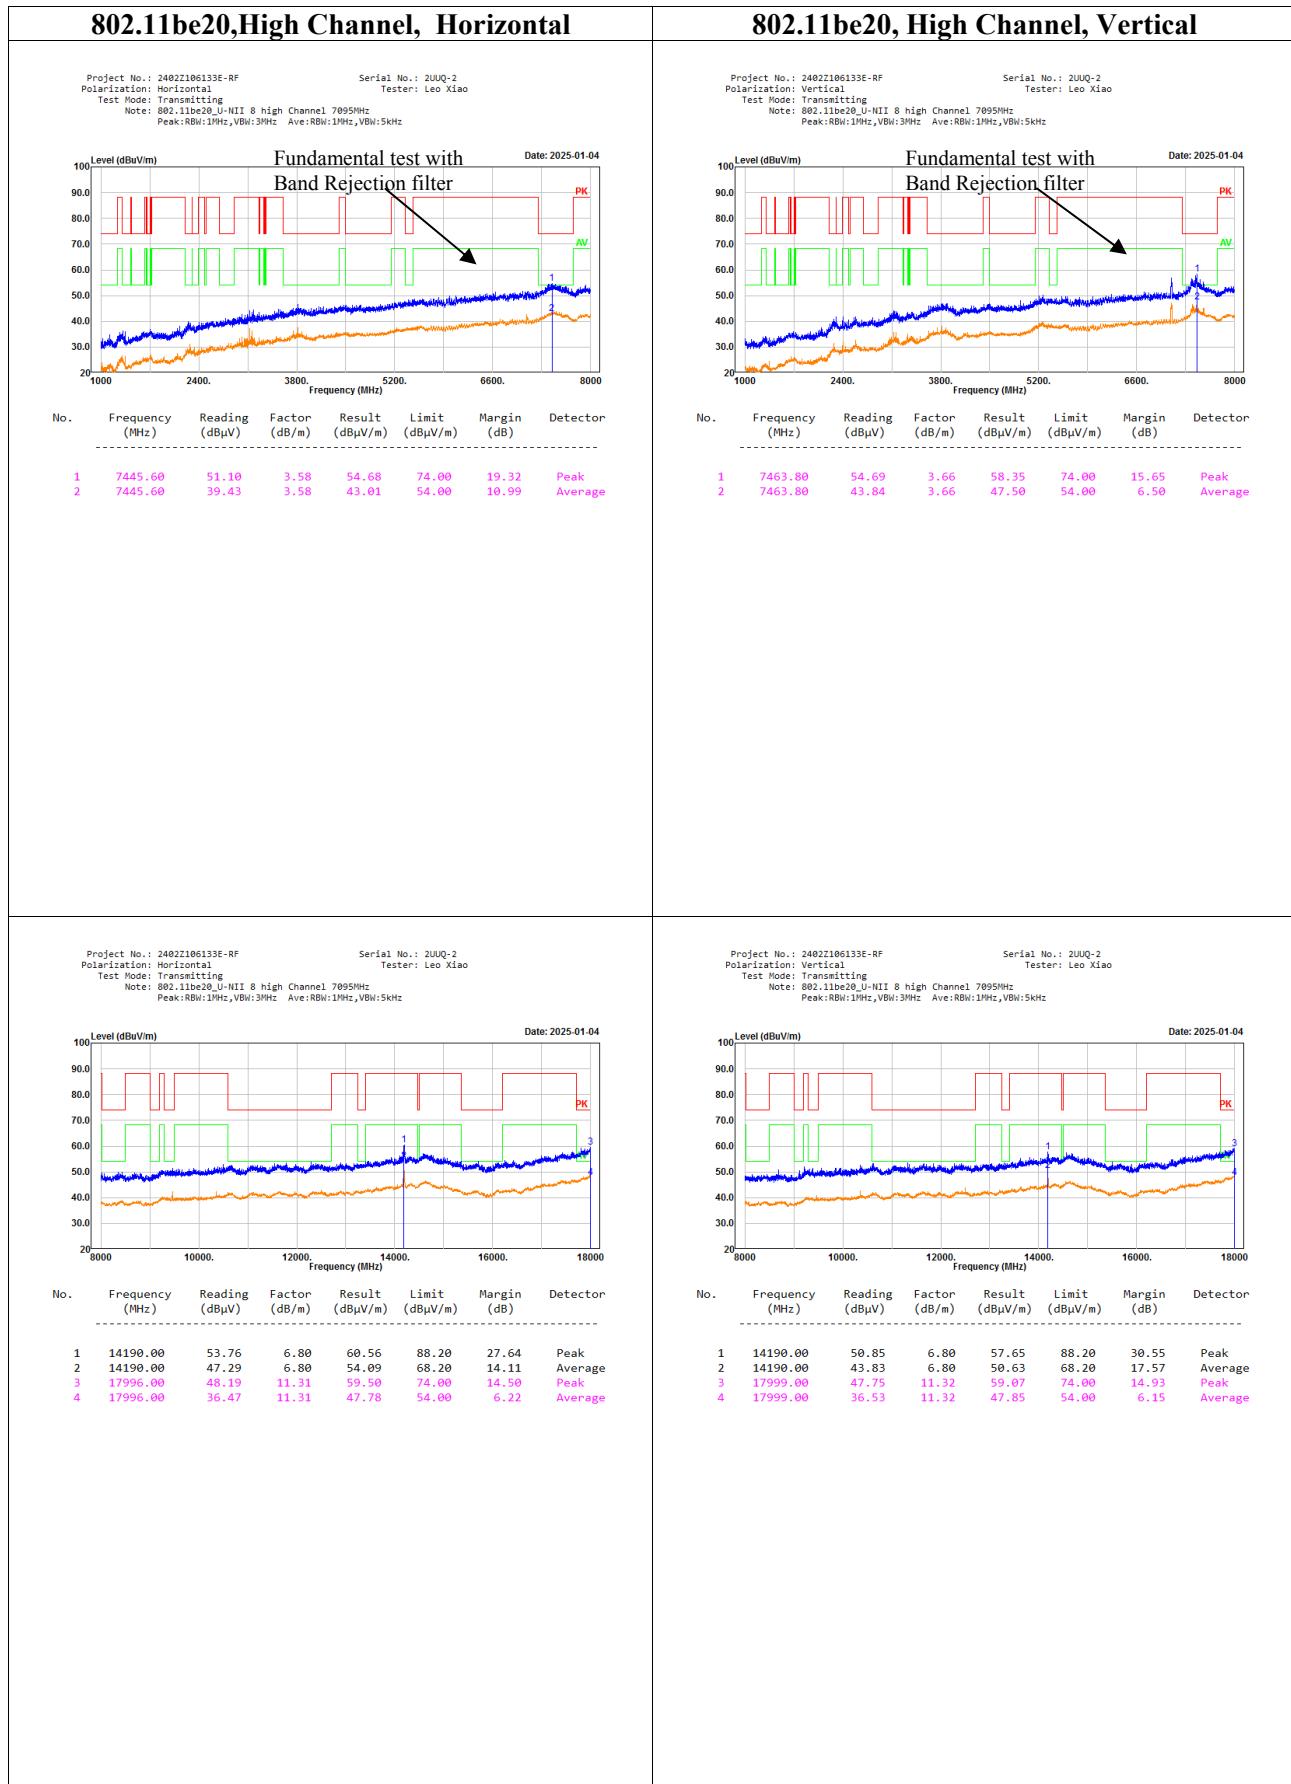


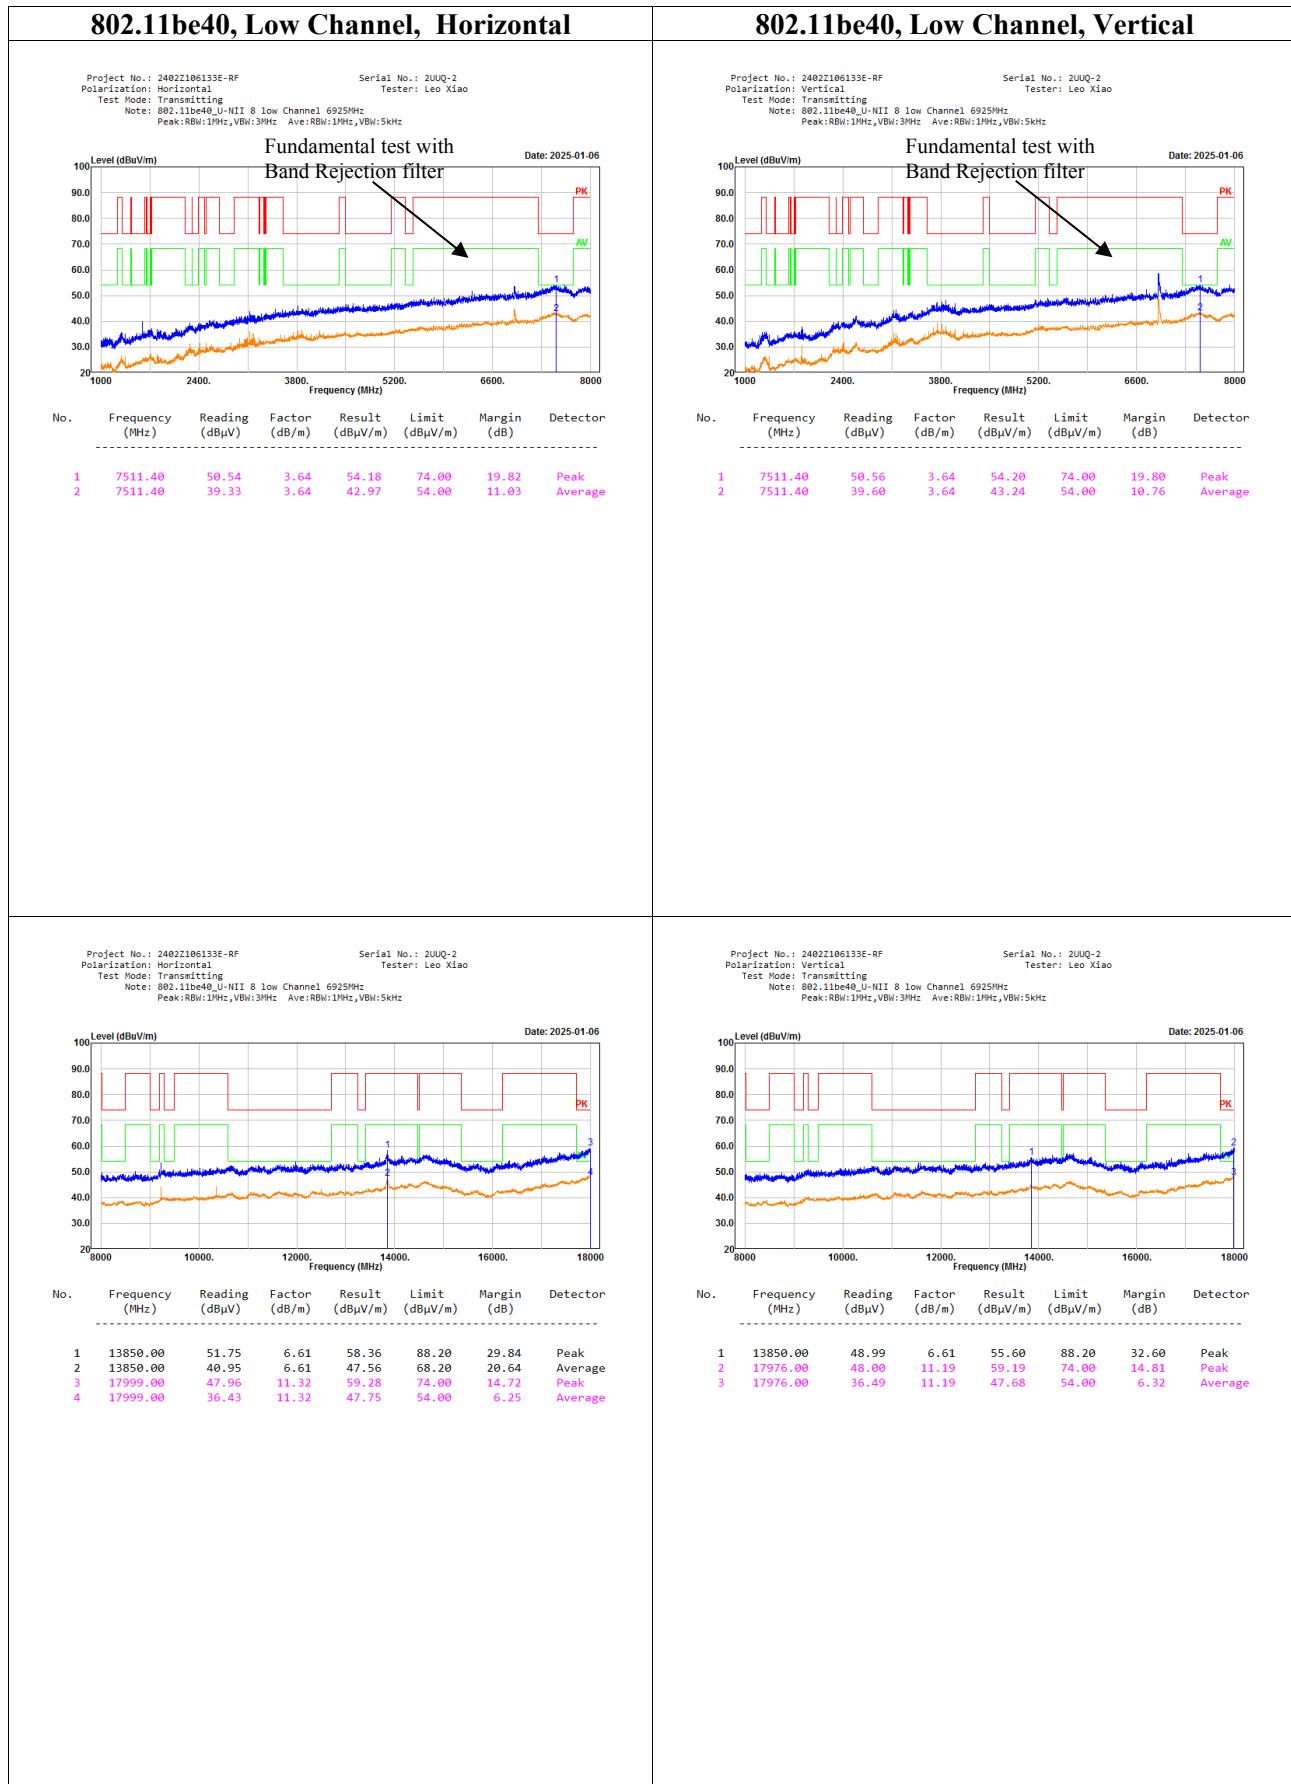


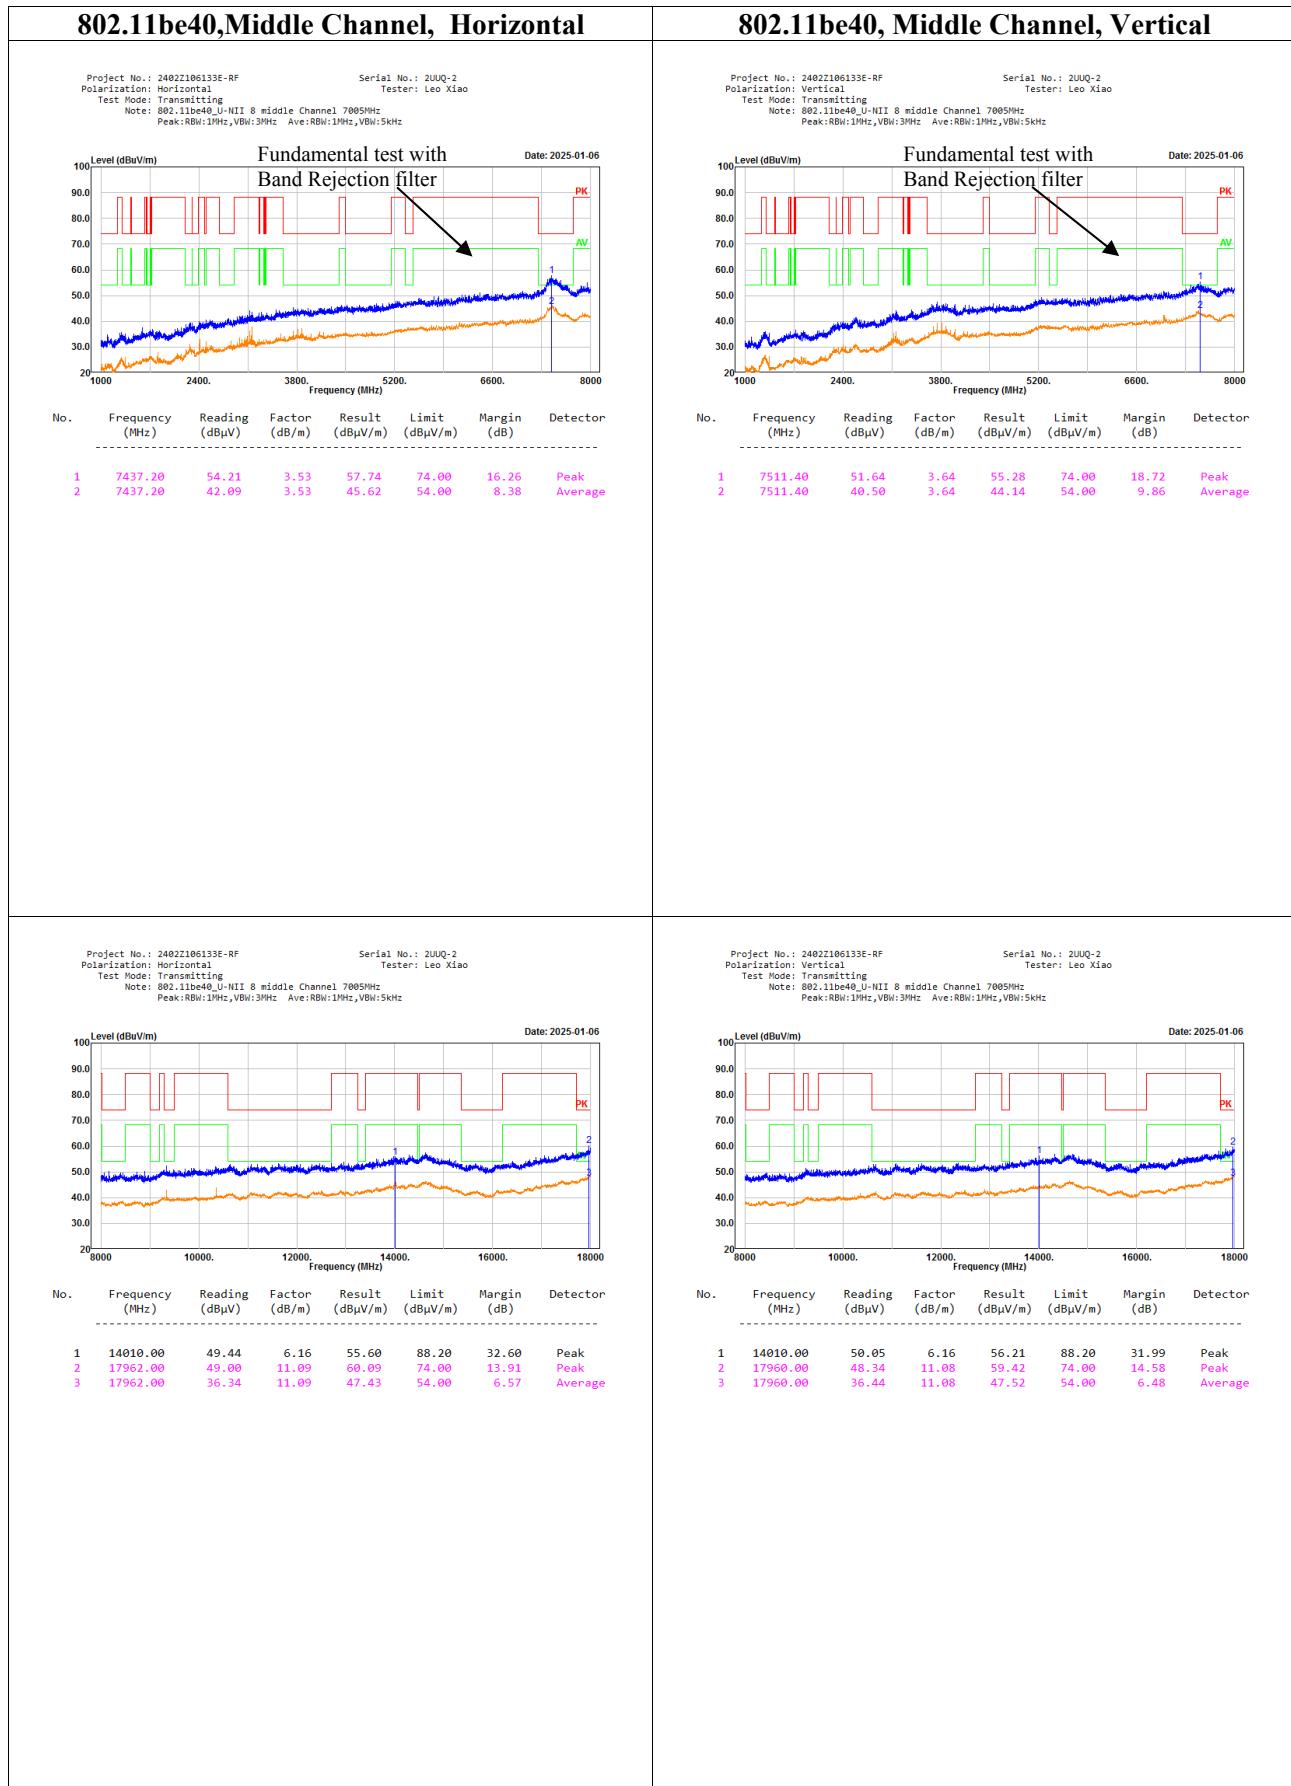

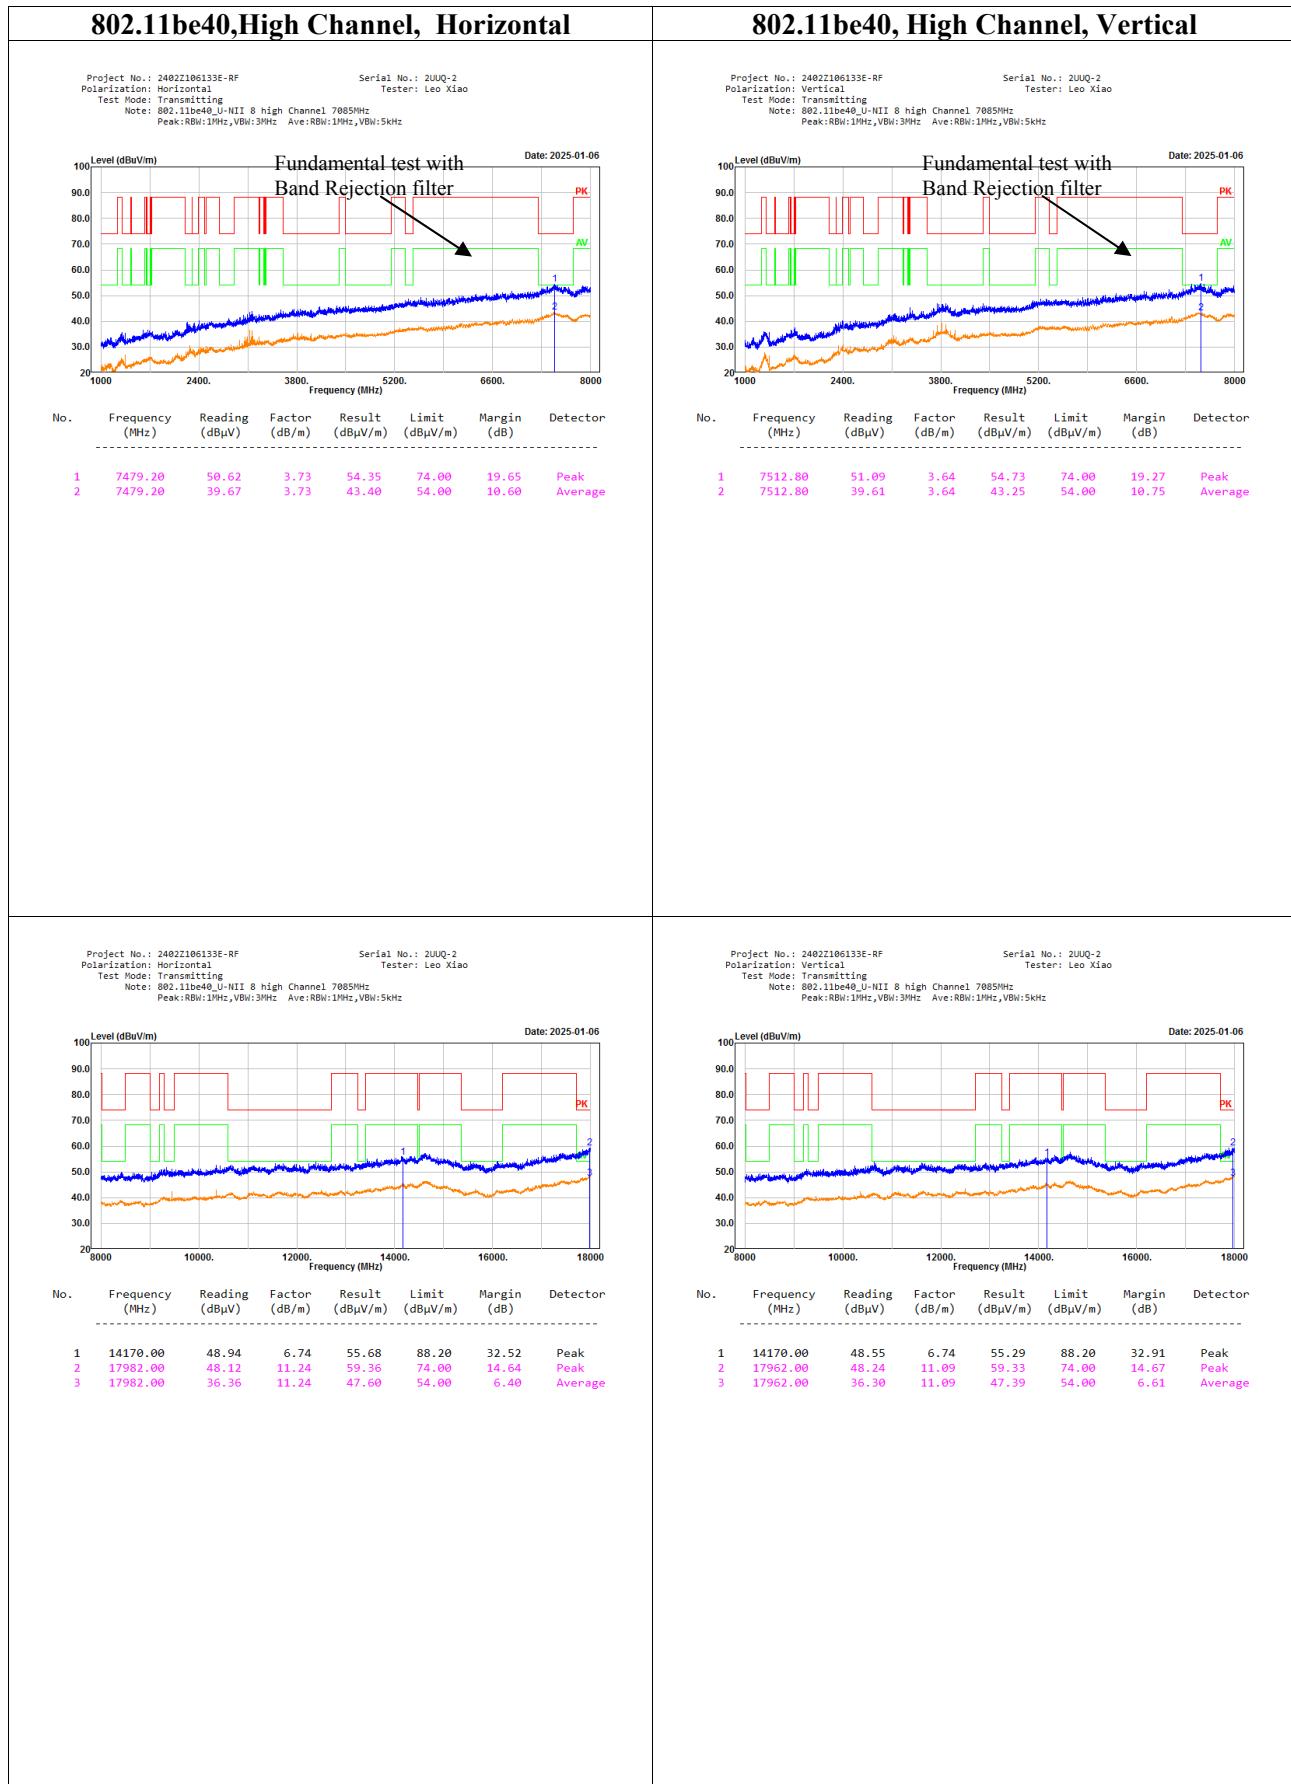

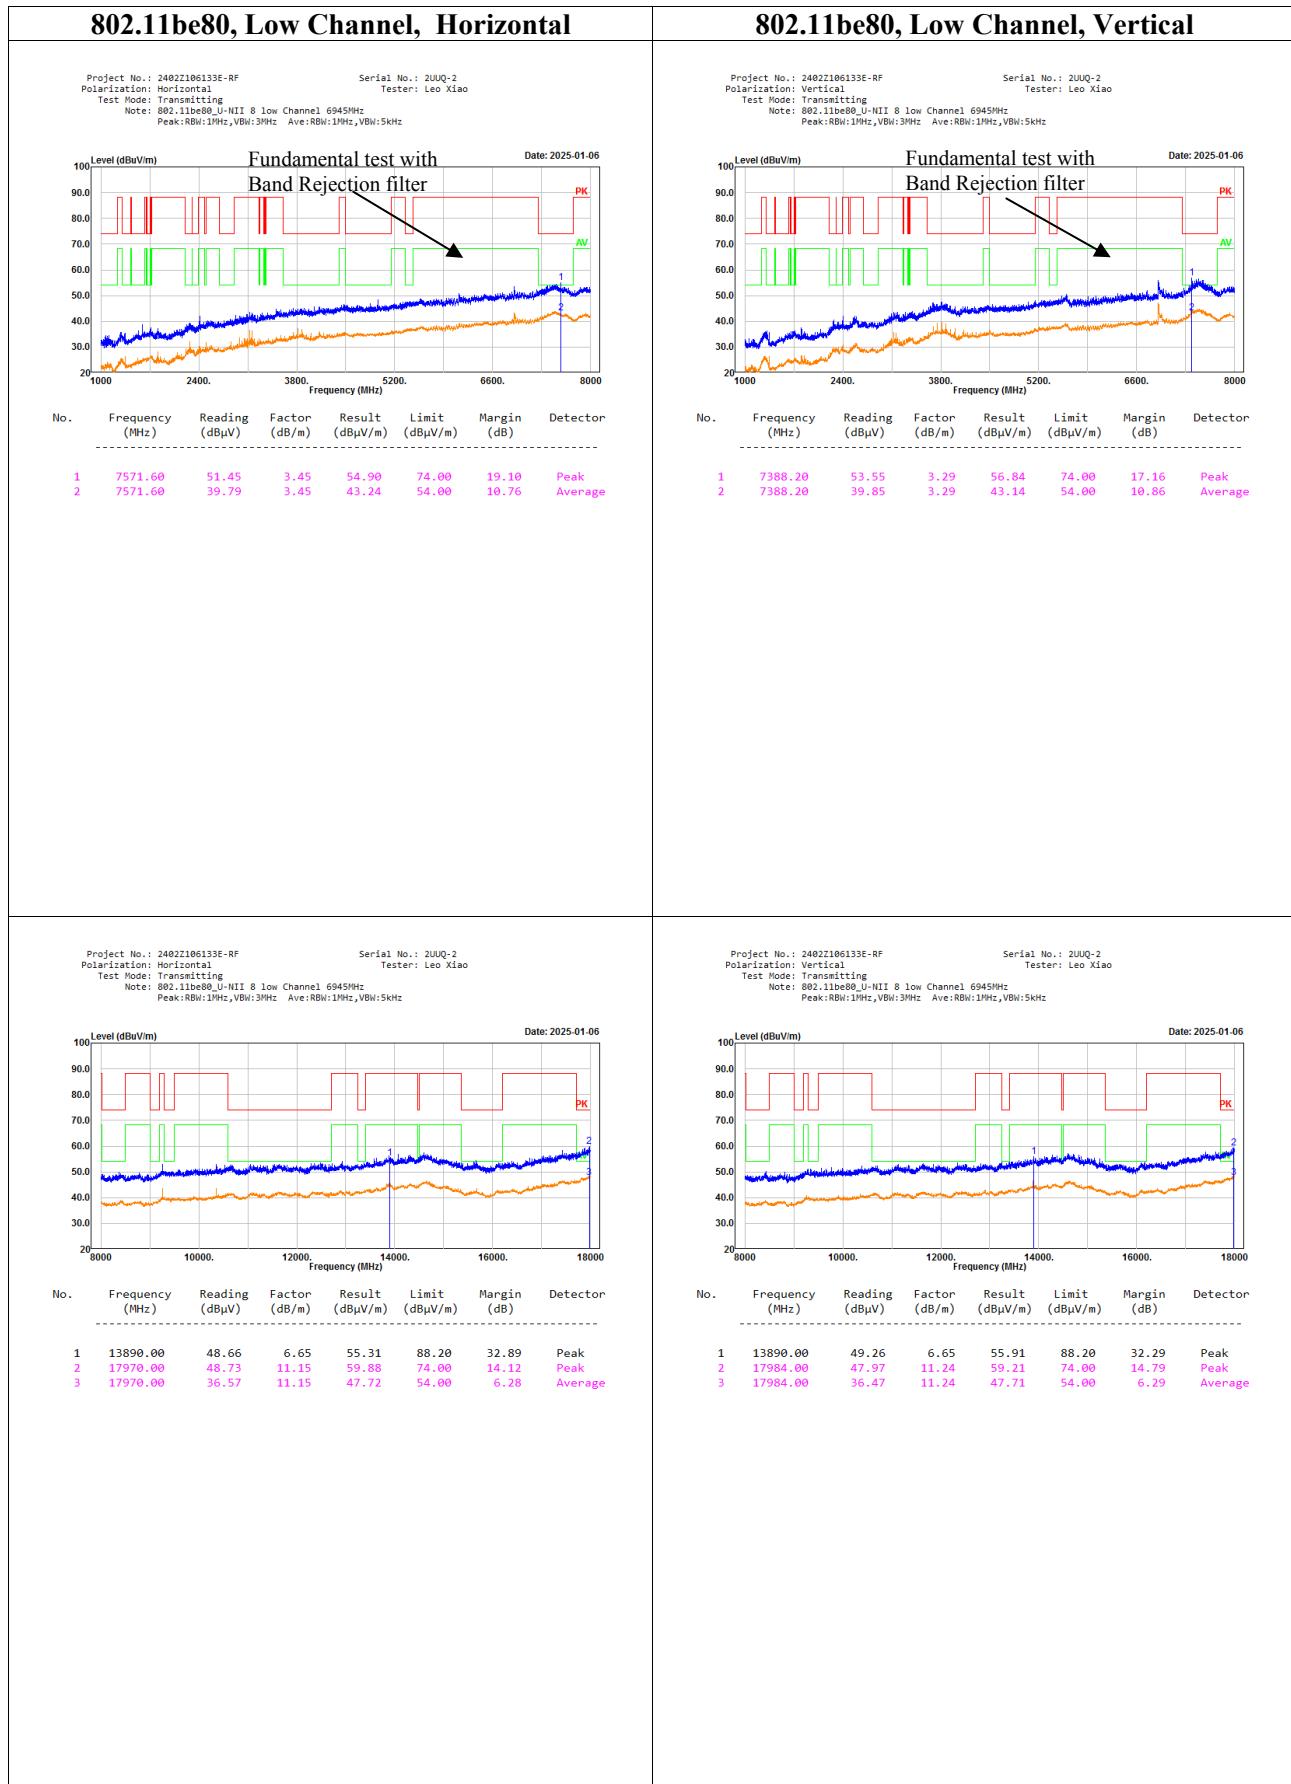

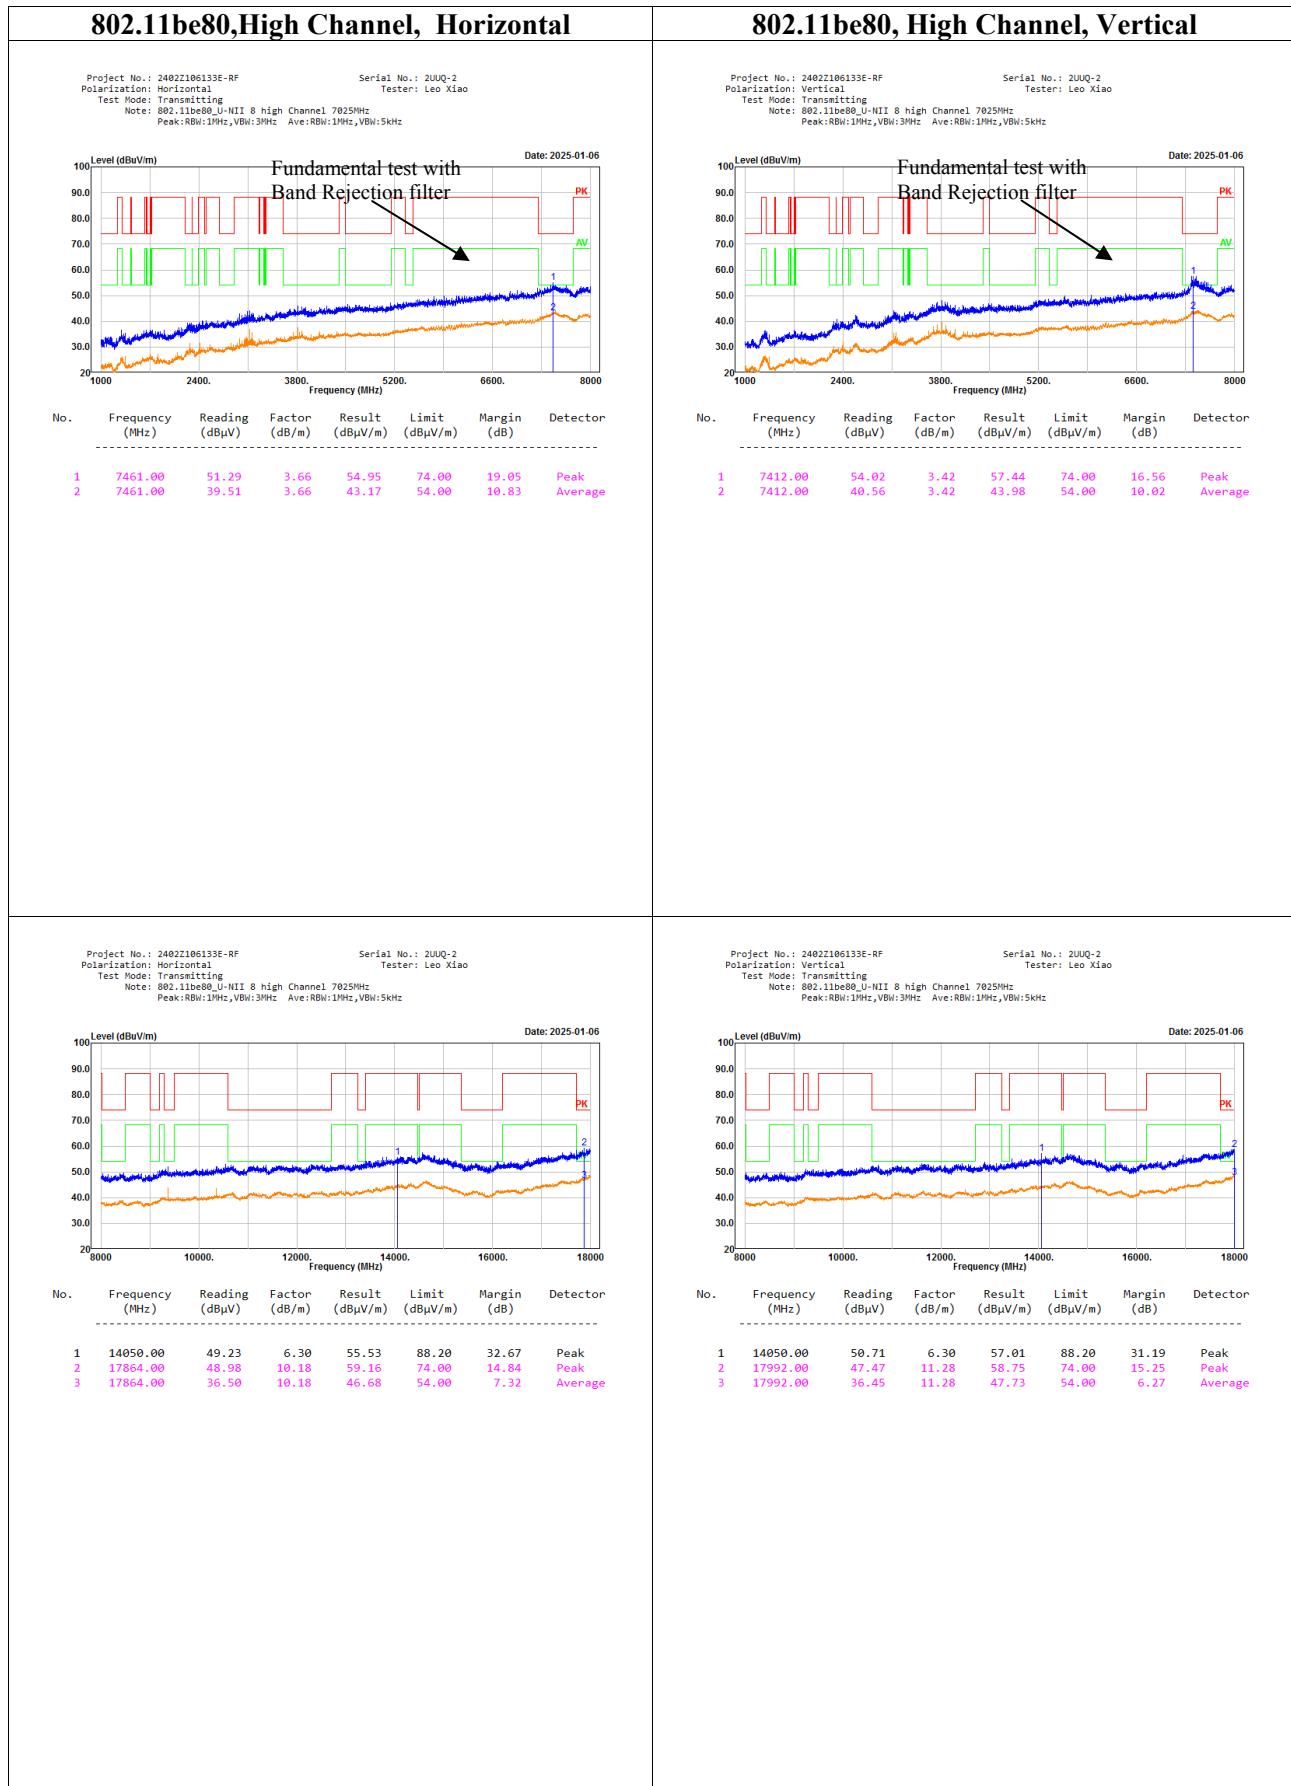

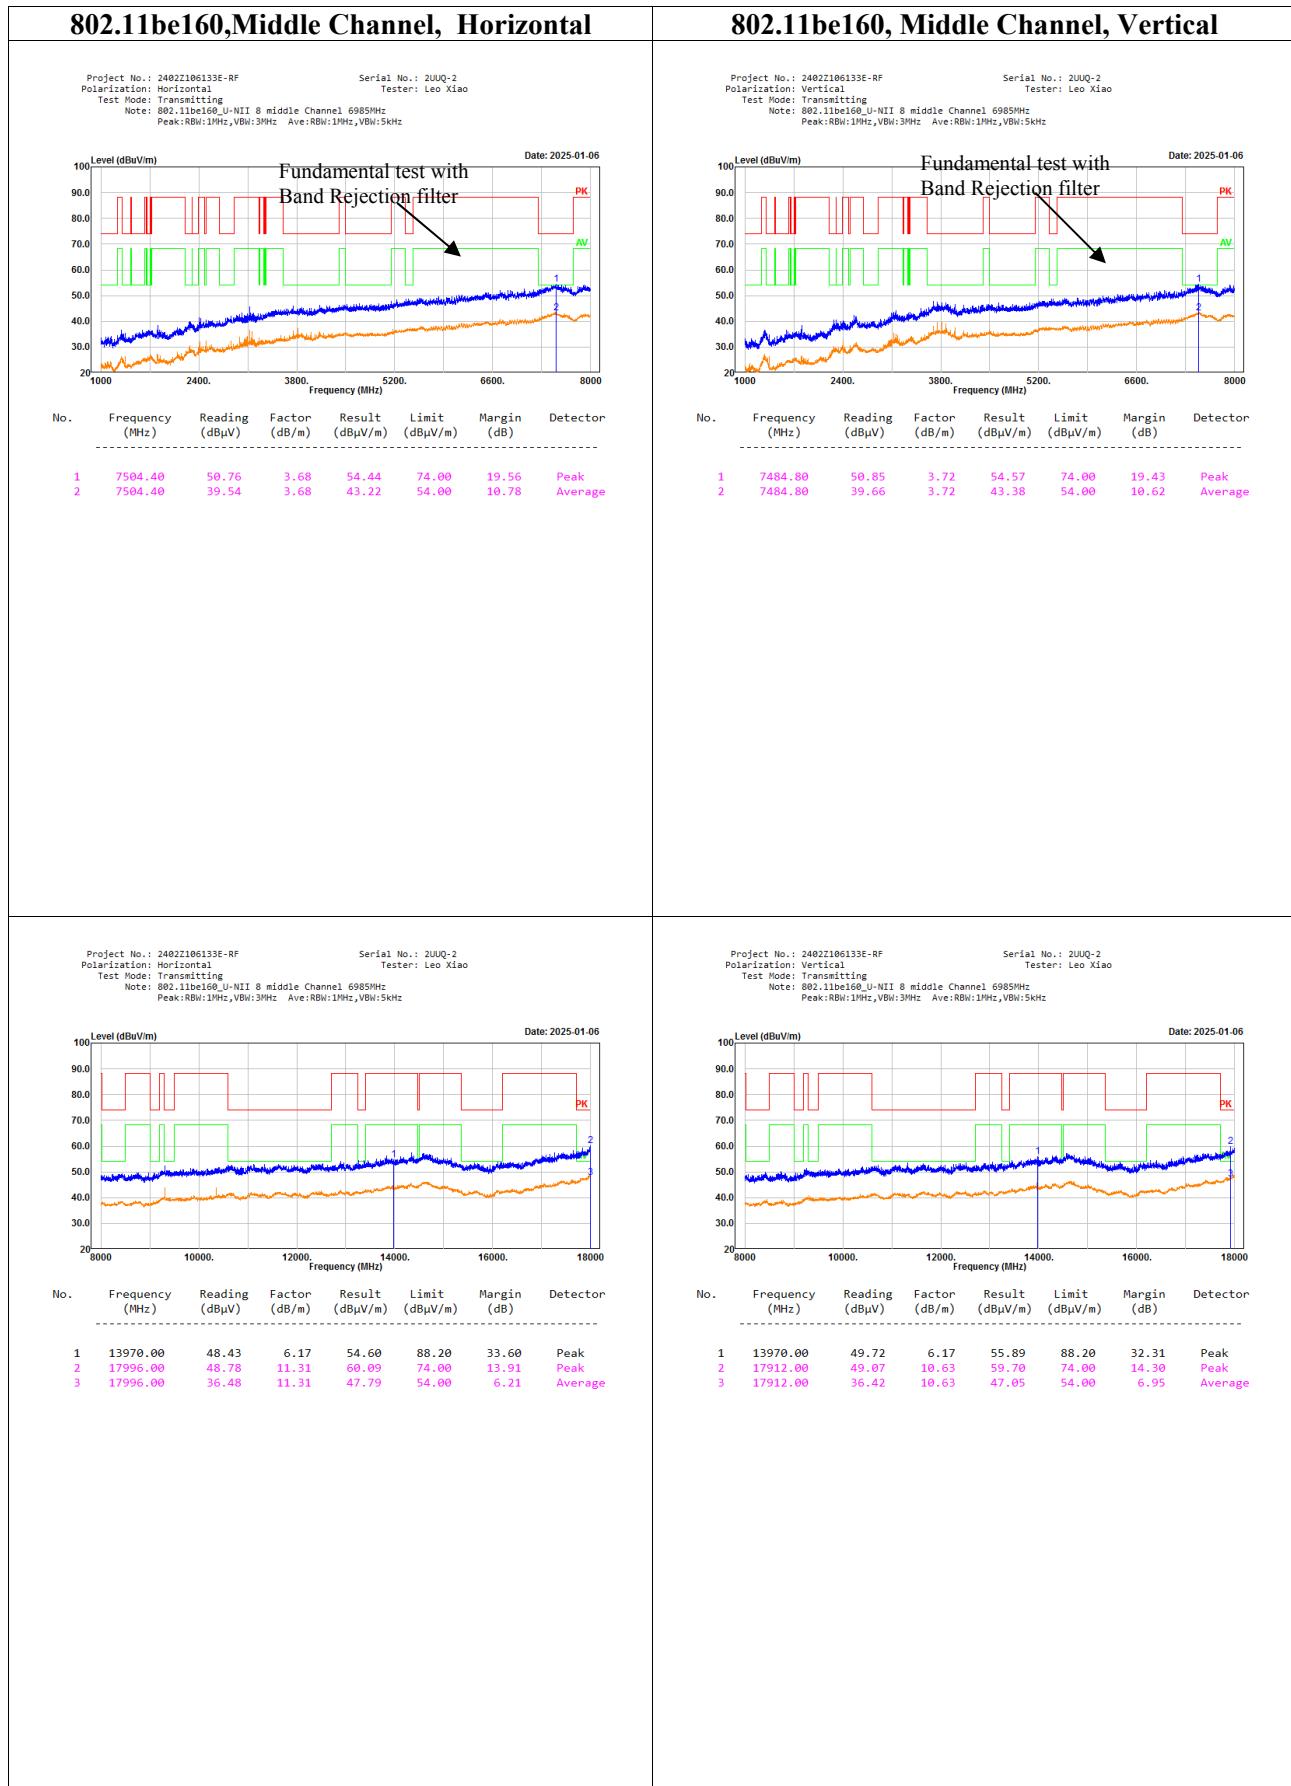


U-NII 5 and U-NII 6

802.11be320, Middle Channel, Horizontal

802.11be320, Middle Channel, Vertical

Project No.: 2402Z106133E-RF
 Polarization: Horizontal
 Test Mode: Transmitting
 Note: 802.11be320_U-NII 6 middle Channel 6425MHz
 Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 2UUQ-2
 Tester: Leo Xiao

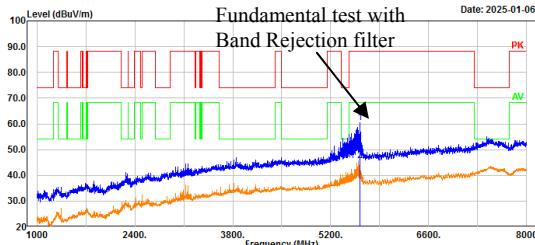

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	5620.00	62.36	-1.82	60.54	88.20	27.66	Peak
2	5620.00	47.45	-1.82	45.63	68.20	22.57	Average

Project No.: 2402Z106133E-RF
 Polarization: Vertical
 Test Mode: Transmitting
 Note: 802.11be320_U-NII 6 middle Channel 6425MHz
 Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 2UUQ-2
 Tester: Leo Xiao

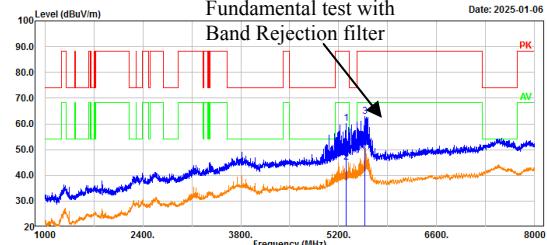

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	5302.20	62.86	-2.79	60.07	88.20	28.13	Peak
2	5302.20	47.92	-2.79	45.13	68.20	23.07	Average
3	5575.20	64.91	-1.95	62.96	88.20	25.24	Peak
4	5575.20	52.52	-1.95	50.57	68.20	17.63	Average

Project No.: 2402Z106133E-RF
 Polarization: Horizontal
 Test Mode: Transmitting
 Note: 802.11be320_U-NII 6 middle Channel 6425MHz
 Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 2UUQ-2
 Tester: Leo Xiao

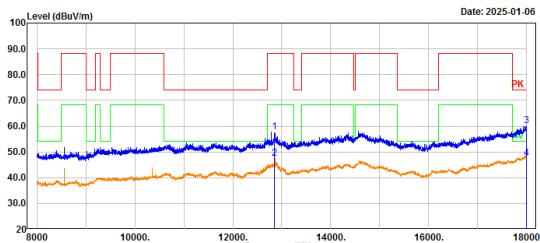

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	12850.00	53.22	4.53	57.75	88.20	30.45	Peak
2	12850.00	43.01	4.53	47.54	68.20	20.66	Average
3	17990.00	48.75	11.27	60.02	74.00	13.98	Peak
4	17990.00	36.33	11.27	47.60	54.00	6.40	Average

Project No.: 2402Z106133E-RF
 Polarization: Vertical
 Test Mode: Transmitting
 Note: 802.11be320_U-NII 6 middle Channel 6425MHz
 Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2UUQ-2
 Tester: Leo Xiao

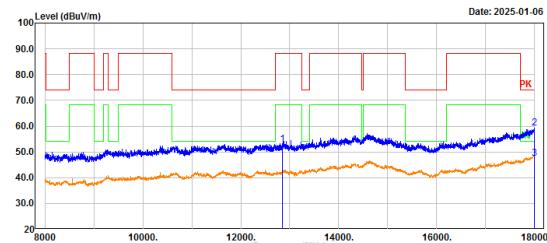


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	12850.00	48.33	4.53	52.86	88.20	35.34	Peak
2	17996.00	47.86	11.31	59.17	74.00	14.83	Peak
3	17996.00	36.22	11.31	47.53	54.00	6.47	Average

U-NII 6 and U-NII 7

802.11be40, Additional Channel, Horizontal


Project No.: 2402Z106133E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11be40_Crossed U-NII 6 and U-NII 7 Channel 6525MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

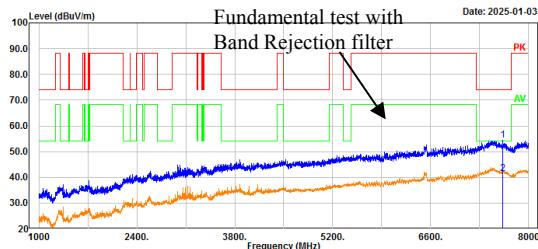

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	7633.20	50.82	3.46	54.28	74.00	19.72	Peak
2	7633.20	38.10	3.46	41.56	54.00	12.44	Average


802.11be40, Additional Channel, Vertical

Project No.: 2402Z106133E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11be40_Crossed U-NII 6 and U-NII 7 Channel 6525MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

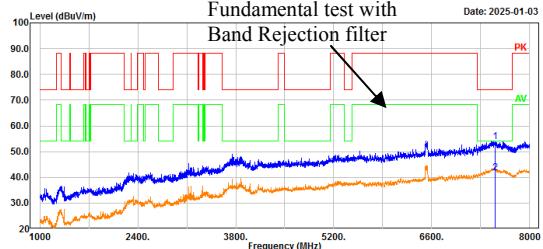


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	7510.00	50.21	3.64	53.85	74.00	20.15	Peak
2	7510.00	38.17	3.64	41.81	54.00	12.19	Average

Project No.: 2402Z106133E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11be40_Crossed U-NII 6 and U-NII 7 Channel 6525MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

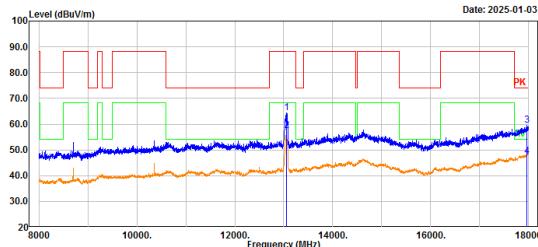


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	13054.00	59.54	4.95	64.49	88.20	23.71	Peak
2	13054.00	52.41	4.95	57.36	68.20	10.84	Average
3	17968.00	48.30	11.15	59.45	74.00	14.55	Peak
4	17968.00	36.30	11.15	47.45	54.00	6.55	Average


Project No.: 2402Z106133E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11be40_Crossed U-NII 6 and U-NII 7 Channel 6525MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

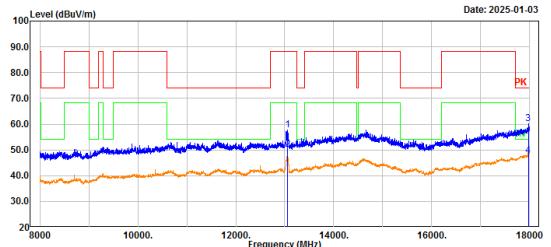


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	13050.00	52.85	4.95	57.80	88.20	30.40	Peak
2	13050.00	45.27	4.95	50.22	68.20	17.98	Average
3	17970.00	49.04	11.15	60.19	74.00	13.81	Peak
4	17970.00	36.60	11.15	47.75	54.00	6.25	Average

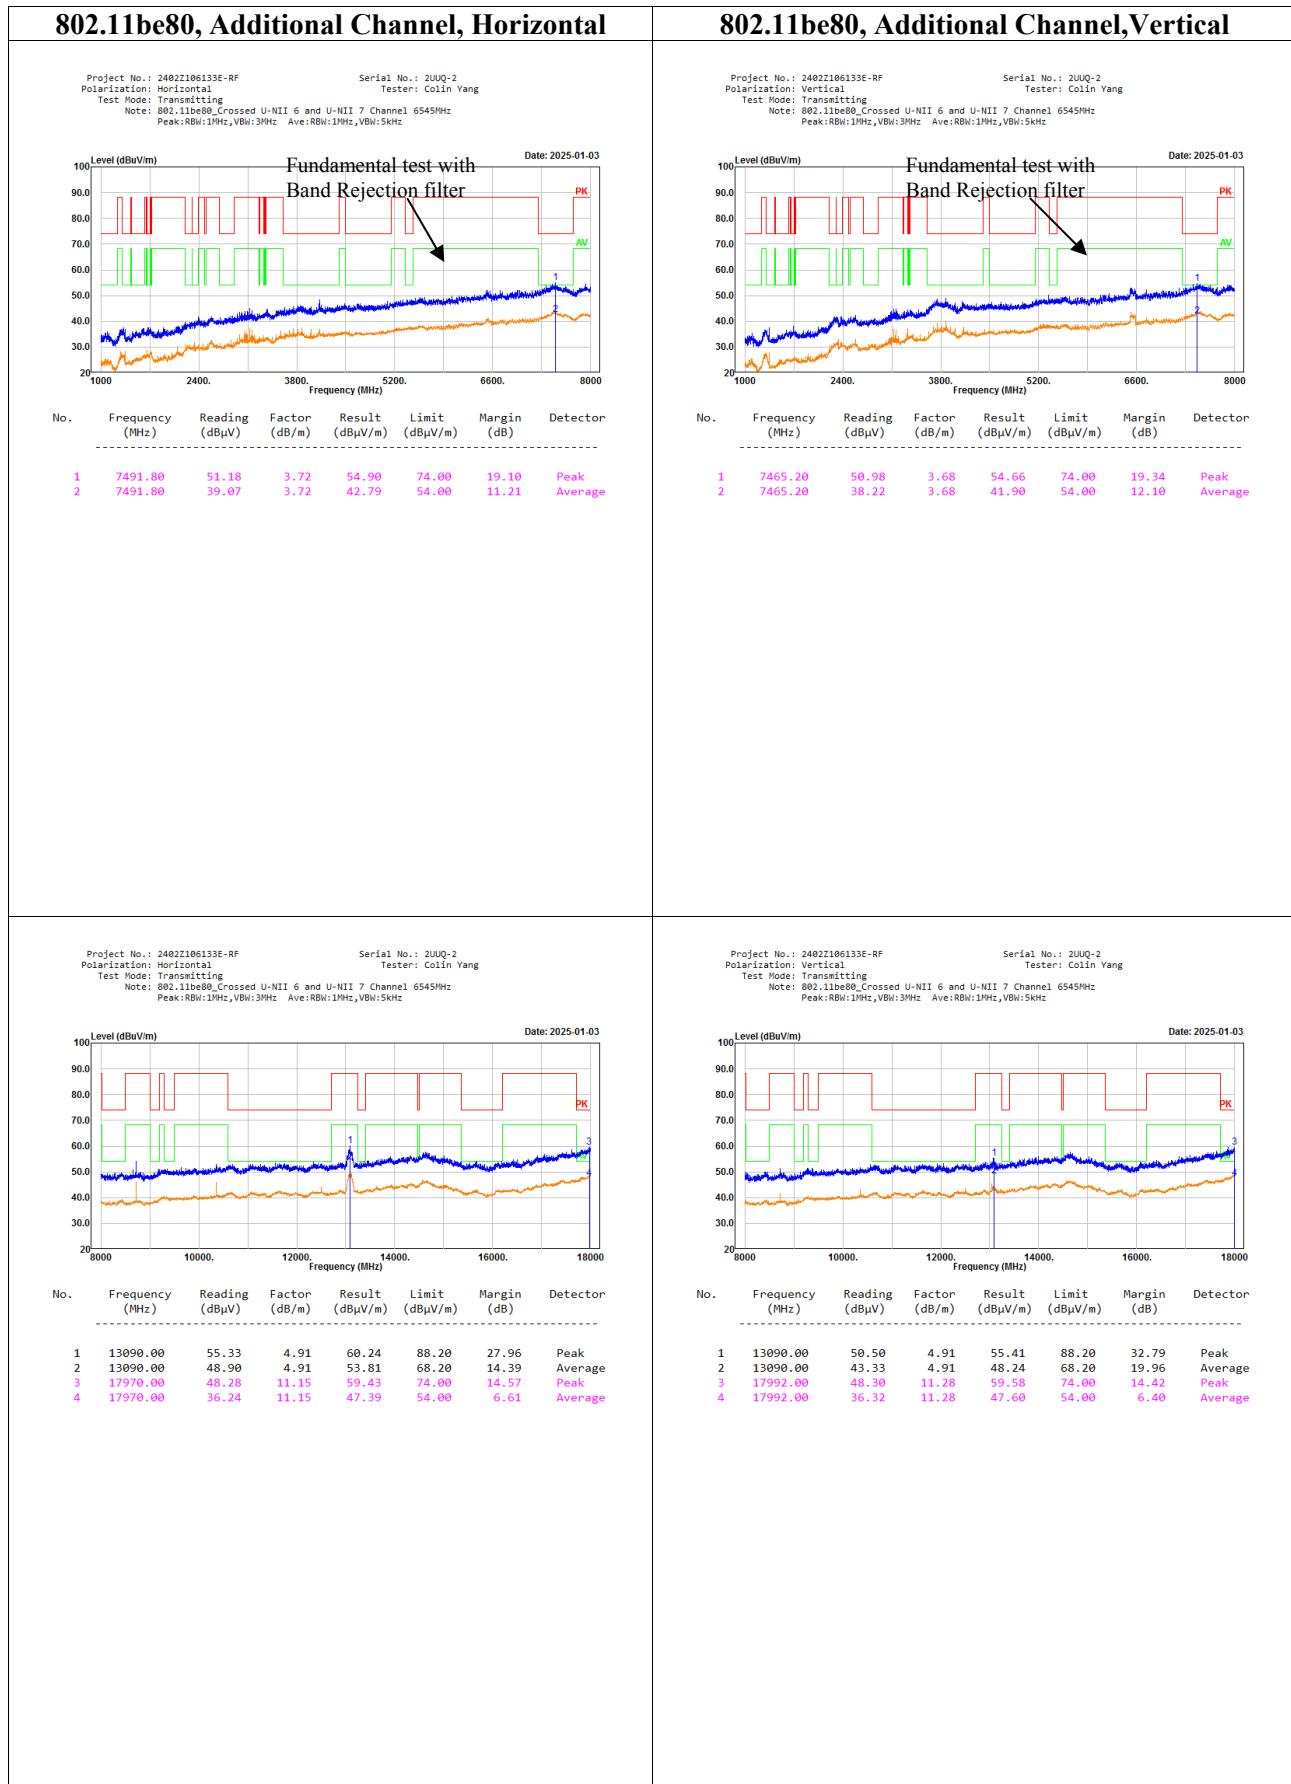


802.11be160, Additional Channel, Horizontal

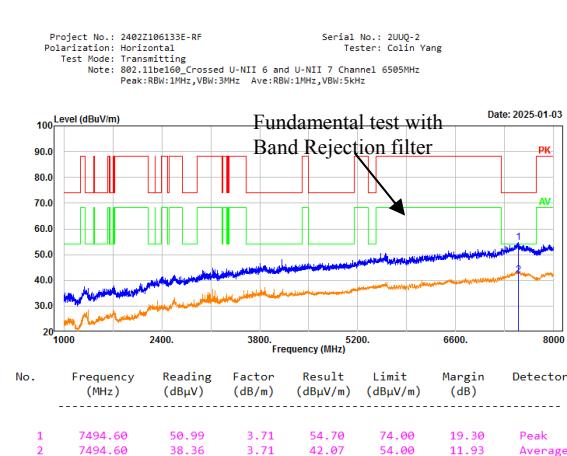

802.11be160, Additional Channel, Vertical

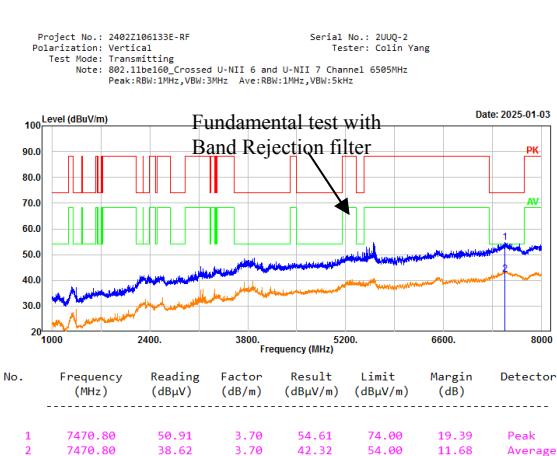


Project No.: 2402Z106133E-RF Serial No.: 2UUQ-2
Polarization: Horizontal Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11be_160_Crossed_U-NII_6 and U-NII_7 Channel 6505MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5KHz

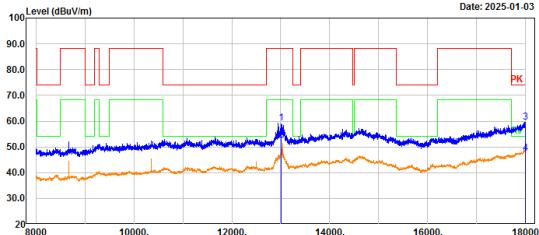


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	13010.00	54.20	4.97	59.17	88.20	29.03	Peak
2	13010.00	47.49	4.97	52.46	68.20	15.74	Average
3	17998.00	48.32	11.32	59.64	74.00	14.36	Peak
4	17998.00	36.22	11.32	47.54	54.00	6.46	Average

Project No.: 24022106133E-RF Serial No.: 2UUQ-2
Polarization: Vertical Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11be160_Crossed U-NII 6 and U-NII 7 Channel 6505MHz
Peak: 1MHz, VBW: 3MHz Ave: RBW: 1MHz, VBW: 5KHz

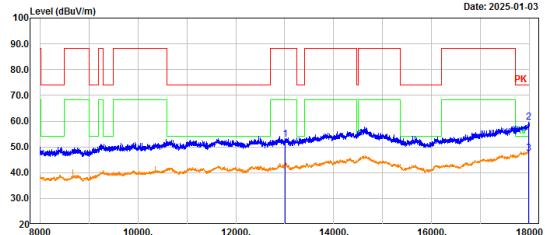


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	13010.00	47.84	4.97	52.81	88.20	35.39	Peak

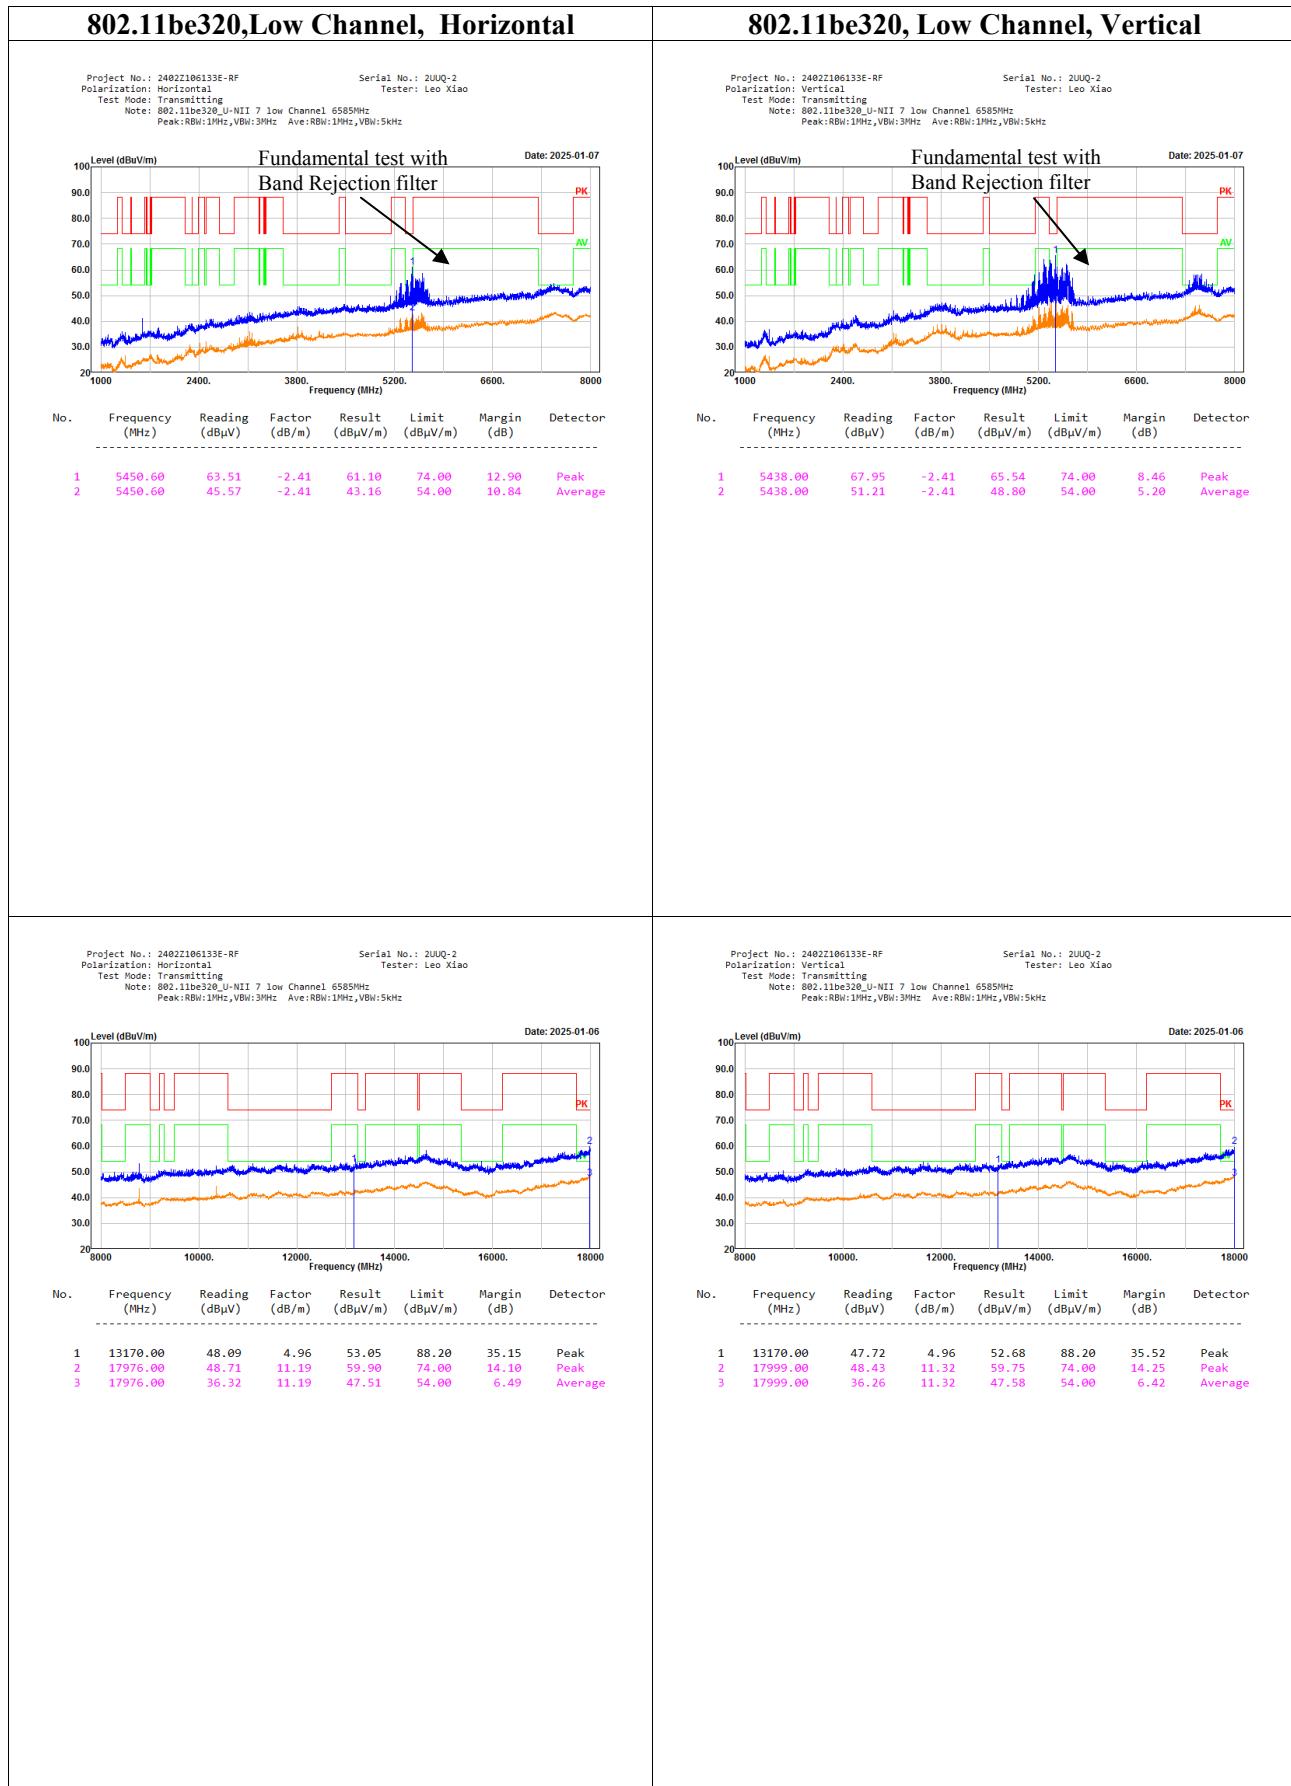

U-NII 7 and U-NII 8

802.11be20, Additional Channel, Horizontal


Project No.: 2402Z106133E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11be20_Crossed U-NII 7 and U-NII 8 Channel 6875MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

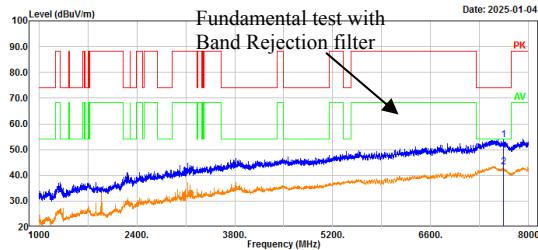Serial No.: 2UUQ-2
Tester: Leo Xiao

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	7643.00	50.30	3.48	53.78	74.00	20.22	Peak
2	7643.00	39.67	3.48	43.15	54.00	10.85	Average


802.11be20, Additional Channel, Vertical

Project No.: 2402Z106133E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11be20_Crossed U-NII 7 and U-NII 8 Channel 6875MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

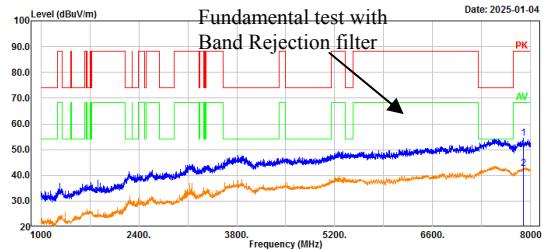Serial No.: 2UUQ-2
Tester: Leo Xiao


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	7892.20	50.70	3.82	54.52	88.20	33.68	Peak
2	7892.20	38.75	3.82	42.57	68.20	25.63	Average

Project No.: 2402Z106133E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11be20_Crossed U-NII 7 and U-NII 8 Channel 6875MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

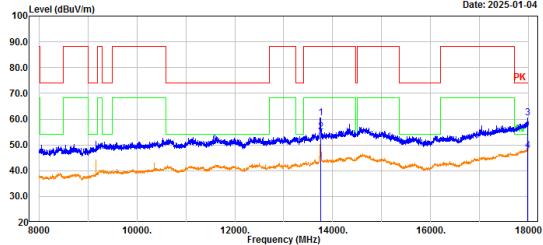
Serial No.: 2UUQ-2
Tester: Leo Xiao


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	13750.00	54.33	6.22	60.55	88.20	27.65	Peak
2	13750.00	48.76	6.22	54.98	68.20	13.22	Average
3	17984.00	49.20	11.24	60.44	74.00	13.56	Peak
4	17984.00	36.48	11.24	47.72	54.00	6.28	Average


Project No.: 2402Z106133E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11be20_Crossed U-NII 7 and U-NII 8 Channel 6875MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

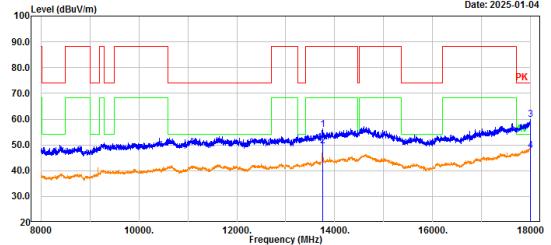
Serial No.: 2UUQ-2
Tester: Leo Xiao


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	13750.00	49.71	6.22	55.93	88.20	32.27	Peak
2	13750.00	43.37	6.22	49.59	68.20	18.61	Average
3	17998.00	48.57	11.32	59.89	74.00	14.11	Peak
4	17998.00	36.50	11.32	47.82	54.00	6.18	Average

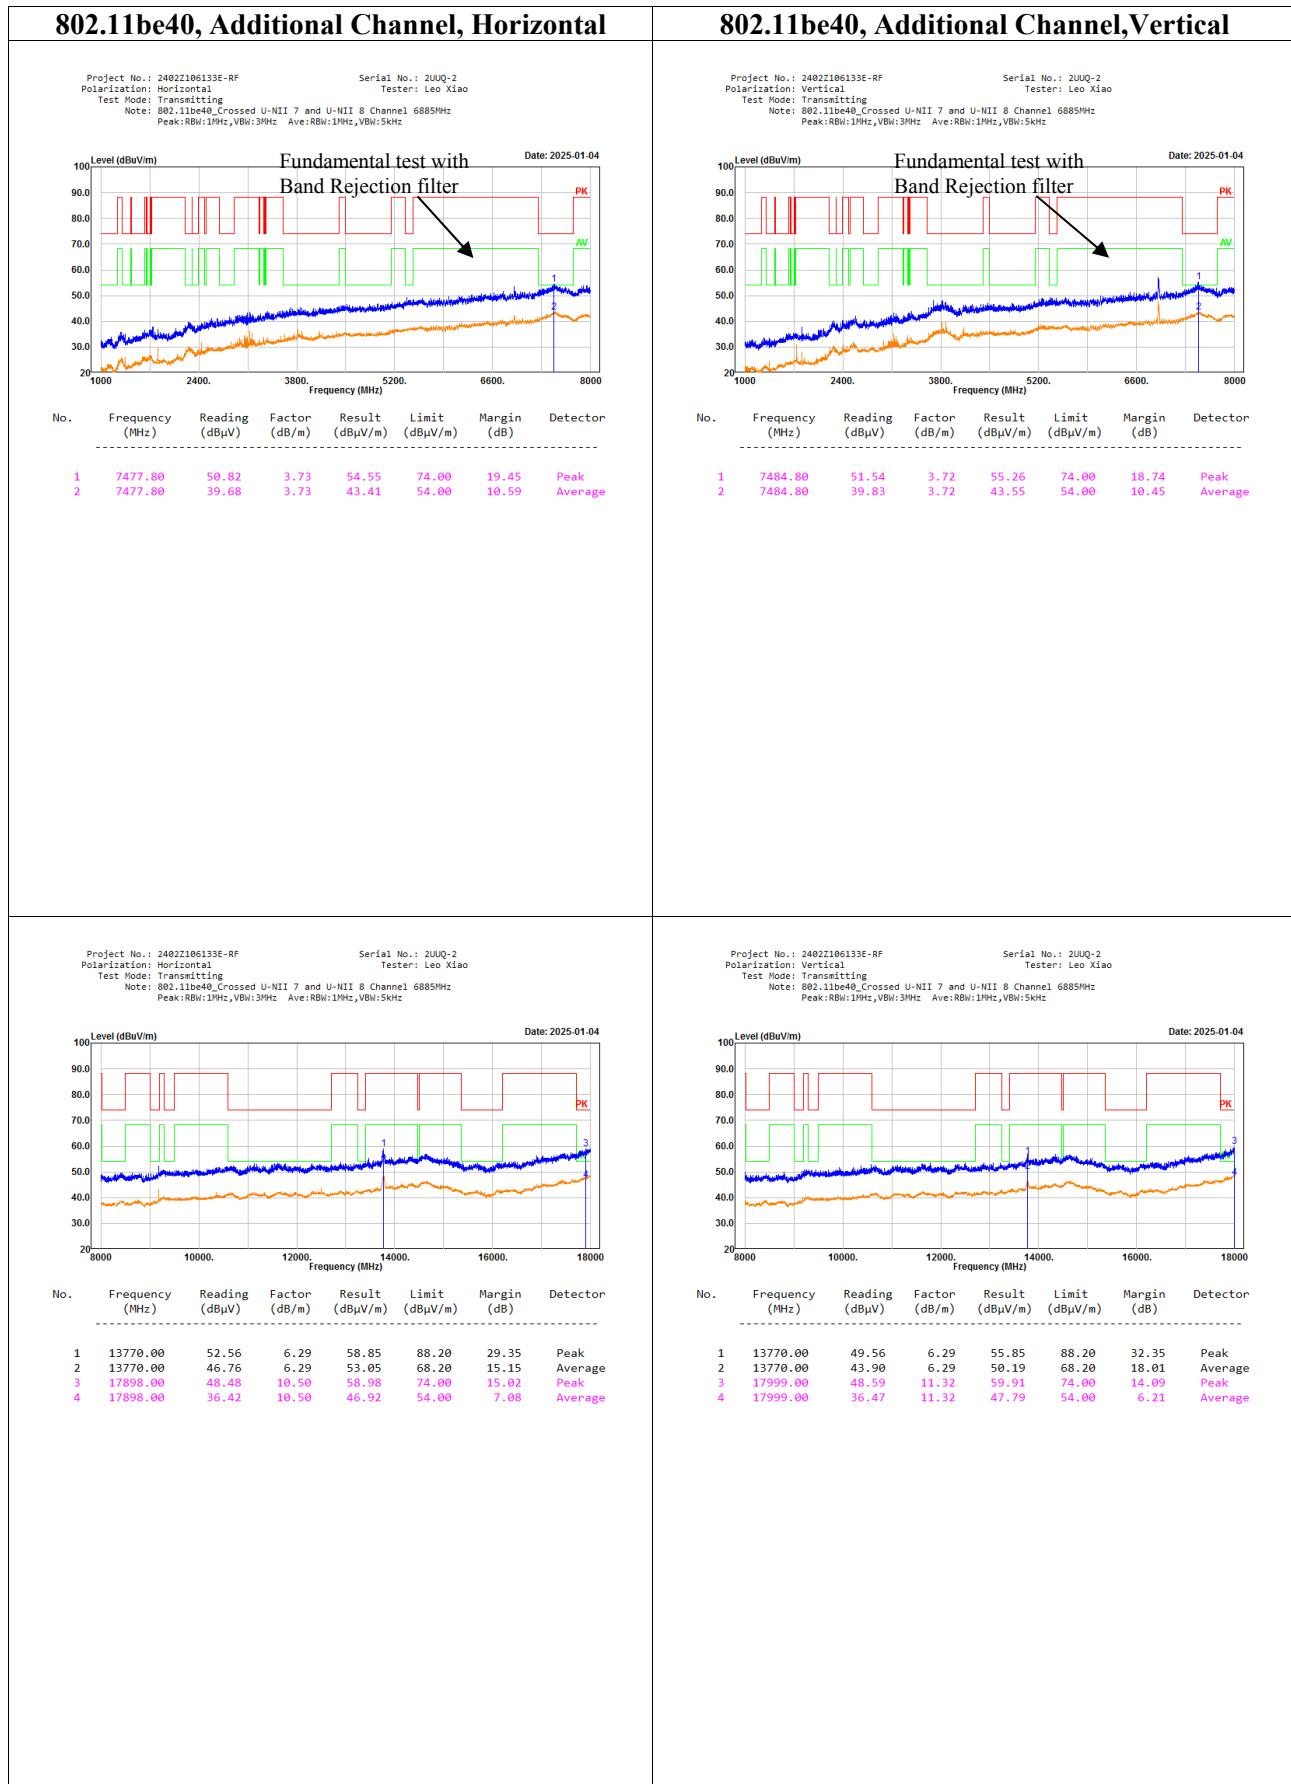

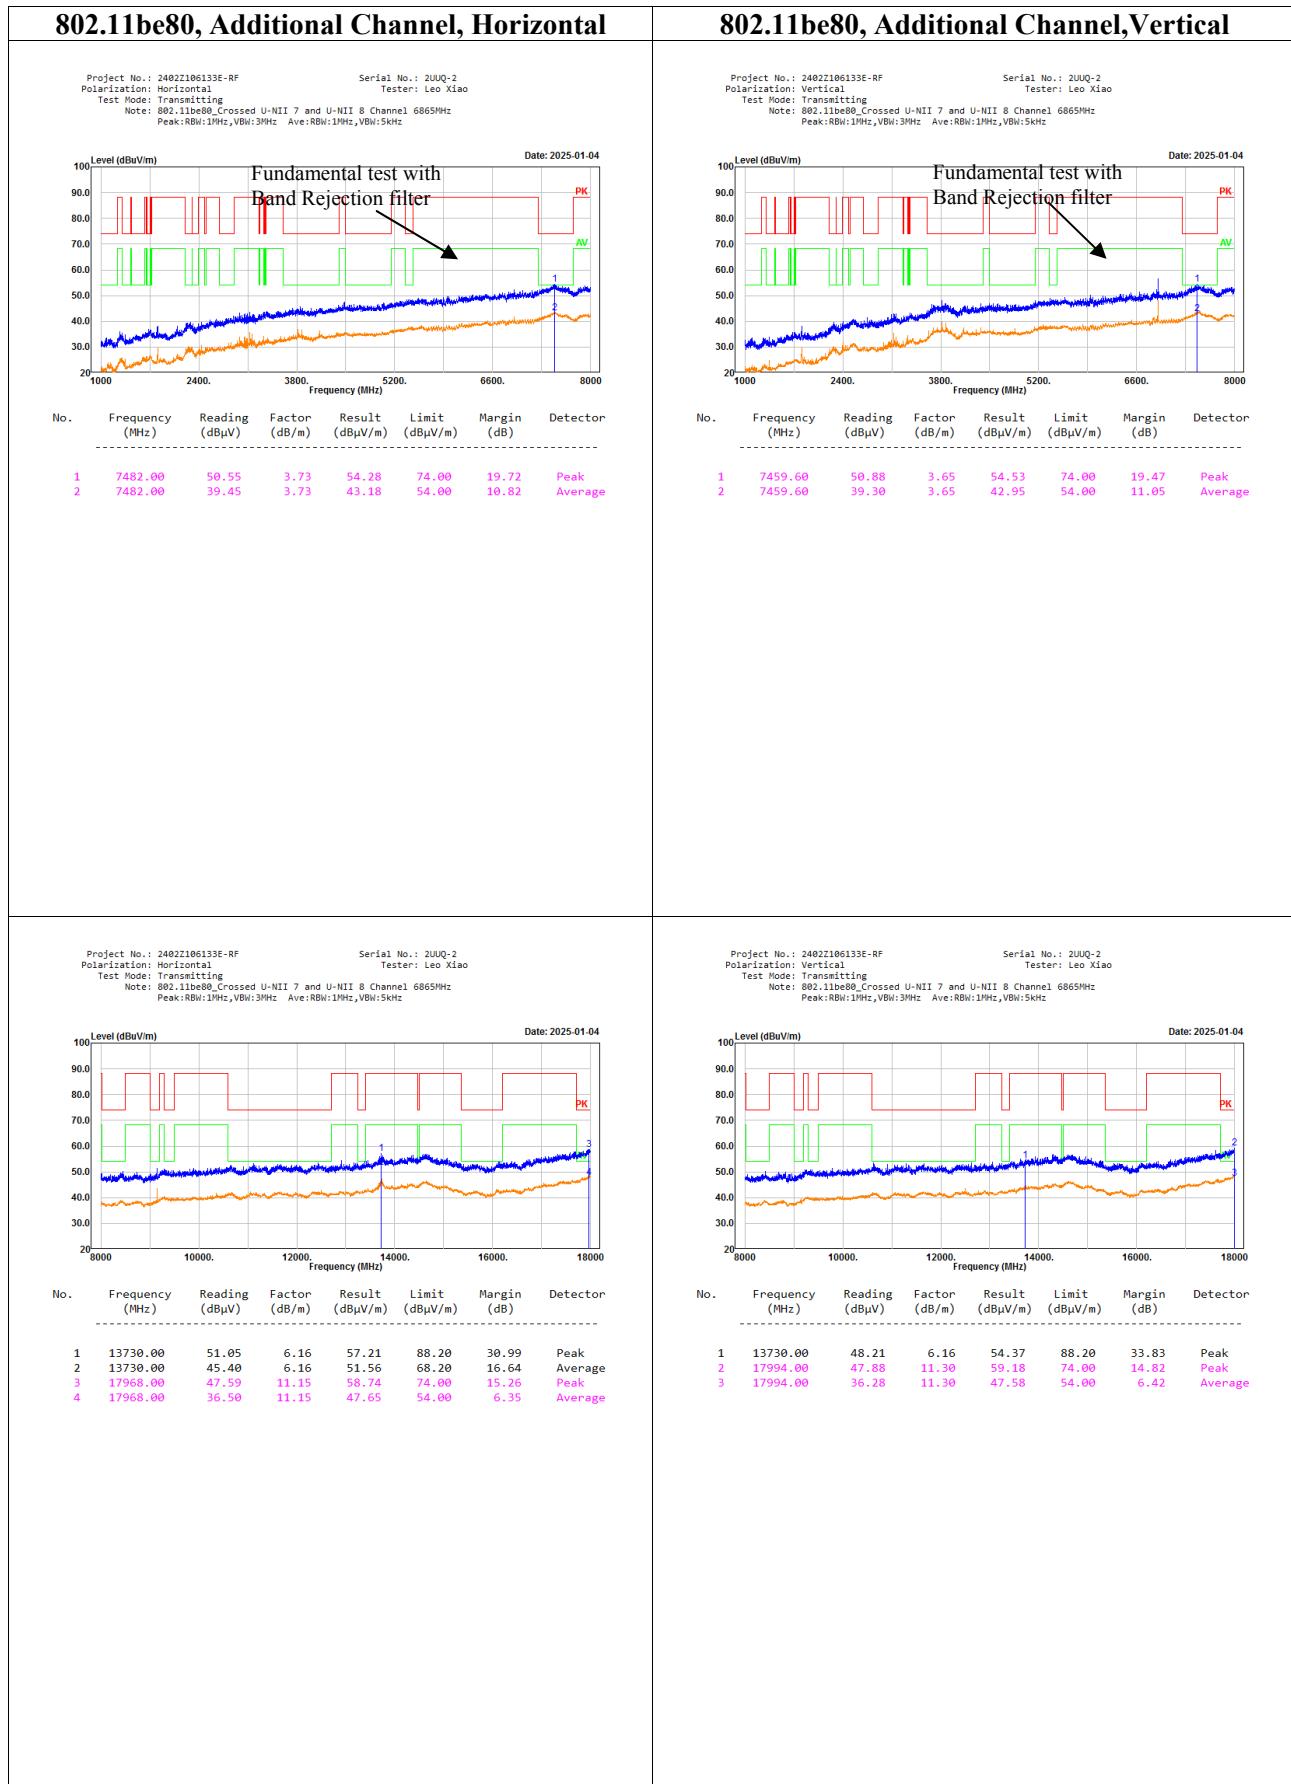

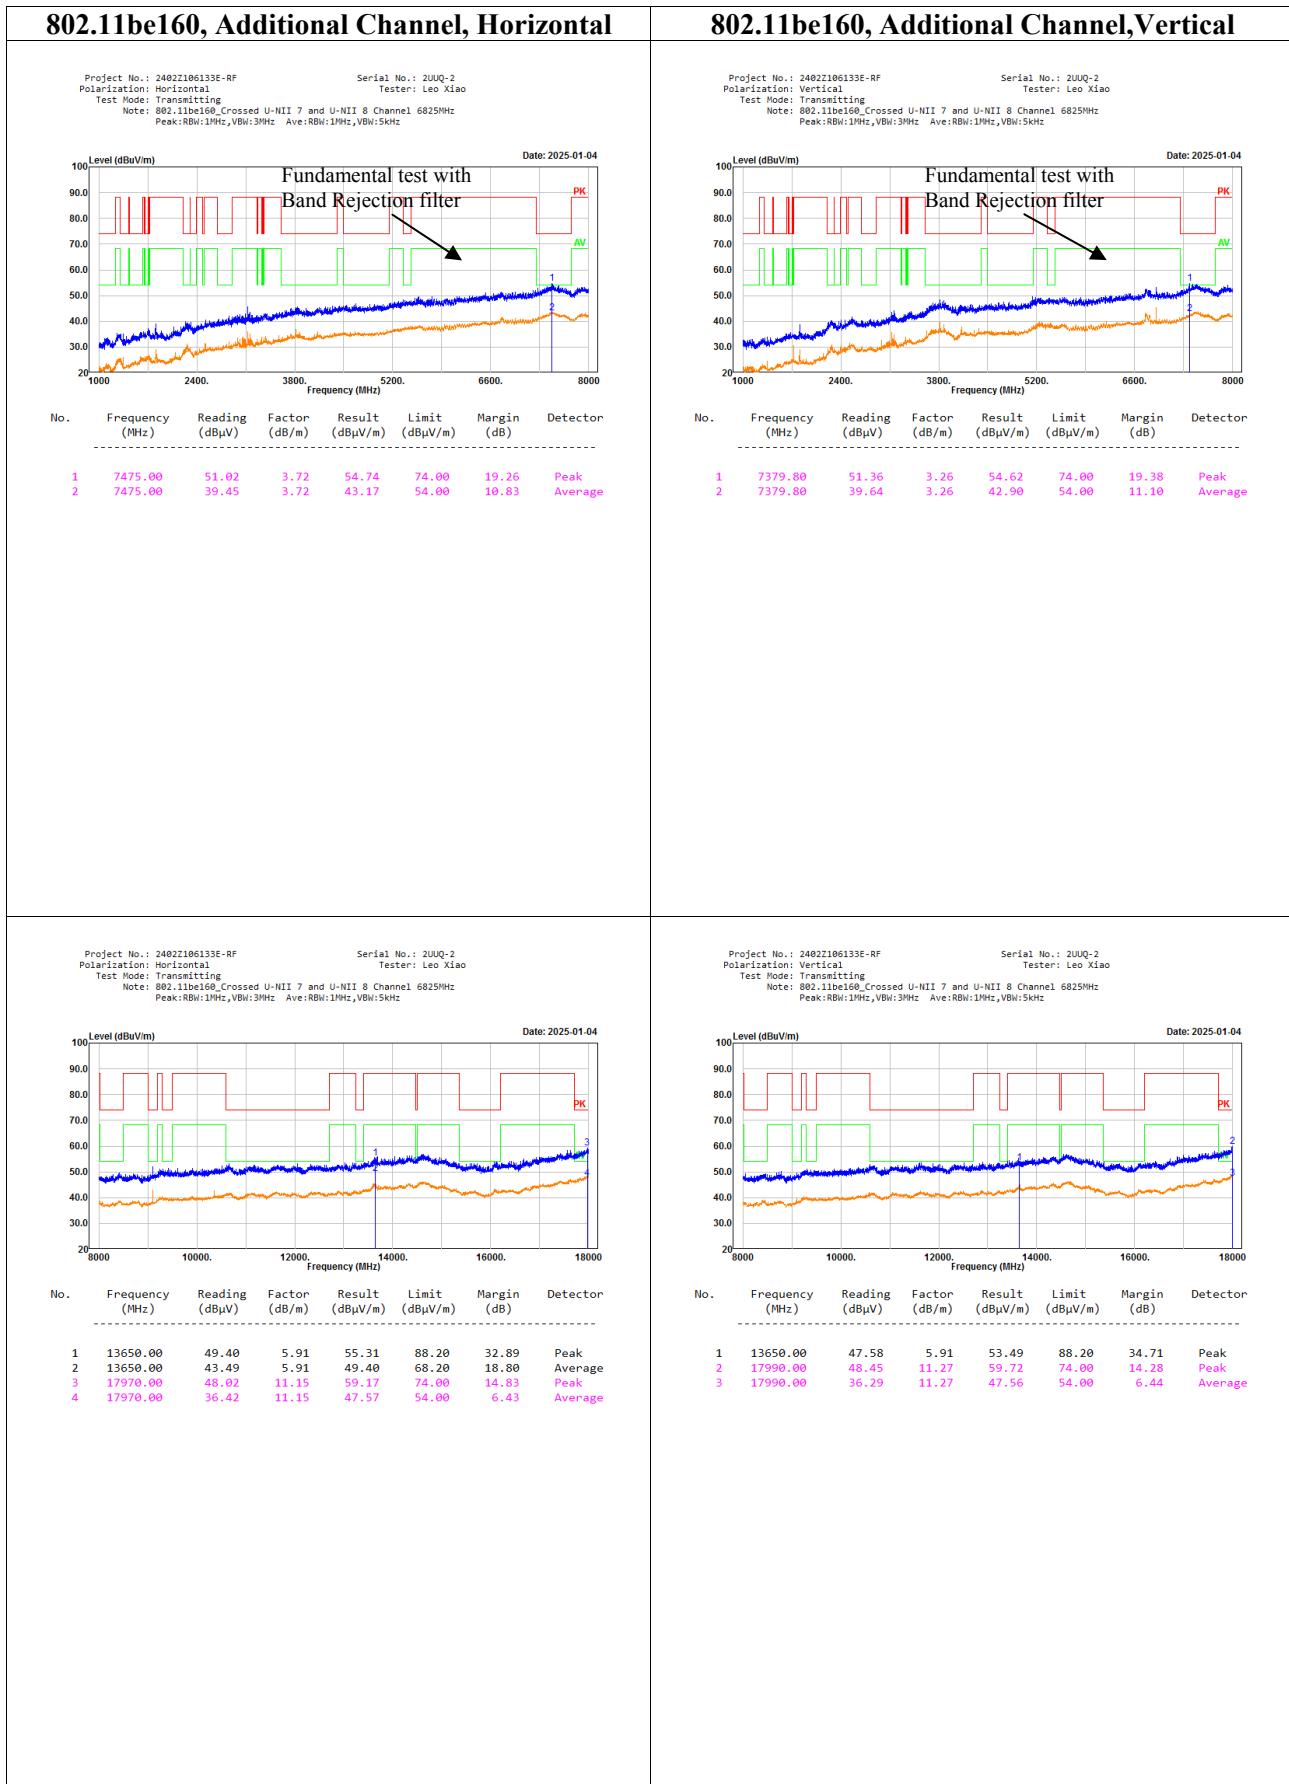





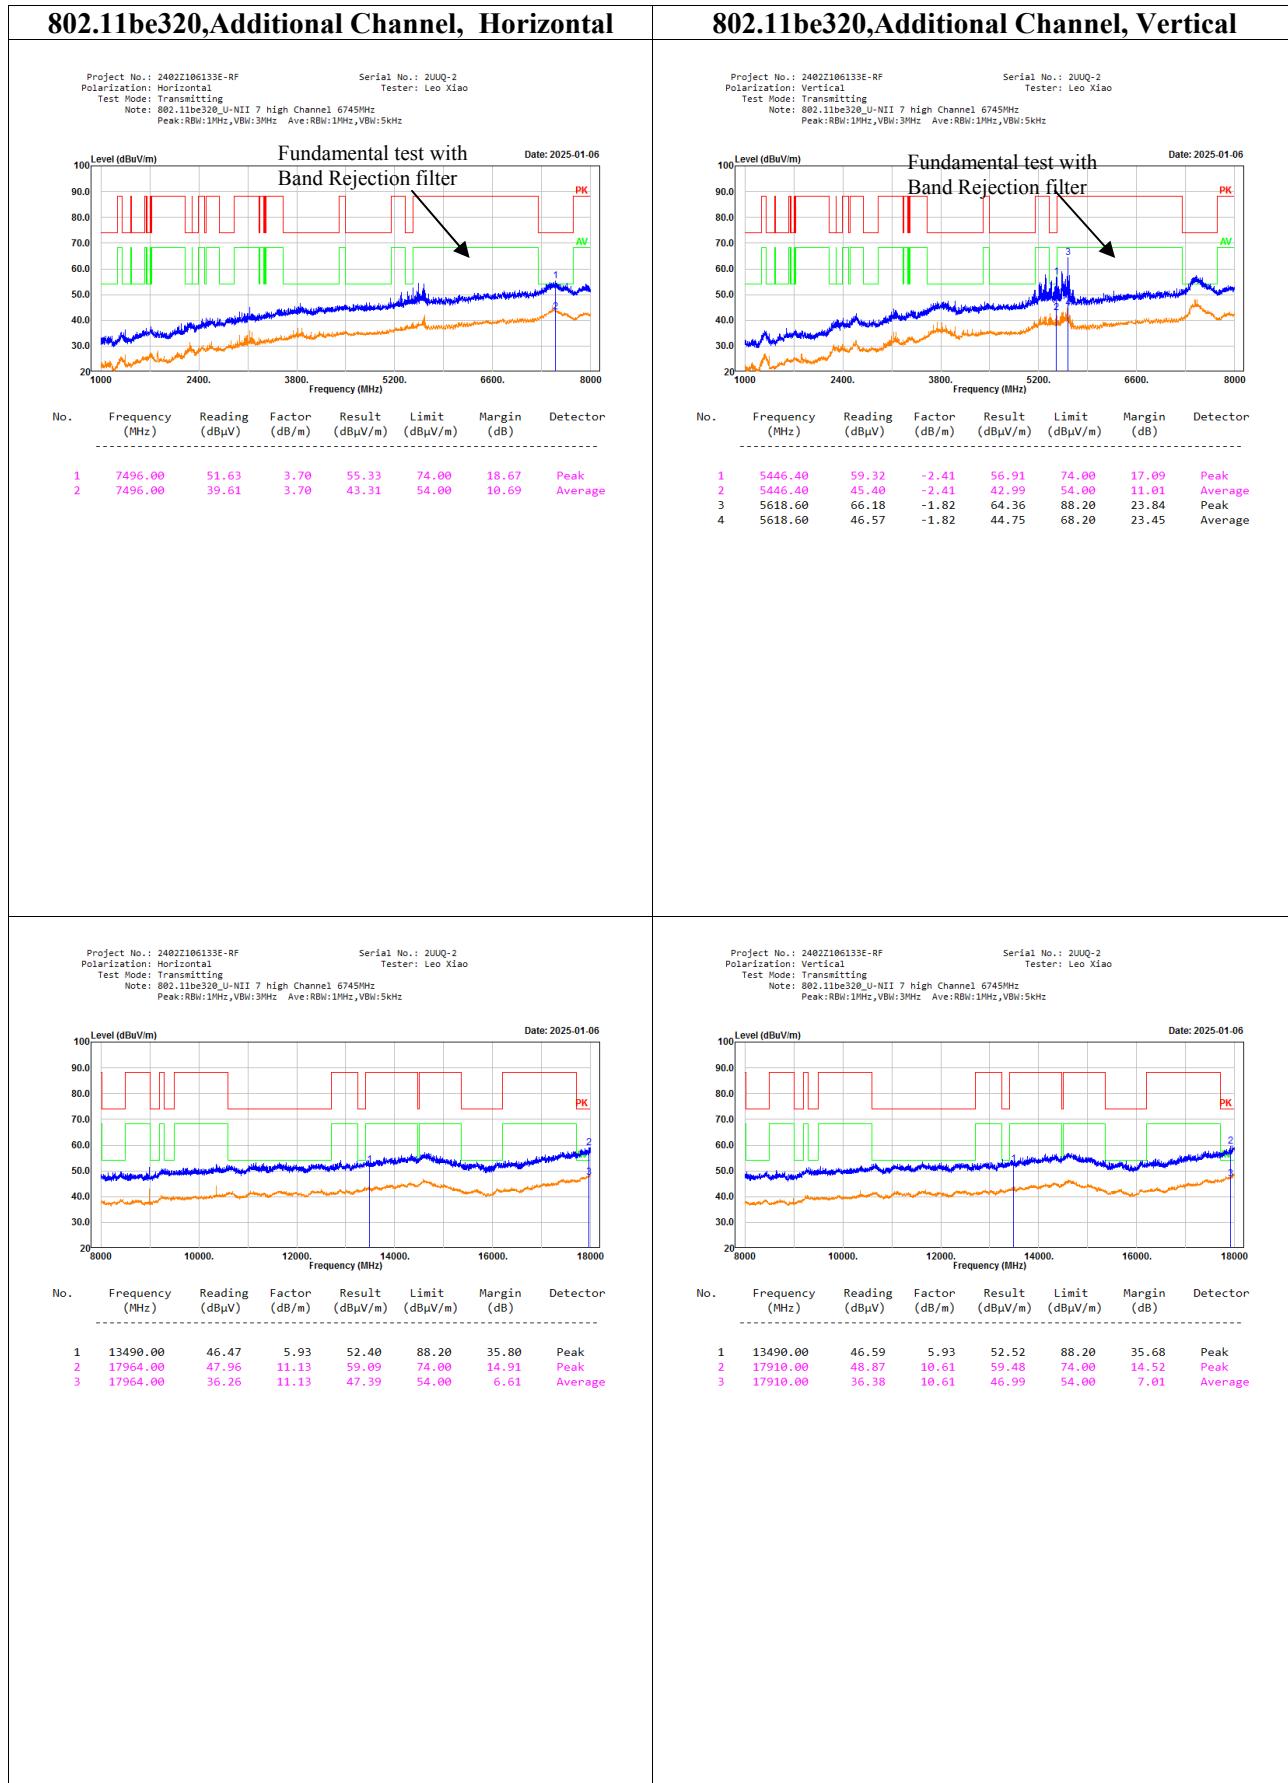


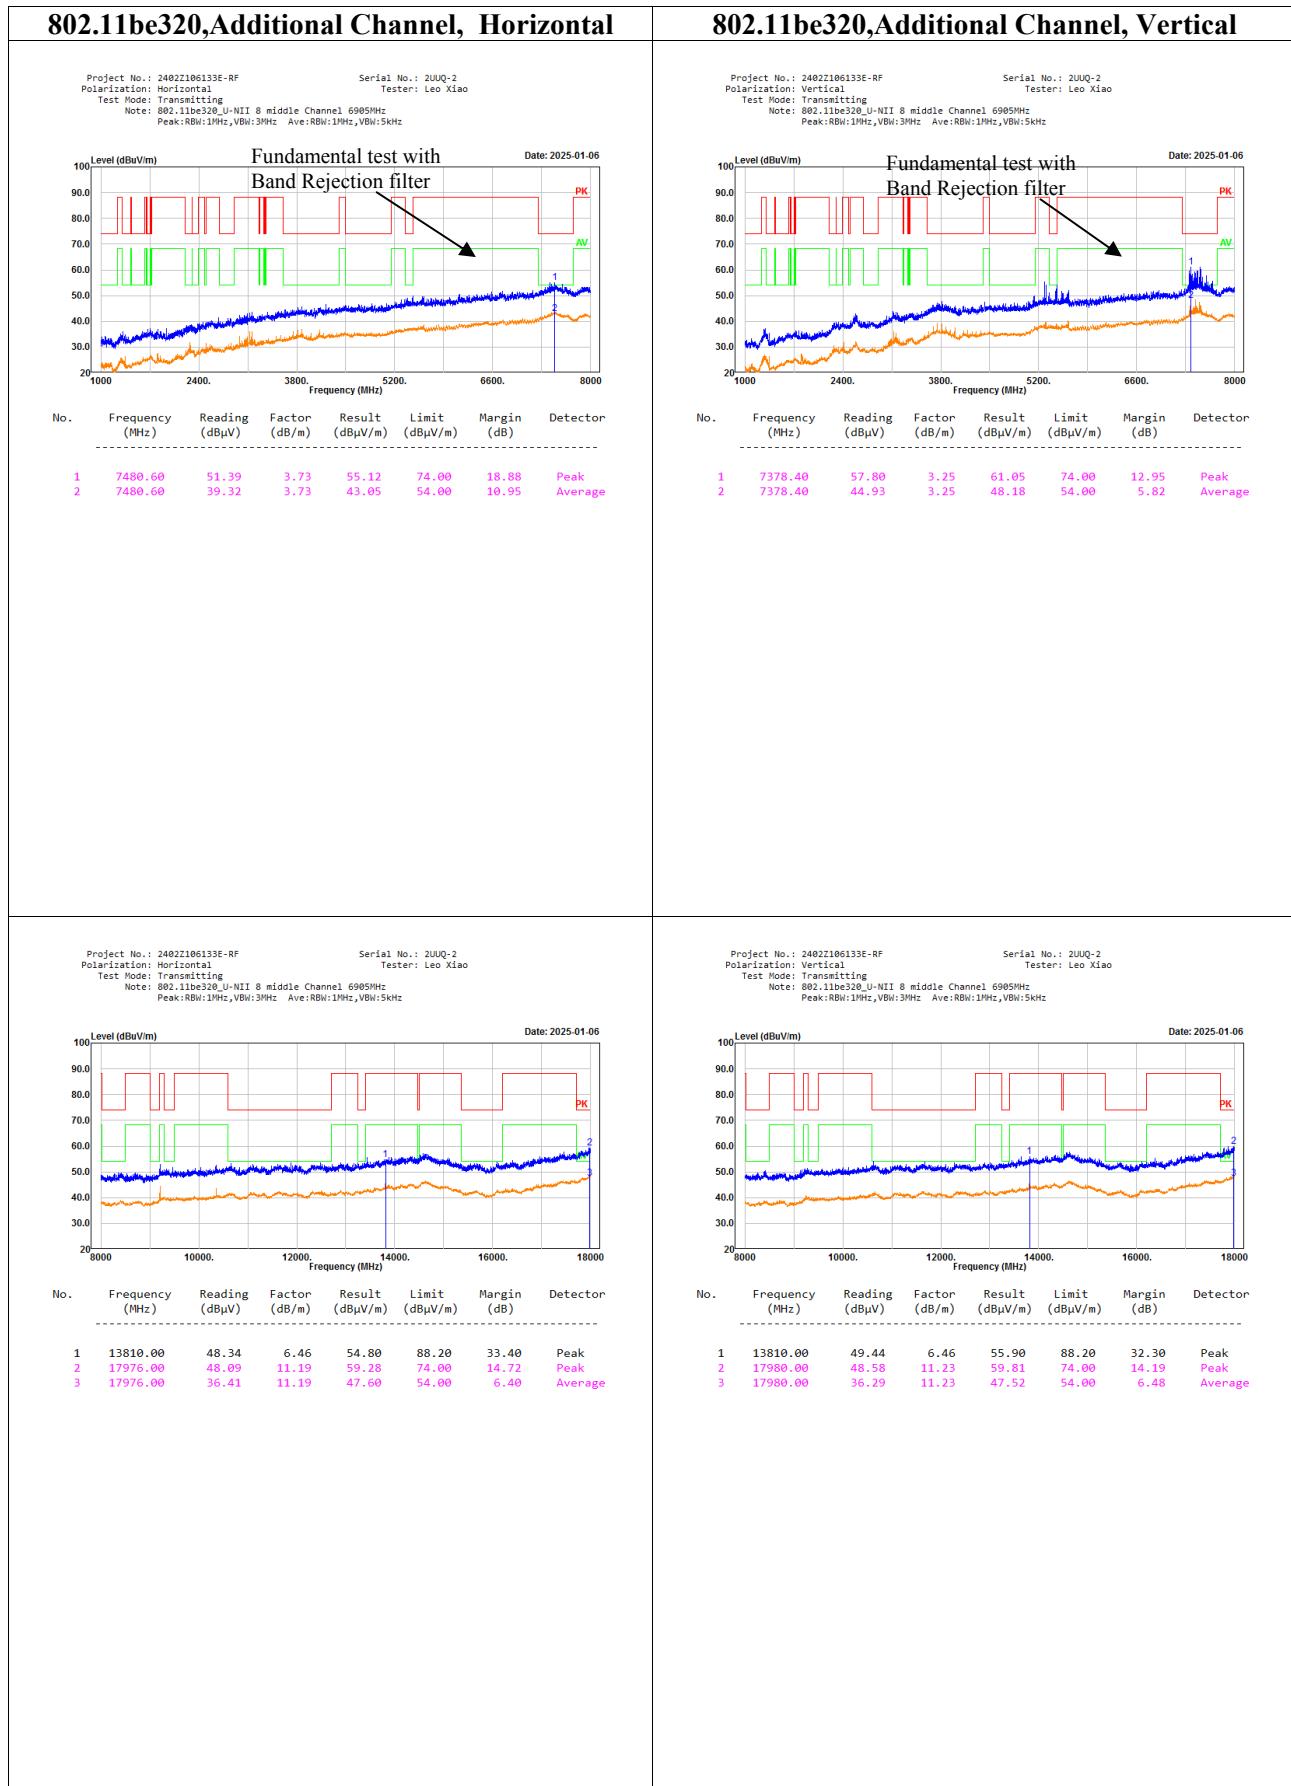



18-40GHz:

No Emission was detected in the range 18-40GHz, test was performed on the mode and channel which with the maximum power.

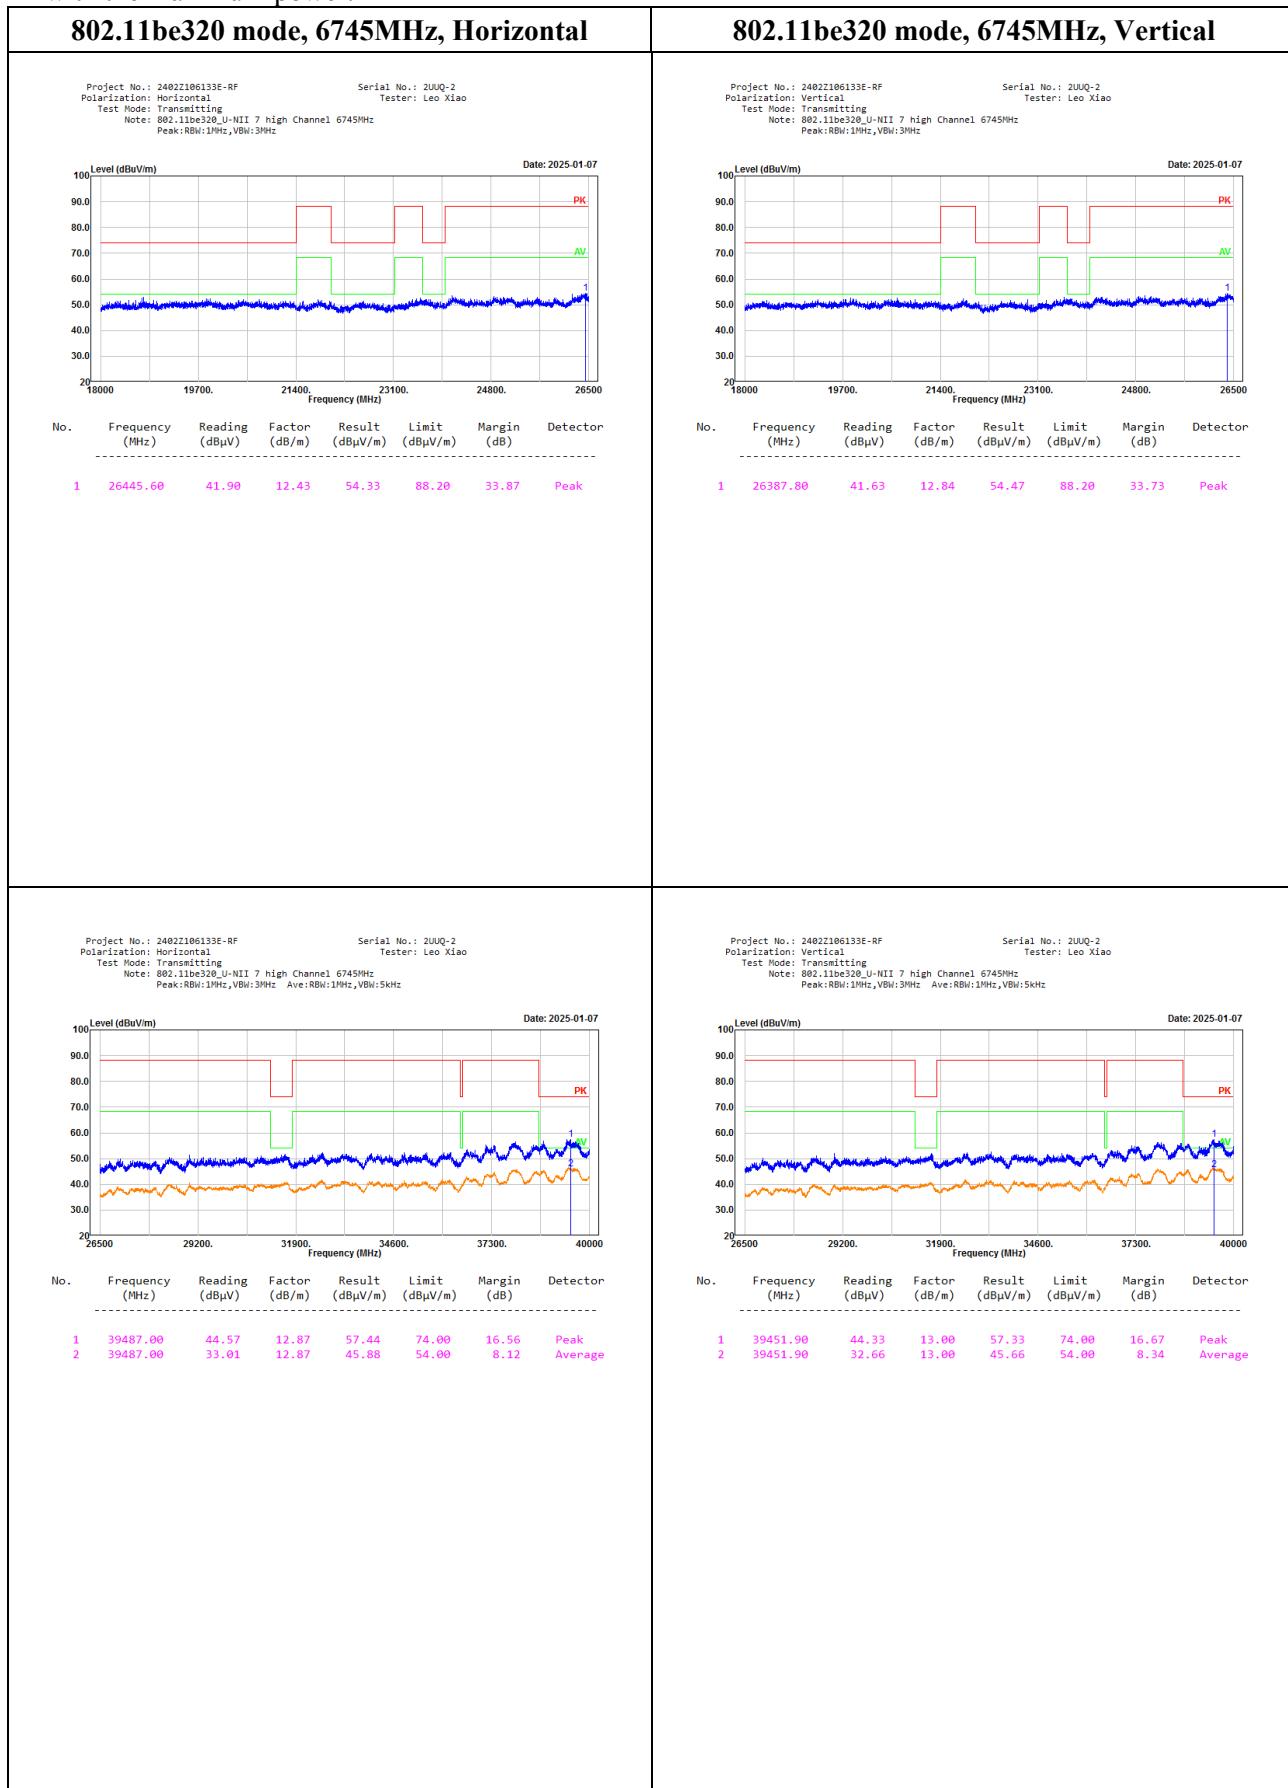

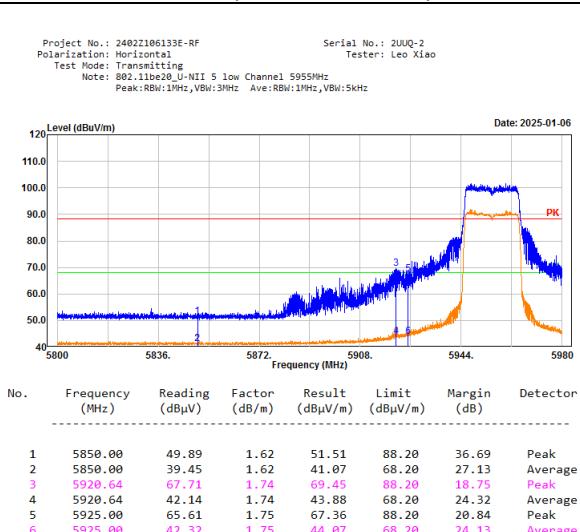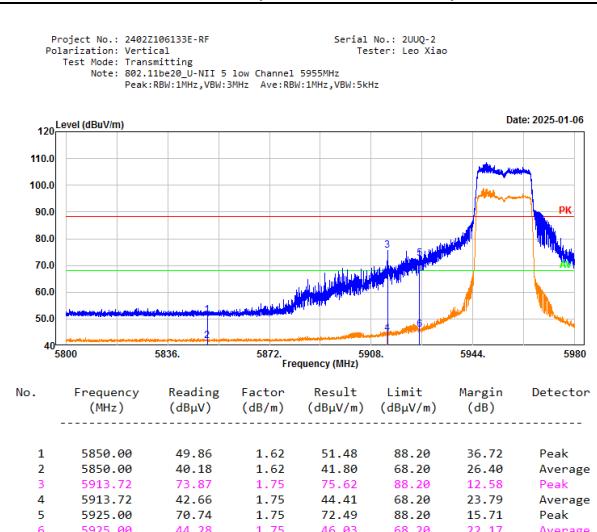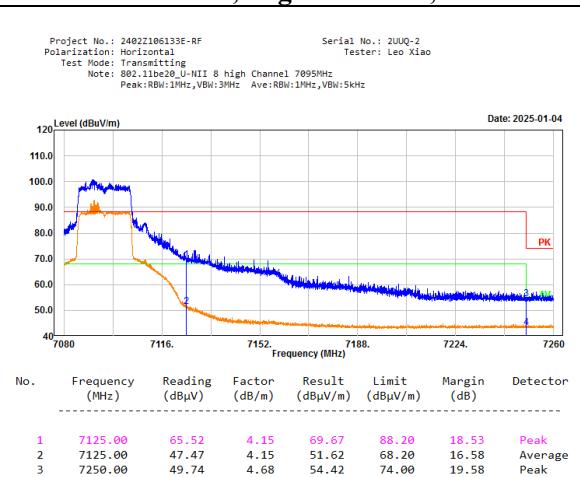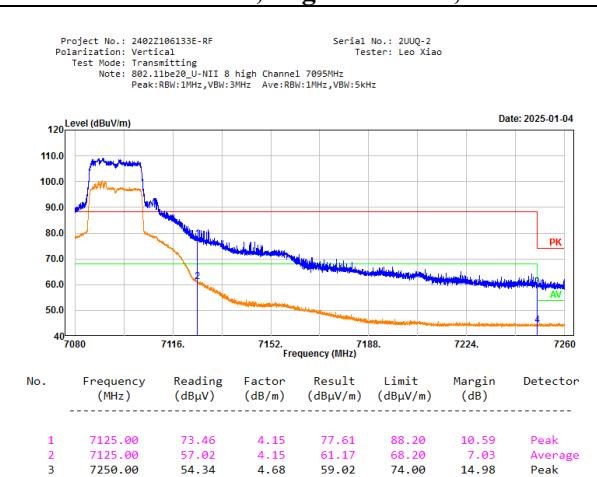Bandedge:**802.11 be20 mode, Low Channel , Horizontal****802.11be20 mode, Low Channel , Vertical****802.11 be20 mode, High Channel , Horizontal****802.11be20 mode, High Channel , Vertical**

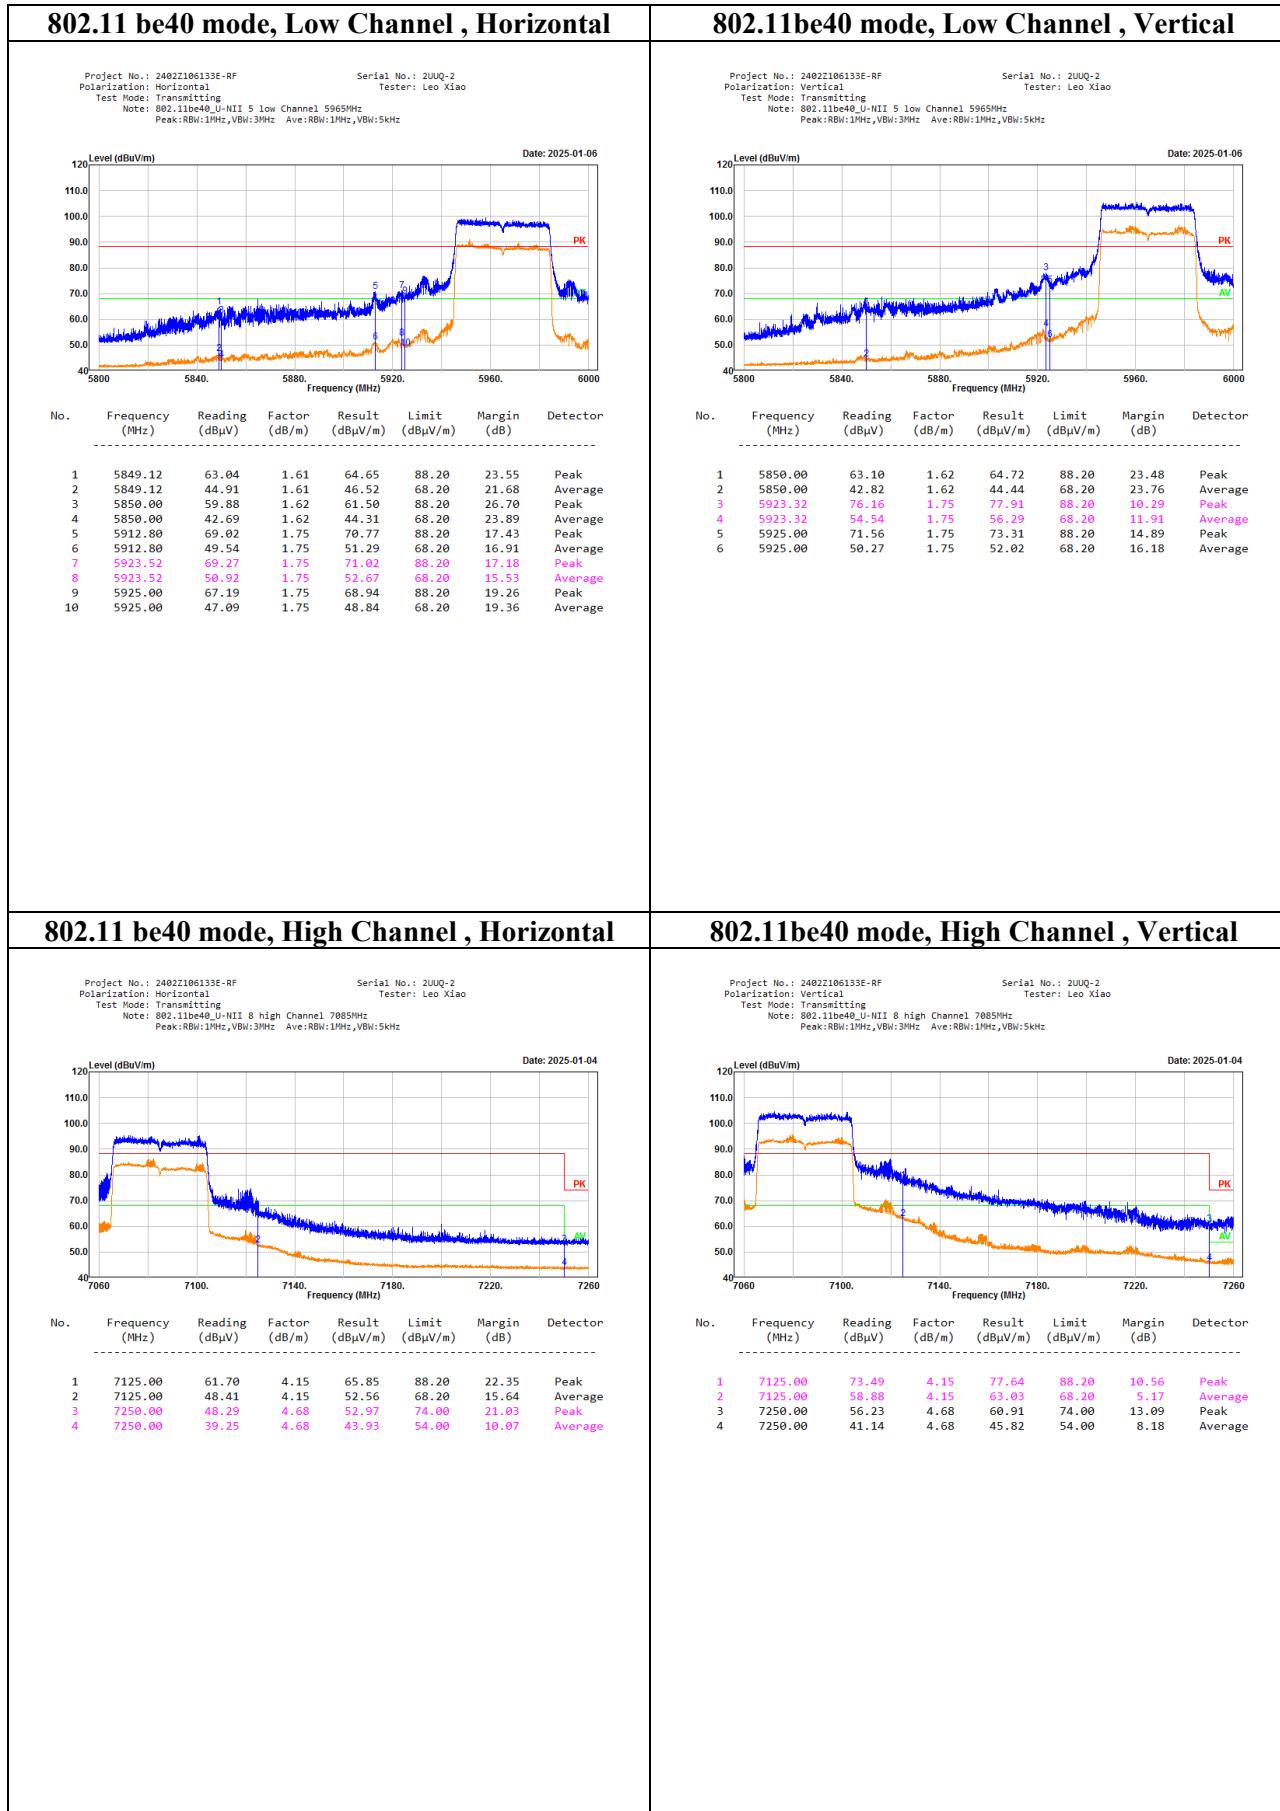


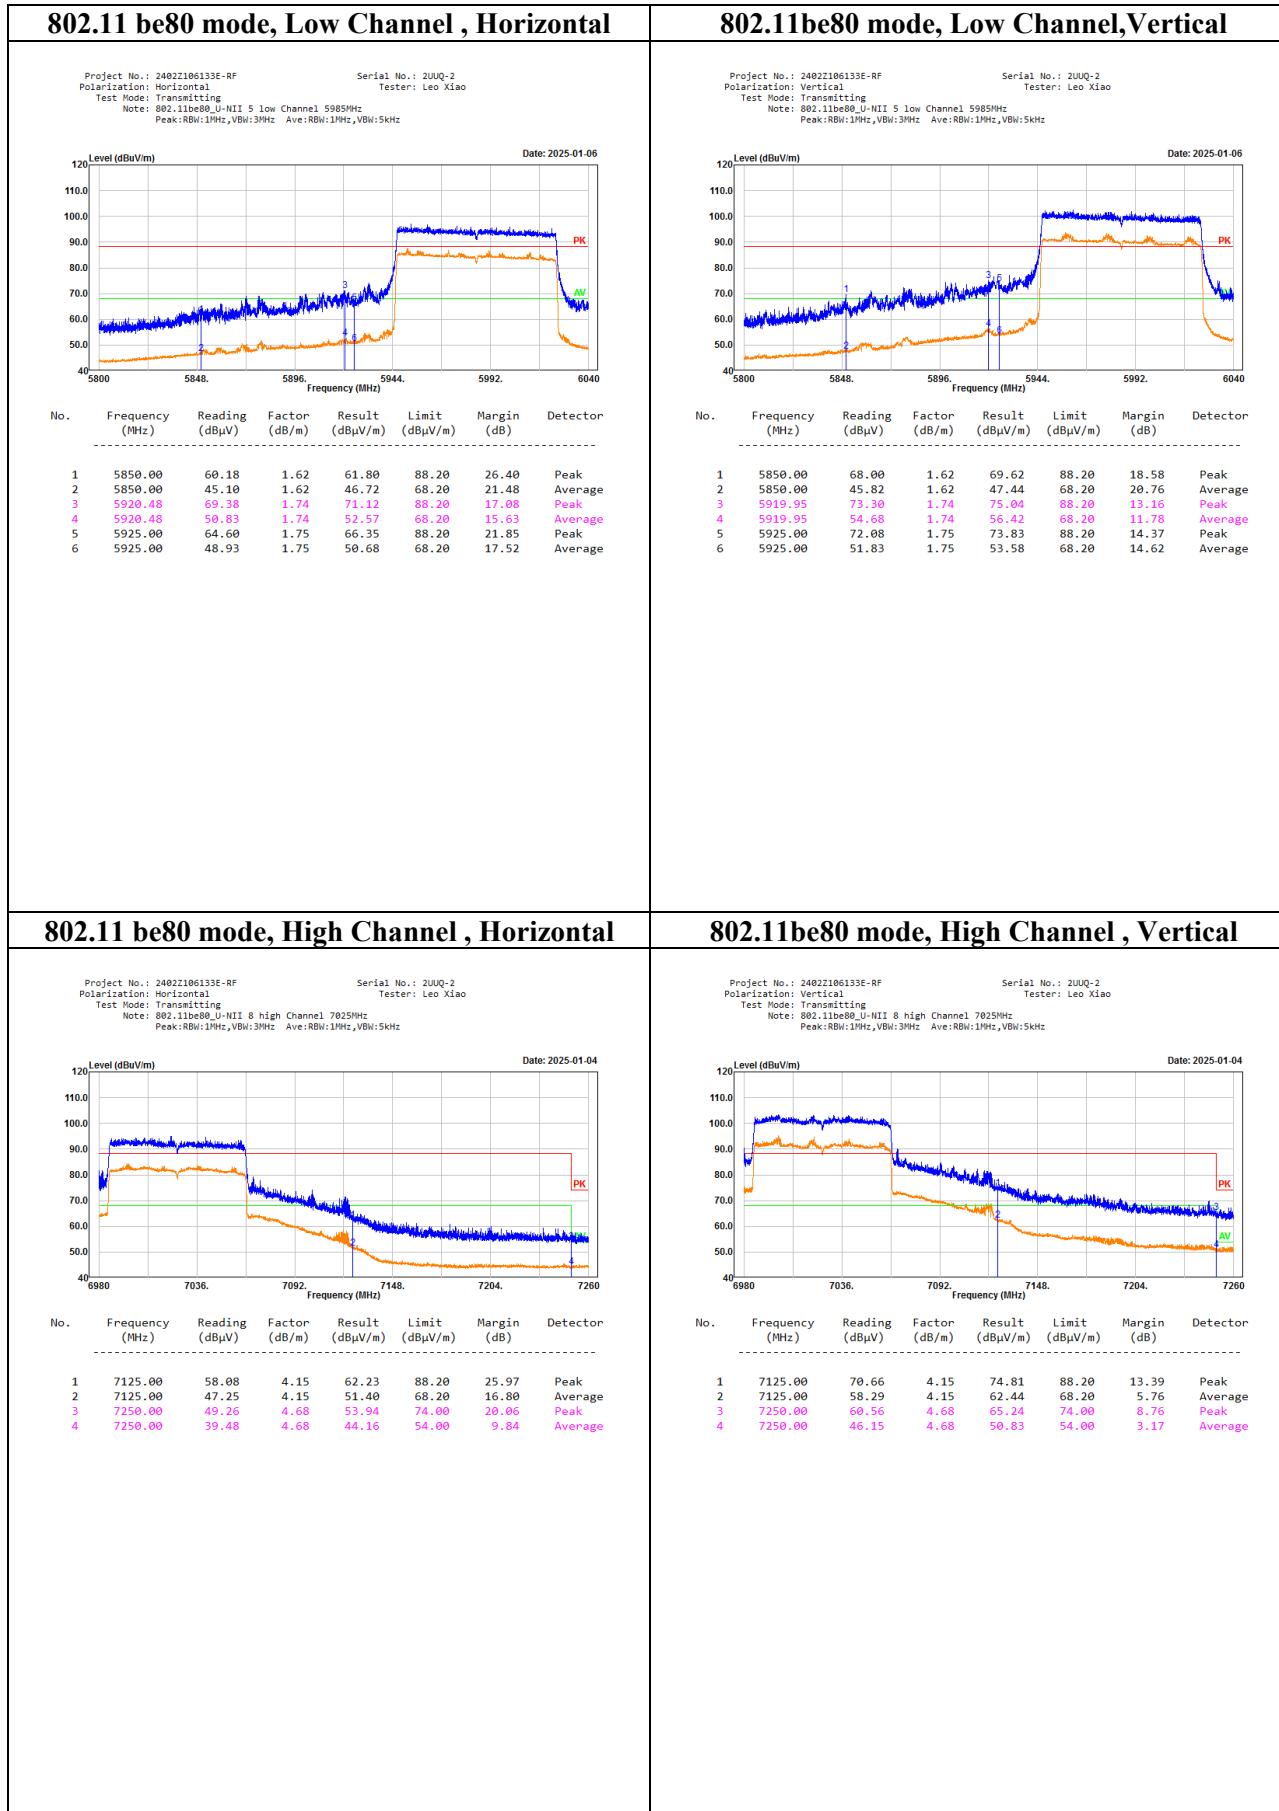

802.11 be160 mode, Low Channel , Horizontal

Project No.: 2402Z106133E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11be160_U-NII 5 low Channel 6925MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2UUQ-2
Tester: Leo Xiao

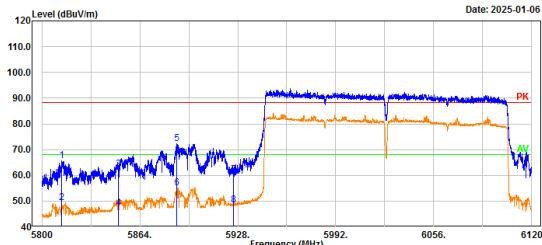


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	5812.99	64.23	1.54	65.77	88.20	22.43	Peak
2	5812.99	47.87	1.54	49.41	68.20	18.79	Average
3	5850.00	60.79	1.62	62.41	88.20	25.79	Peak
4	5850.00	45.48	1.62	47.10	68.20	21.10	Average
5	5888.00	70.56	1.71	72.27	88.20	15.93	Peak
6	5888.00	53.44	1.71	55.15	68.20	13.05	Average
7	5925.00	58.48	1.75	60.23	88.20	27.97	Peak
8	5925.00	46.74	1.75	48.49	68.20	19.71	Average

802.11be160 mode,Low Channel , Vertical

Project No.: 2402Z106133E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11be160_U-NII 5 low Channel 6925MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2UUQ-2
Tester: Leo Xiao

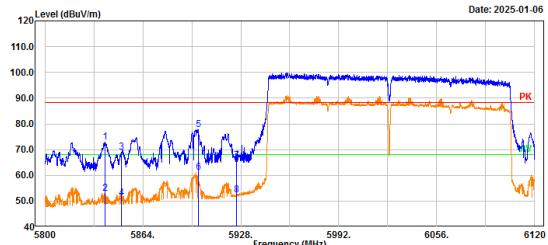


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	5839.30	71.40	1.60	73.00	88.20	15.20	Peak
2	5839.30	51.40	1.60	53.00	68.20	15.20	Average
3	5850.00	67.42	1.62	69.04	88.20	19.16	Peak
4	5850.00	49.62	1.62	51.24	68.20	16.96	Average
5	5900.16	75.97	1.73	77.70	88.20	10.50	Peak
6	5900.16	59.43	1.73	61.16	68.20	7.04	Average
7	5925.00	64.03	1.75	65.78	88.20	22.42	Peak
8	5925.00	50.56	1.75	52.31	68.20	15.89	Average

802.11 be160 mode, High Channel , Horizontal

Project No.: 2402Z106133E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11be160_U-NII 8 high Channel 6985MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2UUQ-2
Tester: Leo Xiao

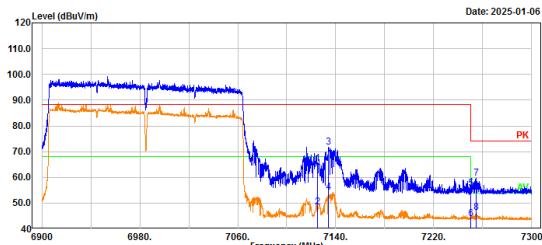


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	7125.00	61.19	4.15	65.34	88.20	22.86	Peak
2	7125.00	44.32	4.15	48.47	68.20	19.73	Average
3	7134.16	67.49	4.18	71.58	88.20	16.62	Peak
4	7134.16	49.95	4.18	54.13	68.20	14.07	Average
5	7250.00	50.98	4.68	55.58	74.00	18.42	Peak
6	7250.00	39.20	4.68	43.88	54.00	10.12	Average
7	7254.56	54.99	4.70	59.69	74.00	14.31	Peak
8	7254.56	41.56	4.70	46.26	54.00	7.74	Average

802.11be160 mode, High Channel,Vertical

Project No.: 2402Z106133E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11be160_U-NII 8 high Channel 6985MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2UUQ-2
Tester: Leo Xiao

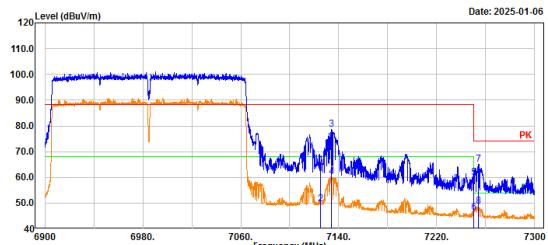


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	7125.00	60.51	4.15	64.66	88.20	23.54	Peak
2	7125.00	45.47	4.15	49.62	68.20	18.58	Average
3	7134.16	74.46	4.18	78.64	88.20	9.56	Peak
4	7134.16	56.04	4.18	60.22	68.20	7.98	Average
5	7250.00	55.23	4.68	59.91	74.00	14.09	Peak
6	7250.00	41.69	4.68	46.37	54.00	7.63	Average
7	7253.92	60.28	4.70	64.98	74.00	9.02	Peak
8	7253.92	43.94	4.70	48.64	54.00	5.36	Average

802.11 be320 mode, Low Channel , Horizontal

Project No.: 2402Z106133E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11be320_U-NII 5 low Channel 6105MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2UUQ-2
Tester: Leo Xiao

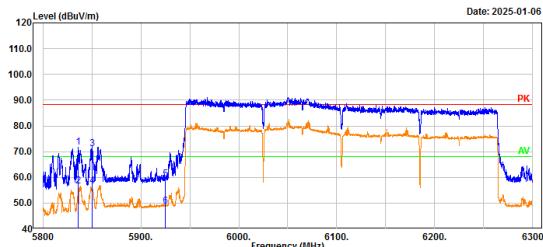


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	5836.20	69.99	1.58	71.57	88.20	16.63	Peak
2	5836.20	55.04	1.58	56.62	68.20	11.58	Average
3	5850.00	69.47	1.62	71.09	88.20	17.11	Peak
4	5850.00	55.13	1.62	56.75	68.20	11.45	Average
5	5925.00	57.71	1.75	59.46	88.20	28.74	Peak
6	5925.00	47.13	1.75	48.88	68.20	19.32	Average

802.11be320 mode, Low Channel , Vertical

Project No.: 2402Z106133E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11be320_U-NII 5 low Channel 6105MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2UUQ-2
Tester: Leo Xiao

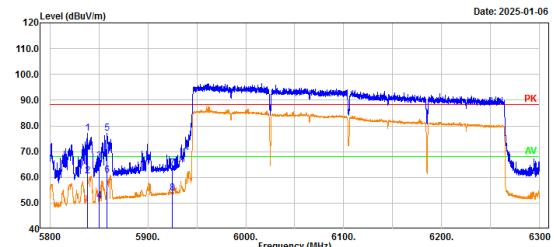


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	5838.40	75.51	1.60	77.11	88.20	11.09	Peak
2	5838.40	58.88	1.60	60.48	68.20	7.72	Average
3	5850.00	64.67	1.62	66.29	88.20	21.91	Peak
4	5850.00	49.21	1.62	50.83	68.20	17.37	Average
5	5858.30	75.57	1.63	77.20	88.20	11.00	Peak
6	5858.30	59.19	1.63	60.82	68.20	7.38	Average
7	5925.00	61.88	1.75	63.63	88.20	24.57	Peak
8	5925.00	52.15	1.75	53.90	68.20	14.30	Average

802.11 be320 mode, High Channel , Horizontal

Project No.: 2402Z106133E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11be320_U-NII 8 high Channel 6905MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2UUQ-2
Tester: Leo Xiao

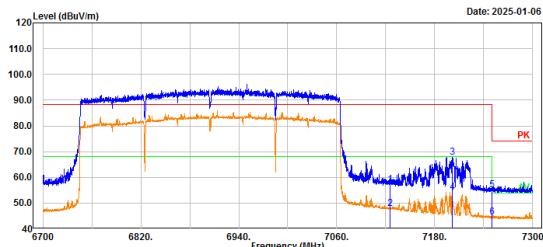


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	7125.00	53.15	4.15	57.30	88.20	30.90	Peak
2	7125.00	43.75	4.15	47.90	68.20	20.30	Average
3	7201.84	63.45	4.47	67.92	88.20	20.28	Peak
4	7201.84	49.78	4.47	54.25	68.20	13.95	Average
5	7250.00	50.27	4.68	54.95	74.00	19.05	Peak
6	7250.00	39.71	4.68	44.39	54.00	9.61	Average

802.11be320 mode, High Channel , Vertical

Project No.: 2402Z106133E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11be320_U-NII 8 high Channel 6905MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 2UUQ-2
Tester: Leo Xiao

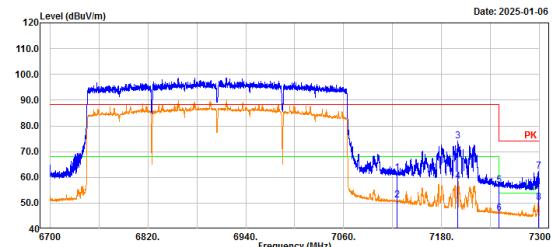


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	7125.00	57.69	4.15	61.84	88.20	26.36	Peak
2	7125.00	46.88	4.15	51.03	68.20	17.17	Average
3	7199.80	69.59	4.47	74.06	88.20	14.14	Peak
4	7199.80	54.01	4.47	58.48	68.20	9.72	Average
5	7250.00	52.15	4.68	56.83	74.00	17.17	Peak
6	7250.00	41.48	4.68	46.08	54.00	7.92	Average
7	7298.32	57.51	4.89	62.40	74.00	11.60	Peak
8	7298.32	45.40	4.89	50.29	54.00	3.71	Average


5G Wifi is transmitted simultaneously with 6G Wifi:

1-18GHz:

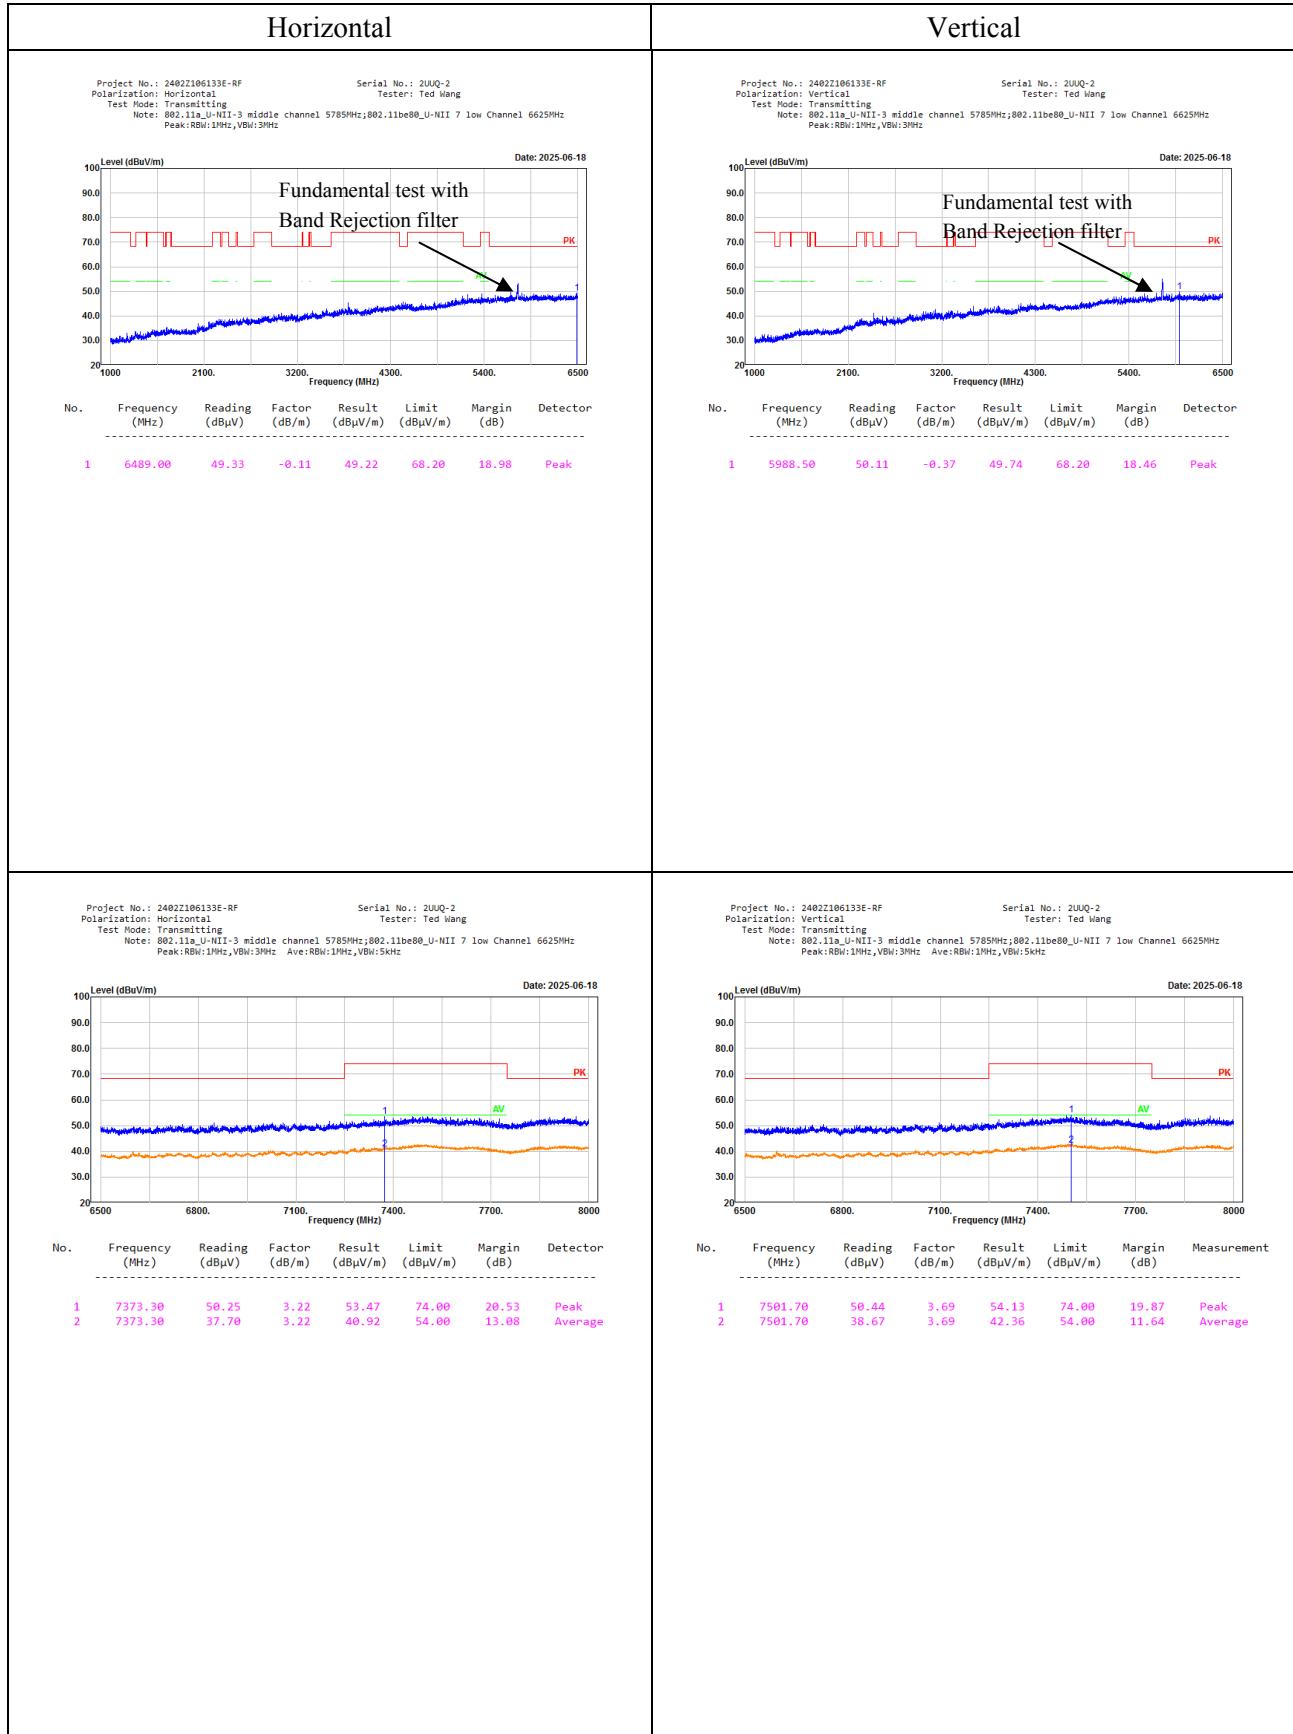

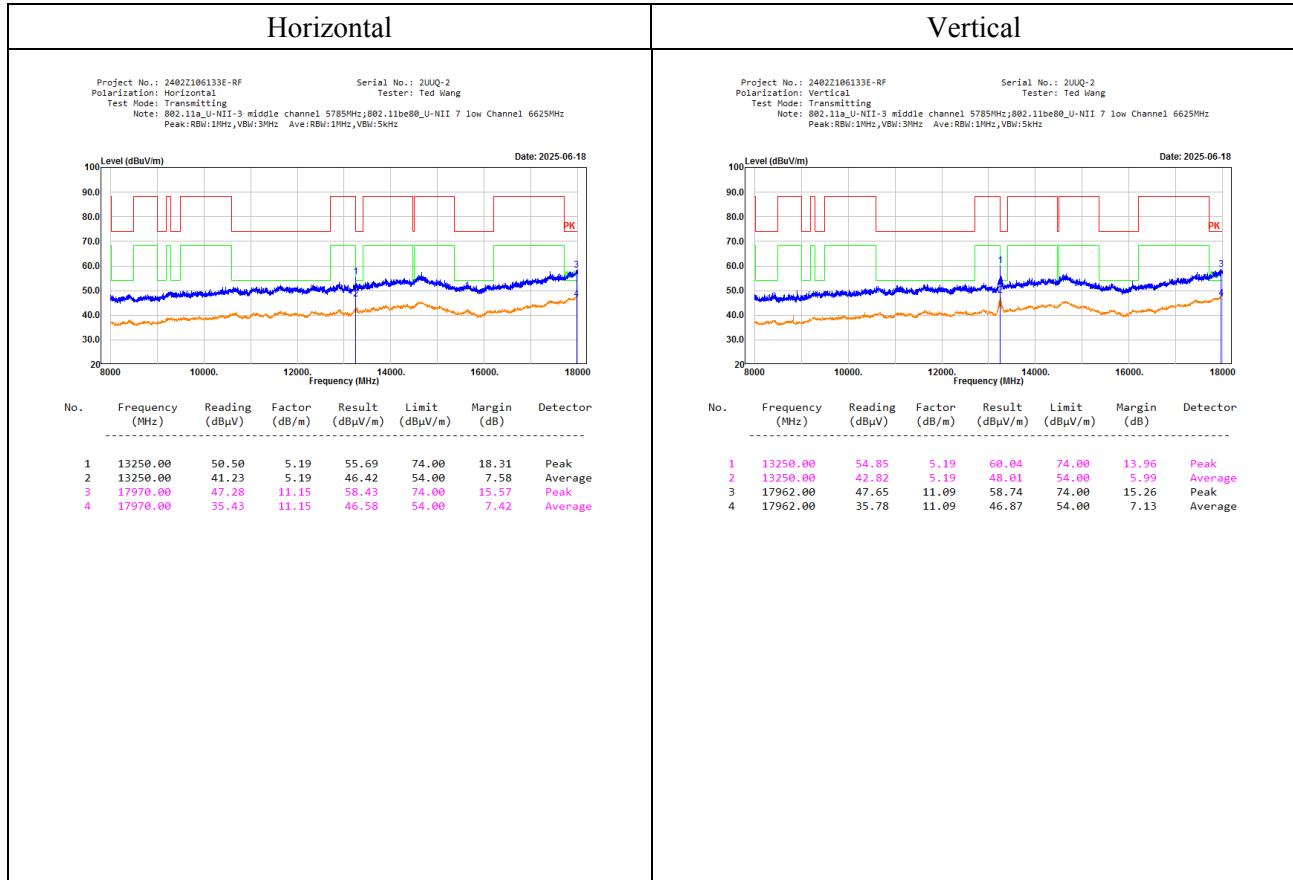

18-40GHz:

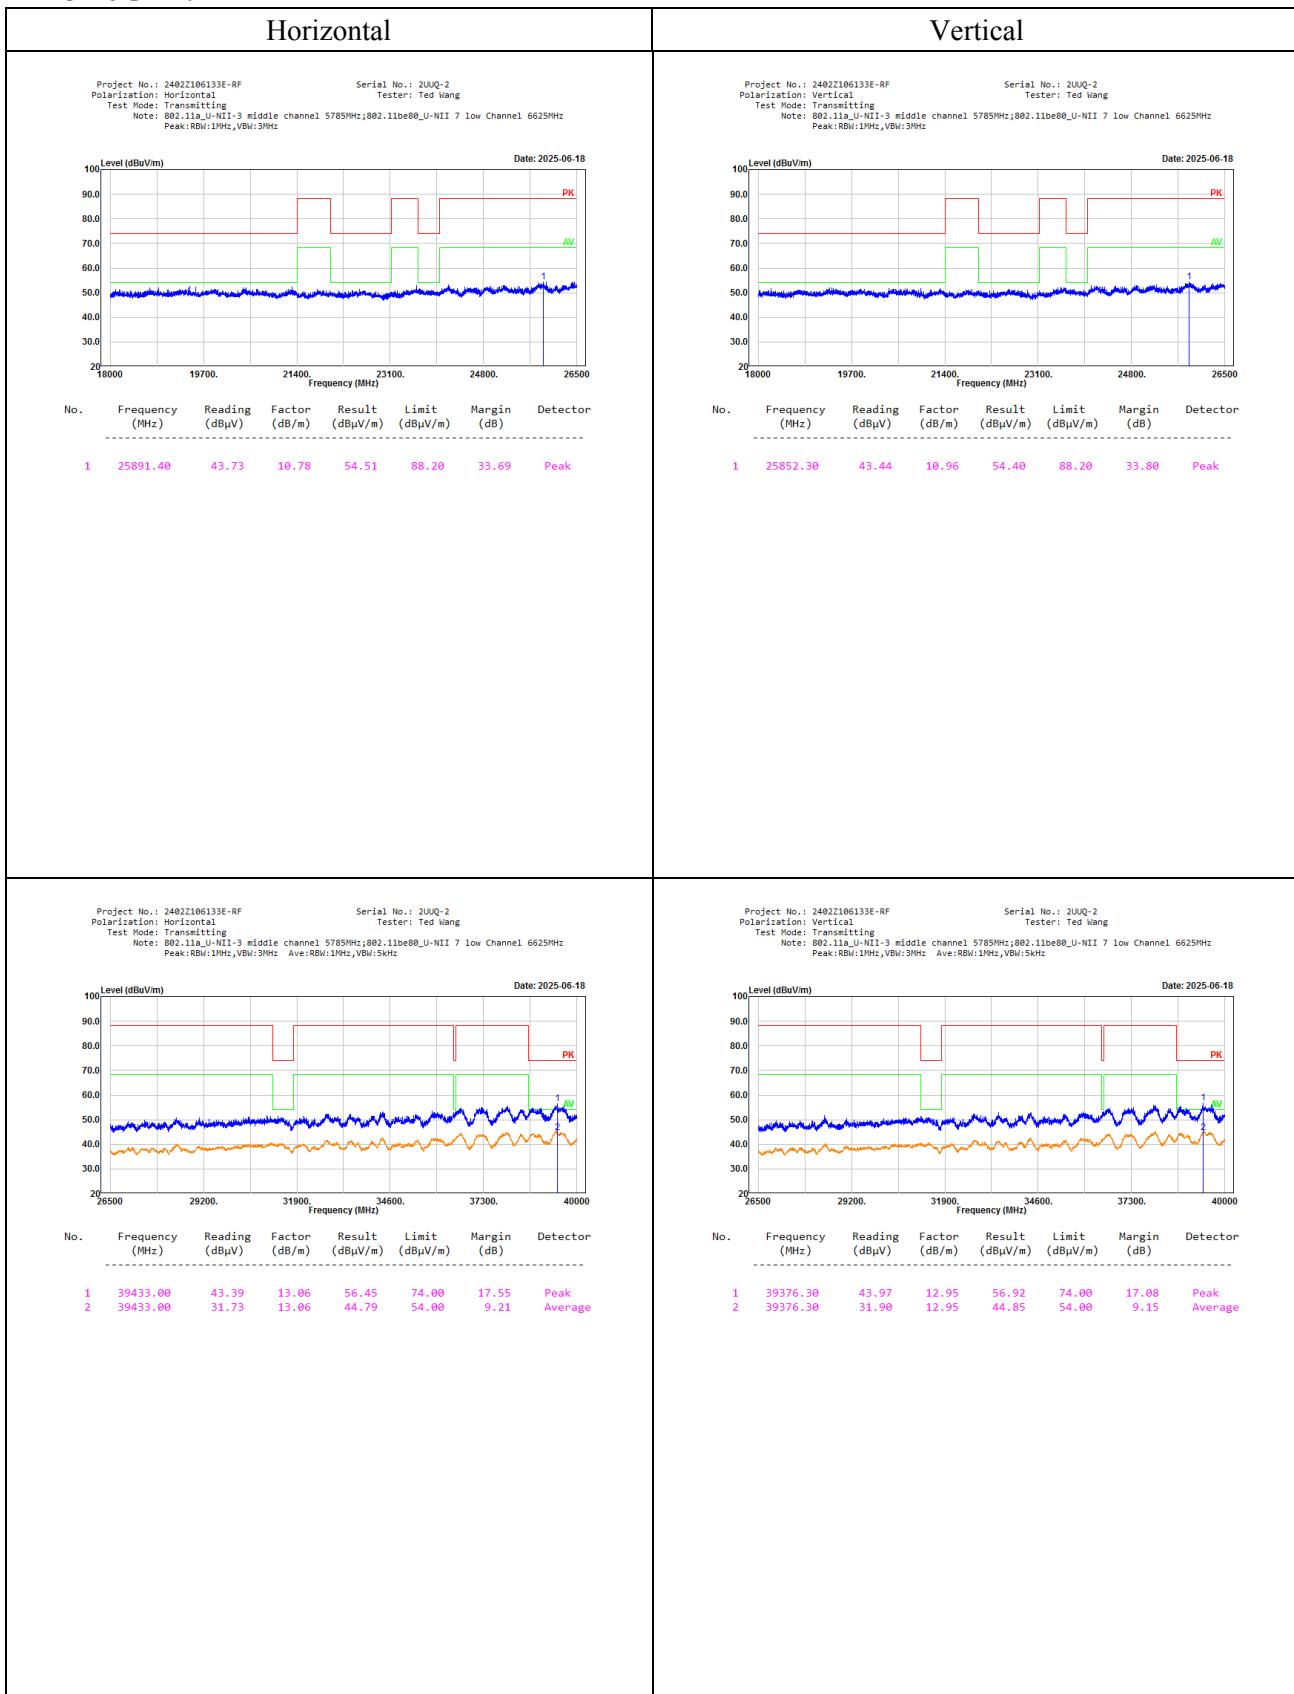

5.3 26dB Emission Bandwidth

Serial No.:	2UUQ-1	Test Date:	2024/12/25~2025/01/02
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jojo Zhou	Test Result:	/

Environmental Conditions:

Temperature: (°C):	24~25.4	Relative Humidity: (%)	39~45	ATM Pressure: (kPa)	101.2~102.8
------------------------------	---------	----------------------------------	-------	-------------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM503	2024/06/07	2025/06/06
R&S	Spectrum Analyzer	FSV40	101461	2024/09/05	2025/09/04

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5925-6425 MHz

Mode	Antenna	Test Frequency (MHz)	Result (MHz)
802.11be20	Chain 0	5955	22.723
		6175	22.773
		6415	23.373
802.11be40	Chain 0	5965	45.345
		6165	44.745
		6405	44.144
802.11be80	Chain 0	5985	89.690
		6145	87.087
		6385	88.689
802.11be160	Chain 0	6025	174.174
		6185	174.174
		6345	175.375
802.11be320	Chain 0	6105	339.540
		6265	342.743

6425-6525 MHz

Mode	Antenna	Test Frequency (MHz)	Result (MHz)
802.11be20	Chain 0	6435	22.823
		6475	23.073
		6515	22.973
802.11be40	Chain 0	6525	45.345
		6445	44.845
		6485	44.444
802.11be80	Chain 0	6545	88.889
		6465	91.091
802.11be160	Chain 0	6505	172.573
802.11be320	Chain 0	6425	345.946

6525-6875MHz


Mode	Antenna	Test Frequency (MHz)	Result (MHz)
802.11be20	Chain 0	6535	22.773
		6695	23.423
		6855	23.273
802.11be40	Chain 0	6565	43.644
		6685	44.745
		6845	44.645
802.11be80	Chain 0	6865	91.291
		6625	89.690
		6705	89.890
		6785	91.091
802.11be160	Chain 0	6825	173.774
		6665	173.774
802.11be320	Chain 0	6585	342.743
		6745	346.747

6875-7125 MHz

Mode	Antenna	Test Frequency (MHz)	Result (MHz)
802.11be20	Chain 0	6875	23.123
		6895	23.724
		6995	23.524
		7095	23.073
802.11be40	Chain 0	6885	44.444
		6925	44.444
		7005	44.344
		7085	44.444
802.11be80	Chain 0	6945	89.489
		7025	89.289
802.11be160	Chain 0	6985	170.971
802.11be320	Chain 0	6905	345.145


5925-6425 MHz

802.11be20_5955MHz_Chain 0

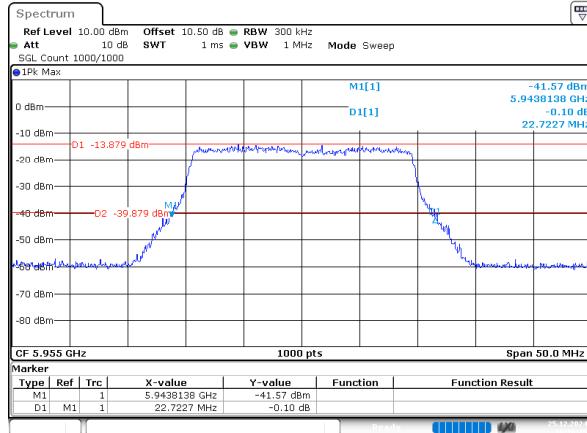


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 25.DEC.2024 16:16:25

802.11be20_6175MHz_Chain 0

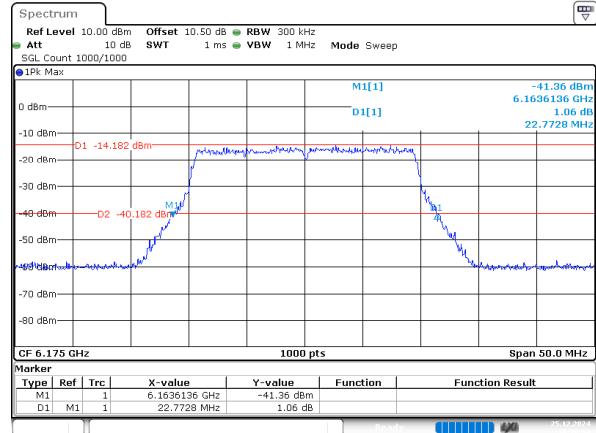


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 25.DEC.2024 16:20:54

802.11be20_6415MHz_Chain 0

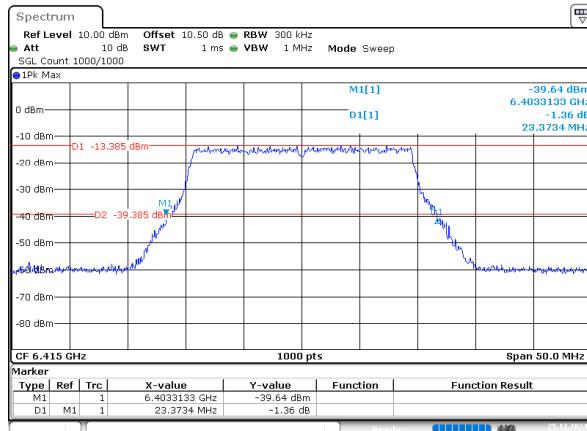


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 25.DEC.2024 16:22:49

802.11be40_5965MHz_Chain 0

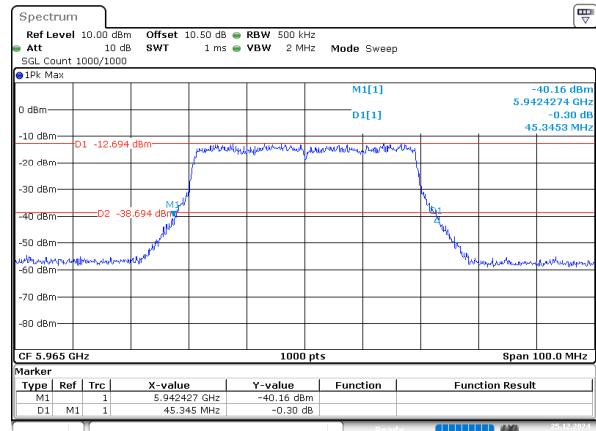


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 25.DEC.2024 17:09:33

802.11be40_6165MHz_Chain 0

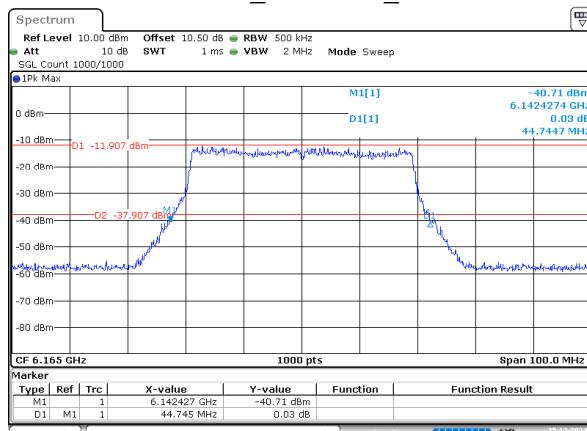


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 25.DEC.2024 17:18:06

802.11be40_6405MHz_Chain 0

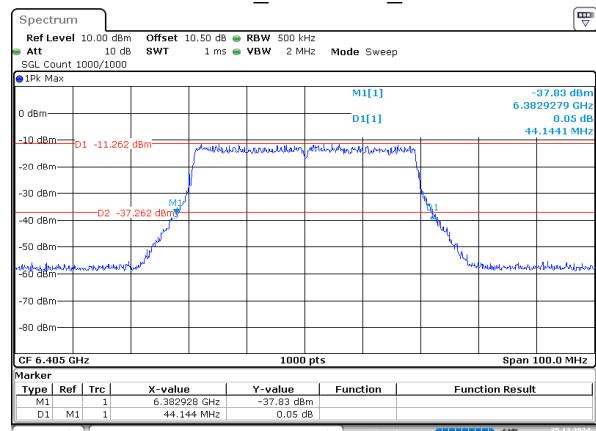


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 25.DEC.2024 17:23:01

802.11be80_5985MHz_Chain 0

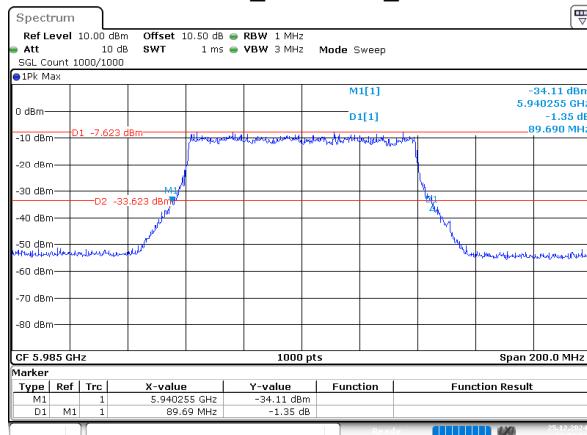


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 25.DEC.2024 18:03:11

802.11be80_6145MHz_Chain 0

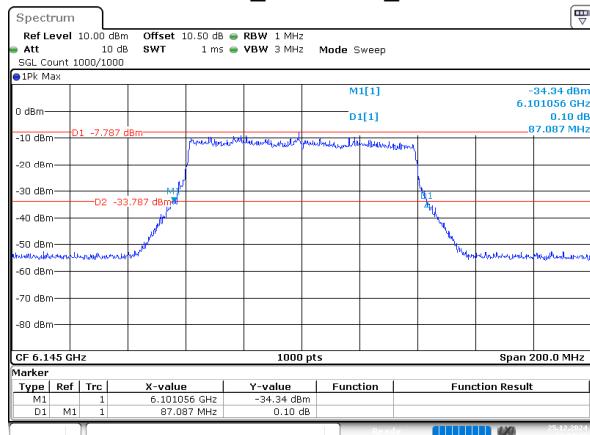


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 25.DEC.2024 18:04:49

802.11be80_6385MHz_Chain 0

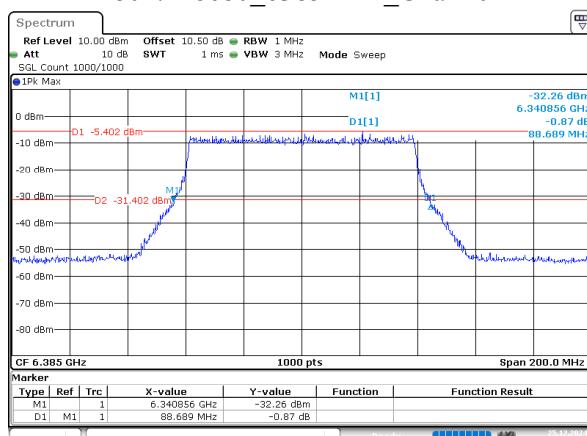


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 25.DEC.2024 18:07:40

802.11be160_6025MHz_Chain 0

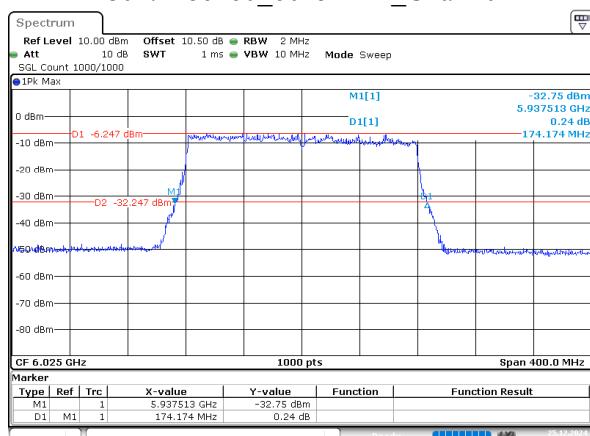


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 25.DEC.2024 19:16:16

802.11be160_6185MHz_Chain 0

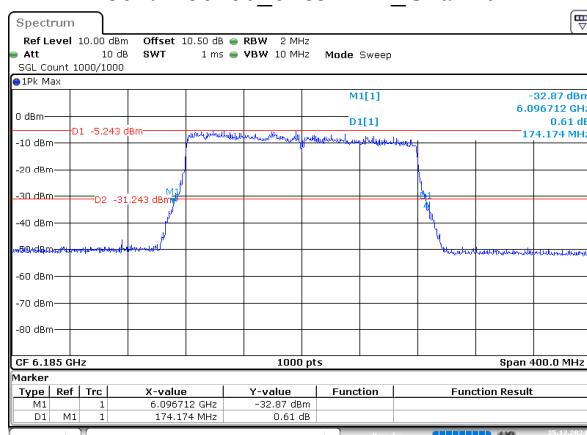


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 25.DEC.2024 19:17:57

802.11be160_6345MHz_Chain 0

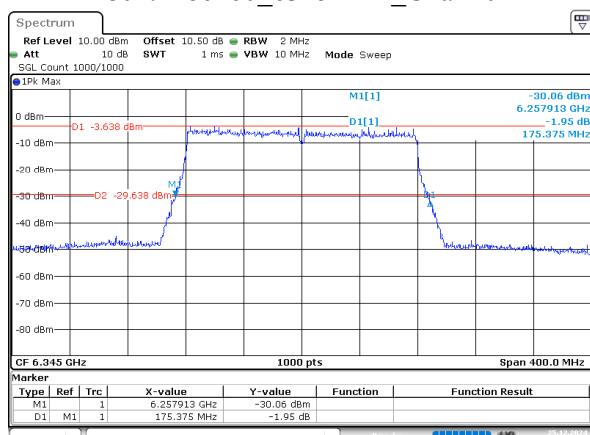


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 25.DEC.2024 19:09:58

802.11be320_6105MHz_Chain 0

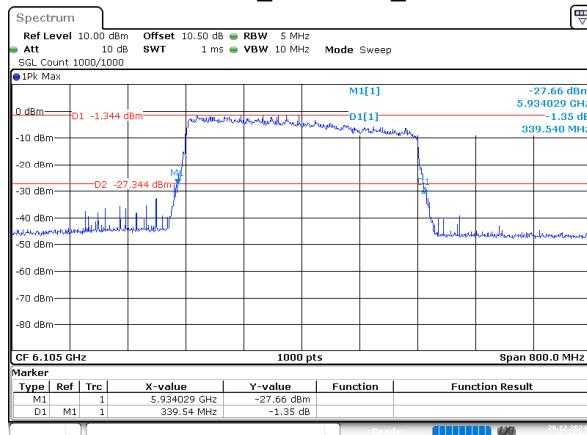

ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 26.DEC.2024 19:23:56


802.11be320_6265MHz_Chain 0

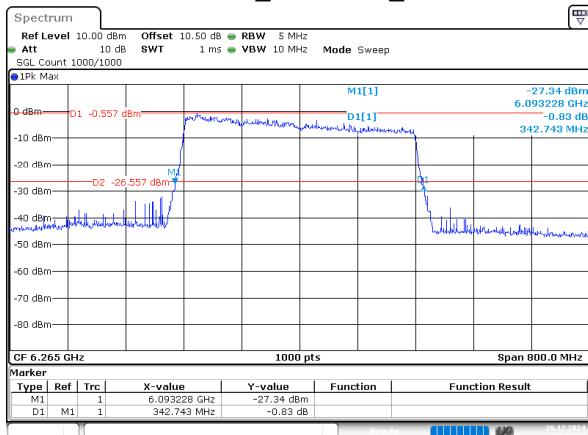

ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 26.DEC.2024 19:29:14


6425-6525 MHz

802.11be20_6435MHz_Chain 0

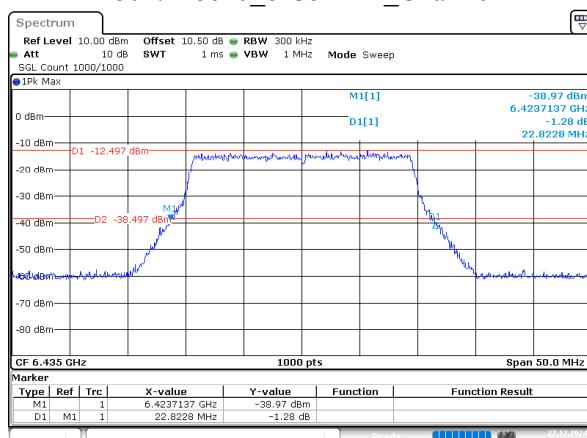


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 27.DEC.2024 16:31:58

802.11be20_6475MHz_Chain 0

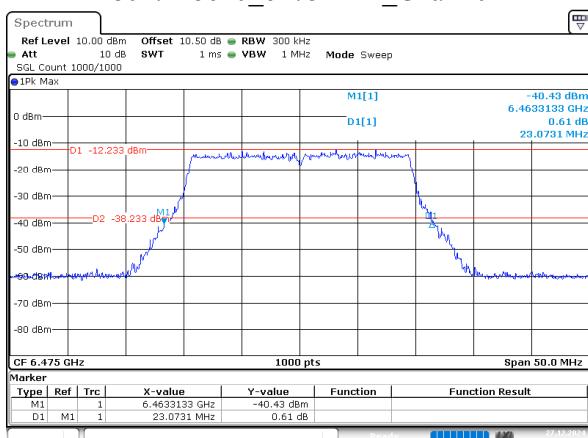


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 27.DEC.2024 16:34:12

802.11be20_6515MHz_Chain 0

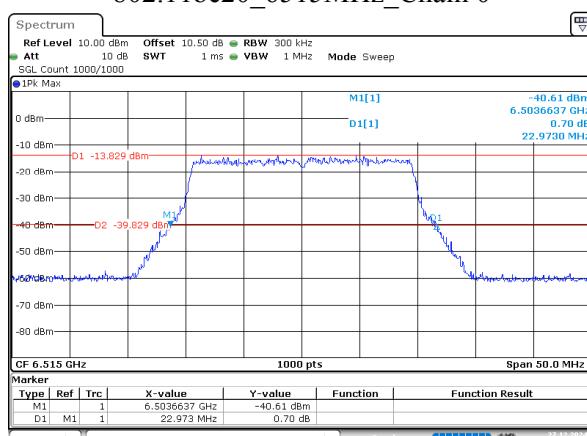


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 27.DEC.2024 16:40:08

802.11be40_6525MHz_Chain 0

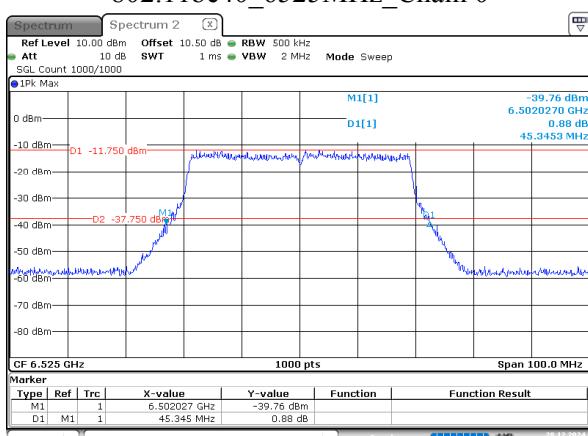


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 28.DEC.2024 13:17:49

802.11be40_6445MHz_Chain 0

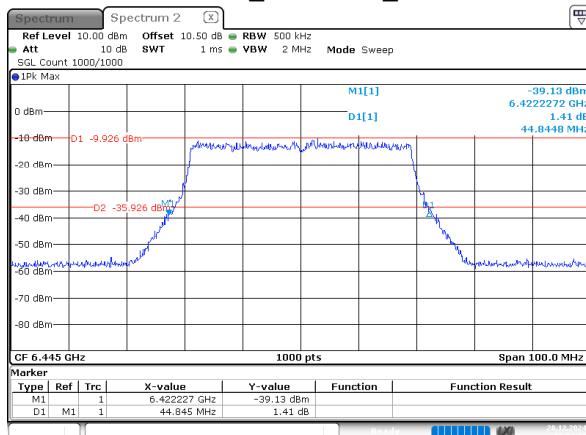


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 28.DEC.2024 13:04:31

802.11be80_6545MHz_Chain 0

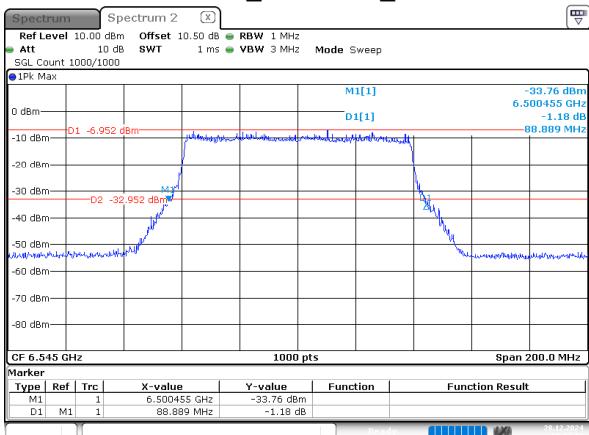


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 28.DEC.2024 13:12:14

802.11be80_6465MHz_Chain 0

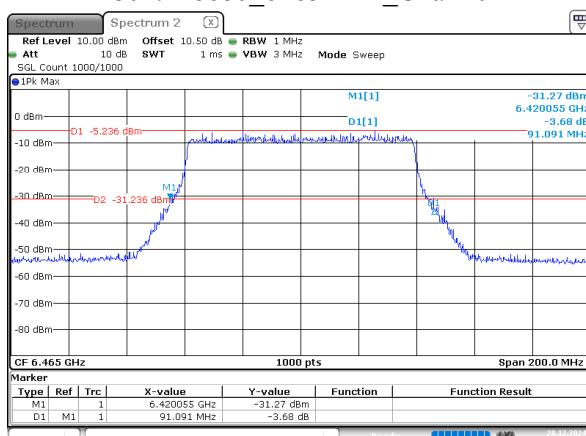


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 28.DEC.2024 13:10:51

802.11be160_6505MHz_Chain 0

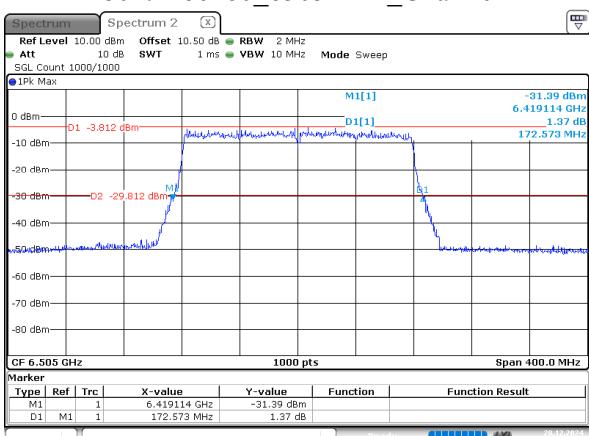

ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 28.DEC.2024 13:34:54


802.11be320_6425MHz_Chain 0

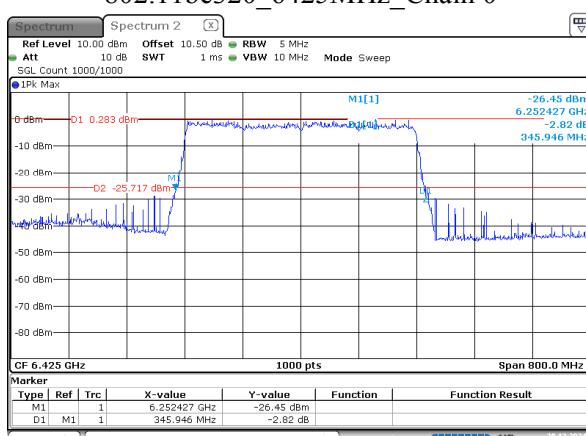

ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 28.DEC.2024 13:55:41


6525-6875MHz

802.11be20_6535MHz_Chain 0

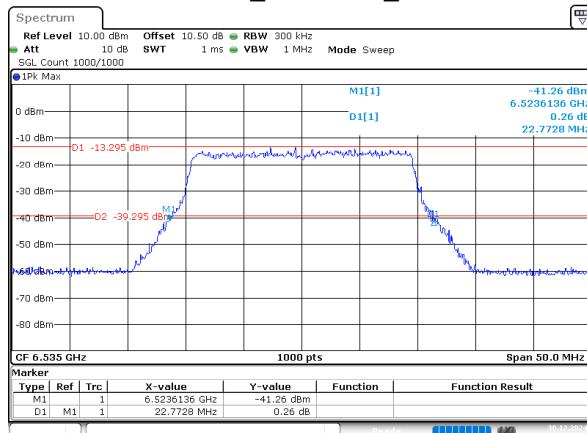


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 30-DEC-2024 13:30:37

802.11be20_6695MHz_Chain 0

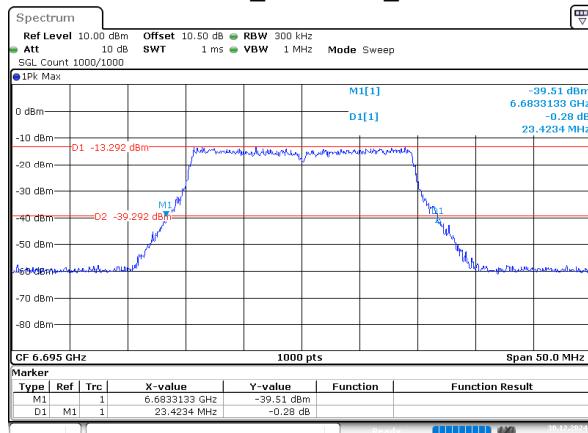


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 30-DEC-2024 13:33:20

802.11be20_6855MHz_Chain 0

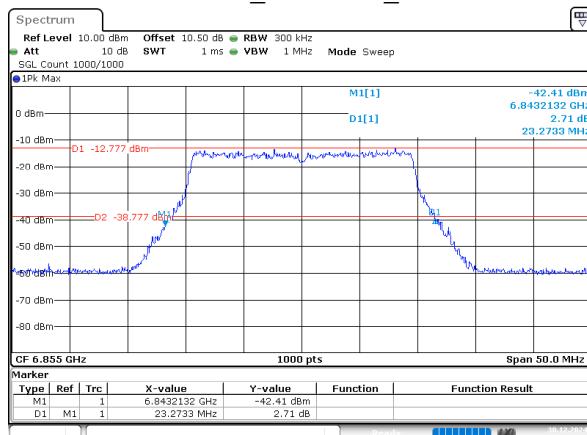


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 30-DEC-2024 13:35:35

802.11be40_6565MHz_Chain 0

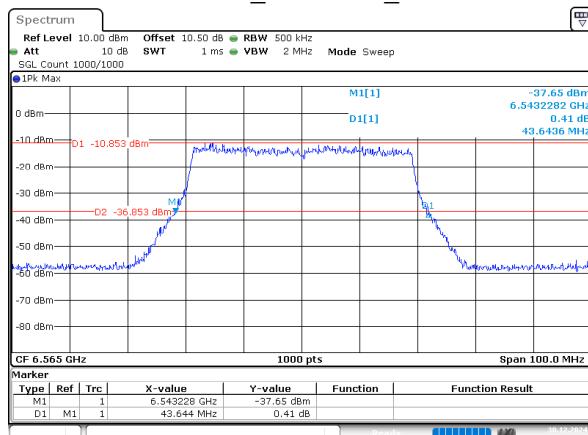


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 30-DEC-2024 13:38:23

802.11be40_6685MHz_Chain 0

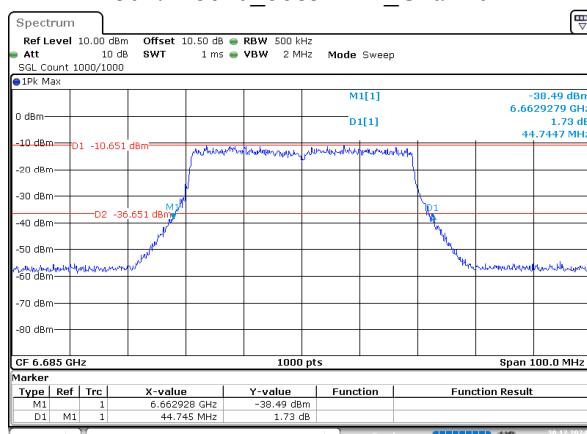


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 30-DEC-2024 13:39:57

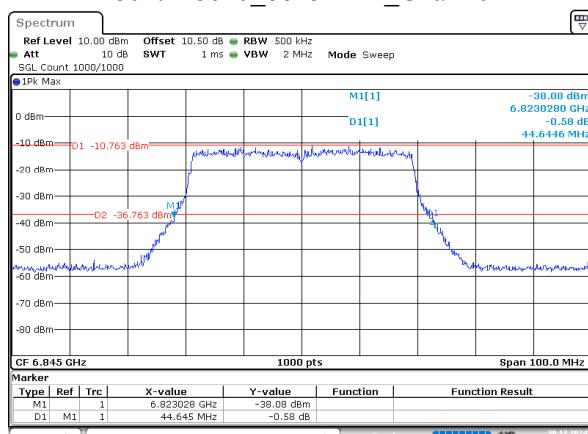


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 30-DEC-2024 13:41:54

802.11be80_6865MHz_Chain 0

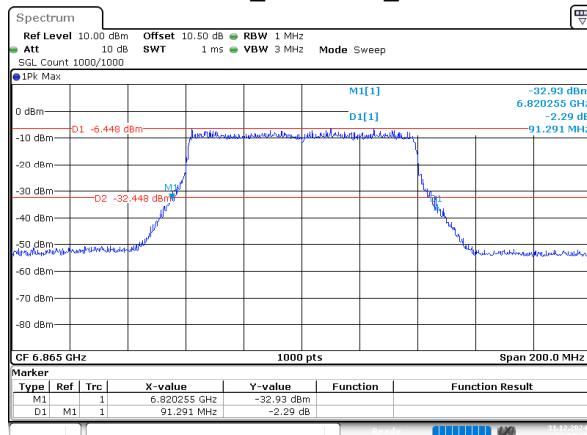


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 31.DEC.2024 11:04:45

802.11be80_6625MHz_Chain 0

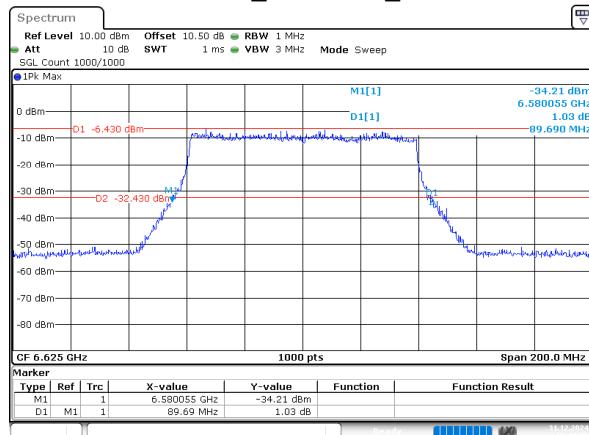


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 31.DEC.2024 10:48:55

802.11be80_6705MHz_Chain 0

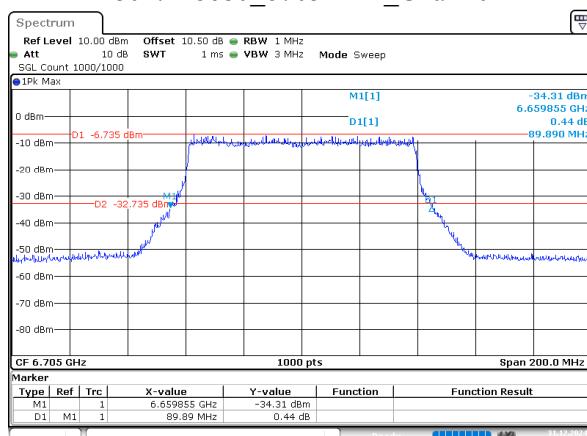


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 31.DEC.2024 10:53:15

802.11be80_6785MHz_Chain 0

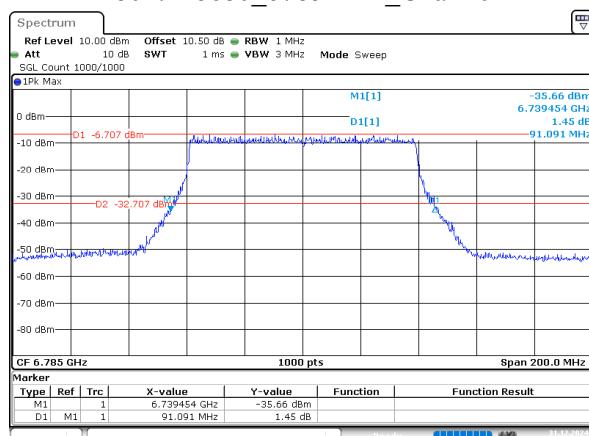


ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 31.DEC.2024 10:58:36

802.11be160_6825MHz_Chain 0

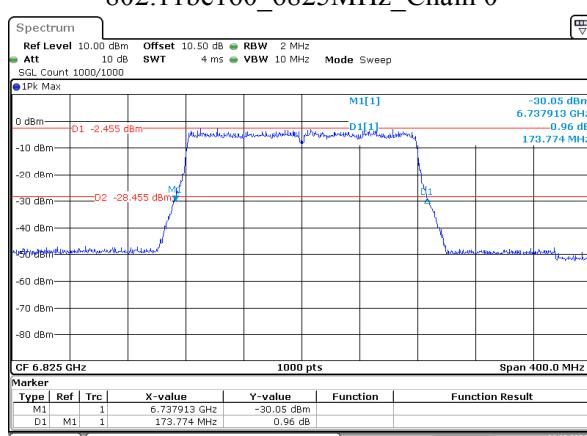

ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 31.DEC.2024 11:12:05

802.11be160_6665MHz_Chain 0

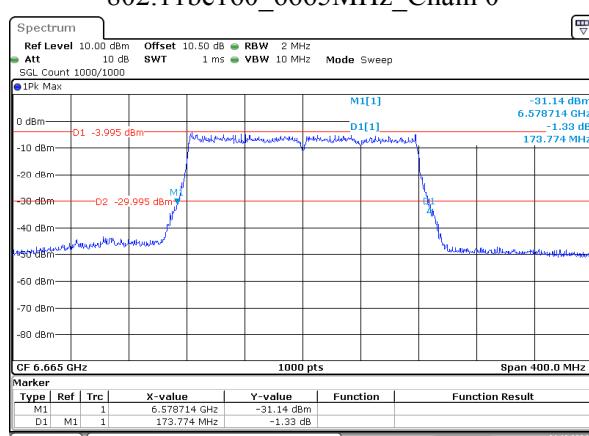

ProjectNo.:2402Z106133E-RF Tester:Jojo Zhou
Date: 31.DEC.2024 10:36:36