



## TEST REPORT

**Applicant:** 8devices

**FCC:** Antakalnio 17 - 6 Vilnius Lithuania

**Address:** IC: Antakalnio g. 17-6 Vilnius Vilnius County LT-10312 Lithuania

**Product Name:** Tachyon

**FCC ID:** Z9W-TNA303X

**IC:** 11468A-TNA303

**HVIN:** TNA-303

**47 CFR Part 15, Subpart C(15.255)**

**Standard(s):**  
ANSI C63.10-2020  
RSS-210 Issue 11, June 25, 2024  
RSS-Gen, Issue 5, February 2021 Amendment 2

**Report Number:** 2402A108372E-RF-00A

**Report Date:** 2025/7/28

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

**Reviewed By:** Pedro Yun

**Approved By:** Gavin Xu

Title: Project Engineer

Title: RF Supervisor

---

**Bay Area Compliance Laboratories Corp. (Dongguan)**  
No.12, Pulong East 1<sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

[www.baclcorp.com.cn](http://www.baclcorp.com.cn)

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

## CONTENTS

<b>DOCUMENT REVISION HISTORY .....</b>	<b>4</b>
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
<b>1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST .....</b>	<b>5</b>
<b>1.2 ACCESSORY INFORMATION.....</b>	<b>5</b>
<b>1.3 ANTENNA INFORMATION DETAIL▲.....</b>	<b>6</b>
<b>1.4 EQUIPMENT MODIFICATIONS .....</b>	<b>6</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
EIRP AND PEAK CONDUCTED OUTPUT POWER .....	7
<b>3. DESCRIPTION OF TEST CONFIGURATION .....</b>	<b>8</b>
<b>3.1 EUT OPERATION CONDITION.....</b>	<b>8</b>
<b>3.2 EUT EXERCISE SOFTWARE.....</b>	<b>8</b>
<b>3.3 SUPPORT EQUIPMENT LIST AND DETAILS .....</b>	<b>8</b>
<b>3.4 SUPPORT CABLE LIST AND DETAILS .....</b>	<b>8</b>
<b>3.5 BLOCK DIAGRAM OF TEST SETUP .....</b>	<b>9</b>
<b>3.6 TEST FACILITY.....</b>	<b>10</b>
<b>3.7 MEASUREMENT UNCERTAINTY .....</b>	<b>10</b>
<b>4. REQUIREMENTS TEST RESULTS .....</b>	<b>11</b>
<b>4.1 AC LINE CONDUCTED EMISSIONS.....</b>	<b>11</b>
4.1.1 Applicable Standard.....	11
4.1.2 EUT Setup.....	13
3.1.3 EMI Test Receiver Setup .....	13
4.1.4 Test Procedure .....	14
4.1.5 Corrected Amplitude & Margin Calculation.....	14
4.1.6 Test Data.....	15
<b>4.2 EIRP AND PEAK CONDUCTED OUTPUT POWER .....</b>	<b>18</b>
4.2.1 Applicable Standard.....	18
4.2.2 EUT Setup.....	20
4.2.3 Test Procedure .....	20
4.2.4 Test Result .....	22
<b>4.3 EMISSION BANDWIDTH.....</b>	<b>32</b>
4.3.1 Applicable Standard.....	32
4.3.2 EUT Setup.....	33
4.3.3 Test Procedure .....	33
4.3.4 Test Data.....	35
<b>4.4 RADIATED SPURIOUS EMISSIONS.....</b>	<b>47</b>
4.4.1 Applicable Standard.....	47
4.4.2 EUT Setup.....	47

4.4.3 EMI Test Receiver & Spectrum Analyzer Setup .....	50
4.4.4 Test Procedure .....	50
4.4.5 Corrected Amplitude & Margin Calculation.....	51
4.4.6 Test Data .....	53
<b>4.5 FREQUENCY STABILITY.....</b>	<b>100</b>
4.5.1 Applicable Standard.....	100
4.5.2 EUT Setup Block Diagram .....	100
4.5.3 Test Procedure .....	100
4.5.4 Test Result .....	101
<b>4.6 GROUP INSTALLTION.....</b>	<b>103</b>
4.6.1 Applicable Standard.....	103
4.6.2 Judgment.....	103
<b>4.7 ANTENNA REQUIREMENT.....</b>	<b>104</b>
4.7.1 Applicable Standard.....	104
4.7.2 Judgment.....	105
<b>EXHIBIT A - EUT PHOTOGRAPHS.....</b>	<b>106</b>
<b>EXHIBIT B - TEST SETUP PHOTOGRAPHS .....</b>	<b>107</b>
<b>EXHIBIT C - RF EXPOSURE EVALUATION.....</b>	<b>108</b>
<b>MAXIMUM PERMISSIBLE EXPOSURE (MPE) .....</b>	<b>108</b>
<b>APPLICABLE STANDARD.....</b>	<b>108</b>
<b>PROCEDURE .....</b>	<b>108</b>
<b>CALCULATED RESULT.....</b>	<b>108</b>
<b>ELECTRIC FIELD STRENGTH LEVELS, MAGNETIC FIELD STRENGTH LEVELS AND POWER DENSITY LEVELS (10 MHZ TO 300 GHZ).....</b>	<b>109</b>
<b>APPLICABLE STANDARD.....</b>	<b>109</b>
<b>PROCEDURE .....</b>	<b>109</b>
<b>CALCULATED RESULT.....</b>	<b>109</b>

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2402A108372E-RF-00A	Original Report	2025/7/28

## 1. GENERAL INFORMATION

### 1.1 General Description of Equipment under Test

<b>EUT Name:</b>	Tachyon
<b>EUT Model:</b>	TNA-303X
<b>Equipment Type:</b>	fixed point-to-point Outdoor equipment
<b>Operation Frequency Range:</b>	58.32-69.12 GHz
<b>Modulation Type:</b>	$\pi/2$ -BPSK, $\pi/2$ -QPSK, $\pi/2$ -16QAM
<b>Maximum Peak Output Power (EIRP):</b>	54.72dBm
<b>Emission Designator:</b>	G1D
<b>Rated Input Voltage:</b>	DC 48V From POE
<b>Serial Number:</b>	2VJ1-4
<b>EUT Received Date:</b>	2024/12/6
<b>EUT Received Status:</b>	Good

### 1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

### 1.3 Antenna Information Detail▲

Antenna	Antenna Type	input impedance (Ohm)	Antenna Gain	Frequency Range
Basic Model	Array Antenna	Unknown	16.2dBi	56-71 GHz

The Method of §15.203 Compliance:

- Antenna must be permanently attached to the unit.
- Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna	Antenna Type	input impedance (Ohm)	Antenna Gain	Frequency Range
Kit:TNA-AK-100	Array Antenna +Parabolic Antenna	Unknown	33dBi	56-71 GHz
Kit:TNA-AK-150		Unknown	37dBi	56-71 GHz
Kit:TNA-AK-300		Unknown	40dBi	56-71 GHz
Kit:TNA-AK-S-45		Unknown	27dBi	56-71 GHz
Kit:TNA-AK-S-90		Unknown	27dBi	56-71 GHz

The Method of §15.203 Compliance:

- Antenna must be permanently attached to the unit.
- Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

### 1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

## 2. SUMMARY OF TEST RESULTS

Standard(s)/Rule(s)	Description of Test	Result
§15.207(a) RSS-Gen Clause 8.8	AC Line Conducted Emissions	Compliant
§15.255(c)(1)(ii) RSS-210 Annex J	EIRP and Peak Conducted Output power	Compliant
§15.215, §15.255 (e) RSS-Gen Clause 6.7	Emission Bandwidth	Compliant
§15.205, §15.209, §15.255(d) RSS-Gen Clause 8.10 RSS-210, Annex J	Radiated Spurious Emissions	Compliant
§15.255 (f) RSS-210 Annex J	Frequency Stability	Compliant
§15.255 (h) RSS-210 Annex J	Group Installation	Compliant
§15.203 RSS-Gen Clause 6.8	Antenna Requirement	Compliant

Note 1: For AC line conducted emissions, the maximum output power mode and channel was tested.

Note 2: For Radiated Spurious Emissions 9kHz~ 40GHz, the maximum output power mode and channel was tested.

Note 3: Only the Basic Model was tested for AC line conducted emissions/bandwidth/frequency stability tests, the all combination was tested for Peak EIRP and Radiated Spurious Emissions tests.

### 3. DESCRIPTION OF TEST CONFIGURATION

#### 3.1 EUT Operation Condition

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

Channel	Frequency (GHz)	Channel	Frequency (GHz)
1	<b>58.32</b>	4	<b>64.80</b>
2	60.48	5	66.96
3	62.64	6	<b>69.12</b>

Note:

The device supports  $\pi/2$ -BPSK,  $\pi/2$ -QPSK,  $\pi/2$ -16QAM modulation, test was performed with all the modulation on the frequencies in bold.

#### 3.2 EUT Exercise Software

Software "Putty.exe" was used in test. The EUT is transmitting in default power level.

#### 3.3 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
CHANNEL WELL TECHNOLOGY	PoE	NET-P15-56IN	NET-P15-56IN
Lenovo	Laptop	E450	PF-OMRADG

#### 3.4 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	No	No	1.5	EUT	POE
RJ45 Cable	No	No	10	EUT	Laptop
Earth Wire	No	No	1.5	EUT	Reference ground

### 3.5 Block Diagram of Test Setup

AC Line Conducted emissions:

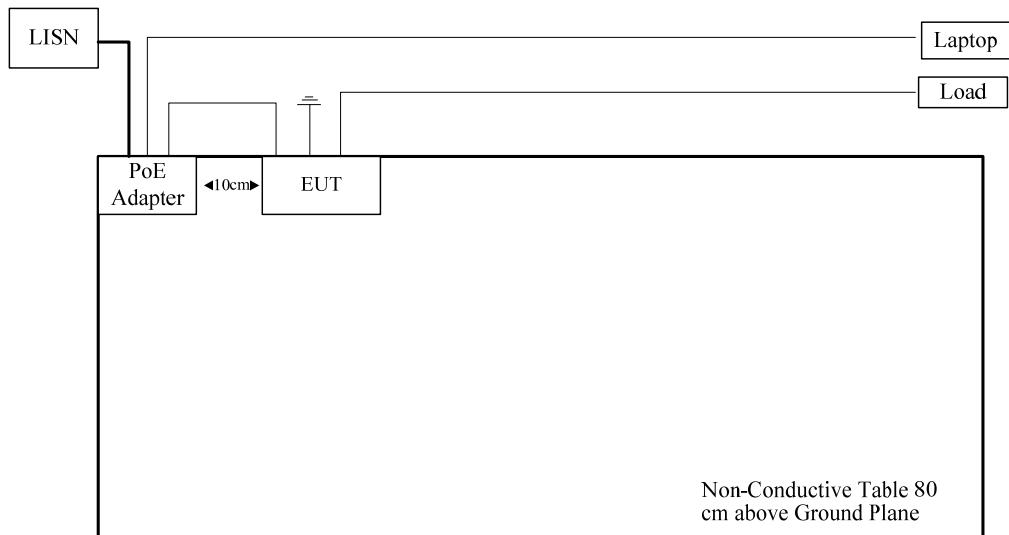

Radiated Spurious emissions:

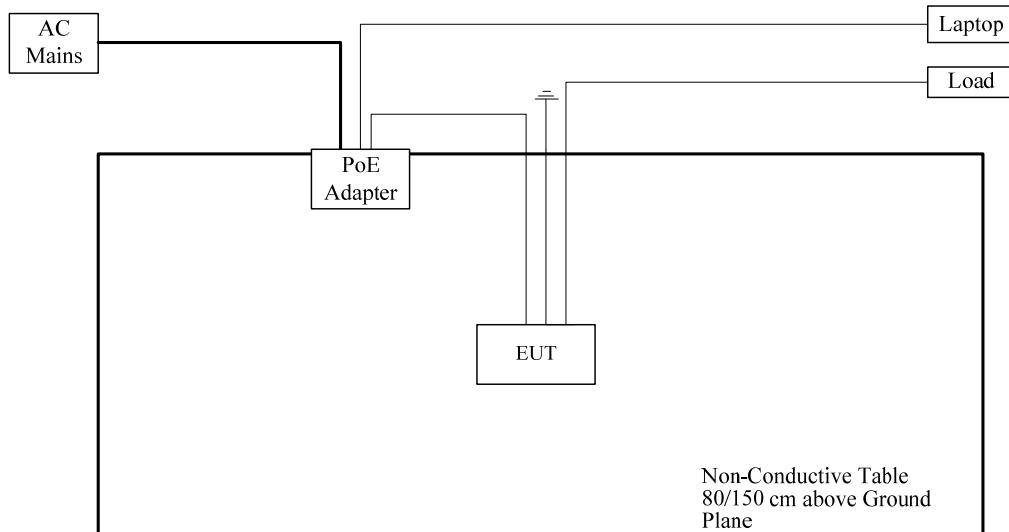

### 3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

### 3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz: 5.47 dB, 26.5GHz~40GHz: 5.63 dB 40~60G: 4.83dB, 60G~90G: 4.94dB, 90G~140G: 5.46dB, 140G~220G: 6.00dB, 220G~325G: 7.35dB
EIRP	4.94dB
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

## 4. REQUIREMENTS TEST RESULTS

### 4.1 AC Line Conducted Emissions

#### 4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtainig their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

## RSS-Gen Clause 8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50  $\mu$ H / 50  $\Omega$  line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

**Table 4 – AC power-line conducted emissions limits**

<b>Frequency (MHz)</b>	<b>Conducted limit (dB<math>\mu</math>V)</b>	
	<b>Quasi-peak</b>	<b>Average</b>
0.15 - 0.5	66 to 56 <sup>1</sup>	56 to 46 <sup>1</sup>
0.5 – 5	56	46
5 – 30	60	50


**Note 1:** The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

(a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.

(b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

#### 4.1.2 EUT Setup

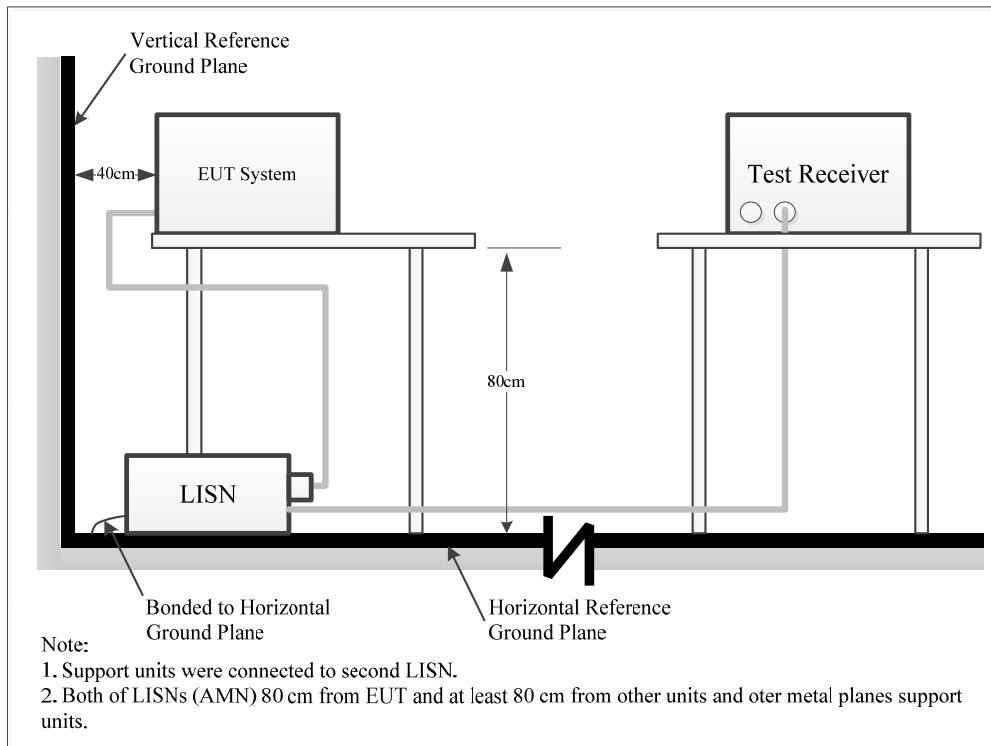

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207, RSS-Gen limits.

The spacing between the peripherals was 10 cm.

#### 3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

#### 4.1.4 Test Procedure

During the conducted emission test, the EUT was connected to the outlet of the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase ("hot") line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

#### 4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The "Margin" column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

**4.1.6 Test Data**

Serial Number:	2VJ1-4	Test Date:	2025/1/24
Test Site:	CE	Test Mode:	Transmitting
Tester:	Yukin Qiu	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	21.4	Relative Humidity: (%)	58	ATM Pressure: (kPa)	100.9
----------------------	------	------------------------------	----	------------------------	-------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2024/9/5	2025/9/4
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2024/9/5	2025/9/4
R&S	EMI Test Receiver	ESCI	100035	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A


\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

Note:  $\pi/2$ -QPSK, 64.8GHz was tested.

Project No.: 2402A108372E  
Port: Line  
Test Mode: Transmitting  
IF B/W 9kHz PK/AV


Serial No.: 2VJ1-4  
Tester: Yukin Qiu

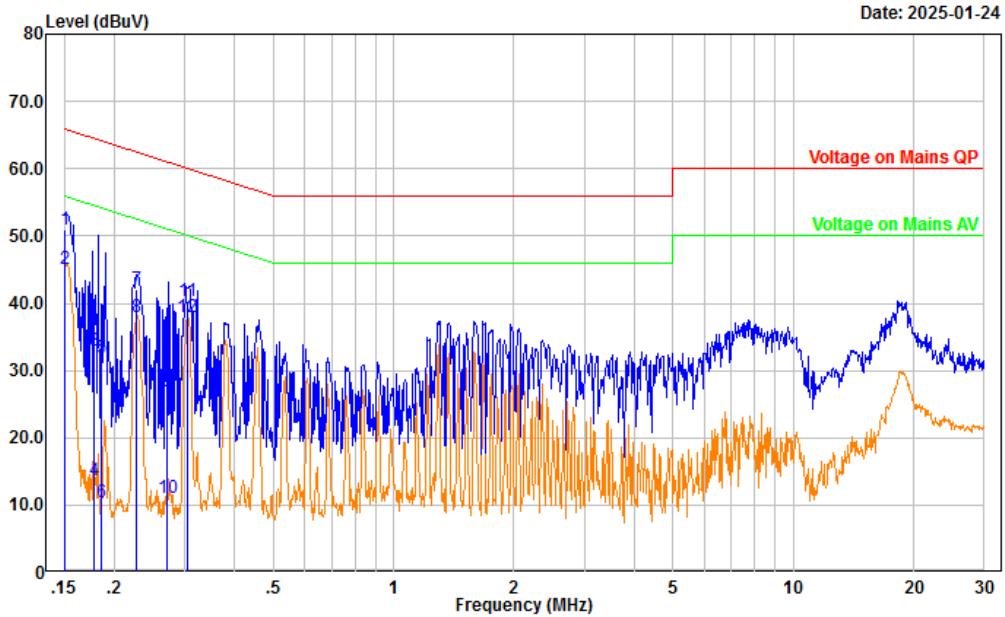

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
<hr/>							
1	0.151	40.22	10.75	50.97	65.94	14.97	QP
2	0.151	34.28	10.75	45.03	55.94	10.91	Average
3	0.178	22.19	10.81	33.00	64.56	31.56	QP
4	0.178	2.84	10.81	13.65	54.56	40.91	Average
5	0.185	21.11	10.82	31.93	64.25	32.32	QP
6	0.185	-0.48	10.82	10.34	54.25	43.91	Average
7	0.228	31.21	10.84	42.05	62.52	20.47	QP
8	0.228	27.10	10.84	37.94	52.52	14.58	Average
9	0.271	16.07	10.83	26.90	61.07	34.17	QP
10	0.271	0.17	10.83	11.00	51.07	40.07	Average
11	0.304	29.52	10.82	40.34	60.13	19.79	QP
12	0.304	27.06	10.82	37.88	50.13	12.25	Average

Project No.: 2402A108372E  
Port: neutral  
Test Mode: Transmitting  
IF B/W 9kHz PK/AV

Serial No.: 2VJ1-4  
Tester: Yukin Qiu

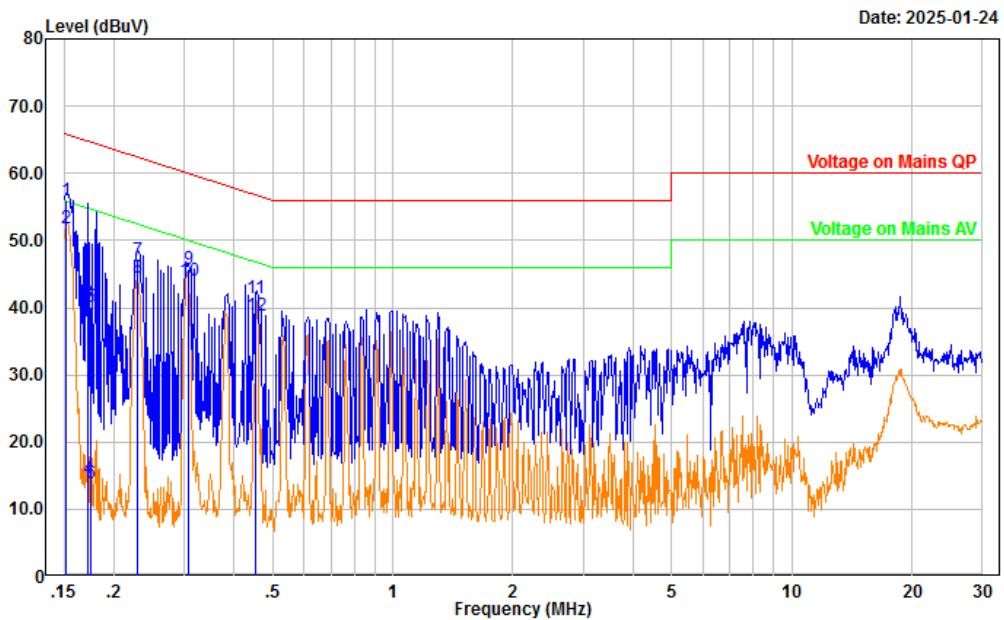

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.151	45.00	10.85	55.85	65.93	10.08	QP
2	0.151	40.96	10.85	51.81	55.93	4.12	Average
3	0.172	29.97	10.85	40.82	64.88	24.06	QP
4	0.172	3.61	10.85	14.46	54.88	40.42	Average
5	0.175	29.36	10.85	40.21	64.70	24.49	QP
6	0.175	2.99	10.85	13.84	54.70	40.86	Average
7	0.229	36.16	10.83	46.99	62.47	15.48	QP
8	0.229	33.61	10.83	44.44	52.47	8.03	Average
9	0.308	34.95	10.78	45.73	60.03	14.30	QP
10	0.308	33.18	10.78	43.96	50.03	6.07	Average
11	0.454	30.56	10.76	41.32	56.81	15.49	QP
12	0.454	28.10	10.76	38.86	46.81	7.95	Average

## 4.2 EIRP and Peak Conducted Output power

### 4.2.1 Applicable Standard

#### FCC §15.255(c) Radiated power limits.

Within the 57-71 GHz band, emission levels shall not exceed the following equivalent isotropically radiated power (EIRP):

(1) Devices other than field disturbance sensors shall comply with one of the following power limits, as measured during the transmit interval:

(i) The average power of any emission shall not exceed 40 dBm and the peak power of any emission shall not exceed 43 dBm; or

(ii) For fixed point-to-point transmitters located outdoors, the average power of any emission shall not exceed 82 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi. The peak power of any emission shall not exceed 85 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi.

(A) The provisions in this paragraph (c) for reducing transmit power based on antenna gain shall not require that the power levels be reduced below the limits specified in paragraph(c)(1)(i) of this section.

(B) The provisions of § 15.204(c)(2) and (4) that permit the use of different antennas of the same type and of equal or less directional gain do not apply to intentional radiator systems operating under this provision. In lieu thereof, intentional radiator systems shall be certified using the specific antenna(s) with which the system will be marketed and operated. Compliance testing shall be performed using the highest gain and the lowest gain antennas for which certification is sought and with the intentional radiator operated at its maximum available output power level. The responsible party, as defined in § 2.909 of this chapter, shall supply a list of acceptable antennas with the application for certification.

#### FCC §15.255(e) Limits on transmitter conducted output power

(1) Except as specified in paragraph (e)(2) of this section, the peak transmitter conducted output power of devices other than field disturbance sensors/radars shall not exceed 500 mW. Depending on the gain of the antenna, it may be necessary to operate the intentional radiator using a lower peak transmitter output power in order to comply with the EIRP limits specified in paragraph (c) of this section.


(2) Devices other than field disturbance sensors/radars with an emission bandwidth of less than 100 megahertz must limit their peak transmitter conducted output power to the product of 500 mW times their emission bandwidth divided by 100 megahertz. For the purposes of this paragraph, emission bandwidth is defined as the instantaneous frequency range occupied by a steady state radiated signal with modulation, outside which the radiated power spectral density never exceeds 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kilohertz resolution bandwidth spectrum analyzer. The center frequency must be stationary during the measurement interval, even if not stationary during normal operation (e.g., for frequency hopping devices)

**RSS-210, Annex J.3.3 Emission limits for devices other than FDS**

Following are the conditions for devices other than FDS:

- a) Except when J.3.3(b) applies, the average e.i.r.p. of any emission shall not exceed 40 dBm and the peak e.i.r.p. of any emission shall not exceed 43 dBm.
- b) For fixed point-to-point equipment located outdoors:
  - (i) The average e.i.r.p. of any emission shall not exceed 82 dBm minus 2 dB for every dB the antenna gain is less than 51 dBi. The peak e.i.r.p. of any emission shall not exceed 85 dBm minus 2 dB for every dB the antenna gain is less than 51 dBi.
  - (ii) The provisions for reducing the transmit power based on the antenna gain, as per J.3.3(b)(i), shall not require that the power levels be reduced below the limits specified in J.3.3(a).
  - (iii) Compliance testing shall be performed using the highest gain and the lowest gain antennas with which the equipment is certified. Further, this equipment shall not be marketed and operated with antennas other than those listed in the certification application with which the equipment is certified.
- c) Except as specified in J.3.3(d), the peak transmitter conducted output power shall not exceed 500 mW. Depending on the gain of the antenna, it may be necessary to operate the intentional radiator using a lower peak transmitter output power in order to comply with the e.i.r.p. limits specified in J.3.3(a) and J.3.3(b).
- d) For devices with an emission bandwidth less than 100 MHz, the peak transmitter conducted output power (PTCOP) shall be less than or equal to the product of 500 mW times their emission bandwidth divided by 100 MHz. For the purpose of J.3.3(d), emission bandwidth is the instantaneous frequency range occupied by a steady radiated signal with modulation, outside which the radiated power spectral density is 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kHz resolution bandwidth. The centre frequency shall be stationary during the measurement interval, even if not stationary during normal operation (e.g. for frequency hopping devices).

#### 4.2.2 EUT Setup

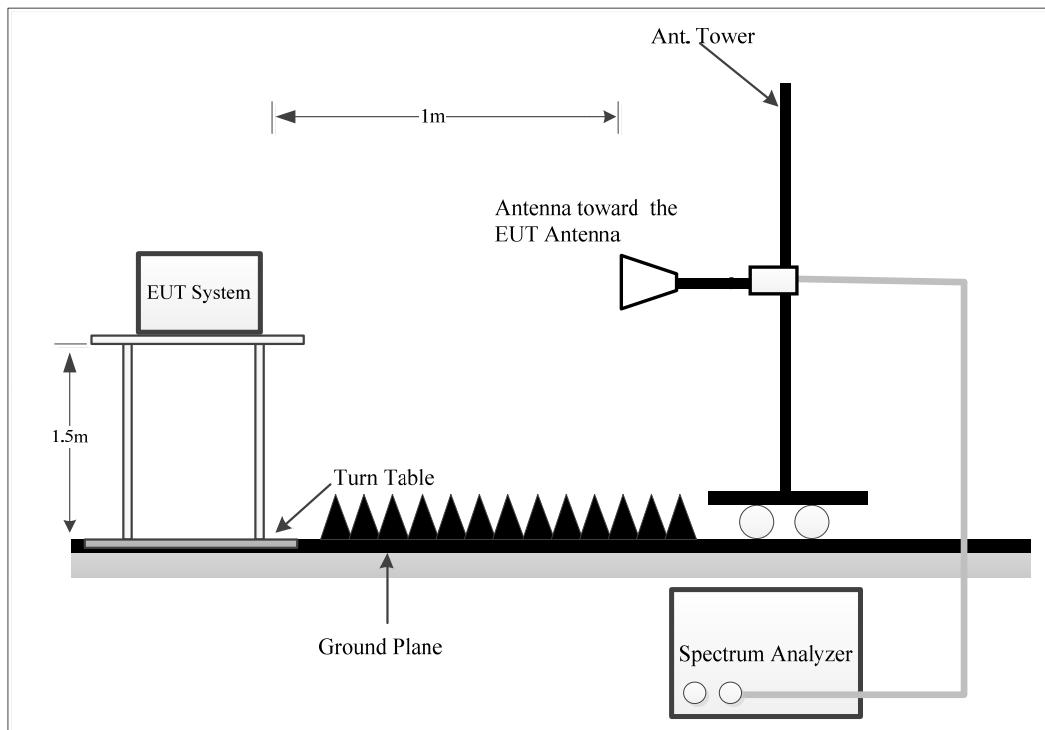

Place the measurement antenna at a measurement distance that is in the far-field of the measurement antenna, in the far-field of the EUT antenna. The EIRP test was performed at 1m distance, which was larger than the minimum test distance, please refer to section 4.4.4 for more detail.

#### 4.2.3 Test Procedure

Refer to ANSI C63.10-2020 Clause 9.9

Step c) For radiated measurements:

- 1) Connect the measurement antenna for the fundamental frequency band to the mm-wave RF detector or the downconverter. Place the measurement antenna at a test distance that is in the far-field of the measurement antenna, in the far-field of the EUT antenna, and meets the measurement distance requirements for final radiated measurements as specified in 9.1.4.
- 2) Place the measurement antenna in the main beam of the EUT then maximize the fundamental emission using maximizing procedures 9.7, noting that multiple peaks can be found at different beam orientations and/or polarizations.

Step d)

- 1) Record the peak voltage from the DSO and record the average voltage during the ON time of the EUT from the DSO.

- 2) Disconnect the measurement antenna or EUT (as applicable for radiated or conducted tests, respectively) from the RF input port of the instrumentation system.
- 3) Connect a mm-wave source to the RF input port of the instrumentation system via a waveguide variable attenuator.
- 4) The mm-wave source shall be unmodulated.
- 5) Adjust the frequency of the mm-wave source to the center of the frequency range occupied by the transmitter.
- 6) Adjust the amplitude of the mm-wave source and/or the variable attenuator such that the DSO indicates a voltage equal to the peak voltage recorded in step d)1)
- 7) Disconnect the waveguide variable attenuator from the RF input port of the instrumentation system.
- 8) Without changing any settings, connect the waveguide variable attenuator to a wideband mm-wave power meter with a thermocouple detector or equivalent.
- 9) Measure and note the power.
- 10) Repeat steps d)3) through d)9) for the average voltage recorded in step d)1) .

Step e)

- 1) Correct the peak and average substitution power at the input to the measurement instrument, as recorded in step d), for any external gain and/or attenuation between the measurement antenna and the measurement instrument that was not included in the substitution power measurement. This is the peak and average (respectively) substitution power at the output of the measurement antenna.
- 2) Calculate the peak and average EIRP from the peak and average (respectively) substitution power at the output of the measurement antenna using Equation (22), and then convert to linear form using Equation (24)
- 3) Calculate the peak conducted output power from the peak EIRP using Equation (27).
- 4) Where applicable, calculate the peak and average power density at the distance at which the limit is specified from the peak and average (respectively) EIRP using Equation (25).

#### 4.2.4 Test Result

Serial Number:	2VJ1-4	Test Date:	2025/4/22
Test Site:	Chamber B	Test Mode:	Transmitting
Tester:	Bill Yang	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	24.8	Relative Humidity: (%)	43	ATM Pressure: (kPa)	100.5

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Tektronix	Digital Phosphor Oscilloscope	TDS 3054	B015264	2024/9/5	2025/9/4
Millitech	RF Detector	DET-15-RPFW0	A18521	2023/2/16	2026/2/15
Resenberger	Coaxial Cable	LU7-022-1000	0031	2025/2/28	2026/2/27
Flann Microwave	Horn Antenna	861V/385	736	2023/2/27	2026/2/26
NSI	Horn Antenna	NSI-RF-SG15	F-08-EM195-3	2023/2/27	2026/2/26
Agilent	mm-Wave Source Modules	83557A	3942A00699	2023/2/16	2026/2/15
Agilent	Coaxial Cable	5061-5458	1301	2025/2/28	2026/2/27
Agilent	Signal Generator	E8247C	MY43321350	2024/9/5	2025/9/4

\* Statement of Traceability: Bay Area Compliance Laboratories Corp.(Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

Note: The device is fixed Point-to-Point equipment.

Base model

**EIRP:**

Frequency (GHz)	DSO		Polar (H/V)	Substituted Level (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
	Reading (mV)	Detector					
<b><math>\pi/2</math>-BPSK</b>							
58.320	104.0	PK	V	-11.78	24.00	32.09	43
58.320	70.1	AV	V	-13.49	24.00	30.38	40
64.800	96.2	PK	V	-12.63	24.00	32.16	43
64.800	64.2	AV	V	-14.39	24.00	30.40	40
69.120	115.4	PK	V	-12.92	24.00	32.43	43
69.120	76.2	AV	V	-14.72	24.00	30.63	40
<b><math>\pi/2</math>-QPSK</b>							
58.320	99.2	PK	V	-11.98	24.00	31.89	43
58.320	66.4	AV	V	-13.73	24.00	30.14	40
64.800	101.0	PK	V	-12.42	24.00	32.37	43
64.800	64.1	AV	V	-14.39	24.00	30.40	40
69.120	104.0	PK	V	-13.37	24.00	31.98	43
69.120	65.4	AV	V	-15.39	24.00	29.96	40
<b><math>\pi/2</math>-16QAM</b>							
58.320	101.30	PK	V	-11.89	24.00	31.98	43
58.320	60.40	AV	V	-14.14	24.00	29.73	40
64.800	94.40	PK	V	-12.71	24.00	32.08	43
64.800	40.60	AV	V	-16.37	24.00	28.42	40
69.120	96.40	PK	V	-13.70	24.00	31.65	43
69.120	43.20	AV	V	-17.19	24.00	28.16	40

$$E = 126.8 - 20\log(\lambda) + P - G$$

$$EIRP = 21.98 - 20\log(\lambda) + 20\log(d_{\text{Meas}}) + P - G$$

=&gt;

$$EIRP = E_{\text{meas}} + 20\log(\text{Measurement distance}) - 104.8$$

$$E_{\text{meas}} = 126.8 - 20\log(\lambda) + \text{Substituted level} - \text{Antenna Gain}$$

Measurement distance = 1m

**TNA-AK-100****EIRP:**

Frequency (GHz)	DSO		Polar (H/V)	Substituted Level (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
	Reading (mV)	Detector					
<b><math>\pi/2</math>-BPSK</b>							
58.320	3526.00	PK	V	3.52	24.00	47.39	49
58.320	2316.00	AV	V	1.70	24.00	45.57	46
64.800	2974.00	PK	V	2.27	24.00	47.06	49
64.800	2018.00	AV	V	0.59	24.00	45.38	46
69.120	3014.00	PK	V	1.25	24.00	46.60	49
69.120	2126.00	AV	V	-0.27	24.00	45.08	46
<b><math>\pi/2</math>-QPSK</b>							
58.320	3110.00	PK	V	2.98	24.00	46.85	49
58.320	2215.00	AV	V	1.51	24.00	45.38	46
64.800	3216.00	PK	V	2.61	24.00	47.40	49
64.800	2241.00	AV	V	1.04	24.00	45.83	46
69.120	3074.00	PK	V	1.33	24.00	46.68	49
69.120	2163.00	AV	V	-0.19	24.00	45.16	46
<b><math>\pi/2</math>-16QAM</b>							
58.320	2974.00	PK	V	2.79	24.00	46.66	49
58.320	2011.00	AV	V	1.09	24.00	44.96	46
64.800	2845.00	PK	V	2.08	24.00	46.87	49
64.800	1649.00	AV	V	-0.29	24.00	44.50	46
69.120	2962.00	PK	V	1.17	24.00	46.52	49
69.120	1745.00	AV	V	-1.13	24.00	44.22	46

$$E = 126.8 - 20\log(\lambda) + P - G$$

$$EIRP = 21.98 - 20\log(\lambda) + 20\log(d_{\text{Meas}}) + P - G$$

=>

$$EIRP = E_{\text{meas}} + 20\log(\text{Measurement distance}) - 104.8$$

$$E_{\text{meas}} = 126.8 - 20\log(\lambda) + \text{Substituted level} - \text{Antenna Gain}$$

Measurement distance = 1m

**TNA-AK-150****EIRP:**

Frequency (GHz)	DSO		Polar (H/V)	Substituted Level (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
	Reading (mV)	Detector					
<b><math>\pi/2</math>-BPSK</b>							
58.320	14993.00	PK	V	9.81	24.00	53.68	57
58.320	11235.00	AV	V	8.56	24.00	52.43	54
64.800	10568.00	PK	V	7.78	24.00	52.57	57
64.800	7481.00	AV	V	6.28	24.00	51.07	54
69.120	14872.00	PK	V	8.18	24.00	53.53	57
69.120	11190.00	AV	V	6.94	24.00	52.29	54
<b><math>\pi/2</math>-QPSK</b>							
58.320	14105.00	PK	V	9.55	24.00	53.42	57
58.320	9516.00	AV	V	7.84	24.00	51.71	54
64.800	11047.00	PK	V	7.97	24.00	52.76	57
64.800	6594.00	AV	V	5.73	24.00	50.52	54
69.120	14227.00	PK	V	7.99	24.00	53.34	57
69.120	9874.00	AV	V	6.40	24.00	51.75	54
<b><math>\pi/2</math>-16QAM</b>							
58.320	9054.00	PK	V	7.62	24.00	51.49	57
58.320	4718.00	AV	V	4.79	24.00	48.66	54
64.800	7481.00	PK	V	6.28	24.00	51.07	57
64.800	3154.00	AV	V	2.53	24.00	47.32	54
69.120	7155.00	PK	V	5.00	24.00	50.35	57
69.120	3065.00	AV	V	1.32	24.00	46.67	54

$$E = 126.8 - 20\log(\lambda) + P - G$$

$$EIRP = 21.98 - 20\log(\lambda) + 20\log(d_{\text{Meas}}) + P - G$$

=>

$$EIRP = E_{\text{meas}} + 20\log(\text{Measurement distance}) - 104.8$$

$$E_{\text{meas}} = 126.8 - 20\log(\lambda) + \text{Substituted level} - \text{Antenna Gain}$$

Measurement distance = 1m

**TNA-AK-300****EIRP:**

Frequency (GHz)	DSO		Polar (H/V)	Substituted Level (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
	Reading (mV)	Detector					
<b><math>\pi/2</math>-BPSK</b>							
58.320	17481.00	PK	V	10.48	24.00	54.35	63
58.320	14512.00	AV	V	9.67	24.00	53.54	60
64.800	13659.00	PK	V	8.89	24.00	53.68	63
64.800	11054.00	AV	V	7.98	24.00	52.77	60
69.120	19574.00	PK	V	9.37	24.00	54.72	63
69.120	14571.00	AV	V	8.09	24.00	53.44	60
<b><math>\pi/2</math>-QPSK</b>							
58.320	17112.00	PK	V	10.39	24.00	54.26	63
58.320	12659.00	AV	V	9.08	24.00	52.95	60
64.800	13296.00	PK	V	8.78	24.00	53.57	63
64.800	9001.00	AV	V	7.08	24.00	51.87	60
69.120	18024.00	PK	V	9.01	24.00	54.36	63
69.120	13265.00	AV	V	7.68	24.00	53.03	60
<b><math>\pi/2</math>-16QAM</b>							
58.320	15978.00	PK	V	10.09	24.00	53.96	63
58.320	11054.00	AV	V	8.49	24.00	52.36	60
64.800	12654.00	PK	V	8.56	24.00	53.35	63
64.800	8594.00	AV	V	6.88	24.00	51.67	60
69.120	13654.00	PK	V	7.81	24.00	53.16	63
69.120	9594.00	AV	V	6.28	24.00	51.63	60

$$E = 126.8 - 20\log(\lambda) + P - G$$

$$EIRP = 21.98 - 20\log(\lambda) + 20\log(d_{\text{Meas}}) + P - G$$

=>

$$EIRP = E_{\text{meas}} + 20\log(\text{Measurement distance}) - 104.8$$

$$E_{\text{meas}} = 126.8 - 20\log(\lambda) + \text{Substituted level} - \text{Antenna Gain}$$

Measurement distance = 1m

**TNA-AK-S-45****EIRP:**

Frequency (GHz)	DSO		Polar (H/V)	Substituted Level (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
	Reading (mV)	Detector					
<b><math>\pi/2</math>-BPSK</b>							
58.320	923.00	PK	V	-2.30	24.00	41.57	43
58.320	581.00	AV	V	-4.31	24.00	39.56	40
64.800	915.00	PK	V	-2.85	24.00	41.94	43
64.800	504.00	AV	V	-5.44	24.00	39.35	40
69.120	894.00	PK	V	-4.03	24.00	41.32	43
69.120	496.00	AV	V	-6.59	24.00	38.76	40
<b><math>\pi/2</math>-QPSK</b>							
58.320	911.00	PK	V	-2.35	24.00	41.52	43
58.320	526.00	AV	V	-4.74	24.00	39.13	40
64.800	874.00	PK	V	-3.04	24.00	41.75	43
64.800	498.00	AV	V	-5.49	24.00	39.30	40
69.120	908.00	PK	V	-3.96	24.00	41.39	43
69.120	501.00	AV	V	-6.55	24.00	38.80	40
<b><math>\pi/2</math>-16QAM</b>							
58.320	874.00	PK	V	-2.53	24.00	41.34	43
58.320	456.00	AV	V	-5.36	24.00	38.51	40
64.800	801.00	PK	V	-3.42	24.00	41.37	43
64.800	432.00	AV	V	-6.11	24.00	38.68	40
69.120	789.00	PK	V	-4.57	24.00	40.78	43
69.120	421.00	AV	V	-7.30	24.00	38.05	40

$$E = 126.8 - 20\log(\lambda) + P - G$$

$$EIRP = 21.98 - 20\log(\lambda) + 20\log(d_{\text{Meas}}) + P - G$$

=>

$$EIRP = E_{\text{meas}} + 20\log(\text{Measurement distance}) - 104.8$$

$$E_{\text{meas}} = 126.8 - 20\log(\lambda) + \text{Substituted level} - \text{Antenna Gain}$$

Measurement distance = 1m

**TNA-AK-S-90****EIRP:**

Frequency (GHz)	DSO		Polar (H/V)	Substituted Level (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
	Reading (mV)	Detector					
<b><math>\pi/2</math>-BPSK</b>							
58.320	915.00	PK	V	-2.33	24.00	41.54	43
58.320	547.00	AV	V	-4.57	24.00	39.30	40
64.800	908.00	PK	V	-2.88	24.00	41.91	43
64.800	507.00	AV	V	-5.41	24.00	39.38	40
69.120	878.00	PK	V	-4.11	24.00	41.24	43
69.120	491.00	AV	V	-6.63	24.00	38.72	40
<b><math>\pi/2</math>-QPSK</b>							
58.320	901.00	PK	V	-2.40	24.00	41.47	43
58.320	524.00	AV	V	-4.75	24.00	39.12	40
64.800	892.00	PK	V	-2.96	24.00	41.83	43
64.800	497.00	AV	V	-5.50	24.00	39.29	40
69.120	884.00	PK	V	-4.08	24.00	41.27	43
69.120	486.00	AV	V	-6.68	24.00	38.67	40
58.320							
58.320	885.00	PK	V	-2.48	24.00	41.39	43
58.320	511.00	AV	V	-4.86	24.00	39.01	40
64.800	845.00	PK	V	-3.19	24.00	41.60	43
64.800	478.00	AV	V	-5.67	24.00	39.12	40
69.120	784.00	PK	V	-4.60	24.00	40.75	43
69.120	433.00	AV	V	-7.18	24.00	38.17	40

$$E = 126.8 - 20\log(\lambda) + P - G$$

$$EIRP = 21.98 - 20\log(\lambda) + 20\log(d_{\text{Meas}}) + P - G$$

=>

$$EIRP = E_{\text{meas}} + 20\log(\text{Measurement distance}) - 104.8$$

$$E_{\text{meas}} = 126.8 - 20\log(\lambda) + \text{Substituted level} - \text{Antenna Gain}$$

Measurement distance = 1m

**Base model****Conducted Peak Output Power:**

Frequency (GHz)	Peak EIRP (dBm)	Antenna Gain (dBi)	Peak Conducted Power (dBm)	Limit (dBm)	Margin (dB)
<b><math>\pi/2</math>-BPSK</b>					
58.32	32.09	16.2	15.89	27	11.11
64.80	32.16	16.2	15.96	27	11.04
69.12	32.43	16.2	16.23	27	10.77
<b><math>\pi/2</math>-QPSK</b>					
58.32	31.89	16.2	15.69	27	11.31
64.80	32.37	16.2	16.17	27	10.83
69.12	31.98	16.2	15.78	27	11.22
<b><math>\pi/2</math>-16QAM</b>					
58.32	31.98	16.2	15.78	27	11.22
64.80	32.08	16.2	15.88	27	11.12
69.12	31.65	16.2	15.45	27	11.55
<i>Note:</i>					
For radiated emissions measurements, calculated transmitter conducted output power $P(\text{con})$					
$P(\text{con}) = \text{EIRP} - \text{Antenna gain(dBi)}$					

**TNA-AK-100****Conducted Peak Output Power:**

Frequency (GHz)	Peak EIRP (dBm)	Antenna Gain (dBi)	Peak Conducted Power (dBm)	Limit (dBm)	Margin (dB)
<b><math>\pi/2</math>-BPSK</b>					
58.32	47.39	33	14.39	27	12.61
64.8	47.06	33	14.06	27	12.94
69.12	46.60	33	13.6	27	13.4
<b><math>\pi/2</math>-QPSK</b>					
58.32	46.85	33	13.85	27	13.15
64.8	47.4	33	14.4	27	12.6
69.12	46.68	33	13.68	27	13.32
<b><math>\pi/2</math>-16QAM</b>					
58.32	46.66	33	13.66	27	13.34
64.8	46.87	33	13.87	27	13.13
69.12	46.52	33	13.52	27	13.48
<i>Note:</i>					
For radiated emissions measurements, calculated transmitter conducted output power $P(\text{con})$					
$P(\text{con}) = \text{EIRP} - \text{Antenna gain(dBi)}$					

**TNA-AK-150****Conducted Peak Output Power:**

Frequency (GHz)	Peak EIRP (dBm)	Antenna Gain (dBi)	Peak Conducted Power (dBm)	Limit (dBm)	Margin (dB)
<b><math>\pi/2</math>-BPSK</b>					
58.32	53.68	37	16.68	27	10.32
64.8	52.57	37	15.57	27	11.43
69.12	53.53	37	16.53	27	10.47
<b><math>\pi/2</math>-QPSK</b>					
58.32	53.42	37	16.42	27	10.58
64.8	52.76	37	15.76	27	11.24
69.12	53.34	37	16.34	27	10.66
<b><math>\pi/2</math>-16QAM</b>					
58.32	51.49	37	14.49	27	12.51
64.8	51.07	37	14.07	27	12.93
69.12	50.35	37	13.35	27	13.65
<i>Note:</i>					
For radiated emissions measurements, calculated transmitter conducted output power $P(\text{con})$					
$P(\text{con}) = \text{EIRP} - \text{Antenna gain(dBi)}$					

**TNA-AK-300****Conducted Peak Output Power:**

Frequency (GHz)	Peak EIRP (dBm)	Antenna Gain (dBi)	Peak Conducted Power (dBm)	Limit (dBm)	Margin (dB)
<b><math>\pi/2</math>-BPSK</b>					
58.32	54.35	40	14.35	27	12.65
64.8	53.68	40	13.68	27	13.32
69.12	54.72	40	14.72	27	12.28
<b><math>\pi/2</math>-QPSK</b>					
58.32	54.26	40	14.26	27	12.74
64.8	53.57	40	13.57	27	13.43
69.12	54.36	40	14.36	27	12.64
<b><math>\pi/2</math>-16QAM</b>					
58.32	53.96	40	13.96	27	13.04
64.8	53.35	40	13.35	27	13.65
69.12	53.16	40	13.16	27	13.84
<i>Note:</i>					
For radiated emissions measurements, calculated transmitter conducted output power $P(\text{con})$					
$P(\text{con}) = \text{EIRP} - \text{Antenna gain(dBi)}$					

**TNA-AK-S-45****Conducted Peak Output Power:**

Frequency (GHz)	Peak EIRP (dBm)	Antenna Gain (dBi)	Peak Conducted Power (dBm)	Limit (dBm)	Margin (dB)
<b><math>\pi/2</math>-BPSK</b>					
58.32	41.57	27	14.57	27	12.43
64.8	41.94	27	14.94	27	12.06
69.12	41.32	27	14.32	27	12.69
<b><math>\pi/2</math>-QPSK</b>					
58.32	41.52	27	14.52	27	12.48
64.8	41.75	27	14.75	27	12.25
69.12	41.39	27	14.39	27	12.61
<b><math>\pi/2</math>-16QAM</b>					
58.32	41.34	27	14.34	27	12.66
64.8	41.37	27	14.37	27	12.63
69.12	40.78	27	13.78	27	13.22
<i>Note:</i>					
For radiated emissions measurements, calculated transmitter conducted output power $P(\text{con})$					
$P(\text{con}) = \text{EIRP} - \text{Antenna gain(dBi)}$					

**TNA-AK-S-90****Conducted Peak Output Power:**

Frequency (GHz)	Peak EIRP (dBm)	Antenna Gain (dBi)	Peak Conducted Power (dBm)	Limit (dBm)	Margin (dB)
<b><math>\pi/2</math>-BPSK</b>					
58.32	41.54	27	14.54	27	12.46
64.8	41.91	27	14.91	27	12.09
69.12	41.24	27	14.24	27	12.76
<b><math>\pi/2</math>-QPSK</b>					
58.32	41.47	27	14.47	27	12.53
64.8	41.83	27	14.83	27	12.17
69.12	41.27	27	14.27	27	12.73
<b><math>\pi/2</math>-16QAM</b>					
58.32	41.39	27	14.39	27	12.61
64.8	41.60	27	14.6	27	12.4
69.12	40.75	27	13.75	27	13.25
<i>Note:</i>					
For radiated emissions measurements, calculated transmitter conducted output power $P(\text{con})$					
$P(\text{con}) = \text{EIRP} - \text{Antenna gain(dBi)}$					

## 4.3 Emission Bandwidth

### 4.3.1 Applicable Standard

#### FCC §15.255(e)(2)

Devices other than field disturbance sensors/radars with an emission bandwidth of less than 100 megahertz must limit their peak transmitter conducted output power to the product of 500 mW times their emission bandwidth divided by 100 megahertz. For the purposes of this paragraph, emission bandwidth is defined as the instantaneous frequency range occupied by a steady state radiated signal with modulation, outside which the radiated power spectral density never exceeds 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kilohertz resolution bandwidth spectrum analyzer. The center frequency must be stationary during the measurement interval, even if not stationary during normal operation (e.g., for frequency hopping devices)

#### RSS-210, Annex J.3.3

d) For devices with an emission bandwidth less than 100 MHz, the peak transmitter conducted output power (PTCOP) shall be less than or equal to the product of 500 mW times their emission bandwidth divided by 100 MHz. For the purpose of J.3.3(d), emission bandwidth is the instantaneous frequency range occupied by a steady radiated signal with modulation, outside which the radiated power spectral density is 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kHz resolution bandwidth. The centre frequency shall be stationary during the measurement interval, even if not stationary during normal operation (e.g. for frequency hopping devices).

#### RSS-Gen Clause 6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth: The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.


The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

#### 4.3.2 EUT Setup

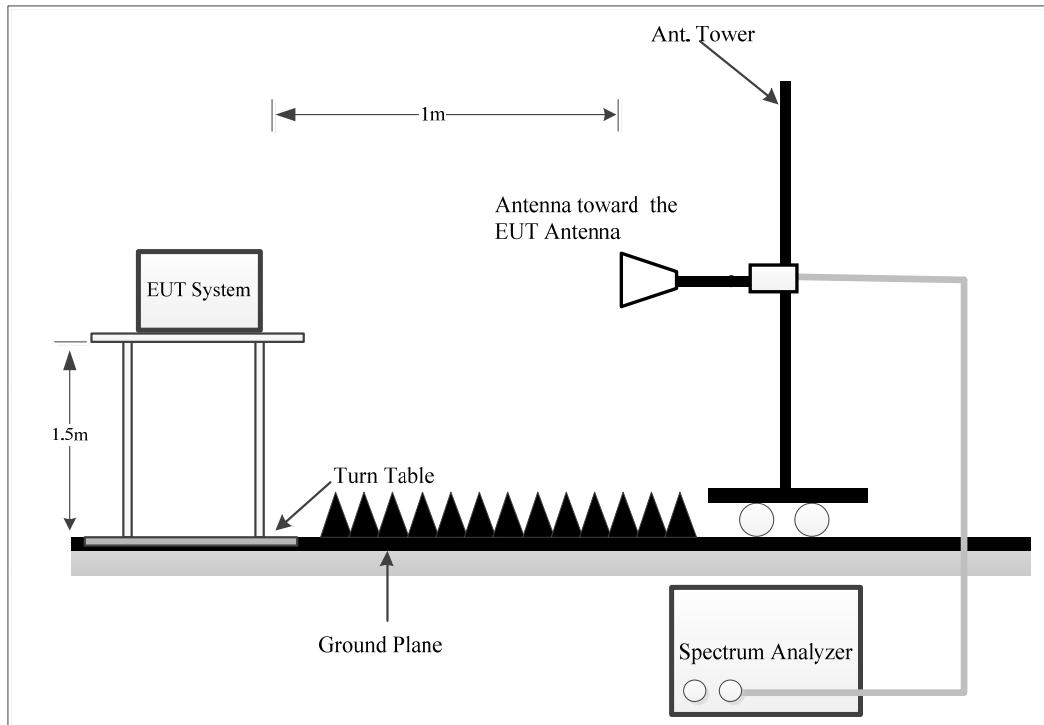

Place the measurement antenna in the main beam of the EUT then maximize the fundamental emission, noting that multiple peaks can be found at different beam orientations and/or polarizations.

#### 4.3.3 Test Procedure

##### ANSI C63.10-2020 Clause 9.3 Emission bandwidth - relative measurement procedure

The emission bandwidth (EBW) is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least the specified amount below the maximum level of the modulated carrier.

The following procedure shall be used for measurement of the bandwidth for millimeter-wave devices. (See Figure 21):

a) Use the following spectrum analyzer settings:

- 1) Span equal to approximately 1.5 times the EBW, centered on the carrier frequency
- 2) RBW, prefer 1% to 5% of EBW, or a minimum of 1 MHz if this is not possible due to a large EBW, unless otherwise specified by the applicable rule
- 3) VBW approximately  $3 \times$  RBW

- 4) Set the reference level of the instrument as required to reduce the chance of the signal amplitude exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.1.6.
- 5) Sweep = No faster than coupled (auto) time.
- 6) Detector function = peak.
- 7) Trace = max-hold.
- b) The EUT shall be transmitting at its maximum data rate. Allow the trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure the specified dB down one side of the emission.
- d) Reset the marker-delta function, and move the marker to the other side of the emission, until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth. The spectral envelope can cross the “-X dB amplitude” at multiple points. The lowest or highest frequency shall be selected as the frequencies that are the farthest away from the center frequency at which the spectral envelope crosses the “-X dB amplitude.”
- e) The EBW shall be reported by providing plot(s) of the measuring instrument display, to include markers depicting the relevant frequency and amplitude information (e.g., marker table). The frequency and amplitude axis and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).
- f) Repeat this test for each modulation scheme using the guidance of 5.6.2.1.

#### **ANSI C63.10-2020 Clause 9.4 Occupied bandwidth—Power bandwidth (99%) measurement procedure**

The occupied bandwidth (OBW) is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

- a) The following procedure shall be used for measuring 99% power bandwidth: Use the following spectrum analyzer settings:
  - 1) Span equal to approximately 1.5 times the OBW, centered on the carrier frequency
  - 2) RBW, prefer 1% to 5% of OBW, or a minimum of 1 MHz if this is not possible due to a large OBW
  - 3) VBW approximately  $3 \times$  RBW
- 4) Set the reference level of the instrument as required to reduce the chance of the signal amplitude exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.1.6.
- 5) Sweep = No faster than coupled (auto) time.
- 6) Detector function = peak.
- 7) Trace = max-hold.
- b) The EUT shall be transmitting at its maximum data rate. Allow the trace to stabilize.
- c) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- d) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).
- e) Repeat this test for each modulation scheme using the guidance of 5.6.2.1.

**4.3.4 Test Data**

Serial Number:	2VJ1-4	Test Date:	2025/4/22~2025/7/27
Test Site:	Chamber B	Test Mode:	Transmitting
Tester:	Bill Yang	Test Result:	N/A

**Environmental Conditions:**

Temperature: (°C)	24.8~27.4	Relative Humidity: (%)	40~43	ATM Pressure: (kPa)	100.1~100.5
-------------------	-----------	------------------------	-------	---------------------	-------------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Waveguide Mixer	11970V	2521A011767	2023/2/16	2026/2/15
Flann Microwave	Horn Antenna	861V/385	736	2023/2/27	2026/2/26
Agilent	Spectrum Analyzer	E4440A	MY44303352	2024/10/22	2025/10/21
Resenberger	Coaxial Cable	LU7-022-1000	0031	2025/2/28	2026/2/27
Resenberger	Coaxial Cable	LU7-022-1000	0032	2025/2/28	2026/2/27

\* Statement of Traceability: Bay Area Compliance Laboratories Corp.(Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:** **$\pi/2$ -BPSK:**

Test Frequency (GHz)	Test Mode	99% Occupied Bandwidth (GHz)	F <sub>L</sub> (GHz)	Limit F <sub>L</sub> (GHz)	F <sub>H</sub> (GHz)	Limit F <sub>H</sub> (GHz)
58.32	Transmitting	1.9684	57.3072	57	59.2755	71
64.8	Transmitting	1.8867	63.8356	57	65.7223	71
69.12	Transmitting	1.9218	68.1240	57	70.0458	71

 **$\pi/2$ -QPSK:**

Test Frequency (GHz)	Test Mode	99% Occupied Bandwidth (GHz)	F <sub>L</sub> (GHz)	Limit F <sub>L</sub> (GHz)	F <sub>H</sub> (GHz)	Limit F <sub>H</sub> (GHz)
58.32	Transmitting	1.9173	57.4378	57	59.3551	71
64.8	Transmitting	1.9301	63.8115	57	65.7416	71
69.12	Transmitting	2.0716	67.9642	57	70.0358	71

$\pi/2$ -16QAM:

Test Frequency (GHz)	Test Mode	99% Occupied Bandwidth (GHz)	F <sub>L</sub> (GHz)	Limit F <sub>L</sub> (GHz)	F <sub>H</sub> (GHz)	Limit F <sub>H</sub> (GHz)
58.32	Transmitting	1.8714	57.4339	57	59.3053	71
64.80	Transmitting	1.9108	63.8163	57	65.7271	71
69.12	Transmitting	1.8409	68.1314	57	69.9724	71

 $\pi/2$ -BPSK:


Test Frequency (GHz)	Test Mode	6dB Emission Bandwidth (GHz)	F <sub>L</sub> (GHz)	Limit F <sub>L</sub> (GHz)	F <sub>H</sub> (GHz)	Limit F <sub>H</sub> (GHz)
58.32	Transmitting	1.4413	57.6179	57	59.0592	71
64.80	Transmitting	0.5452	64.4774	57	65.0226	71
69.12	Transmitting	1.5174	68.2338	57	69.7512	71



 $\pi/2$ -QPSK:


Test Frequency (GHz)	Test Mode	6dB Emission Bandwidth (GHz)	F <sub>L</sub> (GHz)	Limit F <sub>L</sub> (GHz)	F <sub>H</sub> (GHz)	Limit F <sub>H</sub> (GHz)
58.32	Transmitting	1.3231	57.5990	57	58.9221	71
64.80	Transmitting	0.6660	64.2360	57	64.9020	71
69.12	Transmitting	1.2729	68.2288	57	69.5017	71


 $\pi/2$ -16QAM:


Test Frequency (GHz)	Test Mode	6dB Emission Bandwidth (GHz)	F <sub>L</sub> (GHz)	Limit F <sub>L</sub> (GHz)	F <sub>H</sub> (GHz)	Limit F <sub>H</sub> (GHz)
58.32	Transmitting	1.4867	57.6469	57	59.1336	71
64.80	Transmitting	0.7556	64.2107	57	64.9663	71
69.12	Transmitting	1.1574	68.2537	57	69.4111	71

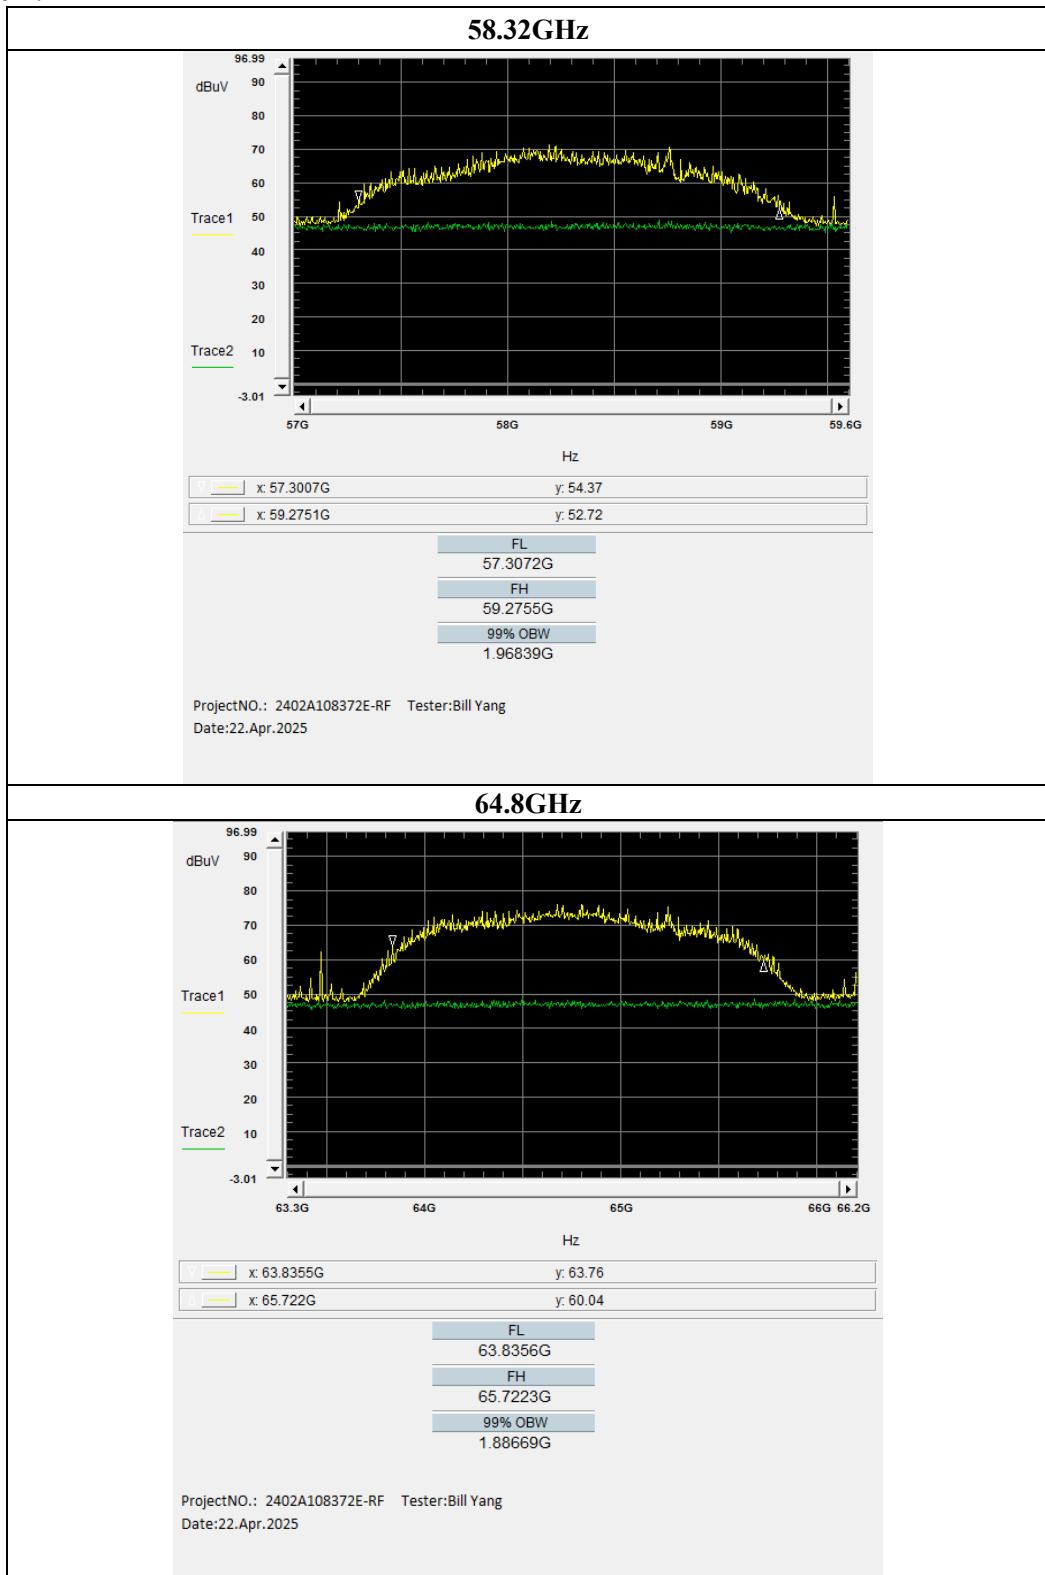
**99% Occupied Bandwidth** **$\pi/2$ -BPSK:**

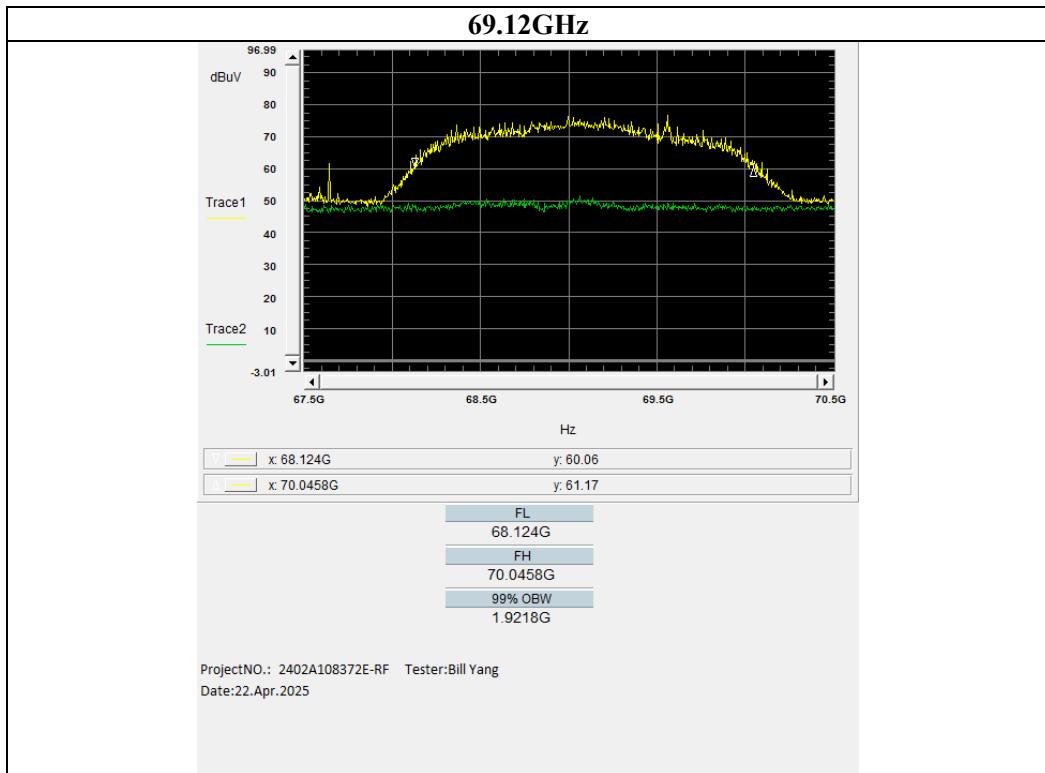
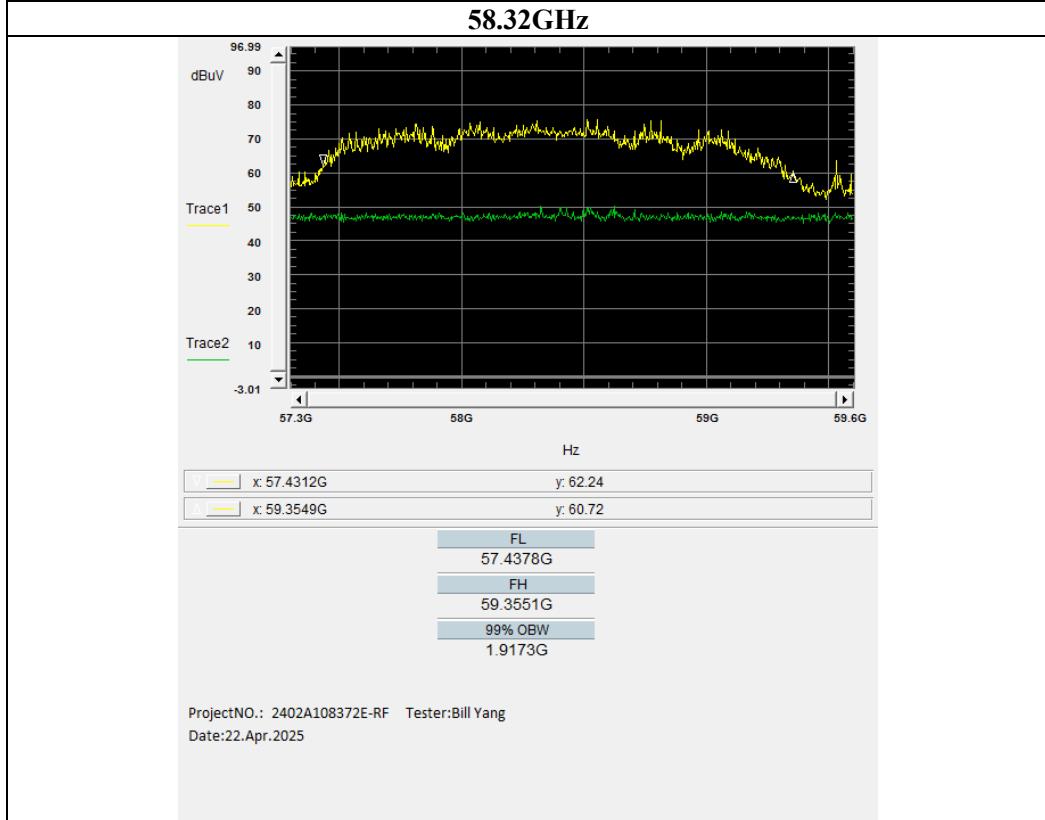
**π2-QPSK:**

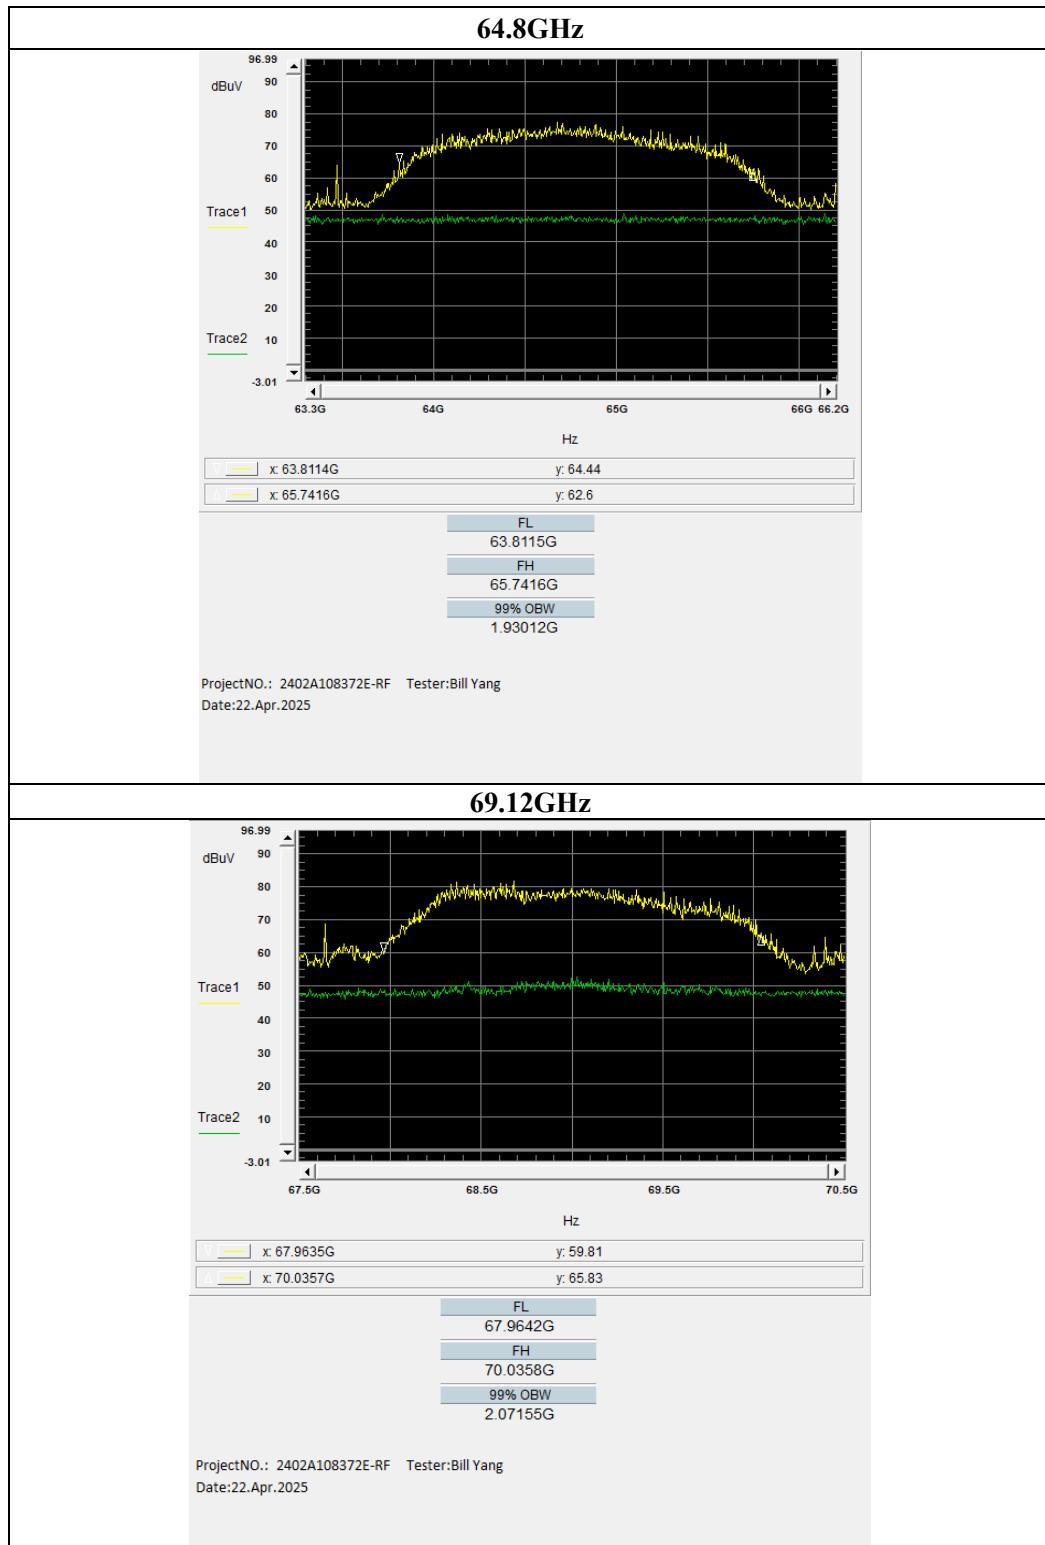


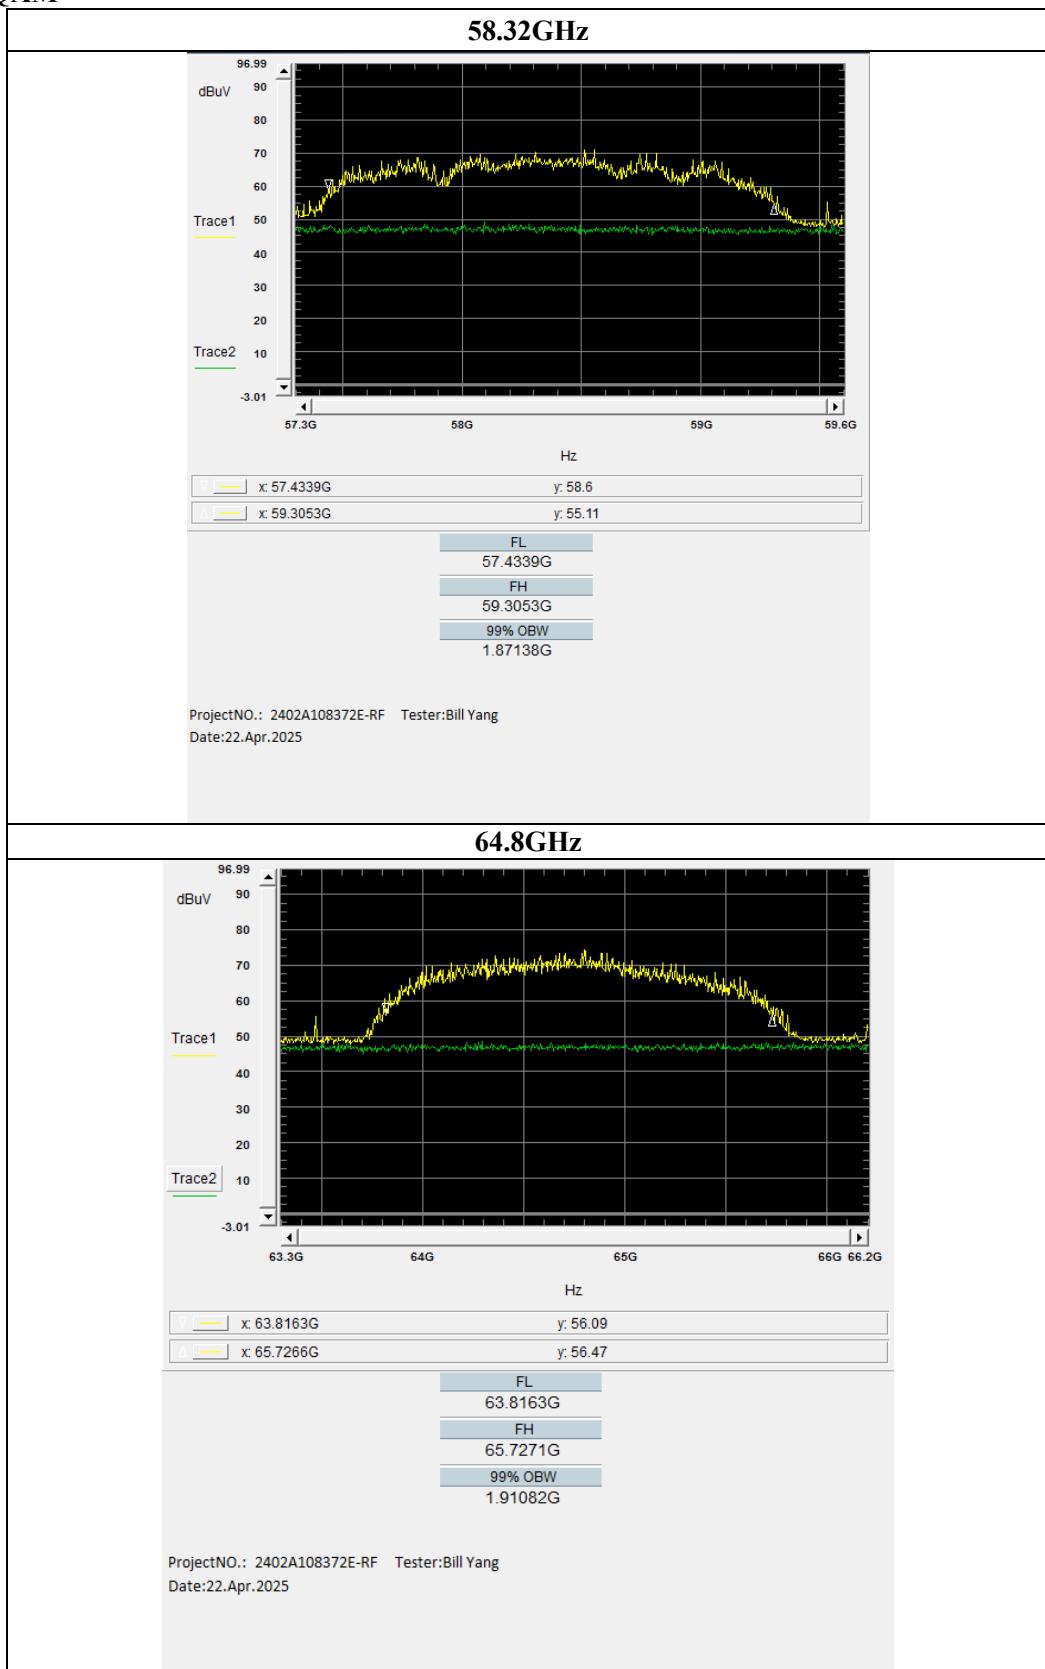
**π2-16QAM**

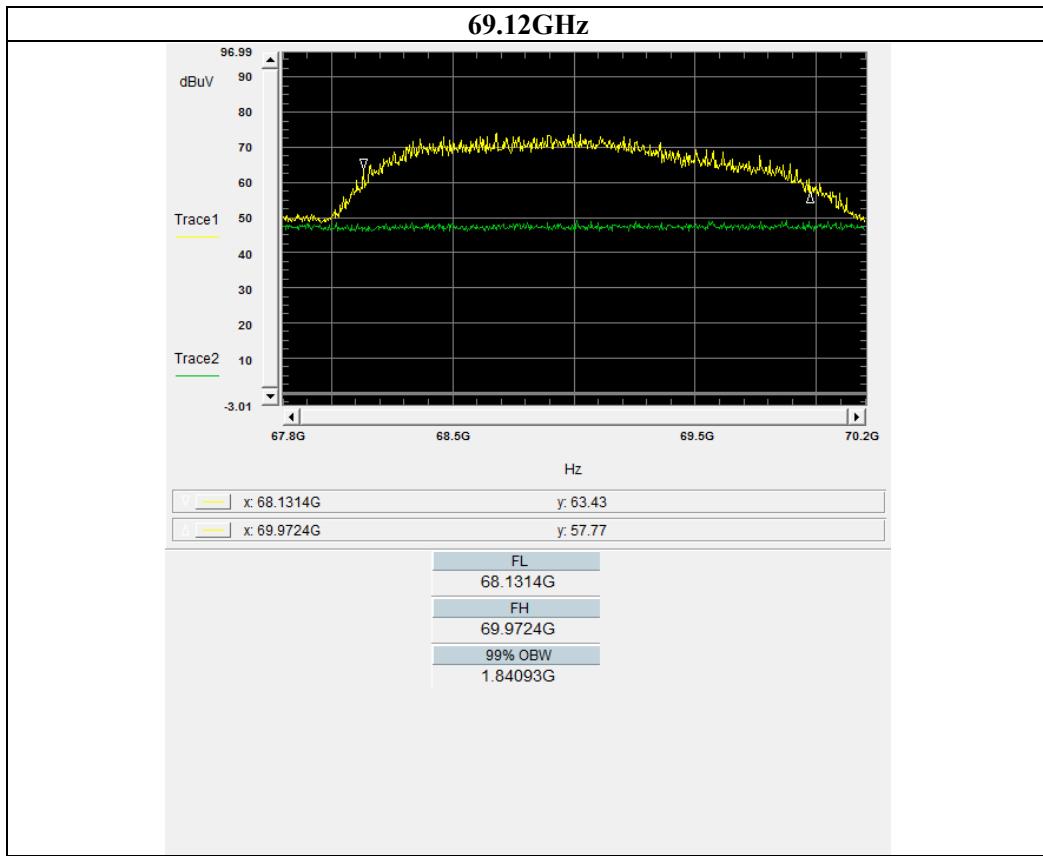


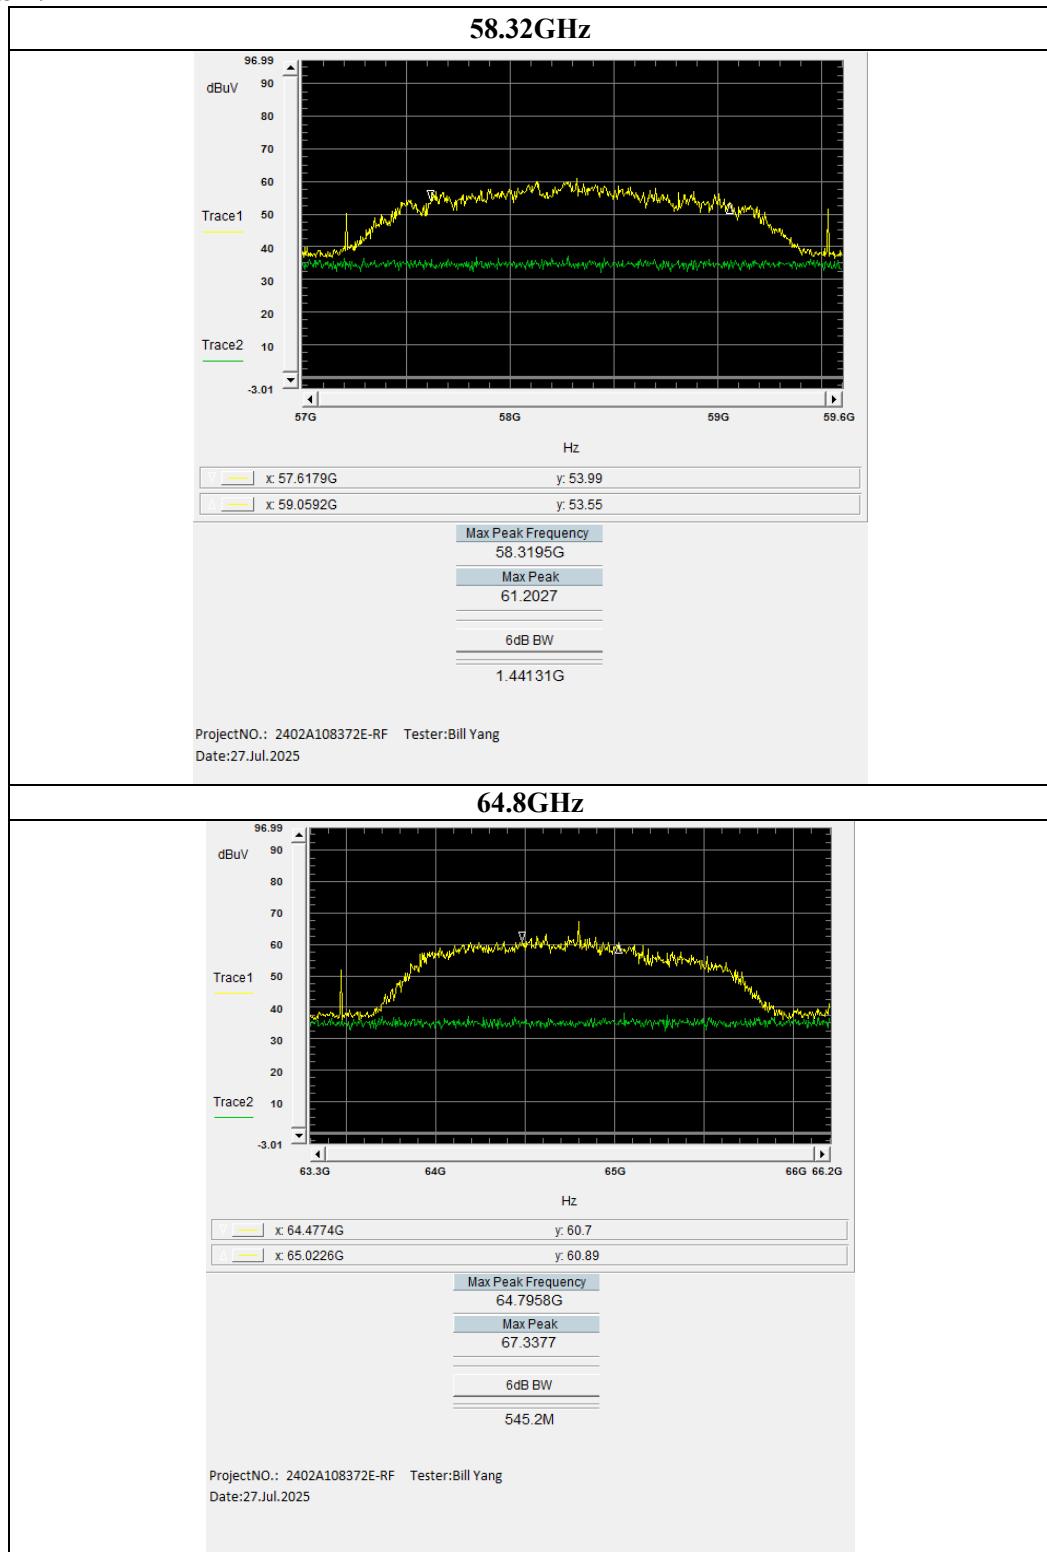**6dB Emission Bandwidth** **$\pi/2$ -BPSK:**

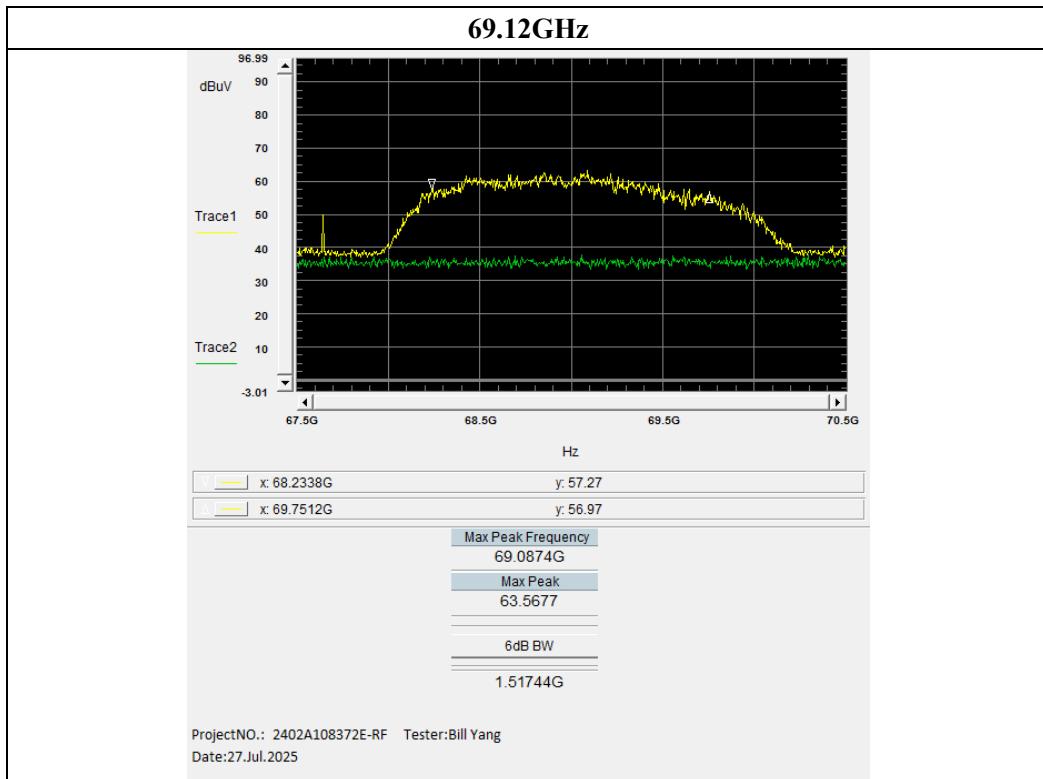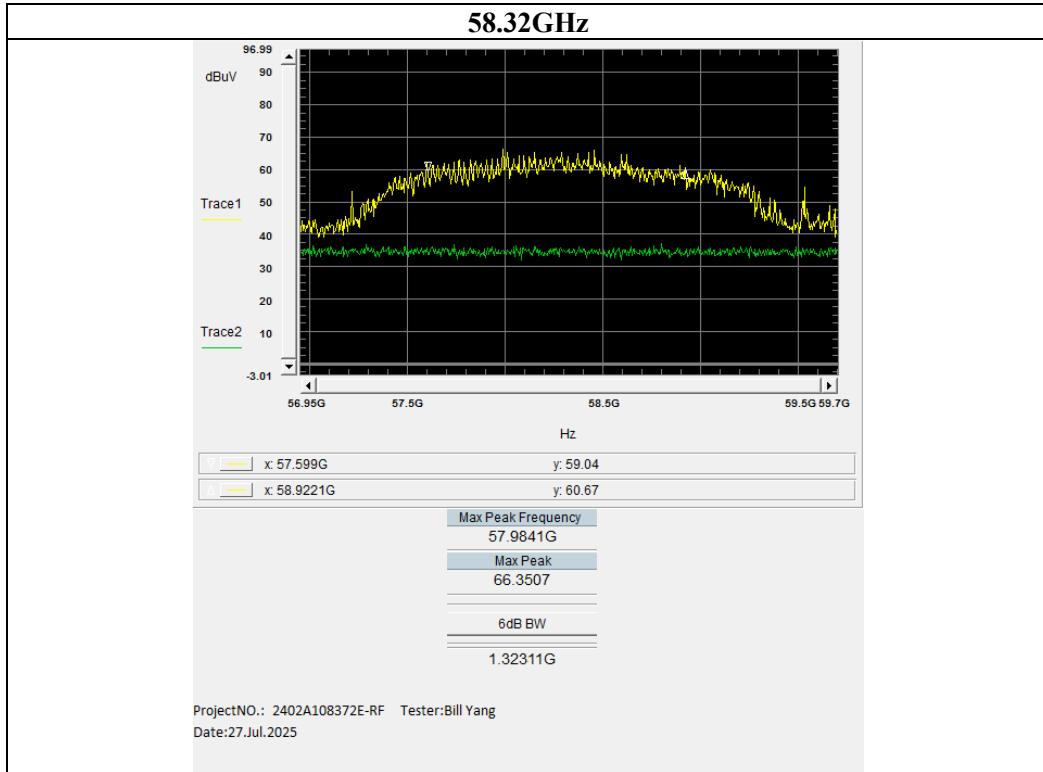 **$\pi/2$ -QPSK:**

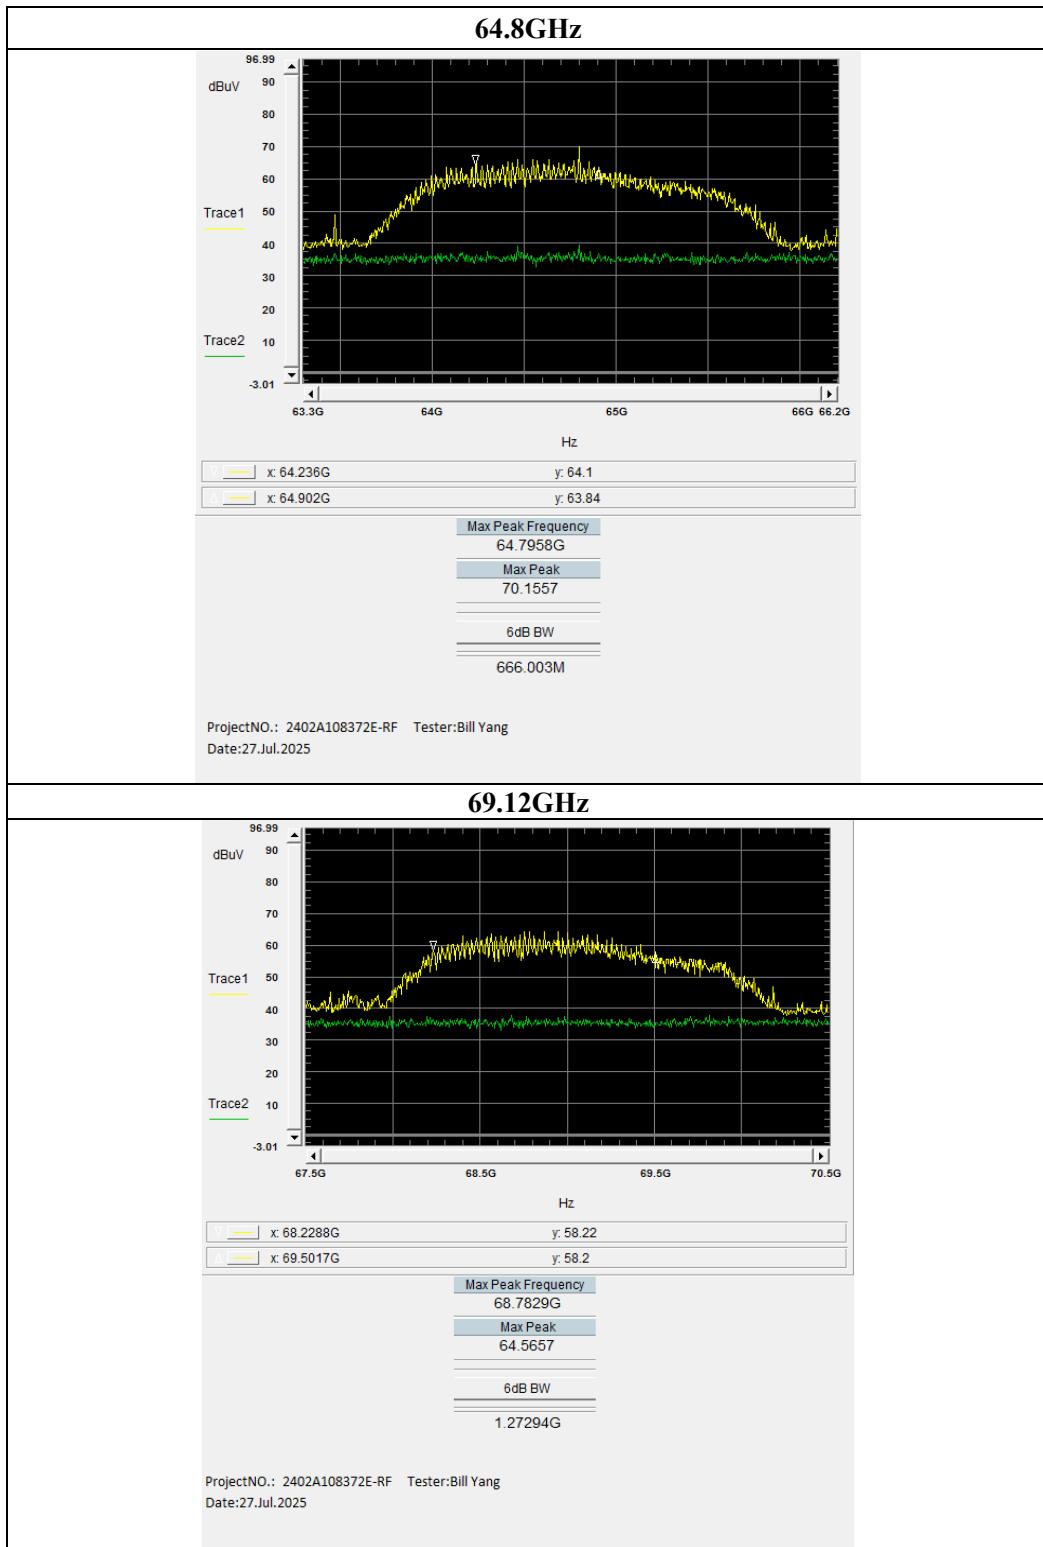

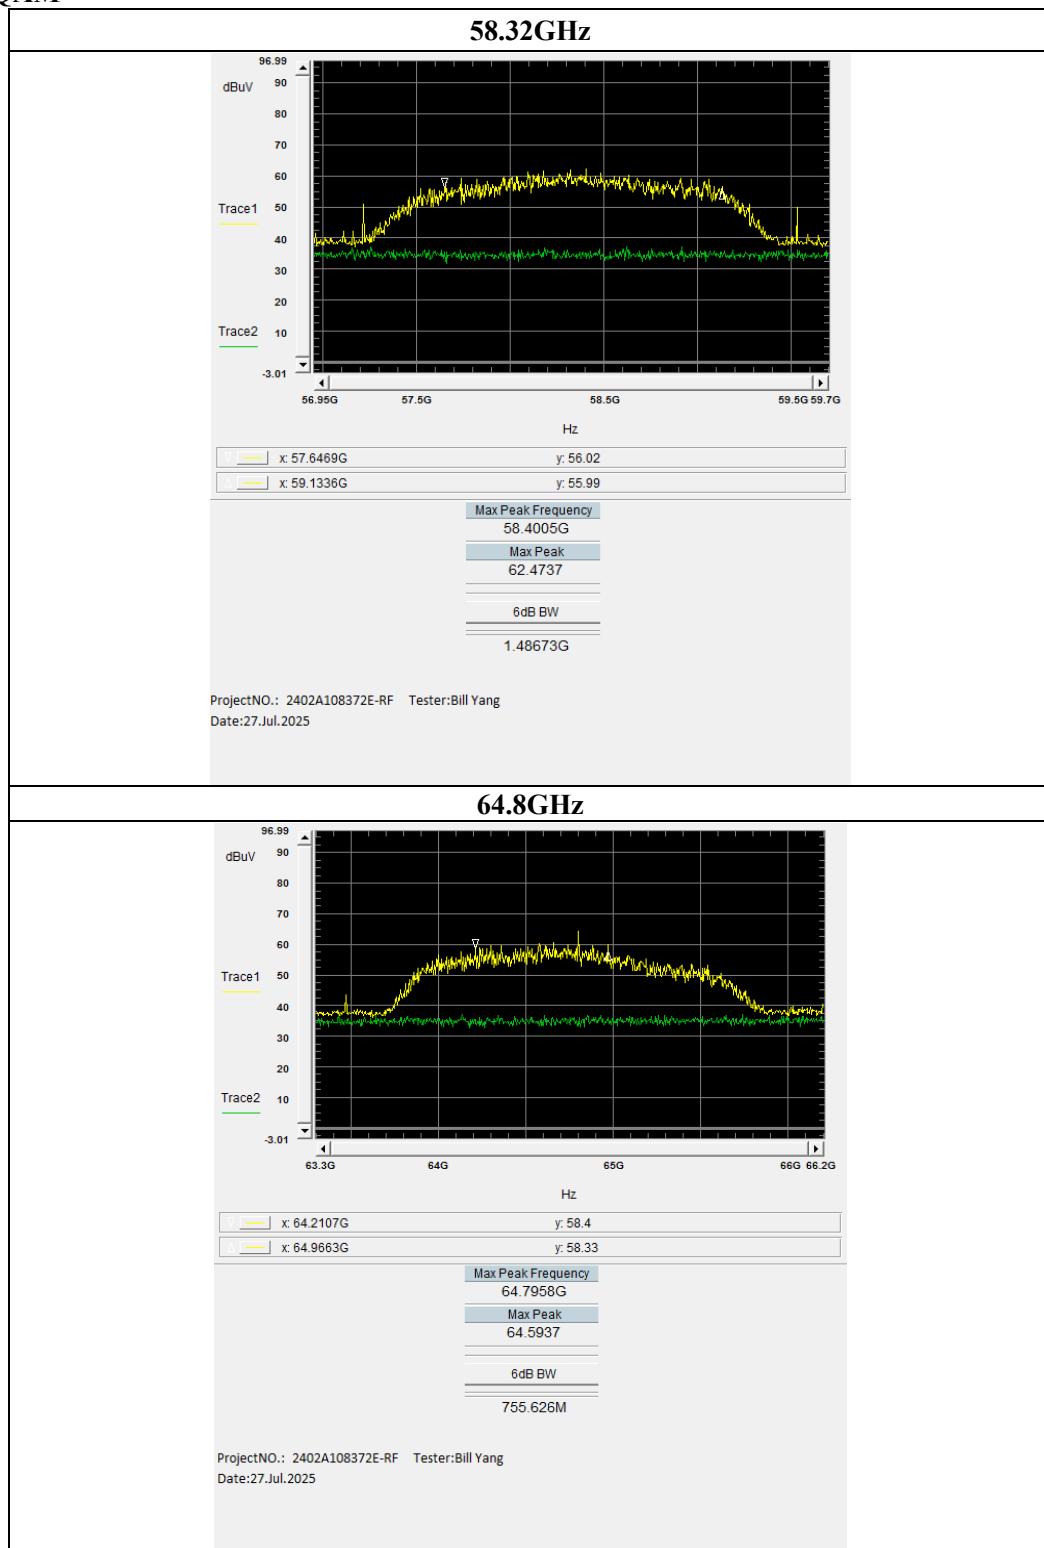**$\pi$ 2-16QAM**

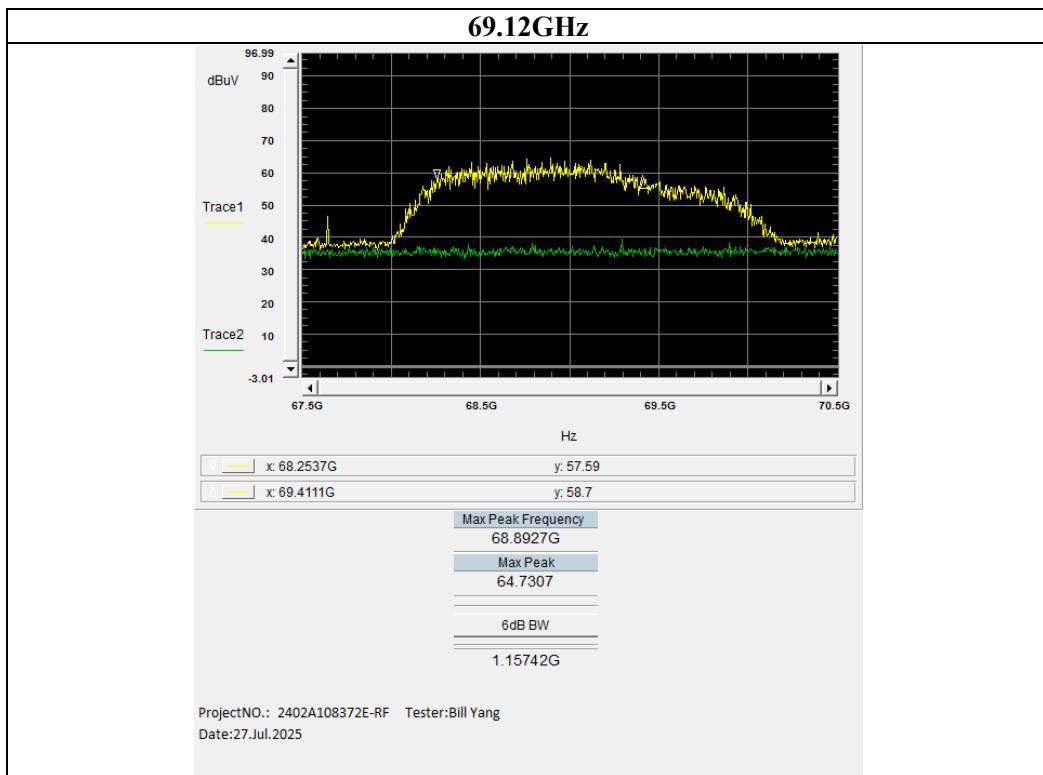

## 4.4 Radiated Spurious Emissions

### 4.4.1 Applicable Standard

FCC §15.255(d)

Limits on spurious emissions:

- (1) The power density of any emissions outside the 57-71 GHz band shall consist solely of spurious emissions.
- (2) Radiated emissions below 40 GHz shall not exceed the general limits in § 15.209.
- (3) Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90 pW/cm<sup>2</sup> at a distance of 3 meters.
- (4) The levels of the spurious emissions shall not exceed the level of the fundamental emission.


RSS-210, Annex J.4



Any emissions outside the band 57-71 GHz shall consist solely of spurious emissions and shall not exceed:



- (a) the fundamental emission levels
- (b) the general field strength limits specified in RSS-Gen, General Requirements for Compliance of Radio Apparatus, for emissions below 40 GHz
- (c) 90 pW/cm<sup>2</sup> peak at a distance of 3 m for emissions between 40 GHz and 200 GHz

### 4.4.2 EUT Setup

9kHz-30MHz:

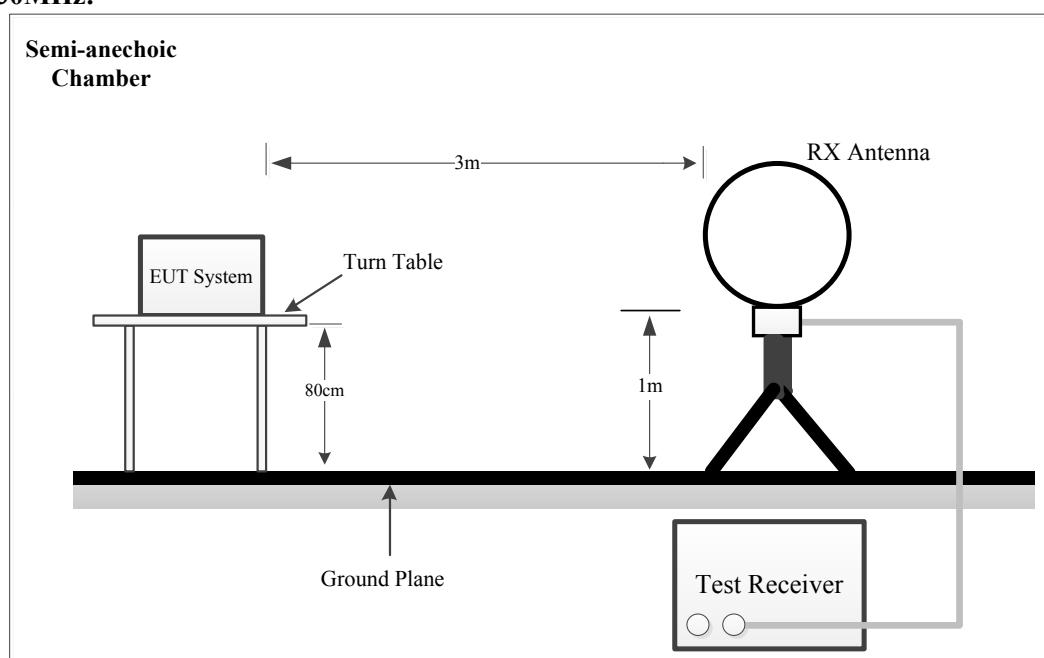

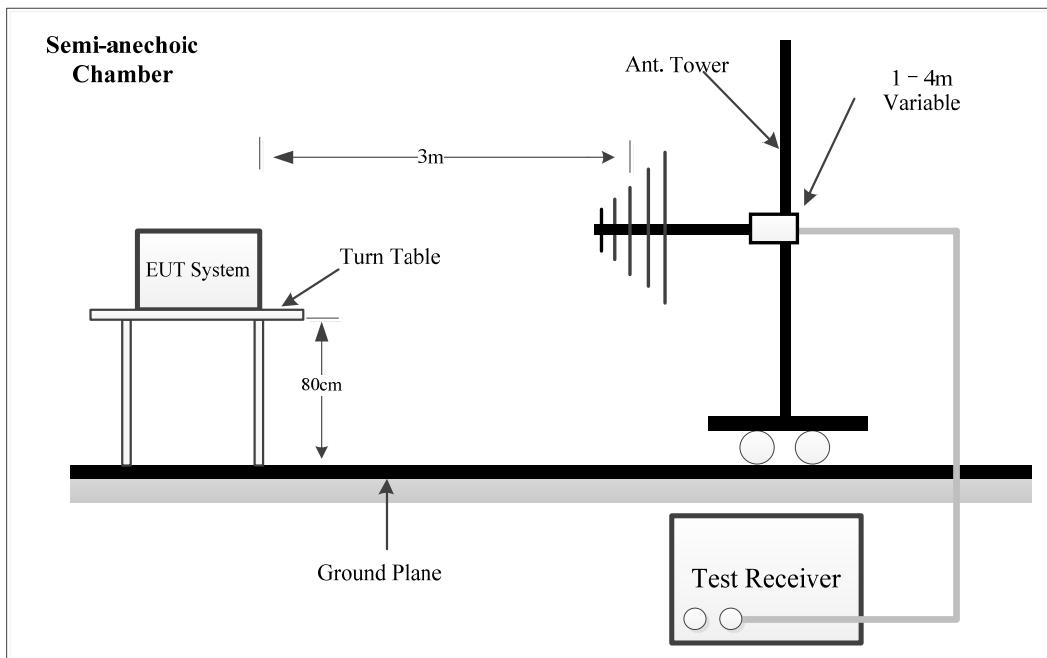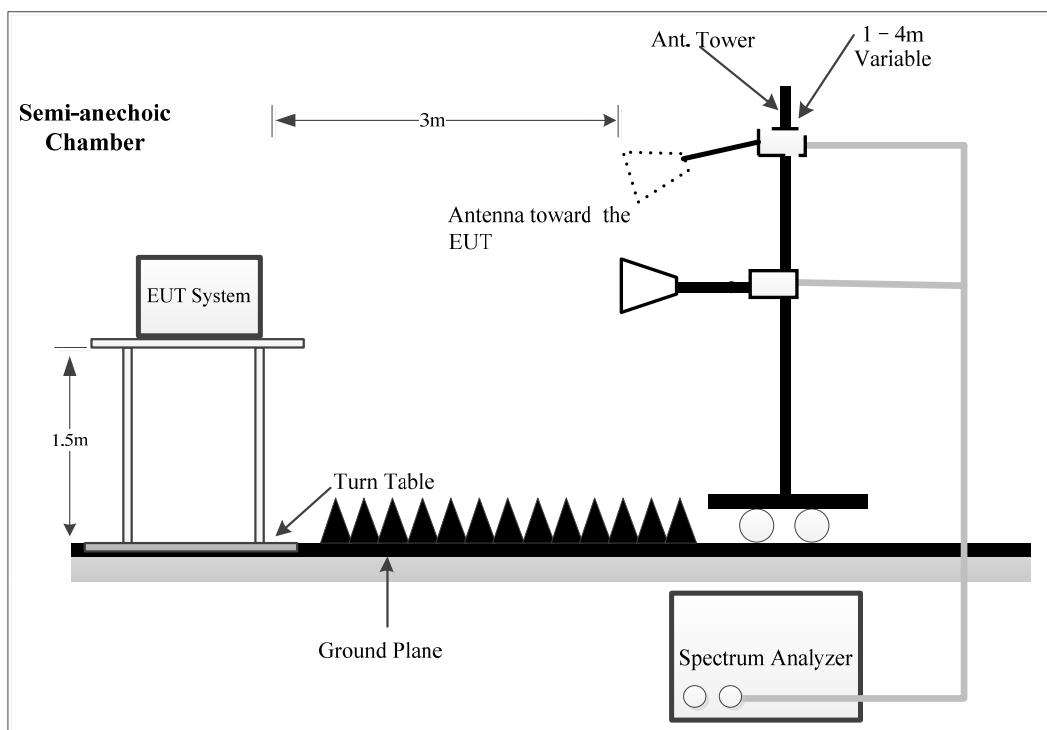**30MHz~1GHz:****1~40 GHz:**

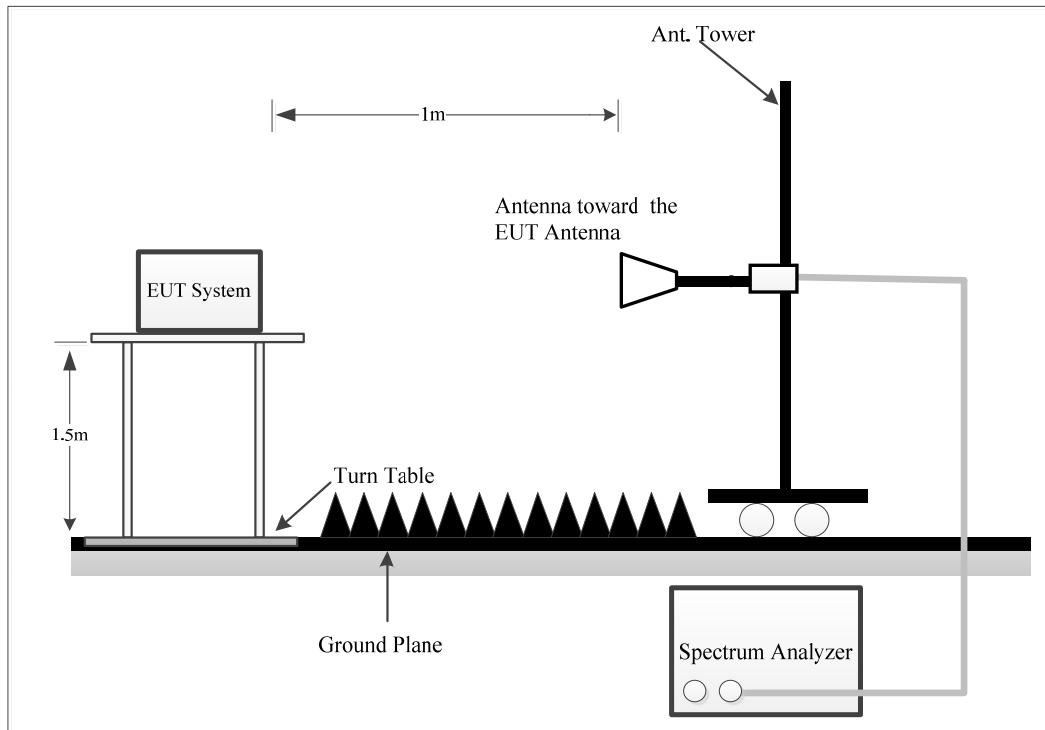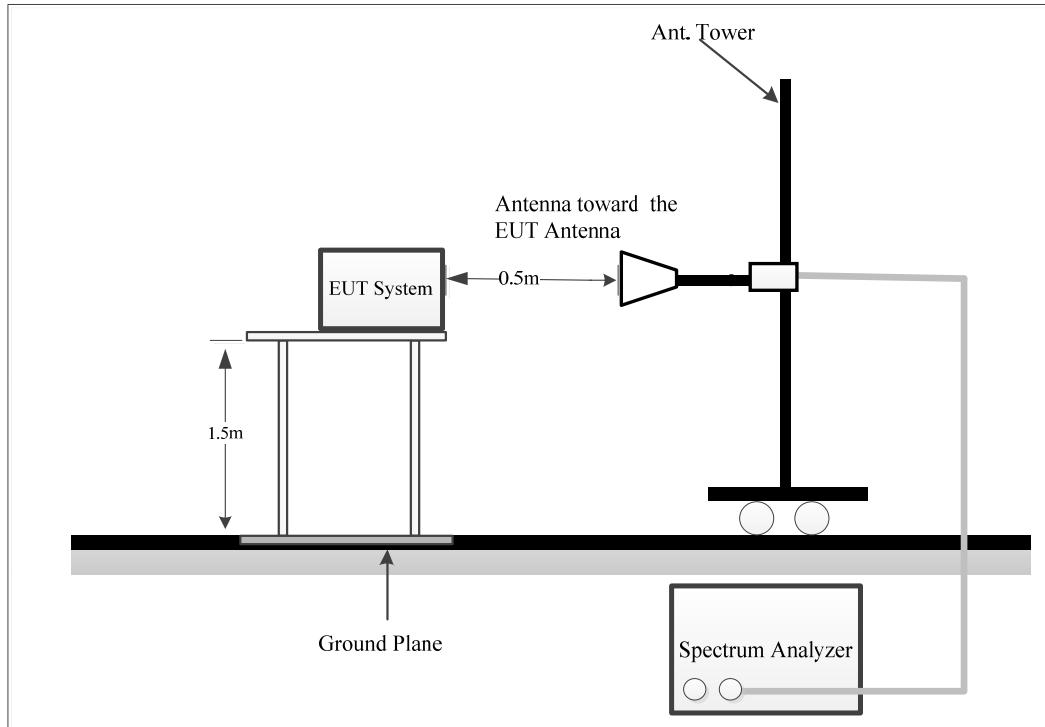**40~90 GHz:****90~200 GHz:**

Above 40GHz:

The antenna is scanned around the entire perimeter surface of the EUT, in both horizontal and vertical polarizations, at the distance of 1.0 m from 40 GHz to 90 GHz, and 0.5 m from 90 GHz to 200 GHz.

The radiated emission and out of band emission tests were performed in the 3 meters chamber, using the setup accordance with the ANSI C63.10-2020 The specification used was the FCC 15.209/15.205/15.255, RSS-210 and RSS-Gen limits.

#### 4.4.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 200 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	300 Hz	1 kHz	200 Hz	QP/Average	QP/Average
150 kHz – 30 MHz	10 kHz	30 kHz	9 kHz	QP/Average	QP/Average
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	PK

1- 40GHz:

Pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
1-40GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	5kHz	PK

Final measurement for emission identified during the pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
1-40GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	10 Hz	PK

40-200GHz:

Frequency Range	Measurement	RBW	Video B/W	Detector
40-200GHz	Peak	1MHz	3 MHz	PK

Note: Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-30MHz except 9 – 90 kHz, 110 – 490 kHz, employing an average detector.

#### 4.4.4 Test Procedure

Refer to ANSI C63.10-2020 Clauses 9.10, and 9.11.

A Maximizing procedure was performed to ensure that the highest emissions from the EUT were actually measured in all of the Test Arrangements of the EUT and Local Support Equipment.

All emissions under the average limit and under the noise floor have not recorded in the report.

All emissions under the average limit and under the noise floor have not recorded in the report. According to C63.10, the 26.5-40GHz test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$  dB= 6.0 dB

#### For above 40GHz:

External harmonic mixers are utilized. The antenna is scanned around the entire perimeter surface of the EUT, in both horizontal and vertical polarizations. The Mixers and it's RF cables is compose a system for calibration, the conversion factor was added into the test Spectrum Analyzer in testing.

The far-field boundary is given in ANSI C63.10-2020:

$$R_m = 2D^2 / \lambda$$

Where:

D is the largest dimension of the antenna aperture in m and

$\lambda$  is the free-space wavelength in m at the frequency of measurement.

The minimum test distance for the frequency range 40GHz-200GHz determine as below:

Model	Frequency Range (GHz)	Largest Dimension of the Horn Antenna (mm)	Minimum Test Distance R <sub>m</sub> (m)
M19RH	40-60	46.3	0.86
861/385	50-75	43.7	0.95
M12RH	60-90	30.02	0.54
M08RH	90-140	19.7	0.36
M05RH	140-220	12.5	0.23

Note: the test distances used were 1.0 m from 40 GHz to 90 GHz, and 0.5 m from 90 GHz to 200 GHz, it can be seen that the EUT was always in the Far-field of the Receive Antenna during all Radiated Emissions Tests.

#### 4.4.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

For 9kHz-26.5GHz:

Result = Reading + Factor

For 26.5GHz-40GHz

Result = Reading + Factor-Distance extrapolation Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

Note: the antenna JB3 was calibrated with 6dB Attenuator, the antenna factor includes the insertion loss of the Attenuator.

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

#### 4.4.6 Test Data

Serial Number:	2VJ1-4	Test Date:	Below 1GHz:2024/12/27 Above 1GHz: 2025/4/24-2025/4/25
Test Site:	Chamber10m, Chamber B	Test Mode:	Transmitting
Tester:	Leesin Xiang, Leo Xiao, Bill Yang	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	21.3~27.1	Relative Humidity: (%)	40~47	ATM Pressure: (kPa)	100.1~102.4
-------------------	-----------	------------------------	-------	---------------------	-------------

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
9kHz~1000MHz					
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A
Above 1GHz					
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5
OML	Waveguide Mixer	WR19/M19HWD	U60313-1	2023/2/16	2026/2/15
OML	Horn Antenna	M19RH	11648-01	2023/2/27	2026/2/26
OML	Waveguide Mixer	WR12/M12HWD	E60120-1	2023/2/16	2026/2/15
OML	Horn Antenna	M12RH	E60120-2	2023/2/27	2026/2/26
OML	Waveguide Mixer	WR08/M08HWD	F60313-1	2023/2/16	2026/2/15
OML	Horn Antenna	M08RH	F60313-2	2023/2/27	2026/2/26
OML	Waveguide Mixer	WR05/M05HWD	G60106-1	2023/2/16	2026/2/15
OML	Horn Antenna	M05RH	G60106-2	2023/2/27	2026/2/26
Resenberger	Coaxial Cable	LU7-022-1000	0031	2025/2/28	2026/2/27
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2024/11/17	2025/11/16
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2024/12/9	2025/12/8
AH	Preamplifier	PAM-0118P	469	2025/4/11	2026/4/10
AH	Preamplifier	PAM-1840VH	191	2024/9/5	2025/9/4
Audix	Test Software	E3	191218 (V9)	N/A	N/A

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

Please refer to the below table and plots.


**1) 9kHz~30MHz**

Three antenna orientations (parallel, perpendicular, and ground-parallel) was measured, the worst orientations was below:

**Base model( $\pi/2$ -BPSK 69.12GHz was tested):**

Project No.: 2402A108372E-RF  
 Polarization: Parallel  
 Test Mode: Transmitting  
 Note: Base model  
 RBW:300Hz VBW:1kHz


Serial No.: 2VJ1-4  
 Tester: Leesin Xiang

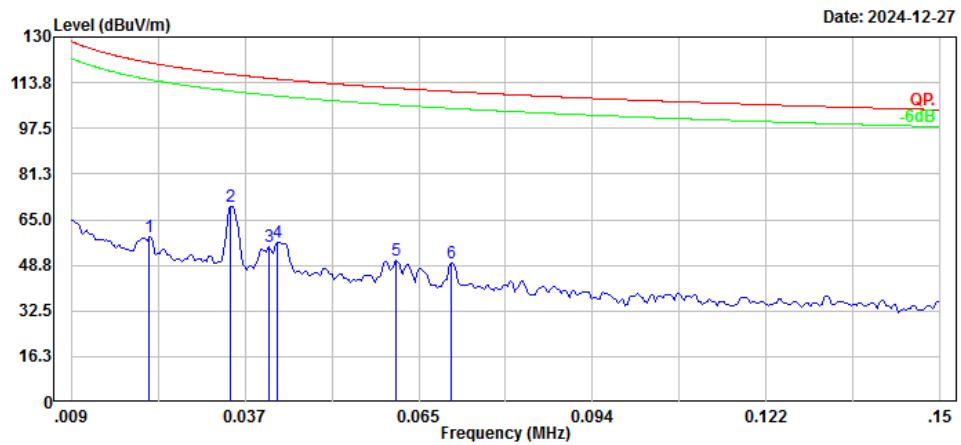

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	0.022	9.02	49.62	58.64	120.88	62.24	Peak
2	0.035	22.91	46.67	69.58	116.74	47.16	Peak
3	0.041	9.72	45.57	55.29	115.32	60.03	Peak
4	0.043	11.47	45.33	56.80	115.02	58.22	Peak
5	0.062	8.25	42.04	50.29	111.79	61.50	Peak
6	0.071	8.86	40.46	49.32	110.61	61.29	Peak

Project No.: 2402A108372E-RF  
Polarization: Parallel  
Test Mode: Transmitting  
Note: Base model  
RBW:10kHz VBW:30kHz

Serial No.: 2VJ1-4  
Tester: Leesin Xiang

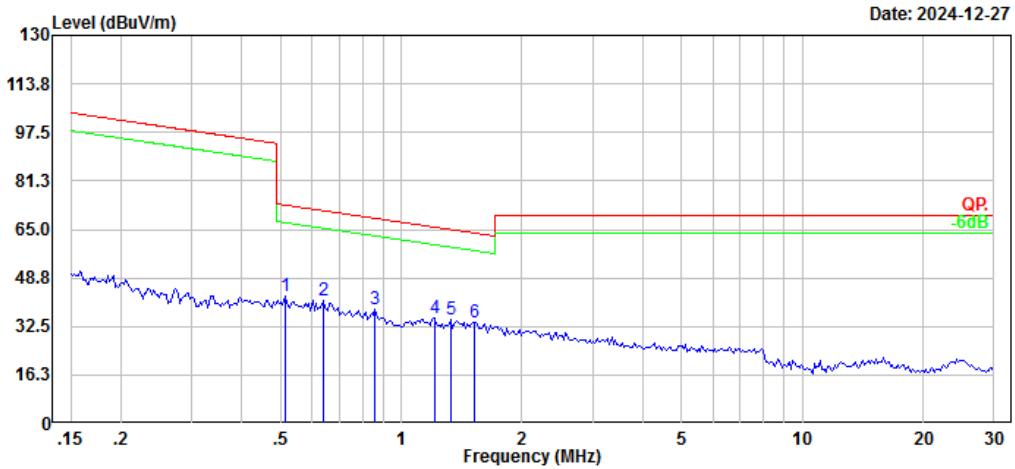


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
<hr/>							
1	0.513	19.07	23.40	42.47	73.40	30.93	Peak
2	0.641	19.05	22.06	41.11	71.42	30.31	Peak
3	0.862	18.82	19.32	38.14	68.79	30.65	Peak
4	1.210	19.63	15.63	35.26	65.78	30.52	Peak
5	1.331	19.54	15.09	34.63	64.94	30.31	Peak
6	1.527	19.85	14.22	34.07	63.72	29.65	Peak

**TNA-AK-100( $\pi/2$ -QPSK 64.80GHz was tested):**

Project No.: 2402A108372E-RF  
Polarization: Parallel  
Test Mode: Transmitting  
Note: TNA-AK-100  
RBW:300Hz VBW:1kHz


Serial No.: 2VJ1-4  
Tester: Leesin Xiang

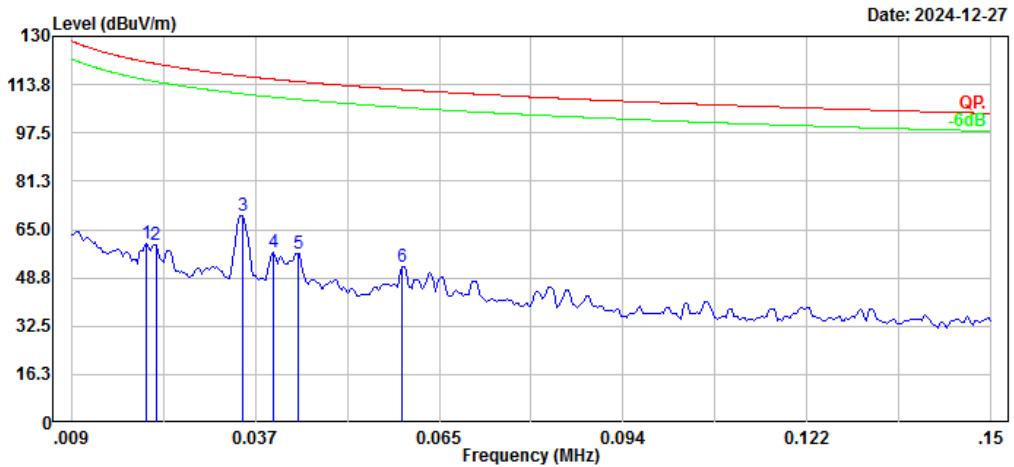

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	0.021	10.46	49.90	60.36	121.34	60.98	Peak
2	0.022	10.23	49.55	59.78	120.77	60.99	Peak
3	0.035	22.89	46.62	69.51	116.67	47.16	Peak
4	0.040	11.42	45.77	57.19	115.56	58.37	Peak
5	0.044	12.00	45.14	57.14	114.80	57.66	Peak
6	0.060	9.92	42.38	52.30	112.08	59.78	Peak

Project No.: 2402A108372E-RF  
Polarization: Parallel  
Test Mode: Transmitting  
Note: TNA-AK-100  
RBW:10kHz VBW:30kHz

Serial No.: 2VJ1-4  
Tester: Leesin Xiang

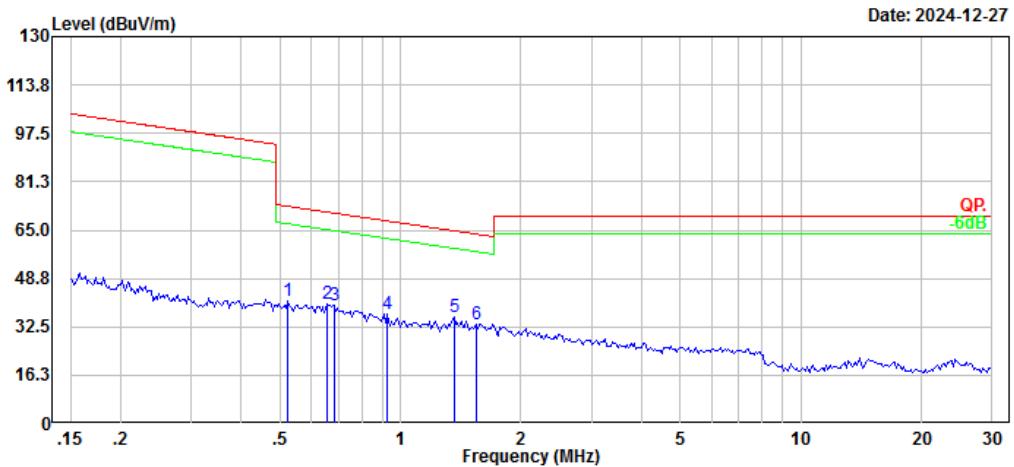


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
<hr/>							
1	0.524	17.94	23.28	41.22	73.21	31.99	Peak
2	0.654	18.23	21.92	40.15	71.24	31.09	Peak
3	0.683	18.31	21.64	39.95	70.86	30.91	Peak
4	0.928	18.64	18.00	36.64	68.13	31.49	Peak
5	1.359	20.67	14.96	35.63	64.75	29.12	Peak
6	1.544	19.23	14.14	33.37	63.62	30.25	Peak

**TNA-AK-150( $\pi/2$ -BPSK 58.32GHz was tested):**

Project No.: 2402A108372E-RF  
Polarization: Parallel  
Test Mode: Transmitting  
Note: TNA-AK-150  
RBW:300Hz VBW:1kHz


Serial No.: 2VJ1-4  
Tester: Leesin Xiang

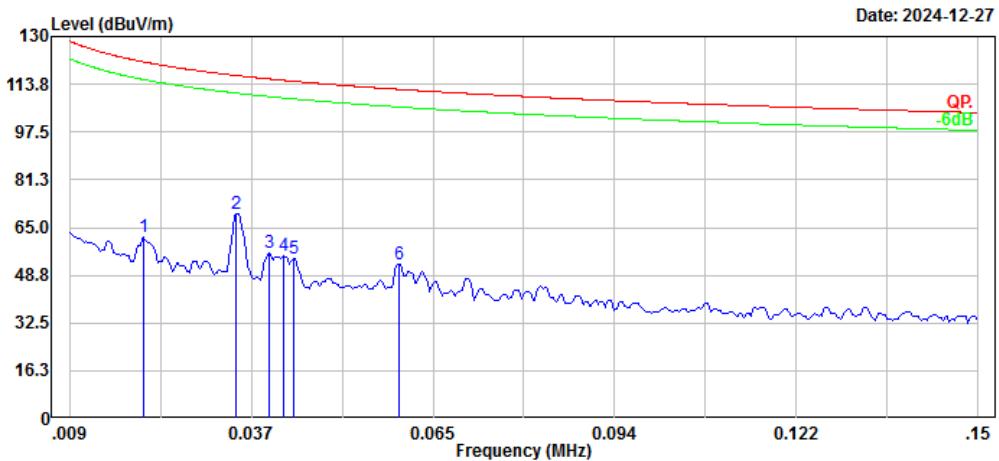

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	0.021	11.68	49.90	61.58	121.34	59.76	Peak
2	0.035	22.93	46.67	69.60	116.74	47.14	Peak
3	0.040	10.43	45.77	56.20	115.56	59.36	Peak
4	0.042	10.03	45.37	55.40	115.08	59.68	Peak
5	0.044	9.50	45.14	54.64	114.80	60.16	Peak
6	0.060	10.40	42.33	52.73	112.04	59.31	Peak

Project No.: 2402A108372E-RF  
Polarization: Parallel  
Test Mode: Transmitting  
Note: TNA-AK-150  
RBW:10kHz VBW:30kHz

Serial No.: 2VJ1-4  
Tester: Leesin Xiang

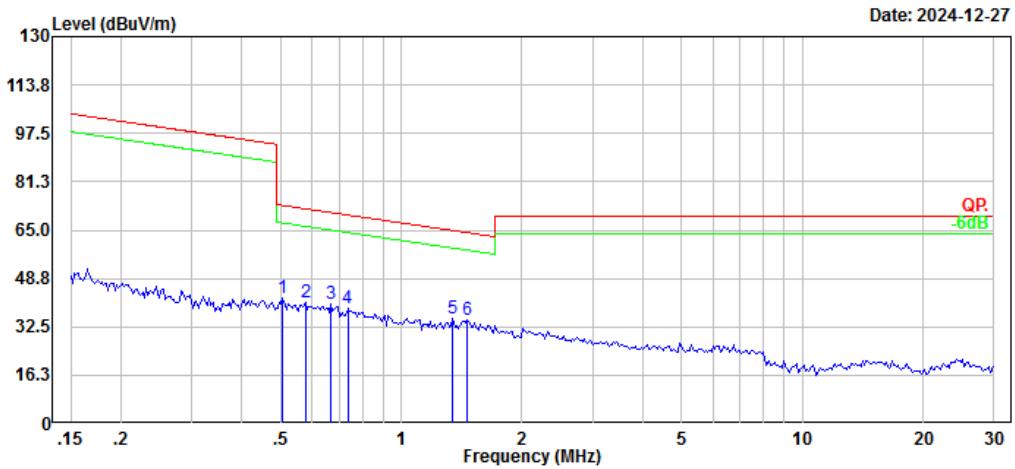


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
<hr/>							
1	0.507	18.52	23.45	41.97	73.49	31.52	Peak
2	0.576	17.86	22.71	40.57	72.36	31.79	Peak
3	0.668	18.39	21.78	40.17	71.05	30.88	Peak
4	0.735	17.46	21.15	38.61	70.20	31.59	Peak
5	1.345	20.15	15.03	35.18	64.84	29.66	Peak
6	1.464	20.26	14.50	34.76	64.09	29.33	Peak

**TNA-AK-300( $\pi/2$ -BPSK 69.12GHz was tested):**

Project No.: 2402A108372E-RF  
Polarization: Parallel  
Test Mode: Transmitting  
Note: TNA-AK-300  
RBW:300Hz VBW:1kHz


Serial No.: 2VJ1-4  
Tester: Leesin Xiang

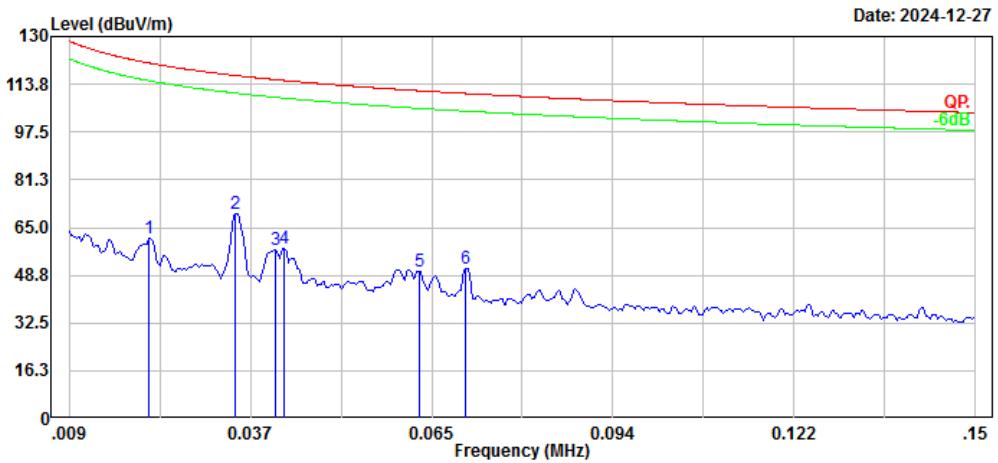

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	0.021	11.45	49.69	61.14	120.99	59.85	Peak
2	0.035	22.89	46.67	69.56	116.74	47.18	Peak
3	0.041	11.82	45.57	57.39	115.32	57.93	Peak
4	0.043	12.56	45.33	57.89	115.02	57.13	Peak
5	0.063	8.54	41.74	50.28	111.56	61.28	Peak
6	0.071	10.56	40.46	51.02	110.61	59.59	Peak

Project No.: 2402A108372E-RF  
Polarization: Parallel  
Test Mode: Transmitting  
Note: TNA-AK-300  
RBW:10kHz VBW:30kHz

Serial No.: 2VJ1-4  
Tester: Leesin Xiang

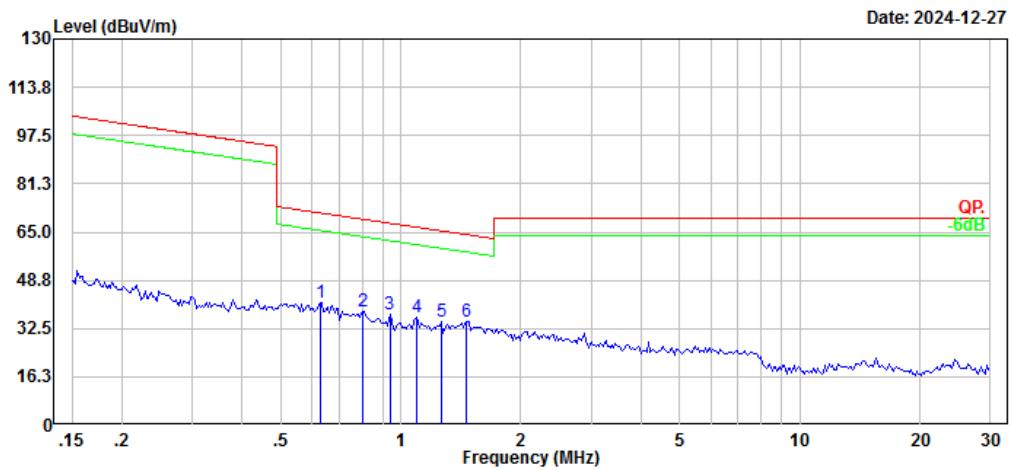


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	0.627	18.98	22.20	41.18	71.61	30.43	Peak
2	0.800	17.88	20.56	38.44	69.45	31.01	Peak
3	0.938	19.70	17.80	37.50	68.04	30.54	Peak
4	1.100	20.32	16.12	36.44	66.63	30.19	Peak
5	1.262	19.47	15.40	34.87	65.41	30.54	Peak
6	1.464	20.54	14.50	35.04	64.09	29.05	Peak

**TNA-AK-S-45( $\pi/2$ -BPSK 64.80GHz was tested):**

Project No.: 2402A108372E-RF  
Polarization: Parallel  
Test Mode: Transmitting  
Note: TNA-AK-S-45  
RBW:300Hz VBW:1kHz


Serial No.: 2VJ1-4  
Tester: Leesin Xiang

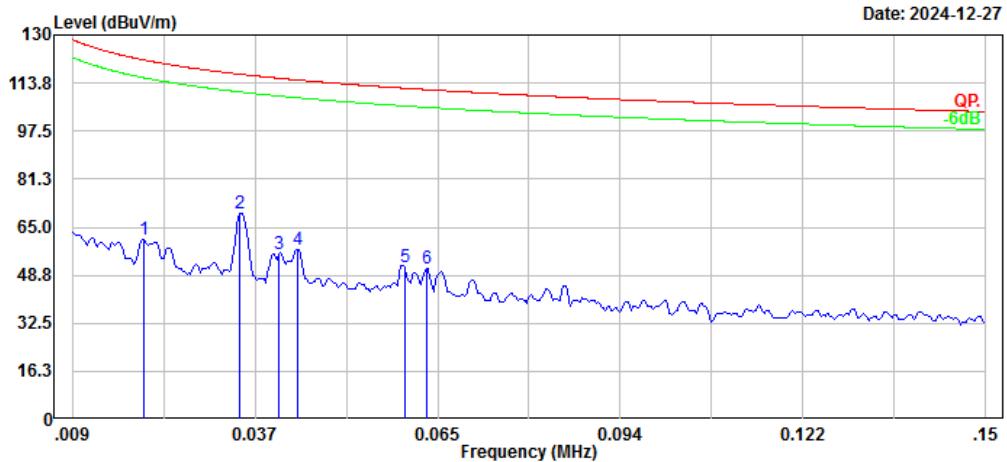

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	0.020	10.59	50.04	60.63	121.58	60.95	Peak
2	0.035	22.88	46.67	69.55	116.74	47.19	Peak
3	0.041	10.46	45.62	56.08	115.38	59.30	Peak
4	0.044	12.41	45.14	57.55	114.80	57.25	Peak
5	0.060	9.38	42.29	51.67	112.00	60.33	Peak
6	0.064	9.39	41.69	51.08	111.52	60.44	Peak

Project No.: 2402A108372E-RF  
Polarization: Parallel  
Test Mode: Transmitting  
Note: TNA-AK-S-45  
RBW:10kHz VBW:30kHz

Serial No.: 2VJ1-4  
Tester: Leesin Xiang

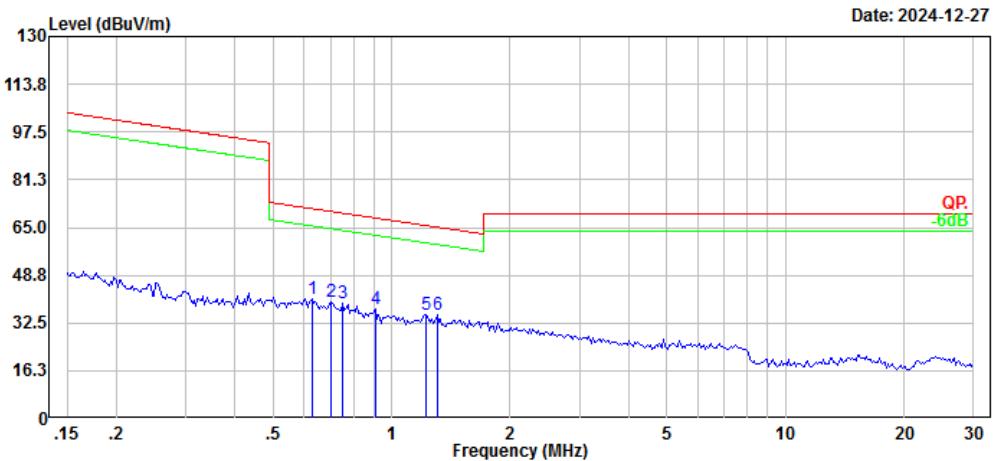


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	0.627	18.38	22.20	40.58	71.61	31.03	Peak
2	0.705	18.44	21.42	39.86	70.58	30.72	Peak
3	0.751	18.18	21.00	39.18	70.01	30.83	Peak
4	0.909	18.86	18.39	37.25	68.32	31.07	Peak
5	1.223	19.61	15.57	35.18	65.69	30.51	Peak
6	1.303	19.89	15.22	35.11	65.13	30.02	Peak

**TNA-AK-S-90( $\pi/2$ -BPSK 64.80GHz was tested):**

Project No.: 2402A108372E-RF  
Polarization: Parallel  
Test Mode: Transmitting  
Note: TNA-Ak-S-90  
RBW:300Hz VBW:1kHz


Serial No.: 2VJ1-4  
Tester: Leesin Xiang

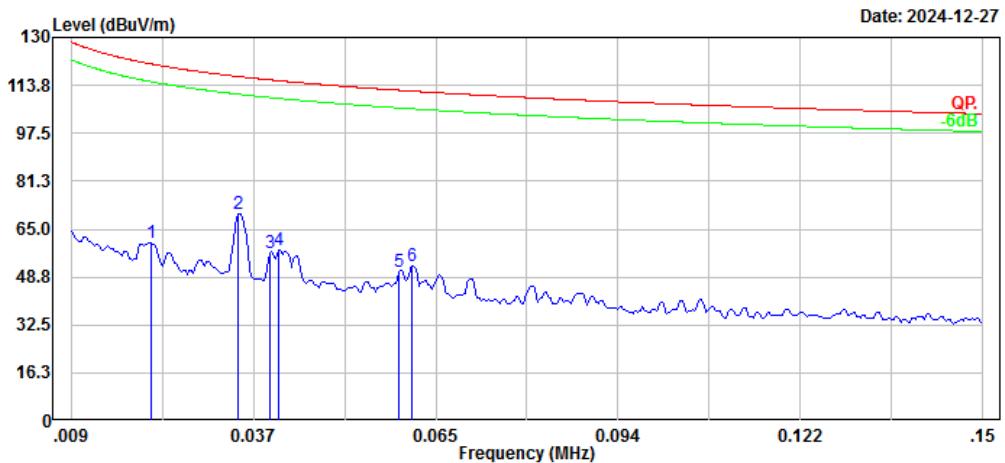

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	0.021	10.88	49.69	60.57	120.99	60.42	Peak
2	0.035	23.35	46.67	70.02	116.74	46.72	Peak
3	0.040	11.13	45.81	56.94	115.62	58.68	Peak
4	0.041	12.21	45.57	57.78	115.32	57.54	Peak
5	0.060	8.38	42.38	50.76	112.08	61.32	Peak
6	0.062	10.59	42.04	52.63	111.79	59.16	Peak

Project No.: 2402A108372E-RF  
Polarization: Parallel  
Test Mode: Transmitting  
Note: TNA-Ak-S-90  
RBW:10kHz VBW:30kHz

Serial No.: 2VJ1-4  
Tester: Leesin Xiang

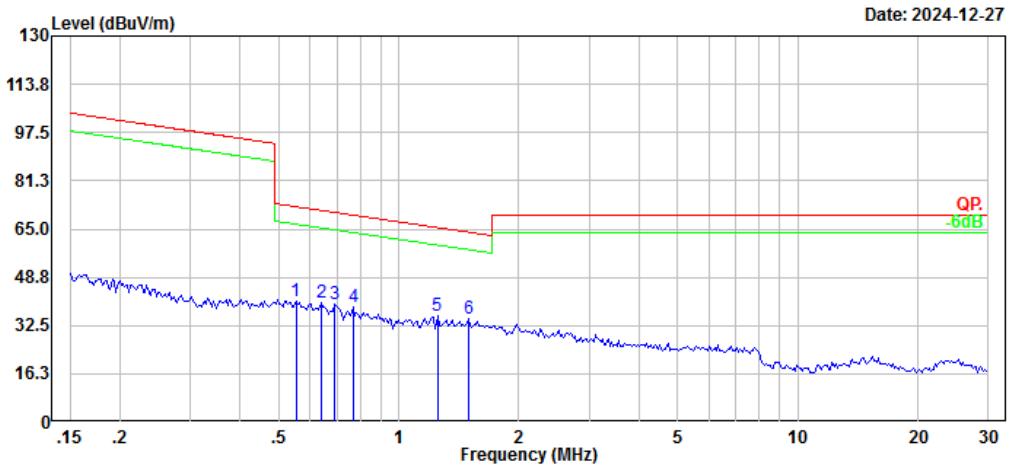


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	0.552	17.80	22.97	40.77	72.74	31.97	Peak
2	0.641	18.12	22.06	40.18	71.42	31.24	Peak
3	0.690	18.17	21.57	39.74	70.77	31.03	Peak
4	0.767	17.72	20.86	38.58	69.83	31.25	Peak
5	1.249	20.27	15.45	35.72	65.50	29.78	Peak
6	1.495	20.42	14.36	34.78	63.90	29.12	Peak

## 2) 30MHz-1GHz

Base model( $\pi/2$ -BPSK 69.12GHz was tested):

Project No.: 2402A108372E-RF  
Polarization: Horizontal  
Test Mode: Transmitting  
Note: Base model  
RBW:100kHz VBW:300kHz


Serial No.: 2VJ1-4  
Tester: Leesin Xiang

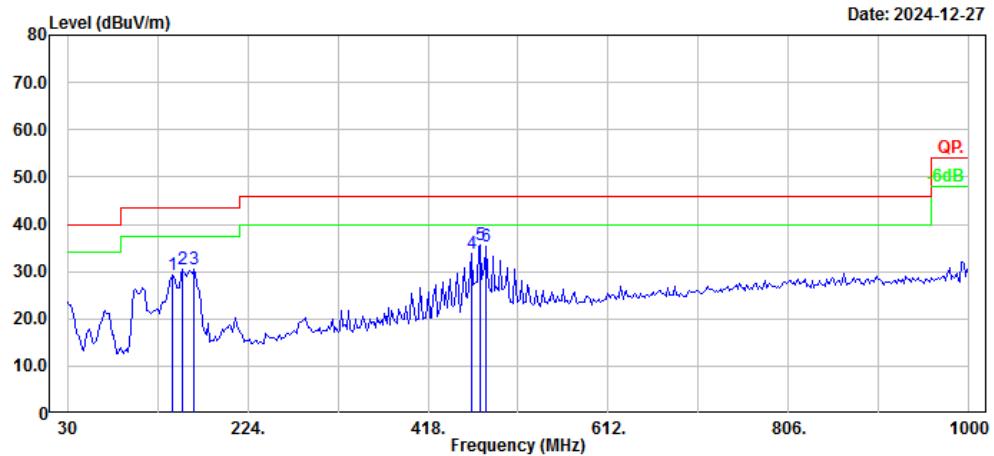

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	142.52	39.99	-10.61	29.38	43.50	14.12	Peak
2	154.16	41.49	-11.09	30.40	43.50	13.10	Peak
3	165.80	41.92	-11.51	30.41	43.50	13.09	Peak
4	464.56	38.88	-5.04	33.84	46.00	12.16	Peak
5	474.26	40.42	-4.84	35.58	46.00	10.42	Peak
6	480.08	40.13	-4.71	35.42	46.00	10.58	Peak

Project No.: 2402A108372E-RF  
Polarization: Vertical  
Test Mode: Transmitting  
Note: Base model  
RBW:100kHz VBW:300kHz

Serial No.: 2VJ1-4  
Tester: Leesin Xiang

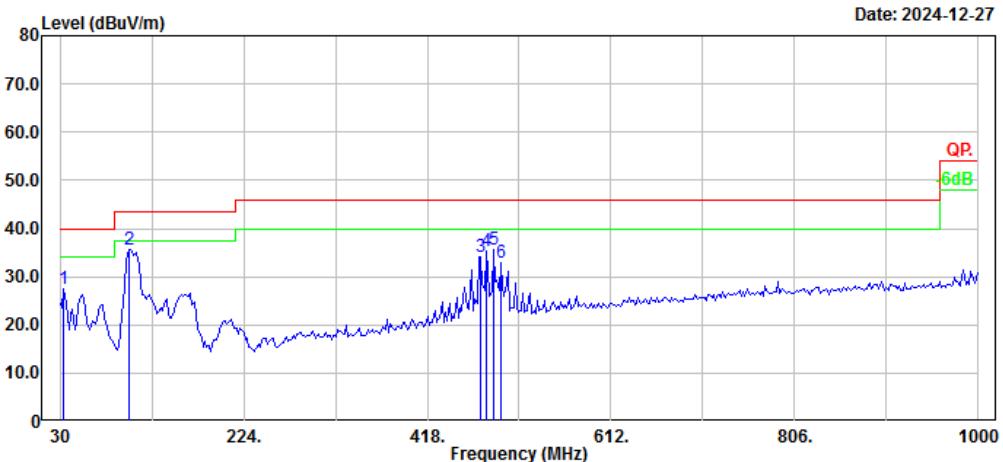


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	33.88	34.06	-6.62	27.44	40.00	12.56	Peak
2	103.72	48.98	-13.27	35.71	43.50	7.79	Peak
3	474.26	39.02	-4.84	34.18	46.00	11.82	Peak
4	480.08	39.92	-4.71	35.21	46.00	10.79	Peak
5	487.84	40.15	-4.54	35.61	46.00	10.39	Peak
6	495.60	37.31	-4.38	32.93	46.00	13.07	Peak

**TNA-AK-100( $\pi/2$ -QPSK 64.80GHz was tested):**

Project No.: 2402A108372E-RF  
Polarization: Horizontal  
Test Mode: Transmitting  
Note: TNA-AK-100  
RBW:100kHz VBW:300kHz


Serial No.: 2VJ1-4  
Tester: Leesin Xiang

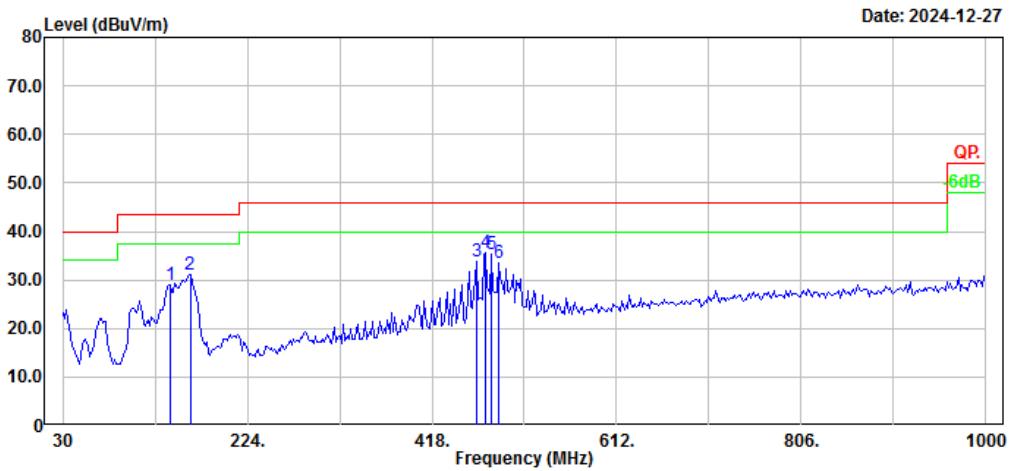

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	142.52	39.74	-10.61	29.13	43.50	14.37	Peak
2	163.86	42.37	-11.39	30.98	43.50	12.52	Peak
3	464.56	38.71	-5.04	33.67	46.00	12.33	Peak
4	474.26	40.59	-4.84	35.75	46.00	10.25	Peak
5	480.08	39.94	-4.71	35.23	46.00	10.77	Peak
6	487.84	37.99	-4.54	33.45	46.00	12.55	Peak

Project No.: 2402A108372E-RF  
Polarization: Vertical  
Test Mode: Transmitting  
Note: TNA-AK-100  
RBW:100kHz VBW:300kHz

Serial No.: 2VJ1-4  
Tester: Leesin Xiang

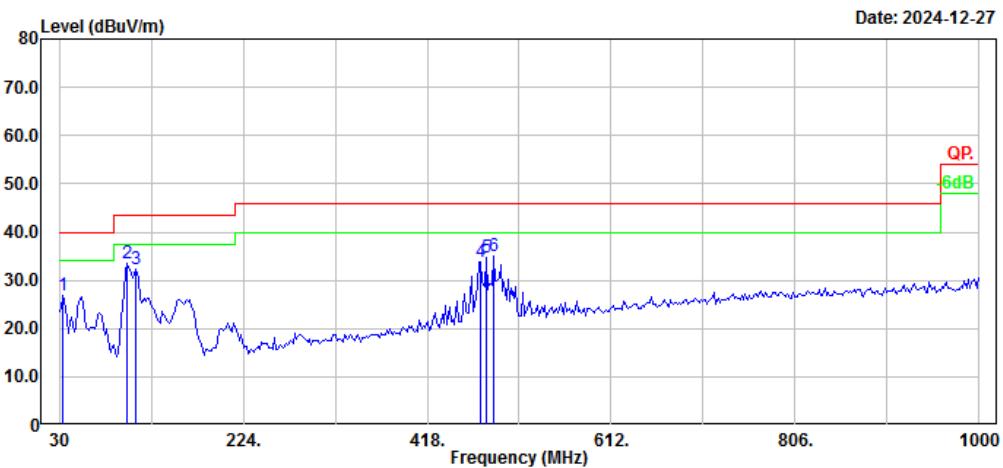


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	33.88	33.34	-6.62	26.72	40.00	13.28	Peak
2	101.78	47.52	-13.86	33.66	43.50	9.84	Peak
3	111.48	43.44	-11.15	32.29	43.50	11.21	Peak
4	474.26	38.56	-4.84	33.72	46.00	12.28	Peak
5	480.08	39.56	-4.71	34.85	46.00	11.15	Peak
6	487.84	39.66	-4.54	35.12	46.00	10.88	Peak

**TNA-AK-150( $\pi/2$ -BPSK 58.32GHz was tested):**

Project No.: 2402A108372E-RF  
Polarization: Horizontal  
Test Mode: Transmitting  
Note: TNA-AK-150  
RBW:100kHz VBW:300kHz


Serial No.: 2VJ1-4  
Tester: Leesin Xiang

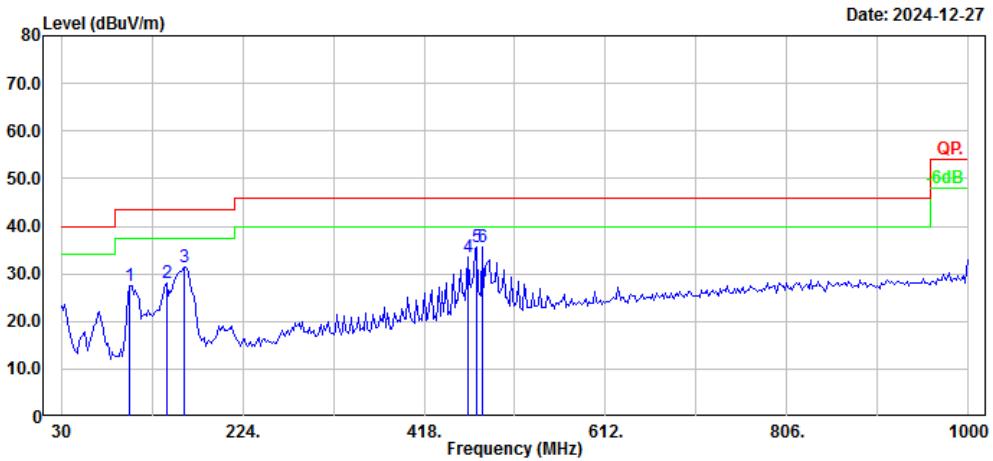

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	103.72	40.72	-13.27	27.45	43.50	16.05	Peak
2	142.52	38.83	-10.61	28.22	43.50	15.28	Peak
3	161.92	42.70	-11.27	31.43	43.50	12.07	Peak
4	464.56	38.45	-5.04	33.41	46.00	12.59	Peak
5	474.26	40.53	-4.84	35.69	46.00	10.31	Peak
6	480.08	40.41	-4.71	35.70	46.00	10.30	Peak

Project No.: 2402A108372E-RF  
Polarization: Vertical  
Test Mode: Transmitting  
Note: TNA-AK-150  
RBW:100kHz VBW:300kHz

Serial No.: 2VJ1-4  
Tester: Leesin Xiang

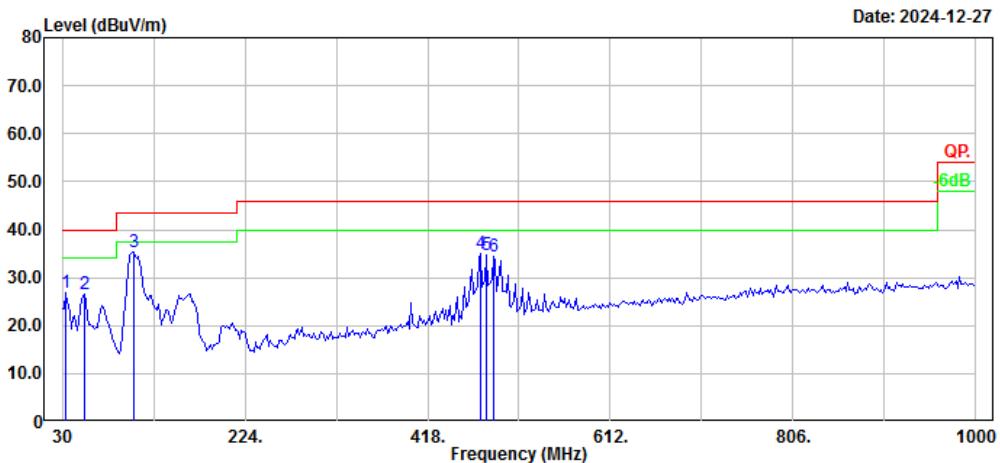


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	33.88	33.62	-6.62	27.00	40.00	13.00	Peak
2	53.28	43.08	-16.52	26.56	40.00	13.44	Peak
3	105.66	47.90	-12.68	35.22	43.50	8.28	Peak
4	474.26	39.96	-4.84	35.12	46.00	10.88	Peak
5	480.08	39.33	-4.71	34.62	46.00	11.38	Peak
6	487.84	38.95	-4.54	34.41	46.00	11.59	Peak

**TNA-AK-300( $\pi/2$ -BPSK 69.12GHz was tested):**

Project No.: 2402A108372E-RF  
Polarization: Horizontal  
Test Mode: Transmitting  
Note: TNA-AK-300  
RBW:100kHz VBW:300kHz


Serial No.: 2VJ1-4  
Tester: Leesin Xiang

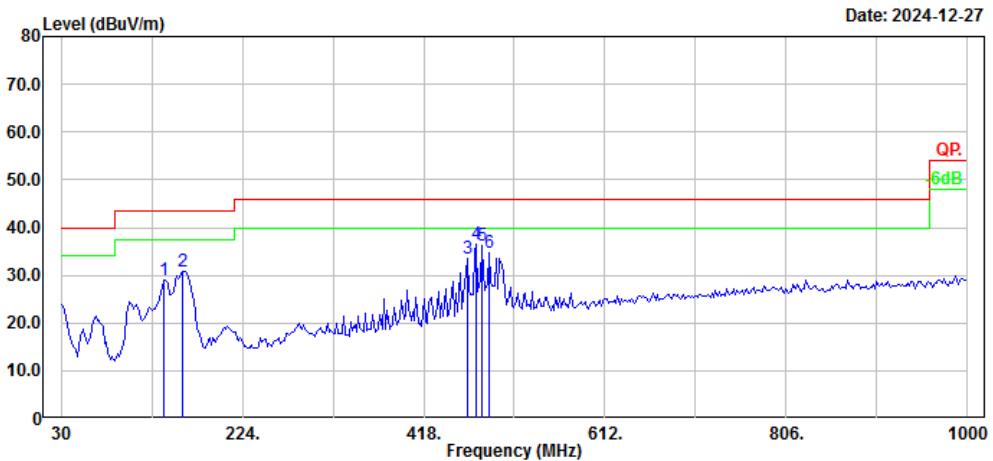

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	140.58	39.55	-10.49	29.06	43.50	14.44	Peak
2	159.98	42.06	-11.15	30.91	43.50	12.59	Peak
3	464.56	38.46	-5.04	33.42	46.00	12.58	Peak
4	474.26	41.26	-4.84	36.42	46.00	9.58	Peak
5	480.08	40.87	-4.71	36.16	46.00	9.84	Peak
6	487.84	39.18	-4.54	34.64	46.00	11.36	Peak

Project No.: 2402A108372E-RF  
Polarization: Vertical  
Test Mode: Transmitting  
Note: TNA-AK-300  
RBW:100kHz VBW:300kHz

Serial No.: 2VJ1-4  
Tester: Leesin Xiang

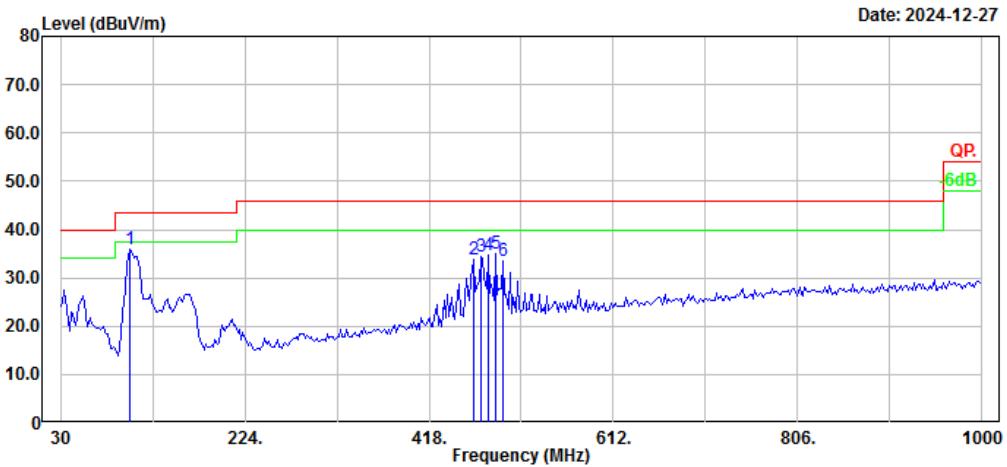


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	103.72	49.06	-13.27	35.79	43.50	7.71	Peak
2	464.56	38.77	-5.04	33.73	46.00	12.27	Peak
3	472.32	39.22	-4.87	34.35	46.00	11.65	Peak
4	480.08	39.46	-4.71	34.75	46.00	11.25	Peak
5	487.84	39.62	-4.54	35.08	46.00	10.92	Peak
6	495.60	38.02	-4.38	33.64	46.00	12.36	Peak

**TNA-AK-S-45 ( $\pi/2$ -BPSK 64.80GHz was tested):**

Project No.: 2402A108372E-RF  
Polarization: Horizontal  
Test Mode: Transmitting  
Note: TNA-AK-S-45  
RBW:100kHz VBW:300kHz


Serial No.: 2VJ1-4  
Tester: Leesin Xiang

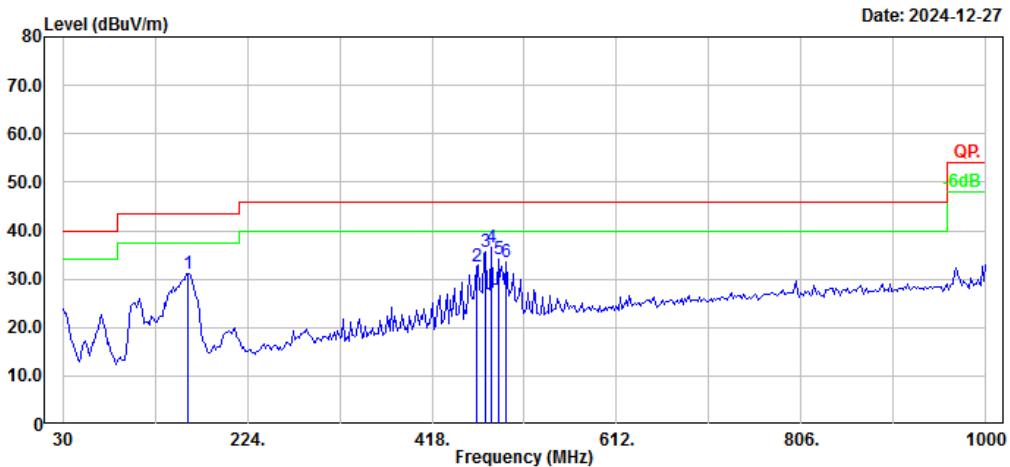

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
<hr/>							
1	161.92	42.48	-11.27	31.21	43.50	12.29	Peak
2	464.56	37.72	-5.04	32.68	46.00	13.32	Peak
3	474.26	40.56	-4.84	35.72	46.00	10.28	Peak
4	480.08	41.35	-4.71	36.64	46.00	9.36	Peak
5	487.84	38.67	-4.54	34.13	46.00	11.87	Peak
6	495.60	37.96	-4.38	33.58	46.00	12.42	Peak

Project No.: 2402A108372E-RF  
Polarization: Vertical  
Test Mode: Transmitting  
Note: TNA-AK-S-45  
RBW:100kHz VBW:300kHz

Serial No.: 2VJ1-4  
Tester: Leesin Xiang

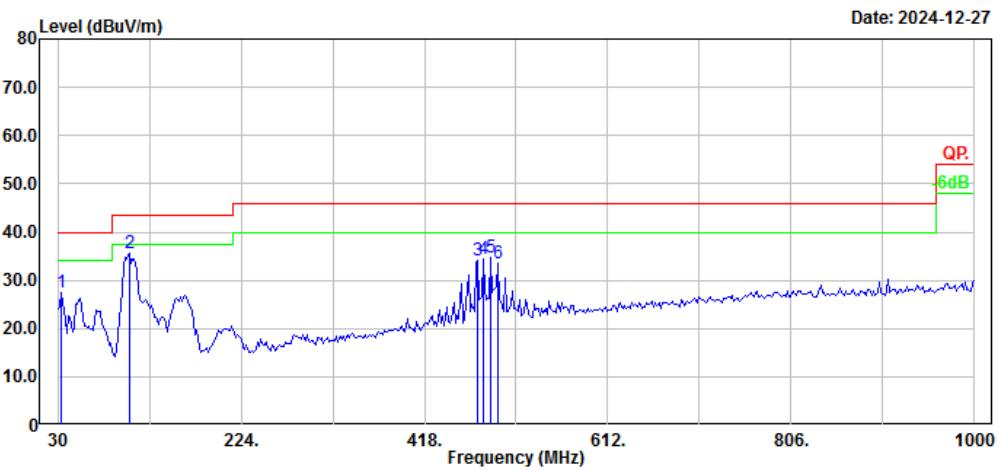


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	33.88	33.97	-6.62	27.35	40.00	12.65	Peak
2	105.66	48.34	-12.68	35.66	43.50	7.84	Peak
3	474.26	38.90	-4.84	34.06	46.00	11.94	Peak
4	480.08	39.26	-4.71	34.55	46.00	11.45	Peak
5	487.84	39.28	-4.54	34.74	46.00	11.26	Peak
6	495.60	37.82	-4.38	33.44	46.00	12.56	Peak

**TNA-AK-S-90( $\pi/2$ -BPSK 64.80GHz was tested):**

Project No.: 2402A108372E-RF  
Polarization: Horizontal  
Test Mode: Transmitting  
Note: TNA-Ak-S-90  
RBW:100kHz VBW:300kHz


Serial No.: 2VJ1-4  
Tester: Leesin Xiang

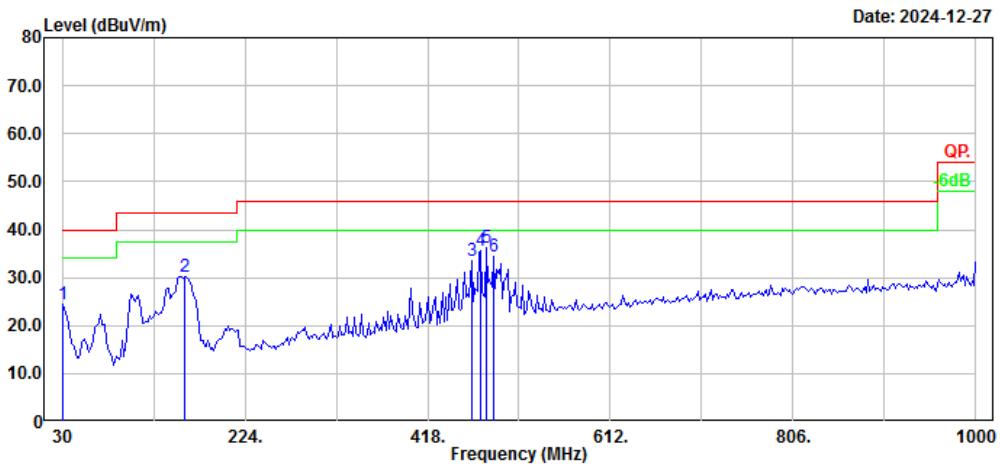

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	30.00	28.15	-3.80	24.35	40.00	15.65	Peak
2	159.98	41.35	-11.15	30.20	43.50	13.30	Peak
3	464.56	38.65	-5.04	33.61	46.00	12.39	Peak
4	474.26	40.45	-4.84	35.61	46.00	10.39	Peak
5	480.08	40.88	-4.71	36.17	46.00	9.83	Peak
6	487.84	38.87	-4.54	34.33	46.00	11.67	Peak

Project No.: 2402A108372E-RF  
Polarization: Vertical  
Test Mode: Transmitting  
Note: TNA-Ak-S-90  
RBW:100kHz VBW:300kHz


Serial No.: 2VJ1-4  
Tester: Leesin Xiang

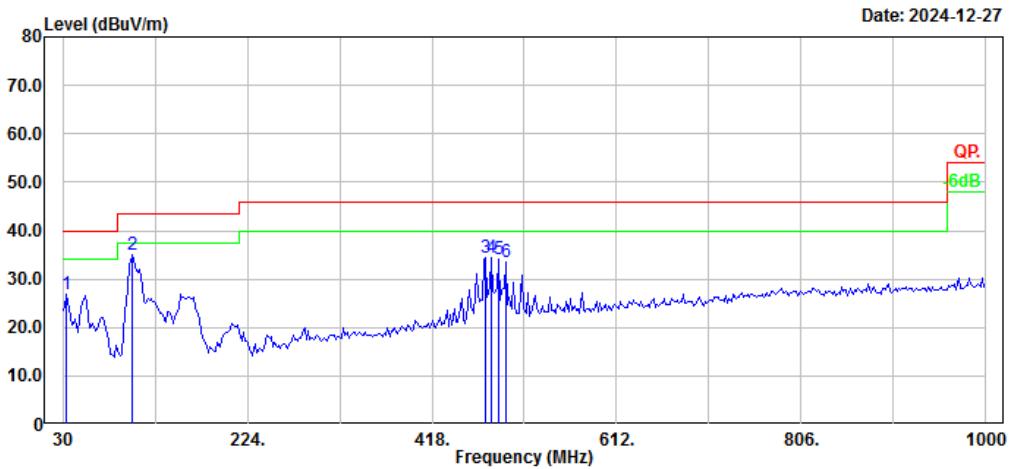


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	33.88	33.59	-6.62	26.97	40.00	13.03	Peak
2	103.72	48.20	-13.27	34.93	43.50	8.57	Peak
3	474.26	39.22	-4.84	34.38	46.00	11.62	Peak
4	480.08	39.10	-4.71	34.39	46.00	11.61	Peak
5	487.84	38.52	-4.54	33.98	46.00	12.02	Peak
6	495.60	37.83	-4.38	33.45	46.00	12.55	Peak


2) 1GHz-40GHz( $\pi/2$ -QPSK, 64.8GHz was tested)


Base model

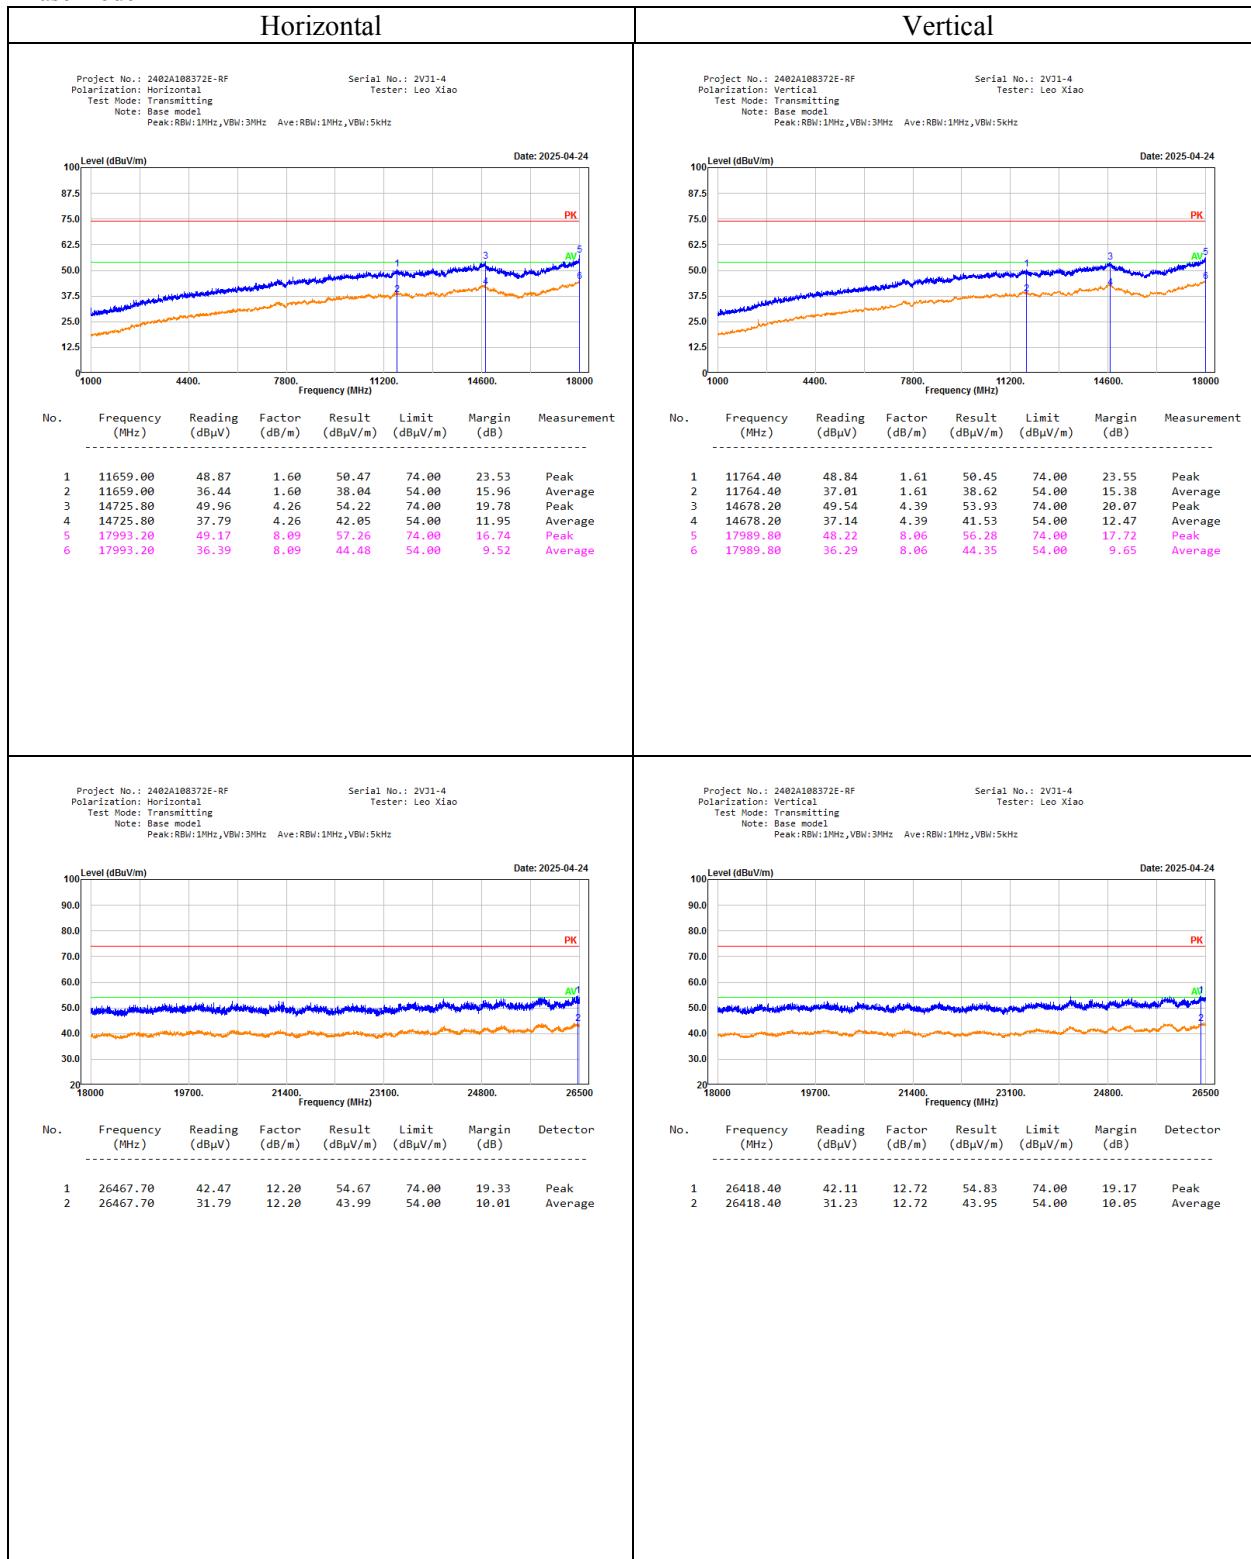

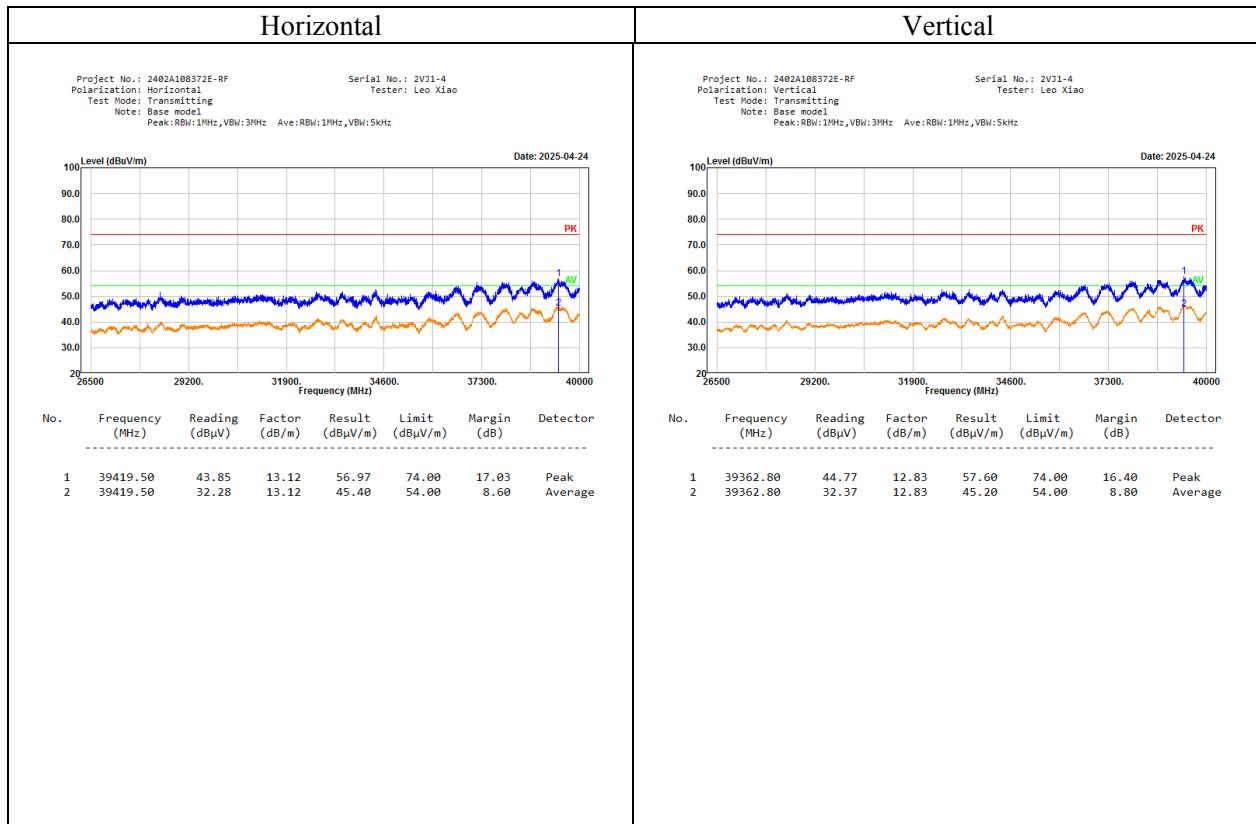



## TNA-AK-100

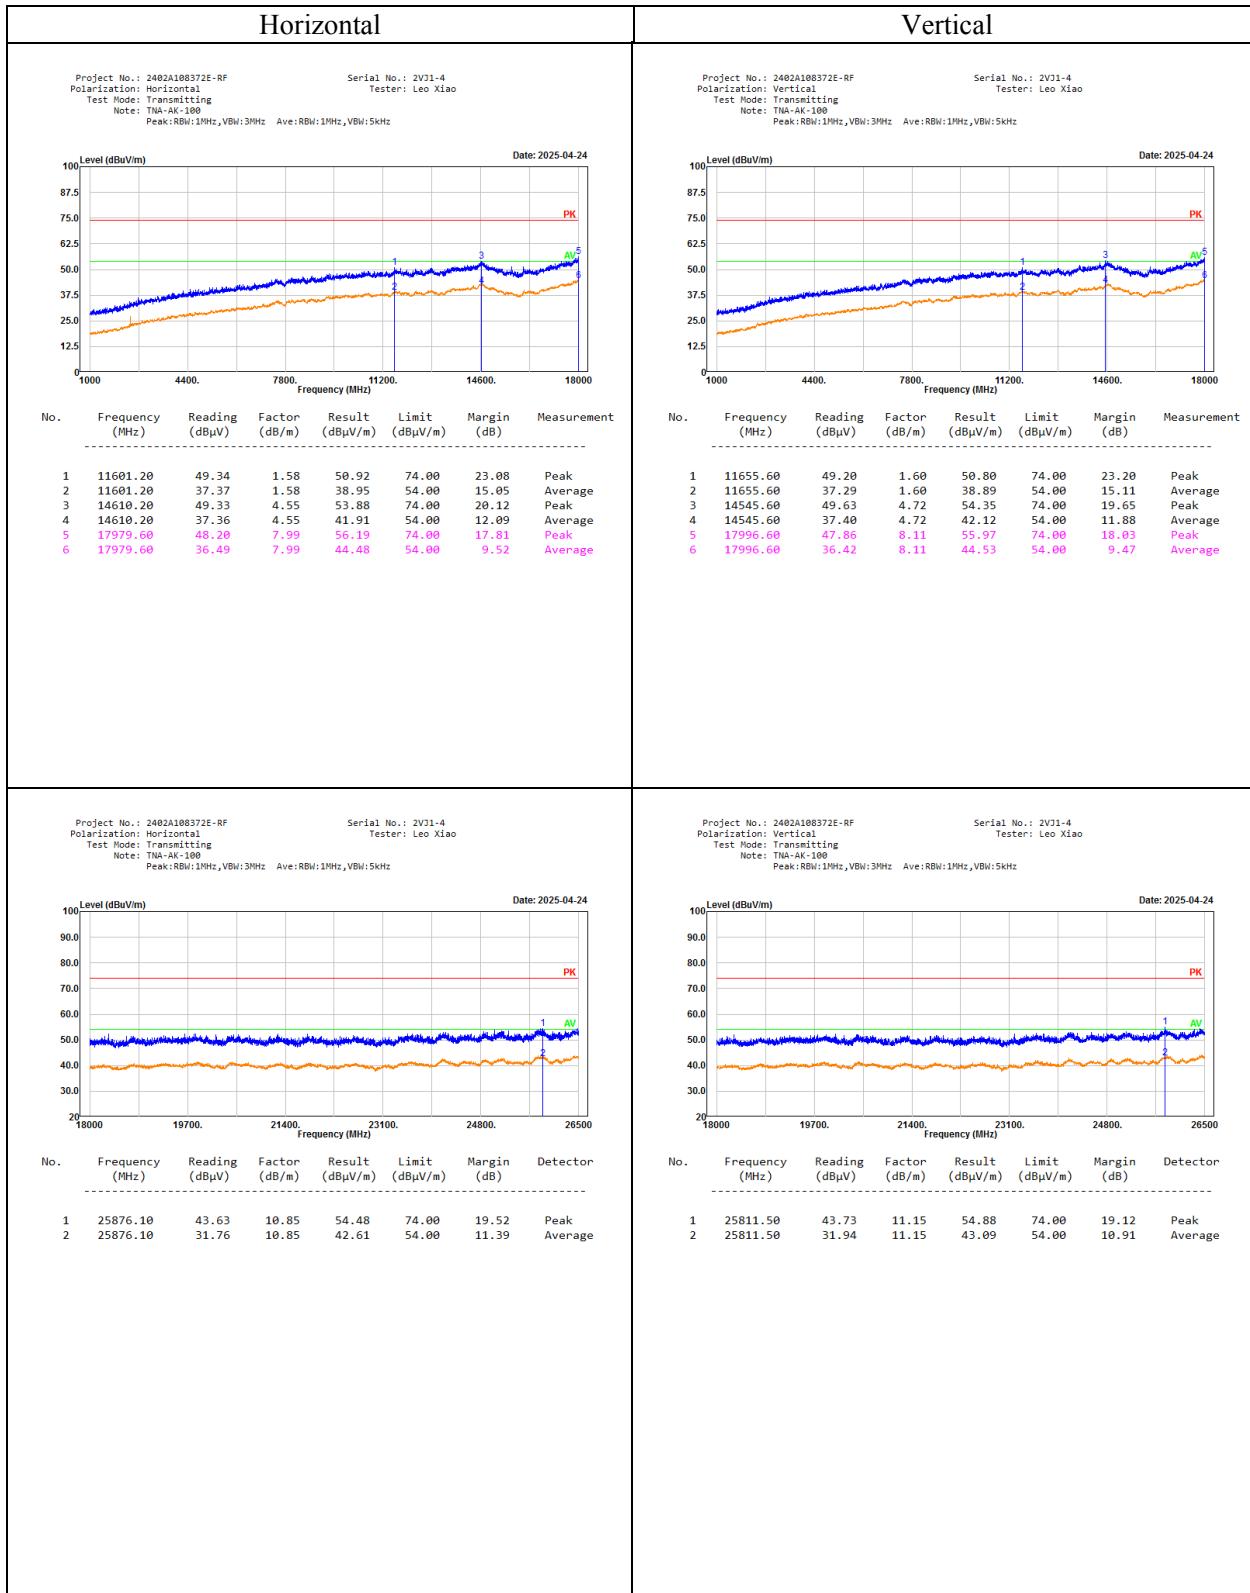

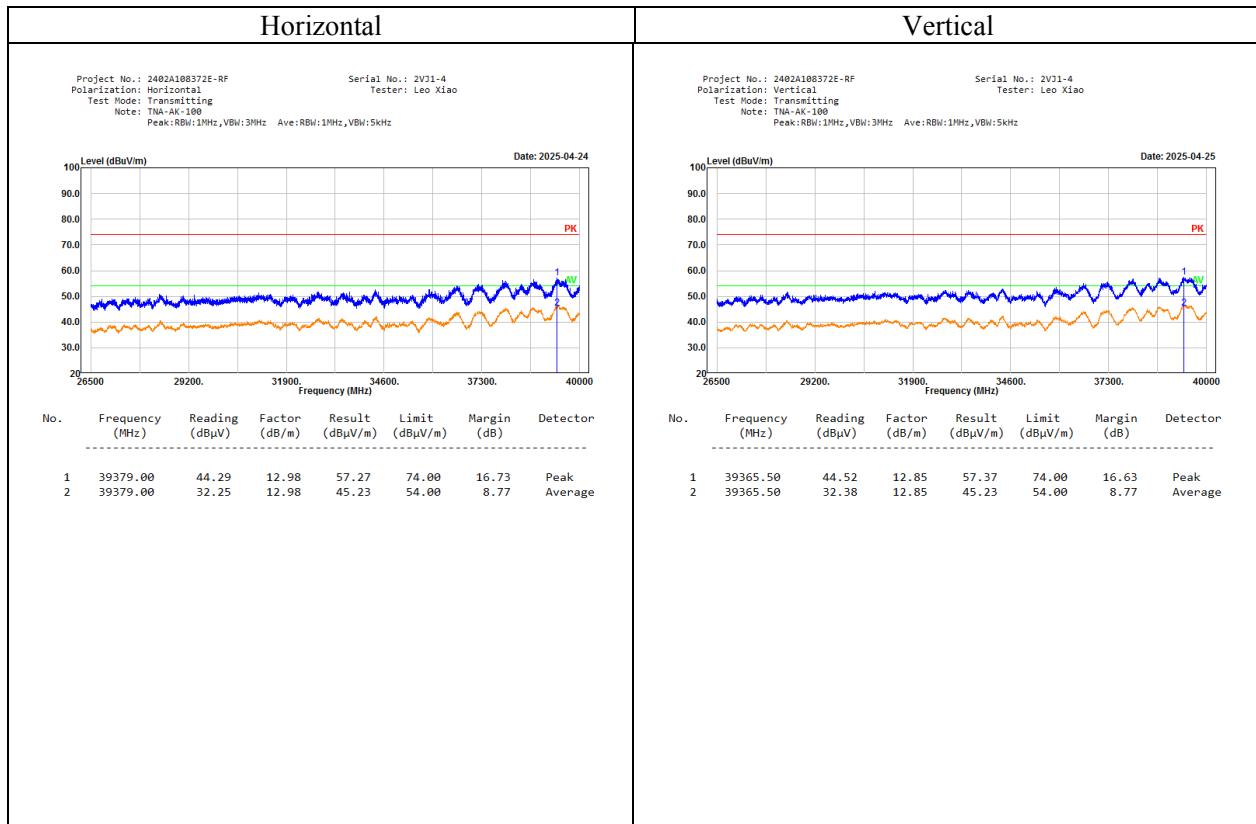



## TNA-AK-150

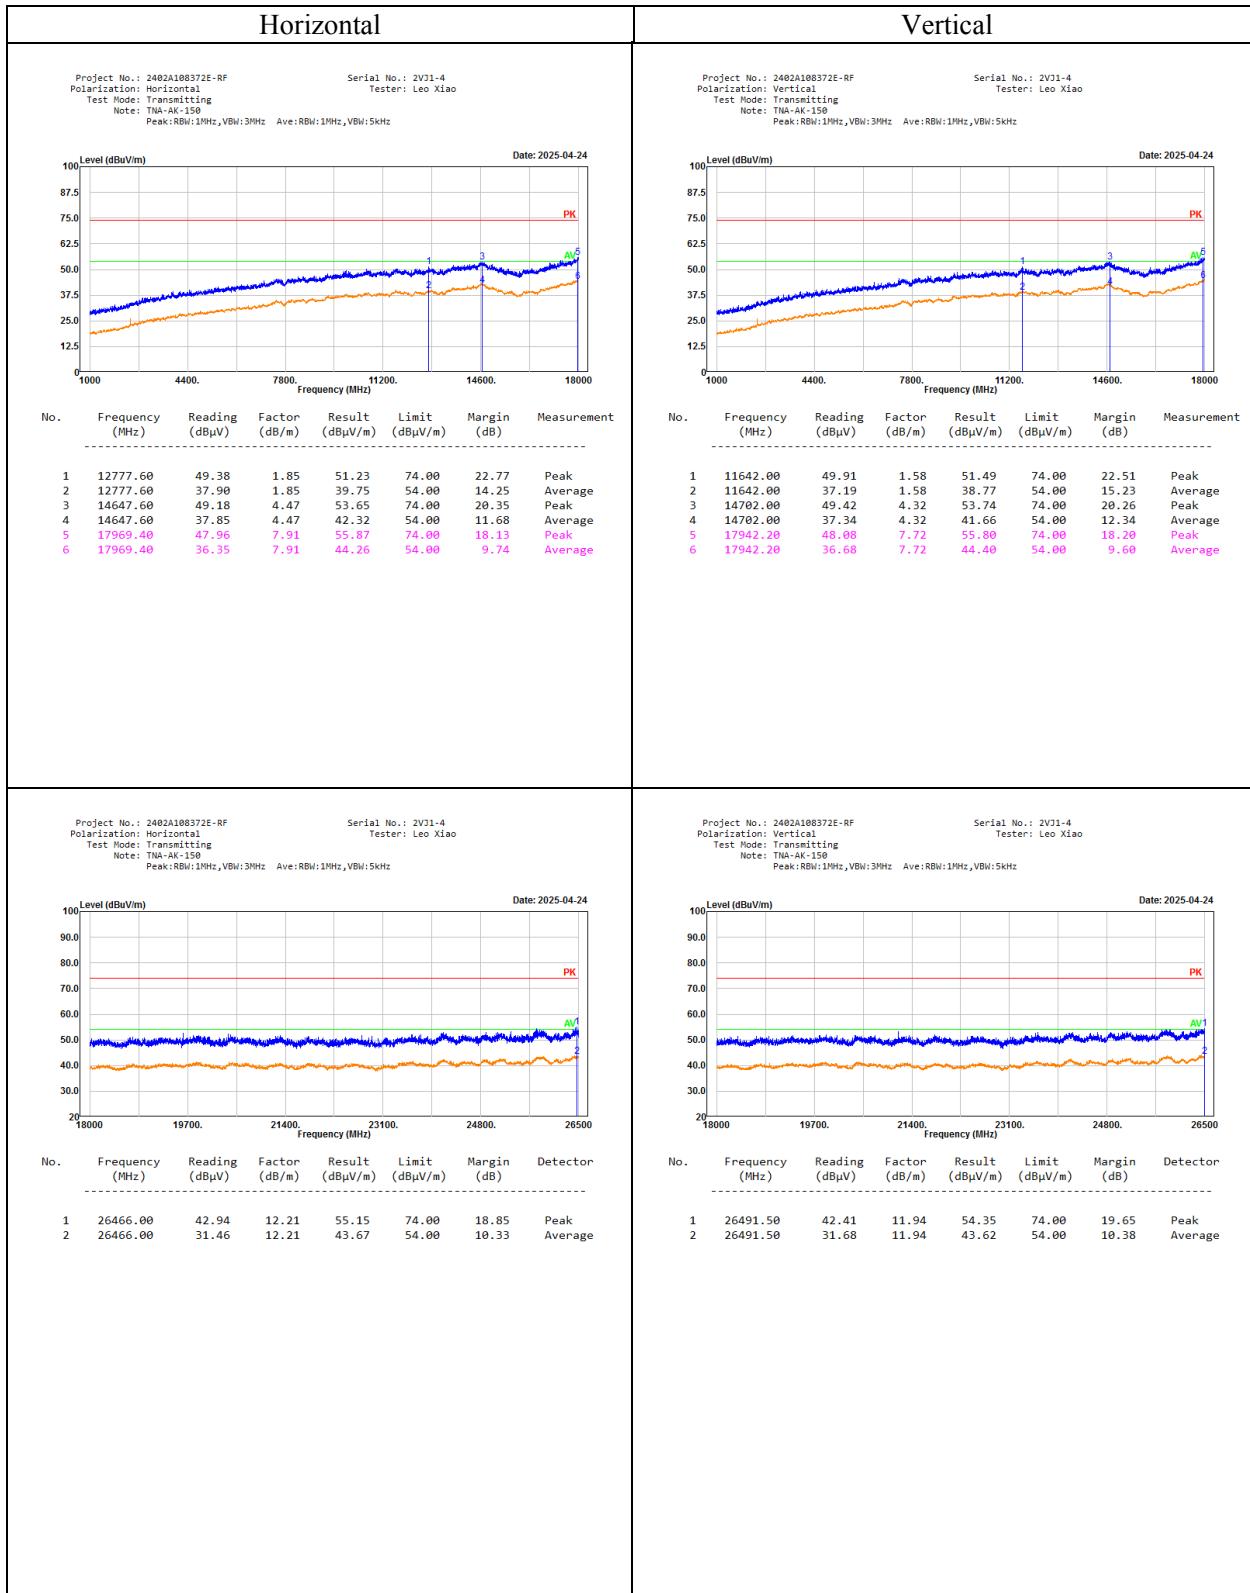

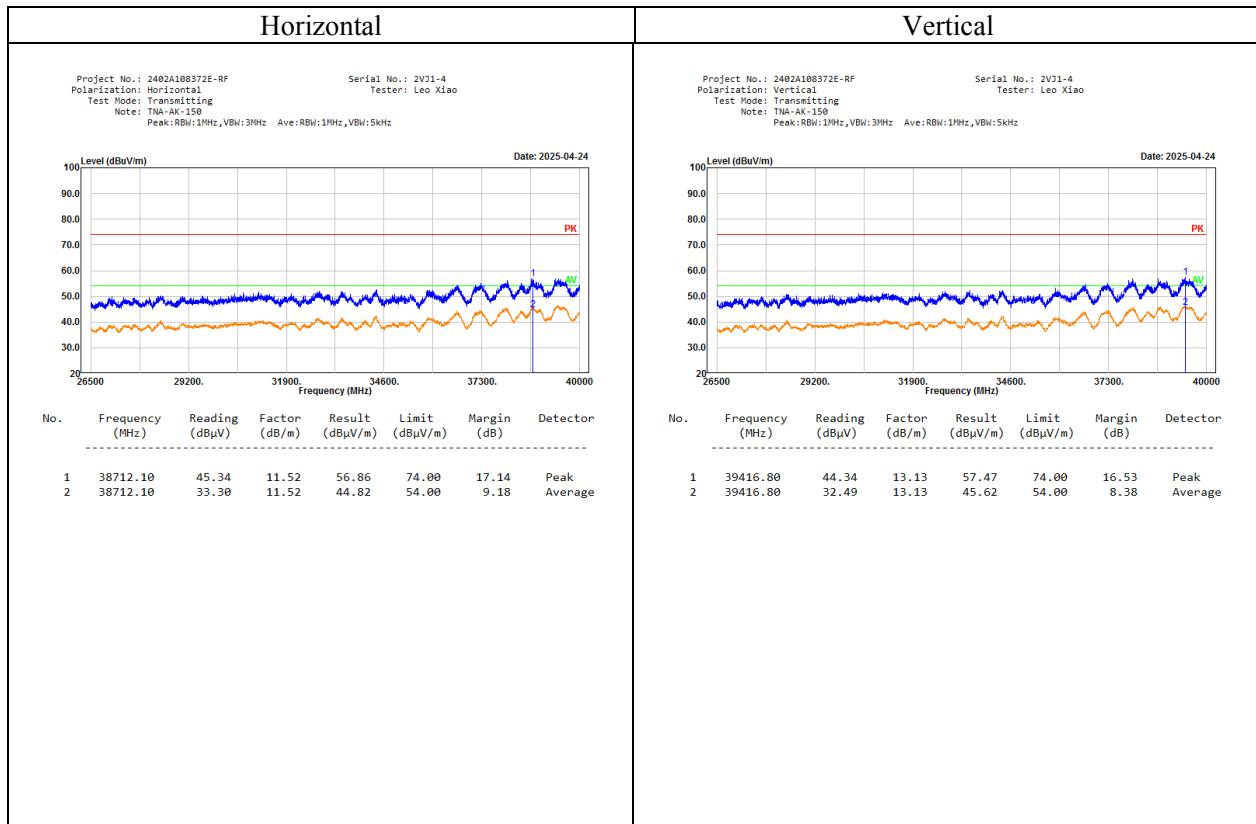



## TNA-AK-300

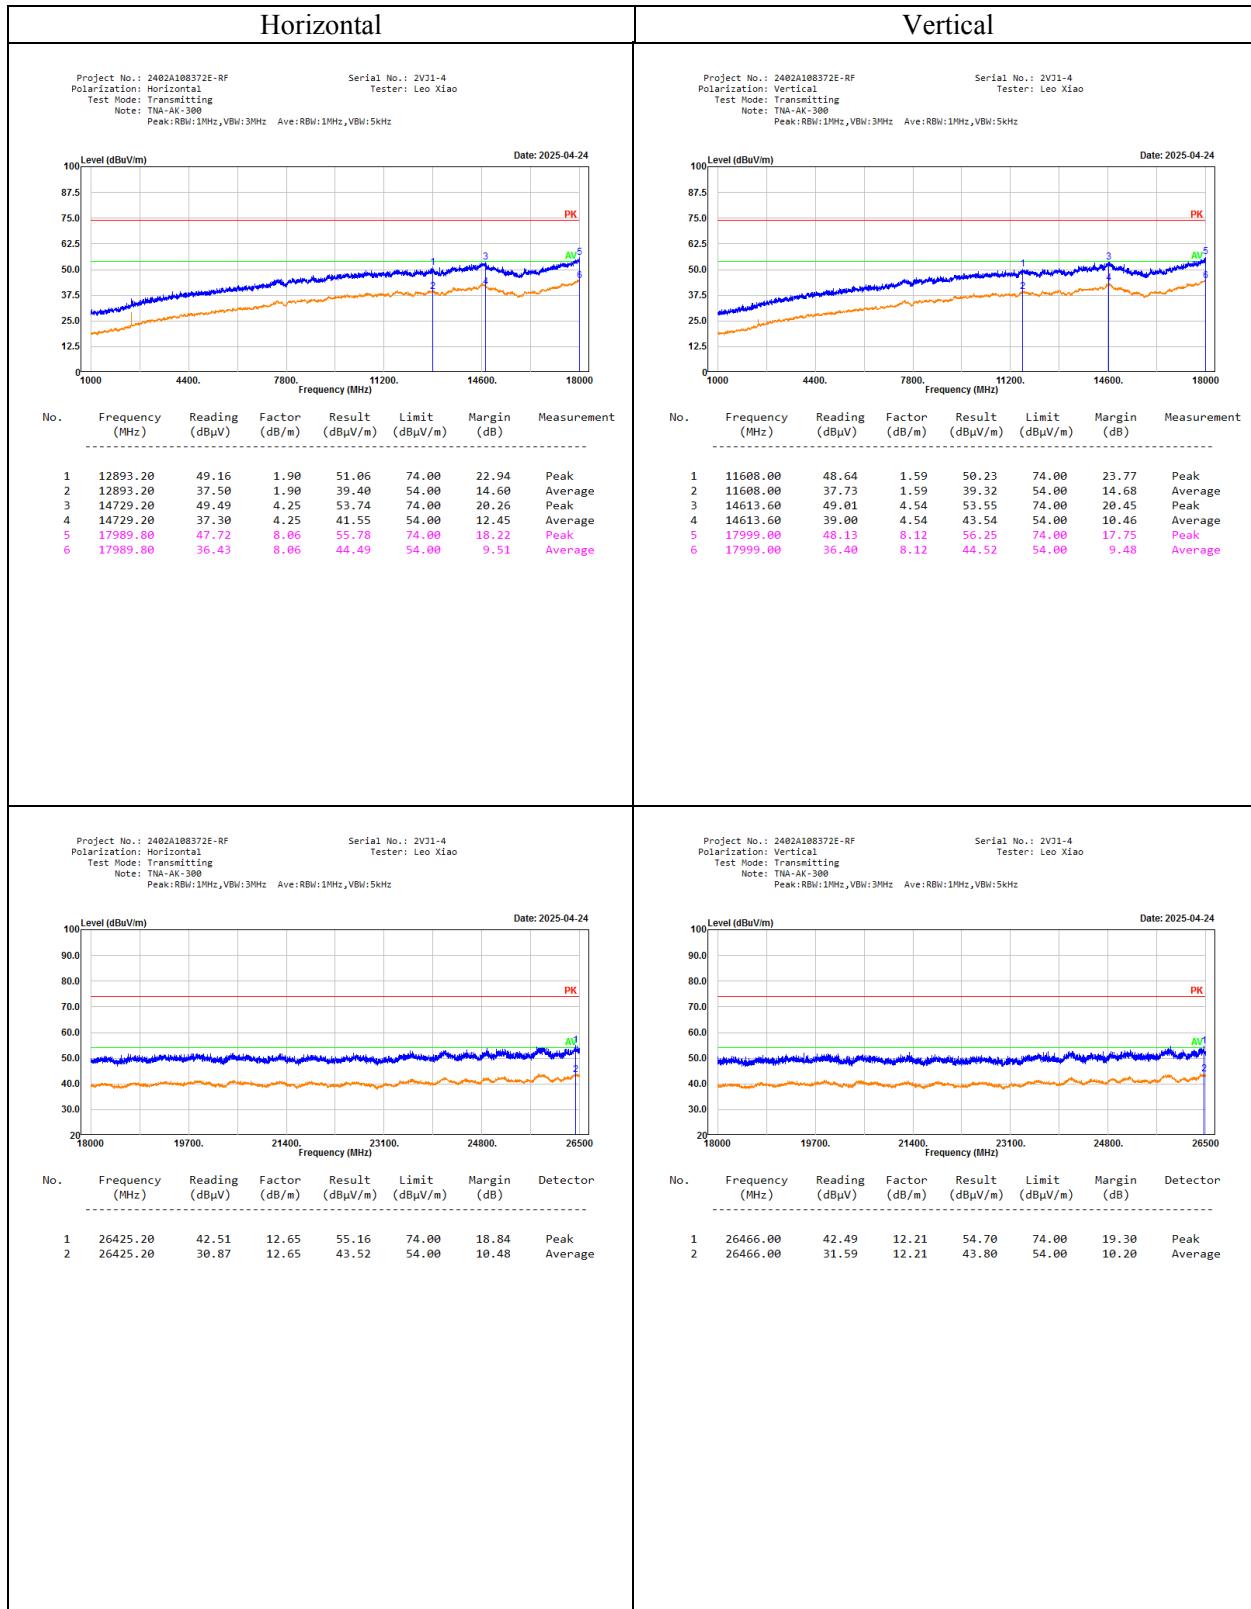

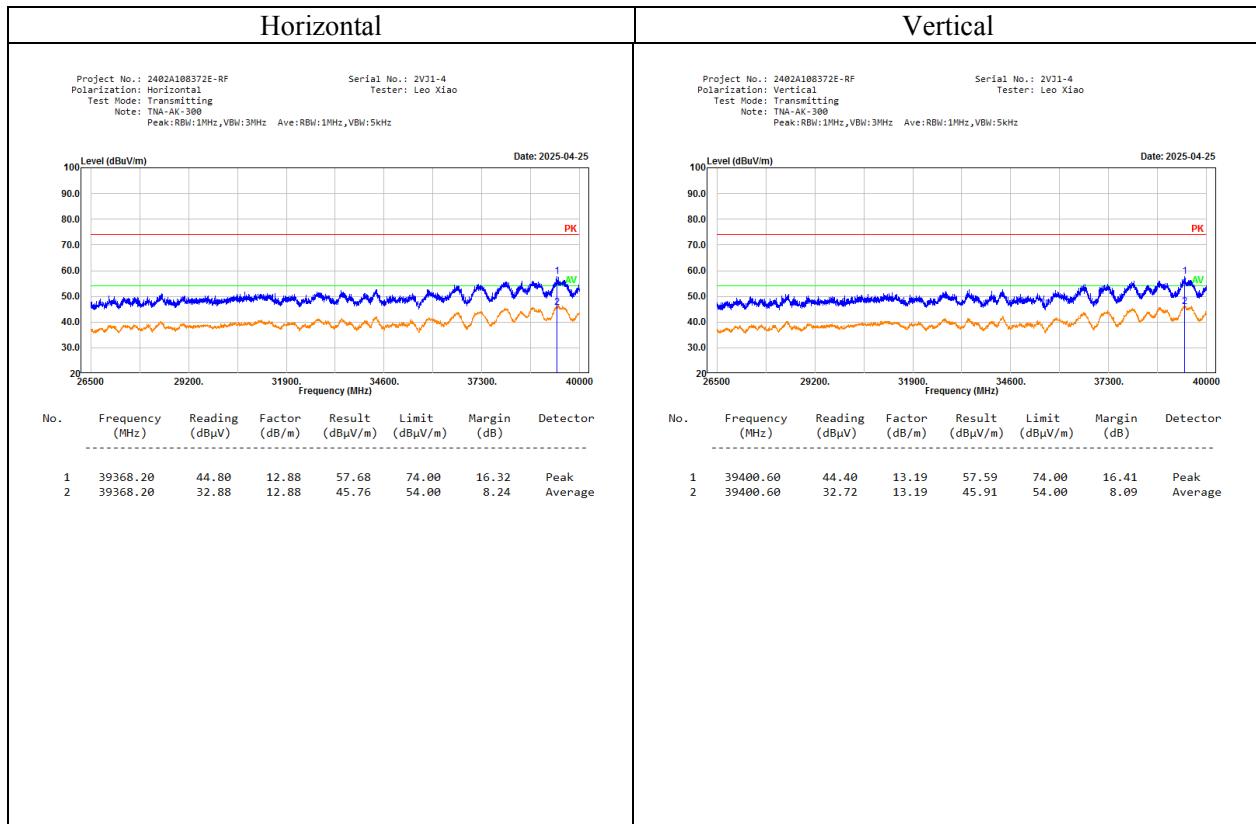



## TNA-AK-S-45

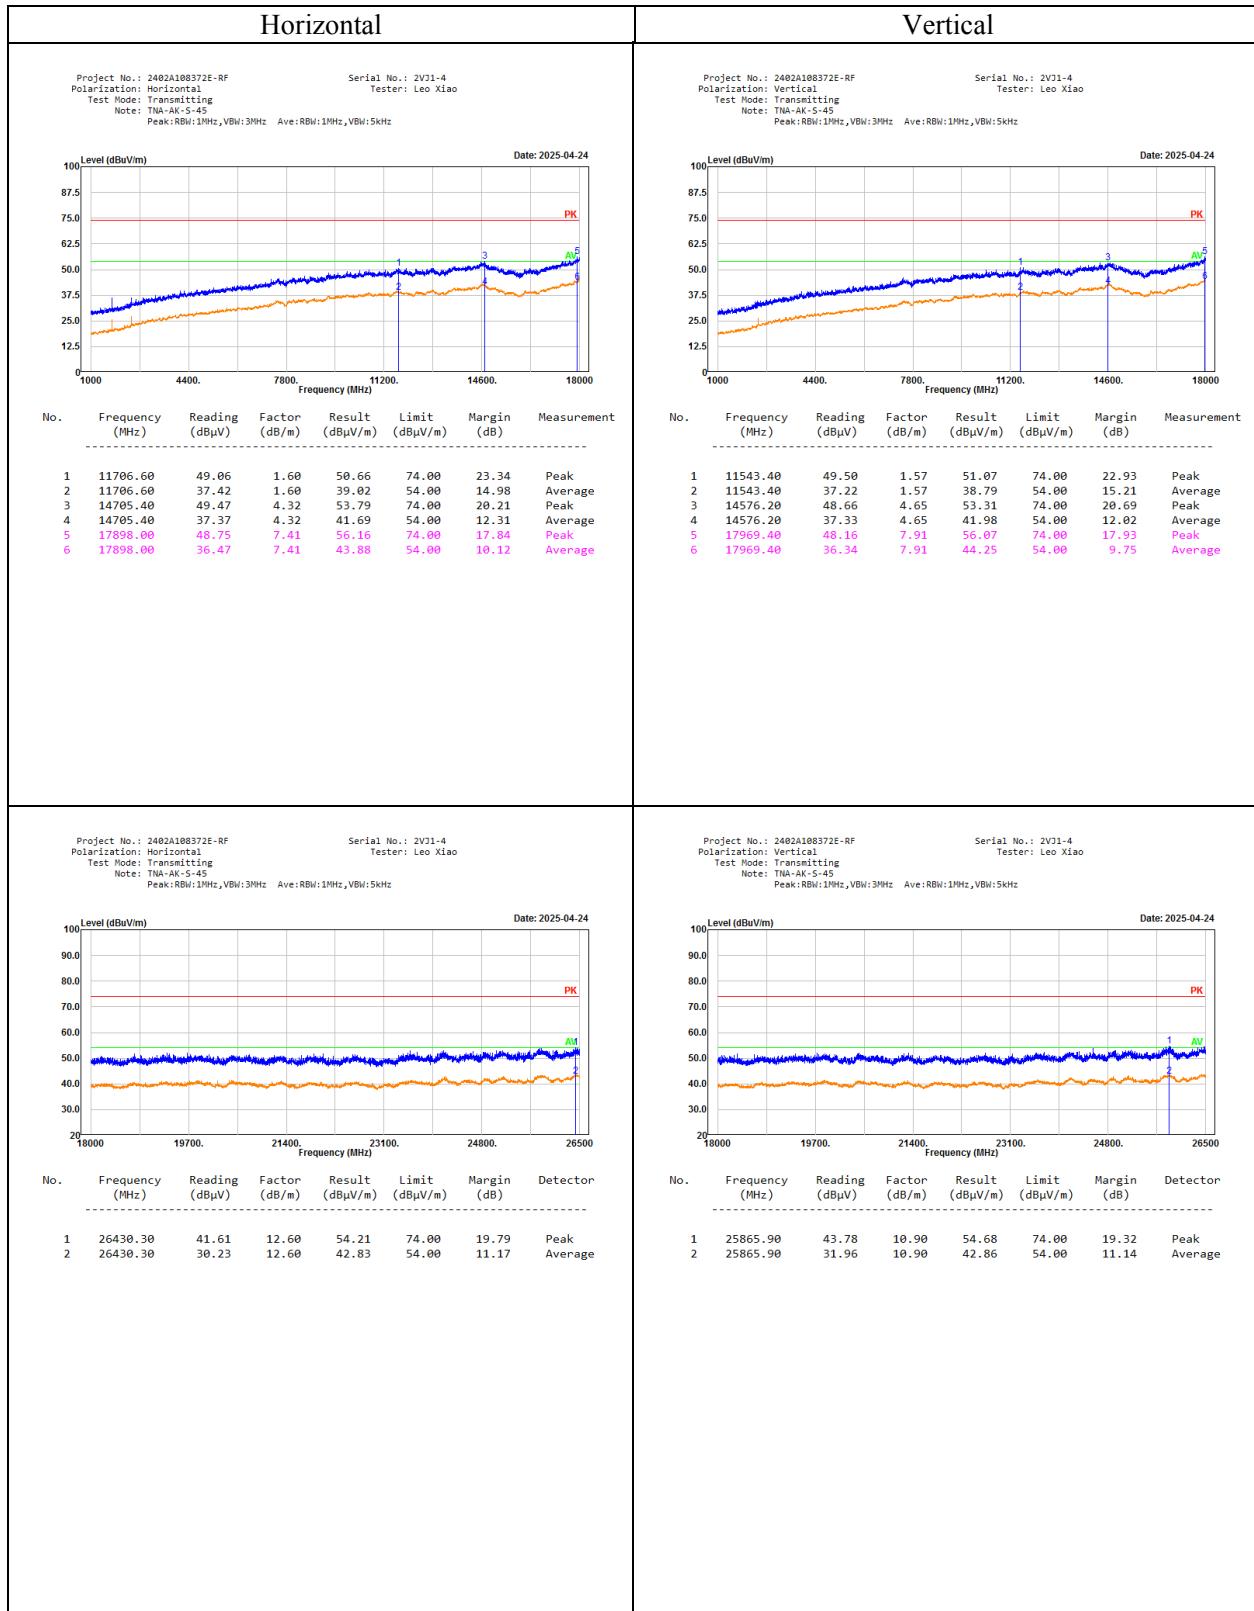

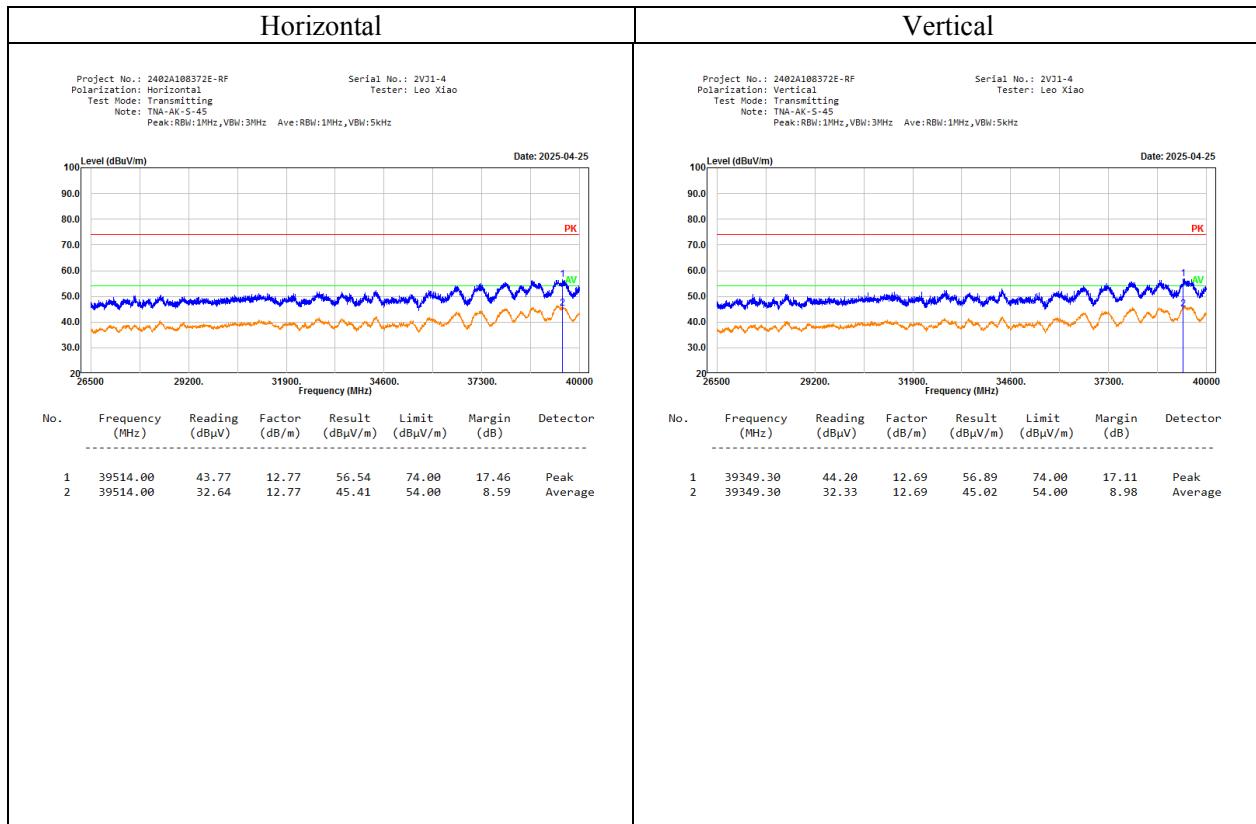

## TNA-AK-S-90

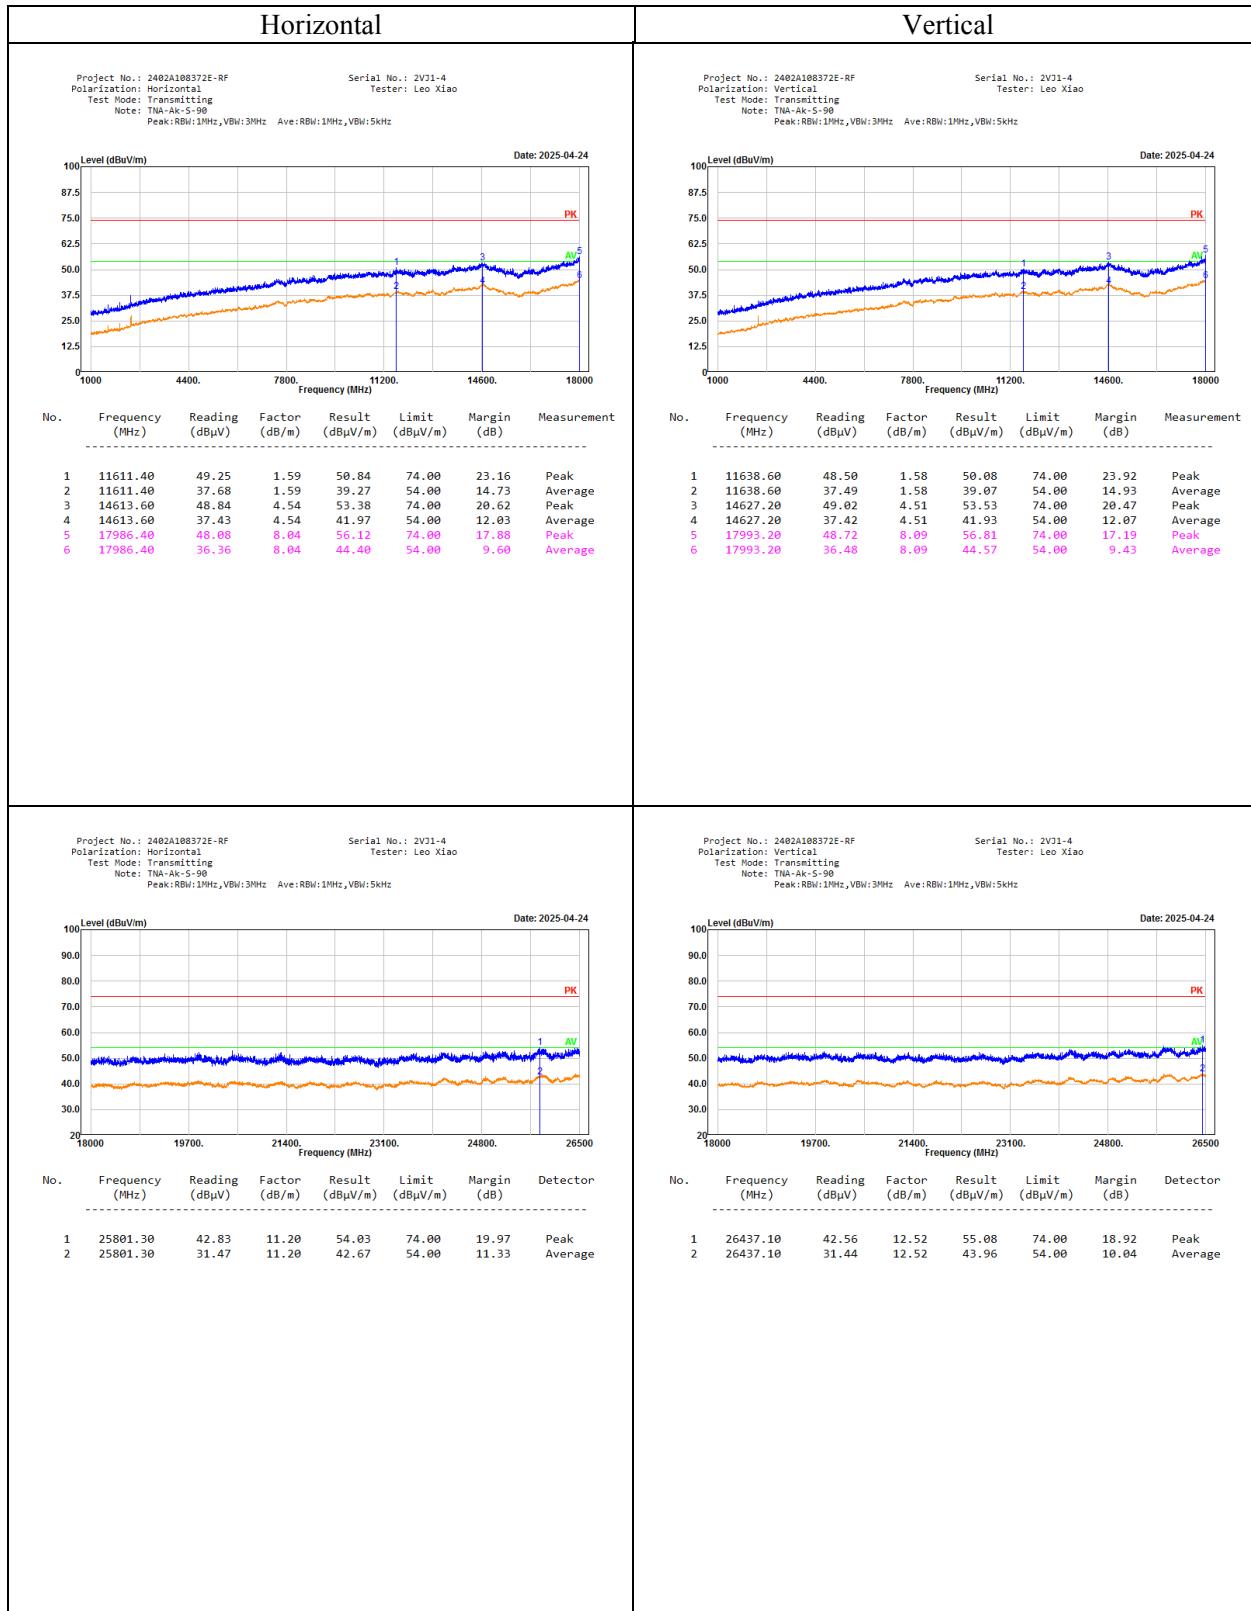

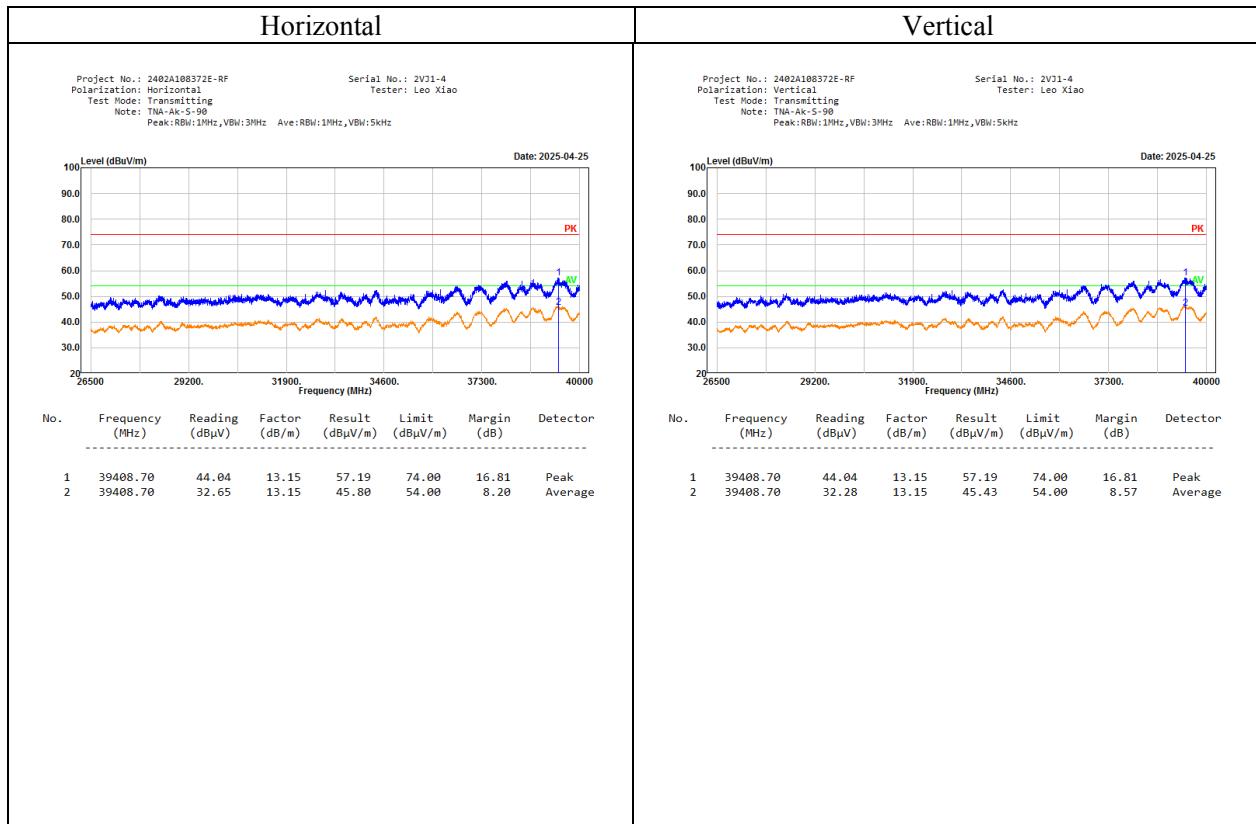

## 3) 40GHz-200GHz:

## Base model

 $\pi/2$ -BPSK

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:				58.32	GHz		
40.580	52.48	PK	H	38.88	81.82	40.33	90.00
40.150	53.48	PK	V	38.81	82.75	49.96	90.00
90.260	52.59	PK	H	45.14	82.17	43.72	90.00
90.487	53.47	PK	V	45.17	83.08	53.91	90.00
Test Frequency:				64.8	GHz		
40.440	53.44	PK	H	38.86	82.76	50.08	90.00
40.100	54.18	PK	V	38.81	83.45	58.70	90.00
90.400	53.11	PK	H	45.16	82.71	49.51	90.00
90.150	54.08	PK	V	45.12	83.64	61.33	90.00
Test Frequency:				69.12	GHz		
40.180	53.26	PK	H	38.82	82.54	47.61	90.00
40.690	53.70	PK	V	38.90	83.06	53.66	90.00
90.550	52.49	PK	H	45.17	82.10	43.02	90.00
90.150	53.66	PK	V	45.12	83.22	55.67	90.00

 $\pi/2$ -QPSK

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:				58.32	GHz		
40.410	53.26	PK	H	38.85	82.57	47.94	90.00
40.550	53.17	PK	V	38.88	82.51	47.28	90.00
90.620	53.08	PK	H	45.18	82.70	49.39	90.00
90.127	52.47	PK	V	45.12	82.03	42.33	90.00
Test Frequency:				64.8	GHz		
40.110	53.22	PK	H	38.81	82.49	47.06	90.00
40.070	53.18	PK	V	38.80	82.44	46.52	90.00
90.700	53.17	PK	H	45.19	82.80	50.54	90.00
90.840	53.07	PK	V	45.21	82.72	49.62	90.00
Test Frequency:				69.12	GHz		
40.110	53.18	PK	H	38.81	82.45	46.63	90.00
40.330	53.57	PK	V	38.84	82.87	51.36	90.00
90.630	53.09	PK	H	45.18	82.71	49.51	90.00
90.180	53.16	PK	V	45.13	82.73	49.73	90.00

**$\pi$ 2-16QAM**

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:						58.32	GHz
40.550	53.26	PK	H	38.88	82.60	48.27	90.00
40.670	53.44	PK	V	38.89	82.79	50.43	90.00
90.160	52.16	PK	H	45.13	81.73	39.51	90.00
90.370	53.17	PK	V	45.15	82.76	50.08	90.00
Test Frequency:						64.8	GHz
40.170	52.50	PK	H	38.82	81.78	39.96	90.00
40.330	53.17	PK	V	38.84	82.47	46.84	90.00
90.710	53.10	PK	H	45.19	82.73	49.73	90.00
90.320	53.49	PK	V	45.15	83.08	53.91	90.00
Test Frequency:						69.12	GHz
40.550	53.22	PK	H	38.88	82.56	47.83	90.00
40.180	53.17	PK	V	38.82	82.45	46.63	90.00
90.260	53.50	PK	H	45.14	83.08	53.88	90.00
90.170	53.65	PK	V	45.13	83.22	55.67	90.00

**TNA-AK-100** **$\pi/2$ -BPSK**

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:				58.32	GHz		
40.660	53.26	PK	H	38.89	82.61	48.38	90.00
40.180	54.18	PK	V	38.82	83.46	58.84	90.00
90.590	53.29	PK	H	45.18	82.91	51.84	90.00
90.630	54.08	PK	V	45.18	83.70	62.18	90.00
Test Frequency:				64.8	GHz		
40.100	52.10	PK	H	38.81	81.37	36.36	90.00
40.350	53.26	PK	V	38.84	82.56	47.83	90.00
90.550	52.17	PK	H	45.17	81.78	40.00	90.00
90.170	53.49	PK	V	45.13	83.06	53.66	90.00
Test Frequency:				69.12	GHz		
40.180	52.26	PK	H	38.82	81.54	37.81	90.00
40.880	53.48	PK	V	38.93	82.87	51.36	90.00
90.360	52.66	PK	H	45.15	82.25	44.53	90.00
90.350	53.47	PK	V	45.15	83.06	53.66	90.00

 **$\pi/2$ -QPSK**

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:				58.32	GHz		
40.590	52.40	PK	H	38.88	81.74	39.60	90.00
40.180	53.20	PK	V	38.82	82.48	46.93	90.00
90.100	52.18	PK	H	45.12	81.74	39.60	90.00
90.320	53.07	PK	V	45.15	82.66	48.94	90.00
Test Frequency:				64.8	GHz		
40.180	52.40	PK	H	38.82	81.68	39.05	90.00
40.480	53.13	PK	V	38.86	82.45	46.59	90.00
90.460	52.18	PK	H	45.16	81.78	39.96	90.00
90.740	53.22	PK	V	45.20	82.86	51.25	90.00
Test Frequency:				69.12	GHz		
40.780	52.30	PK	H	38.91	81.67	38.96	90.00
40.660	53.41	PK	V	38.89	82.76	50.08	90.00
90.550	52.44	PK	H	45.17	82.05	42.53	90.00
90.630	53.16	PK	V	45.18	82.78	50.31	90.00

**π2-16QAM**

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:				58.32	GHz		
40.180	53.48	PK	H	38.82	82.76	50.08	90.00
40.660	53.74	PK	V	38.89	83.09	54.03	90.00
90.480	52.44	PK	H	45.17	82.05	42.53	90.00
90.630	53.69	PK	V	45.18	83.31	56.84	90.00
Test Frequency:				64.8	GHz		
40.700	52.53	PK	H	38.90	81.89	40.99	90.00
40.590	53.10	PK	V	38.88	82.44	46.52	90.00
90.650	52.48	PK	H	45.19	82.11	43.12	90.00
91.480	53.11	PK	V	45.29	82.84	51.01	90.00
Test Frequency:				69.12	GHz		
40.180	52.33	PK	H	38.82	81.61	38.43	90.00
40.550	53.49	PK	V	38.88	82.83	50.89	90.00
90.600	52.08	PK	H	45.18	81.70	39.23	90.00
90.350	53.16	PK	V	45.15	82.75	49.96	90.00

**TNA-AK-150****π2-BPSK**

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:				58.32	GHz		
41.260	52.65	PK	H	38.99	82.10	43.02	90.00
40.180	53.41	PK	V	38.82	82.69	49.28	90.00
90.600	52.60	PK	H	45.18	82.22	44.22	90.00
90.140	52.98	PK	V	45.12	82.54	47.61	90.00
Test Frequency:				64.8	GHz		
40.660	52.30	PK	H	38.89	81.65	38.78	90.00
41.080	52.87	PK	V	38.96	82.29	44.94	90.00
90.610	53.29	PK	H	45.18	82.91	51.84	90.00
90.180	53.44	PK	V	45.13	83.01	53.05	90.00
Test Frequency:				69.12	GHz		
40.700	52.33	PK	H	38.90	81.69	39.14	90.00
40.560	53.01	PK	V	38.88	82.35	45.57	90.00
90.630	52.37	PK	H	45.18	81.99	41.94	90.00
90.260	52.96	PK	V	45.14	82.54	47.61	90.00

**$\pi/2$ -QPSK**

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:				58.32	GHz		
40.580	52.33	PK	H	38.88	81.67	38.96	90.00
40.980	53.19	PK	V	38.94	82.59	48.16	90.00
90.770	53.02	PK	H	45.20	82.66	48.94	90.00
90.650	53.16	PK	V	45.19	82.79	50.43	90.00
Test Frequency:				64.8	GHz		
40.780	52.35	PK	H	38.91	81.72	39.41	90.00
40.960	52.17	PK	V	38.94	81.57	38.08	90.00
90.590	53.66	PK	H	45.18	83.28	56.45	90.00
90.630	53.17	PK	V	45.18	82.79	50.43	90.00
Test Frequency:				69.12	GHz		
40.740	53.26	PK	H	38.91	82.63	48.60	90.00
40.550	53.11	PK	V	38.88	82.45	46.63	90.00
90.650	52.36	PK	H	45.19	81.99	41.94	90.00
90.580	53.08	PK	V	45.18	82.70	49.39	90.00

 **$\pi/2$ -16QAM**

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:				58.32	GHz		
41.523	52.74	PK	H	39.03	82.23	44.33	90.00
41.590	52.16	PK	V	39.04	81.66	38.87	90.00
90.480	53.44	PK	H	45.17	83.05	53.54	90.00
90.320	53.62	PK	V	45.15	83.21	55.55	90.00
Test Frequency:				64.8	GHz		
40.550	52.70	PK	H	38.88	82.04	42.43	90.00
41.370	53.44	PK	V	39.00	82.90	51.72	90.00
90.770	52.18	PK	H	45.20	81.82	40.33	90.00
90.630	53.62	PK	V	45.18	83.24	55.93	90.00
Test Frequency:				69.12	GHz		
40.180	52.36	PK	H	38.82	81.64	38.70	90.00
41.620	53.18	PK	V	39.04	82.68	49.17	90.00
90.550	52.00	PK	H	45.17	81.61	38.43	90.00
90.100	53.01	PK	V	45.12	82.57	47.94	90.00

**TNA-AK-300** **$\pi/2$ -BPSK**

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:				58.32	GHz		
40.630	52.60	PK	H	38.89	81.95	41.56	90.00
40.180	53.26	PK	V	38.82	82.54	47.61	90.00
90.330	53.20	PK	H	45.15	82.79	50.43	90.00
90.180	53.48	PK	V	45.13	83.05	53.54	90.00
Test Frequency:				64.8	GHz		
41.620	53.40	PK	H	39.04	82.90	51.72	90.00
40.700	53.10	PK	V	38.90	82.46	46.74	90.00
90.180	52.49	PK	H	45.13	82.06	42.62	90.00
90.330	52.74	PK	V	45.15	82.33	45.36	90.00
Test Frequency:				69.12	GHz		
40.480	53.14	PK	H	38.86	82.46	46.74	90.00
40.700	53.48	PK	V	38.90	82.84	51.01	90.00
90.650	53.55	PK	H	45.19	83.18	55.16	90.00
90.180	53.16	PK	V	45.13	82.73	49.73	90.00

 **$\pi/2$ -QPSK**

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:				58.32	GHz		
40.700	53.26	PK	H	38.90	82.62	48.49	90.00
40.650	53.40	PK	V	38.89	82.75	49.96	90.00
90.880	53.08	PK	H	45.21	82.73	49.73	90.00
90.630	53.66	PK	V	45.18	83.28	56.45	90.00
Test Frequency:				64.8	GHz		
41.000	52.66	PK	H	38.95	82.07	42.72	90.00
41.590	52.34	PK	V	39.04	81.84	40.52	90.00
90.660	53.24	PK	H	45.19	82.87	51.36	90.00
90.570	53.08	PK	V	45.18	82.70	49.39	90.00
Test Frequency:				69.12	GHz		
40.700	53.66	PK	H	38.90	83.02	53.17	90.00
40.190	53.49	PK	V	38.82	82.77	50.19	90.00
90.660	53.08	PK	H	45.19	82.71	49.51	90.00
90.320	53.11	PK	V	45.15	82.70	49.39	90.00

**π2-16QAM**

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:				58.32	GHz		
40.180	52.15	PK	H	38.82	81.43	36.87	90.00
40.330	53.10	PK	V	38.84	82.40	46.10	90.00
90.570	52.48	PK	H	45.18	82.10	43.02	90.00
90.560	53.09	PK	V	45.18	82.71	49.51	90.00
Test Frequency:				64.8	GHz		
40.870	52.48	PK	H	38.93	81.87	40.80	90.00
40.320	53.16	PK	V	38.84	82.46	46.74	90.00
90.550	52.96	PK	H	45.17	82.57	47.94	90.00
90.620	53.48	PK	V	45.18	83.10	54.16	90.00
Test Frequency:				69.12	GHz		
40.590	52.33	PK	H	38.88	81.67	38.96	90.00
40.330	52.63	PK	V	38.84	81.93	41.37	90.00
90.160	53.48	PK	H	45.13	83.05	53.54	90.00
90.400	53.66	PK	V	45.16	83.26	56.13	90.00

**TNA-AK-S-45****π2-BPSK**

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:				58.32	GHz		
40.630	53.26	PK	H	38.89	82.61	48.38	90.00
40.180	53.10	PK	V	38.82	82.38	45.88	90.00
90.600	52.19	PK	H	45.18	81.81	40.24	90.00
90.180	53.84	PK	V	45.13	83.41	58.16	90.00
Test Frequency:				64.8	GHz		
40.180	52.48	PK	H	38.82	81.76	39.78	90.00
40.550	53.44	PK	V	38.88	82.78	50.31	90.00
90.500	52.18	PK	H	45.17	81.79	40.06	90.00
90.178	53.41	PK	V	45.13	82.98	52.68	90.00
Test Frequency:				69.12	GHz		
40.770	52.44	PK	H	38.91	81.81	40.24	90.00
40.840	53.18	PK	V	38.92	82.56	47.83	90.00
90.660	52.47	PK	H	45.19	82.10	43.02	90.00
90.530	53.65	PK	V	45.17	83.26	56.19	90.00

**$\pi/2$ -QPSK**

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:				58.32	GHz		
40.880	52.35	PK	H	38.93	81.74	39.60	90.00
40.620	52.48	PK	V	38.89	81.83	40.43	90.00
90.740	53.24	PK	H	45.20	82.88	51.48	90.00
90.320	53.18	PK	V	45.15	82.77	50.19	90.00
Test Frequency:				64.8	GHz		
40.180	52.30	PK	H	38.82	81.58	38.16	90.00
40.770	53.48	PK	V	38.91	82.85	51.13	90.00
90.350	52.48	PK	H	45.15	82.07	42.72	90.00
90.840	53.10	PK	V	45.21	82.75	49.96	90.00
Test Frequency:				69.12	GHz		
40.740	52.37	PK	H	38.91	81.74	39.60	90.00
41.650	53.18	PK	V	39.05	82.69	49.28	90.00
90.600	53.26	PK	H	45.18	82.88	51.48	90.00
91.250	53.11	PK	V	45.26	82.81	50.66	90.00

 **$\pi/2$ -16QAM**

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:				58.32	GHz		
41.210	52.48	PK	H	38.98	81.92	41.27	90.00
40.770	53.26	PK	V	38.91	82.63	48.60	90.00
90.740	52.11	PK	H	45.20	81.75	39.69	90.00
90.550	53.00	PK	V	45.17	82.61	48.38	90.00
Test Frequency:				64.8	GHz		
41.220	52.84	PK	H	38.98	82.28	44.84	90.00
41.000	53.46	PK	V	38.95	82.87	51.36	90.00
90.650	53.66	PK	H	45.19	83.29	56.58	90.00
90.480	53.48	PK	V	45.17	83.09	54.03	90.00
Test Frequency:				69.12	GHz		
40.670	52.33	PK	H	38.89	81.68	39.05	90.00
40.770	52.48	PK	V	38.91	81.85	40.61	90.00
90.680	53.47	PK	H	45.19	83.10	54.16	90.00
90.480	53.61	PK	V	45.17	83.22	55.67	90.00

**TNA-AK-S-90** **$\pi/2$ -BPSK**

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:				58.32	GHz		
40.150	52.32	PK	H	38.81	81.59	38.25	90.00
40.630	53.10	PK	V	38.89	82.45	46.63	90.00
90.480	52.69	PK	H	45.17	82.30	45.05	90.00
90.630	53.84	PK	V	45.18	83.46	58.84	90.00
Test Frequency:				64.8	GHz		
40.180	53.26	PK	H	38.82	82.54	47.61	90.00
40.590	53.41	PK	V	38.88	82.75	49.96	90.00
90.650	53.08	PK	H	45.19	82.71	49.51	90.00
90.410	53.04	PK	V	45.16	82.64	48.71	90.00
Test Frequency:				69.12	GHz		
40.770	52.40	PK	H	38.91	81.77	39.87	90.00
40.480	53.84	PK	V	38.86	83.16	54.91	90.00
90.660	53.16	PK	H	45.19	82.79	50.43	90.00
90.150	53.59	PK	V	45.12	83.15	54.78	90.00

 **$\pi/2$ -QPSK**

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:				58.32	GHz		
40.550	52.33	PK	H	38.88	81.67	38.96	90.00
41.190	52.42	PK	V	38.98	81.86	40.67	90.00
90.880	53.20	PK	H	45.21	82.85	51.07	90.00
90.650	53.18	PK	V	45.19	82.81	50.66	90.00
Test Frequency:				64.8	GHz		
40.700	52.30	PK	H	38.90	81.66	38.87	90.00
40.550	53.18	PK	V	38.88	82.52	47.39	90.00
90.680	52.48	PK	H	45.19	82.11	43.12	90.00
90.480	53.46	PK	V	45.17	83.07	53.78	90.00
Test Frequency:				69.12	GHz		
40.180	52.33	PK	H	38.82	81.61	38.43	90.00
40.550	53.19	PK	V	38.88	82.53	47.50	90.00
90.600	52.48	PK	H	45.18	82.10	43.02	90.00
90.510	53.46	PK	V	45.17	83.07	53.78	90.00

**$\pi$ 2-16QAM**

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
Test Frequency:						58.32	GHz
40.750	53.26	PK	H	38.91	82.63	48.60	90.00
40.590	53.40	PK	V	38.88	82.74	49.85	90.00
90.630	52.19	PK	H	45.18	81.81	40.24	90.00
90.550	53.46	PK	V	45.17	83.07	53.78	90.00
Test Frequency:						64.8	GHz
40.790	52.46	PK	H	38.91	81.83	40.43	90.00
40.670	53.19	PK	V	38.89	82.54	47.61	90.00
90.660	52.18	PK	H	45.19	81.81	40.24	90.00
90.180	53.44	PK	V	45.13	83.01	53.10	90.00
Test Frequency:						69.12	GHz
40.180	52.47	PK	H	38.82	81.75	39.69	90.00
40.660	53.62	PK	V	38.89	82.97	52.56	90.00
90.570	52.49	PK	H	45.18	82.11	43.12	90.00
90.630	53.24	PK	V	45.18	82.86	51.25	90.00

*Note:*

*Factor = Antenna Factor*

*Field Strength = Reading + Factor + 20log(d<sub>Meas</sub>/d<sub>SpecLimit</sub>)*

*d<sub>Meas</sub> is the measurement distance, in m*

*d<sub>SpecLimit</sub> is the distance specified by the limit, in m*

$$PD = \frac{E_{\text{SpecLimit}}^2}{377}$$

where

PD                    is the power density at the distance specified by the limit, in W/m<sup>2</sup>  
 $E_{\text{SpecLimit}}$             is the field strength at the distance specified by the limit, in V/m

*The Specified distance is 3m.*

## 4.5 Frequency Stability

### 4.5.1 Applicable Standard


FCC §15.255(f)

(f) Frequency stability. Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range  $-20$  to  $+50$  degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

RSS-210, Annex J.6

Fundamental emissions shall be contained within the frequency bands specified in this annex during all conditions of operation when tested at the temperature and voltage variations specified for the frequency stability measurement in RSS-Gen.

### 4.5.2 EUT Setup Block Diagram

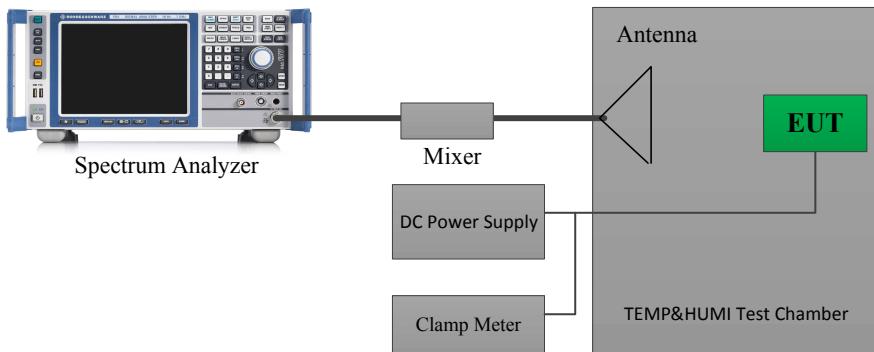

### 4.5.3 Test Procedure

Refer to ANSI C63.10-2020 Clauses 9.5.

The following procedure shall be used for determining frequency stability of millimeter-wave systems:

- a) Arrange EUT and test equipment as shown in Figure 21. Some temperature chambers have a window or other opening that permits locating the receive antenna outside the chamber.
- b) With the EUT at ambient temperature (approximately  $25$  °C) and voltage source set to the EUT nominal operating voltage (100%), record the spectrum mask of the EUT emission on the spectrum analyzer.
- c) Vary EUT power supply between 85% and 115% of nominal, and record the frequency excursion of the EUT emission mask.
- d) Set the power supply to 100% nominal setting, and raise EUT operating temperature to  $50$  °C. Record the frequency excursion of the EUT emission mask.
- e) Repeat step d) at each  $10$  °C increment down to  $-20$  °C.

**4.5.4 Test Result**

Serial Number:	2VJ1-4	Test Date:	2025/4/22
Test Site:	RF	Test Mode:	Transmitting
Tester:	Bill Yang	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	25	Relative Humidity: (%)	60	ATM Pressure: (kPa)	100.5
-------------------	----	------------------------	----	---------------------	-------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Waveguide Mixer	11970V	2521A011767	2023/2/16	2026/2/15
Flann Micowave	Horn Antenna	861V/385	736	2023/2/27	2026/2/26
Agilent	Spectrum Analyzer	E4440A	MY44303352	2024/10/22	2025/10/21
Resenberger	Coaxial Cable	LU7-022-1000	0031	2025/2/28	2026/2/27
Resenberger	Coaxial Cable	LU7-022-1000	0032	2025/2/28	2026/2/27
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30173	2024/9/6	2025/9/5
All-sun	Clamp Meter	EM305A	8348897	2024/8/16	2025/8/15
TDK-Lambda	DC Power Supply	Z+60-14	F-08-EM038-1	N/A	N/A

\* Statement of Traceability: Bay Area Compliance Laboratories Corp.(Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:****π2-BPSK:**(Low channel for  $F_L$ , High channel for  $F_H$ )

Temperature	Voltage	Frequency (GHz)					
		°C	V <sub>DC</sub>	f <sub>L</sub>	f <sub>H</sub>	f <sub>L</sub> Limit	f <sub>H</sub> Limit
-20	48	57.3078	70.0464	57	71		
-10	48	57.3073	70.0462	57	71		
0	48	57.3079	70.0461	57	71		
10	48	57.3078	70.0461	57	71		
20	48	57.3072	70.0458	57	71		
30	48	57.3075	70.0465	57	71		
40	48	57.3076	70.0465	57	71		
50	48	57.3076	70.046	57	71		
20	40.8	57.3077	70.0465	57	71		
20	55.2	57.3073	70.0463	57	71		

**$\pi/2$ -QPSK:**  
**(Low channel for  $F_L$ , High channel for  $F_H$ )**

Temperature	Voltage	Frequency (GHz)			
		$\mathbf{V_{DC}}$	$\mathbf{f_L}$	$\mathbf{f_H}$	$\mathbf{f_L \ Limit}$
-20	48	57.4385	70.0364	57	71
-10	48	57.4382	70.0364	57	71
0	48	57.4380	70.0363	57	71
10	48	57.4381	70.0363	57	71
20	48	57.4378	70.0358	57	71
30	48	57.4382	70.0361	57	71
40	48	57.4380	70.0361	57	71
50	48	57.4379	70.0364	57	71
20	40.8	57.4384	70.0362	57	71
20	55.2	57.4382	70.0361	57	71

**$\pi/2$ -16QAM:**  
**(Low channel for  $F_L$ , High channel for  $F_H$ )**

Low channel	Temperature	Voltage	Frequency (GHz)			
			$\mathbf{V_{DC}}$	$\mathbf{f_L}$	$\mathbf{f_H}$	$\mathbf{f_L \ Limit}$
	-20	48	57.4340	69.9729	57	71
	-10	48	57.4345	69.9725	57	71
	0	48	57.4343	69.9726	57	71
	10	48	57.4344	69.9729	57	71
	20	48	57.4339	69.9724	57	71
	30	48	57.4342	69.9728	57	71
	40	48	57.4343	69.9729	57	71
	50	48	57.4342	69.9728	57	71
	20	40.8	57.4345	69.9727	57	71
	20	55.2	57.4344	69.9727	57	71

Note: the operation voltage is declared by manufacturer ▲.

## 4.6 Group Installation

### 4.6.1 Applicable Standard

§15.255 (h)

Any transmitter that has received the necessary FCC equipment authorization under the rules of this chapter may be mounted in a group installation for simultaneous operation with one or more other transmitter(s) that have received the necessary FCC equipment authorization, without any additional equipment authorization. However, no transmitter operating under the provisions of this section may be equipped with external phase-locking inputs that permit beam-forming arrays to be realized.

RSS-210, Annex J.7

Any transmitter that is certified under this annex may be mounted in a group installation for simultaneous operation with one or more certified transmitters, without any additional equipment authorization. However, no transmitter operating under the provisions of this annex shall be equipped with external phase-locking inputs that permit beam-forming arrays to be realized.

### 4.6.2 Judgment

The frequency, amplitude and phase of the transmit signal are set within the EUT. There are no external phase-locking inputs or any other means of combining two or more units together to realize a beam-forming array.

## 4.7 Antenna Requirement

### 4.7.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

RSS-Gen Clause 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

#### 4.7.2 Judgment

Please refer to the Antenna Information detail in Section 1.3.

## **EXHIBIT A - EUT PHOTOGRAPHS**

Please refer to the attachment 2402A108372E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2402A108372E-RF-INP EUT INTERNAL PHOTOGRAPHS.

## **EXHIBIT B - TEST SETUP PHOTOGRAPHS**

Please refer to the attachment 2402A108372E-RF-00A-TSP SETUP PHOTOGRAPHS.

## EXHIBIT C - RF EXPOSURE EVALUATION

### MAXIMUM PERMISSIBLE EXPOSURE (MPE)

#### Applicable Standard

FCC §15.255(g) & §1.1310 & §2.1091

Regardless of the power density levels permitted under this subpart, devices operating under the provisions of this subpart are subject to the radiofrequency radiation exposure requirements specified in §§ 1.1307(b), 2.1091, and 2.1093 of this chapter, as appropriate. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this chapter.

#### Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

#### Procedure

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

#### Calculated Result

Frequency (GHz)	EIRP including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
	(dBm)	(mW)			
58.32-69.12	55.0	316227.77	160.00	0.983	1.0

*Note: The EIRP Tune-up power was declared by the manufacturer.*

**Result:** The device meet FCC MPE at 160 cm distance.

## Electric field strength levels, magnetic field strength levels and power density levels (10 MHz to 300 GHz)

### Applicable Standard

#### RSS-102 issue 6 Clause 5.3.2,

The electric and magnetic field strength reference levels, power density reference levels, and associated reference period for devices employed by the general public (uncontrolled environment) and controlled-use devices (controlled environment) are specified in table 7 and table 8. Note that the power density limits specified in these tables apply to whole body exposure conditions.

**Table 7: RF field strength and power density limits for devices used by the general public (uncontrolled environment)**

Frequency range (MHz)	Electric field (V <sub>RMS</sub> /m)	Magnetic field (A <sub>RMS</sub> /m)	Power density (W/m <sup>2</sup> )	Reference period (minutes)
10-20	27.46	0.0728	2	6
20-48	58.07 / $f^{0.25}$	0.1540 / $f^{0.25}$	8.944 / $f^{0.5}$	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 $f^{0.3417}$	0.008335 $f^{0.3417}$	0.02619 $f^{0.6834}$	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ $f^{1.2}$
150000-300000	0.158 $f^{0.5}$	$4.21 \times 10^{-4} f^{0.5}$	$6.67 \times 10^{-5} f$	616000/ $f^{1.2}$

**Note:**  $f$  is frequency in MHz.

### Procedure

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. W/m<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., W);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

### Calculated Result

Frequency (GHz)	EIRP including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (W/m <sup>2</sup> )	MPE Limit (W/m <sup>2</sup> )
	(dBm)	(mW)			
58.32-69.12	55.0	316227.77	160.00	9.835	10

*Note: The EIRP Tune-up power was declared by the manufacturer.*

**Result:** The device meet IESD MPE at 160 cm distance.

\*\*\*\*\* END OF REPORT \*\*\*\*\*