

TEST REPORT

Applicant: 8devices

Address: FCC: Antakalnio 17 - 6 Vilnius Lithuania
IC: Antakalnio g. 17-6 Vilnius Vilnius County LT-10312 Lithuania

Product Name: Wireless Access Board

FCC ID: Z9WMAN

IC: 11468A-MAN

HVIN: KIT-100-02-4-CC

Standard(s): 47 CFR Part 15, Subpart E(15.407)
RSS-247 Issue 3, August 2023
FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

Report Number: 2402U80231E-RF-00DA1

Report Date: 2024/10/24

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Gavin Xu

Reviewed By: Gavin Xu

Title: RF Engineer

Ivan Cao

Approved By: Ivan Cao

Title: EMC Manager

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 ACCESSORY INFORMATION:	5
1.3 ANTENNA INFORMATION DETAIL▲:	6
1.4 EQUIPMENT MODIFICATIONS	6
2. DESCRIPTION OF TEST CONFIGURATION	7
2.1 EUT OPERATION CONDITION.....	7
2.2 SUPPORT EQUIPMENT LIST AND DETAILS	7
2.3 SUPPORT CABLE LIST AND DETAILS	7
2.4 BLOCK DIAGRAM OF TEST SETUP	7
2.5 TEST FACILITY.....	8
3. SUMMARY OF TEST RESULTS	9
4. REQUIREMENTS.....	10
4.1 DFS REQUIREMENT.....	10
5. Test PROCEDURE AND RESULTS.....	15
5.1 RADAR WAVEFORM CALIBRATION	16
5.1.1 Test Procedure	16
5.1.2 Test Result	16
Test Graphs	17
5.2 CHANNEL LOADING.....	25
5.2.1 Test Procedure	25
5.2.2 Test Result	25
RU	28
5.3 CHANNEL AVAILABILITY CHECK TIME (CAC).....	29
5.3.1 Test Procedure	29
5.3.2 Test Result	29
5.4 CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME	34
5.4.1 Test Procedure	34
5.4.2 Test Result	34
5.5 NON-OCCUPANCY PERIOD.....	36
5.5.1 Test Procedure	36
5.5.2 Test Result	36
5.6 DETECTION BANDWIDTH	38
5.6.1 Test Procedure	38
5.6.2 Test Result	38

5.7 STATISTICAL PERFORMANCE CHECK41

 5.6.1 Procedure:41

 5.7.2 Result:42

EXHIBIT A - EUT PHOTOGRAPHS..... 109

EXHIBIT B - TEST SETUP PHOTOGRAPHS 110

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2402U80231E-RF-00DA1	Original Report	2024/10/24

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Wireless Access Board
EUT Model:	KIT-100-02-4-CC
Operation Frequency:	Band2: 5260-5320 MHz (802.11a/n ht20/ac vht20/ax he20) 5270-5310 MHz(802.11n ht40/ac vht40/ax he40) 5290 MHz(802.11ac vht80/ax he80) Band3: 5500-5720 MHz (802.11a/n ht20/ac vht20/ax he20) 5510-5710 MHz(802.11n ht40/vht40/ax he40) 5530-5690MHz(802.11ac vht80/ax he80)
Maximum Average Output Power (Conducted):	17.53dBm (5250-5350 MHz) 17.05dBm (5470-5725 MHz)
Maximum Average Output Power (EIRP):	21.23dBm (5250-5350 MHz) 20.75dBm (5470-5725 MHz)
Modulation Type:	802.11a/n/ac: OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM 802.11ax: OFDMA- BPSK, QPSK, 16QAM, 64QAM,256QAM,1024QAM
Rated Input Voltage:	DC 3.3V from Host
Serial Number:	2MQ4-1
EUT Received Date:	2024/6/8
EUT Received Status:	Good

1.2 Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.3 Antenna Information Detail ▲:

Antenna	Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain			
Chain 0& Chain 1	ABRACON	PCB	50	5.25~5.35GHz	3.7dBi			
				5.47~5.725GHz	3.7dBi			
Note: The system supports 2T2R at 802.11n/ac/ax modes. Per KDB 662911 D01 Multiple Transmitter Output v02r01: For power measurements: Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$ directional gain=3.7 dBi for 5250-5350MHz directional gain=3.7 dBi for 5470-5725MHz For power spectral density (PSD) measurements: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB. directional gain=3.7dBi+3dB=6.7dBi for 5250-5350MHz directional gain=3.7dBi+3dB=6.7dBi for 5470-5725MHz								
The design of compliance with §15.203:								
☒ Unit uses a permanently attached antenna.								
☐ Unit uses a unique coupling to the intentional radiator.								
☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.								

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. DESCRIPTION OF TEST CONFIGURATION

2.1 EUT Operation Condition

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.
Equipment Modifications:	No
EUT Exercise Software:	Tfgen
WLAN traffic is generated by software “Tfgen”, software is used by IP and Frame based systems for loading the test channel during the In-service compliance testing of the U-NII device. Data package streamed from the Access Point to the Client using the software “Tfgen”.	


2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	T430	AA887-03
Infinix	mobile phone	Infinix X6850	11334253AA000090

2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

2.4 Block Diagram of Test Setup

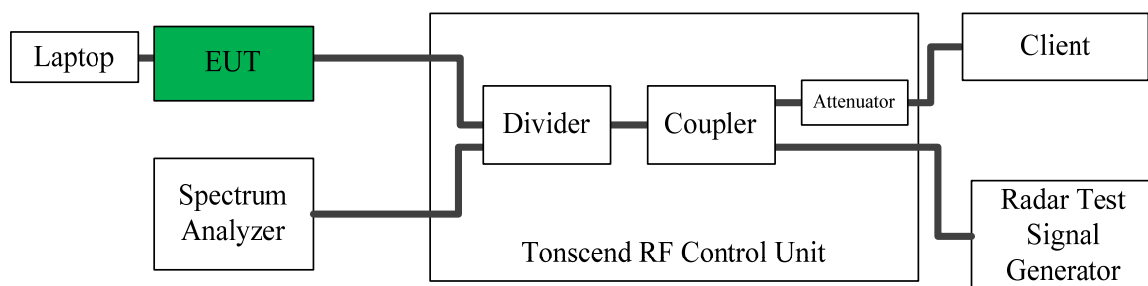

2.5 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3. SUMMARY OF TEST RESULTS

The following result table represents the list of measurements required under the CFR §47 Part 15.407(h), RSS-247 Issue 3, August 2023, KDB: 905462 D02 UNII DFS Compliance Procedures New Rules v02.

Items	Description of Test	Result
Detection Bandwidth	UNII Detection Bandwidth	Compliant
Performance Requirements Check	Initial Channel Availability Check Time (CAC)	Compliant
	Radar Burst at the Beginning of the CAC	Compliant
	Radar Burst at the End of the CAC	Compliant
In-Service Monitoring	Channel Move Time	Compliant
	Channel Closing Transmission Time	Compliant
	Non-Occupancy Period	Compliant
Radar Detection	Statistical Performance Check	Compliant

4. REQUIREMENTS

4.1 DFS Requirement

CFR §47 Part 15.407(h)

RSS-247, Issue 3, August 2023

FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<i>Non-Occupancy Period</i>	Yes	Not required	Yes
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Availability Check Time</i>	Yes	Not required	Not required
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not required
<i>Channel Closing Transmission Time</i>	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>U-NII Detection Bandwidth and Statistical Performance Check</i>	All BW modes must be tested	Not required
<i>Channel Move Time and Channel Closing Transmission Time</i>	Test using widest BW mode available	Test using the widest BW mode available for the link
<i>All other tests</i>	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

Table 4: DFS Response Requirement Values

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U- NII 99% transmission power bandwidth. See Note 3.
Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel move</i> (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	Roundup $\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 usec is selected, the number of pulses

would be $\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{3066} \right) \right\} = \text{Roundup} \{17.2\} = 18.$

Table 5a - Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4. For example, the following table indicates how to compute the aggregate of percentage of successful detections.

Radar Type	Number of Trials	Number of Successful Detections	Minimum Percentage of Successful Detection
1	35	29	82.9%
2	30	18	60%
3	30	27	90%
4	50	44	88%
Aggregate $(82.9\% + 60\% + 90\% + 88\%)/4 = 80.2\%$			

Table 6 – Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per <i>Burst</i>	Number of <i>Bursts</i>	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Table 7 – Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

5. Test PROCEDURE AND RESULTS

Serial Number:	2MQ4-1	Test Date:	2024/8/9~2024/10/24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Harper Shen	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	24.8~27.2	Relative Humidity: (%)	36~68	ATM Pressure: (kPa)	99.8~101.2

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXG Vector Signal Generator	N5182A	MY49060274	2023/10/18	2024/10/17
Agilent	MXG Vector Signal Generator	N5182A	MY49060274	2024/9/5	2025/9/4
Keysight	MXA Signal Analyzer	N9020A	MY48490106	2023/10/18	2024/10/17
Keysight	MXA Signal Analyzer	N9020A	MY48490106	2024/9/5	2025/9/4
Tonscend	RF Control Unit	JS0806-2	19G8060171	2023/10/18	2024/10/17
Tonscend	RF Control Unit	JS0806-2	19G8060171	2024/9/5	2025/9/4
Eastsheep	Coaxial Attenuator	2W-SMA-JK-6G-10dB	F-08-EM509	2024/6/7	2025/6/6
Eastsheep	Coaxial Attenuator	2W-SMA-JK-6G-10dB	F-08-EM510	2024/6/7	2025/6/6
HUBER+SUHNER	Coaxial Attenuator	6610_SMA-50-1	0064	2024/6/13	2025/6/12
HUBER+SUHNER	Coaxial Attenuator	6610_SMA-50-1	0069	2024/6/13	2025/6/12

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

5.1 Radar Waveform Calibration

5.1.1 Test Procedure

A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected in place of the EUT. The amplitude of the signal generator is adjusted to a level of -64 dBm measured on the spectrum analyzer. Record the signal generator amplitude. Repeat each type of radar signal and record the signal generator amplitude

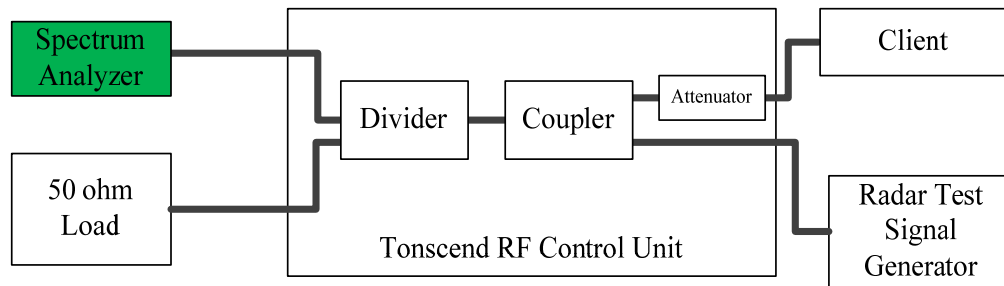

5.1.2 Test Result


Test Mode	Radar Frequency (MHz)	Radar Type	Result[dBm]	Limit[dBm]	Verdict
80M	5290	Type0	-62.32	-62.00	PASS
		Type1	-62.24	-62.00	PASS
		Type2	-62.41	-62.00	PASS
		Type3	-62.47	-62.00	PASS
		Type4	-62.16	-62.00	PASS
		Type5	-62.68	-62.00	PASS
		Type6	-62.40	-62.00	PASS


RU


Test Mode	Radar Frequency (MHz)	Radar Type	Result[dBm]	Limit[dBm]	Verdict
80M	5290	Type0	-62.26	-62.00	PASS
		Type1	-62.11	-62.00	PASS
		Type2	-62.32	-62.00	PASS
		Type3	-62.38	-62.00	PASS
		Type4	-62.29	-62.00	PASS
		Type5	-62.48	-62.00	PASS
		Type6	-62.49	-62.00	PASS


Note: RU means the partial RU mode.

Test Graphs

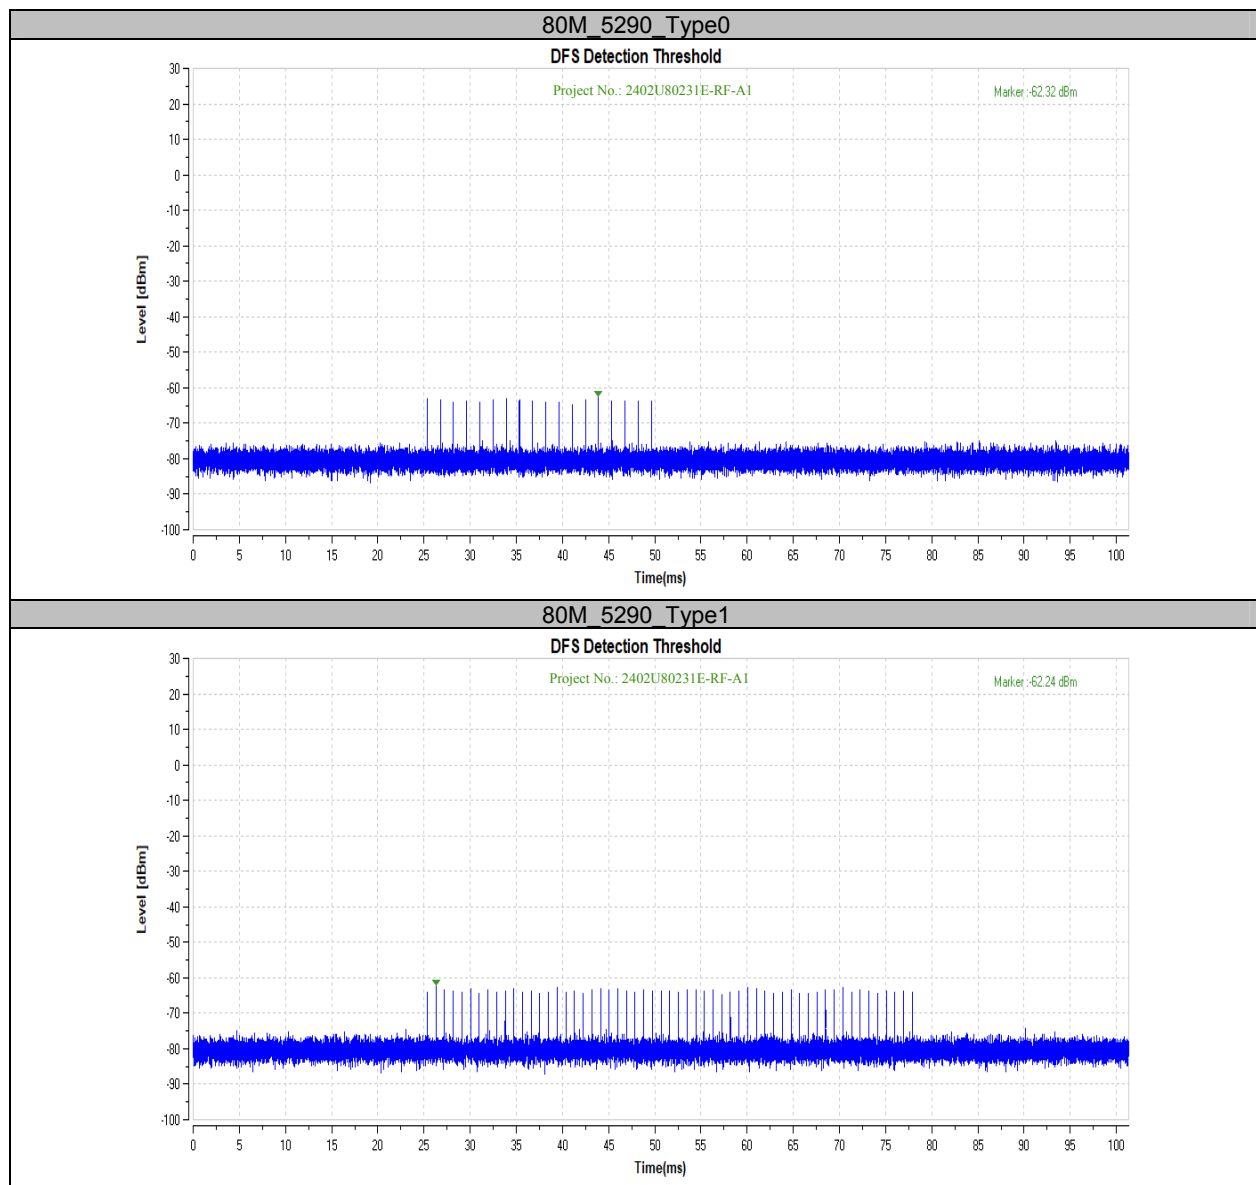


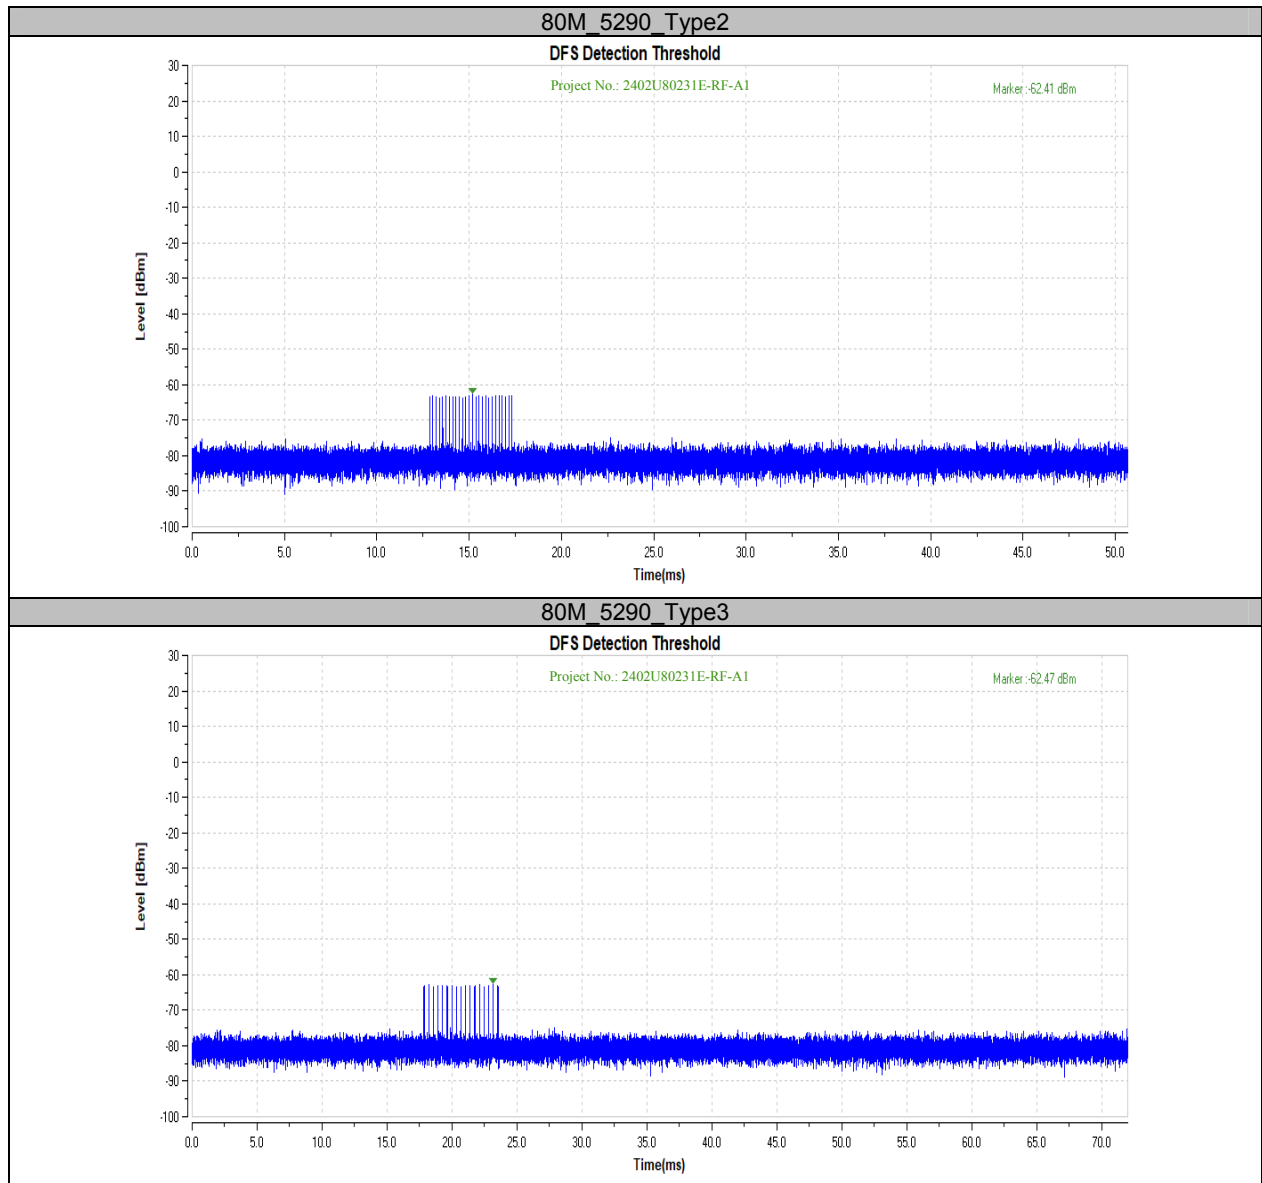


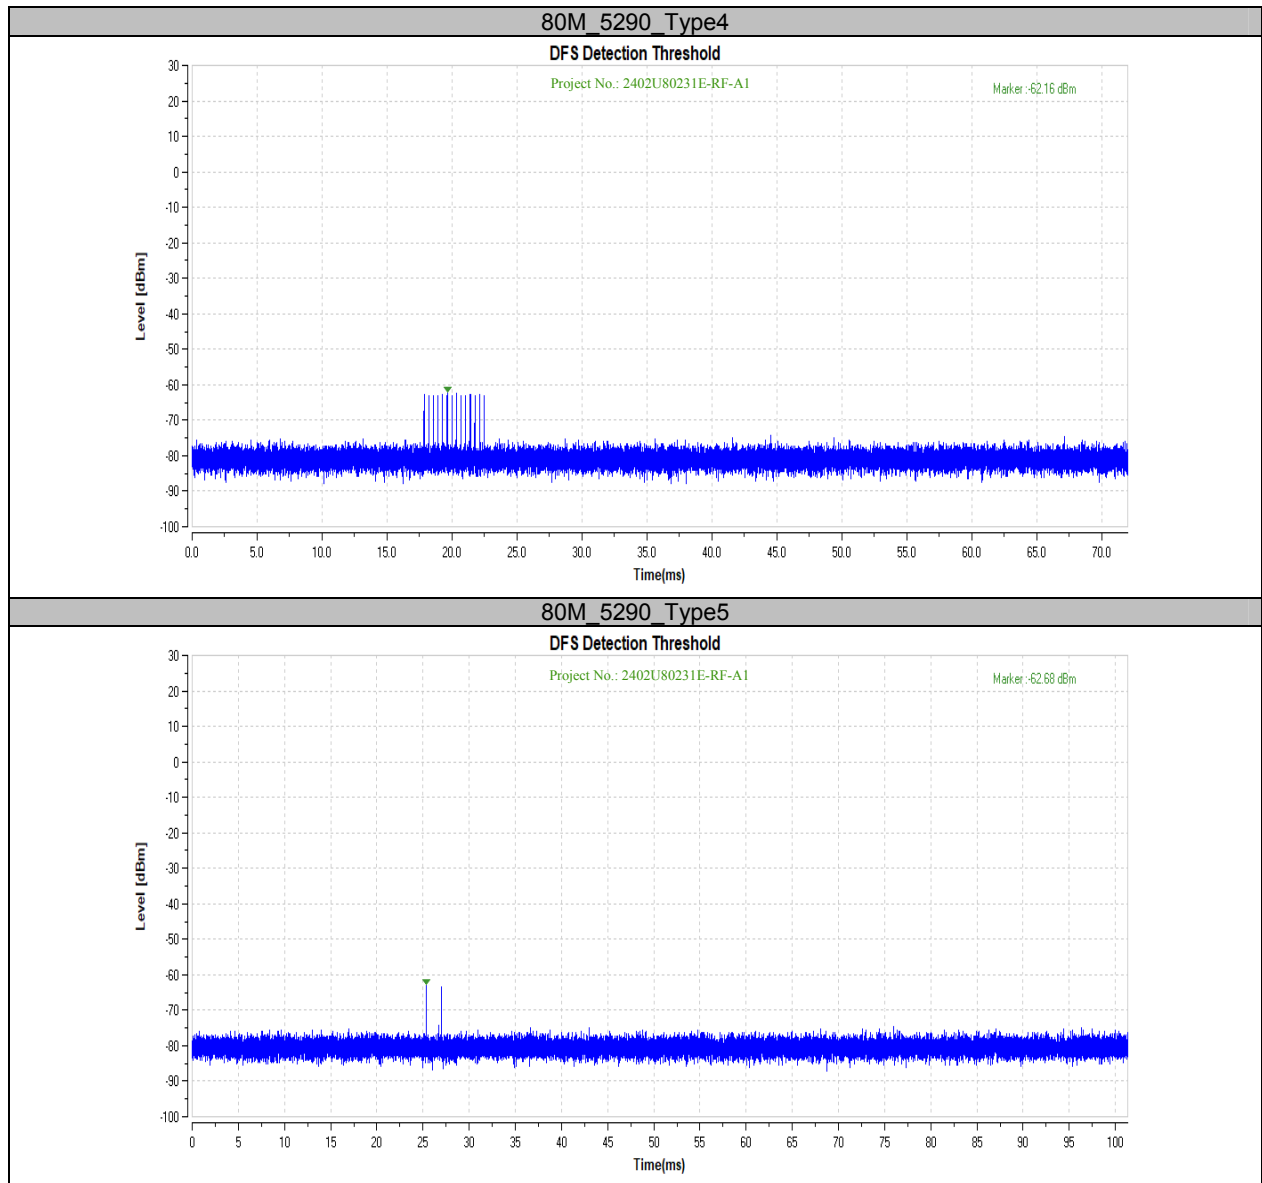


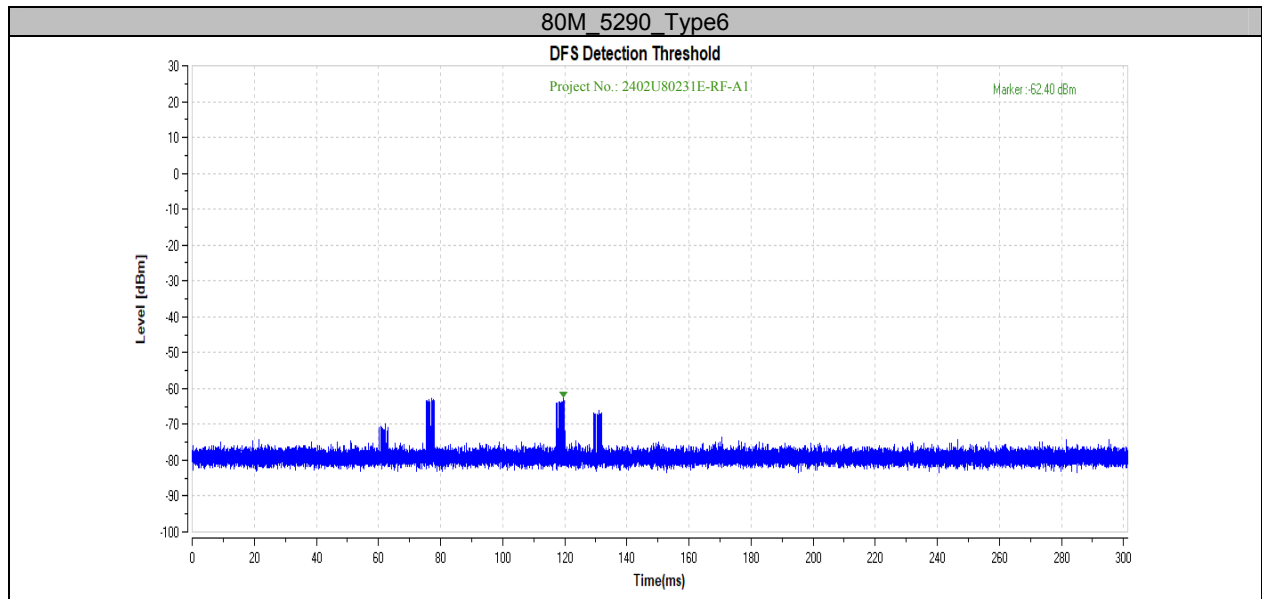


RU

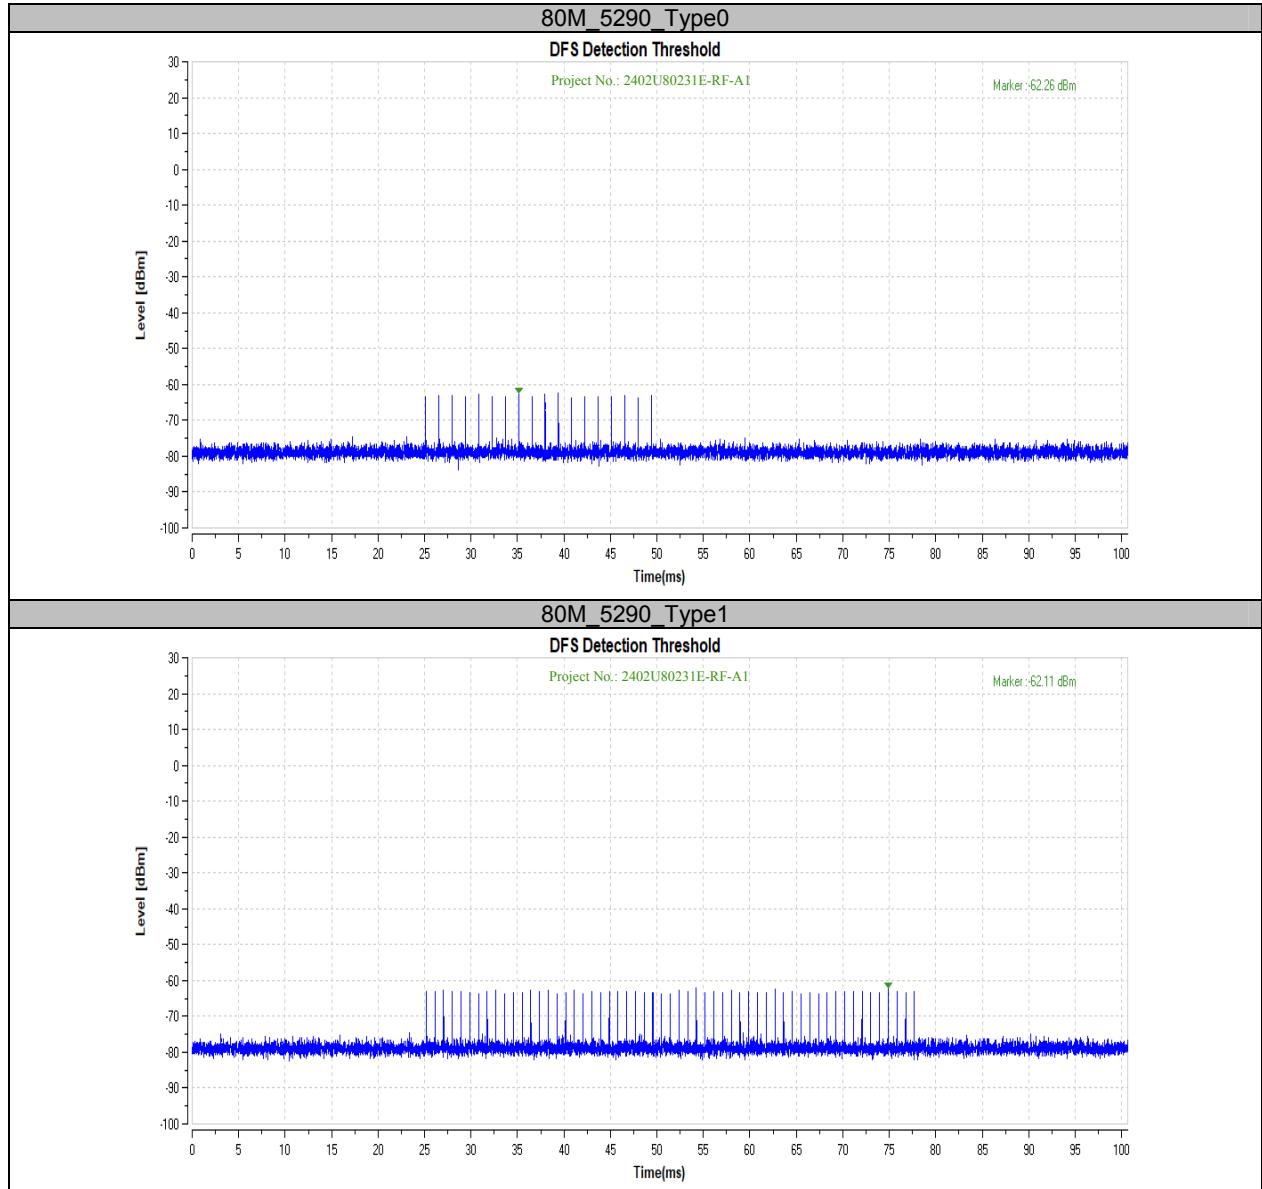

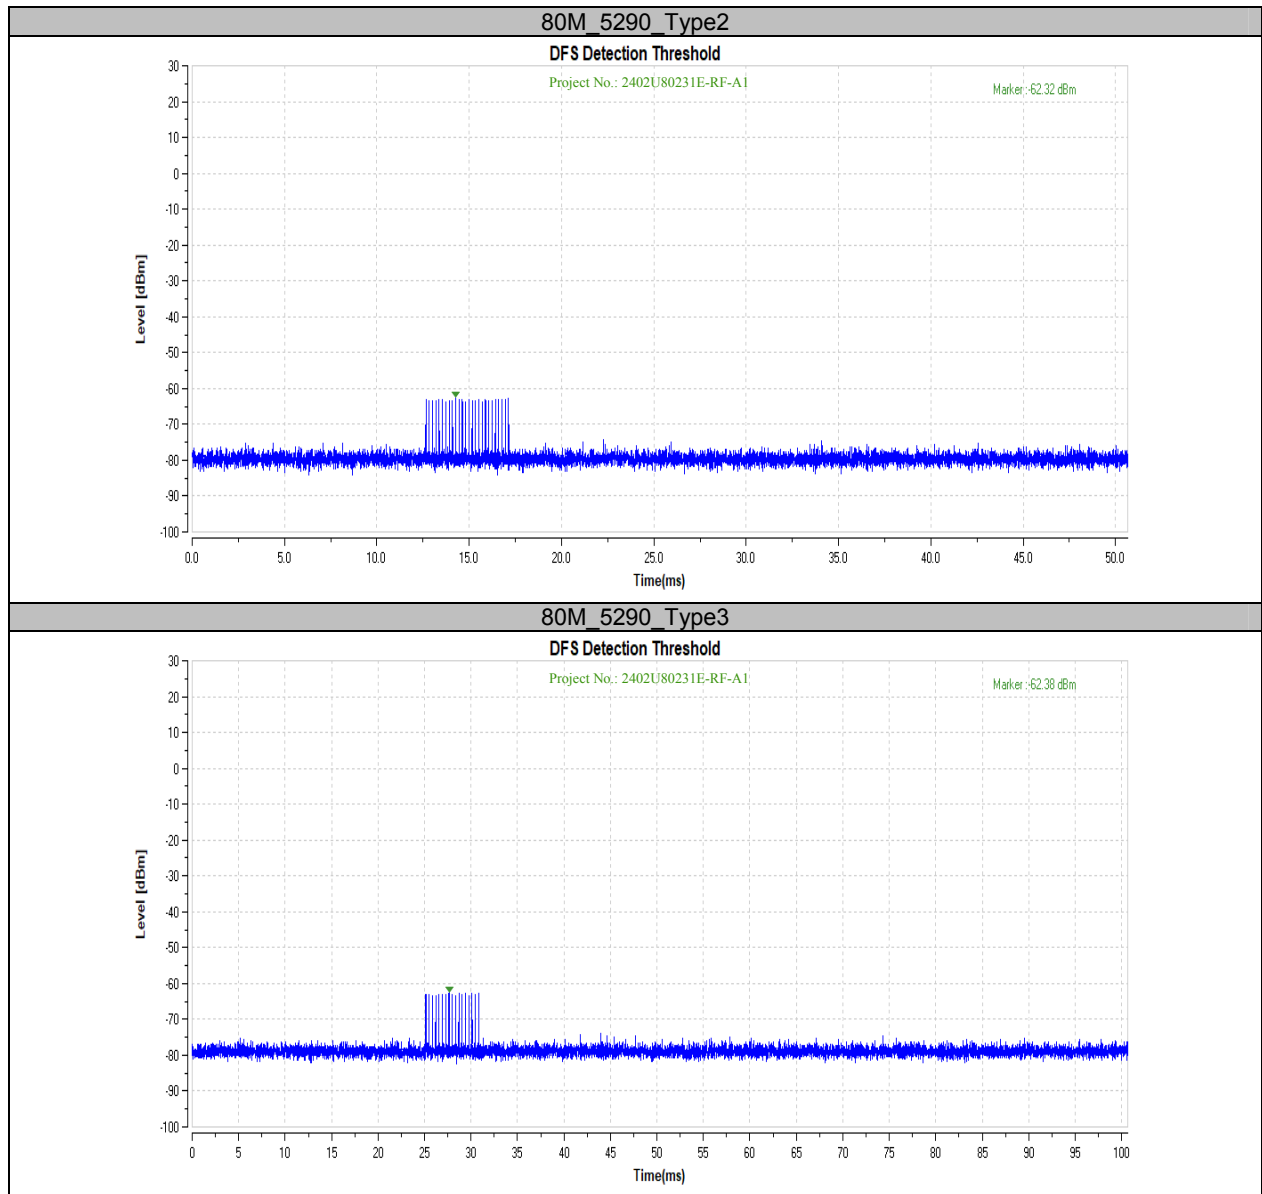

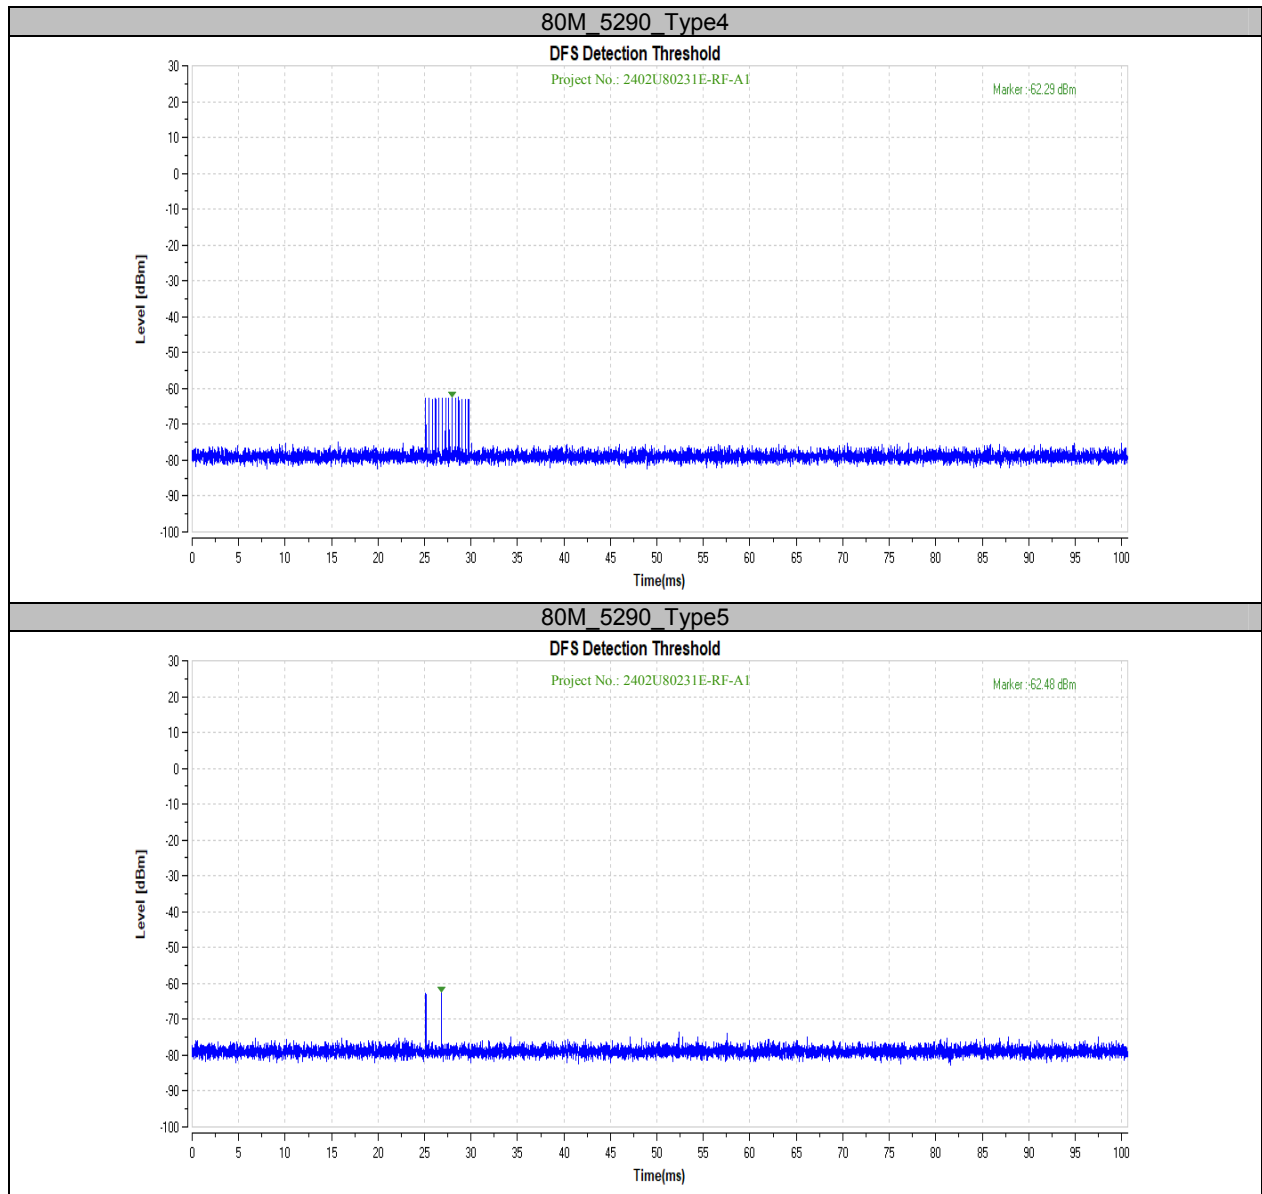


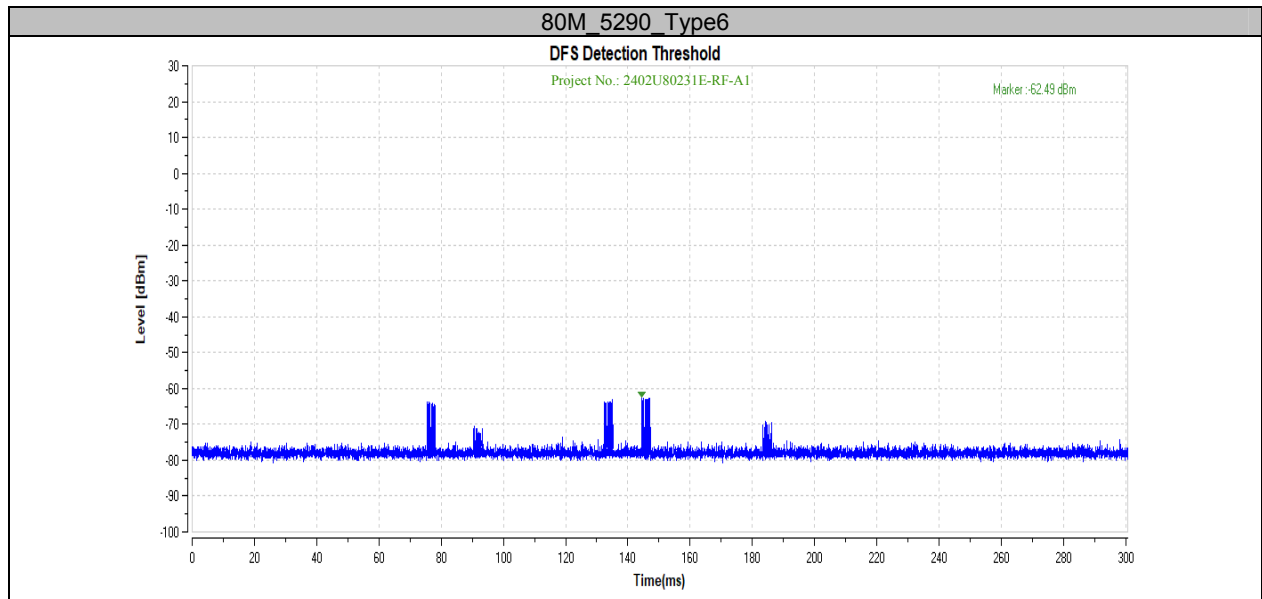

5.2 Channel Loading

5.2.1 Test Procedure

- 1) The Client device is connected to the EUT via wireless connection, and the Laptop is connected with EUT via RJ45 cable, as below block.
- 2) Traffic data from laptop to client via 'Lan test' and reach more than 17% channel loading.
- 3) Capture the transmission in the spectrum analyzer for zero span and calculate the duty cycle.

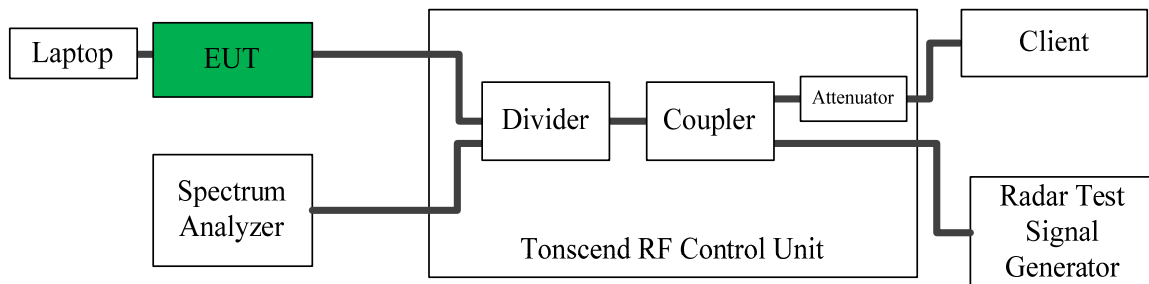


5.2.2 Test Result


TestMode	Test Frequency (MHz)	Result [%]	Limit [%]	Verdict
11N20MIMO	5320	17.18	17	PASS
11AC80MIMO	5290	30.87	17	PASS
11AX40MIMO	5310	41.05	17	PASS

RU


TestMode	Test Frequency (MHz)	Result [%]	Limit [%]	Verdict
11AX80MIMO	5290	21.73	17	PASS

Note: RU means the partial RU mode.

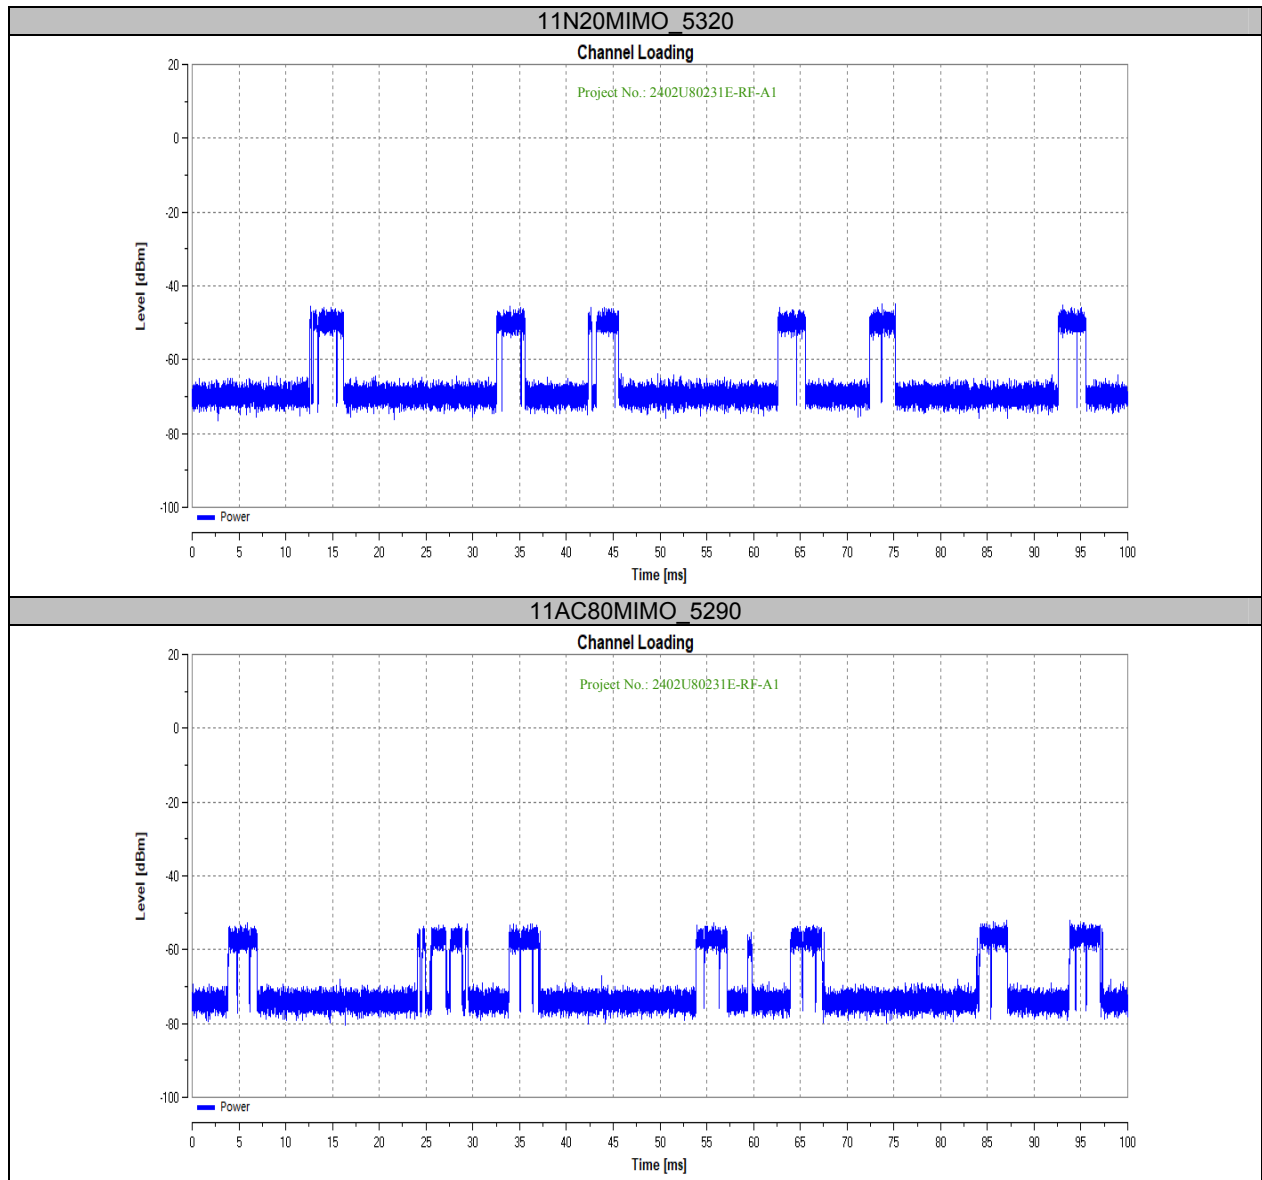

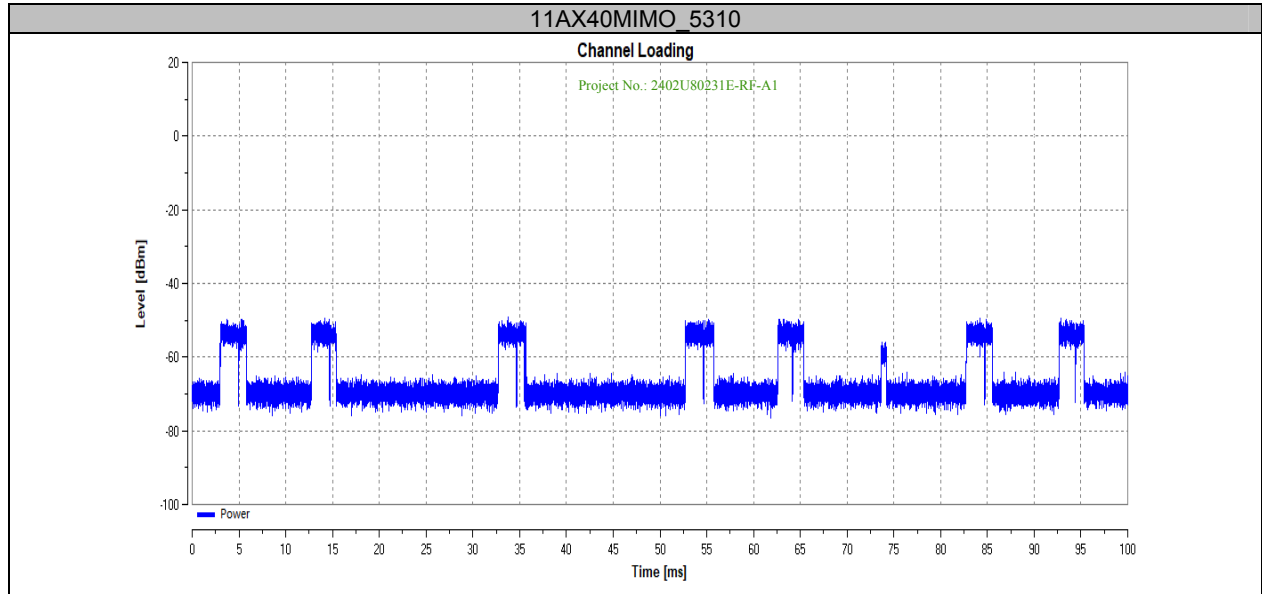

RU

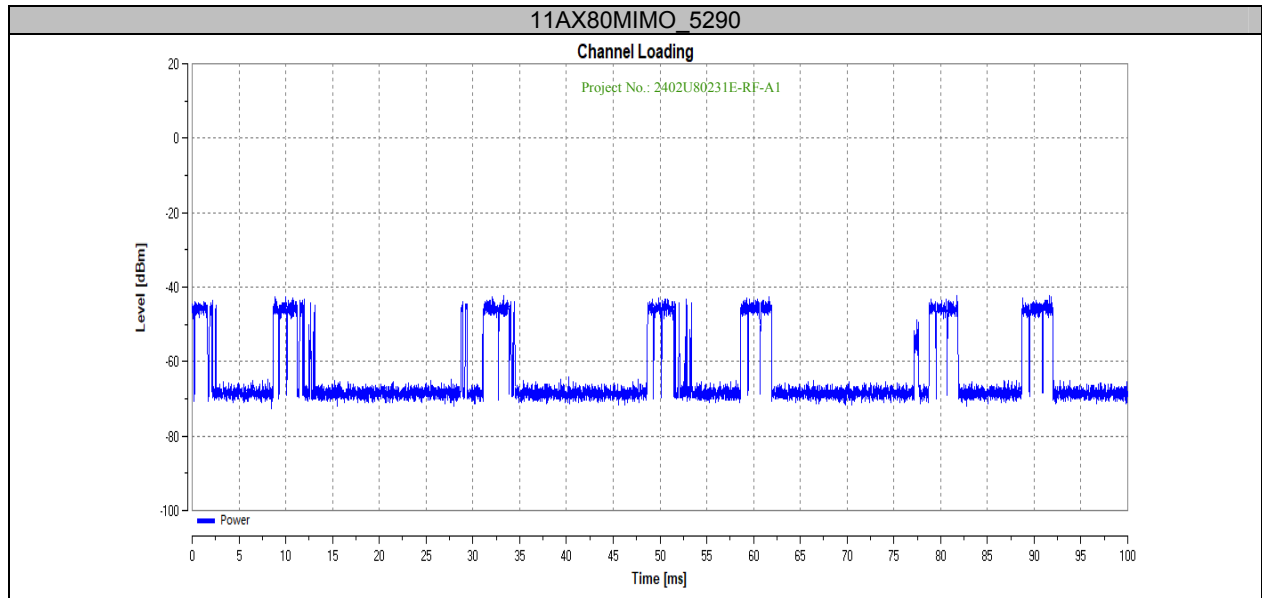

5.3 Channel Availability Check Time (CAC)

5.3.1 Test Procedure

- 1) Channel Availability Check Time (CAC)
- 2) With link established on channel, apply a radar signal within 0~6 seconds after the initial power-up period; monitor the transmissions on channel from the spectrum analyzer.
- 3) Reboot EUT, with a link established on channel, apply a radar signal within 54~60 seconds after the initial power-up period, and monitor the transmission on channel from the spectrum analyzer.

5.3.2 Test Result

Initial Channel Availability Check Time

Test Mode	Test Frequency (MHz)	Result	Verdict
11AC80MIMO	5290	See test Graph	PASS

Beginning of Channel Availability Check Time

Test Mode	Test Frequency (MHz)	Result	Verdict
11AC80MIMO	5290	See test Graph	PASS

End of Channel Availability Check Time

Test Mode	Test Frequency (MHz)	Result	Verdict
11AC80MIMO	5290	See test Graph	PASS

RU

Initial Channel Availability Check Time

Test Mode	Test Frequency (MHz)	Result	Verdict
11AX80MIMO	5290	See test Graph	PASS

Beginning of Channel Availability Check Time

Test Mode	Test Frequency (MHz)	Result	Verdict
11AX80MIMO	5290	See test Graph	PASS

End of Channel Availability Check Time


Test Mode	Test Frequency (MHz)	Result	Verdict
11AX80MIMO	5290	See test Graph	PASS

Note: RU means the partial RU mode.

Please refer to the following plots.


Initial Channel Availability Check Time

11AC80MIMO_5290

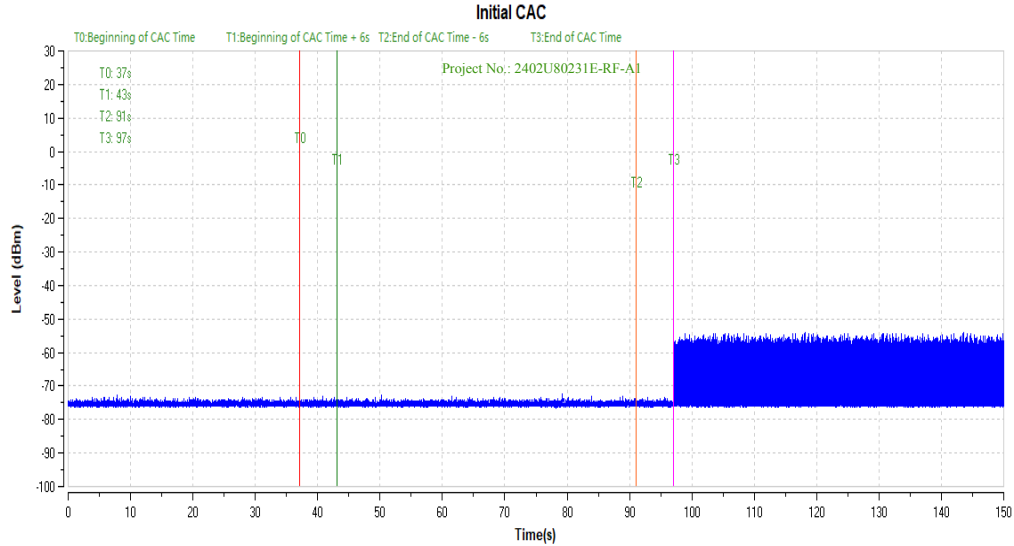

Beginning of Channel Availability Check Time


11AC80MIMO_5290

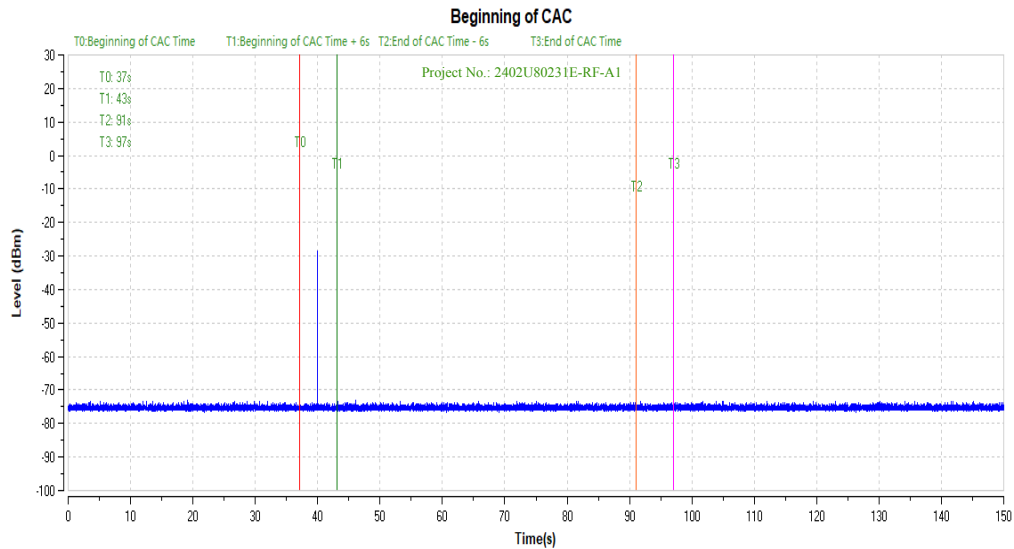



End of Channel Availability Check Time


11AC80MIMO_5290

End of CAC

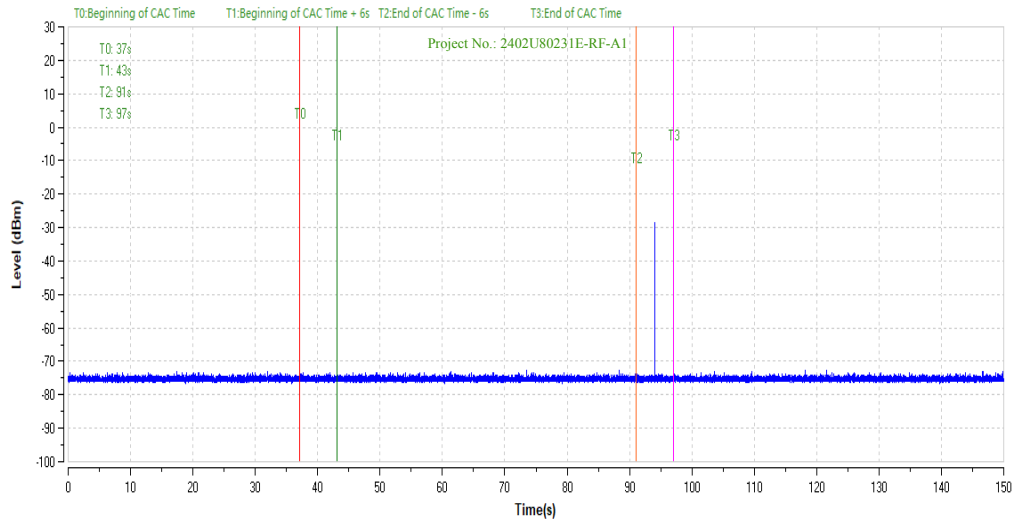

RU

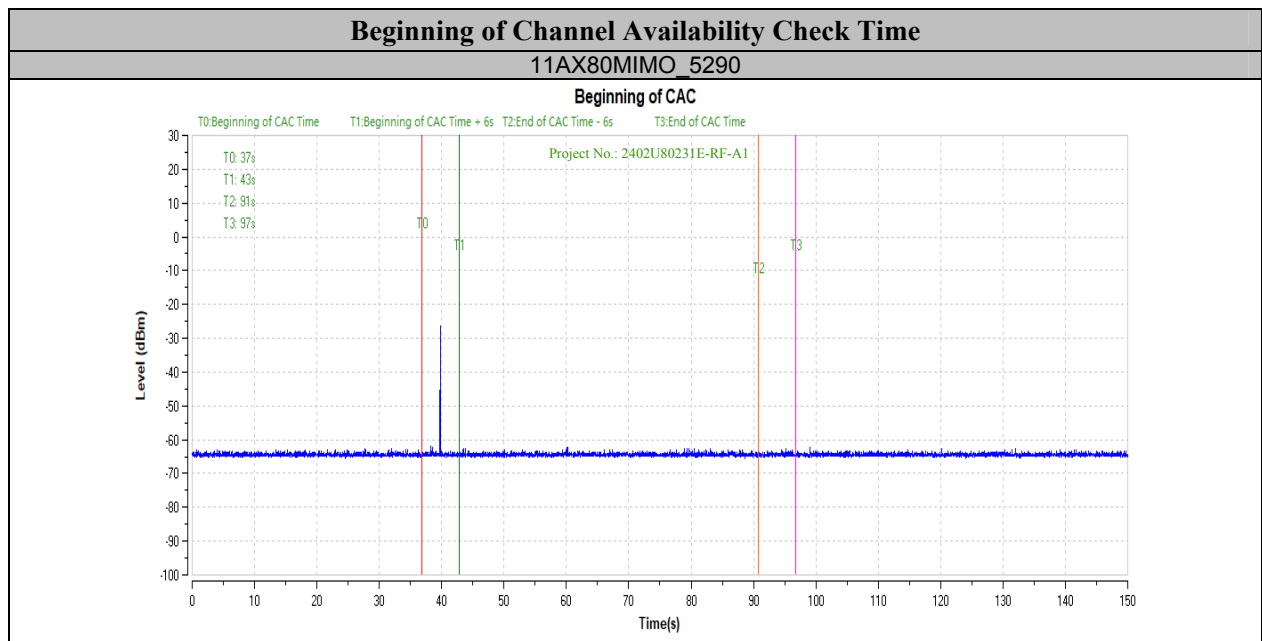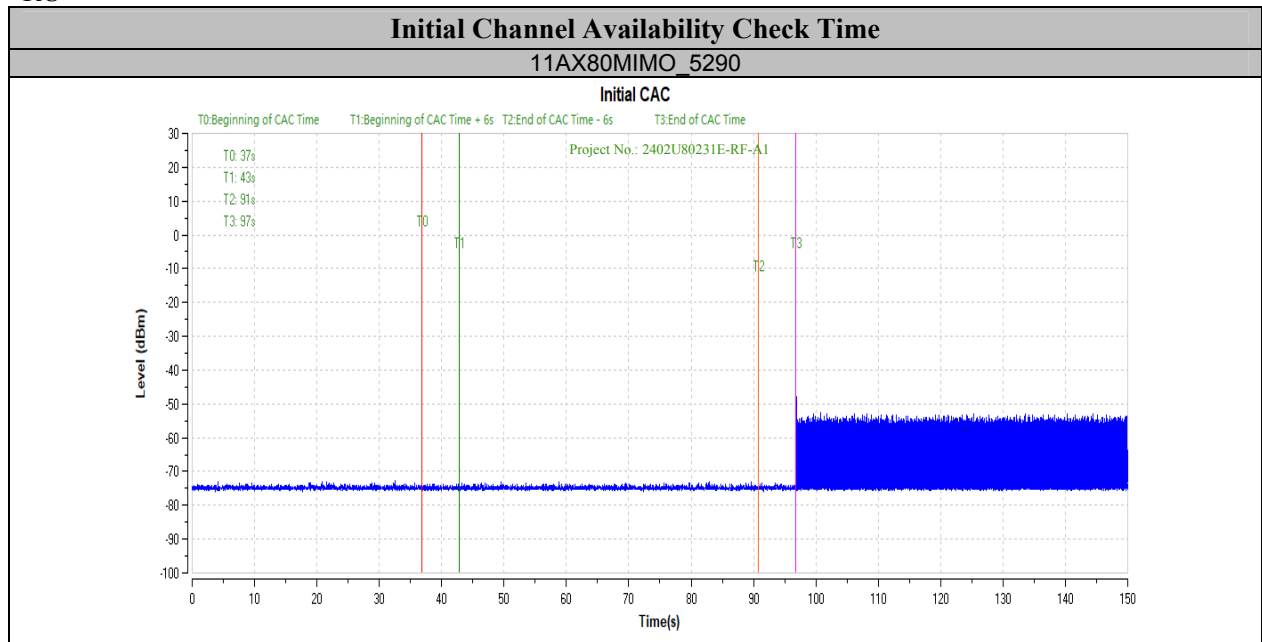

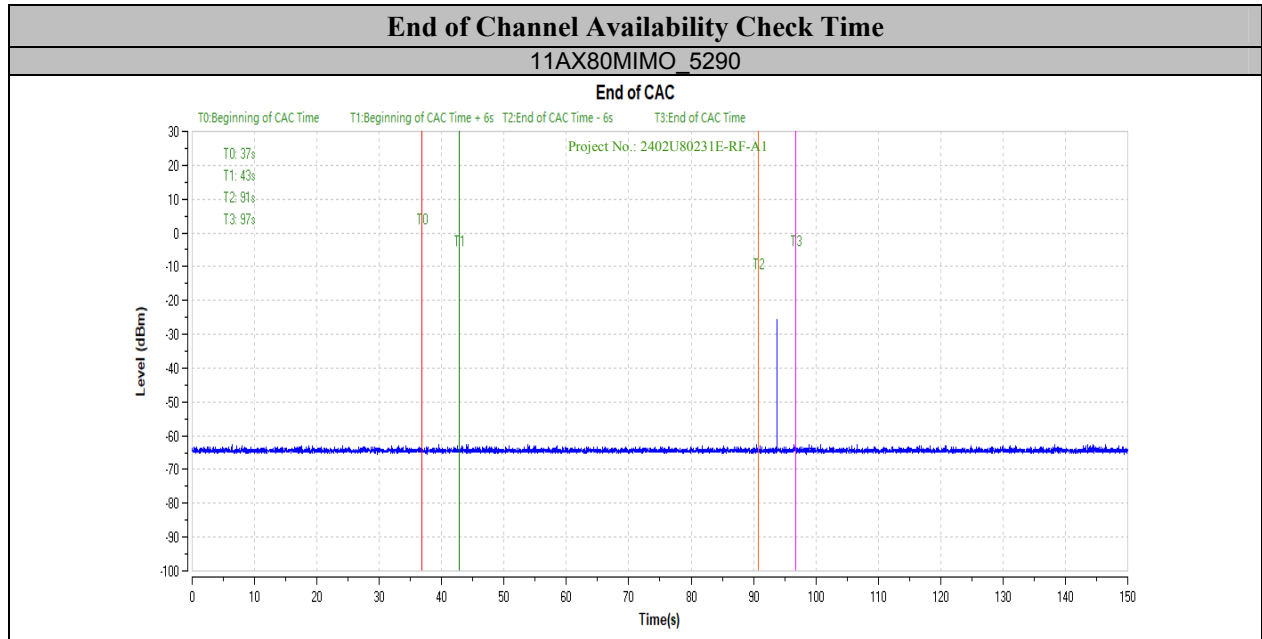

5.4 Channel Move Time And Channel Closing Transmission Time

5.4.1 Test Procedure

Perform type 0 short pulse radar waveform.


The aggregate channel closing transmission time is calculated as follows:

$$\text{Aggregate Transmission Time} = N * \text{Dwell Time}$$

N is the number of spectrum analyzer bins showing a device transmission Dwell Time is the dwell time per bin (i.e. Dwell Time = S/B, S is the sweep time and B is the number of bin, i.e. 8192)

5.4.2 Test Result


Test Mode	Test Frequency[MHz]	CCTT[ms]	Limit[ms]	CMT[ms]	Limit[ms]	Verdict
11AC80MIMO	5290	200+2.88	200+60	560	10000	PASS

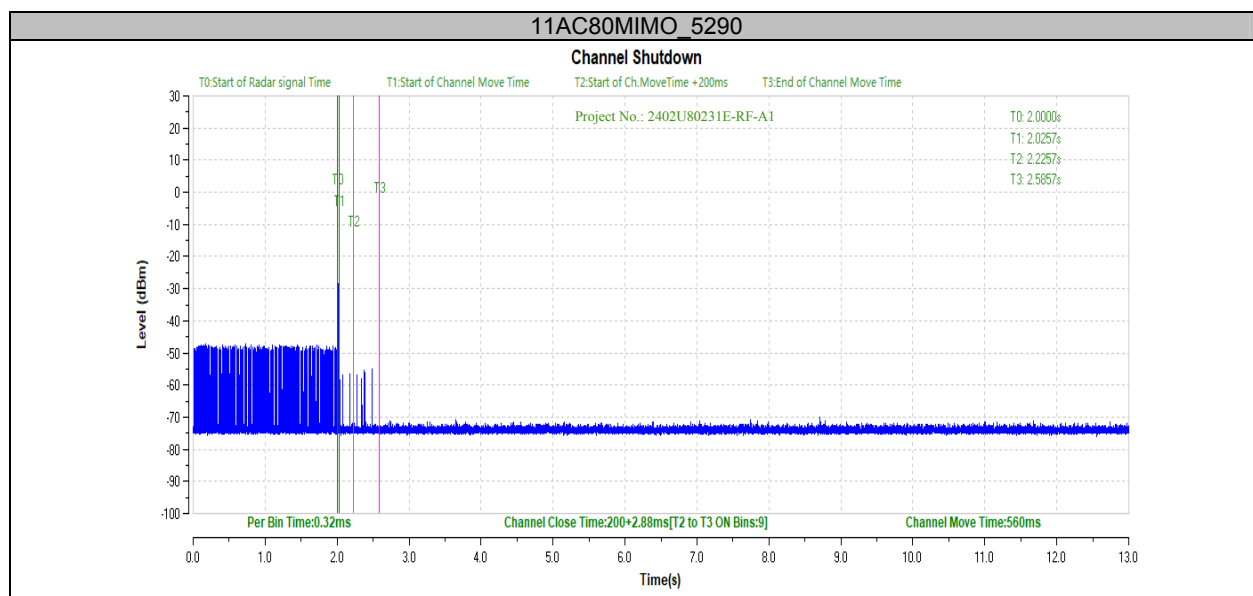

RU

Test Mode	Test Frequency[MHz]	CCTT[ms]	Limit[ms]	CMT[ms]	Limit[ms]	Verdict
11AX80MIMO	5290	200+3.9	200+60	438.1	10000	PASS

Note: RU means the partial RU mode.

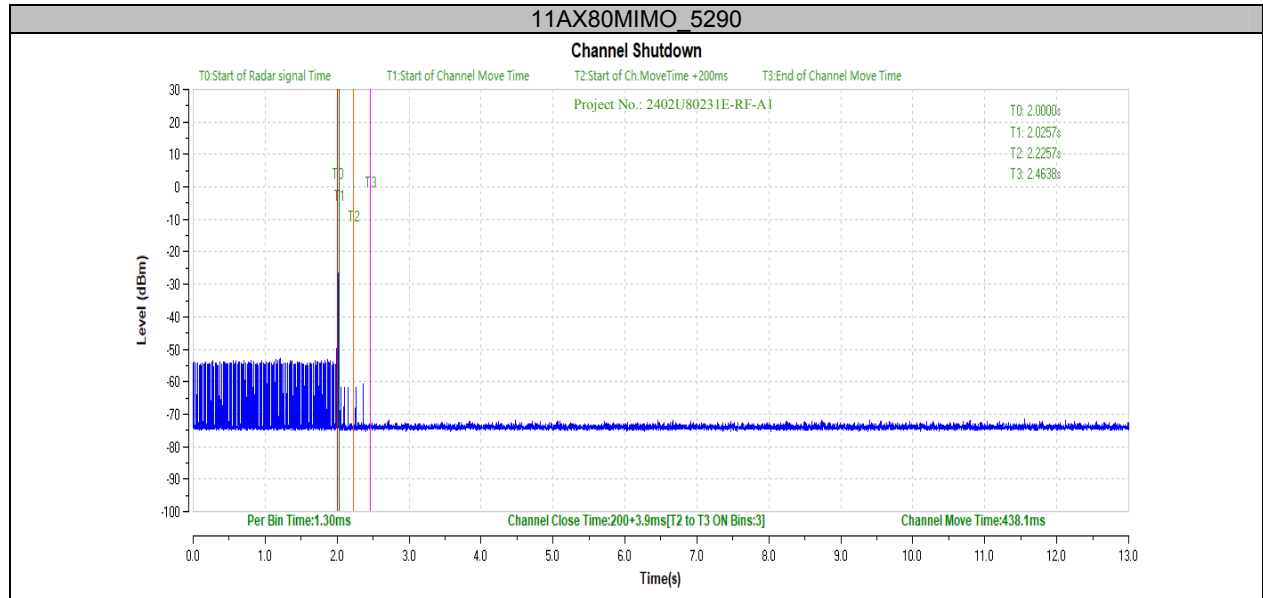

5.5 Non-occupancy Period


5.5.1 Test Procedure

Measure the EUT for more than 30 minutes following the channel close/move time to verify that the EUT does not resume any transmissions on this channel. Provide one plot to demonstrate no transmission on the channel for the non-occupancy period (30 minutes observation time)

5.5.2 Test Result

Test Mode	Test Frequency[MHz]	Result	Limit[s]	Verdict
11AC80MIMO	5290	see test graph	≥1800	PASS

Please refer to the following plots.

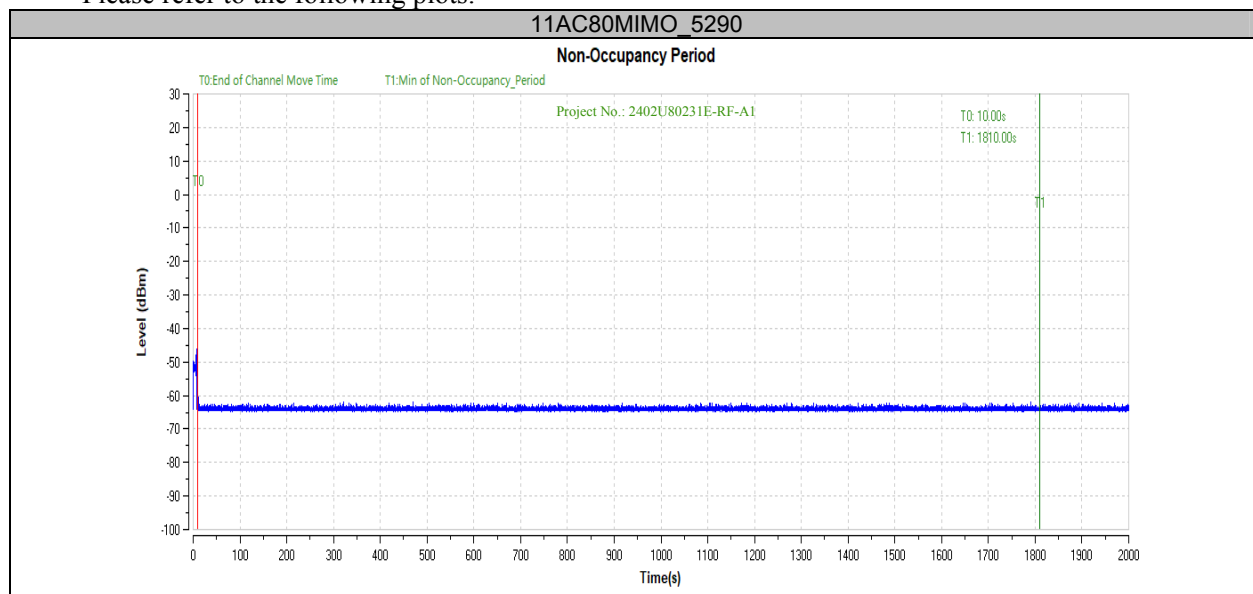


RU

Test Mode	Test Frequency[MHz]	Result	Limit[s]	Verdict
11AX80MIMO	5290	see test graph	≥1800	PASS

Note: RU means the partial RU mode.

Please refer to the following plots.

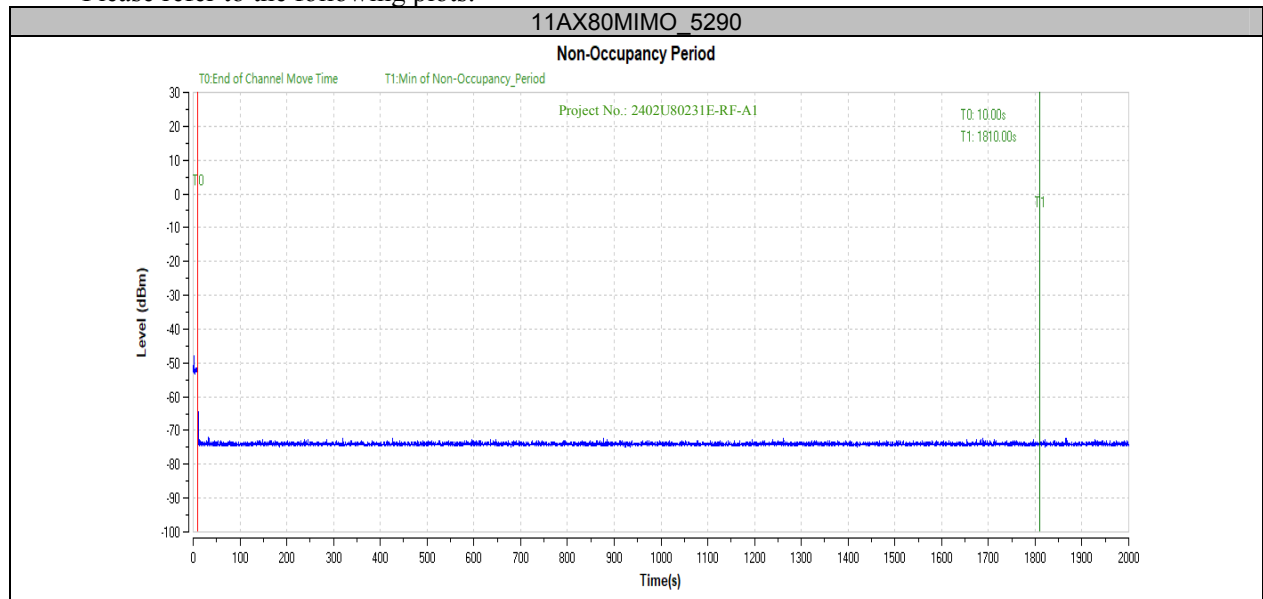

5.6 DETECTION BANDWIDTH

5.6.1 Test Procedure

Performed with Type 0 radar waveforms

Starting at the center frequency of the UUT operating *Channel*, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the *U-NII Detection Bandwidth* criterion specified in **Table 4**. Repeat this measurement in 1MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as F_H) at which detection is greater than or equal to the *U-NII Detection Bandwidth* criterion. Recording the detection rate at frequencies above F_H is not required to demonstrate compliance.

Starting at the center frequency of the UUT operating *Channel*, decrease the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the *U-NII Detection Bandwidth* criterion specified in **Table 4**. Repeat this measurement in 1MHz steps at frequencies 5 MHz above where the detection rate begins to fall. Record the lowest frequency (denote as F_L) at which detection is greater than or equal to the *U-NII Detection Bandwidth* criterion. Recording the detection rate at frequencies below F_L is not required to demonstrate compliance.

The *U-NII Detection Bandwidth* is calculated as follows:

$$U\text{-NII Detection Bandwidth} = F_H - F_L$$

The *U-NII Detection Bandwidth* must meet the *U-NII Detection Bandwidth* criterion specified in **Table 4**. Otherwise, the UUT does not comply with DFS requirements. This is essential to ensure that the UUT is capable of detecting *Radar Waveforms* across the same frequency spectrum that contains the significant energy from the system. In the case that the *U-NII Detection Bandwidth* is greater than or equal to the 99 percent power bandwidth for the measured F_H and F_L , the test can be truncated and the *U-NII Detection Bandwidth* can be reported as the measured F_H and F_L .

5.6.2 Test Result

Test Mode	Test Frequency [MHz]	FL [MHz]	FH [MHz]	Detection Bandwidth [MHz]	OCB [MHz]	Ratio [%]	Limit [%]	Verdict
11N20MIMO	5320	5310	5330	20	17.9	111.73	≥100	PASS
11AC80MIMO	5290	5250	5330	80	76.4	104.71	≥100	PASS
11AX40MIMO	5310	5290	5330	40	38	105.26	≥100	PASS

Please refer to the following tables.

Test Mode	Test Frequency (MHz)	Radar Freq.	Trial 1	Trial2	Trial3	Trial4	Trial5	Trial6	Trial7	Trial8	Trial9	Trial10	Ratio (%)
11N20MIMO	5320	5309	0	0	0	0	0	0	0	0	0	0	0
		5310	1	1	1	1	1	1	1	1	1	1	100
		5315	1	1	1	1	1	1	1	1	1	1	100
		5320	1	1	1	1	1	1	1	1	1	1	100
		5325	1	1	1	1	1	1	1	1	1	1	100
		5330	1	1	1	1	1	1	1	1	1	1	100
		5331	0	0	0	0	0	0	0	0	0	0	0
11AC80MIMO	5290	5249	0	0	0	0	0	0	0	0	0	0	0
		5250	1	1	1	1	1	1	1	1	1	1	100
		5255	1	1	1	1	1	1	1	1	1	1	100
		5260	1	1	1	1	1	1	1	1	1	1	100
		5265	1	1	1	1	1	1	1	1	1	1	100
		5270	1	1	1	1	1	1	1	1	1	1	100
		5275	1	1	1	1	1	1	1	1	1	1	100
		5280	1	1	1	1	1	1	1	1	1	1	100
		5285	1	1	1	1	1	1	1	1	1	1	100
		5290	1	1	1	1	1	1	1	1	1	1	100
		5295	1	1	1	1	1	1	1	1	1	1	100
		5300	1	1	1	1	1	1	1	1	1	1	100
		5305	1	1	1	1	1	1	1	1	1	1	100
		5310	1	1	1	1	1	1	1	1	1	1	100
		5315	1	1	1	1	1	1	1	1	1	1	100
		5320	1	1	1	1	1	1	1	1	1	1	100
		5325	1	1	1	1	1	1	1	1	1	1	100
		5330	1	1	1	1	1	1	1	1	1	1	100
		5331	0	0	0	0	0	0	0	0	0	0	0
11AX40MIMO	5310	5289	0	0	0	0	0	0	0	0	0	0	0
		5290	1	1	1	1	1	1	1	1	1	1	100
		5295	1	1	1	1	1	1	1	1	1	1	100
		5300	1	1	1	1	1	1	1	1	1	1	100
		5305	1	1	1	1	1	1	1	1	1	1	100
		5310	1	1	1	1	1	1	1	1	1	1	100
		5315	1	1	1	1	1	1	1	1	1	1	100
		5320	1	1	1	1	1	1	1	1	1	1	100
		5325	1	1	1	1	1	1	1	1	1	1	100
		5330	1	1	1	1	1	1	1	1	1	1	100
		5331	0	0	0	0	0	0	0	0	0	0	0

RU

Test Mode	Test Frequency (MHz)	FL[MHz]	FH[MHz]	Detection Bandwidth [MHz]	OCB [MHz]	Ratio [%]	Limit [%]	Verdict
11AX80MIMO	5290	5250	5330	80	76.4	104.71	≥100	PASS

Note: RU means the partial RU mode.

Test Mode	Test Frequency (MHz)	Radar Freq.	Trial 1	Trial2	Trial3	Trial4	Trial5	Trial6	Trial7	Trial8	Trial9	Trial10	Ratio (%)
11AX80MIMO	5290	5249	0	0	0	0	0	0	0	0	0	0	0
		5250	1	1	1	1	1	1	1	1	1	1	100
		5255	1	1	1	1	1	1	1	1	1	1	100
		5260	1	1	1	1	1	1	1	1	1	1	100
		5265	1	1	1	1	1	1	1	1	1	1	100
		5270	1	1	1	1	1	1	1	1	1	1	100
		5275	1	1	1	1	1	1	1	1	1	1	100
		5280	1	1	1	1	1	1	1	1	1	1	100
		5285	1	1	1	1	1	1	1	1	1	1	100
		5290	1	1	1	1	1	1	1	1	1	1	100
		5295	1	1	1	1	1	1	1	1	1	1	100
		5300	1	1	1	1	1	1	1	1	1	1	100
		5305	1	1	1	1	1	1	1	1	1	1	100
		5310	1	1	1	1	1	1	1	1	1	1	100
		5315	1	1	1	1	1	1	1	1	1	1	100
		5320	1	1	1	1	1	1	1	1	1	1	100
		5325	1	1	1	1	1	1	1	1	1	1	100
		5330	1	1	1	1	1	1	1	1	1	1	100
		5331	0	0	0	0	0	0	0	0	0	0	0

5.7 STATISTICAL PERFORMANCE CHECK

5.6.1 Procedure:

The steps below define the procedure to determine the minimum percentage of successful detection requirements found in **Tables 5-7** when a radar burst with a level equal to the *DFS Detection Threshold + 1dB* is generated on the *Operating Channel* of the U-NII device (*In- Service Monitoring*).

- a) One frequency will be chosen from the *Operating Channels* of the UUT within the 5250-5350 MHz or 5470-5725 MHz bands.
- b) In case the UUT is a U-NII device operating as a Client Device (with or without Radar Detection), a U-NII device operating as a Master Device will be used to allow the UUT (Client device) to Associate with the Master Device. In case the UUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will Associate with the UUT (Master). In both cases for conducted tests, the Radar Waveform generator will be connected to the Master Device. For radiated tests, the emissions of the Radar Waveform generator will be directed towards the Master Device. If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- c) Stream the channel loading test file from the *Master Device* to the Client Device on the test *Channel* for the entire period of the test.
- d) At time T_0 the *Radar Waveform* generator sends the individual waveform for each of the Radar Types 1- 6 in **Tables 5-7**, at levels defined in **Table 3**, on the *Operating Channel*. An additional 1 dB is added to the radar test signal to ensure it is at or above the *DFS Detection Threshold*, accounting for equipment variations/errors.
- e) Observe the transmissions of the UUT at the end of the Burst on the *Operating Channel* for duration greater than 10 seconds for Radar Type 0 to ensure detection occurs.
- f) Observe the transmissions of the UUT at the end of the Burst on the *Operating Channel* for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.
- g) In case the UUT is a U-NII device operating as a *Client Device* with *In-Service Monitoring*, perform steps a) to f).

5.7.2 Result:

Test Mode	Test Frequency (MHz)	Radar Type	Pass Times	Fail Times	Probability (%)	Limit (%)	Verdict
11N20MIMO	5320	Type1	30	0	100.00	60	PASS
		Type2	30	0	100.00	60	PASS
		Type3	30	0	100.00	60	PASS
		Type4	30	0	100.00	60	PASS
		Aggregate (Type 1-4)	120	0	100.00	80	PASS
		Type5	30	0	100.00	80	PASS
		Type6	30	0	100.00	70	PASS
11AC80MIMO	5290	Type1	30	0	100.00	60	PASS
		Type2	30	0	100.00	60	PASS
		Type3	30	0	100.00	60	PASS
		Type4	30	0	100.00	60	PASS
		Aggregate (Type 1-4)	120	0	100.00	80	PASS
		Type5	30	0	100.00	80	PASS
		Type6	30	0	100.00	70	PASS
11AX40MIMO	5310	Type1	30	0	100.00	60	PASS
		Type2	30	0	100.00	60	PASS
		Type3	30	0	100.00	60	PASS
		Type4	30	0	100.00	60	PASS
		Aggregate (Type 1-4)	120	0	100.00	80	PASS
		Type5	30	0	100.00	80	PASS
		Type6	30	0	100.00	70	PASS

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Pulse width(μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11N20MIMO	5320	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	1
		Type2	9	1.2	156.0	23	1
		Type2	10	3.9	210.0	27	1
		Type2	11	4.6	201.0	29	1
		Type2	12	3.2	162.0	26	1
		Type2	13	2.2	197.0	25	1
		Type2	14	4.5	163.0	29	1
		Type2	15	3.0	203.0	26	1
		Type2	16	5.0	168.0	29	1
		Type2	17	2.4	217.0	25	1
		Type2	18	2.9	191.0	26	1
		Type2	19	2.3	166.0	25	1

	Type2	20	3.7	150.0	27	1
	Type2	21	2.2	176.0	25	1
	Type2	22	4.9	195.0	29	1
	Type2	23	2.9	202.0	26	1
	Type2	24	2.5	178.0	25	1
	Type2	25	1.1	206.0	23	1
	Type2	26	3.8	155.0	27	1
	Type2	27	4.7	157.0	29	1
	Type2	28	2.4	224.0	25	1
	Type2	29	4.2	159.0	28	1
	Type3	0	8.2	355.0	17	1
	Type3	1	6.1	487.0	16	1
	Type3	2	7.1	344.0	16	1
	Type3	3	9.8	288.0	18	1
	Type3	4	8.9	230.0	18	1
	Type3	5	7.9	432.0	17	1
	Type3	6	8.2	207.0	17	1
	Type3	7	7.5	443.0	17	1
	Type3	8	8.1	439.0	17	1
	Type3	9	6.2	223.0	16	1
	Type3	10	8.9	208.0	18	1
	Type3	11	9.6	463.0	18	1
	Type3	12	8.2	441.0	17	1
	Type3	13	7.2	323.0	16	1
	Type3	14	9.5	297.0	18	1
	Type3	15	8.0	412.0	17	1
	Type3	16	10.0	324.0	18	1
	Type3	17	7.4	271.0	17	1
	Type3	18	7.9	349.0	17	1
	Type3	19	7.3	409.0	16	1
	Type3	20	8.7	373.0	18	1
	Type3	21	7.2	254.0	16	1
	Type3	22	9.9	274.0	18	1
	Type3	23	7.9	278.0	17	1
	Type3	24	7.5	317.0	17	1
	Type3	25	6.1	260.0	16	1
	Type3	26	8.8	211.0	18	1
	Type3	27	9.7	272.0	18	1
	Type3	28	7.4	264.0	17	1
	Type3	29	9.2	284.0	18	1
	Type4	0	16.0	355.0	14	1
	Type4	1	11.3	487.0	12	1
	Type4	2	13.5	344.0	13	1
	Type4	3	19.4	288.0	16	1
	Type4	4	17.5	230.0	15	1
	Type4	5	15.3	432.0	14	1
	Type4	6	15.9	207.0	14	1
	Type4	7	14.3	443.0	13	1
	Type4	8	15.8	439.0	14	1
	Type4	9	11.5	223.0	12	1
	Type4	10	17.4	208.0	15	1
	Type4	11	19.0	463.0	16	1
	Type4	12	16.0	441.0	14	1
	Type4	13	13.8	323.0	13	1
	Type4	14	18.9	297.0	16	1

		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1
11AC80MIMO	5290	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	1
		Type2	9	1.2	156.0	23	1

	Type2	10	3.9	210.0	27	1
	Type2	11	4.6	201.0	29	1
	Type2	12	3.2	162.0	26	1
	Type2	13	2.2	197.0	25	1
	Type2	14	4.5	163.0	29	1
	Type2	15	3.0	203.0	26	1
	Type2	16	5.0	168.0	29	1
	Type2	17	2.4	217.0	25	1
	Type2	18	2.9	191.0	26	1
	Type2	19	2.3	166.0	25	1
	Type2	20	3.7	150.0	27	1
	Type2	21	2.2	176.0	25	1
	Type2	22	4.9	195.0	29	1
	Type2	23	2.9	202.0	26	1
	Type2	24	2.5	178.0	25	1
	Type2	25	1.1	206.0	23	1
	Type2	26	3.8	155.0	27	1
	Type2	27	4.7	157.0	29	1
	Type2	28	2.4	224.0	25	1
	Type2	29	4.2	159.0	28	1
	Type3	0	8.2	355.0	17	1
	Type3	1	6.1	487.0	16	1
	Type3	2	7.1	344.0	16	1
	Type3	3	9.8	288.0	18	1
	Type3	4	8.9	230.0	18	1
	Type3	5	7.9	432.0	17	1
	Type3	6	8.2	207.0	17	1
	Type3	7	7.5	443.0	17	1
	Type3	8	8.1	439.0	17	1
	Type3	9	6.2	223.0	16	1
	Type3	10	8.9	208.0	18	1
	Type3	11	9.6	463.0	18	1
	Type3	12	8.2	441.0	17	1
	Type3	13	7.2	323.0	16	1
	Type3	14	9.5	297.0	18	1
	Type3	15	8.0	412.0	17	1
	Type3	16	10.0	324.0	18	1
	Type3	17	7.4	271.0	17	1
	Type3	18	7.9	349.0	17	1
	Type3	19	7.3	409.0	16	1
	Type3	20	8.7	373.0	18	1
	Type3	21	7.2	254.0	16	1
	Type3	22	9.9	274.0	18	1
	Type3	23	7.9	278.0	17	1
	Type3	24	7.5	317.0	17	1
	Type3	25	6.1	260.0	16	1
	Type3	26	8.8	211.0	18	1
	Type3	27	9.7	272.0	18	1
	Type3	28	7.4	264.0	17	1
	Type3	29	9.2	284.0	18	1
	Type4	0	16.0	355.0	14	1
	Type4	1	11.3	487.0	12	1
	Type4	2	13.5	344.0	13	1
	Type4	3	19.4	288.0	16	1
	Type4	4	17.5	230.0	15	1

		Type4	5	15.3	432.0	14	1
		Type4	6	15.9	207.0	14	1
		Type4	7	14.3	443.0	13	1
		Type4	8	15.8	439.0	14	1
		Type4	9	11.5	223.0	12	1
		Type4	10	17.4	208.0	15	1
		Type4	11	19.0	463.0	16	1
		Type4	12	16.0	441.0	14	1
		Type4	13	13.8	323.0	13	1
		Type4	14	18.9	297.0	16	1
		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1
11AX40MIMO	5310	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1

	Type2	0	3.2	179.0	26	1
	Type2	1	1.1	207.0	23	1
	Type2	2	2.1	230.0	24	1
	Type2	3	4.8	200.0	29	1
	Type2	4	3.9	214.0	28	1
	Type2	5	2.9	222.0	26	1
	Type2	6	3.2	204.0	26	1
	Type2	7	2.5	192.0	25	1
	Type2	8	3.1	164.0	26	1
	Type2	9	1.2	156.0	23	1
	Type2	10	3.9	210.0	27	1
	Type2	11	4.6	201.0	29	1
	Type2	12	3.2	162.0	26	1
	Type2	13	2.2	197.0	25	1
	Type2	14	4.5	163.0	29	1
	Type2	15	3.0	203.0	26	1
	Type2	16	5.0	168.0	29	1
	Type2	17	2.4	217.0	25	1
	Type2	18	2.9	191.0	26	1
	Type2	19	2.3	166.0	25	1
	Type2	20	3.7	150.0	27	1
	Type2	21	2.2	176.0	25	1
	Type2	22	4.9	195.0	29	1
	Type2	23	2.9	202.0	26	1
	Type2	24	2.5	178.0	25	1
	Type2	25	1.1	206.0	23	1
	Type2	26	3.8	155.0	27	1
	Type2	27	4.7	157.0	29	1
	Type2	28	2.4	224.0	25	1
	Type2	29	4.2	159.0	28	1
	Type3	0	8.2	355.0	17	1
	Type3	1	6.1	487.0	16	1
	Type3	2	7.1	344.0	16	1
	Type3	3	9.8	288.0	18	1
	Type3	4	8.9	230.0	18	1
	Type3	5	7.9	432.0	17	1
	Type3	6	8.2	207.0	17	1
	Type3	7	7.5	443.0	17	1
	Type3	8	8.1	439.0	17	1
	Type3	9	6.2	223.0	16	1
	Type3	10	8.9	208.0	18	1
	Type3	11	9.6	463.0	18	1
	Type3	12	8.2	441.0	17	1
	Type3	13	7.2	323.0	16	1
	Type3	14	9.5	297.0	18	1
	Type3	15	8.0	412.0	17	1
	Type3	16	10.0	324.0	18	1
	Type3	17	7.4	271.0	17	1
	Type3	18	7.9	349.0	17	1
	Type3	19	7.3	409.0	16	1
	Type3	20	8.7	373.0	18	1
	Type3	21	7.2	254.0	16	1
	Type3	22	9.9	274.0	18	1
	Type3	23	7.9	278.0	17	1
	Type3	24	7.5	317.0	17	1

	Type3	25	6.1	260.0	16	1
	Type3	26	8.8	211.0	18	1
	Type3	27	9.7	272.0	18	1
	Type3	28	7.4	264.0	17	1
	Type3	29	9.2	284.0	18	1
	Type4	0	16.0	355.0	14	1
	Type4	1	11.3	487.0	12	1
	Type4	2	13.5	344.0	13	1
	Type4	3	19.4	288.0	16	1
	Type4	4	17.5	230.0	15	1
	Type4	5	15.3	432.0	14	1
	Type4	6	15.9	207.0	14	1
	Type4	7	14.3	443.0	13	1
	Type4	8	15.8	439.0	14	1
	Type4	9	11.5	223.0	12	1
	Type4	10	17.4	208.0	15	1
	Type4	11	19.0	463.0	16	1
	Type4	12	16.0	441.0	14	1
	Type4	13	13.8	323.0	13	1
	Type4	14	18.9	297.0	16	1
	Type4	15	15.5	412.0	14	1
	Type4	16	19.9	324.0	16	1
	Type4	17	14.1	271.0	13	1
	Type4	18	15.2	349.0	14	1
	Type4	19	13.8	409.0	13	1
	Type4	20	17.1	373.0	15	1
	Type4	21	13.8	254.0	13	1
	Type4	22	19.8	274.0	16	1
	Type4	23	15.3	278.0	14	1
	Type4	24	14.5	317.0	13	1
	Type4	25	11.3	260.0	12	1
	Type4	26	17.3	211.0	15	1
	Type4	27	19.2	272.0	16	1
	Type4	28	14.2	264.0	13	1
	Type4	29	18.2	284.0	15	1

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Number Of Bursts	Wavform Length (s)	Radar Frequency	Detection (1: Yes; 0: No)
11N20MIMO	5320	Type5	0	15	12	5320	1
		Type5	1	8	12	5320	1
		Type5	2	11	12	5320	1
		Type5	3	20	12	5320	1
		Type5	4	17	12	5320	1
		Type5	5	14	12	5320	1
		Type5	6	15	12	5320	1
		Type5	7	12	12	5320	1
		Type5	8	14	12	5320	1
		Type5	9	8	12	5320	1
		Type5	10	17	12	5317.45	1
		Type5	11	19	12	5318.65	1
		Type5	12	15	12	5316.25	1
		Type5	13	12	12	5315.05	1
		Type5	14	19	12	5318.25	1
		Type5	15	14	12	5315.85	1
		Type5	16	20	12	5319.05	1
		Type5	17	12	12	5315.05	1
		Type5	18	14	12	5315.85	1
		Type5	19	12	12	5315.05	1
		Type5	20	16	12	5322.95	1
		Type5	21	12	12	5325.35	1
		Type5	22	20	12	5320.95	1
		Type5	23	14	12	5324.15	1
		Type5	24	13	12	5324.55	1
		Type5	25	8	12	5326.95	1
		Type5	26	17	12	5322.55	1
		Type5	27	19	12	5321.35	1
		Type5	28	12	12	5324.95	1
		Type5	29	18	12	5322.15	1
11AC80MIMO	5290	Type5	0	15	12	5290	1
		Type5	1	8	12	5290	1
		Type5	2	11	12	5290	1
		Type5	3	20	12	5290	1
		Type5	4	17	12	5290	1
		Type5	5	14	12	5290	1
		Type5	6	15	12	5290	1
		Type5	7	12	12	5290	1
		Type5	8	14	12	5290	1
		Type5	9	8	12	5290	1
		Type5	10	17	12	5258.2	1
		Type5	11	19	12	5259.4	1
		Type5	12	15	12	5257	1
		Type5	13	12	12	5255.8	1
		Type5	14	19	12	5259	1
		Type5	15	14	12	5256.6	1
		Type5	16	20	12	5259.8	1
		Type5	17	12	12	5255.8	1
		Type5	18	14	12	5256.6	1
		Type5	19	12	12	5255.8	1
		Type5	20	16	12	5322.2	1

		Type5	21	12	12	5324.6	1
		Type5	22	20	12	5320.2	1
		Type5	23	14	12	5323.4	1
		Type5	24	13	12	5323.8	1
		Type5	25	8	12	5326.2	1
		Type5	26	17	12	5321.8	1
		Type5	27	19	12	5320.6	1
		Type5	28	12	12	5324.2	1
11AX40MIMO	5310	Type5	29	18	12	5321.4	1
		Type5	0	15	12	5310	1
		Type5	1	8	12	5310	1
		Type5	2	11	12	5310	1
		Type5	3	20	12	5310	1
		Type5	4	17	12	5310	1
		Type5	5	14	12	5310	1
		Type5	6	15	12	5310	1
		Type5	7	12	12	5310	1
		Type5	8	14	12	5310	1
		Type5	9	8	12	5310	1
		Type5	10	17	12	5297.4	1
		Type5	11	19	12	5298.6	1
		Type5	12	15	12	5296.2	1
		Type5	13	12	12	5295	1
		Type5	14	19	12	5298.2	1
		Type5	15	14	12	5295.8	1
		Type5	16	20	12	5299	1
		Type5	17	12	12	5295	1
		Type5	18	14	12	5295.8	1
		Type5	19	12	12	5295	1
		Type5	20	16	12	5323	1
		Type5	21	12	12	5325.4	1
		Type5	22	20	12	5321	1
		Type5	23	14	12	5324.2	1
		Type5	24	13	12	5324.6	1
		Type5	25	8	12	5327	1
		Type5	26	17	12	5322.6	1
		Type5	27	19	12	5321.4	1
		Type5	28	12	12	5325	1
		Type5	29	18	12	5322.2	1

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Pulse width (μs)	PRI (μs)	Pulses per Hop	Detection (1: Yes; 0: No)
11N20MIMO	5320	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
11AC80MIMO	5290	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1

		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
11AX40MIMO	5310	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
11N20MIMO	5320	Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
11N20MIMO	5320	Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
11N20MIMO	5320	Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
11N20MIMO	5320	Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
11N20MIMO	5320	Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
11N20MIMO	5320	Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
11N20MIMO	5320	Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
11N20MIMO	5320	Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
11N20MIMO	5320	Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
11N20MIMO	5320	Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
11N20MIMO	5320	Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
11N20MIMO	5320	Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
11N20MIMO	5320	Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
11N20MIMO	5320	Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
11AC80MIMO	5290	Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
11AC80MIMO	5290	Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
11AC80MIMO	5290	Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
11AC80MIMO	5290	Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
11AC80MIMO	5290	Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
11AC80MIMO	5290	Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
11AC80MIMO	5290	Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
11AC80MIMO	5290	Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
11AC80MIMO	5290	Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
11AC80MIMO	5290	Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
11AC80MIMO	5290	Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
11AC80MIMO	5290	Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
11AC80MIMO	5290	Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
11AC80MIMO	5290	Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
11AC80MIMO	5290	Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
11AX40MIMO	5310	Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
11AX40MIMO	5310	Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
11AX40MIMO	5310	Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
11AX40MIMO	5310	Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
11AX40MIMO	5310	Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
11AX40MIMO	5310	Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
11AX40MIMO	5310	Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
11AX40MIMO	5310	Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
11AX40MIMO	5310	Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
11AX40MIMO	5310	Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
11AX40MIMO	5310	Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
11AX40MIMO	5310	Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
11AX40MIMO	5310	Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
11AX40MIMO	5310	Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
11AX40MIMO	5310	Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
11N20MIMO	5320	Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
11N20MIMO	5320	Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
11N20MIMO	5320	Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
11N20MIMO	5320	Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
11N20MIMO	5320	Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
11N20MIMO	5320	Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
11N20MIMO	5320	Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
11AC80MIMO	5290	Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
11AC80MIMO	5290	Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
11AC80MIMO	5290	Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
11AC80MIMO	5290	Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
11AC80MIMO	5290	Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
11AC80MIMO	5290	Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
11AC80MIMO	5290	Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
11AC80MIMO	5290	Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
11AX40MIMO	5310	Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
11AX40MIMO	5310	Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
11AX40MIMO	5310	Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
11AX40MIMO	5310	Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
11AX40MIMO	5310	Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
11AX40MIMO	5310	Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
11AX40MIMO	5310	Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
11AX40MIMO	5310	Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
11N20MIMO	5320	Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
11N20MIMO	5320	Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
11N20MIMO	5320	Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
11N20MIMO	5320	Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
11N20MIMO	5320	Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
11N20MIMO	5320	Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
11N20MIMO	5320	Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
11N20MIMO	5320	Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
11N20MIMO	5320	Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
11N20MIMO	5320	Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
11AC80MIMO	5290	Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
11AC80MIMO	5290	Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
11AC80MIMO	5290	Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
11AC80MIMO	5290	Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
11AC80MIMO	5290	Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
11AC80MIMO	5290	Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
11AC80MIMO	5290	Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
11AC80MIMO	5290	Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
11AC80MIMO	5290	Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
11AC80MIMO	5290	Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
11AC80MIMO	5290	Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
11AX40MIMO	5310	Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
11AX40MIMO	5310	Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
11AX40MIMO	5310	Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
11AX40MIMO	5310	Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
11AX40MIMO	5310	Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
11AX40MIMO	5310	Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
11AX40MIMO	5310	Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
11AX40MIMO	5310	Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
11AX40MIMO	5310	Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
11AX40MIMO	5310	Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
11AX40MIMO	5310	Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
11N20MIMO	5320	Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
11N20MIMO	5320	Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
11N20MIMO	5320	Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
11N20MIMO	5320	Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
11N20MIMO	5320	Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
11N20MIMO	5320	Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
11N20MIMO	5320	Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
11N20MIMO	5320	Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
11N20MIMO	5320	Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
11N20MIMO	5320	Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
11N20MIMO	5320	Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
11N20MIMO	5320	Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
11N20MIMO	5320	Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
11N20MIMO	5320	Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
11N20MIMO	5320	Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
11N20MIMO	5320	Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
11N20MIMO	5320	Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
11N20MIMO	5320	Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
11N20MIMO	5320	Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
11AC80MIMO	5290	Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
11AC80MIMO	5290	Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
11AC80MIMO	5290	Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
11AC80MIMO	5290	Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
11AC80MIMO	5290	Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
11AC80MIMO	5290	Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
11AC80MIMO	5290	Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
11AC80MIMO	5290	Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
11AC80MIMO	5290	Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
11AC80MIMO	5290	Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
11AC80MIMO	5290	Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
11AC80MIMO	5290	Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
11AC80MIMO	5290	Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
11AC80MIMO	5290	Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
11AC80MIMO	5290	Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
11AC80MIMO	5290	Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
11AC80MIMO	5290	Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
11AC80MIMO	5290	Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
11AC80MIMO	5290	Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
11AC80MIMO	5290	Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
11AX40MIMO	5310	Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
11AX40MIMO	5310	Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
11AX40MIMO	5310	Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
11AX40MIMO	5310	Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
11AX40MIMO	5310	Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
11AX40MIMO	5310	Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
11AX40MIMO	5310	Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
11AX40MIMO	5310	Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
11AX40MIMO	5310	Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
11AX40MIMO	5310	Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---

11AX40MIMO	5310	Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
11AX40MIMO	5310	Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
11AX40MIMO	5310	Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
11AX40MIMO	5310	Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
11AX40MIMO	5310	Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
11AX40MIMO	5310	Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
11AX40MIMO	5310	Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
11AX40MIMO	5310	Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
11AX40MIMO	5310	Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
11AX40MIMO	5310	Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
11N20MIMO	5320	Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
11N20MIMO	5320	Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
11N20MIMO	5320	Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
11N20MIMO	5320	Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
11N20MIMO	5320	Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
11N20MIMO	5320	Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
11N20MIMO	5320	Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
11N20MIMO	5320	Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
11N20MIMO	5320	Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
11N20MIMO	5320	Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
11N20MIMO	5320	Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
11N20MIMO	5320	Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
11N20MIMO	5320	Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
11N20MIMO	5320	Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
11N20MIMO	5320	Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
11N20MIMO	5320	Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
11AC80MIMO	5290	Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
11AC80MIMO	5290	Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
11AC80MIMO	5290	Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
11AC80MIMO	5290	Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
11AC80MIMO	5290	Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
11AC80MIMO	5290	Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
11AC80MIMO	5290	Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
11AC80MIMO	5290	Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
11AC80MIMO	5290	Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
11AC80MIMO	5290	Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
11AC80MIMO	5290	Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
11AC80MIMO	5290	Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
11AC80MIMO	5290	Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
11AC80MIMO	5290	Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
11AC80MIMO	5290	Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
11AC80MIMO	5290	Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
11AC80MIMO	5290	Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
11AX40MIMO	5310	Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
11AX40MIMO	5310	Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
11AX40MIMO	5310	Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
11AX40MIMO	5310	Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
11AX40MIMO	5310	Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
11AX40MIMO	5310	Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
11AX40MIMO	5310	Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
11AX40MIMO	5310	Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
11AX40MIMO	5310	Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
11AX40MIMO	5310	Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
11AX40MIMO	5310	Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
11AX40MIMO	5310	Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
11AX40MIMO	5310	Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
11AX40MIMO	5310	Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
11AX40MIMO	5310	Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
11AX40MIMO	5310	Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
11AX40MIMO	5310	Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
11N20MIMO	5320	Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
11N20MIMO	5320	Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
11N20MIMO	5320	Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
11N20MIMO	5320	Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
11N20MIMO	5320	Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
11N20MIMO	5320	Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
11N20MIMO	5320	Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
11N20MIMO	5320	Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
11N20MIMO	5320	Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
11N20MIMO	5320	Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
11N20MIMO	5320	Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
11N20MIMO	5320	Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
11N20MIMO	5320	Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
11AC80MIMO	5290	Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
11AC80MIMO	5290	Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
11AC80MIMO	5290	Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
11AC80MIMO	5290	Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
11AC80MIMO	5290	Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
11AC80MIMO	5290	Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
11AC80MIMO	5290	Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
11AC80MIMO	5290	Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
11AC80MIMO	5290	Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
11AC80MIMO	5290	Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
11AC80MIMO	5290	Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
11AC80MIMO	5290	Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
11AC80MIMO	5290	Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
11AC80MIMO	5290	Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
11AX40MIMO	5310	Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
11AX40MIMO	5310	Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
11AX40MIMO	5310	Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
11AX40MIMO	5310	Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
11AX40MIMO	5310	Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
11AX40MIMO	5310	Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
11AX40MIMO	5310	Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
11AX40MIMO	5310	Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
11AX40MIMO	5310	Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
11AX40MIMO	5310	Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
11AX40MIMO	5310	Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
11AX40MIMO	5310	Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
11AX40MIMO	5310	Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
11AX40MIMO	5310	Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
11N20MIMO	5320	Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
11N20MIMO	5320	Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
11N20MIMO	5320	Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
11N20MIMO	5320	Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
11N20MIMO	5320	Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
11N20MIMO	5320	Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
11N20MIMO	5320	Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
11N20MIMO	5320	Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
11N20MIMO	5320	Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
11N20MIMO	5320	Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
11N20MIMO	5320	Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
11N20MIMO	5320	Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
11N20MIMO	5320	Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
11N20MIMO	5320	Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
11AC80MIMO	5290	Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
11AC80MIMO	5290	Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
11AC80MIMO	5290	Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
11AC80MIMO	5290	Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
11AC80MIMO	5290	Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
11AC80MIMO	5290	Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
11AC80MIMO	5290	Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
11AC80MIMO	5290	Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
11AC80MIMO	5290	Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
11AC80MIMO	5290	Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
11AC80MIMO	5290	Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
11AC80MIMO	5290	Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
11AC80MIMO	5290	Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
11AC80MIMO	5290	Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
11AC80MIMO	5290	Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
11AX40MIMO	5310	Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
11AX40MIMO	5310	Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
11AX40MIMO	5310	Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
11AX40MIMO	5310	Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
11AX40MIMO	5310	Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
11AX40MIMO	5310	Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
11AX40MIMO	5310	Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
11AX40MIMO	5310	Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
11AX40MIMO	5310	Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
11AX40MIMO	5310	Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
11AX40MIMO	5310	Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
11AX40MIMO	5310	Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
11AX40MIMO	5310	Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
11AX40MIMO	5310	Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
11AX40MIMO	5310	Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
11N20MIMO	5320	Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
11N20MIMO	5320	Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
11N20MIMO	5320	Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
11N20MIMO	5320	Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
11N20MIMO	5320	Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
11N20MIMO	5320	Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
11N20MIMO	5320	Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
11N20MIMO	5320	Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
11N20MIMO	5320	Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
11N20MIMO	5320	Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
11N20MIMO	5320	Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
11AC80MIMO	5290	Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
11AC80MIMO	5290	Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
11AC80MIMO	5290	Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
11AC80MIMO	5290	Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
11AC80MIMO	5290	Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
11AC80MIMO	5290	Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
11AC80MIMO	5290	Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
11AC80MIMO	5290	Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
11AC80MIMO	5290	Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
11AC80MIMO	5290	Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
11AC80MIMO	5290	Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
11AC80MIMO	5290	Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
11AX40MIMO	5310	Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
11AX40MIMO	5310	Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
11AX40MIMO	5310	Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
11AX40MIMO	5310	Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
11AX40MIMO	5310	Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
11AX40MIMO	5310	Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
11AX40MIMO	5310	Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
11AX40MIMO	5310	Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
11AX40MIMO	5310	Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
11AX40MIMO	5310	Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
11AX40MIMO	5310	Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
11AX40MIMO	5310	Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
11N20MIMO	5320	Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
11N20MIMO	5320	Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
11N20MIMO	5320	Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
11N20MIMO	5320	Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
11N20MIMO	5320	Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
11N20MIMO	5320	Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
11N20MIMO	5320	Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
11N20MIMO	5320	Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
11N20MIMO	5320	Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
11N20MIMO	5320	Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
11N20MIMO	5320	Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
11N20MIMO	5320	Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
11N20MIMO	5320	Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
11AC80MIMO	5290	Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
11AC80MIMO	5290	Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
11AC80MIMO	5290	Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
11AC80MIMO	5290	Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
11AC80MIMO	5290	Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
11AC80MIMO	5290	Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
11AC80MIMO	5290	Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
11AC80MIMO	5290	Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
11AC80MIMO	5290	Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
11AC80MIMO	5290	Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
11AC80MIMO	5290	Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
11AC80MIMO	5290	Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
11AC80MIMO	5290	Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
11AC80MIMO	5290	Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
11AX40MIMO	5310	Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
11AX40MIMO	5310	Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
11AX40MIMO	5310	Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
11AX40MIMO	5310	Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
11AX40MIMO	5310	Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
11AX40MIMO	5310	Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
11AX40MIMO	5310	Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
11AX40MIMO	5310	Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
11AX40MIMO	5310	Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
11AX40MIMO	5310	Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
11AX40MIMO	5310	Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
11AX40MIMO	5310	Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
11AX40MIMO	5310	Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
11AX40MIMO	5310	Type5	8	13	98172.0	13	1	64.3	1937.0	---	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
11N20MIMO	5320	Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
11N20MIMO	5320	Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
11N20MIMO	5320	Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
11N20MIMO	5320	Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
11N20MIMO	5320	Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
11N20MIMO	5320	Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
11N20MIMO	5320	Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
11AC80MIMO	5290	Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
11AC80MIMO	5290	Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
11AC80MIMO	5290	Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
11AC80MIMO	5290	Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
11AC80MIMO	5290	Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
11AC80MIMO	5290	Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
11AC80MIMO	5290	Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
11AC80MIMO	5290	Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
11AX40MIMO	5310	Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
11AX40MIMO	5310	Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
11AX40MIMO	5310	Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
11AX40MIMO	5310	Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
11AX40MIMO	5310	Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
11AX40MIMO	5310	Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
11AX40MIMO	5310	Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
11AX40MIMO	5310	Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
11N20MIMO	5320	Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
11N20MIMO	5320	Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
11N20MIMO	5320	Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
11N20MIMO	5320	Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
11N20MIMO	5320	Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
11N20MIMO	5320	Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
11N20MIMO	5320	Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
11N20MIMO	5320	Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
11N20MIMO	5320	Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
11N20MIMO	5320	Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
11N20MIMO	5320	Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
11N20MIMO	5320	Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
11N20MIMO	5320	Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
11N20MIMO	5320	Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
11N20MIMO	5320	Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
11N20MIMO	5320	Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
11AC80MIMO	5290	Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
11AC80MIMO	5290	Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
11AC80MIMO	5290	Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
11AC80MIMO	5290	Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
11AC80MIMO	5290	Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
11AC80MIMO	5290	Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
11AC80MIMO	5290	Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
11AC80MIMO	5290	Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
11AC80MIMO	5290	Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
11AC80MIMO	5290	Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
11AC80MIMO	5290	Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
11AC80MIMO	5290	Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
11AC80MIMO	5290	Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
11AC80MIMO	5290	Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
11AC80MIMO	5290	Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
11AC80MIMO	5290	Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
11AC80MIMO	5290	Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
11AX40MIMO	5310	Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
11AX40MIMO	5310	Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
11AX40MIMO	5310	Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
11AX40MIMO	5310	Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
11AX40MIMO	5310	Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
11AX40MIMO	5310	Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
11AX40MIMO	5310	Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
11AX40MIMO	5310	Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
11AX40MIMO	5310	Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
11AX40MIMO	5310	Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
11AX40MIMO	5310	Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
11AX40MIMO	5310	Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
11AX40MIMO	5310	Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
11AX40MIMO	5310	Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
11AX40MIMO	5310	Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
11AX40MIMO	5310	Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
11AX40MIMO	5310	Type5	10	16	125509.0	16	1	59.3	1093.0	---	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
11N20MIMO	5320	Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
11N20MIMO	5320	Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
11N20MIMO	5320	Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
11N20MIMO	5320	Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
11N20MIMO	5320	Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
11N20MIMO	5320	Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
11N20MIMO	5320	Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
11N20MIMO	5320	Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
11N20MIMO	5320	Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
11N20MIMO	5320	Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
11N20MIMO	5320	Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
11N20MIMO	5320	Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
11N20MIMO	5320	Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
11N20MIMO	5320	Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
11N20MIMO	5320	Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
11N20MIMO	5320	Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
11N20MIMO	5320	Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
11N20MIMO	5320	Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
11AC80MIMO	5290	Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
11AC80MIMO	5290	Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
11AC80MIMO	5290	Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
11AC80MIMO	5290	Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
11AC80MIMO	5290	Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
11AC80MIMO	5290	Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
11AC80MIMO	5290	Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
11AC80MIMO	5290	Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
11AC80MIMO	5290	Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
11AC80MIMO	5290	Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
11AC80MIMO	5290	Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
11AC80MIMO	5290	Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
11AC80MIMO	5290	Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
11AC80MIMO	5290	Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
11AC80MIMO	5290	Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
11AC80MIMO	5290	Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
11AC80MIMO	5290	Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
11AC80MIMO	5290	Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
11AC80MIMO	5290	Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
11AX40MIMO	5310	Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
11AX40MIMO	5310	Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
11AX40MIMO	5310	Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
11AX40MIMO	5310	Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
11AX40MIMO	5310	Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
11AX40MIMO	5310	Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
11AX40MIMO	5310	Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
11AX40MIMO	5310	Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
11AX40MIMO	5310	Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
11AX40MIMO	5310	Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
11AX40MIMO	5310	Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
11AX40MIMO	5310	Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---

11AX40MIMO	5310	Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
11AX40MIMO	5310	Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
11AX40MIMO	5310	Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
11AX40MIMO	5310	Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
11AX40MIMO	5310	Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
11AX40MIMO	5310	Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
11AX40MIMO	5310	Type5	11	18	495737.0	19	1	55.0	1012.0	---	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
11N20MIMO	5320	Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
11N20MIMO	5320	Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
11N20MIMO	5320	Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
11N20MIMO	5320	Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
11N20MIMO	5320	Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
11N20MIMO	5320	Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
11N20MIMO	5320	Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
11N20MIMO	5320	Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
11N20MIMO	5320	Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
11N20MIMO	5320	Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
11N20MIMO	5320	Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
11N20MIMO	5320	Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
11N20MIMO	5320	Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
11N20MIMO	5320	Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
11AC80MIMO	5290	Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
11AC80MIMO	5290	Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
11AC80MIMO	5290	Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
11AC80MIMO	5290	Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
11AC80MIMO	5290	Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
11AC80MIMO	5290	Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
11AC80MIMO	5290	Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
11AC80MIMO	5290	Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
11AC80MIMO	5290	Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
11AC80MIMO	5290	Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
11AC80MIMO	5290	Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
11AC80MIMO	5290	Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
11AC80MIMO	5290	Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
11AC80MIMO	5290	Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
11AC80MIMO	5290	Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
11AX40MIMO	5310	Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
11AX40MIMO	5310	Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
11AX40MIMO	5310	Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
11AX40MIMO	5310	Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
11AX40MIMO	5310	Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
11AX40MIMO	5310	Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
11AX40MIMO	5310	Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
11AX40MIMO	5310	Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
11AX40MIMO	5310	Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
11AX40MIMO	5310	Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
11AX40MIMO	5310	Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
11AX40MIMO	5310	Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
11AX40MIMO	5310	Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
11AX40MIMO	5310	Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
11AX40MIMO	5310	Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
11N20MIMO	5320	Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
11N20MIMO	5320	Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
11N20MIMO	5320	Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
11N20MIMO	5320	Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
11N20MIMO	5320	Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
11N20MIMO	5320	Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
11N20MIMO	5320	Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
11N20MIMO	5320	Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
11N20MIMO	5320	Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
11N20MIMO	5320	Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
11N20MIMO	5320	Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
11AC80MIMO	5290	Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
11AC80MIMO	5290	Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
11AC80MIMO	5290	Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
11AC80MIMO	5290	Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
11AC80MIMO	5290	Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
11AC80MIMO	5290	Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
11AC80MIMO	5290	Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
11AC80MIMO	5290	Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
11AC80MIMO	5290	Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
11AC80MIMO	5290	Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
11AC80MIMO	5290	Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
11AC80MIMO	5290	Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
11AX40MIMO	5310	Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
11AX40MIMO	5310	Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
11AX40MIMO	5310	Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
11AX40MIMO	5310	Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
11AX40MIMO	5310	Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
11AX40MIMO	5310	Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
11AX40MIMO	5310	Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
11AX40MIMO	5310	Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
11AX40MIMO	5310	Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
11AX40MIMO	5310	Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
11AX40MIMO	5310	Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
11AX40MIMO	5310	Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
11N20MIMO	5320	Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
11N20MIMO	5320	Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
11N20MIMO	5320	Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
11N20MIMO	5320	Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
11N20MIMO	5320	Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
11N20MIMO	5320	Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
11N20MIMO	5320	Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
11N20MIMO	5320	Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
11N20MIMO	5320	Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
11N20MIMO	5320	Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
11N20MIMO	5320	Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
11N20MIMO	5320	Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
11N20MIMO	5320	Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
11N20MIMO	5320	Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
11N20MIMO	5320	Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
11N20MIMO	5320	Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
11N20MIMO	5320	Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
11N20MIMO	5320	Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
11AC80MIMO	5290	Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
11AC80MIMO	5290	Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
11AC80MIMO	5290	Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
11AC80MIMO	5290	Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
11AC80MIMO	5290	Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
11AC80MIMO	5290	Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
11AC80MIMO	5290	Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
11AC80MIMO	5290	Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
11AC80MIMO	5290	Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
11AC80MIMO	5290	Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
11AC80MIMO	5290	Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
11AC80MIMO	5290	Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
11AC80MIMO	5290	Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
11AC80MIMO	5290	Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
11AC80MIMO	5290	Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
11AC80MIMO	5290	Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
11AC80MIMO	5290	Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
11AC80MIMO	5290	Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
11AC80MIMO	5290	Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
11AX40MIMO	5310	Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
11AX40MIMO	5310	Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
11AX40MIMO	5310	Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
11AX40MIMO	5310	Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
11AX40MIMO	5310	Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
11AX40MIMO	5310	Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
11AX40MIMO	5310	Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
11AX40MIMO	5310	Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
11AX40MIMO	5310	Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
11AX40MIMO	5310	Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
11AX40MIMO	5310	Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
11AX40MIMO	5310	Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0

11AX40MIMO	5310	Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
11AX40MIMO	5310	Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
11AX40MIMO	5310	Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
11AX40MIMO	5310	Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
11AX40MIMO	5310	Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
11AX40MIMO	5310	Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
11AX40MIMO	5310	Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
11N20MIMO	5320	Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
11N20MIMO	5320	Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
11N20MIMO	5320	Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
11N20MIMO	5320	Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
11N20MIMO	5320	Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
11N20MIMO	5320	Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
11N20MIMO	5320	Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
11N20MIMO	5320	Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
11N20MIMO	5320	Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
11N20MIMO	5320	Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
11N20MIMO	5320	Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
11N20MIMO	5320	Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
11N20MIMO	5320	Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
11AC80MIMO	5290	Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
11AC80MIMO	5290	Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
11AC80MIMO	5290	Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
11AC80MIMO	5290	Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
11AC80MIMO	5290	Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
11AC80MIMO	5290	Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
11AC80MIMO	5290	Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
11AC80MIMO	5290	Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
11AC80MIMO	5290	Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
11AC80MIMO	5290	Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
11AC80MIMO	5290	Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
11AC80MIMO	5290	Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
11AC80MIMO	5290	Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
11AC80MIMO	5290	Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
11AX40MIMO	5310	Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
11AX40MIMO	5310	Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
11AX40MIMO	5310	Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
11AX40MIMO	5310	Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
11AX40MIMO	5310	Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
11AX40MIMO	5310	Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
11AX40MIMO	5310	Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
11AX40MIMO	5310	Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
11AX40MIMO	5310	Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
11AX40MIMO	5310	Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
11AX40MIMO	5310	Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
11AX40MIMO	5310	Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
11AX40MIMO	5310	Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
11AX40MIMO	5310	Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
11N20MIMO	5320	Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
11N20MIMO	5320	Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
11N20MIMO	5320	Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
11N20MIMO	5320	Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
11N20MIMO	5320	Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
11N20MIMO	5320	Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
11N20MIMO	5320	Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
11N20MIMO	5320	Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
11N20MIMO	5320	Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
11N20MIMO	5320	Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
11N20MIMO	5320	Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
11N20MIMO	5320	Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
11N20MIMO	5320	Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
11N20MIMO	5320	Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
11N20MIMO	5320	Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
11N20MIMO	5320	Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
11N20MIMO	5320	Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
11N20MIMO	5320	Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
11N20MIMO	5320	Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
11AC80MIMO	5290	Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
11AC80MIMO	5290	Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
11AC80MIMO	5290	Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
11AC80MIMO	5290	Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
11AC80MIMO	5290	Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
11AC80MIMO	5290	Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
11AC80MIMO	5290	Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
11AC80MIMO	5290	Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
11AC80MIMO	5290	Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
11AC80MIMO	5290	Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
11AC80MIMO	5290	Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
11AC80MIMO	5290	Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
11AC80MIMO	5290	Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
11AC80MIMO	5290	Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
11AC80MIMO	5290	Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
11AC80MIMO	5290	Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
11AC80MIMO	5290	Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
11AC80MIMO	5290	Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
11AC80MIMO	5290	Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
11AC80MIMO	5290	Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
11AX40MIMO	5310	Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
11AX40MIMO	5310	Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
11AX40MIMO	5310	Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
11AX40MIMO	5310	Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
11AX40MIMO	5310	Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
11AX40MIMO	5310	Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
11AX40MIMO	5310	Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
11AX40MIMO	5310	Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
11AX40MIMO	5310	Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
11AX40MIMO	5310	Type5	16	9	456884.0	20	1	62.1	1495.0	---	---

11AX40MIMO	5310	Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
11AX40MIMO	5310	Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
11AX40MIMO	5310	Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
11AX40MIMO	5310	Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
11AX40MIMO	5310	Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
11AX40MIMO	5310	Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
11AX40MIMO	5310	Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
11AX40MIMO	5310	Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
11AX40MIMO	5310	Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
11AX40MIMO	5310	Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
11N20MIMO	5320	Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
11N20MIMO	5320	Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
11N20MIMO	5320	Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
11N20MIMO	5320	Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
11N20MIMO	5320	Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
11N20MIMO	5320	Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
11N20MIMO	5320	Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
11N20MIMO	5320	Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
11N20MIMO	5320	Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
11N20MIMO	5320	Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
11N20MIMO	5320	Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
11AC80MIMO	5290	Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
11AC80MIMO	5290	Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
11AC80MIMO	5290	Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
11AC80MIMO	5290	Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
11AC80MIMO	5290	Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
11AC80MIMO	5290	Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
11AC80MIMO	5290	Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
11AC80MIMO	5290	Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
11AC80MIMO	5290	Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
11AC80MIMO	5290	Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
11AC80MIMO	5290	Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
11AC80MIMO	5290	Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
11AX40MIMO	5310	Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
11AX40MIMO	5310	Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
11AX40MIMO	5310	Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
11AX40MIMO	5310	Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
11AX40MIMO	5310	Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
11AX40MIMO	5310	Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
11AX40MIMO	5310	Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
11AX40MIMO	5310	Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
11AX40MIMO	5310	Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
11AX40MIMO	5310	Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
11AX40MIMO	5310	Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
11AX40MIMO	5310	Type5	17	11	98897.0	10	1	65.3	1709.0	---	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
11N20MIMO	5320	Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
11N20MIMO	5320	Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
11N20MIMO	5320	Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
11N20MIMO	5320	Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
11N20MIMO	5320	Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
11N20MIMO	5320	Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
11N20MIMO	5320	Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
11N20MIMO	5320	Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
11N20MIMO	5320	Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
11N20MIMO	5320	Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
11N20MIMO	5320	Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
11N20MIMO	5320	Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
11N20MIMO	5320	Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
11AC80MIMO	5290	Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
11AC80MIMO	5290	Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
11AC80MIMO	5290	Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
11AC80MIMO	5290	Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
11AC80MIMO	5290	Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
11AC80MIMO	5290	Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
11AC80MIMO	5290	Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
11AC80MIMO	5290	Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
11AC80MIMO	5290	Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
11AC80MIMO	5290	Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
11AC80MIMO	5290	Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
11AC80MIMO	5290	Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
11AC80MIMO	5290	Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
11AC80MIMO	5290	Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
11AX40MIMO	5310	Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
11AX40MIMO	5310	Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
11AX40MIMO	5310	Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
11AX40MIMO	5310	Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
11AX40MIMO	5310	Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
11AX40MIMO	5310	Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
11AX40MIMO	5310	Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
11AX40MIMO	5310	Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
11AX40MIMO	5310	Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
11AX40MIMO	5310	Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
11AX40MIMO	5310	Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
11AX40MIMO	5310	Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
11AX40MIMO	5310	Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
11AX40MIMO	5310	Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
11N20MIMO	5320	Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
11N20MIMO	5320	Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
11N20MIMO	5320	Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
11N20MIMO	5320	Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
11N20MIMO	5320	Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
11N20MIMO	5320	Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
11N20MIMO	5320	Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
11N20MIMO	5320	Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
11N20MIMO	5320	Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
11N20MIMO	5320	Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
11N20MIMO	5320	Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
11AC80MIMO	5290	Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
11AC80MIMO	5290	Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
11AC80MIMO	5290	Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
11AC80MIMO	5290	Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
11AC80MIMO	5290	Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
11AC80MIMO	5290	Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
11AC80MIMO	5290	Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
11AC80MIMO	5290	Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
11AC80MIMO	5290	Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
11AC80MIMO	5290	Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
11AC80MIMO	5290	Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
11AC80MIMO	5290	Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
11AX40MIMO	5310	Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
11AX40MIMO	5310	Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
11AX40MIMO	5310	Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
11AX40MIMO	5310	Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
11AX40MIMO	5310	Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
11AX40MIMO	5310	Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
11AX40MIMO	5310	Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
11AX40MIMO	5310	Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
11AX40MIMO	5310	Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
11AX40MIMO	5310	Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
11AX40MIMO	5310	Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
11AX40MIMO	5310	Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
11N20MIMO	5320	Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
11N20MIMO	5320	Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
11N20MIMO	5320	Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
11N20MIMO	5320	Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
11N20MIMO	5320	Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
11N20MIMO	5320	Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
11N20MIMO	5320	Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
11N20MIMO	5320	Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
11N20MIMO	5320	Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
11N20MIMO	5320	Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
11N20MIMO	5320	Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
11N20MIMO	5320	Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
11N20MIMO	5320	Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
11N20MIMO	5320	Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
11N20MIMO	5320	Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
11AC80MIMO	5290	Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
11AC80MIMO	5290	Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
11AC80MIMO	5290	Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
11AC80MIMO	5290	Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
11AC80MIMO	5290	Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
11AC80MIMO	5290	Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
11AC80MIMO	5290	Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
11AC80MIMO	5290	Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
11AC80MIMO	5290	Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
11AC80MIMO	5290	Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
11AC80MIMO	5290	Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
11AC80MIMO	5290	Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
11AC80MIMO	5290	Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
11AC80MIMO	5290	Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
11AC80MIMO	5290	Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
11AC80MIMO	5290	Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
11AX40MIMO	5310	Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
11AX40MIMO	5310	Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
11AX40MIMO	5310	Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
11AX40MIMO	5310	Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
11AX40MIMO	5310	Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
11AX40MIMO	5310	Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
11AX40MIMO	5310	Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
11AX40MIMO	5310	Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
11AX40MIMO	5310	Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
11AX40MIMO	5310	Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
11AX40MIMO	5310	Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
11AX40MIMO	5310	Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
11AX40MIMO	5310	Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
11AX40MIMO	5310	Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
11AX40MIMO	5310	Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
11AX40MIMO	5310	Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
11N20MIMO	5320	Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
11N20MIMO	5320	Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
11N20MIMO	5320	Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
11N20MIMO	5320	Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
11N20MIMO	5320	Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
11N20MIMO	5320	Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
11N20MIMO	5320	Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
11N20MIMO	5320	Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
11N20MIMO	5320	Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
11N20MIMO	5320	Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
11N20MIMO	5320	Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
11AC80MIMO	5290	Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
11AC80MIMO	5290	Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
11AC80MIMO	5290	Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
11AC80MIMO	5290	Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
11AC80MIMO	5290	Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
11AC80MIMO	5290	Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
11AC80MIMO	5290	Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
11AC80MIMO	5290	Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
11AC80MIMO	5290	Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
11AC80MIMO	5290	Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
11AC80MIMO	5290	Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
11AC80MIMO	5290	Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
11AX40MIMO	5310	Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
11AX40MIMO	5310	Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
11AX40MIMO	5310	Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
11AX40MIMO	5310	Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
11AX40MIMO	5310	Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
11AX40MIMO	5310	Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
11AX40MIMO	5310	Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
11AX40MIMO	5310	Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
11AX40MIMO	5310	Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
11AX40MIMO	5310	Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
11AX40MIMO	5310	Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
11AX40MIMO	5310	Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
11N20MIMO	5320	Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
11N20MIMO	5320	Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
11N20MIMO	5320	Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
11N20MIMO	5320	Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
11N20MIMO	5320	Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
11N20MIMO	5320	Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
11N20MIMO	5320	Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
11N20MIMO	5320	Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
11N20MIMO	5320	Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
11N20MIMO	5320	Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
11N20MIMO	5320	Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
11N20MIMO	5320	Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
11N20MIMO	5320	Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
11N20MIMO	5320	Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
11N20MIMO	5320	Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
11N20MIMO	5320	Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
11N20MIMO	5320	Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
11N20MIMO	5320	Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
11N20MIMO	5320	Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
11AC80MIMO	5290	Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
11AC80MIMO	5290	Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
11AC80MIMO	5290	Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
11AC80MIMO	5290	Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
11AC80MIMO	5290	Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
11AC80MIMO	5290	Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
11AC80MIMO	5290	Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
11AC80MIMO	5290	Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
11AC80MIMO	5290	Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
11AC80MIMO	5290	Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
11AC80MIMO	5290	Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
11AC80MIMO	5290	Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
11AC80MIMO	5290	Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
11AC80MIMO	5290	Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
11AC80MIMO	5290	Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
11AC80MIMO	5290	Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
11AC80MIMO	5290	Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
11AC80MIMO	5290	Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
11AC80MIMO	5290	Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
11AC80MIMO	5290	Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
11AX40MIMO	5310	Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
11AX40MIMO	5310	Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
11AX40MIMO	5310	Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
11AX40MIMO	5310	Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
11AX40MIMO	5310	Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
11AX40MIMO	5310	Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
11AX40MIMO	5310	Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
11AX40MIMO	5310	Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
11AX40MIMO	5310	Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
11AX40MIMO	5310	Type5	22	9	371906.0	20	1	57.9	1193.0	---	---

11AX40MIMO	5310	Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
11AX40MIMO	5310	Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
11AX40MIMO	5310	Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
11AX40MIMO	5310	Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
11AX40MIMO	5310	Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
11AX40MIMO	5310	Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
11AX40MIMO	5310	Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
11AX40MIMO	5310	Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
11AX40MIMO	5310	Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
11AX40MIMO	5310	Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
11N20MIMO	5320	Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
11N20MIMO	5320	Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
11N20MIMO	5320	Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
11N20MIMO	5320	Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
11N20MIMO	5320	Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
11N20MIMO	5320	Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
11N20MIMO	5320	Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
11N20MIMO	5320	Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
11N20MIMO	5320	Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
11N20MIMO	5320	Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
11N20MIMO	5320	Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
11N20MIMO	5320	Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
11N20MIMO	5320	Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
11AC80MIMO	5290	Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
11AC80MIMO	5290	Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
11AC80MIMO	5290	Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
11AC80MIMO	5290	Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
11AC80MIMO	5290	Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
11AC80MIMO	5290	Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
11AC80MIMO	5290	Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
11AC80MIMO	5290	Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
11AC80MIMO	5290	Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
11AC80MIMO	5290	Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
11AC80MIMO	5290	Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
11AC80MIMO	5290	Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
11AC80MIMO	5290	Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
11AC80MIMO	5290	Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
11AX40MIMO	5310	Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
11AX40MIMO	5310	Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
11AX40MIMO	5310	Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
11AX40MIMO	5310	Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
11AX40MIMO	5310	Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
11AX40MIMO	5310	Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
11AX40MIMO	5310	Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
11AX40MIMO	5310	Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
11AX40MIMO	5310	Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
11AX40MIMO	5310	Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
11AX40MIMO	5310	Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
11AX40MIMO	5310	Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
11AX40MIMO	5310	Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
11AX40MIMO	5310	Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
11N20MIMO	5320	Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
11N20MIMO	5320	Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
11N20MIMO	5320	Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
11N20MIMO	5320	Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
11N20MIMO	5320	Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
11N20MIMO	5320	Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
11N20MIMO	5320	Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
11N20MIMO	5320	Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
11N20MIMO	5320	Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
11N20MIMO	5320	Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
11N20MIMO	5320	Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
11N20MIMO	5320	Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
11AC80MIMO	5290	Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
11AC80MIMO	5290	Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
11AC80MIMO	5290	Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
11AC80MIMO	5290	Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
11AC80MIMO	5290	Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
11AC80MIMO	5290	Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
11AC80MIMO	5290	Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
11AC80MIMO	5290	Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
11AC80MIMO	5290	Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
11AC80MIMO	5290	Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
11AC80MIMO	5290	Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
11AC80MIMO	5290	Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
11AC80MIMO	5290	Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
11AX40MIMO	5310	Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
11AX40MIMO	5310	Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
11AX40MIMO	5310	Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
11AX40MIMO	5310	Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
11AX40MIMO	5310	Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
11AX40MIMO	5310	Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
11AX40MIMO	5310	Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
11AX40MIMO	5310	Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
11AX40MIMO	5310	Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
11AX40MIMO	5310	Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
11AX40MIMO	5310	Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
11AX40MIMO	5310	Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
11AX40MIMO	5310	Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
11N20MIMO	5320	Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
11N20MIMO	5320	Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
11N20MIMO	5320	Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
11N20MIMO	5320	Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
11N20MIMO	5320	Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
11N20MIMO	5320	Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
11N20MIMO	5320	Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
11AC80MIMO	5290	Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
11AC80MIMO	5290	Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
11AC80MIMO	5290	Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
11AC80MIMO	5290	Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
11AC80MIMO	5290	Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
11AC80MIMO	5290	Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
11AC80MIMO	5290	Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
11AC80MIMO	5290	Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
11AX40MIMO	5310	Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
11AX40MIMO	5310	Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
11AX40MIMO	5310	Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
11AX40MIMO	5310	Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
11AX40MIMO	5310	Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
11AX40MIMO	5310	Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
11AX40MIMO	5310	Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
11AX40MIMO	5310	Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
11N20MIMO	5320	Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
11N20MIMO	5320	Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
11N20MIMO	5320	Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
11N20MIMO	5320	Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
11N20MIMO	5320	Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
11N20MIMO	5320	Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
11N20MIMO	5320	Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
11N20MIMO	5320	Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
11N20MIMO	5320	Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
11N20MIMO	5320	Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
11N20MIMO	5320	Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
11N20MIMO	5320	Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
11N20MIMO	5320	Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
11N20MIMO	5320	Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
11N20MIMO	5320	Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
11N20MIMO	5320	Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
11AC80MIMO	5290	Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
11AC80MIMO	5290	Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
11AC80MIMO	5290	Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
11AC80MIMO	5290	Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
11AC80MIMO	5290	Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
11AC80MIMO	5290	Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
11AC80MIMO	5290	Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
11AC80MIMO	5290	Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
11AC80MIMO	5290	Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
11AC80MIMO	5290	Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
11AC80MIMO	5290	Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
11AC80MIMO	5290	Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
11AC80MIMO	5290	Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
11AC80MIMO	5290	Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
11AC80MIMO	5290	Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
11AC80MIMO	5290	Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
11AC80MIMO	5290	Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
11AX40MIMO	5310	Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
11AX40MIMO	5310	Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
11AX40MIMO	5310	Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
11AX40MIMO	5310	Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
11AX40MIMO	5310	Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
11AX40MIMO	5310	Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
11AX40MIMO	5310	Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
11AX40MIMO	5310	Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
11AX40MIMO	5310	Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
11AX40MIMO	5310	Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
11AX40MIMO	5310	Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
11AX40MIMO	5310	Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
11AX40MIMO	5310	Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
11AX40MIMO	5310	Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
11AX40MIMO	5310	Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
11AX40MIMO	5310	Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
11AX40MIMO	5310	Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
11N20MIMO	5320	Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
11N20MIMO	5320	Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
11N20MIMO	5320	Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
11N20MIMO	5320	Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
11N20MIMO	5320	Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
11N20MIMO	5320	Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
11N20MIMO	5320	Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
11N20MIMO	5320	Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
11N20MIMO	5320	Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
11N20MIMO	5320	Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
11N20MIMO	5320	Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
11N20MIMO	5320	Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
11N20MIMO	5320	Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
11N20MIMO	5320	Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
11N20MIMO	5320	Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
11N20MIMO	5320	Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
11N20MIMO	5320	Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
11N20MIMO	5320	Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
11AC80MIMO	5290	Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
11AC80MIMO	5290	Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
11AC80MIMO	5290	Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
11AC80MIMO	5290	Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
11AC80MIMO	5290	Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
11AC80MIMO	5290	Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
11AC80MIMO	5290	Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
11AC80MIMO	5290	Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
11AC80MIMO	5290	Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
11AC80MIMO	5290	Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
11AC80MIMO	5290	Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
11AC80MIMO	5290	Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
11AC80MIMO	5290	Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
11AC80MIMO	5290	Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
11AC80MIMO	5290	Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
11AC80MIMO	5290	Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
11AC80MIMO	5290	Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
11AC80MIMO	5290	Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
11AC80MIMO	5290	Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
11AX40MIMO	5310	Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
11AX40MIMO	5310	Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
11AX40MIMO	5310	Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
11AX40MIMO	5310	Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
11AX40MIMO	5310	Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
11AX40MIMO	5310	Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
11AX40MIMO	5310	Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
11AX40MIMO	5310	Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
11AX40MIMO	5310	Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
11AX40MIMO	5310	Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
11AX40MIMO	5310	Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
11AX40MIMO	5310	Type5	27	11	357941.0	19	1	65.3	1848.0	---	---

11AX40MIMO	5310	Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
11AX40MIMO	5310	Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
11AX40MIMO	5310	Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
11AX40MIMO	5310	Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
11AX40MIMO	5310	Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
11AX40MIMO	5310	Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
11AX40MIMO	5310	Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
11N20MIMO	5320	Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
11N20MIMO	5320	Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
11N20MIMO	5320	Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
11N20MIMO	5320	Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
11N20MIMO	5320	Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
11N20MIMO	5320	Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
11N20MIMO	5320	Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
11N20MIMO	5320	Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
11N20MIMO	5320	Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
11N20MIMO	5320	Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
11N20MIMO	5320	Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
11AC80MIMO	5290	Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
11AC80MIMO	5290	Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
11AC80MIMO	5290	Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
11AC80MIMO	5290	Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
11AC80MIMO	5290	Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
11AC80MIMO	5290	Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
11AC80MIMO	5290	Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
11AC80MIMO	5290	Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
11AC80MIMO	5290	Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
11AC80MIMO	5290	Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
11AC80MIMO	5290	Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
11AC80MIMO	5290	Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
11AX40MIMO	5310	Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
11AX40MIMO	5310	Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
11AX40MIMO	5310	Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
11AX40MIMO	5310	Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
11AX40MIMO	5310	Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
11AX40MIMO	5310	Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
11AX40MIMO	5310	Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
11AX40MIMO	5310	Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
11AX40MIMO	5310	Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
11AX40MIMO	5310	Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
11AX40MIMO	5310	Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
11AX40MIMO	5310	Type5	28	11	176231.0	10	1	55.3	1522.0	---	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11N20MIMO	5320	Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
11N20MIMO	5320	Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
11N20MIMO	5320	Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
11N20MIMO	5320	Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
11N20MIMO	5320	Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
11N20MIMO	5320	Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
11N20MIMO	5320	Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
11N20MIMO	5320	Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
11N20MIMO	5320	Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
11N20MIMO	5320	Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
11N20MIMO	5320	Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
11N20MIMO	5320	Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
11N20MIMO	5320	Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
11N20MIMO	5320	Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
11N20MIMO	5320	Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
11N20MIMO	5320	Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
11N20MIMO	5320	Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
11N20MIMO	5320	Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
11AC80MIMO	5290	Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
11AC80MIMO	5290	Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
11AC80MIMO	5290	Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
11AC80MIMO	5290	Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
11AC80MIMO	5290	Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
11AC80MIMO	5290	Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
11AC80MIMO	5290	Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
11AC80MIMO	5290	Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
11AC80MIMO	5290	Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
11AC80MIMO	5290	Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
11AC80MIMO	5290	Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
11AC80MIMO	5290	Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
11AC80MIMO	5290	Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
11AC80MIMO	5290	Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
11AC80MIMO	5290	Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
11AC80MIMO	5290	Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
11AC80MIMO	5290	Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
11AC80MIMO	5290	Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
11AX40MIMO	5310	Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
11AX40MIMO	5310	Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
11AX40MIMO	5310	Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
11AX40MIMO	5310	Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
11AX40MIMO	5310	Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
11AX40MIMO	5310	Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
11AX40MIMO	5310	Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
11AX40MIMO	5310	Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
11AX40MIMO	5310	Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
11AX40MIMO	5310	Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
11AX40MIMO	5310	Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
11AX40MIMO	5310	Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
11AX40MIMO	5310	Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
11AX40MIMO	5310	Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---

11AX40MIMO	5310	Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
11AX40MIMO	5310	Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
11AX40MIMO	5310	Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
11AX40MIMO	5310	Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---

RU

Test Mode	Test Frequency (MHz)	Radar Type	Pass Times	Fail Times	Probability (%)	Limit (%)	Verdict
11AX80MIMO	5290	Type1	30	0	100.00	60	PASS
		Type2	30	0	100.00	60	PASS
		Type3	30	0	100.00	60	PASS
		Type4	30	0	100.00	60	PASS
		Aggregate (Type 1-4)	120	0	100.00	80	PASS
		Type5	30	0	100.00	80	PASS
		Type6	30	0	100.00	70	PASS

Note: RU means the partial RU mode.

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Pulse width(μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11AX80MIMO	5290	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	1
		Type2	9	1.2	156.0	23	1
		Type2	10	3.9	210.0	27	1
		Type2	11	4.6	201.0	29	1
		Type2	12	3.2	162.0	26	1
		Type2	13	2.2	197.0	25	1
		Type2	14	4.5	163.0	29	1
		Type2	15	3.0	203.0	26	1
		Type2	16	5.0	168.0	29	1
		Type2	17	2.4	217.0	25	1
		Type2	18	2.9	191.0	26	1
		Type2	19	2.3	166.0	25	1
		Type2	20	3.7	150.0	27	1

	Type2	21	2.2	176.0	25	1
	Type2	22	4.9	195.0	29	1
	Type2	23	2.9	202.0	26	1
	Type2	24	2.5	178.0	25	1
	Type2	25	1.1	206.0	23	1
	Type2	26	3.8	155.0	27	1
	Type2	27	4.7	157.0	29	1
	Type2	28	2.4	224.0	25	1
	Type2	29	4.2	159.0	28	1
	Type3	0	8.2	355.0	17	1
	Type3	1	6.1	487.0	16	1
	Type3	2	7.1	344.0	16	1
	Type3	3	9.8	288.0	18	1
	Type3	4	8.9	230.0	18	1
	Type3	5	7.9	432.0	17	1
	Type3	6	8.2	207.0	17	1
	Type3	7	7.5	443.0	17	1
	Type3	8	8.1	439.0	17	1
	Type3	9	6.2	223.0	16	1
	Type3	10	8.9	208.0	18	1
	Type3	11	9.6	463.0	18	1
	Type3	12	8.2	441.0	17	1
	Type3	13	7.2	323.0	16	1
	Type3	14	9.5	297.0	18	1
	Type3	15	8.0	412.0	17	1
	Type3	16	10.0	324.0	18	1
	Type3	17	7.4	271.0	17	1
	Type3	18	7.9	349.0	17	1
	Type3	19	7.3	409.0	16	1
	Type3	20	8.7	373.0	18	1
	Type3	21	7.2	254.0	16	1
	Type3	22	9.9	274.0	18	1
	Type3	23	7.9	278.0	17	1
	Type3	24	7.5	317.0	17	1
	Type3	25	6.1	260.0	16	1
	Type3	26	8.8	211.0	18	1
	Type3	27	9.7	272.0	18	1
	Type3	28	7.4	264.0	17	1
	Type3	29	9.2	284.0	18	1
	Type4	0	16.0	355.0	14	1
	Type4	1	11.3	487.0	12	1
	Type4	2	13.5	344.0	13	1
	Type4	3	19.4	288.0	16	1
	Type4	4	17.5	230.0	15	1
	Type4	5	15.3	432.0	14	1
	Type4	6	15.9	207.0	14	1
	Type4	7	14.3	443.0	13	1
	Type4	8	15.8	439.0	14	1
	Type4	9	11.5	223.0	12	1
	Type4	10	17.4	208.0	15	1
	Type4	11	19.0	463.0	16	1
	Type4	12	16.0	441.0	14	1
	Type4	13	13.8	323.0	13	1
	Type4	14	18.9	297.0	16	1
	Type4	15	15.5	412.0	14	1

	Type4	16	19.9	324.0	16	1
	Type4	17	14.1	271.0	13	1
	Type4	18	15.2	349.0	14	1
	Type4	19	13.8	409.0	13	1
	Type4	20	17.1	373.0	15	1
	Type4	21	13.8	254.0	13	1
	Type4	22	19.8	274.0	16	1
	Type4	23	15.3	278.0	14	1
	Type4	24	14.5	317.0	13	1
	Type4	25	11.3	260.0	12	1
	Type4	26	17.3	211.0	15	1
	Type4	27	19.2	272.0	16	1
	Type4	28	14.2	264.0	13	1
	Type4	29	18.2	284.0	15	1
	Type4	27	19.2	272.0	16	1
	Type4	28	14.2	264.0	13	1
	Type4	29	18.2	284.0	15	1

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Number Of Bursts	Waveform Length (s)	Radar Frequency	Detection (1: Yes; 0: No)
11AX80MI MO	5290	Type5	0	15	12	5290	1
		Type5	1	8	12	5290	1
		Type5	2	11	12	5290	1
		Type5	3	20	12	5290	1
		Type5	4	17	12	5290	1
		Type5	5	14	12	5290	1
		Type5	6	15	12	5290	1
		Type5	7	12	12	5290	1
		Type5	8	14	12	5290	1
		Type5	9	8	12	5290	1
		Type5	10	17	12	5258.2	1
		Type5	11	19	12	5259.4	1
		Type5	12	15	12	5257	1
		Type5	13	12	12	5255.8	1
		Type5	14	19	12	5259	1
		Type5	15	14	12	5256.6	1
		Type5	16	20	12	5259.8	1
		Type5	17	12	12	5255.8	1
		Type5	18	14	12	5256.6	1
		Type5	19	12	12	5255.8	1
		Type5	20	16	12	5322.2	1
		Type5	21	12	12	5324.6	1
		Type5	22	20	12	5320.2	1
		Type5	23	14	12	5323.4	1
		Type5	24	13	12	5323.8	1
		Type5	25	8	12	5326.2	1
		Type5	26	17	12	5321.8	1
		Type5	27	19	12	5320.6	1
		Type5	28	12	12	5324.2	1
		Type5	29	18	12	5321.4	1

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Pulse width (μs)	PRI (μs)	Pulses per Hop	Detection (1: Yes; 0: No)
11AX80MI MO	5290	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
11AX80MIMO	5290	Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
11AX80MIMO	5290	Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
11AX80MIMO	5290	Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
11AX80MIMO	5290	Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
11AX80MIMO	5290	Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
11AX80MIMO	5290	Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
11AX80MIMO	5290	Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
11AX80MIMO	5290	Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
11AX80MIMO	5290	Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
11AX80MIMO	5290	Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
11AX80MIMO	5290	Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
11AX80MIMO	5290	Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
11AX80MIMO	5290	Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
11AX80MIMO	5290	Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
11AX80MIMO	5290	Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
11AX80MIMO	5290	Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
11AX80MIMO	5290	Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
11AX80MIMO	5290	Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
11AX80MIMO	5290	Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
11AX80MIMO	5290	Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
11AX80MIMO	5290	Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
11AX80MIMO	5290	Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
11AX80MIMO	5290	Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
11AX80MIMO	5290	Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
11AX80MIMO	5290	Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
11AX80MIMO	5290	Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
11AX80MIMO	5290	Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
11AX80MIMO	5290	Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
11AX80MIMO	5290	Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
11AX80MIMO	5290	Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
11AX80MIMO	5290	Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
11AX80MIMO	5290	Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
11AX80MIMO	5290	Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
11AX80MIMO	5290	Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
11AX80MIMO	5290	Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
11AX80MIMO	5290	Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
11AX80MIMO	5290	Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
11AX80MIMO	5290	Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
11AX80MIMO	5290	Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
11AX80MIMO	5290	Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
11AX80MIMO	5290	Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
11AX80MIMO	5290	Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
11AX80MIMO	5290	Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
11AX80MIMO	5290	Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
11AX80MIMO	5290	Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
11AX80MIMO	5290	Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
11AX80MIMO	5290	Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
11AX80MIMO	5290	Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
11AX80MIMO	5290	Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
11AX80MIMO	5290	Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
11AX80MIMO	5290	Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
11AX80MIMO	5290	Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
11AX80MIMO	5290	Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
11AX80MIMO	5290	Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
11AX80MIMO	5290	Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
11AX80MIMO	5290	Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
11AX80MIMO	5290	Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
11AX80MIMO	5290	Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
11AX80MIMO	5290	Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
11AX80MIMO	5290	Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
11AX80MIMO	5290	Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
11AX80MIMO	5290	Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
11AX80MIMO	5290	Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
11AX80MIMO	5290	Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
11AX80MIMO	5290	Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
11AX80MIMO	5290	Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
11AX80MIMO	5290	Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
11AX80MIMO	5290	Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
11AX80MIMO	5290	Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
11AX80MIMO	5290	Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
11AX80MIMO	5290	Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
11AX80MIMO	5290	Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
11AX80MIMO	5290	Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
11AX80MIMO	5290	Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
11AX80MIMO	5290	Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
11AX80MIMO	5290	Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
11AX80MIMO	5290	Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
11AX80MIMO	5290	Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
11AX80MIMO	5290	Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
11AX80MIMO	5290	Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
11AX80MIMO	5290	Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
11AX80MIMO	5290	Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
11AX80MIMO	5290	Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
11AX80MIMO	5290	Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
11AX80MIMO	5290	Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
11AX80MIMO	5290	Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
11AX80MIMO	5290	Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
11AX80MIMO	5290	Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
11AX80MIMO	5290	Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
11AX80MIMO	5290	Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
11AX80MIMO	5290	Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
11AX80MIMO	5290	Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
11AX80MIMO	5290	Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
11AX80MIMO	5290	Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
11AX80MIMO	5290	Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
11AX80MIMO	5290	Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
11AX80MIMO	5290	Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
11AX80MIMO	5290	Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
11AX80MIMO	5290	Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
11AX80MIMO	5290	Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
11AX80MIMO	5290	Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
11AX80MIMO	5290	Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
11AX80MIMO	5290	Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
11AX80MIMO	5290	Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
11AX80MIMO	5290	Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
11AX80MIMO	5290	Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
11AX80MIMO	5290	Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
11AX80MIMO	5290	Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
11AX80MIMO	5290	Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
11AX80MIMO	5290	Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
11AX80MIMO	5290	Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
11AX80MIMO	5290	Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
11AX80MIMO	5290	Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
11AX80MIMO	5290	Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
11AX80MIMO	5290	Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
11AX80MIMO	5290	Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
11AX80MIMO	5290	Type5	8	13	98172.0	13	1	64.3	1937.0	---	---

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
11AX80MIMO	5290	Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
11AX80MIMO	5290	Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
11AX80MIMO	5290	Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
11AX80MIMO	5290	Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
11AX80MIMO	5290	Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
11AX80MIMO	5290	Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
11AX80MIMO	5290	Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
11AX80MIMO	5290	Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
11AX80MIMO	5290	Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
11AX80MIMO	5290	Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
11AX80MIMO	5290	Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
11AX80MIMO	5290	Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
11AX80MIMO	5290	Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
11AX80MIMO	5290	Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
11AX80MIMO	5290	Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
11AX80MIMO	5290	Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
11AX80MIMO	5290	Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
11AX80MIMO	5290	Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
11AX80MIMO	5290	Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
11AX80MIMO	5290	Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
11AX80MIMO	5290	Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
11AX80MIMO	5290	Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
11AX80MIMO	5290	Type5	10	16	125509.0	16	1	59.3	1093.0	---	---

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
11AX80MIMO	5290	Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
11AX80MIMO	5290	Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
11AX80MIMO	5290	Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
11AX80MIMO	5290	Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
11AX80MIMO	5290	Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
11AX80MIMO	5290	Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
11AX80MIMO	5290	Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
11AX80MIMO	5290	Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
11AX80MIMO	5290	Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
11AX80MIMO	5290	Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
11AX80MIMO	5290	Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
11AX80MIMO	5290	Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
11AX80MIMO	5290	Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
11AX80MIMO	5290	Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
11AX80MIMO	5290	Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
11AX80MIMO	5290	Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
11AX80MIMO	5290	Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
11AX80MIMO	5290	Type5	11	18	495737.0	19	1	55.0	1012.0	---	---

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
11AX80MIMO	5290	Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
11AX80MIMO	5290	Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
11AX80MIMO	5290	Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
11AX80MIMO	5290	Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
11AX80MIMO	5290	Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
11AX80MIMO	5290	Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
11AX80MIMO	5290	Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
11AX80MIMO	5290	Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
11AX80MIMO	5290	Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
11AX80MIMO	5290	Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
11AX80MIMO	5290	Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
11AX80MIMO	5290	Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
11AX80MIMO	5290	Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
11AX80MIMO	5290	Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
11AX80MIMO	5290	Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
11AX80MIMO	5290	Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
11AX80MIMO	5290	Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
11AX80MIMO	5290	Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
11AX80MIMO	5290	Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
11AX80MIMO	5290	Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
11AX80MIMO	5290	Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
11AX80MIMO	5290	Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
11AX80MIMO	5290	Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
11AX80MIMO	5290	Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
11AX80MIMO	5290	Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
11AX80MIMO	5290	Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
11AX80MIMO	5290	Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
11AX80MIMO	5290	Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
11AX80MIMO	5290	Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
11AX80MIMO	5290	Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
11AX80MIMO	5290	Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
11AX80MIMO	5290	Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
11AX80MIMO	5290	Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
11AX80MIMO	5290	Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
11AX80MIMO	5290	Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
11AX80MIMO	5290	Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
11AX80MIMO	5290	Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
11AX80MIMO	5290	Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
11AX80MIMO	5290	Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
11AX80MIMO	5290	Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
11AX80MIMO	5290	Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
11AX80MIMO	5290	Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
11AX80MIMO	5290	Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
11AX80MIMO	5290	Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
11AX80MIMO	5290	Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
11AX80MIMO	5290	Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
11AX80MIMO	5290	Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
11AX80MIMO	5290	Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
11AX80MIMO	5290	Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
11AX80MIMO	5290	Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
11AX80MIMO	5290	Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
11AX80MIMO	5290	Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
11AX80MIMO	5290	Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
11AX80MIMO	5290	Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
11AX80MIMO	5290	Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
11AX80MIMO	5290	Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
11AX80MIMO	5290	Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
11AX80MIMO	5290	Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
11AX80MIMO	5290	Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
11AX80MIMO	5290	Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
11AX80MIMO	5290	Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
11AX80MIMO	5290	Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
11AX80MIMO	5290	Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
11AX80MIMO	5290	Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
11AX80MIMO	5290	Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
11AX80MIMO	5290	Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
11AX80MIMO	5290	Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
11AX80MIMO	5290	Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
11AX80MIMO	5290	Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
11AX80MIMO	5290	Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
11AX80MIMO	5290	Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
11AX80MIMO	5290	Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
11AX80MIMO	5290	Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
11AX80MIMO	5290	Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
11AX80MIMO	5290	Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
11AX80MIMO	5290	Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
11AX80MIMO	5290	Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
11AX80MIMO	5290	Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
11AX80MIMO	5290	Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
11AX80MIMO	5290	Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
11AX80MIMO	5290	Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
11AX80MIMO	5290	Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
11AX80MIMO	5290	Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
11AX80MIMO	5290	Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
11AX80MIMO	5290	Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
11AX80MIMO	5290	Type5	17	11	98897.0	10	1	65.3	1709.0	---	---

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
11AX80MIMO	5290	Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
11AX80MIMO	5290	Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
11AX80MIMO	5290	Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
11AX80MIMO	5290	Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
11AX80MIMO	5290	Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
11AX80MIMO	5290	Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
11AX80MIMO	5290	Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
11AX80MIMO	5290	Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
11AX80MIMO	5290	Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
11AX80MIMO	5290	Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
11AX80MIMO	5290	Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
11AX80MIMO	5290	Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
11AX80MIMO	5290	Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
11AX80MIMO	5290	Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
11AX80MIMO	5290	Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
11AX80MIMO	5290	Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
11AX80MIMO	5290	Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
11AX80MIMO	5290	Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
11AX80MIMO	5290	Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
11AX80MIMO	5290	Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
11AX80MIMO	5290	Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
11AX80MIMO	5290	Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
11AX80MIMO	5290	Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
11AX80MIMO	5290	Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
11AX80MIMO	5290	Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
11AX80MIMO	5290	Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
11AX80MIMO	5290	Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
11AX80MIMO	5290	Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
11AX80MIMO	5290	Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
11AX80MIMO	5290	Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
11AX80MIMO	5290	Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
11AX80MIMO	5290	Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
11AX80MIMO	5290	Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
11AX80MIMO	5290	Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
11AX80MIMO	5290	Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
11AX80MIMO	5290	Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
11AX80MIMO	5290	Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
11AX80MIMO	5290	Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
11AX80MIMO	5290	Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
11AX80MIMO	5290	Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
11AX80MIMO	5290	Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
11AX80MIMO	5290	Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
11AX80MIMO	5290	Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
11AX80MIMO	5290	Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
11AX80MIMO	5290	Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
11AX80MIMO	5290	Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
11AX80MIMO	5290	Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
11AX80MIMO	5290	Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
11AX80MIMO	5290	Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
11AX80MIMO	5290	Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
11AX80MIMO	5290	Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
11AX80MIMO	5290	Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
11AX80MIMO	5290	Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
11AX80MIMO	5290	Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
11AX80MIMO	5290	Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
11AX80MIMO	5290	Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
11AX80MIMO	5290	Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
11AX80MIMO	5290	Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
11AX80MIMO	5290	Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
11AX80MIMO	5290	Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
11AX80MIMO	5290	Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
11AX80MIMO	5290	Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
11AX80MIMO	5290	Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
11AX80MIMO	5290	Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
11AX80MIMO	5290	Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
11AX80MIMO	5290	Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
11AX80MIMO	5290	Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
11AX80MIMO	5290	Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
11AX80MIMO	5290	Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
11AX80MIMO	5290	Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
11AX80MIMO	5290	Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
11AX80MIMO	5290	Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
11AX80MIMO	5290	Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
11AX80MIMO	5290	Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
11AX80MIMO	5290	Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
11AX80MIMO	5290	Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
11AX80MIMO	5290	Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
11AX80MIMO	5290	Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
11AX80MIMO	5290	Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
11AX80MIMO	5290	Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
11AX80MIMO	5290	Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
11AX80MIMO	5290	Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
11AX80MIMO	5290	Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
11AX80MIMO	5290	Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
11AX80MIMO	5290	Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
11AX80MIMO	5290	Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
11AX80MIMO	5290	Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
11AX80MIMO	5290	Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
11AX80MIMO	5290	Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
11AX80MIMO	5290	Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
11AX80MIMO	5290	Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
11AX80MIMO	5290	Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
11AX80MIMO	5290	Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
11AX80MIMO	5290	Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
11AX80MIMO	5290	Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
11AX80MIMO	5290	Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
11AX80MIMO	5290	Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
11AX80MIMO	5290	Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
11AX80MIMO	5290	Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
11AX80MIMO	5290	Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
11AX80MIMO	5290	Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
11AX80MIMO	5290	Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
11AX80MIMO	5290	Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
11AX80MIMO	5290	Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
11AX80MIMO	5290	Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
11AX80MIMO	5290	Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
11AX80MIMO	5290	Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
11AX80MIMO	5290	Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
11AX80MIMO	5290	Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
11AX80MIMO	5290	Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
11AX80MIMO	5290	Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
11AX80MIMO	5290	Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
11AX80MIMO	5290	Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
11AX80MIMO	5290	Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
11AX80MIMO	5290	Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
11AX80MIMO	5290	Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
11AX80MIMO	5290	Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
11AX80MIMO	5290	Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
11AX80MIMO	5290	Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
11AX80MIMO	5290	Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
11AX80MIMO	5290	Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
11AX80MIMO	5290	Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
11AX80MIMO	5290	Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
11AX80MIMO	5290	Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
11AX80MIMO	5290	Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
11AX80MIMO	5290	Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
11AX80MIMO	5290	Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
11AX80MIMO	5290	Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
11AX80MIMO	5290	Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
11AX80MIMO	5290	Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
11AX80MIMO	5290	Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
11AX80MIMO	5290	Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
11AX80MIMO	5290	Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
11AX80MIMO	5290	Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
11AX80MIMO	5290	Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
11AX80MIMO	5290	Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
11AX80MIMO	5290	Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
11AX80MIMO	5290	Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
11AX80MIMO	5290	Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
11AX80MIMO	5290	Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
11AX80MIMO	5290	Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
11AX80MIMO	5290	Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
11AX80MIMO	5290	Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
11AX80MIMO	5290	Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
11AX80MIMO	5290	Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
11AX80MIMO	5290	Type5	28	11	176231.0	10	1	55.3	1522.0	---	---

TestMode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX80MIMO	5290	Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
11AX80MIMO	5290	Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
11AX80MIMO	5290	Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
11AX80MIMO	5290	Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
11AX80MIMO	5290	Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
11AX80MIMO	5290	Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
11AX80MIMO	5290	Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
11AX80MIMO	5290	Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
11AX80MIMO	5290	Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
11AX80MIMO	5290	Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
11AX80MIMO	5290	Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
11AX80MIMO	5290	Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
11AX80MIMO	5290	Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
11AX80MIMO	5290	Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
11AX80MIMO	5290	Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
11AX80MIMO	5290	Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
11AX80MIMO	5290	Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
11AX80MIMO	5290	Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2402U80231E-RF-A1-EXP EUT EXTERNAL PHOTOGRAPHS and 2402U80231E-RF-A1-INP EUT INTERNAL PHOTOGRAPHS.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2402U80231E-RF-00DA1-TSP TEST SETUP PHOTOGRAPHS.

******* END OF REPORT *******