




Tutti i comandi supportano 433 MHz



## T Specifiche del tipo

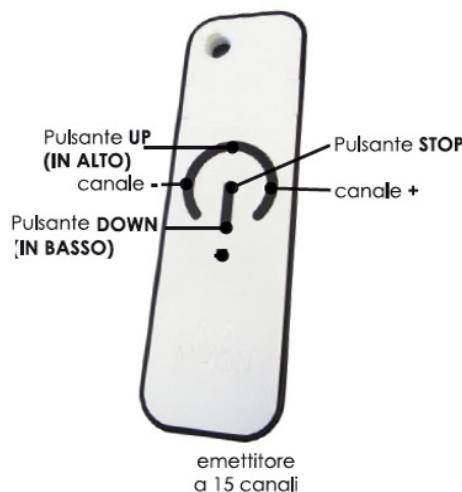

## T Supporto tecnico



Supporto tecnico

**Tensione di ingresso:** DC 3V**Frequenza di emissione:** 433,92 MHz ± 100 KHz**Potenza di emissione:** 10 milliwatt**Temperatura di funzionamento:** -10°C / 50°C**Lunghezza di emissione:** all'aperto 200 m, tra due pareti 30 m**Trasmettitore:** è possibile sceglierlo a canale singolo o a 5 canali**Avviso:** non esporre il trasmettitore a urti o all'umidità, per non pregiudicarne la durata.

Quando si utilizza il trasmettitore, se la distanza di emissione risulta chiaramente insufficiente o non corrispondente ai comandi, cambiare la batteria con una nuova dello stesso tipo. Tenere le batterie per il riciclaggio.


## T Modalita' di utilizzo emettitori multicanale

Supporto tecnico

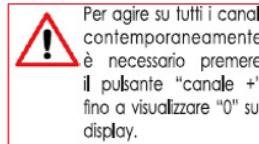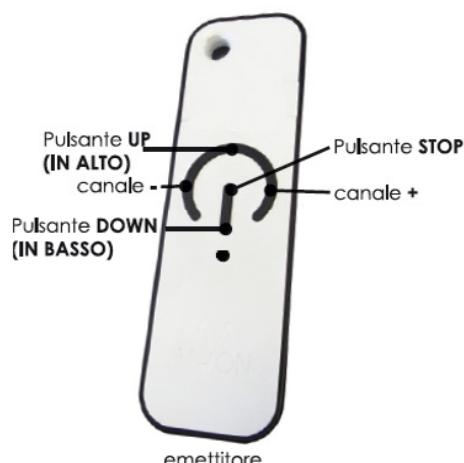


# 1 Impostazione del motore tubolare R abbinabile

## PRIMO METODO

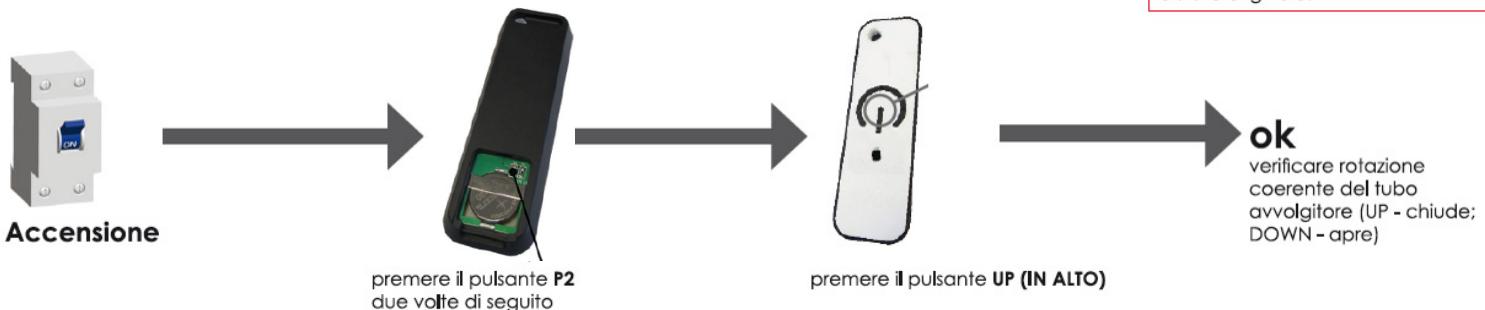

## SECONDO METODO

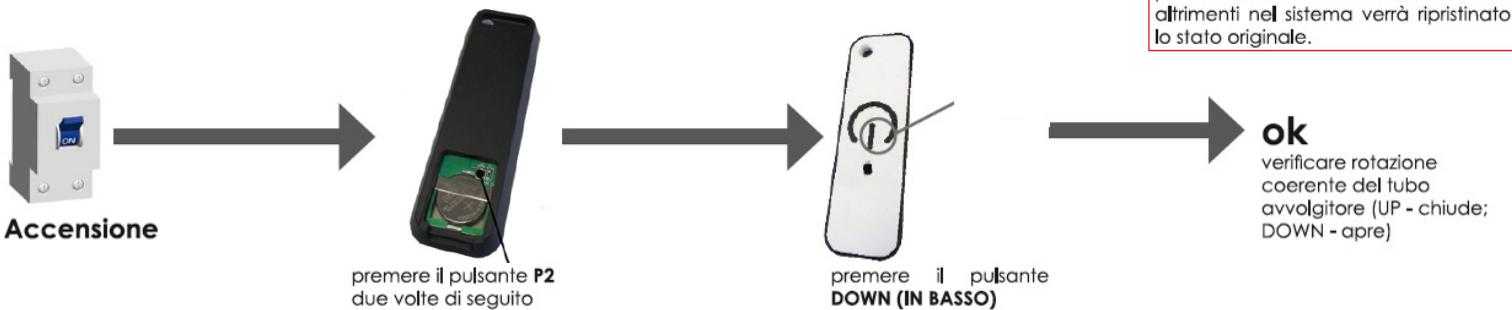

## A Aggiunta emettitore



## A Cancellazione emettitore



L'intervallo di pressione di ciascun pulsante deve essere entro 10 secondi, altrimenti nel sistema verrà ripristinato lo stato originale.

ok

verificare rotazione  
coerente del tubo  
avvolgitore (UP - chiude;  
DOWN - apre)



L'intervallo di pressione di ciascun pulsante deve essere entro 10 secondi, altrimenti nel sistema verrà ripristinato lo stato originale.

ok

verificare rotazione  
coerente del tubo  
avvolgitore (UP - chiude;  
DOWN - apre)

## FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
  - (2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.