



Willow Run Test Labs, LLC  
7117 Fieldcrest Dr.  
Brighton, Michigan 48116 USA  
Tel: (734) 252-9785  
Fax: (734) 926-9785  
e-mail: info@wrtest.com

Testing of

## Electromagnetic Emissions

per

USA: CFR Title 47, Part 15.109 (Emissions)

are herein reported for

# Lear Auto. Serv. (Netherlands) BV ZAFFT6BCMRKETPM

Test Report No.: 20160720-RPTWAC010026Br0

Copyright © 2016

Applicant/Provider:

Lear Auto. Serv. (Netherlands) BV

Philippine Branch, PE&TC, Mactan Ec. Zone, MEPZ II, Lapu-Lapu City Cebu 6015 Philippines

Phone: +63 32 340-7950, Fax: +63 32 340-7950

Contact Person: Reus Edgar O. Masongsong; RMasongsong@lear.com

Data Recorded by:

Dr. Joseph Brunett, EMC-002790-NE

Reviewed by:

Dr. Joseph Brunett, EMC-002790-NE

Prepared by:

Dr. Joseph Brunett, EMC-002790-NE

Date of Issue:

December 7, 2016

Results of testing completed on (or before) July 19, 2016 are as follows.

**Emissions:** Radiated spurious emissions associated with the receive chain of this device **COMPLY** the regulatory limit(s) by no less than 23.7 dB.

## Revision History

Rev. No.	Date	Details	Revised By
r0	December 7, 2016	Initial Release.	J. Brunett

## Contents

<b>Revision History</b>	<b>2</b>
<b>Table of Contents</b>	<b>2</b>
<b>1 Test Report Scope and Limitations</b>	<b>4</b>
1.1 Laboratory Authorization . . . . .	4
1.2 Report Retention . . . . .	4
1.3 Subcontracted Testing . . . . .	4
1.4 Limitation of Results . . . . .	4
1.5 Copyright . . . . .	4
1.6 Endorsements . . . . .	4
1.7 Test Location . . . . .	5
1.8 Traceability and Equipment Used . . . . .	5
<b>2 Test Specifications and Procedures</b>	<b>6</b>
2.1 Test Specification and General Procedures . . . . .	6
<b>3 Configuration and Identification of the Equipment Under Test</b>	<b>7</b>
3.1 Description and Declarations . . . . .	7
3.1.1 EUT Configuration . . . . .	7
3.1.2 Modes of Operation . . . . .	7
3.1.3 Variants . . . . .	7
3.1.4 Test Samples . . . . .	7
3.1.5 Functional Exerciser . . . . .	7
3.1.6 Modifications Made . . . . .	8
3.1.7 Production Intent . . . . .	8
3.1.8 Declared Exemptions and Additional Product Notes . . . . .	8
<b>4 Emissions</b>	<b>9</b>
4.1 General Test Procedures . . . . .	9
4.1.1 Radiated Test Setup and Procedures . . . . .	9
4.1.2 Conducted Emissions Test Setup and Procedures . . . . .	11
4.1.3 Power Supply Variation . . . . .	11
4.1.4 Thermal Variation . . . . .	11
4.2 Unintentional Emissions . . . . .	12
4.2.1 Radiated Receiver Spurious . . . . .	12
<b>5 Measurement Uncertainty</b>	<b>13</b>

## List of Tables

1	Test Site List. . . . .	5
2	Equipment List. . . . .	5
3	EUT Declarations. . . . .	7
4	Receiver Chain Spurious Emissions $\geq$ 30 MHz. . . . .	12
5	Measurement Uncertainty. . . . .	13

## List of Figures

1	Photos of EUT. . . . .	7
2	EUT Test Configuration Diagram. . . . .	8
3	Radiated Emissions Diagram of the EUT. . . . .	9
4	Radiated Emissions Test Setup Photograph(s). . . . .	10

## 1 Test Report Scope and Limitations

### 1.1 Laboratory Authorization

Test Facility description and attenuation characteristics are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: 688478) and with ISED Canada, Ottawa, ON (File Ref. No: IC8719A-1).

### 1.2 Report Retention

For equipment verified to comply with the regulations herein, the manufacturer is obliged to retain this report with the product records for the life of the product, and no less than ten years. A copy of this Report will remain on file with this Laboratory until December 2026.

### 1.3 Subcontracted Testing

This report does not contain data produced under subcontract.

### 1.4 Limitation of Results

The test results contained in this report relate only to the item(s) tested. Any electrical or mechanical modification made to the test item subsequent to the test date shall invalidate the data presented in this report. Any electrical or mechanical modification made to the test item subsequent to this test date shall require reevaluation.

### 1.5 Copyright

This report shall not be reproduced, except in full, without the written approval of Willow Run Test Labs, LLC.

### 1.6 Endorsements

This report shall not be used to claim product endorsement by any accrediting, regulatory, or governmental agency.

## 1.7 Test Location

The EUT was fully tested by **Willow Run Test Labs, LLC**, 7117 Fieldcrest Dr., Brighton, Michigan 48116 USA. Table 1 lists all site(s) employed herein. Specific test sites utilized are also listed in the test results sections of this report.

Table 1: Test Site List.

Description	Location	Quality Num.
OATS (3 meter)	8501 Beck Rd. Bldg 2227, Belleville MI 48111	OATSA

## 1.8 Traceability and Equipment Used

Pertinent test equipment used for measurements at this facility is listed in Table 2. The quality system employed at Willow Run Test Labs, LLC has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, other recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards.

Table 2: Equipment List.

Description	Manufacturer/Model	SN	Quality Num.	Last Cal By / Date Due
Spectrum Analyzer	Rhode-Schwarz / FSV30	101660	RSFSV30001	RS / May-2018
Biconical	EMCO / 93110B	9802-3039	BICEMCO01	Lib. Labs / Aug-2017
Log Periodic Antenna	EMCO / 3146	9305-3614	LOGEMCO01	Lib. Labs/ April-2017
Quad Ridge Horn	ETS Lind. / 3164-04	00066988	HRNQR316401	Lib. Labs / April-2017
Quad Ridge Horn	Singer / A6100	C35200	HQR2TO18S01	Lib. Labs / April-2017

## 2 Test Specifications and Procedures

### 2.1 Test Specification and General Procedures

The ultimate goal of Lear Auto. Serv. (Netherlands) BV is to demonstrate that the Equipment Under Test (EUT) complies with the Rules and/or Directives below. Detailed in this report are the results of testing the Lear Auto. Serv. (Netherlands) BV ZAFFT6BCMRKETPMS for compliance to:

Country/Region	Rules or Directive	Referenced Section(s)
United States	Code of Federal Regulations	CFR Title 47, Part 15.109
ANSI C63.4:2014	"Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"	
ANSI C63.10:2013 (USA)	"American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"	

### 3 Configuration and Identification of the Equipment Under Test

#### 3.1 Description and Declarations

The equipment under test is an automotive Remote Keyless Entry receiver. The EUT is approximately 23 x 18 x 5 cm (approx.) in dimension, and is depicted in Figure 1. It is powered by 12 VDC vehicle power system. In use, this device is permanently installed in a motor vehicle. Table 3 outlines provider declared EUT specifications.

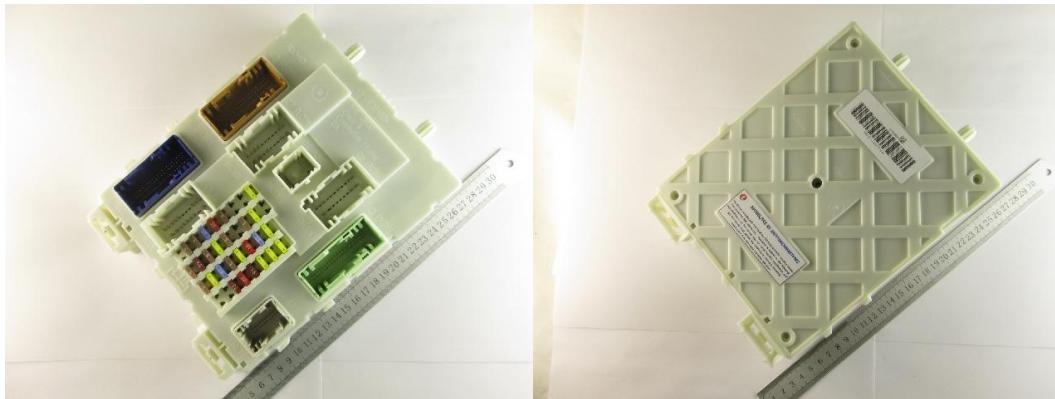


Figure 1: Photos of EUT.

Table 3: EUT Declarations.

General Declarations			
Equipment Type:	Receiver	Country of Origin:	Philippines
Nominal Supply:	12 VDC	Oper. Temp Range:	-40°C to +85°C
Frequency Range:	433.92 MHz	Antenna Dimension:	Integral
Antenna Type:	PCB trace (integral)	Antenna Gain:	Not Declared (Integral)
United States			
FCC ID Number:	ZAFFT6BCMRKETPMS	Classification:	CYY

##### 3.1.1 EUT Configuration

The EUT is configured for testing as depicted in Figure 2.

##### 3.1.2 Modes of Operation

There is only a single mode of operation for this device, as a receiver.

##### 3.1.3 Variants

There is only a single variant of the EUT, as tested.

##### 3.1.4 Test Samples

One sample of the EUT was provided for testing. Its software was modified by the manufacturer to keep the receiver awake whenever power is applied.

##### 3.1.5 Functional Exerciser

EUT functionality was verified by observation of load box which responds to manual button press on a paired keyfob.

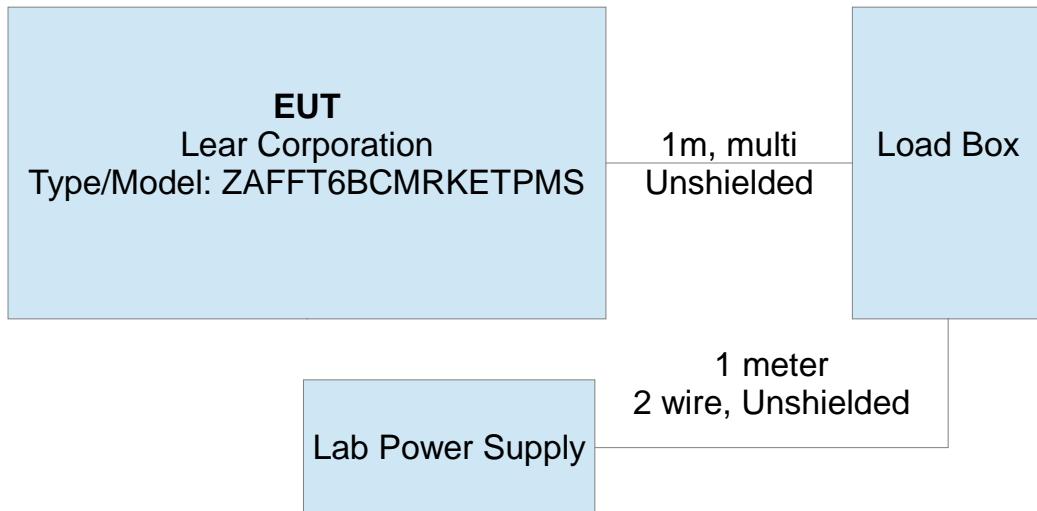


Figure 2: EUT Test Configuration Diagram.

### 3.1.6 Modifications Made

There were no modifications made to the EUT by this laboratory.

### 3.1.7 Production Intent

The EUT appears to be a production ready sample.

### 3.1.8 Declared Exemptions and Additional Product Notes

The EUT is permanently installed in a transportation vehicle. As such, digital emissions are exempt from US and Canadian digital emissions regulations (per FCC 15.103(a) and IC correspondence on ICES-003).

## 4 Emissions

### 4.1 General Test Procedures

#### 4.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first pre-scanned in our shielded anechoic chamber or GTEM test cell. Spectrum and modulation characteristics of all emissions are recorded. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.7 are employed. After pre-scan, emission measurements are made on the test site of record. If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in relevant test standards are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 3. All intentionally radiating elements that are not fixed-mounted in use are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. If the EUT is fixed-mounted in use, measurements are made with the device oriented in the manner consistent with installation and then emissions are recorded.

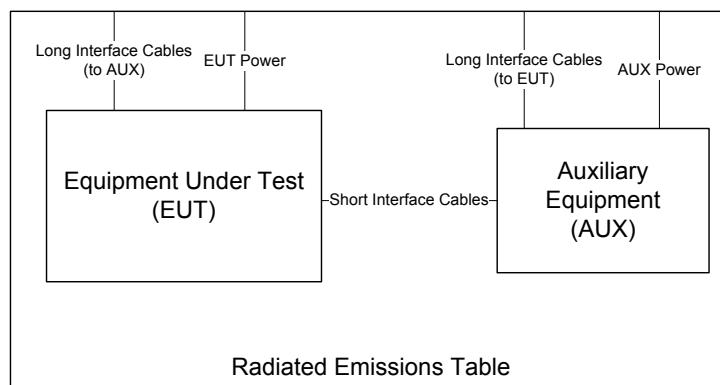


Figure 3: Radiated Emissions Diagram of the EUT.

If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied. For devices with intentional emissions below 30 MHz, a shielded loop antenna is used. It is placed at a 1 meter receive height. Emissions between 30 MHz and 1 GHz are measured using tuned dipoles and/or calibrated broadband antennas. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through 360° in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded. Emissions above 1 GHz are characterized using standard gain horn or broadband ridge-horn antennas on our OATS with a 4 × 5 m rectangle of H-4 absorber placed over the ground screen covering the OATS ground screen. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced. Photographs of the test setup employed are depicted in Figure 4.

Where regulations allow for direct measurement of field strength, power values (dBm) measured on the test receiver / analyzer are converted to dB $\mu$ V/m at the regulatory distance, using

$$E_{dist} = 107 + P_R + K_A - K_G + K_E - C_F$$

where  $P_R$  is the power recorded on spectrum analyzer, in dBm,  $K_A$  is the test antenna factor in dB/m,  $K_G$  is the combined pre-amplifier gain and cable loss in dB,  $K_E$  is duty correction factor (when applicable) in dB, and  $C_F$  is a distance conversion (employed only if limits are specified at alternate distance) in dB. This field strength value is then compared with the regulatory limit. If effective isotropic radiated power (EIRP) is computed, it is computed as

$$EIRP(dBm) = E_{3m}(dB\mu V/m) - 95.2.$$

When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported.

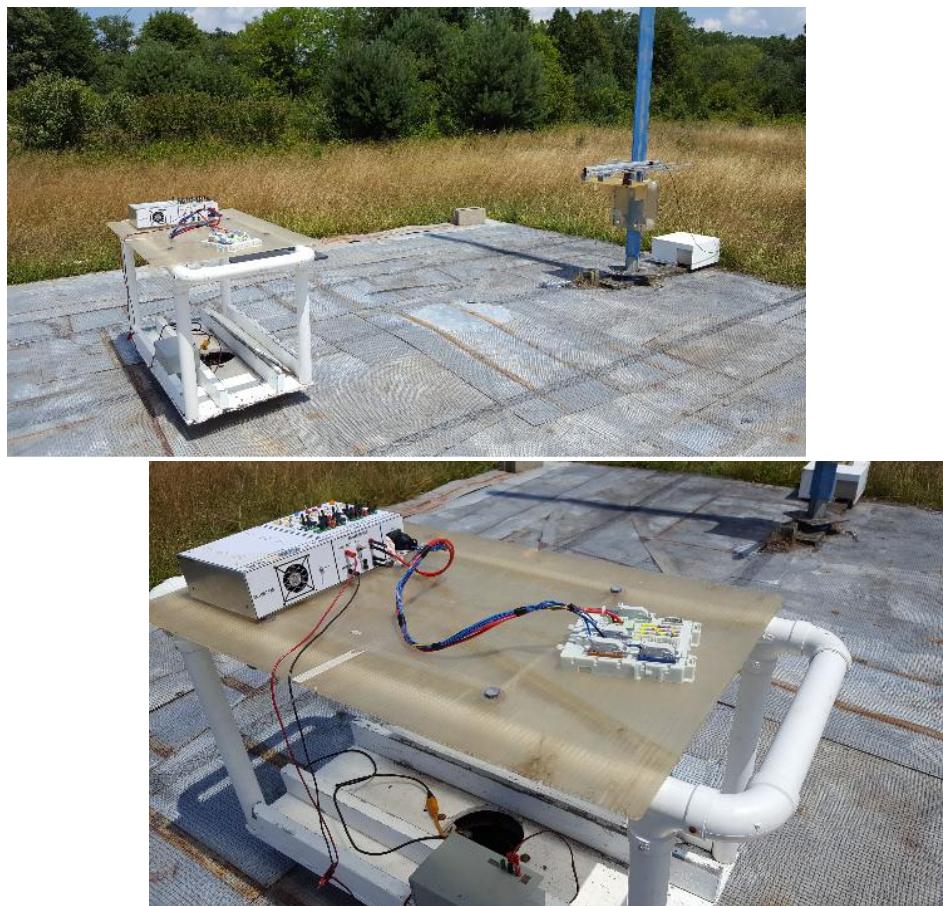


Figure 4: Radiated Emissions Test Setup Photograph(s).

#### 4.1.2 Conducted Emissions Test Setup and Procedures

**Vehicle Power Conducted Spurious** The EUT is not subject to power line conducted emissions regulations as it is powered solely by the vehicle power system for use in said motor vehicle.

#### 4.1.3 Power Supply Variation

Tests at extreme supply voltages are made if required by the the procedures specified in the test standard, and results of this testing are detailed in this report.

#### 4.1.4 Thermal Variation

Tests at extreme temperatures were not performed for this device.

## 4.2 Unintentional Emissions

### 4.2.1 Radiated Receiver Spurious

The results for the measurement of radiated receiver spurious emissions (emissions arising from the receiver chain, e.g. LO or VCO) at the nominal voltage and temperature are reported in Table 4. Receive chain emissions are measured to 5 times the highest receive chain frequency employed or 4 GHz, whichever is higher. If no emissions are detected, only those noise floor emissions at the LO/VCO frequency are reported.

Table 4: Receiver Chain Spurious Emissions  $\geq 30$  MHz.

Frequency Range		Det	IF Bandwidth			Video Bandwidth			Test Date:								
25 MHz $\leq$ f $\leq$ 1 000 MHz		Pk/QPk	120 kHz			300 kHz			19-Jul-16								
f > 1 000 MHz		Pk/Avg	1 MHz			3 MHz			Test Engineer:								
<b>Receiver Spurious</b>																	
#	Frequency Band Start MHz	Frequency Band Stop MHz	Test Antenna + Cable Type/Asset			Rx. Power*		Distance Meas. m		E-Field**		EIRP					
			H/V	Pol.	Ka	Kg	Peak dBm	Qpk/Avg dBm	Des. m	CF dB	Pk dBuV/m	Pk dBm	Avg dBm	E-Field Limit FCC dBuV/m	Pass By dB	Comments	
3	423.2	423.2	LOGEMCO01	H	16.1	31.2	-75.2		3.0	3.0	.0	16.7			46.0	29.3	background
4	423.2	423.2	LOGEMCO01	V	16.1	31.2	-71.9		3.0	3.0	.0	20.0			46.0	26.0	background
7	846.4	846.4	LOGEMCO01	H	22.0	27.1	-84.2		3.0	3.0	.0	17.7			46.0	28.3	background
8	846.4	846.4	LOGEMCO01	V	22.0	27.1	-88.1		3.0	3.0	.0	13.8			46.0	32.2	background
9	1000.0	4500.0	HRNQR316401	H/V	33.0	-0.5	-110.2		3.0	3.0	.0	30.3			54.0	23.7	noise
12																	
13																	
14																	
15																	

\*QPk detection below 1 GHz, Avg detection at or above 1 GHz with receiver bandwidth as specified at top of table.

\*\* When E-field is reported directly from Spectrum Analyzer, Antenna Factors and Cable losses are included directly in SA settings.

## 5 Measurement Uncertainty

The maximum values of measurement uncertainty for the laboratory test equipment and facilities associated with each test are given in the table below. This uncertainty is computed for a 95.45% confidence level based on a coverage factor of  $k = 2$ .

Table 5: Measurement Uncertainty.

Measured Parameter	Measurement Uncertainty <sup>†</sup>
Radio Frequency	$\pm(f_{Mkr}/10^7 + RBW/10 + (SPN/(PTS - 1))/2 + 1 \text{ Hz})$
Conducted Emm. Amplitude	$\pm1.8 \text{ dB}$
Radiated Emm. Amplitude (30 – 200 MHz)	$\pm2.7 \text{ dB}$
Radiated Emm. Amplitude (200 – 1000 MHz)	$\pm2.5 \text{ dB}$
Radiated Emm. Amplitude ( $f > 1000 \text{ MHz}$ )	$\pm3.7 \text{ dB}$
DC and Low Frequency Voltages	$\pm2\%$
Temperature	$\pm0.5^\circ\text{C}$
Humidity	$\pm5\%$

<sup>†</sup>Ref: CISPR 16-4-2:2011+A1:2014