

TEST REPORT CONCERNING THE COMPLIANCE OF A DIGITAL TRANSMISSION SYSTEM OPERATING IN THE FREQUENCYRANGE 920.5 -922.2 MHz, BRAND THYSSENKRUPP, MODEL CALL & PARK (CP) WITH 47 CFR PART 15 (10-1-09 EDITION).

10081601.fcc02 April 19,2011

> FCC listed : 90828 Industry Canada : 2932G-1 VCCI Registered : R-1518, C-1598

R&TTE, LVD, EMC Notified Body : 1856

TÜV Rheinland EPS B.V. P.O. Box 15 9822 ZG Niekerk (NL) Smidshornerweg 18 9822 TL Niekerk (NL)

Telephone: +31 594 505005 Telefax: +31 594 504804

E-mail: info@tuv-eps.com Web: www.tuv-eps.com

Project number: 10081601.fcc02_ZAH-1000915



Brand mark: ThyssenKrupp
Model: Call & Park (CP)
FCC ID: ZAH-1000915

MEASUREMENT/TECHNICAL REPORT

ThyssenKrupp Accessibility BV Model: Call & Park (CP)

FCC ID: ZAH-1000915

April 19, 2011

This report concerns: Original grant/certification Class 2 change Verification Equipment type: **Digital Transmission System** Report prepared by: Name : Richard van der Meer Company name : TÜV Rheinland EPS B.V. Address : Smidshornerweg 18 : 9822 TL Niekerk Postal code/city Mailing address : P.O. Box 15 Postal code/city : 9822 ZG Niekerk Country : The Netherlands Telephone number : + 31 594 505 005 Telefax number : + 31 594 504 804 E-mail : info@tuv-eps.com

The data taken for this test and report herein was done in accordance with 47 CFR Part 15 (10-1-09 Edition) and the measurement procedures of ANSI C63.4-2009. TÜV Rheinland EPS B.V. at Niekerk, The Netherlands, certifies that the data is accurate and contains a true representation of the emission profile of the Equipment Under Test (EUT) on the date of the test as noted in the test report. I have reviewed the test report and find it to be an accurate description of the test(s) performed and the EUT so tested.

Date: April 19, 2011 Signature:

O. Hoekstra

Senior Engineer Telecom TÜV Rheinland EPS B.V.

M Wulsh

Project number : 10081601.fcc01_ZAH-1000915 Page 2 of 16



Brand mark: ThyssenKrupp
Model: Call & Park (CP)
FCC ID: ZAH-1000915

Summary

The equipment under test does:

✓	fulfill the general approval requirements as identified in this test report
	not fulfill the general approval requirements as identified in this test report

Description of test item

Test item : Digital Transmission System operating in the range 920.5 – 922.2 MHz

Manufacturer : ThyssenKrupp Accessibility BV

Brand : ThyssenKrupp
Model : Call & Park (CP)

Serial number(s) : n.a. Revision : n.a.

Applicant information

Applicant's representative : Mr. P. Kasbergen

Company : ThyssenKrupp Accessibility BV

Address : Van Utrechtweg 99

Postal code : 2921 LN

City : Krimpen aan den IJssel

 Country
 :
 The Netherlands

 Telephone number
 :
 +31 (0) 180530962

 Telefax number
 :
 +31 (0) 180530996

Test(s) performed

Location : Niekerk

Test(s) started : February 15, 2011 Test(s) completed : April 19, 2011

Purpose of test(s) : Equipment Authorization (Original grant/certification)

Test specification(s) : 47 CFR Part 15 (10-1-09 Edition)

Test engineer(s) : R. van der Meer

Report written by : R. van der Meer

Report date : April 19, 2011

This report is in conformity with NEN-EN-ISO/IEC 17025: 2005

This report shall not be reproduced, except in full, without the written permission of TÜV Rheinland EPS B.V.

The test results relate only to the item(s) tested.

Project number : 10081601.fcc01_ZAH-1000915 Page 3 of 16



Test specification(s):
Description of EUT:
Manufacturer:
Brand mark:
Model:
FCC ID:

47 CFR Part 15 (10-1-09 Edition) Digital Transmission System ThyssenKrupp Accessibility BV ThyssenKrupp Call & Park (CP)

ZAH-1000915

Table of contents

1	Ger	neral information	5
1	.1	Product description	5
	1.1.	.1 Introduction	5
1	.2	Related submittal(s) and/or Grant(s)	5
	1.2.	.1 General	5
1	.3	Tested system details	5
	1.3.	.1 Description of input and output ports.	5
1	.4	Test Summary	6
1	.5	Test methodology	6
1	.6	Test facility.	6
1	.7	Test conditions.	6
2	Sys	stem test configuration	7
2	2.1	Justification	
2	2.2	EUT mode of operation.	7
2	2.3	Special accessories	
2	2.4	Equipment modifications.	7
2	2.5	Product Labelling	
2	2.6	Block diagram of the EUT.	
2	2.7	Schematics of the EUT	
_	2.8	Part list of the EUT.	
		diated emission data	
3	3.1	Radiated field strength measurements (above 30 MHz, E-field), Av and QP values	
	3.1.	, , , , , , , , , , , , , , , , , , ,	
	3.1.		
	3.1.		
3		Radiated field strength measurements (above 30 MHz, E-field), Peak values	
	3.2.	, , , , , , , , , , , , , , , , , , ,	
	3.2.		
	3.2.	.3 Radiated field strength measurements (above 30 MHz, E-field), EUT's TX Frequency 922.2 MHz	11
4		nducted emission data	
	l.1	Conducted emission data of the EUT	
5		issions at the band edges	
6	Ban	ndwidth of the emission	
7	List	of utilized test equipment	16



Brand mark: ThyssenKrupp
Model: Call & Park (CP)
FCC ID: ZAH-1000915

1 General information.

1.1 Product description.

The brand ThyssenKrupp, model Call & Park (CP), hereafter referred to as EUT, is part of a Stairlift Wireless Control System and is used to control the lift while being moved by the chairlift. The EUT is designed to operate in the frequency band (920.5 MHz to 922.2 MHz).

1.1.1 Introduction.

The content of this report and measurement results have not been changed other than the way of presenting the data.

1.2 Related submittal(s) and/or Grant(s).

1.2.1 General.

This test report supports the original grant/certification in equipment authorization files under FCC ID: ZAH-1000915.

1.3 Tested system details.

Details and an overview of the system and all of its components, as it has been tested, may be found below.

EUT : Digital Transmission System

Manufacturer : ThyssenKrupp Accessibility BV

Brand : ThyssenKrupp
Model : Call & Park (CP)

Serial number : N.a.

Operating frequency range : 920.5 - 922.2 MHzVoltage input rating : 3 V_{DC} (2* C batteries)

Voltage output rating : --

Current input rating : not provided Antenna : Internal Remarks : --

1.3.1 Description of input and output ports.

There were no input and/or output port connections required to operate the EUT.

Project number : 10081601.fcc01_ZAH-1000915 Page 5 of 16



Brand mark: ThyssenKrupp
Model: Call & Park (CP)
FCC ID: ZAH-1000915

1.4 Test Summary

The EUT was tested in accordance with the specifications given in the table below.

Test Standard 47 CFR Part 15 (10-1-09 Edition)	Description	Page	Pass / Fail	
15.207(a)	Conducted emissions	Not Applicable	Not Applicable	
15.209, 15.249 and 15.35	Radiated emissions	8 - 11	Pass	
15.249 (d)	Emissions radiated outside the specified bandwidth	12	Pass	
15.215(c)	Occupied bandwidth	13 - 15	Pass	

Table: Testspecifications

1.5 Test methodology.

The test methodology used is based on the requirements of 47 CFR Part 15 (10-1-09 Edition), sections 15.31, 15.207, 15.209 and 15.249.

The test methods, which have been used, are based on ANSI C63.4: 2009.

Radiated emission tests above 30 MHz were performed at a measurement distance of 3 meters. Radiated emission tests below 30 MHz were performed at a measurement distance of 3 meters.

The receivers are switching automatically to the right bandwidth in accordance with CISPR 16. This is implemented in the receiver. The antenna factors are programmed in the test receiver. The receiver automatically calculates the appropriate correction factor for the utilized antenna and also the appropriate antenna factor for the cable loss. The total correction is automatically added to the measured value.

1.6 Test facility.

The Federal Communications Commission and Industry Canada has reviewed the technical characteristics of the test facilities at TÜV Rheinland EPS B.V., located in Niekerk, 9822 TL Smidshornerweg 18, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948 (10-1-06 edition).

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 90828. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The description of the test facilities has been filed to Industry Canada under registration number 2932G-1. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

1.7 Test conditions.

Normal test conditions:

Temperature (*) : +15°C to +35°C Relative humidity(*) : 20 % to 75 %

Supply voltage : The EUT is battery operated

Air pressure : 950 – 1050 hPa

When it was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.

Project number : 10081601.fcc01_ZAH-1000915 Page 6 of 16



Brand mark: ThyssenKrupp
Model: Call & Park (CP)
FCC ID: ZAH-1000915

2 System test configuration.

2.1 Justification.

The system was configured for testing in a typical situation as a customer would normally use it.

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.4: 2009.

2.2 EUT mode of operation.

The EUT has been tested in continues transmit mode with a modulated carrier. The output power was set for maximum output by the applicant. The intentional radiator tests (47 CFR Part 15 sections, 15.207, 15.209 and 15.249) have been performed with a complete functioning EUT and interconnections, where applicable.

2.3 Special accessories.

No special accessories are used and/or needed to achieve compliance.

2.4 Equipment modifications.

No modifications have been made to the equipment in order to achieve compliance.

2.5 Product Labelling

The product labeling information is available in the technical documentation package.

2.6 Block diagram of the EUT.

The block diagram is available in the technical documentation package.

2.7 Schematics of the EUT.

The schematics are available in the technical documentation package.

2.8 Part list of the EUT.

The part list is available in the technical documentation package.

Project number : 10081601.fcc01_ZAH-1000915 Page 7 of 16

Manufacturer: ThyssenKrupp Accessibility BV
Brand mark: ThyssenKrupp
Model: Call & Park (CP)
FCC ID: ZAH-1000915

3 Radiated emission data.

3.1 Radiated field strength measurements (above 30 MHz, E-field), Av and QP values

3.1.1 Radiated field strength measurements (above 30 MHz, E-field), EUT's TX Frequency 920.5 MHz

Frequency (MHz)	Measure- ment results @3m Vertical (dBµV)	Measure- ment results @3m Horizontal (dBµV)	Detector	Correction factor (dB)	Results after correction Vertical (dBµV/m)	Results after correction Horizontal (dBµV/m)	Limits @3m (dBµV/m)	Pass/Fail
53.625	17.5	17.0	Qp	8.3	25.8	25.3	40	Pass
73.875	16.5	16.5	Qp	8.2	24.7	24.7	40	Pass
149.475	15.5	15.5	Qp	13.7	29.2	29.2	43.5	Pass
920.5 (fundamental)	57.2	56.8	Qp	33.6	90.8	90.4	94	Pass
964.22	-4.4	-6.7	Av	35.7	31.3	29.0	54	Pass
1025.0	-8.6	-8.9	Av	35.7	27.1	26.8	54	Pass
1841.0	0.8	0.1	Av	38.1	38.9	38.2	54	Pass
2761.5	-3.1	-3.6	Av	38.9	35.8	35.3	54	Pass
3682.0	-3.5	-3.5	Av	38.9	35.4	35.4	54	Pass

Table 1a

3.1.2 Radiated field strength measurements (above 30 MHz, E-field), EUT's TX Frequency 921.5 MHz

Frequency (MHz)	Measure- ment results @3m Vertical (dBµV)	Measure- ment results @3m Horizontal (dBµV)	Detector	Correction factor (dB)	Results after correction Vertical (dBµV/m)	Results after correction Horizontal (dBµV/m)	Limits @3m (dBµV/m)	Pass/Fail
53.625	17.5	17.0	Qp	8.3	25.8	25.3	40	Pass
73.875	16.5	16.5	Qp	8.2	24.7	24.7	40	Pass
149.475	15.5	15.5	Qp	13.7	29.2	29.2	43.5	Pass
921.5 (fundamental)	57.4	57.0	Qp	33.6	91.0	90.6	94	Pass
1002.0	-4.2	-6.3	Av	35.7	31.5	29.4	54	Pass
1198.0	-7.7	-7.8	Av	35.7	28.0	27.9	54	Pass
1299.0	-4.4	-5.9	Av	35.7	31.3	29.8	54	Pass
1843.0	12.8	2.3	Av	38.1	50.9	40.4	54	Pass
2764.0	-7.1	-4.1	Av	38.9	31.8	34.8	54	Pass
3686.0	-1.8	3.2	Av	38.9	37.1	42.1	54	Pass

Table 1b

Project number : 10081601.fcc01_ZAH-1000915 Page 8 of 16



Brand mark: ThyssenKrupp
Model: Call & Park (CP)
FCC ID: ZAH-1000915

3.1.3 Radiated field strength measurements (above 30 MHz, E-field), EUT's TX Frequency 922.2 MHz

Frequency (MHz)	Measure- ment results @3m Vertical (dBµV)	Measure- ment results @3m Horizontal (dBµV)	Detector	Correction factor (dB)	Results after correction Vertical (dBµV/m)	Results after correction Horizontal (dBµV/m)	Limits @3m (dBµV/m)	Pass/Fail
53.625	17.5	17.0	Qp	8.3	25.8	25.3	40	Pass
73.875	16.5	16.5	Qp	8.2	24.7	24.7	40	Pass
149.475	15.5	15.5	Qp	13.7	29.2	29.2	43.5	Pass
922.2 (fundamental)	57.3	56.8	Qp	33.6	90.9	90.4	94	Pass
1201.0	-4.4	-6.7	Av	35.7	31.3	29.0	54	Pass
1297.0	-8.5	-9.0	Av	35.7	27.2	26.7	54	Pass
1844.4	-1.5	-1.3	Av	38.1	36.6	36.8	54	Pass
2766.6	-5.2	-7.9	Av	38.9	33.7	31.0	54	Pass
3065.0	-11.4	-13.1	Av	38.9	27.5	25.8	54	Pass
3688.8	0.9	-0.5	Av	38.9	39.8	38.4	54	Pass

Table 1c

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15 section 15.209 and 15.249 with the EUT operating in continues transmit mode are depicted in Table 1a,1b and 1c.

Notes:

- 1. Field strength values of radiated emissions at frequencies not listed in the table above are more than 20 dB below the applicable limit.
- 2. Measurement uncertainty is ±5.0dB
- 3. The reported field strength values are the worst case values at the indicated frequency. The EUT was varied in three positions, the antenna was varied in horizontal and vertical orientations and also in height (between 1m and 4m).
- 4. The EUT was tested in on the lowest frequency (920.5 MHz), a middle frequency (921.5 MHz) and the highest frequency (922.2 MHz) in the 920.5 922.2 MHz band wherein it operates.
- 5. Values are from Antenna 1 (ANT 1) which from pre-tests proved to be worst case opposite Ant2.
- 6. Up to the 10th harmonic of the fundamental frequency was investigated, with a maximum of 9.3 GHz.
- 7. A Quasi-peak detector was used with a resolution bandwidth of 120 kHz, except for frequencies above 960 MHz where an average detector was used.

Used test equipment and ancillaries:

	99580	99070	99071	99107	99608	99609	99699	99547	15453
ĺ	12504	12484							

Test engineer

Signature :

Name : Richard van der Meer

Date : April 19, 2011

Project number : 10081601.fcc01_ZAH-1000915 Page 9 of 16

Brand mark: ThyssenKrupp
Model: Call & Park (CP)
FCC ID: ZAH-1000915

3.2 Radiated field strength measurements (above 30 MHz, E-field), Peak values

3.2.1 Radiated field strength measurements (above 30 MHz, E-field), EUT's TX Frequency 920.5 MHz

Frequency (MHz)	Measure- ment results @3m Vertical (dBµV)	Measure- ment results @3m Horizontal (dBµV)	Detector/ Resolution bandwidth (Hz)	Correction factor (dB)	Results after correction Vertical (dBµV/m)	Results after correction Horizontal (dBµV/m)	Limits @3m (dBµV/m)	Pass/Fail
964.22	-1.7	-4.1	Pk / 1000 k	35.7	34.0	31.6	74	Pass
1025.0	-4.3	-6.2	Pk / 1000 k	35.7	31.4	29.5	74	Pass
1841.0	3.8	2.1	Pk / 1000 k	38.1	41.9	40.2	74	Pass
2761.5	-0.6	-1.9	Pk / 1000 k	38.9	38.3	37.0	74	Pass
3682.0	-2.2	-2.9	Pk / 1000 k	38.9	36.7	36.0	74	Pass

Table 1d

3.2.2 Radiated field strength measurements (above 30 MHz, E-field), EUT's TX Frequency 921.5 MHz

Frequency (MHz)	Measure- ment results @3m Vertical (dBµV)	Measure- ment results @3m Horizontal (dBµV)	Detector/ Resolution bandwidth	Correction factor (dB)	Results after correction Vertical (dBµV/m)	Results after correction Horizontal (dBµV/m)	Limits @3m (dBµV/m)	Pass/Fail
1002.0	-2.4	-3.8	Pk / 1000 k	35.7	33.3	31.9	74	Pass
1198.0	-5.9	-5.9	Pk / 1000 k	35.7	29.8	29.8	74	Pass
1299.0	-2.7	-4.6	Pk / 1000 k	35.7	33.0	31.1	74	Pass
1843.0	15.8	5.7	Pk / 1000 k	38.9	54.7	44.6	74	Pass
2764.0	-6.6	-3.7	Pk / 1000 k	38.9	32.3	35.2	74	Pass
3686.0	-1.1	3.7	Pk / 1000 k	38.9	37.8	42.6	74	Pass

Table 1e

Project number : 10081601.fcc01_ZAH-1000915 Page 10 of 16



Brand mark: ThyssenKrupp
Model: Call & Park (CP)
FCC ID: ZAH-1000915

3.2.3 Radiated field strength measurements (above 30 MHz, E-field), EUT's TX Frequency 922.2 MHz

Frequency (MHz)	Measure- ment Results @3m Vertical (dBµV)	Measure- ment results @3m Horizontal (dBµV)	Detector/ Resolution bandwidth	Correction factor (dB)	Results after correction Vertical (dBµV/m)	Results after correction Horizontal (dBµV/m)	Limits @3m (dBµV/m)	Pass/Fail
1201.0	-2.8	-4.6	Pk / 1000 k	35.7	32.9	31.1	74	Pass
1297.0	-6.3	-6.6	Pk / 1000 k	35.7	29.4	29.1	74	Pass
1844.4	0.9	-0.5	Pk / 1000 k	38.1	39.0	37.6	74	Pass
2766.6	-4.3	-5.9	Pk / 1000 k	38.9	34.6	33.0	74	Pass
3065.0	-9.7	-11.7	Pk / 1000 k	38.9	29.2	27.2	74	Pass
3688.8	2.4	0.8	Pk / 1000 k	38.9	41.3	39.7	74	Pass

Table 1f

The results of the radiated emission tests (Peak values), carried out in accordance with 47 CFR Part 15 section 15.35 and 15.249 with the EUT operating in continues transmit mode are depicted in Table 1d,1e and 1f. Which are the Peak values of the Average detector measurement results as noted in Tables 1, 1b and 1c.

Notes:

- 1. Field strength values of radiated emissions at frequencies not listed in the table above are more than 20 dB below the applicable limit.
- 2. Measurement uncertainty is ±5.0dB
- 3. The reported field strength values are the worst case values at the indicated frequency. The EUT was varied in three positions, the antenna was varied in horizontal and vertical orientations and also in height (between 1m and 4m).
- 4. The EUT was tested in on the lowest frequency (920.5 MHz), a middle frequency (921.5 MHz) and the highest frequency (922.2 MHz) in the 920.5 922.2 MHz band wherein it operates.
- 5. Values are from Antenna 1 (ANT 1) which from pre-tests proved to be worst case opposite Ant2

Used test equipment and ancillaries:

99580	99070	99071	99107	99608	99609	99699	99547	15453
12504	12484							

Test engineer

Signature

Name : Richard van der Meer Date : March 10, 2011

Project number : 10081601.fcc01_ZAH-1000915 Page 11 of 16



Brand mark: ThyssenKrupp
Model: Call & Park (CP)
FCC ID: ZAH-1000915

4 Conducted emission data.

4.1 Conducted emission data of the EUT

Not applicable, EUT is battery operated.

5 Emissions at the band edges

The plots below show compliance with the 47 CFR Part 15 section 15.249(d), this section requires the emissions at the 902 MHz and 928 MHz band edges to be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in section 15.209, whichever is the lower attenuation.

The EUT is tested against the limits of section 15.209 and the results are note in Table 3 below.

Frequency (MHz)	Measured radiated fieldstrength (dВµV)	Correction (dB)	Results after correction (dBµV/m)	Limit (dBµV/m)	Pass / Fail
902.0	7.0	32.9	39.9	46	Pass
928.0	8.0	33.8	41.8	46	Pass

Table 3 Radiated emissions at the specified bandwidth edges

Used test equipment and ancillaries:

99580	99070	99071	99107	99608	99609	99699	99547	15453

Test engineer

Signature

Name : Richard van der Meer

Date : March 10, 2011

Project number : 10081601.fcc01_ZAH-1000915 Page 12 of 16




Test specification(s):
Description of EUT:
Manufacturer:
Brand mark:
Model:

FCC ID:

47 CFR Part 15 (10-1-09 Edition) Digital Transmission System ThyssenKrupp Accessibility BV ThyssenKrupp Call & Park (CP) ZAH-1000915

6 Bandwidth of the emission

The plots below, as measured on a spectrum analyzer, show compliance with the 47 CFR Part 15 section 15.215(c), this section requires the 20 dB emission bandwidth is within the frequencyband designated in section 15.249.

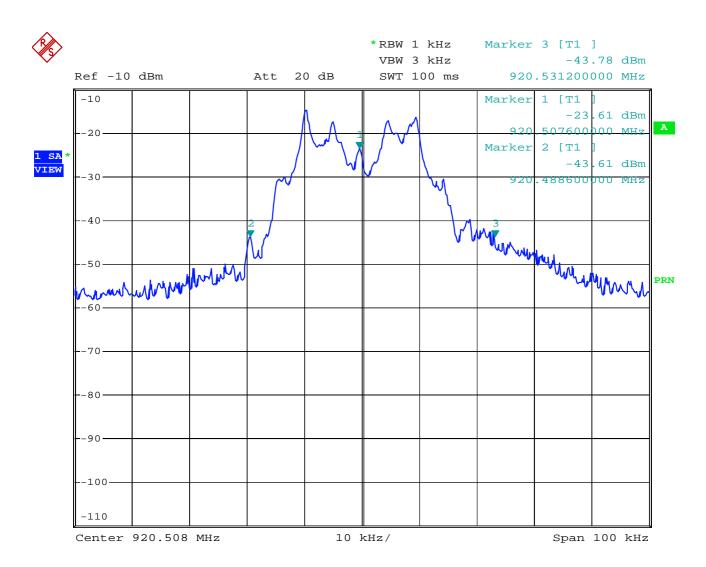

Date: 23.MAR.2011 13:40:06

Plot 1: Occupied 20dB Bandwidth (= 42.6 kHz) of the EUT transmitting at 920.5 MHz


Project number : 10081601.fcc01_ZAH-1000915 Page 13 of 16



Test specification(s): 4:
Description of EUT: D
Manufacturer: T
Brand mark: T

47 CFR Part 15 (10-1-09 Edition)
Digital Transmission System
ThyssenKrupp Accessibility BV
ThyssenKrupp

Model: Call & Park (CP) FCC ID: ZAH-1000915

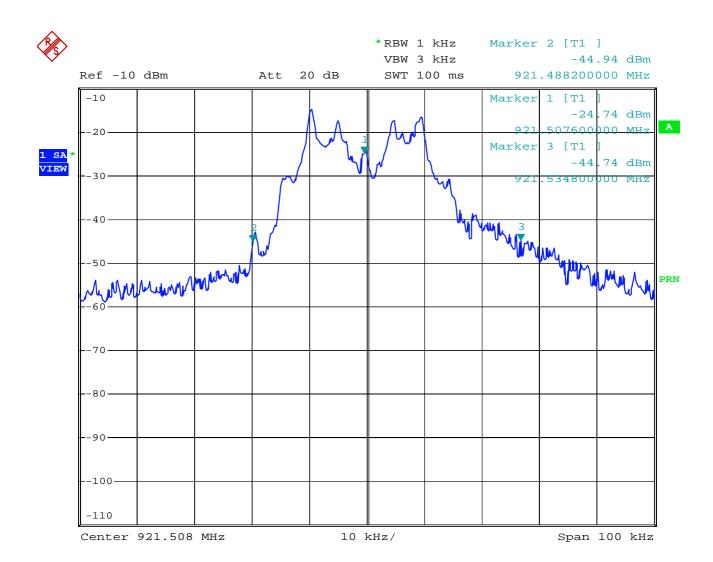

Date: 23.MAR.2011 13:25:48

Plot 2: Occupied 20dB Bandwidth (= 46.6 kHz) of the EUT transmitting at 921.5 MHz


Project number : 10081601.fcc01_ZAH-1000915 Page 14 of 16



Test specification(s): 47
Description of EUT: Dig
Manufacturer: Th
Brand mark: Th

47 CFR Part 15 (10-1-09 Edition) Digital Transmission System ThyssenKrupp Accessibility BV ThyssenKrupp

Model: Call & Park (CP) FCC ID: ZAH-1000915

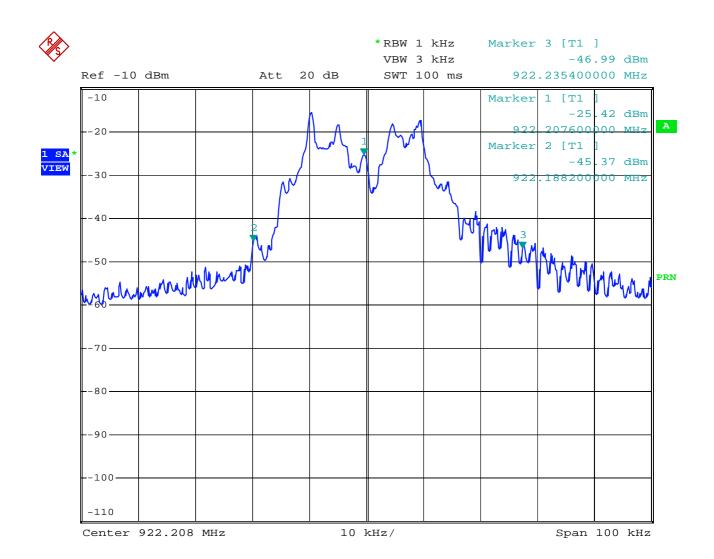

Date: 23.MAR.2011 13:32:58

Plot 3: Occupied 20dB Bandwidth (= 47.2 kHz) of the EUT transmitting at 922.2 MHz

Project number : 10081601.fcc01_ZAH-1000915 Page 15 of 16



Brand mark: ThyssenKrupp
Model: Call & Park (CP)
FCC ID: ZAH-1000915

7 List of utilized test equipment.

Inventory number	Description	Brand	Model	Last cal.	Next cal.
12484	Guide horn antenna	Emco	3115	04/2010	04/2012
12504	Filter 1-4 GHz Passband	BSC	MH1288	NA	NA
12476	Antenna mast	EMCO	TR3	NA	NA
12477	Antenna mast 1-4 mtr	Poelstra	NA	NA	NA
15633	Biconilog Testantenna	Chase	CBL 6111B	02/2010	02/2012
99069	Coax 5m RG213 OATS	NMi Certin B.V.	KABEL 5M OATS	10/2010	10/2011
99070	Coax 15m RG213 OATS	NMi Certin B.V.	KABEL 15M OATS	10/2010	10/2011
99071	Coax OATS ground	NMi Certin B.V.	KABEL GROND OATS	10/2010	10/2011
99107	Controller OATS	Heinrich Deisel	4630-100	NA	NA
99538	Spectrum analyzer	R&S	FSP40	05/2010	05/2011
99547	Temperature-Humiditymeter	Europe supplies	WS-7082	10/2010	10/2011
99580	OATS	Comtest	FCC listed: 90828	08/2008	08/2011
99608	Controller (OATS)	EMCS	DOC202	NA	NA
99609	Antenna mast	EMCS	AP-4702C	NA	NA
99613	Temperature-Humiditymeter	Europe supplies	WS-7082	10/2010	10/2011
99699	Measuring receiver	R&S	ESCI	02/2011	02/2012

NA= Not Applicable

Project number : 10081601.fcc01_ZAH-1000915 Page 16 of 16