

## TEST REPORT

Test report no.: 24-1-0040201T001\_TR1-R02



Deutsche  
Akkreditierungsstelle  
D-PL-12047-01-00

### Testing laboratory

**cetecom advanced GmbH**

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://www.cetecomadvanced.com>

e-mail: [mail@cetecomadvanced.com](mailto:mail@cetecomadvanced.com)

**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS).

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number:

D-PL-12047-01-00.

ISED Testing Laboratory Recognized Listing Number: DE0001

FCC designation number: DE0002

### Applicant

**Husqvarna AB**

Drottninggatan 2

SE - 56182 Huskvarna / SWEDEN

Phone:

Contact: Nihada Poricanin

e-mail: [nihada.poricanin@husqvarnagroup.com](mailto:nihada.poricanin@husqvarnagroup.com)

### Manufacturer

**Husqvarna AB**

Drottninggatan 2

SE - 56182 Huskvarna / SWEDEN

### Test standard/s

FCC - Title 47 of the Code of Federal Regulations      Part 15—Radio Frequency Devices  
§ 15.255 Operation within the band 57-71 GHz

RSS-210      RSS-210 — Licence-Exempt Radio Apparatus: Category J Equipment

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:**      Milimeter wave radar sensor

**Model name:**      Radar Module Type 1

**FCC ID:**      ZASHQ-RAD-1

**IC:**      23307-HQRAD1

**Frequency:**      57 – 61.56 GHz

**Technology tested:**      RADAR

**Antenna:**      Integrated antenna

**Power supply:**      Nominal Voltage 18 V DC

**Temperature range:**      -5°C to 50°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:



Christian Lorenz  
Lab Manager  
Radio Communications

### Test performed:



Al-Amin Hossain  
Lab Manager  
Radio Communications

## 1 Table of contents

|       |                                                                                 |    |
|-------|---------------------------------------------------------------------------------|----|
| 1     | Table of contents.....                                                          | 2  |
| 2     | General information.....                                                        | 4  |
| 2.1   | Notes and disclaimer .....                                                      | 4  |
| 2.2   | Application details .....                                                       | 4  |
| 2.3   | Involved test locations .....                                                   | 5  |
| 2.4   | Test laboratories sub-contracted .....                                          | 5  |
| 2.5   | Laboratory listings and recognitions .....                                      | 5  |
| 3     | Test standard/s, references and accreditations .....                            | 6  |
| 4     | Reporting statements of conformity – decision rule .....                        | 7  |
| 5     | Test environment .....                                                          | 8  |
| 6     | Test item .....                                                                 | 8  |
| 6.1   | General description .....                                                       | 8  |
| 6.2   | Additional information .....                                                    | 9  |
| 7     | Description of the test setup.....                                              | 11 |
| 7.1   | Shielded semi anechoic chamber (f < 30 MHz).....                                | 12 |
|       | Schematic:.....                                                                 | 12 |
|       | Testing method: .....                                                           | 12 |
|       | Formula:.....                                                                   | 13 |
| 7.1.1 | Sample calculation .....                                                        | 13 |
| 7.1.2 | Correction factors due to reduced meas. distance (f < 30 MHz) .....             | 14 |
| 7.1.3 | Measurement Location .....                                                      | 15 |
| 7.1.4 | Limit.....                                                                      | 15 |
| 7.1.5 | Result.....                                                                     | 15 |
| 7.2   | Equipment table: .....                                                          | 15 |
| 7.3   | Radiated field strength emissions 30 MHz – 1000 MHz .....                       | 16 |
| 7.3.1 | Description of the general test setup and methodology, see below example: ..... | 16 |
|       | Schematic:.....                                                                 | 16 |
|       | Testing method: .....                                                           | 16 |
|       | Formula:.....                                                                   | 17 |
| 7.3.2 | Sample calculation .....                                                        | 17 |
| 7.3.3 | Measurement Location .....                                                      | 17 |
| 7.3.4 | Limit.....                                                                      | 17 |
| 7.3.5 | Result.....                                                                     | 17 |
| 7.4   | Shielded fully anechoic chamber (1 GHz – 18 GHz / Chamber: FAC 2) .....         | 19 |
| 7.4.1 | Description of the general test setup and methodology, see below example: ..... | 19 |
|       | Schematic:.....                                                                 | 19 |
|       | Testing method: .....                                                           | 19 |
|       | Formula:.....                                                                   | 20 |
| 7.4.2 | Sample calculation .....                                                        | 20 |
| 7.5   | Radiated measurements > 18 GHz .....                                            | 21 |
| 7.6   | Radiated measurements > 50/67 GHz .....                                         | 21 |
| 8     | Sequence of testing.....                                                        | 23 |
| 8.1   | Sequence of testing radiated spurious 9 kHz to 30 MHz .....                     | 23 |
| 8.2   | Sequence of testing radiated spurious 30 MHz to 1 GHz.....                      | 23 |
| 8.3   | Sequence of testing radiated spurious 1 GHz to 18 GHz .....                     | 23 |
| 8.4   | Sequence of testing radiated spurious above 18 GHz.....                         | 24 |
| 8.5   | Sequence of testing radiated spurious above 50 GHz with external mixers .....   | 25 |

|      |                                                                                        |    |
|------|----------------------------------------------------------------------------------------|----|
| 9    | Measurement uncertainty .....                                                          | 25 |
| 10   | Far field consideration for measurements above 18 GHz .....                            | 26 |
| 11   | Summary of measurement results .....                                                   | 27 |
| 12   | Additional comments .....                                                              | 27 |
| 13   | Basic information of the DUT & selection of applicable rule parts .....                | 28 |
| 14   | Measurement results .....                                                              | 36 |
| 14.1 | Occupied bandwidth & emission bandwidth & frequency stability .....                    | 36 |
| 14.2 | Radiated power (EIRP) .....                                                            | 39 |
| 14.3 | Time domain requirements: Continuous transmitter off-times & transmit duty cycle ..... | 45 |
| 14.4 | Spurious emissions radiated.....                                                       | 48 |
| 15   | Glossary .....                                                                         | 80 |
| 16   | Document history .....                                                                 | 81 |

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.

The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".

cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.

All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

|                                    |            |
|------------------------------------|------------|
| Date of receipt of order:          | 2024-06-10 |
| Date of receipt of test item:      | 2024-06-25 |
| Start of test:*                    | 2024-06-28 |
| End of test:*                      | 2024-10-10 |
| Person(s) present during the test: | -/-        |

\*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

## 2.3 Involved test locations

| <input type="checkbox"/> | Saarbruecken lab                                            |  | <input checked="" type="checkbox"/> | Essen lab                                  |
|--------------------------|-------------------------------------------------------------|--|-------------------------------------|--------------------------------------------|
|                          | Untertuerkheimer Str. 6-10<br>66117 Saarbruecken<br>Germany |  |                                     | Im Teelbruch 116<br>45219 Essen<br>Germany |

## 2.4 Test laboratories sub-contracted

None

## 2.5 Laboratory listings and recognitions

|      | Saarbruecken | Essen        |
|------|--------------|--------------|
| FCC  | DE0002       | DE0003       |
| ISED | DE0001 3462C | DE0001 3462D |

### 3 Test standard/s, references and accreditations

| Test standard              | Date       | Description                                                                                                                         |
|----------------------------|------------|-------------------------------------------------------------------------------------------------------------------------------------|
| FCC - Title 47 CFR Part 15 | 2024-07-11 | FCC - Title 47 of the Code of Federal Regulations; Part 15—Radio Frequency Devices<br>§ 15.255 Operation within the band 57-71 GHz. |
| RSS-210                    | 2024-06-11 | ISED RSS-210 J (Issue 11),<br>RSS-Gen (Issue 5)                                                                                     |


| Guidance                          | Version | Description                                                                                                                                                         |
|-----------------------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ANSI C63.4-2014                   | -/-     | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| ANSI C63.10-2020                  | -/-     | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                                                                      |
| 57-71 GHz (60 GHz) frequency band | V01     | 364244 D01 Meas 15.255 Radars v01: RADAR DEVICES<br>CERTIFYING UNDER THE PROVISIONS OF §15.255                                                                      |

#### 4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong.

measured value, measurement uncertainty, verdict

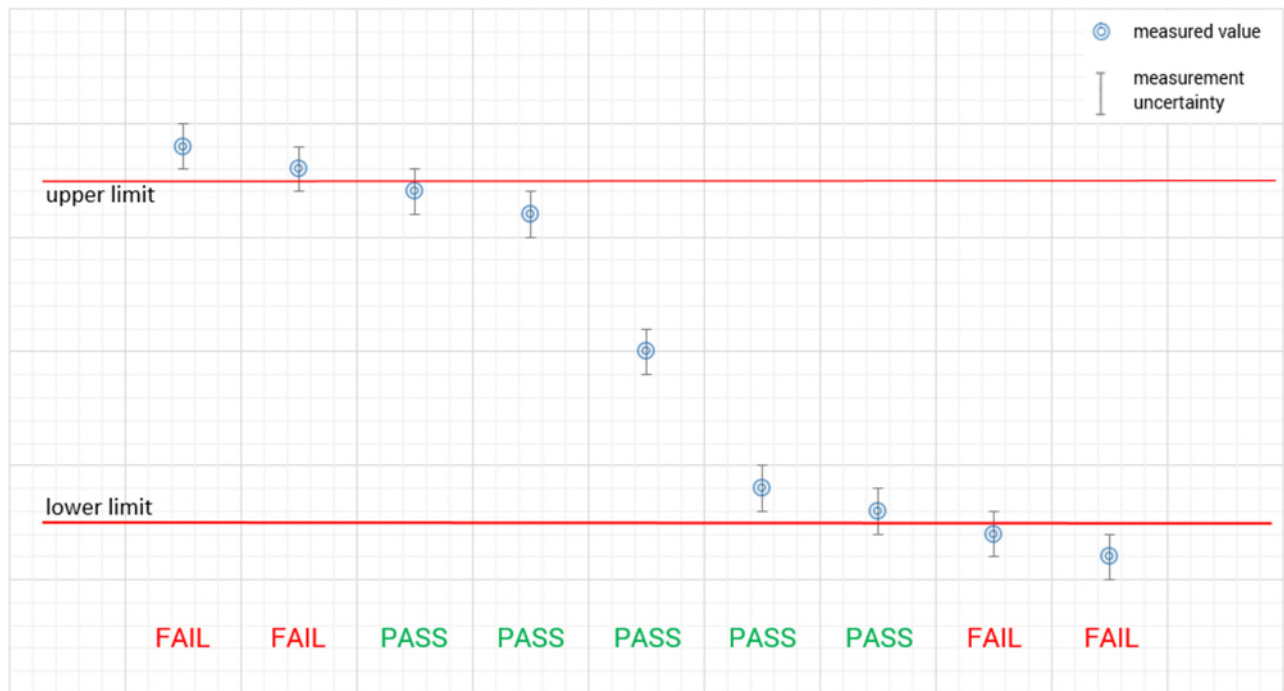

## 5 Test environment

|                             |                                     |                                                                                                                     |
|-----------------------------|-------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Temperature :               | $T_{nom}$<br>$T_{max}$<br>$T_{min}$ | +22 °C during room temperature tests<br>+50 °C during high temperature tests<br>-20 °C during low temperature tests |
| Relative humidity content : |                                     | 55 % - 65 %                                                                                                         |
| Barometric pressure :       |                                     | 990 hPa to 1010 hPa                                                                                                 |
| Power supply :              | $V_{nom}$<br>$V_{max}$<br>$V_{min}$ | 18 V DC<br>20.7 V DC (+15% of Nominal Voltage)<br>15.3 V DC (-15% of Nominal Voltage)                               |

## 6 Test item

### 6.1 General description

|                                                             |                                                                                                                                                                 |                              |                                      |
|-------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|--------------------------------------|
| Kind of test item :                                         | Milimeter wave radar sensor                                                                                                                                     |                              |                                      |
| Model name :                                                | Radar Module Type 1                                                                                                                                             |                              |                                      |
| HMN :                                                       | --                                                                                                                                                              |                              |                                      |
| PMN :                                                       | Radar Module Type 1                                                                                                                                             |                              |                                      |
| HVIN :                                                      | 531262402                                                                                                                                                       |                              |                                      |
| FVIN :                                                      | 52.1_Radar-App_24.66                                                                                                                                            |                              |                                      |
| S/N serial number :                                         | --                                                                                                                                                              |                              |                                      |
| Hardware status :                                           | 531262402                                                                                                                                                       |                              |                                      |
| Software status :                                           | 52.100_Radar-Boot, 52.1_Radar-App_24.66                                                                                                                         |                              |                                      |
| Firmware status :                                           | --                                                                                                                                                              |                              |                                      |
| Frequency band :                                            | 57 – 60.726 GHz                                                                                                                                                 |                              |                                      |
| Type of radio transmission :<br>Use of frequency spectrum : | 1) 100 millisecond frame repetition time<br>2) 257 microsecond chirp repetition time<br>3) 64 chirps per frame<br>4) TotalBurstTime 16.448 milliseconds on time |                              |                                      |
| Type of modulation :                                        | FMCW                                                                                                                                                            |                              |                                      |
| Number of channels :                                        | 3 Tx and 4 Rx antennas (Three transmit channels and Four receive channels)                                                                                      |                              |                                      |
| Antenna :                                                   | Integrated antenna                                                                                                                                              |                              |                                      |
| Power supply :                                              | Nominal Voltage 18 V                                                                                                                                            |                              |                                      |
|                                                             |                                                                                                                                                                 | Description                  | Lower test limit    Upper test limit |
|                                                             | Vin+                                                                                                                                                            | Voltage from battery         | 16.0V                      58.8V     |
|                                                             | 5V                                                                                                                                                              | Internal and external supply | 4.75V                      5.25V     |
| Temperature range :                                         | -5°C to 50°C                                                                                                                                                    |                              |                                      |

Note: For more information regarding EUT general information, see document

"SYS\_FCC\_§15.255(afterUpdate2023-08-23)\_Questionnaire (required from customer)\_2024-11-19\_V3"



## 6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

- 24-1-0040201T001\_TR1-A101-R01 (External photographs of EUT)
- 24-1-0040201T001\_TR1-A102-R01 (Internal photographs of EUT)
- 24-1-0040201T001\_TR1-A103-R01 (Test set-up photographs)
- Note: The referenced photos show EUT delivered by the customer in this project, not necessarily the exact one used for the specific tests. EUT identification shown in the photos may differ.

Additional measurement reports:

- 24-1-0040201T001\_TR1-A201-R1

Additional declarations (manufacturer's declarations, declarations of conformity, etc.):

None

## EUT Information:

| EUT No. | EUT Sample No. | Product Type                | Model Name          | HW           | SW                                      |
|---------|----------------|-----------------------------|---------------------|--------------|-----------------------------------------|
| 1       | S06_C01        | Milimeter wave radar sensor | Radar Module Type 1 | 531 26 24-01 | 52.100_Radar-Boot, 52.1_Radar-App_24.66 |
| 2       | S08_C02        | Milimeter wave radar sensor | Radar Module Type 1 | 531262402    | 52.100_Radar-Boot, 52.1_Radar-App_24.66 |
| 3       | S10_C02        | Milimeter wave radar sensor | Radar Module Type 1 | 531262402    | 52.100_Radar-Boot, 52.1_Radar-App_24.66 |

## EUT Setup Information:

| Setup | Description     | Following measurements have performed with different setups                                                                                  |
|-------|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| 1     | EUT 1 + Harness | <ul style="list-style-type: none"> <li>➤ Cycle Time = 100 ms</li> <li>➤ 99% OBW+20 dB OBW</li> <li>➤ 9 kHz - 1 GHz</li> </ul>                |
| 2     | EUT 2 + Harness | <ul style="list-style-type: none"> <li>➤ Cycle Time = 100 ms</li> <li>➤ Peak EIRP</li> <li>➤ 18 - 50 GHz</li> <li>➤ 110 - 200 GHz</li> </ul> |
| 3     | EUT 3 + Harness | <ul style="list-style-type: none"> <li>➤ Cycle Time = 100 ms</li> <li>➤ 1 - 18 GHz</li> <li>➤ 50 - 110 GHz</li> </ul>                        |

Note: Once the EUT is power on, it goes directly in operation. No additional Laptop / Tools are required.

## 7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

### **Agenda:** Kind of Calibration


|        |                                            |  |     |                                                      |
|--------|--------------------------------------------|--|-----|------------------------------------------------------|
| k/cal  | calibration / calibrated                   |  | EK  | limited calibration                                  |
| Ne/cnn | not required (k, ev, izw, zw not required) |  | zw  | cyclical maintenance (external cyclical maintenance) |
| Ev/chk | periodic self verification                 |  | izw | internal cyclical maintenance                        |
| Ve     | long-term stability recognized             |  | g   | blocked for accredited testing                       |
| vlkl!  | Attention: extended calibration interval   |  |     |                                                      |
| NK!    | Attention: not calibrated                  |  | *)  | next calibration ordered / currently in progress     |
| cpu    | check prior usage                          |  |     |                                                      |

## 7.1 Shielded semi anechoic chamber ( $f < 30$ MHz)

Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter 9.2.1. The tests are performed in the semi anechoic room recognized by the regulatory commission.

### Schematic:

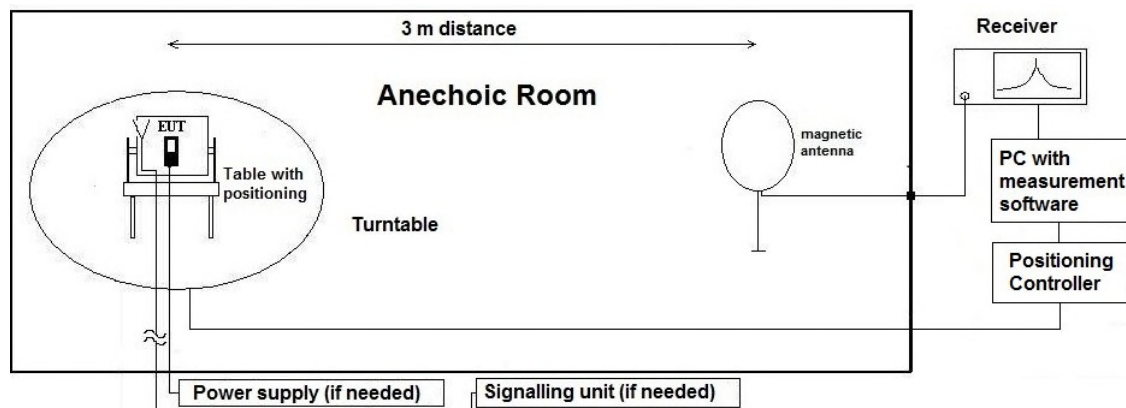

### Testing method:

The measurement is made according to relevant reference clauses:  
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

#### Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded.

The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

#### Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

C<sub>L</sub> = Cable lossD<sub>F</sub> = Distance correction factor (if used)E<sub>C</sub> = Electrical field – corrected valueE<sub>R</sub> = Receiver readingG<sub>A</sub> = Gain of pre-amplifier (if used)L<sub>T</sub> = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

**7.1.1 Sample calculation**

| Raw-Value<br>[dBuV/m] | Antenna<br>factor | Distance<br>Correction<br>[dB] | Cable<br>Loss | Preamplifier | Resulting<br>correction<br>value<br>[dB] | Final result<br>[dBuV/m] | Remarks                                                       |
|-----------------------|-------------------|--------------------------------|---------------|--------------|------------------------------------------|--------------------------|---------------------------------------------------------------|
| 19.83                 | 18.9              | -70.75                         | 0.18          | --           | -51.67                                   | -31.83                   | 30 to 3 m<br>correction used<br>according<br>ANSI C63.10-2020 |

Remark: This calculation is based on an example value at 458 kHz

### 7.1.2 Correction factors due to reduced meas. distance ( $f < 30$ MHz)

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according Extrapolation formulas valid for EUT's with maximum dimension of  $0.625 \times \text{Lambda}$ . Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors

| Frequency Range | f [kHz/MHz] | Lambda [m] | Far-Field Point [m] | Distance Limit accord. 15.209 [m] | 1st Condition ( $d_{\text{meas}} < D_{\text{near-field}}$ ) | 2nd Condition (Limit distance bigger $d_{\text{near}}$ -field) | Distance Correction accord. Formula |
|-----------------|-------------|------------|---------------------|-----------------------------------|-------------------------------------------------------------|----------------------------------------------------------------|-------------------------------------|
| kHz             | 9           | 33333.33   | 5305.17             | 300                               | fullfilled                                                  | not fullfilled                                                 | -80.00                              |
|                 | 10          | 30000.00   | 4774.65             |                                   | fullfilled                                                  | not fullfilled                                                 | -80.00                              |
|                 | 20          | 15000.00   | 2387.33             |                                   | fullfilled                                                  | not fullfilled                                                 | -80.00                              |
|                 | 30          | 10000.00   | 1591.55             |                                   | fullfilled                                                  | not fullfilled                                                 | -80.00                              |
|                 | 40          | 7500.00    | 1193.66             |                                   | fullfilled                                                  | not fullfilled                                                 | -80.00                              |
|                 | 50          | 6000.00    | 954.93              |                                   | fullfilled                                                  | not fullfilled                                                 | -80.00                              |
|                 | 60          | 5000.00    | 795.78              |                                   | fullfilled                                                  | not fullfilled                                                 | -80.00                              |
|                 | 70          | 4285.71    | 682.09              |                                   | fullfilled                                                  | not fullfilled                                                 | -80.00                              |
|                 | 80          | 3750.00    | 596.83              |                                   | fullfilled                                                  | not fullfilled                                                 | -80.00                              |
|                 | 90          | 3333.33    | 530.52              |                                   | fullfilled                                                  | not fullfilled                                                 | -80.00                              |
|                 | 100         | 3000.00    | 477.47              |                                   | fullfilled                                                  | not fullfilled                                                 | -80.00                              |
|                 | 125         | 2400.00    | 381.97              |                                   | fullfilled                                                  | not fullfilled                                                 | -80.00                              |
|                 | 200         | 1500.00    | 238.73              |                                   | fullfilled                                                  | fullfilled                                                     | -78.02                              |
|                 | 300         | 1000.00    | 159.16              |                                   | fullfilled                                                  | fullfilled                                                     | -74.49                              |
|                 | 400         | 750.00     | 119.37              |                                   | fullfilled                                                  | fullfilled                                                     | -72.00                              |
|                 | 490         | 612.24     | 97.44               |                                   | fullfilled                                                  | fullfilled                                                     | -70.23                              |
|                 | 500         | 600.00     | 95.49               |                                   | fullfilled                                                  | not fullfilled                                                 | -40.00                              |
|                 | 600         | 500.00     | 79.58               |                                   | fullfilled                                                  | not fullfilled                                                 | -40.00                              |
|                 | 700         | 428.57     | 68.21               |                                   | fullfilled                                                  | not fullfilled                                                 | -40.00                              |
|                 | 800         | 375.00     | 59.68               |                                   | fullfilled                                                  | not fullfilled                                                 | -40.00                              |
|                 | 900         | 333.33     | 53.05               |                                   | fullfilled                                                  | not fullfilled                                                 | -40.00                              |
| MHz             | 1.00        | 300.00     | 47.75               | 30                                | fullfilled                                                  | not fullfilled                                                 | -40.00                              |
|                 | 1.59        | 188.50     | 30.00               |                                   | fullfilled                                                  | not fullfilled                                                 | -40.00                              |
|                 | 2.00        | 150.00     | 23.87               |                                   | fullfilled                                                  | fullfilled                                                     | -38.02                              |
|                 | 3.00        | 100.00     | 15.92               |                                   | fullfilled                                                  | fullfilled                                                     | -34.49                              |
|                 | 4.00        | 75.00      | 11.94               |                                   | fullfilled                                                  | fullfilled                                                     | -32.00                              |
|                 | 5.00        | 60.00      | 9.55                |                                   | fullfilled                                                  | fullfilled                                                     | -30.06                              |
|                 | 6.00        | 50.00      | 7.96                |                                   | fullfilled                                                  | fullfilled                                                     | -28.47                              |
|                 | 7.00        | 42.86      | 6.82                |                                   | fullfilled                                                  | fullfilled                                                     | -27.13                              |
|                 | 8.00        | 37.50      | 5.97                |                                   | fullfilled                                                  | fullfilled                                                     | -25.97                              |
|                 | 9.00        | 33.33      | 5.31                |                                   | fullfilled                                                  | fullfilled                                                     | -24.95                              |
|                 | 10.00       | 30.00      | 4.77                |                                   | fullfilled                                                  | fullfilled                                                     | -24.04                              |
|                 | 10.60       | 28.30      | 4.50                |                                   | fullfilled                                                  | fullfilled                                                     | -23.53                              |
|                 | 11.00       | 27.27      | 4.34                |                                   | fullfilled                                                  | fullfilled                                                     | -23.21                              |
|                 | 12.00       | 25.00      | 3.98                |                                   | fullfilled                                                  | fullfilled                                                     | -22.45                              |
|                 | 13.56       | 22.12      | 3.52                |                                   | fullfilled                                                  | fullfilled                                                     | -21.39                              |
|                 | 15.00       | 20.00      | 3.18                |                                   | fullfilled                                                  | fullfilled                                                     | -20.51                              |
|                 | 15.92       | 18.85      | 3.00                |                                   | fullfilled                                                  | fullfilled                                                     | -20.00                              |
|                 | 17.00       | 17.65      | 2.81                |                                   | not fullfilled                                              | fullfilled                                                     | -20.00                              |
|                 | 18.00       | 16.67      | 2.65                |                                   | not fullfilled                                              | fullfilled                                                     | -20.00                              |
|                 | 20.00       | 15.00      | 2.39                |                                   | not fullfilled                                              | fullfilled                                                     | -20.00                              |
|                 | 21.00       | 14.29      | 2.27                |                                   | not fullfilled                                              | fullfilled                                                     | -20.00                              |
|                 | 23.00       | 13.04      | 2.08                |                                   | not fullfilled                                              | fullfilled                                                     | -20.00                              |
|                 | 25.00       | 12.00      | 1.91                |                                   | not fullfilled                                              | fullfilled                                                     | -20.00                              |
|                 | 27.00       | 11.11      | 1.77                |                                   | not fullfilled                                              | fullfilled                                                     | -20.00                              |
|                 | 29.00       | 10.34      | 1.65                |                                   | not fullfilled                                              | fullfilled                                                     | -20.00                              |
|                 | 30.00       | 10.00      | 1.59                |                                   | not fullfilled                                              | fullfilled                                                     | -20.00                              |

### 7.1.3 Measurement Location

|           |       |
|-----------|-------|
| Test site | SAC 3 |
|-----------|-------|

### 7.1.4 Limit

| Radiated emissions limits (3 meters) |                           |                                    |              |            |           |
|--------------------------------------|---------------------------|------------------------------------|--------------|------------|-----------|
| Frequency Range [MHz]                | Limit [ $\mu\text{V/m}$ ] | Limit [ $\text{dB}\mu\text{V/m}$ ] | Distance [m] | Detector   | RBW [kHz] |
| 0.009 – 0.09                         | 2400 / f [kHz]            | 67.6 – 20Log(f) (kHz)              | 300          | Pk & Avg   | 0.2       |
| 0.09 – 0.11                          | 2400 / f [kHz]            | 67.6 – 20Log(f) (kHz)              | 300          | Quasi peak | 0.2       |
| 0.11 – 0.15                          | 2400 / f [kHz]            | 67.6 – 20Log(f) (kHz)              | 300          | Pk & Avg   | 0.2       |
| 0.15 – 0.49                          | 2400 / f [kHz]            | 67.6 – 20Log(f) (kHz)              | 300          | Pk & Avg   | 9         |
| 0.49 – 1.705                         | 24000 / f [kHz]           | 87.6 – 20Log(f) (kHz)              | 30           | Quasi peak | 9         |
| 1.705 - 30                           | 30                        | 29.5                               | 30           | Quasi peak | 9         |

\*Remark: In Canada same limits apply, just unit reference is different

### 7.1.5 Result

Note: For more information Check Chapter 12.5

## 7.2 Equipment table:


| No. | Lab / Item | Equipment                | Type                           | Manufacturer                                   | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|--------------------------|--------------------------------|------------------------------------------------|------------|----------|---------------------|------------------|------------------|
| 1   | 20341      | Digital Multimeter       | Digital Multimeter Fluke 112   | Fluke Deutschland GmbH / Glottertal            | 81650455   | –        | cal                 | 13.05.2024       | 13.05.2026       |
| 2   | 20482      | Filter Matrix            | Filter Matrix SAC3             | cetecom advanced GmbH / Essen                  | without    | –        | cnn                 | -/-              | -/-              |
| 3   | 20574      | Biconilog Hybrid Antenna | Biconilog Hybrid Antenna BTA-L | Frankonia GmbH / Heideck                       | 980026L    | –        | cal                 | 15.06.2022       | 15.06.2025       |
| 4   | 20620      | EMI Test Receiver        | EMI Test Receiver ESU26        | Rohde & Schwarz Messgerätebau GmbH / Memmingen | 100362     | –        | cal                 | 15.05.2024       | 15.05.2025       |
| 5   | 20885      | Power Supply EA3632A     | Power Supply EA3632A           | Agilent Technologies Deutschland GmbH          | 75305850   | –        | cnn                 | -/-              | -/-              |
| 6   | 25038      | Loop Antenna             | Loop Antenna HFH2-Z2           | Rohde & Schwarz Messgerätebau GmbH / Memmingen | 879824/13  | –        | cal                 | 04.07.2022       | 04.07.2025       |

### 7.3 Radiated field strength emissions 30 MHz – 1000 MHz

#### 7.3.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant Semi anechoic Chamber (SAC) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 1 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz.

#### Schematic:

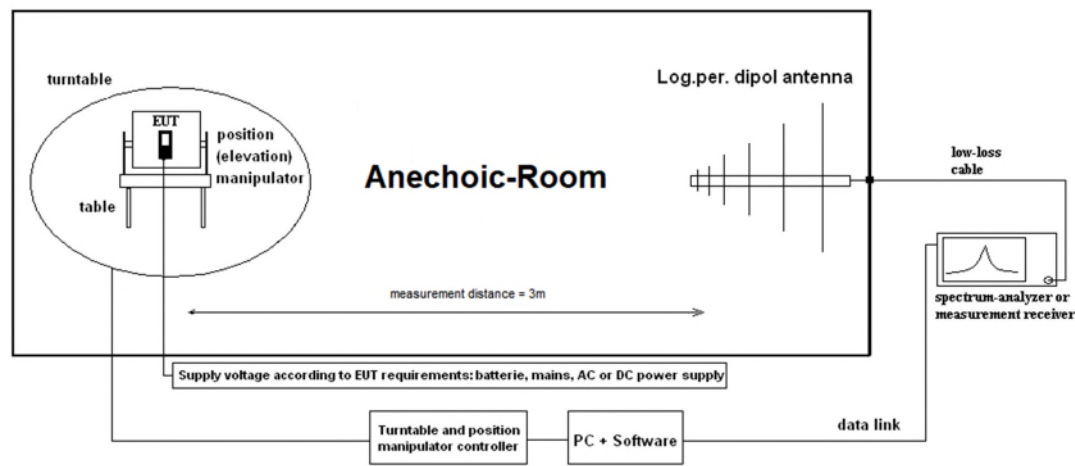

#### Testing method:

The measurement is made according to relevant reference clauses:  
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

##### Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 90°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and it's characteristics was recorded with an EMI-receiver, broadband antenna and software.

Measurement antenna: horizontal and vertical, heights: 1,0 m and 1,82 m as worst-case determined by an exploratory emission measurements. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

##### Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc. either on 10m OATS or 3m semi-anechoic room.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height between 1 m and 4 m.



On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

AF = Antenna factor

C<sub>L</sub> = Cable lossD<sub>F</sub> = Distance correction factor (if used)E<sub>C</sub> = Electrical field – corrected valueE<sub>R</sub> = Receiver readingG<sub>A</sub> = Gain of pre-amplifier (if used)L<sub>T</sub> = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

**7.3.2 Sample calculation**

| Raw-Value<br>[dBuV/m] | Antenna factor | Distance Correction<br>[dB] | Cable Loss | Preamplifier | Resulting correction value<br>[dB] | Final result<br>[dBuV/m] | Remarks |
|-----------------------|----------------|-----------------------------|------------|--------------|------------------------------------|--------------------------|---------|
| 32.7                  | 22.25          | --                          | 3.1        | --           | 25.35                              | 58.05                    | --      |

Remark: This calculation is based on an example value at 800.4 MHz

**7.3.3 Measurement Location**

|           |       |
|-----------|-------|
| Test site | SAC 3 |
|-----------|-------|

**7.3.4 Limit**

| Radiated emissions limits (3 meters) |                 |                   |            |                    |
|--------------------------------------|-----------------|-------------------|------------|--------------------|
| Frequency Range<br>[MHz]             | Limit<br>[μV/m] | Limit<br>[dBμV/m] | Detector   | RBW / VBW<br>[kHz] |
| 30 - 88                              | 100             | 40.0              | Quasi peak | 100 / 300          |
| 88 - 216                             | 150             | 43.5              | Quasi peak | 100 / 300          |
| 216 - 960                            | 200             | 46.0              | Quasi peak | 100 / 300          |
| 960 - 1000                           | 500             | 54.0              | Quasi peak | 100 / 300          |

**7.3.5 Result**

Note: For more information Check Chapter 12.5

**Equipment table:**


| No. | Lab / Item | Equipment                   | Type                              | Manufacturer                                            | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|-----------------------------|-----------------------------------|---------------------------------------------------------|------------|----------|---------------------|------------------|------------------|
| 1   | 20341      | Digital Multimeter          | Digital Multimeter<br>Fluke 112   | Fluke Deutschland<br>GmbH / Glottertal                  | 81650455   |          | cal                 | 13.05.2024       | 13.05.2026       |
| 2   | 20482      | Filter Matrix               | Filter Matrix SAC3                | cetecom advanced<br>GmbH / Essen                        | without    |          | cnn                 | -/-              | -/-              |
| 3   | 20574      | Biconilog Hybrid<br>Antenna | Biconilog Hybrid<br>Antenna BTA-L | Frankonia GmbH /<br>Heideck                             | 980026L    |          | cal                 | 15.06.2022       | 15.06.2025       |
| 4   | 20620      | EMI Test Receiver           | EMI Test Receiver<br>ESU26        | Rohde & Schwarz<br>Messgerätebau<br>GmbH /<br>Memmingen | 100362     |          | cal                 | 15.05.2024       | 15.05.2025       |
| 5   | 20885      | Power Supply<br>EA3632A     | Power Supply<br>EA3632A           | Agilent<br>Technologies<br>Deutschland GmbH             | 75305850   |          | cnn                 | -/-              | -/-              |
| 6   | 20979      | Loop Antenna                | Loop Antenna HFH2-<br>Z2          | Rohde & Schwarz<br>Messgerätebau<br>GmbH /<br>Memmingen | 872096/61  |          | cal                 | 16.09.2024       | 16.09.2027       |

## 7.4 Shielded fully anechoic chamber (1 GHz – 18 GHz / Chamber: FAC 2)

### 7.4.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 18-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 12.4 GHz and 2 meter up to 18 GHz. Horn antennas are used for frequency range 1 GHz to 65 GHz.

#### Schematic:

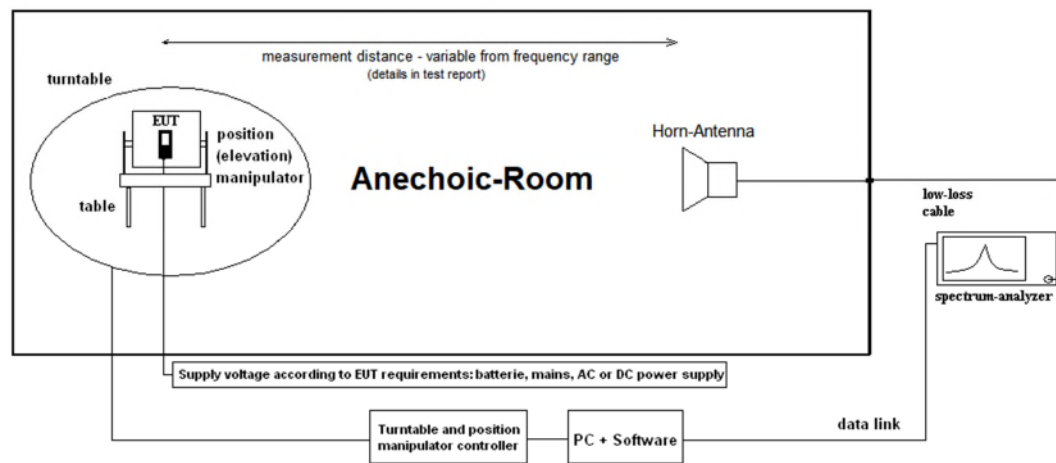

#### Testing method:

The measurement is made according to relevant reference clauses:  
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

##### Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.55 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 15°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

##### Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions or three axis scan for portable/small equipment.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$P_{EIRP} = P_{MEAS} + C_L + FSL - G_A \quad (1)$$

$P_{MEAS}$  = measured power at instrument

M = Margin

$L_T$  = Limit

FSL = Free Space loss = Function(frequency, measurement distance)

$$M = L_T - P_{EIRP}$$

$C_L$  = cable loss

$G_A$  = Gain of pre-amplifier (if used)

All units are dB-units, positive margin means value is below limit.

**7.4.2 Sample calculation**

| Raw-Value<br>[dBuV/m] | Antenna<br>factor | Distance<br>Correction<br>[dB] | Cable Loss<br>+<br>Preamplifier | Resulting<br>correction<br>value<br>[dB] | Final<br>result<br>[dBuV/m] | Remarks                                                           |
|-----------------------|-------------------|--------------------------------|---------------------------------|------------------------------------------|-----------------------------|-------------------------------------------------------------------|
| 29.37                 | 41.20             | --                             | 24.28                           | 16.92                                    | 46.3                        | CableLoss<br>and PreAmp<br>data in one<br>data<br>correction file |


Remark: This calculation is based on an example value at 10 GHz

**Equipment table:**


| No. | Lab /<br>Item | Equipment                                   | Type                                                        | Manufacturer                                            | Serial No.  | INV. No.  | Kind of<br>Calibration | Last<br>Calibration | Next<br>Calibration |
|-----|---------------|---------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------|-------------|-----------|------------------------|---------------------|---------------------|
| 1   | 20133         | Double-Ridged<br>Waveguide Horn<br>Antenna  | Double-Ridged<br>Waveguide Horn<br>Antenna 3115 (Meas<br>1) | EMCO Elektronik<br>GmbH / Gilching                      | 9012-3629   | --        | cal                    | 22.05.2023          | 22.05.2026          |
| 2   | 20354         | DC - Power Supply<br>40A                    | DC - Power Supply<br>40A NGPE 40/40                         |                                                         | 448         | --        | cpu                    | 05.03.2008          | -/-                 |
| 3   | 20412         | Fully Anechoic<br>Chamber                   | Fully Anechoic<br>Chamber 2                                 | ETS-Lindgren GmbH<br>/ Taufkirchen                      | without     | --        | chk                    | 15.03.2024          | 15.03.2025          |
| 4   | 20972         | Signal- and<br>Spectrum Analyzer            | Signal- and<br>Spectrum Analyzer<br>FSW50                   | Rohde & Schwarz<br>Messgerätebau<br>GmbH /<br>Memmingen | 101929      | --        | cal                    | 05.01.2024          | 05.01.2025          |
| 5   | 20811         | Horn Antenna                                | Horn Antenna ASY-<br>SGH-124-SMA                            | Antenna Systems<br>Solutions S.L /<br>Santander         | 29F14182337 | --        | cal                    | 20.10.2021          | 08.10.2027          |
| 6   | 20816         | SGH Antenna                                 | SGH Antenna SGH-<br>26-WR10                                 | Antenal S.L.                                            | 1144        | --        | cnn                    | -/-                 | -/-                 |
| 7   | 20817         | Waveguide<br>Rectangular Horn<br>Antenna    | Waveguide<br>Rectangular Horn<br>Antenna SAR-2309-<br>22-S2 | ERAVANT /<br>Torrance                                   | 13254-01    | --        | chk                    | 20.10.2023          | 16.10.2026          |
| 8   | 20836         | Amplifier                                   | 1-18 GHz Amplifier                                          | Wright<br>Technologies, Inc.,<br>Inc. / Roseville       | 0001        | --        | chk                    | -/-                 | -/-                 |
| 9   | 20912         | Low noise Amplifier<br>Module 0.5-4GHz      | Low noise Amplifier<br>Module 0.5-4GHz                      | RF-Lambda Europe<br>GmbH /<br>Rüsselsheim               | 19041200083 | --        | cpu                    | -/-                 | -/-                 |
| 10  | 20913         | Phase Amplitude<br>Stable Cable<br>Assembly | Phase Amplitude<br>Stable Cable<br>Assembly DC-40GHz        | RF-Lambda Europe<br>GmbH                                | AC19040001  | --        | cnn                    | -/-                 | -/-                 |
| 11  | 25457         | DRG Horn Antenna                            | DRG Horn Antenna<br>SAS-574                                 | A.H. Systems, Inc. /<br>Chatsworth                      | 383         | P/N: 2581 | cal                    | 28.03.2022          | 28.03.2025          |

<sup>2</sup>calibration made according DAkkS requirements (formerly DKD calibration).

## 7.5 Radiated measurements > 18 GHz

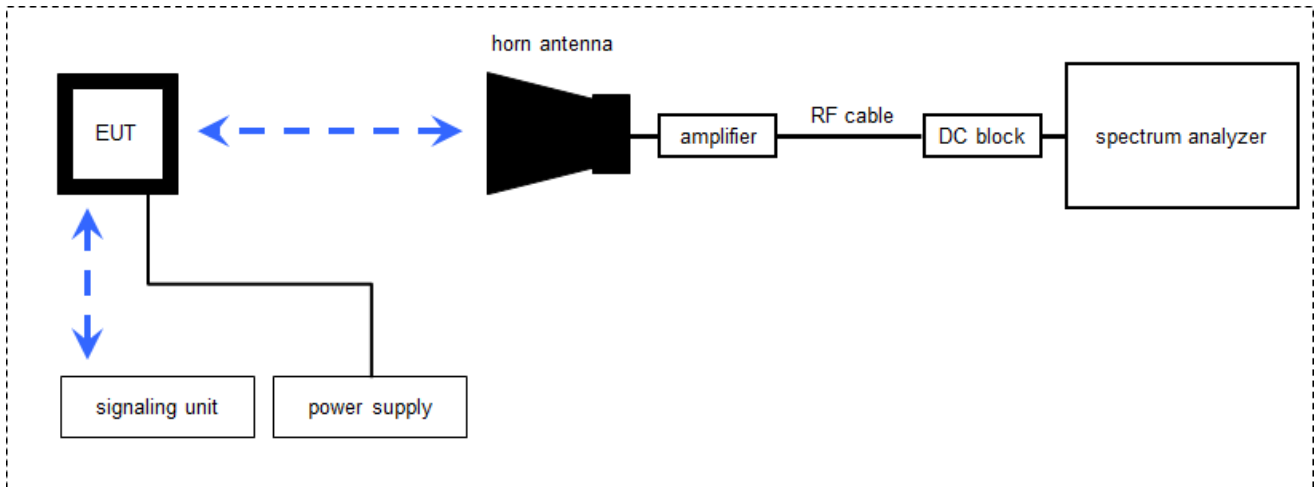

## 7.6 Radiated measurements > 50/67 GHz

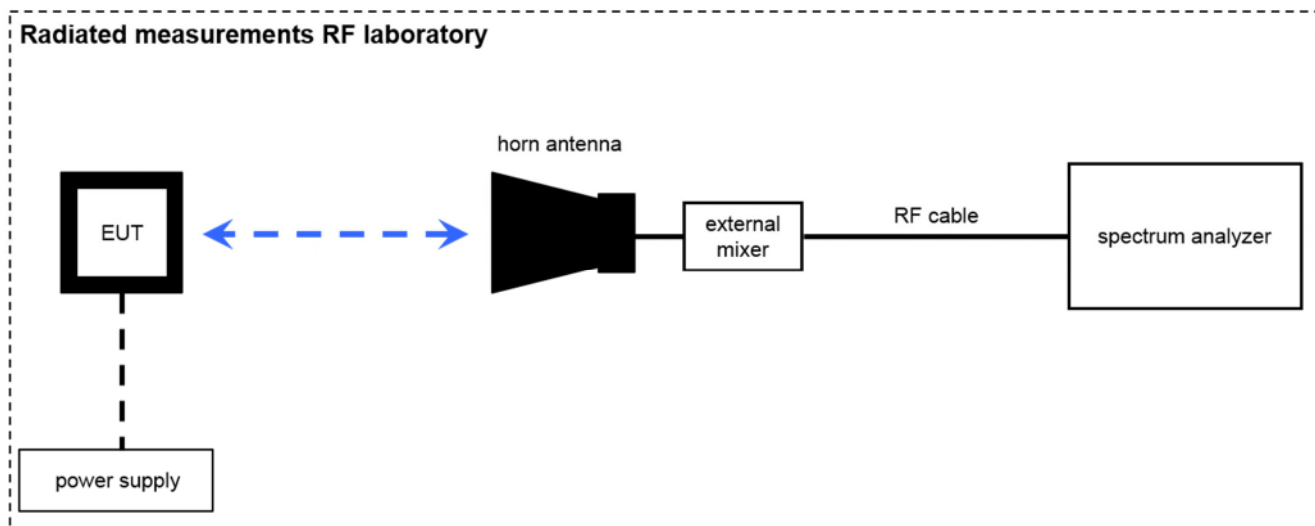

Measurement distance: horn antenna e.g. 75 cm

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-60.1) \text{ [dB]} + 36.74 \text{ [dB/m]} = 16.64 \text{ [dB}\mu\text{V/m]} \text{ (6.79 } \mu\text{V/m)}$$

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)

Example calculation:

$$OP \text{ [dBm]} = -59.0 \text{ [dBm]} + 44.0 \text{ [dB]} - 20.0 \text{ [dBi]} + 5.0 \text{ [dB]} = -30 \text{ [dBm]} \text{ (1 } \mu\text{W)}$$

Note: conversion loss of mixer is already included in analyzer value.

**Equipment table:**

| No. | Lab / Item | Equipment                             | Type                                               | Manufacturer                                   | Serial No.  | INV. No.  | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|---------------------------------------|----------------------------------------------------|------------------------------------------------|-------------|-----------|---------------------|------------------|------------------|
| 1   | 20133      | Double-Ridged Waveguide Horn Antenna  | Double-Ridged Waveguide Horn Antenna 3115 (Meas 1) | EMCO Elektronik GmbH / Gilching                | 9012-3629   |           | cal                 | 22.05.2023       | 22.05.2026       |
| 2   | 20354      | DC - Power Supply 40A                 | DC - Power Supply 40A NGPE 40/40                   |                                                | 448         |           | cpu                 | 05.03.2008       | -/-              |
| 3   | 20412      | Fully Anechoic Chamber                | Fully Anechoic Chamber 2                           | ETS-Lindgren GmbH / Taufkirchen                | without     |           | chk                 | 15.03.2024       | 15.03.2025       |
| 4   | 20729      | Harmonic Mixer                        | FS-Z140                                            | Rohde & Schwarz Messgerätebau GmbH / Memmingen | 101004      |           | cal                 | 16.06.2023       | 16.06.2026       |
| 5   | 20730      | Harmonic Mixer                        | FS-Z110                                            | Rohde & Schwarz Messgerätebau GmbH / Memmingen | 101468      |           | cal                 | 02.06.2023       | 02.06.2026       |
| 6   | 20731      | Harmonic Mixer                        | FS-Z75                                             | Rohde & Schwarz Messgerätebau GmbH / Memmingen | 101022      |           | cal                 | 18.05.2022       | 18.05.2025       |
| 7   | 20732      | Signal- and Spectrum Analyzer         | Signal- and Spectrum Analyzer FSW67                | Rohde & Schwarz Messgerätebau GmbH / Memmingen | 104023      |           | cal                 | 30.07.2024       | 30.07.2025       |
| 8   | 20733      | Harmonic Mixer                        | Harmonic Mixer FS-Z220                             | RPG-Radiometer Physics GmbH / Meckenheim       | 101009      |           | cal                 | 24.05.2024       | 24.05.2027       |
| 9   | 20734      | Harmonic Mixer                        | Harmonic Mixer FS-Z325                             | RPG-Radiometer Physics GmbH / Meckenheim       | 101005      |           | cal                 | 24.05.2024       | 24.05.2027       |
| 10  | 20765      | Pickett-Potter Horn Antenna           | Pickett-Potter Horn Antenna FH-PP 40-60            | RPG-Radiometer Physics GmbH / Meckenheim       | 010001      |           | chk                 | 20.10.2023       | 16.10.2026       |
| 11  | 20767      | Pickett-Potter Horn Antenna           | Pickett-Potter Horn Antenna FH-PP 140-220          | RPG-Radiometer Physics GmbH / Meckenheim       | 010011      |           | chk                 | 20.10.2023       | 09.10.2026       |
| 12  | 20811      | Horn Antenna                          | Horn Antenna ASY-SGH-124-SMA                       | Antenna Systems Solutions S.L. / Santander     | 29F14182337 |           | cal                 | 20.10.2021       | 08.10.2027       |
| 13  | 20813      | Pickett-Potter Horn Antenna           | Pickett-Potter Horn Antenna FH-PP 075              | RPG-Radiometer Physics GmbH / Meckenheim       | 10006       |           | chk                 | 20.10.2023       | 16.10.2026       |
| 14  | 20814      | Pickett-Potter Horn Antenna           | Pickett-Potter Horn Antenna FH-PP 140              | RPG-Radiometer Physics GmbH / Meckenheim       | 10008       |           | chk                 | 20.10.2023       | 09.10.2026       |
| 15  | 20815      | Pickett-Potter Horn Antenna           | Pickett-Potter Horn Antenna FH-PP 110              | RPG-Radiometer Physics GmbH / Meckenheim       | 10014       |           | chk                 | 20.10.2023       | 22.03.2026       |
| 16  | 20817      | Waveguide Rectangular Horn Antenna    | Waveguide Rectangular Horn Antenna SAR-2309-22-S2  | ERAVANT / Torrance                             | 13254-01    |           | chk                 | 20.10.2023       | 16.10.2026       |
| 17  | 20836      | Amplifier                             | 1-18 GHz Amplifier                                 | Wright Technologies, Inc., Inc. / Roseville    | 0001        |           | chk                 | -/-              | -/-              |
| 18  | 20912      | Low noise Amplifier Module 0.5-4GHz   | Low noise Amplifier Module 0.5-4GHz                | RF-Lambda Europe GmbH / Rüsselsheim            | 19041200083 |           | cpu                 | -/-              | -/-              |
| 19  | 20913      | Phase Amplitude Stable Cable Assembly | Phase Amplitude Stable Cable Assembly DC-40GHz     | RF-Lambda Europe GmbH                          | AC19040001  |           | cnn                 | -/-              | -/-              |
| 20  | 25457      | DRG Horn Antenna                      | DRG Horn Antenna SAS-574                           | A.H. Systems, Inc. / Chatsworth                | 383         | P/N: 2581 | cal                 | 28.03.2022       | 28.03.2025       |

<sup>2</sup>calibration made according DAkkS requirements (formerly DKD calibration).

## **8 Sequence of testing**

### **8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz**

#### **Setup**

Note: Check Chapter 7.1

#### **Premeasurement\***

Note: Check Chapter 7.1

#### **Final measurement**

Note: Check Chapter 7.1

### **8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz**

#### **Setup**

Note: Check Chapter 7.2

#### **Premeasurement**

Note: Check Chapter 7.2

#### **Final measurement**

Note: Check Chapter 7.2

### **8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz**

#### **Setup**

Note: Check Chapter 7.3

#### **Premeasurement**

Note: Check Chapter 7.3

#### **Final measurement**

Note: Check Chapter 7.3

## 8.4 Sequence of testing radiated spurious above 18 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

### Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

### Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.



## 8.5 Sequence of testing radiated spurious above 50 GHz with external mixers

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is specified in chapter 10.
- The EUT is set into operation.

### Premeasurement

- The test antenna with external mixer is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.
- Caution is taken to reduce the possible overloading of the external mixer.

### Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- As external mixers may generate false images care is taken to ensure that any emission measured by the spectrum analyzer does indeed originate in the EUT. Signal identification feature of spectrum analyzer is used to eliminate false mixer images (i.e., it is not the fundamental emission or a harmonic falling precisely at the measured frequency).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

## 9 Measurement uncertainty

| Test case                                                          | Uncertainty                                               |
|--------------------------------------------------------------------|-----------------------------------------------------------|
| Equivalent isotropically radiated power (e.i.r.p.)                 | Conducted value $\pm 1$ dB<br>Radiated value $\pm 3.5$ dB |
| Permitted range of operating frequencies                           | $\pm 100$ kHz                                             |
| Conducted unwanted emissions in the spurious domain (up to 18 GHz) | $\pm 1$ dB                                                |
| Radiated unwanted emissions in the spurious domain (up to 18 GHz)  | $\pm 3.5$ dB                                              |
| Conducted unwanted emissions in the spurious domain (18 to 40 GHz) | $\pm 4$ dB                                                |
| Radiated unwanted emissions in the spurious domain (18 to 40 GHz)  | $\pm 4$ dB                                                |
| Conducted unwanted emissions in the spurious domain (40 to 50 GHz) | $\pm 4.5$ dB                                              |
| Radiated unwanted emissions in the spurious domain (40 to 50 GHz)  | $\pm 4.5$ dB                                              |
| Conducted unwanted emissions in the spurious domain (above 50 GHz) | $\pm 5$ dB                                                |
| Radiated unwanted emissions in the spurious domain (above 50 GHz)  | $\pm 5$ dB                                                |
| DC and low frequency voltages                                      | $\pm 3$ %                                                 |
| Temperature                                                        | $\pm 1$ °C                                                |
| Humidity                                                           | $\pm 3$ %                                                 |

## 10 Far field consideration for measurements above 18 GHz

### Far field distance calculation:

$$D_{ff} = 2 \times D^2 / \lambda$$

with

$D_{ff}$  Far field distance

$D$  Antenna dimension

$\lambda$  wavelength

### Spurious emission measurements:

| Antenna frequency range in GHz | Highest measured frequency in GHz | D in m   | $\lambda$ in m | $D_{ff}$ in m |
|--------------------------------|-----------------------------------|----------|----------------|---------------|
| 18 – 40                        | 40                                | 0.0450   | 0.00749481     | 0.54          |
| 40-55                          | 55                                | 0.0384   | 0.005450772    | 0.54          |
| 55-75                          | 73.5                              | 0.03072  | 0.004078810    | 0.46          |
| 55-75                          | 74.5                              | 0.03072  | 0.004024060    | 0.47          |
| 55-75                          | 75                                | 0.03072  | 0.003997233    | 0.47          |
| 75-110                         | 76                                | 0.020757 | 0.003944640    | 0.22          |
| 75-110                         | 78.5                              | 0.020757 | 0.003819010    | 0.23          |
| 75-110                         | 79.5                              | 0.020757 | 0.003770974    | 0.23          |
| 75-110                         | 81                                | 0.020757 | 0.003701141    | 0.23          |
| 75-110                         | 90                                | 0.020757 | 0.003331027    | 0.26          |
| 75-110                         | 98                                | 0.020757 | 0.003059107    | 0.28          |
| 75-110                         | 110                               | 0.020757 | 0.002725386    | 0.32          |
| 90-140                         | 122                               | 0.016696 | 0.002457315    | 0.23          |
| 90-140                         | 130                               | 0.016696 | 0.002306100    | 0.24          |
| 140-220                        | 220                               | 0.010700 | 0.001362693    | 0.17          |
| 220-325                        | 250                               | 0.007050 | 0.001199170    | 0.08          |

### Measurement distance used during measurements:

| Measurement frequency range, [GHz]: | Measurement distance, [m] | Boundary for near/far field, [m] |
|-------------------------------------|---------------------------|----------------------------------|
| 18 - 40                             | 1                         | 0.54                             |
| 40 – 50                             | 1.5                       | 0.49                             |
| 50 – 55                             | 1                         | 0.54                             |
| 55 – 65                             | 1                         | 0.41                             |
| 65 – 75                             | 1                         | 0.47                             |
| 75 – 95                             | 0.5                       | 0.27                             |
| 95 – 110                            | 0.5                       | 0.32                             |
| 110 – 130                           | 1                         | 0.22                             |
| 130 – 140                           | 0.5                       | 0.26                             |
| 140 – 150                           | 0.5                       | 0.11                             |
| 150 – 160                           | 0.5                       | 0.12                             |
| 160 – 170                           | 0.5                       | 0.13                             |
| 170 – 180                           | 0.5                       | 0.14                             |
| 180 – 190                           | 0.5                       | 0.15                             |
| 190 – 200                           | 0.5                       | 0.15                             |

## 11 Summary of measurement results

|                                     |                                                                                                                          |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | <b>No deviations from the technical specifications were ascertained</b>                                                  |
| <input type="checkbox"/>            | There were deviations from the technical specifications ascertained                                                      |
| <input type="checkbox"/>            | This test report is only a partial test report.<br>The content and verdict of the performed test cases are listed below. |

| TC identifier | Description                                                                              | verdict   | date       | Remark |
|---------------|------------------------------------------------------------------------------------------|-----------|------------|--------|
| RF-Testing    | FCC 47 CFR Part 15 (dated 2023-08-23)<br>ISED RSS-210 J (Issue 11),<br>RSS-Gen (Issue 5) | see below | 2025-02-24 | -/-    |

| Test specification clause                                                               | Test case                                              | Temperature conditions | Power supply       | Pass                                | Fail                     | NA                                  | NP                       | Remark   |
|-----------------------------------------------------------------------------------------|--------------------------------------------------------|------------------------|--------------------|-------------------------------------|--------------------------|-------------------------------------|--------------------------|----------|
| 47 CFR<br>15.215(b) & (c),<br>47 CFR 15.255(f)<br><br>RSS-210 J.2 & J.3,<br>RSS-210 J.6 | <b>Occupied bandwidth &amp; Frequency stability</b>    | Nominal<br>Extreme     | Nominal<br>Extreme | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | complies |
| 47 CFR<br>15.255 (C) (2)(ii)<br><br>RSS-210 J.3                                         | <b>Radiated power (EIRP)</b>                           | Nominal                | Nominal            | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | complies |
| 47 CFR<br>15.255 (C) (2)(ii)<br><br>RSS-210 J.3.2                                       | <b>Time domain requirements</b>                        | Nominal                | Nominal            | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | complies |
| 47 CFR 15.255(d)<br><br>RSS-210 J.4                                                     | <b>Spurious emissions radiated</b>                     | Nominal                | Nominal            | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | complies |
| 47 CFR 15.207<br><br>RSS-Gen 8.8                                                        | <b>Conducted emissions &lt; 30 MHz (AC power line)</b> | Nominal                | Nominal            | <input type="checkbox"/>            | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | --       |

**Note:** NA = Not applicable; NP = Not performed

## 12 Additional comments

Special test descriptions: None

Configuration descriptions: None

### 13 Basic information of the DUT & selection of applicable rule parts

#### Basic information of the DUT:

General: see chapter "X Test item"

Operation condition: ☐ Operation on aircraft (47 CFR 15.255(b) / RSS-210 J.2)

☐ Unmanned aircraft (47 CFR 15.255(b)(3)) / Unmanned air vehicles (UAVs) (RSS-210 J.2)

☐ Not unmanned aircraft

☒ No operation on aircraft

Note: Operation under the provisions of this section is not permitted for equipment used on satellites (47 CFR 15.255(a)).

Note: The devices certified under this annex J are not permitted to be used on satellites (RSS-210 J.2).

Kind of DUT: ☐ Devices other than field disturbance sensors and other than fixed point-to-point transmitters located outdoors

☐ Fixed point-to-point transmitters located outdoors

☒ Field disturbance sensors/radars

☐ Pulsed field disturbance sensors/radars

☒ Other than pulsed field disturbance sensors/radars

Frequency band: ☐ Operating within band 59.3 – 71.0 GHz (47 CFR 15.255(b)(2)(iii)) (RSS-210 J.2(b)(iv))

☐ Operating within band 60 – 64 GHz (47 CFR 15.255(b)(3)) (RSS-210 J.2(d)(i))

☐ Operating within band 57 – 71 GHz (47 CFR 15.255(c)(1) / (c)(2)) (RSS-210 J.3.2 / J.3.3)

☐ Operating within band 57.0 – 59.4 GHz (47 CFR 15.255(c)(2)(i)) (RSS-210 J.3.2(b)(i))

☒ Operating within band 57.0 – 61.56 GHz (47 CFR 15.255(c)(2)(ii)) (RSS-210 J.3.2(b)(ii))

☐ Operating within band 57 – 64 GHz (47 CFR 15.255(c)(2)(iii) / (c)(3)) (RSS-210 J.3.2(b)(iii) / J.3.2(c))

☐ Operating within band 61.0 – 61.5 GHz (47 CFR 15.255(c)(2)(v)) (RSS-210 J.3.2(a))

Note: See results in chapter 14.1

**Selection of applicable rule parts:**

Applicable rule parts and limits depend on the basic information of the DUT (see chapter 13).  
The comparison of the basic information of the DUT with the rule parts lead to the following conclusions:

| Rule Part                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Applicable?                         |                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Yes                                 | No                                  |
| <b>47 CFR 15.255:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                     |                                     |
| (a) <b>General:</b> Operation under the provisions of this section is not permitted for equipment used on <b>satellites</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <input checked="" type="checkbox"/> |                                     |
| (b) <b>Operation on aircraft:</b> Operation on aircraft is permitted under the following conditions:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| (1) When the aircraft is on the ground.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (2) While airborne, only in closed exclusive on-board communication networks within the aircraft, with the following exceptions:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (i) Equipment shall not be used in wireless avionics intra-communication (WAIC) applications where external structural sensors or external cameras are mounted on the outside of the aircraft structure.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (ii) Except as permitted in paragraph (b)(3) of this section, equipment shall not be used on aircraft where there is little attenuation of RF signals by the body/fuselage of the aircraft.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (iii) <b>Field disturbance sensor/radar</b> devices may only operate in the frequency band <b>59.3–71.0 GHz</b> while installed in passengers' personal portable electronic equipment (e.g., smartphones, tablets) and shall comply with paragraph (b)(2)(i) of this section, and relevant requirements of paragraphs (c)(2) through (c)(4) of this section.                                                                                                                                                                                                                                                                                                                                                                                        | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (3) <b>Field disturbance sensors/radar</b> devices deployed on <b>unmanned aircraft</b> may operate within the frequency band <b>60–64 GHz</b> , provided that the transmitter not exceed 20 dBm peak EIRP. The sum of continuous transmitter off-times of at least two milliseconds shall equal at least 16.5 milliseconds within any contiguous interval of 33 milliseconds. Operation shall be limited to a maximum of 121.92 meters (400 feet) above ground level.                                                                                                                                                                                                                                                                              | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (c) <b>Radiated power limits:</b> Within the <b>57–71 GHz band</b> , emission levels shall not exceed the following equivalent isotropically radiated power (EIRP):                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <input type="checkbox"/>            |                                     |
| (1) <b>Devices other than field disturbance sensors</b> shall comply with one of the following power limits, as measured during the transmit interval:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (i) The average power of any emission shall not exceed 40 dBm and the peak power of any emission shall not exceed 43 dBm; or                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (ii) For <b>fixed point-to-point transmitters located outdoors</b> , the average power of any emission shall not exceed 82 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi. The peak power of any emission shall not exceed 85 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi.                                                                                                                                                                                                                                                                                                                                                                                   | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (A) The provisions in this paragraph (c) for reducing transmit power based on antenna gain shall not require that the power levels be reduced below the limits specified in paragraph (c)(1)(i) of this section.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (B) The provisions of § 15.204(c)(2) and (4) that permit the use of different antennas of the same type and of equal or less directional gain do not apply to intentional radiator systems operating under this provision. In lieu thereof, intentional radiator systems shall be certified using the specific antenna(s) with which the system will be marketed and operated. Compliance testing shall be performed using the highest gain and the lowest gain antennas for which certification is sought and with the intentional radiator operated at its maximum available output power level. The responsible party, as defined in § 2.909 of this chapter, shall supply a list of acceptable antennas with the application for certification. | <input type="checkbox"/>            | <input type="checkbox"/>            |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                     |                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|--------------------------|
| (2) <b>Field disturbance sensors/radars</b> shall not exceed -10 dBm peak conducted output power and 10 dBm peak EIRP except that field disturbance sensors/radars that limit their operation to all or part of the specified frequency band may operate without being subject to a transmitter conducted output power limit if they operate in compliance with paragraph (b)(3) of this section or with one or more of the provisions below:                                                                                                                                                                                                                                                                                           | <input type="checkbox"/>            | <input type="checkbox"/> |
| (i) <b>57.0–59.4 GHz:</b> the peak EIRP level shall not exceed 20 dBm for <b>indoor operation</b> or 30 dBm for <b>outdoor operation</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <input type="checkbox"/>            | <input type="checkbox"/> |
| (ii) <b>57.0–61.56 GHz:</b> the peak EIRP shall not exceed 3 dBm except that the peak EIRP shall not exceed 20 dBm if the sum of continuous transmitter off-times of at least two milliseconds equals at least 16.5 milliseconds within any contiguous interval of 33 milliseconds;                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| (iii) <b>57.0–64.0 GHz:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <input type="checkbox"/>            | <input type="checkbox"/> |
| (A) The peak EIRP shall not exceed 14 dBm, and the sum of continuous transmitter off-times of at least two milliseconds shall equal at least 25.5 milliseconds within any contiguous interval of 33 milliseconds, except as specific in paragraph (c)(2)(iii)(B) of this section;                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <input type="checkbox"/>            | <input type="checkbox"/> |
| (B) The peak EIRP shall not exceed 20 dBm, and the sum of continuous transmitter off-times of at least two milliseconds shall equal at least 16.5 milliseconds within any contiguous interval of 33 milliseconds when operated outdoors:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <input type="checkbox"/>            | <input type="checkbox"/> |
| (1) As part of a <b>temporary or permanently fixed application</b> ; or                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <input type="checkbox"/>            | <input type="checkbox"/> |
| (2) When being used in <b>vehicular applications to perform specific tasks of moving something or someone, except for in-cabin applications</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <input type="checkbox"/>            | <input type="checkbox"/> |
| (iv) A <b>field disturbance sensor</b> may operate in any of the modes in the above sub-sections so long as the device operates in only one mode at any time and does so for at least 33 milliseconds before switching to another mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <input type="checkbox"/>            | <input type="checkbox"/> |
| (v) <b>61.0–61.5 GHz:</b> For <b>field disturbance sensors/radars</b> that occupy 500 MHz bandwidth or less that are contained wholly <b>within the frequency band 61.0–61.5 GHz</b> , the average power of any emission, measured during the transmit interval, shall not exceed 40 dBm, and the peak power of any emission shall not exceed 43 dBm. In addition, the average power of any emission <b>outside of the 61.0–61.5 GHz band</b> , measured during the transmit interval, but still within the 57–71 GHz band, shall not exceed 10 dBm, and the peak power of any emission shall not exceed 13 dBm.                                                                                                                        | <input type="checkbox"/>            | <input type="checkbox"/> |
| (3) For <b>pulsed field disturbance sensors/radars</b> operating in the 57–64 GHz band that have a maximum pulse duration of 6 ns, the average EIRP shall not exceed 13 dBm and the transmit duty cycle shall not exceed 10% during any 0.3 $\mu$ s time window. In addition, the average integrated EIRP within the frequency band <b>61.5–64.0 GHz</b> shall not exceed 5 dBm in any 0.3 $\mu$ s time window. Peak emissions shall not exceed 20 dB above the maximum permitted average emission limit applicable to the equipment under test. The radar bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna | <input type="checkbox"/>            | <input type="checkbox"/> |
| (4) The provisions in § 15.35(b) and (c) that require emissions to be averaged over a 100 millisecond period and that limits the peak power to 20 dB above the average limit do not apply to devices operating under paragraphs (c)(2) and (3) of this section.                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <input type="checkbox"/>            | <input type="checkbox"/> |
| (d) Limits on spurious emissions:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <input checked="" type="checkbox"/> |                          |
| (1) The power density of any emissions outside the 57–61.56 GHz band shall consist solely of spurious emissions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> |                          |
| (2) Radiated emissions below 40 GHz shall not exceed the general limits in § 15.209.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <input checked="" type="checkbox"/> |                          |
| (3) Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90 pW/cm <sup>2</sup> at a distance of 3 meters.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <input checked="" type="checkbox"/> |                          |
| (4) The levels of the spurious emissions shall not exceed the level of the fundamental emission.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> |                          |
| (e) Limits on transmitter conducted output power.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <input type="checkbox"/>            | <input type="checkbox"/> |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                     |                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|--------------------------|
| (1) Except as specified in paragraph (e)(2) of this section, the peak transmitter conducted output power of <b>devices other than field disturbance sensors/radars</b> shall not exceed 500 mW. Depending on the gain of the antenna, it may be necessary to operate the intentional radiator using a lower peak transmitter output power in order to comply with the EIRP limits specified in paragraph (c) of this section.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <input type="checkbox"/>            | <input type="checkbox"/> |
| (2) <b>Devices other than field disturbance sensors/radars</b> with an emission bandwidth of less than 100 megahertz must limit their peak transmitter conducted output power to the product of 500 mW times their emission bandwidth divided by 100 megahertz. For the purposes of this paragraph, emission bandwidth is defined as the instantaneous frequency range occupied by a steady state radiated signal with modulation, outside which the radiated power spectral density never exceeds 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kilohertz resolution bandwidth spectrum analyzer. The center frequency must be stationary during the measurement interval, even if not stationary during normal operation (e.g., for frequency hopping devices).                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <input type="checkbox"/>            | <input type="checkbox"/> |
| (f) Frequency stability: Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to + 50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> |                          |
| (g) Radio frequency radiation exposure: Radio frequency devices operating under the provisions of this part are subject to the radio frequency radiation exposure requirements specified in §§ 1.1307(b), 1.1310, 2.1091, and 2.1093 of this chapter, as appropriate. Applications for equipment authorization of mobile or portable devices operating under this section must contain a statement confirming compliance with these requirements. Technical information showing the basis for this statement must be submitted to the Commission upon request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <input type="checkbox"/>            |                          |
| (h) Group installation: Any transmitter that has received the necessary FCC equipment authorization under the rules of this chapter may be mounted in a group installation for simultaneous operation with one or more other transmitter(s) that have received the necessary FCC equipment authorization, without any additional equipment authorization. However, no transmitter operating under the provisions of this section may be equipped with external phase-locking inputs that permit beam-forming arrays to be realized.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <input checked="" type="checkbox"/> |                          |
| (i) Compliance measurement: Measurement procedures that have been found to be acceptable to the Commission in accordance with § 2.947 of this chapter may be used to demonstrate compliance.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <input checked="" type="checkbox"/> |                          |
| (1) For purposes of demonstrating compliance with this section, corrections to the transmitter conducted output power may be made due to the antenna and circuit loss.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input type="checkbox"/>            |                          |
| (2) Compliance measurements of <b>frequency-agile field disturbance sensors/radars</b> shall be performed with any related frequency sweep, step, or hop function activated.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| <b>47 CFR 15.215</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                     |                          |
| (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the <b>20 dB bandwidth of the emission</b> , or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation. | <input checked="" type="checkbox"/> |                          |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                     |                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|--------------------------|
| <b>47 CFR 15.209</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <input type="checkbox"/>            |                          |
| <b>47 CFR 15.207</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                     |                          |
| <p>(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the table of this paragraph, as measured using a 50 <math>\mu</math>H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.</p> | <input type="checkbox"/>            |                          |
| <p>(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which <b>only employ battery power</b> for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.</p>                                                                         | <input checked="" type="checkbox"/> | <input type="checkbox"/> |



| Rule Part                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Applicable?                         |                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Yes                                 | No                                  |
| <b>RSS-210 J:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <input checked="" type="checkbox"/> |                                     |
| <b>J.2 Restrictions:</b><br>The devices certified under this annex are not permitted to be used on <b>satellites</b> .                                                                                                                                                                                                                                                                                                                                                                                                | <input checked="" type="checkbox"/> |                                     |
| Devices used on <b>aircraft</b> are permitted under the following conditions:                                                                                                                                                                                                                                                                                                                                                                                                                                         | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (a) Except as allowed in J.2(b), devices are only to be used when the aircraft is on the ground.                                                                                                                                                                                                                                                                                                                                                                                                                      | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (b) Devices used <b>in-flight</b> are subject to the following restrictions:                                                                                                                                                                                                                                                                                                                                                                                                                                          | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (i) they shall be used within closed, exclusive on-board, communication networks within the aircraft                                                                                                                                                                                                                                                                                                                                                                                                                  | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (ii) they shall not be used in wireless avionics intra-communication (WAIC) applications where external structural sensors or external cameras are mounted on the outside of the aircraft structure                                                                                                                                                                                                                                                                                                                   | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (iii) they shall not be used on aircraft equipped with a body/fuselage that provides little or no RF attenuation except when installed on unmanned air vehicles (UAVs) and complying with J.2(d)                                                                                                                                                                                                                                                                                                                      | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (iv) devices operating in the <b>59.3-71.0 GHz</b> band shall not be used except if they meet all of the following conditions:<br>(1) they are FDS<br>(2) they are installed within personal portable electronic devices<br>(3) they comply with the relevant requirements in J.3.2(a), J.3.2(b) and J.3.2(c)                                                                                                                                                                                                         | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (c) Devices' user manuals shall include text indicating restrictions shown in J.2(a) and J.2(b).                                                                                                                                                                                                                                                                                                                                                                                                                      | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (d) FDS devices deployed on <b>UAVs</b> shall comply with all of the following conditions:<br>(i) they operate in the <b>60-64 GHz band</b><br>(ii) the UAVs limit their altitude operation to the regulations established by Transport Canada (e.g. altitudes below 122 metres above ground)<br>(iii) they comply with J.3.2(d)                                                                                                                                                                                      | <input type="checkbox"/>            | <input type="checkbox"/>            |
| <b>J.3 Emission limits within the band 57-71 GHz</b><br>This section specifies the emission limits inside the allocated band.                                                                                                                                                                                                                                                                                                                                                                                         | <input checked="" type="checkbox"/> |                                     |
| <b>J.3.1 General</b><br>Within the band 57-71 GHz, the power of any emissions shall be measured during the transmission interval and shall comply with the limits in this section. For the purpose of this annex, the terms "average e.i.r.p." and "peak e.i.r.p." refer to e.i.r.p. with transmitter output power measured in terms of average value or peak value, respectively.                                                                                                                                    | <input checked="" type="checkbox"/> |                                     |
| <b>J.3.2 Emission limits for FDS</b><br><b>FDS</b> devices operating in the 57-71 GHz band shall not exceed -10 dBm peak transmitter conducted output power and 10 dBm peak e.i.r.p. The following exceptions apply:                                                                                                                                                                                                                                                                                                  | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| (a) FDS devices that occupy a <b>bandwidth of 500 MHz or less</b> and where this bandwidth is contained wholly within the frequency band <b>61.0-61.5 GHz</b> shall comply with the following limits: the equipment shall not exceed 40 dBm average e.i.r.p. and 43 dBm peak e.i.r.p. in the 61.0-61.5 GHz band. In addition, the average and peak e.i.r.p. of any emission outside of the band 61.0-61.5 GHz, but still within the band 57-71 GHz, shall not exceed 10 dBm average e.i.r.p. and 13 dBm peak e.i.r.p. | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (b) FDS devices may operate in any mode as indicated in J.3.2(b)(i) and J.3.2(b)(ii), as long as they operate in only one of these modes for at least 33 ms before switching to another mode.                                                                                                                                                                                                                                                                                                                         | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (i) FDS devices operating in the <b>57.0-59.4 GHz</b> band shall comply with one of the following limits, depending on the operating condition of the device:                                                                                                                                                                                                                                                                                                                                                         | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (1) the peak e.i.r.p. shall not exceed 20 dBm for <b>indoor usage</b> (devices operating and situated in or designed to be used in, or carried within the interior of a building)                                                                                                                                                                                                                                                                                                                                     | <input type="checkbox"/>            | <input type="checkbox"/>            |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                     |                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-------------------------------------|
| (2) the peak e.i.r.p. for <b>outdoor usage</b> (devices operating, situated in, designed to be used in, or carried in open air) shall not exceed 30 dBm                                                                                                                                                                                                                                                                                                                                                           | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (ii) FDS devices operating in the <b>57.0-61.56 GHz</b> band shall have the peak e.i.r.p. not exceeding 3 dBm or, if the sum of continuous transmitter off-times of at least 2 ms equals at least 16.5 ms within any contiguous interval of 33 ms, the peak e.i.r.p. shall not exceed 20 dBm.                                                                                                                                                                                                                     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
| (iii) FDS operating in the <b>57.0-64.0 GHz</b> band shall comply with one of the following limits, depending on the operating condition of the device:                                                                                                                                                                                                                                                                                                                                                           | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (1) the peak e.i.r.p. shall not exceed <b>14 dBm</b> and the sum of continuous transmitter off-times of at least 2 ms shall equal at least 25.5 ms within any contiguous interval of 33 ms                                                                                                                                                                                                                                                                                                                        | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (2) for devices employed for <b>outdoor operation</b> (temporary or permanently fixed application) or vehicular uses (excluding in-cabin applications and operations), the peak e.i.r.p. shall not exceed <b>20 dBm</b> and the sum of continuous transmitter off-times of at least 2 ms shall equal at least 16.5 ms within any contiguous interval of 33 ms                                                                                                                                                     | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (c) For <b>pulsed FDS</b> devices operating in the 57-64 GHz band that have a maximum pulse duration of 6 ns:                                                                                                                                                                                                                                                                                                                                                                                                     | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (i) the average e.i.r.p. shall not exceed 13 dBm and the transmit duty cycle shall not exceed 10% during any 0.3 $\mu$ s time window                                                                                                                                                                                                                                                                                                                                                                              | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (ii) the average integrated e.i.r.p. within the 61.5-64.0 GHz band shall not exceed 5 dBm in any 0.3 $\mu$ s time window                                                                                                                                                                                                                                                                                                                                                                                          | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (iii) peak emissions shall not exceed 20 dB above the maximum permitted average emission limit applicable to the device                                                                                                                                                                                                                                                                                                                                                                                           | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (iv) the bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna                                                                                                                                                                                                                                                                                                                             | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (v) For FDS devices <b>installed on UAVs</b> , their peak e.i.r.p. shall not exceed 20 dBm and the sum of continuous transmitter off-times of at least 2 ms shall equal at least 16.5 ms within any contiguous interval of 33 ms. See also J.2(d).                                                                                                                                                                                                                                                                | <input type="checkbox"/>            | <input type="checkbox"/>            |
| <b>J.3.3 Emission limits for devices other than FDS</b><br>Following are the conditions for devices other than FDS:                                                                                                                                                                                                                                                                                                                                                                                               | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| (a) Except when J.3.3(b) applies, the average e.i.r.p. of any emission shall not exceed 40 dBm and the peak e.i.r.p. of any emission shall not exceed 43 dBm.                                                                                                                                                                                                                                                                                                                                                     | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (b) For <b>fixed point-to-point equipment located outdoors</b> :                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (i) The average e.i.r.p. of any emission shall not exceed 82 dBm minus 2 dB for every dB the antenna gain is less than 51 dBi. The peak e.i.r.p. of any emission shall not exceed 85 dBm minus 2 dB for every dB the antenna gain is less than 51 dBi.                                                                                                                                                                                                                                                            | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (ii) The provisions for reducing the transmit power based on the antenna gain, as per J.3.3(b)(i), shall not require that the power levels be reduced below the limits specified in J.3.3(a).                                                                                                                                                                                                                                                                                                                     | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (iii) Compliance testing shall be performed using the highest gain and the lowest gain antennas with which the equipment is certified. Further, this equipment shall not be marketed and operated with antennas other than those listed in the certification application with which the equipment is certified.                                                                                                                                                                                                   | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (c) Except as specified in J.3.3(d), the peak transmitter conducted output power shall not exceed 500 mW. Depending on the gain of the antenna, it may be necessary to operate the intentional radiator using a lower peak transmitter output power in order to comply with the e.i.r.p. limits specified in J.3.3(a) and J.3.3(b).                                                                                                                                                                               | <input type="checkbox"/>            | <input type="checkbox"/>            |
| (d) For devices with an <b>emission bandwidth less than 100 MHz</b> , the peak transmitter conducted output power (PTCOP) shall be less than or equal to the product of 500 mW times their emission bandwidth divided by 100 MHz. For the purpose of J.3.3(d), emission bandwidth is the instantaneous frequency range occupied by a steady radiated signal with modulation, outside which the radiated power spectral density is 6 dB below the maximum radiated power spectral density in the band, as measured | <input type="checkbox"/>            | <input type="checkbox"/>            |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                     |                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|--------------------------|
| with a 100 kHz resolution bandwidth. The centre frequency shall be stationary during the measurement interval, even if not stationary during normal operation (e.g. for frequency hopping devices).                                                                                                                                                                                                                                                                                                                                                 |                                     |                          |
| <b>J.4 Spurious emissions</b><br>Any emissions outside the band 57-61.56 GHz shall consist solely of spurious emissions and shall not exceed: <ul style="list-style-type: none"> <li>(a) the fundamental emission levels</li> <li>(b) the general field strength limits specified in RSS-Gen, General Requirements for Compliance of Radio Apparatus, for emissions below 40 GHz</li> <li>(c) the general field strength limits specified in RSS-Gen, General Requirements for Compliance of Radio Apparatus, for emissions below 40 GHz</li> </ul> | <input checked="" type="checkbox"/> |                          |
| <b>J.5 Measurement requirements</b><br>Following are the measurement requirements for emissions:                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <input checked="" type="checkbox"/> |                          |
| (a) Emissions shall be measured up to 200 GHz.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input checked="" type="checkbox"/> |                          |
| (b) <b>Conducted measurement</b> for emissions above 40 GHz are permitted provided the antenna characteristics can be determined accurately.                                                                                                                                                                                                                                                                                                                                                                                                        | <input type="checkbox"/>            | <input type="checkbox"/> |
| (c) Compliance measurements of <b>frequency-agile FDS</b> shall be performed with any related frequency sweep, step, or hop function activated.                                                                                                                                                                                                                                                                                                                                                                                                     | <input type="checkbox"/>            | <input type="checkbox"/> |
| (d) Corrections to the <b>transmitter conducted output power</b> may be considered due to the antenna and cabling loss.                                                                                                                                                                                                                                                                                                                                                                                                                             | <input type="checkbox"/>            | <input type="checkbox"/> |
| (e) The provisions of RSS-Gen requiring the application of a peak limit that is 20 dB above the average limit shall not apply to devices subject to <b>J.3.2(a) and J.3.2(b)</b> .                                                                                                                                                                                                                                                                                                                                                                  | <input type="checkbox"/>            | <input type="checkbox"/> |
| (a) The provisions of RSS-Gen requiring averaging over a time interval of 0.1 seconds shall not apply to devices subject to <b>J.3.2(a), J.3.2(b) and J.3.2(c)</b> .                                                                                                                                                                                                                                                                                                                                                                                | <input type="checkbox"/>            | <input type="checkbox"/> |
| <b>J.6 Transmitter frequency stability</b><br>Fundamental emissions shall be contained within the frequency bands specified in this annex during all conditions of operation when tested at the temperature and voltage variations specified for the frequency stability measurement in RSS-Gen.                                                                                                                                                                                                                                                    | <input checked="" type="checkbox"/> |                          |
| <b>J.7 Group installations</b><br>Any transmitter that is certified under this annex may be mounted in a group installation for simultaneous operation with one or more certified transmitters, without any additional equipment authorization. However, no transmitter operating under the provisions of this annex shall be equipped with external phase-locking inputs that permit beam-forming arrays to be realized.                                                                                                                           | <input checked="" type="checkbox"/> |                          |
| <b>RSS-Gen</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input checked="" type="checkbox"/> |                          |
| <b>6.7 Occupied bandwidth (or 99% emission bandwidth) and x dB bandwidth</b><br>The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs. [...]                                                    | <input checked="" type="checkbox"/> |                          |
| <b>8.8 AC power-line conducted emissions limits</b><br>Unless stated otherwise in the applicable RSS, <b>for radio apparatus that are designed to be connected to the public utility AC power network</b> , the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 µH / 50 Ω line impedance stabilization network. [...]                                                                       | <input type="checkbox"/>            |                          |
| <b>8.9 Transmitter emission limits</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <input type="checkbox"/>            |                          |

## 14 Measurement results

### 14.1 Occupied bandwidth & emission bandwidth & frequency stability

#### Description:

Measurement of the bandwidth and the frequency stability of the wanted signal (fundamental emission) under temperature and supply voltage variations.

#### Limits and provisions:

Selection of applicable rule parts: see 13

| Bandwidth & Applicable limits of designated frequency band |                                            |                                                   |                                    |
|------------------------------------------------------------|--------------------------------------------|---------------------------------------------------|------------------------------------|
| Applicable                                                 | Rule part                                  | Method of bandwidth measurement                   | Limit of designated frequency band |
| <input type="checkbox"/>                                   | 15.255(b)(2)(iii)<br>RSS-210 J.3.2(b)(iv)  | 20 dB bandwidth or 99% bandwidth<br>99% bandwidth | 59.3 - 71.0 GHz                    |
| <input type="checkbox"/>                                   | 15.255(b)(3)<br>RSS-210 J.2(d)(i)          | 20 dB bandwidth or 99% bandwidth<br>99% bandwidth | 60 - 64 GHz                        |
| <input type="checkbox"/>                                   | 15.255(c)(1)(i)<br>RSS-210 J.3.3(a)        | 20 dB bandwidth or 99% bandwidth<br>99% bandwidth | 57 - 71 GHz                        |
| <input type="checkbox"/>                                   | 15.255(c)(1)(ii)<br>RSS-210 J.3.3(b)       | 20 dB bandwidth or 99% bandwidth<br>99% bandwidth | 57 - 71 GHz                        |
| <input type="checkbox"/>                                   | 15.255(c)(2)<br>RSS-210 J.3.2              | 20 dB bandwidth or 99% bandwidth<br>99% bandwidth | 57 - 71 GHz                        |
| <input type="checkbox"/>                                   | 15.255(c)(2)(i)<br>RSS-210 J.3.2(b)(i)     | 20 dB bandwidth or 99% bandwidth<br>99% bandwidth | 57.0 - 59.4 GHz                    |
| <input checked="" type="checkbox"/>                        | 15.255(c)(2)(ii)<br>RSS-210 J.3.2(b)(ii)   | 20 dB bandwidth or 99% bandwidth<br>99% bandwidth | 57.0 - 61.56 GHz                   |
| <input type="checkbox"/>                                   | 15.255(c)(2)(iii)<br>RSS-210 J.3.2(b)(iii) | 20 dB bandwidth or 99% bandwidth<br>99% bandwidth | 57.0 - 64.0 GHz                    |
| <input type="checkbox"/>                                   | 15.255(c)(2)(v)<br>RSS-210 J.3.2(a)        | 20 dB bandwidth or 99% bandwidth<br>99% bandwidth | 61.0 - 61.5 GHz                    |
| <input type="checkbox"/>                                   | 15.255(c)(3)<br>RSS-210 J.3.2(c)           | 10 dB bandwidth                                   | 57 - 64 GHz                        |
| <input type="checkbox"/>                                   | 15.255(e)(2)<br>RSS-210 J.3.3(d)           | 6 dB emission bandwidth (EBW <sub>6dB</sub> )     | --                                 |

**Measurement:**

| Measurement parameter |          |
|-----------------------|----------|
| Detector:             | Pos-Peak |
| Resolution bandwidth: | 50 MHz   |
| Video bandwidth:      | 80 MHz   |
| Trace-Mode:           | Max Hold |

Measurement procedures:

- Bandwidth: ANSI C63.10-2020 6.9 / 9.3 / 9.4
- Frequency stability: ANSI C63.10-2020 6.8 / 9.5

**Measurement results:****20 dB bandwidth at normal conditions:**

| EUT     | Mode   | Test condition      | $f_L$ [GHz] | $f_H$ [GHz] | Bandwidth [GHz] |
|---------|--------|---------------------|-------------|-------------|-----------------|
| S06_C01 | Normal | $T_{nom} / V_{nom}$ | 57.038      | 61.070      | 4.032           |

**99% bandwidth at normal conditions:**

| EUT     | Mode   | Test condition      | $f_L$ [GHz] | $f_H$ [GHz] | Bandwidth [GHz] |
|---------|--------|---------------------|-------------|-------------|-----------------|
| S06_C01 | Normal | $T_{nom} / V_{nom}$ | 57.128      | 60.954      | 3.826           |

Note:

- Detailed measurement results: see measurement annex **24-1-0040201T001\_TR1-A201-R1**.

**Verdict: Compliant**

**Frequency stability (15.255(f) / RSS-210 J.6):**

Mode for frequency stability tests: Normal mode (Mode with the widest bandwidth, ANSI C63.10-2020 5.6.2.2)

Bandwidth measurement for frequency stability tests: 20 dB bandwidth.

| Test condition     | Frequency $f_L$ [GHz] | Frequency $f_H$ [GHz] | Bandwidth [GHz] |
|--------------------|-----------------------|-----------------------|-----------------|
| -20 °C / $V_{nom}$ | 57.044                | 61.130                | 4.086           |
| -10 °C / $V_{nom}$ | 57.038                | 61.124                | 4.038           |
| 0 °C / $V_{nom}$   | 57.038                | 61.118                | 4.080           |
| 10 °C / $V_{nom}$  | 57.038                | 61.094                | 4.056           |
| 20 °C / $V_{nom}$  | 57.038                | 61.070                | 4.032           |
| 20 °C / $V_{min}$  | 57.038                | 61.076                | 4.038           |
| 20 °C / $V_{max}$  | 57.038                | 61.076                | 4.038           |
| 30 °C / $V_{nom}$  | 57.032                | 61.088                | 4.056           |
| 40 °C / $V_{nom}$  | 57.032                | 61.100                | 4.068           |
| 50 °C / $V_{nom}$  | 57.032                | 61.046                | 4.014           |

Note:

- Detailed measurement results: see measurement report **24-1-0040201T001\_TR1-A201-R1**

Bandwidth measurement for frequency stability tests: 99% bandwidth

| Test condition     | Frequency $f_L$ [GHz] | Frequency $f_H$ [GHz] | Bandwidth [MHz] |
|--------------------|-----------------------|-----------------------|-----------------|
| -20 °C / $V_{nom}$ | 57.142                | 61.028                | 3.886           |
| -10 °C / $V_{nom}$ | 57.135                | 61.012                | 3.877           |
| 0 °C / $V_{nom}$   | 57.133                | 60.998                | 3.864           |
| 10 °C / $V_{nom}$  | 57.128                | 60.970                | 3.842           |
| 20 °C / $V_{nom}$  | 57.128                | 60.954                | 3.826           |
| 20 °C / $V_{min}$  | 57.128                | 60.954                | 3.826           |
| 20 °C / $V_{max}$  | 57.126                | 60.956                | 3.830           |
| 30 °C / $V_{nom}$  | 57.120                | 60.941                | 3.820           |
| 40 °C / $V_{nom}$  | 57.133                | 60.936                | 3.803           |
| 50 °C / $V_{nom}$  | 57.115                | 60.914                | 3.800           |

Note:

- Detailed measurement results: see measurement report **24-1-0040201T001\_TR1-A201-R1**

**Verdict: Compliant**

## 14.2 Radiated power (EIRP)

### Description:

Measurement of the maximum radiated E.I.R.P. of the wanted signal.

### Limits and provisions:

Selection of applicable rule parts: see chapter 13

| Applicable limits of radiated power (EIRP) |                                                  |                                                                                                                                                                               |                                                          |
|--------------------------------------------|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| Applicable                                 | Rule part                                        | Limit average EIRP                                                                                                                                                            | Limit peak EIRP                                          |
| <input type="checkbox"/>                   | 15.255(b)(3)<br>RSS-210 J.3.2(a)                 | none                                                                                                                                                                          | 20 dBm                                                   |
| <input type="checkbox"/>                   | 15.255(c)(1)(i)<br>RSS-210 J.3.3(a)              | 40 dBm (see note 1)                                                                                                                                                           | 43 dBm                                                   |
| <input type="checkbox"/>                   | 15.255(c)(1)(ii)<br>RSS-210 J.3.3(b)             | Calculation depending on EUT antenna gain<br>(see note 1, 2.1 & 2.3)                                                                                                          | Depending on EUT antenna gain<br>(see note 1, 2.2 & 2.3) |
| <input type="checkbox"/>                   | 15.255(c)(2)<br>RSS-210 J.3.2                    | none                                                                                                                                                                          | 10 dBm                                                   |
| <input type="checkbox"/>                   | 15.255(c)(2)(i)<br>RSS-210 J.3.2(b)(i)           | none                                                                                                                                                                          | 20 dBm (indoor)<br>30 dBm (outdoor)                      |
| <input checked="" type="checkbox"/>        | 15.255(c)(2)(ii)<br>RSS-210 J.3.2(b)(ii)         | none                                                                                                                                                                          | 3 dBm (general)<br>20 dBm (+ off-time requirement)       |
| <input type="checkbox"/>                   | 15.255(c)(2)(iii)(A)<br>RSS-210 J.3.2(b)(iii)(1) | none                                                                                                                                                                          | 14 dBm (+ off-time requirement)                          |
| <input type="checkbox"/>                   | 15.255(c)(2)(iii)(B)<br>RSS-210 J.3.2(b)(iii)(2) | none                                                                                                                                                                          | 20 dBm (+ off-time requirement)                          |
| <input type="checkbox"/>                   | 15.255(c)(2)(v)<br>RSS-210 J.3.2(a)              | 40 dBm (within 61-61.5 GHz)<br>(see note 1)                                                                                                                                   | 43 dBm (within 61.0-61.5 GHz)                            |
|                                            |                                                  | 10 dBm (outside 61-61.5 GHz, but<br>within 57-71GHz)<br>(see note 1)                                                                                                          | 13 dBm (outside 61-61.5 GHz,<br>but within 57-71GHz)     |
| <input type="checkbox"/>                   | 15.255(c)(3)<br>RSS-210 J.3.2(c)                 | 13 dBm (average EIRP during any<br>0.3 µs time window)<br>(+ time domain requirement)<br>5 dBm (average integrated EIRP<br>within 61.5–64.0 GHz in any 0.3<br>µs time window) | applicable average limit + 20 dB                         |

**Measurement:****Spectrum analyzer:**

| Measurement parameter |          |
|-----------------------|----------|
| Detector:             | Pos-Peak |
| Resolution bandwidth: | 50 MHz   |
| Video bandwidth:      | 80 MHz   |
| Trace-Mode:           | Max Hold |

**Measurement procedures:**

- Fundamental emission using an RF detector: ANSI C63.10-2020 9.8

**Measurement results:**

| EUT     | Mode   | Test condition      | Peak E.I.R.P. | Limit<br>Peak E.I.R.P |
|---------|--------|---------------------|---------------|-----------------------|
| S08_C02 | Normal | $T_{nom} / V_{nom}$ | 16.27 dBm     | 20 dBm                |

**Note:**

- Detailed measurement results: see below diagrams.


**Verdict: Compliant**



Spectrum analyzer:

**Plot 1: Peak EIRP, EUT 08\_C02, Mode Normal**

TID018\_24-1-0040201T001\_Peak\_EIRP\_Check for desensitization\_RBW\_50MHz\_S08\_C02

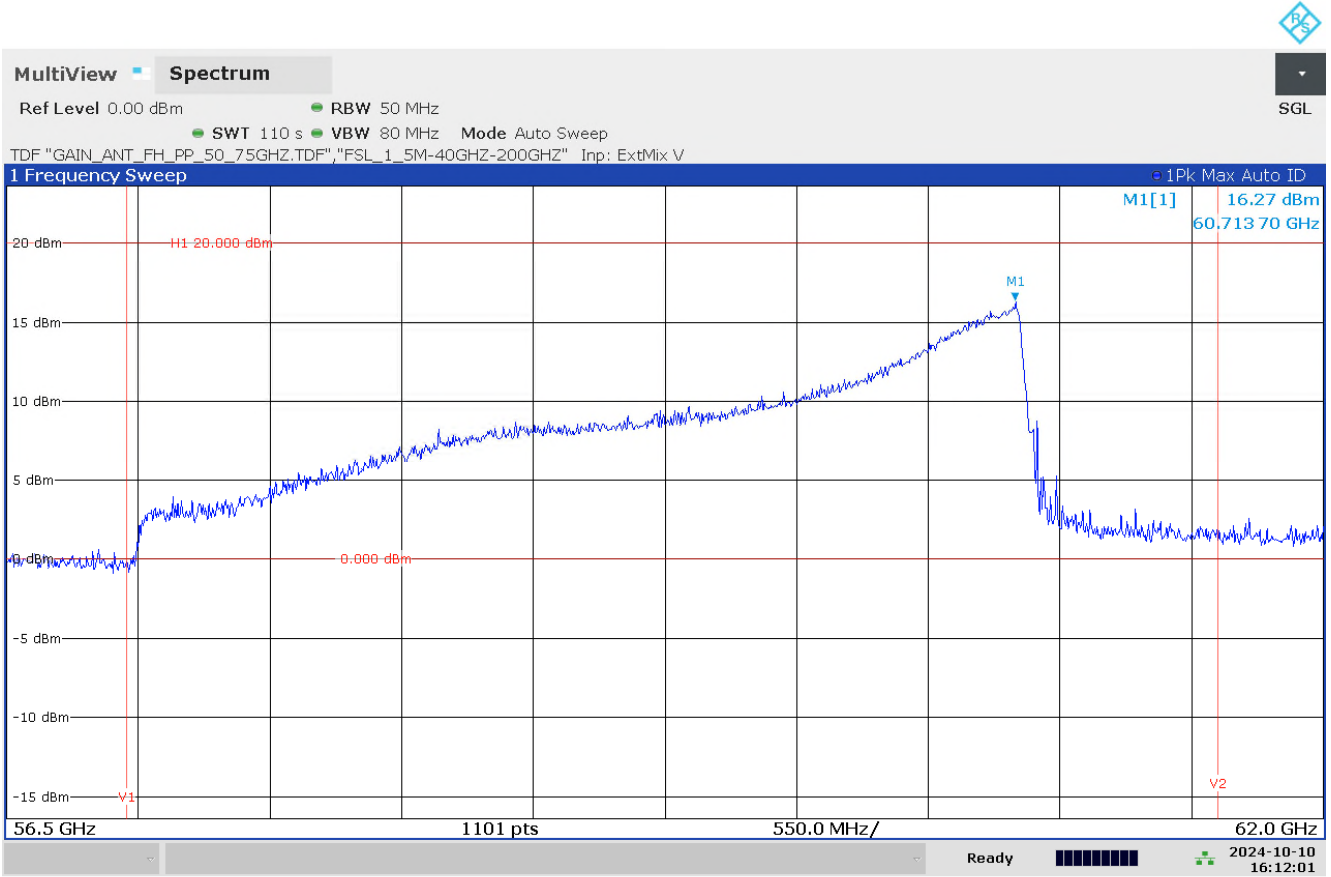


04:12:01 10/10/2024

Note: RBW 50 MHz has been taken to avoid Desensitization effect.

Other measurements have been performed with different RBW to verify desensitization effect,  
See below Diagrams.


TID013\_24-1-0040201T001\_Peak\_EIRP\_Check for desensitization\_RBW\_1MHz\_S08\_C02

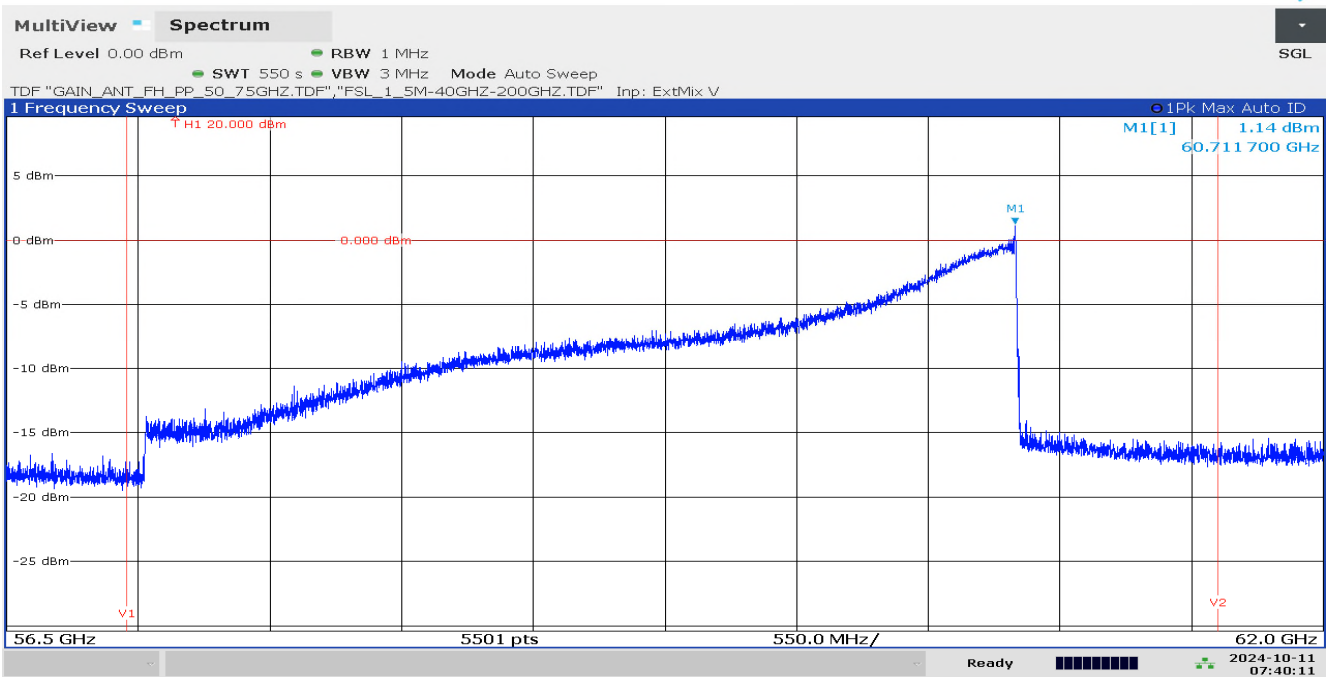

07:40:12 10/11/2024

Note: This Diagram is only for information, RBW 1 MHz.


TID014\_24-1-0040201T001\_Peak\_EIRP\_Check for desensitization\_RBW\_10MHz\_S08\_C02

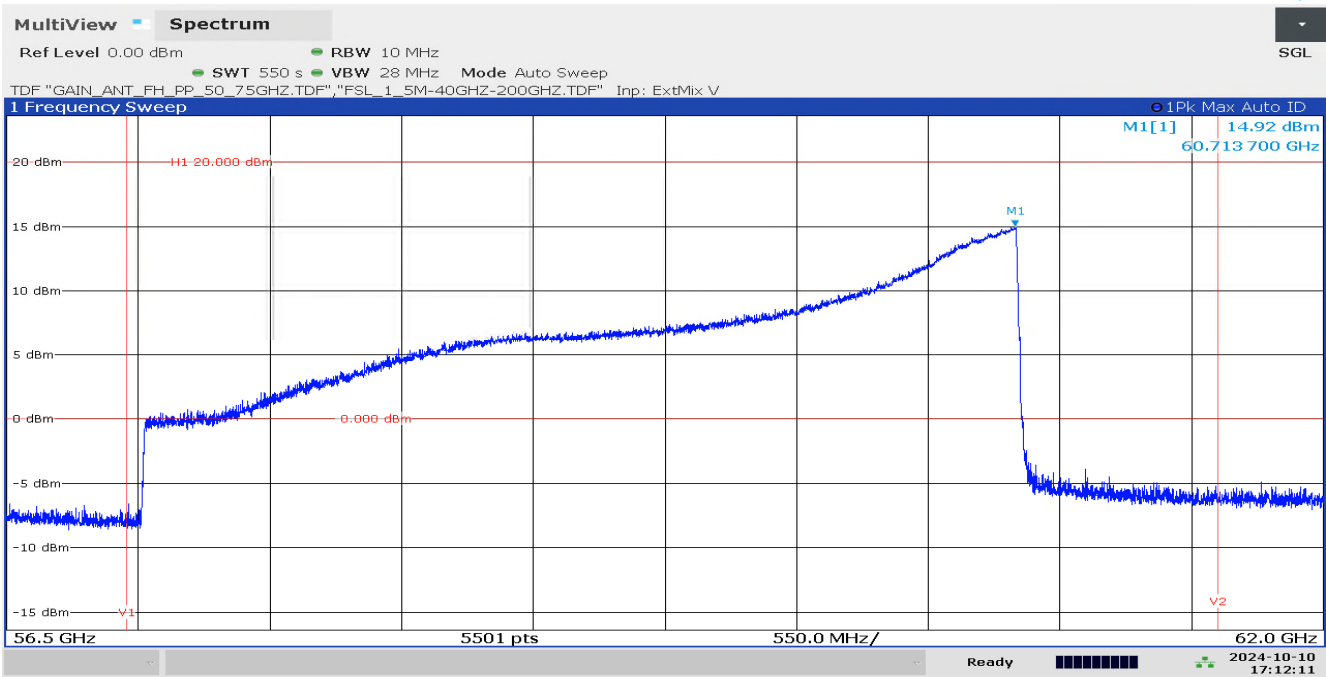

05:12:11 10/10/2024

Note: This Diagram is only for information, RBW 10 MHz.


TID015\_24-1-0040201T001\_Peak\_EIRP\_Check for desensitization\_RBW\_20MHz\_S08\_C02

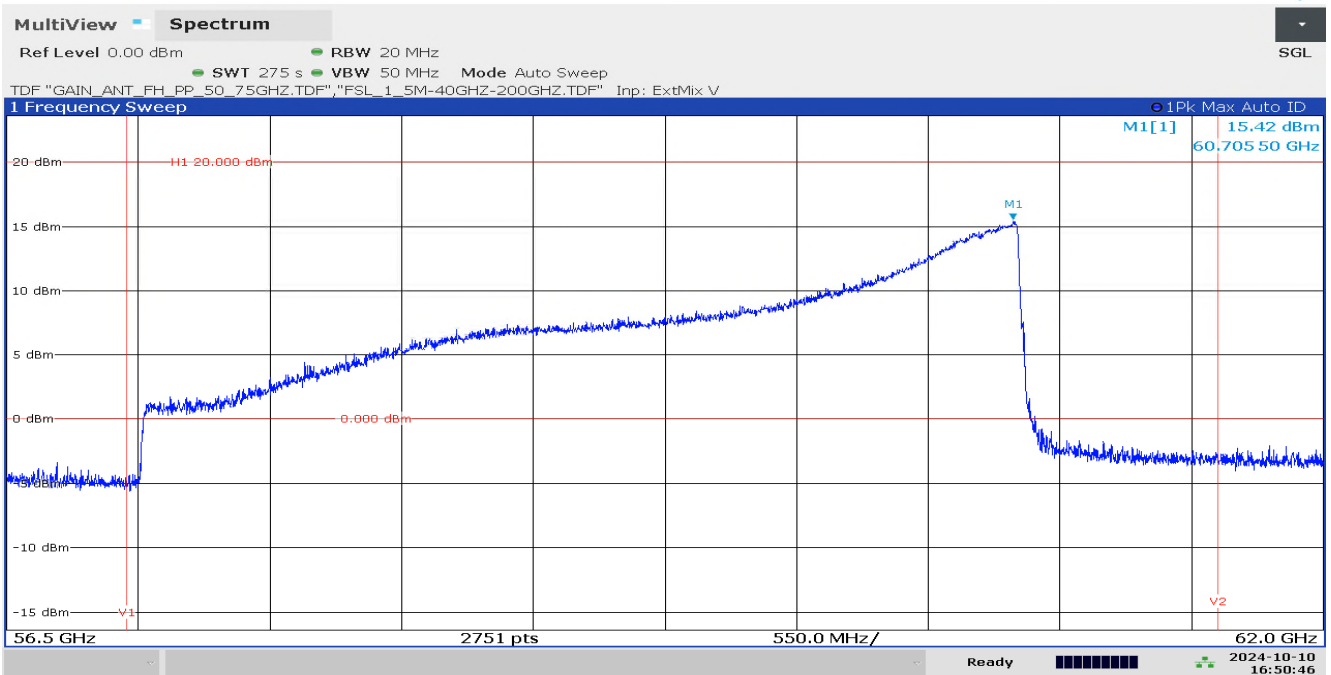

04:50:46 10/10/2024

Note: This Diagram is only for information, RBW 20 MHz.


TID016\_24-1-0040201T001\_Peak\_EIRP\_Check for desensitization\_RBW\_30MHz\_S08\_C02

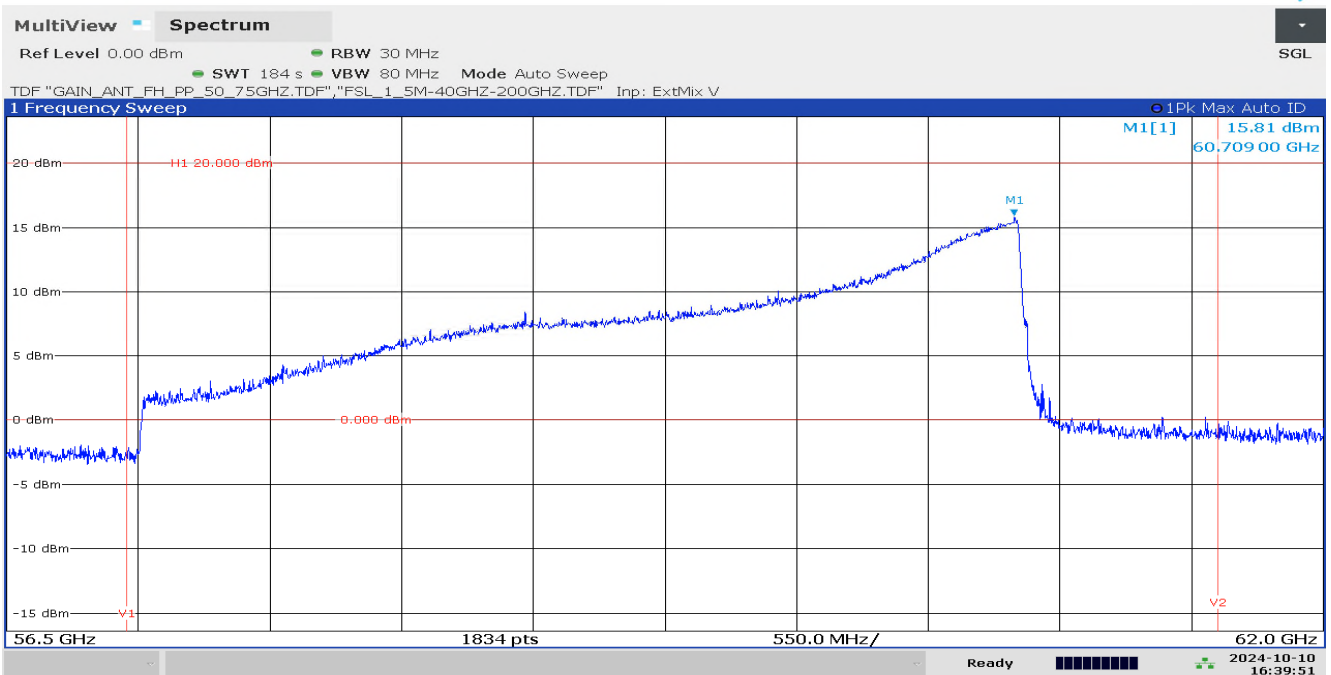

04:39:51 10/10/2024

Note: This Diagram is only for information, RBW 30 MHz.

TID017\_24-1-0040201T001\_Peak\_EIRP\_Check for desensitization\_RBW\_40MHz\_S08\_C02

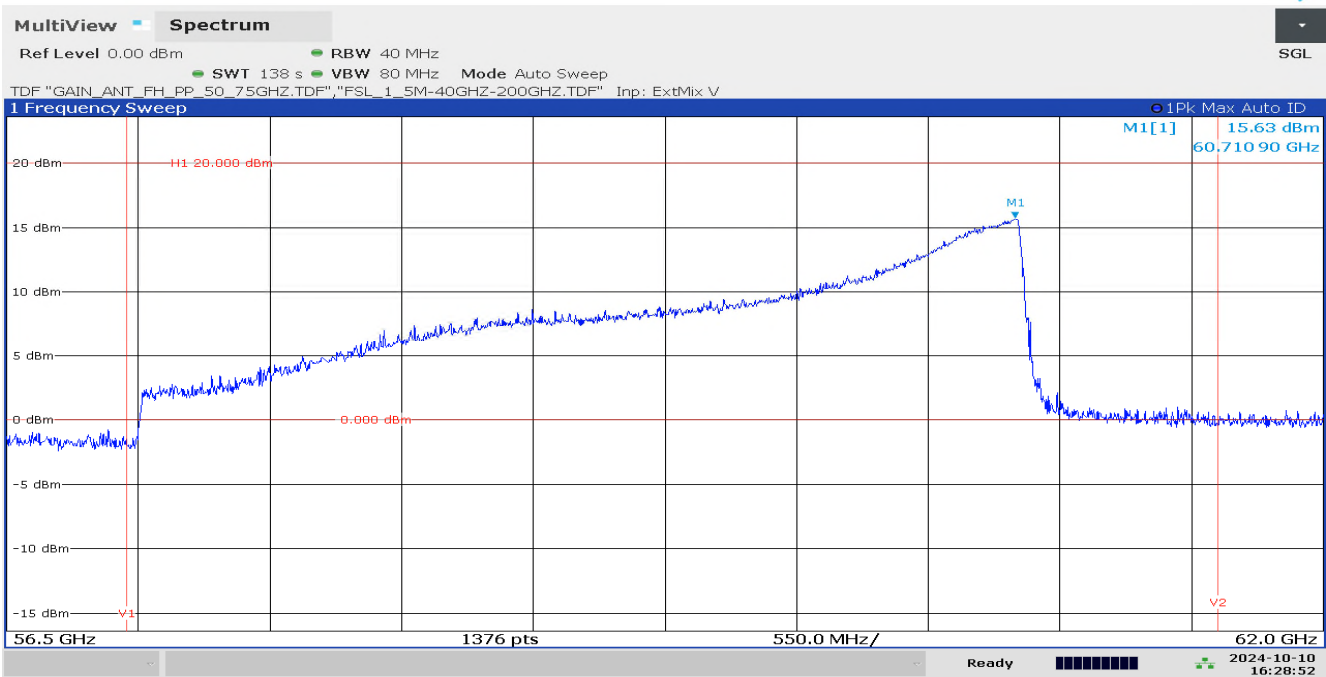

04:28:52 10/10/2024

Note: This Diagram is only for information, RBW 40 MHz.

### 14.3 Time domain requirements: Continuous transmitter off-times & transmit duty cycle

#### Description:

Measurement of the time domain parameter.

#### Limits and provisions:

Selection of applicable rule parts: see 13

| Applicable time domain requirements |                                                   |                                                                                                                                                                                                                                         |
|-------------------------------------|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicable                          | Rule part                                         | Time domain requirement                                                                                                                                                                                                                 |
| <input type="checkbox"/>            | 15.255(b)(3)<br>RSS- 210 J.3.2(d)                 | sum of continuous transmitter off-times of at least two milliseconds shall equal at least 16.5 milliseconds within any contiguous interval of 33 milliseconds                                                                           |
| <input checked="" type="checkbox"/> | 15.255(c)(2)(ii)<br>RSS- 210 J.3.2(b)(ii)         | Peak EIRP $\leq$ 3 dBm: none<br><br><b>Peak EIRP <math>\leq</math> 20 dBm: sum of continuous transmitter off-times of at least two milliseconds equals at least 16.5 milliseconds within any contiguous interval of 33 milliseconds</b> |
| <input type="checkbox"/>            | 15.255(c)(2)(iii)(A)<br>RSS- 210 J.3.2(b)(iii)(1) | sum of continuous transmitter off-times of at least two milliseconds shall equal at least 25.5 milliseconds within any contiguous interval of 33 milliseconds                                                                           |
| <input type="checkbox"/>            | 15.255(c)(2)(iii)(B)<br>RSS- 210 J.3.2(b)(iii)(2) | sum of continuous transmitter off-times of at least two milliseconds shall equal at least 16.5 milliseconds within any contiguous interval of 33 milliseconds                                                                           |
| <input type="checkbox"/>            | 15.255(c)(3)<br>RSS- 210 J.3.2(c)                 | maximum pulse duration of 6 ns;<br>transmit duty cycle shall not exceed 10% during any 0.3 $\mu$ s time window                                                                                                                          |
| <input type="checkbox"/>            | other                                             | none                                                                                                                                                                                                                                    |

#### Note:

- Continuous transmitter off-times:  
Off-times are only taken into account if they are larger than the specified minimum value (e.g. 2 ms).  
Off-times smaller than the specified minimum value are not considered when checking the specified limit (e.g. "at least 25.5 ms within any contiguous interval of 33 ms").

#### Measurement:


| Measurement parameter |                        |
|-----------------------|------------------------|
| Detector:             | Pos-Peak (RF-Detector) |
| Video bandwidth:      | Video bandwidth:       |

**Measurement results:**

| EUT     | Mode   | Test condition      | Maximum sum of continuous transmitter off-times of at least two milliseconds within any contiguous interval of 33 milliseconds. |                                                                   |
|---------|--------|---------------------|---------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|
| S06_C01 | Normal | $T_{nom} / V_{nom}$ | Measured value                                                                                                                  | Limit                                                             |
|         |        |                     | Off time: 82.2ms<br>Total off-Time within 33ms: one Pulse-Train within 100ms<br>Max-on Time one pulse train: 16.075ms           | Off time $\geq 2$ ms (continuous) and $\geq 16.5$ ms within 33 ms |


**Applicants information:**

Total Burst Time 16.448 milliseconds on time

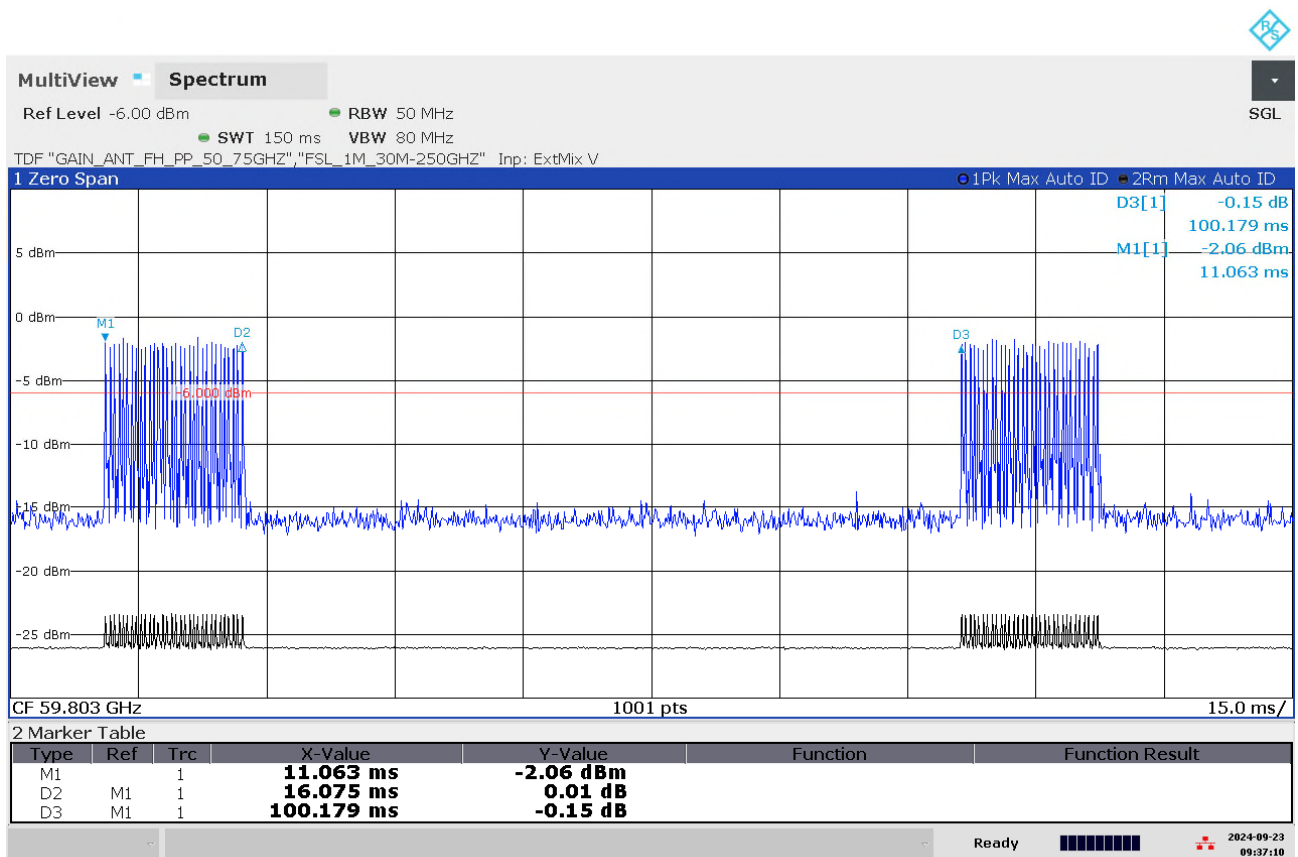

09:37:10 AM 09/23/2024

Measured total burst-time: 16.075ms (M1-D2 Marker)

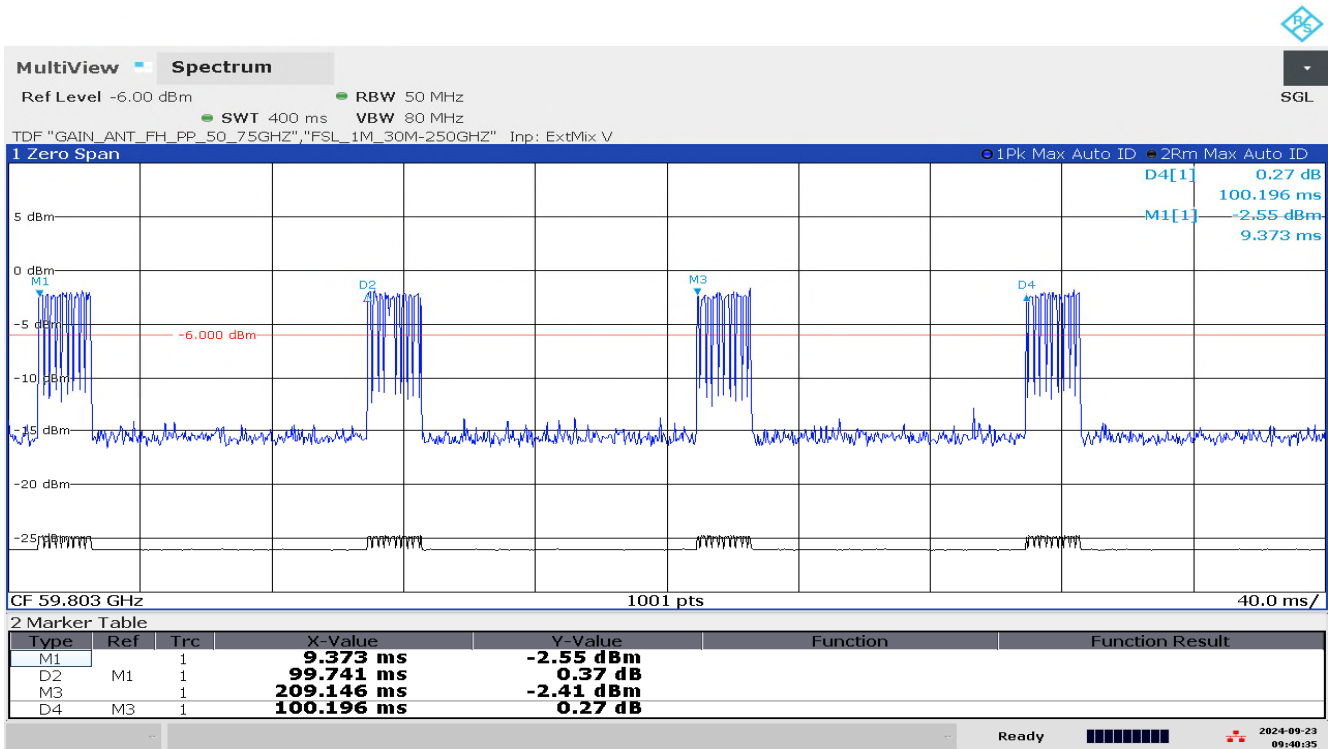

09:40:35 AM 09/23/2024

TID000\_24-1-0040201T001\_EUT\_Cycle\_Time\_100ms\_S08\_C02

**Verdict: Compliant**

## 14.4 Spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions.

### Limits and provisions:

Selection of applicable rule parts: see 13

| <b>47CFR Part 15.209(a)</b><br><b>RSS-Gen 8.9</b>                                                                                                                                                         |                                                                                               |                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|--------------------------------------------------------|
| Frequency (MHz)                                                                                                                                                                                           | Field strength (microvolts/meter)<br>Magnetic field strength (H-Field)<br>( $\mu\text{A/m}$ ) | Measurement distance (meters)                          |
| 0.009 – 0.490                                                                                                                                                                                             | 2400/F(kHz)<br>6.37/F (F in kHz)                                                              | 300                                                    |
| 0.490 – 1.705                                                                                                                                                                                             | 24000/F(kHz)<br>63.7/F (F in kHz)                                                             | 30                                                     |
| 1.705 – 30.0                                                                                                                                                                                              | 30<br>0.08                                                                                    | 30                                                     |
| 30 – 88                                                                                                                                                                                                   | 100                                                                                           | 3                                                      |
| 88 – 216                                                                                                                                                                                                  | 150                                                                                           | 3                                                      |
| 216 – 960                                                                                                                                                                                                 | 200                                                                                           | 3                                                      |
| Above 960                                                                                                                                                                                                 | 500                                                                                           | 3                                                      |
| <b>47 CFR 15.255(d)</b><br><b>RSS-210 J.4</b>                                                                                                                                                             |                                                                                               |                                                        |
| Frequency (GHz)                                                                                                                                                                                           | Power density [ $\text{pW/cm}^2$ ]                                                            | Equivalent isotropically radiated<br>power: EIRP [dBm] |
| Below 40                                                                                                                                                                                                  | See §15.209<br>See RSS-Gen 8.9                                                                | -/-                                                    |
| 40 - 200                                                                                                                                                                                                  | 90 @ distance of 3 m                                                                          | -10                                                    |
| The power density of any emissions outside the 57-61.56 GHz band shall consist solely of spurious emissions.                                                                                              |                                                                                               |                                                        |
| The levels of the spurious emissions shall not exceed the level of the fundamental emission.                                                                                                              |                                                                                               |                                                        |
| <b>47 CFR 15.255(i)(2)</b><br><b>RSS-210 J.5(c)</b>                                                                                                                                                       |                                                                                               |                                                        |
| Compliance measurements of frequency-agile field disturbance sensors/radars shall be performed with any related frequency sweep, step, or hop function activated.                                         |                                                                                               |                                                        |
| <b>47 CFR 15.33(a)(3)</b>                                                                                                                                                                                 |                                                                                               |                                                        |
| If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules. |                                                                                               |                                                        |
| <b>RSS-210 J.5(a)</b>                                                                                                                                                                                     |                                                                                               |                                                        |
| Emissions shall be measured up to 200 GHz.                                                                                                                                                                |                                                                                               |                                                        |



**Limit conversion (ANSI C63.10-2020 9.2.3):**

$$\text{EIRP[dBm]} = 10 \times \log(4 \times \pi \times d^2 \times \text{PD}[\text{W/m}^2])$$

- Power density at the distance specified by the limit: PD [W/m<sup>2</sup>]
- Equivalent isotropically radiated power: EIRP [dBm]
- Distance at which the power density limit is specified: d [m]

According to this formula, an emission limit of PD = 90 pW/cm<sup>2</sup> at a distance of d = 3 m corresponds to an equivalent isotropically radiated power of EIRP = -10 dBm.

**Measurement:**

| Measurement parameter |                                        |
|-----------------------|----------------------------------------|
| Detector:             | Quasi Peak / Pos-Peak / RMS            |
| Resolution bandwidth: | F < 1 GHz: 100 kHz<br>F > 1 GHz: 1 MHz |
| Video bandwidth:      | F < 1 GHz: 300 kHz<br>F > 1 GHz: 3 MHz |
| Trace-Mode:           | Max Hold                               |

**Measurement results:**

| Diagram No.                                                                                 | Frequency [GHz] | Detector  | Bandwidth [MHz] | Level [dBμV]                                               | Limit [dBμV] | Margin [dB]    |
|---------------------------------------------------------------------------------------------|-----------------|-----------|-----------------|------------------------------------------------------------|--------------|----------------|
| 2.01                                                                                        | 0.000009 – 0.30 | PK        | 0.12            | ≤20.00                                                     | 29.54        | 10.00          |
| 3.04                                                                                        | 0.03 – 1        | QPK       | 0.12            | 34.46                                                      | 46           | 11.54          |
| 3.06                                                                                        | 0.03 – 1        | QPK       | 0.12            | 33.72                                                      | 46           | 12.28          |
| TID031                                                                                      | 1 – 15          | PK<br>AVG | 1               | 62.44<br>51.28                                             | 74<br>54     | 11.56<br>2.72  |
| TID032                                                                                      | 15 – 18         | PK<br>AVG | 1               | 53.27<br>42.94                                             | 74<br>54     | 20.73<br>11.06 |
| TID034                                                                                      | 18 – 30         | PK<br>AVG | 1               | Critical Emission<br>found at 28.8 GHz,<br>Check TID034_19 | 74<br>54     | –              |
| TID034_19                                                                                   | 18 – 30         | PK<br>AVG | 1               | 57.42<br>50.41                                             | 74<br>54     | 16.58<br>3.59  |
| TID036                                                                                      | 30 – 40         | PK<br>AVG | 1               | 56.85<br>42.94                                             | 74<br>54     | 17.15<br>11.06 |
| Please refer to the following plots for more information on the level of spurious emissions |                 |           |                 |                                                            |              |                |

Note: Only Worst case Results are stated here.  
In Details, see measurements diagram below.

**Verdict: Compliant**

| Diagram No.                                                                                 | Frequency [GHz] | Detector | Bandwidth [MHz] | Level [dBm] | Limit [dBm] | Margin [dB] |
|---------------------------------------------------------------------------------------------|-----------------|----------|-----------------|-------------|-------------|-------------|
| TID038                                                                                      | 40 – 50         | RMS      | 1               | Note-3      | -10         | --          |
| TID044                                                                                      | 50 – 75         | RMS      | 1               | Note-3      | -10         | --          |
| TID046                                                                                      | 75 – 90         | RMS      | 1               | Note-3      | -10         | --          |
| TID048                                                                                      | 90 – 110        | RMS      | 1               | Note-3      | -10         | --          |
| TID050                                                                                      | 110 – 115       | RMS      | 1               | Note-3      | -10         | --          |
| TID051                                                                                      | 115 – 120       | RMS      | 1               | Note-3      | -10         | --          |
| TID052_01                                                                                   | 120 – 125       | RMS      | 1               | -24.27      | -10         | 14.27       |
| TID053                                                                                      | 125 – 130       | RMS      | 1               | -21.36      | -10         | 11.36       |
| TID054                                                                                      | 130 – 135       | RMS      | 1               | -28.87      | -10         | 18.87       |
| TID055                                                                                      | 135 – 140       | RMS      | 1               | -29.49      | -10         | 19.49       |
| TID056                                                                                      | 140 – 150       | RMS      | 1               | -26.51      | -10         | 16.51       |
| TID057                                                                                      | 150 – 160       | RMS      | 1               | -26.74      | -10         | 16.74       |
| TID058                                                                                      | 160 – 170       | RMS      | 1               | -27.00      | -10         | 17.00       |
| TID059                                                                                      | 170 – 180       | RMS      | 1               | -28.05      | -10         | 18.05       |
| TID060                                                                                      | 180 – 190       | RMS      | 1               | -26.62      | -10         | 16.62       |
| TID061                                                                                      | 190 – 200       | RMS      | 1               | -26.03      | -10         | 16.03       |
| Please refer to the following plots for more information on the level of spurious emissions |                 |          |                 |             |             |             |

Note-1: Only Worst case Results are stated here.

Note-2: In Diagram Peak detector is only for information, RMS detector is for Assessment.


Note-3: No Critical Emission found = Margin is more than 20 dB from Limit Line.

Note-4: Mixer Products are used during measurement; therefore, Image signal could be seen in some diagrams.

**Verdict: Compliant**


## 2.01\_RSE\_MgField\_TX\_NormMode

Full Spectrum

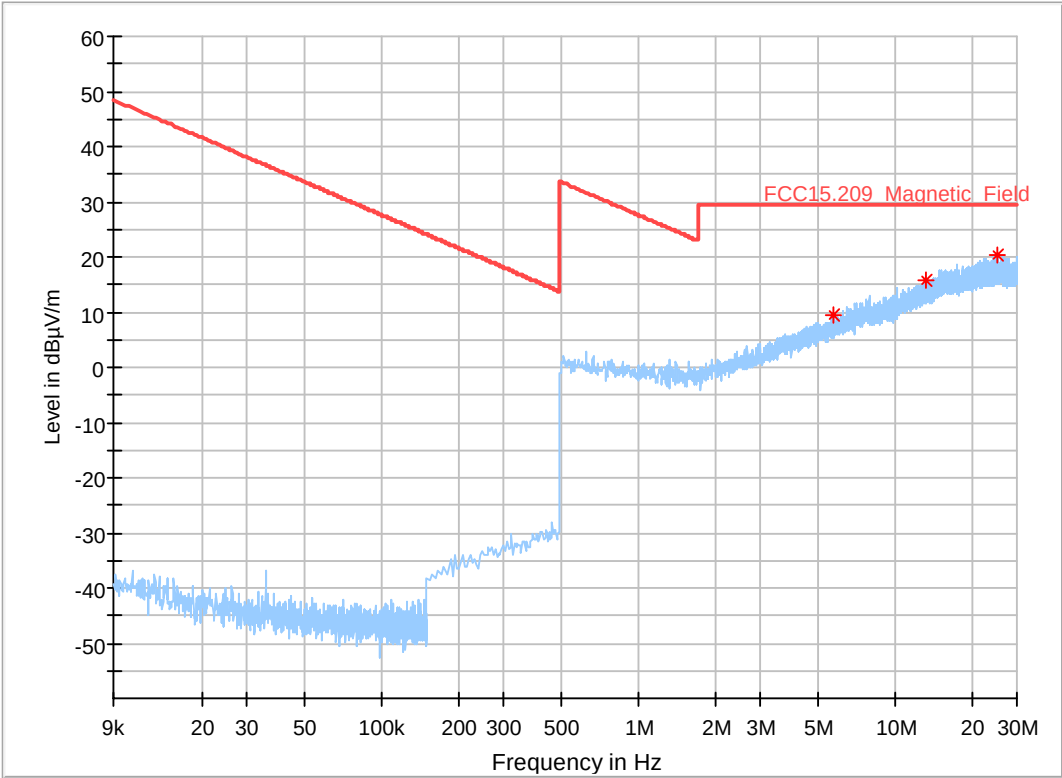

Note: Only Noise level,  $\leq 20$  dBµV.

## 3.04\_RSE\_TX\_NormMode\_EUT\_standing

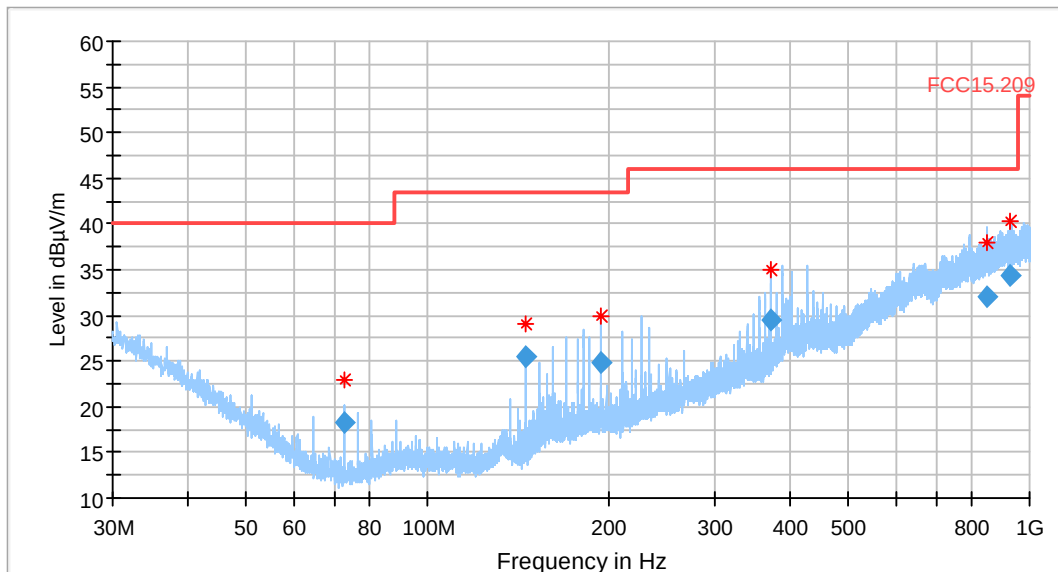


### Final\_Result

| Frequency (MHz) | Quasi Peak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Sig Path (dB) |
|-----------------|---------------------|----------------|-------------|-----------------|-------------|-----|---------------|--------------|---------------|
| 72.683000       | 18.26               | 40.00          | 21.74       | 120.000         | 144.0       | V   | 53.0          | 6.2          | 0.0           |
| 145.355000      | 25.39               | 43.50          | 18.11       | 120.000         | 105.0       | V   | 355.0         | 8.0          | 0.0           |
| 193.925000      | 24.87               | 43.50          | 18.63       | 120.000         | 109.0       | V   | 223.0         | 11.2         | 0.0           |
| 371.485000      | 29.58               | 46.00          | 16.42       | 120.000         | 144.0       | V   | 6.0           | 17.1         | 0.0           |
| 848.243000      | 31.98               | 46.00          | 14.02       | 120.000         | 263.0       | H   | 43.0          | 26.4         | 0.0           |
| 927.923000      | 34.46               | 46.00          | 11.54       | 120.000         | 280.0       | H   | 15.0          | 27.0         | 0.0           |

(continuation of the "Final\_Result" table from column 17 ...)

| Frequency (MHz) | Preamp (dB) | Trd Corr. (dB/m) | Raw Rec (dBµV) | Comment               |
|-----------------|-------------|------------------|----------------|-----------------------|
| 72.683000       | 0.8         | 5.4              | 12.0           | 12:20:32 - 19.07.2024 |
| 145.355000      | 1.1         | 6.9              | 17.4           | 12:10:48 - 19.07.2024 |
| 193.925000      | 1.5         | 9.6              | 13.7           | 12:15:29 - 19.07.2024 |
| 371.485000      | 2.0         | 15.2             | 12.4           | 12:25:24 - 19.07.2024 |
| 848.243000      | 3.2         | 23.2             | 5.5            | 12:06:15 - 19.07.2024 |
| 927.923000      | 3.4         | 23.6             | 7.5            | 12:00:46 - 19.07.2024 |

## 3.06\_RSE\_TX\_NormMode\_EUT\_laying

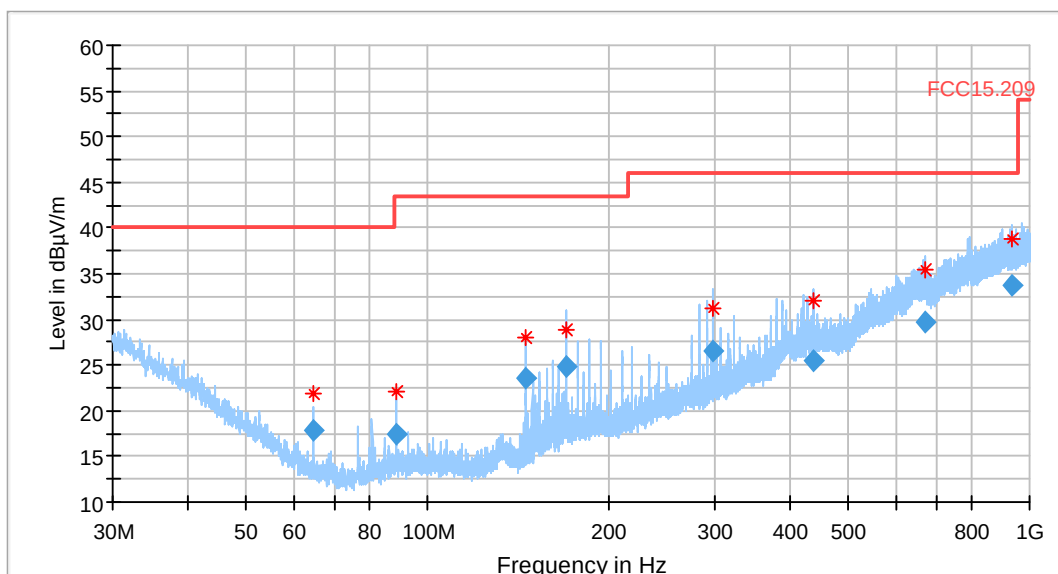


### Final Result

| Frequency (MHz) | Quasi Peak (dBμV /m) | Limit (dBμV /m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Sig Path (dB) |
|-----------------|----------------------|-----------------|-------------|-----------------|-------------|-----|---------------|--------------|---------------|
| 64.643000       | 17.90                | 40.00           | 22.10       | 120.000         | 129.0       | V   | 174.0         | 6.9          | 0.0           |
| 88.845000       | 17.42                | 43.50           | 26.08       | 120.000         | 159.0       | V   | 12.0          | 7.8          | 0.0           |
| 145.405000      | 23.59                | 43.50           | 19.91       | 120.000         | 105.0       | V   | 108.0         | 8.0          | 0.0           |
| 169.643000      | 24.92                | 43.50           | 18.58       | 120.000         | 105.0       | V   | 89.0          | 10.0         | 0.0           |
| 298.835000      | 26.45                | 46.00           | 19.55       | 120.000         | 169.0       | V   | 99.0          | 15.1         | 0.0           |
| 436.159000      | 25.44                | 46.00           | 20.56       | 120.000         | 259.0       | V   | 24.0          | 20.2         | 0.0           |
| 672.445000      | 29.70                | 46.00           | 16.30       | 120.000         | 298.0       | V   | 290.0         | 24.1         | 0.0           |
| 934.883000      | 33.72                | 46.00           | 12.28       | 120.000         | 360.0       | V   | 273.0         | 27.1         | 0.0           |

(continuation of the "Final Result" table from column 17 ...)

| Frequency (MHz) | Preamp (dB) | Trd Corr. (dB/m) | Raw Rec (dBμV) | Comment               |
|-----------------|-------------|------------------|----------------|-----------------------|
| 64.643000       | 0.7         | 6.1              | 11.0           | 14:21:46 - 19.07.2024 |
| 88.845000       | 0.9         | 6.9              | 9.6            | 13:57:12 - 19.07.2024 |
| 145.405000      | 1.1         | 6.9              | 15.6           | 14:06:59 - 19.07.2024 |
| 169.643000      | 1.4         | 8.6              | 14.9           | 14:02:01 - 19.07.2024 |
| 298.835000      | 1.7         | 13.4             | 11.4           | 14:12:05 - 19.07.2024 |
| 436.159000      | 2.2         | 18.0             | 5.3            | 13:48:07 - 19.07.2024 |
| 672.445000      | 2.8         | 21.3             | 5.6            | 14:16:33 - 19.07.2024 |
| 934.883000      | 3.4         | 23.7             | 6.6            | 13:51:52 - 19.07.2024 |

# TID031\_24-1-0040201T001\_RSE\_1 - 15 GHz\_S10\_C02

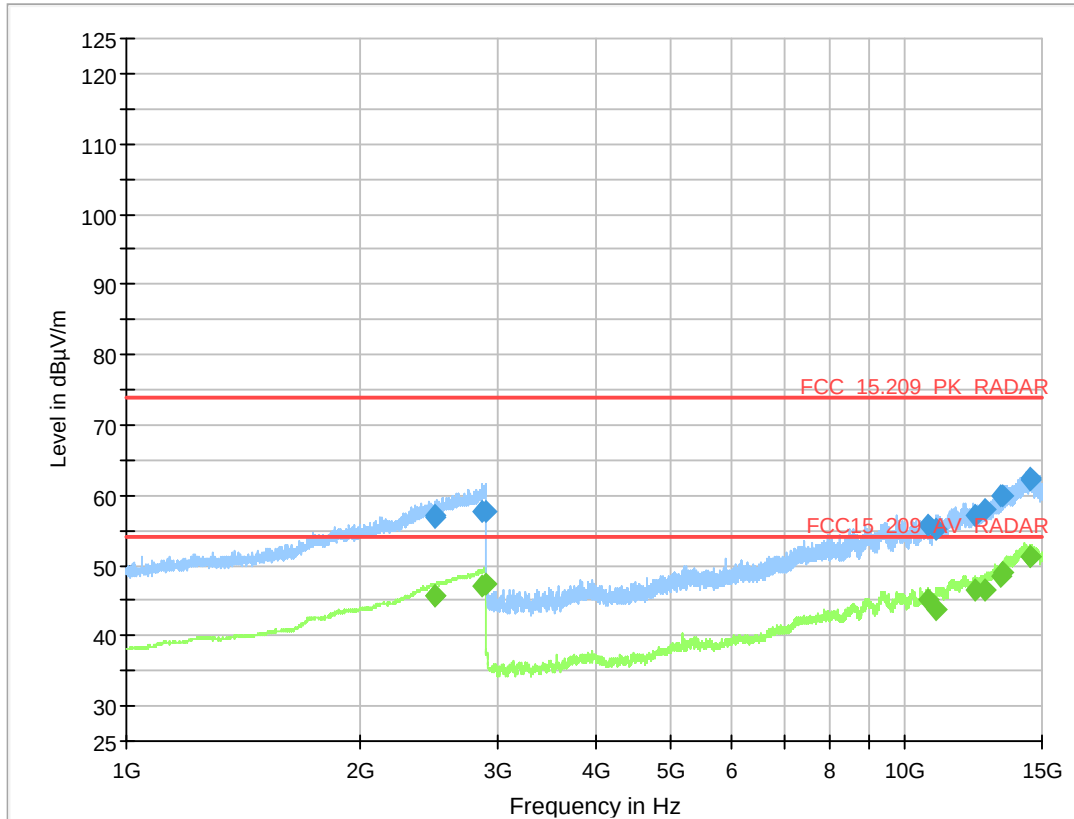

## Final\_Result\_PK+

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Elevation (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|-----------------|--------------|
| 2493.713333     | 56.97            | 74.00          | 17.03       | 1000.000        | 155.0       | V   | 265.0         | 90.0            | 33.5         |
| 2497.006666     | 57.07            | 74.00          | 16.93       | 1000.000        | 155.0       | V   | 12.0          | 90.0            | 33.6         |
| 2857.123333     | 57.78            | 74.00          | 16.22       | 1000.000        | 155.0       | H   | 91.0          | 0.0             | 34.5         |
| 2898.963232     | 57.74            | 74.00          | 16.26       | 1000.000        | 155.0       | V   | 315.0         | 90.0            | 34.7         |
| 10712.232500    | 55.79            | 74.00          | 18.21       | 1000.000        | 155.0       | H   | 175.0         | 0.0             | 9.0          |
| 10951.509583    | 55.06            | 74.00          | 18.94       | 1000.000        | 155.0       | V   | 343.0         | 0.0             | 8.8          |
| 12288.717917    | 57.07            | 74.00          | 16.93       | 1000.000        | 155.0       | H   | 221.0         | 90.0            | 11.3         |
| 12657.387500    | 57.92            | 74.00          | 16.08       | 1000.000        | 155.0       | V   | 213.0         | 0.0             | 12.4         |
| 13280.693333    | 59.86            | 74.00          | 14.14       | 1000.000        | 155.0       | H   | 230.0         | 0.0             | 13.7         |
| 13379.612083    | 59.83            | 74.00          | 14.17       | 1000.000        | 155.0       | H   | 146.0         | 0.0             | 13.9         |
| 14475.135417    | 62.07            | 74.00          | 11.93       | 1000.000        | 155.0       | V   | 84.0          | 90.0            | 14.9         |
| 14479.732917    | 62.44            | 74.00          | 11.56       | 1000.000        | 155.0       | V   | 342.0         | 90.0            | 14.8         |

(continuation of the "Final\_Result\_PK+" table from column 12 ...)

| Frequency (MHz) | Pream p | Trd Corr. (dB/m) | Raw Rec (dBμV) | Comment                 |
|-----------------|---------|------------------|----------------|-------------------------|
| 2493.713333     | 0.0     | 28.7             | 23.5           | 12:40:33 PM - 24-Sep-24 |

|              |     |      |      |                         |
|--------------|-----|------|------|-------------------------|
| 2497.006666  | 0.0 | 28.7 | 23.5 | 12:38:52 PM - 24-Sep-24 |
| 2857.123333  | 0.0 | 29.4 | 23.3 | 12:37:16 PM - 24-Sep-24 |
| 2898.963232  | 0.0 | 29.5 | 23.0 | 12:41:56 PM - 24-Sep-24 |
| 10712.232500 | 0.0 | 38.1 | 46.8 | 1:14:02 PM - 24-Sep-24  |
| 10951.509583 | 0.0 | 38.2 | 46.3 | 1:20:26 PM - 24-Sep-24  |
| 12288.717917 | 0.0 | 38.4 | 45.7 | 1:22:20 PM - 24-Sep-24  |
| 12657.387500 | 0.0 | 38.5 | 45.5 | 1:18:47 PM - 24-Sep-24  |
| 13280.693333 | 0.0 | 39.8 | 46.2 | 1:17:11 PM - 24-Sep-24  |
| 13379.612083 | 0.0 | 40.1 | 45.9 | 1:15:32 PM - 24-Sep-24  |
| 14475.135417 | 0.0 | 41.3 | 47.2 | 1:24:08 PM - 24-Sep-24  |
| 14479.732917 | 0.0 | 41.3 | 47.6 | 1:26:00 PM - 24-Sep-24  |

## Final Result RMS

| Frequency (MHz) | RMS (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Elevation (deg) | Corr. (dB/m) |
|-----------------|--------------|----------------|-------------|-----------------|-------------|-----|---------------|-----------------|--------------|
| 2493.713333     | 45.72        | 54.00          | 8.28        | 1000.000        | 155.0       | V   | 265.0         | 90.0            | 33.5         |
| 2497.006666     | 45.67        | 54.00          | 8.33        | 1000.000        | 155.0       | V   | 12.0          | 90.0            | 33.6         |
| 2857.123333     | 47.03        | 54.00          | 6.97        | 1000.000        | 155.0       | H   | 91.0          | 0.0             | 34.5         |
| 2898.963232     | 47.38        | 54.00          | 6.62        | 1000.000        | 155.0       | V   | 315.0         | 90.0            | 34.7         |
| 10712.232500    | 45.06        | 54.00          | 8.94        | 1000.000        | 155.0       | H   | 175.0         | 0.0             | 9.0          |
| 10951.509583    | 43.72        | 54.00          | 10.28       | 1000.000        | 155.0       | V   | 343.0         | 0.0             | 8.8          |
| 12288.717917    | 46.41        | 54.00          | 7.59        | 1000.000        | 155.0       | H   | 221.0         | 90.0            | 11.3         |
| 12657.387500    | 46.47        | 54.00          | 7.53        | 1000.000        | 155.0       | V   | 213.0         | 0.0             | 12.4         |
| 13280.693333    | 48.35        | 54.00          | 5.65        | 1000.000        | 155.0       | H   | 230.0         | 0.0             | 13.7         |
| 13379.612083    | 48.90        | 54.00          | 5.10        | 1000.000        | 155.0       | H   | 146.0         | 0.0             | 13.9         |
| 14475.135417    | 51.22        | 54.00          | 2.78        | 1000.000        | 155.0       | V   | 84.0          | 90.0            | 14.9         |
| 14479.732917    | 51.28        | 54.00          | 2.72        | 1000.000        | 155.0       | V   | 342.0         | 90.0            | 14.8         |

(continuation of the "Final Result RMS" table from column 12 ...)


| Frequency (MHz) | Preamp (dB) | Trd Corr. | Raw Rec | Comment                 |
|-----------------|-------------|-----------|---------|-------------------------|
| 2493.713333     | 0.0         | 28.7      | 12.2    | 12:40:33 PM - 24-Sep-24 |
| 2497.006666     | 0.0         | 28.7      | 12.1    | 12:38:52 PM - 24-Sep-24 |
| 2857.123333     | 0.0         | 29.4      | 12.5    | 12:37:16 PM - 24-Sep-24 |
| 2898.963232     | 0.0         | 29.5      | 12.7    | 12:41:57 PM - 24-Sep-24 |
| 10712.232500    | 0.0         | 38.1      | 36.1    | 1:14:03 PM - 24-Sep-24  |
| 10951.509583    | 0.0         | 38.2      | 34.9    | 1:20:26 PM - 24-Sep-24  |
| 12288.717917    | 0.0         | 38.4      | 35.1    | 1:22:20 PM - 24-Sep-24  |
| 12657.387500    | 0.0         | 38.5      | 34.1    | 1:18:47 PM - 24-Sep-24  |
| 13280.693333    | 0.0         | 39.8      | 34.6    | 1:17:11 PM - 24-Sep-24  |
| 13379.612083    | 0.0         | 40.1      | 35.0    | 1:15:33 PM - 24-Sep-24  |
| 14475.135417    | 0.0         | 41.3      | 36.4    | 1:24:09 PM - 24-Sep-24  |
| 14479.732917    | 0.0         | 41.3      | 36.4    | 1:26:00 PM - 24-Sep-24  |

# TID032\_24-1-0040201T001\_RSE\_15 - 18 GHz\_AntV\_S10\_C02

## Common Information

|                           |                                              |
|---------------------------|----------------------------------------------|
| Test Description:         | Radiated Field Strength Emission@3m distance |
| Test Site Location:       | cetecom advanced Essen                       |
| Test Site:                | Fully Anechoic Room (FAR2)                   |
| Test Standard:            | FCC 15.209 & RSS-Gen, Issue 5                |
| Operating Mode:           | RADAR active (57 - 60.72 GHz)                |
| Environmental Conditions: | Humidity: 53rH; Temperature: 23.2°C          |
| SW-Version:               | EMC32 V10.60.20                              |
| Operator:                 | AHo                                          |
| Set-up:                   | 1                                            |
| Verdict:                  | Passed                                       |
| EUT Sample No:            | S10_C02                                      |

Full Spectrum

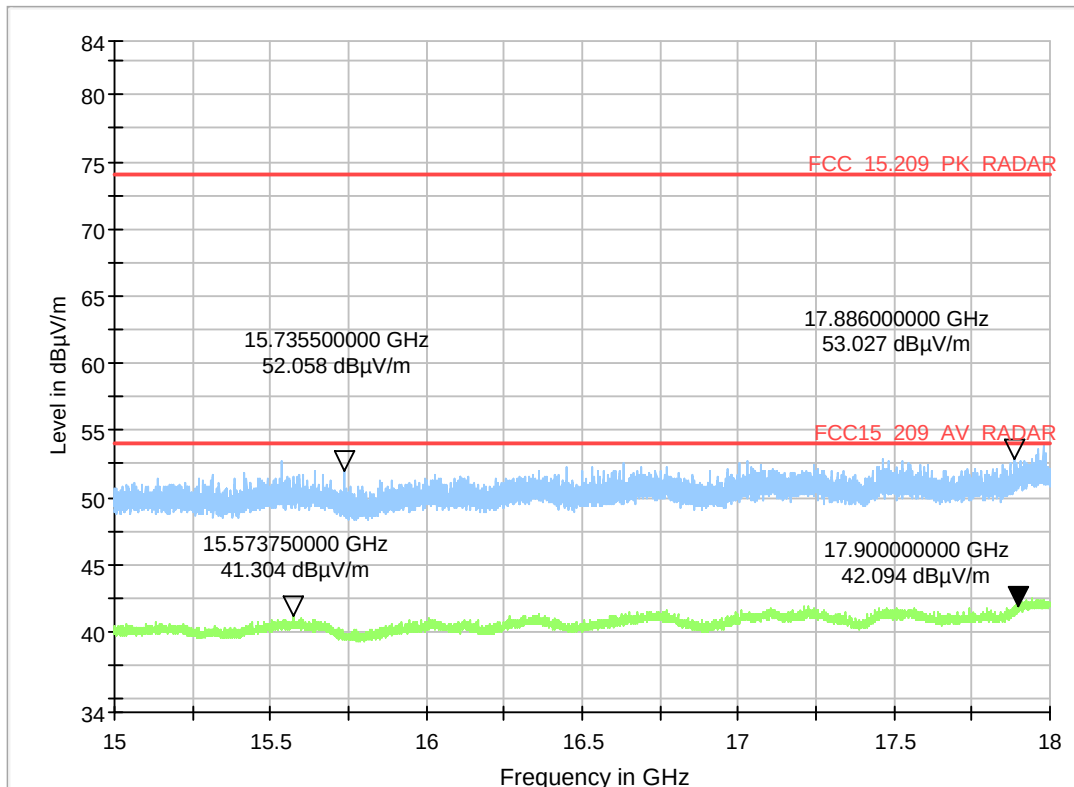




# TID033\_24-1-0040201T001\_RSE\_15 - 18 GHz\_Anth\_S10\_C02


## Common Information

|                           |                                              |
|---------------------------|----------------------------------------------|
| Test Description:         | Radiated Field Strength Emission@3m distance |
| Test Site Location:       | cetecom advanced Essen                       |
| Test Site:                | Fully Anechoic Room (FAR2)                   |
| Test Standard:            | FCC 15.209 & RSS-Gen, Issue 5                |
| Operating Mode:           | RADAR active (57 - 60.72 GHz)                |
| Environmental Conditions: | Humidity: 53rH; Temperature: 23.2°C          |
| SW-Version:               | EMC32 V10.60.20                              |
| Operator:                 | AHo                                          |
| Set-up:                   | 1                                            |
| Verdict:                  | Passed                                       |
| EUT Sample No:            | S10_C02                                      |

Full Spectrum

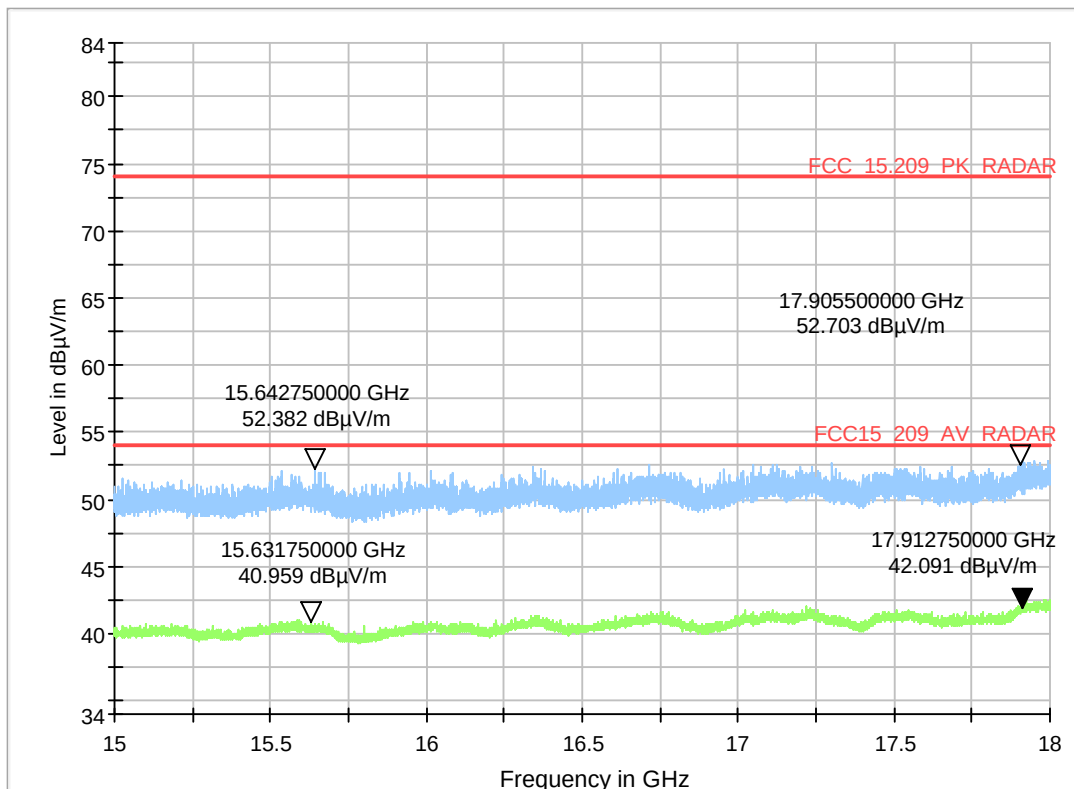


TID034\_24-1-0040201T001\_RSE\_18 - 30 GHz\_Anth\_S08\_C02\_CT\_100ms

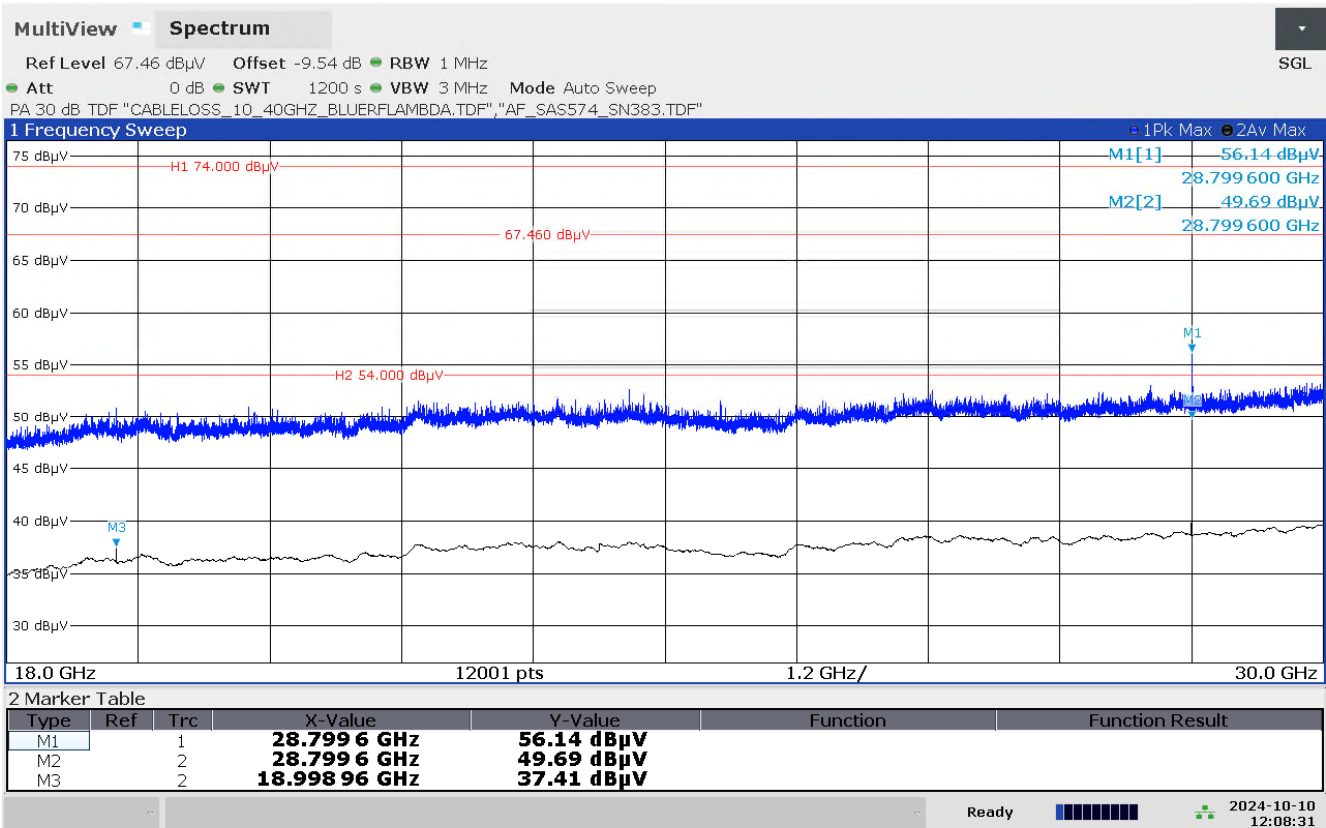


12:08:32 10/10/2024

TID034\_18\_24-1-0040201T001\_Maximum Peak search\_TT286°\_TD136°\_Anth\_S08\_C02\_CT\_100ms

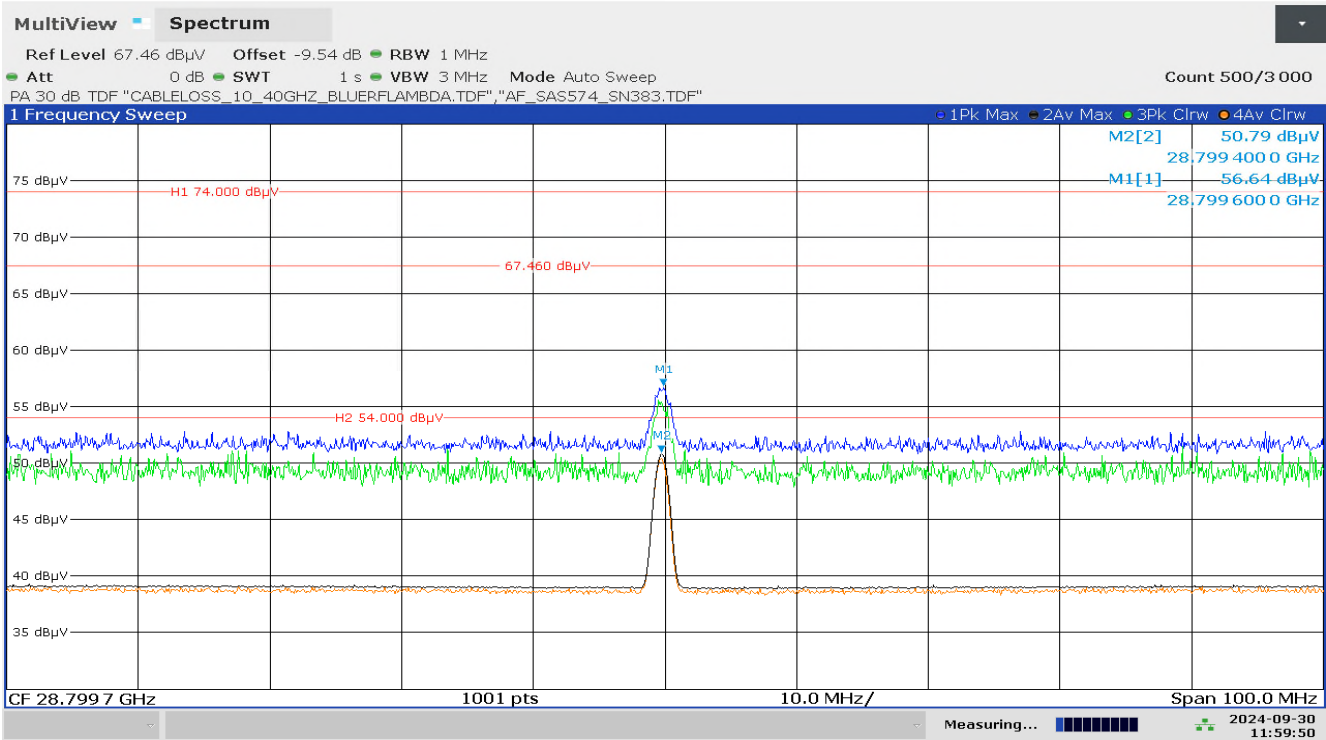


11:59:50 09/30/2024

TID034\_19\_24-1-0040201T001\_Final Result with Zero Span at 28.8 GHz\_AntH\_S08\_C02\_CT\_100ms\_Pass

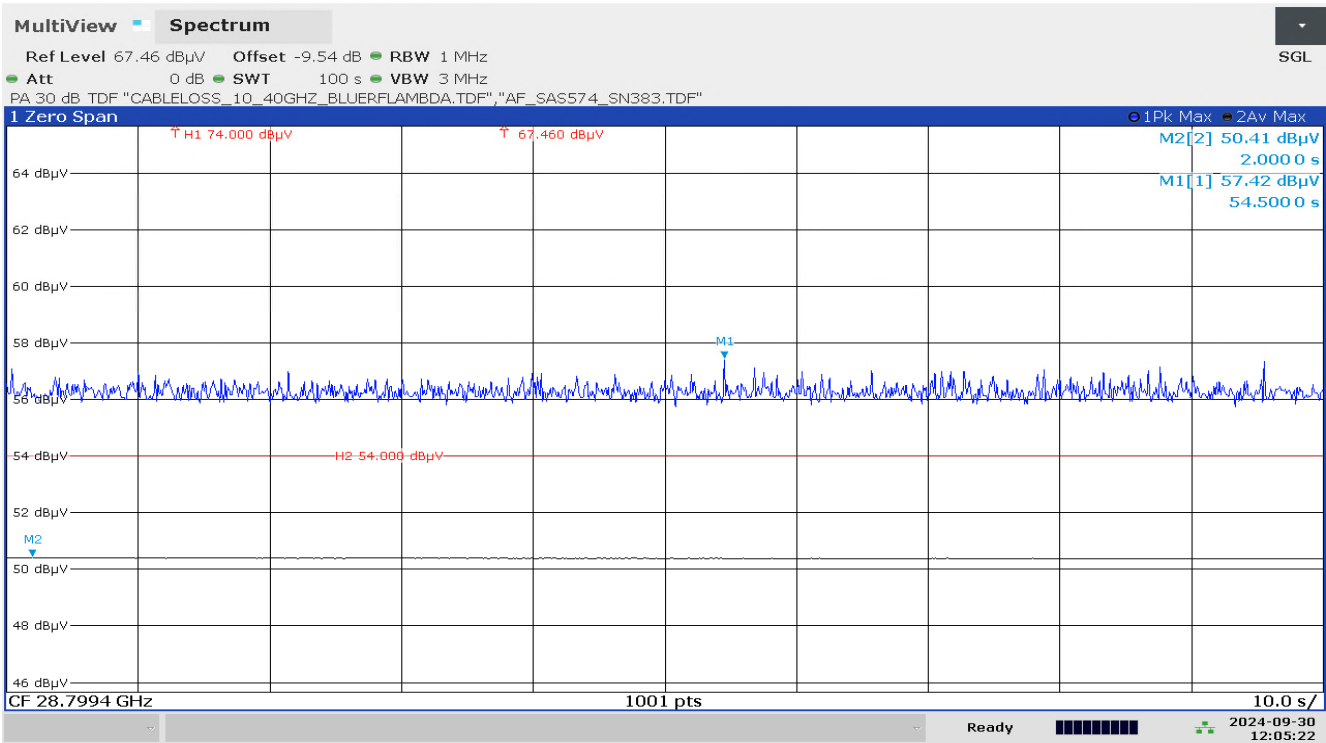


12:05:22 09/30/2024

TID035\_24-1-0040201T001\_RSE\_18 - 30 GHz\_AntV\_S08\_C02\_CT\_100ms

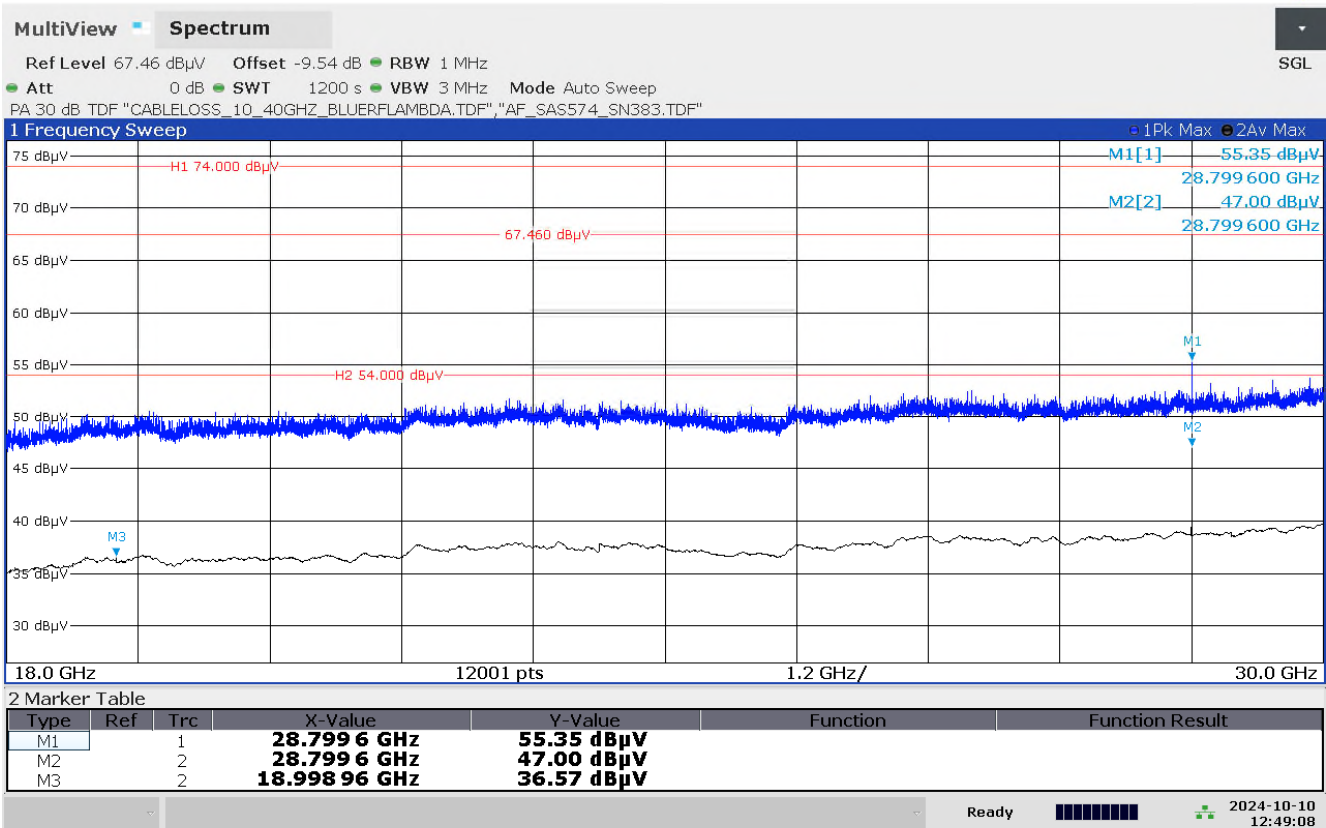


12:49:08 10/10/2024


TID035\_18\_24-1-0040201T001\_Maximum Peak search\_TT342°\_TD72°\_AntV\_S08\_C02\_CT\_100ms

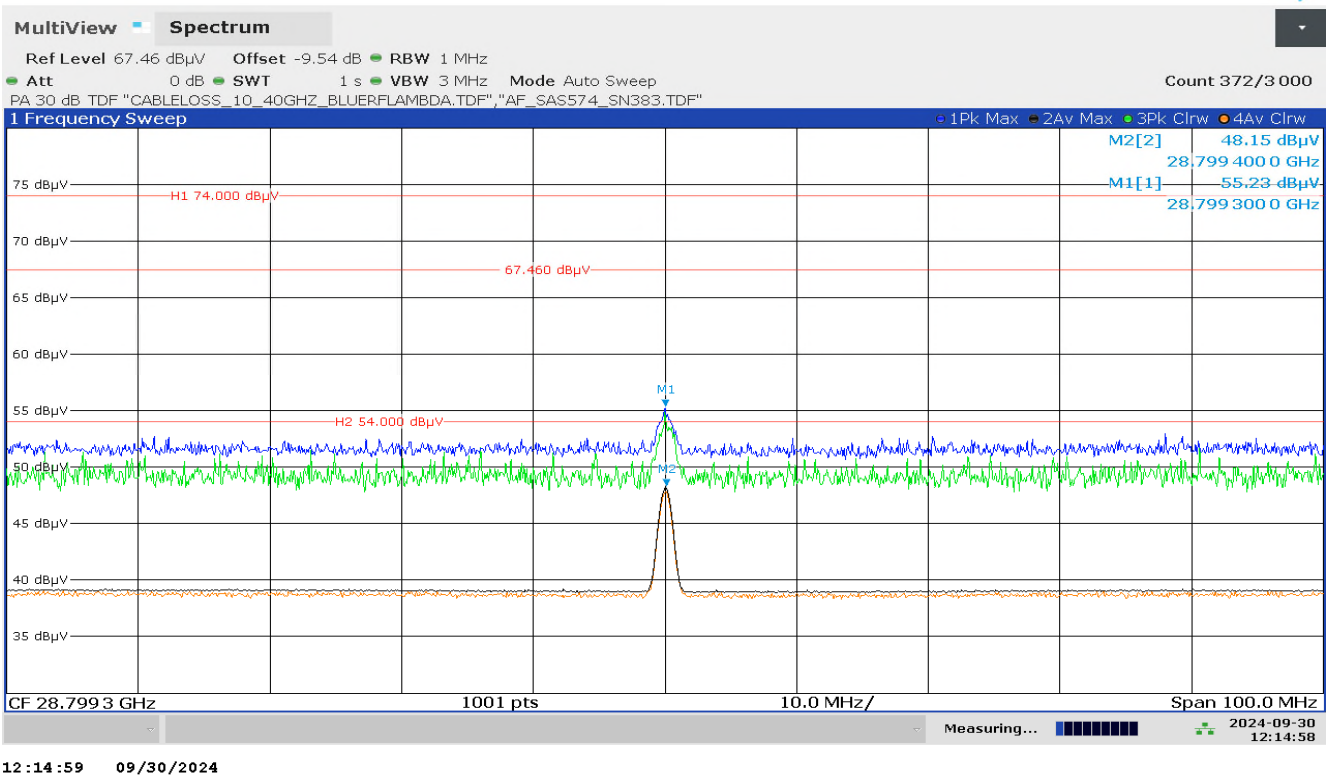

TID035\_19\_24-1-0040201T001\_Final Result with Zero Span at 28.8 GHz\_AntV\_S08\_C02\_CT\_100ms\_Pass

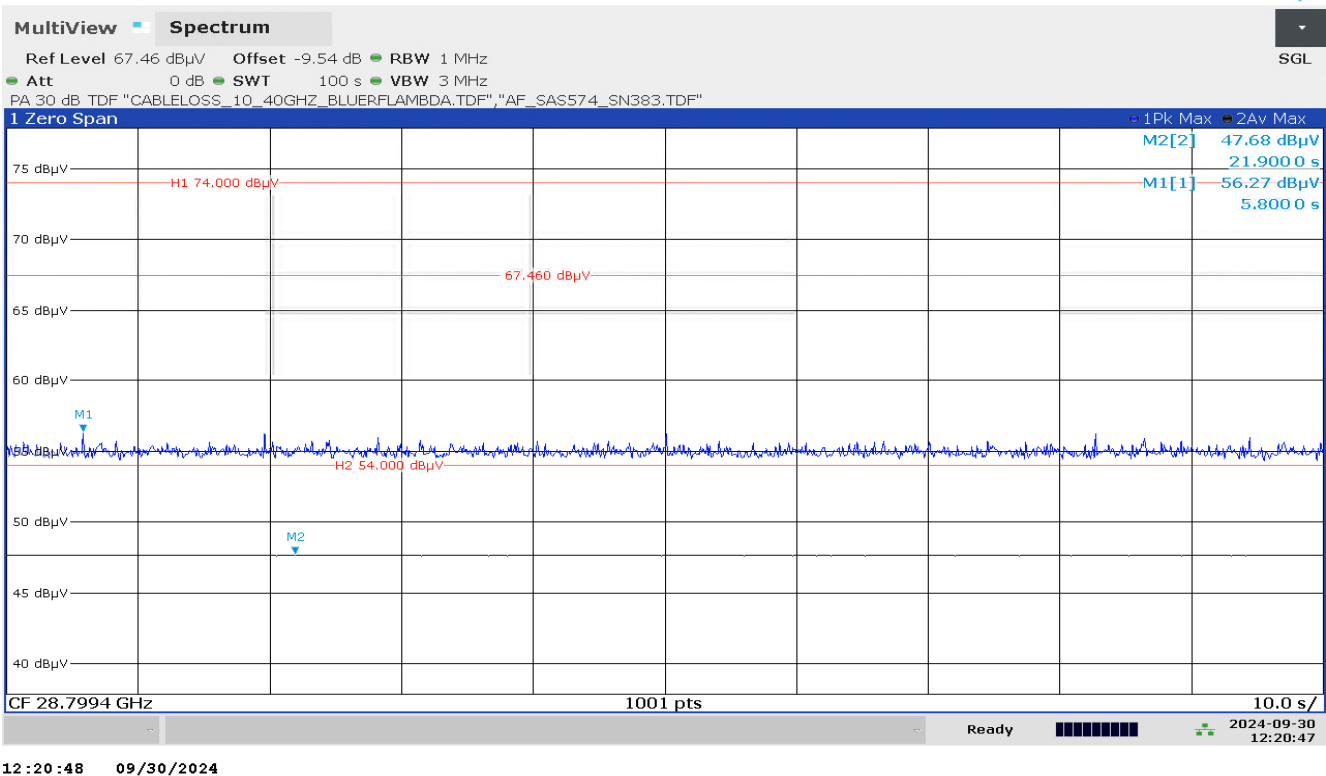


## TID036\_24-1-0040201T001\_RSE\_30 - 40 GHz\_Anth\_S08\_C02\_CT\_100ms

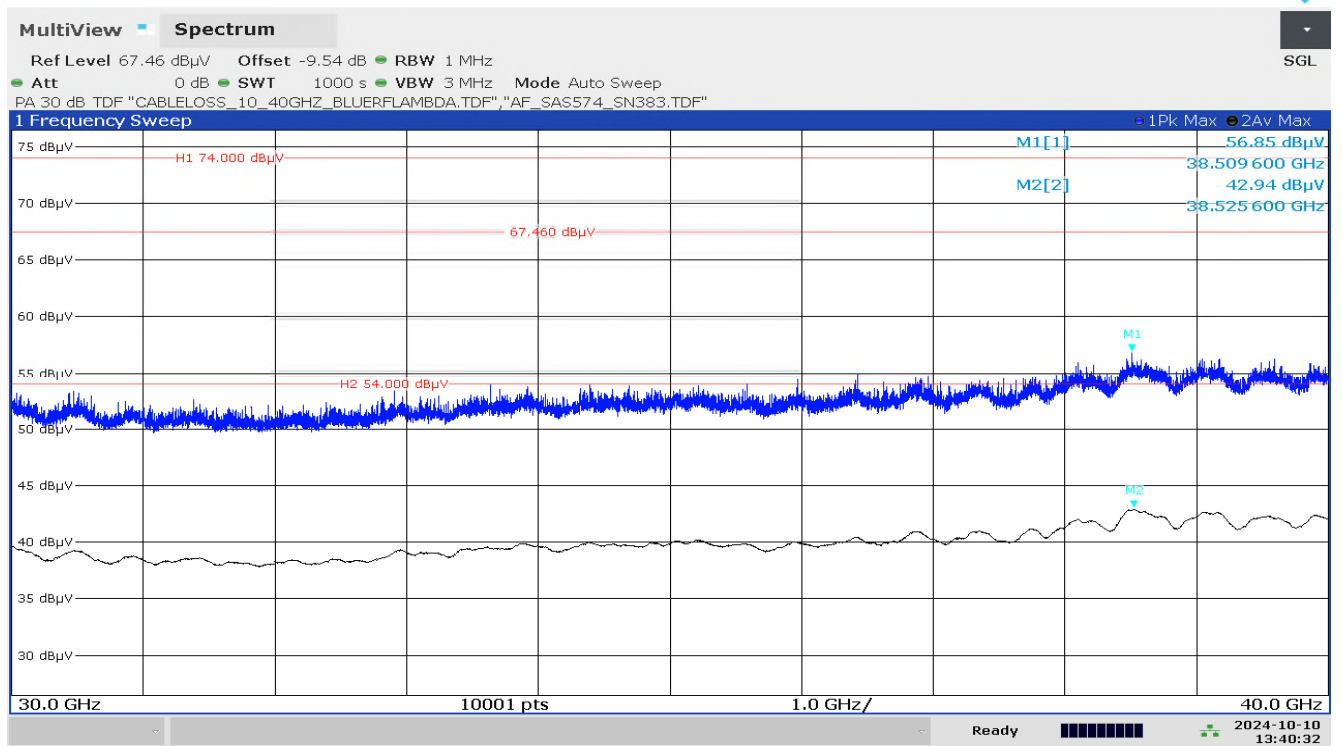


01:40:33 10/10/2024

## TID037\_24-1-0040201T001\_RSE\_30 - 40 GHz\_AntV\_S08\_C02\_CT\_100ms

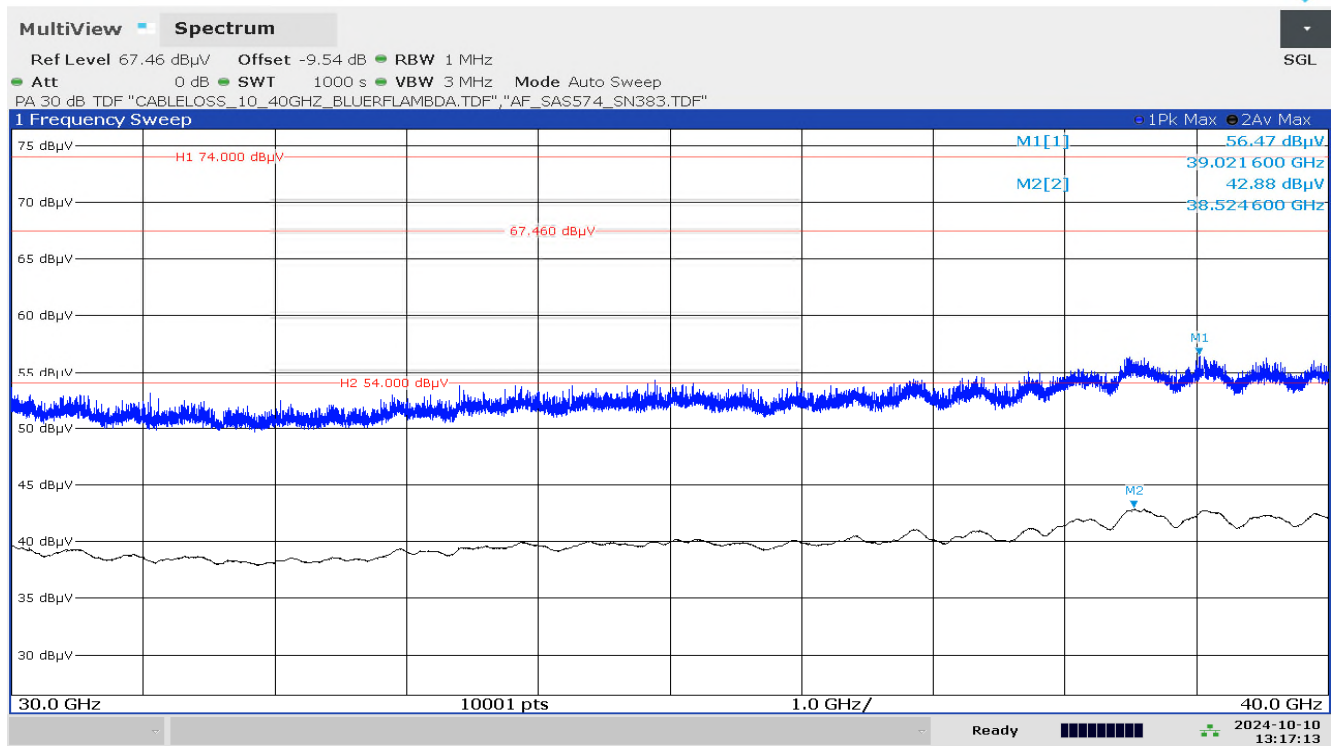


01:17:13 10/10/2024

## TID038\_24-1-0040201T001\_RSE\_40 - 50 GHz\_Anth\_S08\_C02\_CT\_100ms

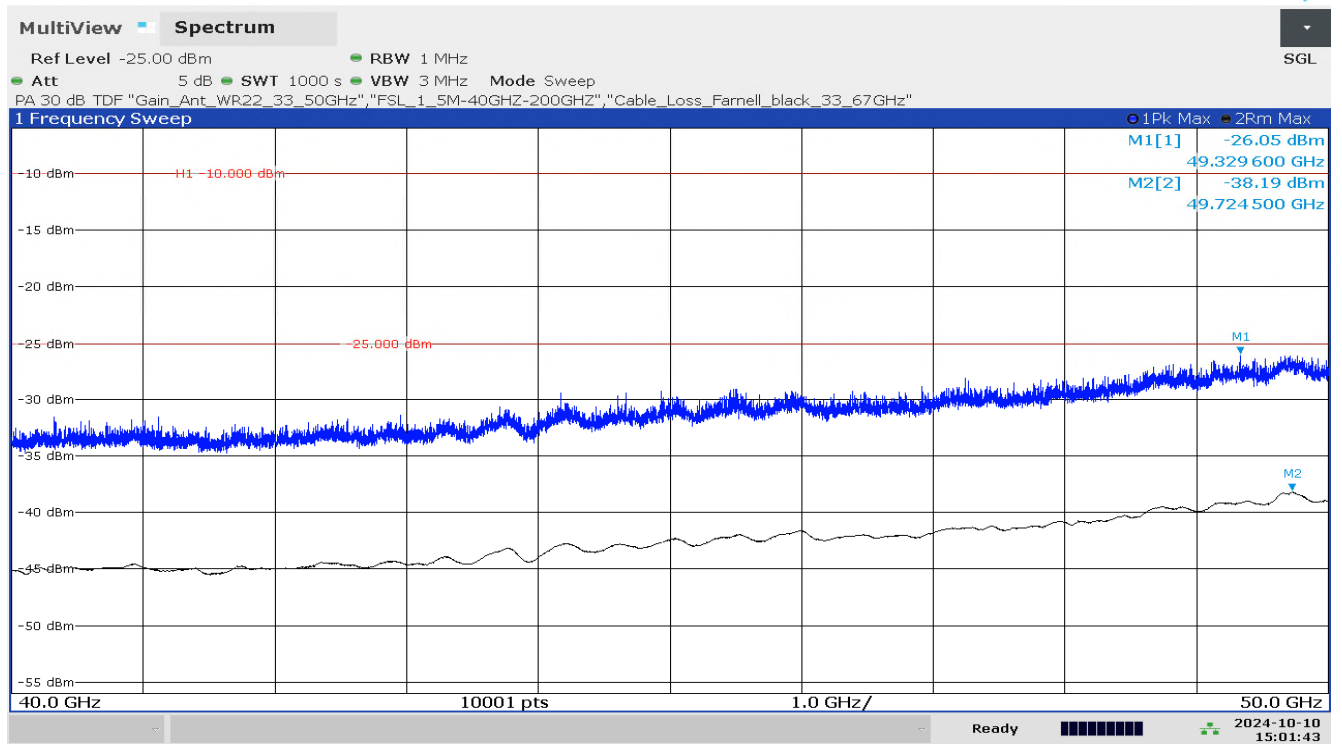

03:01:44 10/10/2024


## TID039\_24-1-0040201T001\_RSE\_40 - 50 GHz\_AntV\_S08\_C02\_CT\_100ms

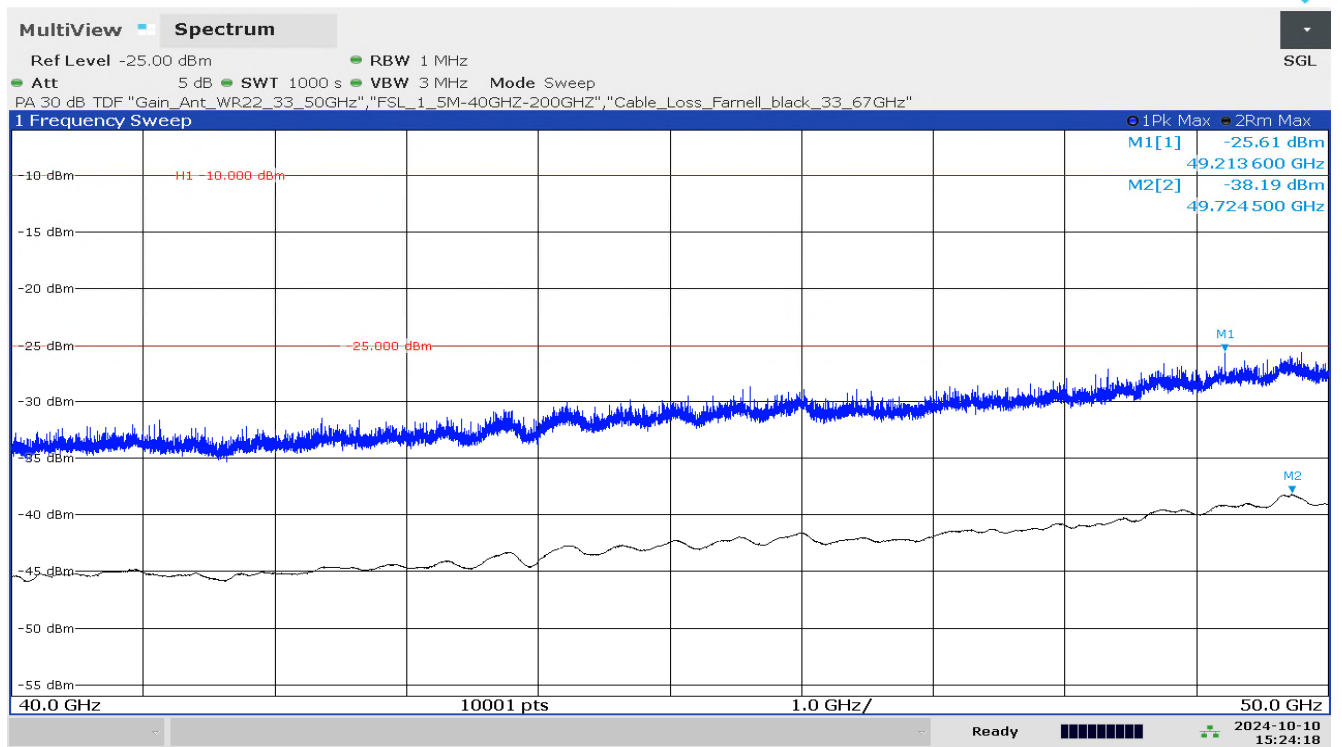

03:24:19 10/10/2024




## TID044\_24-1-0040201T001\_RSE\_50 - 75 GHz\_AntV\_S10\_C02

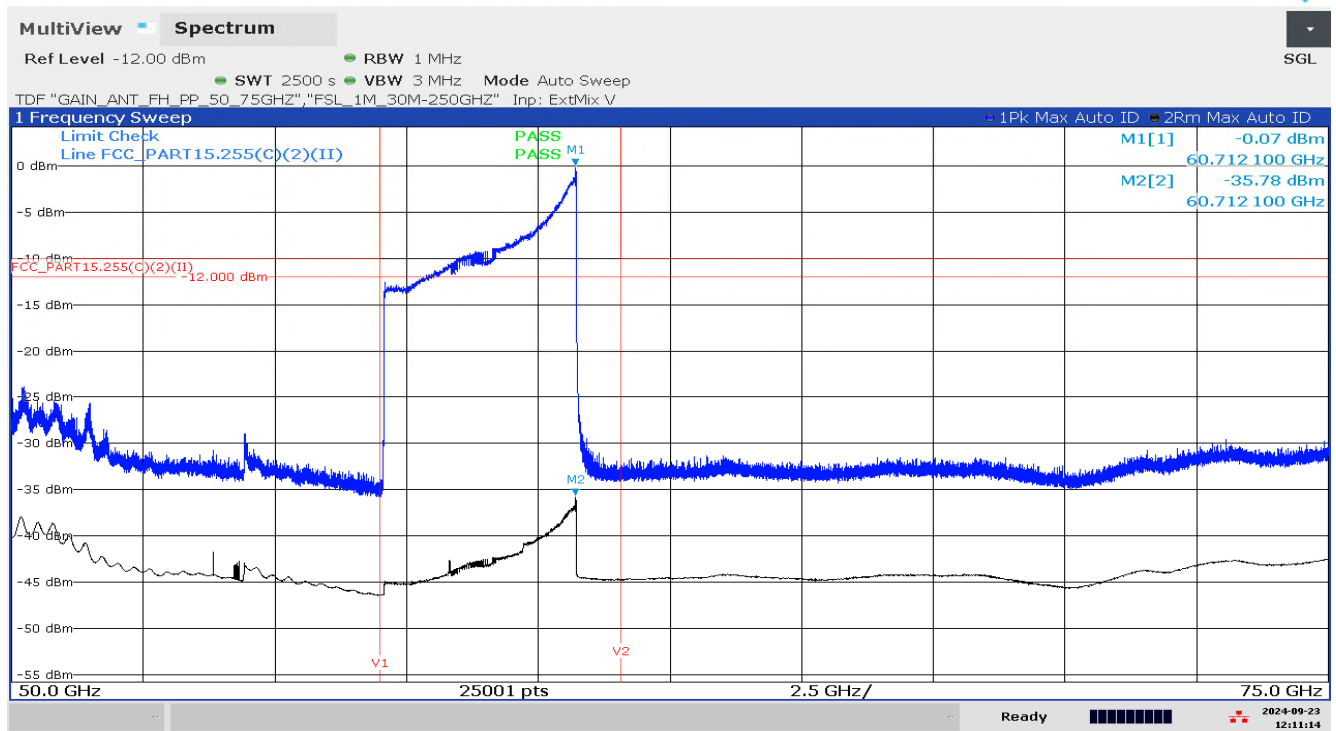

12:11:14 PM 09/23/2024

Note: RADAR active from V1 = 57 GHz to V2 = 61.56 GHz. Therefore V 1 – V2 are not related to Assessment.

## TID045\_24-1-0040201T001\_RSE\_50 - 75 GHz\_AntH\_S10\_C02

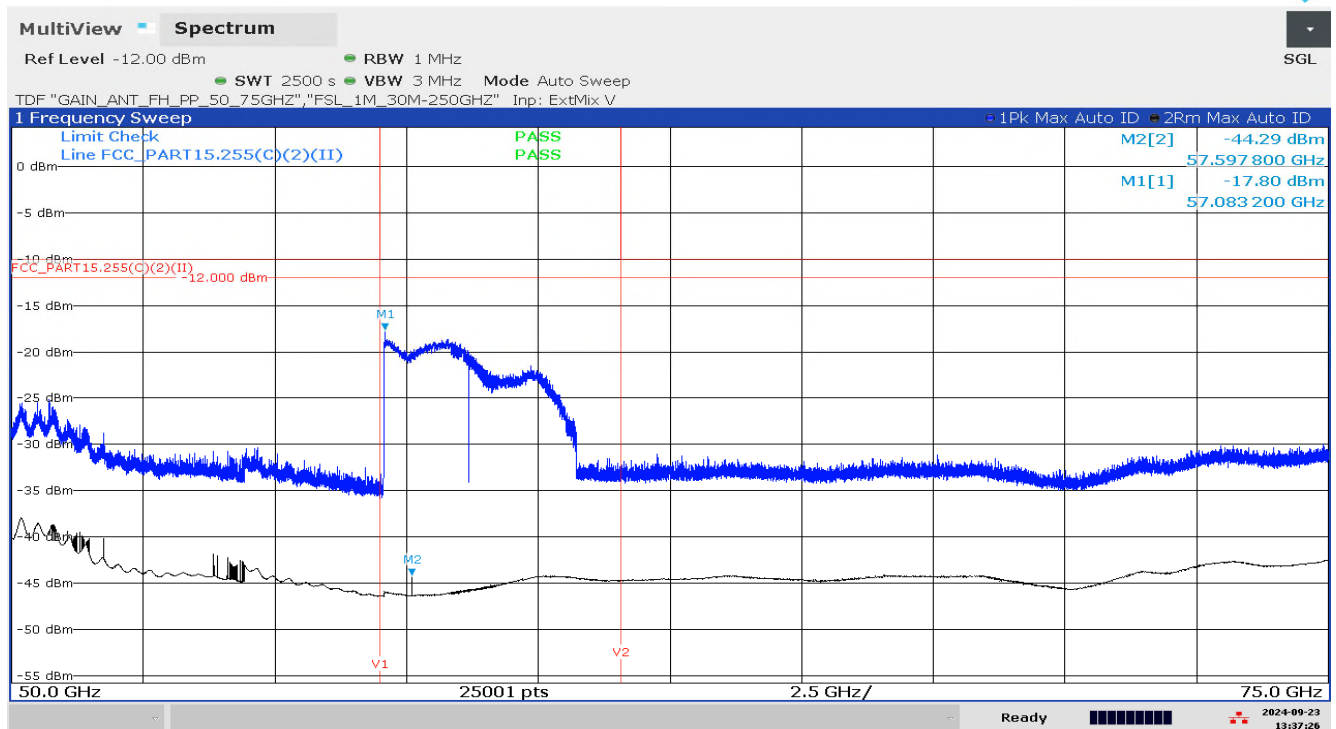


01:37:26 PM 09/23/2024

Note: RADAR active from V1 = 57 GHz to V2 = 61.56 GHz. Therefore V 1 – V2 are not related to Assessment.




TID046\_24-1-0040201T001\_RSE\_75 - 90 GHz\_AntV\_S10\_C02

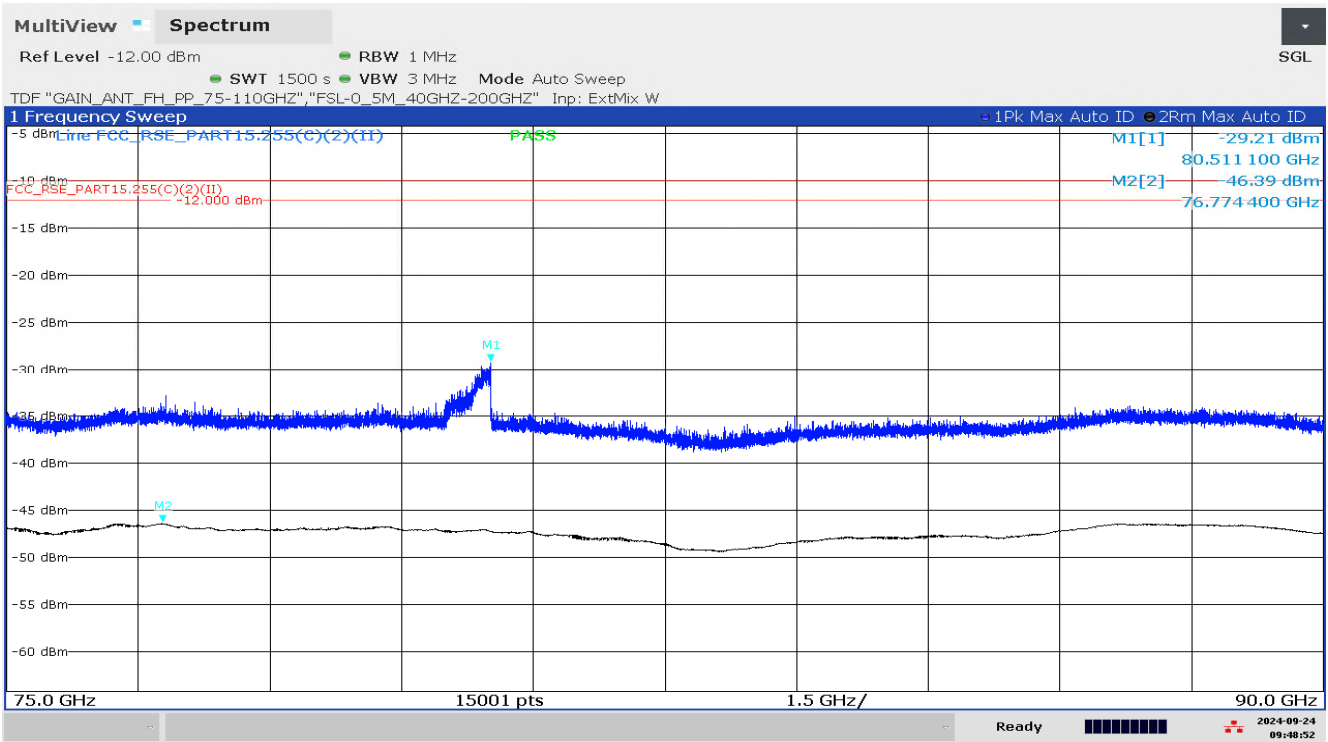

09:48:52 AM 09/24/2024


TID046\_01\_24-1-0040201T001\_RSE\_75 - 90 GHz\_AntV\_S10\_C02\_image\_signal

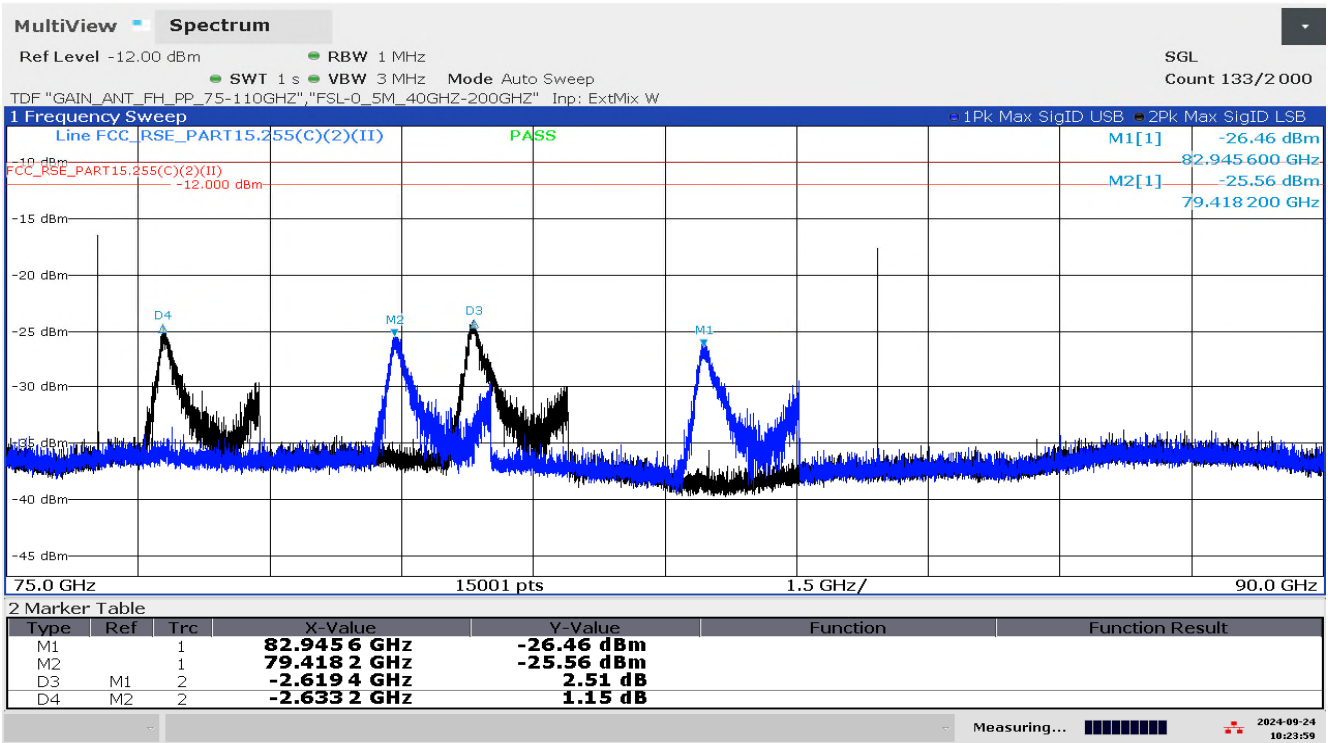

10:24:00 AM 09/24/2024


Note: Only Image signal, no critical emission found.

## TID047\_24-1-0040201T001\_RSE\_75 - 90 GHz\_Anth\_S10\_C02

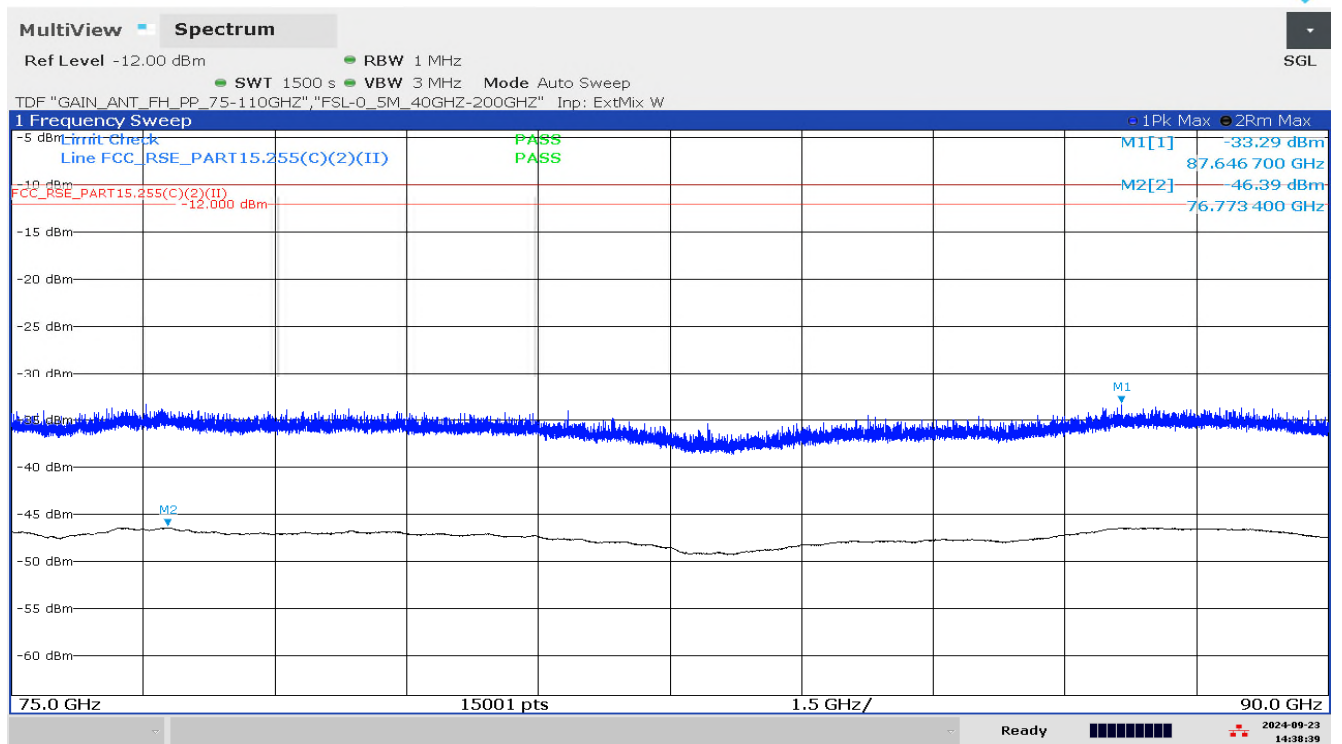


02:38:39 PM 09/23/2024

## TID048\_24-1-0040201T001\_RSE\_90 - 110 GHz\_AntV\_S10\_C02

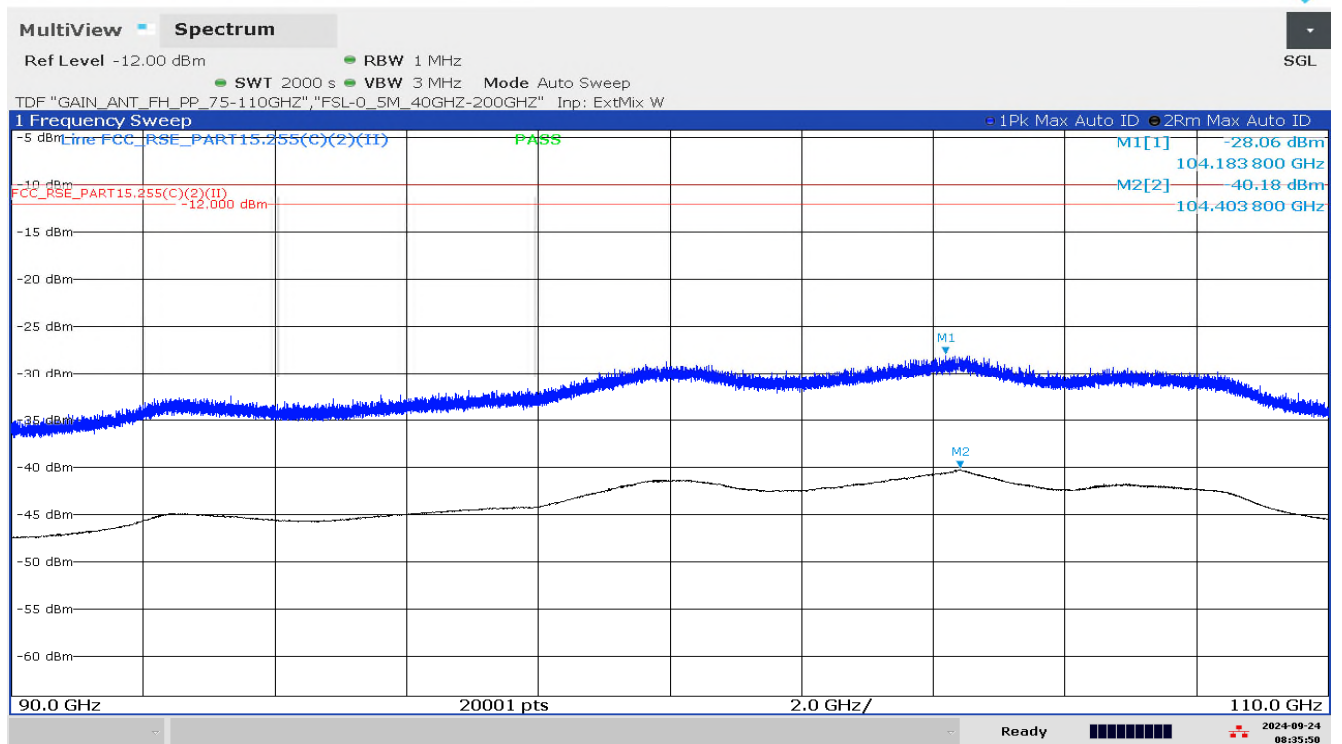


08:35:50 AM 09/24/2024

TID049\_24-1-0040201T001\_RSE\_90 - 110 GHz\_Anth\_S10\_C02

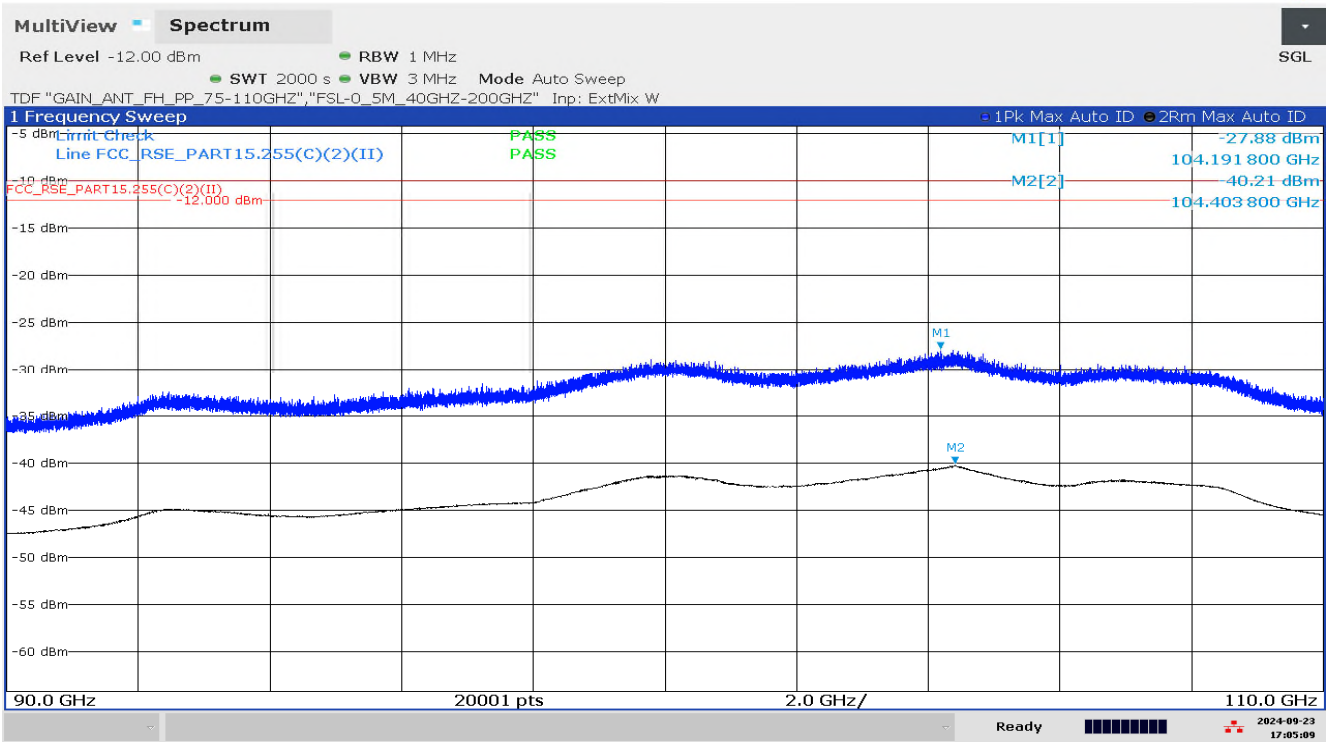


05:05:10 PM 09/23/2024

TID050\_24-1-0040201T001\_RSE\_110 - 115 GHz\_AntV\_S08\_C02

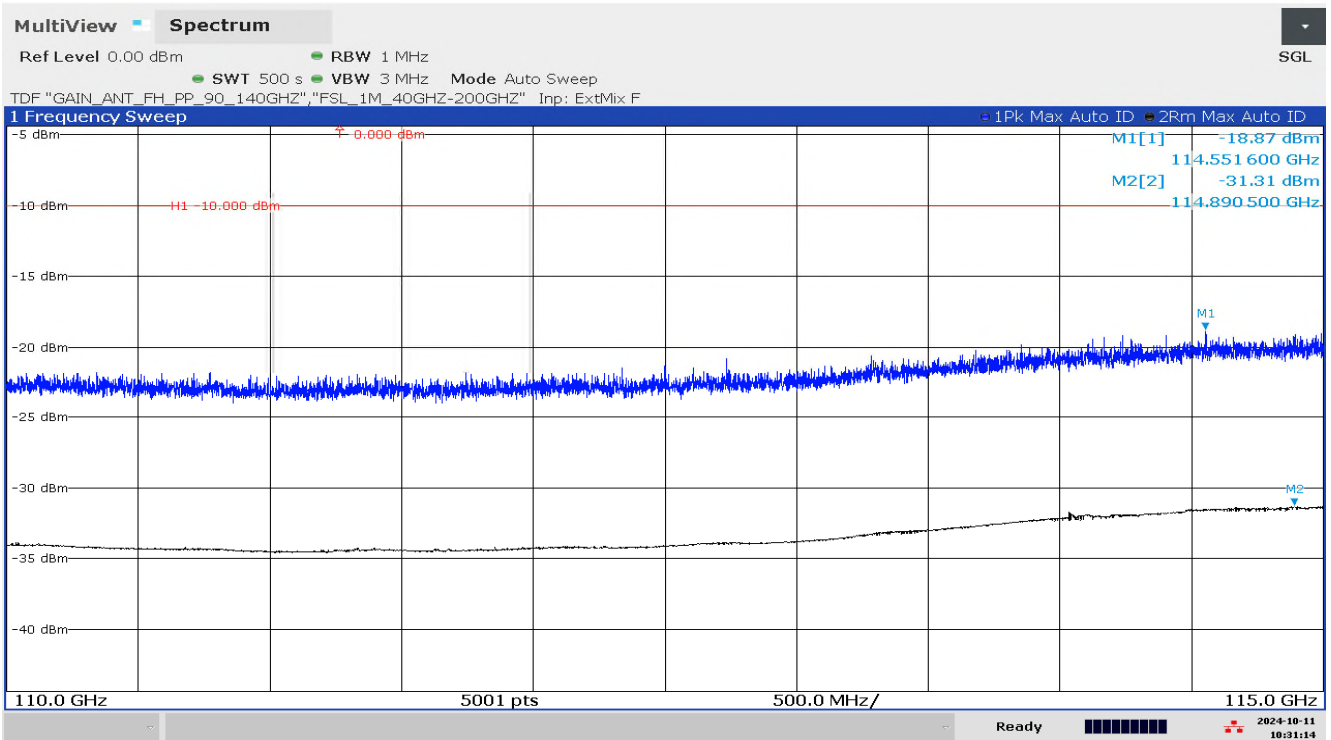


10:31:14 AM 10/11/2024

TID050\_01\_24-1-0040201T001\_RSE\_110 - 115 GHz\_AntH\_S08\_C02

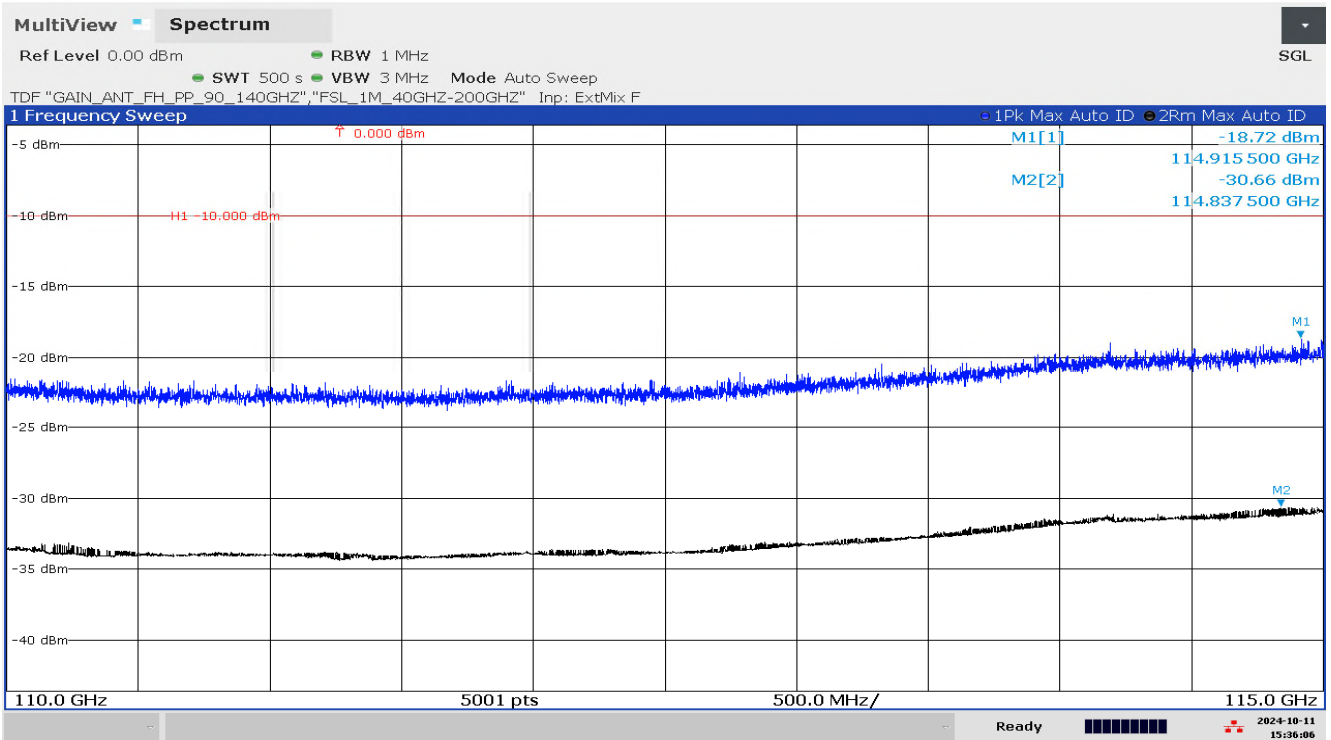


03:36:06 PM 10/11/2024

TID051\_24-1-0040201T001\_RSE\_115 - 120 GHz\_AntV\_S08\_C02

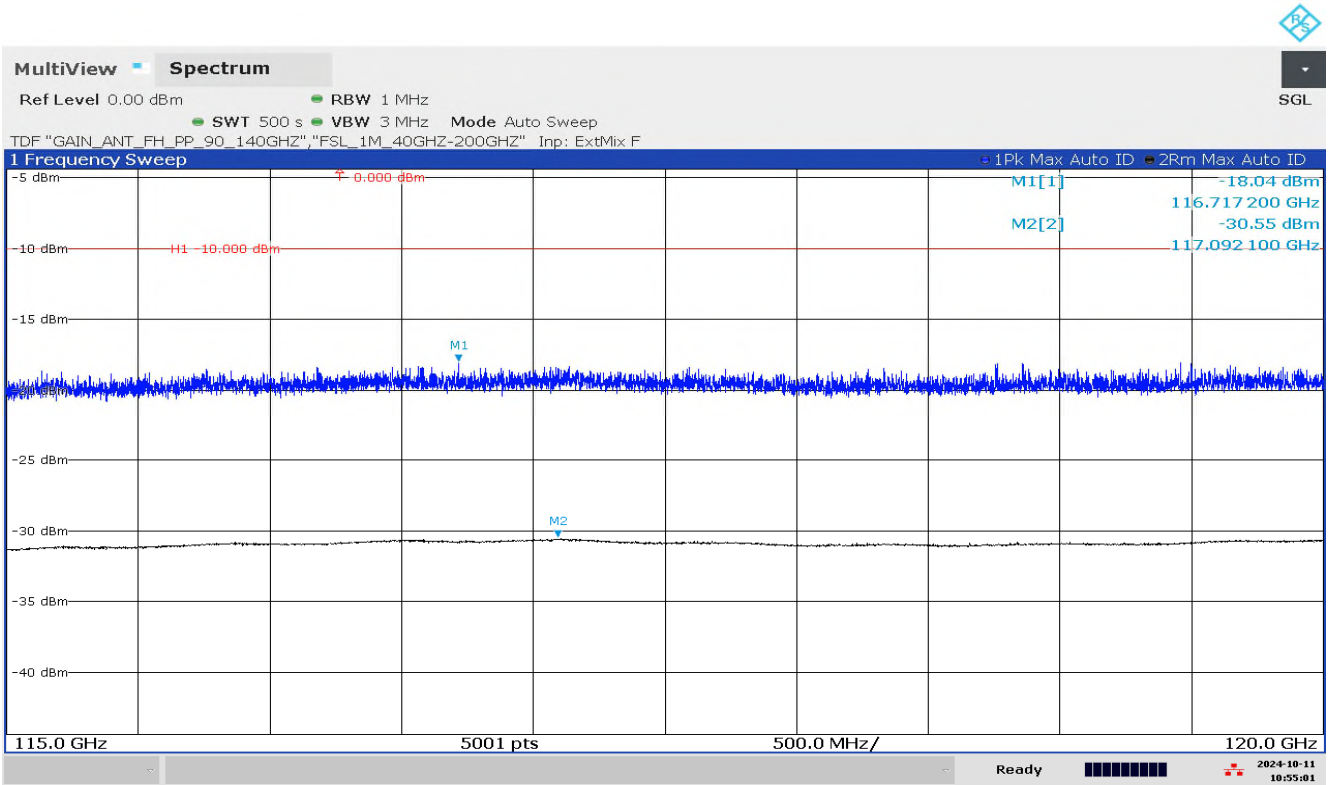


10:55:01 AM 10/11/2024

TID051\_01\_24-1-0040201T001\_RSE\_115 - 120 GHz\_AntH\_S08\_C02

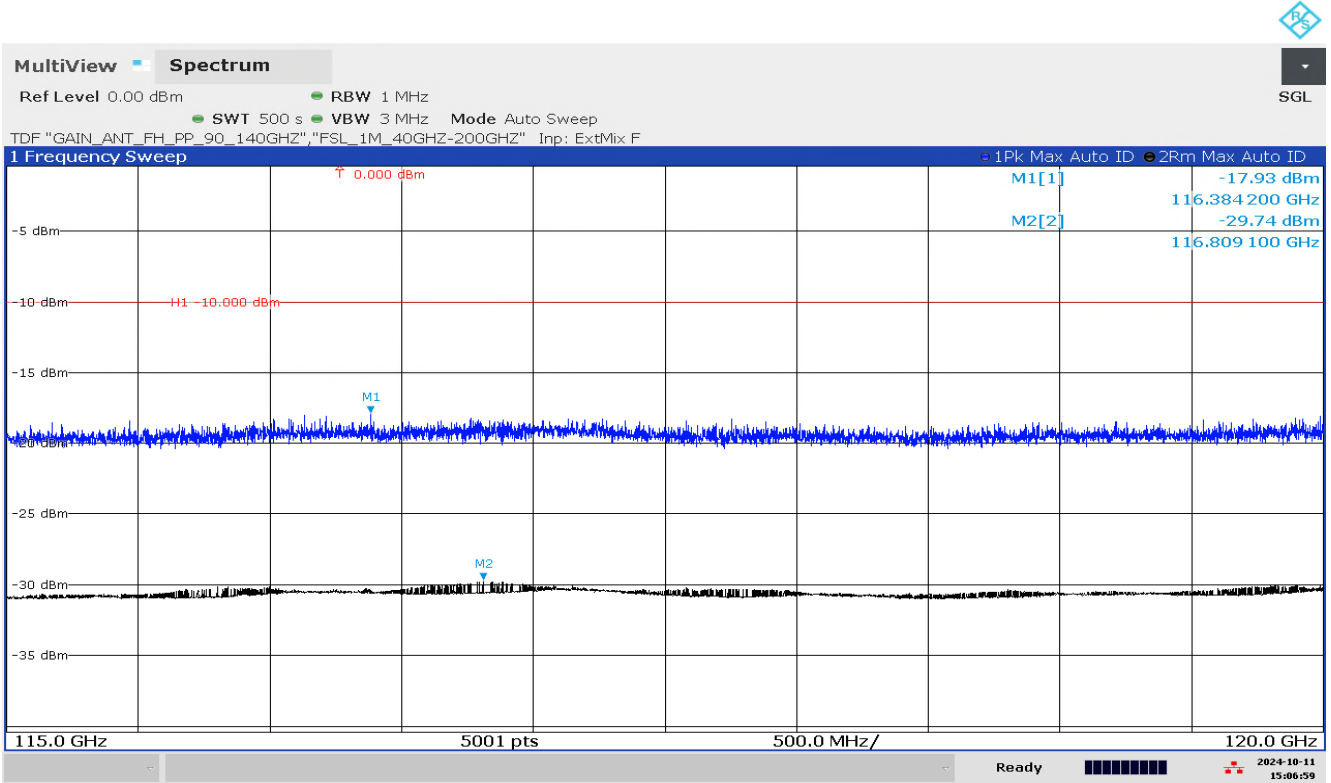


03:06:59 PM 10/11/2024

## TID052\_24-1-0040201T001\_RSE\_120 - 125 GHz\_AntV\_S08\_C02

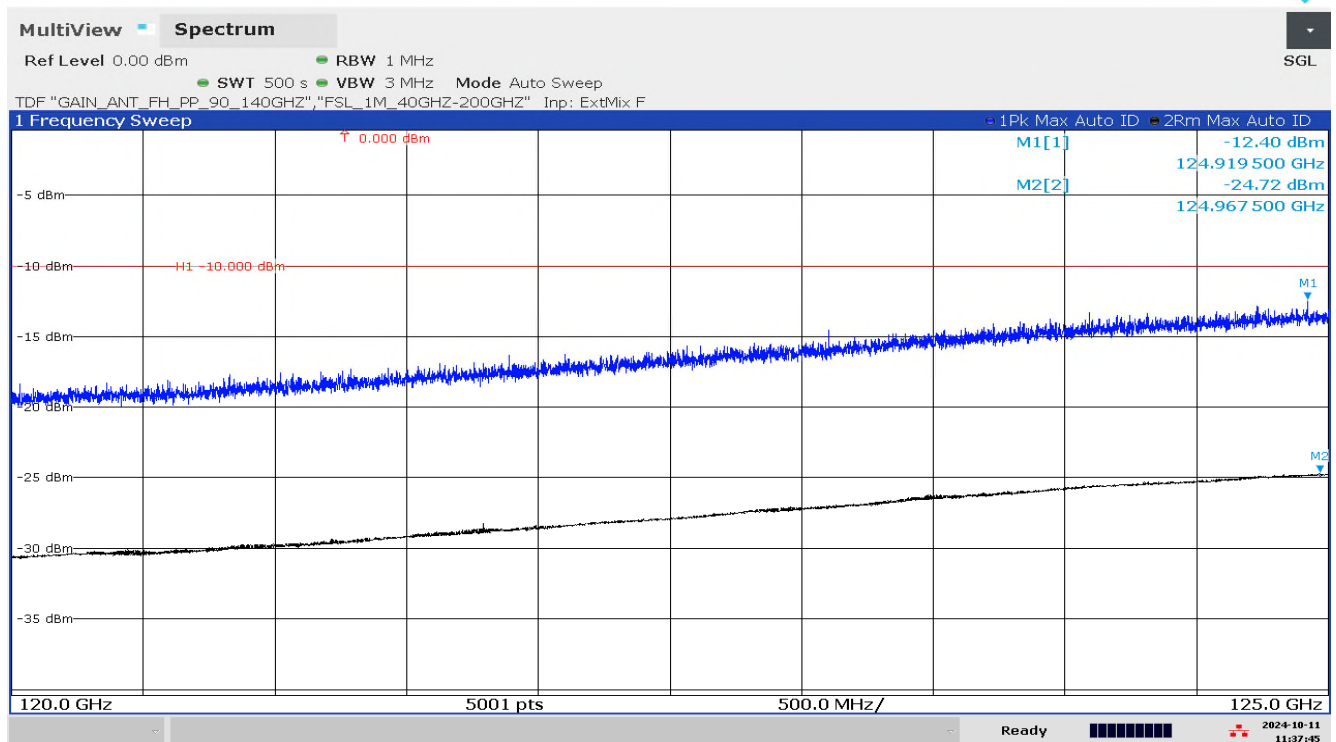

11:37:45 AM 10/11/2024


## TID052\_01\_24-1-0040201T001\_RSE\_120 - 125 GHz\_AntH\_S08\_C02

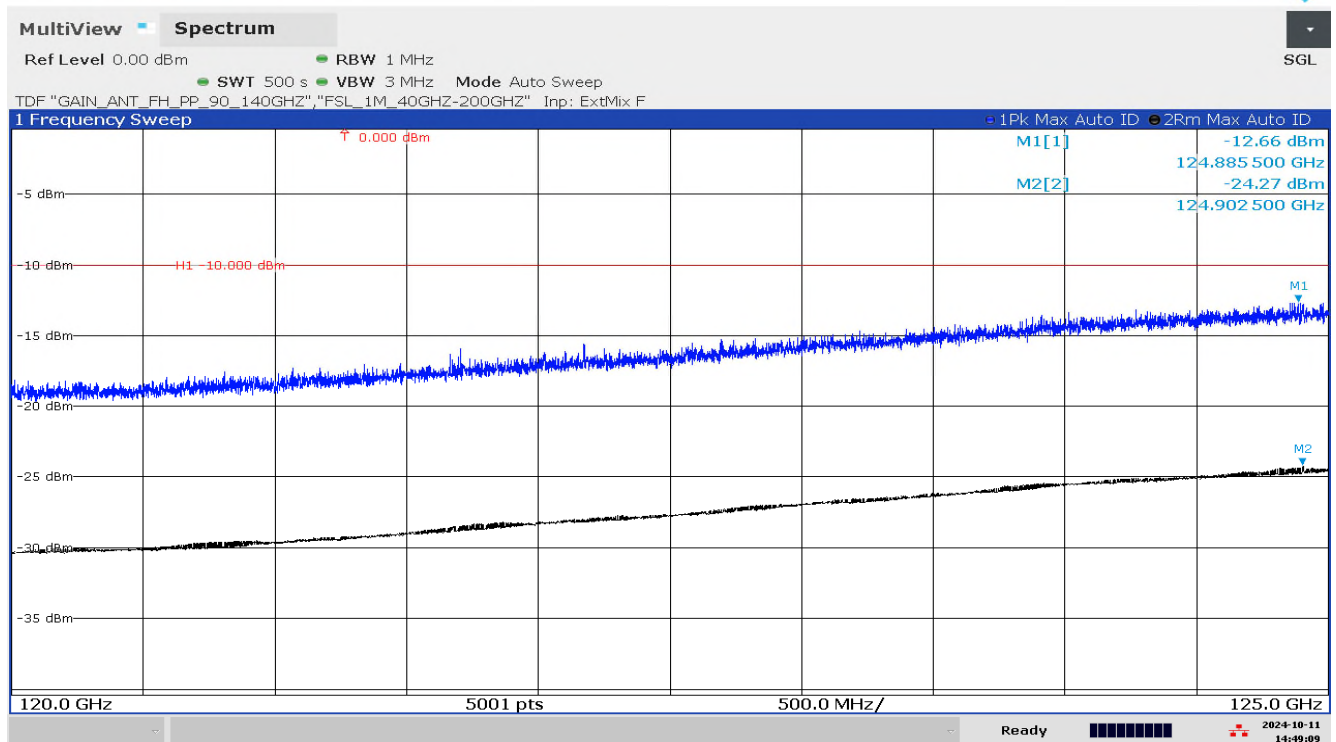

02:49:09 PM 10/11/2024




TID053\_24-1-0040201T001\_RSE\_125 - 130 GHz\_AntV\_S08\_C02

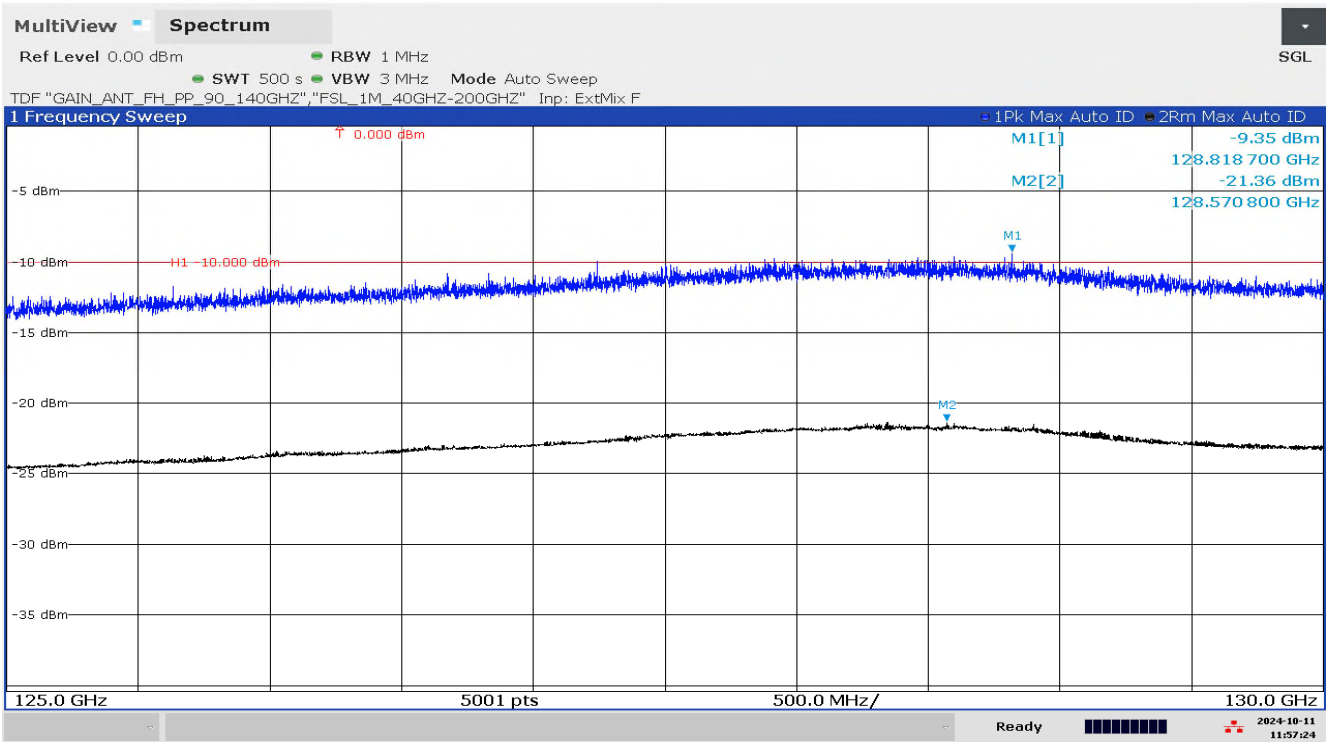


11:57:24 AM 10/11/2024

TID053\_01\_24-1-0040201T001\_RSE\_125 - 130 GHz\_AntH\_S08\_C02

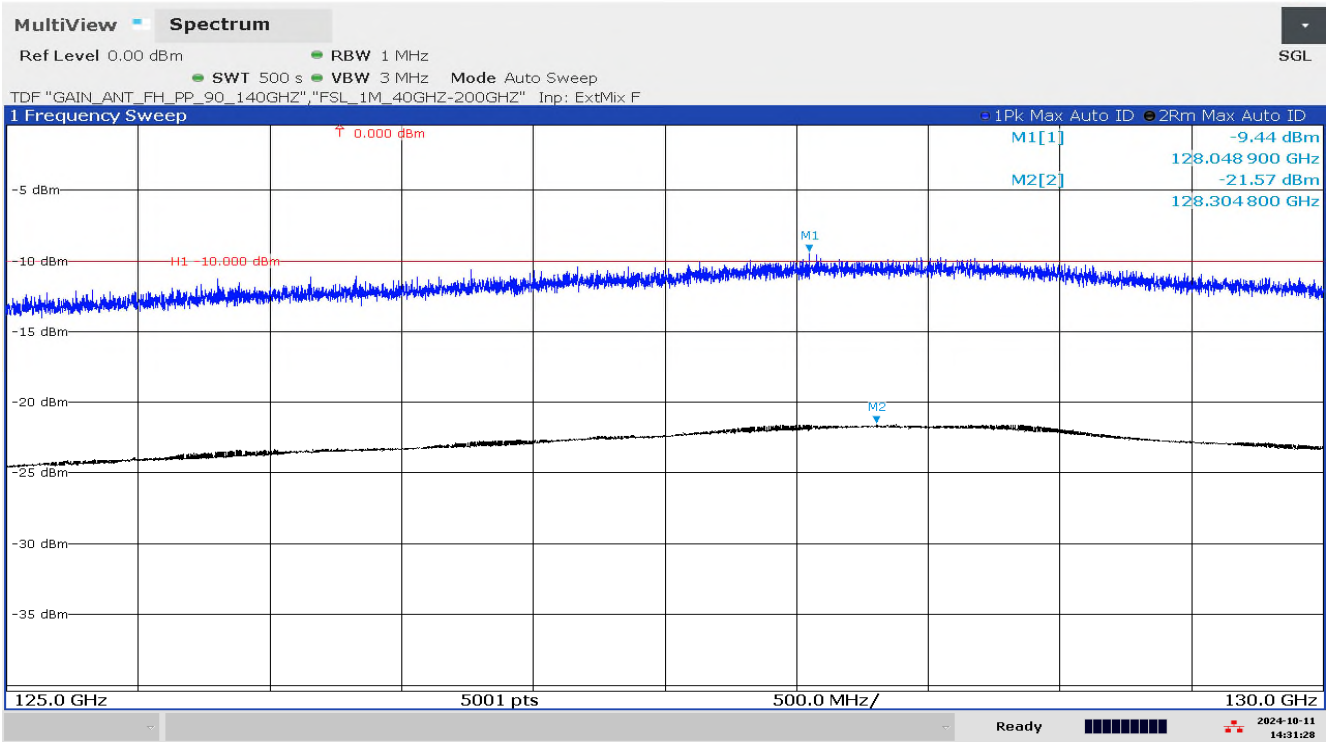


02:31:29 PM 10/11/2024

TID054\_24-1-0040201T001\_RSE\_130 - 135 GHz\_AntV\_S08\_C02

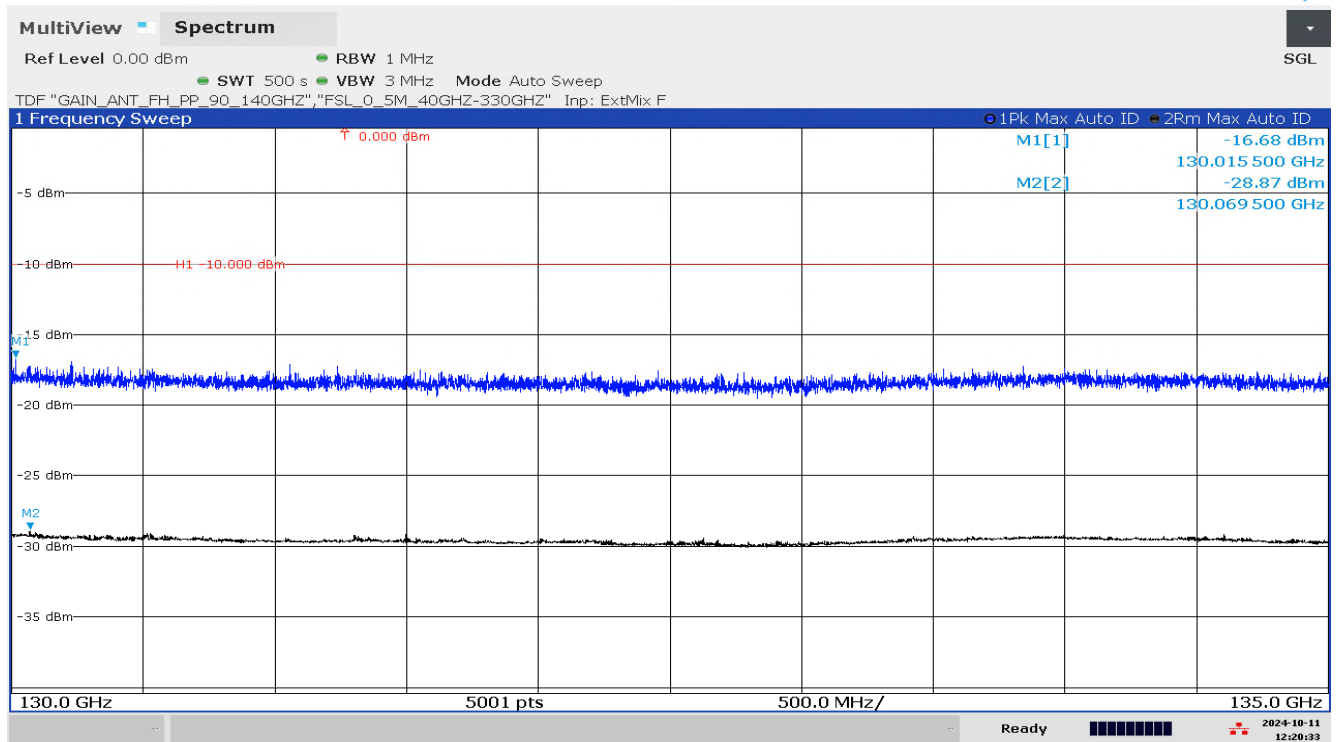

12:20:33 PM 10/11/2024


TID054\_01\_24-1-0040201T001\_RSE\_130 - 135 GHz\_AntH\_S08\_C02

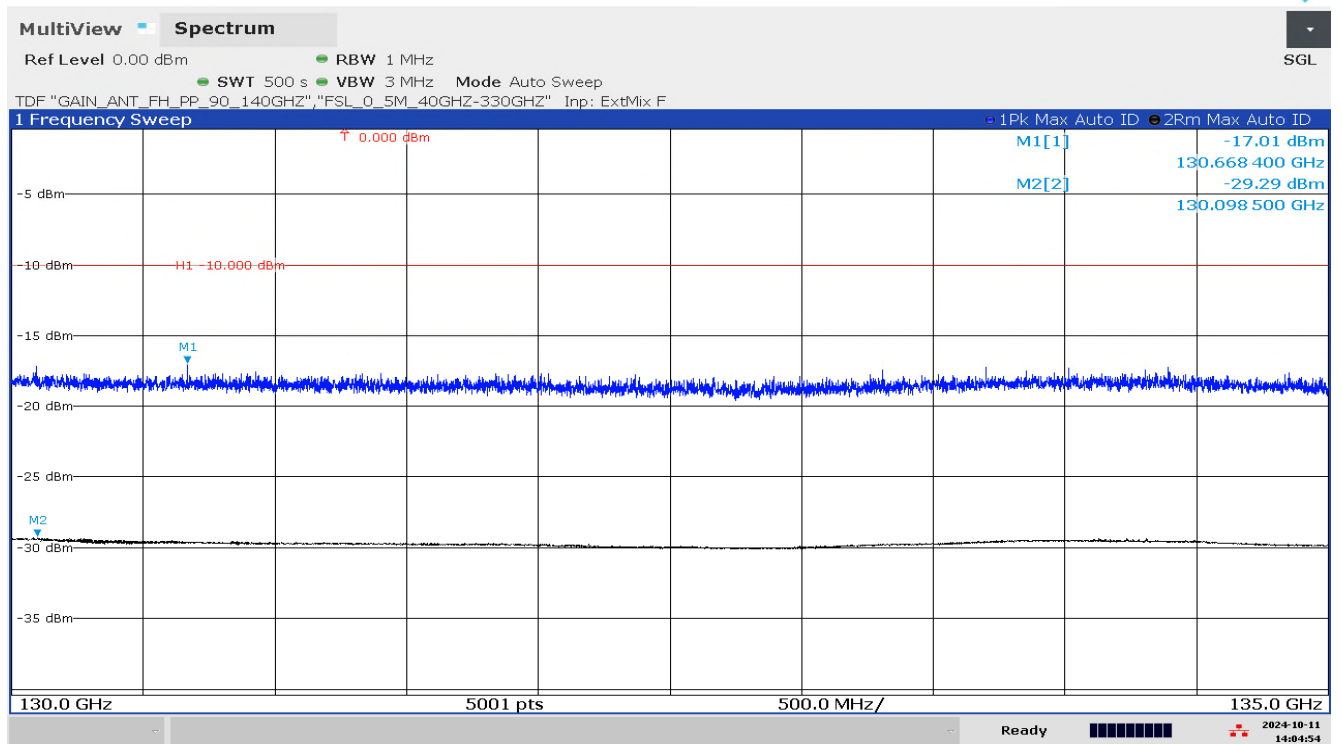

02:04:54 PM 10/11/2024




TID055\_24-1-0040201T001\_RSE\_135 - 140 GHz\_AntV\_S08\_C02

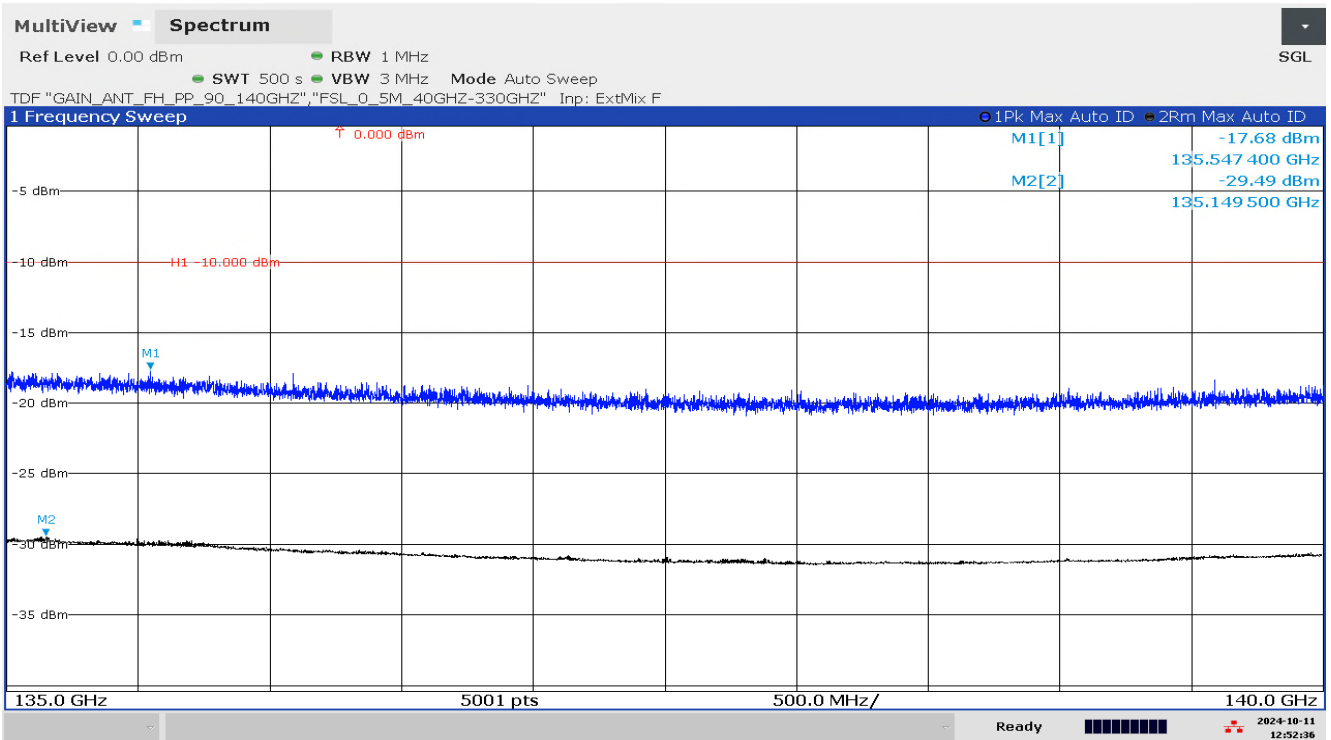


12:52:36 PM 10/11/2024

TID055\_01\_24-1-0040201T001\_RSE\_135 - 140 GHz\_AntH\_S08\_C02

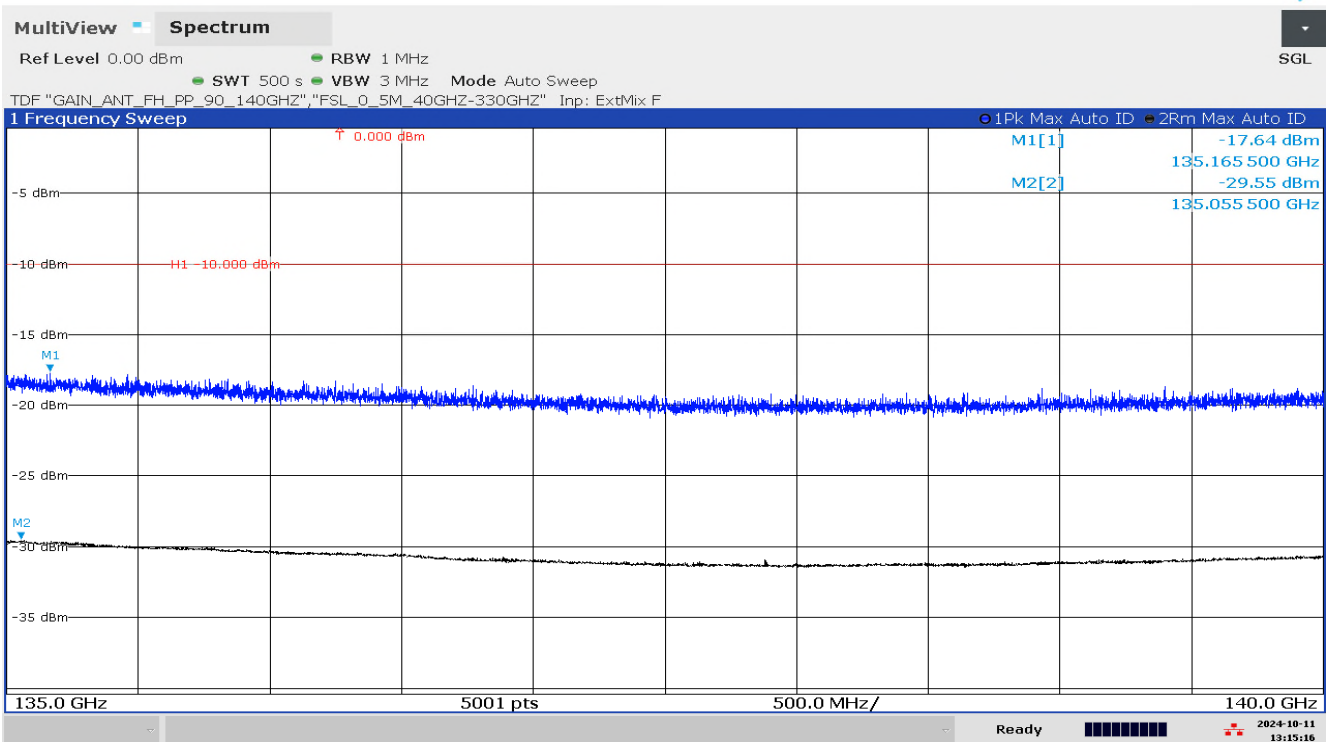


01:15:16 PM 10/11/2024

TID056\_24-1-0040201T001\_RSE\_140 - 150 GHz\_AntH\_S08\_C02

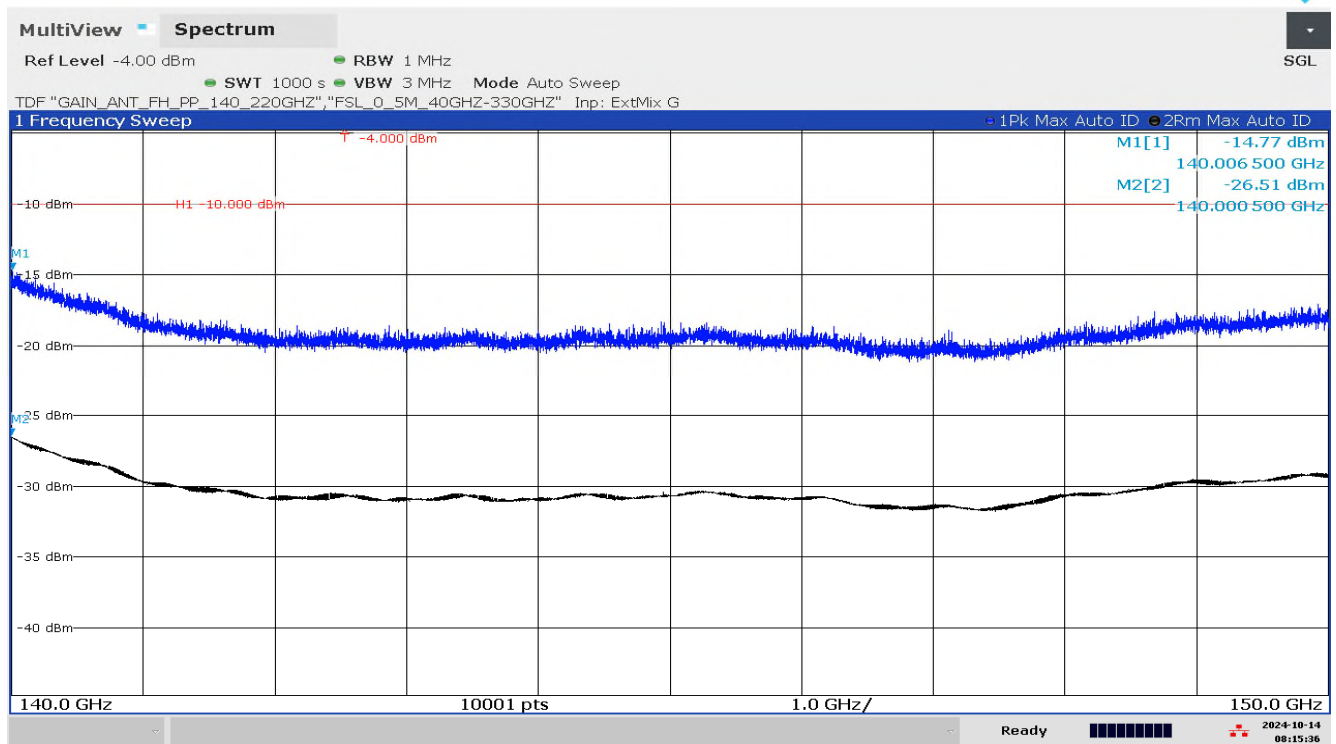


08:15:36 AM 10/14/2024

TID056\_01\_24-1-0040201T001\_RSE\_140 - 150 GHz\_AntH\_S08\_C02

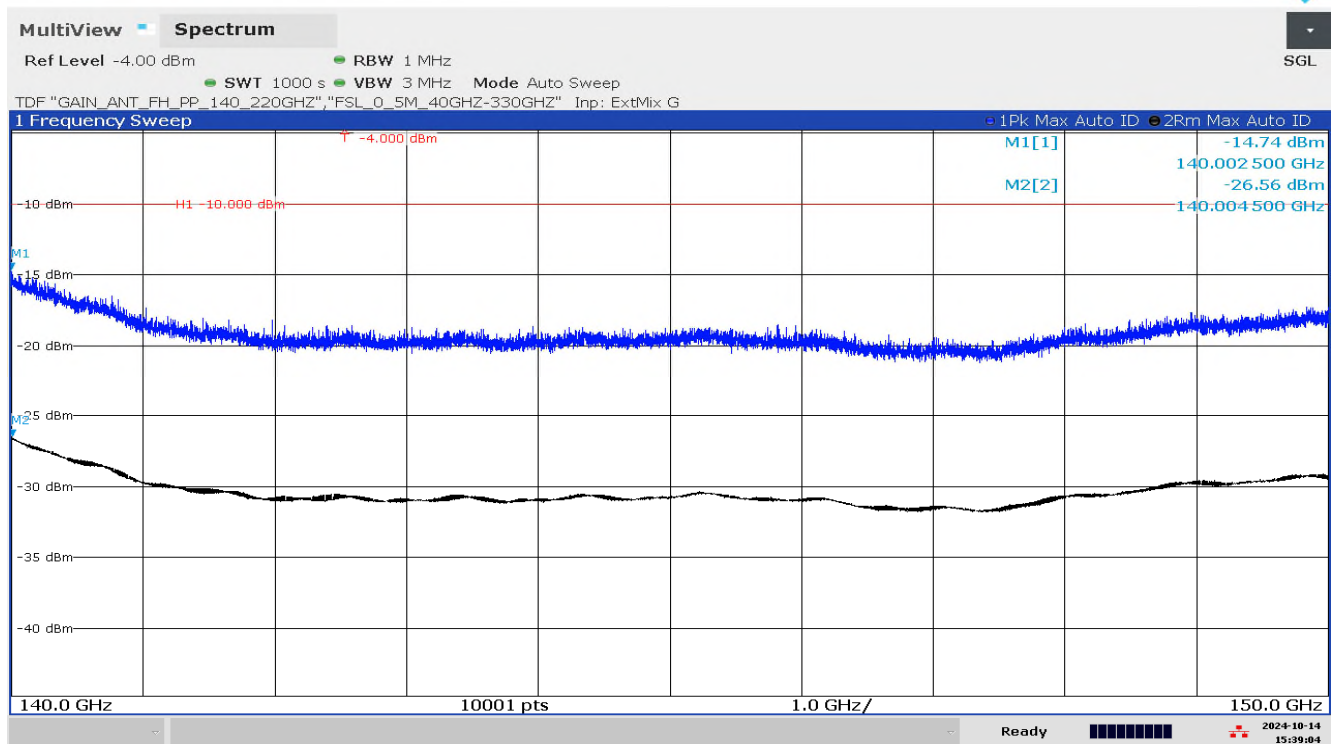


03:39:04 PM 10/14/2024

TID057\_24-1-0040201T001\_RSE\_150 - 160 GHz\_AntH\_S08\_C02

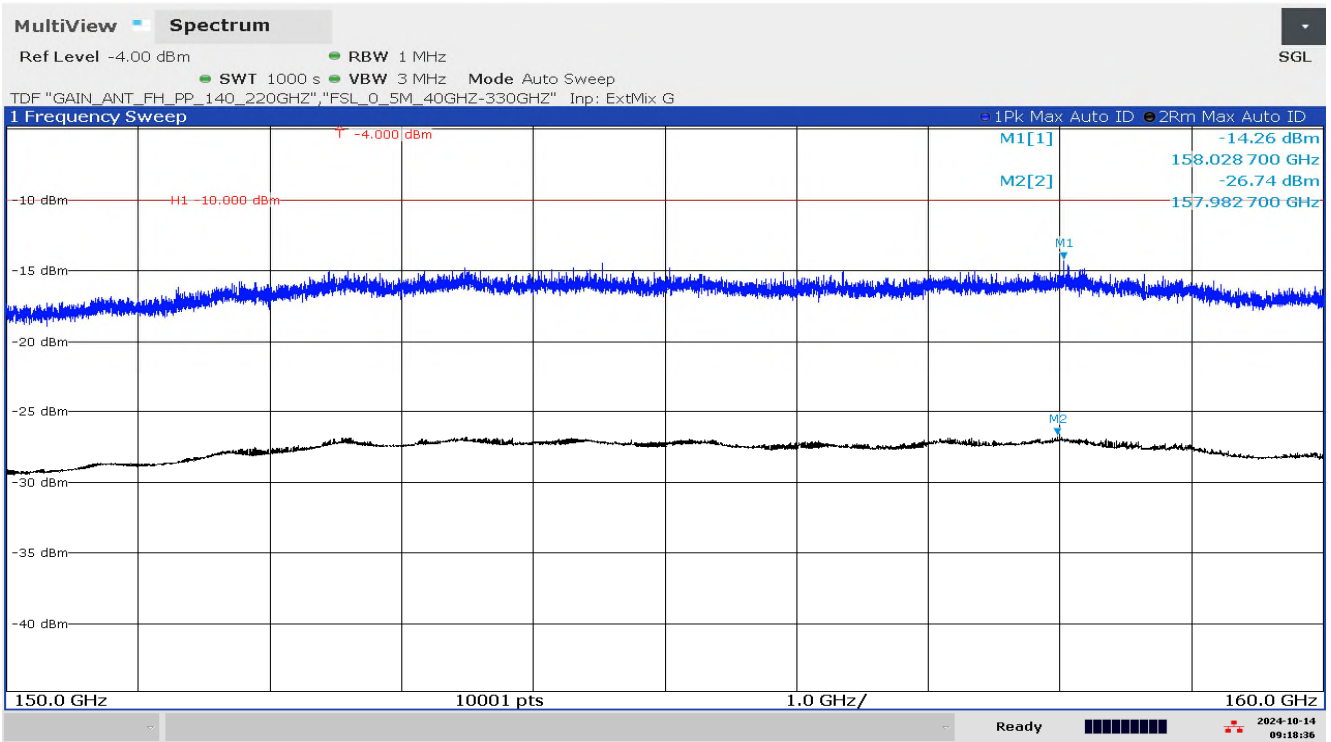


09:18:36 AM 10/14/2024

TID057\_01\_24-1-0040201T001\_RSE\_150 - 160 GHz\_AntV\_S08\_C02

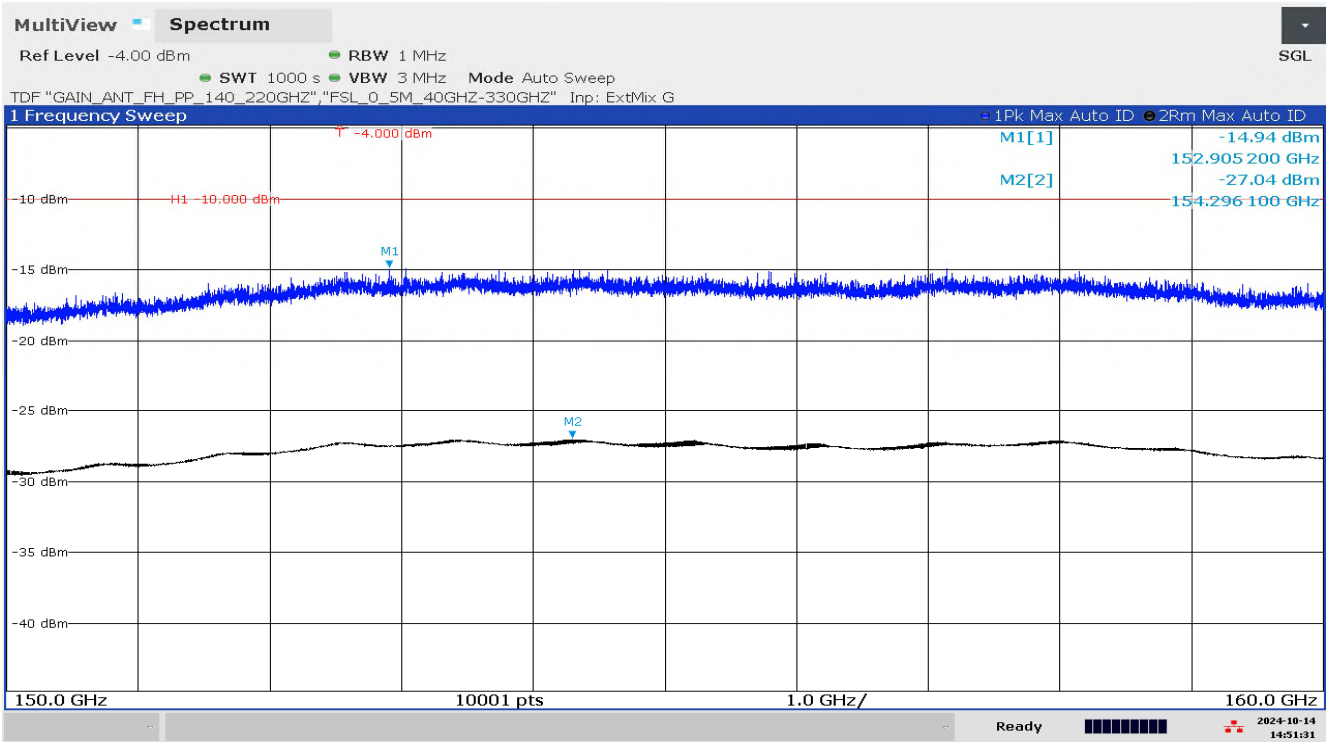


02:51:31 PM 10/14/2024

TID058\_24-1-0040201T001\_RSE\_160 - 170 GHz\_AntH\_S08\_C02

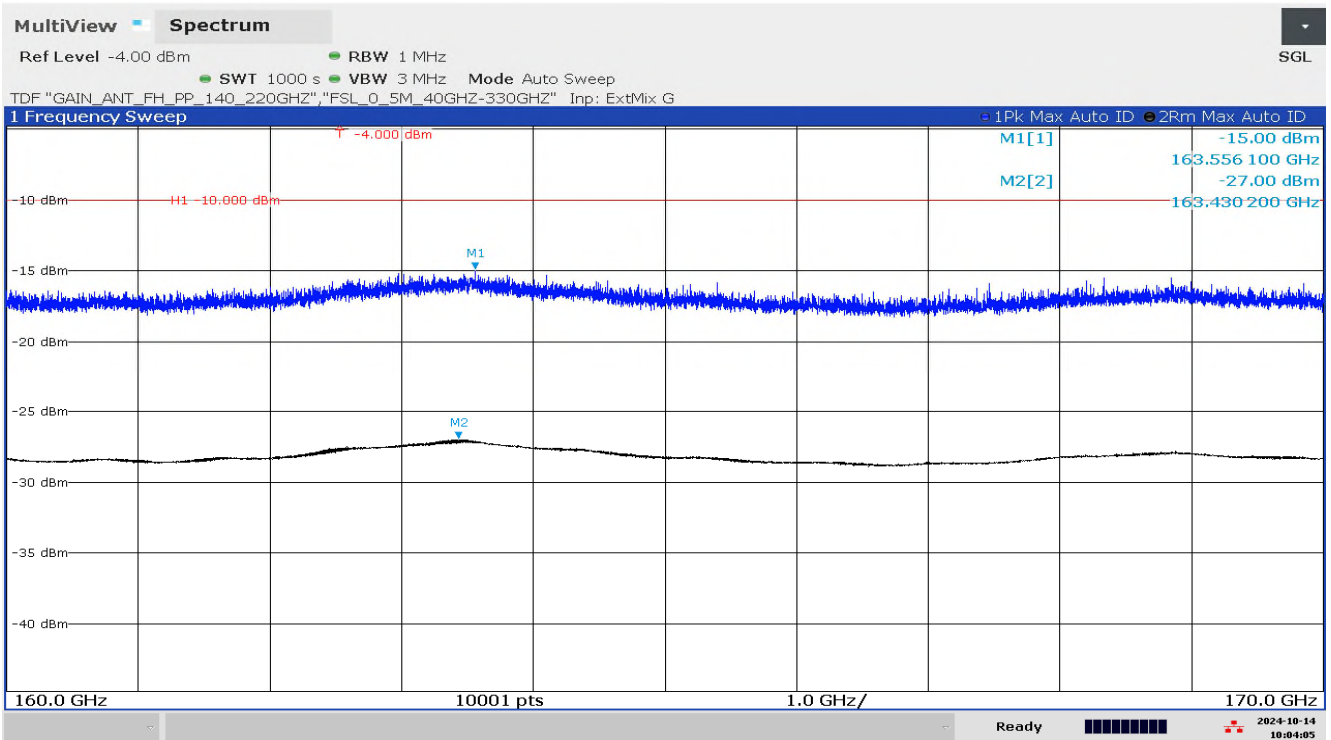


10:04:06 AM 10/14/2024

TID058\_01\_24-1-0040201T001\_RSE\_160 - 170 GHz\_AntV\_S08\_C02

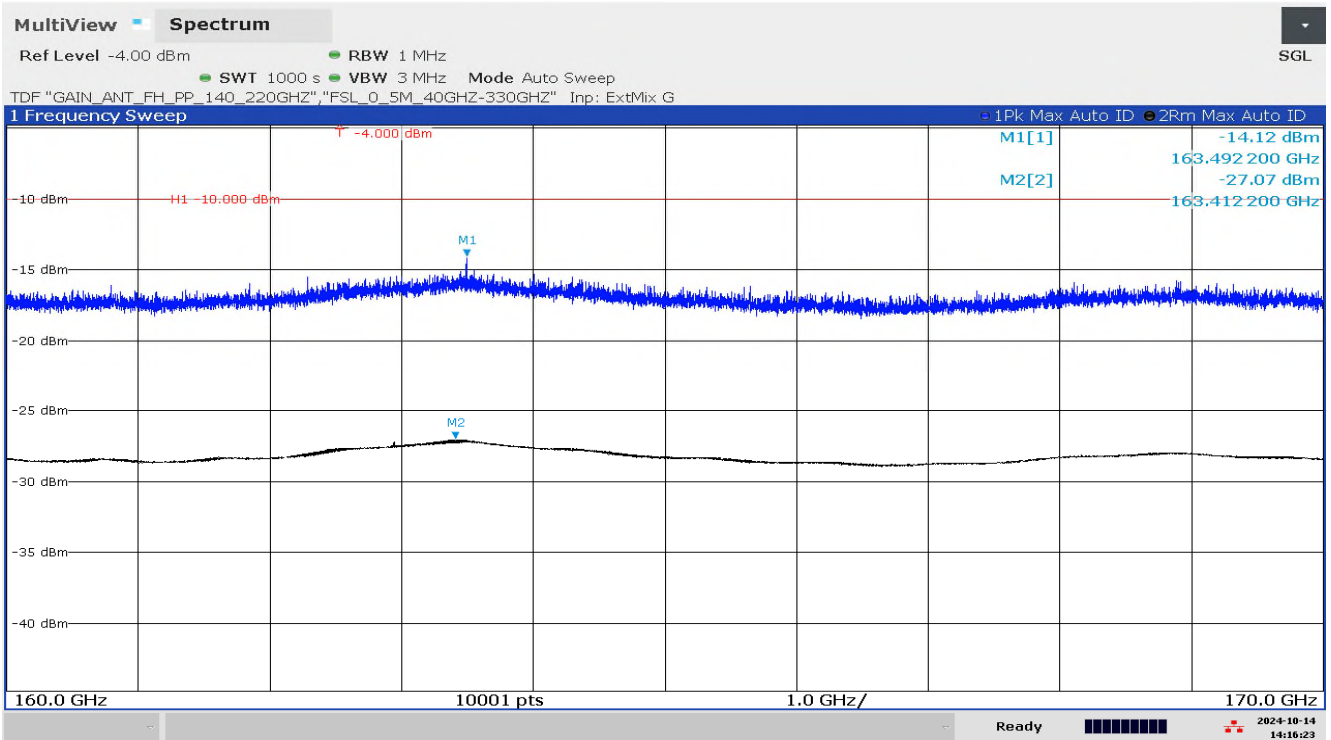


02:16:23 PM 10/14/2024

TID059\_24-1-0040201T001\_RSE\_170 - 180 GHz\_AntH\_S08\_C02

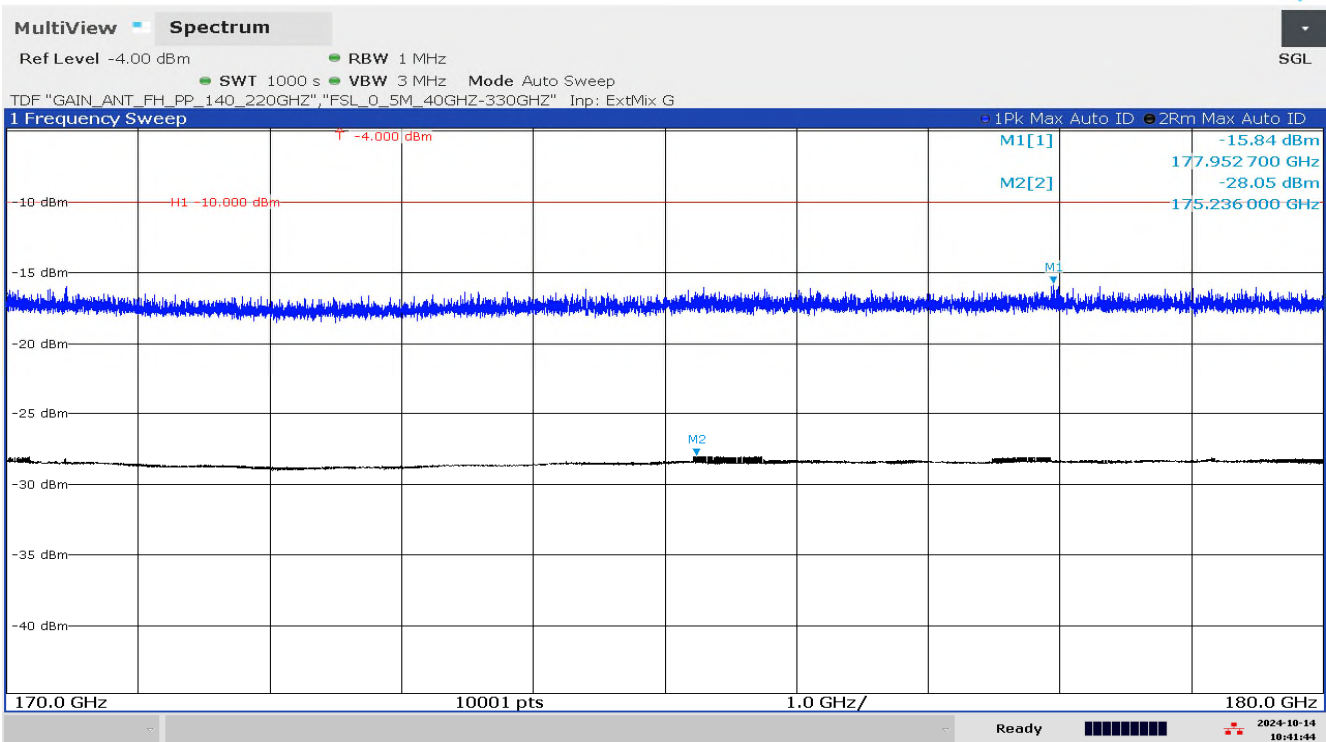

10:41:45 AM 10/14/2024


TID059\_01\_24-1-0040201T001\_RSE\_170 - 180 GHz\_AntV\_S08\_C02

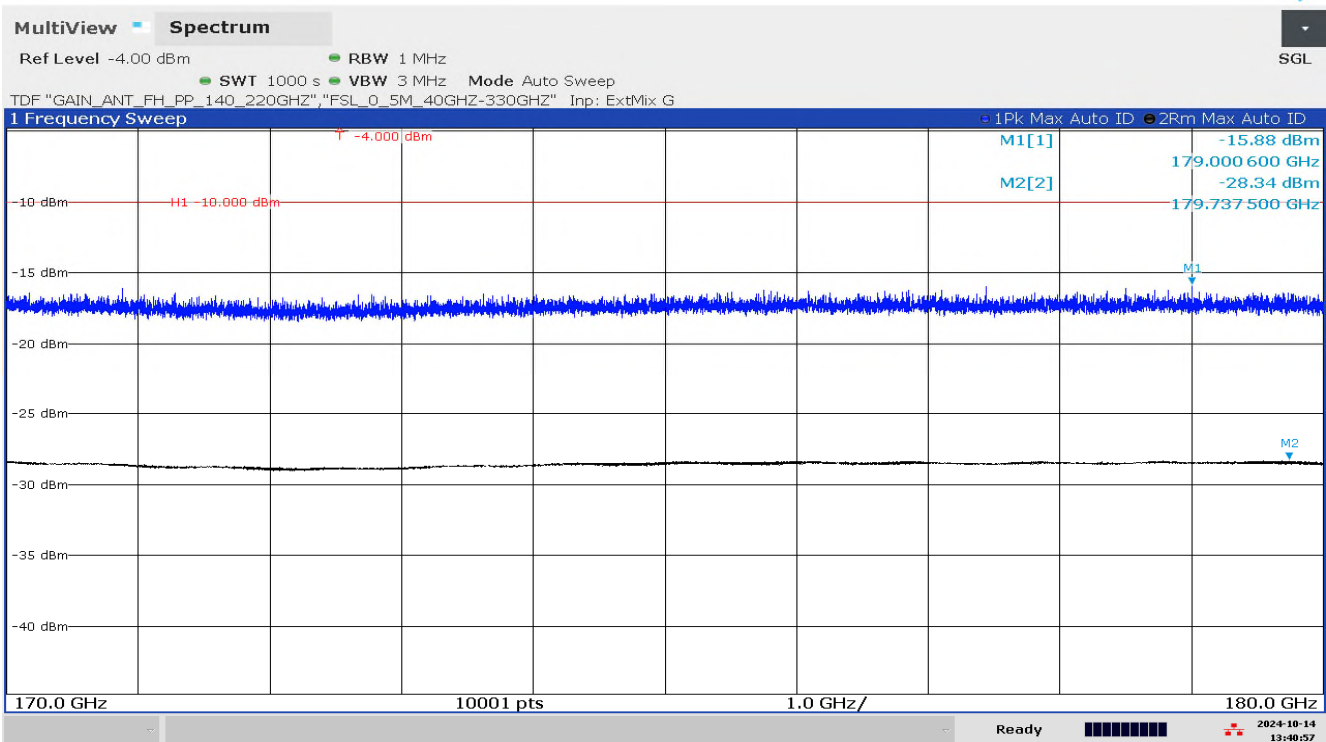

01:40:57 PM 10/14/2024




TID060\_24-1-0040201T001\_RSE\_180 - 190 GHz\_Anth\_S08\_C02

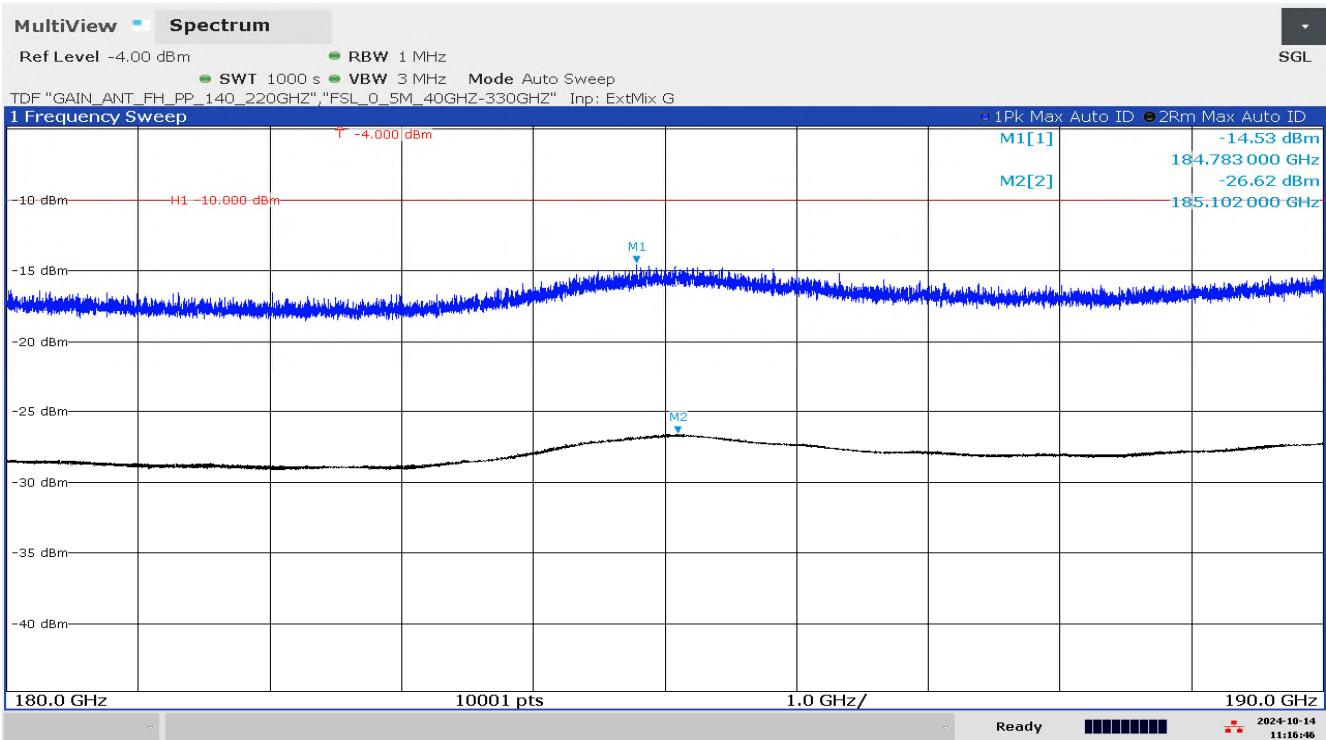


11:16:46 AM 10/14/2024

TID060\_01\_24-1-0040201T001\_RSE\_180 - 190 GHz\_AntV\_S08\_C02

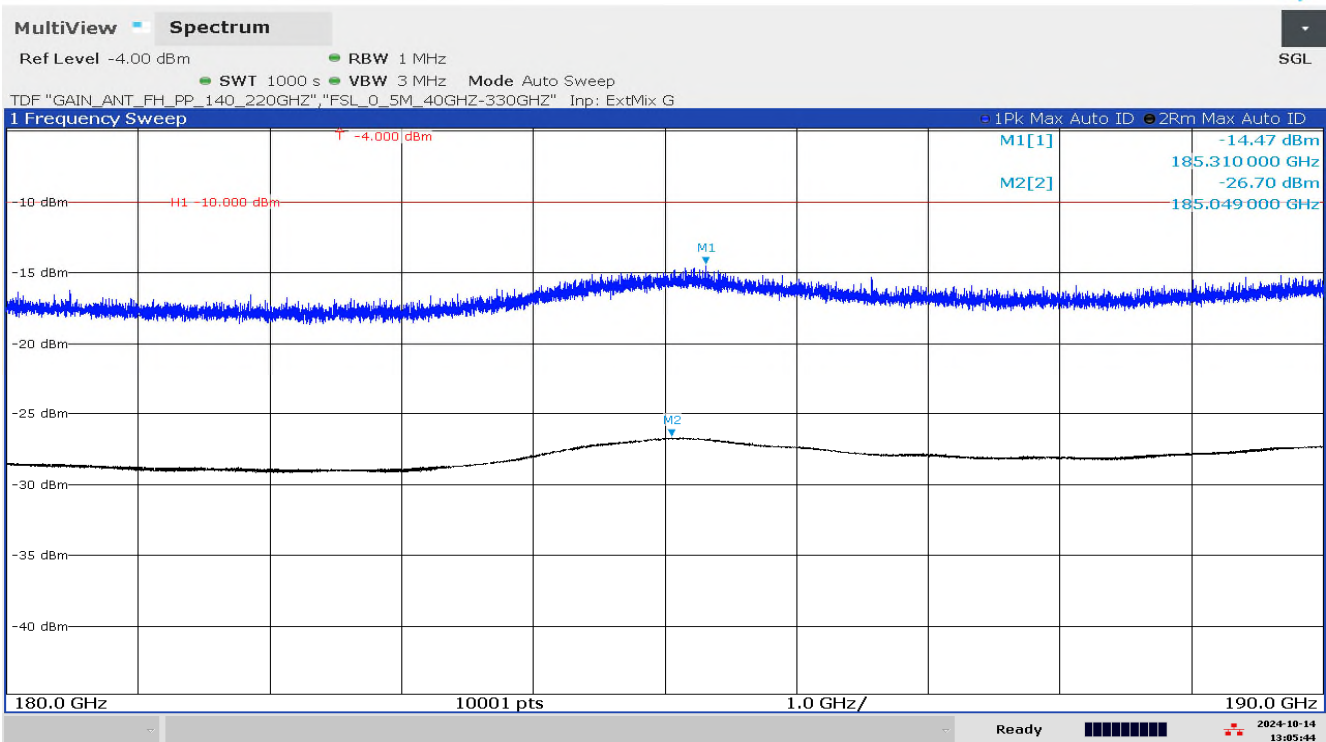


01:05:44 PM 10/14/2024

## TID061\_24-1-0040201T001\_RSE\_190 - 200 GHz\_Anth\_S08\_C02

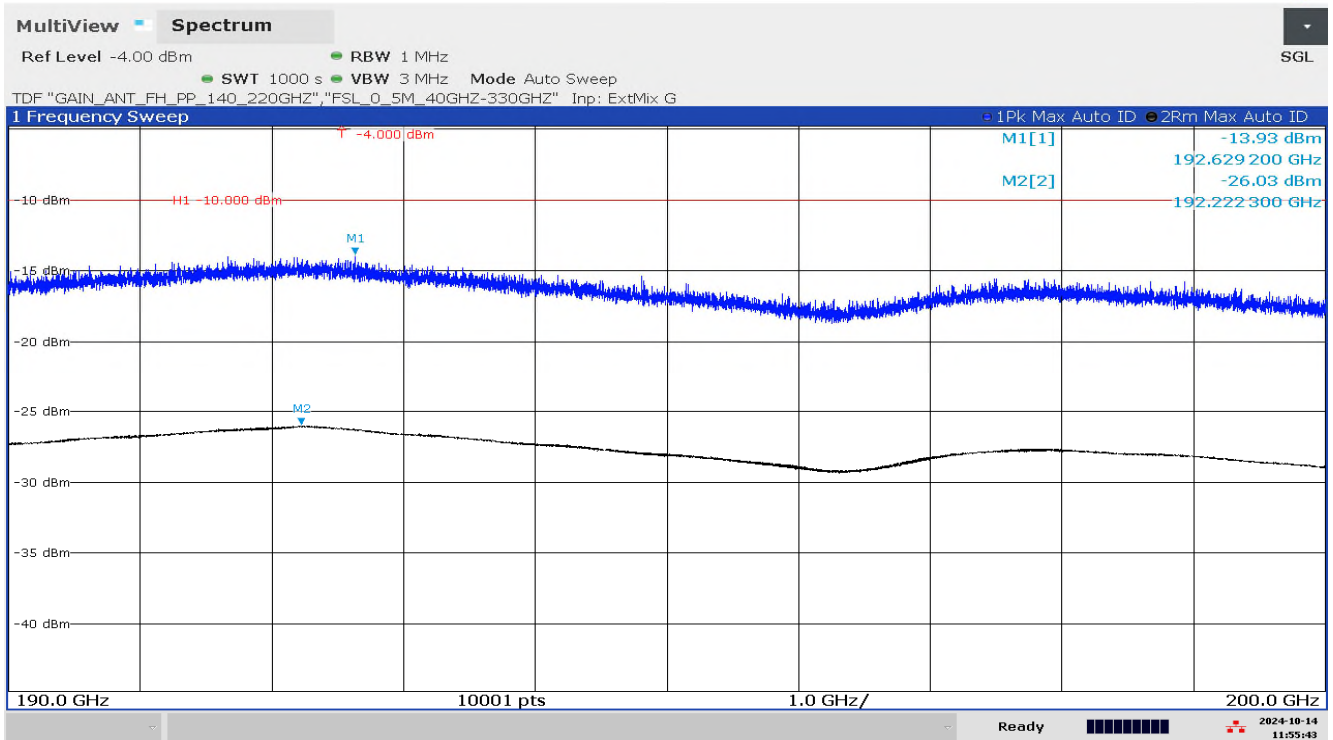

11:55:43 AM 10/14/2024

## TID061\_01\_24-1-0040201T001\_RSE\_190 - 200 GHz\_AntV\_S08\_C02

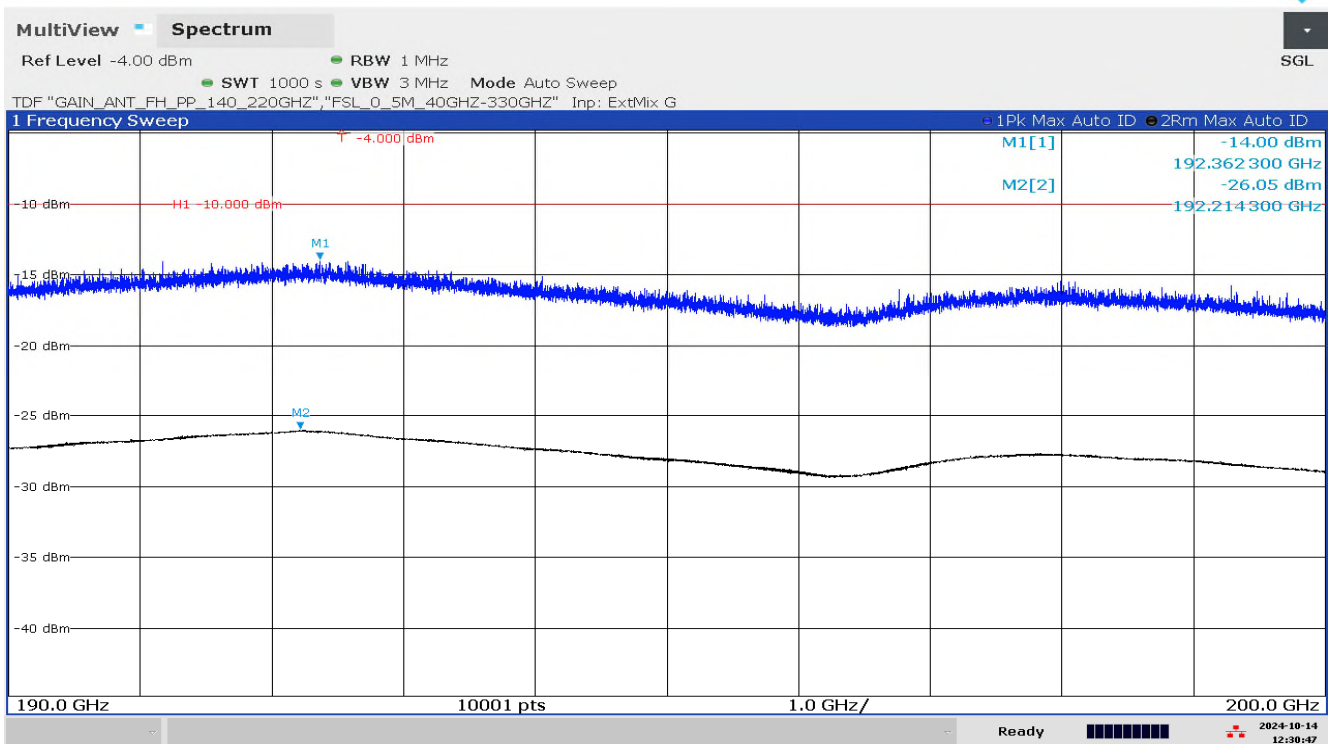

12:30:47 PM 10/14/2024

## 15 Glossary

|                        |                                                    |
|------------------------|----------------------------------------------------|
| <b>EUT</b>             | Equipment under test                               |
| <b>DUT</b>             | Device under test                                  |
| <b>UUT</b>             | Unit under test                                    |
| <b>GUE</b>             | GNSS User Equipment                                |
| <b>ETSI</b>            | European Telecommunications Standards Institute    |
| <b>EN</b>              | European Standard                                  |
| <b>FCC</b>             | Federal Communications Commission                  |
| <b>FCC ID</b>          | Company Identifier at FCC                          |
| <b>IC</b>              | Industry Canada                                    |
| <b>PMN</b>             | Product marketing name                             |
| <b>HMN</b>             | Host marketing name                                |
| <b>HVIN</b>            | Hardware version identification number             |
| <b>FVIN</b>            | Firmware version identification number             |
| <b>EMC</b>             | Electromagnetic Compatibility                      |
| <b>HW</b>              | Hardware                                           |
| <b>SW</b>              | Software                                           |
| <b>Inv. No.</b>        | Inventory number                                   |
| <b>S/N or SN</b>       | Serial number                                      |
| <b>C</b>               | Compliant                                          |
| <b>NC</b>              | Not compliant                                      |
| <b>NA</b>              | Not applicable                                     |
| <b>NP</b>              | Not performed                                      |
| <b>PP</b>              | Positive peak                                      |
| <b>QP</b>              | Quasi peak                                         |
| <b>AVG</b>             | Average                                            |
| <b>OC</b>              | Operating channel                                  |
| <b>OCW</b>             | Operating channel bandwidth                        |
| <b>OBW</b>             | Occupied bandwidth                                 |
| <b>OOB</b>             | Out of band                                        |
| <b>DFS</b>             | Dynamic frequency selection                        |
| <b>CAC</b>             | Channel availability check                         |
| <b>OP</b>              | Occupancy period                                   |
| <b>NOP</b>             | Non occupancy period                               |
| <b>DC</b>              | Duty cycle                                         |
| <b>PER</b>             | Packet error rate                                  |
| <b>CW</b>              | Clean wave                                         |
| <b>MC</b>              | Modulated carrier                                  |
| <b>WLAN</b>            | Wireless local area network                        |
| <b>RLAN</b>            | Radio local area network                           |
| <b>DSSS</b>            | Dynamic sequence spread spectrum                   |
| <b>OFDM</b>            | Orthogonal frequency division multiplexing         |
| <b>FHSS</b>            | Frequency hopping spread spectrum                  |
| <b>GNSS</b>            | Global Navigation Satellite System                 |
| <b>C/N<sub>0</sub></b> | Carrier to noise-density ratio, expressed in dB-Hz |



16 Document history

| Version | Applied changes                                                           | Date of release |
|---------|---------------------------------------------------------------------------|-----------------|
| R01     | Initial release                                                           | 2025-02-14      |
| R02     | Minor change due to report template error,<br>D03 is removed from header. | 2025-02-21      |

##### END OF TEST REPORT #####