FCC Test Report

Report No.: AGC03925160501FE03

FCC ID : ZAY-Z-BT1000

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Bluetooth Headset

BRAND NAME : ZONOKI

MODEL NAME : Z-BT1000, Z-BF1000

CLIENT: SHENZHEN ZONOKI DIGITAL TECHNOLOGY CO., LTD.

DATE OF ISSUE : June 12, 2016

STANDARD(S) : FCC Part 15 Rules

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 71

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	June 12, 2016	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RECEIVER INPUT BANDWIDTH	7
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	7
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR .	7
2.6. RELATED SUBMITTAL(S) / GRANT (S)	8
2.7. TEST METHODOLOGY	8
2.8. SPECIAL ACCESSORIES	8
2.9. EQUIPMENT MODIFICATIONS	8
3. MEASUREMENT UNCERTAINTY	9
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF EUT SYSTEM	10
5.2. EQUIPMENT USED IN EUT SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	13
7.1. MEASUREMENT PROCEDURE	13
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	13
7.3. LIMITS AND MEASUREMENT RESULT	14
8. 20DB BANDWIDTH	20
8.1. MEASUREMENT PROCEDURE	20
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	20
8.3. LIMITS AND MEASUREMENT RESULTS	20
9. CONDUCTED SPURIOUS EMISSION	27
9.1. MEASUREMENT PROCEDURE	27
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	27
9.3. MEASUREMENT EQUIPMENT USED	27
9.4. LIMITS AND MEASUREMENT RESULT	27
10. RADIATED EMISSION	31
10.1. MEASUREMENT PROCEDURE	31
10.2. TEST SETUP	
10.3. TEST RESULT (Worst Modulation: π /4-DQPSK)	35

11. BAND EDGE EMISSION	47
11.1. MEASUREMENT PROCEDURE	47
11.2. TEST SET-UP	47
11.3. TEST RESULT (Worst Modulation: π /4-DQPSK)	48
12. NUMBER OF HOPPING FREQUENCY	52
12.1. MEASUREMENT PROCEDURE	52
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	52
12.3. MEASUREMENT EQUIPMENT USED	52
12.4. LIMITS AND MEASUREMENT RESULT	52
13. TIME OF OCCUPANCY (DWELL TIME)	53
13.1. MEASUREMENT PROCEDURE	53
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	53
13.3. MEASUREMENT EQUIPMENT USED	53
13.4. LIMITS AND MEASUREMENT RESULT	53
14. FREQUENCY SEPARATION	56
14.1. MEASUREMENT PROCEDURE	56
14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	56
14.3. MEASUREMENT EQUIPMENT USED	56
14.4. LIMITS AND MEASUREMENT RESULT	56
15. FCC LINE CONDUCTED EMISSION TEST	58
15.1. LIMITS OF LINE CONDUCTED EMISSION TEST	58
15.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	58
15.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	59
15.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	59
15.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	60
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	62
APPENDIX B: PHOTOGRAPHS OF EUT	64

Page 5 of 71

1. VERIFICATION OF CONFORMITY

Applicant	SHENZHEN ZONOKI DIGITAL TECHNOLOGY CO., LTD.		
Address	1-3 Floor, Building B, NO.49, ShangXia Road, Henggang Street, Longgang District, Shenzhen, China, 518115		
Manufacturer	SHENZHEN ZONOKI DIGITAL TECHNOLOGY CO., LTD.		
Address	1-3 Floor, Building B, NO.49, ShangXia Road, Henggang Street, Longgang District, Shenzhen, China, 518115		
Product Designation	Bluetooth Headset		
Brand Name	ZONOKI		
Test Model	Z-BT1000		
Series Model	Z-BF1000		
Difference description	All the same except for the model name.		
Date of test	May 30, 2016 to June 01, 2016		
Deviation	None		
Condition of Test Sample	Normal		
Report Template	AGCRT-US-BR/RF (2013-03-01)		

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.247.

Tested By	Strive Lang	
	Strive Liang(Liang Faqiang) June 1	2, 2016
Reviewed By	Foresto ei	
	Forrest Lei(Lei Yonggang) June 1	2, 2016
Approved By	Selya shong	
	Solger Zhang(Zhang Hongyi) Authorized Officer June 1	2, 2016

Report No.: AGC03925160501FE03 Page 6 of 71

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is "Bluetooth Headset" designed as a "Communication Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

7 thajor toolimour dooshpateri or 201 is dooshbad do lellowing			
Operation Frequency 2.402 GHz to 2.480GHz			
RF Output Power	6.98dBm(Max)		
Bluetooth Version	V4.1		
Modulation	GFSK, π /4-DQPSK, 8DPSK		
Number of channels	79		
Hardware Version	Z-BF1000-V2		
Software Version V4.1			
Antenna Designation PCB Antenna			
Antenna Gain	0dBi		
Power Supply	DC 3.7 V		
Note: 1. The USB port only used for charging and can't be used to transfer data with PC.			

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
2402~2480MHZ	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

Page 7 of 71

2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHZ,In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single of multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode: 40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67 56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59 72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75 09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06 01, 51, 03, 55, 05, 04

2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For ehavior zation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire. LAP(24 bits), 4LSB's (4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following ehavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always Differ from the first one.

Page 8 of 71

2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: ZAY-Z-BT1000** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.7. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013.

2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 9 of 71

3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 2.75dB Radiated measurement: +/- 3.2dB

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π /4-DQPSK
5	Middle channel π /4-DQPSK
6	High channel π /4-DQPSK
7	Low channel TX(8DPSK)
8	Middle channel TX (8DPSK)
9	High channel TX (8DPSK)
10	BT Link with charging
11	BT Link

Note:


- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode. 3.The EUT used fully-charged battery when tested.

Page 10 of 71


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)



5.2. EQUIPMENT USED IN EUT SYSTEM

ITEM	EQUIPMENT	MFR/BRAND	MODEL/TYPE NO.	REMARK
1	Bluetooth Headset	ZONOKI	Z-BT1000	EUT
2	Battery	N/A	XK602030	Accessory
3	PC	Sony	E1412AYCW	A.E
4	Control box	CSR	N/A	A.E
5	Adapter	SURPER-EAGEL	CH06-050100-US	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Spurious Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Frequency Separation	Compliant

Page 11 of 71

6. TEST FACILITY

Site Dongguan Precise Testing Service Co., Ltd.	
Location Building D,Baoding Technology Park,Guangming Road2,Dongcheng Dis Dongguan, Guangdong, China,	
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.10:2013.

ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016	
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016	
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016	
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016	
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016	
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A	
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016	
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016	

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016	
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016	
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016	
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016	
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016	
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016	
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A	
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016	

Page 12 of 71

Conducted Emission Test Site						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016	
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016	
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016	
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016	
Shielded Room	CHENGYU	843	PTS-002	June 6, 2015	June 5, 2016	
Conduction Cable	MXT	SE1	S003	June 6, 2015	June 5, 2016	

Page 13 of 71

7. PEAK OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the high, middle and the low operation frequency individually.
- 3. RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW.
- 4. Record the maximum power from the Spectrum Analyzer.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

PEAK POWER TEST SETUP

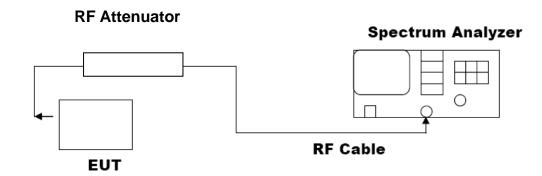


Page 14 of 71


7.3. LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MODULATION				
Frequency (GHz) Peak Power (dBm) Applicable Limits (dBm) Pass or Fail				
2.402	3.94	21	Pass	
2.441	6.07	21	Pass	
2.480	6.98	21	Pass	


CH₀

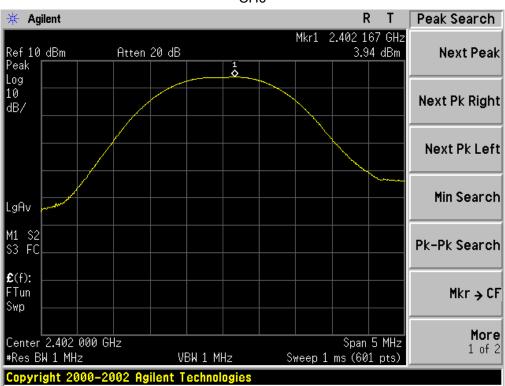

CH39

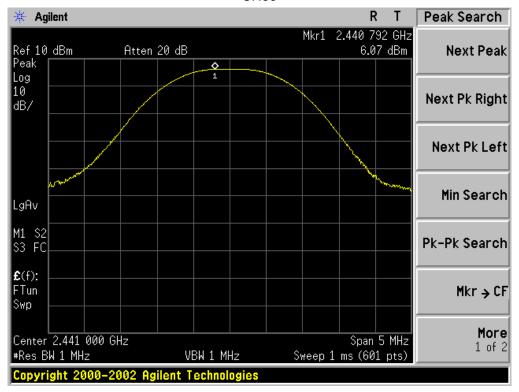


CH78

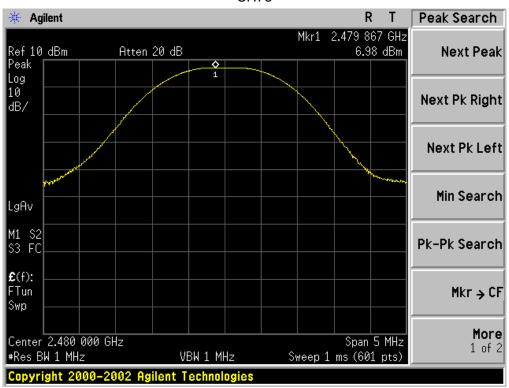

Page 16 of 71


PEAK OUTPUT POWER MEASUREMENT RESULT FOR II /4-DQPSK MODULATION				
Frequency Peak Power (dBm) Applicable Limits Pass or Fail			Pass or Fail	
2.402	1.47	21	Pass	
2.441	4.74	21	Pass	
2.480	5.89	21	Pass	



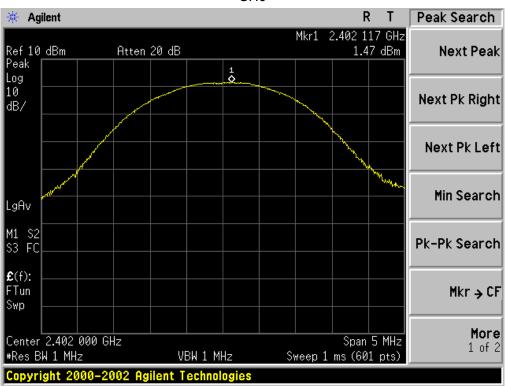


Report No.: AGC03925160501FE03 Page 17 of 71

CH39

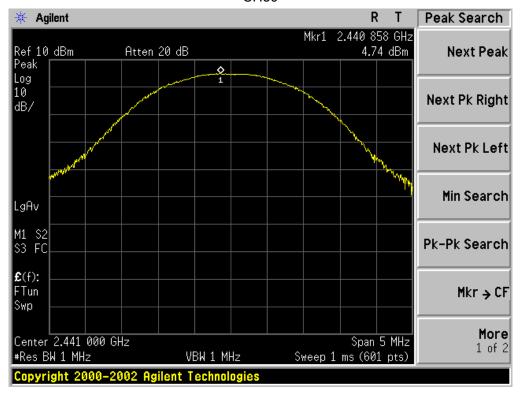


CH78

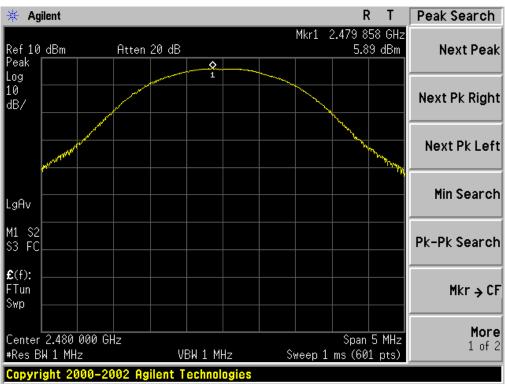


Page 18 of 71

PEAK OUTPUT POWER MEASUREMENT RESULT FOR DPSK MODULATION				
Frequency Peak Power Applicable Limits (GHz) Pass or Fail			Pass or Fail	
2.402	1.62	21	Pass	
2.441	4.81	21	Pass	
2.480	5.90	21	Pass	

CH0

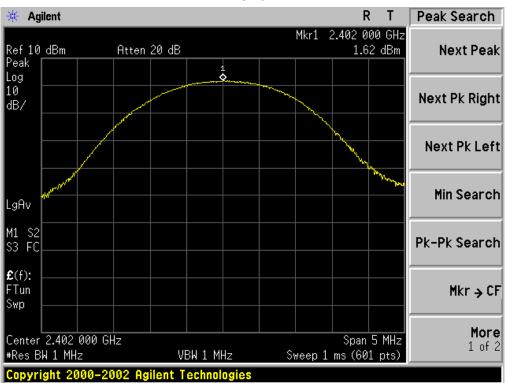

CH39

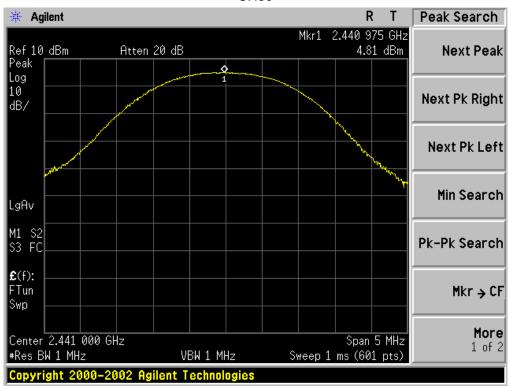

CH78




Page 20 of 71

8. 20DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the high, middle and the low operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

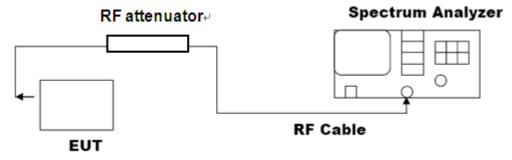


Note: The EUT has been used temporary antenna connector for testing.

8.3. LIMITS AND MEASUREMENT RESULTS

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
	Measurement Result			
Applicable Limits	Test Data (MHz)			Danak
		99%OBW (MHz)	-20dB BW(MHz)	Result
	Low Channel	0.943	1.113	PASS
N/A	Middle Channel	0.932	1.097	PASS
	High Channel	0.934	1.094	PASS

Page 21 of 71

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

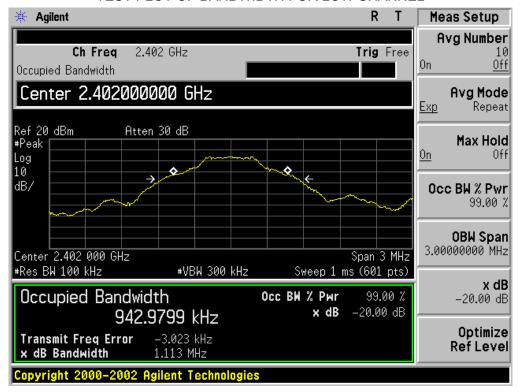


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



Page 22 of 71


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

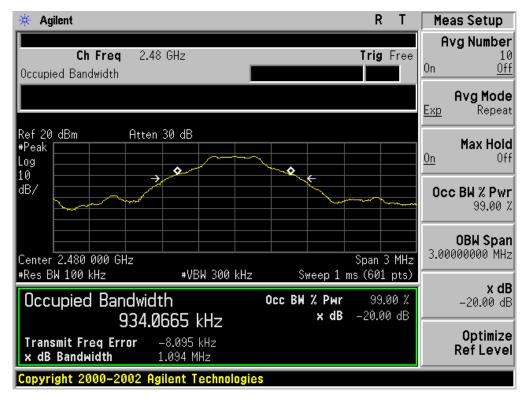

Report No.: AGC03925160501FE03 Page 23 of 71


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
Measurement Result				
Applicable Limits	Test Data (MHz)			Doords
		99%OBW (MHz)	-20dB BW(MHz)	Result
	Low Channel	1.192	1.331	PASS
N/A	Middle Channel	1.233	1.411	PASS
	High Channel	1.233	1.390	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

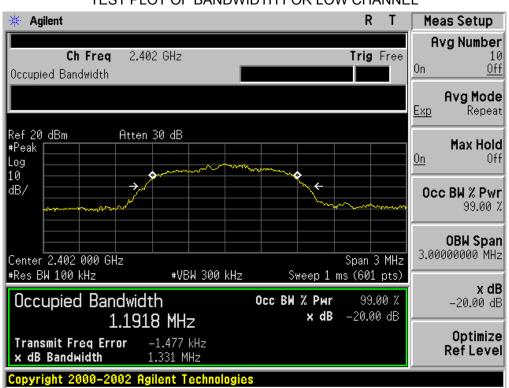


Page 24 of 71

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

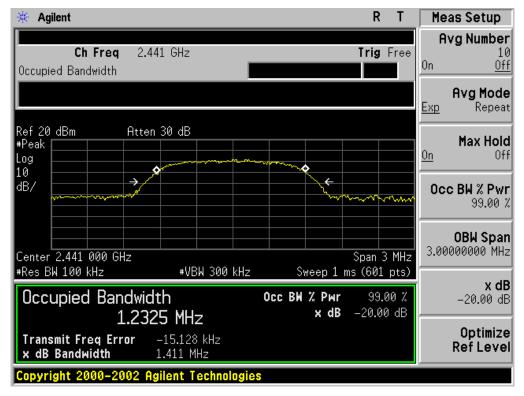


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

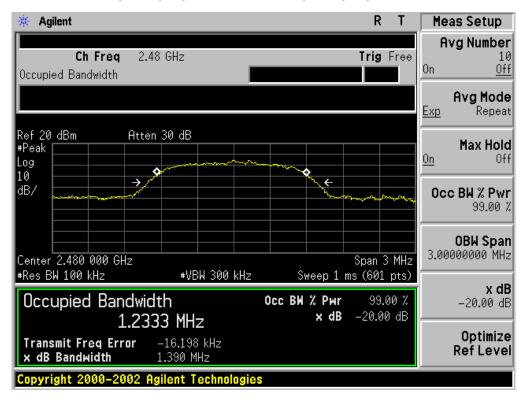

Page 25 of 71


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
	Measurement Result			
Applicable Limits	Test Data (MHz)			Decali
		99%OBW (MHz)	-20dB BW(MHz)	Result
	Low Channel	1.232	1.405	PASS
N/A	Middle Channel	1.243	1.418	PASS
	High Channel	1.210	1.351	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

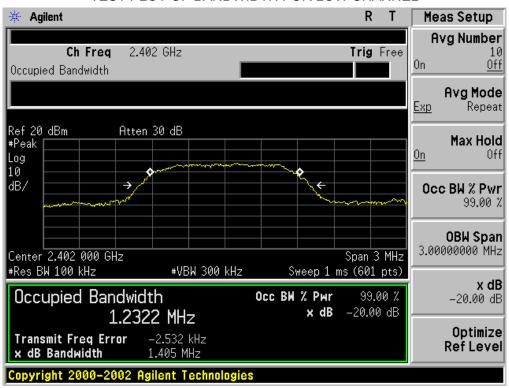


Page 26 of 71

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

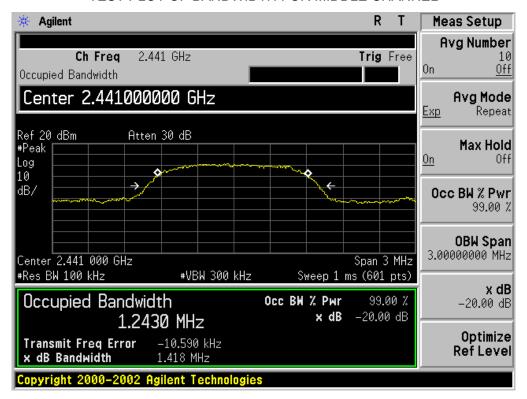

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

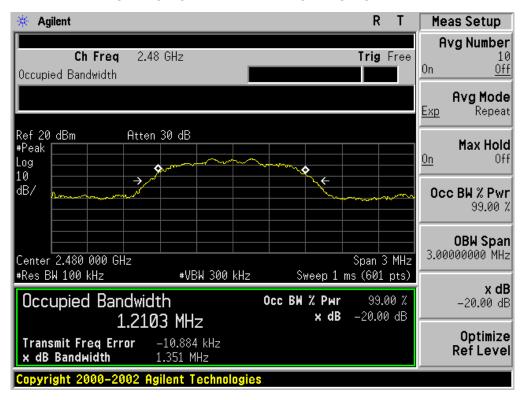

Page 27 of 71

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the high, middle and the low operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.

 RBW = 100 kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

9.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6


9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT				
Applicable Limite	Measurement Result			
Applicable Limits	Test Data	Result		
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit			
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS		
intentional radiator is operating, the radio frequency	Channel			
power that is produce by the intentional radiator				
shall be at least 20 dB below that in 100KHz				
bandwidth within the band that contains the highest				
level of the desired power.	At least -20dBc than the limit Specified on the TOP Channel	DACC		
In addition, radiation emissions which fall in the		PASS		
restricted bands, as defined in §15.205(a), must also				
comply with the radiated emission limits specified				
in§15.209(a))				

Page 28 of 71


TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF GFSK MODULATION IN LOW CHANNEL

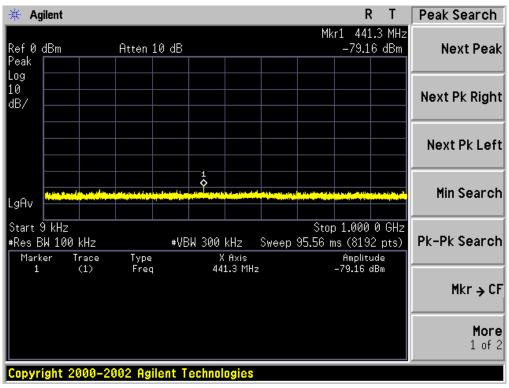


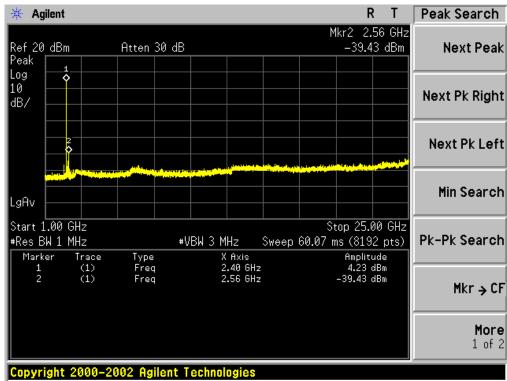

Page 29 of 71


TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL

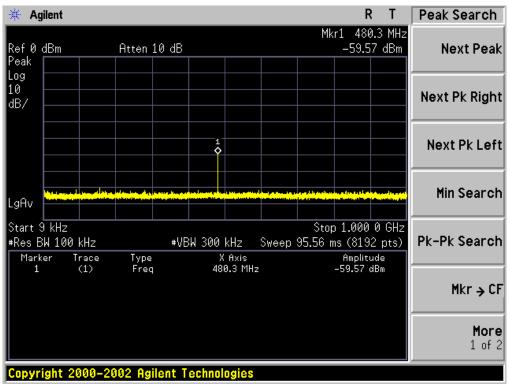


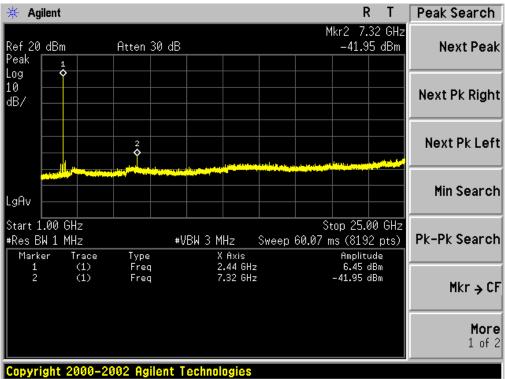

Page 30 of 71

TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL

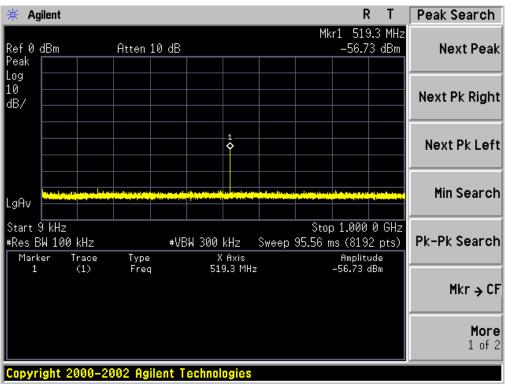

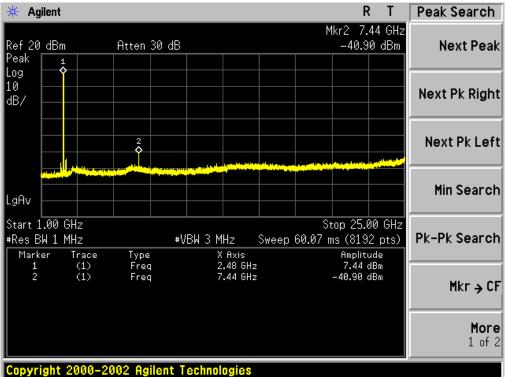

Page 31 of 71

10. RADIATED EMISSION

10.1. MEASUREMENT PROCEDURE

- 1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- 3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

Report No.: AGC03925160501FE03 Page 32 of 71

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz
Stant Stap Fraquency	1MHz/3MHz for Peak, 1MHz/10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Page 33 of 71

10.2. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

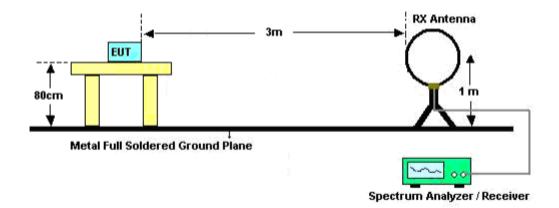


RADIATED EMISSION TEST SETUP 30MHz-1000MHz

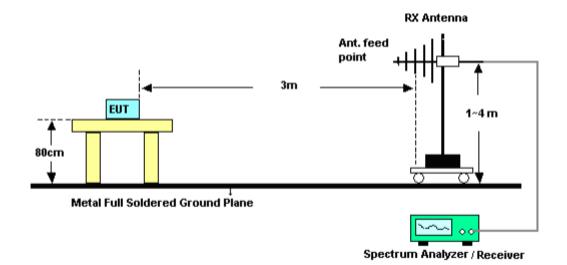

Page 34 of 71

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

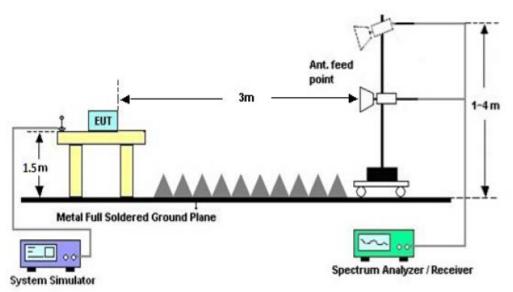

Page 35 of 71


10.3. TEST RESULT (Worst Modulation: GFSK)

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

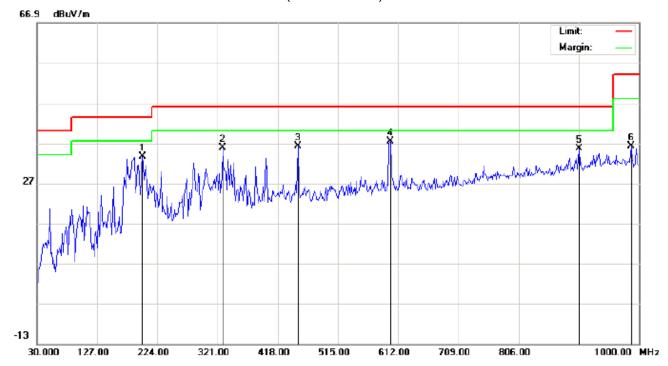

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth Headset

M/N:Z-BT1000

Mode:Low Channel TX

Note:

Polarization:	Horizontal	Temperature: 22.6
Power:		Humidity: 54.6 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		199.7500	21.71	11.99	33.70	43.50	-9.80	peak			
2		329.0833	18.40	17.35	35.75	46.00	-10.25	peak			
3		450.3333	15.64	20.59	36.23	46.00	-9.77	peak			
4	*	599.0667	13.66	23.71	37.37	46.00	-8.63	peak			
5		903.0000	7.01	28.69	35.70	46.00	-10.30	peak			
6		987.0667	6.60	29.64	36.24	54.00	-17.76	peak			


RESULT: PASS

Temperature: 22.6

Humidity: 54.6 %

Page 36 of 71

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

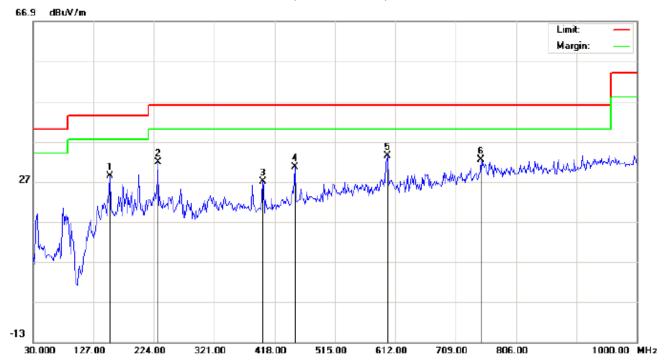

Polarization:

Power:

Distance:

Vertical

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth Headset

M/N:Z-BT1000

Mode:Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		152.8667	13.08	15.28	28.36	43.50	-15.14	peak			
2		230.4667	19.73	11.99	31.72	46.00	-14.28	peak			
3		398.6000	7.94	19.06	27.00	46.00	-19.00	peak			
4		450.3333	9.93	20.59	30.52	46.00	-15.48	peak			
5	*	599.0667	10.77	22.73	33.50	46.00	-12.50	peak			
6		749.4167	5.87	26.61	32.48	46.00	-13.52	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 37 of 71

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

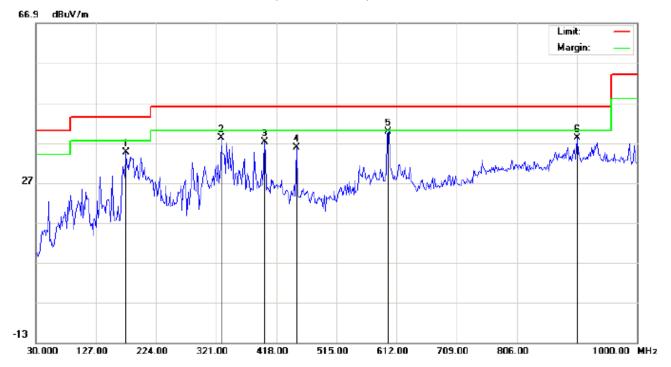

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth Headset

M/N:Z-BT1000

Mode:Middle Channel TX

Note:

Polarization:	Horizontal	Temperature: 22.6	
Power:		Humidity: 54.6 %	

Distance:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		175.5000	23.64	10.90	34.54	43.50	-8.96	peak			
2		329.0833	20.90	17.35	38.25	46.00	-7.75	peak			
3		398.6000	18.19	19.06	37.25	46.00	-8.75	peak			
4		450.3333	15.14	20.59	35.73	46.00	-10.27	peak			
5	*	599.0666	16.16	23.71	39.87	46.00	-6.13	peak			
6		903.0000	9.51	28.69	38.20	46.00	-7.80	peak			

Temperature: 22.6

Humidity: 54.6 %

Page 38 of 71

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

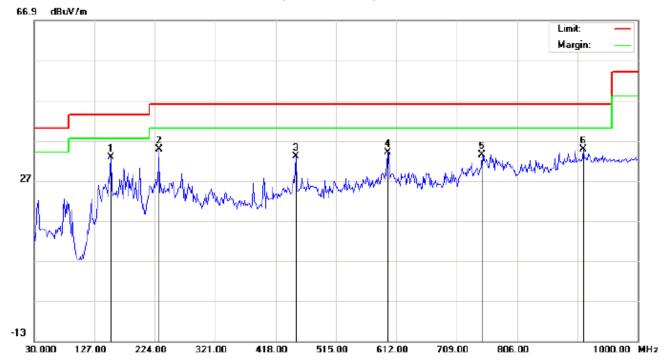

Polarization: Vertical

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth Headset

M/N:Z-BT1000

Mode:Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	152.8667	17.58	15.28	32.86	43.50	-10.64	peak			
2		230.4667	22.73	11.99	34.72	46.00	-11.28	peak			
3		450.3333	12.43	20.59	33.02	46.00	-12.98	peak			
4		599.0666	11.27	22.73	34.00	46.00	-12.00	peak			
5		749.4166	6.87	26.61	33.48	46.00	-12.52	peak			
6		912.7000	5.92	28.96	34.88	46.00	-11.12	peak			

Power:

Distance:


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 39 of 71

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

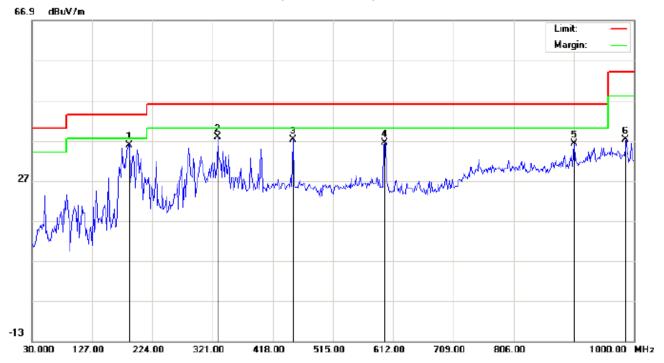

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth Headset

M/N:Z-BT1000

Mode:High Channel TX

Note:

Polarization: *Horizontal* Temperature: 22.6 Power: Humidity: 54.6 %

Distance:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1	*	186.8166	24.51	11.39	35.90	43.50	-7.60	peak			
2		329.0833	20.40	17.35	37.75	46.00	-8.25	peak			
3		450.3333	16.64	20.59	37.23	46.00	-8.77	peak			
4		599.0666	12.66	23.71	36.37	46.00	-9.63	peak			
5		903.0000	7.51	28.69	36.20	46.00	-9.80	peak			
6		987.0666	7.60	29.64	37.24	54.00	-16.76	peak			

Temperature: 22.6

Humidity: 54.6 %

Page 40 of 71

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

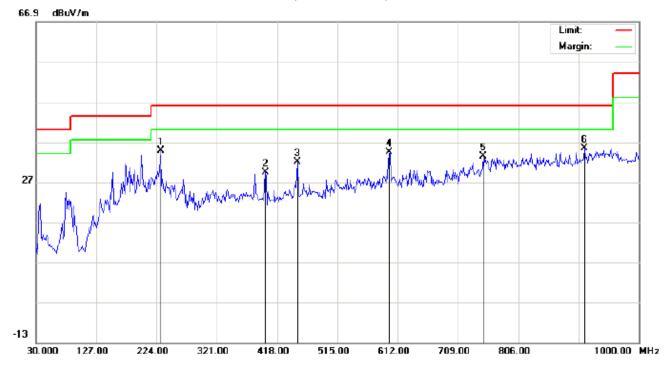

Polarization: Vertical

Site: site #1 Limit: FCC Class B 3M Radiation

ELIT: Blueteeth Heedeet

EUT:Bluetooth Headset

M/N:Z-BT1000

Mode:High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		230.4667	22.73	11.99	34.72	46.00	-11.28	peak			
2		398.6000	10.44	19.06	29.50	46.00	-16.50	peak			
3		450.3333	11.43	20.59	32.02	46.00	-13.98	peak			
4		599.0666	11.77	22.73	34.50	46.00	-11.50	peak			
5		749.4166	6.87	26.61	33.48	46.00	-12.52	peak		·	
6	*	912.7000	6.42	28.96	35.38	46.00	-10.62	peak			

Power:

Distance:

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 41 of 71

RADIATED EMISSION ABOVE 1GHZ

RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)-LOW CHANNEL-HORIZONTAL

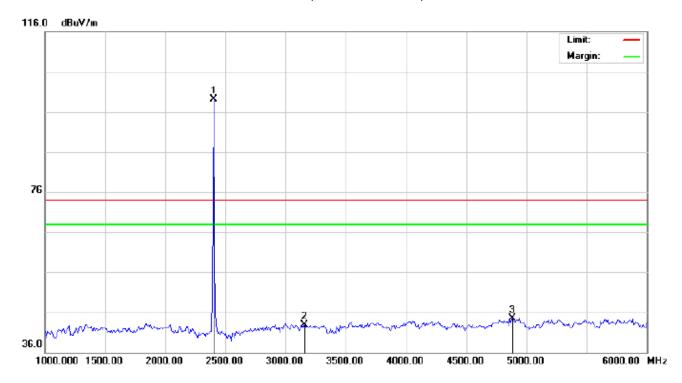

Site: Conduction Polarization: Horizontal Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance:

M/N:Z-BT1000


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	88.81	10.32	99.13	74.00	25.13	peak			
2		3158.333	31.19	11.79	42.98	74.00	-31.02	peak			
3		4883.333	36.56	7.89	44.45	74.00	-29.55	peak			

Page 42 of 71

RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)-LOW CHANNEL -VERTICAL

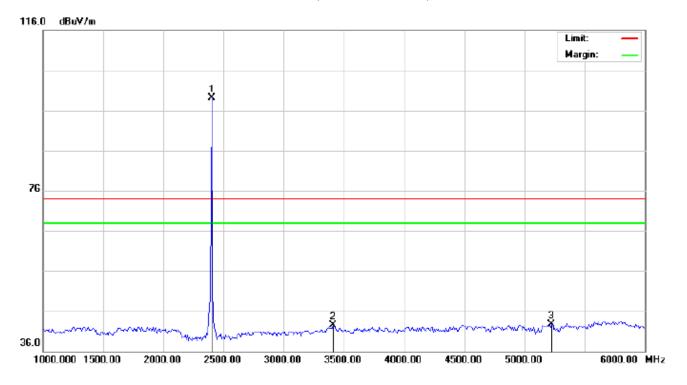

Site: Conduction Polarization: Vertical Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance:

M/N:Z-BT1000


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	88.87	10.32	99.19	74.00	25.19	peak			
2		3408.333	30.42	12.02	42.44	74.00	-31.56	peak			
3		5225.000	38.96	3.70	42.66	74.00	-31.34	peak			

Page 43 of 71

RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)-MIDDLE CHANNEL-HORIZONTAL

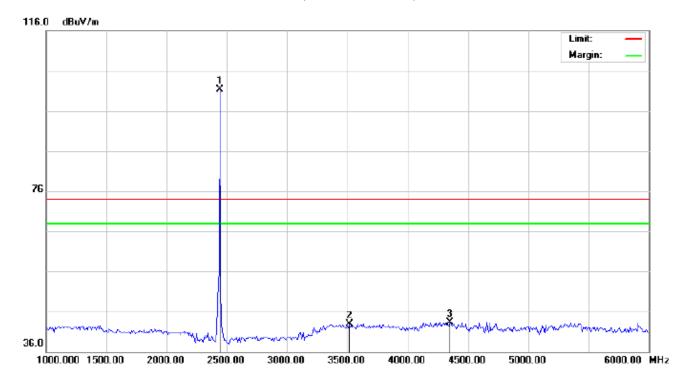

Site: Conduction Polarization: Horizontal Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance:

M/N:Z-BT1000


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2441.000	90.92	10.37	101.29	74.00	27.29	peak			
2		3516.667	30.63	12.21	42.84	74.00	-31.16	peak			
3		4350.000	33.90	9.38	43.28	74.00	-30.72	peak			

Page 44 of 71

RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics) - MIDDLE CHANNEL -VERTICAL

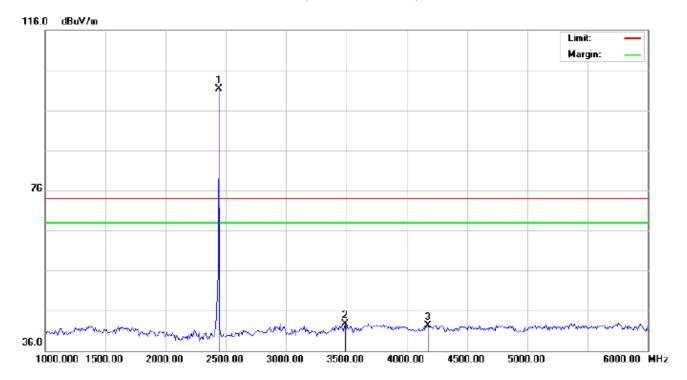

Site: Conduction Polarization: Vertical Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance:

M/N:Z-BT1000


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2441.000	90.88	10.37	101.25	74.00	27.25	peak			
2		3491.667	30.65	12.10	42.75	74.00	-31.25	peak			
3		4175.000	30.12	12.28	42.40	74.00	-31.60	peak			

Page 45 of 71

RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)-HIGH CHANNEL-HORIZONTAL

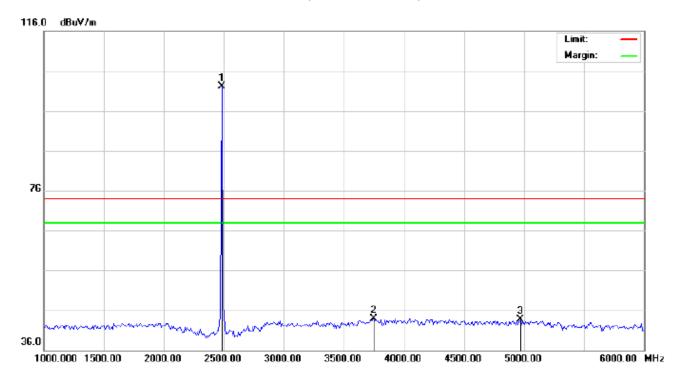

Site: Conduction Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance:

M/N: Z-BT1000


Mode: High Channel TX

Note:

N	0.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		-	MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
	1	*	2480.000	91.75	10.41	102.16	74.00	28.16	peak			
	2		3750.000	30.25	13.65	43.90	74.00	-30.10	peak			
	3		4966.667	35.58	8.11	43.69	74.00	-30.31	peak			

Page 46 of 71

RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)-HIGH CHANNEL -VERTICAL

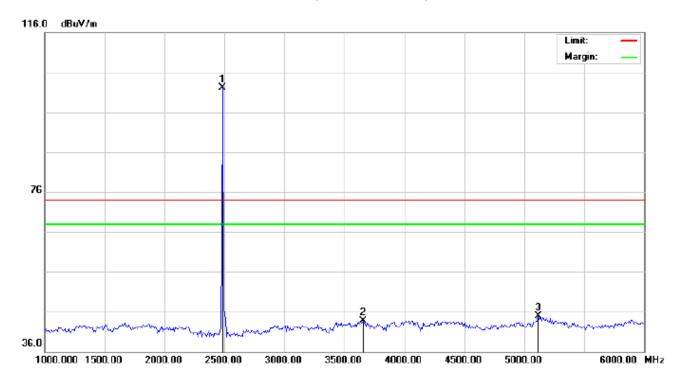

Site: Conduction Polarization: Vertical Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance:

M/N:Z-BT1000

Mode:High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	91.77	10.41	102.18	74.00	28.18	peak			
2		3658.333	30.58	13.09	43.67	74.00	-30.33	peak			
3		5116.667	39.03	5.86	44.89	74.00	-29.11	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


Page 47 of 71

11. BAND EDGE EMISSION

11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency=Operation Frequency, RBW>=100kHz, VBW>=3*RBW, Center frequency =Operation frequency
- 3. The band edges was measured and recorded.


11.2. TEST SET-UP

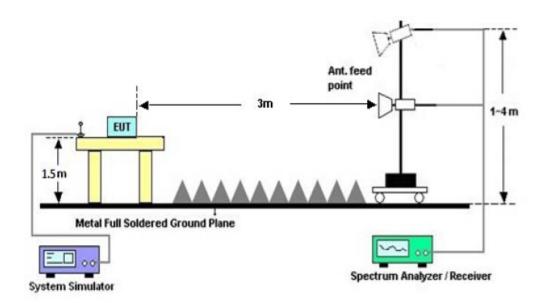

Page 48 of 71

11.3. TEST RESULT (Worst Modulation: GFSK)

TEST PLOT OF BAND EDGE FOR LOW CHANNEL (1Mbps)-Horizontal

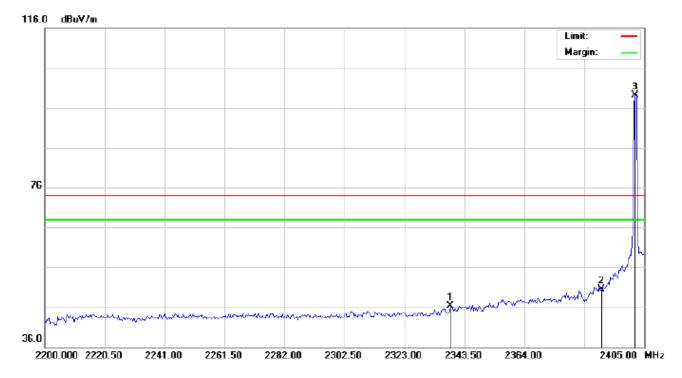

Site: Conduction Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance:


M/N: Z-BT1000

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2338.717	35.97	10.25	46.22	74.00	-27.78	peak			
2		2390.000	40.12	10.31	50.43	74.00	-23.57	peak			
3	*	2402.000	88.81	10.32	99.13	74.00	25.13	peak			

Page 49 of 71

TEST PLOT OF BAND EDGE FOR LOW CHANNEL (1Mbps)-Vertical

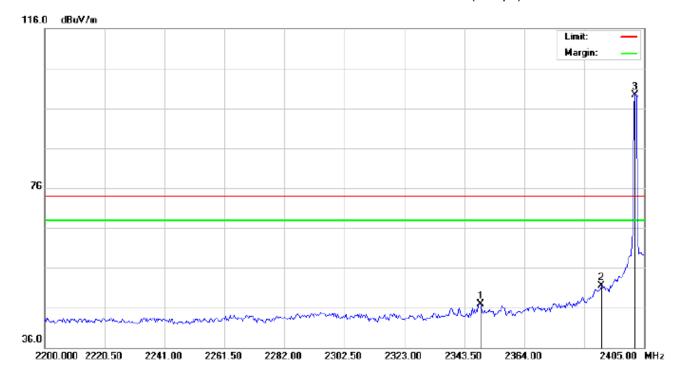

Site: Conduction Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance:


M/N: Z-BT1000

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2348.967	36.73	10.26	46.99	74.00	-27.01	peak			
2		2390.000	41.12	10.31	51.43	74.00	-22.57	peak			
3	*	2402.000	88.91	10.32	99.23	74.00	25.23	peak			

Page 50 of 71

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (1Mbps)-Horizontal

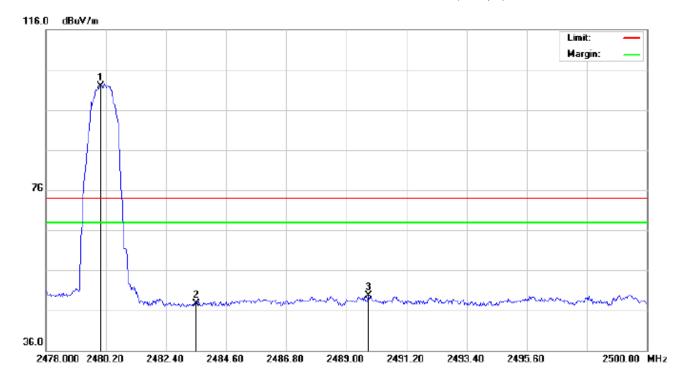

Site: Conduction Polarization: Horizontal Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance:


M/N: Z-BT1000

Mode: High Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	91.46	10.41	101.87	74.00	27.87	peak			
2		2483.500	37.25	10.41	47.66	74.00	-26.34	peak			
3		2489.807	39.28	10.42	49.70	74.00	-24.30	peak			

Page 51 of 71

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (1Mbps)-Vertical

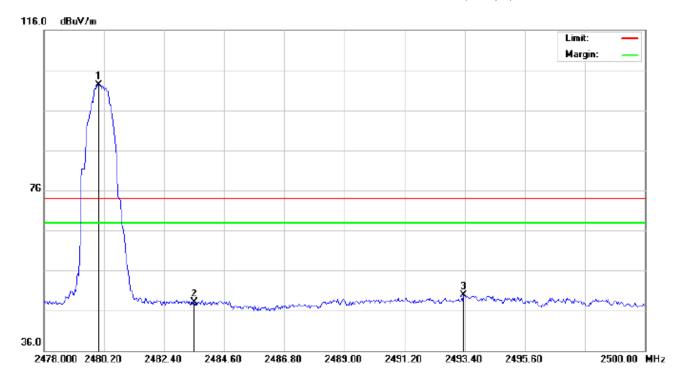

Site: Conduction Polarization: Vertical Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance:

M/N: Z-BT1000

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	91.96	10.41	102.37	74.00	28.37	peak			
2		2483.500	37.75	10.41	48.16	74.00	-25.84	peak			
3		2493.363	39.45	10.42	49.87	74.00	-24.13	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 52 of 71

12. NUMBER OF HOPPING FREQUENCY

12.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
- 4. Set the Spectrum Analyzer as RBW>=1%span, VBW>=RBW.

12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2


12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

12.4. LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
HOPPING CHANNEL	>=15	79	PASS

TEST PLOT FOR NO. OF TOTAL CHANNELS

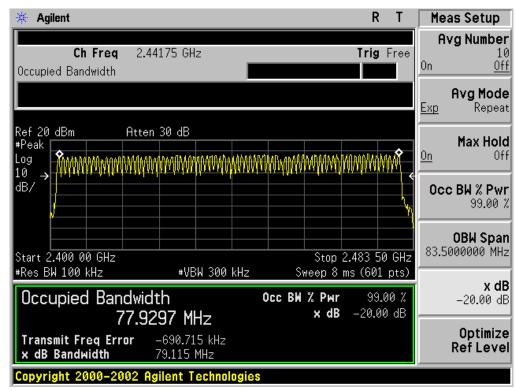

Page 53 of 71

13. TIME OF OCCUPANCY (DWELL TIME)

13.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set Span = zero span, centered on a hoping channel
- 4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz

13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

13.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

13.4. LIMITS AND MEASUREMENT RESULT


The Worst Case (3Mbps)

		` ;			
Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)	
Low	2.90	31.6	309.12	400	
Middle	2.87	31.6	306.13	400	
High	2.90	31.6	309.12	400	


Low Channel Time 2.90*(1600/6)/79*31.6=309.12ms Middle Channel Time 2.87*(1600/6)/79*31.6=306.13ms High Channel Time 2.90*(1600/6)/79*31.6=309.12ms

Page 54 of 71

TEST PLOT OF LOW CHANNEL

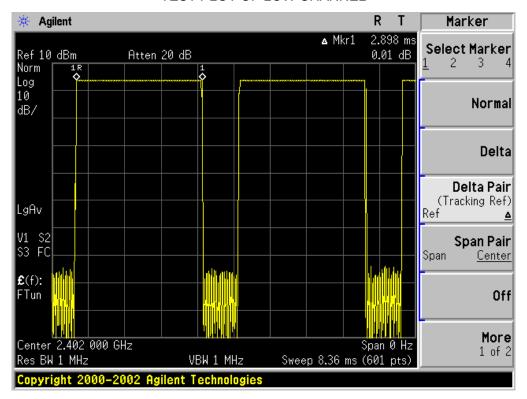


TEST PLOT OF MIDDLE CHANNEL

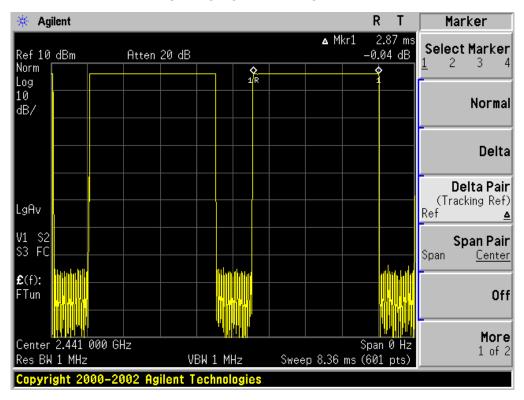

Page 55 of 71

TEST PLOT OF HIGH CHANNEL

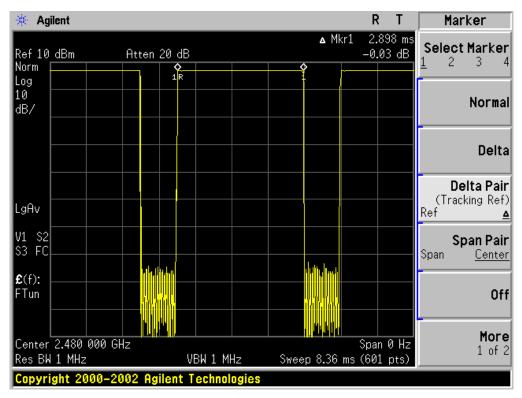

Page 56 of 71

14. FREQUENCY SEPARATION

14.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold

14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2

14.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6.3

14.4. LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT		
	KHz	KHz	Dage		
CH00-CH01	1000	>=25 KHz or 2/3 20 dB BW	Pass		

Page 57 of 71

TEST PLOT FOR FREQUENCY SEPARATION (3Mbps)

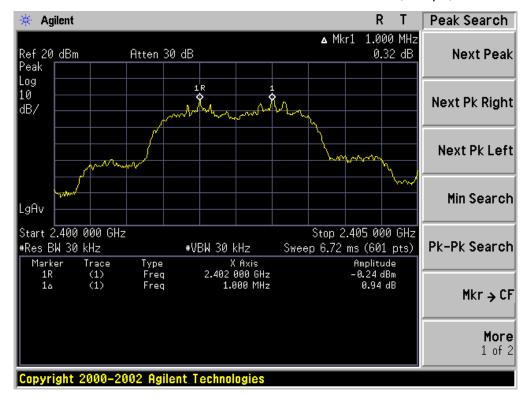

Page 58 of 71

15. FCC LINE CONDUCTED EMISSION TEST


15.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francis	Maximum RF Line Voltage							
Frequency	Q.P.(dBuV)	Average(dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

15.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

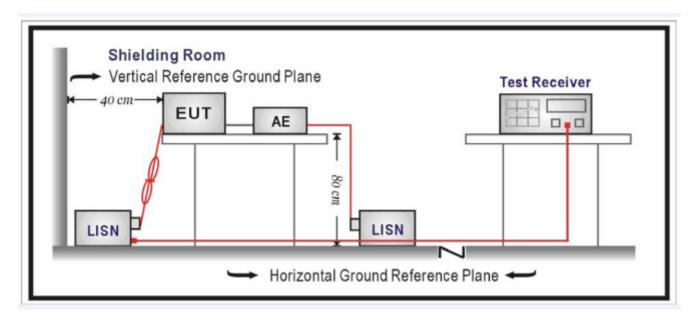

Page 59 of 71

15.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by PC or by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

15.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Page 60 of 71

15.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Worst Case (By Adapter)

Line Conducted Emission Test Line 1-L

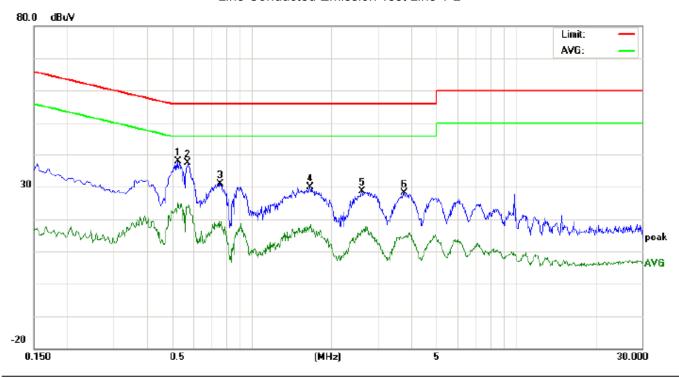

Site: Conduction Phase: L1 Temperature: 24.1
Limit: FCC Class B Conduction(QP) Power: Humidity: 53.5 %

EUT:Bluetooth Headset


M/N: Z-BT1000

Mode: BT Link with charging

No.	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.5261	27.37		14.76	10.38	37.75		25.14	56.00	46.00	-18.25	-20.86	Р	
2	0.5741	26.96		13.19	10.33	37.29		23.52	56.00	46.00	-18.71	-22.48	Р	
3	0.7621	20.49		7.58	10.31	30.80		17.89	56.00	46.00	-25.20	-28.11	Р	
4	1.6621	19.62		7.32	10.33	29.95		17.65	56.00	46.00	-26.05	-28.35	Р	
5	2.6180	18.10		6.13	10.46	28.56		16.59	56.00	46.00	-27.44	-29.41	Р	
6	3.7861	17.67		3.92	10.46	28.13		14.38	56.00	46.00	-27.87	-31.62	Р	

Page 61 of 71

Line Conducted Emission Test Line 2-N

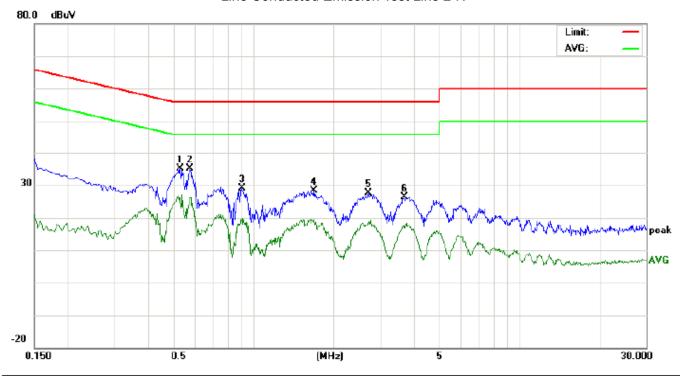

Site: Conduction Phase: N Temperature: 24.1 Limit: FCC Class B Conduction(QP) Power: Humidity: 53.5 %

EUT:Bluetooth Headset

M/N: Z-BT1000


Mode: BT Link with charging

No.	Freq. (MHz)	Reading_Level (dBuV)		Correct Factor	1			Limit (dBuV)		Margin (dB)		P/F	Comment	
		Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.5301	24.83		15.73	10.37	35.20		26.10	56.00	46.00	-20.80	-19.90	Р	
2	0.5781	24.85		15.86	10.33	35.18		26.19	56.00	46.00	-20.82	-19.81	Р	
3	0.9061	18.76		9.31	10.41	29.17		19.72	56.00	46.00	-26.83	-26.28	Р	
4	1.6941	18.16		9.18	10.32	28.48		19.50	56.00	46.00	-27.52	-26.50	Р	
5	2.7061	17.11		8.35	10.48	27.59		18.83	56.00	46.00	-28.41	-27.17	Р	
6	3.7021	15.88		7.05	10.48	26.36		17.53	56.00	46.00	-29.64	-28.47	Р	


Page 62 of 71


APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP

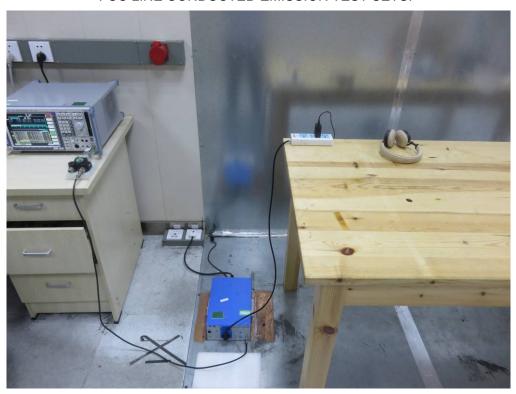

FCC RADIATED EMISSION TEST SETUP

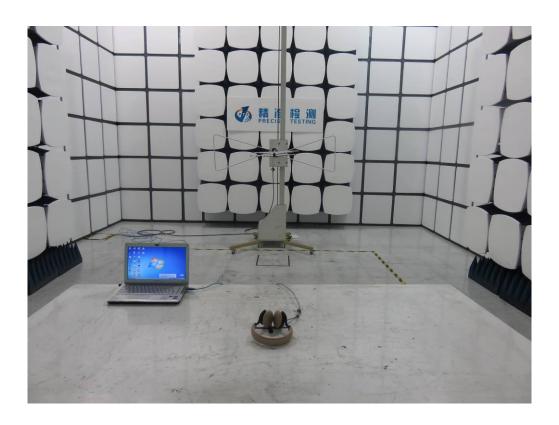

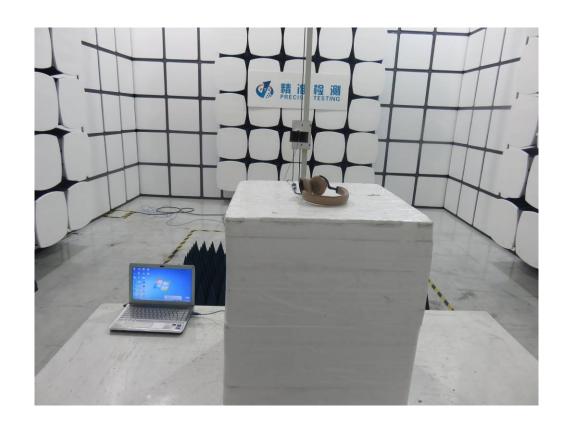

APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT




VIEW OF EUT (PORT)




VIEW OF EUT (OPEN)




INTERNAL VIEW OF EUT-1

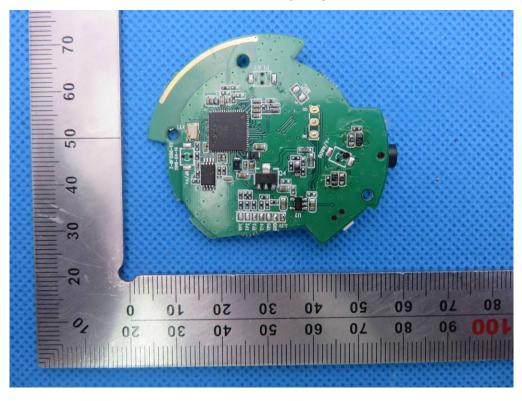


INTERNAL VIEW OF EUT-2

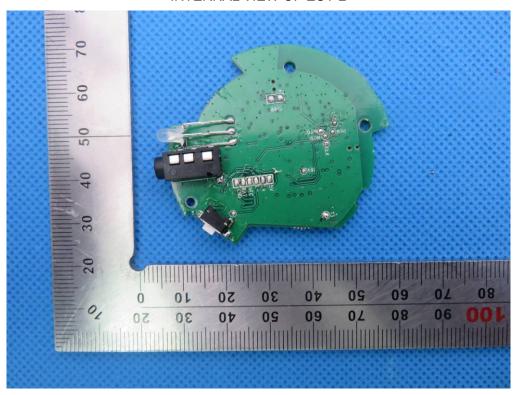


INTERNAL VIEW OF EUT-3

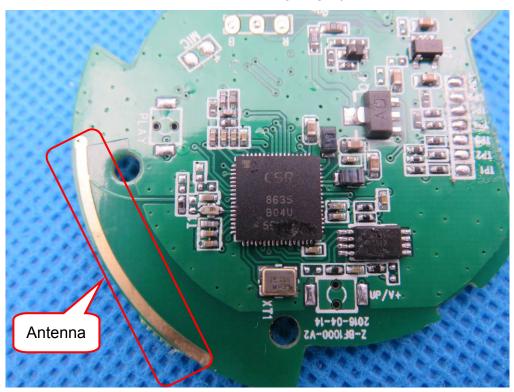


INTERNAL VIEW OF EUT-4

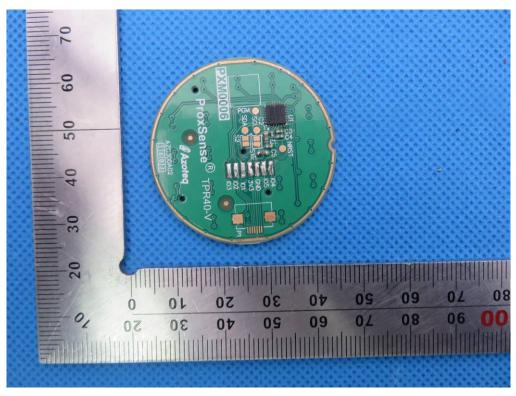


INTERNAL VIEW OF EUT-5

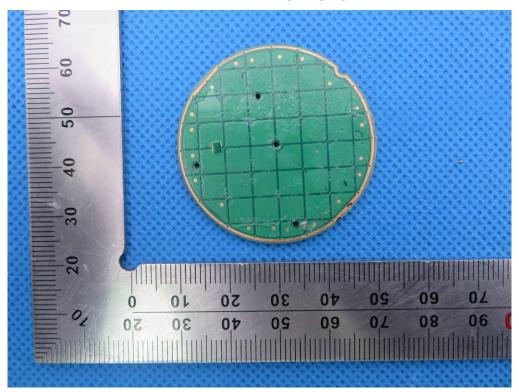

INTERNAL VIEW OF EUT-6

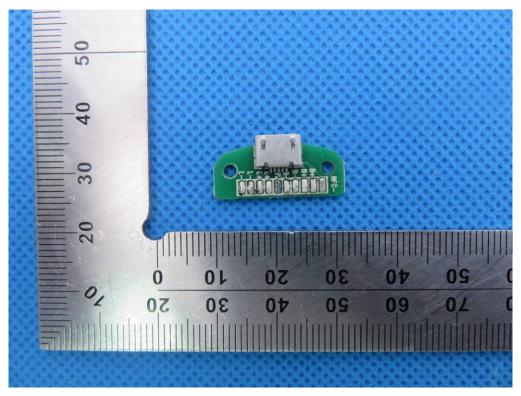

INTERNAL VIEW OF EUT-7

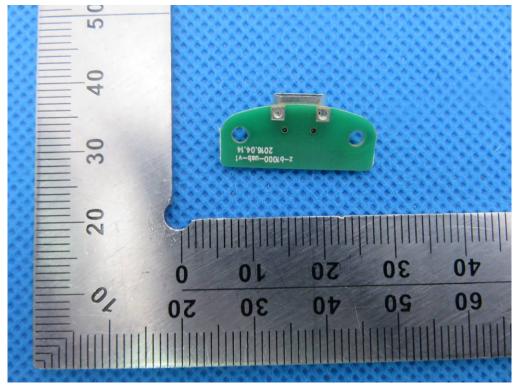

----END OF REPORT----