

Intertek
731 Enterprise Drive
Lexington, KY 40510

Tel 859 226 1000
Fax 859 226 1040

www.intertek.com

Foundation Fitness LLC

TEST REPORT

SCOPE OF WORK

EMC TESTING – DASH M200 BIKE COMPUTER

REPORT NUMBER

104771489LEX-024.3

ISSUE DATE
12/6/2021

REVISED DATE
8/23/2022

PAGES
48

DOCUMENT CONTROL NUMBER

Non-Specific EMC Report Shell Rev. December 2017
© 2017 INTERTEK



EMC TEST REPORT

(FULL COMPLIANCE)

Report Number: 104771489LEX-024.3

Project Number: G104771489

Report Issue Date: 12/6/2021

Report Revised Date: 8/23/2022

Model(s) Tested: M200

Standards: Title 47 CFR Part 15.247

RSS-247 Issue 2

RSS-Gen Issue 5

Tested by:

Intertek Testing Services NA, Inc.
731 Enterprise Dr.
Lexington, KY 40510
USA

Client:

Foundation Fitness LLC
1220 Main Street
Suite 400
Vancouver, WA 98660
USA

Report prepared by



Brian Lackey, Team Leader

Report reviewed by



James Sudduth, Senior Staff Engineer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



Table of Contents

| | | |
|-----------|--|-----------|
| 1 | <i>Introduction and Conclusion</i> | 4 |
| 2 | <i>Test Summary</i> | 4 |
| 3 | <i>Client Information</i> | 5 |
| 4 | <i>Description of Equipment under Test and Variant Models</i> | 6 |
| 5 | <i>System Setup and Method</i> | 7 |
| 6 | <i>Receiver Spurious Emissions</i> | 8 |
| 7 | <i>Transmitter Spurious Emissions</i> | 13 |
| 8 | <i>Output Power</i> | 23 |
| 9 | <i>Occupied Bandwidth</i> | 28 |
| 10 | <i>Power Spectral Density</i> | 38 |
| 11 | <i>Conducted Spurious Emissions</i> | 43 |
| 12 | <i>Antenna Requirement</i> | 47 |
| 13 | <i>Revision History</i> | 48 |



1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 4.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested **complies** with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested. Intertek does not make any claims of compliance for samples or variants which were not tested.

2 Test Summary

| Section | Test full name | Result |
|---------|---|-----------------|
| 6 | Receiver Spurious Emissions (ANSI C63.4: 2014) | Pass |
| 7 | Transmitter Spurious Emissions (FCC Part 15.247(d), RSS-247 Issue 2 § 5.5) | Pass |
| 8 | Output Power (FCC Part 15.247(b)(3), RSS-247 Issue 2 § 5.4(d)) | Pass |
| 9 | Occupied Bandwidth (FCC Part 15.247, RSS-247 Issue 2 § 5.2(a)) | Pass |
| 10 | Power Spectral Density (FCC Part 15.247(e), RSS-247 Issue 2 § 5.2(b)) | Pass |
| 11 | Conducted Spurious Emissions (FCC Part 15.247(d), RSS-247 Issue 2 § 5.5) | Pass |
| 12 | Antenna Requirement (FCC Part 15.203, RSS-Gen Issue 5 § 6.8) | Pass |
| -- | Conducted Emissions on the AC Mains (ANSI C63.4: 2014) | NA ¹ |

¹ The Dash M200 Bike Computer is battery powered when in use and installed on a bicycle. It has no connections to the AC mains.



3 Client Information

This product was tested at the request of the following:

| Client Information | |
|------------------------------|--|
| Client Name: | Foundation Fitness LLC |
| Address: | 1220 Main Street Suite 400 Vancouver, WA 98660 USA |
| Contact: | Jim Stemper |
| Email: | jstemper@stagescycling.com |
| Manufacturer Information | |
| Manufacturer Name: | Digital Concepts, Inc. |
| Manufacturer Address: | 3108 Riverport Tech Center Drive Maryland Heights, MO 63043 United States of America |
| Factory Address: | Digital Concepts de Mexico. S de RL de CV Ponciano Arriaga No. 716 Col. Parque Industrial Los Aztecas Cd. Juarez Chihuahua, Mexico, CP: 32679 |



4 Description of Equipment under Test and Variant Models

| Equipment Under Test | |
|--|--|
| Product Name | Dash M200 Bike Computer |
| Model Numbers | M200 |
| Serial Number | Test Sample 2 |
| Receive Date | 9/1/2021 |
| Test Start Date | 9/21/2021 |
| Test End Date | 9/25/2021 |
| Device Received Condition | Good |
| Test Sample Type | Production |
| Rated Voltage | 5VDC |
| Frequency Band(s) | 2400-2483.5MHz |
| Modulation Type(s) | GFSK |
| Test Channel(s) | 2402MHz, 2440MHz, 2480MHz |
| Maximum Antenna Gain (dBi) | 1.6dBi Taiyo Yuden Model AH316M245001-T Antenna Information was provided by Foundation Fitness LLC and may affect compliance |
| Description of Equipment Under Test (provided by client) | |
| The Dash M200 Bike Computer is a 2.2" color display rechargeable bike computer with GPS, Bluetooth (Low Energy) and WiFi (approved module), Barometric pressure sensor, piezoelectric buzzer, 16GB of memory, 5 buttons and a plastic mounting interface to connect to handlebars. This computer is built on Linux and is based on the existing M50 bike computer, utilizing all of its existing features. | |

4.1 Variant Models:

There were no variant models covered by this evaluation.



5 System Setup and Method

5.1 Method:


Configuration as required by ANSI C63.4: 2014 and ANSI C63.10:2013

| No. | Descriptions of EUT Exercising |
|-----|--|
| 1 | Transmitting a Bluetooth Low Energy (BLE) signal or low, middle, or high channel |
| 2 | Idle, not transmitting. External AC/DC supply used in lieu of battery for testing. |

| Cables | | | | | |
|--------|--------------------|------------|-----------|----------|-----------------|
| Qty | Description | Length (m) | Shielding | Ferrites | Termination |
| 1 | USB Charging Cable | 2m | Yes | None | Laptop Computer |

| Support Equipment | | | |
|-------------------|--------------|--------------|---------------|
| Description | Manufacturer | Model Number | Serial Number |
| Laptop Computer | HP | EliteBook | Not Labeled |

5.2 EUT Block Diagram:

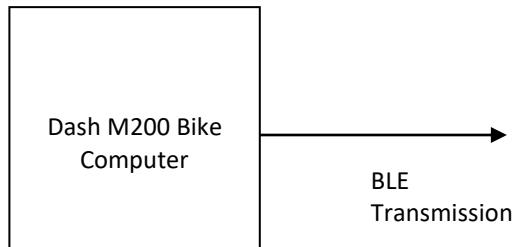



6 Receiver Spurious Emissions

6.1 Test Method

Tests are performed in accordance with ANSI C63.4: 2014

TEST SITE: 10m ALSE

Site Designation: 10m Chamber

Measurement Uncertainty

| Measurement | Frequency Range | Expanded Uncertainty (k=2) | Ucispr |
|-------------------------|-----------------|----------------------------|--------|
| Radiated Emissions, 10m | 30-1000 MHz | 3.9dB | 6.3 dB |
| Radiated Emissions, 3m | 30-1000 MHz | 4.0dB | 6.3 dB |
| Radiated Emissions, 3m | 1-6 GHz | 4.7dB | 5.2 dB |
| Radiated Emissions, 3m | 6-15 GHz | 4.7dB | 5.5 dB |
| Radiated Emissions, 3m | 15-18 GHz | 4.7dB | 5.5 dB |
| Radiated Emissions, 3m | 18-40 GHz | 4.7dB | 5.5 dB |

As shown in the table above our radiated emissions U_{lab} is less than the corresponding U_{CISPR} reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required.



6.2 Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 $\text{dB}\mu\text{V}$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 $\text{dB}\mu\text{V}/\text{m}$. This value in $\text{dB}\mu\text{V}/\text{m}$ was converted to its corresponding level in $\mu\text{V}/\text{m}$.

$$RA = 52.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}/\text{m}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$FS = 32 \text{ dB}\mu\text{V}/\text{m}$$

To convert from $\text{dB}\mu\text{V}$ to μV or mV the following was used:

$$UF = 10^{(NF/20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

$$NF = \text{Net Reading in } \text{dB}\mu\text{V}$$

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$

$$UF = 10^{(32 \text{ dB}\mu\text{V}/\text{m} / 20)} = 39.8 \mu\text{V}/\text{m}$$



6.3 Test Equipment Used

| Description | Asset | Manufacturer | Model | Cal Date | Cal Due |
|----------------------------|-------|-----------------|--------|-----------------------|-----------------------|
| EMI Test Receiver | 8131 | Rohde & Schwarz | ESW44 | 1/15/2020 | 1/22/2022 |
| Bilog Antenna (30MHz-1GHz) | 7085 | SunAR | JB6 | 10/5/2021 | 10/5/2022 |
| Horn Antenna (1-18GHz) | 3780 | ETS | 3117 | 6/28/2021 | 6/28/2022 |
| System Controller | 4096 | ETS Lindgren | 2090 | Verify at Time of Use | Verify at Time of Use |
| System Controller | 3957 | Sunol Sciences | SC99V | Verify at Time of Use | Verify at Time of Use |
| Coaxial Cable | 3074 | | | 12/21/2020 | 12/21/2021 |
| Preamplifier | 3918 | TS-PR18 | 122005 | 12/21/2020 | 12/21/2021 |
| Coaxial Cable | 2588 | | | 12/21/2020 | 12/21/2021 |
| Coaxial Cable | 2593 | | | 12/21/2020 | 12/21/2021 |
| Coaxial Cable | 2592 | | | 12/21/2020 | 12/21/2021 |
| Coaxial Cable | 3339 | | | 12/21/2020 | 12/21/2021 |

6.4 Software Utilized

| Name | Manufacturer | Version |
|-------|-----------------|-----------------|
| EMC32 | Rohde & Schwarz | Version 9.15.02 |

6.5 Test Results


The sample tested was found to be **compliant**.

6.6 Test Conditions

| | | | |
|--|-----------------|-----------------------|-------------------------|
| Test Personnel: | Bryan Taylor | Test Date: | 9/22/2021 |
| Supervising/Reviewing Engineer: (Where Applicable) | NA | FCC Part 15.209 / | FCC Part 15.109 Class B |
| Product Standard: | FCC Part 15.247 | Ambient Temperature: | 21.3C |
| Input Voltage: | RSS-247 Issue 2 | Relative Humidity: | 55.8% |
| Pretest Verification w / Ambient Signals or BB Source: | Battery Powered | Atmospheric Pressure: | 984mbar |
| | Yes | | |



6.7 Test Data: 30MHz – 1GHz

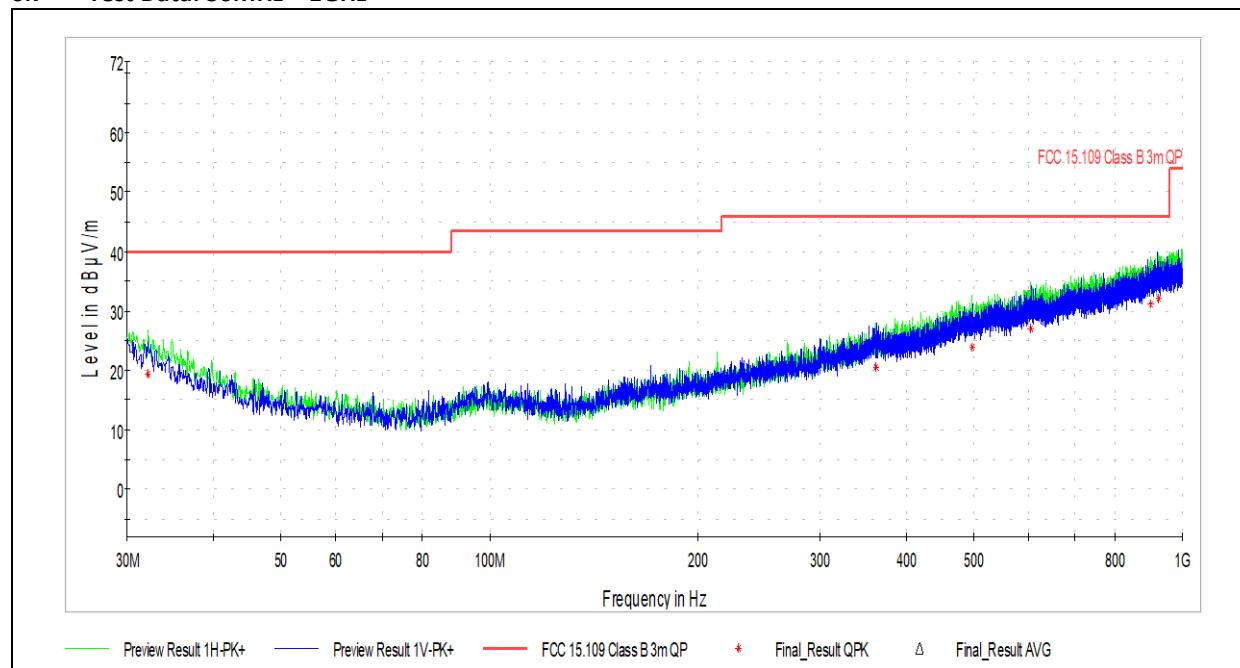


| Frequency (MHz) | QuasiPeak (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------------|----------------------|-------------|-----------------|-------------|-----|---------------|--------------|
| 32.155556 | 19.40 | 40.00 | 20.60 | 120.000 | 378.0 | H | 29.0 | 24 |
| 361.686111 | 20.50 | 46.02 | 25.52 | 120.000 | 97.0 | H | 236.0 | 26 |
| 497.055000 | 23.95 | 46.02 | 22.08 | 120.000 | 363.0 | H | 69.0 | 29 |
| 603.593333 | 27.02 | 46.02 | 19.00 | 120.000 | 202.0 | H | 134.0 | 32 |
| 899.443333 | 31.06 | 46.02 | 14.96 | 120.000 | 100.0 | H | 110.0 | 37 |
| 924.340000 | 32.13 | 46.02 | 13.89 | 120.000 | 162.0 | H | 39.0 | 38 |

Deviations, Additions, or Exclusions: None



6.8 Test Data: 1GHz – 18GHz

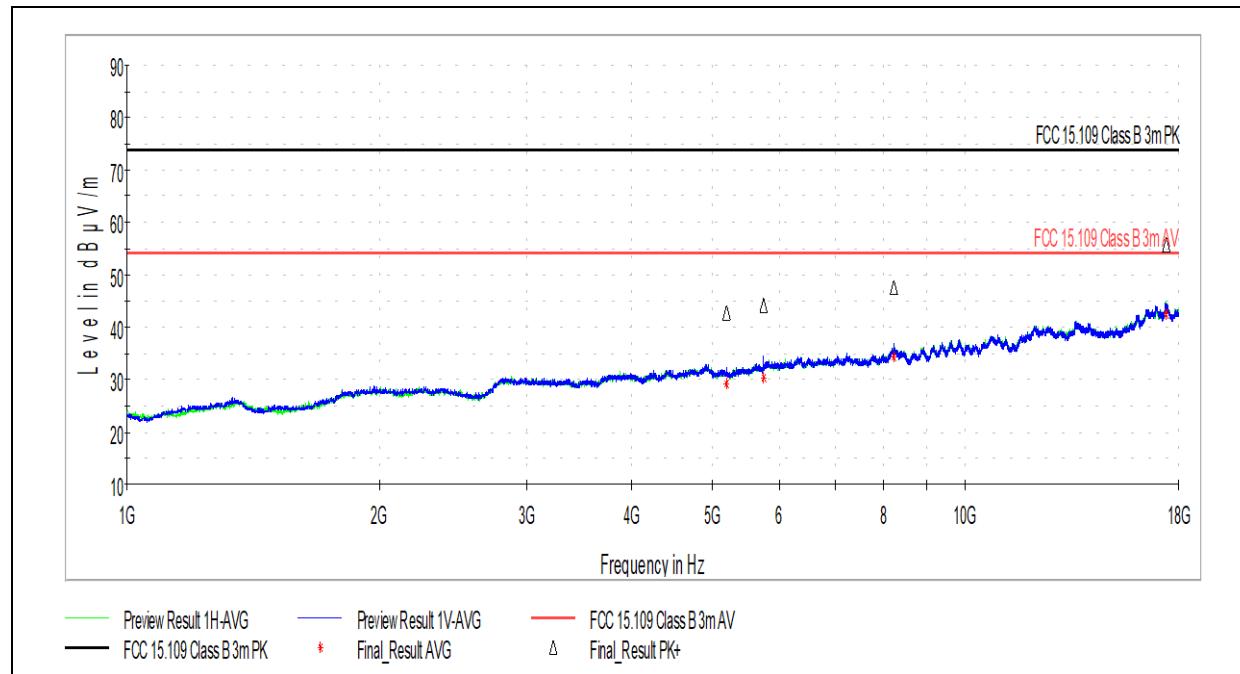

| Frequency (MHz) | MaxPeak (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|----------------------|-------------|-----------------|-------------|-----|---------------|--------------|
| 5193.500000 | 42.79 | 73.98 | 31.19 | 1000.000 | 313.0 | V | 249.0 | 10 |
| 5753.000000 | 44.15 | 73.98 | 29.83 | 1000.000 | 299.0 | V | 338.0 | 11 |
| 8233.000000 | 47.48 | 73.98 | 26.50 | 1000.000 | 100.0 | V | 271.0 | 15 |
| 17377.500000 | 55.66 | 73.98 | 18.32 | 1000.000 | 117.0 | H | 0.0 | 25 |

| Frequency (MHz) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|----------------------|-------------|-----------------|-------------|-----|---------------|--------------|
| 5193.500000 | 29.19 | 53.98 | 24.79 | 1000.000 | 313.0 | V | 249.0 | 10 |
| 5753.000000 | 30.42 | 53.98 | 23.56 | 1000.000 | 299.0 | V | 338.0 | 11 |
| 8233.000000 | 34.38 | 53.98 | 19.60 | 1000.000 | 100.0 | V | 271.0 | 15 |
| 17377.500000 | 42.57 | 53.98 | 11.41 | 1000.000 | 117.0 | H | 0.0 | 25 |

Deviations, Additions, or Exclusions: None



7 Transmitter Spurious Emissions

7.1 Test Limits

FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247 Issue 2 § 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.2 Test Method

Tests are performed in accordance with ANSI C63.10:2013 § 11.12.1 Radiated emission measurements.



7.3 Test Equipment Used

| Description | Asset | Manufacturer | Model | Cal Date | Cal Due |
|----------------------------|-------|-----------------|---------|-----------------------|-----------------------|
| EMI Test Receiver | 8131 | Rohde & Schwarz | ESW44 | 1/15/2020 | 1/22/2022 |
| Bilog Antenna (30MHz-1GHz) | 7085 | SunAR | JB6 | 10/5/2021 | 10/5/2022 |
| Horn Antenna (1-18GHz) | 3780 | ETS | 3117 | 6/28/2021 | 6/28/2022 |
| System Controller | 4096 | ETS Lindgren | 2090 | Verify at Time of Use | Verify at Time of Use |
| System Controller | 3957 | Sunol Sciences | SC99V | Verify at Time of Use | Verify at Time of Use |
| Coaxial Cable | 3074 | | | 12/21/2020 | 12/21/2021 |
| Preamplifier | 3918 | TS-PR18 | 122005 | 12/21/2020 | 12/21/2021 |
| Coaxial Cable | 2588 | | | 12/21/2020 | 12/21/2021 |
| Coaxial Cable | 2593 | | | 12/21/2020 | 12/21/2021 |
| Coaxial Cable | 2592 | | | 12/21/2020 | 12/21/2021 |
| Coaxial Cable | 3339 | | | 12/21/2020 | 12/21/2021 |
| Magnetic Loop Antenna | 2366 | ETS | 6502 | 7/30/2021 | 7/30/2022 |
| Preamplifier (18-40GHz) | 3921 | Rohde & Schwarz | TS-PR40 | 12/21/2020 | 12/21/2021 |
| Horn Antenna (18-40GHz) | 3779 | ETS | 3116c | 7/30/2021 | 7/30/2022 |

7.4 Software Utilized


| Name | Manufacturer | Version |
|-------|-----------------|-----------------|
| EMC32 | Rohde & Schwarz | Version 9.15.02 |

7.5 Test Results

The sample tested was found to be **compliant**. The data presented represents the worst case emissions with the device positioned in three orthogonal positions. All observed emissions outside of the band of operation were attenuated by at least 20dB.


7.6 Test Conditions

| | | | |
|--|-----------------|-----------------------|--|
| Test Personnel: | Bryan Taylor | Test Date: | 9/21/2021 – 9/25/2021 |
| Supervising/Reviewing Engineer: (Where Applicable) | NA | Limit Applied: | FCC Part 15.209 in Restricted Bands from FCC Part 15.205 |
| Product Standard: | FCC Part 15.247 | Ambient Temperature: | 22.5C |
| Input Voltage: | RSS-247 Issue 2 | Relative Humidity: | 59.2% |
| Pretest Verification w / Ambient Signals or BB Source: | Battery | Atmospheric Pressure: | 977.2mbar |

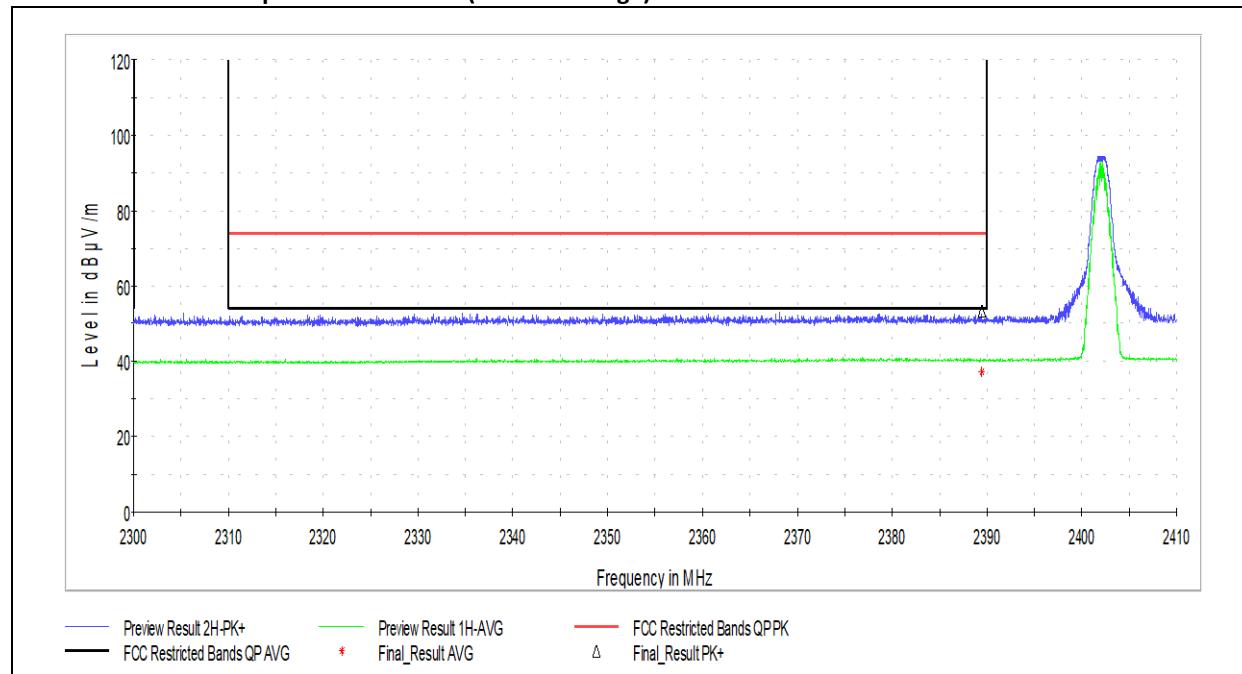**7.7 BLE 2402MHz Spurious Emissions (Low Band Edge):**

| Frequency (MHz) | MaxPeak (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|----------------------|-------------|-----------------|-------------|-----|---------------|--------------|
| 2389.480769 | 53.33 | 73.98 | 20.65 | 1000.000 | 300.0 | H | -9.0 | 39 |

| Frequency (MHz) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|----------------------|-------------|-----------------|-------------|-----|---------------|--------------|
| 2389.480769 | 37.16 | 53.98 | 16.82 | 1000.000 | 300.0 | H | -9.0 | 39 |

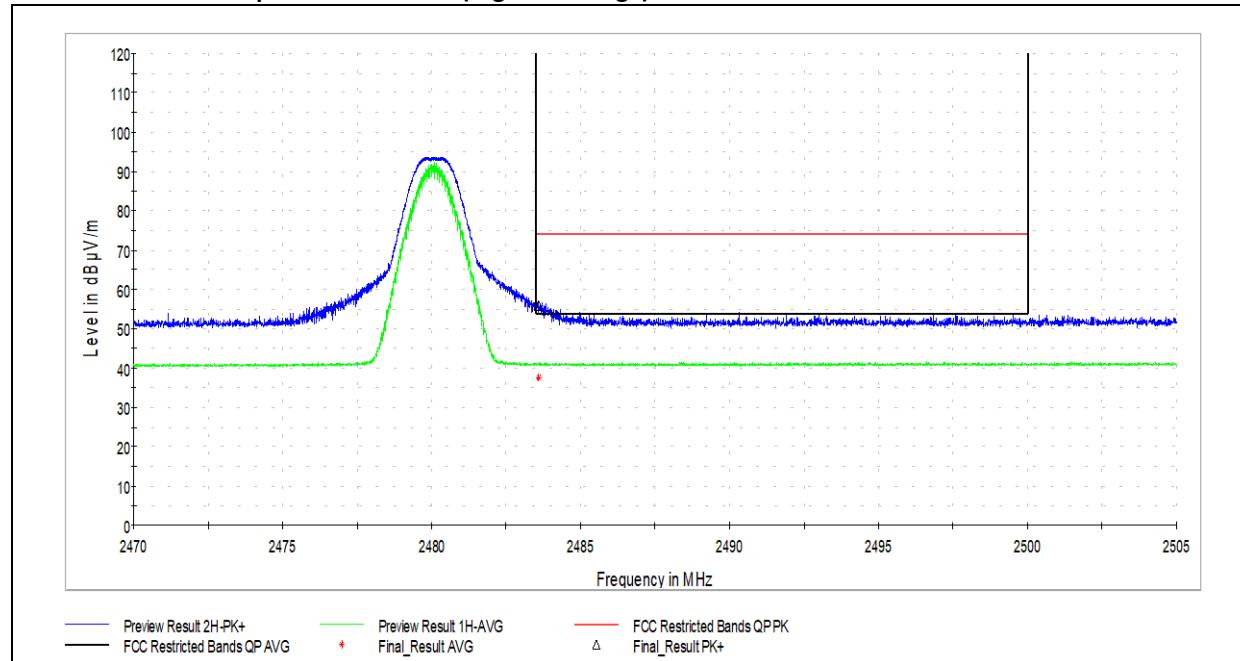
**7.8 BLE 2480MHz Spurious Emissions (High Band Edge):**

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|--------------|
| 2483.575962 | 55.90 | 73.98 | 18.08 | 1000.000 | 300.0 | H | 189.0 | 39 |

| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|--------------|
| 2483.575962 | 37.74 | 53.98 | 16.24 | 1000.000 | 300.0 | H | 189.0 | 39 |



7.9 Spurious Emissions, 9kHz – 30MHz:

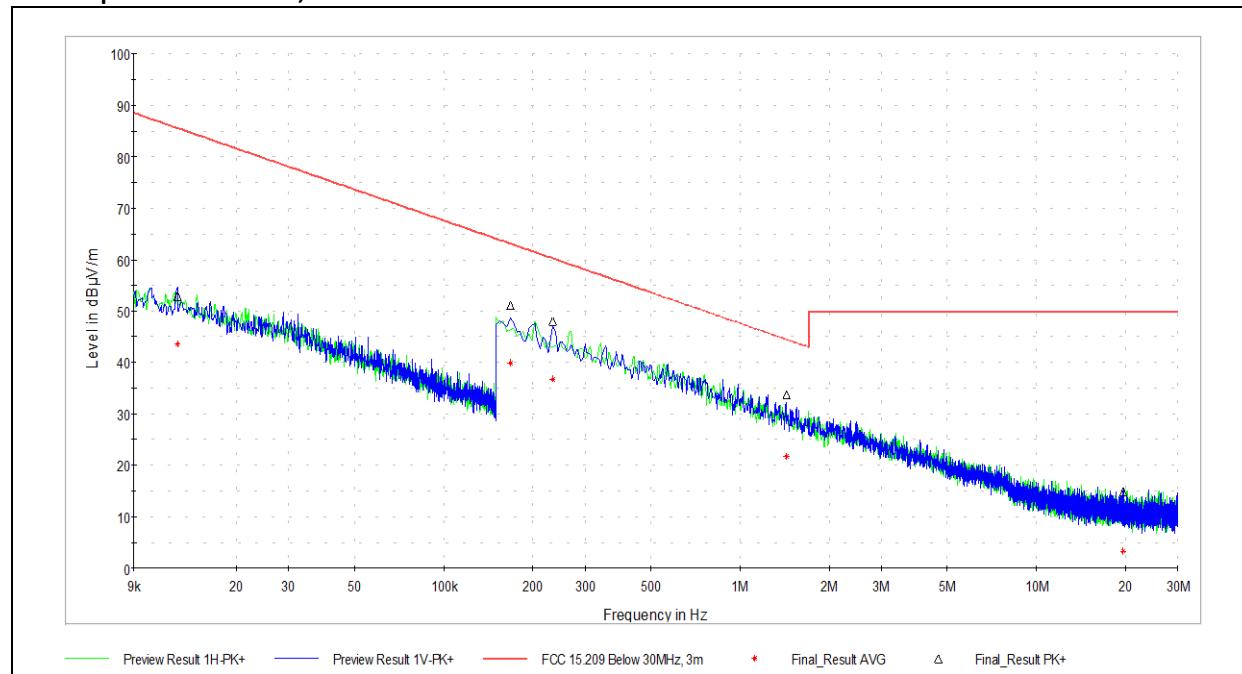


| Frequency (MHz) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Bandwidth (kHz) | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|----------------------|-------------|-----------------|---------------|--------------|
| 0.012626 | 43.50 | 85.58 | 42.08 | 0.200 | 93.0 | 17 |
| 0.167559 | 39.84 | 63.12 | 23.28 | 9.000 | 302.0 | 12 |
| 0.233405 | 36.66 | 60.24 | 23.59 | 9.000 | 350.0 | 12 |
| 1.431794 | 21.73 | 44.49 | 22.76 | 9.000 | 334.0 | 12 |
| 19.618346 | 3.34 | 50.00 | 46.66 | 9.000 | 295.0 | 11 |

Note: results shown represent the worst case of three channels under test



7.10 Spurious Emissions, 30MHz-1GHz:

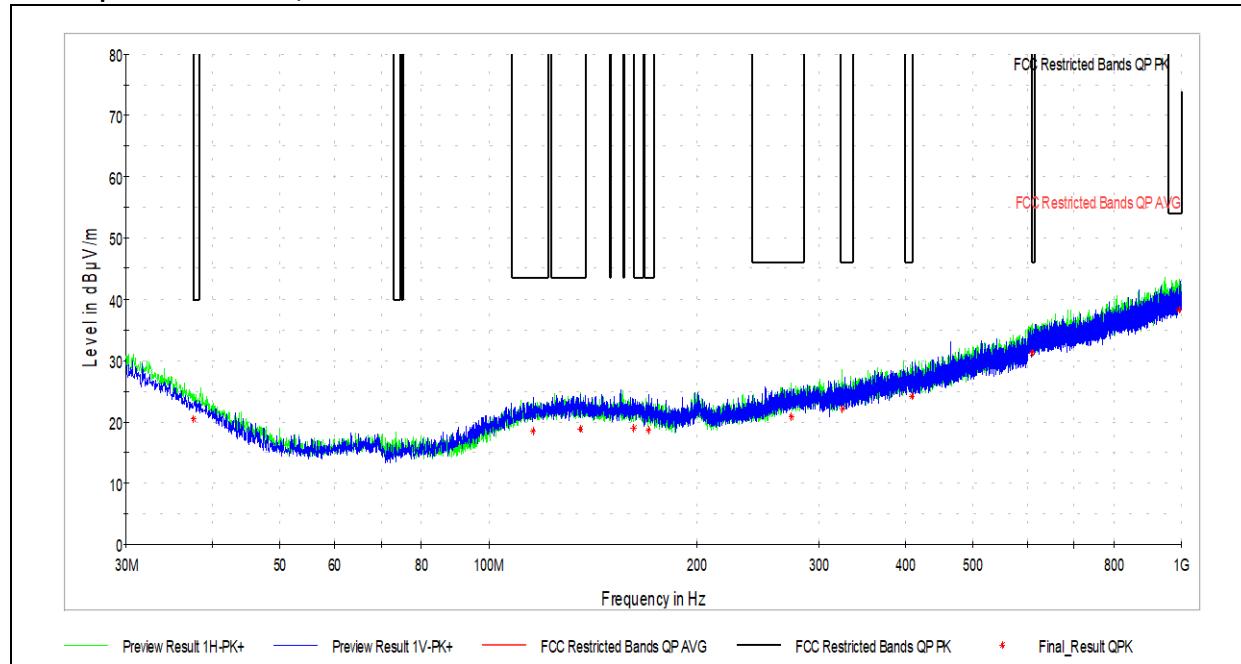


| Frequency (MHz) | QuasiPeak (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------------|----------------------|-------------|-----------------|-------------|-----|---------------|--------------|
| 37.544444 | 20.45 | 40.00 | 19.55 | 120.000 | 136.0 | H | 0.0 | 23 |
| 115.952778 | 18.47 | 43.52 | 25.05 | 120.000 | 262.0 | V | 48.0 | 22 |
| 135.676111 | 18.73 | 43.52 | 24.79 | 120.000 | 318.0 | H | 0.0 | 22 |
| 162.081667 | 19.04 | 43.52 | 24.48 | 120.000 | 165.0 | V | 194.0 | 22 |
| 170.434444 | 18.62 | 43.52 | 24.90 | 120.000 | 135.0 | V | 192.0 | 21 |
| 273.577778 | 20.79 | 46.02 | 25.23 | 120.000 | 106.0 | H | 319.0 | 23 |
| 324.287222 | 22.08 | 46.02 | 23.94 | 120.000 | 150.0 | H | 318.0 | 25 |
| 408.623333 | 24.16 | 46.02 | 21.86 | 120.000 | 392.0 | V | 213.0 | 27 |
| 608.012222 | 31.34 | 46.02 | 14.68 | 120.000 | 392.0 | H | 142.0 | 32 |
| 992.886667 | 38.19 | 53.98 | 15.79 | 120.000 | 292.0 | H | 278.0 | 38 |

Note: results shown represent the worst case of three channels under test



7.11 BLE 2402MHz Spurious Emissions

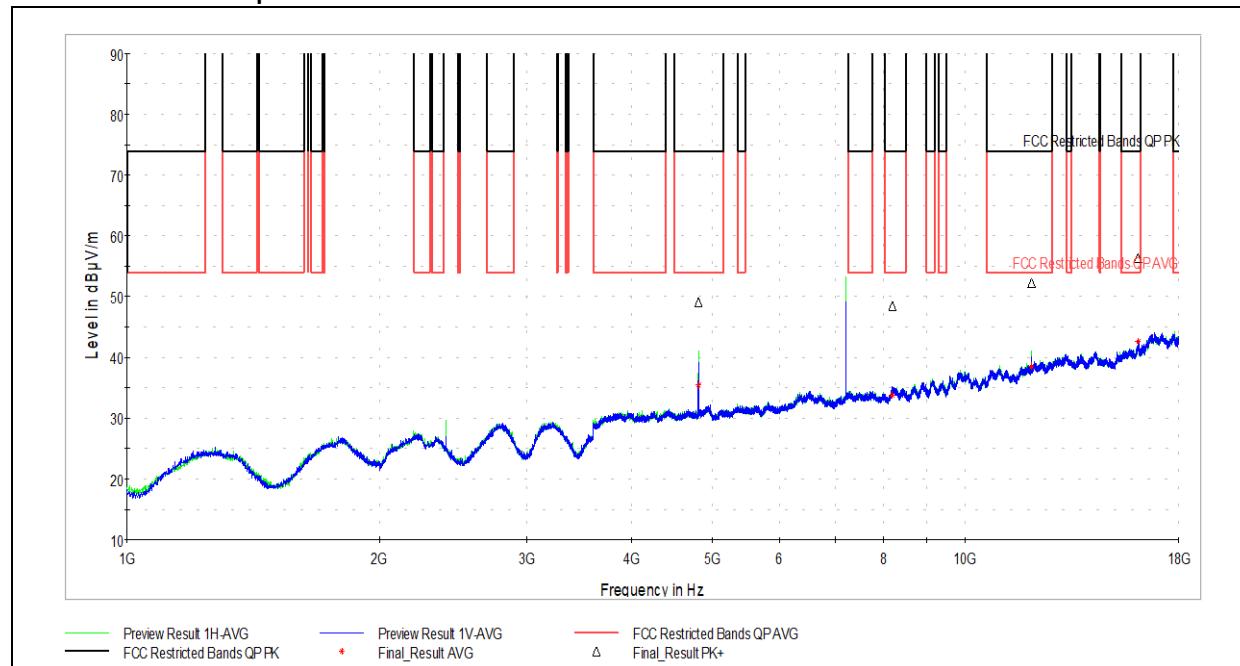


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|--------------|
| 4804.000000 | 49.07 | 73.98 | 24.91 | 1000.000 | 355.0 | H | 97.0 | 9 |
| 8193.000000 | 48.49 | 73.98 | 25.49 | 1000.000 | 410.0 | V | 307.0 | 15 |
| 12011.000000 | 52.25 | 73.98 | 21.73 | 1000.000 | 244.0 | H | 201.0 | 19 |
| 16108.500000 | 56.31 | 73.98 | 17.67 | 1000.000 | 100.0 | V | 0.0 | 25 |

| Frequency (MHz) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|--------------|
| 4804.000000 | 35.48 | 53.98 | 18.50 | 1000.000 | 355.0 | H | 97.0 | 9 |
| 8193.000000 | 33.82 | 53.98 | 20.16 | 1000.000 | 410.0 | V | 307.0 | 15 |
| 12011.000000 | 38.51 | 53.98 | 15.47 | 1000.000 | 244.0 | H | 201.0 | 19 |
| 16108.500000 | 42.59 | 53.98 | 11.39 | 1000.000 | 100.0 | V | 0.0 | 25 |



7.12 BLE 2440MHz Spurious Emissions

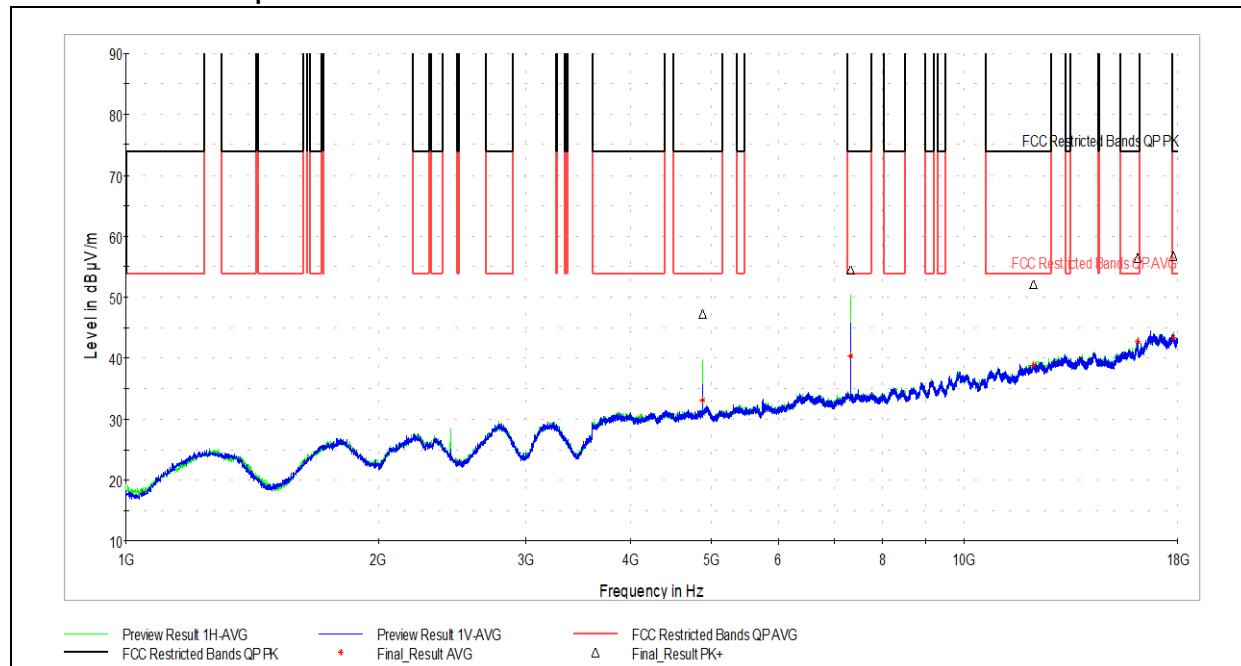


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|--------------|
| 4880.500000 | 47.23 | 73.98 | 26.75 | 1000.000 | 364.0 | H | 144.0 | 10 |
| 7320.000000 | 54.57 | 73.98 | 19.41 | 1000.000 | 100.0 | H | 287.0 | 13 |
| 12105.500000 | 52.16 | 73.98 | 21.82 | 1000.000 | 100.0 | H | 152.0 | 20 |
| 16118.000000 | 56.48 | 73.98 | 17.50 | 1000.000 | 100.0 | V | 0.0 | 25 |
| 17786.500000 | 56.77 | 73.98 | 17.21 | 1000.000 | 100.0 | H | 200.0 | 25 |

| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|--------------|
| 4880.500000 | 33.06 | 53.98 | 20.92 | 1000.000 | 364.0 | H | 144.0 | 10 |
| 7320.000000 | 40.29 | 53.98 | 13.69 | 1000.000 | 100.0 | H | 287.0 | 13 |
| 12105.500000 | 38.86 | 53.98 | 15.12 | 1000.000 | 100.0 | H | 152.0 | 20 |
| 16118.000000 | 42.73 | 53.98 | 11.25 | 1000.000 | 100.0 | V | 0.0 | 25 |
| 17786.500000 | 43.33 | 53.98 | 10.65 | 1000.000 | 100.0 | H | 200.0 | 25 |



7.13 BLE 2480MHz Spurious Emissions

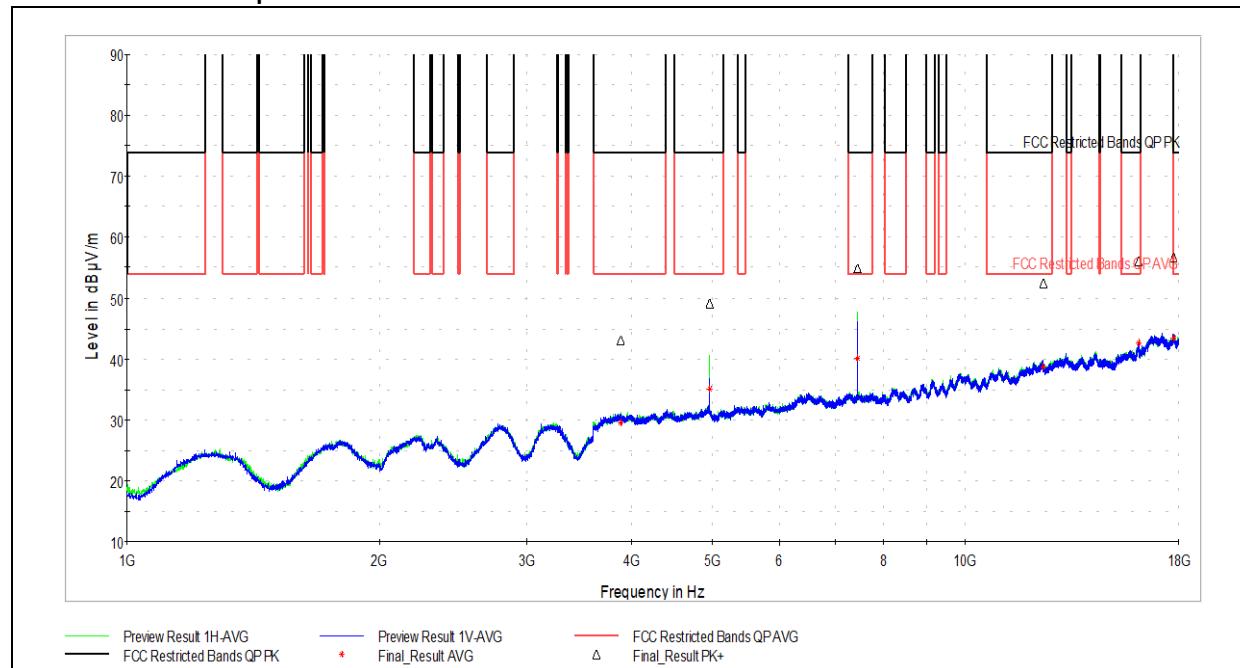


| Frequency (MHz) | MaxPeak (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|----------------------|-------------|-----------------|-------------|-----|---------------|--------------|
| 3880.500000 | 43.08 | 73.98 | 30.90 | 1000.000 | 100.0 | H | 77.0 | 8 |
| 4960.000000 | 49.20 | 73.98 | 24.78 | 1000.000 | 217.0 | H | 80.0 | 10 |
| 7440.000000 | 54.91 | 73.98 | 19.07 | 1000.000 | 100.0 | H | 296.0 | 13 |
| 12400.000000 | 52.46 | 73.98 | 21.52 | 1000.000 | 154.0 | V | 314.0 | 20 |
| 16116.000000 | 56.14 | 73.98 | 17.84 | 1000.000 | 100.0 | H | 286.0 | 25 |
| 17734.500000 | 56.66 | 73.98 | 17.32 | 1000.000 | 100.0 | H | 0.0 | 25 |

| Frequency (MHz) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|----------------------|-------------|-----------------|-------------|-----|---------------|--------------|
| 3880.500000 | 29.55 | 53.98 | 24.43 | 1000.000 | 100.0 | H | 77.0 | 8 |
| 4960.000000 | 35.07 | 53.98 | 18.91 | 1000.000 | 217.0 | H | 80.0 | 10 |
| 7440.000000 | 40.09 | 53.98 | 13.89 | 1000.000 | 100.0 | H | 296.0 | 13 |
| 12400.000000 | 38.76 | 53.98 | 15.22 | 1000.000 | 154.0 | V | 314.0 | 20 |
| 16116.000000 | 42.72 | 53.98 | 11.26 | 1000.000 | 100.0 | H | 286.0 | 25 |
| 17734.500000 | 43.40 | 53.98 | 10.58 | 1000.000 | 100.0 | H | 0.0 | 25 |



7.14 Spurious Emissions, 18GHz-40GHz:

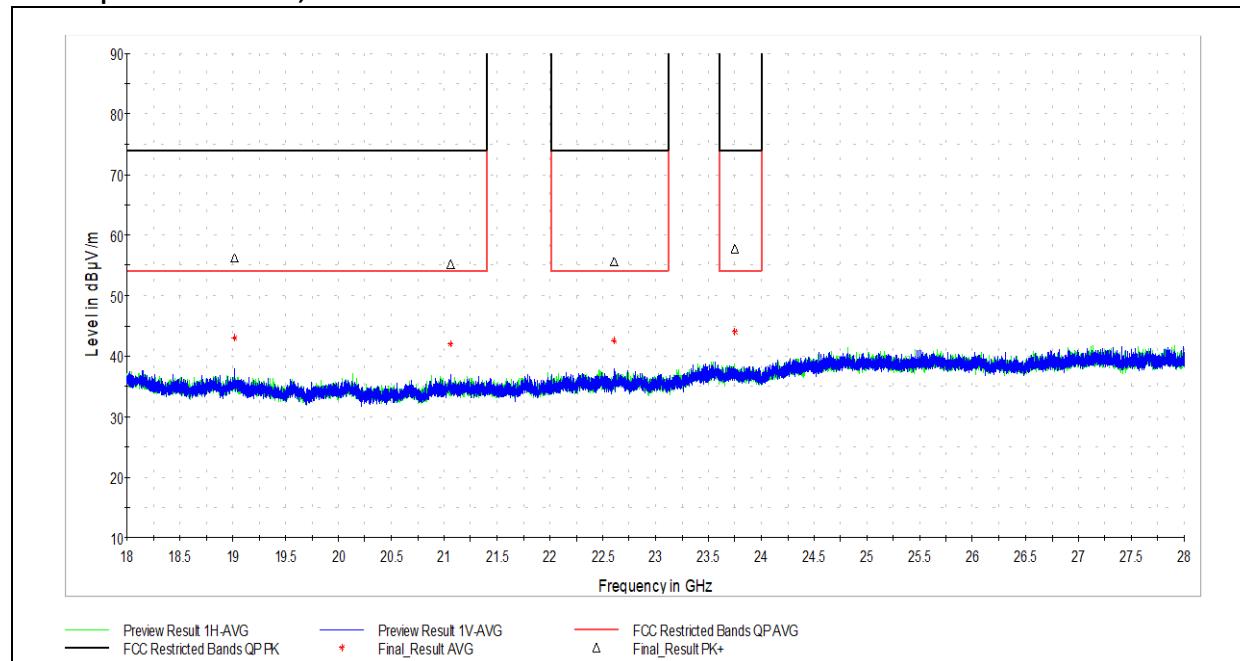

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|--------------|
| 19018.500000 | 56.30 | 73.98 | 17.68 | 1000.000 | 410.0 | V | 102.0 | 19 |
| 21057.000000 | 55.25 | 73.98 | 18.73 | 1000.000 | 153.0 | V | 314.0 | 13 |
| 22604.500000 | 55.69 | 73.98 | 18.29 | 1000.000 | 410.0 | V | 84.0 | 10 |
| 23750.500000 | 57.66 | 73.98 | 16.32 | 1000.000 | 318.0 | H | 68.0 | 11 |

| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|--------------|
| 19018.500000 | 43.03 | 53.98 | 10.95 | 1000.000 | 410.0 | V | 102.0 | 19 |
| 21057.000000 | 42.04 | 53.98 | 11.94 | 1000.000 | 153.0 | V | 314.0 | 13 |
| 22604.500000 | 42.52 | 53.98 | 11.46 | 1000.000 | 410.0 | V | 84.0 | 10 |
| 23750.500000 | 44.11 | 53.98 | 9.87 | 1000.000 | 318.0 | H | 68.0 | 11 |

Note: results shown represent the worst case of three channels under test.



8 Output Power

8.1 Test Limits

FCC Part 15.247(b)(3):

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

RSS-247 Issue 2 § 5.4(d):

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.



8.2 Test Method

Tests are performed in accordance with ANSI C63.10:2013 § 11.9.1.1. EIRP measurements were converted to output power based on customer-supplied antenna gain values.

8.3 Test Equipment Used

| Description | Asset | Manufacturer | Model | Cal Date | Cal Due |
|-------------------|-------|-----------------|-------|-----------------------|-----------------------|
| EMI Test Receiver | 8181 | Rohde & Schwarz | ESW44 | 11/16/2021 | 11/16/2022 |
| Horn Antenna | 3780 | ETS | 3117 | 6/28/2021 | 6/28/2022 |
| System Controller | 3957 | Sunol Sciences | SC99V | Verify at Time of Use | Verify at Time of Use |
| Coaxial Cable | 3074 | | | 1/13/2022 | 1/13/2023 |
| Coaxial Cable | 2588 | | | 1/13/2022 | 1/13/2023 |
| Coaxial Cable | 2593 | | | 1/13/2022 | 1/13/2023 |
| Coaxial Cable | 2592 | | | 1/13/2022 | 1/13/2023 |

8.4 Test Results

The device was found to be **compliant**. The peak output power was less than 1W.


8.5 Test Conditions


| | | | |
|--|-----------------|-----------------------|-----------|
| Test Personnel: | Brandon Norris | Test Date: | 4/15/2022 |
| Supervising/Reviewing Engineer: (Where Applicable) | NA | Limit Applied: | See Above |
| | FCC Part 15.247 | Ambient Temperature: | 23.3C |
| Product Standard: | RSS-247 Issue 2 | Relative Humidity: | 51.5% |
| Input Voltage: | Battery | Atmospheric Pressure: | 981mbar |
| Pretest Verification w / Ambient Signals or BB Source: | Yes | | |


8.6 Test Data

| Channel | Frequency (MHz) | Field Strength (dBuV/m) | EIRP (dBm) | Conducted Power (dBm) | Limit (dBm) | Margin (dB) | Result |
|---------|-----------------|-------------------------|------------|-----------------------|-------------|-------------|-------------|
| 0 | 2402 | 99.712 | 4.512 | 2.912 | 30 | 27.088 | PASS |
| 39 | 2440 | 100.310 | 5.110 | 3.510 | 30 | 26.490 | PASS |
| 79 | 2480 | 100.223 | 5.023 | 3.423 | 30 | 26.577 | PASS |

Deviations, Additions, or Exclusions: None

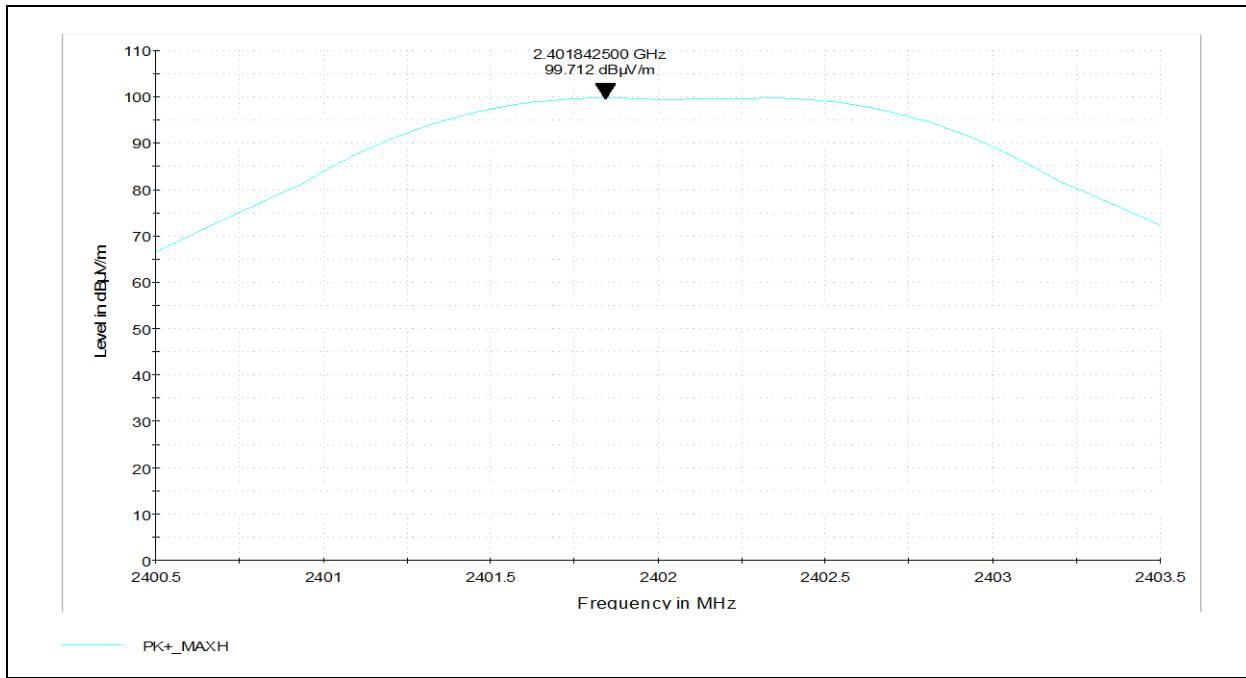

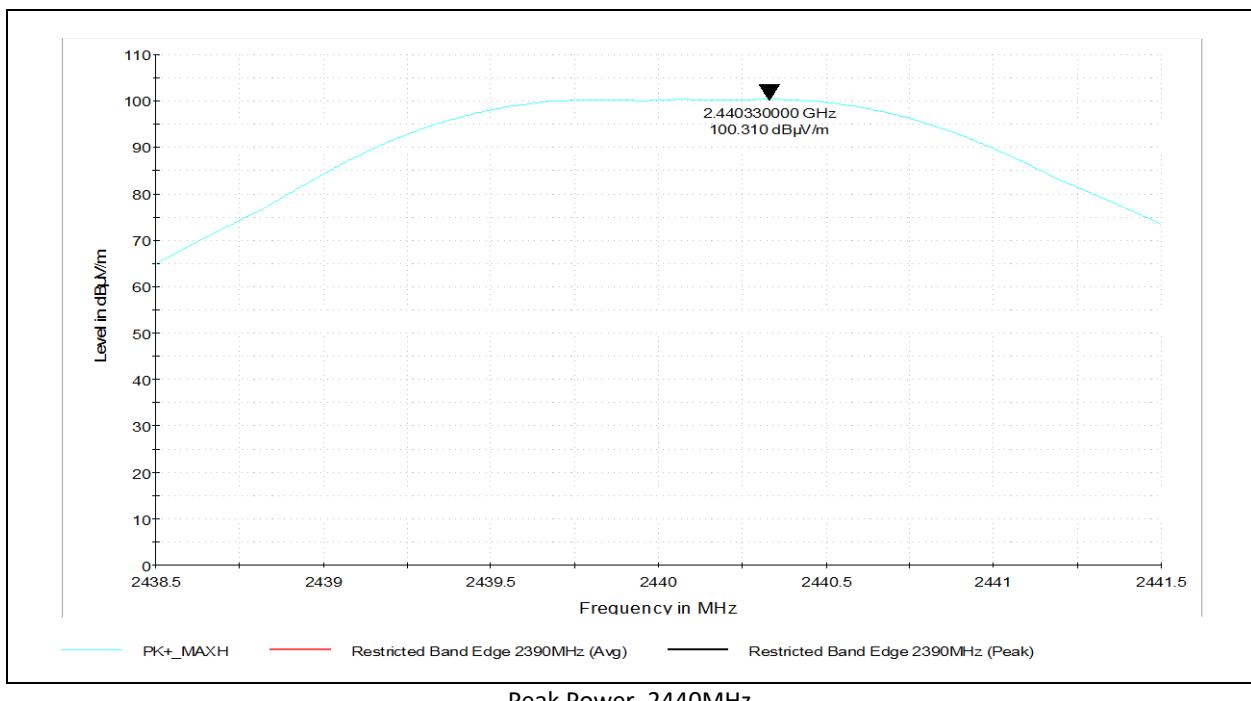

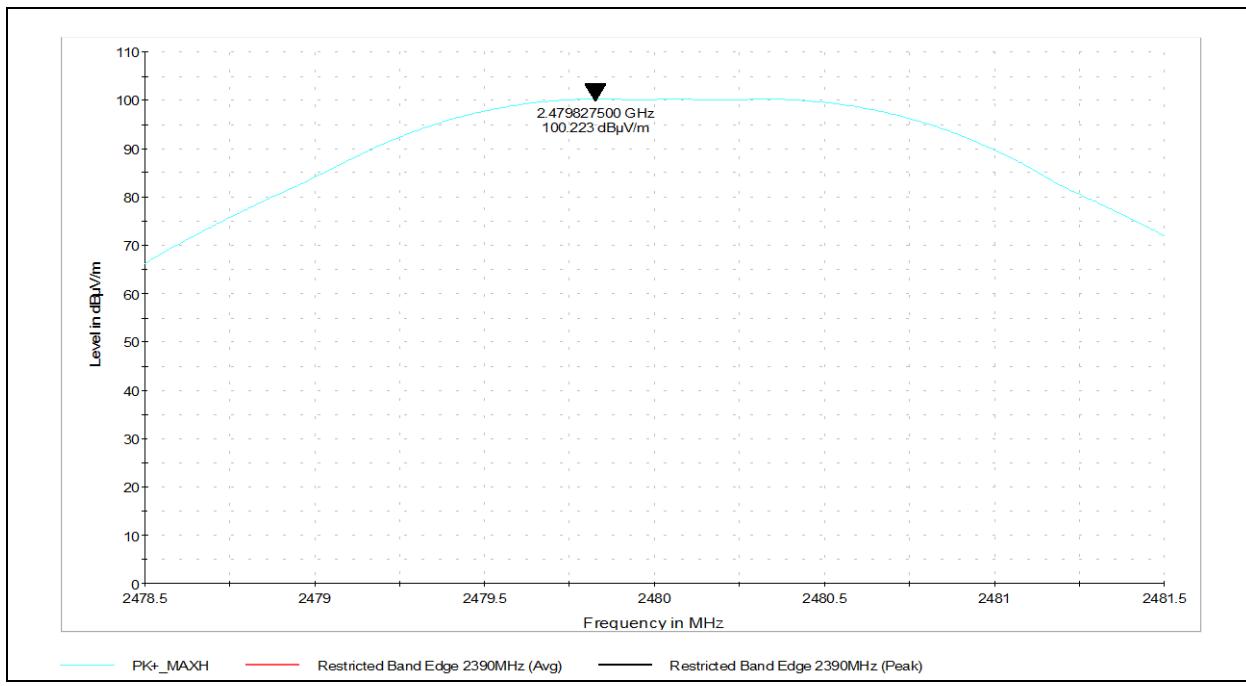



9 Occupied Bandwidth

9.1 Test Limits

FCC Part 15.247(a)(2):

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

RSS-247 Issue 2 § 5.2(a):

The minimum 6 dB bandwidth shall be 500 kHz.

9.2 Test Method

Tests are performed in accordance with ANSI C63.10:2013 § 11.8.1.

9.3 Test Equipment Used

| Description | Asset | Manufacturer | Model | Cal Date | Cal Due |
|-------------------|-------|-----------------|-------|-----------|-----------|
| Spectrum Analyzer | 3981 | Rohde & Schwarz | FSU | 9/17/2021 | 9/17/2022 |
| Spectrum Analyzer | 3727 | Rohde & Schwarz | FSQ | 9/17/2021 | 9/17/2022 |

9.4 Test Results

The device was found to be **compliant**. The 6dB bandwidth was at least 500kHz.

9.5 Test Conditions

| | | | |
|---|-----------------|-----------------------|------------------------|
| Test Personnel: | Bryan Taylor | Test Date: | 9/21/2021 – 10/22/2021 |
| Supervising/Reviewing Engineer: (Where Applicable) | NA | Limit Applied: | See Above |
| | FCC Part 15.247 | Ambient Temperature: | 23.3C |
| Product Standard: | RSS-247 Issue 2 | Relative Humidity: | 51.5% |
| Input Voltage: | Battery | Atmospheric Pressure: | 981mbar |
| Pretest Verification w / Ambient Signals or BB Source: | Yes | | |

9.6 Test Data

| Channel | Frequency (MHz) | DTS BW (kHz) | 6dB BW (kHz) | 99% BW (kHz) |
|---------|-----------------|--------------|--------------|--------------|
| 0 | 2402 | 700 | 609.2 | 1100 |
| 39 | 2440 | 695 | 609.2 | 1052 |
| 79 | 2480 | 700 | 601.2 | 1046 |



RS

MARKER 1
2.402085 GHz* RBW 100 kHz
* VBW 300 kHz
* SWT 5 msMarker 1 [T1]
-13.43 dBm
2.402085000 GHz

Ref 10 dBm Att 35 dB

ndB [T1] 6.00 dB
BW 700.000000000 kHz

Temp 1 [T1 ndB]


-19.40 dBm

2.401730000 GHz

Temp 2 [T1 ndB]


-13.43 dBm

2.402430000 GHz

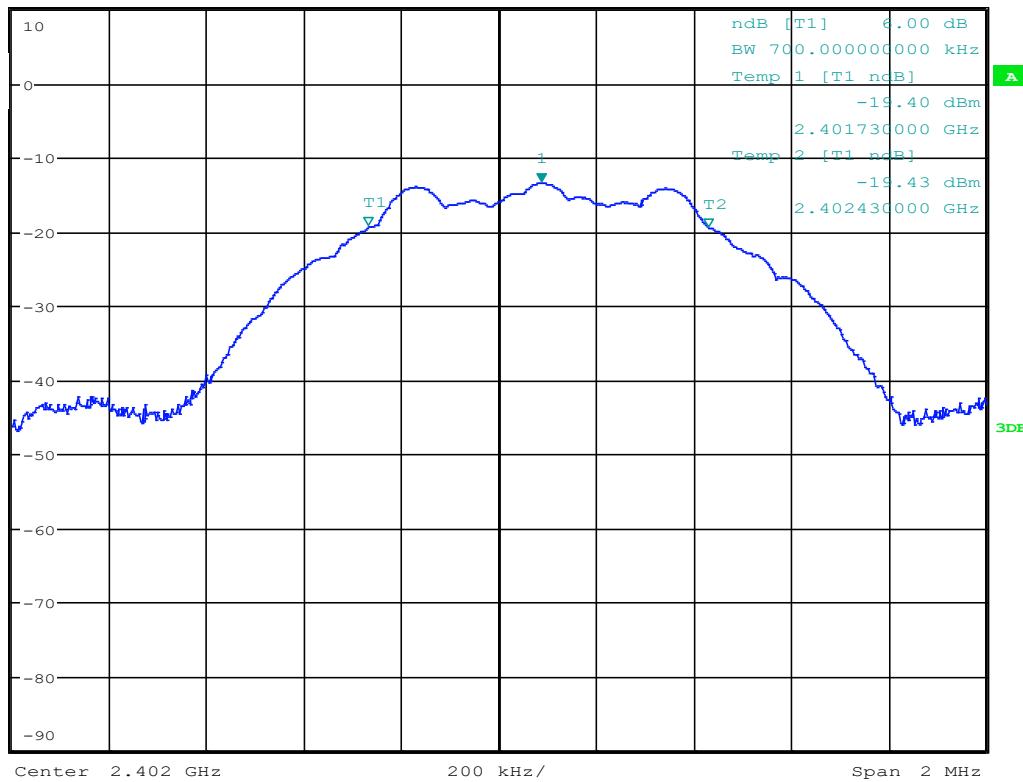1 PR
MAXH


Date: 22.OCT.2021 14:31:42

DTS Bandwidth, 2402MHz

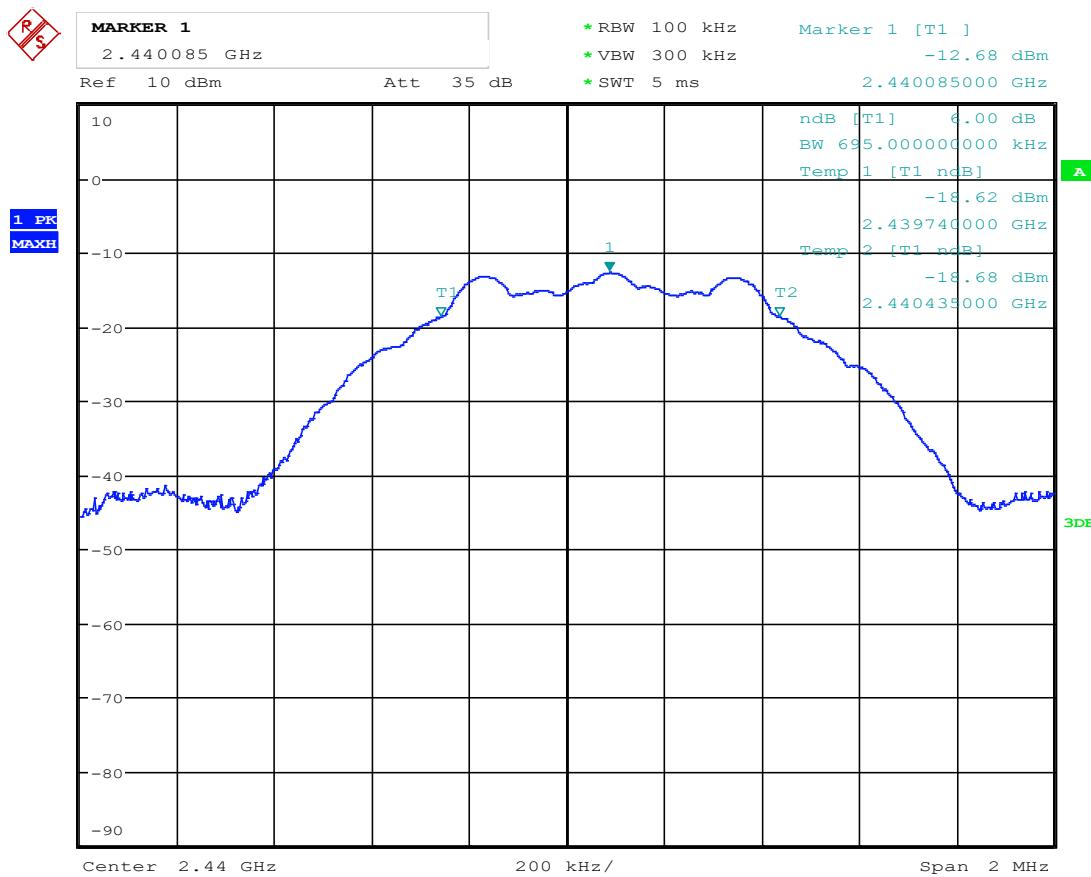


Date: 22.OCT.2021 14:32:50

DTS Bandwidth, 2440MHz

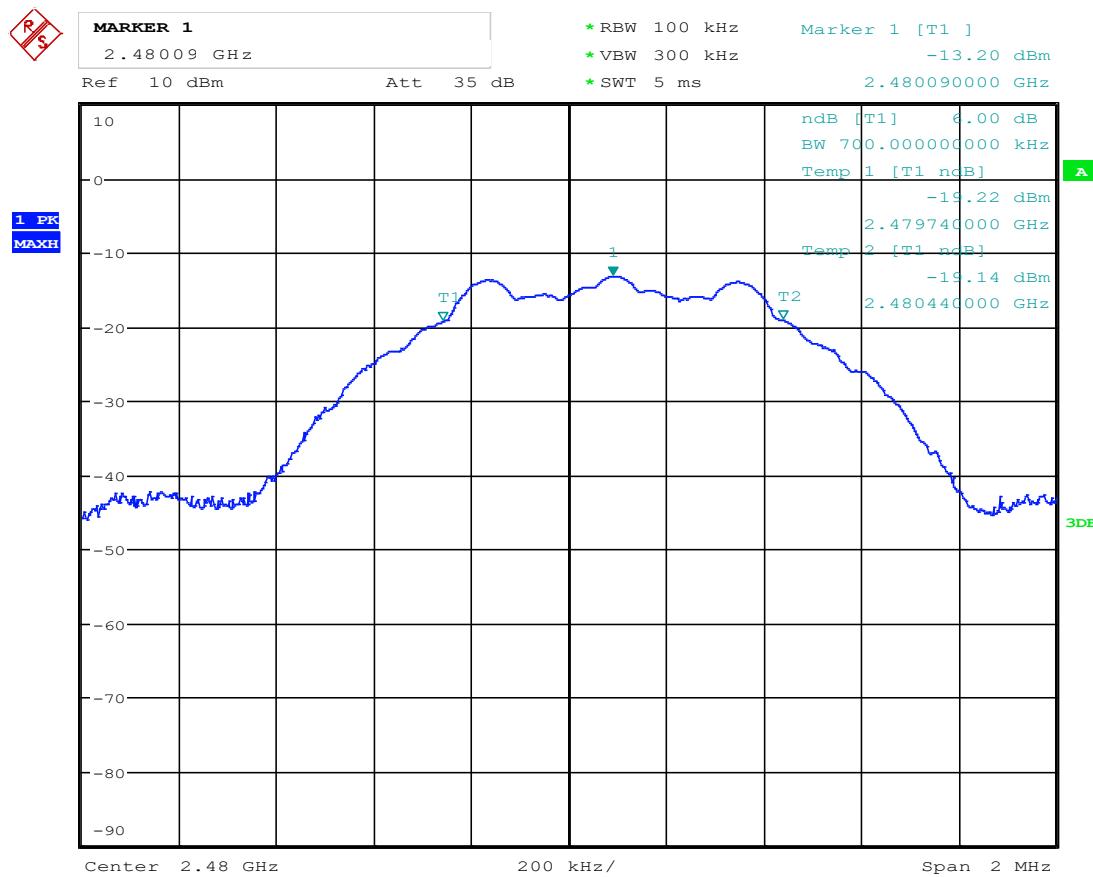


Date: 22.OCT.2021 14:33:54

DTS Bandwidth, 2480MHz

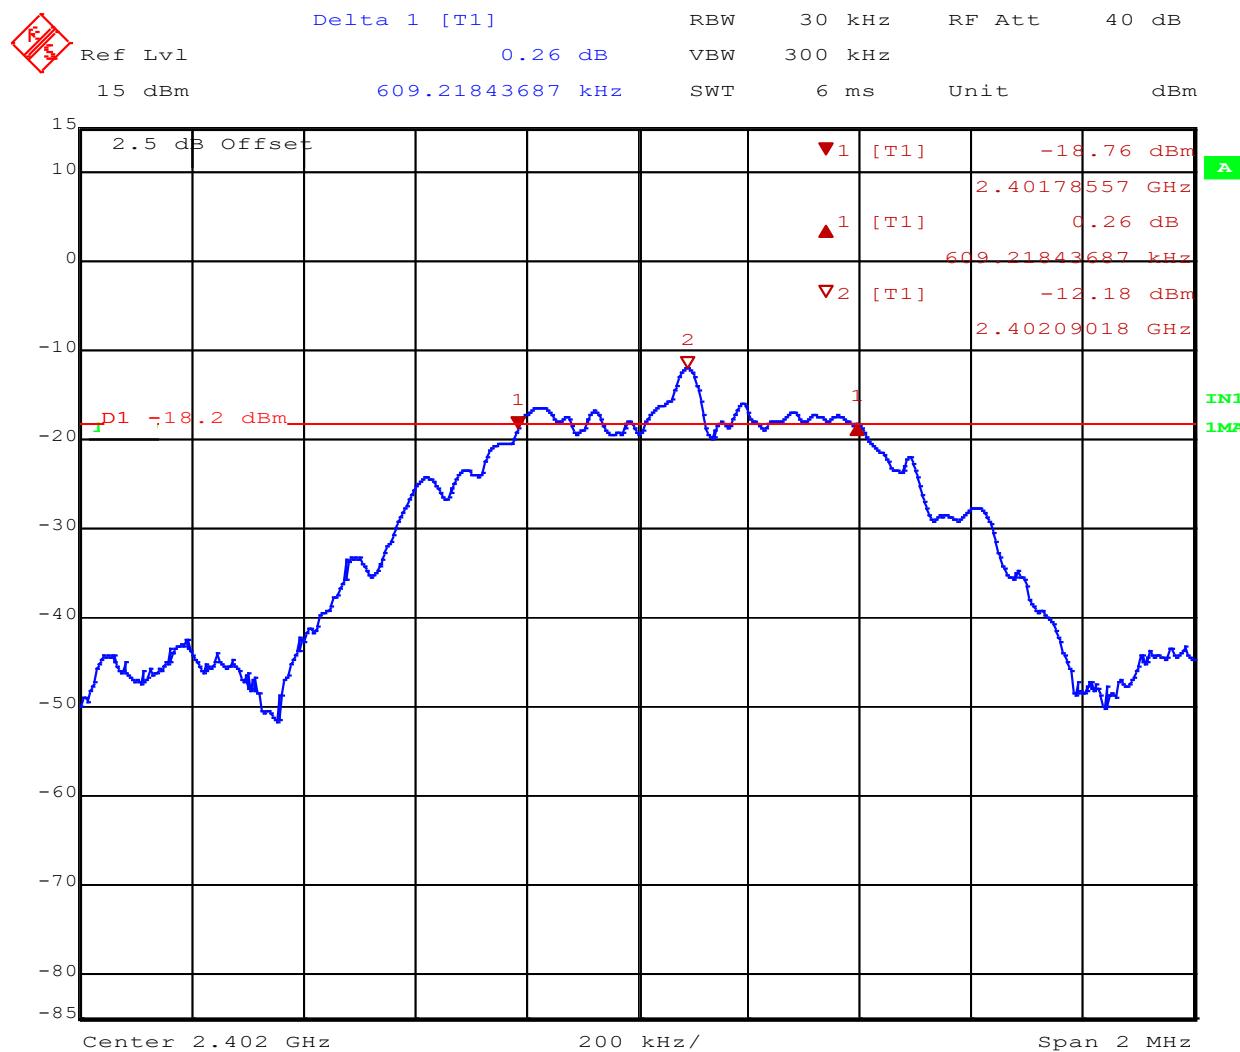


Date: 21.SEP.2021 15:28:39

6dB Bandwidth, 2402MHz

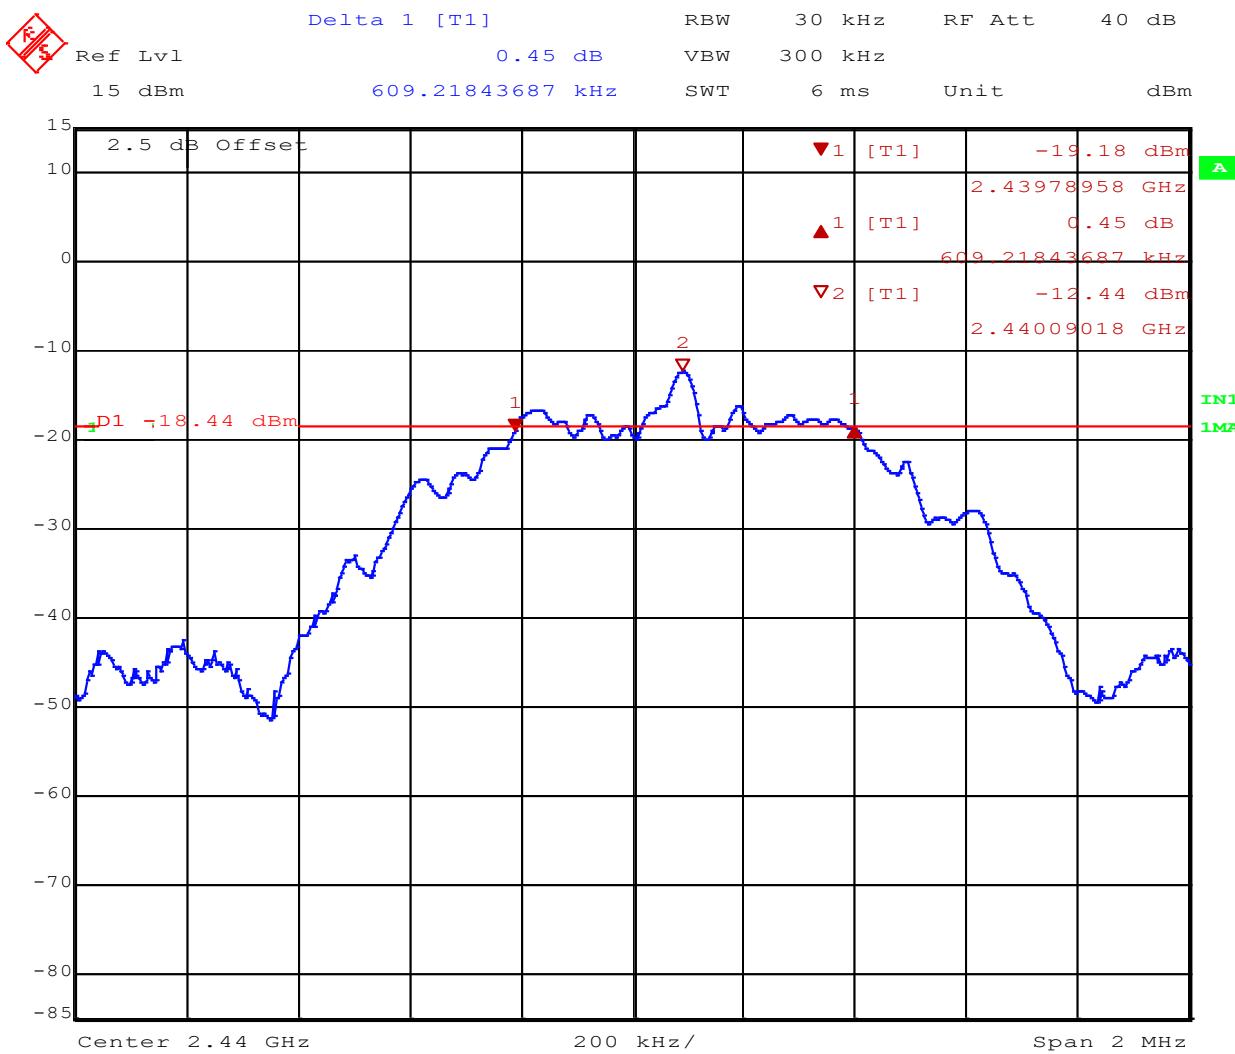


Date: 21.SEP.2021 15:26:36

6dB Bandwidth, 2440MHz

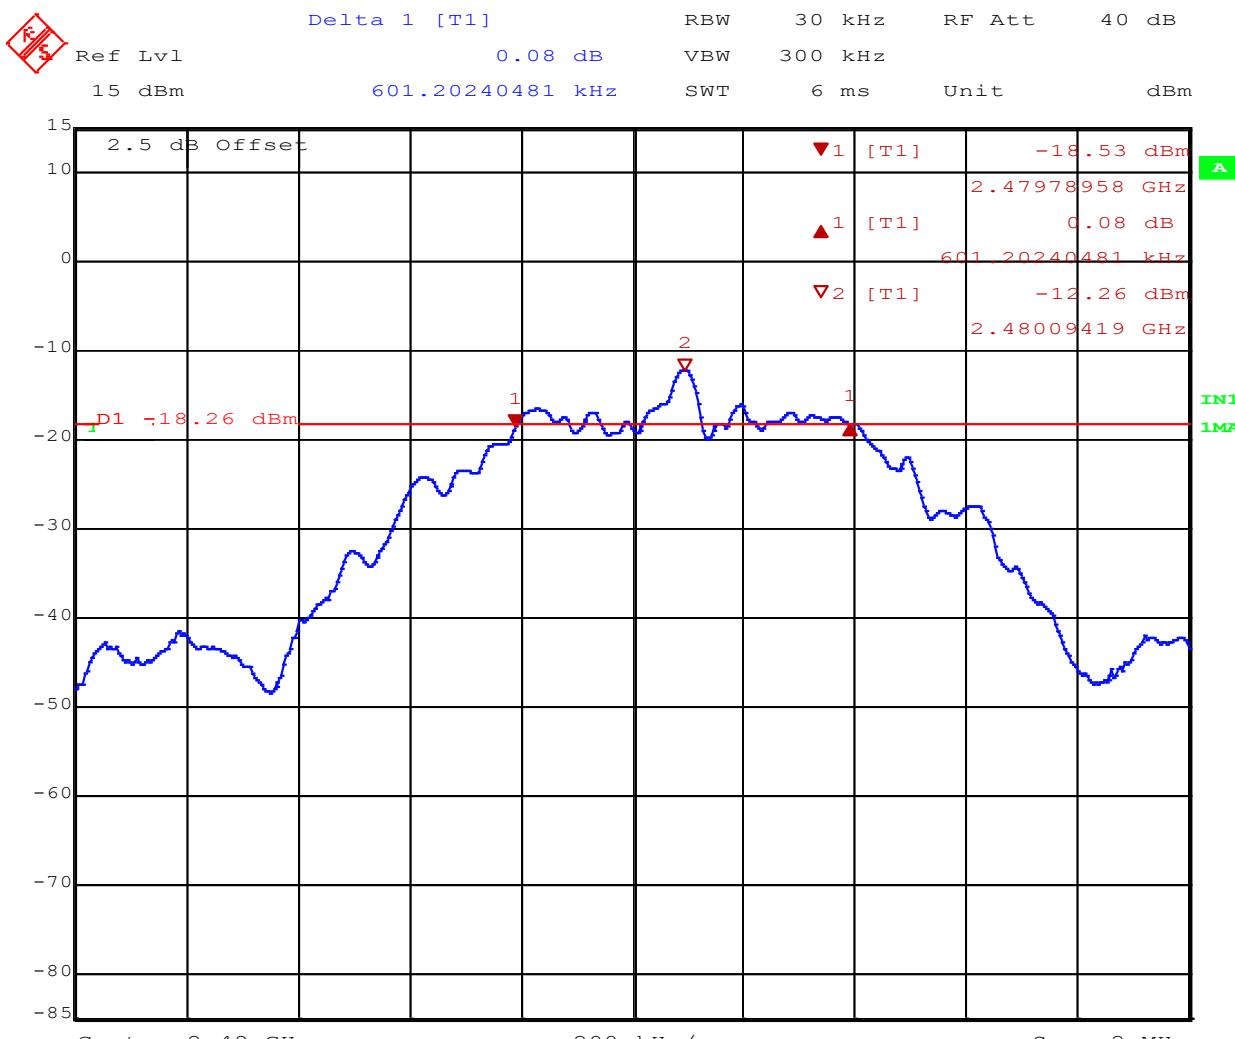


Date: 21.SEP.2021 15:25:03


6dB Bandwidth, 2480MHz

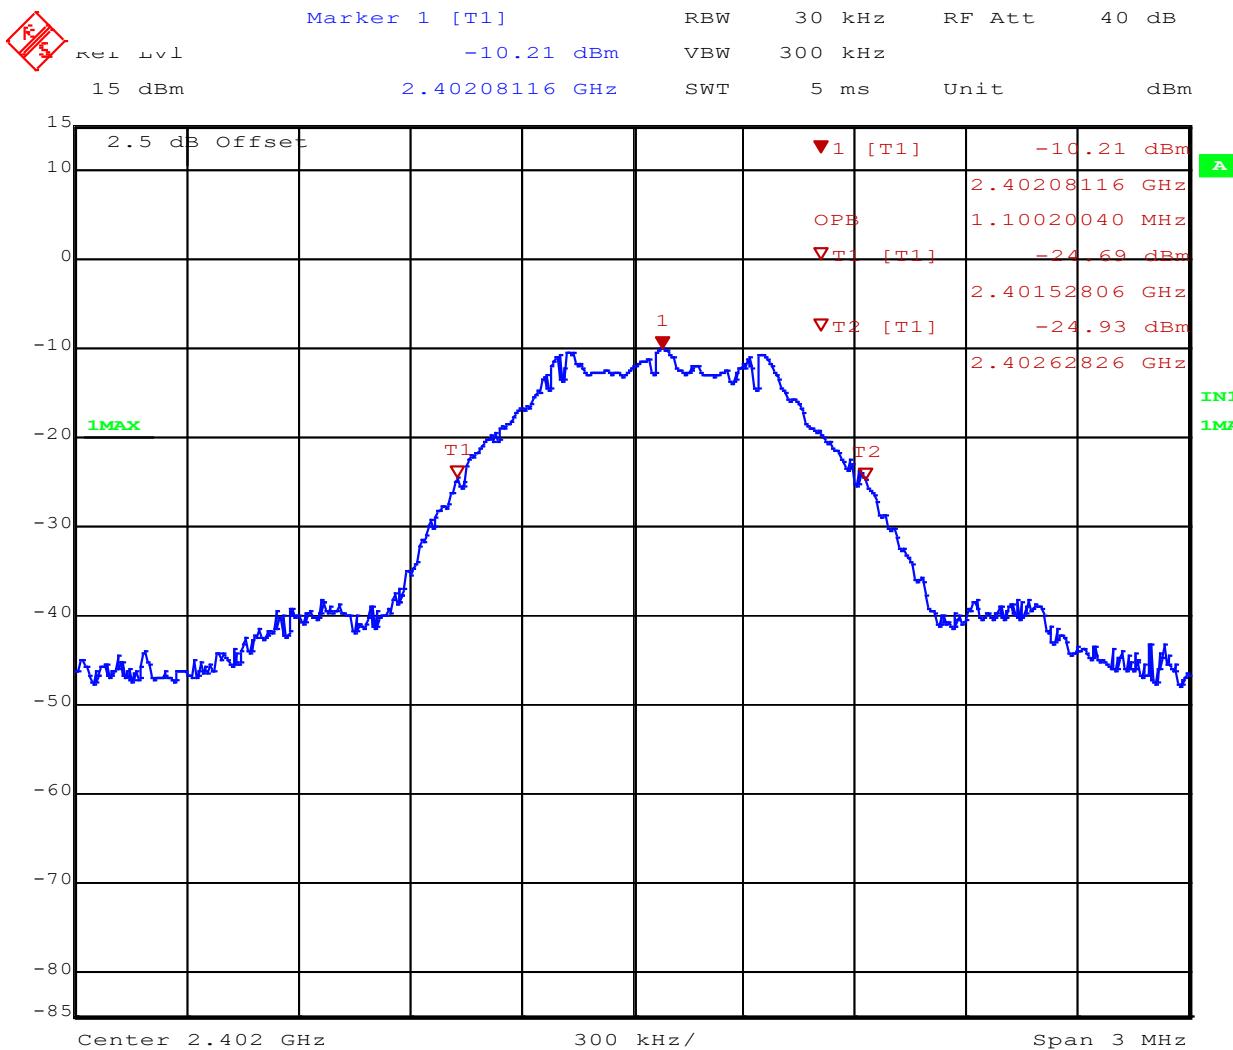

Date: 21.SEP.2021 14:08:17

99% Bandwidth, 2402MHz

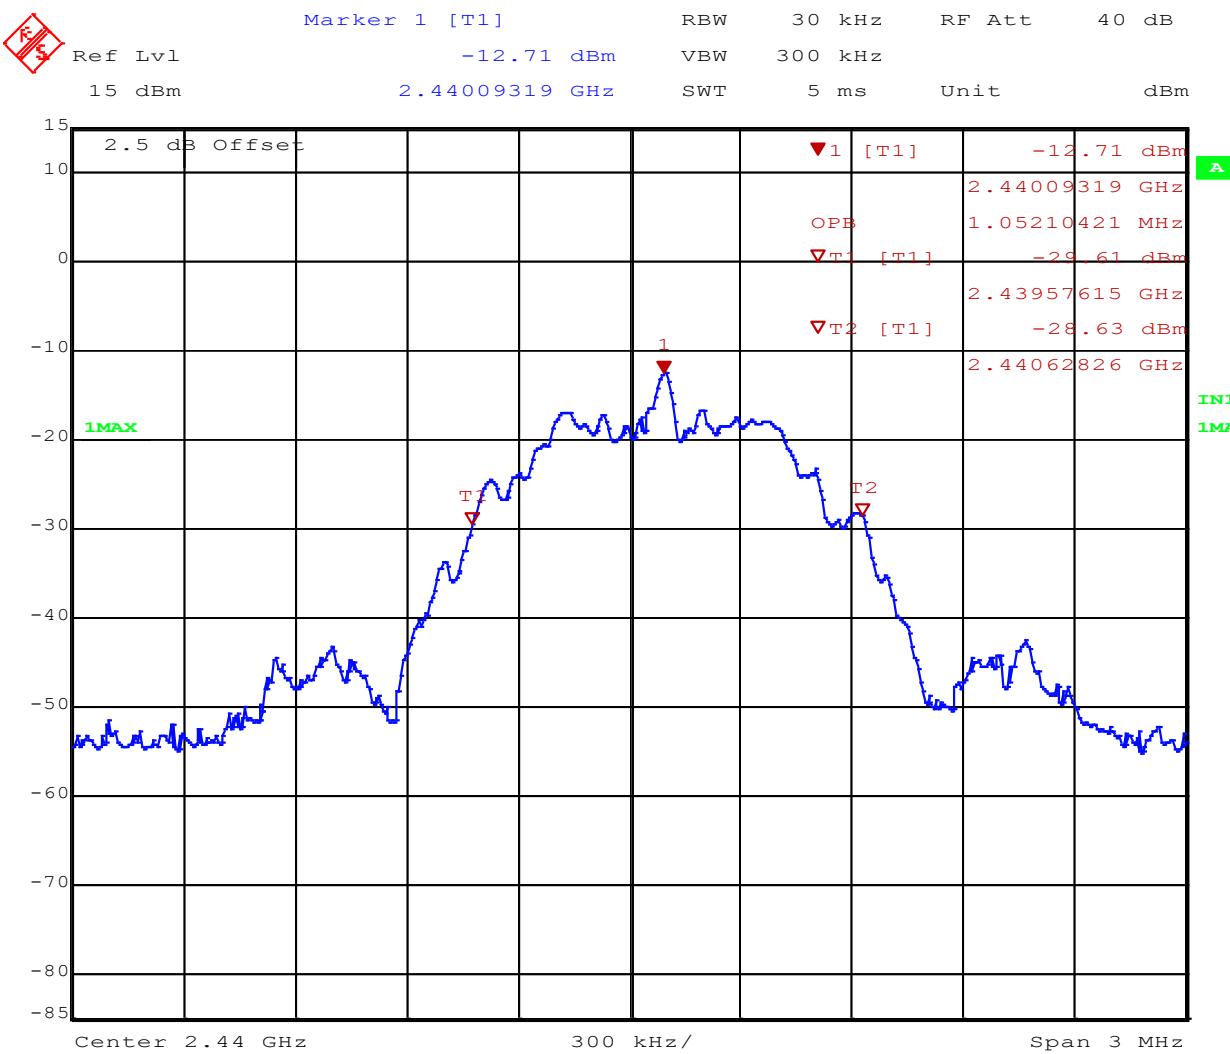

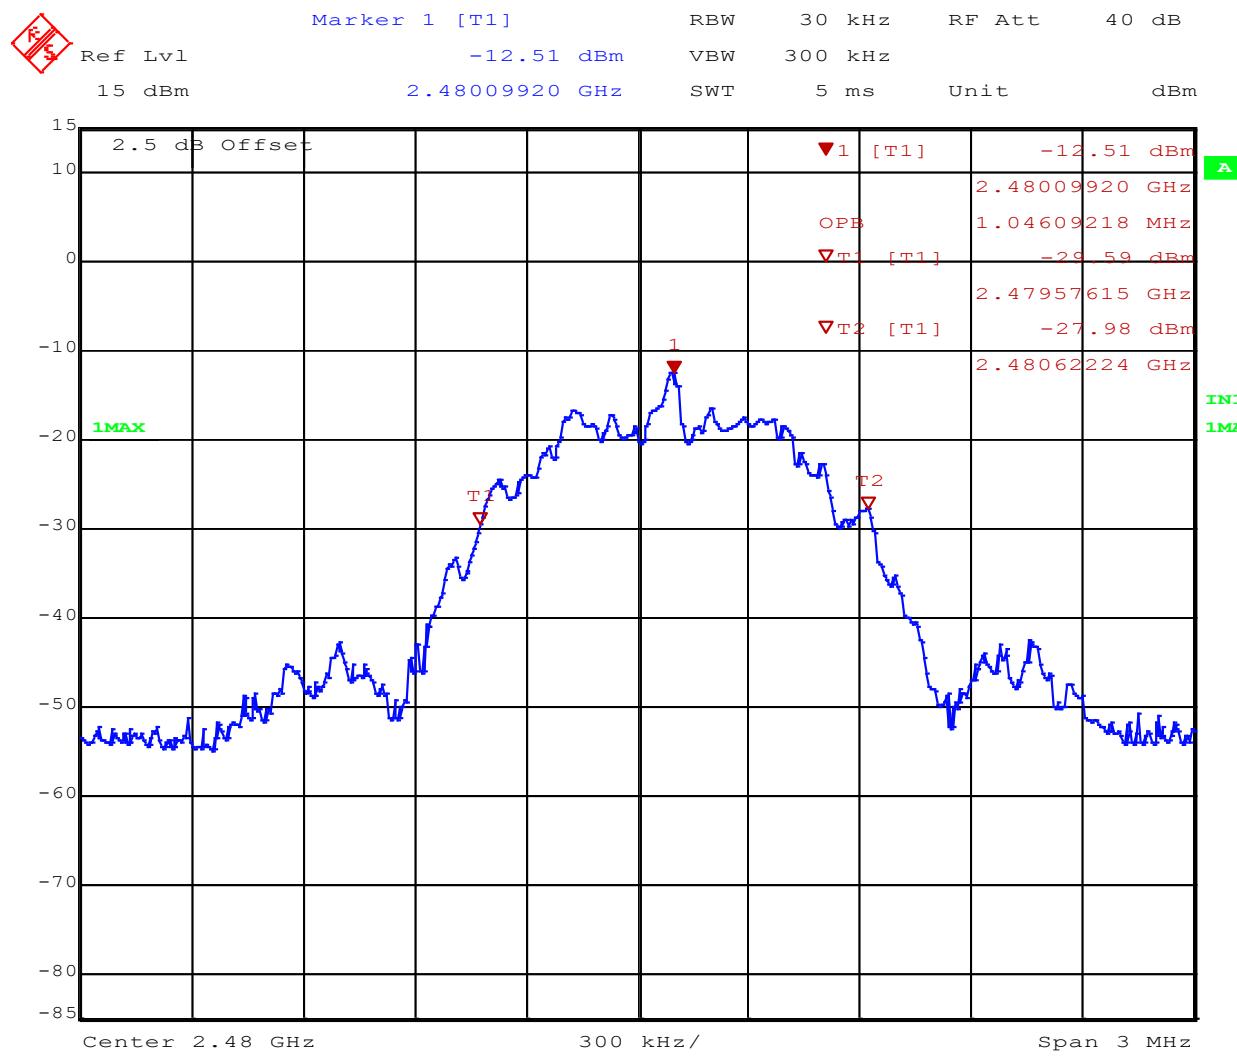



10 Power Spectral Density

10.1 Test Limits

FCC Part 15.247(e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

RSS-247 Issue 2 § 5.2(b):

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

10.2 Test Method

Tests are performed in accordance with ANSI C63.10:2013 § 11.10.2 Method PKPSD (peak PSD). EIRP measurements were converted to conducted PPSD values based on customer-supplied antenna gain.

10.3 Test Equipment Used

| Description | Asset | Manufacturer | Model | Cal Date | Cal Due |
|-------------------|-------|-----------------|-------|-----------------------|-----------------------|
| EMI Test Receiver | 8181 | Rohde & Schwarz | ESW44 | 11/16/2021 | 11/16/2022 |
| Horn Antenna | 3780 | ETS | 3117 | 6/28/2021 | 6/28/2022 |
| System Controller | 3957 | Sunol Sciences | SC99V | Verify at Time of Use | Verify at Time of Use |
| Coaxial Cable | 3074 | | | 1/13/2022 | 1/13/2023 |
| Coaxial Cable | 2588 | | | 1/13/2022 | 1/13/2023 |
| Coaxial Cable | 2593 | | | 1/13/2022 | 1/13/2023 |
| Coaxial Cable | 2592 | | | 1/13/2022 | 1/13/2023 |

10.4 Test Results

The device was found to be **compliant**. The peak power spectral density was less than 8dBm.





10.5 Test Conditions

| | | | |
|---|-----------------|-----------------------|-----------|
| Test Personnel: | Brandon Norris | Test Date: | 4/15/2022 |
| Supervising/Reviewing Engineer: (Where Applicable) | NA | Limit Applied: | See Above |
| | FCC Part 15.247 | | |
| Product Standard: | RSS-247 Issue 2 | Ambient Temperature: | 23.3C |
| Input Voltage: | Battery | Relative Humidity: | 51.5% |
| Pretest Verification w / Ambient Signals or BB Source: | Yes | Atmospheric Pressure: | 981mbar |


10.6 Test Data

| Channel | Frequency (MHz) | Field Strength (dBuV/m) | EIRP (dBm) | PPSD (dBm/3kHz) | Limit (dBm/3kHz) | Margin (dB) | Result |
|---------|-----------------|-------------------------|------------|-----------------|------------------|-------------|--------|
| 0 | 2402 | 82.020 | -13.210 | -14.810 | 8 | 22.810 | PASS |
| 39 | 2440 | 83.592 | -11.638 | -13.238 | 8 | 21.238 | PASS |
| 79 | 2480 | 82.347 | -12.883 | -14.483 | 8 | 22.483 | PASS |

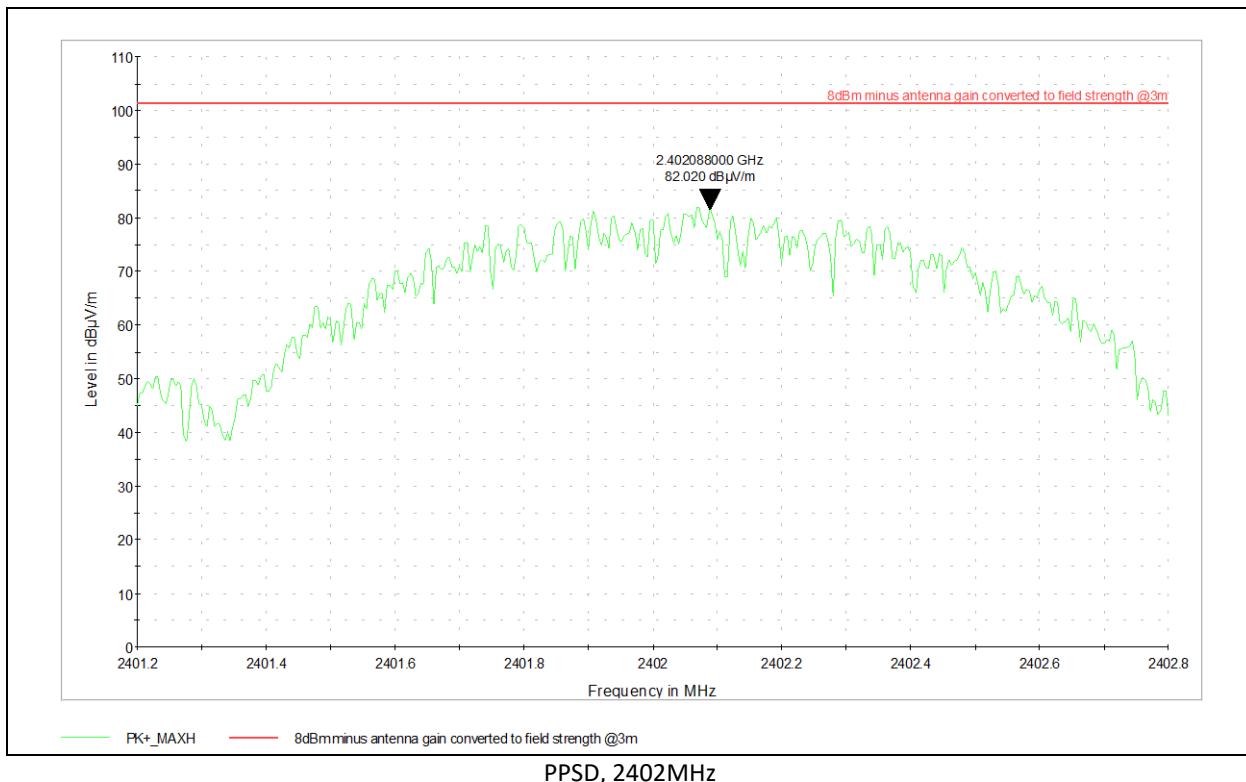

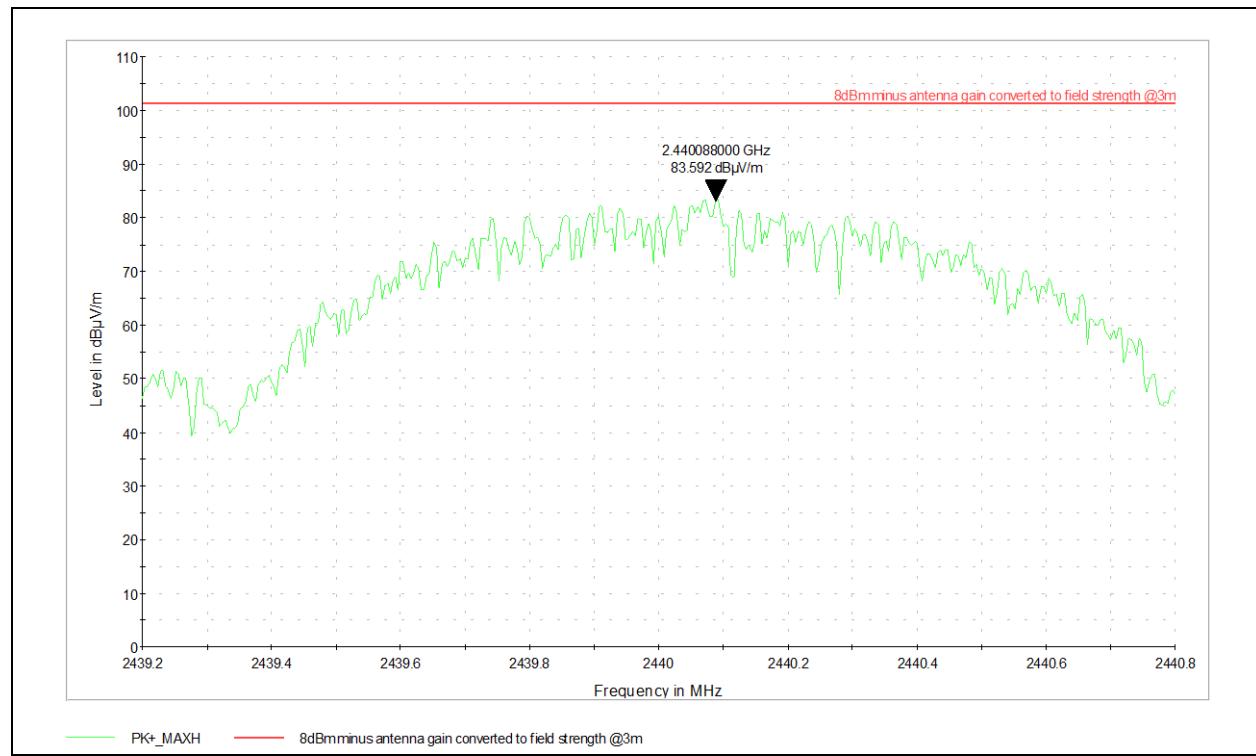

PPSD, 2440MHz

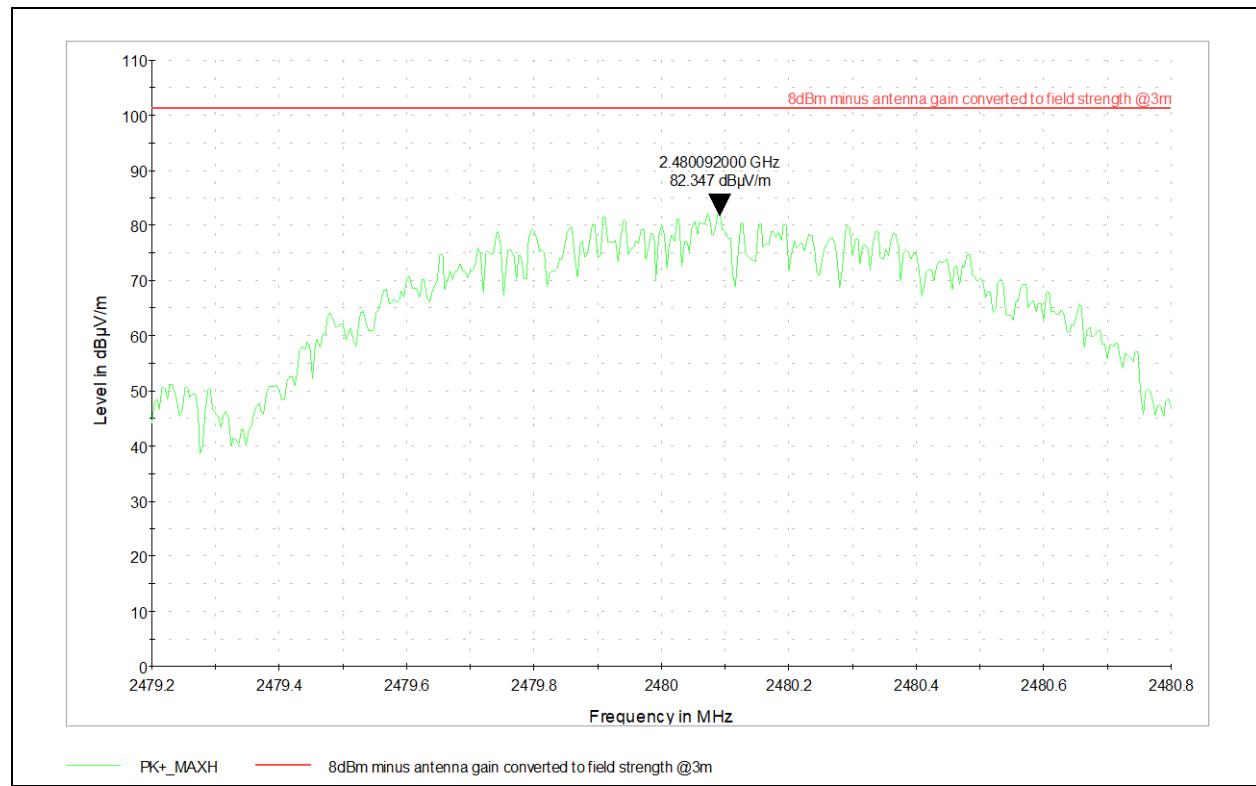

PPSD, 2480MHz



11 Conducted Spurious Emissions

11.1 Test Limits

FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247 Issue 2 § 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

11.2 Test Method

Tests are performed in accordance with ANSI C63.10:2013 § 11.11 Emissions in nonrestricted frequency bands.

11.3 Test Equipment Used

| Description | Asset | Manufacturer | Model | Cal Date | Cal Due |
|-------------------|-------|-----------------|-------|-----------|-----------|
| Spectrum Analyzer | 3727 | Rohde & Schwarz | FSQ | 9/17/2021 | 9/17/2022 |




11.4 Test Results


The device was found to be **compliant**. All spurious emissions were found to be attenuated more than 20dB below the level of the fundamental.

11.5 Test Conditions


| | | | |
|--|-----------------|-----------------------|-----------|
| Test Personnel: | Bryan Taylor | Test Date: | 9/21/2021 |
| Supervising/Reviewing Engineer: | | | |
| (Where Applicable) | NA | Limit Applied: | See Above |
| | FCC Part 15.247 | | |
| Product Standard: | RSS-247 Issue 2 | Ambient Temperature: | 23.3C |
| Input Voltage: | Battery | Relative Humidity: | 51.5% |
| Pretest Verification w / Ambient Signals or BB Source: | Yes | Atmospheric Pressure: | 981mbar |

11.6 Test Data

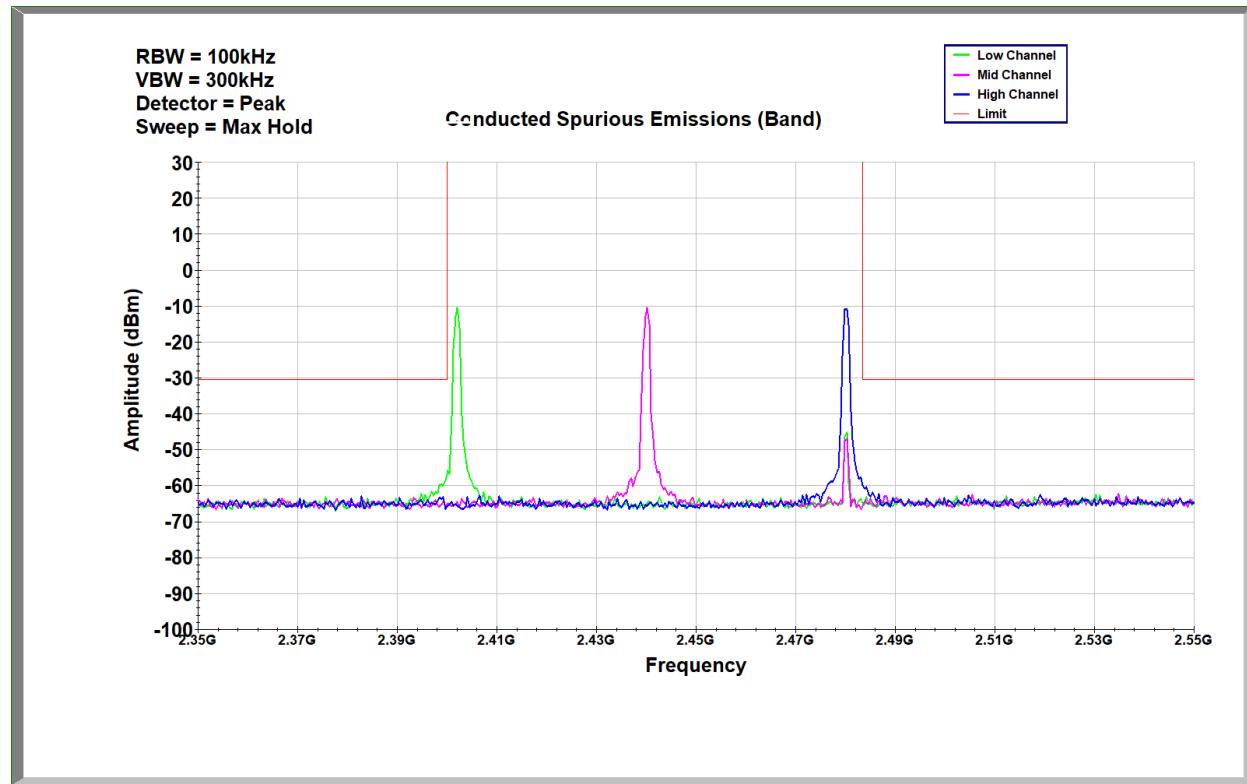


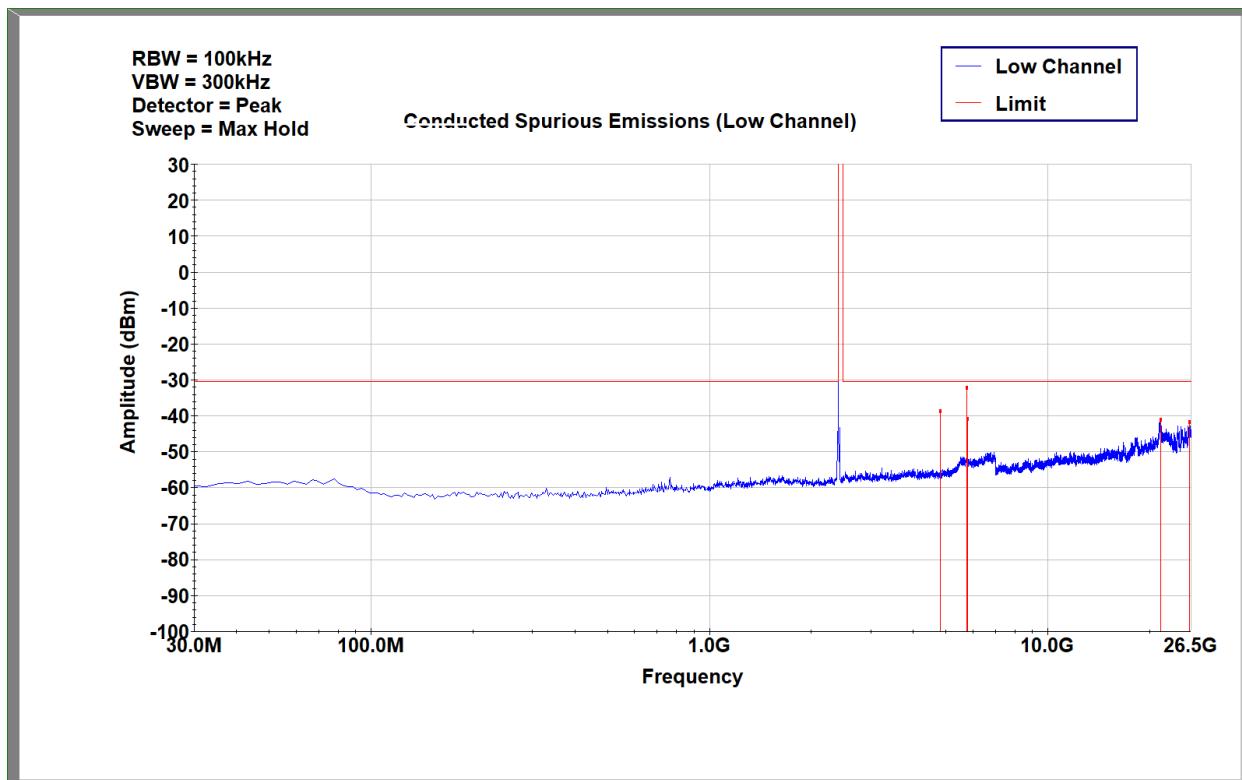

2402MHz Conducted Spurious Emissions

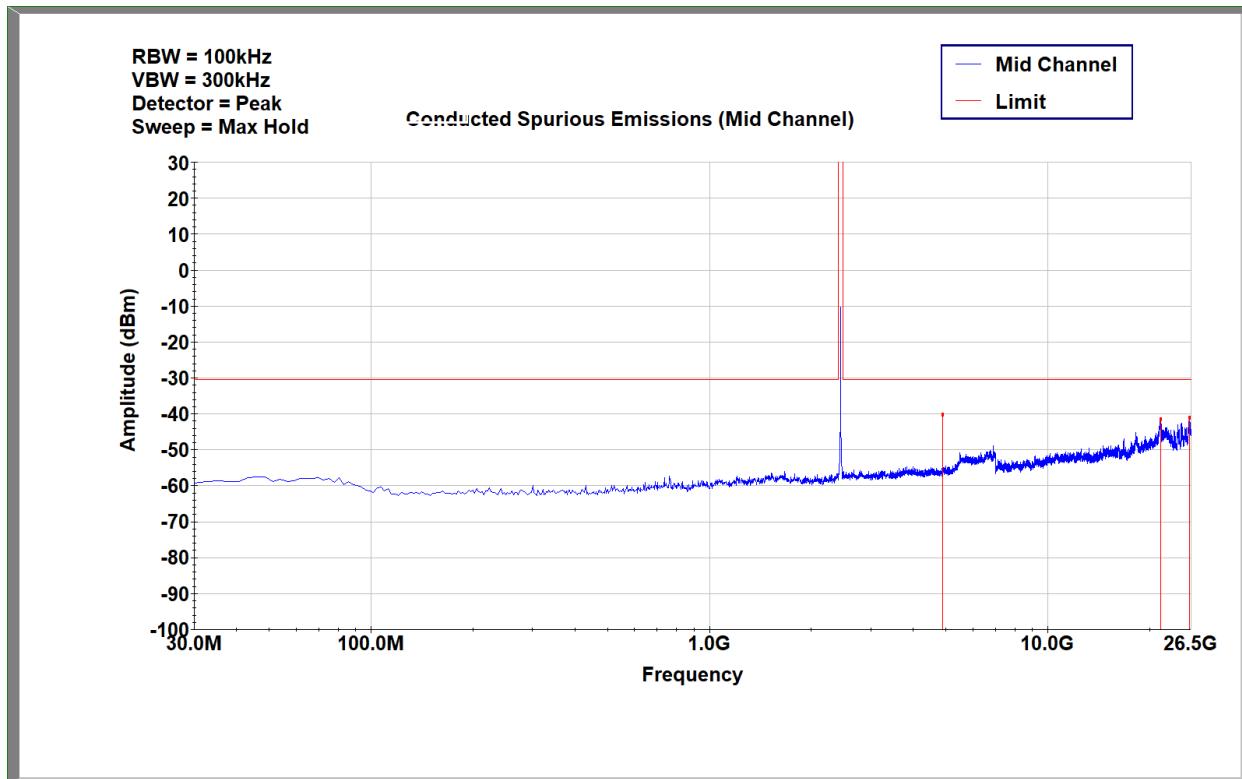

2440MHz Conducted Spurious Emissions

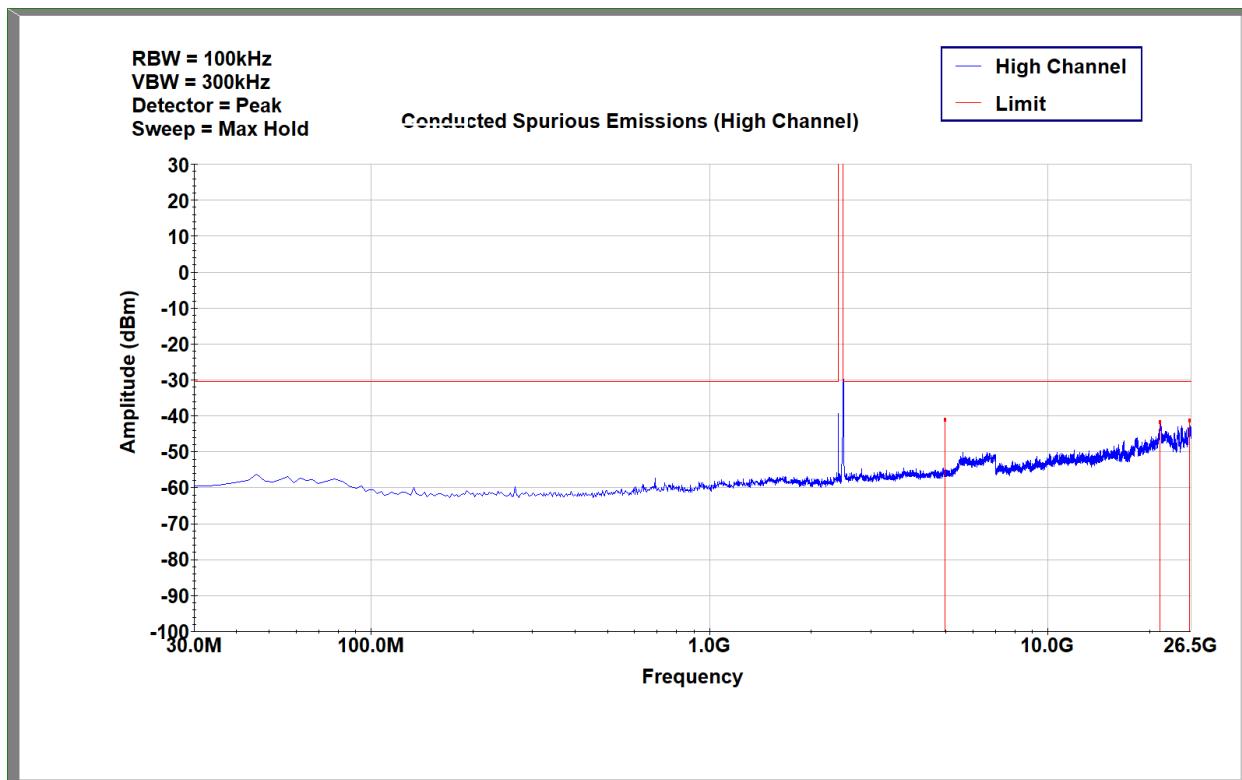



12 Antenna Requirement

12.1 Test Limits

FCC Part 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

RSS-Gen Issue 5 § 6.8:

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dB_i) and the required impedance for each antenna.

Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the licence-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

User manuals for transmitters equipped with detachable antennas shall also contain the following notice in a conspicuous location:

This radio transmitter (identify the device by certification number) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types approved for use with the transmitter, indicating the maximum permissible antenna gain (in dB_i).

12.2 Test Results

The device was found to be **compliant**. The device has an internal, permanently affixed antenna.



13 Revision History

| Revision Level | Date | Report Number | Prepared By | Reviewed By | Notes |
|----------------|-----------|--------------------|-------------|-------------|---|
| 0 | 12/6/2021 | 104771489LEX-024 | BCT | BL | Original Issue |
| 1 | 4/18/2022 | 104771489LEX-024.1 | BL | JTS | Updated output power and PPSD measurements. |
| 2 | 8/4/2022 | 104771489LEX-024.2 | BL | JTS | Updated contact information. |
| 3 | 8/23/2022 | 104771489LEX-024.3 | BL | JTS | Updated contact information. |
| | | | | | |