FCC TEST REPORT

For

Tablet

Model Number: ilium PAD E7 3G

FCC ID: ZC4E7

Report Number : WT138003319

Test Laboratory: Shenzhen Academy of Metrology and Quality

Inspection

National Digital Electronic Product Testing Center

Site Location: No.4 Tongfa Road, Xili Town, Nanshan District,

Shenzhen, Guangdong, China

Tel : 0086-755-86928965

Fax : 0086-755-86009898-31396

Web: www.smq.com.cn

Report No.: WT138003319 Page 11 of74

Test report declaration

Applicant : Corporativo LANIX S.A de C.V.

Address : : Carretera International a Nogales Km8.5, Colonia: SAN LUIS

Hermosillo ,Sonora ,C.P. 83160 Mexico

Manufacturer : : Shenzhen Skyworth Wireless Technology Limited

Address : : Unit3A01, Block A Skyworth Building, Gaoxin Ave.1.S.,

Nanshan District, Shenzhen, China.

EUT : Tablet

Model No : ilium PAD E7 3G

Trade mark : :/

Serial Number : :/

FCC ID : ZC4E7

Test Standards:

FCC PART 22H AND 24E (2012)

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with FCC Rules Part 22H AND 24E.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer:	刘锋	Date:	Oct.31,2013
Checked by:	(Liu Zheng) 脳ネチ		
		Date:	Oct.31.,2013
	(Yang Dongping)		
Approved by:	本本的	Deter	
		Date:	Oct.31,2013
	(Lin Bin)		

port No.: WT138003319 Page 2 of74

TABLE OF CONTENTS

TEST	REPO	RT DECLARATION	.2
1.	TEST	RESULTS SUMMARY	.4
2.	GENE	RAL INFORMATION	.5
	2.1.	Report information	.5
	2.2.	Laboratory Accreditation and Relationship to Customer	.5
	2.3.	Measurement Uncertainty	.6
3.	PROD	OUCT DESCRIPTION	.7
	3.1.	EUT Description	.7
	3.2.	Related Submittal(s) / Grant (s)	.8
	3.3.	Block Diagram of EUT Configuration	.8
	3.4.	Operating Condition of EUT	
	3.5.	Support Equipment List	
	3.6.	Test Conditions	
	3.7.	Special Accessories	
	3.8.	Equipment Modifications	
4.	TEST	EQUIPMENT USED	1
5.	TEST	RESULTS	12
	5.1.	RF Power Output	12
	5.2.	Peak to Average Radio	4
	5.3.	Modulation Characteristics	
	5.4.	Occupied Bandwidth/Emission Bandwidth	
	5.5.	Spurious Emission at Antenna Terminal	
	5.6.	Spurious Emissions Radiated	
	5.7.	Frequency Stability	59

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

FCC Measuremen t	FCC Limits Part(s)	Description	Result
Specification	00.040		5400
2.1046	22.913 24.232	Effective Radiated Power of Transmitter	PASS
2.1046	22.913 24.232(b)	Conducted Power of Transmitter	PASS
2.1046	24.232(d)	Peak to Average Radio	PASS
2.1047	/	Modulation Characteristics	PASS
2.1049	22.917(b) 24.238(b)	Occupied Bandwidth	PASS
2.1051	22.917 24.238	Spurious Emission at Antenna Terminal	PASS
2.1053	22.917 24.238	Radiated Spurious Emissions	PASS
2.1055	22.355 24.235	Frequency Stability	PASS

CFR 47 (FCC) part 24 subpart E

Remark: "N/A" means "Not applicable." The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 2, FCC CFR 47 Part 22 Part 24.

port No.: WT138003319 Page 4 of74

2. GENERAL INFORMATION

2.1. Report information

- 2.1.1.This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way quarantees the later performance of the product/equipment.
- 2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 2.1.3.Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at Bldg. of Metrology & Quality Inspection, Longzhu Road, Nanshan District, Shenzhen, Guangdong, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number are 446246 806614 994606(semi anechoic chamber).

The Laboratory is listed in Voluntary Control Council for Interference by Information Technology Equipment (VCCI), and the registration number are R-1974(open area test site) , R-1966(semi anechoic chamber),C-2117(mains ports conducted interference measurement) and T-180(telecommunication ports conducted interference measurement).

The Laboratory is registered to perform emission tests with Industry Canada (IC), and the registration number is IC4174.

TUV Rhineland accredits the Laboratory for conformance to IEC and EN standards, the registration number is E2024086Z02.

port No.: WT138003319 Page 5 of74

2.3. Measurement Uncertainty **Conducted Emission** 9kHz~30MHz 3.5dB Radiated Emission 30MHz~1000MHz 4.5dB 1GHz~18GHz 4.6dB

port No.: WT138003319 Page 6 of74

3. PRODUCT DESCRIPTION

3.1. EUT Description

Table 2 Specification of the Equipment under Test

Product Type:	ilium PAD E7 3G
Hardware Revision :	G805V03
Software Revision :	ILIUMPAD_E7_CLARO_CO_SW_01
FCC-ID:	ZC4E7
Frequency:	GSM 850: 824.2-848.8MHz;
	PCS 1900: 1850.2-1909.8MHz
	FDD V: 826.4-846.6MHz;
	FDD II: 1852.4-1907.6MHz
Type(s) of	GSM:GMSK,
Modulation:	WCDMA: QPSK
Antenna Type:	Internal
Operating voltage:	Internal battery, 110V AC Adapter;
	3.4V (Low)/ 4.2V (Nominal)/ 4.2V (Max)

Table 3 Identification of the Equipment Under Test (EUT)

EUT	Serial Number/IMEI	HW Version	SW Version	Notes
1	355467040007415	G805V0 3	ILIUMPAD_E7_CL ARO_CO_SW_01	Conducted testing sample.
2	355467040007427	G805V0 3	ILIUMPAD_E7_CL ARO_CO_SW_01	Radiated testing sample.

Table 4 Identification of Accessory equipment

AE #	Туре	Manuf acturer	Model	Serial Number
1	110V AC Adapter	XIAMEN KELI ELECTR ONICS CO. LTD	SW-5220	N/A
2	Battery	i-mobile	4356156PL	N/A
3	External Antenna connector	HENGXI ANGTON G	N/A	N/A

port No.: WT138003319 Page 7 of74

3.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: ZC4E7 filing to comply with FCC PART 22H AND 24E.

3.3. Block Diagram of EUT Configuration




Figure 1 EUT setup of test mode 1&2

3.4. Operating Condition of EUT

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (X plane).

TM1: GPRS/GSM Mode with GMSK Modulation **TM2**: WCDMA Mode with QPSK Modulation

The maximum power levels are GSM mode for GMSK link, RMC 12.2Kbps mode for WCDMA, only these modes were used for all tests.

The conducted power tables are as follows:

Band: GSM850		Conducted Power (dBm)			
Channel	128	128 190 251			
Frequency (MHz)	824.2	836.6	848.8		
GSM (GMSK, 1 Tx slot)	32.00	32.05	31.46		
GPRS (GMSK, 1 Tx slot)	31.48	31.55	31.21		
GPRS (GMSK, 2 Tx slots)	30.17	30.20	30.29		
GPRS (GMSK, 3 Tx slots)	27.36	27.1	27.16		
GPRS (GMSK, 4 Tx slots)	26.56	26.37	26.45		

port No.: WT138003319 Page 8 of74

Band: GSM1900	Conducted Power (dBm)			
Channel	512	661	810	
Frequency (MHz)	1850.2	1880	1909.8	
GSM (GMSK, 1 Tx slot)	29.12	29.22	29.45	
GPRS (GMSK, 1 Tx slot)	29.21	29.22	29.30	
GPRS (GMSK, 2 Tx slots)	28.52	28.71	28.01	
GPRS (GMSK, 3 Tx slots)	26.85	26.67	26.33	
GPRS (GMSK, 4 Tx slots)	24.61	24.35	24.54	

Band	WCDMA Ba	ınd V		WCDMA Ba	ınd II	
Channel	4,132	4,182	4,233	9,262	9,400	9,538
Frequency (MHz)	826.4	836.4	846.6	1,852.40	1,880.00	1,907.60
RMC 12.2K	23.1	23.6	23.2	23.0	23.4	23.2
HSDPA	23.0	23.5	23.1	22.7	23.3	23.1
Subtest-1	20.0	20.0	20		20.0	20.1
HSDPA	23.0	23.4	23.2	22.7	23.2	23.2
Subtest-2	20.0	20	20.2		20.2	20.2
HSDPA	23.0	23.5	23.2	22.7	23.3	23.2
Subtest-3						
HSDPA	23.1	23.5	23.2	22.7	23.3	23.1
Subtest-4						
HSUPA	23.3	22.7	22.3	22.7	23.2	23.1
Subtest-1						
HSUPA	21.7	22.1	21.7	21.9	22.3	22.3
Subtest-2						
HSUPA	21.4	21.8	21.4	21.3	21.8	21.7
Subtest-3						
HSUPA	22.1	22.5	22.1	21.0	21.5	21.4
Subtest-4						
HSUPA	20.0	20.5	20.1	21.7	22.1	22.1
Subtest-5						

3.5. Support Equipment List

Table 5 Support Equipment List

Name	Model No	S/N	Manufacturer
N/A			


3.6. Test Conditions

Date of test: Oct 18- Oct 26, 2013

Date of EUT Receive: Oct.12,2013

Temperature: 22-24 °C

port No.: WT138003319 Page 9 of74

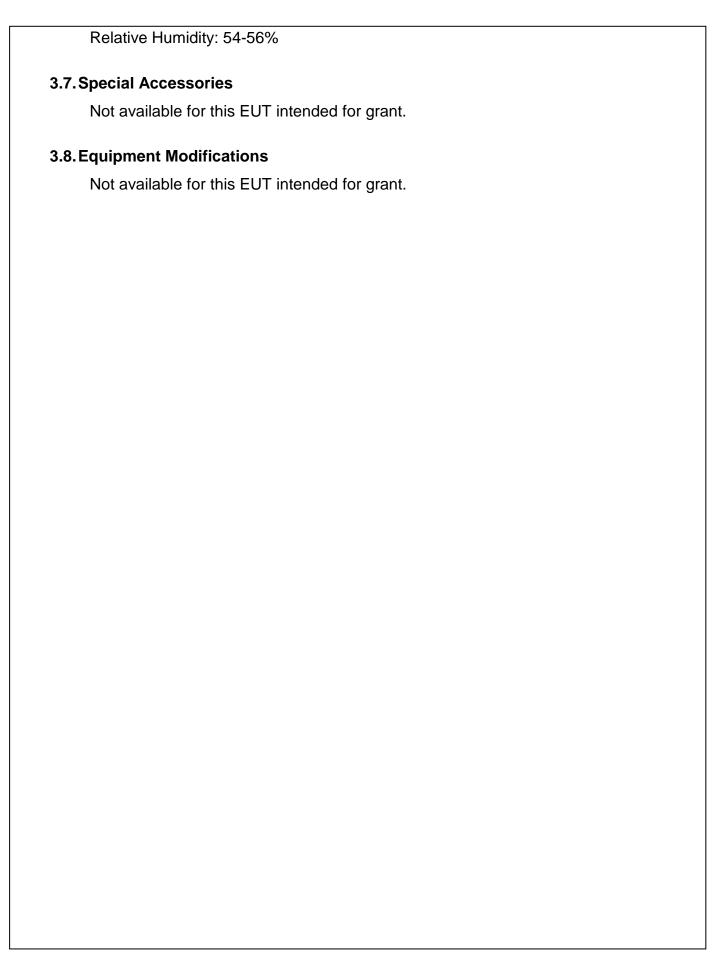

Report No.: WT138003319 Page 10 of74

4. TEST EQUIPMENT USED

Table 6 Test Equipment

	Table o Test Equipment						
No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval		
SB2603	EMI Test Receiver	Rohde & Schwarz	ESCS30	Jan.21, 2013	1 Year		
SB3321	AMN	Rohde & Schwarz	ESH2-Z5	Jan.21, 2013	1 Year		
SB2604	AMN	Rohde & Schwarz	ESH3-Z5	Jan.21, 2013	1 Year		
SB8501/09	EMI Test Receiver	Rohde & Schwarz	ESU40	May.17, 2013	1 Year		
SB8501/04	Bilog Antenna	Schwarzbeck	VULB9163	May 14, 2013	1 Year		
SB5472/02	Bilog Antenna	Schwarzbeck	VULB9163	Jan.21, 2013	1 Year		
SB3435	Horn Antenna	Rohde & Schwarz	HF906	Jan.21, 2013	1 Year		
SB3434	Horn Antenna	Rohde & Schwarz	HF906	Jan.21, 2013	1 Year		
SB3435/01	Amplifier(1-18GHz)	Rohde & Schwarz		Jan.21, 2013	1 Year		
SB3435/02	Amplifier(18-40GHz)	Rohde & Schwarz		May.17, 2013	1 Year		
SB5392/02	Horn Antenna	Amplifier Research	AT4560	May.17, 2013	1 Year		
SB3450/01	3m Semi-anechoic chamber	Albatross Projects	9X6X6	Oct.12, 2012	2 Years		
SB8501/02	Communication Test Unit	Rohde & Schwarz	CMU200	Jan.8, 2013	1 Year		
SB9721/02	Signal Analyzer	Agilent	N9020A	Feb.4, 2013	1 Year		
SB3611	DC Power Supply	KENWOOD	PDS36-10	May.17, 2013	1 Year		
SB6691	Climatic Chamber	NANYA	DW-0150	Apr 14, 2013	1 Year		

Report No.: WT138003319 Page 11 of74

5. TEST RESULTS

5.1.RF Power Output

5.1.1.Test Standard

FCC: CFR Part 2.1046, CFR Part 22.913, CFR Part 24.232

5.1.2.Test Limit

FCC 22.913 (a) Effective radiated power limits.

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

FCC 24.232 (b)(c) Power limits.

(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP). (c) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

5.1.3.Test Procedure

Radiated Output Power Measurement procedure

Ref: TIA-603C 2004 -2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic

- 1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.
- 2. Adjust the settings of the Universal Radio Communication Tester (CMU) to set the EUT to its maximum power at the required channel.
- 3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
- 4. Rotate the EUT 360. Record the peak level in dBm (LVL).
- 5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
- 6. Connect the antenna to a signal generator with known output power and record the path loss in dB (LOSS). LOSS = Generator Output Power (dBm) Analyzer reading (dBm).
- 7. Determine the ERP using the following equation:

ERP (dBm) = LVL (dBm) + LOSS (dB)

8. Determine the EIRP using the following equation:

EIRP (dBm) = ERP (dBm) + 2.15 (dB)

9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

Report No.: WT138003319 Page 12 of74

5.1.4.Test Data

Table 7 Substitution Results

Test Mode	Freq. [MHz]	SG. Level [dBm]	Cable Loss [dB]	Antenna Gain [dBd]	Substitution Level (ERP) [dBm]	Limit [dBm]	Result
TM1	824.2	17.73	0.5	5.28	22.513	38.5	Pass
TM1	836.6	18.87	0.5	5.28	23.652	38.5	Pass
TM1	848.8	18.80	0.5	5.28	23.582	38.5	Pass
TM2	826.4	8.96	0.5	5.28	13.743	38.5	Pass
TM2	836.6	9.40	0.5	5.28	14.179	38.5	Pass
TM2	846.6	9.71	0.5	5.28	14.490	38.5	Pass

Table 8 Substitution Results

Test Mode	Freq. [MHz]	SG. Level [dBm]	Cable Loss [dB]	Antenna Gain [dBi]	Substitution Level (EIRP) [dBm]	Limit [dBm]	Result
TM1	1850.2	10.16	0.97	8.92	18.119	33	Pass
TM1	1880	10.49	0.97	8.92	18.449	33	Pass
TM1	1909.8	10.31	0.97	8.92	18.264	33	Pass
TM2	1852.4	14.31	0.97	8.92	22.261	33	Pass
TM2	1880	14.33	0.97	8.92	22.287	33	Pass
TM2	1907.6	13.93	0.97	8.92	21.879	33	Pass

Report No.: WT138003319 Page 13 of74

5.2. Peak to Average Radio

5.2.1.Test Standard

CFR 47 (FCC) part 24 subpart E

5.2.2.Test Limit

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

5.2.3.Test Procedure

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

5.2.4.Test Data

Test Band	Test Mode	Test Channel	Measured[dB]	Limit [dB]	Verdict
GSM1900	GSM/TM1	1850.2	0.17	13	PASS
		1880	0.16	13	PASS
		1909.8	0.19	13	PASS
Test Band	Test Mode	Test Channel	Measured[dB]	Limit [dB]	Verdict
WCDMA1900	UMTS/TM1	1852.4	3.27	13	PASS
		1880	3.29	13	PASS
		1907.6	3.26	13	PASS

Report No.: WT138003319 Page 14 of74

5.3. Modulation Characteristics

5.3.1.Test Standard

CFR 47 (FCC) part 2.1047, part 22 subpart H and par 24 subpart E

5.3.2.Test Limit

2.1047 (d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

5.3.3.Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 via the antenna connector. The frequency band is set as US celluar; the EUT's output is matched with 50 Ω load, test method was according to 3GPP TS 51.010 and 3GPP TS 34.121. The waveform quality and constellation of the Mobile Phone was tested.


5.3.4.Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

5.3.5.Test Data


GMSK modulation

Report No.: WT138003319 Page 15 of74

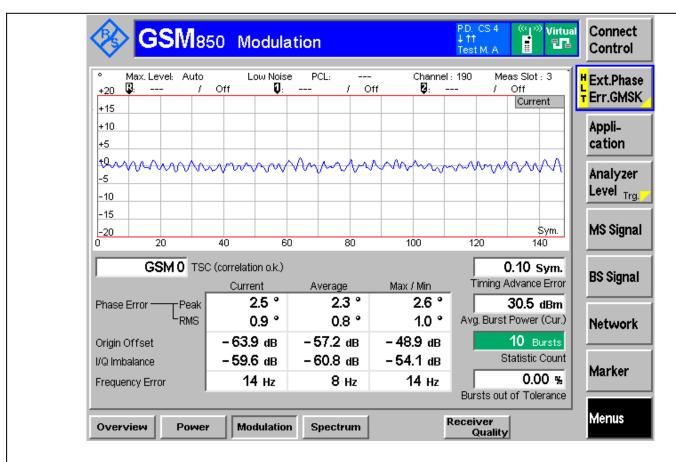

QPSK modulation

Report No.: WT138003319 Page 16 of74

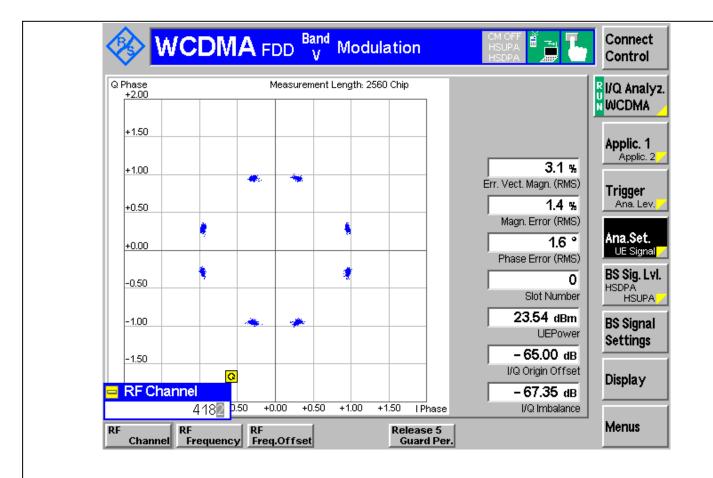

Report No.: WT138003319 Page 17 of74

5.4. Occupied Bandwidth/Emission Bandwidth

5.4.1.Test Standard

FCC: CFR Part 2.1049, CFR Part 22.917, CFR Part 24.238

5.4.2.Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable.


(h) Transmitters employing digital modulation techniques-when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated.

5.4.3.Test Procedure

- 1. Connect the equipment as shown in the above diagram.
- 2. Adjust the settings of the Universal Radio Communication Tester (CMU) to set the EUT to its maximum power at the required channel.
- 3. Set the spectrum analyzer to measure the 99% occupied bandwidth. Record the value.
- 4. Set the spectrum analyzer to measure the -26 dB emission bandwidth. Record the value.
- 5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

Spectrum analyzer settings: Measurement bandwidth of at least 1% of the occupied bandwidth

5.4.4.Test Setup

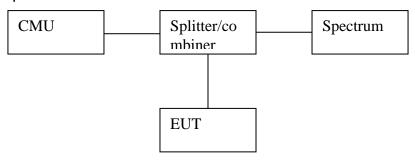

Report No.: WT138003319 Page 18 of74


5.4.5.Test Data

Table 9 Occupied Bandwidth Test Data


CSM 950: CMSK Mode						
GSM 850: GMSK Mode						
CHANNEL	99% OBW	26dBc BANDWIDTH (kHz)				
FREQUENCY	(kHz)					
(MHz)		(112)				
824.2	248.41	320.6				
836.6	248.26	320.2				
848.8	243.34	313.3				
UMTS 850						
CHANNEL	99% OBW	26dBc BANDWIDTH				
FREQUENCY	(MHz)					
(MHz)		(MHz)				
826.4	4.167	4.622				
836.6	4.151	4.608				
846.6	4.165	4.604				
GSM 1900: GMSK Mode						
CHANNEL	99% OBW	26dBc BANDWIDTH				
FREQUENCY	(kHz)					
(MHz)		(kHz)				
1850.2	243.57	315.1				
1880.0	243.52	316.4				
1909.8	243.63	315.3				
UMTS 1900						
CHANNEL	99% OBW	26dBc BANDWIDTH (MHz)				
FREQUENCY	(MHz)					
(MHz)	,					
1852.4	4.168	4.607				
1880.0	4.157	4.603				
1907.6	4.160	4.609				

Report No.: WT138003319 Page 19 of74

Test Band = GSM850 Test Mode = GSM/TM1

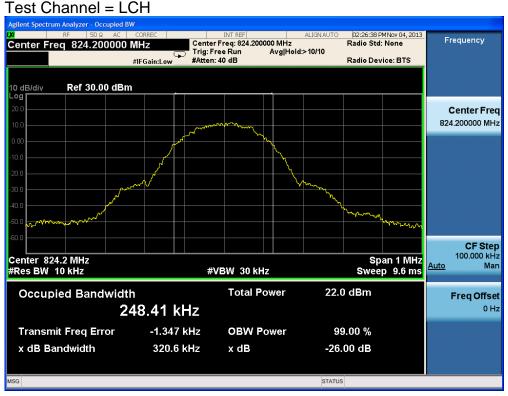


Test Band = GSM850 Test Mode = GSM/TM1

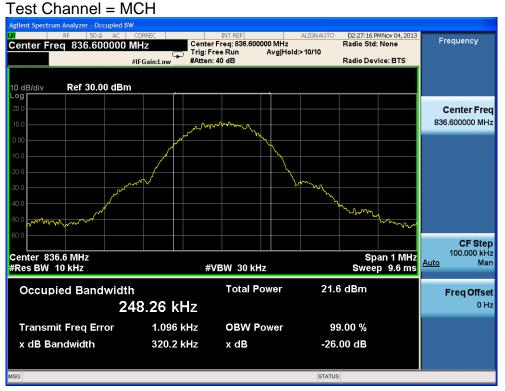

Report No.: WT138003319 Page 20 of74

Test Band = GSM850 Test Mode = GSM/TM1 Test Channel = HCH

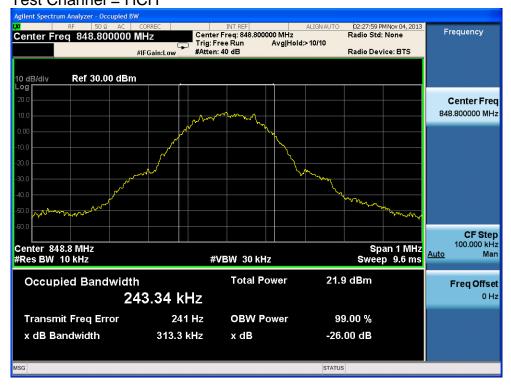


Test Band = WCDMA850 Test Mode = WCDMA/TM2 Test Channel = LCH




Report No.: WT138003319 Page 21 of74

Test Band = WCDMA850 Test Mode = WCDMA /TM2 Test Channel = MCH

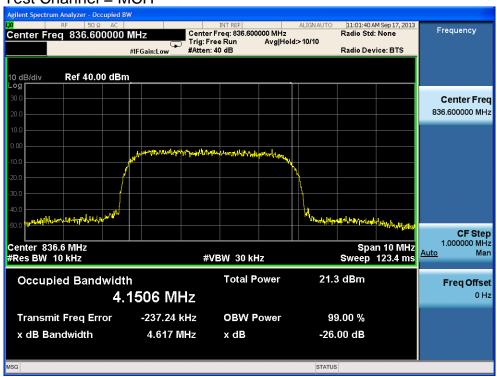

Test Band = WCDMA850
Test Mode = WCDMA /TM2
Test Channel = HCH

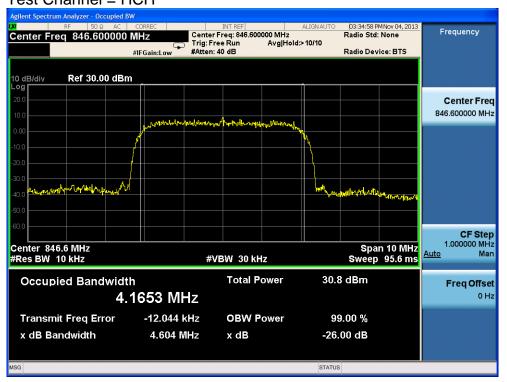

Report No.: WT138003319 Page 22 of74

Test Band = GSM1900 Test Mode = GSM/TM1 Test Channel = LCH



Test Band = GSM1900 Test Mode = GSM /TM1 Test Channel = MCH




Report No.: WT138003319 Page 23 of74

Test Band = GSM1900 Test Mode = GSM /TM1 Test Channel = HCH




Test Band = WCDMA1900 Test Mode = WCDMA/TM2 Test Channel = LCH

Report No.: WT138003319 Page 24 of74

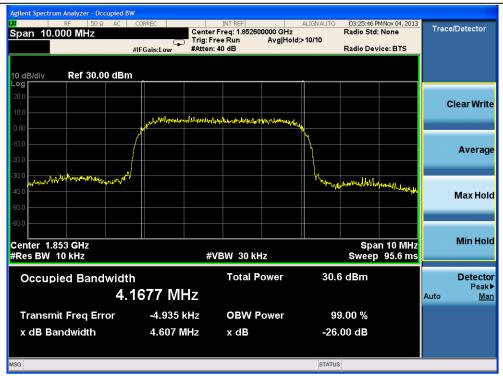


Test Band = WCDMA1900 Test Mode = WCDMA /TM2

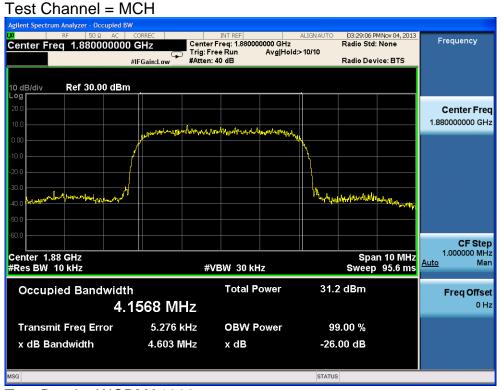

Test Band = WCDMA1900 Test Mode = WCDMA /TM2 Test Channel = HCH

Report No.: WT138003319 Page 25 of74

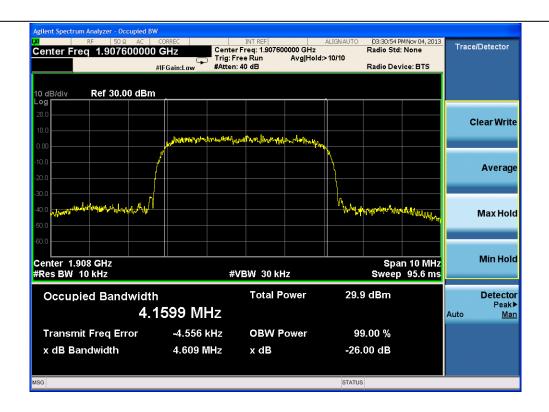

5.5. Spurious Emission at Antenna Terminal

5.5.1.Test Standard

FCC: CFR Part 2.1051, CFR Part 22.917, CFR Part 24.238

5.5.2.Test Limit

The radio frequency voltage or power generated within the equipment and appearing on a

spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in FCC 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. For all power levels +30dBm to 0dBm, this becomes a constant specification of -13dBm.

FCC 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular

Radiotelephone Service.

(b) Measurement procedure. Compliance with these provisions is based on the use of

Report No.: WT138003319 Page 26 of74

measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.


(b) Measurement procedure. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.5.3.Test Procedure

- 1. Connect the equipment as shown in the above diagram.
- 2. Set the spectrum analyzer to measure peak hold with the required settings.
- 3. Set the signal generator to a known output power and record the path loss in dB (LOSS) for frequencies up to the tenth harmonic of the EUT's carrier frequency. \LOSS = Generator Output Power (dBm) Analyzer reading (dBm).
- 4. Replace the signal generator with the EUT.
- 5. Adjust the settings of the Universal Radio Communication Tester (CMU) to set the EUT to its maximum power at the required channel.
- 6. Set the spectrum analyzer to measure peak hold with the required settings. Offset the spectrum analyzer reference level by the path loss measured above.
- 7. Measure and record all spurious emissions up to the tenth harmonic of the carrier frequency.
- 8. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
- 9. If necessary steps 6 and 7 may be performed with the spectrum analyzer set to average detector.

(Note: Step 3 above is performed prior to testing and LOSS is recorded by test software. Steps 2, 6, and 7 above are performed with test software.)

Report No.: WT138003319 Page 27 of74

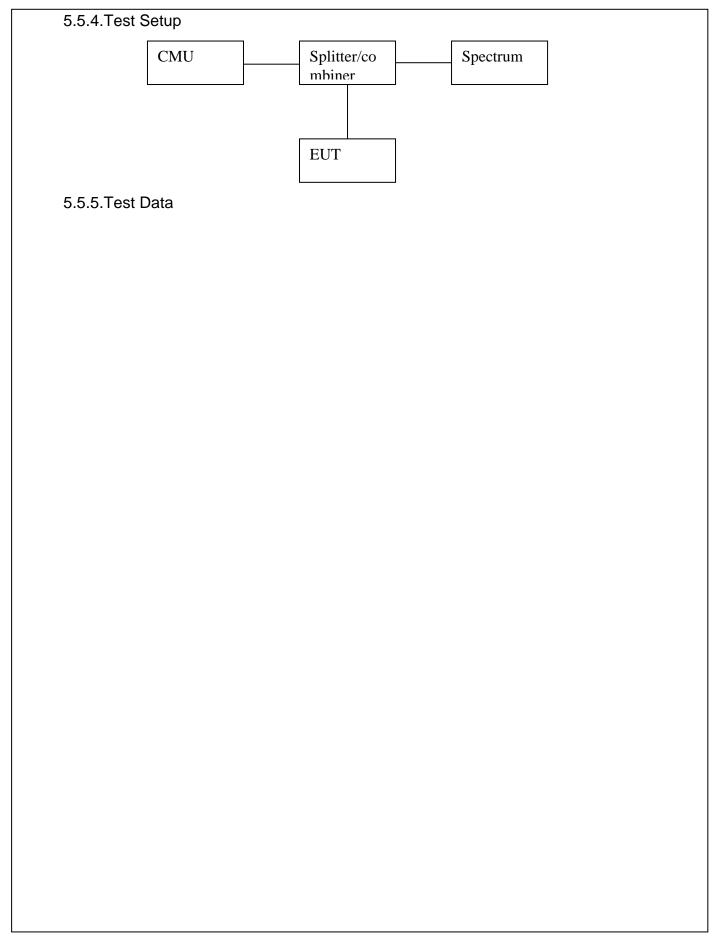

Report No.: WT138003319 Page 28 of74

Out of band measurement Test Band = GSM850 Test Mode = GSM /TM1 Test Channel = LCH



Report No.: WT138003319 Page 29 of74




Report No.: WT138003319 Page 30 of74

Out of band measurement Test Band = GSM850 Test Mode = GSM /TM1 Test Channel = MCH




Report No.: WT138003319 Page 31 of74

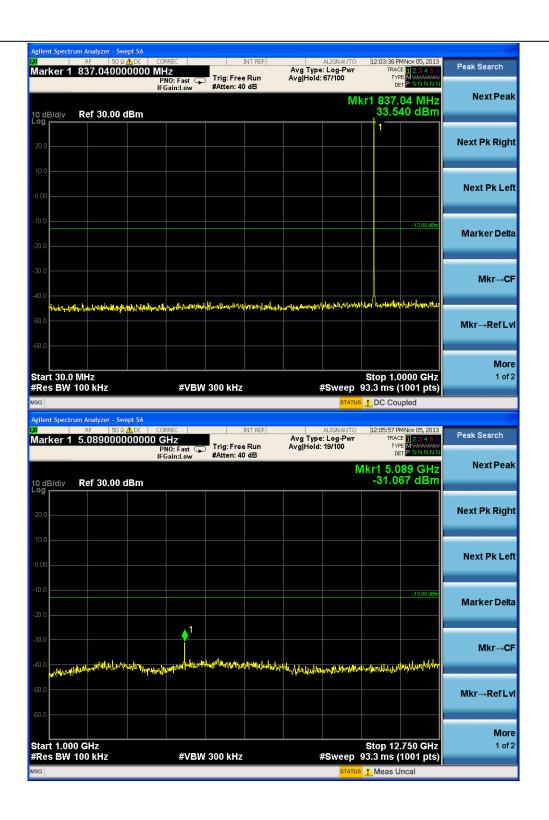


Report No.: WT138003319 Page 32 of74

Out of band measurement Test Band = GSM850 Test Mode = GSM /TM1 Test Channel = HCH

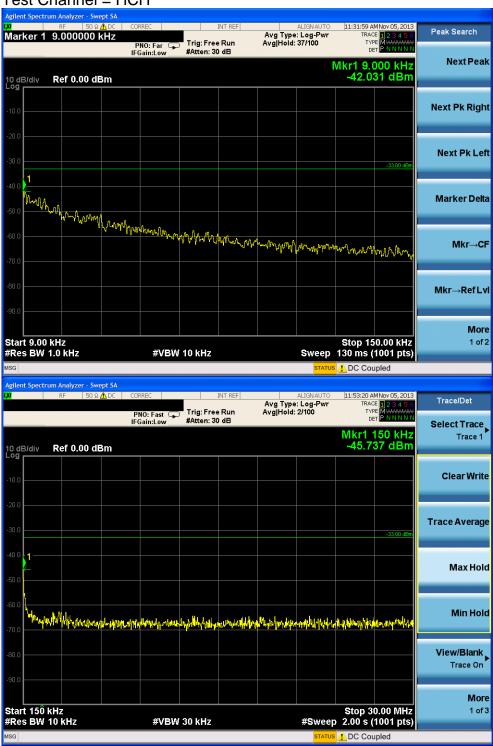


Report No.: WT138003319 Page 33 of74

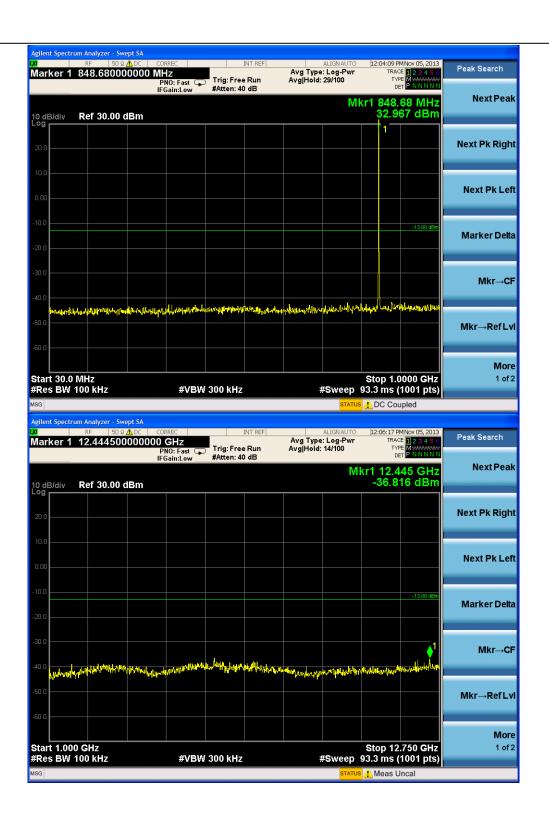

Report No.: WT138003319 Page 34 of74


Band edge measurement Test Band = GSM850 Test Mode = GSM /TM1 Test Channel = LCH/HCH



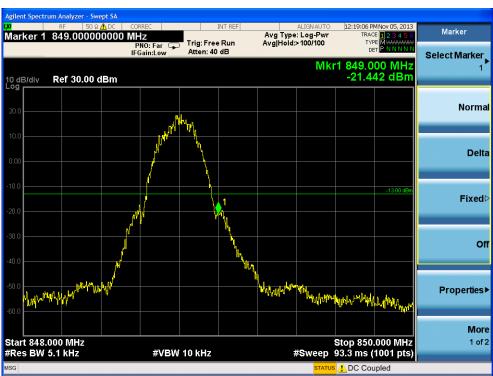


Report No.: WT138003319 Page 35 of74

Out of band measurement Test Band = WCDMA850 Test Mode = WCDMA /TM2 Test Channel = LCH

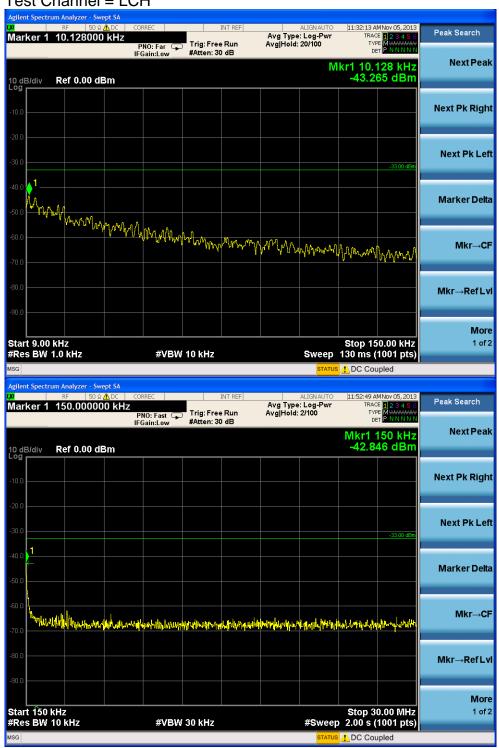


Report No.: WT138003319 Page 36 of74

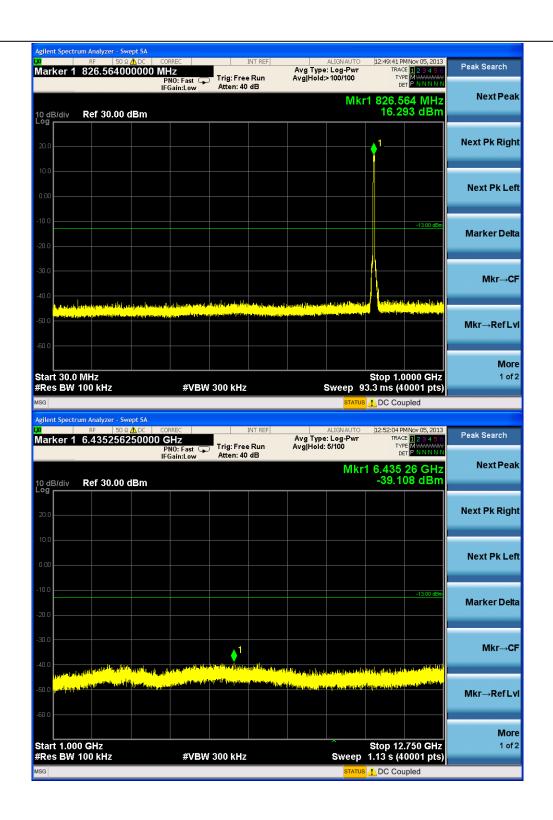


Report No.: WT138003319 Page 37 of74

Out of band measurement Test Band = WCDMA850 Test Mode = WCDMA /TM2

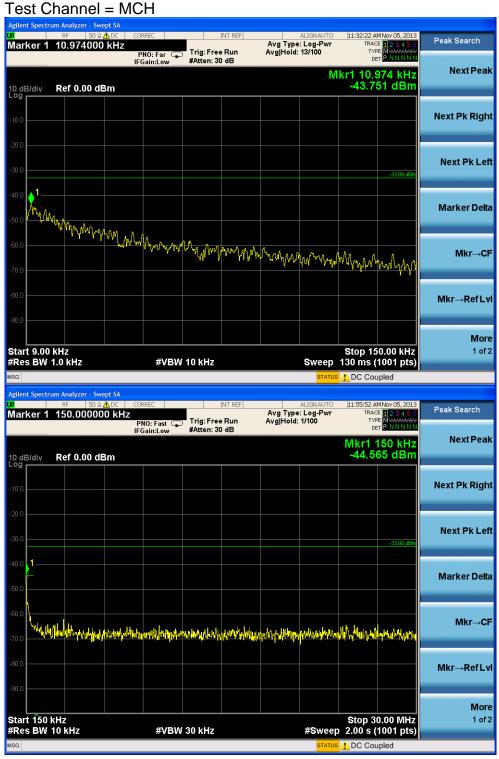


Report No.: WT138003319 Page 38 of74

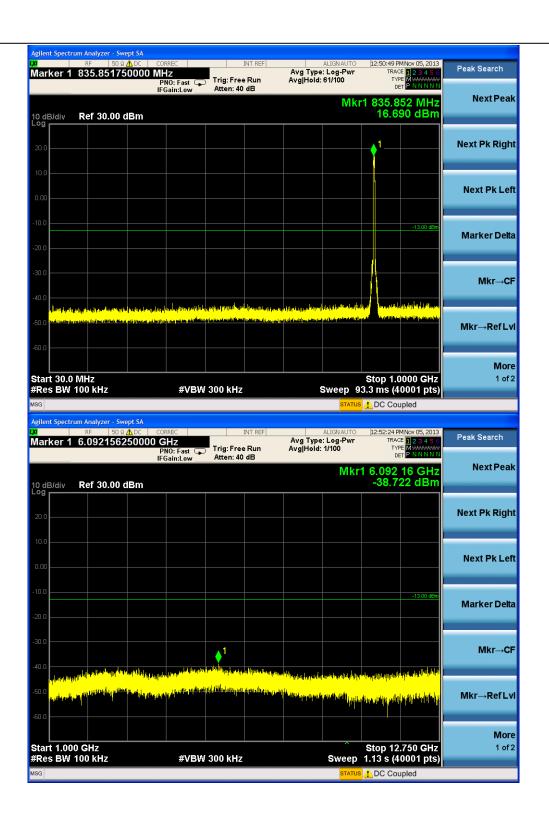


Report No.: WT138003319 Page 39 of74

Out of band measurement Test Band = WCDMA850 Test Mode = WCDMA /TM2

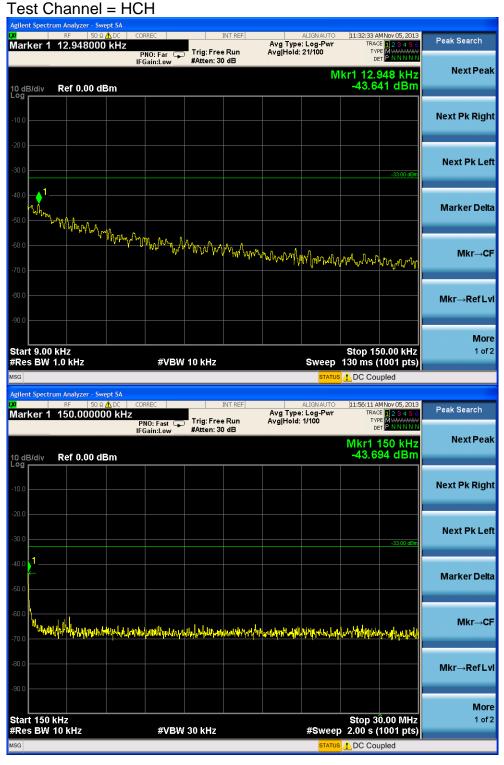


Report No.: WT138003319 Page 40 of74

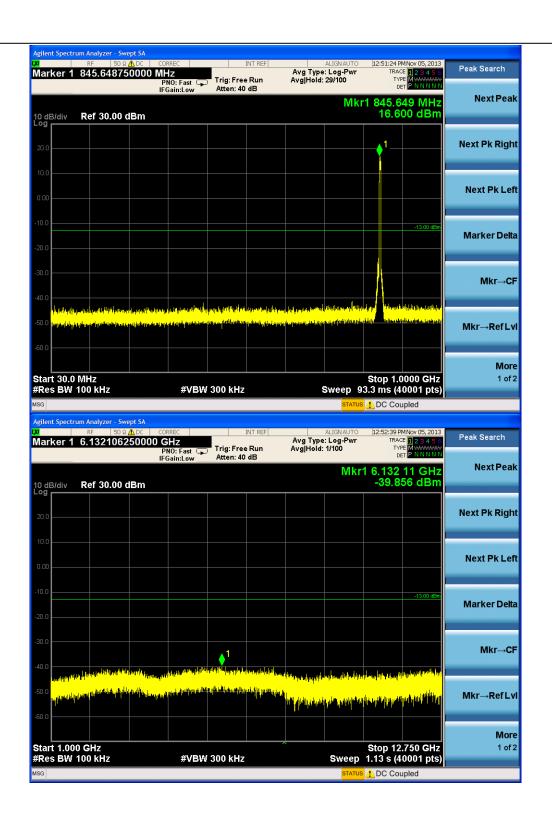


Report No.: WT138003319 Page 41 of74

Band edge measurement Test Band = WCDMA850 Test Mode = WCDMA /TM2 Test Channel = LCH/HCH

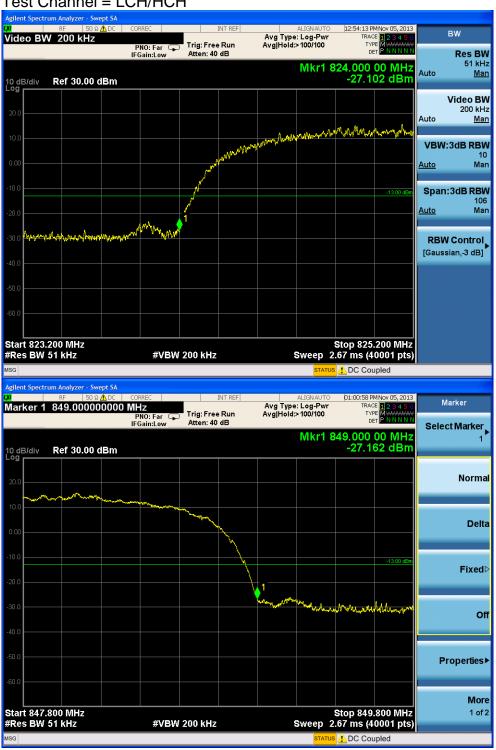


Report No.: WT138003319 Page 42 of74


Out of band measurement Test Band = GSM1900 Test Mode = GSM /TM1 Test Channel = LCH

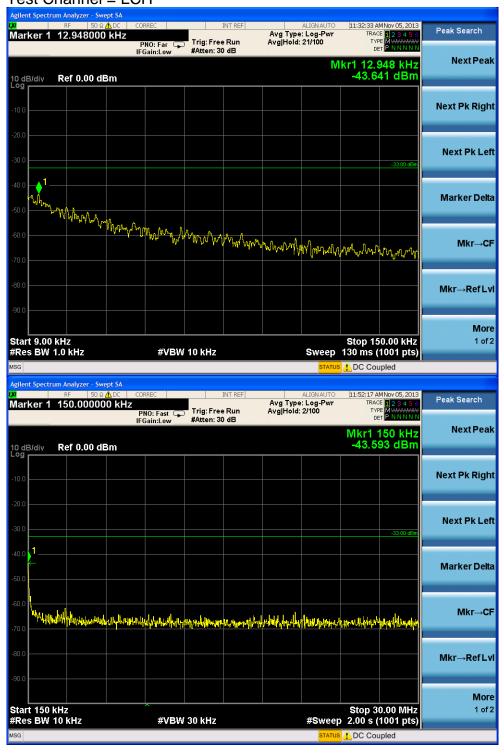

Report No.: WT138003319 Page 43 of74

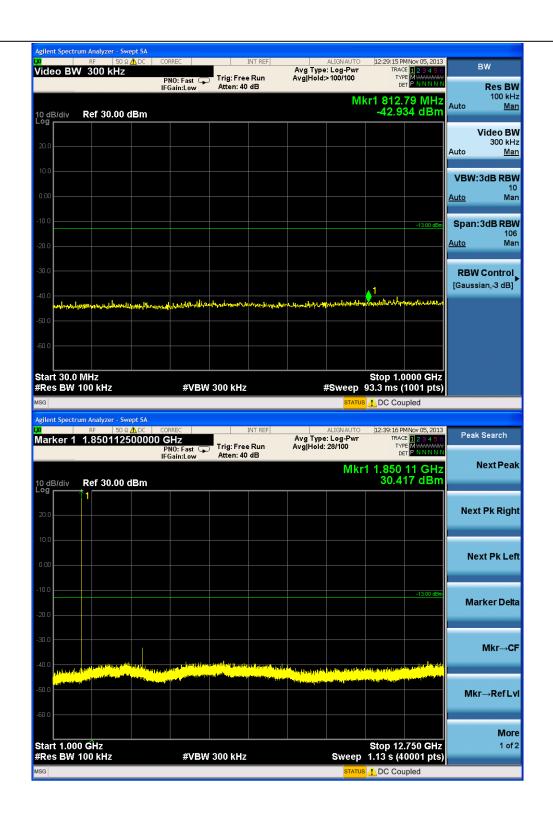


Report No.: WT138003319 Page 44 of74

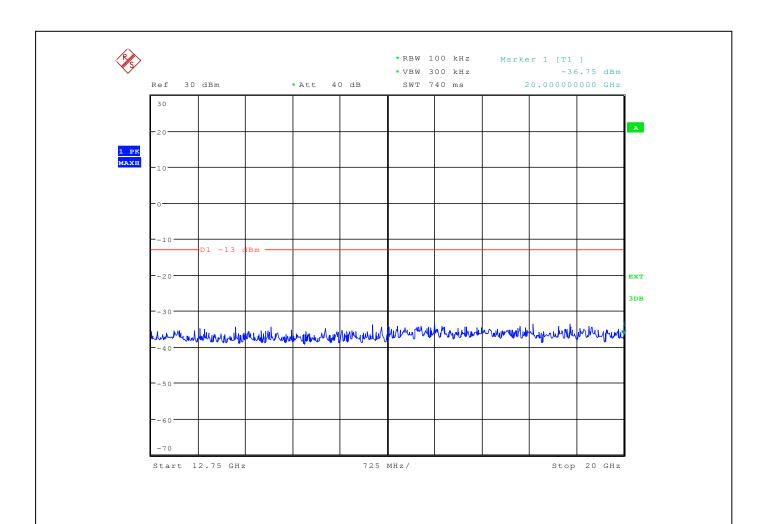


Report No.: WT138003319 Page 45 of74


Out of band measurement Test Band = GSM1900 Test Mode = GSM /TM1 Test Channel = MCH

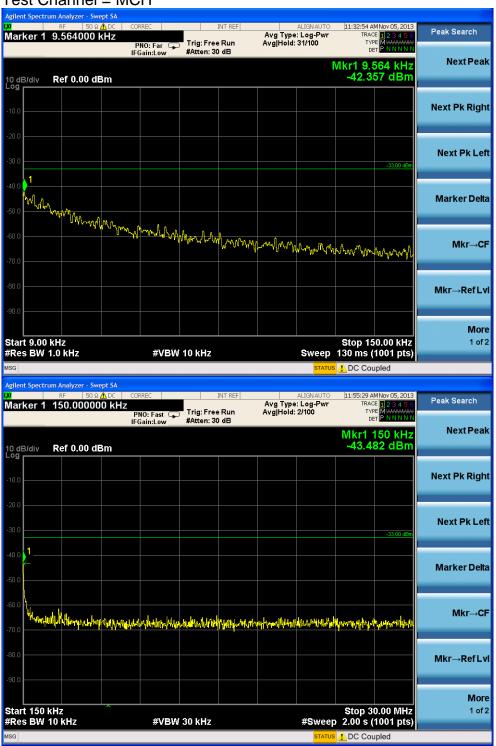

Report No.: WT138003319 Page 46 of74

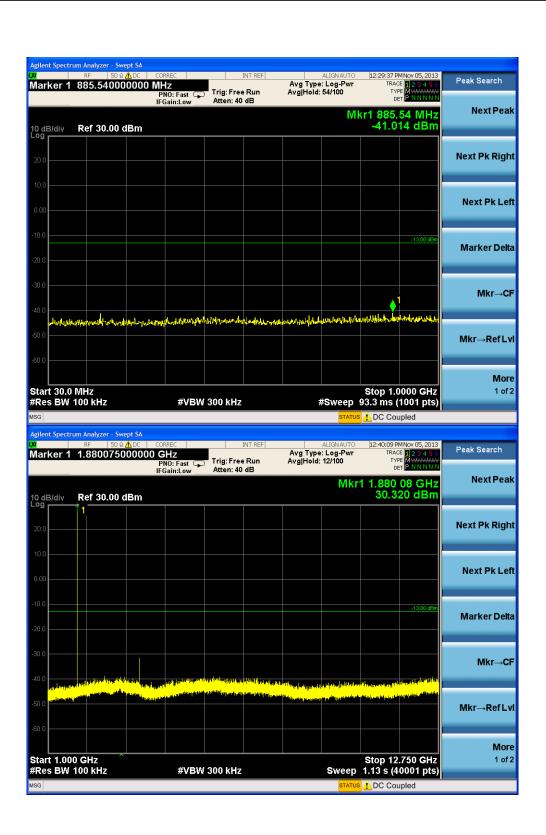


Report No.: WT138003319 Page 47 of74

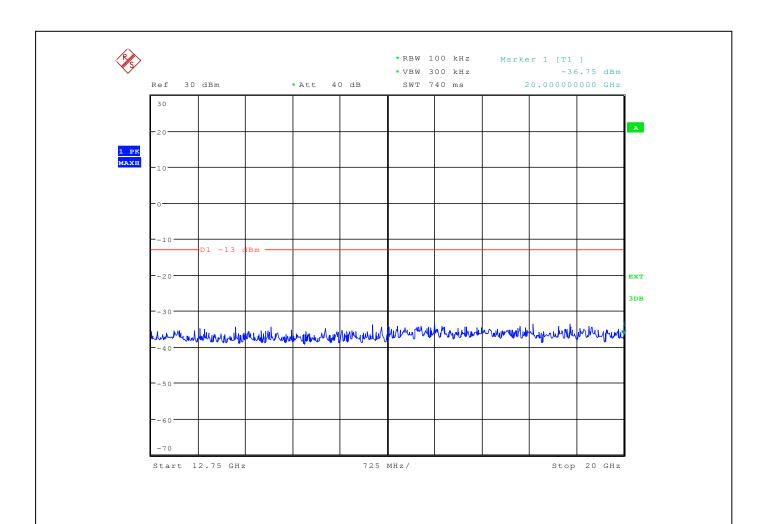


Report No.: WT138003319 Page 48 of74


Out of band measurement Test Band = GSM1900 Test Mode = GSM /TM1 Test Channel = HCH

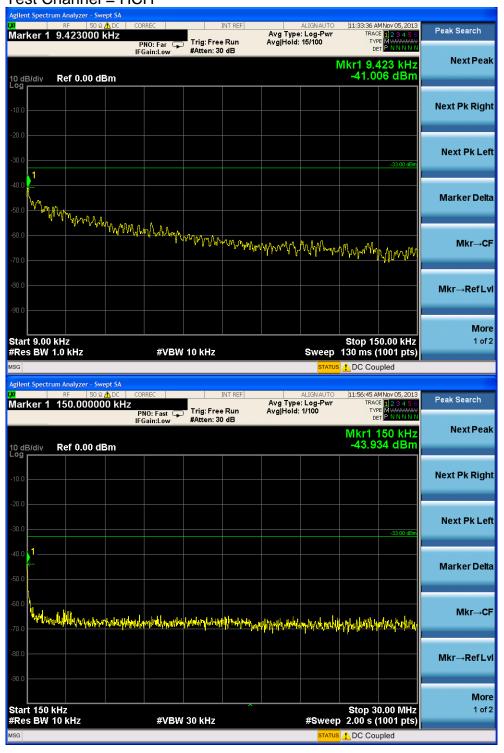

Report No.: WT138003319 Page 49 of74

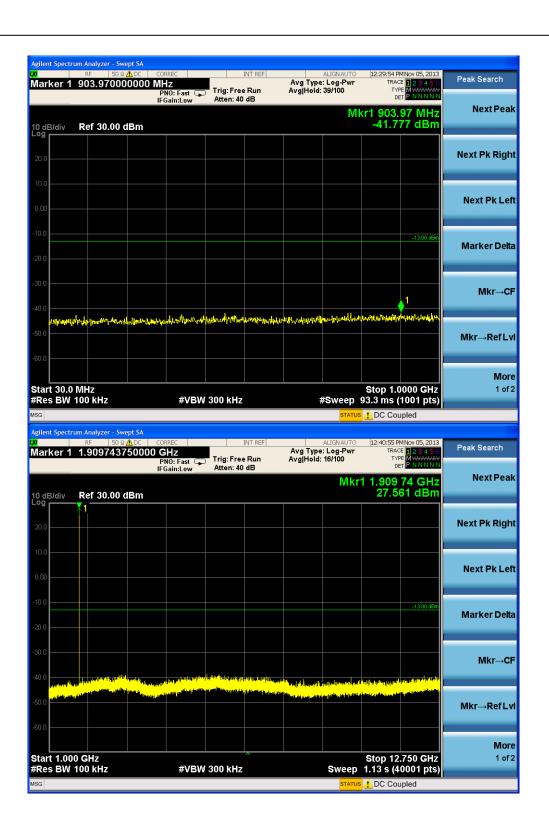


Report No.: WT138003319 Page 50 of74

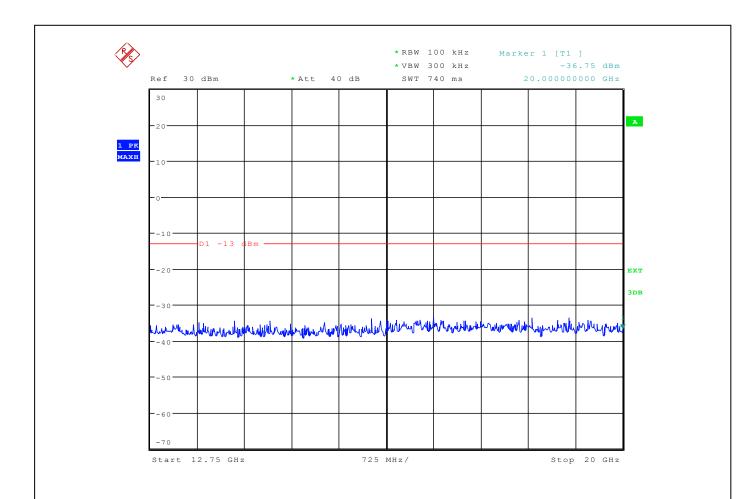


Date: 15.NOV.2013 10:36:39

Report No.: WT138003319 Page 51 of74


Band edge measurement Test Band = GSM1900 Test Mode = GSM /TM1 Test Channel = LCH/HCH

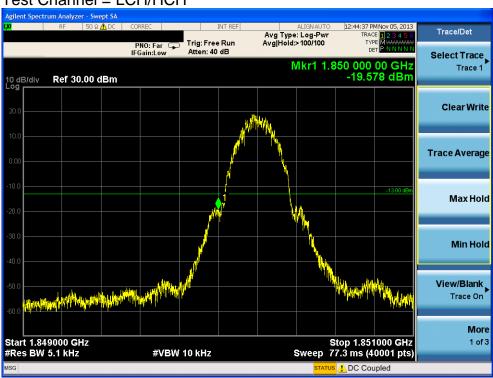

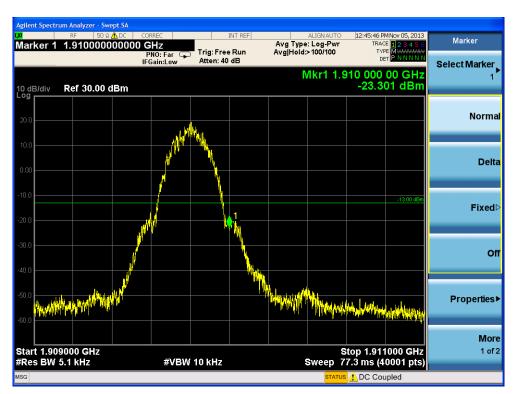


Report No.: WT138003319 Page 52 of74


Out of band measurement Test Band = WCDMA1900 Test Mode = WCDMA /TM2

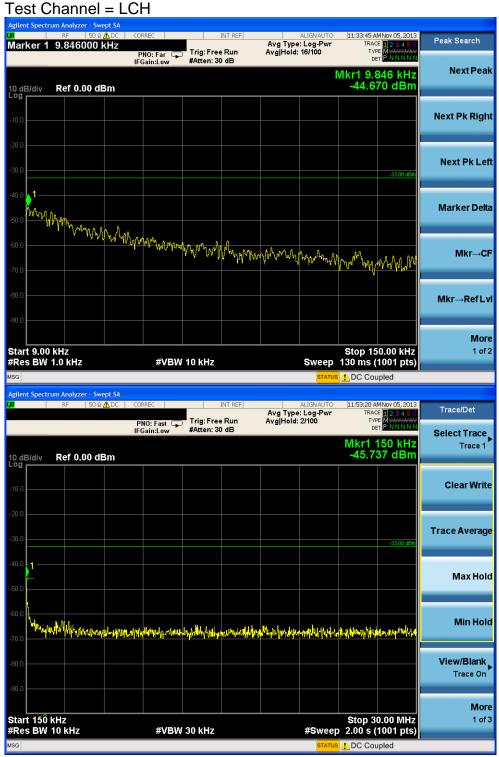

Report No.: WT138003319 Page 53 of74

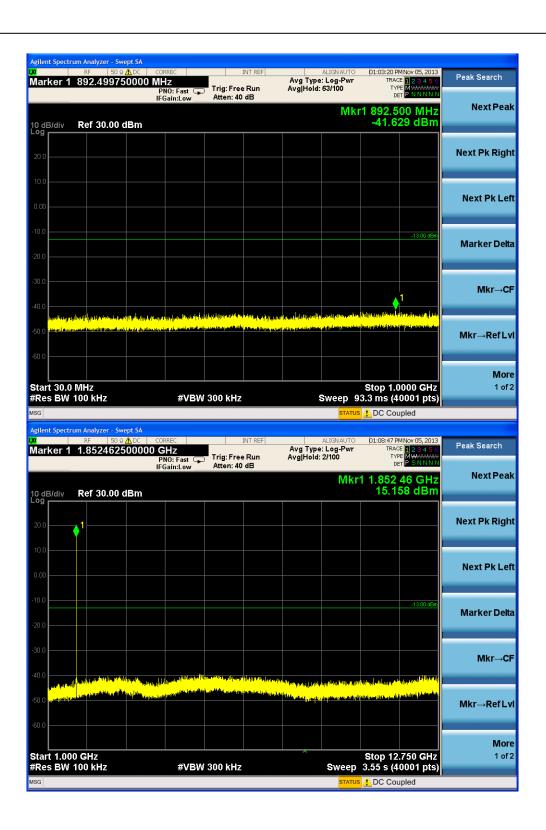


Report No.: WT138003319 Page 54 of74

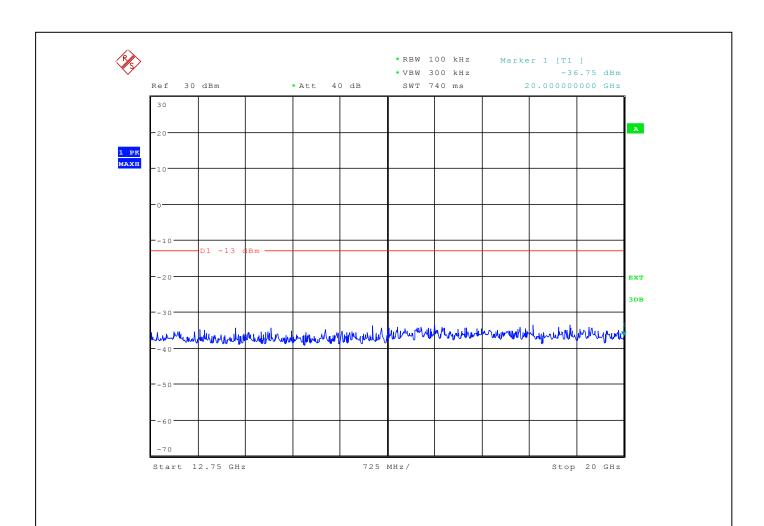


Report No.: WT138003319 Page 55 of74

Out of band measurement Test Band = WCDMA1900 Test Mode = WCDMA /TM2 Test Channel = MCH



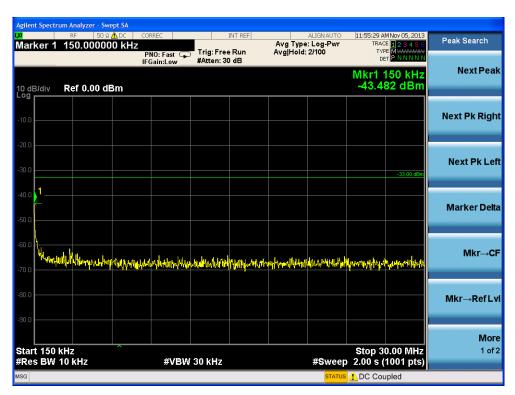


Report No.: WT138003319 Page 56 of74

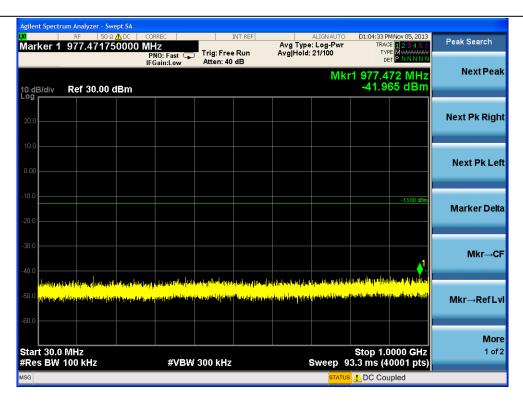




Report No.: WT138003319 Page 57 of74

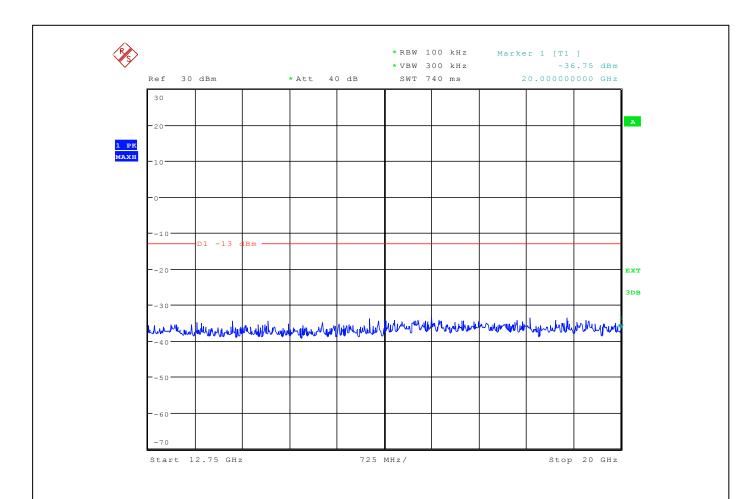


Date: 15.NOV.2013 10:36:45


Report No.: WT138003319 Page 58 of74

Out of band measurement Test Band = WCDMA1900 Test Mode = WCDMA /TM2 Test Channel = HCH

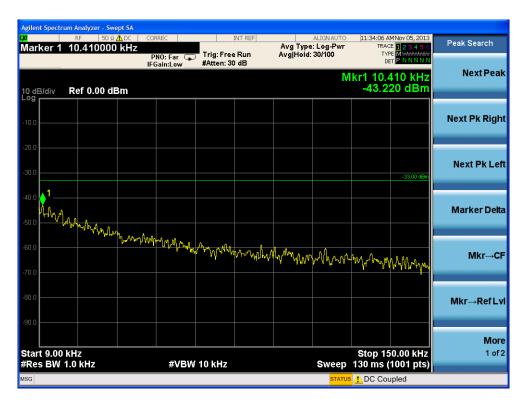

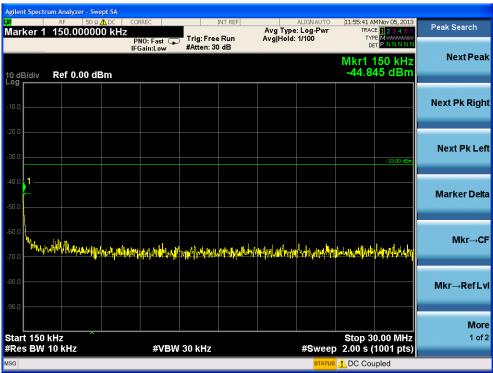


Report No.: WT138003319 Page 59 of74

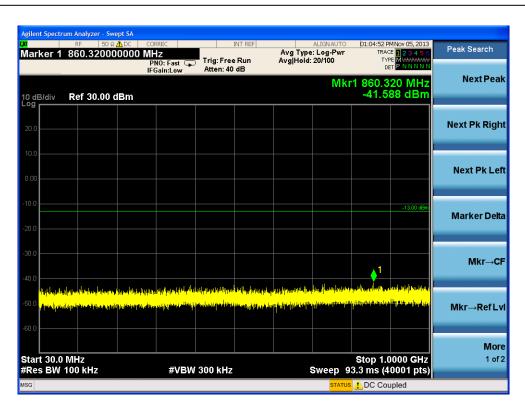



Report No.: WT138003319 Page 60 of74

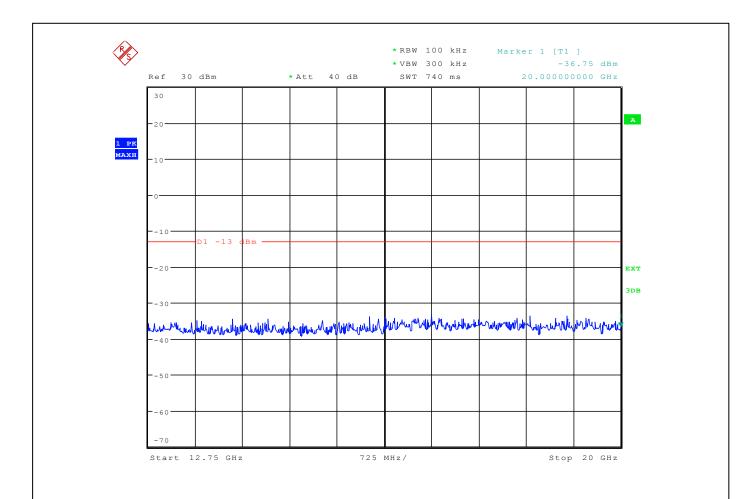

Date: 15.NOV.2013 10:36:48

Report No.: WT138003319 Page 61 of74

Band edge measurement Test Band = WCDMA1900 Test Mode = WCDMA /TM2 Test Channel = LCH/HCH





Report No.: WT138003319 Page 62 of74

5.6. Spurious Emissions Radiated

5.6.1.Test Standard

FCC: CFR Part 2.1053, CFR Part 22.917, CFR Part 24.238

5.6.2.Test Limit

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

5.5.3 Limits:

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

For all power levels +30dBm to 0dBm, this becomes a constant specification of -13dBm.

5.5.3.1 FCC 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular

Radiotelephone Service.

(b) Measurement procedure. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.5.3.2 FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(b) Measurement procedure. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two

Report No.: WT138003319 Page 63 of74

points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.6.3.Test Procedure

- 1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
- 2. Adjust the settings of the Universal Radio Communication Tester (CMU) to set the EUT to its maximum power at the required channel.
- 3. Set the spectrum analyzer to measure peak hold with the required settings.
- 4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360.

Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360 at each height to maximize all emissions. Measure and record all spurious emissions (LVL) up to the tenth harmonic of the carrier frequency.


- 5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
- 6. Connect the antenna to a signal generator with known output power and record the path loss in dB (LOSS). LOSS = Generator Output Power (dBm) Analyzer reading (dBm).
- 7. Determine the level of spurious emissions using the following equation: Spurious (dBm) = LVL (dBm) + LOSS (dB):
- 8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
- 9. Determine the level of spurious emissions using the following equation: Spurious (dBm) = LVL (dBm) + LOSS (dB):
- 10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

(Note: Steps 5 and 6 above are performed prior to testing and LOSS is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

Spectrum analyzer settings: RBW=VBW=1MHz

5.6.4.Test Setup

Report No.: WT138003319 Page 64 of74

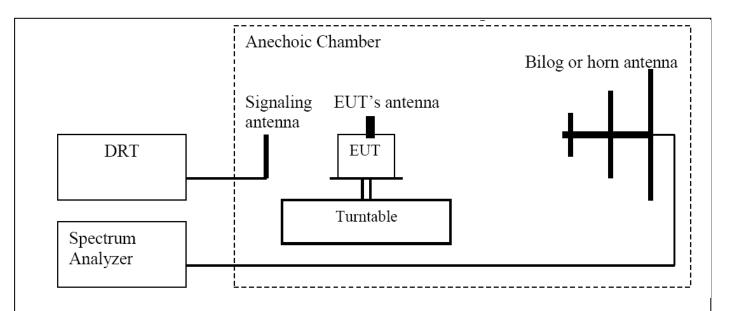

5.6.5.Test Data

Test Band = GSM850 Test Mode = GSM /TM1 Test Channel = LCH

Freq.	SG. Level	Cable Loss	Antenn a Gain	Preamp	Substitutio n	Limit
[MHz]	[dBm]	[dB]	[dBd]	dB	Level (ERP)	[dBm]
					[dBm]	

The emissions don't show in above result tables are more than 20dB below the limits

Test Band = GSM850 Test Mode = GSM /TM1 Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenn a Gain	Preamp	Substitutio n	Limit
[MHz]	[dBm]	[dB]	[dBd]	dB	Level (ERP)	[dBm]
					[dBm]	

The emissions don't show in above result tables are more than 20dB below the limits

Report No.: WT138003319 Page 65 of74

Test Band = GSM850 Test Mode = GSM /TM1 Test Channel = HCH

Freq.	SG. Level	Cable Loss	Antenn a Gain	Preamp	Substitutio n	Limit
[MHz]	[dBm]	[dB]	[dBd]	dB	Level (ERP)	[dBm]
					[dBm]	

The emissions don't show in above result tables are more than 20dB below the limits

Test Band = WCDMA850 Test Mode = WCDMA /TM2 Test Channel = LCH

Freq.	SG. Level	Cable Loss	Antenn a Gain	Preamp	Substitutio n	Limit
[MHz]	[dBm]	[dB]	[dBd]	dB	Level (ERP)	[dBm]
					[dBm]	
			-		-	

The emissions don't show in above result tables are more than 20dB below the limits

Test Band = WCDMA850 Test Mode = WCDMA /TM2 Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenn a Gain	Preamp	Substitutio n	Limit
[MHz]	[dBm]	[dB]	[dBd]	dB	Level (ERP)	[dBm]
					[dBm]	

The emissions don't show in above result tables are more than 20dB below the limits

Test Band = WCDMA850 Test Mode = WCDMA /TM2

Test Channel = HCH

Frog	SG.	Cable	Antenn	Preamp	Substitutio	Limit
Freq.	Level	Loss	a Gain	Freamp	n	LIIIII

Report No.: WT138003319 Page 66 of74

[MHz]	[dBm]	[dB]	[dBd]	dB	Level (ERP)	[dBm]
					[dBm]	

The emissions don't show in above result tables are more than 20dB below the limits

Test Band = GSM1900 Test Mode = GSM /TM1 Test Channel = LCH

Freq.	SG. Level	Cable Loss	Antenn a Gain	Preamp	Substitutio n	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP)	[dBm]
					[dBm]	

The emissions don't show in above result tables are more than 20dB below the limits

Test Band = GSM1900 Test Mode = GSM /TM1 Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenn a Gain	Preamp	Substitutio n	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP)	[dBm]
					[dBm]	

The emissions don't show in above result tables are more than 20dB below the limits

Test Band = GSM1900 Test Mode = GSM /TM1 Test Channel = HCH

Freq.	SG. Level	Cable Loss	Antenn a Gain	Preamp	Substitutio n	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP)	[dBm]
					[dBm]	

The emissions don't show in above result tables are more than 20dB below the limits

Report No.: WT138003319 Page 67 of74

Test Band = WCDMA1900 Test Mode = WCDMA /TM2 Test Channel = LCH

Freq.	SG. Level	Cable Loss	Antenn a Gain	Preamp	Substitutio n	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP)	[dBm]
					[dBm]	

The emissions don't show in above result tables are more than 20dB below the limits

Test Band = WCDMA1900 Test Mode = WCDMA /TM2 Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenn a Gain	Preamp	Substitutio n	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP)	[dBm]
					[dBm]	

The emissions don't show in above result tables are more than 20dB below the limits

Test Band = WCDMA1900 Test Mode = WCDMA /TM2 Test Channel = HCH

Freq.	SG. Level	Cable Loss	Antenn a Gain	Preamp	Substitutio n	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP)	[dBm]
					[dBm]	

The emissions don't show in above result tables are more than 20dB below the limits

Report No.: WT138003319 Page 68 of74

5.7. Frequency Stability

5.7.1.Test Standard

CFR 47 (FCC) part 2.1055, 22.355 and 24.235

5.7.2.Test Limit

According to part 22.355, from 821MHz to 896MHz, for mobile device, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances 2.5ppm.

5.7.3.Test Procedure

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU 200 Universal Radio Communication Tester.

- 1. Measure the carrier frequency at room temperature.
- 2. Subject the EUT to overnight soak at -30 C.
- 3. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 4183 for FDD5 & 661 for PCS1900 & 9400 for FDD2), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
- 4. Repeat the above measurements at 10 C increments from -30 C to +50 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
- 5. Re-measure carrier frequency at room temperature with nominal voltage. Re-measure carrier frequency at low and high voltage. Pause at nominal voltage for 1 1/2 hours un-powered, to allow any self-heating to stabilize, before continuing.
- 6. Subject the EUT to overnight soak at +50 C.
- 7. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 4183 for FDD5 & 661 for PCS1900 & 9400 for FDD2), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
- 8. Repeat the above measurements at 10 C increments from +50 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
- 9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

5.7.4.Test Setup

Connect the EUT to the Wireless Communication test set CMU200 via the connector. Then measure the frequency error by the Wireless Communication test set CMU200. The EUT's output is matched with a 50 Ω load.

Report No.: WT138003319 Page 69 of74

5.7.5.Test Data

Measurement Results vs. Variation of Temperature—GSM850

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result	
-30 ℃	836.6	-9	Pass	
-20 ℃	836.6	-15	Pass	
-10 ℃	836.6	-12	Pass	
D 0	836.6	-20	Pass	
+10 ℃	836.6	-24	Pass	
+20 ℃	836.6	9	Pass	
+30 ℃	836.6	-11	Pass	
+40 ℃	836.6	3	Pass	
+50 ℃	836.6	3	Pass	

Measurement Results vs. Variation of Voltage-GSM850

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
3.4 V	836.6	24	Pass
3.7 V	836.6	14	Pass
4.2V	836.6	-4	Pass

Report No.: WT138003319 Page 70 of74

Measurement Results vs. Variation of Temperature — GSM1900

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 ℃	1880.0	-1	Pass
-20 ℃	1880.0	24	Pass
-10 ℃	1880.0	6	Pass
D 0	1880.0	-18	Pass
+10 ℃	1880.0	-20	Pass
+20 ℃	1880.0	20	Pass
+30 ℃	1880.0	23	Pass
+40 ℃	1880.0	-8	Pass
+50 ℃	1880.0	12	Pass

Measurement Results vs. Variation of Voltage—GSM1900

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
3.4 V	1880.0	4	Pass
3.7 V	1880.0	10	Pass
4.2V	1880.0	21	Pass

Report No.: WT138003319 Page 71 of74

$Measurement \ Results \ vs. \ Variation \ of \ Temperature-WCDMA850$

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 ℃	836.6	17	Pass
-20 ℃	836.6	9	Pass
-10 ℃	836.6	24	Pass
D 0	836.6	4	Pass
+10 ℃	836.6	15	Pass
+20 ℃	836.6	18	Pass
+30 ℃	836.6	-16	Pass
+40 ℃	836.6	0	Pass
+50 ℃	836.6	10	Pass

Measurement Results vs. Variation of Voltage—WCDMA850

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
3.4 V	836.6	24	Pass
3.7 V	836.6	-11	Pass
4.2V	836.6	-20	Pass

Report No.: WT138003319 Page 72 of74

${\it Measurement Results vs. Variation of Temperature-WCDMA1900}$

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 ℃	1880.0	6	Pass
-20 ℃	1880.0	3	Pass
-10 ℃	1880.0	-13	Pass
D 0	1880.0	18	Pass
+10 ℃	1880.0	16	Pass
+20 ℃	1880.0	-17	Pass
+30 ℃	1880.0	-4	Pass
+40 ℃	1880.0	22	Pass
+50 ℃	1880.0	1	Pass

Measurement Results vs. Variation of Voltage—WCDMA1900

medeatement research for failurer of total				
Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result	
3.4 V	1880.0	23	Pass	
3.7 V	1880.0	-20	Pass	
4.2V	1880.0	4	Pass	

Report No.: WT138003319 Page 73 of74