



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401

## SAR TEST REPORT

**Applicant Name:**

**SAMSUNG Electronics Co., Ltd.**

129, Samsung-ro, Yeongtong-gu, Suwon-Si, Gyeonggi-do,  
16677 Rep. of Korea

**Date of Issue:** 02. 21 2020

**Test Report No.:** HCT-SR-2002-FC001-R1

**Test Site:** HCT CO., LTD.

**FCC ID:**

**ZCASMA015A**

**Equipment Type:**

**Mobile Phone**

**Application Type**

**Certification**

**FCC Rule Part(s):**

**CFR §2.1093**

**Model Name:**

**SM-A015A, SM-A015AZ**

**Date of Test:**

**02/07/2020 ~ 02/13/2020, 02/20/2020**

This device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in FCC KDB procedures and had been tested in accordance with the measurement procedures specified in FCC KDB procedures.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested By

Jee Lii, Lee  
Test Engineer  
SAR Team  
Certification Division

Reviewed By

Yun Jeang, Heo  
Technical Manager  
SAR Team  
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

**REVISION HISTORY**

The revision history for this test report is shown in table.

| Revision No. | Date of Issue | Description                                  |
|--------------|---------------|----------------------------------------------|
| 0            | 02. 18, 2020  | Initial Release                              |
| 1            | 02. 21. 2020  | Added GSM850, 1900 GPRS Head, Body-Worn test |

**CONTENTS**

|                                                       |     |
|-------------------------------------------------------|-----|
| 1. Test Regulations .....                             | 4   |
| 2. Test Location .....                                | 5   |
| 3. Information of the EUT .....                       | 5   |
| 4. Device Under Test Description .....                | 7   |
| 5. Introduction .....                                 | 17  |
| 6. Description of test equipment.....                 | 18  |
| 7. SAR Measurement Procedure .....                    | 19  |
| 8. Description of Test Position .....                 | 21  |
| 9. RF Exposure Limits.....                            | 24  |
| 10. FCC SAR General Measurement Procedures.....       | 27  |
| 11. Output Power Specifications .....                 | 33  |
| 12. System Verification .....                         | 61  |
| 13. SAR Test Data Summary .....                       | 64  |
| 14. Simultaneous SAR Analysis .....                   | 83  |
| 15. SAR Measurement Variability and Uncertainty ..... | 93  |
| 16. Measurement Uncertainty .....                     | 95  |
| 17. SAR Test Equipment.....                           | 96  |
| 18. Conclusion .....                                  | 98  |
| 19. References .....                                  | 99  |
| Attachment 1. – SAR Test Plots .....                  | 101 |
| Attachment 2. – Dipole Verification Plots.....        | 102 |
| Attachment 3. – SAR Tissue Characterization .....     | 166 |
| Attachment 4. – SAR System Validation .....           | 167 |
| Attachment 5. – Probe Calibration Data                |     |
| Attachment 6. – Dipole Calibration Data               |     |

## 1. Test Regulations

The tests documented in this report were performed in accordance with FCC CFR § 2.1093, IEEE 1528-2013, ANSI C63.26-2015 the following FCC Published RF exposure KDB procedures:

- FCC KDB Publication 941225 D01 3G SAR Procedures v03r01
- FCC KDB Publication 941225 D06 Hot Spot SAR v02r01
- FCC KDB Publication 941225 D05 SAR for LTE Devices v02r05
- FCC KDB Publication 941225 D05A LTE Rel.10 KDB Inquiry sheet v01r02
- FCC KDB Publication 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB Publication 447498 D01 General SAR Guidance v06
- FCC KDB Publication 648474 D04 Handset SAR v01r03
- FCC KDB Publication 616217 D04 v01r02 (Proximity Sensor)
- FCC KDB Publication 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- FCC KDB Publication 865664 D02 SAR Reporting v01r02

In Addition to the above, the following information was used.

- October 2013 TCB Workshop Notes (GPRS testing criteria)
- April 2015 TCB Workshop Notes (Simultaneous transmission summation clarified)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)

## 2. Test Location

### 2.1 Test Laboratory

|              |                                                                                 |
|--------------|---------------------------------------------------------------------------------|
| Company Name | HCT Co., Ltd.                                                                   |
| Address      | 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA |
| Telephone    | 031-645-6300                                                                    |
| Fax.         | 031-645-6401                                                                    |

### 2.2 Test Facilities

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

|       |                                                         |
|-------|---------------------------------------------------------|
| Korea | National Radio Research Agency (Designation No. KR0032) |
|       | KOLAS (Testing No. KT197)                               |

## 3. Information of the EUT

### 3.1 General Information of the EUT

|                  |                               |
|------------------|-------------------------------|
| Model Name       | SM-A015A, SM-A015AZ           |
| Equipment Type   | Mobile Phone                  |
| FCC ID           | ZCasma015A                    |
| Application Type | Certification                 |
| Applicant        | SAMSUNG Electronics Co., Ltd. |

### 3.2 Attestation of test result of device under test

| The Highest Reported SAR                  |                                     |                 |                     |              |              |
|-------------------------------------------|-------------------------------------|-----------------|---------------------|--------------|--------------|
| Band                                      | Tx. Frequency                       | Equipment Class | Reported SAR (W/kg) |              |              |
|                                           |                                     |                 | 1g Head             | 1g Body-Worn | 1g Hotspot   |
| GSM/GPRS/EDGE 850                         | 824.2 MHz ~ 848.8 MHz               | PCE             | 0.46                | 0.43         | 0.51         |
| GSM/GPRS/EDGE 1900                        | 1 850.2 MHz ~ 1 909.8 MHz           | PCE             | 0.36                | 0.20         | 0.44         |
| WCDMA 850                                 | 826.4 MHz ~ 846.6 MHz               | PCE             | 0.61                | 0.48         | 0.52         |
| WCDMA 1700                                | 1 712.4 MHz ~ 1 752.6 MHz           | PCE             | 0.29                | 0.61         | 1.39         |
| WCDMA 1900                                | 1 852.4 MHz ~ 1 907.6 MHz           | PCE             | 0.58                | 0.54         | 1.39         |
| LTE Band 2 (PCS)                          | 1 850.7 MHz ~ 1 909.3 MHz           | PCE             | 0.56                | 0.36         | 1.06         |
| LTE Band 4 (AWS)                          | 1 710.7 MHz ~ 1 754.3 MHz           | PCE             | 0.30                | 0.51         | 1.22         |
| LTE Band 5 (Cell)                         | 824.7 MHz ~ 848.3 MHz               | PCE             | 0.30                | 0.34         | 0.39         |
| LTE Band 12                               | 699.7 MHz ~ 715.3 MHz               | PCE             | 0.26                | 0.36         | 0.46         |
| LTE Band 14                               | 790.5 MHz ~ 795.5 MHz               | PCE             | 0.29                | 0.39         | 0.46         |
| 802.11b                                   | 2 412 MHz ~ 2 462 MHz               | DTS             | 0.59                | <0.10        | 0.25         |
| U-NII-1                                   | 5 180 MHz ~ 5 240 MHz               | NII             | N/A                 | N/A          | N/A          |
| U-NII-2A                                  | 5 260 MHz ~ 5 320 MHz               | NII             | 0.40                | 0.62         | N/A          |
| U-NII-2C                                  | 5 500 MHz ~ 5 720 MHz               | NII             | 0.34                | 0.43         | N/A          |
| U-NII-3                                   | 5 745 MHz ~ 5 825 MHz               | NII             | 0.29                | 0.49         | 0.69         |
| Bluetooth                                 | 2 402 MHz ~ 2 480 MHz               | DSS             | <0.10               | <0.10        | <0.10        |
| Simultaneous SAR per KDB 690783 D01v01r03 |                                     |                 | <b>1.205</b>        | <b>1.230</b> | <b>1.587</b> |
| Date(s) of Tests:                         | 02/07/2020 ~ 02/13/2020, 02/20/2020 |                 |                     |              |              |

## 4. Device Under Test Description

### 4.1 DUT specification

| Device Wireless specification overview |                                                                                                                                                                                        |                           |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| Band & Mode                            | Operating Mode                                                                                                                                                                         | Tx Frequency              |
| GSM850                                 | Voice / Data                                                                                                                                                                           | 824.2 MHz ~ 848.8 MHz     |
| GSM1900                                | Voice / Data                                                                                                                                                                           | 1 850.2 MHz ~ 1 909.8 MHz |
| WCDMA 850                              | Voice / Data                                                                                                                                                                           | 826.4 MHz ~ 846.6 MHz     |
| WCDMA 1700                             | Voice / Data                                                                                                                                                                           | 1 712.4 MHz ~ 1 752.6 MHz |
| WCDMA 1900                             | Voice / Data                                                                                                                                                                           | 1 852.4 MHz ~ 1 907.6 MHz |
| LTE Band 2 (PCS)                       | Voice / Data                                                                                                                                                                           | 1 850.7 MHz ~ 1 909.3 MHz |
| LTE Band 4 (AWS)                       | Voice / Data                                                                                                                                                                           | 1 710.7 MHz ~ 1 754.3 MHz |
| LTE Band 5 (Cell)                      | Voice / Data                                                                                                                                                                           | 824.7 MHz ~ 848.3 MHz     |
| LTE Band 7                             | Voice / Data                                                                                                                                                                           | 2 502.5 MHz ~ 2 567.5 MHz |
| LTE Band 12                            | Voice / Data                                                                                                                                                                           | 699.7 MHz ~ 715.3 MHz     |
| LTE Band 14                            | Voice / Data                                                                                                                                                                           | 790.5 MHz ~ 795.5 MHz     |
| U-NII-1                                | Voice / Data                                                                                                                                                                           | 5 180 MHz ~ 5 240 MHz     |
| U-NII-2A                               | Voice / Data                                                                                                                                                                           | 5 260 MHz ~ 5 320 MHz     |
| U-NII-2C                               | Voice / Data                                                                                                                                                                           | 5 500 MHz ~ 5 720 MHz     |
| U-NII-3                                | Voice / Data                                                                                                                                                                           | 5 745 MHz ~ 5 825 MHz     |
| 2.4 GHz WLAN                           | Data                                                                                                                                                                                   | 2 412 MHz ~ 2 462 MHz     |
| Bluetooth / LE 5.0                     | Data                                                                                                                                                                                   | 2 402 MHz ~ 2 480 MHz     |
| Device Description                     |                                                                                                                                                                                        |                           |
| Device Dimension                       | Overall (Length x Width): 147.0 mm x 66 mm<br>Overall Diagonal: 156.4 mm                                                                                                               |                           |
| Battery Information                    | Standard (Li-ion Polymer Battery)                                                                                                                                                      |                           |
|                                        | Battery Model Name: QL1695 (Ningde Amperex Technology Limited)                                                                                                                         |                           |
| HW version                             | REV3.0                                                                                                                                                                                 |                           |
| SW(AP) version                         | A015A.001(A015AUCU0ATAC), A015AZ.001(A015AZUCE0ATA1)                                                                                                                                   |                           |
| Device Serial Numbers                  | Mode                                                                                                                                                                                   | Serial Number             |
|                                        | GSM850 Head, GSM1900 Head, W2 Head, W4 Head, W5 Head, LTE2 Head, LTE4 Head,                                                                                                            | R9JMC051W6J               |
|                                        | GSM850 Body, GSM1900 Body, W5 Body                                                                                                                                                     | R9JMC052EJJ               |
|                                        | 5 GHz WLAN, W2, LTE4 Body                                                                                                                                                              | R9JMC0526JJ               |
|                                        | W2 Head, W4 Body, LTE2 Body, LTE4 Body, LTE5 Head, LTE5 Body, LTE12 Head, LTE12 Body, LTE14 Head, LTE14 Body                                                                           | R9JMC052DXJ               |
|                                        | 2.4 GHz WLAN Bluetooth                                                                                                                                                                 | R9JMC052CRJ               |
|                                        | The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics are within operational tolerances expected for production units. |                           |

## 4.2 Power Reduction for SAR

This device utilizes power reduction mechanisms for some wireless modes and bands for SAR compliance under some conditions when the device is being used in close proximity to the user's hand..

This device uses an independent fixed level power reduction mechanism for WLAN modes during held-to-ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR Positions described in IEEE1528-2013. Detailed descriptions of the power reduction mechanism are include in the operational description.

The reduced powers for the power reduction mechanisms were conformed via conducted power measurements at the RF Port .



### 4.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB publication 447498 D01v06.

#### 4.3.1 Maximum PCE Output Power

| Mode / Band             |         | Voice                   | Burst Average GMSK (dBm) |            | Burst Average 8-PSK (dBm) |           |
|-------------------------|---------|-------------------------|--------------------------|------------|---------------------------|-----------|
|                         |         | 1 Tx Slot               | 1 Tx Slot                | 2 Tx Slot  | 1 Tx Slot                 | 2 Tx Slot |
| GSM/GPRS/EDGE 850       | Maximum | 33.7                    | 33.7                     | 30.7       | 27.7                      | 24.7      |
|                         | Nominal | 32.7                    | 32.7                     | 29.7       | 26.7                      | 23.7      |
| GSM/GPRS/EDGE1900       | Maximum | 31.0                    | 31.0                     | 28.7       | 27.2                      | 25.2      |
|                         | Nominal | 30.0                    | 30.0                     | 27.7       | 26.2                      | 24.2      |
| Mode / Band             |         | Modulated Average (dBm) |                          |            |                           |           |
|                         |         | 3GPP WCDMA              |                          | 3GPP HSDPA | 3GPP HSUPA                |           |
| WCDMA Band 5 (850 MHz)  | Maximum | 24.7                    |                          | 23.7       | 23.7                      |           |
|                         | Nominal | 23.7                    |                          | 22.7       | 22.7                      |           |
| WCDMA Band 4 (1700 MHz) | Maximum | 23.5                    |                          | 22.6       | 22.5                      |           |
|                         | Nominal | 22.5                    |                          | 21.6       | 21.5                      |           |
| WCDMA Band 2 (1900 MHz) | Maximum | 24.7                    |                          | 23.7       | 23.6                      |           |
|                         | Nominal | 23.7                    |                          | 22.7       | 22.6                      |           |
| Mode / Band             |         | Modulated Average (dBm) |                          |            |                           |           |
| LTE Band 2 (PCS)        | Maximum | 24.2                    |                          |            |                           |           |
|                         | Nominal | 23.2                    |                          |            |                           |           |
| LTE Band 4 (AWS)        | Maximum | 23.7                    |                          |            |                           |           |
|                         | Nominal | 22.7                    |                          |            |                           |           |
| LTE Band 5              | Maximum | 24.2                    |                          |            |                           |           |
|                         | Nominal | 23.2                    |                          |            |                           |           |
| LTE Band 12             | Maximum | 24.2                    |                          |            |                           |           |
|                         | Nominal | 23.2                    |                          |            |                           |           |
| LTE Band 14             | Maximum | 24.0                    |                          |            |                           |           |
|                         | Nominal | 23.0                    |                          |            |                           |           |

#### 4.3.2 Reduced PCE Power (Hotspot Mode / Grip-Sensor on)

| Mode / Band       |         | Voice     | Burst Average GMSK (dBm) |           | Burst Average 8-PSK (dBm) |           |
|-------------------|---------|-----------|--------------------------|-----------|---------------------------|-----------|
|                   |         | 1 Tx Slot | 1 Tx Slot                | 2 Tx Slot | 1 Tx Slot                 | 2 Tx Slot |
| GSM/GPRS/EDGE1900 | Maximum | 28.0      | 28.0                     | 25.0      | 25.0                      | 22.0      |
|                   | Nominal | 27.0      | 27.0                     | 24.0      | 24.0                      | 21.0      |

#### WCDMA band /HSDPA/HSUPA

| Mode / Band             |         | Modulated Average (dBm) |            |            |
|-------------------------|---------|-------------------------|------------|------------|
|                         |         | 3GPP WCDMA              | 3GPP HSDPA | 3GPP HSUPA |
| WCDMA Band 4 (1700 MHz) | Maximum | 19.8                    | 19.0       | 19.0       |
|                         | Nominal | 18.8                    | 18.0       | 18.0       |
| WCDMA Band 2 (1900 MHz) | Maximum | 22.2                    | 22.0       | 21.0       |
|                         | Nominal | 21.2                    | 21.0       | 20.0       |

#### LTE

| Mode / Band      |         | Modulated Average (dBm) |
|------------------|---------|-------------------------|
| LTE Band 2 (PCS) | Maximum | 21.5                    |
|                  | Nominal | 20.5                    |
| LTE Band 4 (AWS) | Maximum | 18.7                    |
|                  | Nominal | 17.7                    |

#### 4.3.4 Maximum 2.4 GHz, 5 GHz WIFI output power

| Mode / Band           |              | Modulated Average (dBm) |      |      |      |      |
|-----------------------|--------------|-------------------------|------|------|------|------|
|                       |              | SISO                    |      |      |      |      |
|                       |              | 11a                     | 11b  | 11g  | 11n  | 11ac |
| 2.4 GHz WIFI (20 MHz) | Ch.1 ~ Ch.11 | N/A                     | 19.5 | 19.5 | 19.5 | N/A  |
| 2.4 GHz WIFI (40 MHz) | Ch.3 ~ Ch.9  | N/A                     | N/A  | N/A  | 19.5 | N/A  |
| 5 GHz WIFI (20 MHz)   | 5200 MHz     | 19.0                    | N/A  | N/A  | 19.0 | 19.0 |
|                       | 5300 MHz     | 19.0                    | N/A  | N/A  | 19.0 | 19.0 |
|                       | 5500 MHz     | 19.0                    | N/A  | N/A  | 19.0 | 19.0 |
|                       | 5800 MHz     | 17.0                    | N/A  | N/A  | 17.0 | 17.0 |
| 5 GHz WIFI (40 MHz)   | 5200 MHz     | N/A                     | N/A  | N/A  | 19.0 | 18.0 |
|                       | 5300 MHz     | N/A                     | N/A  | N/A  | 19.0 | 18.0 |
|                       | 5500 MHz     | N/A                     | N/A  | N/A  | 19.0 | 18.0 |
|                       | 5800 MHz     | N/A                     | N/A  | N/A  | 17.0 | 17.0 |
| 5 GHz WIFI (80 MHz)   | 5200 MHz     | N/A                     | N/A  | N/A  | N/A  | 17.0 |
|                       | 5300 MHz     | N/A                     | N/A  | N/A  | N/A  | 17.0 |
|                       | 5500 MHz     | N/A                     | N/A  | N/A  | N/A  | 17.0 |
|                       | 5800 MHz     | N/A                     | N/A  | N/A  | N/A  | 17.0 |

#### 4.3.5 Reduced 2.4 GHz, 5 GHz WIFI output power

| Mode / Band           |              | Modulated Average (dBm) |      |      |      |      |
|-----------------------|--------------|-------------------------|------|------|------|------|
|                       |              | SISO                    |      |      |      |      |
|                       |              | 11a                     | 11b  | 11g  | 11n  | 11ac |
| 2.4 GHz WIFI (20 MHz) | Ch.1 ~ Ch.11 | N/A                     | 19.0 | 19.0 | 19.0 | N/A  |
| 2.4 GHz WIFI (40 MHz) | Ch.3 ~ Ch.9  | N/A                     | N/A  | N/A  | 18.0 | N/A  |
| 5 GHz WIFI (20 MHz)   | 5200 MHz     | 16.0                    | N/A  | N/A  | 16.0 | 16.0 |
|                       | 5300 MHz     | 16.0                    | N/A  | N/A  | 16.0 | 16.0 |
|                       | 5500 MHz     | 16.0                    | N/A  | N/A  | 16.0 | 16.0 |
|                       | 5800 MHz     | 16.0                    | N/A  | N/A  | 16.0 | 16.0 |
| 5 GHz WIFI (40 MHz)   | 5200 MHz     | N/A                     | N/A  | N/A  | 16.0 | 16.0 |
|                       | 5300 MHz     | N/A                     | N/A  | N/A  | 16.0 | 16.0 |
|                       | 5500 MHz     | N/A                     | N/A  | N/A  | 16.0 | 16.0 |
|                       | 5800 MHz     | N/A                     | N/A  | N/A  | 16.0 | 16.0 |
| 5 GHz WIFI (80 MHz)   | 5200 MHz     | N/A                     | N/A  | N/A  | N/A  | 16.0 |
|                       | 5300 MHz     | N/A                     | N/A  | N/A  | N/A  | 16.0 |
|                       | 5500 MHz     | N/A                     | N/A  | N/A  | N/A  | 16.0 |
|                       | 5800 MHz     | N/A                     | N/A  | N/A  | N/A  | 16.0 |

#### 4.3.6 Maximum Bluetooth Power

| Mode / Band |                  |       |         | Modulated Average (dBm) |
|-------------|------------------|-------|---------|-------------------------|
| Bluetooth   | V2.0 with BR 0   | CH 00 | Maximum | 9.5                     |
|             |                  | CH 39 | Maximum | 9.5                     |
|             |                  | CH 78 | Maximum | 9.5                     |
|             | v4.0/4.2 with LE |       | Maximum | 0                       |

#### 4.4 LTE Information

| Item.                                                            |                   | Description                                                                                                                                                                                                                                                          |                 |                 |
|------------------------------------------------------------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|
| Frequency Range                                                  | LTE Band 2 (PCS)  | 1 850.7 MHz ~ 1 909.3 MHz                                                                                                                                                                                                                                            |                 |                 |
|                                                                  | LTE Band 4 (AWS)  | 1 710.7 MHz ~ 1 754.3 MHz                                                                                                                                                                                                                                            |                 |                 |
|                                                                  | LTE Band 5 (Cell) | 824.7 MHz ~ 848.3 MHz                                                                                                                                                                                                                                                |                 |                 |
|                                                                  | LTE Band 12       | 699.7 MHz ~ 715.3 MHz                                                                                                                                                                                                                                                |                 |                 |
|                                                                  | LTE Band 14       | 790.5 MHz ~ 795.5 MHz                                                                                                                                                                                                                                                |                 |                 |
| Channel Bandwidths                                               | LTE Band 2 (PCS)  | 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz                                                                                                                                                                                                                        |                 |                 |
|                                                                  | LTE Band 4 (AWS)  | 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz                                                                                                                                                                                                                        |                 |                 |
|                                                                  | LTE Band 5 (Cell) | 1.4 MHz, 3 MHz, 5 MHz, 10 MHz                                                                                                                                                                                                                                        |                 |                 |
|                                                                  | LTE Band 12       | 1.4 MHz, 3 MHz, 5 MHz, 10 MHz                                                                                                                                                                                                                                        |                 |                 |
|                                                                  | LTE Band 14       | 5 MHz, 10 MHz                                                                                                                                                                                                                                                        |                 |                 |
| Ch. No.& Freq.(MHz)                                              |                   | Low                                                                                                                                                                                                                                                                  | Mid             | High            |
| LTE Band 2                                                       | 1.4 MHz           | 1 850.7 (18607)                                                                                                                                                                                                                                                      | 1 880.0 (18900) | 1 909.3 (19193) |
|                                                                  | 3 MHz             | 1 851.5 (18615)                                                                                                                                                                                                                                                      | 1 880.0 (18900) | 1 908.5 (19185) |
|                                                                  | 5 MHz             | 1 852.5 (18625)                                                                                                                                                                                                                                                      | 1 880.0 (18900) | 1 907.5 (19175) |
|                                                                  | 10 MHz            | 1 855.0 (18650)                                                                                                                                                                                                                                                      | 1 880.0 (18900) | 1 905.0 (19150) |
|                                                                  | 15 MHz            | 1 857.5 (18675)                                                                                                                                                                                                                                                      | 1 880.0 (18900) | 1 902.5 (19125) |
|                                                                  | 20 MHz            | 1 860.0 (18700)                                                                                                                                                                                                                                                      | 1 880.0 (18900) | 1 900.0 (19100) |
| LTE Band 4                                                       | 1.4 MHz           | 1 710.7 (19957)                                                                                                                                                                                                                                                      | 1 732.5 (20175) | 1 754.3 (20393) |
|                                                                  | 3 MHz             | 1 711.5 (19965)                                                                                                                                                                                                                                                      | 1 732.5 (20175) | 1 753.5 (20385) |
|                                                                  | 5 MHz             | 1 712.5 (19975)                                                                                                                                                                                                                                                      | 1 732.5 (20175) | 1 752.5 (20375) |
|                                                                  | 10 MHz            | 1 715.0 (20000)                                                                                                                                                                                                                                                      | 1 732.5 (20175) | 1 750.0 (20350) |
|                                                                  | 15 MHz            | 1 717.5 (20025)                                                                                                                                                                                                                                                      | 1 732.5 (20175) | 1 747.5 (20325) |
|                                                                  | 20 MHz            | 1 720.0 (20050)                                                                                                                                                                                                                                                      | 1 732.5 (20175) | 1 745.0 (20300) |
| LTE Band 5                                                       | 1.4 MHz           | 824.7 (20407)                                                                                                                                                                                                                                                        | 836.5 (20525)   | 848.3 (20643)   |
|                                                                  | 3 MHz             | 825.5 (20415)                                                                                                                                                                                                                                                        | 836.5 (20525)   | 847.5 (20635)   |
|                                                                  | 5 MHz             | 826.5 (20425)                                                                                                                                                                                                                                                        | 836.5 (20525)   | 846.5 (20625)   |
|                                                                  | 10 MHz            | 829.0 (20450)                                                                                                                                                                                                                                                        | 836.5 (20525)   | 844.0 (20600)   |
| LTE Band 12                                                      | 1.4 MHz           | 699.7 (23017)                                                                                                                                                                                                                                                        | 707.5 (23095)   | 715.3 (23173)   |
|                                                                  | 3 MHz             | 700.5 (23025)                                                                                                                                                                                                                                                        | 707.5 (23095)   | 714.5 (23165)   |
|                                                                  | 5 MHz             | 701.5 (23035)                                                                                                                                                                                                                                                        | 707.5 (23095)   | 713.5 (23155)   |
|                                                                  | 10 MHz            | 704.0 (23060)                                                                                                                                                                                                                                                        | 707.5 (23095)   | 711.0 (23130)   |
| LTE Band 14                                                      | 5 MHz             | 790.5 (23305)                                                                                                                                                                                                                                                        | 793 (23330)     | 795.5 (23355)   |
|                                                                  | 10 MHz            |                                                                                                                                                                                                                                                                      | 793 (23330)     |                 |
| UE Category                                                      |                   | LTE Rel. 11, DL: Category 6, UL: Category 5                                                                                                                                                                                                                          |                 |                 |
| Modulations Supported in UL                                      |                   | QPSK, 16QAM, 64QAM                                                                                                                                                                                                                                                   |                 |                 |
| LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3 |                   | Yes                                                                                                                                                                                                                                                                  |                 |                 |
| A-MPR disabled for SAR Testing.                                  |                   | Yes                                                                                                                                                                                                                                                                  |                 |                 |
| LTE Carrier Aggregation                                          |                   | This device dose not supports Up-Link Carrier aggregation.in US.                                                                                                                                                                                                     |                 |                 |
| LTE Release 10 information                                       |                   | This device does not support full CA features on 3GPP Release 12. The following LTE Release 12 features are not supported. Uplink Carrier aggregations, Relay, HetNet, Enhanced MIMO, eICI, WiFi offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA. |                 |                 |

#### 4.5 DUT Antenna Locations

The overall dimensions of this device are > 9 X 5 cm. The overall diagonal dimension of the device is < 160 mm and the diagonal display is < 150 mm.

This model allows users to exchange data or media files with other Bluetooth enabled devices using Bluetooth, which means they can connect to other Bluetooth enabled devices via Bluetooth tethering. Therefore, SAR test was performed for additional simultaneous transmissions. Head and Bluetooth Tethering SAR were evaluated for BT BR tethering applications.

| Mode               | Rear | Front | Left | Right | Bottom | Top |
|--------------------|------|-------|------|-------|--------|-----|
| GSM/GPRS/EDGE 850  | Yes  | Yes   | Yes  | Yes   | Yes    | No  |
| GSM/GPRS/EDGE 1900 | Yes  | Yes   | Yes  | Yes   | Yes    | No  |
| WCDMA 850          | Yes  | Yes   | Yes  | Yes   | Yes    | No  |
| WCDMA 1700         | Yes  | Yes   | Yes  | Yes   | Yes    | No  |
| WCDMA 1900         | Yes  | Yes   | Yes  | Yes   | Yes    | No  |
| LTE Band 2 (PCS)   | Yes  | Yes   | Yes  | Yes   | Yes    | No  |
| LTE Band 4 (AWS)   | Yes  | Yes   | Yes  | Yes   | Yes    | No  |
| LTE Band 5 (Cell)  | Yes  | Yes   | Yes  | Yes   | Yes    | No  |
| LTE Band 12        | Yes  | Yes   | Yes  | Yes   | Yes    | No  |
| LTE Band 14        | Yes  | Yes   | Yes  | Yes   | Yes    | No  |
| 2.4 GHz WLAN       | Yes  | Yes   | Yes  | No    | No     | Yes |
| 5 GHz WLAN         | Yes  | Yes   | Yes  | No    | No     | Yes |
| Bluetooth          | Yes  | Yes   | Yes  | No    | No     | Yes |

Particular EUT edges were not required to be evaluated for Bluetooth Tethering and Hotspot SAR if the edges were > 25 mm from the transmitting antenna according to FCC KDB 941225 D06v02r01 on page 2.

The distance between the transmit antennas and the edges of the device are included in the filing.  
- Note: All test configurations are based on front view position.

## 4.6 SAR Summation Scenario

According to FCC KDB 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the EUT are shown below paths and are mode in same rectangle to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB 447498 D01v06.

| Simultaneous Transmission Scenarios |      |           |         |
|-------------------------------------|------|-----------|---------|
| Applicable Combination              | Head | Body-Worn | Hotspot |
| GSM Voice + 2.4 GHz WiFi            | Yes  | Yes       | N/A     |
| GSM Voice + 5 GHz WiFi              | Yes  | Yes       | N/A     |
| GSM Voice + Bluetooth               | Yes# | Yes       | N/A     |
| GPRS + 2.4 GHz WiFi                 | N/A  | Yes       | Yes     |
| GPRS + 5 GHz WiFi                   | N/A  | Yes       | Yes     |
| GPRS + Bluetooth                    | N/A  | Yes       | Yes#    |
| WCDMA + 2.4 GHz WiFi                | Yes  | Yes       | Yes     |
| WCDMA + 5 GHz WiFi                  | Yes  | Yes       | Yes     |
| WCDMA + Bluetooth                   | Yes# | Yes       | Yes#    |
| LTE + 2.4 GHz WiFi                  | Yes  | Yes       | Yes     |
| LTE + 5 GHz WiFi                    | Yes  | Yes       | Yes     |
| LTE+ Bluetooth                      | Yes# | Yes       | Yes#    |

1. Bluetooth cannot transmit simultaneously with WLAN.
2. The device does not support licensed bands simultaneously transmitting.
3. WCDMA +WLAN scenario also represents the WCDMA Voice/DATA + WLAN hotspot scenario.
4. VoIP is supported in GPRS/EDGE
5. The highest reported SAR for each exposure condition is used for SAR summation purpose.
6. Wi-Fi Hotspot is supported for 2.4 GHz/ UNII-3 of 5 GHz WLAN.
7. This device supports # Bluetooth tethering.
8. 5 GHz Wireless Router is only supported for the UNII-3 by SW, therefore U-NII-1,U-NII2A and U-NII2C were not evaluated for wireless router conditions.

## 4.7 SAR Test Considerations

### 4.7.1 WiFi

Since wireless router operations are not allowed by the chipset firmware using U-NII-1, U-NII-2A & U-NII-2C WiFi, WiFi Hotspot SAR test and combinations are considered only 2.4 GHz and U-NII-3 for SAR with respected to wireless router configurations according to FCC KDB 941225 D06v02r01.

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg for 1g SAR and is less than 3.0 W/kg for 10g SAR, SAR is not required for U-NII-1 band according to FCC KDB 248227D01v02r02.

This device supports IEEE 802.11 ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 1Tx Antenna output
- d) 256 QAM is supported
- e) TDWR channels are supported.
- f) Straddle channels are supported
- g) Band gap channels are supported

Per FCC KDB 648474 D04v01r03, this device is considered a “Phablet” since the diagonal dimension is greater than 160 mm and less than 200 mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR >1.2 W/kg.

### 4.7.2 Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r05.

This Device supports 64QAM on the uplink for LTE Operations. Conducted powers for 64QAM uplink configurations were measured per section 5.1 of FCC KDB 941225 D05v02r05. SAR was not required for 64QAM since the highest maximum output power for 64QAM is  $\leq 0.5$  dB higher than the same configuration in QPSK and the reported SAR for QPSK configuration is  $\leq 1.45$  W/Kg, per section 5.2.4 for FCC KDB 941225 D05v02r05.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of LTE Band falls completely within an LTE Band with a larger transmission frequency range, both LTE bands have the same target power or the band with the larger transmission frequency range has a higher target power and both LTE bands share the same transmission path and signal characteristics, SAR was only tested for the band with the larger transmission frequency range.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

Per FCC KDB 941225 D01v03r01, 12.2 kbps RMC is the primary mode and HSPA (HSUPA/HSDPA with RMC) is the secondary mode.

Per FCC KDB 941225 D01v03r01, The SAR test exclusion is applied to the secondary mode by the following equation.

$$\text{Adjusted SAR} = \text{Highest Reported SAR} \times \frac{\text{Secondary Max tune-up (mW)}}{\text{Primary Max tune-up (mW)}} \leq 1.2 \text{ W/kg.}$$

Based on the highest Reported SAR, the secondary mode is not required.

Per FCC KDB 690783 1 D01 SAR Listings on Grants v01r03 and KDB 447498 D01 General RF Exposure Guidance v06 The SAR numbers listed must be consistent with the highest reported test results required by the published RF exposure KDB procedures. When the measured SAR is not at the maximum tune-up tolerance limit or maximum output power allowed for production units, the measured results are scaled to the maximum conditions to determine compliance; the scaled results are referred to as the reported SAR.

$$\text{The Reported SAR} = \text{The Measured SAR} \times \frac{\text{Maximum tune-up (mW)}}{\text{Measured Conducted Power (mW)}}$$

The Reported SAR for WLAN and Bluetooth

$$\text{The Reported SAR} = \text{The Measured SAR} \times \frac{\text{Maximum tune-up (mW)}}{\text{Measured Conducted Power (mW)}} \times \text{Duty factor}$$

FCC KDB 447498 D01v06 General RF Exposure Guidance introduces a new formula for calculating the SAR a Peak Location Separation Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$\text{SPLSR}_i = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / R_i$$

Where:

$\text{SAR}_1$  is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

$\text{SAR}_2$  is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

$R_i$  is the separation distance between the pair of simultaneous transmitting antennas, When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of  $[(X_1 - X_2)^2 + (Y_1 - Y_2)^2 + (Z_1 - Z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum 1-g of SAR > 1.6 W/kg and with the sum 10-g of SAR > 4W/Kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(\text{SAR}_1 + \text{SAR}_2)^{1.5} / R_i \leq 0.04 \text{ for 1g SAR and } (\text{SAR}_1 + \text{SAR}_2)^{1.5} / R_i \leq 0.1 \text{ for 10g SAR.}$$



## 5. Introduction

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York 10017. The measurement procedure described in IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

### SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative of the incremental electromagnetic energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density ( $\rho$ ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body.

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right)$$

Figure 1. SAR Mathematical Equation  
SAR is expressed in units of Watts per Kilogram (W/kg)

$$SAR = \sigma E^2 / \rho$$

Where:

$\sigma$  = conductivity of the tissue-simulant material (S/m)  
 $\rho$  = mass density of the tissue-simulant material (kg/m<sup>3</sup>)  
 $E$  = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

## 6. Description of test equipment

### 6.1 SAR MEASUREMENT SETUP

These measurements are performed using the DASY4 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Staubli), robot controller, Pentium III computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Figure.2).

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The PC with Windows XP or Windows 7 is working with SAR Measurement system DASY4 & DASY5, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

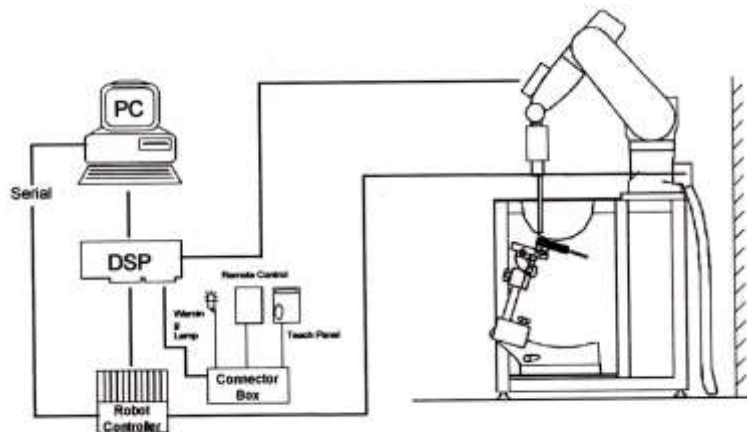


Figure 2. HCT SAR Lab. Test Measurement Set-up

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

## 7. SAR Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013.

1. The SAR distribution at the exposed side of the head or body was measured at a distance no more than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the DUT's head and body area and the horizontal grid resolution was depending on the FCC KDB 865664 D01v01r04 table 4-1 & IEEE 1528-2013.
2. Based on step, the area of the maximum absorption was determined by sophisticated interpolations routines implemented in DASY software. When an Area Scan has measured all reachable point. DASY system computes the field maximal found in the scanned are, within a range of the maximum. SAR at this fixed point was measured and used as a reference value.
3. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB 865664 D01v01r04 table 4-1 and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (reference from the DASY manual.)
  - a. The data at the surface were extrapolated, since the center of the dipoles is no more than 2.7 mm away from the tip of the probe (it is different from the probe type) and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
  - b. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan. If the value changed by more than 5 %, the SAR evaluation and drift measurements were repeated.

Area scan and zoom scan resolution setting follow KDB 865664 D01v01r04 quoted below.

|                                                                                                        | $\leq 3 \text{ GHz}$                                                                                                                                                                                                                                                   | $> 3 \text{ GHz}$                                                                                                                              |
|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | $5 \pm 1 \text{ mm}$                                                                                                                                                                                                                                                   | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$                                                                                     |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location              | $30^\circ \pm 1^\circ$                                                                                                                                                                                                                                                 | $20^\circ \pm 1^\circ$                                                                                                                         |
|                                                                                                        | $\leq 2 \text{ GHz: } \leq 15 \text{ mm}$<br>$2-3 \text{ GHz: } \leq 12 \text{ mm}$                                                                                                                                                                                    | $3-4 \text{ GHz: } \leq 12 \text{ mm}$<br>$4-6 \text{ GHz: } \leq 10 \text{ mm}$                                                               |
| Maximum area scan Spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$                 | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                                                                                                                                |
| Maximum zoom scan Spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$                 | $\leq 2 \text{ GHz: } \leq 8 \text{ mm}$<br>$2-3 \text{ GHz: } \leq 5 \text{ mm}^*$                                                                                                                                                                                    | $3-4 \text{ GHz: } \leq 5 \text{ mm}^*$<br>$4-6 \text{ GHz: } \leq 4 \text{ mm}^*$                                                             |
|                                                                                                        | uniform grid: $\Delta z_{\text{zoom}}(n)$                                                                                                                                                                                                                              | $\leq 5 \text{ mm}$<br>$3-4 \text{ GHz: } \leq 4 \text{ mm}$<br>$4-5 \text{ GHz: } \leq 3 \text{ mm}$<br>$5-6 \text{ GHz: } \leq 2 \text{ mm}$ |
| Maximum zoom scan Spatial resolution normal to phantom surface                                         | $\Delta z_{\text{zoom}}(1)$ : between 1 <sup>st</sup> two Points closest to phantom surface<br>$\leq 4 \text{ mm}$                                                                                                                                                     | $3-4 \text{ GHz: } \leq 3 \text{ mm}$<br>$4-5 \text{ GHz: } \leq 2.5 \text{ mm}$<br>$5-6 \text{ GHz: } \leq 2 \text{ mm}$                      |
|                                                                                                        | graded grid<br>$\Delta z_{\text{zoom}}(n>1)$ : between subsequent Points                                                                                                                                                                                               | $\leq 1.5 \cdot \Delta z_{\text{zoom}}(n-1)$                                                                                                   |
| Minimum zoom scan volume x, y, z                                                                       | $\geq 30 \text{ mm}$                                                                                                                                                                                                                                                   | $3-4 \text{ GHz: } \geq 28 \text{ mm}$<br>$4-5 \text{ GHz: } \geq 25 \text{ mm}$<br>$5-6 \text{ GHz: } \geq 22 \text{ mm}$                     |

Note:  $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

\* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is  $\leq 1.4 \text{ W/kg}$ ,  $\leq 8 \text{ mm}$ ,  $\leq 7 \text{ mm}$  and  $\leq 5 \text{ mm}$  zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.



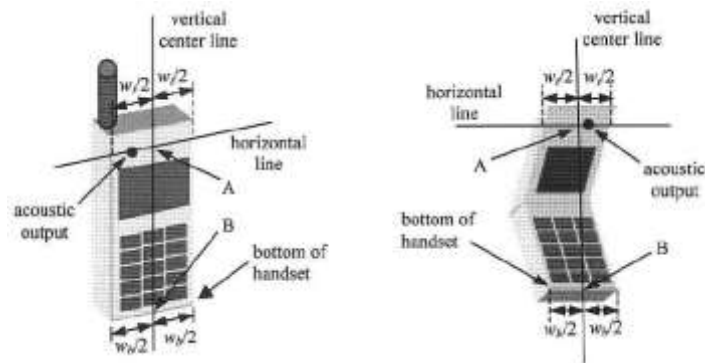


Figure 6-3. Handset vertical and horizontal reference lines

## 8.3 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameter; relative permittivity  $\epsilon=3$  and loss tangent  $\sigma=0.02$ .

## 8.4 Position for cheek

Figure 6.4. shows cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

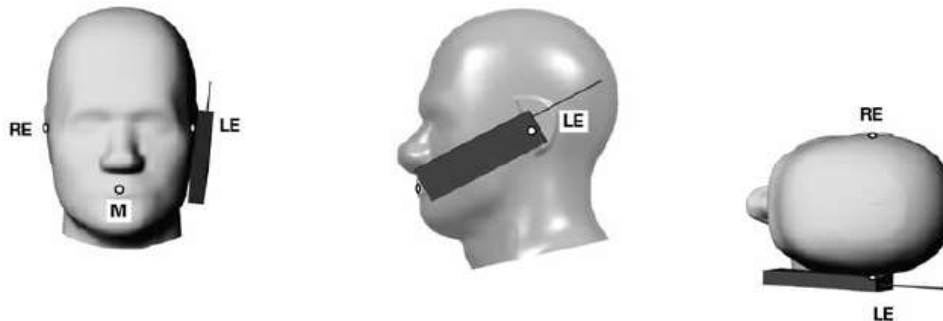


Figure 8.4 Cheek/ Touch position of the wireless device

## 8.5 Definition of the “tilted” position

Figure 6.5. shows tilted position. Place the device in the cheek position. Then while maintaining the orientation of the device, retract the device parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15°



Figure 8.5. Tilt 15° position of the wireless device

## 8.6 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-dips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-6). Per FCC KDB Publication 648474 D04v01r03 Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in Body-worn accessories. The Body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for Body-worn accessory SAR compliance, without a headset connected to it.. When the reported SAR for a body- worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.



Figure 8-6  
Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-dip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

## 8.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets (L x W ≥ 9cm x 5 cm) are based on a composite test separation distance of 10 mm from the front back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the Body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some Body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The Portable Hotspot feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## 8.8 Additional Test Positions due to Proximity Conditions

This device uses a sensor to reduce output powers in extremity (hand-held) use conditions.

When the sensor detects a user is touching the device on or near to the antenna the device reduces the maximum allowed output power. However, the proximity sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, an additional exposure condition is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level.

FCC KDB 616217 D04 v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional exposure conditions. The smallest separation distance determined by the sensor triggering and sensor coverage for each applicable edge, minus 1 mm, was used as the test separation distance for SAR testing. Sensor triggering distance summary data is included in below table.

| Wireless technologies                           | Position | §6.2 Triggering Distance | §6.3 Coverage | §6.4 Tilt Angle | SAR Test distance |
|-------------------------------------------------|----------|--------------------------|---------------|-----------------|-------------------|
| WWAN<br>(GSM1900/<br>WCDMA B2/B4<br>/LTE/B2/B4) | Rear     | 20                       | N/A           | N/A             | 19                |
|                                                 | Front    | 16                       | N/A           | N/A             | 15                |
|                                                 | Bottom   | 20                       | N/A           | N/A             | 19                |



### **8.9 Bluetooth tethering Configurations**

Per May 2017 TCBC Workshop documents When Bluetooth tethering applies ,simultaneous transmission SAR needs consideration

This model allows users to exchange data or media files with other Bluetooth enabled devices using Bluetooth, which means they can connect to other Bluetooth enabled devices via Bluetooth tethering.

Therefore, SAR test was performed for additional simultaneous transmissions.

Head and Bluetooth tethering SAR were evaluated for BT BR tethering applications.

## 9. RF Exposure Limits

| HUMAN EXPOSURE                                         | UNCONTROLLED ENVIRONMENT<br>General Population<br>(W/kg) or (mW/g) | CONTROLLED ENVIRONMENT<br>Occupational<br>(W/kg) or (mW/g) |
|--------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------|
| SPATIAL PEAK SAR *<br>(Partial Body)                   | 1.6                                                                | 8.0                                                        |
| SPATIAL AVERAGE SAR **<br>(Whole Body)                 | 0.08                                                               | 0.4                                                        |
| SPATIAL PEAK SAR ***<br>(Hands / Feet / Ankle / Wrist) | 4.0                                                                | 20.0                                                       |

### NOTES:

\* The Spatial Peak value of the SAR averaged over any 1 g of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

\*\* The Spatial Average value of the SAR averaged over the whole-body.

\*\*\* The Spatial Peak value of the SAR averaged over any 10 g of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

## 10. FCC SAR General Measurement Procedures

Power Measurements for licensed transmitters are performed using a base simulator under digital average power.

### 10.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as Reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

### 10.2 3G SAR Test Reduction Procedure

#### 10.2.1 GSM, GPRS AND EDGE

The following procedures may be considered for each frequency band to determine SAR test reduction for devices operating in GSM/GPRS/EDGE modes to demonstrate RF exposure compliance. GSM voice mode transmits with 1 time-slot. GPRS and EDGE may transmit up to 4 time slots in the 8 time-slot frame according to the multi-slot class implemented in a device.

#### 10.2.2 SAR Test Reduction

In FCC KDB 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is  $\leq 0.25$  dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is  $\leq 1.2$  W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode. SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested

#### 10.2.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB 941225 D01v03r01-3G SAR Measurement Procedures

The handset was placed into a simulated call using a base station simulator in a shielded chamber. Such test signals offer a consistent means for testing SAR and are recommended for evaluation SAR measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The SAR measurement Software calculates a reference point at the start and end of the test to Check for power drifts. If conducted Power deviations of more than 5 % occurred, the tests were repeated.

## 10.3 SAR Measurement Conditions for WCDMA

### 10.3.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in sec. 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

### 10.3.2 Body SAR measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s". the 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using and applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported SAR configuration in 12.2 kbps RMC.

### 10.3.3 SAR Measurements with Rel. 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using and FRC with H-SET 1 in Sub-test and a 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to release 6 HSPA test procedures. 8.4.5 SAR Measurement with Rel.6 HSUPA The 3G SAR test Reduction Procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, Using H-Set 1 and QPSK for FRC and a 12.2kbps RMC configured in Test Loop Mode 1 and Power Control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

### 10.3.4 SAR Measurements with Rel. 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

## 10.4 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r05 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluation SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

### 10.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### 10.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

### 10.4.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

### 10.4.4 Required RB Size and RB offsets for SAR testing

According to FCC KDB 941225 D05v02r05

- a. Per sec 4.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
  - i. The required channel and offset combination with the highest maximum output power is required for SAR.
  - ii. When the reported SAR is  $\leq 0.8$  W/Kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
  - iii. When the reported SAR for a required test channel is  $> 1.45$  W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Sec 4.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Sec 4.2.1.
- c. Per Sec. 4.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is  $< 0.8$  W/kg.
- d. Per Sec. 4.2.4 and 4.3, SAR test for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sec. 4.2.1 through 4.2.3 is less than or equal to 1/2 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is  $< 1.45$  W/Kg.

## 10.5 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

### 10.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR system to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92-96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

### 10.5.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is  $> 1.2$  W/kg for 1g SAR or  $> 3.0$  W/kg for 10g SAR. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is  $> 1.2$  W/kg for 1g SAR or  $> 3.0$  W/kg for 10g SAR.

### 10.5.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 -5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels.

### 10.5.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg for 1g SAR and  $\leq 1.0$  W/kg for 10g SAR, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg for 1g SAR and  $\leq 2.0$  W/kg for 10g SAR or all test positions are measured.

#### 10.5.5 2.4 GHz SAR test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS is that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is  $> 1.2$  W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

#### 10.5.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate and lowest order 802.11 a/g/n/ac mode. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11 ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

#### 10.5.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 GHz and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements.

**10.5.8 Subsequent Test Configuration Procedures**

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position on procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is  $\leq 1.2$  W/kg for 1g SAR and  $\leq 3.0$  W/kg for 10g SAR, no additional SAR tests for the subsequent test configurations are required.



## 11. Output Power Specifications

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB publication 447498 D01v06.

### Licensed bands

| Test Description       | Test Procedure Used                                                                     |
|------------------------|-----------------------------------------------------------------------------------------|
| Conducted Output Power | - KDB 971168 D01 v03r01 - Section 5.2.4<br>- ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2 |

### Test Overview


According to ANSI C63.26-2015 Section 5.2.1 when measuring the maximum RF output power from such devices, control over the EUT must be provided either through special test software (provided by manufacturer specifically for compliance testing, but not accessible by an end user) or through use of a base station emulator, communications test set, call box, or similar instrumentation that is capable of establishing a communications link with the EUT to enable control over variable parameters (e.g., output power, OBW, etc.).

In some cases, these instruments also include basic digital spectrum analyzer and/or power meter capabilities that can be utilized to measure the RF output power if the specified detectors and requirements can be realized and the measurement functions have been calibrated.

### Test Procedure

1. The RF port of the EUT was connected to the Communication Tester via an RF cable.
2. Conducted average power was measured using a calibrated Radio Communication Tester.

### Test setup

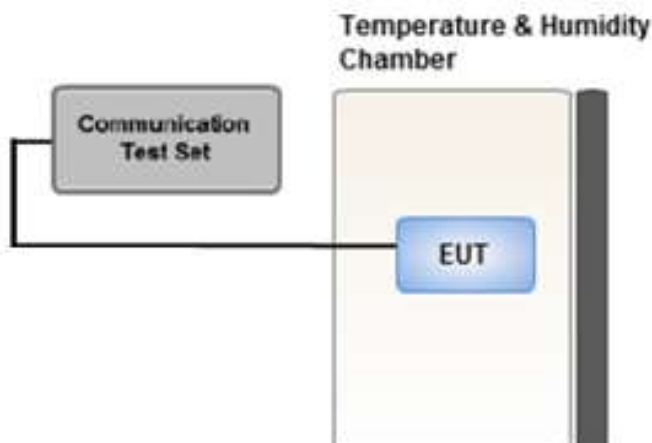

## 11.1 GSM

### 11.1.1 GSM Maximum Conducted Output Power

| Mode / Band |     | Voice | GPRS(GMSK) Data – CS1(dBm) |                   | EDGE Data (dBm)   |                   |
|-------------|-----|-------|----------------------------|-------------------|-------------------|-------------------|
|             |     | GSM   | GPRS<br>1 TX Slot          | GPRS<br>2 TX Slot | EDGE<br>1 TX Slot | EDGE<br>2 TX Slot |
| Maximum     |     | 33.70 | 33.70                      | 30.70             | 27.70             | 24.70             |
| Nominal     |     | 32.70 | 32.70                      | 29.70             | 26.70             | 23.70             |
| GSM 850     | 128 | 32.89 | 32.90                      | 30.02             | 27.27             | 24.31             |
|             | 190 | 33.04 | 33.03                      | 30.15             | 27.16             | 24.16             |
|             | 251 | 32.78 | 32.77                      | 30.28             | 27.09             | 24.15             |
| Maximum     |     | 31.00 | 31.00                      | 28.70             | 27.20             | 25.20             |
| Nominal     |     | 30.00 | 30.00                      | 27.70             | 26.20             | 24.20             |
| GSM 1900    | 512 | 30.32 | 30.31                      | 27.09             | 26.19             | 24.05             |
|             | 661 | 30.59 | 30.57                      | 27.67             | 26.55             | 24.40             |
|             | 810 | 30.62 | 30.63                      | 27.93             | 26.81             | 24.66             |

GSM Conducted output powers (Burst-Average)

| Mode / Band |       | Voice | GPRS(GMSK) Data – CS1(dBm) |                   | EDGE Data (dBm)   |                   |
|-------------|-------|-------|----------------------------|-------------------|-------------------|-------------------|
|             |       | GSM   | GPRS<br>1 TX Slot          | GPRS<br>2 TX Slot | EDGE<br>1 TX Slot | EDGE<br>2 TX Slot |
| Maximum     |       | 24.67 | 24.67                      | 24.68             | 18.67             | 18.68             |
| Nominal     |       | 23.67 | 23.67                      | 23.68             | 17.67             | 17.68             |
| GSM 850     | 23.86 | 23.86 | 23.87                      | 24.00             | 18.24             | 18.29             |
|             | 24.01 | 24.01 | 24.00                      | 24.13             | 18.13             | 18.14             |
|             | 23.75 | 23.75 | 23.74                      | 24.26             | 18.06             | 18.13             |
| Maximum     |       | 21.97 | 21.97                      | 22.68             | 18.17             | 19.18             |
| Nominal     |       | 20.97 | 20.97                      | 21.68             | 17.17             | 18.18             |
| GSM 1900    | 21.29 | 21.29 | 21.28                      | 21.07             | 17.16             | 18.03             |
|             | 21.56 | 21.56 | 21.54                      | 21.65             | 17.52             | 18.38             |
|             | 21.59 | 21.59 | 21.60                      | 21.91             | 17.78             | 18.64             |

GSM Conducted output powers (Frame-Average)

### 11.1.2 GSM Reduced Conducted Output Power (Hotspot mode activated)

| Mode / Band |     | Voice | GPRS(GMSK) Data – CS1(dBm) |                      | EDGE Data (dBm)      |                      |
|-------------|-----|-------|----------------------------|----------------------|----------------------|----------------------|
|             |     | GSM   | GPRS<br>1 TX<br>Slot       | GPRS<br>2 TX<br>Slot | EDGE<br>1 TX<br>Slot | EDGE<br>2 TX<br>Slot |
| Maximum     |     | 28.00 | 28.00                      | 25.00                | 25.00                | 22.00                |
| Nominal     |     | 27.00 | 27.00                      | 24.00                | 24.00                | 21.00                |
| GSM 1900    | 512 | 26.95 | 26.96                      | 23.89                | 23.69                | 21.06                |
|             | 661 | 27.69 | 27.64                      | 24.66                | 24.06                | 21.54                |
|             | 810 | 27.95 | 27.96                      | 24.98                | 24.36                | 21.83                |

GSM Conducted output powers (Burst-Average)

| Mode / Band |     | Voice | GPRS(GMSK) Data – CS1(dBm) |                      | EDGE Data (dBm)      |                      |
|-------------|-----|-------|----------------------------|----------------------|----------------------|----------------------|
|             |     | GSM   | GPRS<br>1 TX<br>Slot       | GPRS<br>2 TX<br>Slot | EDGE<br>1 TX<br>Slot | EDGE<br>2 TX<br>Slot |
| Maximum     |     | 18.97 | 18.97                      | 18.98                | 15.97                | 15.98                |
| Nominal     |     | 17.97 | 17.97                      | 17.98                | 14.97                | 14.98                |
| GSM 1900    | 512 | 17.92 | 17.93                      | 17.87                | 14.66                | 15.04                |
|             | 661 | 18.66 | 18.61                      | 18.64                | 15.03                | 15.52                |
|             | 810 | 18.92 | 18.93                      | 18.96                | 15.33                | 15.81                |

GSM Conducted output powers (Frame-Average)

#### Note:

Time slot average factor is as follows:

1 Tx slot = 9.03 dB, Frame-Average output power = Burst-Average output power – 9.03 dB


2 Tx slot = 6.02 dB, Frame-Average output power = Burst-Average output power – 6.02 dB

GSM Class : B

GSM voice: Head SAR , Body worn SAR

GPRS/EDGE Multi-slots 10 : Hotspot SAR with GPRS/EDGE

Multi-slot Class 10 with CS 1 (GMSK)



## 11.2 WCDMA

### HSPA+

This DUT is only capable of QPSK HSPA+ in uplink. Therefore, the RF conducted power is not measured according to 941225 D01v03r01 3G SAR.

### 11.2.1 WCDMA Maximum Conducted Output Power

#### WCDMA Band 5

| 3GPP Release Version | Mode  | 3GPP 34.121   | WCDMA Band 5 [dBm] |                    |                    | MPR |
|----------------------|-------|---------------|--------------------|--------------------|--------------------|-----|
|                      |       | Subtest       | UL 4132<br>DL 4357 | UL 4183<br>DL 4408 | UL 4233<br>DL 4458 |     |
| 99                   | WCDMA | 12.2 kbps RMC | 24.06              | 24.02              | 23.98              | -   |
| 99                   |       | 12.2 kbps AMR | 24.07              | 24.02              | 23.98              |     |
| 5                    | HSDPA | Subtest 1     | 22.91              | 22.82              | 22.75              | 1.0 |
| 5                    |       | Subtest 2     | 22.91              | 22.80              | 22.78              | 1.0 |
| 5                    |       | Subtest 3     | 22.44              | 22.39              | 22.28              | 1.4 |
| 5                    |       | Subtest 4     | 22.45              | 22.38              | 22.27              | 1.4 |
| 6                    | HSUPA | Subtest 1     | 22.88              | 22.85              | 22.83              | 1.0 |
| 6                    |       | Subtest 2     | 21.54              | 21.71              | 21.73              | 2.0 |
| 6                    |       | Subtest 3     | 21.77              | 21.35              | 21.35              | 2.2 |
| 6                    |       | Subtest 4     | 21.82              | 21.88              | 21.88              | 1.8 |
| 6                    |       | Subtest 5     | 22.73              | 22.86              | 22.83              | 1.0 |

WCDMA Average Conducted output powers

#### WCDMA Band 4

| 3GPP Release Version | Mode  | 3GPP 34.121   | WCDMA Band 4 [dBm] |                    |                    | MPR |
|----------------------|-------|---------------|--------------------|--------------------|--------------------|-----|
|                      |       | Subtest       | UL 1312<br>DL 1537 | UL 1412<br>DL 1637 | UL 1513<br>DL 1738 |     |
| 99                   | WCDMA | 12.2 kbps RMC | 22.80              | 22.94              | 22.78              | -   |
| 99                   |       | 12.2 kbps AMR | 22.79              | 22.94              | 22.76              |     |
| 5                    | HSDPA | Subtest 1     | 21.56              | 21.67              | 21.67              | 0.9 |
| 5                    |       | Subtest 2     | 21.57              | 21.70              | 21.65              | 0.9 |
| 5                    |       | Subtest 3     | 21.09              | 21.24              | 21.18              | 1.5 |
| 5                    |       | Subtest 4     | 21.11              | 21.25              | 21.19              | 1.5 |
| 6                    | HSUPA | Subtest 1     | 21.41              | 21.77              | 21.33              | 1.0 |
| 6                    |       | Subtest 2     | 20.35              | 20.34              | 20.68              | 2.0 |
| 6                    |       | Subtest 3     | 20.42              | 20.00              | 20.28              | 2.2 |
| 6                    |       | Subtest 4     | 20.84              | 20.85              | 21.15              | 1.6 |
| 6                    |       | Subtest 5     | 21.27              | 21.43              | 21.15              | 1.2 |

WCDMA Average Conducted output powers

### WCDMA Band 2

| 3GPP Release Version | Mode  | 3GPP 34.121   | WCDMA Band 2 [dBm] |                    |                    | MPR |
|----------------------|-------|---------------|--------------------|--------------------|--------------------|-----|
|                      |       | Subtest       | UL 9262<br>DL 9662 | UL 9400<br>DL 9800 | UL 9538<br>DL 9938 |     |
| 99                   | WCDMA | 12.2 kbps RMC | 23.76              | 23.92              | 23.91              | -   |
| 99                   |       | 12.2 kbps AMR | 23.75              | 23.93              | 23.88              | -   |
| 5                    | HSDPA | Subtest 1     | 22.75              | 22.87              | 22.80              | 1.0 |
| 5                    |       | Subtest 2     | 22.73              | 22.88              | 22.73              | 1.0 |
| 5                    |       | Subtest 3     | 22.19              | 22.34              | 22.22              | 1.5 |
| 5                    |       | Subtest 4     | 22.19              | 22.33              | 22.21              | 1.5 |
| 6                    | HSUPA | Subtest 1     | 22.72              | 22.75              | 22.13              | 1.1 |
| 6                    |       | Subtest 2     | 21.29              | 21.53              | 21.67              | 2.1 |
| 6                    |       | Subtest 3     | 21.14              | 21.82              | 21.39              | 2.2 |
| 6                    |       | Subtest 4     | 21.69              | 21.91              | 22.14              | 1.8 |
| 6                    |       | Subtest 5     | 22.68              | 22.71              | 21.97              | 1.3 |

WCDMA Average Conducted output powers

It is expected by the manufacturer that MPR for some HSPA Subtests may be up to 2 dB more than specified by 3GPP, But also as low as 1 dB according to the chipset implementation in this model to match manufacturer.

### 11.2.2 WCDMA Reduced Conducted Output Power (Hotspot, Grip Sensor back mode activated)

#### WCDMA Band 4 Hotspot Back-off Power

| 3GPP Release Version | Mode  | 3GPP 34.121   | WCDMA Band 4 [dBm] |                    |                    | MPR |
|----------------------|-------|---------------|--------------------|--------------------|--------------------|-----|
|                      |       | Subtest       | UL 1312<br>DL 1537 | UL 1412<br>DL 1637 | UL 1513<br>DL 1738 |     |
| 99                   | WCDMA | 12.2 kbps RMC | 18.71              | 18.57              | 18.65              | -   |
| 99                   |       | 12.2 kbps AMR | 18.69              | 18.54              | 18.64              | -   |
| 5                    | HSDPA | Subtest 1     | 17.60              | 17.53              | 17.64              | 0   |
| 5                    |       | Subtest 2     | 17.58              | 17.52              | 17.63              | 0   |
| 5                    |       | Subtest 3     | 16.93              | 17.04              | 17.06              | 0   |
| 5                    |       | Subtest 4     | 16.93              | 17.04              | 17.05              | 0   |
| 6                    | HSUPA | Subtest 1     | 16.85              | 16.78              | 17.05              | 0   |
| 6                    |       | Subtest 2     | 16.48              | 16.49              | 16.60              | 0   |
| 6                    |       | Subtest 3     | 16.47              | 16.02              | 16.31              | 0   |
| 6                    |       | Subtest 4     | 16.37              | 16.49              | 16.89              | 0   |
| 6                    |       | Subtest 5     | 17.41              | 16.59              | 16.86              | 0   |


WCDMA Average Conducted output powers

#### WCDMA Band 2 Hotspot Back-off Power

| 3GPP Release Version | Mode  | 3GPP 34.121   | WCDMA Band 2 [dBm] |                    |                    | MPR |
|----------------------|-------|---------------|--------------------|--------------------|--------------------|-----|
|                      |       | Subtest       | UL 9262<br>DL 9662 | UL 9400<br>DL 9800 | UL 9538<br>DL 9938 |     |
| 99                   | WCDMA | 12.2 kbps RMC | 21.25              | 21.19              | 21.18              | -   |
| 99                   |       | 12.2 kbps AMR | 21.08              | 21.17              | 21.16              | -   |
| 5                    | HSDPA | Subtest 1     | 20.05              | 20.18              | 20.10              | 0   |
| 5                    |       | Subtest 2     | 20.06              | 20.16              | 20.06              | 0   |
| 5                    |       | Subtest 3     | 19.50              | 19.56              | 19.48              | 0   |
| 5                    |       | Subtest 4     | 19.50              | 19.55              | 19.49              | 0   |
| 6                    | HSUPA | Subtest 1     | 19.76              | 19.81              | 19.81              | 0   |
| 6                    |       | Subtest 2     | 18.60              | 18.67              | 18.67              | 0   |
| 6                    |       | Subtest 3     | 18.32              | 18.38              | 18.86              | 0   |
| 6                    |       | Subtest 4     | 19.55              | 19.61              | 19.60              | 0   |
| 6                    |       | Subtest 5     | 19.53              | 19.59              | 19.67              | 0   |

WCDMA Average Conducted output powers

It is expected by the manufacturer that MPR for HSPA Subtests set be 0 dB when Power Back-off is applied.



### 11.3 LTE Maximum Output Power

LTE B4/5/12/14 at 20 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing.

#### 11.3.1 LTE Maximum Conducted Power

LTE Band 2 \_ 1.4 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                       |                         | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|-----------------------|-------------------------|---------------------------|----------|
|           |            |         |           | 18607 Ch.<br>1850.7 MHz  | 18900 Ch.<br>1880 MHz | 19193 Ch.<br>1909.3 MHz |                           |          |
| 1.4 MHz   | QPSK       | 1       | 0         | 23.24                    | 23.17                 | 23.49                   | 0                         | 0        |
|           |            | 1       | 3         | 23.39                    | 23.24                 | 23.82                   | 0                         | 0        |
|           |            | 1       | 5         | 23.33                    | 23.38                 | 23.73                   | 0                         | 0        |
|           |            | 3       | 0         | 23.29                    | 23.23                 | 23.52                   | 0                         | 0        |
|           |            | 3       | 1         | 23.33                    | 23.27                 | 23.54                   | 0                         | 0        |
|           |            | 3       | 3         | 23.31                    | 23.24                 | 23.47                   | 0                         | 0        |
|           |            | 6       | 0         | 22.32                    | 22.27                 | 22.41                   | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.87                    | 21.92                 | 22.66                   | 0-1                       | 1        |
|           |            | 1       | 3         | 21.93                    | 21.87                 | 22.75                   | 0-1                       | 1        |
|           |            | 1       | 5         | 21.63                    | 21.94                 | 22.66                   | 0-1                       | 1        |
|           |            | 3       | 0         | 22.17                    | 22.06                 | 22.44                   | 0-1                       | 1        |
|           |            | 3       | 1         | 22.21                    | 22.14                 | 22.40                   | 0-1                       | 1        |
|           |            | 3       | 3         | 22.09                    | 22.07                 | 22.41                   | 0-1                       | 1        |
|           |            | 6       | 0         | 21.01                    | 20.97                 | 21.32                   | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 21.26                    | 21.00                 | 21.32                   | 0-2                       | 2        |
|           |            | 1       | 3         | 21.44                    | 21.47                 | 21.48                   | 0-2                       | 2        |
|           |            | 1       | 5         | 21.42                    | 21.42                 | 21.65                   | 0-2                       | 2        |
|           |            | 3       | 0         | 21.25                    | 21.22                 | 21.44                   | 0-2                       | 2        |
|           |            | 3       | 1         | 21.30                    | 20.87                 | 21.48                   | 0-2                       | 2        |
|           |            | 3       | 3         | 21.18                    | 20.70                 | 21.18                   | 0-2                       | 2        |
|           |            | 6       | 0         | 20.25                    | 20.08                 | 20.23                   | 0-3                       | 3        |

## LTE Band 2 \_ 3 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                    |                      | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|--------------------|----------------------|---------------------------|----------|
|           |            |         |           | 18615 Ch. 1851.5 MHz     | 18900 Ch. 1880 MHz | 19185 Ch. 1908.5 MHz |                           |          |
| 3 MHz     | QPSK       | 1       | 0         | 23.16                    | 23.15              | 23.50                | 0                         | 0        |
|           |            | 1       | 7         | 23.36                    | 23.41              | 23.60                | 0                         | 0        |
|           |            | 1       | 14        | 23.35                    | 23.38              | 23.51                | 0                         | 0        |
|           |            | 8       | 0         | 22.32                    | 22.36              | 22.56                | 0-1                       | 1        |
|           |            | 8       | 3         | 22.29                    | 22.32              | 22.60                | 0-1                       | 1        |
|           |            | 8       | 7         | 22.29                    | 22.32              | 22.45                | 0-1                       | 1        |
|           | 16QAM      | 15      | 0         | 22.26                    | 22.30              | 22.56                | 0-1                       | 1        |
|           |            | 1       | 0         | 21.67                    | 21.77              | 22.22                | 0-1                       | 1        |
|           |            | 1       | 7         | 22.01                    | 22.05              | 22.26                | 0-1                       | 1        |
|           |            | 1       | 14        | 21.84                    | 21.62              | 22.18                | 0-1                       | 1        |
|           |            | 8       | 0         | 21.26                    | 21.31              | 21.40                | 0-2                       | 2        |
|           |            | 8       | 3         | 21.31                    | 21.27              | 21.26                | 0-2                       | 2        |
|           | 64QAM      | 8       | 7         | 21.05                    | 21.27              | 21.50                | 0-2                       | 2        |
|           |            | 15      | 0         | 20.98                    | 21.19              | 21.47                | 0-2                       | 2        |
|           |            | 1       | 0         | 20.85                    | 20.89              | 21.55                | 0-2                       | 2        |
|           |            | 1       | 7         | 21.00                    | 21.15              | 21.66                | 0-2                       | 2        |
|           |            | 1       | 14        | 20.96                    | 20.90              | 21.14                | 0-2                       | 2        |
|           |            | 8       | 0         | 20.21                    | 20.24              | 20.43                | 0-3                       | 3        |
|           | 64QAM      | 8       | 3         | 20.27                    | 20.30              | 20.51                | 0-3                       | 3        |
|           |            | 8       | 7         | 20.15                    | 20.09              | 20.29                | 0-3                       | 3        |
|           |            | 15      | 0         | 20.19                    | 20.15              | 20.41                | 0-3                       | 3        |

## LTE Band 2 \_ 5 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                    |                      | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|--------------------|----------------------|---------------------------|----------|
|           |            |         |           | 18625 Ch. 1852.5 MHz     | 18900 Ch. 1880 MHz | 19175 Ch. 1907.5 MHz |                           |          |
| 5 MHz     | QPSK       | 1       | 0         | 23.05                    | 23.38              | 23.46                | 0                         | 0        |
|           |            | 1       | 12        | 23.35                    | 23.75              | 23.80                | 0                         | 0        |
|           |            | 1       | 24        | 23.46                    | 23.35              | 23.66                | 0                         | 0        |
|           |            | 12      | 0         | 22.34                    | 22.22              | 22.53                | 0-1                       | 1        |
|           |            | 12      | 6         | 22.33                    | 22.32              | 22.39                | 0-1                       | 1        |
|           |            | 12      | 11        | 22.33                    | 22.24              | 22.57                | 0-1                       | 1        |
|           |            | 25      | 0         | 22.28                    | 22.19              | 22.53                | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.89                    | 21.54              | 22.38                | 0-1                       | 1        |
|           |            | 1       | 12        | 21.99                    | 21.91              | 22.21                | 0-1                       | 1        |
|           |            | 1       | 24        | 22.09                    | 21.94              | 22.43                | 0-1                       | 1        |
|           |            | 12      | 0         | 21.14                    | 21.02              | 21.32                | 0-2                       | 2        |
|           |            | 12      | 6         | 21.02                    | 21.13              | 21.32                | 0-2                       | 2        |
|           |            | 12      | 11        | 21.04                    | 21.04              | 21.29                | 0-2                       | 2        |
|           |            | 25      | 0         | 21.19                    | 21.11              | 21.45                | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 20.92                    | 20.83              | 21.43                | 0-2                       | 2        |
|           |            | 1       | 12        | 21.43                    | 21.41              | 21.56                | 0-2                       | 2        |
|           |            | 1       | 24        | 20.91                    | 20.92              | 21.13                | 0-2                       | 2        |
|           |            | 12      | 0         | 20.11                    | 20.38              | 20.32                | 0-3                       | 3        |
|           |            | 12      | 6         | 20.09                    | 20.29              | 20.28                | 0-3                       | 3        |
|           |            | 12      | 11        | 20.19                    | 20.30              | 20.47                | 0-3                       | 3        |
|           |            | 25      | 0         | 20.12                    | 20.13              | 20.40                | 0-3                       | 3        |



## LTE Band 2 \_ 10 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                       |                       | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|-----------------------|-----------------------|---------------------------|----------|
|           |            |         |           | 18650 Ch.<br>1855 MHz    | 18900 Ch.<br>1880 MHz | 19150 Ch.<br>1905 MHz |                           |          |
| 10 MHz    | QPSK       | 1       | 0         | 23.44                    | 23.51                 | 23.46                 | 0                         | 0        |
|           |            | 1       | 24        | 23.56                    | 23.58                 | 23.76                 | 0                         | 0        |
|           |            | 1       | 49        | 23.58                    | 23.38                 | 23.05                 | 0                         | 0        |
|           |            | 25      | 0         | 22.40                    | 22.36                 | 22.56                 | 0-1                       | 1        |
|           |            | 25      | 12        | 22.41                    | 22.41                 | 22.59                 | 0-1                       | 1        |
|           |            | 25      | 24        | 22.36                    | 22.28                 | 22.51                 | 0-1                       | 1        |
|           |            | 50      | 0         | 22.28                    | 22.32                 | 22.41                 | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 22.14                    | 21.94                 | 22.00                 | 0-1                       | 1        |
|           |            | 1       | 24        | 22.58                    | 21.83                 | 22.10                 | 0-1                       | 1        |
|           |            | 1       | 49        | 21.90                    | 21.47                 | 22.13                 | 0-1                       | 1        |
|           |            | 25      | 0         | 21.31                    | 21.12                 | 21.45                 | 0-2                       | 2        |
|           |            | 25      | 12        | 21.29                    | 21.44                 | 21.60                 | 0-2                       | 2        |
|           |            | 25      | 24        | 21.24                    | 21.32                 | 21.50                 | 0-2                       | 2        |
|           |            | 50      | 0         | 21.16                    | 21.28                 | 21.40                 | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 21.01                    | 21.44                 | 21.46                 | 0-2                       | 2        |
|           |            | 1       | 24        | 21.42                    | 21.14                 | 21.70                 | 0-2                       | 2        |
|           |            | 1       | 49        | 21.13                    | 21.00                 | 21.09                 | 0-2                       | 2        |
|           |            | 25      | 0         | 20.24                    | 20.14                 | 20.48                 | 0-3                       | 3        |
|           |            | 25      | 12        | 20.44                    | 20.47                 | 20.33                 | 0-3                       | 3        |
|           |            | 25      | 24        | 20.37                    | 20.45                 | 20.27                 | 0-3                       | 3        |
|           |            | 50      | 0         | 20.30                    | 20.24                 | 20.46                 | 0-3                       | 3        |

## LTE Band 2 \_ 15 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                       |                         | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|-----------------------|-------------------------|---------------------------|----------|
|           |            |         |           | 18675 Ch.<br>1857.5 MHz  | 18900 Ch.<br>1880 MHz | 19125 Ch.<br>1902.5 MHz |                           |          |
| 15 MHz    | QPSK       | 1       | 0         | 23.39                    | 23.44                 | 23.29                   | 0                         | 0        |
|           |            | 1       | 36        | 24.33                    | 23.81                 | 23.78                   | 0                         | 0        |
|           |            | 1       | 74        | 23.36                    | 23.48                 | 22.99                   | 0                         | 0        |
|           |            | 36      | 0         | 22.39                    | 22.41                 | 22.38                   | 0-1                       | 1        |
|           |            | 36      | 18        | 22.44                    | 22.32                 | 22.46                   | 0-1                       | 1        |
|           |            | 36      | 39        | 22.25                    | 22.23                 | 22.44                   | 0-1                       | 1        |
|           |            | 75      | 0         | 22.26                    | 22.29                 | 22.46                   | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.98                    | 21.48                 | 21.56                   | 0-1                       | 1        |
|           |            | 1       | 36        | 22.92                    | 22.05                 | 22.16                   | 0-1                       | 1        |
|           |            | 1       | 74        | 22.12                    | 22.03                 | 22.19                   | 0-1                       | 1        |
|           |            | 36      | 0         | 21.29                    | 21.06                 | 21.44                   | 0-2                       | 2        |
|           |            | 36      | 18        | 21.42                    | 21.31                 | 21.53                   | 0-2                       | 2        |
|           |            | 36      | 39        | 21.21                    | 21.33                 | 21.52                   | 0-2                       | 2        |
|           |            | 75      | 0         | 21.32                    | 21.26                 | 21.55                   | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 21.30                    | 21.47                 | 21.02                   | 0-2                       | 2        |
|           |            | 1       | 36        | 21.76                    | 21.67                 | 21.23                   | 0-2                       | 2        |
|           |            | 1       | 74        | 21.46                    | 21.17                 | 21.37                   | 0-2                       | 2        |
|           |            | 36      | 0         | 20.23                    | 20.31                 | 20.50                   | 0-3                       | 3        |
|           |            | 36      | 18        | 20.47                    | 20.48                 | 20.60                   | 0-3                       | 3        |
|           |            | 36      | 39        | 20.26                    | 20.33                 | 20.61                   | 0-3                       | 3        |
|           |            | 75      | 0         | 20.35                    | 20.21                 | 20.40                   | 0-3                       | 3        |

## LTE Band 2 \_ 20 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                    |                    | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|--------------------|--------------------|---------------------------|----------|
|           |            |         |           | 18700 Ch. 1860 MHz       | 18900 Ch. 1880 MHz | 19100 Ch. 1900 MHz |                           |          |
| 20 MHz    | QPSK       | 1       | 0         | 23.43                    | 23.37              | 23.42              | 0                         | 0        |
|           |            | 1       | 49        | <b>23.90</b>             | 23.63              | 23.63              | 0                         | 0        |
|           |            | 1       | 99        | 23.40                    | 23.33              | 22.83              | 0                         | 0        |
|           |            | 50      | 0         | 22.35                    | 22.43              | <b>22.46</b>       | 0-1                       | 1        |
|           |            | 50      | 25        | 22.38                    | 22.38              | 22.35              | 0-1                       | 1        |
|           |            | 50      | 49        | 22.33                    | 22.32              | 22.37              | 0-1                       | 1        |
|           |            | 100     | 0         | 22.38                    | 22.23              | 22.41              | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.57                    | 21.84              | 22.07              | 0-1                       | 1        |
|           |            | 1       | 49        | 22.11                    | 21.78              | 22.20              | 0-1                       | 1        |
|           |            | 1       | 99        | 21.74                    | 21.49              | 22.02              | 0-1                       | 1        |
|           |            | 50      | 0         | 21.24                    | 21.44              | 21.26              | 0-2                       | 2        |
|           |            | 50      | 25        | 21.35                    | 21.40              | 21.25              | 0-2                       | 2        |
|           |            | 50      | 49        | 21.37                    | 21.31              | 21.18              | 0-2                       | 2        |
|           |            | 100     | 0         | 21.39                    | 21.18              | 21.30              | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 21.28                    | 21.36              | 20.90              | 0-2                       | 2        |
|           |            | 1       | 49        | 21.63                    | 21.32              | 21.28              | 0-2                       | 2        |
|           |            | 1       | 99        | 21.47                    | 21.06              | 21.17              | 0-2                       | 2        |
|           |            | 50      | 0         | 20.45                    | 20.35              | 20.50              | 0-3                       | 3        |
|           |            | 50      | 25        | 20.48                    | 20.43              | 20.39              | 0-3                       | 3        |
|           |            | 50      | 49        | 20.26                    | 20.30              | 20.43              | 0-3                       | 3        |
|           |            | 100     | 0         | 20.42                    | 20.15              | 20.55              | 0-3                       | 3        |

[ LTE Band 4 Conducted Power ]

LTE Band 4 \_ 1.4 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                      |                      | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|----------------------|----------------------|---------------------------|----------|
|           |            |         |           | 19957 Ch. 1710.7 MHz     | 20175 Ch. 1732.5 MHz | 20393 Ch. 1754.3 MHz |                           |          |
| 1.4 MHz   | QPSK       | 1       | 0         | 22.72                    | 23.03                | 22.97                | 0                         | 0        |
|           |            | 1       | 3         | 23.05                    | 23.15                | 23.34                | 0                         | 0        |
|           |            | 1       | 5         | 22.92                    | 23.06                | 23.21                | 0                         | 0        |
|           |            | 3       | 0         | 22.86                    | 23.00                | 23.05                | 0                         | 0        |
|           |            | 3       | 1         | 22.99                    | 23.06                | 23.20                | 0                         | 0        |
|           |            | 3       | 3         | 22.94                    | 23.05                | 23.01                | 0                         | 0        |
|           |            | 6       | 0         | 21.89                    | 22.11                | 21.99                | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.15                    | 21.42                | 21.53                | 0-1                       | 1        |
|           |            | 1       | 3         | 21.35                    | 21.41                | 21.68                | 0-1                       | 1        |
|           |            | 1       | 5         | 21.26                    | 21.25                | 21.72                | 0-1                       | 1        |
|           |            | 3       | 0         | 21.63                    | 21.76                | 21.81                | 0-1                       | 1        |
|           |            | 3       | 1         | 21.88                    | 21.88                | 21.79                | 0-1                       | 1        |
|           |            | 3       | 3         | 21.64                    | 21.73                | 21.80                | 0-1                       | 1        |
|           |            | 6       | 0         | 20.66                    | 20.70                | 20.81                | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 20.50                    | 21.15                | 20.91                | 0-2                       | 2        |
|           |            | 1       | 3         | 21.02                    | 21.22                | 21.11                | 0-2                       | 2        |
|           |            | 1       | 5         | 20.94                    | 20.56                | 20.60                | 0-2                       | 2        |
|           |            | 3       | 0         | 20.64                    | 20.70                | 20.88                | 0-2                       | 2        |
|           |            | 3       | 1         | 20.53                    | 20.87                | 20.74                | 0-2                       | 2        |
|           |            | 3       | 3         | 20.36                    | 20.48                | 20.71                | 0-2                       | 2        |
|           |            | 6       | 0         | 19.77                    | 19.74                | 20.04                | 0-3                       | 3        |

LTE Band 4 \_ 3 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                      |                      | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|----------------------|----------------------|---------------------------|----------|
|           |            |         |           | 19965 Ch. 1711.5 MHz     | 20175 Ch. 1732.5 MHz | 20385 Ch. 1753.5 MHz |                           |          |
| 3 MHz     | QPSK       | 1       | 0         | 22.91                    | 23.04                | 22.82                | 0                         | 0        |
|           |            | 1       | 7         | 22.90                    | 23.12                | 23.09                | 0                         | 0        |
|           |            | 1       | 14        | 22.94                    | 22.95                | 23.10                | 0                         | 0        |
|           |            | 8       | 0         | 22.08                    | 22.17                | 22.01                | 0-1                       | 1        |
|           |            | 8       | 3         | 21.83                    | 22.06                | 21.98                | 0-1                       | 1        |
|           |            | 8       | 7         | 21.81                    | 21.99                | 21.94                | 0-1                       | 1        |
|           |            | 15      | 0         | 21.88                    | 21.92                | 21.91                | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.16                    | 21.81                | 21.24                | 0-1                       | 1        |
|           |            | 1       | 7         | 21.44                    | 21.66                | 21.47                | 0-1                       | 1        |
|           |            | 1       | 14        | 21.30                    | 21.23                | 21.32                | 0-1                       | 1        |
|           |            | 8       | 0         | 20.83                    | 21.00                | 20.78                | 0-2                       | 2        |
|           |            | 8       | 3         | 20.89                    | 21.02                | 20.98                | 0-2                       | 2        |
|           |            | 8       | 7         | 20.98                    | 21.04                | 20.91                | 0-2                       | 2        |
|           |            | 15      | 0         | 20.90                    | 20.95                | 21.01                | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 20.95                    | 20.98                | 20.43                | 0-2                       | 2        |
|           |            | 1       | 7         | 20.95                    | 20.81                | 21.01                | 0-2                       | 2        |
|           |            | 1       | 14        | 20.43                    | 20.47                | 20.65                | 0-2                       | 2        |
|           |            | 8       | 0         | 19.69                    | 19.71                | 19.70                | 0-3                       | 3        |
|           |            | 8       | 3         | 19.77                    | 19.82                | 19.79                | 0-3                       | 3        |
|           |            | 8       | 7         | 19.84                    | 19.72                | 19.71                | 0-3                       | 3        |
|           |            | 15      | 0         | 19.79                    | 19.87                | 19.81                | 0-3                       | 3        |

## LTE Band 4 \_ 5 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                      |                      | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|----------------------|----------------------|---------------------------|----------|
|           |            |         |           | 19975 Ch. 1712.5 MHz     | 20175 Ch. 1732.5 MHz | 20375 Ch. 1752.5 MHz |                           |          |
| 5 MHz     | QPSK       | 1       | 0         | 22.97                    | 22.89                | 23.04                | 0                         | 0        |
|           |            | 1       | 12        | 23.15                    | 23.12                | 23.25                | 0                         | 0        |
|           |            | 1       | 24        | 23.00                    | 22.94                | 23.22                | 0                         | 0        |
|           |            | 12      | 0         | 21.97                    | 22.09                | 22.05                | 0-1                       | 1        |
|           |            | 12      | 6         | 21.85                    | 21.99                | 21.99                | 0-1                       | 1        |
|           |            | 12      | 11        | 21.84                    | 21.95                | 22.05                | 0-1                       | 1        |
|           |            | 25      | 0         | 21.90                    | 21.95                | 21.96                | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.22                    | 21.35                | 21.42                | 0-1                       | 1        |
|           |            | 1       | 12        | 21.35                    | 21.45                | 21.59                | 0-1                       | 1        |
|           |            | 1       | 24        | 21.40                    | 21.44                | 21.66                | 0-1                       | 1        |
|           |            | 12      | 0         | 20.57                    | 20.73                | 20.81                | 0-2                       | 2        |
|           |            | 12      | 6         | 20.54                    | 20.67                | 20.82                | 0-2                       | 2        |
|           |            | 12      | 11        | 20.66                    | 20.71                | 21.00                | 0-2                       | 2        |
|           |            | 25      | 0         | 20.79                    | 20.95                | 20.81                | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 20.38                    | 20.49                | 20.68                | 0-2                       | 2        |
|           |            | 1       | 12        | 20.89                    | 20.77                | 21.06                | 0-2                       | 2        |
|           |            | 1       | 24        | 20.78                    | 20.50                | 20.82                | 0-2                       | 2        |
|           |            | 12      | 0         | 19.59                    | 19.79                | 19.97                | 0-3                       | 3        |
|           |            | 12      | 6         | 19.58                    | 19.99                | 19.89                | 0-3                       | 3        |
|           |            | 12      | 11        | 19.69                    | 19.97                | 19.75                | 0-3                       | 3        |
|           |            | 25      | 0         | 19.59                    | 19.94                | 19.72                | 0-3                       | 3        |

## LTE Band 4 \_ 10 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                      |                    | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|----------------------|--------------------|---------------------------|----------|
|           |            |         |           | 20000 Ch. 1715 MHz       | 20175 Ch. 1732.5 MHz | 20350 Ch. 1750 MHz |                           |          |
| 10 MHz    | QPSK       | 1       | 0         | 22.98                    | 22.92                | 22.98              | 0                         | 0        |
|           |            | 1       | 24        | 23.43                    | 23.52                | 23.14              | 0                         | 0        |
|           |            | 1       | 49        | 22.86                    | 22.96                | 23.16              | 0                         | 0        |
|           |            | 25      | 0         | 22.04                    | 22.17                | 22.16              | 0-1                       | 1        |
|           |            | 25      | 12        | 22.08                    | 22.06                | 22.10              | 0-1                       | 1        |
|           |            | 25      | 24        | 22.02                    | 22.00                | 22.05              | 0-1                       | 1        |
|           |            | 50      | 0         | 22.00                    | 22.02                | 21.89              | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.36                    | 21.48                | 21.70              | 0-1                       | 1        |
|           |            | 1       | 24        | 21.48                    | 21.36                | 21.82              | 0-1                       | 1        |
|           |            | 1       | 49        | 21.66                    | 21.43                | 21.65              | 0-1                       | 1        |
|           |            | 25      | 0         | 21.03                    | 21.00                | 20.95              | 0-2                       | 2        |
|           |            | 25      | 12        | 20.98                    | 20.96                | 21.09              | 0-2                       | 2        |
|           |            | 25      | 24        | 20.93                    | 21.01                | 20.93              | 0-2                       | 2        |
|           |            | 50      | 0         | 20.91                    | 20.83                | 20.87              | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 20.57                    | 21.02                | 21.09              | 0-2                       | 2        |
|           |            | 1       | 24        | 21.10                    | 20.79                | 21.15              | 0-2                       | 2        |
|           |            | 1       | 49        | 21.02                    | 21.02                | 21.12              | 0-2                       | 2        |
|           |            | 25      | 0         | 20.12                    | 20.07                | 19.86              | 0-3                       | 3        |
|           |            | 25      | 12        | 19.99                    | 19.96                | 20.21              | 0-3                       | 3        |
|           |            | 25      | 24        | 19.83                    | 19.82                | 20.05              | 0-3                       | 3        |
|           |            | 50      | 0         | 19.80                    | 19.73                | 19.79              | 0-3                       | 3        |

## LTE Band 4 \_ 15 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                      |                      | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|----------------------|----------------------|---------------------------|----------|
|           |            |         |           | 20025 Ch. 1717.5 MHz     | 20175 Ch. 1732.5 MHz | 20325 Ch. 1747.5 MHz |                           |          |
| 15 MHz    | QPSK       | 1       | 0         | 22.89                    | 22.70                | 23.25                | 0                         | 0        |
|           |            | 1       | 36        | 23.77                    | 23.56                | 23.59                | 0                         | 0        |
|           |            | 1       | 74        | 22.65                    | 23.19                | 23.23                | 0                         | 0        |
|           |            | 36      | 0         | 22.05                    | 22.14                | 22.12                | 0-1                       | 1        |
|           |            | 36      | 18        | 22.19                    | 22.12                | 22.16                | 0-1                       | 1        |
|           |            | 36      | 39        | 22.02                    | 21.96                | 22.17                | 0-1                       | 1        |
|           |            | 75      | 0         | 22.10                    | 21.97                | 22.01                | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.44                    | 21.59                | 21.35                | 0-1                       | 1        |
|           |            | 1       | 36        | 22.05                    | 21.49                | 21.73                | 0-1                       | 1        |
|           |            | 1       | 74        | 21.61                    | 21.57                | 21.25                | 0-1                       | 1        |
|           |            | 36      | 0         | 20.92                    | 21.03                | 21.00                | 0-2                       | 2        |
|           |            | 36      | 18        | 21.09                    | 21.03                | 21.14                | 0-2                       | 2        |
|           |            | 36      | 39        | 21.02                    | 20.96                | 21.04                | 0-2                       | 2        |
|           |            | 75      | 0         | 20.99                    | 20.96                | 21.10                | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 21.08                    | 20.79                | 21.13                | 0-2                       | 2        |
|           |            | 1       | 36        | 21.13                    | 21.25                | 21.43                | 0-2                       | 2        |
|           |            | 1       | 74        | 20.93                    | 21.10                | 21.13                | 0-2                       | 2        |
|           |            | 36      | 0         | 19.96                    | 19.86                | 20.05                | 0-3                       | 3        |
|           |            | 36      | 18        | 20.12                    | 20.06                | 20.17                | 0-3                       | 3        |
|           |            | 36      | 39        | 20.06                    | 19.80                | 19.98                | 0-3                       | 3        |
|           |            | 75      | 0         | 19.99                    | 19.87                | 19.80                | 0-3                       | 3        |

## LTE Band 4 \_ 20 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|---------------------------|----------|
|           |            |         |           | 20175 Ch. 1732.5 MHz     |                           |          |
| 20 MHz    | QPSK       | 1       | 0         | 22.56                    | 0                         | 0        |
|           |            | 1       | 49        | <b>23.28</b>             | 0                         | 0        |
|           |            | 1       | 99        | 23.25                    | 0                         | 0        |
|           |            | 50      | 0         | <b>22.15</b>             | 0-1                       | 1        |
|           |            | 50      | 25        | 22.08                    | 0-1                       | 1        |
|           |            | 50      | 49        | 21.97                    | 0-1                       | 1        |
|           |            | 100     | 0         | 21.99                    | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.48                    | 0-1                       | 1        |
|           |            | 1       | 49        | 22.27                    | 0-1                       | 1        |
|           |            | 1       | 99        | 21.54                    | 0-1                       | 1        |
|           |            | 50      | 0         | 21.05                    | 0-2                       | 2        |
|           |            | 50      | 25        | 21.11                    | 0-2                       | 2        |
|           |            | 50      | 49        | 20.99                    | 0-2                       | 2        |
|           |            | 100     | 0         | 20.99                    | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 20.77                    | 0-2                       | 2        |
|           |            | 1       | 49        | 20.96                    | 0-2                       | 2        |
|           |            | 1       | 99        | 20.81                    | 0-2                       | 2        |
|           |            | 50      | 0         | 20.05                    | 0-3                       | 3        |
|           |            | 50      | 25        | 20.03                    | 0-3                       | 3        |
|           |            | 50      | 49        | 19.89                    | 0-3                       | 3        |
|           |            | 100     | 0         | 19.91                    | 0-3                       | 3        |

[ LTE Band 5 Conducted Power ]

LTE Band 5 \_ 1.4 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                        |                        | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|------------------------|------------------------|---------------------------|----------|
|           |            |         |           | 20407 Ch.<br>824.7 MHz   | 20525 Ch.<br>836.5 MHz | 20643 Ch.<br>848.3 MHz |                           |          |
| 1.4 MHz   | QPSK       | 1       | 0         | 23.18                    | 23.35                  | 23.51                  | 0                         | 0        |
|           |            | 1       | 3         | 23.31                    | 23.59                  | 23.73                  | 0                         | 0        |
|           |            | 1       | 5         | 23.27                    | 23.40                  | 23.51                  | 0                         | 0        |
|           |            | 3       | 0         | 23.22                    | 23.39                  | 23.50                  | 0                         | 0        |
|           |            | 3       | 1         | 23.24                    | 23.41                  | 23.41                  | 0                         | 0        |
|           |            | 3       | 3         | 23.29                    | 23.37                  | 23.33                  | 0                         | 0        |
|           |            | 6       | 0         | 22.31                    | 22.40                  | 22.34                  | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.81                    | 21.83                  | 22.03                  | 0-1                       | 1        |
|           |            | 1       | 3         | 21.99                    | 22.06                  | 22.01                  | 0-1                       | 1        |
|           |            | 1       | 5         | 21.81                    | 21.80                  | 21.89                  | 0-1                       | 1        |
|           |            | 3       | 0         | 22.15                    | 22.32                  | 22.24                  | 0-1                       | 1        |
|           |            | 3       | 1         | 22.28                    | 22.48                  | 22.42                  | 0-1                       | 1        |
|           |            | 3       | 3         | 22.21                    | 22.39                  | 22.26                  | 0-1                       | 1        |
|           |            | 6       | 0         | 21.04                    | 21.27                  | 21.28                  | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 21.47                    | 21.52                  | 21.22                  | 0-2                       | 2        |
|           |            | 1       | 3         | 21.44                    | 21.57                  | 21.69                  | 0-2                       | 2        |
|           |            | 1       | 5         | 21.05                    | 21.14                  | 21.60                  | 0-2                       | 2        |
|           |            | 3       | 0         | 21.02                    | 21.38                  | 21.40                  | 0-2                       | 2        |
|           |            | 3       | 1         | 21.10                    | 21.40                  | 21.31                  | 0-2                       | 2        |
|           |            | 3       | 3         | 21.10                    | 21.34                  | 21.15                  | 0-2                       | 2        |
|           |            | 6       | 0         | 20.24                    | 20.25                  | 20.37                  | 0-3                       | 3        |

LTE Band 5 \_ 3 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                        |                        | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|------------------------|------------------------|---------------------------|----------|
|           |            |         |           | 20415 Ch.<br>825.5 MHz   | 20525 Ch.<br>836.5 MHz | 20635 Ch.<br>847.5 MHz |                           |          |
| 3 MHz     | QPSK       | 1       | 0         | 23.26                    | 23.39                  | 23.37                  | 0                         | 0        |
|           |            | 1       | 7         | 23.42                    | 23.55                  | 23.55                  | 0                         | 0        |
|           |            | 1       | 14        | 23.21                    | 23.54                  | 23.48                  | 0                         | 0        |
|           |            | 8       | 0         | 22.37                    | 22.44                  | 22.37                  | 0-1                       | 1        |
|           |            | 8       | 3         | 22.25                    | 22.46                  | 22.46                  | 0-1                       | 1        |
|           |            | 8       | 7         | 22.19                    | 22.43                  | 22.41                  | 0-1                       | 1        |
|           |            | 15      | 0         | 22.20                    | 22.45                  | 22.36                  | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.56                    | 21.91                  | 22.43                  | 0-1                       | 1        |
|           |            | 1       | 7         | 21.80                    | 22.12                  | 22.23                  | 0-1                       | 1        |
|           |            | 1       | 14        | 22.31                    | 22.18                  | 22.02                  | 0-1                       | 1        |
|           |            | 8       | 0         | 21.39                    | 21.49                  | 21.42                  | 0-2                       | 2        |
|           |            | 8       | 3         | 21.17                    | 21.40                  | 21.42                  | 0-2                       | 2        |
|           |            | 8       | 7         | 21.25                    | 21.46                  | 21.50                  | 0-2                       | 2        |
|           |            | 15      | 0         | 21.15                    | 21.43                  | 21.38                  | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 21.30                    | 21.49                  | 21.15                  | 0-2                       | 2        |
|           |            | 1       | 7         | 21.43                    | 21.58                  | 21.60                  | 0-2                       | 2        |
|           |            | 1       | 14        | 21.34                    | 21.25                  | 21.38                  | 0-2                       | 2        |
|           |            | 8       | 0         | 20.21                    | 20.48                  | 20.38                  | 0-3                       | 3        |
|           |            | 8       | 3         | 20.19                    | 20.33                  | 20.39                  | 0-3                       | 3        |
|           |            | 8       | 7         | 20.08                    | 20.29                  | 20.46                  | 0-3                       | 3        |
|           |            | 15      | 0         | 20.34                    | 20.47                  | 20.53                  | 0-3                       | 3        |

## LTE Band 5 \_ 5 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                     |                     | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|---------------------|---------------------|---------------------------|----------|
|           |            |         |           | 20425 Ch. 826.5 MHz      | 20525 Ch. 836.5 MHz | 20625 Ch. 846.5 MHz |                           |          |
| 5 MHz     | QPSK       | 1       | 0         | 23.05                    | 23.15               | 23.27               | 0                         | 0        |
|           |            | 1       | 12        | 23.28                    | 23.57               | 23.57               | 0                         | 0        |
|           |            | 1       | 24        | 23.05                    | 23.41               | 23.30               | 0                         | 0        |
|           |            | 12      | 0         | 22.35                    | 22.34               | 22.36               | 0-1                       | 1        |
|           |            | 12      | 6         | 22.26                    | 22.48               | 22.36               | 0-1                       | 1        |
|           |            | 12      | 11        | 22.26                    | 22.46               | 22.32               | 0-1                       | 1        |
|           |            | 25      | 0         | 22.26                    | 22.43               | 22.34               | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.63                    | 22.00               | 21.97               | 0-1                       | 1        |
|           |            | 1       | 12        | 22.01                    | 22.64               | 22.08               | 0-1                       | 1        |
|           |            | 1       | 24        | 21.74                    | 22.00               | 21.98               | 0-1                       | 1        |
|           |            | 12      | 0         | 21.03                    | 21.42               | 21.28               | 0-2                       | 2        |
|           |            | 12      | 6         | 21.16                    | 21.54               | 21.45               | 0-2                       | 2        |
|           |            | 12      | 11        | 21.18                    | 21.42               | 21.32               | 0-2                       | 2        |
|           |            | 25      | 0         | 21.21                    | 21.49               | 21.34               | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 21.22                    | 21.28               | 21.09               | 0-2                       | 2        |
|           |            | 1       | 12        | 21.32                    | 21.61               | 21.50               | 0-2                       | 2        |
|           |            | 1       | 24        | 21.21                    | 21.30               | 21.36               | 0-2                       | 2        |
|           |            | 12      | 0         | 20.29                    | 20.29               | 20.45               | 0-3                       | 3        |
|           |            | 12      | 6         | 20.34                    | 20.34               | 20.37               | 0-3                       | 3        |
|           |            | 12      | 11        | 20.16                    | 20.32               | 20.53               | 0-3                       | 3        |
|           |            | 25      | 0         | 20.26                    | 20.55               | 20.42               | 0-3                       | 3        |

## LTE Band 5 \_ 10 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|---------------------------|----------|
|           |            |         |           | 20525 Ch. 836.5 MHz      |                           |          |
| 10 MHz    | QPSK       | 1       | 0         | 23.30                    | 0                         | 0        |
|           |            | 1       | 24        | <b>23.55</b>             | 0                         | 0        |
|           |            | 1       | 49        | 23.53                    | 0                         | 0        |
|           |            | 25      | 0         | 22.40                    | 0-1                       | 1        |
|           |            | 25      | 12        | 22.46                    | 0-1                       | 1        |
|           |            | 25      | 24        | <b>22.52</b>             | 0-1                       | 1        |
|           |            | 50      | 0         | 22.43                    | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 22.03                    | 0-1                       | 1        |
|           |            | 1       | 24        | 22.32                    | 0-1                       | 1        |
|           |            | 1       | 49        | 22.03                    | 0-1                       | 1        |
|           |            | 25      | 0         | 21.38                    | 0-2                       | 2        |
|           |            | 25      | 12        | 21.53                    | 0-2                       | 2        |
|           |            | 25      | 24        | 21.50                    | 0-2                       | 2        |
|           |            | 50      | 0         | 21.33                    | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 21.30                    | 0-2                       | 2        |
|           |            | 1       | 24        | 21.69                    | 0-2                       | 2        |
|           |            | 1       | 49        | 21.43                    | 0-2                       | 2        |
|           |            | 25      | 0         | 20.36                    | 0-3                       | 3        |
|           |            | 25      | 12        | 20.30                    | 0-3                       | 3        |
|           |            | 25      | 24        | 20.54                    | 0-3                       | 3        |
|           |            | 50      | 0         | 20.37                    | 0-3                       | 3        |

[LTE Band 12 Conducted Power]

LTE Band 12 \_ 1.4 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                        |                        | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|------------------------|------------------------|---------------------------|----------|
|           |            |         |           | 23017 Ch.<br>699.7 MHz   | 23095 Ch.<br>707.5 MHz | 23173 Ch.<br>715.3 MHz |                           |          |
| 1.4 MHz   | QPSK       | 1       | 0         | 23.24                    | 23.54                  | 23.23                  | 0                         | 0        |
|           |            | 1       | 3         | 23.54                    | 23.78                  | 23.19                  | 0                         | 0        |
|           |            | 1       | 5         | 23.42                    | 23.51                  | 23.21                  | 0                         | 0        |
|           |            | 3       | 0         | 23.27                    | 23.57                  | 23.16                  | 0                         | 0        |
|           |            | 3       | 1         | 23.27                    | 23.63                  | 23.28                  | 0                         | 0        |
|           |            | 3       | 3         | 23.18                    | 23.52                  | 23.35                  | 0                         | 0        |
|           |            | 6       | 0         | 22.17                    | 22.41                  | 22.29                  | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.92                    | 22.16                  | 21.76                  | 0-1                       | 1        |
|           |            | 1       | 3         | 22.15                    | 22.26                  | 22.01                  | 0-1                       | 1        |
|           |            | 1       | 5         | 21.97                    | 22.08                  | 21.88                  | 0-1                       | 1        |
|           |            | 3       | 0         | 22.05                    | 22.34                  | 22.19                  | 0-1                       | 1        |
|           |            | 3       | 1         | 22.08                    | 22.48                  | 22.15                  | 0-1                       | 1        |
|           |            | 3       | 3         | 22.00                    | 22.34                  | 22.05                  | 0-1                       | 1        |
|           |            | 6       | 0         | 21.06                    | 21.28                  | 21.04                  | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 21.72                    | 21.48                  | 21.40                  | 0-2                       | 2        |
|           |            | 1       | 3         | 21.80                    | 21.58                  | 21.45                  | 0-2                       | 2        |
|           |            | 1       | 5         | 21.76                    | 21.11                  | 20.98                  | 0-2                       | 2        |
|           |            | 3       | 0         | 21.02                    | 21.03                  | 20.78                  | 0-2                       | 2        |
|           |            | 3       | 1         | 21.05                    | 21.10                  | 21.02                  | 0-2                       | 2        |
|           |            | 3       | 3         | 20.73                    | 21.03                  | 20.93                  | 0-2                       | 2        |
|           |            | 6       | 0         | 20.15                    | 20.33                  | 20.24                  | 0-3                       | 3        |

LTE Band 12 \_ 3 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                        |                        | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|------------------------|------------------------|---------------------------|----------|
|           |            |         |           | 23025 Ch.<br>700.5 MHz   | 23095 Ch.<br>707.5 MHz | 23165 Ch.<br>714.5 MHz |                           |          |
| 3 MHz     | QPSK       | 1       | 0         | 23.22                    | 23.35                  | 23.46                  | 0                         | 0        |
|           |            | 1       | 7         | 23.66                    | 23.64                  | 23.65                  | 0                         | 0        |
|           |            | 1       | 14        | 23.32                    | 23.66                  | 23.40                  | 0                         | 0        |
|           |            | 8       | 0         | 22.27                    | 22.52                  | 22.42                  | 0-1                       | 1        |
|           |            | 8       | 3         | 22.29                    | 22.54                  | 22.40                  | 0-1                       | 1        |
|           |            | 8       | 7         | 22.24                    | 22.51                  | 22.36                  | 0-1                       | 1        |
|           |            | 15      | 0         | 22.26                    | 22.57                  | 22.35                  | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.93                    | 21.85                  | 22.21                  | 0-1                       | 1        |
|           |            | 1       | 7         | 22.01                    | 22.20                  | 22.60                  | 0-1                       | 1        |
|           |            | 1       | 14        | 21.88                    | 22.01                  | 22.32                  | 0-1                       | 1        |
|           |            | 8       | 0         | 21.26                    | 21.45                  | 21.47                  | 0-2                       | 2        |
|           |            | 8       | 3         | 21.32                    | 21.54                  | 21.53                  | 0-2                       | 2        |
|           |            | 8       | 7         | 21.38                    | 21.64                  | 21.41                  | 0-2                       | 2        |
|           |            | 15      | 0         | 21.36                    | 21.66                  | 21.35                  | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 21.25                    | 21.08                  | 21.21                  | 0-2                       | 2        |
|           |            | 1       | 7         | 21.32                    | 21.58                  | 21.49                  | 0-2                       | 2        |
|           |            | 1       | 14        | 20.93                    | 21.19                  | 20.97                  | 0-2                       | 2        |
|           |            | 8       | 0         | 20.09                    | 20.42                  | 20.30                  | 0-3                       | 3        |
|           |            | 8       | 3         | 20.05                    | 20.43                  | 20.30                  | 0-3                       | 3        |
|           |            | 8       | 7         | 19.95                    | 20.42                  | 20.14                  | 0-3                       | 3        |
|           |            | 15      | 0         | 20.18                    | 20.47                  | 20.31                  | 0-3                       | 3        |



LTE Band 12\_ 5 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                     |                     | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|---------------------|---------------------|---------------------------|----------|
|           |            |         |           | 23035 Ch. 701.5 MHz      | 23095 Ch. 707.5 MHz | 23155 Ch. 713.5 MHz |                           |          |
| 5 MHz     | QPSK       | 1       | 0         | 23.31                    | 23.37               | 23.46               | 0                         | 0        |
|           |            | 1       | 12        | 23.27                    | 23.60               | 23.58               | 0                         | 0        |
|           |            | 1       | 24        | 23.27                    | 23.46               | 23.35               | 0                         | 0        |
|           |            | 12      | 0         | 22.18                    | 22.45               | 22.31               | 0-1                       | 1        |
|           |            | 12      | 6         | 22.27                    | 22.61               | 22.32               | 0-1                       | 1        |
|           |            | 12      | 11        | 22.19                    | 22.56               | 22.26               | 0-1                       | 1        |
|           |            | 25      | 0         | 22.26                    | 22.52               | 22.35               | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.72                    | 22.40               | 22.47               | 0-1                       | 1        |
|           |            | 1       | 12        | 21.84                    | 22.78               | 21.86               | 0-1                       | 1        |
|           |            | 1       | 24        | 21.87                    | 22.21               | 21.76               | 0-1                       | 1        |
|           |            | 12      | 0         | 21.07                    | 21.22               | 21.23               | 0-2                       | 2        |
|           |            | 12      | 6         | 21.07                    | 21.37               | 21.24               | 0-2                       | 2        |
|           |            | 12      | 11        | 21.09                    | 21.29               | 21.28               | 0-2                       | 2        |
|           |            | 25      | 0         | 21.21                    | 21.51               | 21.45               | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 20.89                    | 21.36               | 21.46               | 0-2                       | 2        |
|           |            | 1       | 12        | 21.43                    | 21.61               | 21.42               | 0-2                       | 2        |
|           |            | 1       | 24        | 21.02                    | 21.06               | 21.28               | 0-2                       | 2        |
|           |            | 12      | 0         | 20.33                    | 20.26               | 20.12               | 0-3                       | 3        |
|           |            | 12      | 6         | 20.29                    | 20.42               | 20.20               | 0-3                       | 3        |
|           |            | 12      | 11        | 20.25                    | 20.51               | 20.16               | 0-3                       | 3        |
|           |            | 25      | 0         | 20.37                    | 20.54               | 20.30               | 0-3                       | 3        |

LTE Band 12\_ 10 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|---------------------------|----------|
|           |            |         |           | 23095 Ch. 707.5 MHz      |                           |          |
| 10 MHz    | QPSK       | 1       | 0         | 23.34                    | 0                         | 0        |
|           |            | 1       | 24        | <b>23.70</b>             | 0                         | 0        |
|           |            | 1       | 49        | 23.42                    | 0                         | 0        |
|           |            | 25      | 0         | 22.41                    | 0-1                       | 1        |
|           |            | 25      | 12        | <b>22.54</b>             | 0-1                       | 1        |
|           |            | 25      | 24        | 22.44                    | 0-1                       | 1        |
|           |            | 50      | 0         | 22.44                    | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 21.94                    | 0-1                       | 1        |
|           |            | 1       | 24        | 22.05                    | 0-1                       | 1        |
|           |            | 1       | 49        | 21.91                    | 0-1                       | 1        |
|           |            | 25      | 0         | 21.36                    | 0-2                       | 2        |
|           |            | 25      | 12        | 21.51                    | 0-2                       | 2        |
|           |            | 25      | 24        | 21.33                    | 0-2                       | 2        |
|           |            | 50      | 0         | 21.52                    | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 21.25                    | 0-2                       | 2        |
|           |            | 1       | 24        | 21.44                    | 0-2                       | 2        |
|           |            | 1       | 49        | 21.40                    | 0-2                       | 2        |
|           |            | 25      | 0         | 20.38                    | 0-3                       | 3        |
|           |            | 25      | 12        | 20.65                    | 0-3                       | 3        |
|           |            | 25      | 24        | 20.46                    | 0-3                       | 3        |
|           |            | 50      | 0         | 20.37                    | 0-3                       | 3        |

[ LTE Band 14 Conducted Power ]

LTE Band 14 5 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] |                   |                     | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|-------------------|---------------------|---------------------------|----------|
|           |            |         |           | 23305 Ch. 790.5 MHz      | 23330 Ch. 793 MHz | 23355 Ch. 795.5 MHz |                           |          |
| 5 MHz     | QPSK       | 1       | 0         | 23.25                    | 23.30             | 23.18               | 0                         | 0        |
|           |            | 1       | 12        | 23.53                    | 23.39             | 23.52               | 0                         | 0        |
|           |            | 1       | 24        | 23.14                    | 23.18             | 23.28               | 0                         | 0        |
|           |            | 12      | 0         | 22.41                    | 22.31             | 22.22               | 0-1                       | 1        |
|           |            | 12      | 6         | 22.36                    | 22.25             | 22.32               | 0-1                       | 1        |
|           |            | 12      | 11        | 22.29                    | 22.20             | 22.28               | 0-1                       | 1        |
|           |            | 25      | 0         | 22.33                    | 22.18             | 22.24               | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 22.11                    | 22.02             | 22.04               | 0-1                       | 1        |
|           |            | 1       | 12        | 22.57                    | 22.06             | 22.24               | 0-1                       | 1        |
|           |            | 1       | 24        | 22.34                    | 21.85             | 22.12               | 0-1                       | 1        |
|           |            | 12      | 0         | 21.35                    | 21.15             | 21.15               | 0-2                       | 2        |
|           |            | 12      | 6         | 21.40                    | 21.18             | 21.25               | 0-2                       | 2        |
|           |            | 12      | 11        | 21.29                    | 21.14             | 21.32               | 0-2                       | 2        |
|           |            | 25      | 0         | 21.44                    | 21.38             | 21.25               | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 21.44                    | 21.44             | 21.23               | 0-2                       | 2        |
|           |            | 1       | 12        | 21.62                    | 21.46             | 21.52               | 0-2                       | 2        |
|           |            | 1       | 24        | 21.28                    | 21.31             | 21.34               | 0-2                       | 2        |
|           |            | 12      | 0         | 20.48                    | 20.39             | 20.25               | 0-3                       | 3        |
|           |            | 12      | 6         | 20.21                    | 20.48             | 20.27               | 0-3                       | 3        |
|           |            | 12      | 11        | 20.34                    | 20.49             | 20.43               | 0-3                       | 3        |
|           |            | 25      | 0         | 20.46                    | 20.39             | 20.24               | 0-3                       | 3        |

LTE Band 14 10 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Max. Average Power [dBm] | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|--------------------------|---------------------------|----------|
|           |            |         |           | 23330 Ch. 793 MHz        |                           |          |
| 10 MHz    | QPSK       | 1       | 0         | 23.22                    | 0                         | 0        |
|           |            | 1       | 24        | <b>23.41</b>             | 0                         | 0        |
|           |            | 1       | 49        | 23.06                    | 0                         | 0        |
|           |            | 25      | 0         | <b>22.27</b>             | 0-1                       | 1        |
|           |            | 25      | 12        | 22.22                    | 0-1                       | 1        |
|           |            | 25      | 24        | 22.17                    | 0-1                       | 1        |
|           |            | 50      | 0         | 22.20                    | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 22.19                    | 0-1                       | 1        |
|           |            | 1       | 24        | 22.44                    | 0-1                       | 1        |
|           |            | 1       | 49        | 21.88                    | 0-1                       | 1        |
|           |            | 25      | 0         | 21.21                    | 0-2                       | 2        |
|           |            | 25      | 12        | 21.22                    | 0-2                       | 2        |
|           |            | 25      | 24        | 21.10                    | 0-2                       | 2        |
|           |            | 50      | 0         | 21.22                    | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 21.17                    | 0-2                       | 2        |
|           |            | 1       | 24        | 21.38                    | 0-2                       | 2        |
|           |            | 1       | 49        | 21.06                    | 0-2                       | 2        |
|           |            | 25      | 0         | 20.30                    | 0-3                       | 3        |
|           |            | 25      | 12        | 20.33                    | 0-3                       | 3        |
|           |            | 25      | 24        | 20.09                    | 0-3                       | 3        |
|           |            | 50      | 0         | 20.22                    | 0-3                       | 3        |

### 11.3.2 LTE Reduced Conducted Power (Hotspot, Grip Sensor activated)

[ LTE Band 2 Conducted Power ]

LTE Band 2 \_ 1.4 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Reduced Power [dBm]     |                       |                         | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|-------------------------|-----------------------|-------------------------|---------------------------|----------|
|           |            |         |           | 18607 Ch.<br>1850.7 MHz | 18900 Ch.<br>1880 MHz | 19193 Ch.<br>1909.3 MHz |                           |          |
| 1.4 MHz   | QPSK       | 1       | 0         | 20.76                   | 20.86                 | 20.64                   | 0                         | 0        |
|           |            | 1       | 3         | 20.81                   | 20.96                 | 20.71                   | 0                         | 0        |
|           |            | 1       | 5         | 20.80                   | 21.01                 | 20.64                   | 0                         | 0        |
|           |            | 3       | 0         | 20.77                   | 20.95                 | 20.62                   | 0                         | 0        |
|           |            | 3       | 1         | 20.80                   | 21.11                 | 20.66                   | 0                         | 0        |
|           |            | 3       | 3         | 20.88                   | 21.00                 | 20.62                   | 0                         | 0        |
|           |            | 6       | 0         | 19.75                   | 19.78                 | 19.62                   | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 19.54                   | 19.76                 | 19.20                   | 0-1                       | 1        |
|           |            | 1       | 3         | 19.77                   | 19.56                 | 19.35                   | 0-1                       | 1        |
|           |            | 1       | 5         | 19.35                   | 19.35                 | 19.28                   | 0-1                       | 1        |
|           |            | 3       | 0         | 19.58                   | 19.71                 | 19.51                   | 0-1                       | 1        |
|           |            | 3       | 1         | 19.73                   | 19.81                 | 19.56                   | 0-1                       | 1        |
|           |            | 3       | 3         | 19.67                   | 19.64                 | 19.49                   | 0-1                       | 1        |
|           |            | 6       | 0         | 18.71                   | 18.82                 | 18.56                   | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 18.51                   | 18.88                 | 18.88                   | 0-2                       | 2        |
|           |            | 1       | 3         | 18.65                   | 18.90                 | 18.58                   | 0-2                       | 2        |
|           |            | 1       | 5         | 19.08                   | 19.10                 | 18.88                   | 0-2                       | 2        |
|           |            | 3       | 0         | 18.83                   | 18.62                 | 18.64                   | 0-2                       | 2        |
|           |            | 3       | 1         | 18.64                   | 18.68                 | 18.66                   | 0-2                       | 2        |
|           |            | 3       | 3         | 18.50                   | 18.72                 | 18.60                   | 0-2                       | 2        |
|           |            | 6       | 0         | 17.76                   | 17.81                 | 17.65                   | 0-3                       | 3        |

LTE Band 2 \_ 3 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Reduced Power [dBm]     |                       |                         | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|-------------------------|-----------------------|-------------------------|---------------------------|----------|
|           |            |         |           | 18615 Ch.<br>1851.5 MHz | 18900 Ch.<br>1880 MHz | 19185 Ch.<br>1908.5 MHz |                           |          |
| 3 MHz     | QPSK       | 1       | 0         | 20.72                   | 20.79                 | 20.51                   | 0                         | 0        |
|           |            | 1       | 7         | 20.95                   | 21.02                 | 20.63                   | 0                         | 0        |
|           |            | 1       | 14        | 20.89                   | 20.74                 | 20.63                   | 0                         | 0        |
|           |            | 8       | 0         | 19.86                   | 19.84                 | 19.59                   | 0-1                       | 1        |
|           |            | 8       | 3         | 19.91                   | 19.82                 | 19.69                   | 0-1                       | 1        |
|           |            | 8       | 7         | 19.78                   | 19.92                 | 19.74                   | 0-1                       | 1        |
|           |            | 15      | 0         | 19.78                   | 19.80                 | 19.67                   | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 19.29                   | 20.07                 | 19.09                   | 0-1                       | 1        |
|           |            | 1       | 7         | 19.59                   | 19.78                 | 19.37                   | 0-1                       | 1        |
|           |            | 1       | 14        | 19.47                   | 19.42                 | 19.16                   | 0-1                       | 1        |
|           |            | 8       | 0         | 18.87                   | 18.88                 | 18.72                   | 0-2                       | 2        |
|           |            | 8       | 3         | 18.89                   | 18.83                 | 18.81                   | 0-2                       | 2        |
|           |            | 8       | 7         | 18.92                   | 18.83                 | 18.87                   | 0-2                       | 2        |
|           |            | 15      | 0         | 18.86                   | 18.78                 | 18.76                   | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 18.81                   | 18.80                 | 18.36                   | 0-2                       | 2        |
|           |            | 1       | 7         | 18.88                   | 18.98                 | 18.80                   | 0-2                       | 2        |
|           |            | 1       | 14        | 18.61                   | 18.52                 | 18.75                   | 0-2                       | 2        |
|           |            | 8       | 0         | 17.82                   | 17.81                 | 17.73                   | 0-3                       | 3        |
|           |            | 8       | 3         | 17.77                   | 17.86                 | 17.84                   | 0-3                       | 3        |
|           |            | 8       | 7         | 17.75                   | 17.87                 | 17.76                   | 0-3                       | 3        |
|           |            | 15      | 0         | 17.72                   | 17.80                 | 17.66                   | 0-3                       | 3        |

## LTE Band 2 \_ 5 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Reduced Power [dBm]     |                       |                         | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|-------------------------|-----------------------|-------------------------|---------------------------|----------|
|           |            |         |           | 18625 Ch.<br>1852.5 MHz | 18900 Ch.<br>1880 MHz | 19175 Ch.<br>1907.5 MHz |                           |          |
| 5 MHz     | QPSK       | 1       | 0         | 20.80                   | 20.77                 | 20.64                   | 0                         | 0        |
|           |            | 1       | 12        | 20.99                   | 20.99                 | 20.71                   | 0                         | 0        |
|           |            | 1       | 24        | 20.89                   | 20.86                 | 20.65                   | 0                         | 0        |
|           |            | 12      | 0         | 19.86                   | 19.89                 | 19.63                   | 0-1                       | 1        |
|           |            | 12      | 6         | 19.81                   | 19.82                 | 19.61                   | 0-1                       | 1        |
|           |            | 12      | 11        | 19.78                   | 19.85                 | 19.66                   | 0-1                       | 1        |
|           |            | 25      | 0         | 19.77                   | 19.88                 | 19.60                   | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 19.22                   | 19.39                 | 19.49                   | 0-1                       | 1        |
|           |            | 1       | 12        | 19.60                   | 19.60                 | 19.55                   | 0-1                       | 1        |
|           |            | 1       | 24        | 19.55                   | 19.29                 | 19.68                   | 0-1                       | 1        |
|           |            | 12      | 0         | 18.84                   | 18.68                 | 18.43                   | 0-2                       | 2        |
|           |            | 12      | 6         | 18.81                   | 18.81                 | 18.67                   | 0-2                       | 2        |
|           |            | 12      | 11        | 18.76                   | 18.92                 | 18.73                   | 0-2                       | 2        |
|           |            | 25      | 0         | 18.83                   | 18.96                 | 18.56                   | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 18.78                   | 18.60                 | 18.43                   | 0-2                       | 2        |
|           |            | 1       | 12        | 19.04                   | 18.66                 | 18.42                   | 0-2                       | 2        |
|           |            | 1       | 24        | 18.90                   | 18.80                 | 18.33                   | 0-2                       | 2        |
|           |            | 12      | 0         | 17.90                   | 17.76                 | 17.58                   | 0-3                       | 3        |
|           |            | 12      | 6         | 17.77                   | 17.99                 | 17.77                   | 0-3                       | 3        |
|           |            | 12      | 11        | 17.93                   | 17.90                 | 17.80                   | 0-3                       | 3        |
|           |            | 25      | 0         | 17.88                   | 18.00                 | 17.60                   | 0-3                       | 3        |

## LTE Band 2 \_ 10 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Reduced Power [dBm]   |                       |                       | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|-----------------------|-----------------------|-----------------------|---------------------------|----------|
|           |            |         |           | 18650 Ch.<br>1855 MHz | 18900 Ch.<br>1880 MHz | 19150 Ch.<br>1905 MHz |                           |          |
| 10 MHz    | QPSK       | 1       | 0         | 20.86                 | 21.00                 | 20.80                 | 0                         | 0        |
|           |            | 1       | 24        | 21.26                 | 20.99                 | 20.89                 | 0                         | 0        |
|           |            | 1       | 49        | 20.80                 | 21.02                 | 20.71                 | 0                         | 0        |
|           |            | 25      | 0         | 19.89                 | 20.00                 | 19.82                 | 0-1                       | 1        |
|           |            | 25      | 12        | 19.89                 | 19.91                 | 19.78                 | 0-1                       | 1        |
|           |            | 25      | 24        | 19.77                 | 19.92                 | 19.63                 | 0-1                       | 1        |
|           |            | 50      | 0         | 19.87                 | 19.81                 | 19.61                 | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 19.44                 | 19.41                 | 19.43                 | 0-1                       | 1        |
|           |            | 1       | 24        | 19.94                 | 19.44                 | 19.74                 | 0-1                       | 1        |
|           |            | 1       | 49        | 19.28                 | 19.33                 | 19.22                 | 0-1                       | 1        |
|           |            | 25      | 0         | 18.86                 | 18.80                 | 18.59                 | 0-2                       | 2        |
|           |            | 25      | 12        | 18.86                 | 18.82                 | 18.84                 | 0-2                       | 2        |
|           |            | 25      | 24        | 18.85                 | 18.90                 | 18.70                 | 0-2                       | 2        |
|           |            | 50      | 0         | 18.94                 | 18.79                 | 18.57                 | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 18.49                 | 17.82                 | 18.77                 | 0-2                       | 2        |
|           |            | 1       | 24        | 18.80                 | 19.15                 | 19.06                 | 0-2                       | 2        |
|           |            | 1       | 49        | 18.96                 | 18.85                 | 18.66                 | 0-2                       | 2        |
|           |            | 25      | 0         | 17.80                 | 18.11                 | 18.01                 | 0-3                       | 3        |
|           |            | 25      | 12        | 17.72                 | 18.03                 | 18.07                 | 0-3                       | 3        |
|           |            | 25      | 24        | 17.77                 | 17.77                 | 17.92                 | 0-3                       | 3        |
|           |            | 50      | 0         | 17.87                 | 17.93                 | 17.72                 | 0-3                       | 3        |

## LTE Band 2 \_ 15 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Reduced Power [dBm]     |                       |                         | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|-------------------------|-----------------------|-------------------------|---------------------------|----------|
|           |            |         |           | 18675 Ch.<br>1857.5 MHz | 18900 Ch.<br>1880 MHz | 19125 Ch.<br>1902.5 MHz |                           |          |
| 15 MHz    | QPSK       | 1       | 0         | 20.82                   | 21.01                 | 20.85                   | 0                         | 0        |
|           |            | 1       | 36        | 21.19                   | 21.29                 | 21.07                   | 0                         | 0        |
|           |            | 1       | 74        | 20.83                   | 20.87                 | 20.66                   | 0                         | 0        |
|           |            | 36      | 0         | 19.93                   | 20.03                 | 19.75                   | 0-1                       | 1        |
|           |            | 36      | 18        | 19.85                   | 19.91                 | 19.80                   | 0-1                       | 1        |
|           |            | 36      | 39        | 19.86                   | 19.86                 | 19.62                   | 0-1                       | 1        |
|           |            | 75      | 0         | 19.91                   | 19.86                 | 19.64                   | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 19.42                   | 19.45                 | 19.53                   | 0-1                       | 1        |
|           |            | 1       | 36        | 19.52                   | 19.63                 | 19.61                   | 0-1                       | 1        |
|           |            | 1       | 74        | 19.23                   | 18.94                 | 19.11                   | 0-1                       | 1        |
|           |            | 36      | 0         | 18.88                   | 18.90                 | 18.72                   | 0-2                       | 2        |
|           |            | 36      | 18        | 18.90                   | 18.88                 | 18.67                   | 0-2                       | 2        |
|           |            | 36      | 39        | 18.81                   | 18.75                 | 18.49                   | 0-2                       | 2        |
|           |            | 75      | 0         | 18.86                   | 18.84                 | 18.62                   | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 19.08                   | 18.66                 | 18.06                   | 0-2                       | 2        |
|           |            | 1       | 36        | 19.25                   | 19.33                 | 18.64                   | 0-2                       | 2        |
|           |            | 1       | 74        | 18.94                   | 18.70                 | 17.83                   | 0-2                       | 2        |
|           |            | 36      | 0         | 17.96                   | 18.04                 | 17.78                   | 0-3                       | 3        |
|           |            | 36      | 18        | 18.05                   | 17.95                 | 17.83                   | 0-3                       | 3        |
|           |            | 36      | 39        | 17.95                   | 18.02                 | 17.75                   | 0-3                       | 3        |
|           |            | 75      | 0         | 17.80                   | 18.07                 | 17.75                   | 0-3                       | 3        |

## LTE Band 2 \_ 20 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Reduced Power [dBm]   |                       |                       | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|-----------------------|-----------------------|-----------------------|---------------------------|----------|
|           |            |         |           | 18700 Ch.<br>1860 MHz | 18900 Ch.<br>1880 MHz | 19100 Ch.<br>1900 MHz |                           |          |
| 20 MHz    | QPSK       | 1       | 0         | 20.98                 | 20.98                 | 20.81                 | 0                         | 0        |
|           |            | 1       | 49        | <b>21.15</b>          | 21.07                 | 21.05                 | 0                         | 0        |
|           |            | 1       | 99        | 20.91                 | 20.90                 | 20.58                 | 0                         | 0        |
|           |            | 50      | 0         | 19.91                 | 19.95                 | 19.85                 | 0-1                       | 1        |
|           |            | 50      | 25        | 19.86                 | <b>19.98</b>          | 19.80                 | 0-1                       | 1        |
|           |            | 50      | 49        | 19.83                 | 19.89                 | 19.63                 | 0-1                       | 1        |
|           |            | 100     | 0         | 19.88                 | 19.87                 | 19.79                 | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 19.54                 | 19.54                 | 19.12                 | 0-1                       | 1        |
|           |            | 1       | 49        | 19.54                 | 20.17                 | 19.36                 | 0-1                       | 1        |
|           |            | 1       | 99        | 19.44                 | 19.48                 | 18.78                 | 0-1                       | 1        |
|           |            | 50      | 0         | 18.81                 | 19.01                 | 18.82                 | 0-2                       | 2        |
|           |            | 50      | 25        | 18.84                 | 18.87                 | 18.89                 | 0-2                       | 2        |
|           |            | 50      | 49        | 18.82                 | 18.80                 | 18.64                 | 0-2                       | 2        |
|           |            | 100     | 0         | 18.84                 | 18.82                 | 18.67                 | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 19.07                 | 19.16                 | 18.91                 | 0-2                       | 2        |
|           |            | 1       | 49        | 19.15                 | 18.93                 | 19.00                 | 0-2                       | 2        |
|           |            | 1       | 99        | 19.09                 | 18.71                 | 18.74                 | 0-2                       | 2        |
|           |            | 50      | 0         | 17.96                 | 17.94                 | 17.88                 | 0-3                       | 3        |
|           |            | 50      | 25        | 17.87                 | 17.92                 | 17.91                 | 0-3                       | 3        |
|           |            | 50      | 49        | 17.74                 | 17.96                 | 17.67                 | 0-3                       | 3        |
|           |            | 100     | 0         | 17.78                 | 17.78                 | 17.72                 | 0-3                       | 3        |

[ LTE Band 4 Conducted Power ]

LTE Band 4 \_ 1.4 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Reduced Power [dBm]  |                      |                      | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|----------------------|----------------------|----------------------|---------------------------|----------|
|           |            |         |           | 19957 Ch. 1710.7 MHz | 20175 Ch. 1732.5 MHz | 20393 Ch. 1754.3 MHz |                           |          |
| 1.4 MHz   | QPSK       | 1       | 0         | 17.94                | 18.06                | 18.01                | 0                         | 0        |
|           |            | 1       | 3         | 18.02                | 18.09                | 18.10                | 0                         | 0        |
|           |            | 1       | 5         | 17.95                | 18.05                | 18.06                | 0                         | 0        |
|           |            | 3       | 0         | 17.94                | 17.98                | 18.02                | 0                         | 0        |
|           |            | 3       | 1         | 17.99                | 18.13                | 17.98                | 0                         | 0        |
|           |            | 3       | 3         | 17.95                | 18.04                | 18.03                | 0                         | 0        |
|           |            | 6       | 0         | 16.90                | 17.07                | 16.88                | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 16.33                | 17.14                | 17.05                | 0-1                       | 1        |
|           |            | 1       | 3         | 16.63                | 16.62                | 16.67                | 0-1                       | 1        |
|           |            | 1       | 5         | 16.42                | 16.66                | 16.44                | 0-1                       | 1        |
|           |            | 3       | 0         | 16.78                | 17.19                | 16.71                | 0-1                       | 1        |
|           |            | 3       | 1         | 17.02                | 17.21                | 16.80                | 0-1                       | 1        |
|           |            | 3       | 3         | 17.15                | 17.19                | 16.74                | 0-1                       | 1        |
|           |            | 6       | 0         | 15.76                | 16.23                | 15.76                | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 15.95                | 16.08                | 16.11                | 0-2                       | 2        |
|           |            | 1       | 3         | 15.84                | 16.30                | 16.16                | 0-2                       | 2        |
|           |            | 1       | 5         | 15.68                | 16.19                | 16.15                | 0-2                       | 2        |
|           |            | 3       | 0         | 15.72                | 16.12                | 15.72                | 0-2                       | 2        |
|           |            | 3       | 1         | 15.83                | 16.15                | 15.88                | 0-2                       | 2        |
|           |            | 3       | 3         | 15.75                | 15.62                | 15.66                | 0-2                       | 2        |
|           |            | 6       | 0         | 14.83                | 15.38                | 14.71                | 0-3                       | 3        |

LTE Band 4 \_ 3 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Reduced Power [dBm]  |                      |                      | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|----------------------|----------------------|----------------------|---------------------------|----------|
|           |            |         |           | 19965 Ch. 1711.5 MHz | 20175 Ch. 1732.5 MHz | 20385 Ch. 1753.5 MHz |                           |          |
| 3 MHz     | QPSK       | 1       | 0         | 17.86                | 18.05                | 18.08                | 0                         | 0        |
|           |            | 1       | 7         | 17.94                | 18.10                | 18.24                | 0                         | 0        |
|           |            | 1       | 14        | 17.87                | 18.03                | 18.04                | 0                         | 0        |
|           |            | 8       | 0         | 17.06                | 17.12                | 16.93                | 0-1                       | 1        |
|           |            | 8       | 3         | 16.98                | 17.12                | 16.97                | 0-1                       | 1        |
|           |            | 8       | 7         | 16.84                | 17.06                | 16.93                | 0-1                       | 1        |
|           |            | 15      | 0         | 16.85                | 17.01                | 16.94                | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 16.81                | 16.89                | 16.67                | 0-1                       | 1        |
|           |            | 1       | 7         | 16.13                | 16.78                | 16.80                | 0-1                       | 1        |
|           |            | 1       | 14        | 16.01                | 16.43                | 16.65                | 0-1                       | 1        |
|           |            | 8       | 0         | 15.88                | 16.32                | 15.92                | 0-2                       | 2        |
|           |            | 8       | 3         | 15.90                | 16.22                | 15.98                | 0-2                       | 2        |
|           |            | 8       | 7         | 15.86                | 16.26                | 16.11                | 0-2                       | 2        |
|           |            | 15      | 0         | 15.93                | 16.10                | 15.95                | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 16.03                | 16.15                | 15.58                | 0-2                       | 2        |
|           |            | 1       | 7         | 15.98                | 16.13                | 16.07                | 0-2                       | 2        |
|           |            | 1       | 14        | 15.80                | 16.06                | 15.95                | 0-2                       | 2        |
|           |            | 8       | 0         | 14.80                | 14.91                | 14.73                | 0-3                       | 3        |
|           |            | 8       | 3         | 14.82                | 14.97                | 14.76                | 0-3                       | 3        |
|           |            | 8       | 7         | 14.70                | 15.02                | 14.81                | 0-3                       | 3        |
|           |            | 15      | 0         | 14.76                | 14.95                | 14.86                | 0-3                       | 3        |

## LTE Band 4 \_ 5 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Reduced Power [dBm]  |                      |                      | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|----------------------|----------------------|----------------------|---------------------------|----------|
|           |            |         |           | 19975 Ch. 1712.5 MHz | 20175 Ch. 1732.5 MHz | 20375 Ch. 1752.5 MHz |                           |          |
| 5 MHz     | QPSK       | 1       | 0         | 17.87                | 18.00                | 18.06                | 0                         | 0        |
|           |            | 1       | 12        | 17.89                | 17.96                | 18.37                | 0                         | 0        |
|           |            | 1       | 24        | 17.88                | 18.07                | 18.12                | 0                         | 0        |
|           |            | 12      | 0         | 16.95                | 17.03                | 17.10                | 0-1                       | 1        |
|           |            | 12      | 6         | 16.89                | 17.03                | 16.98                | 0-1                       | 1        |
|           |            | 12      | 11        | 16.78                | 17.09                | 16.97                | 0-1                       | 1        |
|           |            | 25      | 0         | 16.86                | 17.02                | 16.93                | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 16.90                | 16.43                | 17.15                | 0-1                       | 1        |
|           |            | 1       | 12        | 16.50                | 16.85                | 16.65                | 0-1                       | 1        |
|           |            | 1       | 24        | 16.45                | 16.72                | 16.70                | 0-1                       | 1        |
|           |            | 12      | 0         | 15.65                | 15.90                | 15.93                | 0-2                       | 2        |
|           |            | 12      | 6         | 15.84                | 15.98                | 16.00                | 0-2                       | 2        |
|           |            | 12      | 11        | 15.83                | 16.06                | 15.98                | 0-2                       | 2        |
|           |            | 25      | 0         | 15.82                | 15.99                | 16.06                | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 15.69                | 16.02                | 15.57                | 0-2                       | 2        |
|           |            | 1       | 12        | 16.01                | 16.22                | 16.18                | 0-2                       | 2        |
|           |            | 1       | 24        | 15.77                | 16.15                | 16.15                | 0-2                       | 2        |
|           |            | 12      | 0         | 14.81                | 14.93                | 14.94                | 0-3                       | 3        |
|           |            | 12      | 6         | 15.04                | 14.92                | 15.00                | 0-3                       | 3        |
|           |            | 12      | 11        | 14.90                | 14.80                | 14.90                | 0-3                       | 3        |
|           |            | 25      | 0         | 14.77                | 14.89                | 14.94                | 0-3                       | 3        |

## LTE Band 4 \_ 10 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Reduced Power [dBm] |                      |                    | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|---------------------|----------------------|--------------------|---------------------------|----------|
|           |            |         |           | 20000 Ch. 1715 MHz  | 20175 Ch. 1732.5 MHz | 20350 Ch. 1750 MHz |                           |          |
| 10 MHz    | QPSK       | 1       | 0         | 17.96               | 17.86                | 18.01              | 0                         | 0        |
|           |            | 1       | 24        | 18.07               | 18.15                | 18.29              | 0                         | 0        |
|           |            | 1       | 49        | 17.89               | 17.87                | 18.07              | 0                         | 0        |
|           |            | 25      | 0         | 16.93               | 17.02                | 17.07              | 0-1                       | 1        |
|           |            | 25      | 12        | 16.93               | 17.08                | 16.88              | 0-1                       | 1        |
|           |            | 25      | 24        | 16.83               | 17.01                | 17.15              | 0-1                       | 1        |
|           |            | 50      | 0         | 16.81               | 17.04                | 17.04              | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 16.69               | 16.56                | 16.75              | 0-1                       | 1        |
|           |            | 1       | 24        | 16.28               | 17.12                | 16.66              | 0-1                       | 1        |
|           |            | 1       | 49        | 16.09               | 16.69                | 16.64              | 0-1                       | 1        |
|           |            | 25      | 0         | 15.89               | 15.98                | 16.04              | 0-2                       | 2        |
|           |            | 25      | 12        | 15.99               | 16.15                | 16.32              | 0-2                       | 2        |
|           |            | 25      | 24        | 15.90               | 16.08                | 16.32              | 0-2                       | 2        |
|           |            | 50      | 0         | 15.97               | 15.93                | 16.12              | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 15.66               | 15.72                | 15.77              | 0-2                       | 2        |
|           |            | 1       | 24        | 16.03               | 15.92                | 16.50              | 0-2                       | 2        |
|           |            | 1       | 49        | 15.58               | 15.67                | 15.74              | 0-2                       | 2        |
|           |            | 25      | 0         | 14.94               | 15.13                | 15.10              | 0-3                       | 3        |
|           |            | 25      | 12        | 14.94               | 15.29                | 14.93              | 0-3                       | 3        |
|           |            | 25      | 24        | 14.84               | 15.05                | 15.15              | 0-3                       | 3        |
|           |            | 50      | 0         | 14.82               | 15.00                | 14.93              | 0-3                       | 3        |

## LTE Band 4 \_ 15 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Reduced Power [dBm]  |                      |                      | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|----------------------|----------------------|----------------------|---------------------------|----------|
|           |            |         |           | 20025 Ch. 1717.5 MHz | 20175 Ch. 1732.5 MHz | 20325 Ch. 1747.5 MHz |                           |          |
| 15 MHz    | QPSK       | 1       | 0         | 17.91                | 17.96                | 18.16                | 0                         | 0        |
|           |            | 1       | 36        | 18.07                | 18.10                | 18.27                | 0                         | 0        |
|           |            | 1       | 74        | 17.99                | 18.00                | 18.02                | 0                         | 0        |
|           |            | 36      | 0         | 16.89                | 17.01                | 17.06                | 0-1                       | 1        |
|           |            | 36      | 18        | 16.92                | 17.08                | 16.95                | 0-1                       | 1        |
|           |            | 36      | 39        | 16.87                | 16.99                | 17.05                | 0-1                       | 1        |
|           |            | 75      | 0         | 16.89                | 17.00                | 16.97                | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 16.57                | 16.51                | 16.56                | 0-1                       | 1        |
|           |            | 1       | 36        | 17.17                | 16.71                | 16.59                | 0-1                       | 1        |
|           |            | 1       | 74        | 16.55                | 16.61                | 16.26                | 0-1                       | 1        |
|           |            | 36      | 0         | 15.84                | 15.95                | 16.05                | 0-2                       | 2        |
|           |            | 36      | 18        | 15.88                | 16.04                | 15.97                | 0-2                       | 2        |
|           |            | 36      | 39        | 16.01                | 15.95                | 16.12                | 0-2                       | 2        |
|           |            | 75      | 0         | 15.95                | 16.07                | 16.13                | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 15.50                | 15.71                | 15.40                | 0-2                       | 2        |
|           |            | 1       | 36        | 16.42                | 16.42                | 16.24                | 0-2                       | 2        |
|           |            | 1       | 74        | 15.86                | 15.93                | 15.86                | 0-2                       | 2        |
|           |            | 36      | 0         | 14.92                | 14.85                | 15.04                | 0-3                       | 3        |
|           |            | 36      | 18        | 14.85                | 15.12                | 15.00                | 0-3                       | 3        |
|           |            | 36      | 39        | 14.99                | 15.03                | 15.14                | 0-3                       | 3        |
|           |            | 75      | 0         | 14.78                | 15.02                | 15.00                | 0-3                       | 3        |

## LTE Band 4 \_ 20 MHz Bandwidth

| Bandwidth | Modulation | RB Size | RB Offset | Reduced Power [dBm]  | MPR Allowed Per 3GPP [dB] | MPR [dB] |
|-----------|------------|---------|-----------|----------------------|---------------------------|----------|
|           |            |         |           | 20175 Ch. 1732.5 MHz |                           |          |
| 20 MHz    | QPSK       | 1       | 0         | <b>18.17</b>         | 0                         | 0        |
|           |            | 1       | 49        | 18.11                | 0                         | 0        |
|           |            | 1       | 99        | 18.10                | 0                         | 0        |
|           |            | 50      | 0         | 17.00                | 0-1                       | 1        |
|           |            | 50      | 25        | <b>17.13</b>         | 0-1                       | 1        |
|           |            | 50      | 49        | 16.98                | 0-1                       | 1        |
|           |            | 100     | 0         | 17.02                | 0-1                       | 1        |
|           | 16QAM      | 1       | 0         | 16.60                | 0-1                       | 1        |
|           |            | 1       | 49        | 17.31                | 0-1                       | 1        |
|           |            | 1       | 99        | 16.67                | 0-1                       | 1        |
|           |            | 50      | 0         | 16.06                | 0-2                       | 2        |
|           |            | 50      | 25        | 16.12                | 0-2                       | 2        |
|           |            | 50      | 49        | 16.04                | 0-2                       | 2        |
|           |            | 100     | 0         | 15.98                | 0-2                       | 2        |
|           | 64QAM      | 1       | 0         | 15.80                | 0-2                       | 2        |
|           |            | 1       | 49        | 16.30                | 0-2                       | 2        |
|           |            | 1       | 99        | 15.81                | 0-2                       | 2        |
|           |            | 50      | 0         | 15.12                | 0-3                       | 3        |
|           |            | 50      | 25        | 15.08                | 0-3                       | 3        |
|           |            | 50      | 49        | 15.02                | 0-3                       | 3        |
|           |            | 100     | 0         | 14.94                | 0-3                       | 3        |



## 11.4 WIFI Conducted Power measurement method


### Un-Licensed bands (DTS Band)

| Test Description       | Test Procedure Used                                                        |
|------------------------|----------------------------------------------------------------------------|
| Conducted Output Power | - KDB 558074 v05 - Section 8.3.2.3<br>- ANSI 63.10-2013 - Section 11.9.2.3 |

#### Test Procedure

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Test setup




### Un-Licensed bands (NII Band)

| Test Description       | Test Procedure Used                     |
|------------------------|-----------------------------------------|
| Conducted Output Power | - KDB 789033 D02 v02r01 - Section E.3.a |

#### Test Procedure

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Test setup



#### 11.4.1 IEEE 802.11 (2.4 GHz) Maximum Conducted Power

| Mode              | Frequency [MHz] | Channel | IEEE 802.11 (2.4 GHz) Average RF Conducted Power [dBm] |
|-------------------|-----------------|---------|--------------------------------------------------------|
| 802.11b           | 2 412           | 1       | 19.01                                                  |
|                   | 2 437           | 6       | 18.92                                                  |
|                   | 2 462           | 11      | 18.85                                                  |
| 802.11g           | 2 412           | 1       | 19.20                                                  |
|                   | 2 437           | 6       | 19.24                                                  |
|                   | 2 462           | 11      | 19.06                                                  |
| 802.11n<br>(HT20) | 2 412           | 1       | 19.03                                                  |
|                   | 2 437           | 6       | 19.29                                                  |
|                   | 2 462           | 11      | 19.11                                                  |
| 802.11n<br>(HT40) | 2 422           | 3       | 18.62                                                  |
|                   | 2 437           | 6       | 18.39                                                  |
|                   | 2 452           | 9       | 18.28                                                  |

#### 11.4.2 IEEE 802.11 (2.4 GHz) Reduced Conducted Power (Held to ear VOIP)

| Mode              | Frequency [MHz] | Channel | IEEE 802.11 (2.4 GHz) Reduced Average Conducted Power [dBm] |
|-------------------|-----------------|---------|-------------------------------------------------------------|
| 802.11b           | 2 412           | 1       | 18.42                                                       |
|                   | 2 437           | 6       | 18.37                                                       |
|                   | 2 462           | 11      | 18.34                                                       |
| 802.11g           | 2 412           | 1       | 18.57                                                       |
|                   | 2 437           | 6       | 18.70                                                       |
|                   | 2 462           | 11      | 18.57                                                       |
| 802.11n<br>(HT20) | 2 412           | 1       | 18.66                                                       |
|                   | 2 437           | 6       | 18.72                                                       |
|                   | 2 462           | 11      | 18.61                                                       |
| 802.11n<br>(HT40) | 2 422           | 3       | 17.25                                                       |
|                   | 2 437           | 6       | 17.19                                                       |
|                   | 2 452           | 9       | 17.15                                                       |

### 11.4.3 IEEE 802.11 (5 GHz) Maximum Conducted Power

| Mode                   | Frequency [MHz] | Channel | IEEE 802.11n(5 GHz) Average RF Conducted Power [dBm] |
|------------------------|-----------------|---------|------------------------------------------------------|
| 802.11n<br>(40 MHz BW) | 5 190           | 38      | 18.92                                                |
|                        | 5 230           | 46      | 18.98                                                |
|                        | 5 270           | 54      | 18.92                                                |
|                        | 5 310           | 62      | 18.91                                                |
|                        | 5 510           | 102     | 18.44                                                |
|                        | 5 590           | 118     | 18.53                                                |
|                        | 5 630           | 126     | 18.83                                                |
|                        | 5 710           | 142     | 18.43                                                |
|                        | 5 755           | 151     | 15.96                                                |
|                        | 5 795           | 159     | 16.10                                                |

| Mode                    | Frequency [MHz] | Channel | IEEE 802.11ac(5 GHz) Average RF Conducted Power [dBm] |
|-------------------------|-----------------|---------|-------------------------------------------------------|
| 802.11ac<br>(80 MHz BW) | 5 210           | 42      | 16.98                                                 |
|                         | 5 290           | 58      | 16.71                                                 |
|                         | 5 530           | 106     | 16.40                                                 |
|                         | 5 610           | 122     | 16.75                                                 |
|                         | 5 690           | 138     | 16.81                                                 |
|                         | 5 775           | 155     | 15.99                                                 |


### 11.4.4 IEEE 802.11 (5 GHz) Reduced Conducted Power (Held to ear VOIP)

| Mode                    | Frequency [MHz] | Channel | IEEE 802.11 (5 GHz) Reduced Average Conducted Power [dBm] |
|-------------------------|-----------------|---------|-----------------------------------------------------------|
| 802.11ac<br>(80 MHz BW) | 5 210           | 42      | 15.99                                                     |
|                         | 5 290           | 58      | 15.69                                                     |
|                         | 5 530           | 106     | 15.39                                                     |
|                         | 5 610           | 122     | 15.65                                                     |
|                         | 5 690           | 138     | 15.81                                                     |
|                         | 5 775           | 155     | 14.97                                                     |

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission mode with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.


#### Test Configuration



## 11.5 Bluetooth Conducted Power

The Burst averaged-conducted power

| Mode  | Channel | Bluetooth Power [dBm] |
|-------|---------|-----------------------|
| DH5   | 0       | 6.73                  |
|       | 39      | 8.57                  |
|       | 78      | 7.96                  |
| 2-DH5 | 0       | 4.93                  |
|       | 39      | 6.75                  |
|       | 78      | 6.14                  |
| 3-DH5 | 0       | 4.93                  |
|       | 39      | 6.75                  |
|       | 78      | 6.14                  |

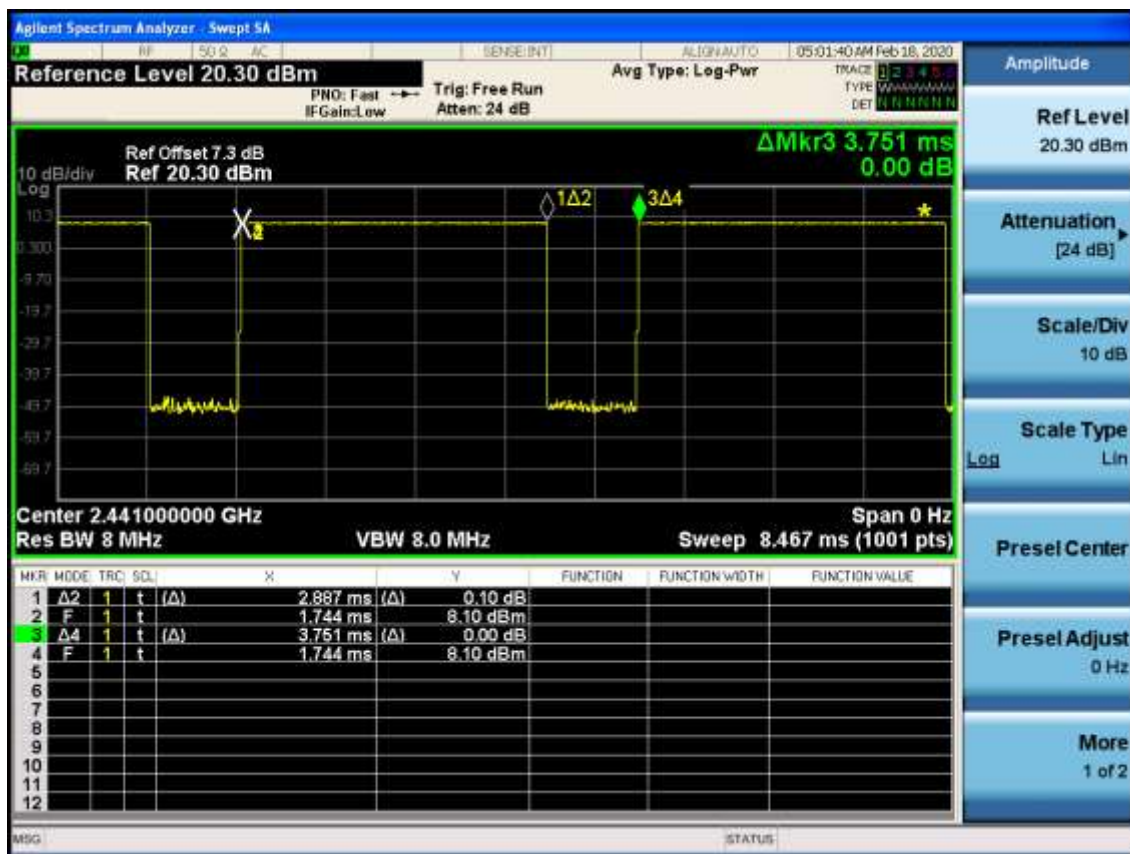

Duty Cycle

= (BT-On time / BT-Full time) = (2.887/3.751) = 0.770 (DH5)

Duty factor= 1/Duty cycle : 1.299

## 12. System Verification

### 12.1 Tissue Verification

The body simulating material is calibrated by HCT using the DAKS 3.5 to determine the conductivity and permittivity.

| Table for Head Tissue Verification |                   |             |             |                                      |                                          |                                    |                                        |                |                  |
|------------------------------------|-------------------|-------------|-------------|--------------------------------------|------------------------------------------|------------------------------------|----------------------------------------|----------------|------------------|
| Date of Tests                      | Tissue Temp. (°C) | Tissue Type | Freq. (MHz) | Measured Conductivity $\sigma$ (S/m) | Measured Dielectric Constant, $\epsilon$ | Target Conductivity $\sigma$ (S/m) | Target Dielectric Constant, $\epsilon$ | % dev $\sigma$ | % dev $\epsilon$ |
| 02/07/2020                         | 20.9              | 750H        | 705         | 0.851                                | 42.065                                   | 0.889                              | 42.174                                 | -4.27%         | -0.26%           |
|                                    |                   |             | 710         | 0.856                                | 41.993                                   | 0.890                              | 42.148                                 | -3.82%         | -0.37%           |
|                                    |                   |             | 750         | 0.895                                | 41.442                                   | 0.893                              | 41.940                                 | 0.22%          | -1.19%           |
|                                    |                   |             | 785         | 0.925                                | 40.999                                   | 0.896                              | 41.758                                 | 3.24%          | -1.82%           |
| 02/12/2020                         | 21.0              | 835H        | 820         | 0.911                                | 42.493                                   | 0.899                              | 41.577                                 | 1.33%          | 2.20%            |
|                                    |                   |             | 835         | 0.928                                | 42.292                                   | 0.900                              | 41.500                                 | 3.11%          | 1.91%            |
|                                    |                   |             | 850         | 0.940                                | 42.102                                   | 0.916                              | 41.500                                 | 2.62%          | 1.45%            |
| 02/07/2020                         | 20.9              | 835H        | 820         | 0.912                                | 42.506                                   | 0.899                              | 41.577                                 | 1.45%          | 2.23%            |
|                                    |                   |             | 835         | 0.928                                | 42.329                                   | 0.900                              | 41.500                                 | 3.11%          | 2.00%            |
|                                    |                   |             | 850         | 0.938                                | 42.171                                   | 0.916                              | 41.500                                 | 2.40%          | 1.62%            |
| 02/20/2020                         | 20.7              | 835H        | 820         | 0.911                                | 42.566                                   | 0.899                              | 41.577                                 | 1.33%          | 2.38%            |
|                                    |                   |             | 835         | 0.928                                | 42.328                                   | 0.900                              | 41.500                                 | 3.11%          | 2.00%            |
|                                    |                   |             | 850         | 0.937                                | 42.108                                   | 0.916                              | 41.500                                 | 2.29%          | 1.47%            |
| 02/12/2020                         | 21.0              | 1800H       | 1710        | 1.300                                | 39.439                                   | 1.348                              | 40.144                                 | -3.56%         | -1.76%           |
|                                    |                   |             | 1750        | 1.340                                | 39.308                                   | 1.371                              | 40.080                                 | -2.26%         | -1.93%           |
|                                    |                   |             | 1800        | 1.392                                | 39.083                                   | 1.400                              | 40.000                                 | -0.57%         | -2.29%           |
| 02/13/2020                         | 20.9              | 1900H       | 1850        | 1.360                                | 38.796                                   | 1.400                              | 40.000                                 | -2.86%         | -3.01%           |
|                                    |                   |             | 1900        | 1.418                                | 38.696                                   | 1.400                              | 40.000                                 | 1.29%          | -3.26%           |
|                                    |                   |             | 1910        | 1.424                                | 38.643                                   | 1.400                              | 40.000                                 | 1.71%          | -3.39%           |
| 02/12/2020                         | 21.0              | 1900H       | 1850        | 1.361                                | 38.794                                   | 1.400                              | 40.000                                 | -2.79%         | -3.02%           |
|                                    |                   |             | 1900        | 1.418                                | 38.685                                   | 1.400                              | 40.000                                 | 1.29%          | -3.29%           |
|                                    |                   |             | 1910        | 1.424                                | 38.637                                   | 1.400                              | 40.000                                 | 1.71%          | -3.41%           |
| 02/20/2020                         | 20.7              | 1900H       | 1850        | 1.344                                | 40.463                                   | 1.400                              | 40.000                                 | -4.00%         | 1.16%            |
|                                    |                   |             | 1900        | 1.359                                | 40.294                                   | 1.400                              | 40.000                                 | -2.93%         | 0.73%            |
|                                    |                   |             | 1910        | 1.367                                | 40.284                                   | 1.400                              | 40.000                                 | -2.36%         | 0.71%            |
| 02/11/2020                         | 19.8              | 2450H       | 2400        | 1.728                                | 38.616                                   | 1.756                              | 39.290                                 | -1.59%         | -1.72%           |
|                                    |                   |             | 2450        | 1.790                                | 38.349                                   | 1.800                              | 39.200                                 | -0.56%         | -2.17%           |
|                                    |                   |             | 2500        | 1.842                                | 38.192                                   | 1.855                              | 39.140                                 | -0.70%         | -2.42%           |
| 02/11/2020                         | 20.2              | 5180H-5825H | 5180        | 4.721                                | 36.991                                   | 4.635                              | 36.010                                 | 1.86%          | 2.72%            |
|                                    |                   |             | 5250        | 4.847                                | 36.904                                   | 4.706                              | 35.930                                 | 3.00%          | 2.71%            |
|                                    |                   |             | 5280        | 4.777                                | 36.778                                   | 4.737                              | 35.894                                 | 0.84%          | 2.46%            |
|                                    |                   |             | 5320        | 4.748                                | 36.880                                   | 4.778                              | 35.846                                 | -0.63%         | 2.88%            |
|                                    |                   |             | 5500        | 5.043                                | 36.518                                   | 4.963                              | 35.640                                 | 1.61%          | 2.46%            |
|                                    |                   |             | 5600        | 5.173                                | 36.713                                   | 5.065                              | 35.530                                 | 2.13%          | 3.33%            |
|                                    |                   |             | 5750        | 5.299                                | 36.797                                   | 5.219                              | 35.360                                 | 1.53%          | 4.06%            |
|                                    |                   |             | 5800        | 5.264                                | 36.976                                   | 5.270                              | 35.300                                 | -0.11%         | 4.75%            |
|                                    |                   |             | 5825        | 5.145                                | 36.432                                   | 5.296                              | 35.270                                 | -0.98%         | -4.30%           |

| Table for Body Tissue Verification |                   |             |             |                                      |                                          |                                    |                                        |                |                  |
|------------------------------------|-------------------|-------------|-------------|--------------------------------------|------------------------------------------|------------------------------------|----------------------------------------|----------------|------------------|
| Date of Tests                      | Tissue Temp. (°C) | Tissue Type | Freq. (MHz) | Measured Conductivity $\sigma$ (S/m) | Measured Dielectric Constant, $\epsilon$ | Target Conductivity $\sigma$ (S/m) | Target Dielectric Constant, $\epsilon$ | % dev $\sigma$ | % dev $\epsilon$ |
| 02/11/2020                         | 21.5              | 750B        | 705         | 0.923                                | 55.812                                   | 0.959                              | 55.710                                 | -3.75%         | 0.18%            |
|                                    |                   |             | 710         | 0.928                                | 55.780                                   | 0.960                              | 55.690                                 | -3.33%         | 0.16%            |
|                                    |                   |             | 750         | 0.968                                | 55.393                                   | 0.963                              | 55.530                                 | 0.52%          | -0.25%           |
|                                    |                   |             | 785         | 0.995                                | 54.997                                   | 0.966                              | 55.397                                 | 3.00%          | -0.72%           |
| 02/12/2020                         | 20.2              | 835B        | 820         | 0.943                                | 53.562                                   | 0.969                              | 55.260                                 | -2.68%         | -3.07%           |
|                                    |                   |             | 835         | 0.959                                | 53.394                                   | 0.970                              | 55.200                                 | -1.13%         | -3.27%           |
|                                    |                   |             | 850         | 0.970                                | 53.160                                   | 0.988                              | 55.150                                 | -1.82%         | -3.61%           |
| 02/10/2020                         | 21.4              | 835B        | 820         | 0.942                                | 56.520                                   | 0.969                              | 55.260                                 | -2.79%         | 2.28%            |
|                                    |                   |             | 835         | 0.961                                | 56.339                                   | 0.970                              | 55.200                                 | -0.93%         | 2.06%            |
|                                    |                   |             | 850         | 0.973                                | 56.182                                   | 0.988                              | 55.150                                 | -1.52%         | 1.87%            |
| 02/20/2020                         | 20.4              | 835B        | 820         | 0.941                                | 56.590                                   | 0.969                              | 55.260                                 | -2.89%         | 2.41%            |
|                                    |                   |             | 835         | 0.960                                | 56.410                                   | 0.970                              | 55.200                                 | -1.03%         | 2.19%            |
|                                    |                   |             | 850         | 0.972                                | 56.246                                   | 0.988                              | 55.150                                 | -1.62%         | 1.99%            |
| 02/13/2020                         | 20.8              | 1800B       | 1710        | 1.455                                | 53.895                                   | 1.463                              | 53.534                                 | -0.55%         | 0.67%            |
|                                    |                   |             | 1750        | 1.488                                | 53.866                                   | 1.488                              | 53.430                                 | 0.00%          | 0.82%            |
|                                    |                   |             | 1800        | 1.536                                | 53.745                                   | 1.520                              | 53.300                                 | 1.05%          | 0.83%            |
| 02/13/2020                         | 20.3              | 1900B       | 1850        | 1.483                                | 53.609                                   | 1.520                              | 53.300                                 | -2.43%         | 0.58%            |
|                                    |                   |             | 1900        | 1.526                                | 53.548                                   | 1.520                              | 53.300                                 | 0.39%          | 0.47%            |
|                                    |                   |             | 1910        | 1.543                                | 53.566                                   | 1.520                              | 53.300                                 | 1.51%          | 0.50%            |
| 02/13/2020                         | 20.8              | 1900B       | 1850        | 1.479                                | 53.669                                   | 1.520                              | 53.300                                 | -2.70%         | 0.69%            |
|                                    |                   |             | 1900        | 1.525                                | 53.523                                   | 1.520                              | 53.300                                 | 0.33%          | 0.42%            |
|                                    |                   |             | 1910        | 1.537                                | 53.594                                   | 1.520                              | 53.300                                 | 1.12%          | 0.55%            |
| 02/20/2020                         | 20.4              | 1900B       | 1850        | 1.479                                | 53.642                                   | 1.520                              | 53.300                                 | -2.70%         | 0.64%            |
|                                    |                   |             | 1900        | 1.527                                | 53.523                                   | 1.520                              | 53.300                                 | 0.46%          | 0.42%            |
|                                    |                   |             | 1910        | 1.535                                | 53.572                                   | 1.520                              | 53.300                                 | 0.99%          | 0.51%            |
| 02/11/2020                         | 19.8              | 2450B       | 2400        | 1.880                                | 53.900                                   | 1.902                              | 52.770                                 | -1.16%         | 2.14%            |
|                                    |                   |             | 2450        | 1.948                                | 53.712                                   | 1.950                              | 52.700                                 | -0.10%         | 1.92%            |
|                                    |                   |             | 2500        | 2.004                                | 53.538                                   | 2.021                              | 52.640                                 | -0.84%         | 1.71%            |
| 02/12/2020                         | 21.0              | 5180B-5600B | 5180        | 5.222                                | 47.742                                   | 5.276                              | 49.038                                 | -1.02%         | -2.64%           |
|                                    |                   |             | 5250        | 5.476                                | 48.246                                   | 5.358                              | 48.950                                 | 2.20%          | -1.44%           |
|                                    |                   |             | 5280        | 5.324                                | 47.364                                   | 5.393                              | 48.908                                 | -1.28%         | -3.16%           |
|                                    |                   |             | 5320        | 5.429                                | 46.747                                   | 5.439                              | 48.852                                 | -0.18%         | -4.31%           |
|                                    |                   |             | 5500        | 5.670                                | 47.046                                   | 5.650                              | 48.610                                 | 0.35%          | -3.22%           |
| 02/13/2020                         | 20.8              | 5750B-5825B | 5600        | 5.822                                | 47.949                                   | 5.766                              | 48.470                                 | 0.97%          | -1.07%           |
|                                    |                   |             | 5750        | 5.869                                | 46.447                                   | 5.942                              | 48.270                                 | -1.23%         | -3.78%           |
|                                    |                   |             | 5800        | 6.041                                | 46.146                                   | 6.000                              | 48.200                                 | 0.68%          | -4.26%           |
|                                    |                   |             | 5825        | 5.970                                | 46.096                                   | 6.029                              | 48.165                                 | -0.98%         | -4.30%           |

## 12.2 System Verification

Input Power: 50 mW

| Freq. [MHz] | Date       | Probe (S/N) | Dipole (S/N) | Liquid | Amb. Temp. [°C] | Liquid Temp. [°C] | 1 W Target SAR <sub>1g</sub> (SPEAG) [W/kg] | 50mW Measured SAR <sub>1g</sub> [W/kg] | 1 W Normalized SAR <sub>1g</sub> [W/kg] | Deviation [%] | Limit [%] |
|-------------|------------|-------------|--------------|--------|-----------------|-------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|---------------|-----------|
| 750         | 02/07/2020 | 3076        | 1014         | Head   | 21.2            | 20.9              | 8.25                                        | 0.425                                  | 8.5                                     | + 3.03        | ± 10      |
| 750         | 02/11/2020 | 3076        |              | Body   | 21.8            | 21.5              | 8.48                                        | 0.425                                  | 8.5                                     | + 0.24        | ± 10      |
| 835         | 02/12/2020 | 7370        | 441          | Head   | 21.2            | 21.0              | 9.69                                        | 0.495                                  | 9.9                                     | + 2.17        | ± 10      |
| 835         | 02/07/2020 | 3076        |              | Head   | 21.2            | 20.9              | 9.69                                        | 0.501                                  | 10.02                                   | + 3.41        | ± 10      |
| 835         | 02/20/2020 | 7370        |              | Head   | 20.9            | 20.7              | 9.69                                        | 0.473                                  | 9.46                                    | - 2.37        | ± 10      |
| 835         | 02/12/2020 | 3797        |              | Body   | 20.4            | 20.2              | 9.73                                        | 0.465                                  | 9.3                                     | - 4.42        | ± 10      |
| 835         | 02/10/2020 | 3076        |              | Body   | 21.7            | 21.4              | 9.73                                        | 0.495                                  | 9.9                                     | + 1.75        | ± 10      |
| 835         | 02/20/2020 | 3797        |              | Body   | 20.6            | 20.4              | 9.73                                        | 0.479                                  | 9.58                                    | - 1.54        | ± 10      |
| 1 800       | 02/12/2020 | 7370        | 2d015        | Head   | 21.2            | 21.0              | 38.5                                        | 1.96                                   | 39.2                                    | + 1.82        | ± 10      |
| 1 800       | 02/13/2020 | 3863        |              | Body   | 21.1            | 20.8              | 38.3                                        | 1.84                                   | 36.8                                    | - 3.92        | ± 10      |
| 1 900       | 02/13/2020 | 7370        | 5d061        | Head   | 21.2            | 20.9              | 39.9                                        | 2.02                                   | 40.4                                    | + 1.25        | ± 10      |
| 1 900       | 02/12/2020 | 7370        |              | Head   | 21.2            | 21.0              | 39.9                                        | 1.92                                   | 38.4                                    | - 3.76        | ± 10      |
| 1 900       | 02/20/2020 | 7370        |              | Head   | 20.9            | 20.7              | 39.9                                        | 1.88                                   | 37.6                                    | - 5.76        | ± 10      |
| 1 900       | 02/13/2020 | 3797        |              | Body   | 20.4            | 20.3              | 39.8                                        | 1.90                                   | 38.0                                    | - 4.52        | ± 10      |
| 1 900       | 02/13/2020 | 3863        |              | Body   | 21.1            | 20.8              | 39.8                                        | 1.89                                   | 37.8                                    | - 5.03        | ± 10      |
| 1 900       | 02/20/2020 | 3797        |              | Body   | 20.6            | 20.4              | 39.8                                        | 1.85                                   | 37                                      | - 7.04        | ± 10      |
| 2 450       | 02/11/2020 | 3968        | 965          | Head   | 20.0            | 19.8              | 52.3                                        | 2.66                                   | 53.2                                    | + 1.72        | ± 10      |
| 2 450       | 02/11/2020 | 3968        |              | Body   | 20.0            | 19.8              | 51.2                                        | 2.73                                   | 54.6                                    | + 6.64        | ± 10      |
| 5 250       | 02/11/2020 | 3863        | 1107         | Head   | 20.6            | 20.2              | 81.6                                        | 4.05                                   | 81.0                                    | - 0.74        | ± 10      |
| 5 250       | 02/12/2020 | 3863        |              | Body   | 21.2            | 21.0              | 75.4                                        | 3.73                                   | 74.6                                    | - 1.06        | ± 10      |
| 5 600       | 02/11/2020 | 3863        |              | Head   | 20.6            | 20.2              | 84.0                                        | 4.17                                   | 83.4                                    | - 0.71        | ± 10      |
| 5 600       | 02/12/2020 | 3863        |              | Body   | 21.2            | 21.0              | 78.5                                        | 3.81                                   | 76.2                                    | - 2.93        | ± 10      |
| 5 750       | 02/11/2020 | 3863        |              | Head   | 20.6            | 20.2              | 80.9                                        | 4.23                                   | 84.6                                    | + 4.57        | ± 10      |
| 5 750       | 02/13/2020 | 3863        |              | Body   | 21.1            | 20.8              | 76.6                                        | 3.61                                   | 72.2                                    | - 5.74        | ± 10      |

## 12.3 System Verification Procedure

SAR measurement was prior to assessment, the system is verified to the ± 10 % of the specifications at each frequency band by using the system verification kit. (Graphic Plots Attached)

- Cabling the system, using the verification kit equipment.
- Generate about 50 mW Input level from the signal generator to the Dipole Antenna.
- Dipole antenna was placed below the flat phantom.
- The measured one-gram SAR at the surface of the phantom above the dipole feed-point should be within 10 % of the target reference value.
- The results are normalized to 1 W input power.

Note;

SAR Verification was performed according to the FCC KDB 865664 D01v01r04.



## 13. SAR Test Data Summary

### 13.1 SAR Measurement Results

| GSM 850 Head SAR                                                                                    |     |          |               |             |             |                                          |            |           |                |              |          |
|-----------------------------------------------------------------------------------------------------|-----|----------|---------------|-------------|-------------|------------------------------------------|------------|-----------|----------------|--------------|----------|
| Frequency                                                                                           |     | Mode     | Tune-Up Limit | Meas. Power | Power Drift | Test Position                            | Duty Cycle | Meas. SAR | Scaling Factor | Scaled SAR   | Plot No. |
| MHz                                                                                                 | Ch. |          | (dB)          | (dB)        | (dB)        |                                          |            | (W/kg)    |                | (W/kg)       |          |
| 836.6                                                                                               | 190 | GSM      | 33.7          | 33.04       | -0.15       | Left Cheek                               | 1:8.3      | 0.396     | 1.164          | 0.461        | -        |
| 836.6                                                                                               | 190 | GSM      | 33.7          | 33.04       | -0.12       | Left Tilt                                | 1:8.3      | 0.171     | 1.164          | 0.199        | -        |
| 836.6                                                                                               | 190 | GSM      | 33.7          | 33.04       | -0.12       | Right Cheek                              | 1:8.3      | 0.399     | 1.164          | <b>0.464</b> | 1        |
| 836.6                                                                                               | 190 | GSM      | 33.7          | 33.04       | 0.10        | Right Tilt                               | 1:8.3      | 0.240     | 1.164          | 0.279        | -        |
| 836.6                                                                                               | 190 | GPRS 2Tx | 30.7          | 30.15       | -0.12       | Left Cheek                               | 1:4.1495   | 0.278     | 1.135          | 0.316        | -        |
| 836.6                                                                                               | 190 | GPRS 2Tx | 30.7          | 30.15       | -0.15       | Left Tilt                                | 1:4.1495   | 0.141     | 1.135          | 0.160        | -        |
| 836.6                                                                                               | 190 | GPRS 2Tx | 30.7          | 30.15       | 0.16        | Right Cheek                              | 1:4.1495   | 0.262     | 1.135          | 0.297        | -        |
| 836.6                                                                                               | 190 | GPRS 2Tx | 30.7          | 30.15       | -0.01       | Right Tilt                               | 1:4.1495   | 0.133     | 1.135          | 0.151        | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |     |          |               |             |             | Head<br>1.6 W/kg<br>Averaged over 1 gram |            |           |                |              |          |

| GSM 1900 Head SAR                                                                                   |     |          |               |             |             |                                          |            |           |                |              |          |
|-----------------------------------------------------------------------------------------------------|-----|----------|---------------|-------------|-------------|------------------------------------------|------------|-----------|----------------|--------------|----------|
| Frequency                                                                                           |     | Mode     | Tune-Up Limit | Meas. Power | Power Drift | Test Position                            | Duty Cycle | Meas. SAR | Scaling Factor | Scaled SAR   | Plot No. |
| MHz                                                                                                 | Ch. |          | (dB)          | (dB)        | (dB)        |                                          |            | (W/kg)    |                | (W/kg)       |          |
| 1 880                                                                                               | 661 | GSM      | 31.0          | 30.59       | -0.12       | Left Cheek                               | 1:8.3      | 0.239     | 1.099          | 0.263        | -        |
| 1 880                                                                                               | 661 | GSM      | 31.0          | 30.59       | 0.03        | Left Tilt                                | 1:8.3      | 0.225     | 1.099          | 0.247        | -        |
| 1 880                                                                                               | 661 | GSM      | 31.0          | 30.59       | 0.03        | Right Cheek                              | 1:8.3      | 0.330     | 1.099          | <b>0.363</b> | 2        |
| 1 880                                                                                               | 661 | GSM      | 31.0          | 30.59       | 0.12        | Right Tilt                               | 1:8.3      | 0.151     | 1.099          | 0.166        | -        |
| 1 909.8                                                                                             | 810 | GPRS 2Tx | 28.7          | 27.93       | -0.14       | Left Cheek                               | 1:4.1495   | 0.148     | 1.194          | 0.177        | -        |
| 1 909.8                                                                                             | 810 | GPRS 2Tx | 28.7          | 27.93       | 0.14        | Left Tilt                                | 1:4.1495   | 0.128     | 1.194          | 0.153        | -        |
| 1 909.8                                                                                             | 810 | GPRS 2Tx | 28.7          | 27.93       | 0.19        | Right Cheek                              | 1:4.1495   | 0.165     | 1.194          | 0.197        | -        |
| 1 909.8                                                                                             | 810 | GPRS 2Tx | 28.7          | 27.93       | 0.16        | Right Tilt                               | 1:4.1495   | 0.089     | 1.194          | 0.106        | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |     |          |               |             |             | Head<br>1.6 W/kg<br>Averaged over 1 gram |            |           |                |              |          |

| WCDMA 850 Head SAR                                                                                  |      |      |               |             |             |                                                 |            |           |                |              |          |
|-----------------------------------------------------------------------------------------------------|------|------|---------------|-------------|-------------|-------------------------------------------------|------------|-----------|----------------|--------------|----------|
| Frequency                                                                                           |      | Mode | Tune-Up Limit | Meas. Power | Power Drift | Test Position                                   | Duty Cycle | Meas. SAR | Scaling Factor | Scaled SAR   | Plot No. |
| MHz                                                                                                 | Ch.  |      | (dB)          | (dB)        | (dB)        |                                                 |            | (W/kg)    |                | (W/kg)       |          |
| 836.6                                                                                               | 4183 | RMC  | 24.7          | 24.02       | 0.13        | Left Cheek                                      | 1:1        | 0.523     | 1.169          | <b>0.611</b> | 3        |
| 836.6                                                                                               | 4183 | RMC  | 24.7          | 24.02       | -0.13       | Left Tilt                                       | 1:1        | 0.222     | 1.169          | 0.260        | -        |
| 836.6                                                                                               | 4183 | RMC  | 24.7          | 24.02       | -0.11       | Right Cheek                                     | 1:1        | 0.493     | 1.169          | 0.576        | -        |
| 836.6                                                                                               | 4183 | RMC  | 24.7          | 24.02       | -0.15       | Right Tilt                                      | 1:1        | 0.291     | 1.169          | 0.340        | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |      |      |               |             |             | Head<br>1.6 W/kg (mW/g)<br>Averaged over 1 gram |            |           |                |              |          |



| WCDMA 1700 Head SAR                                                                                 |      |      |               |             |             |                                                 |            |           |                |              |          |
|-----------------------------------------------------------------------------------------------------|------|------|---------------|-------------|-------------|-------------------------------------------------|------------|-----------|----------------|--------------|----------|
| Frequency                                                                                           |      | Mode | Tune-Up Limit | Meas. Power | Power Drift | Test Position                                   | Duty Cycle | Meas. SAR | Scaling Factor | Scaled SAR   | Plot No. |
| MHz                                                                                                 | Ch.  |      | (dB)          | (dB)        | (dB)        |                                                 |            | (W/kg)    |                | (W/kg)       |          |
| 1 732.4                                                                                             | 1412 | RMC  | 23.5          | 22.94       | -0.17       | Left Cheek                                      | 1:1        | 0.154     | 1.138          | 0.175        | -        |
| 1 732.4                                                                                             | 1412 | RMC  | 23.5          | 22.94       | 0.16        | Left Tilt                                       | 1:1        | 0.118     | 1.138          | 0.134        | -        |
| 1 732.4                                                                                             | 1412 | RMC  | 23.5          | 22.94       | 0.02        | Right Cheek                                     | 1:1        | 0.258     | 1.138          | <b>0.294</b> | 4        |
| 1 732.4                                                                                             | 1412 | RMC  | 23.5          | 22.94       | 0.01        | Right Tilt                                      | 1:1        | 0.104     | 1.138          | 0.118        | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |      |      |               |             |             | Head<br>1.6 W/kg (mW/g)<br>Averaged over 1 gram |            |           |                |              |          |

| WCDMA 1900 Head SAR                                                                                 |      |      |               |             |             |                                                 |            |           |                |              |          |
|-----------------------------------------------------------------------------------------------------|------|------|---------------|-------------|-------------|-------------------------------------------------|------------|-----------|----------------|--------------|----------|
| Frequency                                                                                           |      | Mode | Tune-Up Limit | Meas. Power | Power Drift | Test Position                                   | Duty Cycle | Meas. SAR | Scaling Factor | Scaled SAR   | Plot No. |
| MHz                                                                                                 | Ch.  |      | (dB)          | (dB)        | (dB)        |                                                 |            | (W/kg)    |                | (W/kg)       |          |
| 1 880                                                                                               | 9400 | RMC  | 24.7          | 23.92       | -0.02       | Left Cheek                                      | 1:1        | 0.360     | 1.197          | 0.431        | -        |
| 1 880                                                                                               | 9400 | RMC  | 24.7          | 23.92       | 0.11        | Left Tilt                                       | 1:1        | 0.348     | 1.197          | 0.417        | -        |
| 1 880                                                                                               | 9400 | RMC  | 24.7          | 23.92       | -0.19       | Right Cheek                                     | 1:1        | 0.480     | 1.197          | <b>0.575</b> | 5        |
| 1 880                                                                                               | 9400 | RMC  | 24.7          | 23.92       | 0.01        | Right Tilt                                      | 1:1        | 0.229     | 1.197          | 0.274        | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |      |      |               |             |             | Head<br>1.6 W/kg (mW/g)<br>Averaged over 1 gram |            |           |                |              |          |

| LTE Band 2 Head SAR                                                                                 |       |      |            |               |             |             |                                          |      |         |           |            |           |                |              |          |
|-----------------------------------------------------------------------------------------------------|-------|------|------------|---------------|-------------|-------------|------------------------------------------|------|---------|-----------|------------|-----------|----------------|--------------|----------|
| Frequency                                                                                           |       | Mode | Band width | Tune-Up Limit | Meas. Power | Power Drift | Test Position                            | MPR  | RB Size | RB offset | Duty Cycle | Meas. SAR | Scaling Factor | Scaled SAR   | Plot No. |
| MHz                                                                                                 | Ch.   |      | (MHz)      | (dBm)         | (dBm)       | (dB)        |                                          | (dB) | (W/kg)  | (W/kg)    |            |           |                |              |          |
| 1 860                                                                                               | 18700 | QPSK | 20         | 24.2          | 23.90       | -0.09       | Left Cheek                               | 0    | 1       | 49        | 1:1        | 0.368     | 1.072          | 0.394        | -        |
| 1 900                                                                                               | 19100 | QPSK | 20         | 23.2          | 22.46       | 0.17        | Left Cheek                               | 1    | 50      | 0         | 1:1        | 0.337     | 1.186          | 0.400        | -        |
| 1 860                                                                                               | 18700 | QPSK | 20         | 24.2          | 23.90       | 0.14        | Left Tilt                                | 0    | 1       | 49        | 1:1        | 0.297     | 1.072          | 0.318        | -        |
| 1 900                                                                                               | 19100 | QPSK | 20         | 23.2          | 22.46       | 0.07        | Left Tilt                                | 1    | 50      | 0         | 1:1        | 0.179     | 1.186          | 0.212        | -        |
| 1 860                                                                                               | 18700 | QPSK | 20         | 24.2          | 23.90       | -0.02       | Right Cheek                              | 0    | 1       | 49        | 1:1        | 0.525     | 1.072          | <b>0.563</b> | 6        |
| 1 900                                                                                               | 19100 | QPSK | 20         | 23.2          | 22.46       | 0.01        | Right Cheek                              | 1    | 50      | 0         | 1:1        | 0.369     | 1.186          | 0.438        | -        |
| 1 860                                                                                               | 18700 | QPSK | 20         | 24.2          | 23.90       | 0.16        | Right Tilt                               | 0    | 1       | 49        | 1:1        | 0.228     | 1.072          | 0.244        | -        |
| 1 900                                                                                               | 19100 | QPSK | 20         | 23.2          | 22.46       | 0.10        | Right Tilt                               | 1    | 50      | 0         | 1:1        | 0.127     | 1.186          | 0.151        | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |       |      |            |               |             |             | Head<br>1.6 W/kg<br>Averaged over 1 gram |      |         |           |            |           |                |              |          |

### LTE Band 4 Head SAR

| Frequency                                                                                           |       | Mode | Band width<br>(MHz) | Tune-Up Limit<br>(dBm) | Meas. Power<br>(dBm) | Power Drift<br>(dB) | Test Position                            | MPR<br>(dB) | RB Size | RB offset | Duty Cycle | Meas. SAR<br>(W/kg) | Scaling Factor | Scaled SAR<br>(W/kg) | Plot No. |
|-----------------------------------------------------------------------------------------------------|-------|------|---------------------|------------------------|----------------------|---------------------|------------------------------------------|-------------|---------|-----------|------------|---------------------|----------------|----------------------|----------|
| MHz                                                                                                 | Ch.   |      |                     |                        |                      |                     |                                          |             |         |           |            |                     |                |                      |          |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 23.7                   | 23.28                | 0.17                | Left Cheek                               | 0           | 1       | 49        | 1:1        | 0.157               | 1.102          | 0.173                | -        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 22.7                   | 22.15                | -0.01               | Left Cheek                               | 1           | 50      | 0         | 1:1        | 0.110               | 1.135          | 0.125                | -        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 23.7                   | 23.28                | 0.11                | Left Tilt                                | 0           | 1       | 49        | 1:1        | 0.099               | 1.102          | 0.109                | -        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 22.7                   | 22.15                | -0.04               | Left Tilt                                | 1           | 50      | 0         | 1:1        | 0.074               | 1.135          | 0.084                | -        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 23.7                   | 23.28                | -0.17               | Right Cheek                              | 0           | 1       | 49        | 1:1        | 0.271               | 1.102          | <b>0.299</b>         | 7        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 22.7                   | 22.15                | -0.16               | Right Cheek                              | 1           | 50      | 0         | 1:1        | 0.198               | 1.135          | 0.225                | -        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 23.7                   | 23.28                | -0.12               | Right Tilt                               | 0           | 1       | 49        | 1:1        | 0.115               | 1.102          | 0.127                | -        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 22.7                   | 22.15                | -0.06               | Right Tilt                               | 1           | 50      | 0         | 1:1        | 0.076               | 1.135          | 0.086                | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |       |      |                     |                        |                      |                     | Head<br>1.6 W/kg<br>Averaged over 1 gram |             |         |           |            |                     |                |                      |          |

### LTE Band 5 Head SAR

| Frequency                                                                                           |       | Mode | Band width<br>(MHz) | Tune-Up Limit<br>(dBm) | Meas. Power<br>(dBm) | Power Drift<br>(dB) | Test Position                            | MPR<br>(dB) | RB Size | RB offset | Duty Cycle | Meas. SAR<br>(W/kg) | Scaling Factor | Scaled SAR<br>(W/kg) | Plot No. |
|-----------------------------------------------------------------------------------------------------|-------|------|---------------------|------------------------|----------------------|---------------------|------------------------------------------|-------------|---------|-----------|------------|---------------------|----------------|----------------------|----------|
| MHz                                                                                                 | Ch.   |      |                     |                        |                      |                     |                                          |             |         |           |            |                     |                |                      |          |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 24.2                   | 23.55                | 0.18                | Left Cheek                               | 0           | 1       | 24        | 1:1        | 0.255               | 1.161          | 0.296                | -        |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 23.2                   | 22.52                | 0.08                | Left Cheek                               | 1           | 25      | 24        | 1:1        | 0.257               | 1.169          | 0.300                | -        |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 24.2                   | 23.55                | 0.01                | Left Tilt                                | 0           | 1       | 24        | 1:1        | 0.120               | 1.161          | 0.139                | -        |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 23.2                   | 22.52                | 0.04                | Left Tilt                                | 1           | 25      | 24        | 1:1        | 0.103               | 1.169          | 0.120                | -        |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 24.2                   | 23.55                | -0.09               | Right Cheek                              | 0           | 1       | 24        | 1:1        | 0.249               | 1.161          | 0.289                | -        |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 23.2                   | 22.52                | 0.11                | Right Cheek                              | 1           | 25      | 24        | 1:1        | 0.257               | 1.169          | <b>0.300</b>         | 8        |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 24.2                   | 23.55                | -0.19               | Right Tilt                               | 0           | 1       | 24        | 1:1        | 0.143               | 1.161          | 0.166                | -        |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 23.2                   | 22.52                | -0.04               | Right Tilt                               | 1           | 25      | 24        | 1:1        | 0.141               | 1.169          | 0.165                | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |       |      |                     |                        |                      |                     | Head<br>1.6 W/kg<br>Averaged over 1 gram |             |         |           |            |                     |                |                      |          |

### LTE Band 12 Head SAR

| Frequency                                                                                           |       | Mode | Band width<br>(MHz) | Tune-Up Limit<br>(dBm) | Meas. Power<br>(dBm) | Power Drift<br>(dB) | Test Position                            | MPR<br>(dB) | RB Size | RB offset | Duty Cycle | Meas. SAR<br>(W/kg) | Scaling Factor | Scaled SAR<br>(W/kg) | Plot No. |
|-----------------------------------------------------------------------------------------------------|-------|------|---------------------|------------------------|----------------------|---------------------|------------------------------------------|-------------|---------|-----------|------------|---------------------|----------------|----------------------|----------|
| MHz                                                                                                 | Ch.   |      |                     |                        |                      |                     |                                          |             |         |           |            |                     |                |                      |          |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 24.2                   | 23.70                | 0.08                | Left Cheek                               | 0           | 1       | 24        | 1:1        | 0.206               | 1.122          | 0.231                | -        |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 23.2                   | 22.54                | 0.14                | Left Cheek                               | 1           | 25      | 12        | 1:1        | 0.205               | 1.164          | 0.239                | -        |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 24.2                   | 23.70                | -0.13               | Left Tilt                                | 0           | 1       | 24        | 1:1        | 0.100               | 1.122          | 0.112                | -        |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 23.2                   | 22.54                | 0.04                | Left Tilt                                | 1           | 25      | 12        | 1:1        | 0.077               | 1.164          | 0.090                | -        |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 24.2                   | 23.70                | 0.15                | Right Cheek                              | 0           | 1       | 24        | 1:1        | 0.228               | 1.122          | <b>0.256</b>         | 9        |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 23.2                   | 22.54                | -0.02               | Right Cheek                              | 1           | 25      | 12        | 1:1        | 0.211               | 1.164          | 0.246                | -        |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 24.2                   | 23.70                | 0.04                | Right Tilt                               | 0           | 1       | 24        | 1:1        | 0.112               | 1.122          | 0.126                | -        |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 23.2                   | 22.54                | 0.07                | Right Tilt                               | 1           | 25      | 12        | 1:1        | 0.107               | 1.164          | 0.125                | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |       |      |                     |                        |                      |                     | Head<br>1.6 W/kg<br>Averaged over 1 gram |             |         |           |            |                     |                |                      |          |

### LTE Band 14 Head SAR

| Frequency                                                                                           |       | Mode | Band width<br>(MHz) | Tune-Up Limit<br>(dBm) | Meas. Power<br>(dBm) | Power Drift<br>(dB) | Test Position                            | MPR<br>(dB) | RB Size | RB offset | Duty Cycle | Meas. SAR<br>(W/kg) | Scaling Factor | Scaled SAR<br>(W/kg) | Plot No. |
|-----------------------------------------------------------------------------------------------------|-------|------|---------------------|------------------------|----------------------|---------------------|------------------------------------------|-------------|---------|-----------|------------|---------------------|----------------|----------------------|----------|
| MHz                                                                                                 | Ch.   |      |                     |                        |                      |                     |                                          |             |         |           |            |                     |                |                      |          |
| 793                                                                                                 | 23330 | QPSK | 10                  | 24.0                   | 23.41                | 0.10                | Left Cheek                               | 0           | 1       | 24        | 1:1        | 0.252               | 1.146          | <b>0.289</b>         | 10       |
| 793                                                                                                 | 23330 | QPSK | 10                  | 23.0                   | 22.27                | 0.16                | Left Cheek                               | 1           | 25      | 0         | 1:1        | 0.198               | 1.183          | 0.234                | -        |
| 793                                                                                                 | 23330 | QPSK | 10                  | 24.0                   | 23.41                | 0.04                | Left Tilt                                | 0           | 1       | 24        | 1:1        | 0.135               | 1.146          | 0.155                | -        |
| 793                                                                                                 | 23330 | QPSK | 10                  | 23.0                   | 22.27                | 0.16                | Left Tilt                                | 1           | 25      | 0         | 1:1        | 0.103               | 1.183          | 0.122                | -        |
| 793                                                                                                 | 23330 | QPSK | 10                  | 24.0                   | 23.41                | -0.07               | Right Cheek                              | 0           | 1       | 24        | 1:1        | 0.237               | 1.146          | 0.272                | -        |
| 793                                                                                                 | 23330 | QPSK | 10                  | 23.0                   | 22.27                | 0.18                | Right Cheek                              | 1           | 25      | 0         | 1:1        | 0.235               | 1.183          | 0.278                | -        |
| 793                                                                                                 | 23330 | QPSK | 10                  | 24.0                   | 23.41                | 0.05                | Right Tilt                               | 0           | 1       | 24        | 1:1        | 0.148               | 1.146          | 0.170                | -        |
| 793                                                                                                 | 23330 | QPSK | 10                  | 23.0                   | 22.27                | 0.06                | Right Tilt                               | 1           | 25      | 0         | 1:1        | 0.137               | 1.183          | 0.162                | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |       |      |                     |                        |                      |                     | Head<br>1.6 W/kg<br>Averaged over 1 gram |             |         |           |            |                     |                |                      |          |

### DTS Head SAR

| Frequency                                                                                           |     | Mode    | Band width<br>(MHz) | Data Rate<br>(Mbps) | Tune-Up Limit<br>(dBm) | Meas. Power<br>(dBm) | Power Drift<br>(dB)                      | Test Position | Duty Cycle | Area Scan Peak SAR<br>(W/kg) | Meas. SAR<br>(W/kg) | Scaling Factor | Scaling Factor<br>(Duty) | Scaled SAR<br>(W/kg) | Plot No. |
|-----------------------------------------------------------------------------------------------------|-----|---------|---------------------|---------------------|------------------------|----------------------|------------------------------------------|---------------|------------|------------------------------|---------------------|----------------|--------------------------|----------------------|----------|
| MHz                                                                                                 | Ch. |         |                     |                     |                        |                      |                                          |               |            |                              |                     |                |                          |                      |          |
| 2 412                                                                                               | 1   | 802.11b | 20                  | 1                   | 19.0                   | 18.42                |                                          | Left Cheek    | 100        | 0.484                        |                     | 1.143          | 1.000                    |                      | -        |
| 2 412                                                                                               | 1   | 802.11b | 20                  | 1                   | 19.0                   | 18.42                |                                          | Left Tilt     | 100        | 0.521                        |                     | 1.143          | 1.000                    |                      | -        |
| 2 412                                                                                               | 1   | 802.11b | 20                  | 1                   | 19.0                   | 18.42                | -0.11                                    | Right Cheek   | 100        | 0.945                        | 0.520               | 1.143          | 1.000                    | <b>0.594</b>         | 11       |
| 2 412                                                                                               | 1   | 802.11b | 20                  | 1                   | 19.0                   | 18.42                | -0.11                                    | Right Tilt    | 100        | 0.636                        | 0.335               | 1.143          | 1.000                    | 0.383                | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |     |         |                     |                     |                        |                      | Head<br>1.6 W/kg<br>Averaged over 1 gram |               |            |                              |                     |                |                          |                      |          |

| NII Head SAR                                                                                        |     |          |            |           |               |             |             |                                          |            |                    |           |                |                |              |          |
|-----------------------------------------------------------------------------------------------------|-----|----------|------------|-----------|---------------|-------------|-------------|------------------------------------------|------------|--------------------|-----------|----------------|----------------|--------------|----------|
| Frequency                                                                                           |     | Mode     | Band width | Data Rate | Tune-Up Limit | Meas. Power | Power Drift | Test Position                            | Duty Cycle | Area Scan Peak SAR | Meas. SAR | Scaling Factor | Scaling Factor | Scaled SAR   | Plot No. |
| MHz                                                                                                 | Ch. |          | (MHz)      | (Mbps)    | (dBm)         | (dBm)       | (dB)        |                                          |            | (W/kg)             | (W/kg)    |                | (Duty)         | (W/kg)       |          |
| 5 290                                                                                               | 58  | 802.11ac | 80         | MCS0      | 16.0          | 15.69       |             | Left Cheek                               | 96.0       | 0.329              |           | 1.074          | 1.042          |              | -        |
| 5 290                                                                                               | 58  | 802.11ac | 80         | MCS0      | 16.0          | 15.69       |             | Left Tilt                                | 96.0       | 0.410              |           | 1.074          | 1.042          |              | -        |
| 5 290                                                                                               | 58  | 802.11ac | 80         | MCS0      | 16.0          | 15.69       | 0.17        | Right Cheek                              | 96.0       | 0.809              | 0.355     | 1.074          | 1.042          | <b>0.397</b> | 12       |
| 5 290                                                                                               | 58  | 802.11ac | 80         | MCS0      | 16.0          | 15.69       |             | Right Tilt                               | 96.0       | 0.557              |           | 1.074          | 1.042          |              | -        |
| 5 690                                                                                               | 138 | 802.11ac | 80         | MCS0      | 16.0          | 15.81       |             | Left Cheek                               | 96.0       | 0.449              |           | 1.045          | 1.042          |              | -        |
| 5 690                                                                                               | 138 | 802.11ac | 80         | MCS0      | 16.0          | 15.81       |             | Left Tilt                                | 96.0       | 0.474              |           | 1.045          | 1.042          |              | -        |
| 5 690                                                                                               | 138 | 802.11ac | 80         | MCS0      | 16.0          | 15.81       | -0.12       | Right Cheek                              | 96.0       | 0.744              | 0.316     | 1.045          | 1.042          | 0.344        | -        |
| 5 690                                                                                               | 138 | 802.11ac | 80         | MCS0      | 16.0          | 15.81       |             | Right Tilt                               | 96.0       | 0.605              |           | 1.045          | 1.042          |              | -        |
| 5 775                                                                                               | 155 | 802.11ac | 80         | MCS0      | 16.0          | 14.97       |             | Left Cheek                               | 96.0       | 0.395              |           | 1.268          | 1.042          |              | -        |
| 5 775                                                                                               | 155 | 802.11ac | 80         | MCS0      | 16.0          | 14.97       |             | Left Tilt                                | 96.0       | 0.427              |           | 1.268          | 1.042          |              | -        |
| 5 775                                                                                               | 155 | 802.11ac | 80         | MCS0      | 16.0          | 14.97       | -0.03       | Right Cheek                              | 96.0       | 0.458              | 0.219     | 1.268          | 1.042          | 0.289        | -        |
| 5 775                                                                                               | 155 | 802.11ac | 80         | MCS0      | 16.0          | 14.97       |             | Right Tilt                               | 96.0       | 0.389              |           | 1.268          | 1.042          |              | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |     |          |            |           |               |             |             | Head<br>1.6 W/kg<br>Averaged over 1 gram |            |                    |           |                |                |              |          |

| DSS Head SAR                                                                                        |     |               |               |             |             |                                                 |           |                |                |              |          |
|-----------------------------------------------------------------------------------------------------|-----|---------------|---------------|-------------|-------------|-------------------------------------------------|-----------|----------------|----------------|--------------|----------|
| Frequency                                                                                           |     | Mode          | Tune-Up Limit | Meas. Power | Power Drift | Test Position                                   | Meas. SAR | Scaling Factor | Scaling Factor | Scaled SAR   | Plot No. |
| MHz                                                                                                 | Ch. |               | (dBm)         | (dBm)       | (dB)        |                                                 | (W/kg)    |                | (Duty)         | (W/kg)       |          |
| 2 441                                                                                               | 39  | Bluetooth DH5 | 9.5           | 8.57        | -0.10       | Left Cheek                                      | 0.023     | 1.239          | 1.299          | 0.037        | -        |
| 2 441                                                                                               | 39  | Bluetooth DH5 | 9.5           | 8.57        | -0.17       | Left Tilt                                       | 0.025     | 1.239          | 1.299          | 0.040        | -        |
| 2 441                                                                                               | 39  | Bluetooth DH5 | 9.5           | 8.57        | -0.02       | Right Cheek                                     | 0.036     | 1.239          | 1.299          | <b>0.058</b> | 13       |
| 2 441                                                                                               | 39  | Bluetooth DH5 | 9.5           | 8.57        | -0.10       | Right Tilt                                      | 0.023     | 1.239          | 1.299          | 0.037        | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |     |               |               |             |             | Head<br>1.6 W/kg (mW/g)<br>Averaged over 1 gram |           |                |                |              |          |

### 13.2 Body-worn SAR Measurement Results

This product is applied with power reduction by operation of grip sensor at 20mm on the Rear side and 16mm on the front Side in GSM1900 / WCDMA B4 / B2LTE B2 / B4 mode. Thus, SAR measurement of the rear side 15mm of the Body Worn SAR was performed at power reduction.

#### GSM/ WCDMA Body-Worn SAR

| Frequency                                                                                           |      | Mode           |     | Tune-Up Limit | Meas. Power | Power Drift | Test Position                            | Duty Cycle | Distan-<br>ce | Meas. SAR | Scaling Factor | Scaled SAR   | Plot No. |
|-----------------------------------------------------------------------------------------------------|------|----------------|-----|---------------|-------------|-------------|------------------------------------------|------------|---------------|-----------|----------------|--------------|----------|
| MHz                                                                                                 | Ch.  |                |     | (dB)          | (dB)        | (dB)        |                                          |            | (mm)          | (W/kg)    |                | (W/kg)       |          |
| 836.6                                                                                               | 190  | GSM 850 Voice  |     | 33.7          | 33.04       | -0.01       | Rear                                     | 1:8.3      | 15            | 0.372     | 1.164          | <b>0.433</b> | 14       |
| 836.6                                                                                               | 190  | GSM 850 Voice  |     | 33.7          | 33.04       | -0.07       | Front                                    | 1:8.3      | 15            | 0.350     | 1.164          | 0.407        | -        |
| 836.6                                                                                               | 190  | GPRS 2Tx       |     | 30.7          | 30.15       | 0.16        | Rear                                     | 1:4.1495   | 15            | 0.346     | 1.135          | 0.393        | -        |
| 836.6                                                                                               | 190  | GPRS 2Tx       |     | 30.7          | 30.15       | -0.09       | Front                                    | 1:4.1495   | 15            | 0.310     | 1.135          | 0.352        | -        |
| 1 909.8                                                                                             | 810  | GSM 1900 Voice |     | 28            | 27.95       | -0.13       | Rear                                     | 1:8.3      | 15            | 0.142     | 1.005          | 0.143        | -        |
| 1 880                                                                                               | 661  | GSM 1900 Voice |     | 31.0          | 30.59       | -0.11       | Front                                    | 1:8.3      | 15            | 0.181     | 1.099          | <b>0.199</b> | 15       |
| 1 909.8                                                                                             | 810  | GPRS 2Tx       |     | 25            | 24.98       | -0.19       | Rear                                     | 1:4.1495   | 15            | 0.139     | 1.005          | 0.140        | -        |
| 1 909.8                                                                                             | 810  | GPRS 2Tx       |     | 28.7          | 27.93       | -0.18       | Front                                    | 1:4.1495   | 15            | 0.107     | 1.194          | 0.128        | -        |
| 836.6                                                                                               | 4183 | WCDMA 850      | RMC | 24.7          | 24.02       | -0.01       | Rear                                     | 1:1        | 15            | 0.410     | 1.169          | <b>0.479</b> | 16       |
| 836.6                                                                                               | 4183 | WCDMA 850      | RMC | 24.7          | 24.02       | 0.11        | Front                                    | 1:1        | 15            | 0.386     | 1.169          | 0.451        | -        |
| 1 732.4                                                                                             | 1412 | WCDMA 1700     | RMC | 19.8          | 18.57       | -0.04       | Rear                                     | 1:1        | 15            | 0.461     | 1.327          | <b>0.612</b> | 17       |
| 1 732.4                                                                                             | 1412 | WCDMA 1700     | RMC | 23.5          | 22.94       | 0.17        | Front                                    | 1:1        | 15            | 0.433     | 1.138          | 0.493        | -        |
| 1 880                                                                                               | 9400 | WCDMA 1900     | RMC | 22.2          | 21.19       | 0.03        | Rear                                     | 1:1        | 15            | 0.315     | 1.262          | 0.398        | -        |
| 1 880                                                                                               | 9400 | WCDMA 1900     | RMC | 24.7          | 23.92       | 0.03        | Front                                    | 1:1        | 15            | 0.454     | 1.197          | <b>0.543</b> | 18       |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |      |                |     |               |             |             | Body<br>1.6 W/kg<br>Averaged over 1 gram |            |               |           |                |              |          |

| LTE Body-Worn SAR                                                                                   |       |             |            |               |             |             |                                          |      |      |        |            |          |           |         |              |          |
|-----------------------------------------------------------------------------------------------------|-------|-------------|------------|---------------|-------------|-------------|------------------------------------------|------|------|--------|------------|----------|-----------|---------|--------------|----------|
| Frequency                                                                                           |       | Mode        | Band width | Tune-Up Limit | Meas. Power | Power Drift | Test Position                            | MPR  | RB   | RB     | Duty Cycle | Distance | Meas. SAR | Scaling | Scaled SAR   | Plot No. |
| MHz                                                                                                 | Ch.   |             | (MHz)      | (dBm)         | (dBm)       | (dB)        |                                          | (dB) | Size | offset |            | (mm)     | (W/kg)    | Factor  | (W/kg)       |          |
| 1 860                                                                                               | 18700 | LTE 2 QPSK  | 20         | 21.5          | 21.15       | -0.15       | Rear                                     | 0    | 1    | 49     | 1:1        | 15       | 0.323     | 1.084   | 0.350        | -        |
| 1 880                                                                                               | 18900 |             | 20         | 20.5          | 19.98       | -0.11       | Rear                                     | 1    | 50   | 25     | 1:1        | 15       | 0.216     | 1.127   | 0.243        | -        |
| 1 860                                                                                               | 18700 |             | 20         | 24.2          | 23.90       | 0.454       | Front                                    | 0    | 1    | 49     | 1:1        | 15       | 0.333     | 1.072   | <b>0.357</b> | 19       |
| 1 900                                                                                               | 19100 |             | 20         | 23.2          | 22.46       | 0.454       | Front                                    | 1    | 50   | 0      | 1:1        | 15       | 0.246     | 1.186   | 0.292        | -        |
| 1 732.5                                                                                             | 20175 | LTE 4 QPSK  | 20         | 18.7          | 18.17       | -0.11       | Rear                                     | 0    | 1    | 0      | 1:1        | 15       | 0.399     | 1.130   | 0.451        | -        |
| 1 732.5                                                                                             | 20175 |             | 20         | 17.7          | 17.13       | -0.09       | Rear                                     | 1    | 50   | 25     | 1:1        | 15       | 0.287     | 1.140   | 0.327        | -        |
| 1 732.5                                                                                             | 20175 |             | 20         | 23.7          | 23.28       | -0.13       | Front                                    | 0    | 1    | 49     | 1:1        | 15       | 0.458     | 1.102   | <b>0.505</b> | 20       |
| 1 732.5                                                                                             | 20175 |             | 20         | 22.7          | 22.15       | -0.10       | Front                                    | 1    | 50   | 0      | 1:1        | 15       | 0.357     | 1.135   | 0.405        | -        |
| 836.5                                                                                               | 20525 | LTE 5 QPSK  | 10         | 24.2          | 23.55       | -0.01       | Rear                                     | 0    | 1    | 24     | 1:1        | 15       | 0.290     | 1.161   | <b>0.337</b> | 21       |
| 836.5                                                                                               | 20525 |             | 10         | 23.2          | 22.52       | 0.02        | Rear                                     | 1    | 25   | 24     | 1:1        | 15       | 0.232     | 1.169   | 0.271        | -        |
| 836.5                                                                                               | 20525 |             | 10         | 24.2          | 23.55       | -0.16       | Front                                    | 0    | 1    | 24     | 1:1        | 15       | 0.264     | 1.161   | 0.307        | -        |
| 836.5                                                                                               | 20525 |             | 10         | 23.2          | 22.52       | 0.07        | Front                                    | 1    | 25   | 24     | 1:1        | 15       | 0.216     | 1.169   | 0.253        | -        |
| 707.5                                                                                               | 23095 | LTE 12 QPSK | 10         | 24.2          | 23.70       | -0.16       | Rear                                     | 0    | 1    | 24     | 1:1        | 15       | 0.323     | 1.122   | <b>0.362</b> | 22       |
| 707.5                                                                                               | 23095 |             | 10         | 23.2          | 22.54       | -0.00       | Rear                                     | 1    | 25   | 12     | 1:1        | 15       | 0.242     | 1.164   | 0.282        | -        |
| 707.5                                                                                               | 23095 |             | 10         | 24.2          | 23.70       | -0.00       | Front                                    | 0    | 1    | 24     | 1:1        | 15       | 0.276     | 1.122   | 0.310        | -        |
| 707.5                                                                                               | 23095 |             | 10         | 23.2          | 22.54       | -0.06       | Front                                    | 1    | 25   | 12     | 1:1        | 15       | 0.209     | 1.164   | 0.243        | -        |
| 793                                                                                                 | 23330 | LTE 14 QPSK | 10         | 24.0          | 23.41       | -0.16       | Rear                                     | 0    | 1    | 24     | 1:1        | 15       | 0.342     | 1.146   | <b>0.392</b> | 23       |
| 793                                                                                                 | 23330 |             | 10         | 23.0          | 22.27       | -0.04       | Rear                                     | 1    | 25   | 0      | 1:1        | 15       | 0.274     | 1.183   | 0.324        | -        |
| 793                                                                                                 | 23330 |             | 10         | 24.0          | 23.41       | 0.09        | Front                                    | 0    | 1    | 24     | 1:1        | 15       | 0.309     | 1.146   | 0.354        | -        |
| 793                                                                                                 | 23330 |             | 10         | 23.0          | 22.27       | -0.00       | Front                                    | 1    | 25   | 0      | 1:1        | 15       | 0.243     | 1.183   | 0.287        | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |       |             |            |               |             |             | Body<br>1.6 W/kg<br>Averaged over 1 gram |      |      |        |            |          |           |         |              |          |

| DTS Body-Worn SAR                                                                                   |   |         |            |           |               |             |             |                                                 |            |          |                    |           |                |                |              |          |
|-----------------------------------------------------------------------------------------------------|---|---------|------------|-----------|---------------|-------------|-------------|-------------------------------------------------|------------|----------|--------------------|-----------|----------------|----------------|--------------|----------|
| Frequency                                                                                           |   | Mode    | Band width | Data Rate | Tune-Up Limit | Meas. Power | Power Drift | Test Position                                   | Duty Cycle | Distance | Area Scan Peak SAR | Meas. SAR | Scaling Factor | Scaling Factor | Scaled SAR   | Plot No. |
|                                                                                                     |   |         | (MHz)      | (Mbps)    | (dBm)         | (dBm)       | (dB)        |                                                 |            | (mm)     | (W/kg)             | (W/kg)    |                | (Duty)         | (W/kg)       |          |
| 2 412                                                                                               | 1 | 802.11b | 20         | 1         | 19.5          | 19.01       | -0.04       | Rear                                            | 100        | 15       | 0.119              | 0.082     | 1.119          | 1.000          | <b>0.092</b> | 24       |
| 2 412                                                                                               | 1 | 802.11b | 20         | 1         | 19.5          | 19.01       |             | Front                                           | 100        | 15       | 0.105              |           | 1.119          | 1.000          |              | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |   |         |            |           |               |             |             | Body<br>1.6 W/kg (mW/g)<br>Averaged over 1 gram |            |          |                    |           |                |                |              |          |

| NII Body-Worn SAR                                                                                   |     |          |            |           |               |             |             |               |                                                 |          |                    |           |                |                |              |          |
|-----------------------------------------------------------------------------------------------------|-----|----------|------------|-----------|---------------|-------------|-------------|---------------|-------------------------------------------------|----------|--------------------|-----------|----------------|----------------|--------------|----------|
| Frequency                                                                                           |     | Mode     | Band width | Data Rate | Tune-Up Limit | Meas. Power | Power Drift | Test Position | Duty Cycle                                      | Distance | Area Scan Peak SAR | Meas. SAR | Scaling Factor | Scaling Factor | Scaled SAR   | Plot No. |
| MHz                                                                                                 | Ch. |          | (MHz)      | (Mbps)    | (dBm)         | (dBm)       | (dB)        |               |                                                 |          |                    |           |                |                |              |          |
| 5 270                                                                                               | 54  | 802.11n  | 40         | MCS0      | 19            | 18.92       | 0.18        | Rear          | 98.0                                            | 15       | 1.34               | 0.595     | 1.019          | 1.020          | <b>0.618</b> | 25       |
| 5 270                                                                                               | 54  | 802.11n  | 40         | MCS0      | 19            | 18.92       | -0.13       | Front         | 98.0                                            | 15       | 0.262              | 0.122     | 1.019          | 1.020          | 0.127        | -        |
| 5 630                                                                                               | 126 | 802.11n  | 40         | MCS0      | 19            | 18.83       | 0.03        | Rear          | 98.0                                            | 15       | 0.940              | 0.406     | 1.040          | 1.020          | 0.431        | -        |
| 5 630                                                                                               | 126 | 802.11n  | 40         | MCS0      | 19            | 18.83       | 0.11        | Front         | 98.0                                            | 15       | 0.218              | 0.032     | 1.040          | 1.020          | 0.034        | -        |
| 5 775                                                                                               | 155 | 802.11ac | 80         | MCS0      | 17            | 15.99       | 0.17        | Rear          | 96.0                                            | 15       | 0.890              | 0.372     | 1.262          | 1.040          | 0.488        | -        |
| 5 775                                                                                               | 155 | 802.11ac | 80         | MCS0      | 17            | 15.99       | 0.10        | Front         | 96.0                                            | 15       | 0.129              | 0.033     | 1.262          | 1.040          | 0.043        | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |     |          |            |           |               |             |             |               | Body<br>1.6 W/kg (mW/g)<br>Averaged over 1 gram |          |                    |           |                |                |              |          |

| DSS Body-Worn SAR                                                                                   |     |               |               |             |             |               |                                                 |           |                |                |              |          |
|-----------------------------------------------------------------------------------------------------|-----|---------------|---------------|-------------|-------------|---------------|-------------------------------------------------|-----------|----------------|----------------|--------------|----------|
| Frequency                                                                                           |     | Mode          | Tune-Up Limit | Meas. Power | Power Drift | Test Position | Distance                                        | Meas. SAR | Scaling Factor | Scaling Factor | Scaled SAR   | Plot No. |
| MHz                                                                                                 | Ch. |               | (dBm)         | (dBm)       | (dB)        |               | (mm)                                            | (W/kg)    |                | (Duty)         | (W/kg)       |          |
| 2 441                                                                                               | 39  | Bluetooth DH5 | 9.5           | 8.57        | -0.11       | Rear          | 15                                              | 0.00476   | 1.239          | 1.299          | 0.008        | -        |
| 2 441                                                                                               | 39  | Bluetooth DH5 | 9.5           | 8.57        | -0.14       | Front         | 15                                              | 0.00509   | 1.239          | 1.299          | <b>0.008</b> | 26       |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |     |               |               |             |             |               | Body<br>1.6 W/kg (mW/g)<br>Averaged over 1 gram |           |                |                |              |          |

### 13.3 Hotspot SAR Measurement Results

This product is powered by the Grip sensor at 20mm on the back, 16mm on the front, and 20mm on the bottom in the GSM1900 / WCDMA B2 / B4 mode. Therefore, hotspot SAR measurements on the rear side, front side, and bottom side of the hotspot SAR were performed under power reduction.

| GSM 850 Hotspot SAR                                                                                 |     |          |               |             |             |                                          |            |          |           |                |              |          |
|-----------------------------------------------------------------------------------------------------|-----|----------|---------------|-------------|-------------|------------------------------------------|------------|----------|-----------|----------------|--------------|----------|
| Frequency                                                                                           |     | Mode     | Tune-Up Limit | Meas. Power | Power Drift | Test Position                            | Duty Cycle | Distance | Meas. SAR | Scaling Factor | Scaled SAR   | Plot No. |
| MHz                                                                                                 | Ch. |          | (dB)          | (dB)        | (dB)        |                                          |            | (mm)     | (W/kg)    |                | (W/kg)       |          |
| 836.6                                                                                               | 190 | GPRS 2Tx | 30.7          | 30.15       | -0.11       | Rear                                     | 1:4.15     | 10       | 0.450     | 1.135          | <b>0.511</b> | 27       |
| 836.6                                                                                               | 190 | GPRS 2Tx | 30.7          | 30.15       | -0.13       | Front                                    | 1:4.15     | 10       | 0.381     | 1.135          | 0.432        | -        |
| 836.6                                                                                               | 190 | GPRS 2Tx | 30.7          | 30.15       | -0.01       | Left                                     | 1:4.15     | 10       | 0.259     | 1.135          | 0.294        | -        |
| 836.6                                                                                               | 190 | GPRS 2Tx | 30.7          | 30.15       | 0.17        | Right                                    | 1:4.15     | 10       | 0.242     | 1.135          | 0.275        | -        |
| 836.6                                                                                               | 190 | GPRS 2Tx | 30.7          | 30.15       | -0.02       | Bottom                                   | 1:4.15     | 10       | 0.052     | 1.135          | 0.059        | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |     |          |               |             |             | Body<br>1.6 W/kg<br>Averaged over 1 gram |            |          |           |                |              |          |

| GSM 1900 Hotspot SAR                                                                                |     |          |               |             |             |                                          |            |          |           |                |              |          |
|-----------------------------------------------------------------------------------------------------|-----|----------|---------------|-------------|-------------|------------------------------------------|------------|----------|-----------|----------------|--------------|----------|
| Frequency                                                                                           |     | Mode     | Tune-Up Limit | Meas. Power | Power Drift | Test Position                            | Duty Cycle | Distance | Meas. SAR | Scaling Factor | Scaled SAR   | Plot No. |
| MHz                                                                                                 | Ch. |          | (dB)          | (dB)        | (dB)        |                                          |            | (mm)     | (W/kg)    |                | (W/kg)       |          |
| 1 909.8                                                                                             | 810 | GPRS 2Tx | 25.0          | 24.98       | -0.13       | Rear                                     | 1:4.1495   | 10       | 0.338     | 1.005          | 0.340        | -        |
| 1 909.8                                                                                             | 810 | GPRS 2Tx | 25.0          | 24.98       | -0.05       | Front                                    | 1:4.1495   | 10       | 0.200     | 1.005          | 0.201        | -        |
| 1 909.8                                                                                             | 810 | GPRS 2Tx | 28.7          | 27.93       | -0.02       | Left                                     | 1:4.1495   | 10       | 0.115     | 1.194          | 0.137        | -        |
| 1 909.8                                                                                             | 810 | GPRS 2Tx | 28.7          | 27.93       | -0.18       | Right                                    | 1:4.1495   | 10       | 0.118     | 1.194          | 0.141        | -        |
| 1 909.8                                                                                             | 810 | GPRS 2Tx | 25.0          | 24.98       | 0.04        | Bottom                                   | 1:4.1495   | 10       | 0.436     | 1.005          | <b>0.438</b> | 28       |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |     |          |               |             |             | Body<br>1.6 W/kg<br>Averaged over 1 gram |            |          |           |                |              |          |

| WCDMA 850 Hotspot SAR                                                                               |      |      |               |             |             |                                          |            |          |           |                |              |          |
|-----------------------------------------------------------------------------------------------------|------|------|---------------|-------------|-------------|------------------------------------------|------------|----------|-----------|----------------|--------------|----------|
| Frequency                                                                                           |      | Mode | Tune-Up Limit | Meas. Power | Power Drift | Test Position                            | Duty Cycle | Distance | Meas. SAR | Scaling Factor | Scaled SAR   | Plot No. |
| MHz                                                                                                 | Ch.  |      | (dB)          | (dB)        | (dB)        |                                          |            | (mm)     | (W/kg)    |                | (W/kg)       |          |
| 836.6                                                                                               | 4183 | RMC  | 24.7          | 24.02       | 0.06        | Rear                                     | 1:1        | 10       | 0.442     | 1.169          | <b>0.517</b> | 29       |
| 836.6                                                                                               | 4183 | RMC  | 24.7          | 24.02       | -0.09       | Front                                    | 1:1        | 10       | 0.409     | 1.169          | 0.478        | -        |
| 836.6                                                                                               | 4183 | RMC  | 24.7          | 24.02       | 0.02        | Left                                     | 1:1        | 10       | 0.333     | 1.169          | 0.389        | -        |
| 836.6                                                                                               | 4183 | RMC  | 24.7          | 24.02       | -0.01       | Right                                    | 1:1        | 10       | 0.270     | 1.169          | 0.316        | -        |
| 836.6                                                                                               | 4183 | RMC  | 24.7          | 24.02       | -0.14       | Bottom                                   | 1:1        | 10       | 0.067     | 1.169          | 0.078        | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |      |      |               |             |             | Body<br>1.6 W/kg<br>Averaged over 1 gram |            |          |           |                |              |          |



### WCDMA 1700 Hotspot SAR

| Frequency                                                                                           |      | Mode | Tune-Up Limit | Meas. Power | Power Drift | Test Position                            | Duty Cycle | Distance | Meas. SAR | Scaling Factor | Scaled SAR   | Plot No. |
|-----------------------------------------------------------------------------------------------------|------|------|---------------|-------------|-------------|------------------------------------------|------------|----------|-----------|----------------|--------------|----------|
| MHz                                                                                                 | Ch.  |      | (dB)          | (dB)        | (dB)        |                                          |            | (mm)     | (W/kg)    |                | (W/kg)       |          |
| 1 712.4                                                                                             | 1312 | RMC  | 19.8          | 18.71       | -0.18       | Rear                                     | 1:1        | 10       | 0.849     | 1.285          | 1.091        | -        |
| 1 732.4                                                                                             | 1412 | RMC  | 19.8          | 18.57       | 0.06        | Rear                                     | 1:1        | 10       | 0.852     | 1.327          | 1.131        | -        |
| 1 752.6                                                                                             | 1513 | RMC  | 19.8          | 18.65       | 0.13        | Rear                                     | 1:1        | 10       | 0.674     | 1.303          | 0.878        | -        |
| 1 732.4                                                                                             | 1412 | RMC  | 19.8          | 18.57       | -0.12       | Front                                    | 1:1        | 10       | 0.364     | 1.327          | 0.483        | -        |
| 1 732.4                                                                                             | 1412 | RMC  | 23.5          | 22.94       | 0.10        | Left                                     | 1:1        | 10       | 0.064     | 1.138          | 0.073        | -        |
| 1 732.4                                                                                             | 1412 | RMC  | 23.5          | 22.94       | -0.03       | Right                                    | 1:1        | 10       | 0.123     | 1.138          | 0.140        | -        |
| 1 712.4                                                                                             | 1312 | RMC  | 19.8          | 18.71       | 0.11        | Bottom                                   | 1:1        | 10       | 0.698     | 1.285          | 0.897        | -        |
| 1 732.4                                                                                             | 1412 | RMC  | 19.8          | 18.57       | 0.04        | Bottom                                   | 1:1        | 10       | 1.05      | 1.327          | <b>1.393</b> | 30       |
| 1 752.6                                                                                             | 1513 | RMC  | 19.8          | 18.65       | 0.11        | Bottom                                   | 1:1        | 10       | 0.868     | 1.303          | 1.131        | -        |
| 1 732.4                                                                                             | 1412 | RMC  | 19.8          | 18.57       | 0.04        | Bottom                                   | 1:1        | 10       | 1.05      | 1.327          | 1.393        | *        |
| 1 732.4                                                                                             | 1412 | RMC  | 19.8          | 18.57       | 0.16        | Bottom                                   | 1:1        | 10       | 1.02      | 1.327          | 1.354        | **       |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |      |      |               |             |             | Body<br>1.6 W/kg<br>Averaged over 1 gram |            |          |           |                |              |          |

Note: \* Data entry indicate Variability measurement.

\*\* Data entry indicate Device holder perturbation measurement.

### WCDMA 1900 Hotspot SAR

| Frequency                                                                                           |      | Mode | Tune-Up Limit | Meas. Power | Power Drift | Test Position                            | Duty Cycle | Distance | Meas. SAR | Scaling Factor | Scaled SAR   | Plot No. |
|-----------------------------------------------------------------------------------------------------|------|------|---------------|-------------|-------------|------------------------------------------|------------|----------|-----------|----------------|--------------|----------|
| MHz                                                                                                 | Ch.  |      | (dB)          | (dB)        | (dB)        |                                          |            | (mm)     | (W/kg)    |                | (W/kg)       |          |
| 1 852.4                                                                                             | 9262 | RMC  | 22.2          | 21.25       | -0.05       | Rear                                     | 1:1        | 10       | 0.702     | 1.245          | 0.874        | -        |
| 1 880                                                                                               | 9400 | RMC  | 22.2          | 21.19       | -0.10       | Rear                                     | 1:1        | 10       | 0.749     | 1.262          | 0.945        | -        |
| 1907.6                                                                                              | 9538 | RMC  | 22.2          | 21.18       | -0.09       | Rear                                     | 1:1        | 10       | 0.484     | 1.265          | 0.612        | -        |
| 1 880                                                                                               | 9400 | RMC  | 22.2          | 21.19       | -0.04       | Front                                    | 1:1        | 10       | 0.374     | 1.262          | 0.472        | -        |
| 1 880                                                                                               | 9400 | RMC  | 24.7          | 23.92       | -0.01       | Left                                     | 1:1        | 10       | 0.256     | 1.197          | 0.306        | -        |
| 1 880                                                                                               | 9400 | RMC  | 24.7          | 23.92       | 0.05        | Right                                    | 1:1        | 10       | 0.280     | 1.197          | 0.335        | -        |
| 1 852.4                                                                                             | 9262 | RMC  | 22.2          | 21.25       | 0.05        | Bottom                                   | 1:1        | 10       | 1.12      | 1.245          | <b>1.394</b> | 31       |
| 1 880                                                                                               | 9400 | RMC  | 22.2          | 21.19       | 0.16        | Bottom                                   | 1:1        | 10       | 1.01      | 1.262          | 1.275        | -        |
| 1907.6                                                                                              | 9538 | RMC  | 22.2          | 21.18       | 0.08        | Bottom                                   | 1:1        | 10       | 0.908     | 1.265          | 1.149        | -        |
| 1 852.4                                                                                             | 9262 | RMC  | 22.2          | 21.25       | 0.15        | Bottom                                   | 1:1        | 10       | 1.06      | 1.245          | 1.320        | *        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |      |      |               |             |             | Body<br>1.6 W/kg<br>Averaged over 1 gram |            |          |           |                |              |          |

Note: \* Data entry indicate Variability measurement.

### LTE Band 2 (PCS) Hotspot SAR

| Frequency                                                                                           |       | Mode | Band width<br>(MHz) | Tune-<br>Up Limit<br>(dBm) | Meas.<br>Power<br>(dBm) | Power<br>Drift<br>(dB) | Test<br>Position | MPR<br>(dB)                              | RB<br>Size | RB<br>offset | Duty<br>Cycle | Distance<br>(mm) | Meas.<br>SAR<br>(W/kg) | Scaling<br>Factor | Scaled<br>SAR<br>(W/kg) | Plot<br>No. |
|-----------------------------------------------------------------------------------------------------|-------|------|---------------------|----------------------------|-------------------------|------------------------|------------------|------------------------------------------|------------|--------------|---------------|------------------|------------------------|-------------------|-------------------------|-------------|
| MHz                                                                                                 | Ch.   |      |                     |                            |                         |                        |                  |                                          |            |              |               |                  |                        |                   |                         |             |
| 1 860                                                                                               | 18700 | QPSK | 20                  | 21.5                       | 21.15                   | -0.06                  | Rear             | 0                                        | 1          | 49           | 1:1           | 10               | 0.744                  | 1.084             | 0.806                   | -           |
| 1 880                                                                                               | 18900 | QPSK | 20                  | 21.5                       | 21.07                   | -0.05                  | Rear             | 0                                        | 1          | 49           | 1:1           | 10               | 0.642                  | 1.104             | 0.709                   | -           |
| 1 900                                                                                               | 19100 | QPSK | 20                  | 21.5                       | 21.05                   | -0.01                  | Rear             | 0                                        | 1          | 49           | 1:1           | 10               | 0.543                  | 1.109             | 0.602                   | -           |
| 1 880                                                                                               | 18900 | QPSK | 20                  | 20.5                       | 19.98                   | -0.04                  | Rear             | 1                                        | 50         | 25           | 1:1           | 10               | 0.487                  | 1.127             | 0.549                   | -           |
| 1 860                                                                                               | 18700 | QPSK | 20                  | 20.5                       | 19.88                   | -0.10                  | Rear             | 1                                        | 100        | 0            | 1:1           | 10               | 0.560                  | 1.153             | 0.646                   | -           |
| 1 860                                                                                               | 18700 | QPSK | 20                  | 21.5                       | 21.15                   | -0.06                  | Front            | 0                                        | 1          | 49           | 1:1           | 10               | 0.378                  | 1.084             | 0.410                   | -           |
| 1 880                                                                                               | 18900 | QPSK | 20                  | 20.5                       | 19.98                   | -0.13                  | Front            | 1                                        | 50         | 25           | 1:1           | 10               | 0.270                  | 1.127             | 0.304                   | -           |
| 1 860                                                                                               | 18700 | QPSK | 20                  | 24.2                       | 23.90                   | -0.11                  | Left             | 0                                        | 1          | 49           | 1:1           | 10               | 0.228                  | 1.072             | 0.244                   | -           |
| 1 880                                                                                               | 18900 | QPSK | 20                  | 23.2                       | 22.46                   | -0.10                  | Left             | 1                                        | 50         | 0            | 1:1           | 10               | 0.222                  | 1.186             | 0.263                   | -           |
| 1 860                                                                                               | 18700 | QPSK | 20                  | 24.2                       | 23.90                   | 0.01                   | Right            | 0                                        | 1          | 49           | 1:1           | 10               | 0.295                  | 1.072             | 0.316                   | -           |
| 1 880                                                                                               | 18900 | QPSK | 20                  | 23.2                       | 22.46                   | -0.04                  | Right            | 1                                        | 50         | 0            | 1:1           | 10               | 0.197                  | 1.186             | 0.234                   | -           |
| 1 860                                                                                               | 18700 | QPSK | 20                  | 21.5                       | 21.15                   | -0.06                  | Bottom           | 0                                        | 1          | 49           | 1:1           | 10               | 0.950                  | 1.084             | 1.030                   | -           |
| 1 880                                                                                               | 18900 | QPSK | 20                  | 21.5                       | 21.07                   | 0.14                   | Bottom           | 0                                        | 1          | 49           | 1:1           | 10               | 0.959                  | 1.104             | <b>1.059</b>            | 32          |
| 1 900                                                                                               | 19100 | QPSK | 20                  | 21.5                       | 21.05                   | 0.02                   | Bottom           | 0                                        | 1          | 49           | 1:1           | 10               | 0.868                  | 1.109             | 0.963                   | -           |
| 1 880                                                                                               | 18900 | QPSK | 20                  | 20.5                       | 19.98                   | 0.05                   | Bottom           | 1                                        | 50         | 25           | 1:1           | 10               | 0.668                  | 1.127             | 0.753                   | -           |
| 1 860                                                                                               | 18700 | QPSK | 20                  | 20.5                       | 19.88                   | 0.16                   | Bottom           | 1                                        | 100        | 0            | 1:1           | 10               | 0.645                  | 1.153             | 0.744                   | -           |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |       |      |                     |                            |                         |                        |                  | Body<br>1.6 W/kg<br>Averaged over 1 gram |            |              |               |                  |                        |                   |                         |             |

### LTE Band 4 Hotspot SAR

| Frequency                                                                                           |       | Mode | Band width<br>(MHz) | Tune-Up Limit<br>(dBm) | Meas. Power<br>(dBm) | Power Drift<br>(dB) | Test Position | MPR<br>(dB)                              | RB Size | RB offset | Duty Cycle | Distance<br>(mm) | Meas. SAR<br>(W/kg) | Scaling Factor | Scaled SAR<br>(W/kg) | Plot No. |
|-----------------------------------------------------------------------------------------------------|-------|------|---------------------|------------------------|----------------------|---------------------|---------------|------------------------------------------|---------|-----------|------------|------------------|---------------------|----------------|----------------------|----------|
| MHz                                                                                                 | Ch.   |      |                     |                        |                      |                     |               |                                          |         |           |            |                  |                     |                |                      |          |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 18.7                   | 18.17                | -0.13               | Rear          | 0                                        | 1       | 0         | 1:1        | 10               | 0.795               | 1.130          | 0.898                | -        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 17.7                   | 17.13                | -0.13               | Rear          | 1                                        | 50      | 25        | 1:1        | 10               | 0.585               | 1.140          | 0.667                | -        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 17.7                   | 17.02                | -0.12               | Rear          | 1                                        | 100     | 0         | 1:1        | 10               | 0.575               | 1.169          | 0.672                | -        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 18.7                   | 18.17                | -0.13               | Front         | 0                                        | 1       | 0         | 1:1        | 10               | 0.299               | 1.130          | 0.338                | -        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 17.7                   | 17.13                | -0.18               | Front         | 1                                        | 50      | 25        | 1:1        | 10               | 0.212               | 1.140          | 0.242                | -        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 23.7                   | 23.28                | -0.12               | Left          | 0                                        | 1       | 49        | 1:1        | 10               | 0.063               | 1.102          | 0.069                | -        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 22.7                   | 22.15                | -0.18               | Left          | 0                                        | 50      | 0         | 1:1        | 10               | 0.050               | 1.135          | 0.057                | -        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 23.7                   | 23.28                | 0.08                | Right         | 0                                        | 1       | 49        | 1:1        | 10               | 0.124               | 1.102          | 0.137                | -        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 22.7                   | 22.15                | -0.10               | Right         | 0                                        | 50      | 0         | 1:1        | 10               | 0.108               | 1.135          | 0.123                | -        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 18.7                   | 18.17                | 0.14                | Bottom        | 0                                        | 1       | 0         | 1:1        | 10               | 1.080               | 1.130          | <b>1.220</b>         | 33       |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 17.7                   | 17.13                | 0.13                | Bottom        | 1                                        | 50      | 25        | 1:1        | 10               | 0.781               | 1.140          | 0.890                | -        |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 17.7                   | 17.02                | 0.13                | Bottom        | 1                                        | 100     | 0         | 1:1        | 10               | 0.671               | 1.169          | 0.784                | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |       |      |                     |                        |                      |                     |               | Body<br>1.6 W/kg<br>Averaged over 1 gram |         |           |            |                  |                     |                |                      |          |

### LTE Band 5 Hotspot SAR

| Frequency                                                                                           |       | Mode | Band width<br>(MHz) | Tune-Up Limit<br>(dBm) | Meas. Power<br>(dBm) | Power Drift<br>(dB) | Test Position | MPR<br>(dB)                              | RB Size | RB offset | Duty Cycle | Distance<br>(mm) | Meas. SAR<br>(W/kg) | Scaling Factor | Scaled SAR<br>(W/kg) | Plot No. |
|-----------------------------------------------------------------------------------------------------|-------|------|---------------------|------------------------|----------------------|---------------------|---------------|------------------------------------------|---------|-----------|------------|------------------|---------------------|----------------|----------------------|----------|
| MHz                                                                                                 | Ch.   |      |                     |                        |                      |                     |               |                                          |         |           |            |                  |                     |                |                      |          |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 24.2                   | 23.55                | -0.05               | Rear          | 0                                        | 1       | 24        | 1:1        | 10               | 0.339               | 1.161          | <b>0.394</b>         | 34       |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 23.2                   | 22.52                | -0.05               | Rear          | 1                                        | 25      | 24        | 1:1        | 10               | 0.283               | 1.169          | 0.331                | -        |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 24.2                   | 23.55                | 0.06                | Front         | 0                                        | 1       | 24        | 1:1        | 10               | 0.298               | 1.161          | 0.346                | -        |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 23.2                   | 22.52                | -0.02               | Front         | 1                                        | 25      | 24        | 1:1        | 10               | 0.243               | 1.169          | 0.284                | -        |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 24.2                   | 23.55                | -0.07               | Left          | 0                                        | 1       | 24        | 1:1        | 10               | 0.274               | 1.161          | 0.318                | -        |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 23.2                   | 22.52                | 0.06                | Left          | 1                                        | 25      | 24        | 1:1        | 10               | 0.213               | 1.169          | 0.249                | -        |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 24.2                   | 23.55                | 0.18                | Right         | 0                                        | 1       | 24        | 1:1        | 10               | 0.306               | 1.161          | 0.355                | -        |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 23.2                   | 22.52                | 0.04                | Right         | 1                                        | 25      | 24        | 1:1        | 10               | 0.251               | 1.169          | 0.293                | -        |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 24.2                   | 23.55                | 0.06                | Bottom        | 0                                        | 1       | 24        | 1:1        | 10               | 0.049               | 1.161          | 0.057                | -        |
| 836.5                                                                                               | 20525 | QPSK | 10                  | 23.2                   | 22.52                | -0.05               | Bottom        | 1                                        | 25      | 24        | 1:1        | 10               | 0.040               | 1.169          | 0.047                | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |       |      |                     |                        |                      |                     |               | Body<br>1.6 W/kg<br>Averaged over 1 gram |         |           |            |                  |                     |                |                      |          |

### LTE Band 12 Hotspot SAR

| Frequency                                                                                           |       | Mode | Band width<br>(MHz) | Tune-Up Limit<br>(dBm) | Meas. Power<br>(dBm) | Power Drift<br>(dB) | Test Position | MPR<br>(dB)                              | RB Size | RB offset | Duty Cycle | Distance<br>(mm) | Meas. SAR<br>(W/kg) | Scaling Factor | Scaled SAR<br>(W/kg) | Plot No. |
|-----------------------------------------------------------------------------------------------------|-------|------|---------------------|------------------------|----------------------|---------------------|---------------|------------------------------------------|---------|-----------|------------|------------------|---------------------|----------------|----------------------|----------|
| MHz                                                                                                 | Ch.   |      |                     |                        |                      |                     |               |                                          |         |           |            |                  |                     |                |                      |          |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 24.2                   | 23.70                | -0.10               | Rear          | 0                                        | 1       | 24        | 1:1        | 10               | 0.410               | 1.122          | <b>0.460</b>         | 35       |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 23.2                   | 22.54                | 0.01                | Rear          | 1                                        | 25      | 12        | 1:1        | 10               | 0.308               | 1.164          | 0.359                | -        |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 24.2                   | 23.70                | -0.08               | Front         | 0                                        | 1       | 24        | 1:1        | 10               | 0.321               | 1.122          | 0.360                | -        |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 23.2                   | 22.54                | -0.00               | Front         | 1                                        | 25      | 12        | 1:1        | 10               | 0.239               | 1.164          | 0.278                | -        |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 24.2                   | 23.70                | -0.11               | Left          | 0                                        | 1       | 24        | 1:1        | 10               | 0.235               | 1.122          | 0.264                | -        |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 23.2                   | 22.54                | -0.00               | Left          | 1                                        | 25      | 12        | 1:1        | 10               | 0.179               | 1.164          | 0.208                | -        |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 24.2                   | 23.70                | -0.07               | Right         | 0                                        | 1       | 24        | 1:1        | 10               | 0.270               | 1.122          | 0.303                | -        |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 23.2                   | 22.54                | 0.06                | Right         | 1                                        | 25      | 12        | 1:1        | 10               | 0.202               | 1.164          | 0.235                | -        |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 24.2                   | 23.70                | 0.07                | Bottom        | 0                                        | 1       | 24        | 1:1        | 10               | 0.038               | 1.122          | 0.043                | -        |
| 707.5                                                                                               | 23095 | QPSK | 10                  | 23.2                   | 22.54                | 0.13                | Bottom        | 1                                        | 25      | 12        | 1:1        | 10               | 0.029               | 1.164          | 0.034                | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |       |      |                     |                        |                      |                     |               | Body<br>1.6 W/kg<br>Averaged over 1 gram |         |           |            |                  |                     |                |                      |          |

### LTE Band 14 Hotspot SAR

| Frequency                                                                                           |       | Mode | Band width<br>(MHz) | Tune-Up Limit<br>(dBm) | Meas. Power<br>(dBm) | Power Drift<br>(dB) | Test Position | MPR<br>(dB)                              | RB Size | RB offset | Duty Cycle | Distance<br>(mm) | Meas. SAR<br>(W/kg) | Scaling Factor | Scaled SAR<br>(W/kg) | Plot No. |
|-----------------------------------------------------------------------------------------------------|-------|------|---------------------|------------------------|----------------------|---------------------|---------------|------------------------------------------|---------|-----------|------------|------------------|---------------------|----------------|----------------------|----------|
| MHz                                                                                                 | Ch.   |      |                     |                        |                      |                     |               |                                          |         |           |            |                  |                     |                |                      |          |
| 793                                                                                                 | 23330 | QPSK | 10                  | 24.0                   | 23.41                | 0.06                | Rear          | 0                                        | 1       | 24        | 1:1        | 10               | 0.385               | 1.146          | 0.441                | -        |
| 793                                                                                                 | 23330 | QPSK | 10                  | 23.0                   | 22.27                | -0.02               | Rear          | 1                                        | 25      | 0         | 1:1        | 10               | 0.300               | 1.183          | 0.355                | -        |
| 793                                                                                                 | 23330 | QPSK | 10                  | 24.0                   | 23.41                | -0.03               | Front         | 0                                        | 1       | 24        | 1:1        | 10               | 0.321               | 1.146          | 0.368                | -        |
| 793                                                                                                 | 23330 | QPSK | 10                  | 23.0                   | 22.27                | 0.04                | Front         | 1                                        | 25      | 0         | 1:1        | 10               | 0.258               | 1.183          | 0.305                | -        |
| 793                                                                                                 | 23330 | QPSK | 10                  | 24.0                   | 23.41                | -0.00               | Left          | 0                                        | 1       | 24        | 1:1        | 10               | 0.362               | 1.146          | 0.415                | -        |
| 793                                                                                                 | 23330 | QPSK | 10                  | 23.0                   | 22.27                | -0.07               | Left          | 1                                        | 25      | 0         | 1:1        | 10               | 0.290               | 1.183          | 0.343                | -        |
| 793                                                                                                 | 23330 | QPSK | 10                  | 24.0                   | 23.41                | 0.14                | Right         | 0                                        | 1       | 24        | 1:1        | 10               | 0.400               | 1.146          | <b>0.458</b>         | 36       |
| 793                                                                                                 | 23330 | QPSK | 10                  | 23.0                   | 22.27                | -0.05               | Right         | 1                                        | 25      | 0         | 1:1        | 10               | 0.303               | 1.183          | 0.358                | -        |
| 793                                                                                                 | 23330 | QPSK | 10                  | 24.0                   | 23.41                | 0.17                | Bottom        | 0                                        | 1       | 24        | 1:1        | 10               | 0.050               | 1.146          | 0.057                | -        |
| 793                                                                                                 | 23330 | QPSK | 10                  | 23.0                   | 22.27                | 0.11                | Bottom        | 1                                        | 25      | 0         | 1:1        | 10               | 0.039               | 1.183          | 0.046                | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |       |      |                     |                        |                      |                     |               | Body<br>1.6 W/kg<br>Averaged over 1 gram |         |           |            |                  |                     |                |                      |          |

### DTS Hotspot SAR

| Frequency                                                                                           |     | Mode    | Band width<br>(MHz) | Data Rate<br>(Mbps) | Tune-Up Limit<br>(dBm) | Meas. Power<br>(dBm) | Power Drift<br>(dB) | Test Position                            | Duty Cycle | Distance<br>(mm) | Area Scan Peak SAR<br>(W/kg) | Meas. SAR<br>(W/kg) | Scaling Factor | Scaling Factor<br>(Duty) | Scaled SAR<br>(W/kg) | Plot No. |
|-----------------------------------------------------------------------------------------------------|-----|---------|---------------------|---------------------|------------------------|----------------------|---------------------|------------------------------------------|------------|------------------|------------------------------|---------------------|----------------|--------------------------|----------------------|----------|
| MHz                                                                                                 | Ch. |         |                     |                     |                        |                      |                     |                                          |            |                  |                              |                     |                |                          |                      |          |
| 2 412                                                                                               | 1   | 802.11b | 20                  | 1                   | 19.5                   | 19.01                | -0.04               | Rear                                     | 100        | 10               | 0.375                        | 0.226               | 1.119          | 1.000                    | <b>0.253</b>         | 37       |
| 2 412                                                                                               | 1   | 802.11b | 20                  | 1                   | 19.5                   | 19.01                |                     | Front                                    | 100        | 10               | 0.204                        |                     | 1.119          | 1.000                    |                      | -        |
| 2 412                                                                                               | 1   | 802.11b | 20                  | 1                   | 19.5                   | 19.01                | 0.01                | Left                                     | 100        | 10               | 0.135                        | 0.039               | 1.119          | 1.000                    | 0.044                | -        |
| 2 412                                                                                               | 1   | 802.11b | 20                  | 1                   | 19.5                   | 19.01                | 0.02                | Top                                      | 100        | 10               | 0.196                        | 0.102               | 1.119          | 1.000                    | 0.114                | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |     |         |                     |                     |                        |                      |                     | Body<br>1.6 W/kg<br>Averaged over 1 gram |            |                  |                              |                     |                |                          |                      |          |

### 5GHz WLAN Hotspot SAR

| Frequency                                                                                           |     | Mode     | Band width | Data Rate | Tune-Up Limit | Meas. Power | Power Drift | Test Position | Duty Cycle                               | Distance (mm) | Area Scan Peak SAR | Meas. SAR | Scaling Factor | Scaling Factor | Scaled SAR   | Plot No. |
|-----------------------------------------------------------------------------------------------------|-----|----------|------------|-----------|---------------|-------------|-------------|---------------|------------------------------------------|---------------|--------------------|-----------|----------------|----------------|--------------|----------|
| MHz                                                                                                 | Ch. |          | (MHz)      | (Mbps)    | (dBm)         | (dBm)       | (dB)        |               |                                          |               | (W/kg)             | (W/kg)    |                | (Duty)         | (W/kg)       |          |
| 5 775                                                                                               | 155 | 802.11ac | 80         | MCS0      | 17.0          | 15.99       | 0.19        | Rear          | 96.0                                     | 10            | 1.26               | 0.525     | 1.262          | 1.040          | <b>0.689</b> | 38       |
| 5 775                                                                                               | 155 | 802.11ac | 80         | MCS0      | 17.0          | 15.99       | 0.06        | Front         | 96.0                                     | 10            | 0.183              | 0.054     | 1.262          | 1.040          | 0.071        | -        |
| 5 775                                                                                               | 155 | 802.11ac | 80         | MCS0      | 17.0          | 15.99       | 0.13        | Left          | 96.0                                     | 10            | 1.12               | 0.490     | 1.262          | 1.040          | 0.643        | -        |
| 5 775                                                                                               | 155 | 802.11ac | 80         | MCS0      | 17.0          | 15.99       | 0.12        | Top           | 96.0                                     | 10            | 0.380              | 0.149     | 1.262          | 1.040          | 0.196        | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |     |          |            |           |               |             |             |               | Body<br>1.6 W/kg<br>Averaged over 1 gram |               |                    |           |                |                |              |          |

### DSS Tethering SAR

| Frequency                                                                                           |     | Mode          | Tune-Up Limit | Meas. Power | Power Drift | Test Position | Distance (mm)                                   | Meas. SAR (W/kg) | Scaling Factor | Scaling Factor | Scaled SAR   | Plot No. |
|-----------------------------------------------------------------------------------------------------|-----|---------------|---------------|-------------|-------------|---------------|-------------------------------------------------|------------------|----------------|----------------|--------------|----------|
| MHz                                                                                                 | Ch. |               | (dBm)         | (dBm)       | (dB)        |               |                                                 |                  |                | (Duty)         | (W/kg)       |          |
| 2 441                                                                                               | 39  | Bluetooth DH5 | 9.5           | 8.57        | -0.15       | Rear          | 10                                              | 0.013            | 1.239          | 1.299          | <b>0.021</b> | 39       |
| 2 441                                                                                               | 39  | Bluetooth DH5 | 9.5           | 8.57        | -0.18       | Front         | 10                                              | 0.00849          | 1.239          | 1.299          | 0.014        | -        |
| 2 441                                                                                               | 39  | Bluetooth DH5 | 9.5           | 8.57        | -0.17       | Left          | 10                                              | 0.00713          | 1.239          | 1.299          | 0.011        | -        |
| 2 441                                                                                               | 39  | Bluetooth DH5 | 9.5           | 8.57        | -0.10       | Top           | 10                                              | 0.00956          | 1.239          | 1.299          | 0.015        | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |     |               |               |             |             |               | Body<br>1.6 W/kg (mW/g)<br>Averaged over 1 gram |                  |                |                |              |          |

### 13.4 SAR Measurement Result for Grip-sensor Maximum –power

. This product is powered by the Grip sensor at 20mm on the Rear side, 16mm on the front, and 20mm on the bottom in the GSM1900 / WCDMA B4 / B2/LTE B2 / B4 mode. Thus, additional SAR measurements were made at the rear side 19mm, front side 15mm, and bottom side ,19mm at maximum output conditions.

| GSM 1900 Grip-sensor SAR                                                                            |     |          |               |             |             |                                          |            |          |           |                |            |          |
|-----------------------------------------------------------------------------------------------------|-----|----------|---------------|-------------|-------------|------------------------------------------|------------|----------|-----------|----------------|------------|----------|
| Frequency                                                                                           |     | Mode     | Tune-Up Limit | Meas. Power | Power Drift | Test Position                            | Duty Cycle | Distance | Meas. SAR | Scaling Factor | Scaled SAR | Plot No. |
| MHz                                                                                                 | Ch. |          | (dB)          | (dB)        | (dB)        |                                          |            | (mm)     | (W/kg)    |                | (W/kg)     |          |
| 1 909.8                                                                                             | 810 | GPRS 2Tx | 28.7          | 27.93       | -0.19       | Rear                                     | 1:4.1495   | 19       | 0.100     | 1.194          | 0.119      | -        |
| 1 909.8                                                                                             | 810 | GPRS 2Tx | 28.7          | 27.93       | -0.18       | Front                                    | 1:4.1495   | 15       | 0.107     | 1.194          | 0.128      | -        |
| 1 909.8                                                                                             | 810 | GPRS 2Tx | 28.7          | 27.93       | -0.14       | Bottom                                   | 1:4.1495   | 19       | 0.182     | 1.194          | 0.217      | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |     |          |               |             |             | Body<br>1.6 W/kg<br>Averaged over 1 gram |            |          |           |                |            |          |

| WCDMA 1700 Grip-sensor SAR                                                                          |      |      |               |             |             |                                          |            |          |           |                |            |          |
|-----------------------------------------------------------------------------------------------------|------|------|---------------|-------------|-------------|------------------------------------------|------------|----------|-----------|----------------|------------|----------|
| Frequency                                                                                           |      | Mode | Tune-Up Limit | Meas. Power | Power Drift | Test Position                            | Duty Cycle | Distance | Meas. SAR | Scaling Factor | Scaled SAR | Plot No. |
| MHz                                                                                                 | Ch.  |      | (dB)          | (dB)        | (dB)        |                                          |            | (mm)     | (W/kg)    |                | (W/kg)     |          |
| 1 732.4                                                                                             | 1412 | RMC  | 23.5          | 22.94       | -0.13       | Rear                                     | 1:1        | 19       | 0.628     | 1.138          | 0.715      | -        |
| 1 732.4                                                                                             | 1412 | RMC  | 23.5          | 22.94       | 0.17        | Front                                    | 1:1        | 15       | 0.433     | 1.138          | 0.493      | -        |
| 1 712.4                                                                                             | 1312 | RMC  | 23.5          | 22.80       | 0.17        | Bottom                                   | 1:1        | 19       | 0.994     | 1.175          | 1.168      | -        |
| 1 732.4                                                                                             | 1412 | RMC  | 23.5          | 22.94       | -0.00       | Bottom                                   | 1:1        | 19       | 0.872     | 1.138          | 0.992      | -        |
| 1 752.6                                                                                             | 1513 | RMC  | 23.5          | 22.78       | -0.05       | Bottom                                   | 1:1        | 19       | 0.805     | 1.180          | 0.950      | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |      |      |               |             |             | Body<br>1.6 W/kg<br>Averaged over 1 gram |            |          |           |                |            |          |

| WCDMA 1900 Grip-sensor SAR                                                                          |      |      |               |             |             |                                          |            |          |           |                |            |          |
|-----------------------------------------------------------------------------------------------------|------|------|---------------|-------------|-------------|------------------------------------------|------------|----------|-----------|----------------|------------|----------|
| Frequency                                                                                           |      | Mode | Tune-Up Limit | Meas. Power | Power Drift | Test Position                            | Duty Cycle | Distance | Meas. SAR | Scaling Factor | Scaled SAR | Plot No. |
| MHz                                                                                                 | Ch.  |      | (dB)          | (dB)        | (dB)        |                                          |            | (mm)     | (W/kg)    |                | (W/kg)     |          |
| 1 880                                                                                               | 9400 | RMC  | 24.7          | 23.92       | -0.09       | Rear                                     | 1:1        | 19       | 0.289     | 1.197          | 0.346      | -        |
| 1 880                                                                                               | 9400 | RMC  | 24.7          | 23.92       | 0.03        | Front                                    | 1:1        | 15       | 0.454     | 1.197          | 0.543      | -        |
| 1 852.4                                                                                             | 9262 | RMC  | 24.7          | 23.76       | 0.18        | Bottom                                   | 1:1        | 19       | 0.663     | 1.242          | 0.823      | -        |
| 1 880                                                                                               | 9400 | RMC  | 24.7          | 23.92       | 0.14        | Bottom                                   | 1:1        | 19       | 0.910     | 1.197          | 1.089      | -        |
| 1907.6                                                                                              | 9538 | RMC  | 24.7          | 23.91       | 0.16        | Bottom                                   | 1:1        | 19       | 0.495     | 1.199          | 0.594      | -        |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |      |      |               |             |             | Body<br>1.6 W/kg<br>Averaged over 1 gram |            |          |           |                |            |          |

### LTE Band 2 (PCS) Grip-sensor SAR

| Frequency                                                                                           |       | Mode | Band width<br>(MHz) | Tune-<br>Up Limit<br>(dBm) | Meas.<br>Power<br>(dBm) | Power<br>Drift<br>(dB) | Test<br>Position | MPR<br>(dB)                              | RB<br>Size | RB<br>offset | Duty<br>Cycle | Distance<br>(mm) | Meas.<br>SAR<br>(W/kg) | Scaling<br>Factor | Scaled<br>SAR<br>(W/kg) | Plot<br>No. |
|-----------------------------------------------------------------------------------------------------|-------|------|---------------------|----------------------------|-------------------------|------------------------|------------------|------------------------------------------|------------|--------------|---------------|------------------|------------------------|-------------------|-------------------------|-------------|
| MHz                                                                                                 | Ch.   |      |                     |                            |                         |                        |                  |                                          |            |              |               |                  |                        |                   |                         |             |
| 1 860                                                                                               | 18700 | QPSK | 20                  | 24.2                       | 23.90                   | -0.16                  | Rear             | 0                                        | 1          | 49           | 1:1           | 19               | 0.423                  | 1.072             | 0.453                   | -           |
| 1 900                                                                                               | 19100 | QPSK | 20                  | 23.2                       | 22.46                   | -0.07                  | Rear             | 1                                        | 50         | 0            | 1:1           | 19               | 0.247                  | 1.186             | 0.293                   | -           |
| 1 860                                                                                               | 18700 | QPSK | 20                  | 24.2                       | 23.90                   | -0.15                  | Front            | 0                                        | 1          | 49           | 1:1           | 15               | 0.333                  | 1.072             | 0.357                   | -           |
| 1 900                                                                                               | 19100 | QPSK | 20                  | 23.2                       | 22.46                   | -0.09                  | Front            | 1                                        | 50         | 0            | 1:1           | 15               | 0.246                  | 1.186             | 0.292                   | -           |
| 1 860                                                                                               | 18700 | QPSK | 20                  | 24.2                       | 23.90                   | -0.08                  | Bottom           | 0                                        | 1          | 49           | 1:1           | 19               | 0.613                  | 1.072             | 0.657                   | -           |
| 1 900                                                                                               | 19100 | QPSK | 20                  | 23.2                       | 22.46                   | -0.01                  | Bottom           | 1                                        | 50         | 0            | 1:1           | 19               | 0.410                  | 1.186             | 0.486                   | -           |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |       |      |                     |                            |                         |                        |                  | Body<br>1.6 W/kg<br>Averaged over 1 gram |            |              |               |                  |                        |                   |                         |             |

### LTE Band 4 Grip-sensor SAR

| Frequency                                                                                           |       | Mode | Band width<br>(MHz) | Tune-<br>Up Limit<br>(dBm) | Meas.<br>Power<br>(dBm) | Power<br>Drift<br>(dB) | Test<br>Position | MPR<br>(dB)                              | RB<br>Size | RB<br>offset | Duty<br>Cycle | Distance<br>(mm) | Meas.<br>SAR<br>(W/kg) | Scaling<br>Factor | Scaled<br>SAR<br>(W/kg) | Plot<br>No. |
|-----------------------------------------------------------------------------------------------------|-------|------|---------------------|----------------------------|-------------------------|------------------------|------------------|------------------------------------------|------------|--------------|---------------|------------------|------------------------|-------------------|-------------------------|-------------|
| MHz                                                                                                 | Ch.   |      |                     |                            |                         |                        |                  |                                          |            |              |               |                  |                        |                   |                         |             |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 23.7                       | 23.28                   | 0.04                   | Rear             | 0                                        | 1          | 49           | 1:1           | 19               | 0.775                  | 1.102             | 0.854                   | -           |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 22.7                       | 22.15                   | -0.19                  | Rear             | 1                                        | 50         | 0            | 1:1           | 19               | 0.633                  | 1.135             | 0.718                   | -           |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 22.7                       | 21.99                   | -0.18                  | Rear             | 1                                        | 100        | 0            | 1:1           | 19               | 0.512                  | 1.178             | 0.603                   | -           |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 23.7                       | 23.28                   | -0.13                  | Front            | 0                                        | 1          | 49           | 1:1           | 15               | 0.458                  | 1.102             | 0.505                   | -           |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 22.7                       | 22.15                   | -0.10                  | Front            | 1                                        | 50         | 0            | 1:1           | 15               | 0.357                  | 1.135             | 0.405                   | -           |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 23.7                       | 23.28                   | 0.19                   | Bottom           | 0                                        | 1          | 49           | 1:1           | 19               | 1.06                   | 1.102             | 1.168                   | -           |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 22.7                       | 22.15                   | 0.02                   | Bottom           | 1                                        | 50         | 0            | 1:1           | 19               | 0.894                  | 1.135             | 1.015                   | -           |
| 1 732.5                                                                                             | 20175 | QPSK | 20                  | 22.7                       | 21.99                   | 0.06                   | Bottom           | 1                                        | 100        | 0            | 1:1           | 19               | 0.703                  | 1.178             | 0.828                   | -           |
| ANSI/ IEEE C95.1 - 2005 – Safety Limit<br>Spatial Peak<br>Uncontrolled Exposure/ General Population |       |      |                     |                            |                         |                        |                  | Body<br>1.6 W/kg<br>Averaged over 1 gram |            |              |               |                  |                        |                   |                         |             |



### 13.5 SAR Test Notes

#### General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, FCC KDB Procedure.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB 648474 D04v01r03, SAR was evaluated without a headset connected to the device. Since the standalone reported SAR was  $\leq 1.2$  W/kg, no additional SAR evaluation using a headset cable were required.
8. Per FCC KDB 865664 D01v01r04, variability SAR measurement were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg for 1g SAR and  $>2$  for 10g SAR Please see Section 15 for variability analysis.
9. This device utilizes power reduction for some wireless mode and technologies, as outlined in sec. 4.3 The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous scenarios.
10. During SAR testing for the Hotspot conditions per KDB 941225 D06v02r01, the actual portable hotspot operation (with actual simultaneous transmission of a transmitter with WiFi) was not activated.

#### GSM/GPRS Test Notes:

1. This EUT'S GSM and GPRS device class is B.
2. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
3. Justification for reduced test configurations per KDB 941225 D01v03r01: The source-based time-averaged output power was evaluated for all multi-slot operations. The multi-slot configuration with the highest frame averaged output power including tolerance was evaluated for SAR.
4. Per FCC KDB 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is 1/2 dB, instead of the middle channel, the highest output power channel must be used.
5. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.



**WCDMA Notes:**

1. The 12.2 kbps RMC mode is the primary mode per KDB 941225 D01v03r01.
2. WCDMA SAR was tested under RMC 12.2 kbps with HSPA inactive per KDB publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
3. Per FCC KDB 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the channel highest output power channel was used.

**LTE Notes:**

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Consideration for LTE Devices in FCC KDB 941225 D05v02r05.
2. According to FCC KDB 941225 D05v02r05:  
When the reported SAR is  $\leq 0.8$  W/kg, testing of the 100% RB allocation and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the 1RB, 50%RB and 100%RB allocation with highest output power for that channel.  
Only one channel, and as reported SAR values for 1RB allocation and 50%RB allocation were less than 1.45W/Kg only the highest power RB offset for each allocation was required.
3. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to target MPR is indicated alongside the SAR results.
4. When Power reduction is applied , MPR is 0
5. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator.
6. SAR test reduction is applied using the following criteria:  
Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $>0.8$  W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are  $>0.8$  W/kg, testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation  $<1.45$  W/kg. Testing for 16-QAM modulation is not required because the reported SAR for QPSK is  $<1.45$  W/kg and its output power is not more than 0.5 dB higher than that a QPSK. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is  $<1.45$  W/kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

**WLAN Notes:**

1. For held-to-ear and hotspot operations, the initial test position procedures were applied. For initial test position, the highest extrapolated peak SAR will be used. When reported SAR for the initial test position is  $\leq 0.4$  W/kg for 1g SAR and  $\leq 1.0$  W/kg for 10g SAR, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR results is  $\leq 0.8$  W/kg for 1g SAR and  $\leq 2.0$  W/kg for 10g SAR or all test position are measured.
2. Per KDB 2482227 D01v02r02 justification for test configurations of 2.4 GHz WiFi Single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11 g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
3. Per KDB 2482227 D01v02r02 justification for test configurations of 5 GHz WiFi Single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission mode were not investigated since the highest reported SAR for initial test configuration adjusted by the ration of maximum output powers is less than 1.2 W/kg for 1g SAR and less than 3.0 W/kg for 10 g SAR.
4. When the maximum reported 1g averaged SAR is  $\leq 0.8$  W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was  $\leq 1.20$  W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rated, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated WLAN test reports.

**Bluetooth Notes:**

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests mode type. Per October 2016 TCBC Workshop Notes, the reported SAR was scaled to 100% transmission duty factor to determine compliance. Please see sec.11 for the time-domain plot and calculation for duty factor of the device.
2. Head and Bluetooth tethering SAR were evaluated for BT BR tethering applications.

## 14. Simultaneous SAR Analysis

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per KDB Publication 447498 D01v06 4.3.2, simultaneous transmission SAR test exclusion may be applied when the sum of 1g SAR and 10g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is  $\leq 1.6\text{W/kg}$  for 1g SAR and  $\leq 4\text{ W/kg}$  for 10g SAR. The different test positions in an exposure condition may be considered collectively to determine SAR exclusion according to the sum of 1g or 10g SAR.

## 14.1 Head SAR Simultaneous Transmission Analysis.

| Simultaneous Transmission Summation Scenario with 2.4 GHz WLAN |             |          |                  |                |
|----------------------------------------------------------------|-------------|----------|------------------|----------------|
| Exposure condition                                             | Band        | WWAN SAR | 2.4 GHz WLAN SAR | $\sum$ 1-g SAR |
|                                                                |             | (W/kg)   | (W/kg)           | (W/kg)         |
| Head SAR                                                       | GSM 850     | 0.464    | 0.594            | 1.058          |
|                                                                | GPRS 850    | 0.316    | 0.594            | 0.910          |
|                                                                | GSM 1900    | 0.363    | 0.594            | 0.957          |
|                                                                | GPRS 1900   | 0.197    | 0.594            | 0.791          |
|                                                                | WCDMA 850   | 0.611    | 0.594            | <b>1.205</b>   |
|                                                                | WCDMA 1700  | 0.294    | 0.594            | 0.888          |
|                                                                | WCDMA 1900  | 0.575    | 0.594            | 1.169          |
|                                                                | LTE Band 2  | 0.563    | 0.594            | 1.157          |
|                                                                | LTE Band 4  | 0.299    | 0.594            | 0.893          |
|                                                                | LTE Band 5  | 0.300    | 0.594            | 0.894          |
|                                                                | LTE Band 12 | 0.256    | 0.594            | 0.850          |
|                                                                | LTE Band 14 | 0.289    | 0.594            | 0.883          |

| Simultaneous Transmission Summation Scenario with 5 GHz WLAN |             |          |                |                |
|--------------------------------------------------------------|-------------|----------|----------------|----------------|
| Exposure condition                                           | Band        | WWAN SAR | 5 GHz WLAN SAR | $\sum$ 1-g SAR |
|                                                              |             | (W/kg)   | (W/kg)         | (W/kg)         |
| Head SAR                                                     | GSM 850     | 0.464    | 0.397          | 0.861          |
|                                                              | GPRS 850    | 0.316    | 0.397          | 0.713          |
|                                                              | GSM 1900    | 0.363    | 0.397          | 0.760          |
|                                                              | GPRS 1900   | 0.197    | 0.397          | 0.594          |
|                                                              | WCDMA 850   | 0.611    | 0.397          | 1.008          |
|                                                              | WCDMA 1700  | 0.294    | 0.397          | 0.691          |
|                                                              | WCDMA 1900  | 0.575    | 0.397          | 0.972          |
|                                                              | LTE Band 2  | 0.563    | 0.397          | 0.960          |
|                                                              | LTE Band 4  | 0.299    | 0.397          | 0.696          |
|                                                              | LTE Band 5  | 0.300    | 0.397          | 0.697          |
|                                                              | LTE Band 12 | 0.256    | 0.397          | 0.653          |
|                                                              | LTE Band 14 | 0.289    | 0.397          | 0.686          |

| Simultaneous Transmission Summation Scenario with Bluetooth |             |          |           |                |
|-------------------------------------------------------------|-------------|----------|-----------|----------------|
| Exposure condition                                          | Band        | WWAN SAR | Bluetooth | $\sum$ 1-g SAR |
|                                                             |             | (W/kg)   | (W/kg)    | (W/kg)         |
| Head SAR                                                    | GSM 850     | 0.464    | 0.058     | 0.522          |
|                                                             | GPRS 850    | 0.316    | 0.058     | 0.374          |
|                                                             | GSM 1900    | 0.363    | 0.058     | 0.421          |
|                                                             | GPRS 1900   | 0.197    | 0.058     | 0.255          |
|                                                             | WCDMA 850   | 0.611    | 0.058     | 0.669          |
|                                                             | WCDMA 1700  | 0.294    | 0.058     | 0.352          |
|                                                             | WCDMA 1900  | 0.575    | 0.058     | 0.633          |
|                                                             | LTE Band 2  | 0.563    | 0.058     | 0.621          |
|                                                             | LTE Band 4  | 0.299    | 0.058     | 0.357          |
|                                                             | LTE Band 5  | 0.300    | 0.058     | 0.358          |
|                                                             | LTE Band 12 | 0.256    | 0.058     | 0.314          |
|                                                             | LTE Band 14 | 0.289    | 0.058     | 0.347          |

## 14.2 Body-Worn SAR Simultaneous Transmission Analysis.

| Simultaneous Transmission Summation Scenario with 2.4 GHz WLAN |          |             |          |                  |                |
|----------------------------------------------------------------|----------|-------------|----------|------------------|----------------|
| Exposure condition                                             | Distance | Band        | WWAN SAR | 2.4 GHz WLAN SAR | $\sum$ 1-g SAR |
|                                                                | (mm)     |             | (W/kg)   | (W/kg)           | (W/kg)         |
| Body-worn                                                      | 15       | GSM 850     | 0.433    | 0.092            | 0.525          |
|                                                                |          | GPRS 850    | 0.393    | 0.092            | 0.485          |
|                                                                |          | GSM 1900    | 0.199    | 0.092            | 0.291          |
|                                                                |          | GPRS 1900   | 0.166    | 0.092            | 0.258          |
|                                                                |          | WCDMA 850   | 0.479    | 0.092            | 0.571          |
|                                                                |          | WCDMA 1700  | 0.612    | 0.092            | 0.704          |
|                                                                |          | WCDMA 1900  | 0.543    | 0.092            | 0.635          |
|                                                                |          | LTE Band 2  | 0.357    | 0.092            | 0.449          |
|                                                                |          | LTE Band 4  | 0.505    | 0.092            | 0.597          |
|                                                                |          | LTE Band 5  | 0.337    | 0.092            | 0.429          |
|                                                                |          | LTE Band 12 | 0.362    | 0.092            | 0.454          |
|                                                                |          | LTE Band 14 | 0.392    | 0.092            | 0.484          |

| Simultaneous Transmission Summation Scenario with 5 GHz WLAN |          |             |          |                |                |
|--------------------------------------------------------------|----------|-------------|----------|----------------|----------------|
| Exposure condition                                           | Distance | Band        | WWAN SAR | 5 GHz WLAN SAR | $\sum$ 1-g SAR |
|                                                              | (mm)     |             | (W/kg)   | (W/kg)         | (W/kg)         |
| Body-worn                                                    | 15       | GSM 850     | 0.433    | 0.618          | 1.051          |
|                                                              |          | GPRS 850    | 0.393    | 0.618          | 1.011          |
|                                                              |          | GSM 1900    | 0.199    | 0.618          | 0.817          |
|                                                              |          | GPRS 1900   | 0.166    | 0.618          | 0.784          |
|                                                              |          | WCDMA 850   | 0.479    | 0.618          | 1.097          |
|                                                              |          | WCDMA 1700  | 0.612    | 0.618          | <b>1.230</b>   |
|                                                              |          | WCDMA 1900  | 0.543    | 0.618          | 1.161          |
|                                                              |          | LTE Band 2  | 0.357    | 0.618          | 0.975          |
|                                                              |          | LTE Band 4  | 0.505    | 0.618          | 1.123          |
|                                                              |          | LTE Band 5  | 0.337    | 0.618          | 0.955          |
|                                                              |          | LTE Band 12 | 0.362    | 0.618          | 0.980          |
|                                                              |          | LTE Band 14 | 0.392    | 0.618          | 1.010          |

| Simultaneous Transmission Summation Scenario with Bluetooth |          |             |          |               |                |
|-------------------------------------------------------------|----------|-------------|----------|---------------|----------------|
| Exposure condition                                          | Distance | Band        | WWAN SAR | Bluetooth SAR | $\sum$ 1-g SAR |
|                                                             | (mm)     |             | (W/kg)   | (W/kg)        | (W/kg)         |
| Body-worn                                                   | 15       | GSM 850     | 0.433    | 0.008         | 0.441          |
|                                                             |          | GPRS 850    | 0.393    | 0.008         | 0.401          |
|                                                             |          | GSM 1900    | 0.199    | 0.008         | 0.207          |
|                                                             |          | GPRS 1900   | 0.166    | 0.008         | 0.174          |
|                                                             |          | WCDMA 850   | 0.479    | 0.008         | 0.487          |
|                                                             |          | WCDMA 1700  | 0.612    | 0.008         | 0.620          |
|                                                             |          | WCDMA 1900  | 0.543    | 0.008         | 0.551          |
|                                                             |          | LTE Band 2  | 0.357    | 0.008         | 0.365          |
|                                                             |          | LTE Band 4  | 0.505    | 0.008         | 0.513          |
|                                                             |          | LTE Band 5  | 0.337    | 0.008         | 0.345          |
|                                                             |          | LTE Band 12 | 0.362    | 0.008         | 0.370          |
|                                                             |          | LTE Band 14 | 0.392    | 0.008         | 0.400          |

### 14.3 Hotspot SAR Simultaneous Transmission Analysis.

| Simultaneous Transmission Summation Scenario with 2.4 GHz WLAN |          |            |            |          |                  |                  |          |
|----------------------------------------------------------------|----------|------------|------------|----------|------------------|------------------|----------|
| Exposure condition                                             | Distance | Band       |            | WWAN SAR | 2.4 GHz WLAN SAR | $\Sigma$ 1-g SAR | SPLSR    |
|                                                                | (mm)     |            |            | (W/kg)   | (W/kg)           | (W/kg)           | (Yes/No) |
| Hotspot                                                        | 10       | GSM 850    |            | 0.511    | 0.253            | 0.764            | No       |
|                                                                |          | GSM 1900   |            | 0.438    | 0.253            | 0.691            | No       |
|                                                                |          | WCDMA 850  |            | 0.517    | 0.253            | 0.770            | No       |
|                                                                |          | WCDMA 1700 | Rear       | 1.131    | 0.253            | 1.384            | No       |
|                                                                |          |            | Front      | 0.483    | 0.253            | 0.736            | No       |
|                                                                |          |            | Left       | 0.073    | 0.044            | 0.117            | No       |
|                                                                |          |            | Right      | 0.140    |                  | 0.140            | No       |
|                                                                |          |            | Top        |          | 0.114            | 0.114            | No       |
|                                                                |          |            | Bottom     | 1.393    |                  | 1.393            | No       |
|                                                                |          |            | WCDMA 1900 | Rear     | 0.945            | 0.253            | 1.198    |
|                                                                |          | Front      |            | 0.472    | 0.253            | 0.725            | No       |
|                                                                |          | Left       |            | 0.306    | 0.044            | 0.350            | No       |
|                                                                |          | Right      |            | 0.335    |                  | 0.335            | No       |
|                                                                |          | Top        |            |          | 0.114            | 0.114            | No       |
|                                                                |          | Bottom     |            | 1.394    |                  | 1.394            | No       |
|                                                                |          | LTE Band 2 |            | 1.059    | 0.253            | 1.312            | No       |
|                                                                |          | LTE Band 4 |            | 1.220    | 0.253            | 1.473            | No       |
|                                                                |          | LTE Band 5 |            | 0.394    | 0.253            | 0.647            | No       |
| LTE Band 12                                                    |          | 0.460      | 0.253      | 0.713    | No               |                  |          |
| LTE Band 14                                                    |          | 0.458      | 0.253      | 0.711    | No               |                  |          |

| Simultaneous Transmission Summation Scenario with 5 GHz WLAN |          |             |            |          |                |              |          |
|--------------------------------------------------------------|----------|-------------|------------|----------|----------------|--------------|----------|
| Exposure condition                                           | Distance | Band        |            | WWAN SAR | 5 GHz WLAN SAR | ∑ 1-g SAR    | SPLSR    |
|                                                              | (mm)     |             |            | (W/kg)   | (W/kg)         | (W/kg)       | (Yes/No) |
| Hotspot                                                      | 10       | GSM 850     |            | 0.511    | 0.689          | 1.200        | No       |
|                                                              |          | GSM 1900    |            | 0.438    | 0.689          | 1.127        | No       |
|                                                              |          | WCDMA 850   |            | 0.517    | 0.689          | 1.206        | No       |
|                                                              |          | WCDMA 1700  | Rear       | 1.131    | 0.689          | 1.820        | Yes (#1) |
|                                                              |          |             | Front      | 0.483    | 0.071          | 0.554        | No       |
|                                                              |          |             | Left       | 0.073    | 0.643          | 0.716        | No       |
|                                                              |          |             | Right      | 0.140    |                | 0.140        | No       |
|                                                              |          |             | Top        |          | 0.196          | 0.196        | No       |
|                                                              |          |             | Bottom     | 1.393    |                | 1.393        | No       |
|                                                              |          |             | WCDMA 1900 | Rear     | 0.945          | 0.689        | 1.634    |
|                                                              |          | Front       |            | 0.472    | 0.071          | 0.543        | No       |
|                                                              |          | Left        |            | 0.306    | 0.643          | 0.949        | No       |
|                                                              |          | Right       |            | 0.335    |                | 0.335        | No       |
|                                                              |          | Top         |            |          | 0.196          | 0.196        | No       |
|                                                              |          | Bottom      |            | 1.394    |                | 1.394        | No       |
|                                                              |          | LTE Band 2  | Rear       | 0.806    | 0.689          | 1.495        | No       |
|                                                              |          |             | Front      | 0.410    | 0.071          | 0.481        | No       |
|                                                              |          |             | Left       | 0.263    | 0.643          | 0.906        | No       |
|                                                              |          |             | Right      | 0.316    |                | 0.316        | No       |
|                                                              |          |             | Top        |          | 0.196          | 0.196        | No       |
|                                                              |          |             | Bottom     | 1.059    |                | 1.059        | No       |
|                                                              |          | LTE Band 4  | Rear       | 0.898    | 0.689          | <b>1.587</b> | No       |
|                                                              |          |             | Front      | 0.338    | 0.071          | 0.409        | No       |
|                                                              |          |             | Left       | 0.069    | 0.643          | 0.712        | No       |
|                                                              |          |             | Right      | 0.137    |                | 0.137        | No       |
|                                                              |          |             | Top        |          | 0.196          | 0.196        | No       |
|                                                              |          |             | Bottom     | 1.220    |                | 1.220        | No       |
|                                                              |          | LTE Band 5  |            | 0.394    | 0.689          | 1.084        | No       |
|                                                              |          | LTE Band 12 |            | 0.460    | 0.689          | 1.150        | No       |
|                                                              |          | LTE Band 14 |            | 0.458    | 0.689          | 1.148        | No       |

| Simultaneous Transmission Summation Scenario with Bluetooth |          |             |          |               |                  |
|-------------------------------------------------------------|----------|-------------|----------|---------------|------------------|
| Exposure condition                                          | Distance | Band        | WWAN SAR | Bluetooth SAR | $\Sigma$ 1-g SAR |
|                                                             | (mm)     |             | (W/kg)   | (W/kg)        | (W/kg)           |
| Bluetooth Tethering                                         | 10       | GSM 850     | 0.511    | 0.021         | 0.532            |
|                                                             |          | GSM 1900    | 0.438    | 0.021         | 0.459            |
|                                                             |          | WCDMA 850   | 0.517    | 0.021         | 0.538            |
|                                                             |          | WCDMA 1700  | 1.393    | 0.021         | 1.414            |
|                                                             |          | WCDMA 1900  | 1.394    | 0.021         | 1.415            |
|                                                             |          | LTE Band 2  | 1.059    | 0.021         | 1.080            |
|                                                             |          | LTE Band 4  | 1.220    | 0.021         | 1.241            |
|                                                             |          | LTE Band 5  | 0.394    | 0.021         | 0.415            |
|                                                             |          | LTE Band 12 | 0.460    | 0.021         | 0.481            |
|                                                             |          | LTE Band 14 | 0.458    | 0.021         | 0.479            |



#### 14.4 SAR to Peak Location Separation Ratio (SPLSR)

FCC KDB 447498 D01v06 General RF Exposure Guidance introduces a new formula for calculating the SAR a Peak Location Separation Ratio(SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / R_i$$

Where:

$SAR_1$  is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

$SAR_2$  is the highest measured of estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

$R_i$  is the separation distance between the pair of simultaneous transmitting antennas, When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of  $[(X_1 - X_2)^2 + (Y_1 - Y_2)^2 + (Z_1 - Z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum 1-g of SAR > 1.6 W/kg and with the sum 10-g of SAR > 4 W/Kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / R_i \leq 0.04 \text{ for 1g SAR and } (SAR_1 + SAR_2)^{1.5} / R_i \leq 0.1 \text{ for 10g SAR}$$

Per Sec. 14, below simultaneous transmission summations need to be calculated SPLSR.

#### 14.4.1 SPLSR Evaluation

Peak location for SAR Rear side (Active)

| Mode/Band  | X(mm)  | Y(mm)   | Z(mm)  | Reported SAR [W/kg] |
|------------|--------|---------|--------|---------------------|
| WCDMA 1700 | 0.073  | -0.0045 | -0.174 | 0.852               |
| WCDMA 1900 | 0.0715 | -0.006  | -0.174 | 0.749               |
| WLAN 5 GHz | -0.055 | 0.029   | -0.173 | 0.525               |


#### 14.4.2 SAR to Peak Location Ratio (SPLSR) Figures

| Mode       |            | Sum 1g SAR<br>[W/kg] | Peak SAR<br>Separation<br>Distance (mm) | SPLSR | Plot<br>No |
|------------|------------|----------------------|-----------------------------------------|-------|------------|
| WCDMA 1700 | 5 GHz Ant. | 1 + 2                |                                         |       |            |
| 1          | 2          |                      |                                         |       |            |
| 1.131      | 0.689      | 1.820                | 84.896                                  | 0.029 | #1         |


| Mode       |            | Sum 1g SAR<br>[W/kg] | Peak SAR<br>Separation<br>Distance (mm) | SPLSR | Plot<br>No |
|------------|------------|----------------------|-----------------------------------------|-------|------------|
| WCDMA 1900 | 5 GHz Ant. | 1 + 2                |                                         |       |            |
| 1          | 2          |                      |                                         |       |            |
| 0.945      | 0.689      | 1.634                | 84.132                                  | 0.025 | #2         |

### 14.4.3 SPLSR Plot

#### SPLSR Plot #1: WCDMA 1700 + 5 GHz WLAN

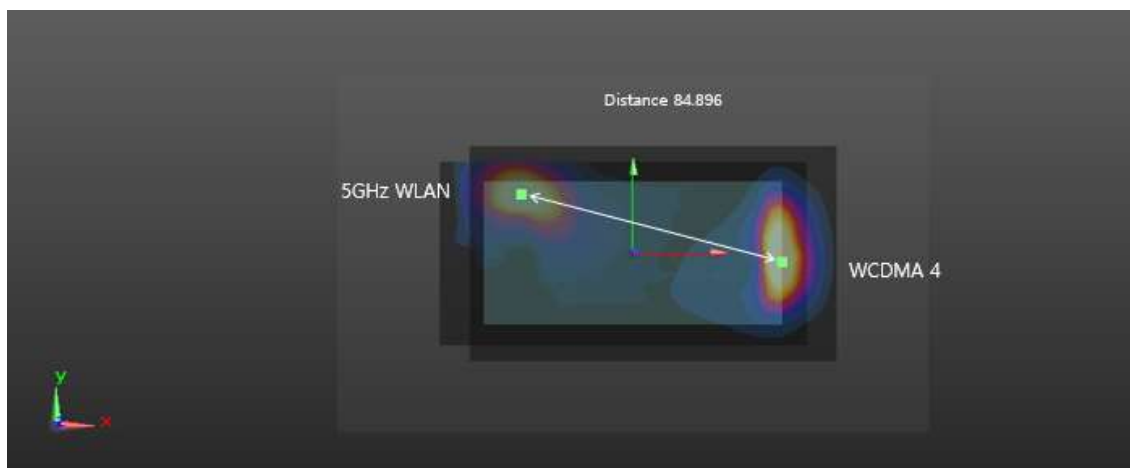

#### SPLSR Plot #2: WCDMA 1900 + 5 GHz WLAN

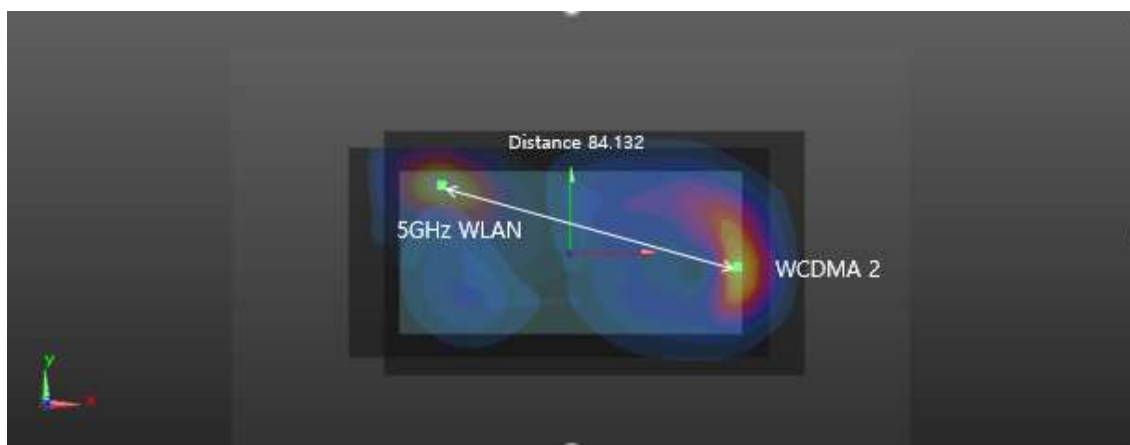

#### **14.4 Simultaneous Transmission Conclusion**

The above numerical summed SAR Results are sufficient to determine that simultaneous transmission cases will not exceed the SAR Limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE1528-2013.

## 15. SAR Measurement Variability and Uncertainty

In accordance with KDB procedure 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz, SAR additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement variability was assessed using the following procedures for each frequency band:

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg for 1g SAR or < 2.0 W/kg for 10g SAR; steps 2) through 4) do not apply.
- 2) When the original highest measured 1g SAR is  $\geq 0.80$  W/kg or 10g SAR  $\geq 2.0$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is  $\geq 1.45$  W/kg for 1g SAR or  $\geq 3.625$  W/kg for 10g SAR (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg for 1g SAR or  $\geq 3.75$  W/kg for 10g SAR and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Hotspot SAR measurement variability Results

| Frequency |         | Mode/Band  | Configuration | Measured SAR (W/kg) | Repeated SAR (W/kg) | SAR Ratio |
|-----------|---------|------------|---------------|---------------------|---------------------|-----------|
| MHz       | Channel |            |               |                     |                     |           |
| 1 852.4   | 9262    | WCDMA 1900 | Bottom        | 1.12                | 1.06                | 1.06      |
| 1 732.4   | 1412    | WCDMA 1700 | Bottom        | 1.05                | 1.05                | 1.00      |

## 16. Device Holder Perturbation Verification.

In accordance with published DUT Holder Perturbations in Oct.2016 TCB Workshop.

When Highest reported SAR is over 1.2 W/kg, Holder Perturbation Verification is required for each antenna, using the highest configuration among all applicable frequency bands.

| Frequency |         | Mode/Band         | Configuration | Highest Reported SAR    |                      | Deviation (%) |
|-----------|---------|-------------------|---------------|-------------------------|----------------------|---------------|
|           |         |                   |               | (without Device Holder) | (with Device Holder) |               |
| MHz       | Channel |                   |               |                         |                      |               |
| 1 732.4   | 1412    | WCDMA 4 (Hotspot) | Rear          | 1.393                   | 1.354                | 1.03          |

## 17. Measurement Uncertainty

The measured SAR was  $<1.5$  W/Kg for 1g SAR and  $<3.75$  W/Kg For 10g SAR for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE1528-2013 was not required.

## 18. SAR Test Equipment

| Manufacturer | Type / Model                     | S/N                | Calib. Date | Calib.Interval | Calib.Due  |
|--------------|----------------------------------|--------------------|-------------|----------------|------------|
| SPEAG        | Triple Modular Phantom           | -                  | N/A         | N/A            | N/A        |
| SPEAG        | SAM Phantom                      | -                  | N/A         | N/A            | N/A        |
| HP           | SAR System Control PC            | -                  | N/A         | N/A            | N/A        |
| Staubli      | CS8Cspeag-TX90                   | F12/ 5K9GA1/ C/ 01 | N/A         | N/A            | N/A        |
| Staubli      | CS8Cspeag-TX90                   | F17/ 59CHA1/ C/ 01 | N/A         | N/A            | N/A        |
| Staubli      | CS8Cspeag-TX90                   | F17/ 59RAA1/ C/ 01 | N/A         | N/A            | N/A        |
| Staubli      | CS8Cspeag-TX90                   | F13/ 5R4XF1/ C/ 01 | N/A         | N/A            | N/A        |
| Staubli      | CS8Cspeag-TX90                   | F11/5K3RA1/C/01    | N/A         | N/A            | N/A        |
| Staubli      | TX90 XLSpeag                     | F12/ 5K9GA1/ A/ 01 | N/A         | N/A            | N/A        |
| Staubli      | TX90 XLSpeag                     | F17/ 59CHA1/ A/ 01 | N/A         | N/A            | N/A        |
| Staubli      | TX90 XLSpeag                     | F17/ 59RAA1/ A/ 01 | N/A         | N/A            | N/A        |
| Staubli      | TX90 XLSpeag                     | F13/ 5R4XF1/ A/ 01 | N/A         | N/A            | N/A        |
| Staubli      | TX90 XLSpeag                     | F11/5K3RA1/A/01    | N/A         | N/A            | N/A        |
| Staubli      | Teach Pendant (Joystick)         | S-1206 0513        | N/A         | N/A            | N/A        |
| Staubli      | Teach Pendant (Joystick)         | 010963             | N/A         | N/A            | N/A        |
| Staubli      | Teach Pendant (Joystick)         | 40331922309        | N/A         | N/A            | N/A        |
| Staubli      | Teach Pendant (Joystick)         | S-1338 1332        | N/A         | N/A            | N/A        |
| Staubli      | Teach Pendant (Joystick)         | S-1203 0309        | N/A         | N/A            | N/A        |
| SPEAG        | DAE4                             | 1225               | 11/18/2019  | Annual         | 11/18/2020 |
| SPEAG        | DAE3                             | 446                | 07/18/2019  | Annual         | 07/18/2020 |
| SPEAG        | DAE4                             | 648                | 05/23/2019  | Annual         | 05/23/2020 |
| SPEAG        | DAE4                             | 652                | 02/03/2020  | Annual         | 02/03/2021 |
| SPEAG        | DAE4                             | 868                | 09/04/2019  | Annual         | 09/04/2020 |
| SPEAG        | DAE4                             | 869                | 09/19/2019  | Annual         | 09/19/2020 |
| SPEAG        | E-Field Probe EX3DV4             | 3797               | 11/28/2019  | Annual         | 11/28/2020 |
| SPEAG        | E-Field Probe EX3DV4             | 7370               | 08/29/2019  | Annual         | 08/29/2020 |
| SPEAG        | E-Field Probe EX3DV4             | 3863               | 05/15/2019  | Annual         | 05/15/2020 |
| SPEAG        | E-Field Probe ES3DV3             | 3076               | 07/23/2019  | Annual         | 07/23/2020 |
| SPEAG        | E-Field Probe EX3DV4             | 3968               | 09/27/2019  | Annual         | 09/27/2020 |
| SPEAG        | Dipole D750V3                    | 1014               | 05/27/2019  | Annual         | 05/27/2020 |
| SPEAG        | Dipole D835V2                    | 441                | 08/23/2019  | Annual         | 08/23/2020 |
| SPEAG        | Dipole D1800V2                   | 2d015              | 09/19/2019  | Annual         | 09/19/2020 |
| SPEAG        | Dipole D1900V2                   | 5d061              | 01/21/2020  | Annual         | 01/21/2021 |
| SPEAG        | Dipole D2450V2                   | 965                | 11/21/2019  | Annual         | 11/21/2020 |
| SPEAG        | Dipole D5GHzV2                   | 1107               | 09/26/2019  | Annual         | 09/26/2020 |
| Agilent      | Power Meter E4419B               | MY41291386         | 10/07/2019  | Annual         | 10/07/2020 |
| Agilent      | Power Meter N1911A               | MY45101406         | 09/10/2019  | Annual         | 09/10/2020 |
| Agilent      | Power Sensor 8481A               | SG1091286          | 10/07/2019  | Annual         | 10/07/2020 |
| Agilent      | Power Sensor 8481A               | MY41090873         | 10/07/2019  | Annual         | 10/07/2020 |
| Agilent      | Power Sensor N1921A              | MY55220026         | 09/06/2019  | Annual         | 09/06/2020 |
| SPEAG        | DAKS 3.5                         | 1031               | 04/16/2019  | Annual         | 04/16/2020 |
| SPEAG        | VNA-R140                         | 0050813            | 03/11/2019  | Annual         | 03/11/2020 |
| Agilent      | WIRELESS COMMUNICATION<br>E5515C | MY48361100         | 10/07/2019  | Annual         | 10/07/2020 |



| Manufacturer | Type / Model                       | S/N         | Calib. Date | Calib.Interval | Calib.Due  |
|--------------|------------------------------------|-------------|-------------|----------------|------------|
| Agilent      | Signal Generator N5182A            | MY47070230  | 05/08/2019  | Annual         | 05/08/2020 |
| Agilent      | 11636B/Power Divider               | 58698       | 02/28/2019  | Annual         | 03/06/2020 |
| TESTO        | 175-H1/Thermometer                 | 40331939309 | 01/29/2020  | Annual         | 01/29/2021 |
| TESTO        | 175-H1/Thermometer                 | 40331915309 | 01/29/2020  | Annual         | 01/29/2021 |
| TESTO        | 175-H1/Thermometer                 | 40331922309 | 01/29/2020  | Annual         | 01/29/2021 |
| TESTO        | 175-H1/Thermometer                 | 40332651310 | 01/29/2020  | Annual         | 01/29/2021 |
| TESTO        | 175-H1/Thermometer                 | 40331949309 | 01/29/2020  | Annual         | 01/29/2021 |
| EMPOWER      | RF Power Amplifier                 | 1084        | 07/23/2019  | Annual         | 07/23/2020 |
| EMPOWER      | RF Power Amplifier                 | 1011        | 10/08/2019  | Annual         | 10/08/2020 |
| MICRO LAB    | LP Filter / LA-15N                 | 10453       | 10/07/2019  | Annual         | 10/07/2020 |
| MICRO LAB    | LP Filter / LA-30N                 | -           | 10/07/2019  | Annual         | 10/07/2020 |
| MICRO LAB    | LP Filter / LA-60N                 | 32011       | 10/07/2019  | Annual         | 10/07/2020 |
| Apitech      | Attenuator (3dB) 18B-03            | 1           | 06/04/2019  | Annual         | 06/04/2020 |
| Agilent      | Attenuator (20dB) 33340C           | 1642        | 05/08/2019  | Annual         | 05/08/2020 |
| Agilent      | Directional Bridge                 | 3140A03878  | 06/12/2019  | Annual         | 06/12/2020 |
| Agilent      | MXA Signal Analyzer N9020A         | MY50510407  | 10/29/2019  | Annual         | 10/29/2020 |
| HP           | Dual Directional Coupler           | 16072       | 10/07/2019  | Annual         | 10/07/2020 |
| Anritsu      | Radio Communication Tester MT8820C | 6201074225  | 03/05/2019  | Annual         | 03/05/2020 |
| Anritsu      | Radio Communication Tester MT8821C | 6201502997  | 08/09/2019  | Annual         | 08/09/2020 |
| R&S          | Bluetooth CBT                      | 100272      | 03/04/2019  | Annual         | 03/04/2020 |

\* The E-field probe was calibrated by SPEAG, by the waveguide technique procedure. Dipole Verification measurement is performed by HCT Lab. before each test. The brain/body simulating material is calibrated by HCT using the DAKS 3.5 to determine the conductivity and permittivity (dielectric constant) of the brain/body-equivalent material.

## 19. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the ANSI/ IEEE C95.1 - 2005.

These measurements were taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

## 20. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio frequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1 - 2005 , American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300 kHz to 300 GHz, New York: IEEE, Sept. 1992
- [3] ANSI/IEEE C 95.1 - 2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3 kHz to 300 GHz, New York: IEEE, 2006
- [4] ANSI/IEEE C95.3 - 2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: December 2002.
- [5] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice or Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body from Wireless Communications Devices
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300 MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectro magnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10 kHz-300 GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation and procedures – Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), July. 2016..
- [21] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz) Mar. 2010.
- [22] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio Communication Apparatus (All Frequency Band) Issue 5, March 2015.
- [23] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [24] FCC SAR Test procedures for 2G-3G Devices, Mobile Hotspot and UMPC Device KDB 941225 D01.
- [25] SAR Measurement Guidance for IEEE 802.11 transmitters, KDB 248227 D01v02r02
- [26] SAR Evaluation of Handsets with Multiple Transmitters and Antennas KDB 648474 D03, D04.
- [27] SAR Evaluation for Laptop, Notebook, Netbook and Tablet computers KDB 616217 D04.
- [28] SAR Measurement and Reporting Requirements for 100 MHz – 6 GHz, KDB 865664 D01, D02.
- [29] FCC General RF Exposure Guidance and SAR procedures for Dongles, KDB 447498 D01,D02.

## **Attachment 1. – SAR Test Plots**

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 21.0 °C  
 Ambient Temperature: 21.2 °C  
 Test Date: 02/12/2020  
 Plot No.: 1

**DUT: SM-A015A, SM-A015AZ; Type: Bar**


Communication System: UID 0, GSM 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042  
 Medium parameters used (interpolated):  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.929 \text{ S/m}$ ;  $\epsilon_r = 42.27$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7370; ConvF(9.88, 9.88, 9.88); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: SAM with CRP v5.0\_Right
- Measurement SW: DASY52, Version 52.8 (8);

**GSM850 Head Right Touch 190ch/Area Scan (8x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.467 W/kg

**GSM850 Head Right Touch 190ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 7.244 V/m; Power Drift = -0.12 dB  
 Peak SAR (extrapolated) = 0.496 W/kg  
**SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.305 W/kg**  
 Maximum value of SAR (measured) = 0.468 W/kg

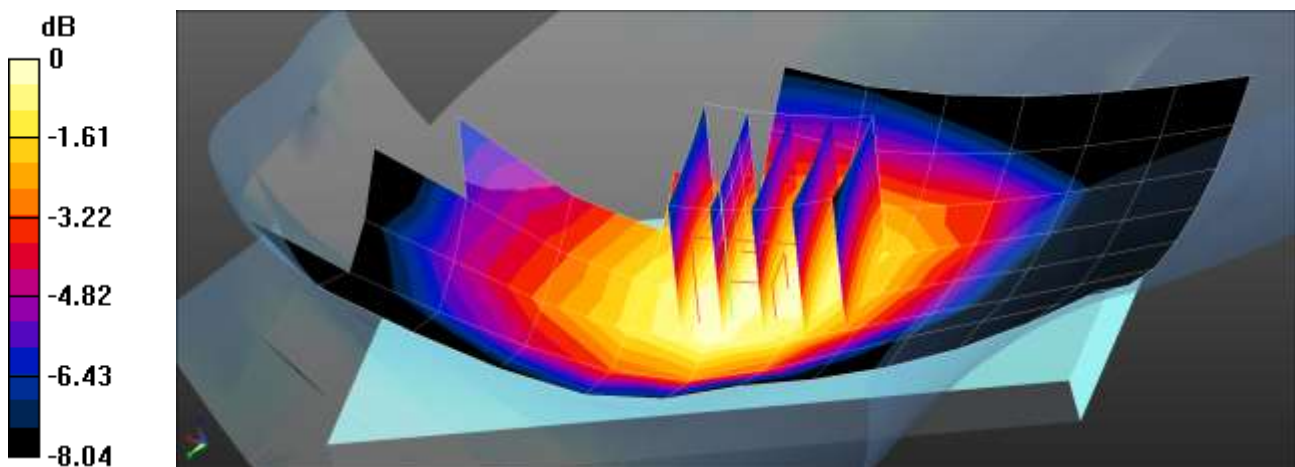

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 20.9 °C  
 Ambient Temperature: 21.2 °C  
 Test Date: 02/13/2020  
 Plot No.: 2

**DUT: SM-A015A, SM-A015AZ; Type: Bar**


Communication System: UID 0, GSM 1900 (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.395 \text{ S/m}$ ;  $\epsilon_r = 38.726$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7370; ConvF(8.09, 8.09, 8.09); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: SAM with CRP v5.0\_Front
- Measurement SW: DASY52, Version 52.8 (8);

**GSM1900 Head Left Touch 661ch/Area Scan (8x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.451 W/kg

**GSM1900 Head Left Touch 661ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 6.686 V/m; Power Drift = 0.03 dB  
 Peak SAR (extrapolated) = 0.532 W/kg  
**SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.200 W/kg**  
 Maximum value of SAR (measured) = 0.450 W/kg

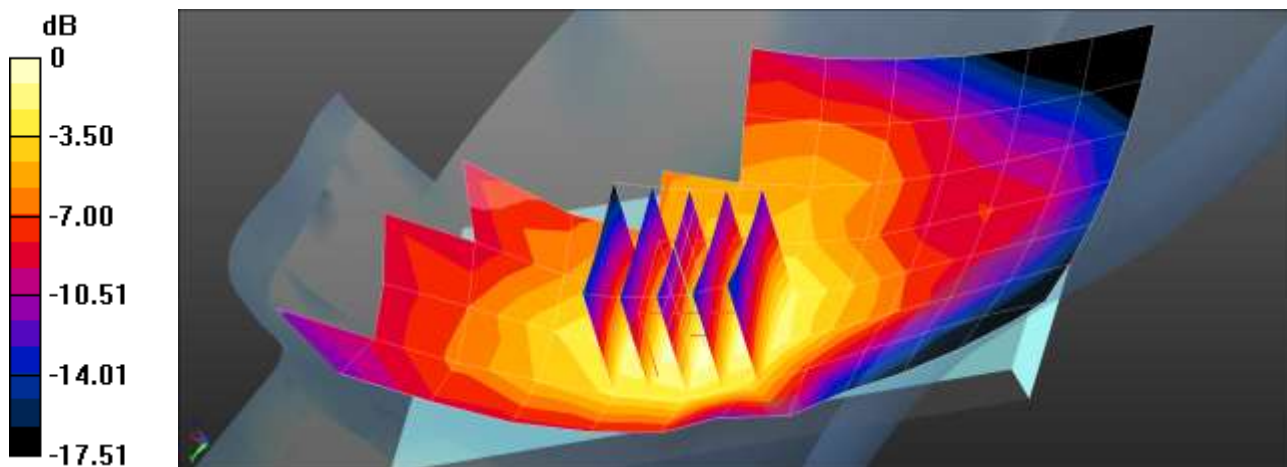

0 dB = 0.450 W/kg = -3.47 dBW/kg

Test Laboratory: HCT CO., LTD  
EUT Type: Mobile Phone  
Liquid Temperature: 21.0 °C  
Ambient Temperature: 21.2 °C  
Test Date: 02/12/2020  
Plot No.: 3

**DUT: SM-A015A, SM-A015AZ; Type: Bar**


Communication System: UID 0, WCDMA850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.929$  S/m;  $\epsilon_r = 42.27$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7370; ConvF(9.88, 9.88, 9.88); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: SAM with CRP v5.0\_Right
- Measurement SW: DASY52, Version 52.8 (8);

**WCDMA 5 Head Left Touch 4183ch/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.581 W/kg

**WCDMA 5 Head Left Touch 4183ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  
dx=8mm, dy=8mm, dz=5mm  
Reference Value = 8.575 V/m; Power Drift = 0.13 dB  
Peak SAR (extrapolated) = 0.657 W/kg  
**SAR(1 g) = 0.523 W/kg; SAR(10 g) = 0.399 W/kg**  
Maximum value of SAR (measured) = 0.609 W/kg

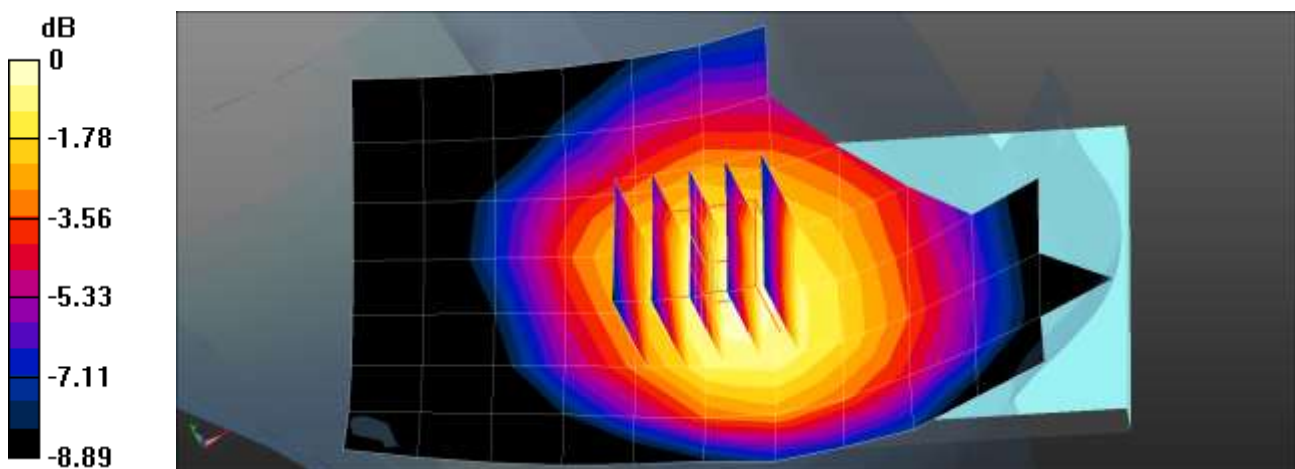

0 dB = 0.609 W/kg = -2.15 dBW/kg



Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 21.0 °C  
 Ambient Temperature: 21.2 °C  
 Test Date: 02/12/2020  
 Plot No.: 4

## DUT: SM-A015A, SM-A015AZ; Type: Bar


Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1732.4$  MHz;  $\sigma = 1.317$  S/m;  $\epsilon_r = 39.344$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Right Section

### DASY Configuration:

- Probe: EX3DV4 - SN7370; ConvF(8.43, 8.43, 8.43); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: SAM with CRP v5.0\_Front
- Measurement SW: DASY52, Version 52.8 (8);

**WCDMA 4 Head Right Touch 1412ch/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.342 W/kg

**WCDMA 4 Head Right Touch 1412ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 5.647 V/m; Power Drift = 0.02 dB  
 Peak SAR (extrapolated) = 0.389 W/kg  
**SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.165 W/kg**  
 Maximum value of SAR (measured) = 0.338 W/kg

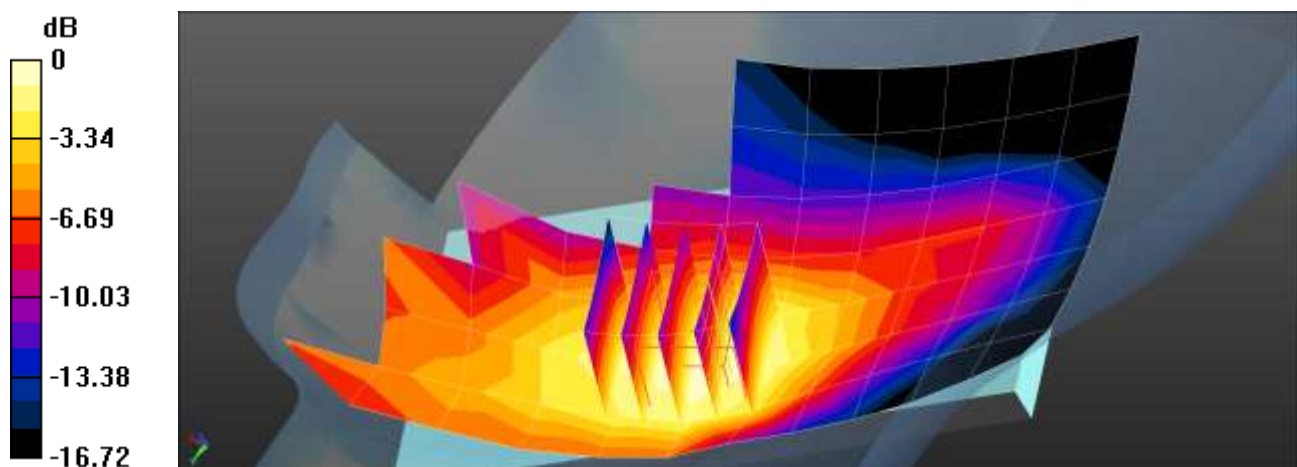

0 dB = 0.338 W/kg = -4.71 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 21.0 °C  
 Ambient Temperature: 21.2 °C  
 Test Date: 02/12/2020  
 Plot No.: 5

**DUT: SM-A015A, SM-A015AZ; Type: Bar**


Communication System: UID 0, WCDMA1900 (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.398$  S/m;  $\epsilon_r = 38.709$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7370; ConvF(8.09, 8.09, 8.09); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: SAM with CRP v5.0\_Front
- Measurement SW: DASY52, Version 52.8 (8);

**WCDMA 2 Head Right Touch 9400ch/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.645 W/kg

**WCDMA 2 Head Right Touch 9400ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 8.346 V/m; Power Drift = -0.19 dB  
 Peak SAR (extrapolated) = 0.764 W/kg  
**SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.296 W/kg**  
 Maximum value of SAR (measured) = 0.653 W/kg

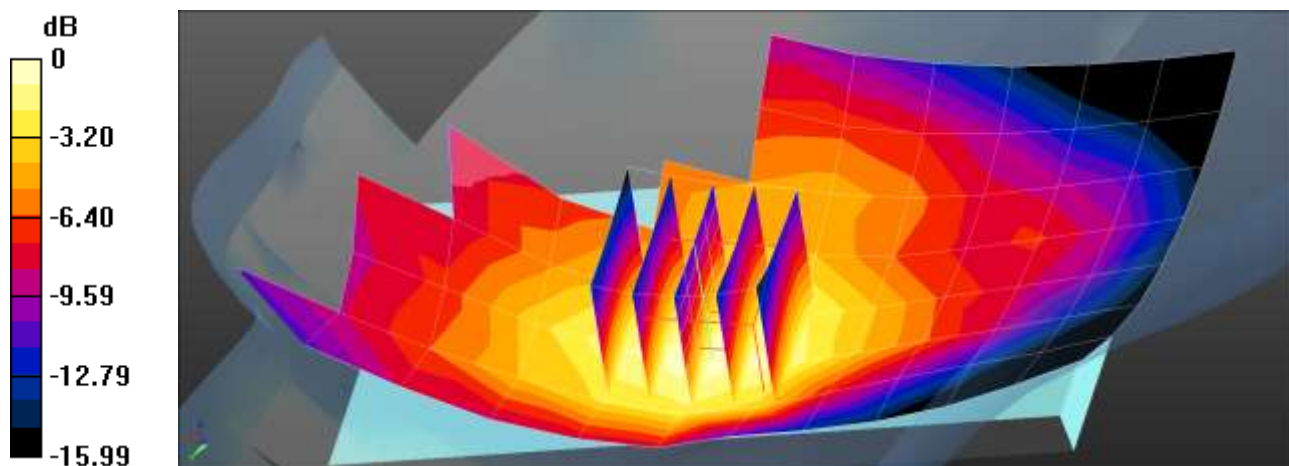

0 dB = 0.653 W/kg = -1.85 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 21.0 °C  
 Ambient Temperature: 21.2 °C  
 Test Date: 02/12/2020  
 Plot No.: 6

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, LTE Band 2 (0); Frequency: 1860 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1860 \text{ MHz}$ ;  $\sigma = 1.374 \text{ S/m}$ ;  $\epsilon_r = 38.793$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7370; ConvF(8.09, 8.09, 8.09); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: SAM with CRP v5.0\_Front
- Measurement SW: DASY52, Version 52.8 (8);

**LTE Band 2 Head Right Touch QPSK 20MHz 1RB 49offset 18700ch/Area Scan (8x13x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.711 W/kg


**LTE Band 2 Head Right Touch QPSK 20MHz 1RB 49offset 18700ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.259 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.818 W/kg

**SAR(1 g) = 0.525 W/kg; SAR(10 g) = 0.334 W/kg**

Maximum value of SAR (measured) = 0.691 W/kg

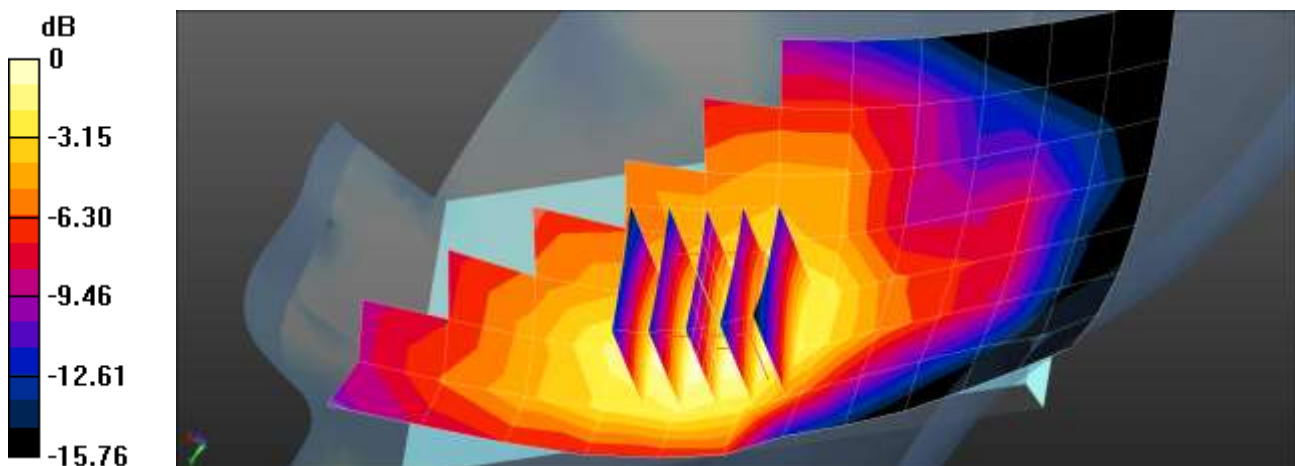

0 dB = 0.691 W/kg = -1.61 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 21.0 °C  
 Ambient Temperature: 21.2 °C  
 Test Date: 02/12/2020  
 Plot No.: 7

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, LTE Band 4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.318$  S/m;  $\epsilon_r = 39.344$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Right Section

**DASY Configuration:**


- Probe: EX3DV4 - SN7370; ConvF(8.43, 8.43, 8.43); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: SAM with CRP v5.0\_Front
- Measurement SW: DASY52, Version 52.8 (8);

**LTE Band 4 Head Right Touch QPSK 20MHz 1RB 49offset 20175ch/Area Scan (8x13x1):**

Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.358 W/kg

**LTE Band 4 Head Right Touch QPSK 20MHz 1RB 49offset 20175ch/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 6.591 V/m; Power Drift = -0.17 dB  
 Peak SAR (extrapolated) = 0.411 W/kg  
**SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.174 W/kg**

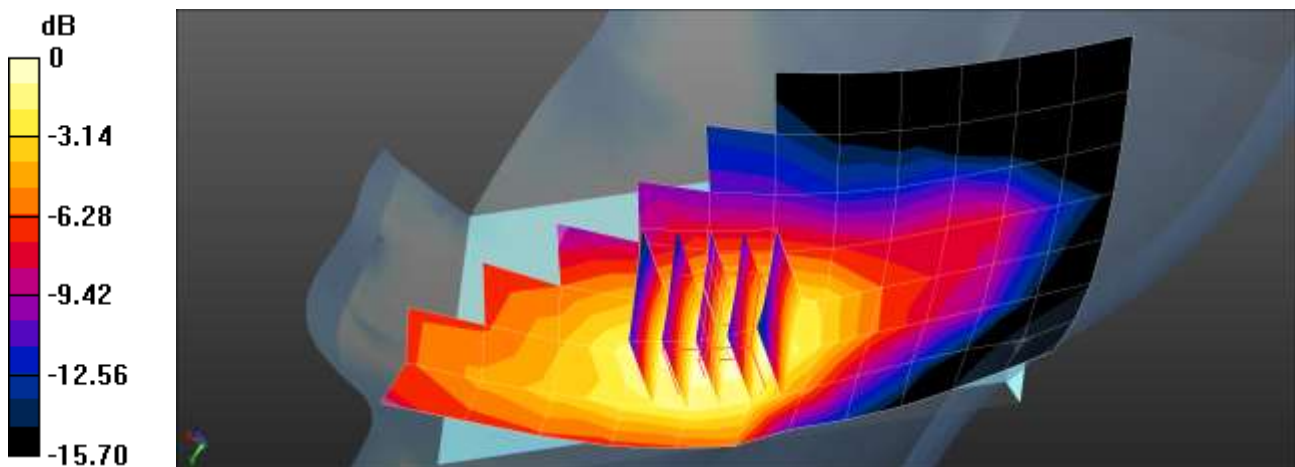

0 dB = 0.358 W/kg = -4.46 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 20.9 °C  
 Ambient Temperature: 21.2 °C  
 Test Date: 02/07/2020  
 Plot No.: 8

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.929$  S/m;  $\epsilon_r = 42.303$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Right Section

**DASY Configuration:**


- Probe: ES3DV3 - SN3076; ConvF(6.22, 6.22, 6.22); Calibrated: 2019-07-23;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2019-05-23
- Phantom: SAM\_Right\_20170913
- Measurement SW: DASY52, Version 52.8 (8);

**LTE Band 5 Head Right Touch QPSK 10MHz 25RB 24offset 20525ch/Area Scan (8x13x1):**

Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.280 W/kg

**LTE Band 5 Head Right Touch QPSK 10MHz 25RB 24offset 20525ch/Zoom Scan**

**(5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 5.856 V/m; Power Drift = 0.11 dB  
 Peak SAR (extrapolated) = 0.328 W/kg  
**SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.193 W/kg**  
 Maximum value of SAR (measured) = 0.287 W/kg

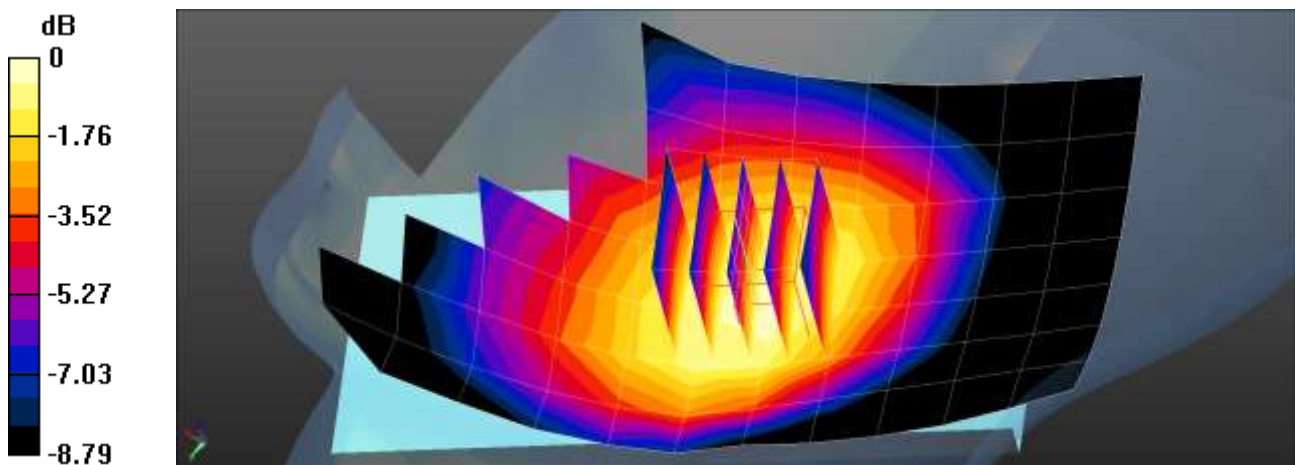

0 dB = 0.287 W/kg = -5.42 dBW/kg



Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 20.9 °C  
 Ambient Temperature: 21.2 °C  
 Test Date: 02/07/2020  
 Plot No.: 9

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.855 \text{ S/m}$ ;  $\epsilon_r = 42.029$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

**DASY Configuration:**

- Probe: ES3DV3 - SN3076; ConvF(6.52, 6.52, 6.52); Calibrated: 2019-07-23;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2019-05-23
- Phantom: SAM\_Right\_20170913
- Measurement SW: DASY52, Version 52.8 (8);

**LTE Band 12 Head Right Touch QPSK 10MHz 1RB 24offset 23095ch/Area Scan (8x13x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.254 W/kg

**LTE Band 12 Head Right Touch QPSK 10MHz 1RB 24offset 23095ch/Zoom Scan**


**(5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.725 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.278 W/kg

**SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.182 W/kg**

Maximum value of SAR (measured) = 0.244 W/kg

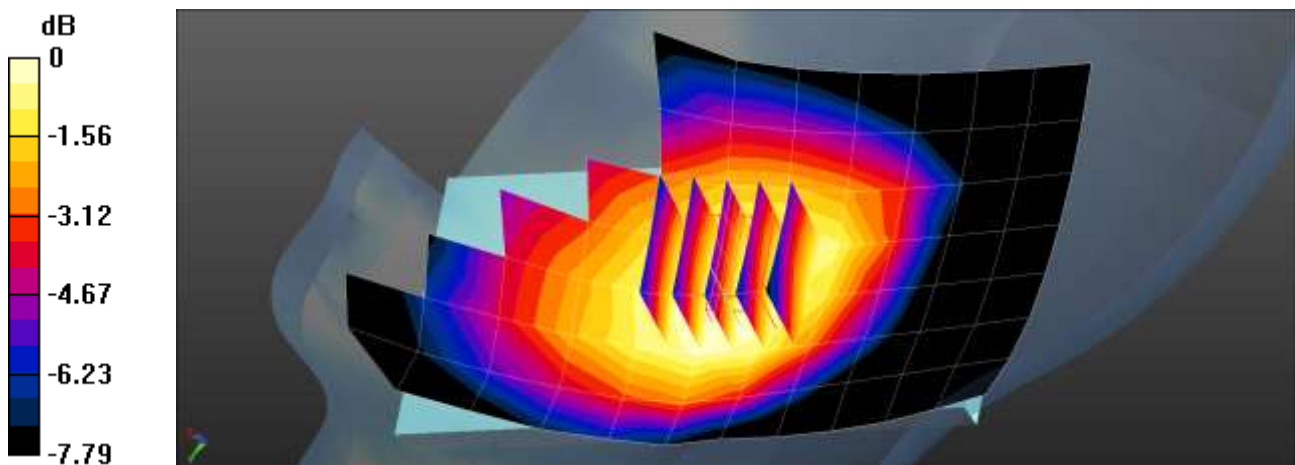

0 dB = 0.244 W/kg = -6.13 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 20.9 °C  
 Ambient Temperature: 21.2 °C  
 Test Date: 02/07/2020  
 Plot No.: 10

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, LTE 14 (0); Frequency: 793 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 793 \text{ MHz}$ ;  $\sigma = 0.933 \text{ S/m}$ ;  $\epsilon_r = 40.859$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3076; ConvF(6.52, 6.52, 6.52); Calibrated: 2019-07-23;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2019-05-23
- Phantom: SAM\_Right\_20170913
- Measurement SW: DASY52, Version 52.8 (8);

**LTE Band 14 Head Left Touch QPSK 10MHz 1RB 24offset 23330ch/Area Scan (8x13x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$



Maximum value of SAR (measured) = 0.273 W/kg

**LTE Band 14 Head Left Touch QPSK 10MHz 1RB 24offset 23330ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.185 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.319 W/kg

**SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.194 W/kg**

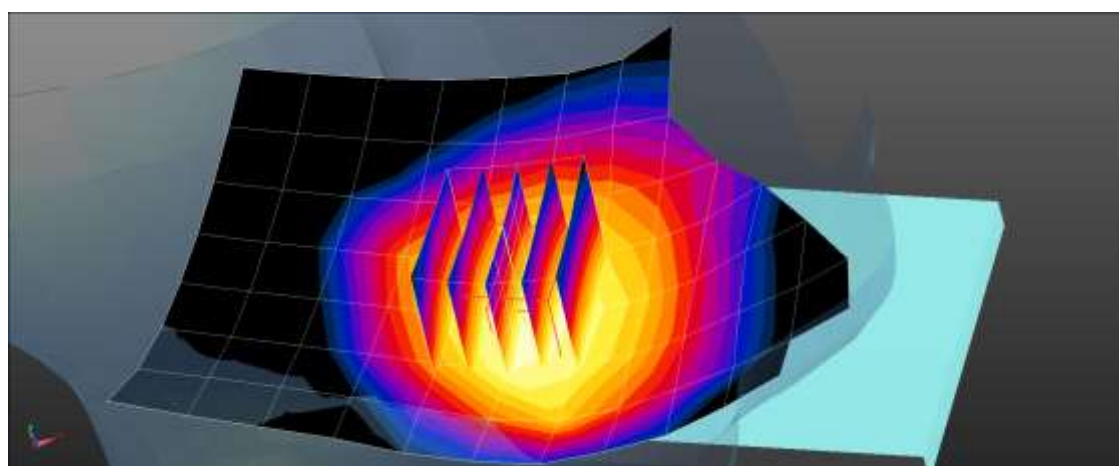

0 dB = 0.273 W/kg = -5.64 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 19.8 °C  
 Ambient Temperature: 20.0 °C  
 Test Date: 02/11/2020  
 Plot No.: 11

**DUT: SM-A015A, SM-A015AZ; Type: Bar**


Communication System: UID 0, 2450MHz FCC (0); Frequency: 2412 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.75 \text{ S/m}$ ;  $\epsilon_r = 38.565$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3968; ConvF(7.6, 7.6, 7.6); Calibrated: 2019-09-27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2019-09-19
- Phantom: SAM with CRP v5.0\_F
- Measurement SW: DASY52, Version 52.8 (8);

**802.11b Head Right Touch 1Mbps 1ch/Area Scan (10x16x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$   
 Maximum value of SAR (measured) = 0.903 W/kg

**802.11b Head Right Touch 1Mbps 1ch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 10.31 V/m; Power Drift = -0.11 dB  
 Peak SAR (extrapolated) = 1.15 W/kg  
**SAR(1 g) = 0.520 W/kg; SAR(10 g) = 0.249 W/kg**  
 Maximum value of SAR (measured) = 0.877 W/kg

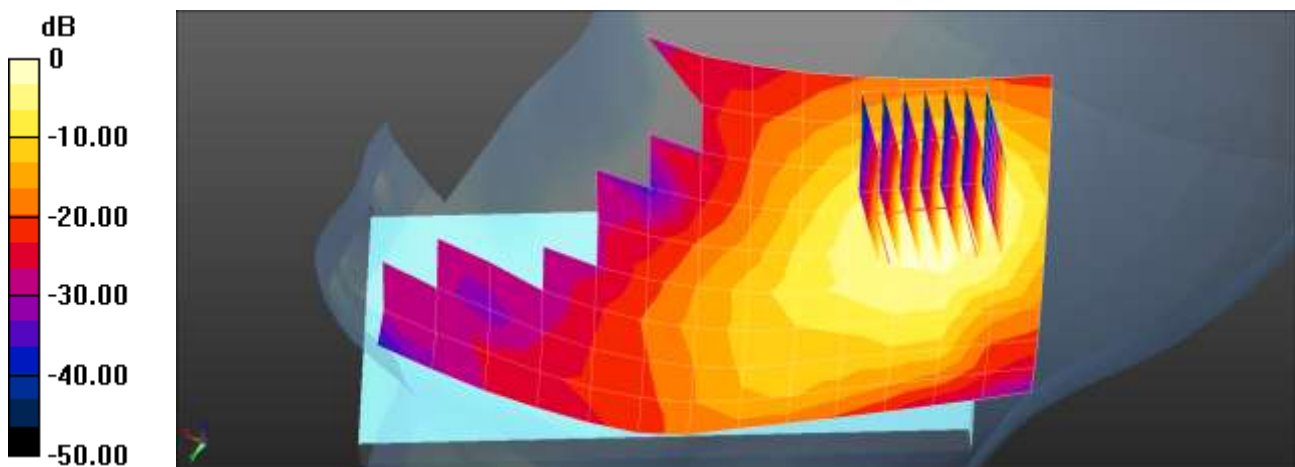

0 dB = 0.903 W/kg = -0.44 dBW/kg



Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 20.2 °C  
 Ambient Temperature: 20.6 °C  
 Test Date: 02/11/2020  
 Plot No.: 12

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5290 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5290 \text{ MHz}$ ;  $\sigma = 4.906 \text{ S/m}$ ;  $\epsilon_r = 36.892$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3863; ConvF(5.09, 5.09, 5.09); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: Twin-SAM V4.0 (Left-Right)
- Measurement SW: DASY52, Version 52.10 (2);

**802.11ac80 Head Right Touch MCS0 58ch/Area Scan (11x18x1):** Measurement grid:

$dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.709 W/kg

**802.11ac80 Head Right Touch MCS0 58ch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio:1.4

Reference Value = 4.035 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.50 W/kg

**SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.112 W/kg**

Maximum value of SAR (measured) = 0.898 W/kg

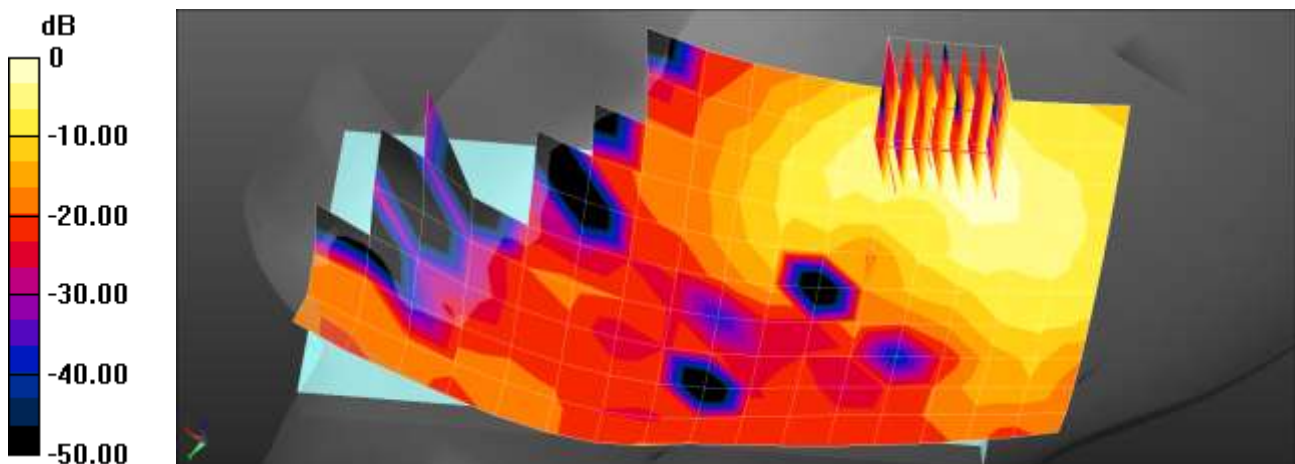

0 dB = 0.709 W/kg = -1.49 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 19.8 °C  
 Ambient Temperature: 20.0 °C  
 Test Date: 02/11/2020  
 Plot No.: 13

**DUT: SM-A015A, SM-A015AZ; Type: Bar**


Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.299  
 Medium parameters used (interpolated):  $f = 2441 \text{ MHz}$ ;  $\sigma = 1.78 \text{ S/m}$ ;  $\epsilon_r = 38.377$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3968; ConvF(7.6, 7.6, 7.6); Calibrated: 2019-09-27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2019-09-19
- Phantom: SAM with CRP v5.0\_F
- Measurement SW: DASY52, Version 52.8 (8);

**Bluetooth Head Right Touch DH5 39ch/Area Scan (10x16x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$   
 Maximum value of SAR (measured) = 0.0618 W/kg

**Bluetooth Head Right Touch DH5 39ch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 3.396 V/m; Power Drift = -0.02 dB  
 Peak SAR (extrapolated) = 0.0830 W/kg  
**SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.016 W/kg**  
 Maximum value of SAR (measured) = 0.0630 W/kg

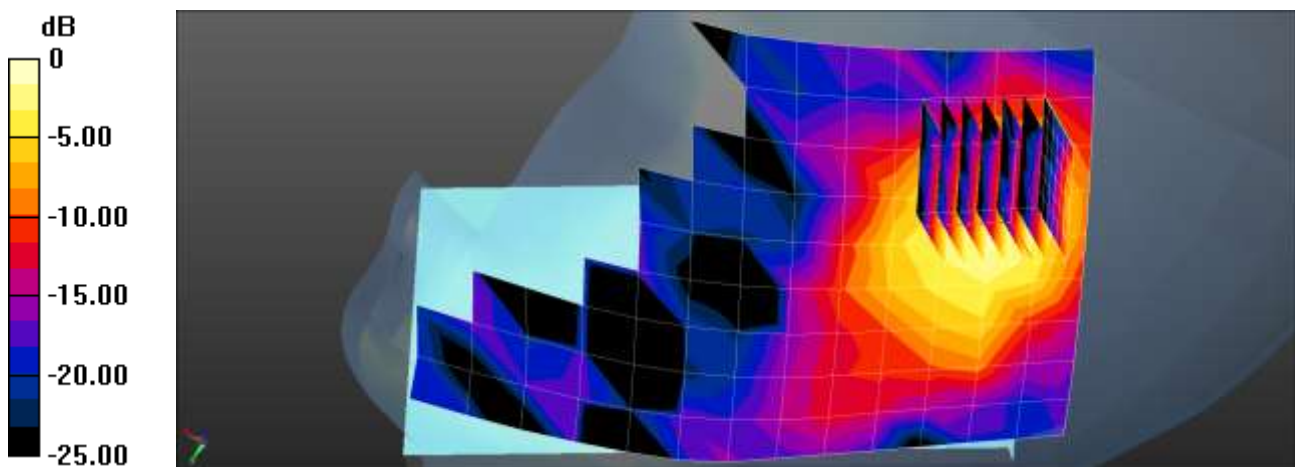

0 dB = 0.0630 W/kg = -12.01 dBW/kg

Test Laboratory: HCT CO., LTD  
EUT Type: Mobile Phone  
Liquid Temperature: 20.2 °C  
Ambient Temperature: 20.4 °C  
Test Date: 02/12/2020  
Plot No.: 14

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, GSM 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042  
Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.96$  S/m;  $\epsilon_r = 53.376$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Center Section

## DASY Configuration:

- Probe: EX3DV4 - SN3797; ConvF(8.97, 8.97, 8.97); Calibrated: 2019-11-28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2019-07-18
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (2);

**GSM850 Body Rear 190ch/Area Scan (14x8x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.447 W/kg


**GSM850 Body Rear 190ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.35 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.490 W/kg

**SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.283 W/kg**

Maximum value of SAR (measured) = 0.451 W/kg

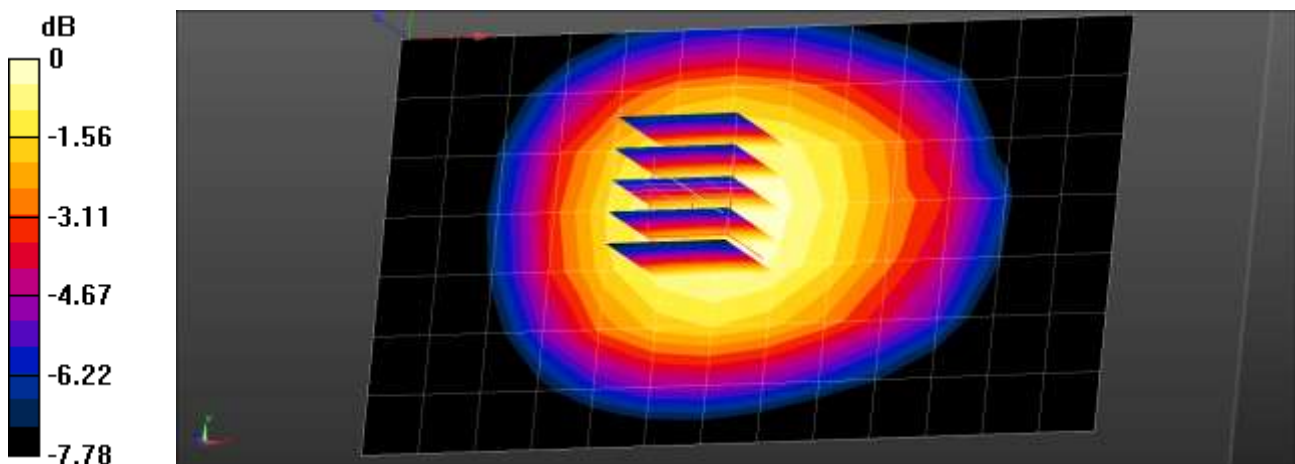

0 dB = 0.451 W/kg = -3.46 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 20.3 °C  
 Ambient Temperature: 20.4 °C  
 Test Date: 02/13/2020  
 Plot No.: 15

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, GSM1900 (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.514 \text{ S/m}$ ;  $\epsilon_r = 53.598$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

**DASY Configuration:**

- Probe: EX3DV4 - SN3797; ConvF(7.61, 7.61, 7.61); Calibrated: 2019-11-28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2019-07-18
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (2);

**GSM1900 Body Front 661ch/Area Scan (14x8x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.248 W/kg


**GSM1900 Body Front 661ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.607 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.301 W/kg

**SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.107 W/kg**

Maximum value of SAR (measured) = 0.257 W/kg

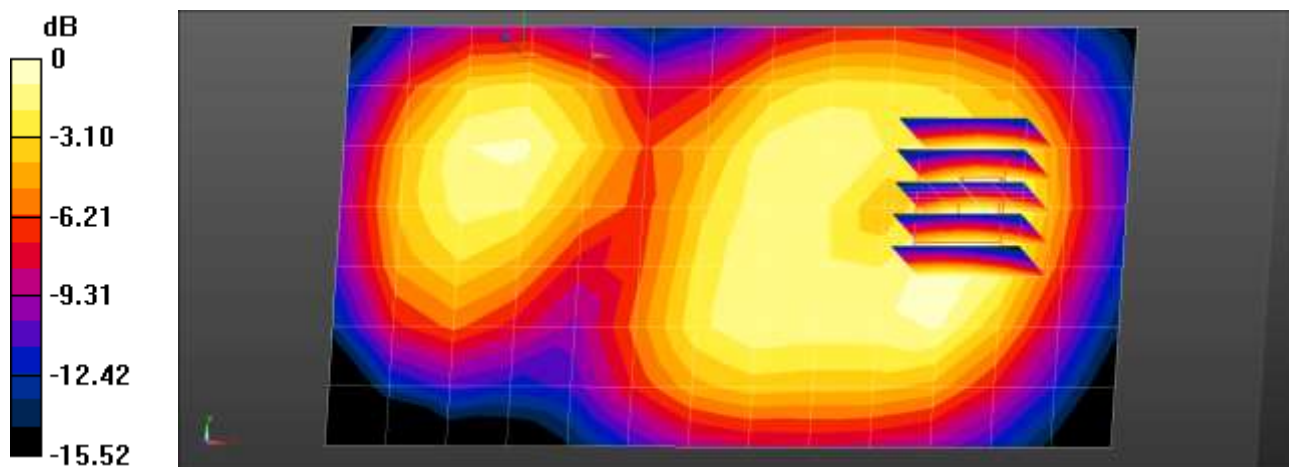

0 dB = 0.257 W/kg = -5.90 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 20.2 °C  
 Ambient Temperature: 20.4 °C  
 Test Date: 02/12/2020  
 Plot No.: 16

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, WCDMA850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.96 \text{ S/m}$ ;  $\epsilon_r = 53.376$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

**DASY Configuration:**

- Probe: EX3DV4 - SN3797; ConvF(8.97, 8.97, 8.97); Calibrated: 2019-11-28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2019-07-18
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (2);

**WCDMA Band 5 Body Rear 4183ch/Area Scan (14x8x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.494 W/kg


**WCDMA Band 5 Body Rear 4183ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 23.60 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.536 W/kg

**SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.312 W/kg**

Maximum value of SAR (measured) = 0.492 W/kg

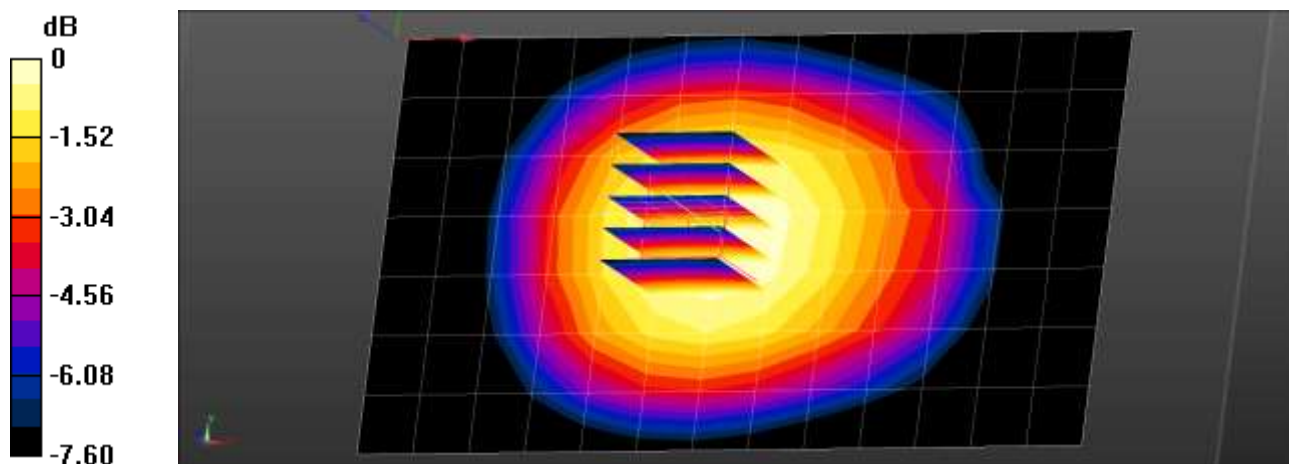

0 dB = 0.492 W/kg = -3.08 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 20.8 °C  
 Ambient Temperature: 21.1 °C  
 Test Date: 02/13/2020  
 Plot No.: 17

**DUT: SM-A015A, SM-A015AZ; Type: Bar**


Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1732.4$  MHz;  $\sigma = 1.48$  S/m;  $\epsilon_r = 53.925$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3863; ConvF(8.23, 8.23, 8.23); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: MFP\_V5.1C\_20171020
- Measurement SW: DASY52, Version 52.10 (2);

**WCDMA Band 4 Body Rear 1412ch/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.628 W/kg

**WCDMA Band 4 Body Rear 1412ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 3.526 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 0.780 W/kg  
**SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.259 W/kg**  
 Maximum value of SAR (measured) = 0.665 W/kg

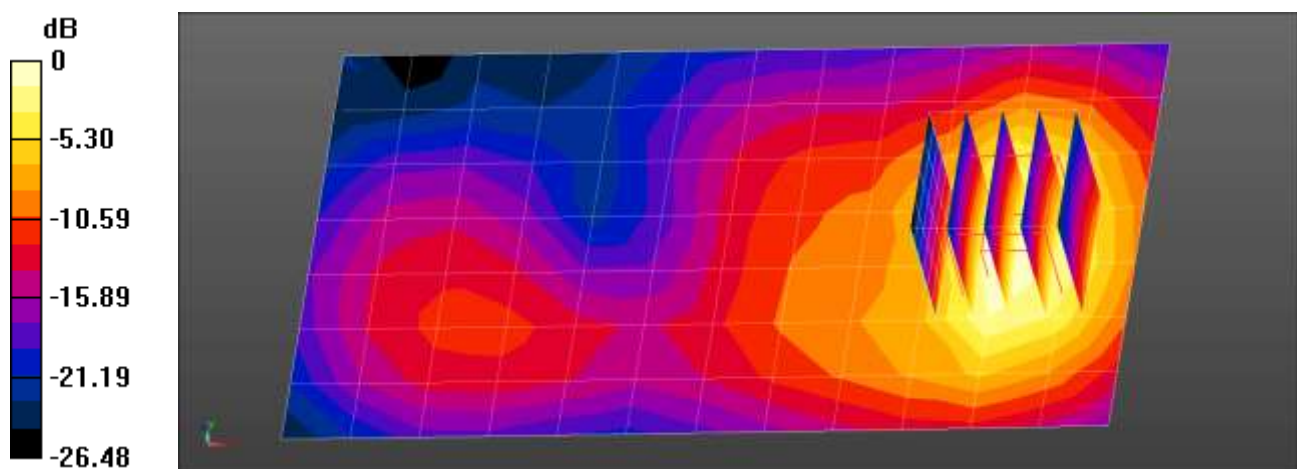

0 dB = 0.628 W/kg = -2.02 dBW/kg



Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 20.8 °C  
 Ambient Temperature: 21.1 °C  
 Test Date: 02/13/2020  
 Plot No.: 18

**DUT: SM-A015A, SM-A015AZ; Type: Bar**


Communication System: UID 0, WCDMA1900 (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.513 \text{ S/m}$ ;  $\epsilon_r = 53.61$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3863; ConvF(7.99, 7.99, 7.99); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: MFP\_V5.1C\_20171020
- Measurement SW: DASY52, Version 52.10 (2);

**WCDMA band 2 Body Front 9400ch/Area Scan (8x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.627 W/kg

**WCDMA band 2 Body Front 9400ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  
 $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 4.086 V/m; Power Drift = 0.03 dB  
 Peak SAR (extrapolated) = 0.766 W/kg  
**SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.261 W/kg**  
 Maximum value of SAR (measured) = 0.644 W/kg

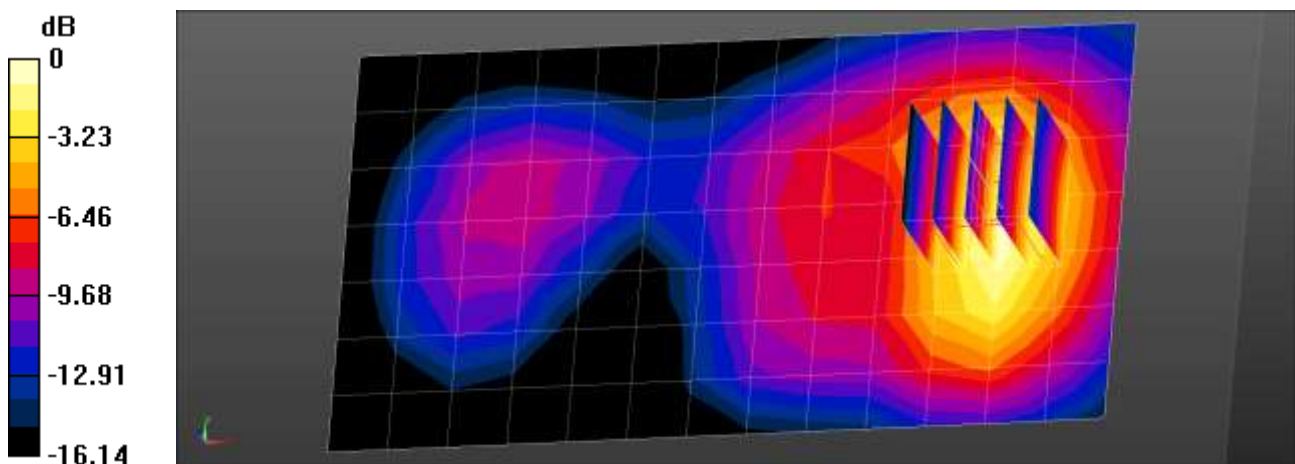

0 dB = 0.644 W/kg = -1.91 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 20.8 °C  
 Ambient Temperature: 21.1 °C  
 Test Date: 02/13/2020  
 Plot No.: 19

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, LTE Band2 (0); Frequency: 1860 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1860 \text{ MHz}$ ;  $\sigma = 1.492 \text{ S/m}$ ;  $\epsilon_r = 53.645$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

**DASY Configuration:**


- Probe: EX3DV4 - SN3863; ConvF(7.99, 7.99, 7.99); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: MFP\_V5.1C\_20171020
- Measurement SW: DASY52, Version 52.10 (2);

**LTE band 2 Body Front QPSK 20MHz 1RB 49offset 18700ch/Area Scan (8x13x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.474 W/kg

**LTE band 2 Body Front QPSK 20MHz 1RB 49offset 18700ch/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 10.70 V/m; Power Drift = -0.15 dB  
 Peak SAR (extrapolated) = 0.581 W/kg  
**SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.189 W/kg**  
 Maximum value of SAR (measured) = 0.490 W/kg

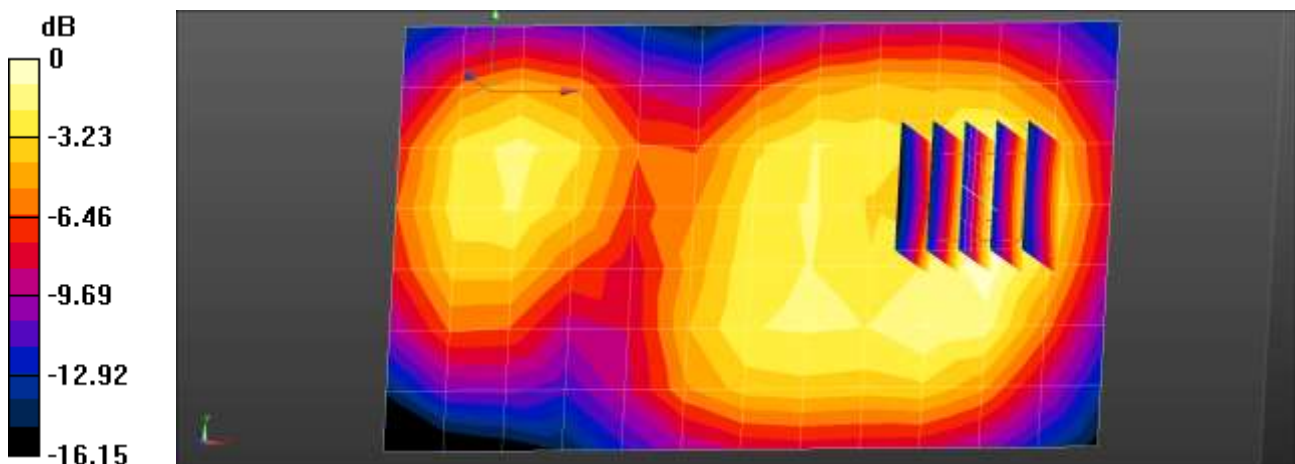

0 dB = 0.490 W/kg = -3.10 dBW/kg



Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 20.8 °C  
 Ambient Temperature: 21.1 °C  
 Test Date: 02/13/2020  
 Plot No.: 20

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, LTE Band4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.481 \text{ S/m}$ ;  $\epsilon_r = 53.924$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY Configuration:


- Probe: EX3DV4 - SN3863; ConvF(8.23, 8.23, 8.23); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: MFP\_V5.1C\_20171020
- Measurement SW: DASY52, Version 52.10 (2);

**LTE band 4 Body Front QPSK 20MHz 1RB 49offset 20175ch/Area Scan (8x13x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.584 W/kg

**LTE band 4 Body Front QPSK 20MHz 1RB 49offset 20175ch/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 4.513 V/m; Power Drift = -0.13 dB  
 Peak SAR (extrapolated) = 0.769 W/kg  
**SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.263 W/kg**  
 Maximum value of SAR (measured) = 0.653 W/kg

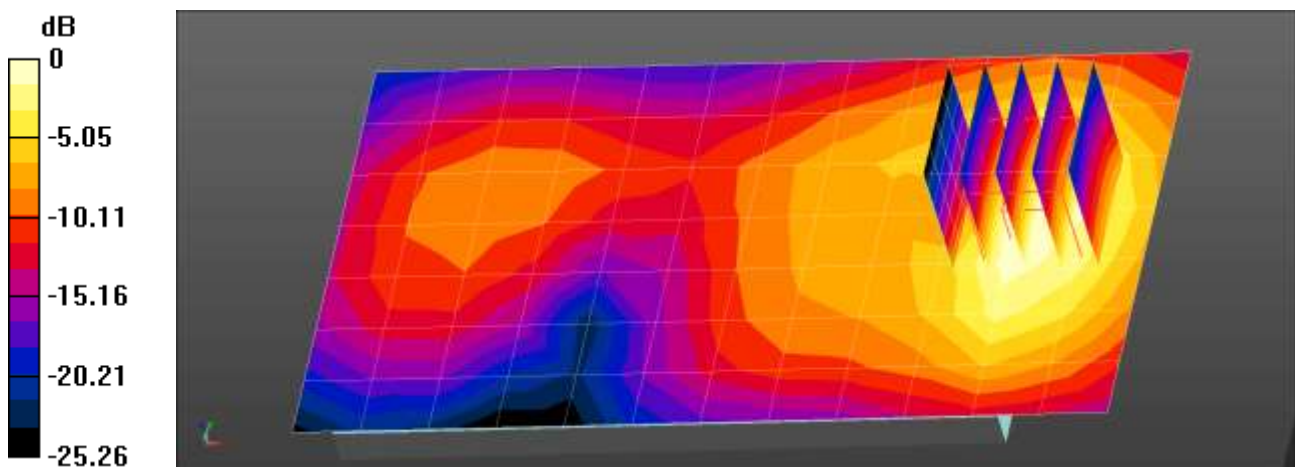

0 dB = 0.584 W/kg = -2.33 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 21.4 °C  
 Ambient Temperature: 21.7 °C  
 Test Date: 02/10/2020  
 Plot No.: 21

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 56.323$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3076; ConvF(5.97, 5.97, 5.97); Calibrated: 2019-07-23;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2019-05-23
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.8 (8);

**LTE Band 5 Body worn Rear QPSK 10MHz 1RB 24offset 20525ch/Area Scan (13x8x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.307 W/kg

**LTE Band 5 Body worn Rear QPSK 10MHz 1RB 24offset 20525ch/Zoom Scan**



**(5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 18.47 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.368 W/kg

**SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.223 W/kg**

Maximum value of SAR (measured) = 0.321 W/kg

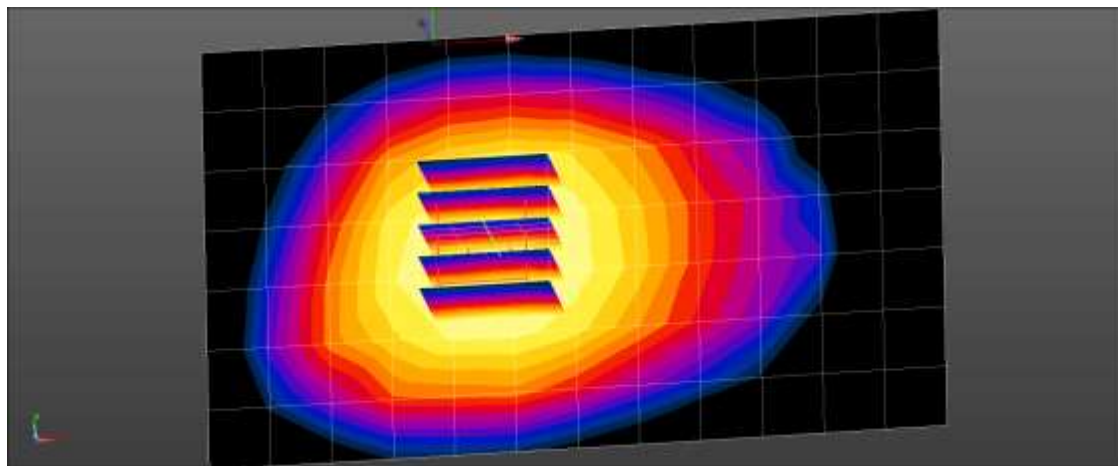

0 dB = 0.321 W/kg = -4.93 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 21.5 °C  
 Ambient Temperature: 21.8 °C  
 Test Date: 02/11/2020  
 Plot No.: 22

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.926 \text{ S/m}$ ;  $\epsilon_r = 55.797$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3076; ConvF(6.12, 6.12, 6.12); Calibrated: 2019-07-23;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2019-05-23
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.8 (8);

**LTE Band 12 Body worn Rear QPSK 10MHz 1RB 24offset 23095ch/Area Scan (13x8x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.357 W/kg

**LTE Band 12 Body worn Rear QPSK 10MHz 1RB 24offset 23095ch/Zoom Scan**


**(5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 19.55 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.396 W/kg

**SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.257 W/kg**

Maximum value of SAR (measured) = 0.353 W/kg

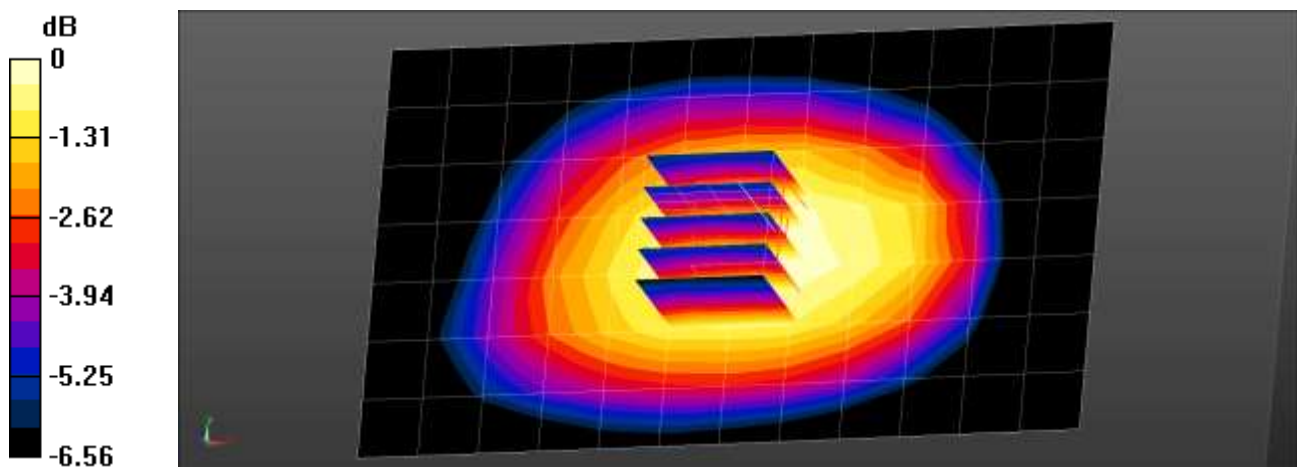

0 dB = 0.353 W/kg = -4.52 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 21.5 °C  
 Ambient Temperature: 21.8 °C  
 Test Date: 02/11/2020  
 Plot No.: 23

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, LTE 14 (0); Frequency: 793 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 793 \text{ MHz}$ ;  $\sigma = 1.005 \text{ S/m}$ ;  $\epsilon_r = 54.943$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3076; ConvF(6.12, 6.12, 6.12); Calibrated: 2019-07-23;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2019-05-23
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.8 (8);

**LTE Band 14 Body worn Rear QPSK 10MHz 1RB 24offset 23330ch/Area Scan (13x8x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.363 W/kg

**LTE Band 14 Body worn Rear QPSK 10MHz 1RB 24offset 23330ch/Zoom Scan**


**(5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 19.96 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.426 W/kg

**SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.266 W/kg**

Maximum value of SAR (measured) = 0.374 W/kg

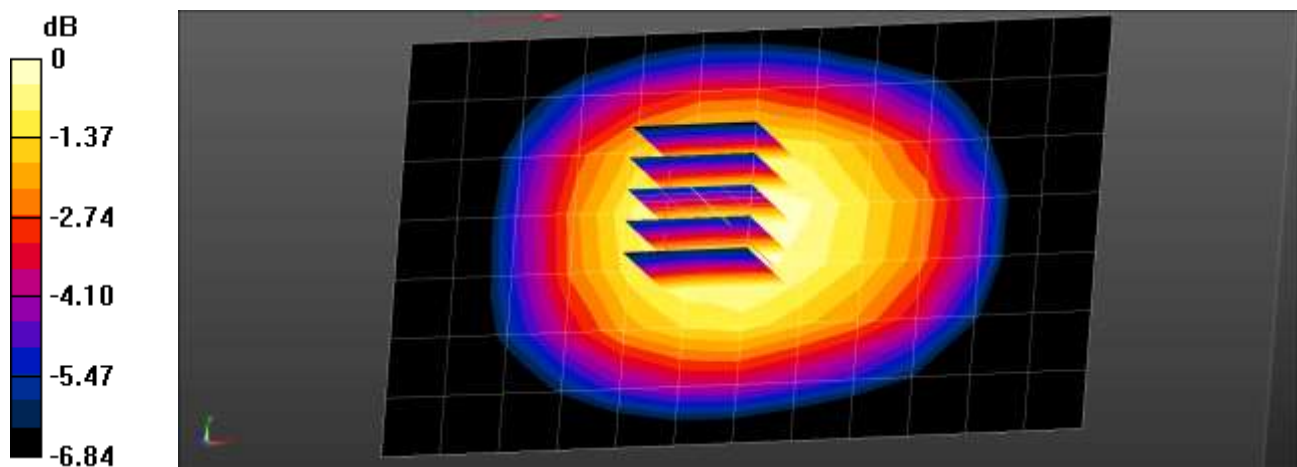

0 dB = 0.374 W/kg = -4.27 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 19.8 °C  
 Ambient Temperature: 20.0 °C  
 Test Date: 02/11/2020  
 Plot No.: 24

**DUT: SM-A015A, SM-A015AZ; Type: Bar**


Communication System: UID 0, 2450MHz FCC (0); Frequency: 2412 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.909 \text{ S/m}$ ;  $\epsilon_r = 53.846$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3968; ConvF(7.68, 7.68, 7.68); Calibrated: 2019-09-27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2019-09-19
- Phantom: Triple Flat Phantom 5.1C
- Measurement SW: DASY52, Version 52.8 (8);

**802.11b Body worn Rear 1Mbps 1ch/Area Scan (10x16x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$   
 Maximum value of SAR (measured) = 0.119 W/kg

**802.11b Body worn Rear 1Mbps 1ch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  
 $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 3.757 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 0.153 W/kg  
**SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.046 W/kg**  
 Maximum value of SAR (measured) = 0.116 W/kg

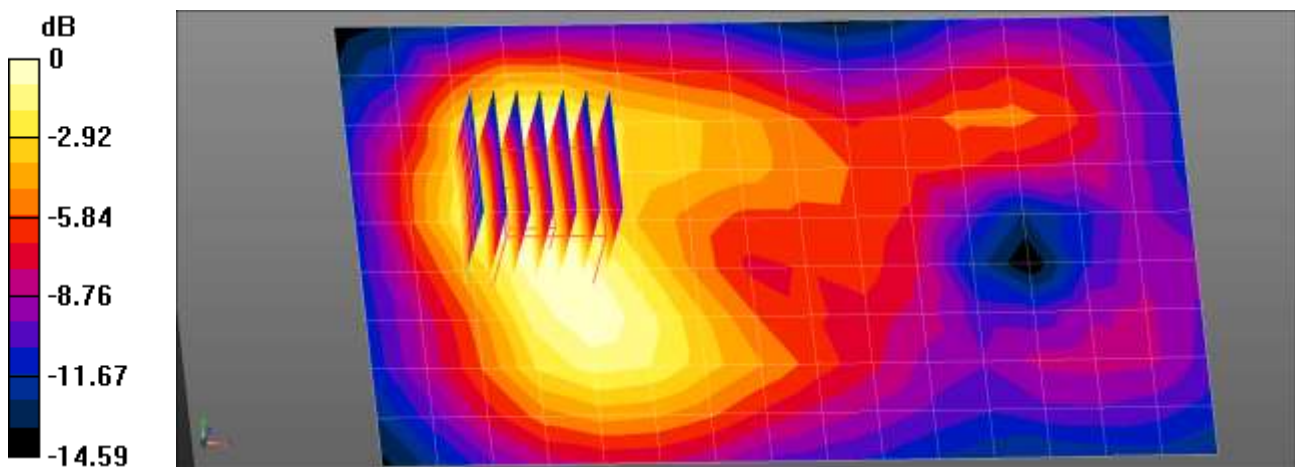

0 dB = 0.119 W/kg = -9.26 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 21.0 °C  
 Ambient Temperature: 21.2 °C  
 Test Date: 02/12/2020  
 Plot No.: 25

**DUT: SM-A015A, SM-A015AZ; Type: Bar**


Communication System: UID 0, WIFI 5GHz (0); Frequency: 5270 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5270 \text{ MHz}$ ;  $\sigma = 5.509 \text{ S/m}$ ;  $\epsilon_r = 47.765$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3863; ConvF(4.4, 4.4, 4.4); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: MFP\_V5.1C\_20171020
- Measurement SW: DASY52, Version 52.10 (2);

**802.11n40 Body-worn Rear MCS0 54ch/Area Scan (19x10x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$   
 Maximum value of SAR (measured) = 1.20 W/kg

**802.11n40 Body-worn Rear MCS0 54ch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  
 $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio:1.4  
 Reference Value = 2.516 V/m; Power Drift = 0.18 dB  
 Peak SAR (extrapolated) = 2.05 W/kg  
**SAR(1 g) = 0.595 W/kg; SAR(10 g) = 0.228 W/kg**  
 Maximum value of SAR (measured) = 1.32 W/kg

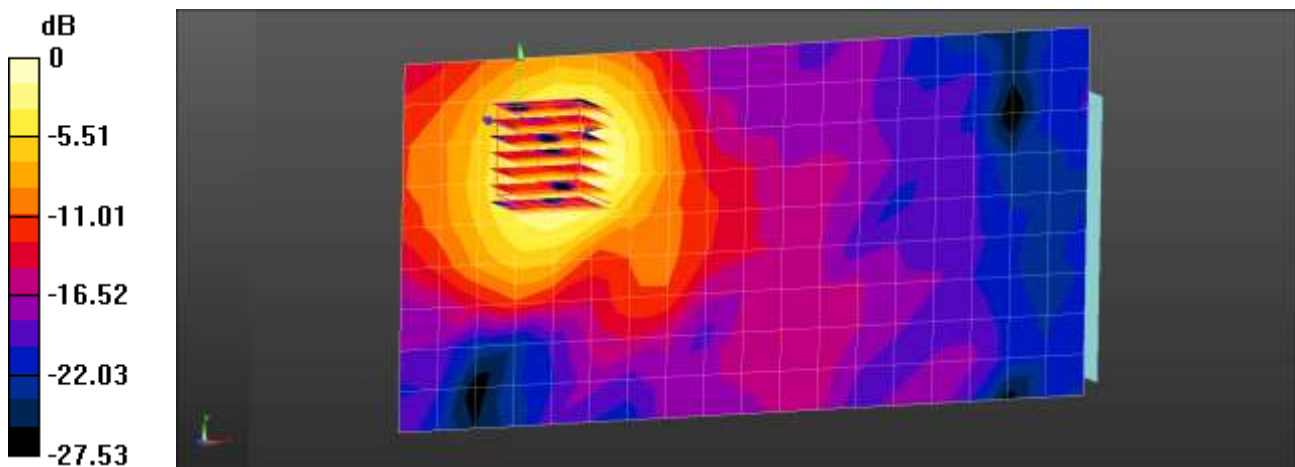

0 dB = 1.20 W/kg = 0.80 dBW/kg



Test Laboratory: HCT CO., LTD  
EUT Type: Mobile Phone  
Liquid Temperature: 19.8 °C  
Ambient Temperature: 20.0 °C  
Test Date: 02/11/2020  
Plot No.: 26

**DUT: SM-A015A, SM-A015AZ; Type: Bar**



Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.299  
Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.938$  S/m;  $\epsilon_r = 53.71$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Center Section

## DASY Configuration:

- Probe: EX3DV4 - SN3968; ConvF(7.68, 7.68, 7.68); Calibrated: 2019-09-27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2019-09-19
- Phantom: Triple Flat Phantom 5.1C
- Measurement SW: DASY52, Version 52.8 (8);

**Bluetooth Body worn Front DH5 39ch/Area Scan (10x16x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.00955 W/kg

**Bluetooth Body worn Front DH5 39ch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 1.049 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 0.0100 W/kg  
**SAR(1 g) = 0.00509 W/kg; SAR(10 g) = 0.00288 W/kg**  
Maximum value of SAR (measured) = 0.00740 W/kg

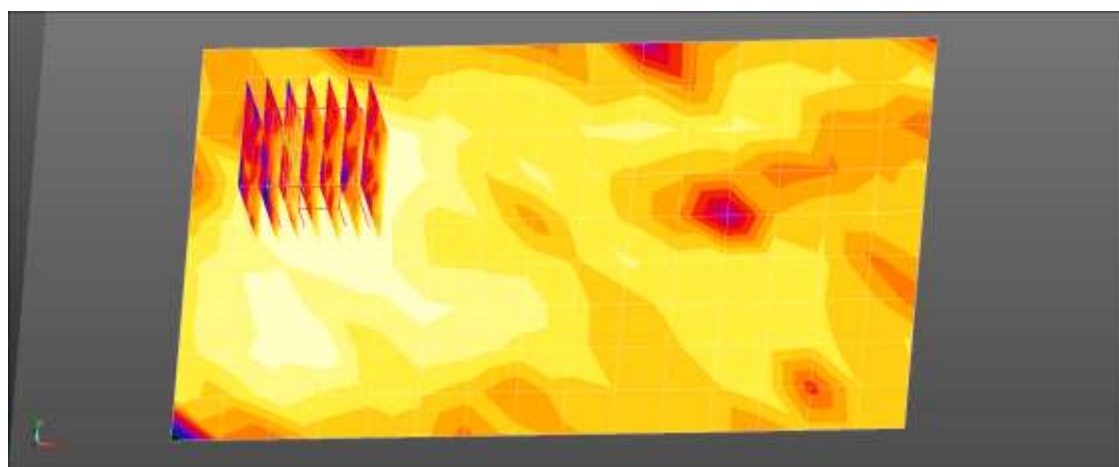

0 dB = 0.00740 W/kg = -21.31 dBW/kg

Test Laboratory: HCT CO., LTD  
EUT Type: Mobile Phone  
Liquid Temperature: 20.2 °C  
Ambient Temperature: 20.4 °C  
Test Date: 02/12/2020  
Plot No.: 27

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, GSM 850 2Tx (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.96$  S/m;  $\epsilon_r = 53.376$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3797; ConvF(8.97, 8.97, 8.97); Calibrated: 2019-11-28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2019-07-18
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (2);

**GSM850 Body Rear 190ch 2Tx/Area Scan (14x8x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.532 W/kg


**GSM850 Body Rear 190ch 2Tx/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.84 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.591 W/kg

**SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.346 W/kg**

Maximum value of SAR (measured) = 0.543 W/kg

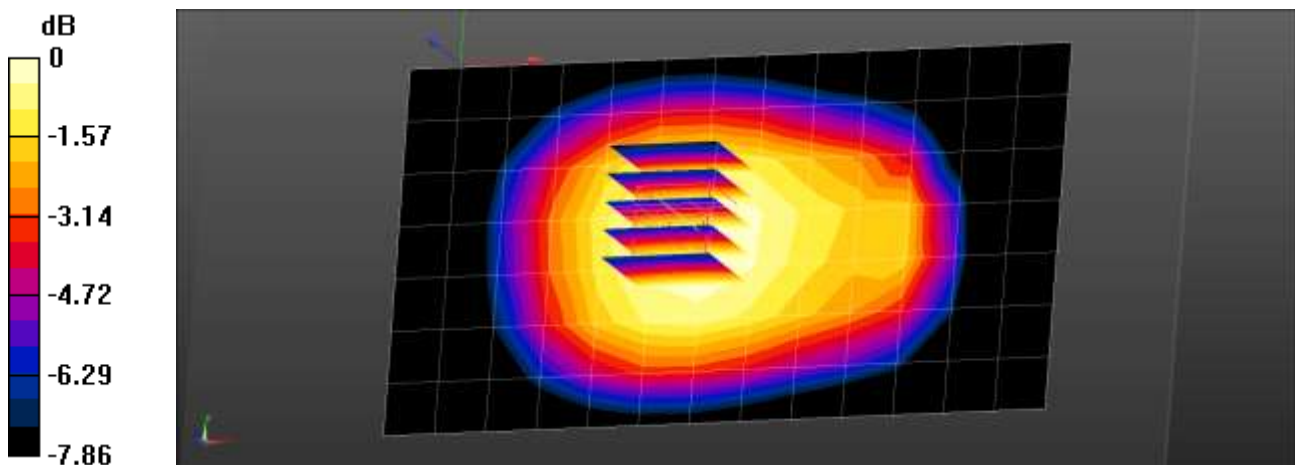



Test Laboratory: HCT CO., LTD  
EUT Type: Mobile Phone  
Liquid Temperature: 20.3 °C  
Ambient Temperature: 20.4 °C  
Test Date: 02/13/2020  
Plot No.: 28

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, GSM1900 2Tx (0); Frequency: 1909.8 MHz; Duty Cycle: 1:4.14954

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.545$  S/m;  $\epsilon_r = 53.566$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

**DASY Configuration:**

- Probe: EX3DV4 - SN3797; ConvF(7.61, 7.61, 7.61); Calibrated: 2019-11-28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2019-07-18
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (2);

**GSM1900 Body Bottom 810ch 2Tx/Area Scan (6x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.439 W/kg


**GSM1900 Body Bottom 810ch 2Tx/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.81 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.765 W/kg

**SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.231 W/kg**

Maximum value of SAR (measured) = 0.653 W/kg

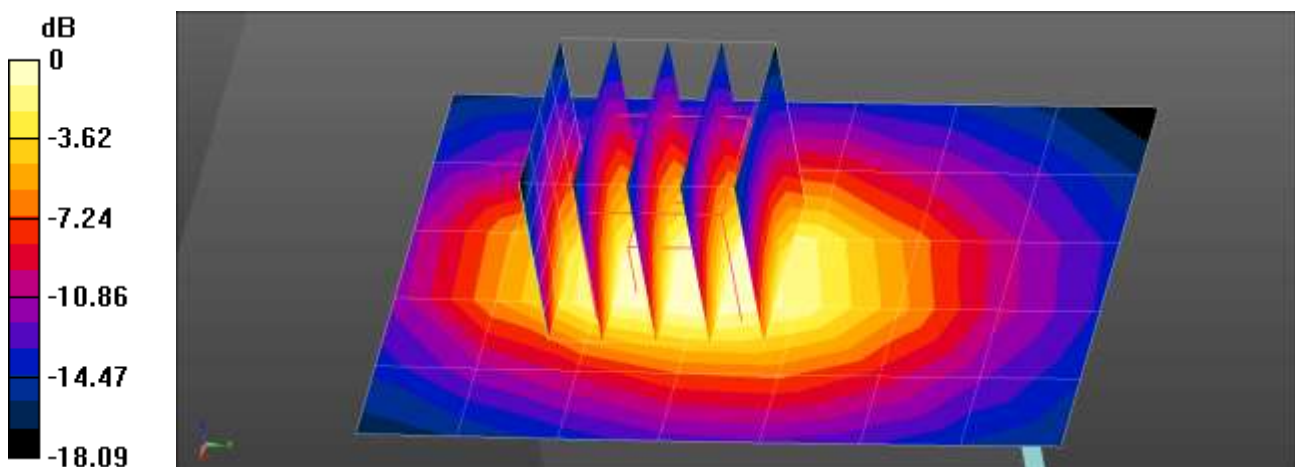

0 dB = 0.439 W/kg = -3.58 dBW/kg

Test Laboratory: HCT CO., LTD  
EUT Type: Mobile Phone  
Liquid Temperature: 20.2 °C  
Ambient Temperature: 20.4 °C  
Test Date: 02/12/2020  
Plot No.: 29

**DUT: SM-A015A, SM-A015AZ; Type: Bar**


Communication System: UID 0, WCDMA850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.96$  S/m;  $\epsilon_r = 53.376$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Center Section

## DASY Configuration:

- Probe: EX3DV4 - SN3797; ConvF(8.97, 8.97, 8.97); Calibrated: 2019-11-28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2019-07-18
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (2);

**WCDMA Band 5 Body Rear 4183ch/Area Scan (14x8x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.574 W/kg

**WCDMA Band 5 Body Rear 4183ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 24.40 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 0.580 W/kg  
**SAR(1 g) = 0.442 W/kg; SAR(10 g) = 0.333 W/kg**  
Maximum value of SAR (measured) = 0.530 W/kg

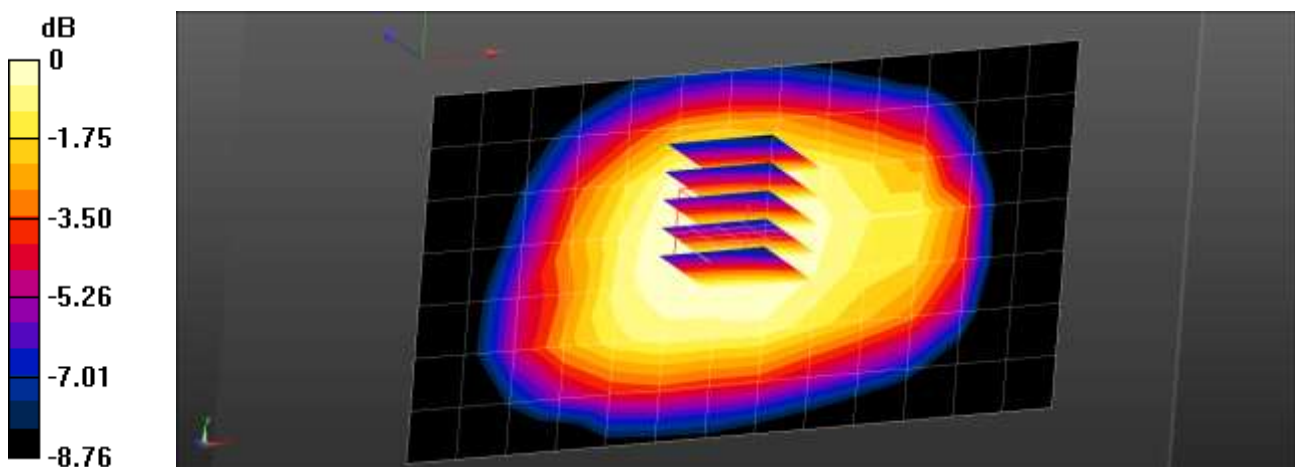

0 dB = 0.530 W/kg = -2.76 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 20.8 °C  
 Ambient Temperature: 21.1 °C  
 Test Date: 02/13/2020  
 Plot No.: 30

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1732.4$  MHz;  $\sigma = 1.48$  S/m;  $\epsilon_r = 53.925$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3863; ConvF(8.23, 8.23, 8.23); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: MFP\_V5.1C\_20171020
- Measurement SW: DASY52, Version 52.8 (8);

**WCDMA band 4 Body Bottom 1412ch/Area Scan (9x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.49 W/kg



**WCDMA band 4 Body Bottom 1412ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.85 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.90 W/kg

**SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.548 W/kg**

Maximum value of SAR (measured) = 1.60 W/kg

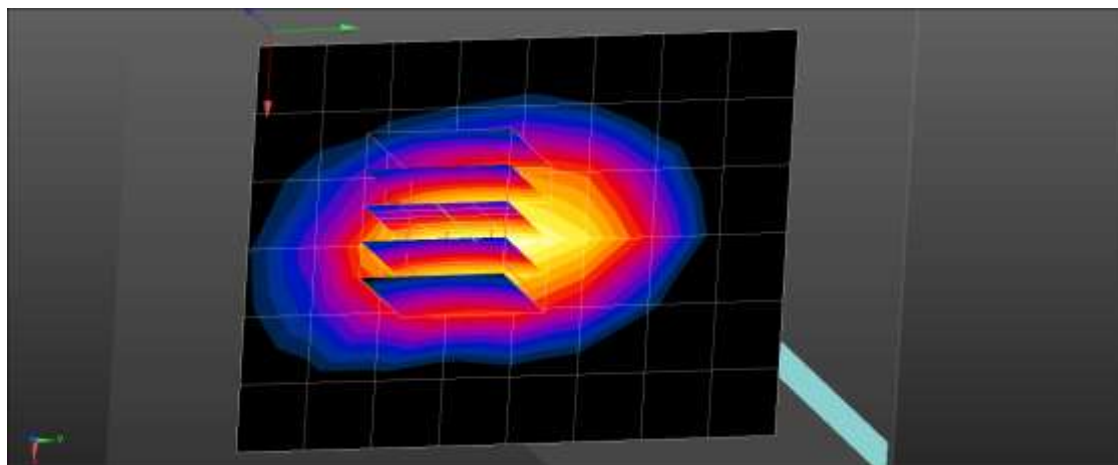

0 dB = 1.60 W/kg = 2.04 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 20.8 °C  
 Ambient Temperature: 21.1 °C  
 Test Date: 02/13/2020  
 Plot No.: 31

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, WCDMA1900 (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.484$  S/m;  $\epsilon_r = 53.663$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3863; ConvF(7.99, 7.99, 7.99); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: MFP\_V5.1C\_20171020
- Measurement SW: DASY52, Version 52.10 (2);

**WCDMA band 2 Body Bottom 9262ch/Area Scan (8x6x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.49 W/kg


**WCDMA band 2 Body Bottom 9262ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.77 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.06 W/kg

**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.575 W/kg**

Maximum value of SAR (measured) = 1.70 W/kg

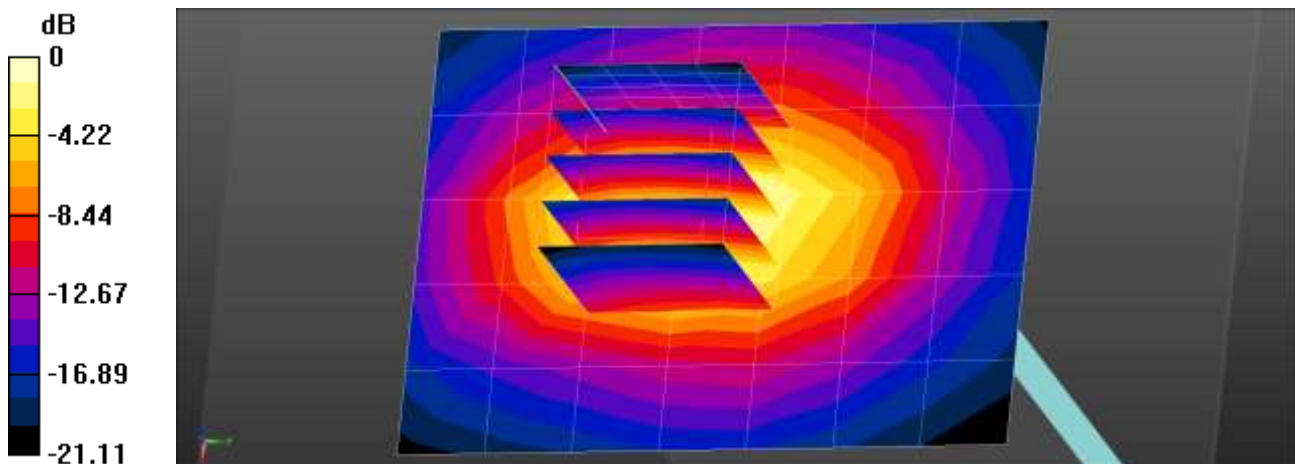

0 dB = 1.49 W/kg = 1.74 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 20.8 °C  
 Ambient Temperature: 21.1 °C  
 Test Date: 02/13/2020  
 Plot No.: 32

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, LTE Band2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.513 \text{ S/m}$ ;  $\epsilon_r = 53.61$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

**DASY Configuration:**


- Probe: EX3DV4 - SN3863; ConvF(7.99, 7.99, 7.99); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: MFP\_V5.1C\_20171020
- Measurement SW: DASY52, Version 52.10 (2);

**LTE band 2 Body Bottom QPSK 20MHz 1RB 49offset 18900ch/Area Scan (8x6x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 1.47 W/kg

**LTE band 2 Body Bottom QPSK 20MHz 1RB 49offset 18900ch/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 25.44 V/m; Power Drift = 0.14 dB  
 Peak SAR (extrapolated) = 1.78 W/kg  
**SAR(1 g) = 0.959 W/kg; SAR(10 g) = 0.488 W/kg**

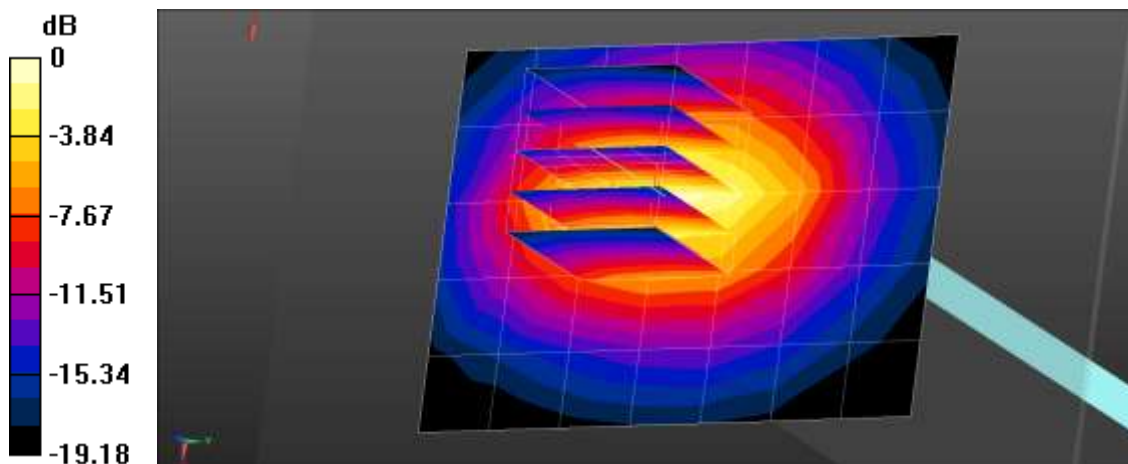

0 dB = 1.47 W/kg = 1.67 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 20.8 °C  
 Ambient Temperature: 21.1 °C  
 Test Date: 02/13/2020  
 Plot No.: 33

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, LTE Band4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.481$  S/m;  $\epsilon_r = 53.924$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3863; ConvF(8.23, 8.23, 8.23); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: MFP\_V5.1C\_20171020
- Measurement SW: DASY52, Version 52.10 (2);

**LTE band 4 Body Bottom QPSK 20MHz 1RB 0offset 20175ch/Area Scan (8x6x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.33 W/kg

**LTE band 4 Body Bottom QPSK 20MHz 1RB 0offset 20175ch/Zoom Scan (5x5x7)/Cube 0:**


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.63 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.99 W/kg

**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.560 W/kg**

Maximum value of SAR (measured) = 1.62 W/kg

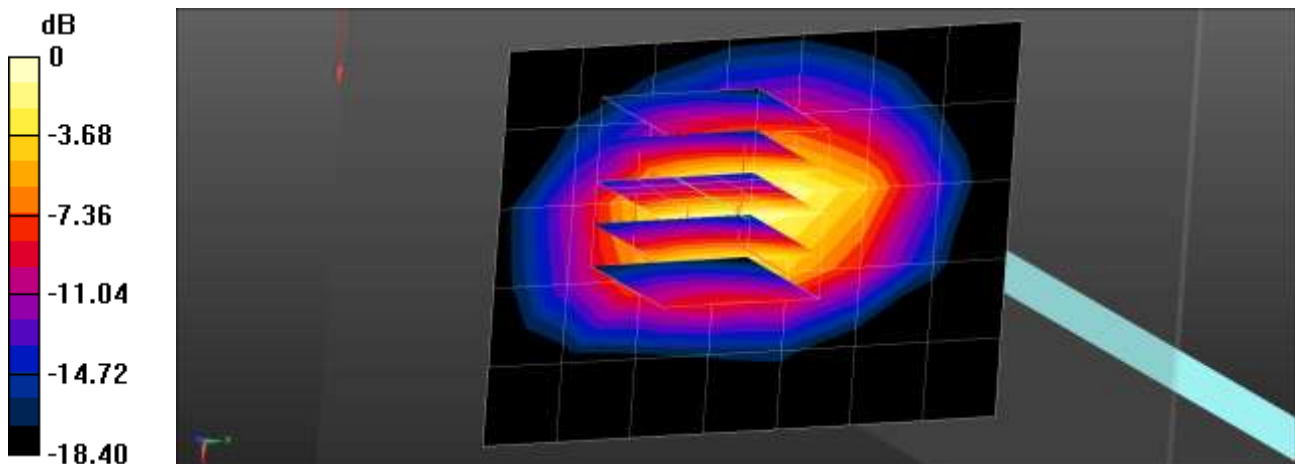

0 dB = 1.62 W/kg = 2.10 dBW/kg



Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 21.4 °C  
 Ambient Temperature: 21.7 °C  
 Test Date: 02/10/2020  
 Plot No.: 34

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.962$  S/m;  $\epsilon_r = 56.323$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

**DASY Configuration:**



- Probe: ES3DV3 - SN3076; ConvF(5.97, 5.97, 5.97); Calibrated: 2019-07-23;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2019-05-23
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.8 (8);

**LTE Band 5 Body Rear QPSK 10MHz 1RB 24offset 20525ch/Area Scan (13x8x1):**

Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.369 W/kg

**LTE Band 5 Body Rear QPSK 10MHz 1RB 24offset 20525ch/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 20.30 V/m; Power Drift = -0.05 dB  
 Peak SAR (extrapolated) = 0.411 W/kg  
**SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.265 W/kg**

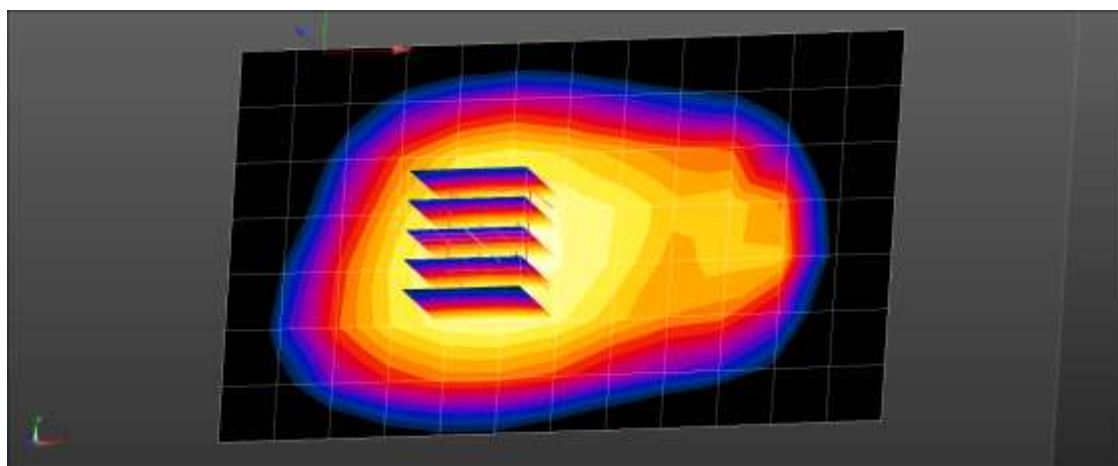

0 dB = 0.369 W/kg = -4.33 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 21.5 °C  
 Ambient Temperature: 21.8 °C  
 Test Date: 02/11/2020  
 Plot No.: 35

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.926 \text{ S/m}$ ;  $\epsilon_r = 55.797$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

**DASY Configuration:**


- Probe: ES3DV3 - SN3076; ConvF(6.12, 6.12, 6.12); Calibrated: 2019-07-23;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2019-05-23
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.8 (8);

**LTE Band 12 Body Rear QPSK 10MHz 1RB 24offset 23095ch/Area Scan (13x8x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.444 W/kg

**LTE Band 12 Body Rear QPSK 10MHz 1RB 24offset 23095ch/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 21.60 V/m; Power Drift = -0.10 dB  
 Peak SAR (extrapolated) = 0.517 W/kg  
**SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.303 W/kg**  
 Maximum value of SAR (measured) = 0.456 W/kg

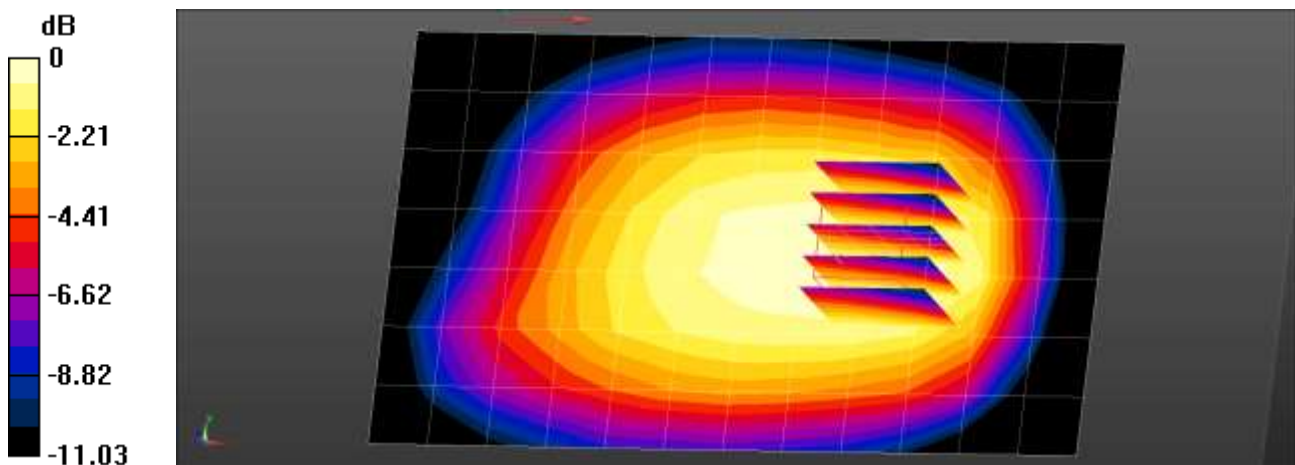

0 dB = 0.456 W/kg = -3.41 dBW/kg



Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 21.5 °C  
 Ambient Temperature: 21.8 °C  
 Test Date: 02/11/2020  
 Plot No.: 36

**DUT: SM-A015A, SM-A015AZ; Type: Bar**

Communication System: UID 0, LTE 14 (0); Frequency: 793 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 793 \text{ MHz}$ ;  $\sigma = 1.005 \text{ S/m}$ ;  $\epsilon_r = 54.943$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY Configuration:


- Probe: ES3DV3 - SN3076; ConvF(6.12, 6.12, 6.12); Calibrated: 2019-07-23;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2019-05-23
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.8 (8);

**LTE Band 14 Body Right QPSK 10MHz 1RB 24offset 23330ch/Area Scan (13x6x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.429 W/kg

**LTE Band 14 Body Right QPSK 10MHz 1RB 24offset 23330ch/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 21.38 V/m; Power Drift = 0.14 dB  
 Peak SAR (extrapolated) = 0.558 W/kg  
**SAR(1 g) = 0.400 W/kg; SAR(10 g) = 0.280 W/kg**  
 Maximum value of SAR (measured) = 0.456 W/kg

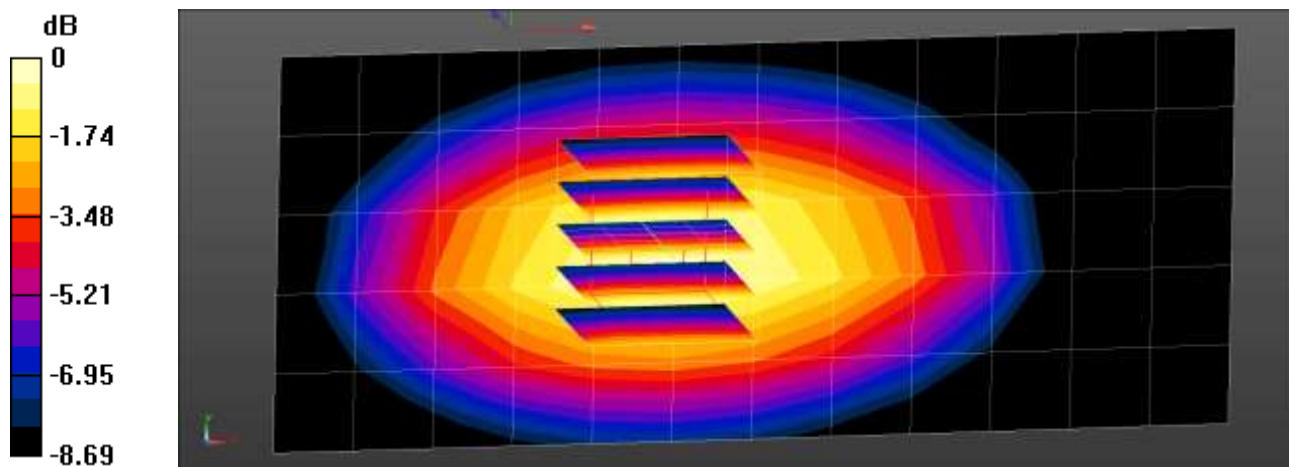

0 dB = 0.456 W/kg = -3.41 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 19.8 °C  
 Ambient Temperature: 20.0 °C  
 Test Date: 02/11/2020  
 Plot No.: 37

**DUT: SM-A015A, SM-A015AZ; Type: Bar**


Communication System: UID 0, 2450MHz FCC (0); Frequency: 2412 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.909 \text{ S/m}$ ;  $\epsilon_r = 53.846$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3968; ConvF(7.68, 7.68, 7.68); Calibrated: 2019-09-27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2019-09-19
- Phantom: Triple Flat Phantom 5.1C
- Measurement SW: DASY52, Version 52.8 (8);

**802.11b Body Rear 1Mbps 1ch/Area Scan (10x16x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$   
 Maximum value of SAR (measured) = 0.320 W/kg

**802.11b Body Rear 1Mbps 1ch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 5.331 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 0.500 W/kg  
**SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.109 W/kg**  
 Maximum value of SAR (measured) = 0.367 W/kg

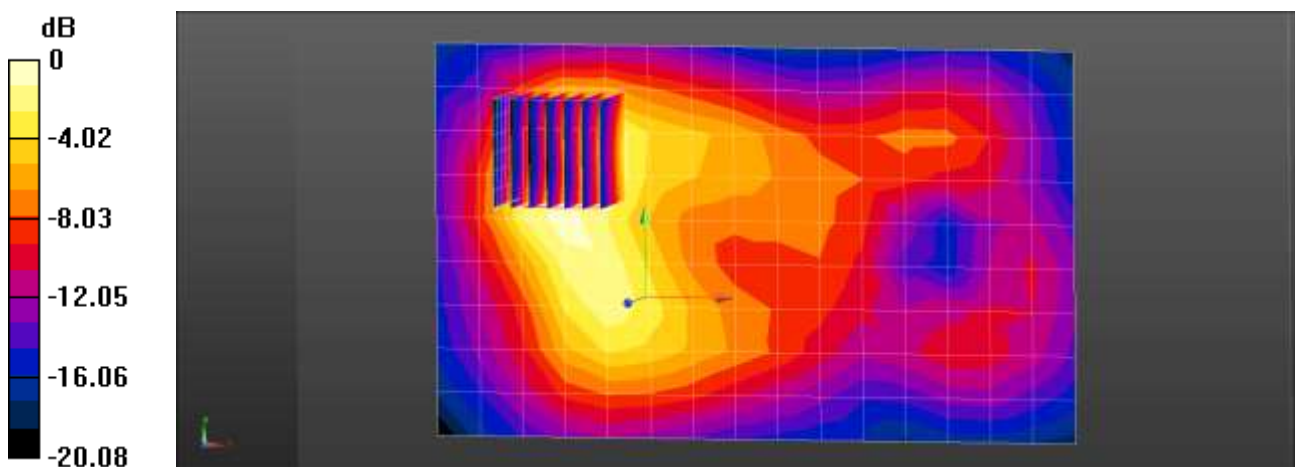

0 dB = 0.320 W/kg = -4.95 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 20.8 °C  
 Ambient Temperature: 21.1 °C  
 Test Date: 02/13/2020  
 Plot No.: 38

**DUT: SM-A015A, SM-A015AZ; Type: Bar**


Communication System: UID 0, WIFI 5GHz (0); Frequency: 5775 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5775 \text{ MHz}$ ;  $\sigma = 6.168 \text{ S/m}$ ;  $\epsilon_r = 47.815$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3863; ConvF(4.21, 4.21, 4.21); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: MFP\_V5.1C\_20171020
- Measurement SW: DASY52, Version 52.10 (2);

**802.11ac80 Body Rear MCS0 155ch/Area Scan (19x10x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$   
 Maximum value of SAR (measured) = 1.16 W/kg

**802.11ac80 Body Rear MCS0 155ch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  
 $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio:1.4  
 Reference Value = 4.497 V/m; Power Drift = 0.19 dB  
 Peak SAR (extrapolated) = 2.25 W/kg  
**SAR(1 g) = 0.525 W/kg; SAR(10 g) = 0.192 W/kg**  
 Maximum value of SAR (measured) = 1.29 W/kg

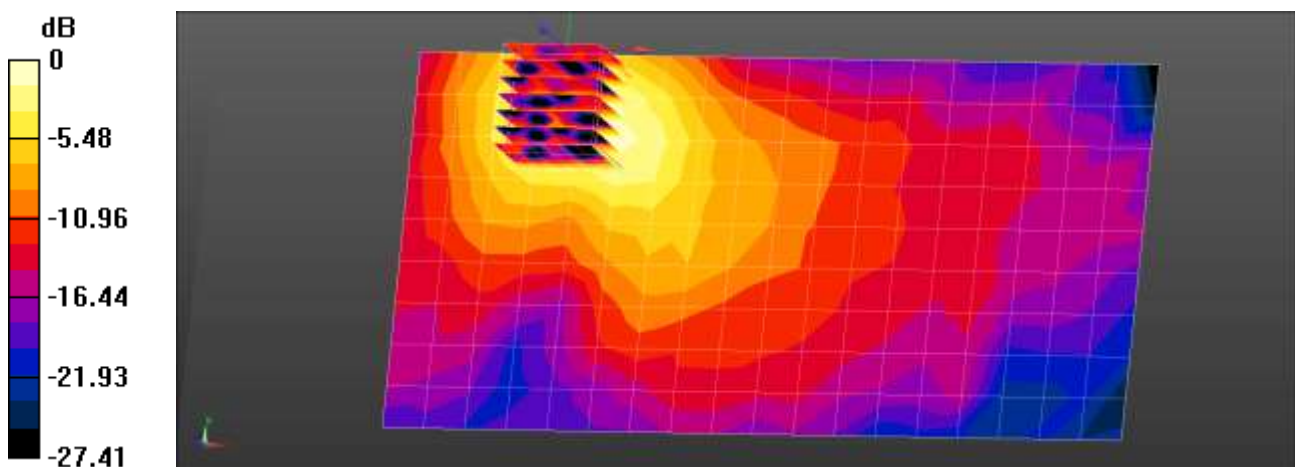

0 dB = 1.16 W/kg = 0.64 dBW/kg

Test Laboratory: HCT CO., LTD  
 EUT Type: Mobile Phone  
 Liquid Temperature: 19.8 °C  
 Ambient Temperature: 20.0 °C  
 Test Date: 02/11/2020  
 Plot No.: 39

**DUT: SM-A015A, SM-A015AZ; Type: Bar**


Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.299  
 Medium parameters used (interpolated):  $f = 2441 \text{ MHz}$ ;  $\sigma = 1.938 \text{ S/m}$ ;  $\epsilon_r = 53.71$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

**DASY Configuration:**

- Probe: EX3DV4 - SN3968; ConvF(7.68, 7.68, 7.68); Calibrated: 2019-09-27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2019-09-19
- Phantom: Triple Flat Phantom 5.1C
- Measurement SW: DASY52, Version 52.8 (8);

**Bluetooth Body Rear DH5 39ch/Area Scan (10x16x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$   
 Maximum value of SAR (measured) = 0.0223 W/kg

**Bluetooth Body Rear DH5 39ch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 1.169 V/m; Power Drift = -0.15 dB  
 Peak SAR (extrapolated) = 0.0330 W/kg  
**SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00609 W/kg**  
 Maximum value of SAR (measured) = 0.0233 W/kg

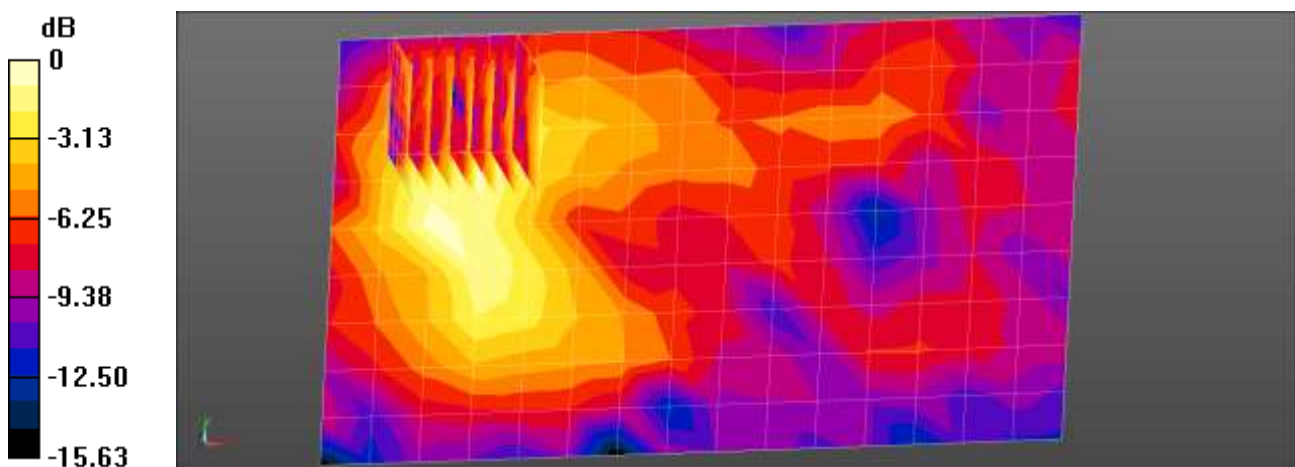

0 dB = 0.0223 W/kg = -16.53 dBW/kg

## Attachment 2. – Dipole Verification Plots

## ■ Verification Data (750 MHz Head)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 20.9 °C  
 Test Date: 02/07/2020

### DUT: Dipole 750 MHz D750V3; Type: D750V3


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.895 \text{ S/m}$ ;  $\epsilon_r = 41.442$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3076; ConvF(6.52, 6.52, 6.52); Calibrated: 2019-07-23;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2019-05-23
- Phantom: SAM\_Right\_20170913
- Measurement SW: DASY52, Version 52.8 (8);

**Dipole/750MHz Head Verification/Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.428 W/kg

**Dipole/750MHz Head Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 22.48 V/m; Power Drift = 0.13 dB  
 Peak SAR (extrapolated) = 0.621 W/kg  
**SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.285 W/kg**  
 Maximum value of SAR (measured) = 0.491 W/kg

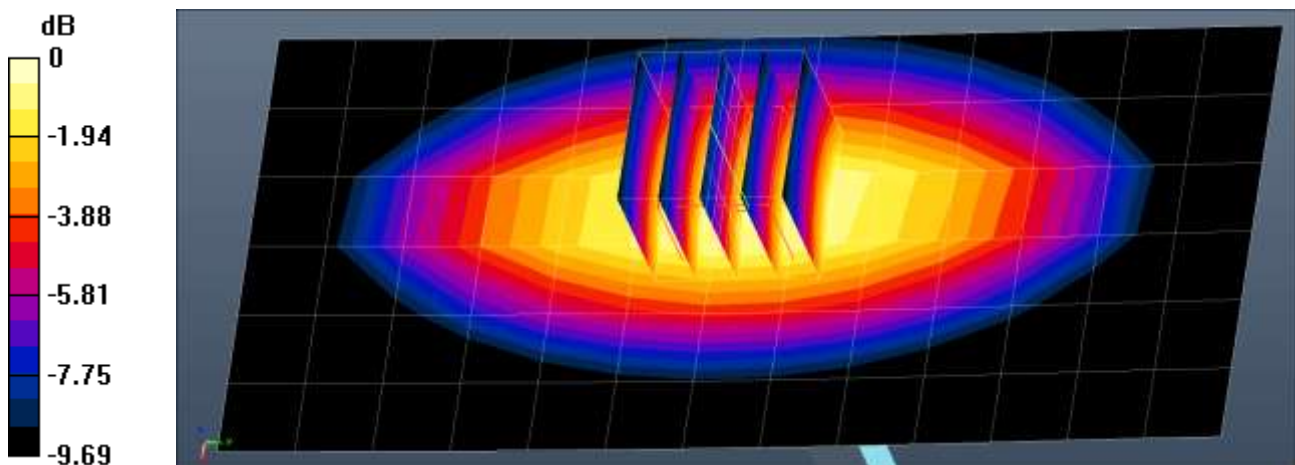

0 dB = 0.491 W/kg = -3.09 dBW/kg

## ■ Verification Data (750 MHz Body)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 21.5 °C  
 Test Date: 02/11/2020

### DUT: Dipole 750 MHz D750V3; Type: D750V3


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.968 \text{ S/m}$ ;  $\epsilon_r = 55.393$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3076; ConvF(6.12, 6.12, 6.12); Calibrated: 2019-07-23;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2019-05-23
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.8 (8);

**Dipole/750MHz Body Verification/Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.484 W/kg

**Dipole/750MHz Body Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 23.08 V/m; Power Drift = -0.02 dB  
 Peak SAR (extrapolated) = 0.619 W/kg  
**SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.286 W/kg**  
 Maximum value of SAR (measured) = 0.494 W/kg

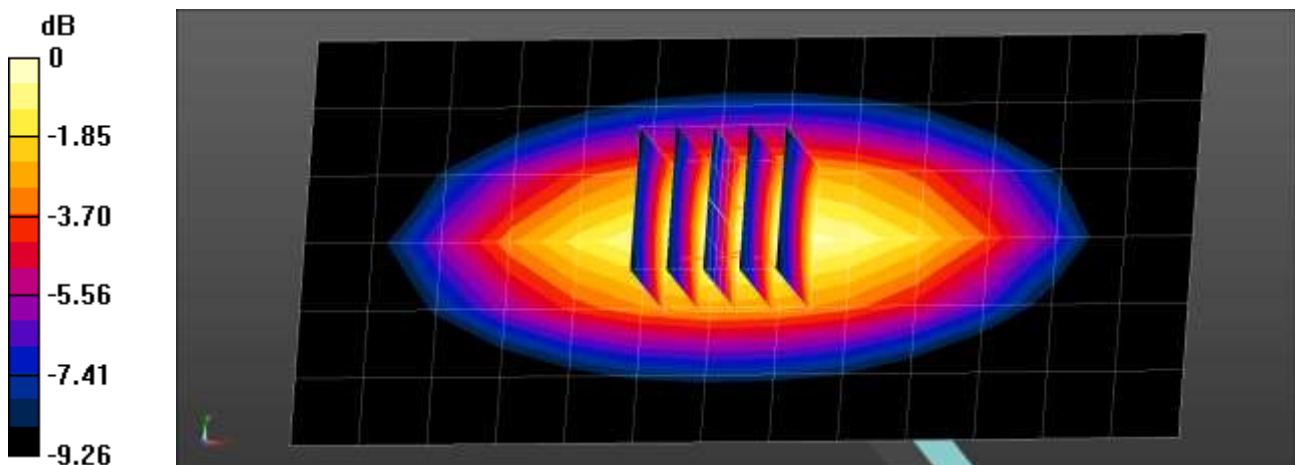

0 dB = 0.494 W/kg = -3.06 dBW/kg



## ■ Verification Data (835 MHz Head)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 21.0 °C  
 Test Date: 02/12/2020

### DUT: Dipole 835 MHz D835V2; Type: D835V2


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 835 \text{ MHz}$ ;  $\sigma = 0.928 \text{ S/m}$ ;  $\epsilon_r = 42.292$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

#### DASY Configuration:

- Probe: EX3DV4 - SN7370; ConvF(9.88, 9.88, 9.88); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: SAM with CRP v5.0\_Right
- Measurement SW: DASY52, Version 52.8 (8);

**Dipole/835MHz Head Verification/Area Scan (6x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.624 W/kg

**Dipole/835MHz Head Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 27.95 V/m; Power Drift = -0.06 dB  
 Peak SAR (extrapolated) = 0.733 W/kg  
**SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.331 W/kg**  
 Maximum value of SAR (measured) = 0.653 W/kg

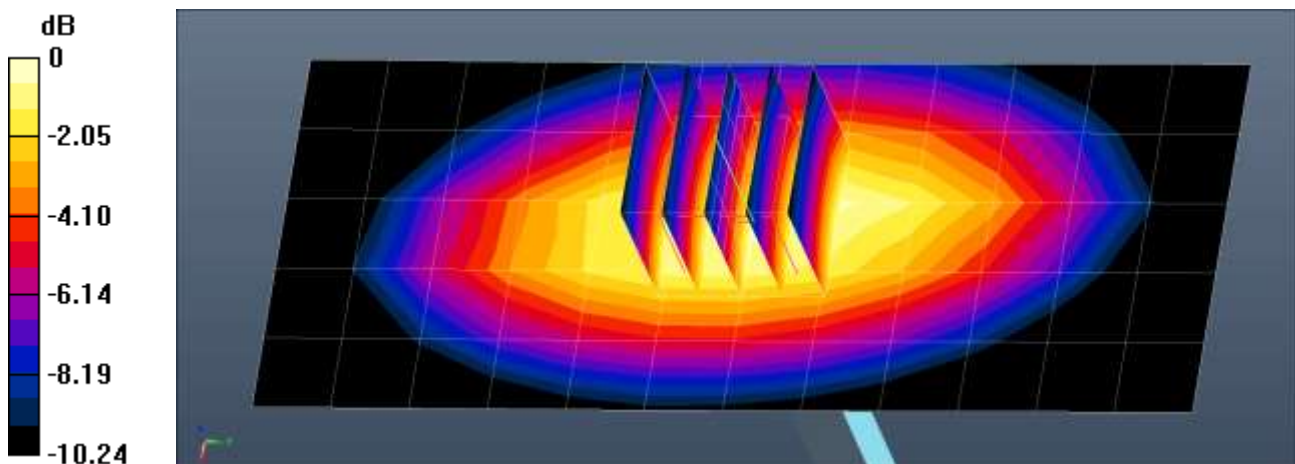

0 dB = 0.653 W/kg = -1.85 dBW/kg



## ■ Verification Data (835 MHz Head)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 20.9 °C  
 Test Date: 02/07/2020

### DUT: Dipole 835 MHz D835V2; Type: D835V2


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 835 \text{ MHz}$ ;  $\sigma = 0.928 \text{ S/m}$ ;  $\epsilon_r = 42.329$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

#### DASY Configuration:

- Probe: ES3DV3 - SN3076; ConvF(6.22, 6.22, 6.22); Calibrated: 2019-07-23;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2019-05-23
- Phantom: SAM\_Right\_20170913
- Measurement SW: DASY52, Version 52.8 (8);

**Dipole/835MHz Head Verification/Area Scan (7x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.534 W/kg

**Dipole/835MHz Head Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 23.28 V/m; Power Drift = 0.12 dB  
 Peak SAR (extrapolated) = 0.745 W/kg  
**SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.331 W/kg**  
 Maximum value of SAR (measured) = 0.586 W/kg

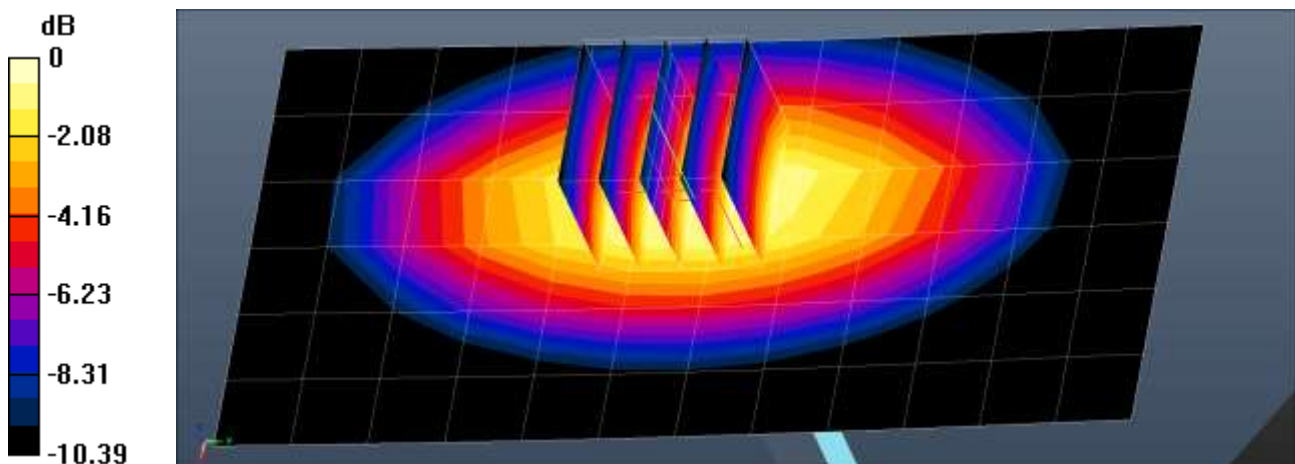

0 dB = 0.586 W/kg = -2.32 dBW/kg

## ■ Verification Data (835 MHz Head)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 20.7 °C  
 Test Date: 02/20/2020

### DUT: Dipole 835 MHz D835V2; Type: D835V2


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 835 \text{ MHz}$ ;  $\sigma = 0.928 \text{ S/m}$ ;  $\epsilon_r = 42.328$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7370; ConvF(9.88, 9.88, 9.88); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn652; Calibrated: 2020-02-03
- Phantom: SAM with CRP v5.0\_Right
- Measurement SW: DASY52, Version 52.8 (8);

**Dipole/835MHz Head Verification/Area Scan (6x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.598 W/kg

**Dipole/835MHz Head Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 27.90 V/m; Power Drift = -0.07 dB  
 Peak SAR (extrapolated) = 0.777 W/kg  
**SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.302 W/kg**  
 Maximum value of SAR (measured) = 0.661 W/kg

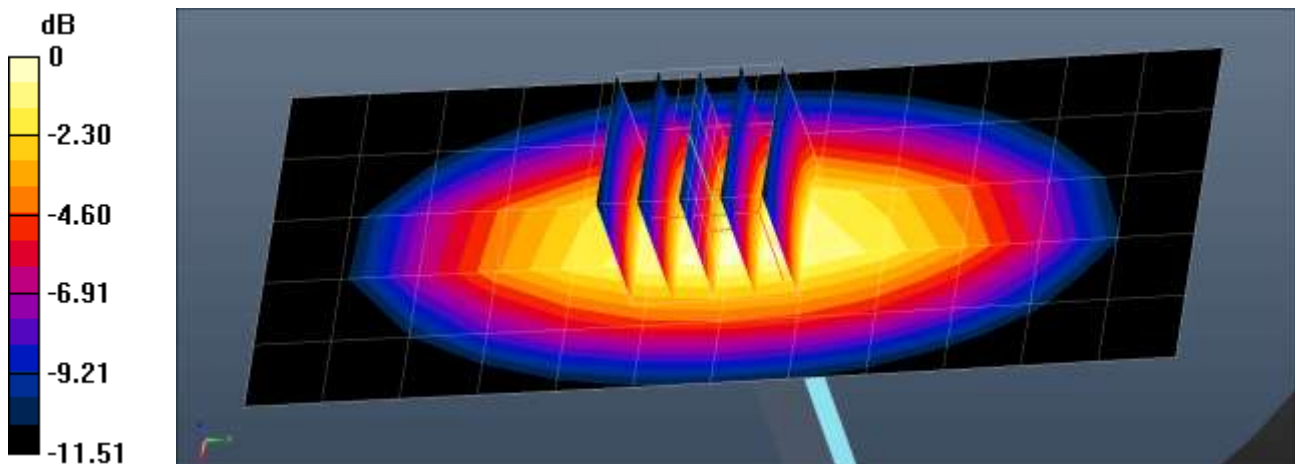

0 dB = 0.661 W/kg = -1.80 dBW/kg

## ■ Verification Data (835 MHz Body)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 20.2 °C  
 Test Date: 02/12/2020

### DUT: Dipole 835 MHz D835V2; Type: D835V2


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 835 \text{ MHz}$ ;  $\sigma = 0.959 \text{ S/m}$ ;  $\epsilon_r = 53.394$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

#### DASY Configuration:

- Probe: EX3DV4 - SN3797; ConvF(8.97, 8.97, 8.97); Calibrated: 2019-11-28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2019-07-18
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (2);

**Dipole/835MHz Body Verification/Area Scan (13x6x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.583 W/kg

**Dipole/835MHz Body Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 26.28 V/m; Power Drift = 0.01 dB  
 Peak SAR (extrapolated) = 0.712 W/kg  
**SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.304 W/kg**  
 Maximum value of SAR (measured) = 0.627 W/kg

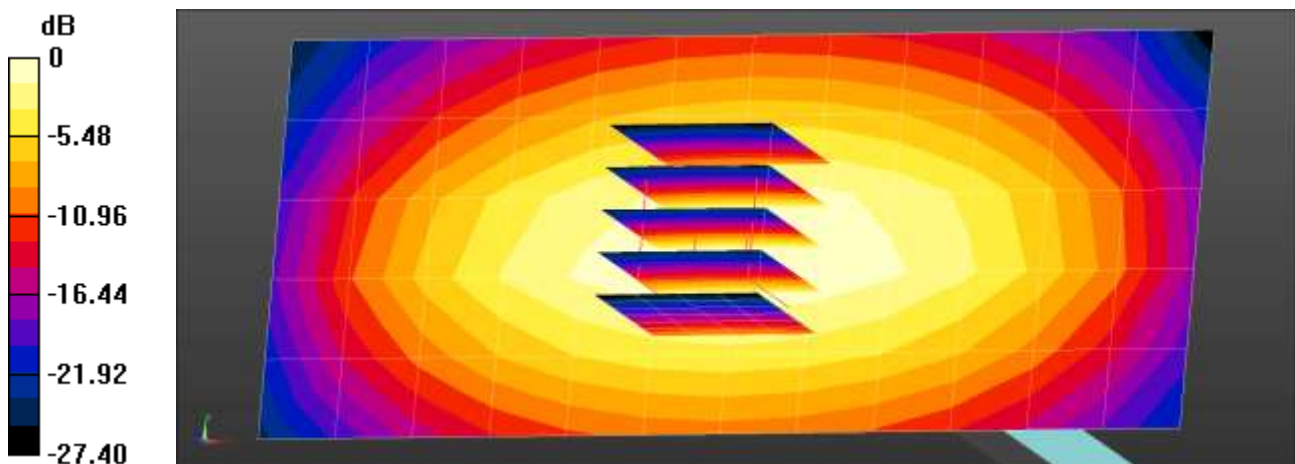

0 dB = 0.583 W/kg = -2.34 dBW/kg

## ■ Verification Data (835 MHz Body)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 21.4 °C  
 Test Date: 02/10/2020

### DUT: Dipole 835 MHz D835V2; Type: D835V2


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 835 \text{ MHz}$ ;  $\sigma = 0.961 \text{ S/m}$ ;  $\epsilon_r = 56.339$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

#### DASY Configuration:

- Probe: ES3DV3 - SN3076; ConvF(5.97, 5.97, 5.97); Calibrated: 2019-07-23;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2019-05-23
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.8 (8);

**Dipole/835MHz Body Verification/Area Scan (7x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.574 W/kg

**Dipole/835MHz Body Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 24.84 V/m; Power Drift = -0.01 dB  
 Peak SAR (extrapolated) = 0.718 W/kg  
**SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.328 W/kg**  
 Maximum value of SAR (measured) = 0.575 W/kg

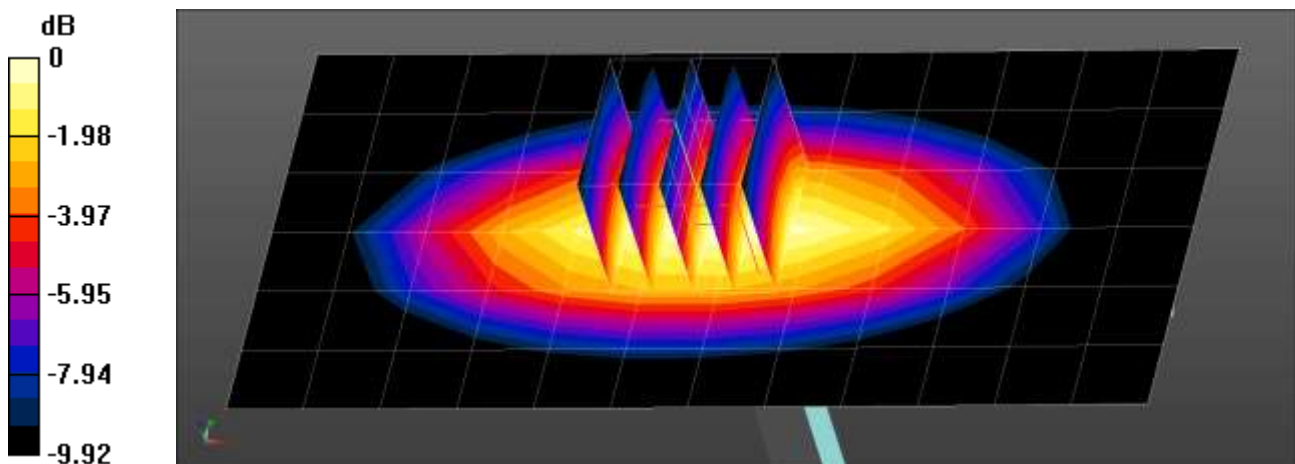

0 dB = 0.575 W/kg = -2.40 dBW/kg

## ■ Verification Data (850 MHz Body)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 20.4 °C  
 Test Date: 02/20/2020

### DUT: Dipole 835 MHz D835V2; Type: D835V2


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 835 \text{ MHz}$ ;  $\sigma = 0.96 \text{ S/m}$ ;  $\epsilon_r = 56.41$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

#### DASY Configuration:

- Probe: EX3DV4 - SN3797; ConvF(8.97, 8.97, 8.97); Calibrated: 2019-11-28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2019-07-18
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (2);

**Dipole/835MHz Body Verification/Area Scan (13x6x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 0.600 W/kg

**Dipole/835MHz Body Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 26.89 V/m; Power Drift = -0.05 dB  
 Peak SAR (extrapolated) = 0.746 W/kg  
**SAR(1 g) = 0.479 W/kg; SAR(10 g) = 0.313 W/kg**  
 Maximum value of SAR (measured) = 0.653 W/kg

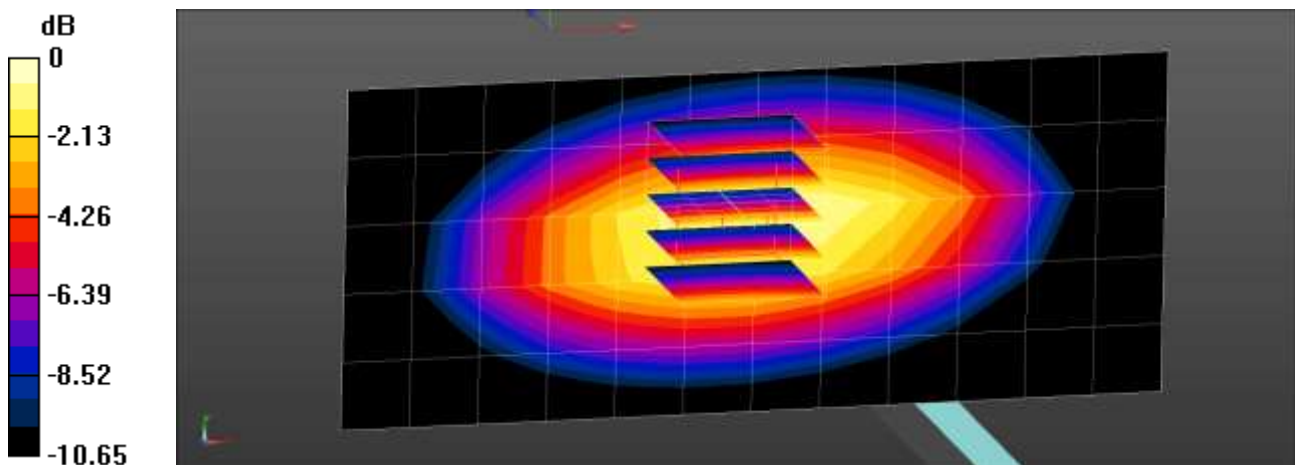

0 dB = 0.653 W/kg = -1.85 dBW/kg

## ■ Verification Data (1 800 MHz Head)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 21.0 °C  
 Test Date: 02/12/2020

### DUT: Dipole 1800 MHz D1800V2; Type: D1800V2


Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1800 \text{ MHz}$ ;  $\sigma = 1.392 \text{ S/m}$ ;  $\epsilon_r = 39.083$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

### DASY Configuration:

- Probe: EX3DV4 - SN7370; ConvF(8.43, 8.43, 8.43); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: SAM with CRP v5.0\_Front
- Measurement SW: DASY52, Version 52.8 (8);

**Dipole/1800MHz Head Verification/Area Scan (6x7x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 2.29 W/kg

**Dipole/1800MHz Head Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 48.71 V/m; Power Drift = -0.15 dB  
 Peak SAR (extrapolated) = 3.69 W/kg  
**SAR(1 g) = 1.96 W/kg; SAR(10 g) = 1.03 W/kg**  
 Maximum value of SAR (measured) = 3.07 W/kg

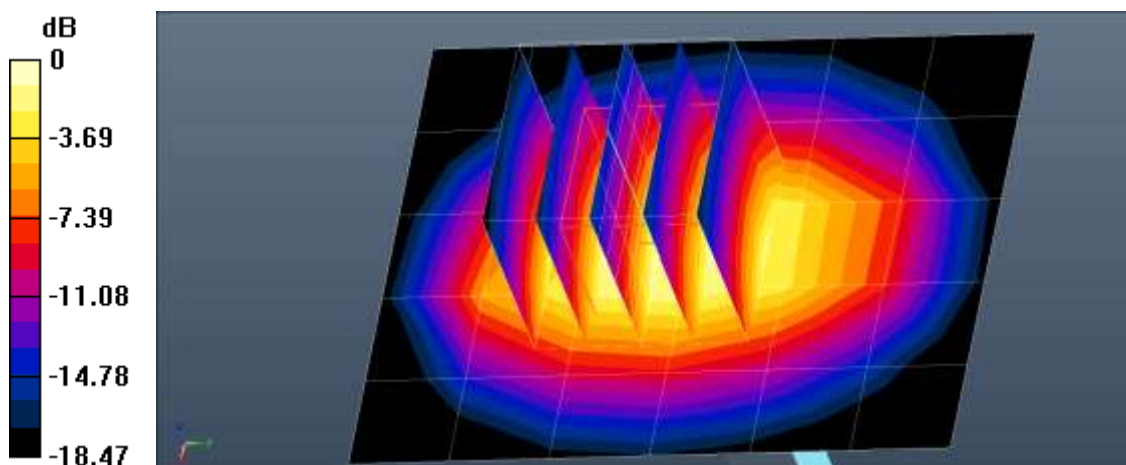

0 dB = 3.07 W/kg = 4.87 dBW/kg



## ■ Verification Data (1 800 MHz Body)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 20.8 °C  
 Test Date: 02/13/2020

### DUT: Dipole 1800 MHz D1800V2; Type: D1800V2


Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1800 \text{ MHz}$ ;  $\sigma = 1.536 \text{ S/m}$ ;  $\epsilon_r = 53.745$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

### DASY Configuration:

- Probe: EX3DV4 - SN3863; ConvF(8.23, 8.23, 8.23); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: MFP\_V5.1C\_20171020
- Measurement SW: DASY52, Version 52.10 (2);

**Dipole/1800 MHz Body Verification/Area Scan (7x7x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 2.85 W/kg

**Dipole/1800 MHz Body Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 44.69 V/m; Power Drift = 0.01 dB  
 Peak SAR (extrapolated) = 3.55 W/kg  
**SAR(1 g) = 1.84 W/kg; SAR(10 g) = 0.949 W/kg**  
 Maximum value of SAR (measured) = 2.94 W/kg

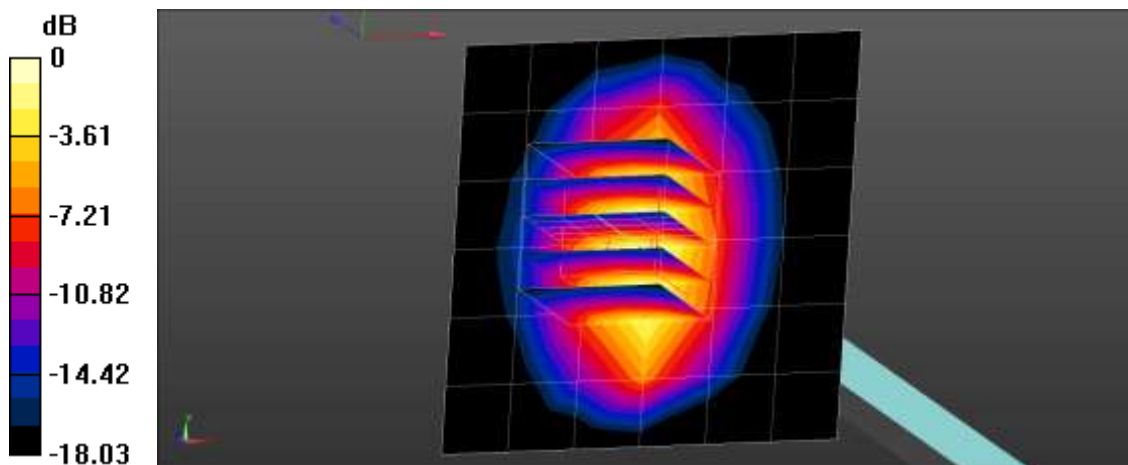

0 dB = 2.94 W/kg = 4.68 dBW/kg

## ■ Verification Data (1 900 MHz Head)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 20.9 °C  
 Test Date: 02/13/2020

### DUT: Dipole 1900 MHz D1900V2; Type: D1900V2


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.418 \text{ S/m}$ ;  $\epsilon_r = 38.696$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

#### DASY Configuration:

- Probe: EX3DV4 - SN7370; ConvF(8.09, 8.09, 8.09); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: SAM with CRP v5.0\_Front
- Measurement SW: DASY52, Version 52.8 (8);

**Dipole/1900MHz Head Verification/Area Scan (6x7x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 2.82 W/kg

**Dipole/1900MHz Head Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 48.35 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 4.04 W/kg  
**SAR(1 g) = 2.02 W/kg; SAR(10 g) = 1.04 W/kg**  
 Maximum value of SAR (measured) = 3.26 W/kg

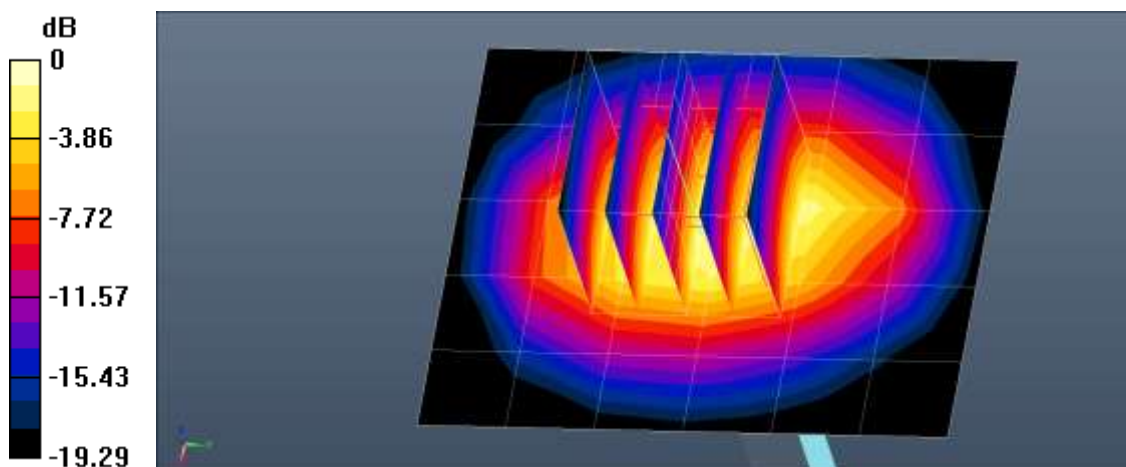

0 dB = 3.26 W/kg = 5.13 dBW/kg



## ■ Verification Data (1 900 MHz Head)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 21.0 °C  
 Test Date: 02/12/2020

### DUT: Dipole 1900 MHz D1900V2; Type: D1900V2


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.418 \text{ S/m}$ ;  $\epsilon_r = 38.685$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7370; ConvF(8.09, 8.09, 8.09); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: SAM with CRP v5.0\_Front
- Measurement SW: DASY52, Version 52.8 (8);

**Dipole/1900MHz Head Verification/Area Scan (6x7x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 2.64 W/kg

**Dipole/1900MHz Head Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 47.08 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 3.80 W/kg  
**SAR(1 g) = 1.92 W/kg; SAR(10 g) = 0.991 W/kg**  
 Maximum value of SAR (measured) = 3.06 W/kg

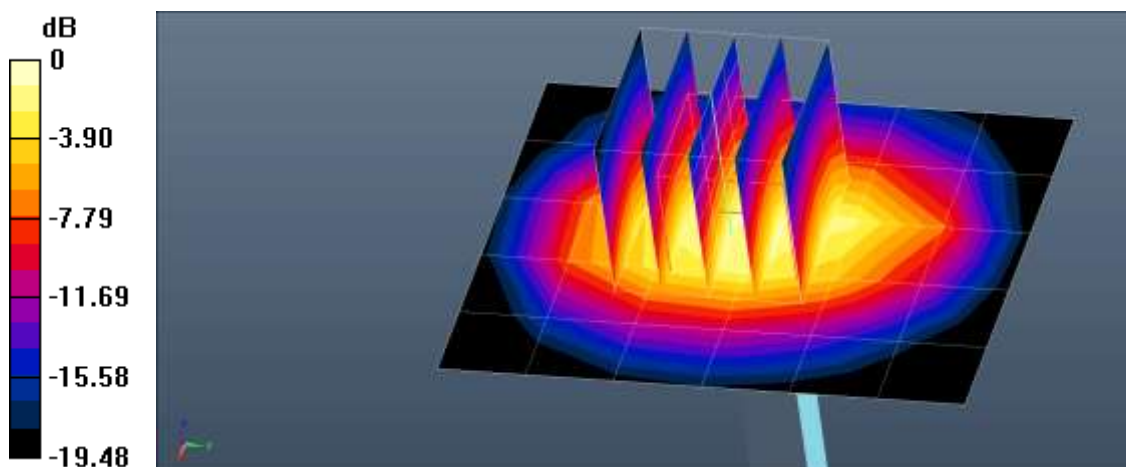

0 dB = 3.06 W/kg = 4.86 dBW/kg

## ■ Verification Data (1 900 MHz Head)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 20.7 °C  
 Test Date: 02/20/2020

### DUT: Dipole 1900 MHz D1900V2; Type: D1900V2


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.359 \text{ S/m}$ ;  $\epsilon_r = 40.294$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

### DASY Configuration:

- Probe: EX3DV4 - SN7370; ConvF(8.09, 8.09, 8.09); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn652; Calibrated: 2020-02-03
- Phantom: SAM with CRP v5.0\_Front
- Measurement SW: DASY52, Version 52.8 (8);

**Dipole/1900MHz Head Verification/Area Scan (8x8x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 2.25 W/kg

**Dipole/1900MHz Head Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 45.51 V/m; Power Drift = 0.19 dB  
 Peak SAR (extrapolated) = 3.52 W/kg  
**SAR(1 g) = 1.88 W/kg; SAR(10 g) = 0.987 W/kg**  
 Maximum value of SAR (measured) = 2.94 W/kg

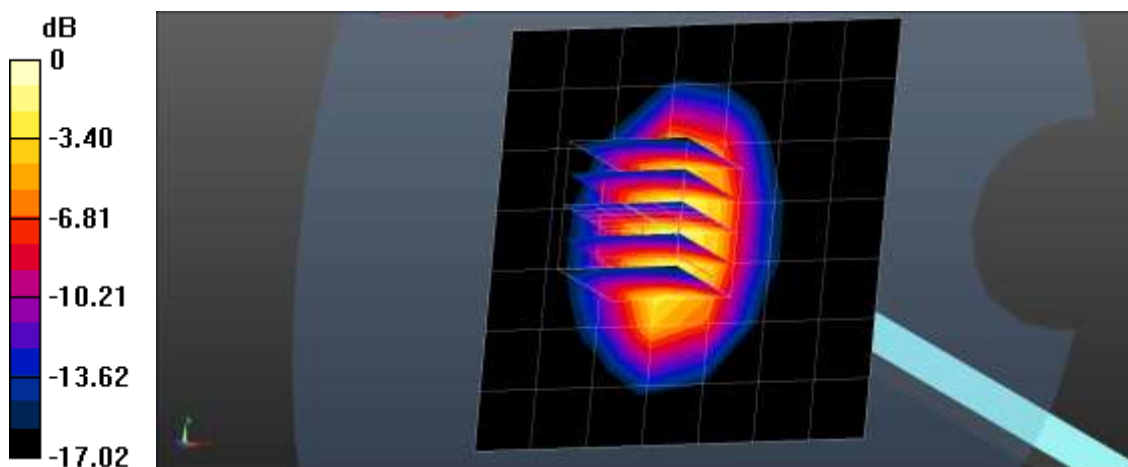

0 dB = 2.94 W/kg = 4.68 dBW/kg

## ■ Verification Data (1 900 MHz Body)

Test Laboratory: HCT CO., LTD  
 Input Power 0.05 W  
 Liquid Temp: 20.3 °C  
 Test Date: 02/13/2020

### DUT: Dipole 1900 MHz D1900V2; Type: D1900V2


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.526 \text{ S/m}$ ;  $\epsilon_r = 53.548$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.61, 7.61, 7.61); Calibrated: 2019-11-28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2019-07-18
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (2);

**Dipole/1900MHz Body Verification/Area Scan (7x8x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 2.73 W/kg

**Dipole/1900MHz Body Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 45.87 V/m; Power Drift = -0.06 dB  
 Peak SAR (extrapolated) = 3.61 W/kg  
**SAR(1 g) = 1.9 W/kg; SAR(10 g) = 0.971 W/kg**  
 Maximum value of SAR (measured) = 3.01 W/kg

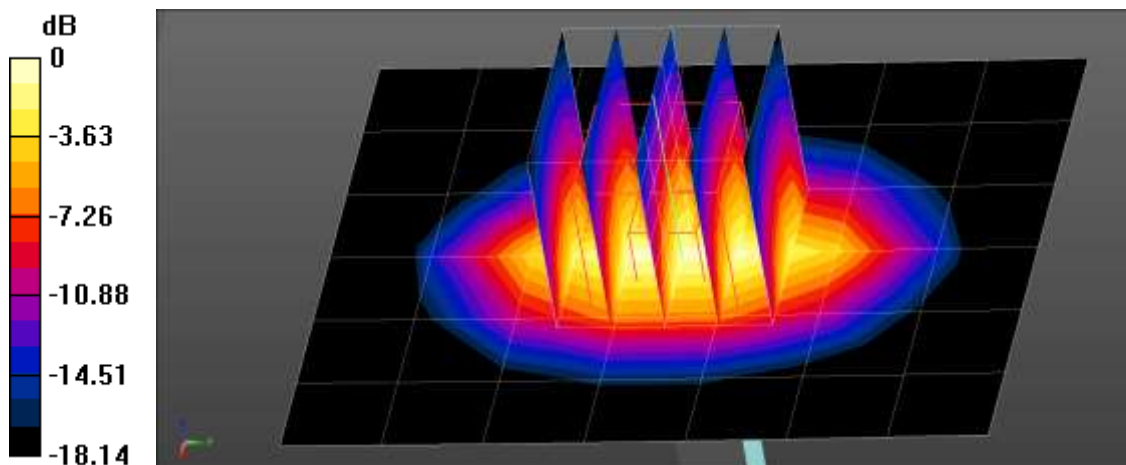

0 dB = 3.01 W/kg = 4.79 dBW/kg

## ■ Verification Data (1 900 MHz Body)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 20.8 °C  
 Test Date: 02/13/2020

### DUT: Dipole 1900 MHz D1900V2; Type: D1900V2


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.525 \text{ S/m}$ ;  $\epsilon_r = 53.523$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3863; ConvF(7.99, 7.99, 7.99); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: MFP\_V5.1C\_20171020
- Measurement SW: DASY52, Version 52.10 (2);

**Dipole/1 900 MHz Body Verification/Area Scan (7x7x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 2.93 W/kg

**Dipole/1 900 MHz Body Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  
 $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 45.75 V/m; Power Drift = 0.03 dB  
 Peak SAR (extrapolated) = 3.69 W/kg  
**SAR(1 g) = 1.89 W/kg; SAR(10 g) = 0.961 W/kg**  
 Maximum value of SAR (measured) = 3.03 W/kg

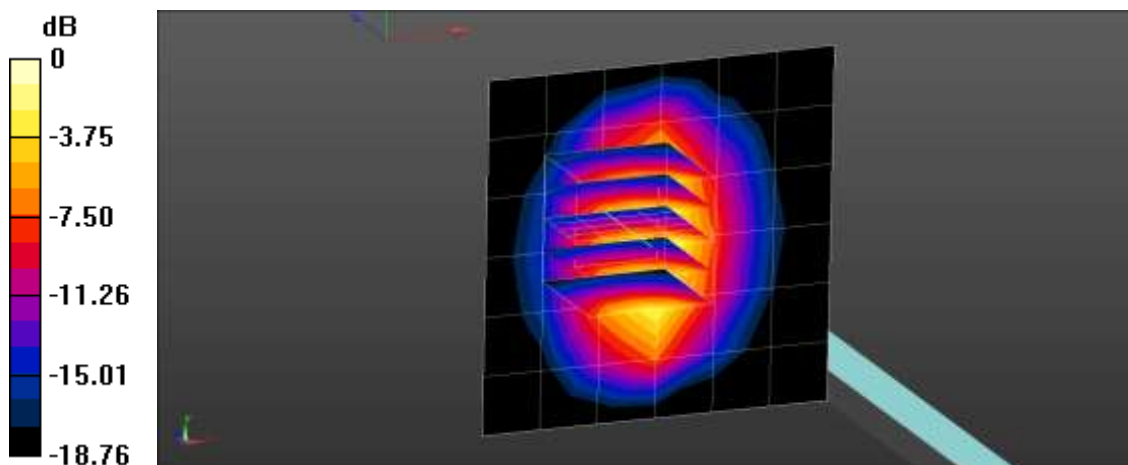

0 dB = 3.03 W/kg = 4.81 dBW/kg

## ■ Verification Data (1 900 MHz Body)

Test Laboratory: HCT CO., LTD  
 Input Power 0.05 W  
 Liquid Temp: 20.4 °C  
 Test Date: 02/20/2020

### DUT: Dipole 1900 MHz D1900V2; Type: D1900V2

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.527 \text{ S/m}$ ;  $\epsilon_r = 53.523$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

### DASY Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.61, 7.61, 7.61); Calibrated: 2019-11-28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2019-07-18
- Phantom: MFP\_V5.1C (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (2);

**1900MHz Body Verification/Area Scan (6x8x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 2.22 W/kg


**1900MHz Body Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 43.44 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 3.41 W/kg

**SAR(1 g) = 1.85 W/kg; SAR(10 g) = 0.963 W/kg**

Maximum value of SAR (measured) = 2.87 W/kg

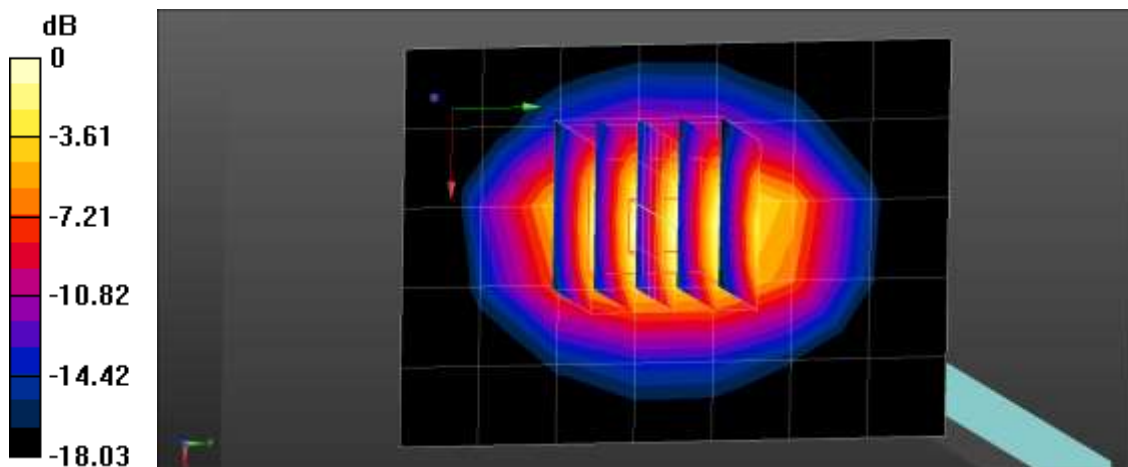

0 dB = 2.87 W/kg = 4.58 dBW/kg

## ■ Verification Data (2 450 MHz Head)

Test Laboratory: HCT CO., LTD  
 Input Power 0.05 W  
 Liquid Temp: 19.8 °C  
 Test Date: 02/11/2020

### DUT: Dipole 2450 MHz D2450V2; Type: D2450V2


Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2450 \text{ MHz}$ ;  $\sigma = 1.79 \text{ S/m}$ ;  $\epsilon_r = 38.349$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3968; ConvF(7.6, 7.6, 7.6); Calibrated: 2019-09-27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2019-09-19
- Phantom: SAM with CRP v5.0\_F
- Measurement SW: DASY52, Version 52.8 (8);

**Dipole/2450MHz Head Verification/Area Scan (7x7x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$   
 Maximum value of SAR (measured) = 4.26 W/kg

**Dipole/2450MHz Head Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 52.33 V/m; Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 6.08 W/kg  
**SAR(1 g) = 2.66 W/kg; SAR(10 g) = 1.18 W/kg**  
 Maximum value of SAR (measured) = 4.73 W/kg

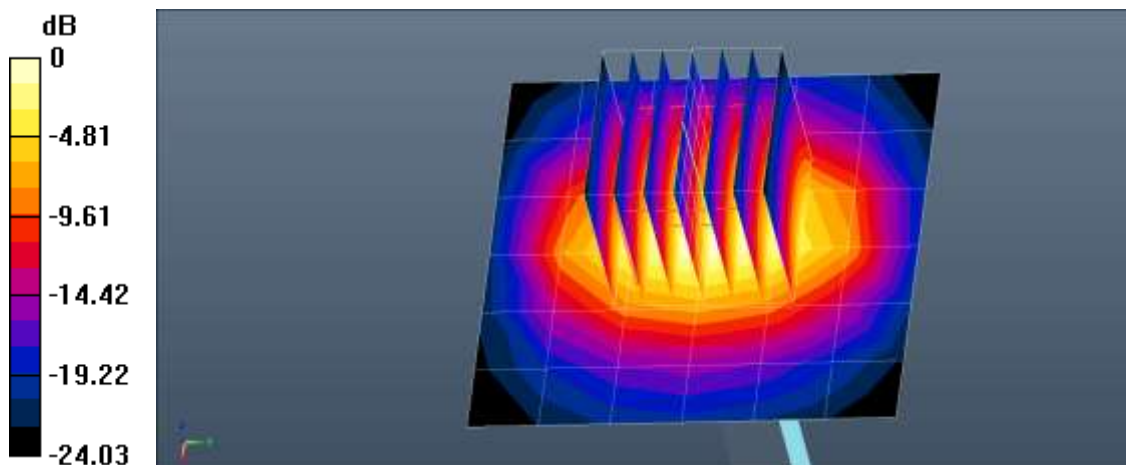

0 dB = 4.73 W/kg = 6.75 dBW/kg

## ■ Verification Data (2 450 MHz Body)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 19.8 °C  
 Test Date: 02/11/2020

### DUT: Dipole 2450 MHz D2450V2; Type: D2450V2


Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2450 \text{ MHz}$ ;  $\sigma = 1.948 \text{ S/m}$ ;  $\epsilon_r = 53.712$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

#### DASY Configuration:

- Probe: EX3DV4 - SN3968; ConvF(7.68, 7.68, 7.68); Calibrated: 2019-09-27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2019-09-19
- Phantom: Triple Flat Phantom 5.1C
- Measurement SW: DASY52, Version 52.8 (8);

**Dipole/2450MHz Body Verification/Area Scan (7x7x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$   
 Maximum value of SAR (measured) = 3.16 W/kg

**Dipole/2450MHz Body Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 43.97 V/m; Power Drift = -0.01 dB  
 Peak SAR (extrapolated) = 5.50 W/kg  
**SAR(1 g) = 2.73 W/kg; SAR(10 g) = 1.27 W/kg**  
 Maximum value of SAR (measured) = 4.36 W/kg

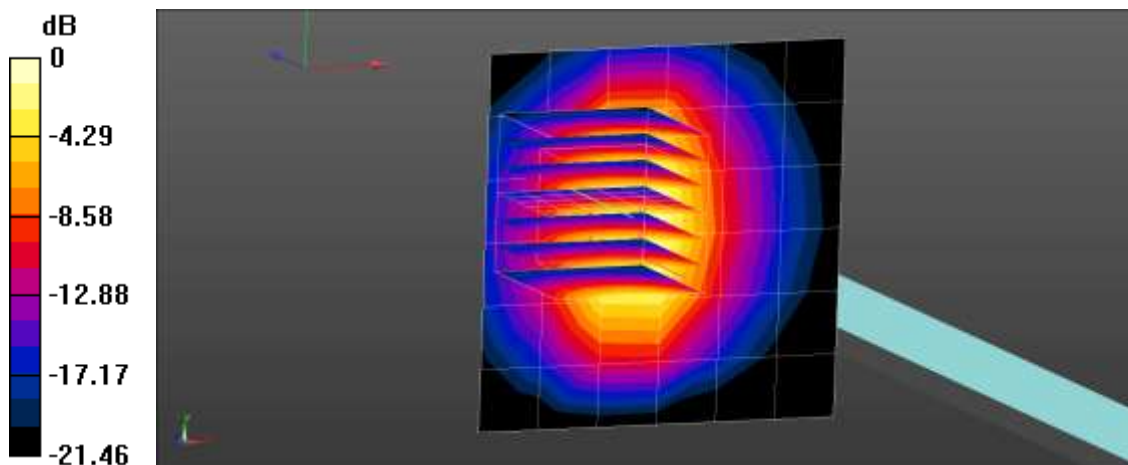

0 dB = 4.36 W/kg = 6.39 dBW/kg



## ■ Verification Data (5 250 MHz Head)

Test Laboratory: HCT CO., LTD  
 Input Power 0.05 W  
 Liquid Temp: 20.2 °C  
 Test Date: 02/11/2020

### DUT: Dipole D5GHzV2; Type: D5GHzV2


Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5250 \text{ MHz}$ ;  $\sigma = 4.847 \text{ S/m}$ ;  $\epsilon_r = 36.904$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3863; ConvF(5.09, 5.09, 5.09); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: Twin-SAM V4.0 (Left-Right)
- Measurement SW: DASY52, Version 52.10 (2);

**Dipole/5250 MHz Head Verification/Area Scan (8x8x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$   
 Maximum value of SAR (measured) = 7.43 W/kg

**Dipole/5250 MHz Head Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio:1.4  
 Reference Value = 49.65 V/m; Power Drift = -0.10 dB  
 Peak SAR (extrapolated) = 16.8 W/kg  
**SAR(1 g) = 4.05 W/kg; SAR(10 g) = 1.21 W/kg**  
 Maximum value of SAR (measured) = 10.0 W/kg

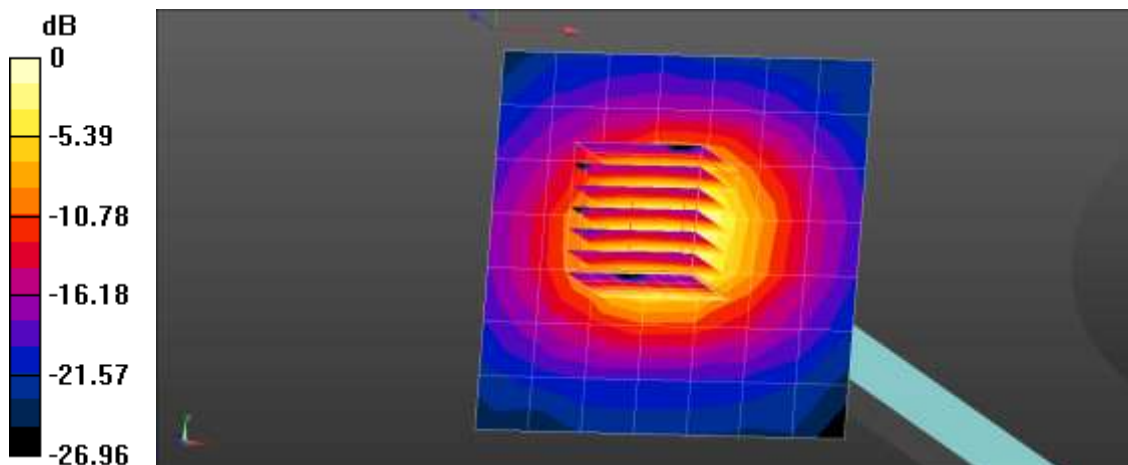

0 dB = 7.43 W/kg = 8.71 dBW/kg



## ■ Verification Data (5 250 MHz Body)

Test Laboratory: HCT CO., LTD  
 Input Power 0.05 W  
 Liquid Temp: 21.0 °C  
 Test Date: 02/12/2020

### DUT: Dipole D5GHzV2; Type: D5GHzV2


Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5250 \text{ MHz}$ ;  $\sigma = 5.476 \text{ S/m}$ ;  $\epsilon_r = 48.246$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3863; ConvF(4.4, 4.4, 4.4); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: MFP\_V5.1C\_20171020
- Measurement SW: DASY52, Version 52.10 (2);

**Dipole/5250MHz Body Verification/Area Scan (8x8x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$   
 Maximum value of SAR (measured) = 6.87 W/kg

**Dipole/5250MHz Body Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio:1.4  
 Reference Value = 44.70 V/m; Power Drift = 0.13 dB  
 Peak SAR (extrapolated) = 15.4 W/kg  
**SAR(1 g) = 3.73 W/kg; SAR(10 g) = 1.08 W/kg**  
 Maximum value of SAR (measured) = 9.47 W/kg

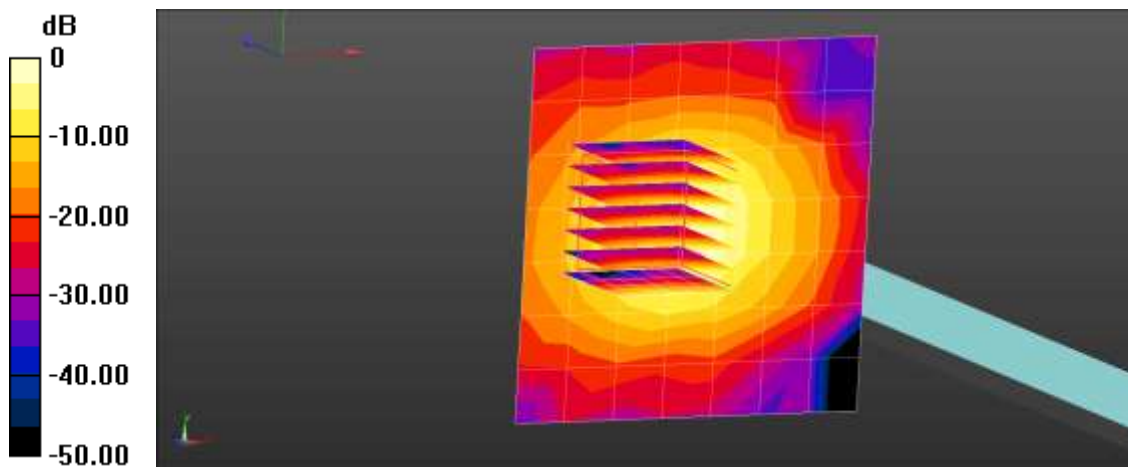

0 dB = 6.87 W/kg = 8.37 dBW/kg

## ■ Verification Data (5 600 MHz Head)

Test Laboratory: HCT CO., LTD  
 Input Power 0.05 W  
 Liquid Temp: 20.2 °C  
 Test Date: 02/11/2020

### DUT: Dipole D5GHzV2; Type: D5GHzV2


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.173$  S/m;  $\epsilon_r = 36.713$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3863; ConvF(4.69, 4.69, 4.69); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: Twin-SAM V4.0 (Left-Right)
- Measurement SW: DASY52, Version 52.10 (2);

**Dipole/5600 MHz Head Verification/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm  
 Maximum value of SAR (measured) = 7.88 W/kg

**Dipole/5600 MHz Head Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio:1.4  
 Reference Value = 49.19 V/m; Power Drift = -0.02 dB  
 Peak SAR (extrapolated) = 18.1 W/kg  
**SAR(1 g) = 4.17 W/kg; SAR(10 g) = 1.24 W/kg**  
 Maximum value of SAR (measured) = 10.4 W/kg

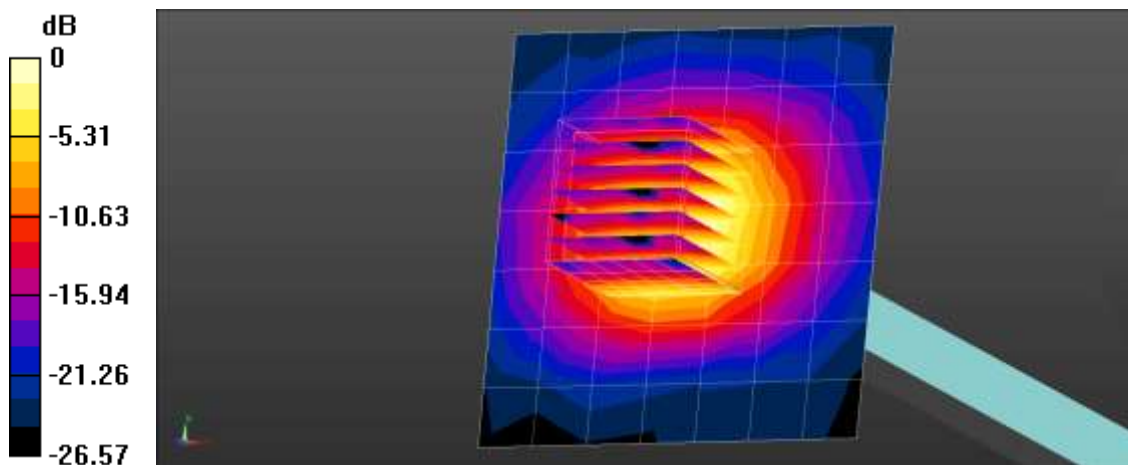

0 dB = 7.88 W/kg = 8.96 dBW/kg

## ■ Verification Data (5 600 MHz Body)

Test Laboratory: HCT CO., LTD  
 Input Power 0.05 W  
 Liquid Temp: 21.0 °C  
 Test Date: 02/12/2020

### DUT: Dipole D5GHzV2; Type: D5GHzV2


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5600 \text{ MHz}$ ;  $\sigma = 5.822 \text{ S/m}$ ;  $\epsilon_r = 47.949$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

#### DASY Configuration:

- Probe: EX3DV4 - SN3863; ConvF(3.94, 3.94, 3.94); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: MFP\_V5.1C\_20171020
- Measurement SW: DASY52, Version 52.10 (2);

**Dipole/5600MHz Body Verification/Area Scan (8x8x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$   
 Maximum value of SAR (measured) = 7.24 W/kg

**Dipole/5600MHz Body Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio:1.4  
 Reference Value = 45.71 V/m; Power Drift = 0.13 dB  
 Peak SAR (extrapolated) = 17.4 W/kg  
**SAR(1 g) = 3.81 W/kg; SAR(10 g) = 1.09 W/kg**  
 Maximum value of SAR (measured) = 10.1 W/kg

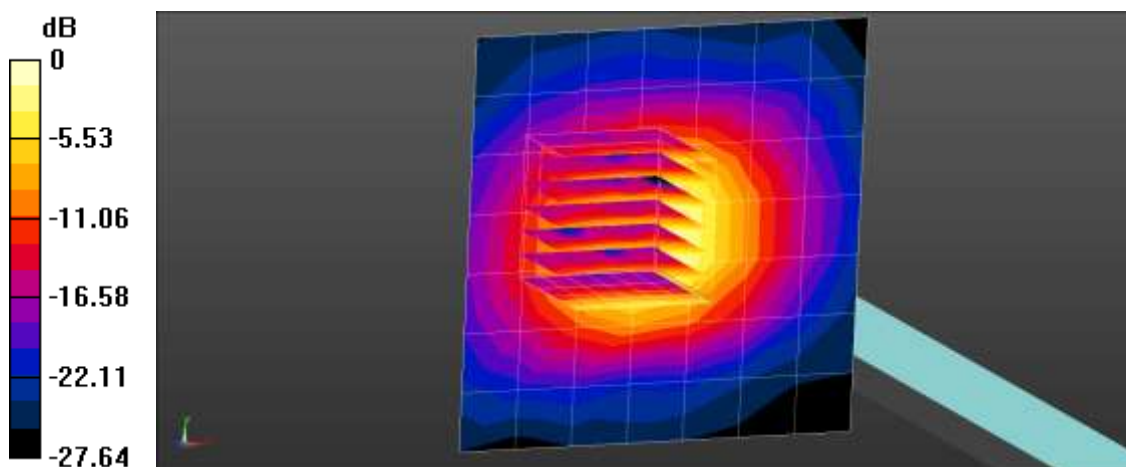

0 dB = 7.24 W/kg = 8.60 dBW/kg

## ■ Verification Data (5 750 MHz Head)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 20.2 °C  
 Test Date: 02/11/2020

### DUT: Dipole D5GHzV2; Type: D5GHzV2


Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5750 \text{ MHz}$ ;  $\sigma = 5.299 \text{ S/m}$ ;  $\epsilon_r = 36.797$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

### DASY Configuration:

- Probe: EX3DV4 - SN3863; ConvF(4.99, 4.99, 4.99); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: Twin-SAM V4.0 (Left-Right)
- Measurement SW: DASY52, Version 52.10 (2);

**Dipole/5750 MHz Head Verification/Area Scan (8x8x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$   
 Maximum value of SAR (measured) = 7.28 W/kg

**Dipole/5750 MHz Head Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  
 $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio:1.4  
 Reference Value = 49.84 V/m; Power Drift = -0.17 dB  
 Peak SAR (extrapolated) = 19.1 W/kg  
**SAR(1 g) = 4.23 W/kg; SAR(10 g) = 1.27 W/kg**  
 Maximum value of SAR (measured) = 10.7 W/kg

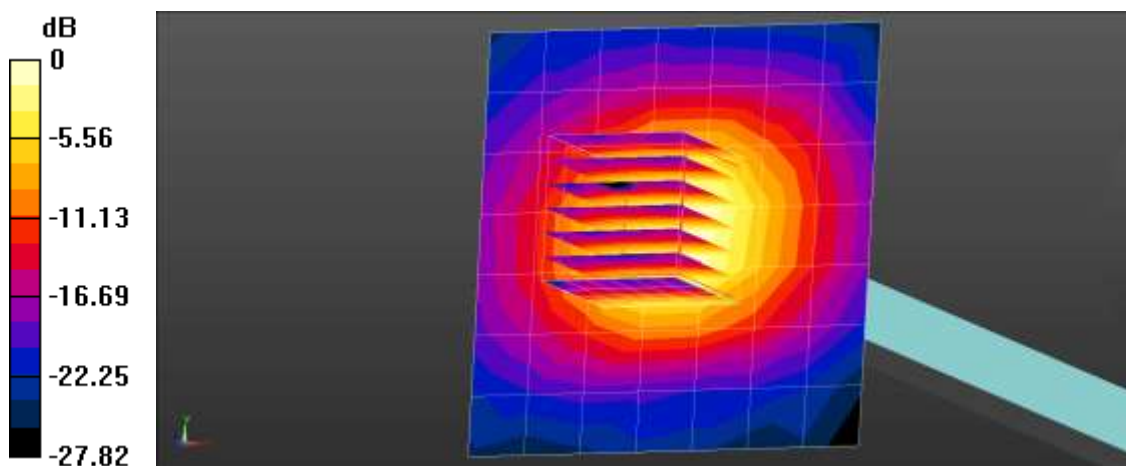

0 dB = 7.28 W/kg = 8.62 dBW/kg

## ■ Verification Data (5 750 MHz Body)

Test Laboratory: HCT CO., LTD  
 Input Power: 0.05 W  
 Liquid Temp: 20.8 °C  
 Test Date: 02/13/2020

### DUT: Dipole D5GHzV2; Type: D5GHzV2


Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5750 \text{ MHz}$ ;  $\sigma = 5.869 \text{ S/m}$ ;  $\epsilon_r = 46.447$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

### DASY Configuration:

- Probe: EX3DV4 - SN3863; ConvF(4.21, 4.21, 4.21); Calibrated: 2019-05-15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2019-11-18
- Phantom: MFP\_V5.1C\_20171020
- Measurement SW: DASY52, Version 52.10 (2);

**Dipole/5750MHz Body Verification/Area Scan (8x8x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$   
 Maximum value of SAR (measured) = 6.82 W/kg

**Dipole/5750MHz Body Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio:1.4  
 Reference Value = 44.15 V/m; Power Drift = 0.13 dB  
 Peak SAR (extrapolated) = 16.3 W/kg  
**SAR(1 g) = 3.61 W/kg; SAR(10 g) = 1.04 W/kg**  
 Maximum value of SAR (measured) = 9.45 W/kg

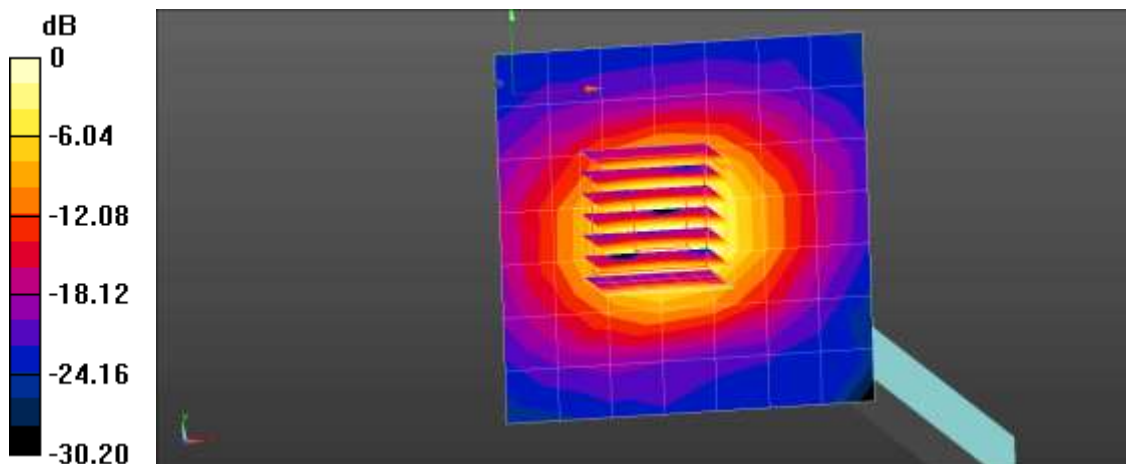

0 dB = 6.82 W/kg = 8.34 dBW/kg

### Attachment 3. – SAR Tissue Characterization

The brain and muscle mixtures consist of a viscous gel using hydrox-ethyl cellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Harts grove.

| Ingredients<br>(% by weight)  | Frequency (MHz) |      |       |       |       |      |       |       |               |      |              |       |
|-------------------------------|-----------------|------|-------|-------|-------|------|-------|-------|---------------|------|--------------|-------|
|                               | 750             |      | 835   |       | 1 750 |      | 1 900 |       | 2 450 – 2 700 |      | 3500 - 5 800 |       |
| Tissue Type                   | Head            | Body | Head  | Body  | Head  | Body | Head  | Body  | Head          | Body | Head         | Body  |
| Water                         | 41.1            | 51.7 | 40.45 | 53.06 | 52.6  | 68.8 | 54.9  | 70.17 | 71.88         | 73.2 | 65.52        | 78.66 |
| Salt (NaCl)                   | 1.4             | 0.9  | 1.45  | 0.94  | 0.4   | 0.2  | 0.18  | 0.39  | 0.16          | 0.1  | 0.0          | 0.0   |
| Sugar                         | 57.0            | 47.2 | 57.0  | 44.9  | 0.0   | 0.0  | 0.0   | 0     | 0.0           | 0.0  | 0.0          | 0.0   |
| HEC                           | 0.2             | 0    | 1.0   | 1.0   | 0.0   | 0.0  | 0.0   | 0     | 0.0           | 0.0  | 0.0          | 0.0   |
| Bactericide                   | 0.2             | 0.1  | 0.1   | 0.1   | 0.0   | 0.0  | 0.0   | 0     | 0.0           | 0.0  | 0.0          | 0.0   |
| Triton X-100                  | 0.0             | 0.0  | 0.0   | 0.0   | 0.0   | 0.0  | 0.0   | 0.0   | 19.97         | 0.0  | 17.24        | 10.67 |
| DGBE                          | 0.0             | 0.0  | 0.0   | 0.0   | 47    | 31   | 44.92 | 29.44 | 7.99          | 26.7 | 0.0          | 0.0   |
| Diethylene glycol hexyl ether | -               | -    | -     | -     | -     | -    | -     | -     | -             | -    | -            | -     |

|                           |                                                                    |        |                        |
|---------------------------|--------------------------------------------------------------------|--------|------------------------|
| Salt:                     | 99 % Pure Sodium Chloride                                          | Sugar: | 98 % Pure Sucrose      |
| Water:                    | De-ionized, 16M resistivity                                        | HEC:   | Hydroxyethyl Cellulose |
| DGBE:                     | 99 % Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy) ethanol]  |        |                        |
| Triton X-100(ultra-pure): | Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether |        |                        |

Composition of the Tissue Equivalent Matter

## Attachment 4. – SAR System Validation

Per FCC KCB 865664 D02v01r02, SAR system validation status should be document to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in IEEE 1528-2013 and FCC KDB 865664 D01v01r04. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

| SAR System No. | Probe | Probe Type | Probe Calibration Point |      | Dipole | Date       | Dielectric Parameters |                       | CW Validation |                 |                | Modulation Validation |             |      |
|----------------|-------|------------|-------------------------|------|--------|------------|-----------------------|-----------------------|---------------|-----------------|----------------|-----------------------|-------------|------|
|                |       |            |                         |      |        |            | Measured Permittivity | Measured Conductivity | Sensitivity   | Probe Linearity | Probe Isotropy | MOD. Type             | Duty Factor | PAR  |
| 11             | 3076  | ES3DV3     | Head                    | 750  | 1014   | 2019-08-06 | 42.0                  | 0.88                  | PASS          | PASS            | PASS           | N/A                   | N/A         | N/A  |
| 11             | 3076  | ES3DV3     | Body                    | 750  | 1014   | 2019-08-06 | 55.6                  | 0.98                  | PASS          | PASS            | PASS           | N/A                   | N/A         | N/A  |
| 12             | 7370  | EX3DV4     | Head                    | 835  | 441    | 2019-09-11 | 41.6                  | 0.91                  | PASS          | PASS            | PASS           | GMSK                  | PASS        | N/A  |
| 11             | 3076  | ES3DV3     | Head                    | 835  | 441    | 2019-09-03 | 41.6                  | 0.91                  | PASS          | PASS            | PASS           | N/A                   | N/A         | N/A  |
| 3              | 3797  | EX3DV4     | Body                    | 835  | 441    | 2019-12-10 | 55.3                  | 0.98                  | PASS          | PASS            | PASS           | GMSK                  | PASS        | N/A  |
| 11             | 3076  | ES3DV3     | Body                    | 835  | 441    | 2019-09-03 | 55.5                  | 0.97                  | PASS          | PASS            | PASS           | N/A                   | N/A         | N/A  |
| 12             | 7370  | EX3DV4     | Head                    | 1750 | 2d015  | 2019-10-01 | 40.1                  | 1.39                  | PASS          | PASS            | PASS           | N/A                   | N/A         | N/A  |
| 1              | 3863  | EX3DV4     | Body                    | 1750 | 2d015  | 2019-10-01 | 53.5                  | 1.52                  | PASS          | PASS            | PASS           | N/A                   | N/A         | N/A  |
| 12             | 7370  | EX3DV4     | Head                    | 1900 | 5d061  | 2020-01-30 | 40.1                  | 1.42                  | PASS          | PASS            | PASS           | N/A                   | N/A         | N/A  |
| 12             | 7370  | EX3DV4     | Head                    | 1900 | 5d061  | 2020-01-30 | 40.1                  | 1.42                  | PASS          | PASS            | PASS           | GMSK                  | PASS        | N/A  |
| 3              | 3797  | EX3DV4     | Body                    | 1900 | 5d061  | 2020-01-30 | 53.3                  | 1.53                  | PASS          | PASS            | PASS           | GMSK                  | PASS        | N/A  |
| 1              | 3863  | EX3DV4     | Body                    | 1900 | 5d061  | 2020-01-30 | 53.5                  | 1.52                  | PASS          | PASS            | PASS           | GMSK                  | PASS        | N/A  |
| 1              | 3863  | EX3DV4     | Body                    | 1900 | 5d061  | 2020-01-30 | 53.5                  | 1.52                  | PASS          | PASS            | PASS           | N/A                   | N/A         | N/A  |
| 3              | 3797  | EX3DV4     | Body                    | 1900 | 5d061  | 2020-01-30 | 53.3                  | 1.53                  | PASS          | PASS            | PASS           | GMSK                  | PASS        | N/A  |
| 9              | 3968  | EX3DV4     | Head                    | 2450 | 965    | 2019-11-30 | 39.4                  | 1.81                  | PASS          | PASS            | PASS           | OFDM                  | N/A         | PASS |
| 9              | 3968  | EX3DV4     | Body                    | 2450 | 965    | 2019-11-30 | 52.8                  | 1.94                  | PASS          | PASS            | PASS           | OFDM                  | N/A         | PASS |
| 1              | 3863  | EX3DV4     | Head                    | 5250 | 1107   | 2019-10-11 | 35.6                  | 4.71                  | PASS          | PASS            | PASS           | OFDM                  | N/A         | PASS |
| 1              | 3863  | EX3DV4     | Head                    | 5600 | 1107   | 2019-10-11 | 35.3                  | 5.04                  | PASS          | PASS            | PASS           | OFDM                  | N/A         | PASS |
| 1              | 3863  | EX3DV4     | Head                    | 5750 | 1107   | 2019-10-11 | 35.8                  | 5.25                  | PASS          | PASS            | PASS           | OFDM                  | N/A         | PASS |
| 1              | 3863  | EX3DV4     | Body                    | 5250 | 1107   | 2019-10-11 | 48.8                  | 5.36                  | PASS          | PASS            | PASS           | OFDM                  | N/A         | PASS |
| 1              | 3863  | EX3DV4     | Body                    | 5600 | 1107   | 2019-10-11 | 48.3                  | 5.78                  | PASS          | PASS            | PASS           | OFDM                  | N/A         | PASS |
| 1              | 3863  | EX3DV4     | Body                    | 5750 | 1107   | 2019-10-11 | 48.4                  | 5.95                  | PASS          | PASS            | PASS           | OFDM                  | N/A         | PASS |

SAR System Validation Summary 1g

### Note;

All measurement were performed using probes calibrated for CW signal only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r04. SAR system were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to KDB 865664 D01v01r04.