



No. 24T04Z200128-011

For

Samsung Electronics Co., Ltd.

Multi-band GSM/WCDMA/LTE Mobile Phone with Bluetooth, WLAN

Model Name: SM-A065F/DS

FCC ID: ZCASMA065F

with

Hardware Version: REV1.0

Software Version: A065F.001

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.


Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

Test positions for head:

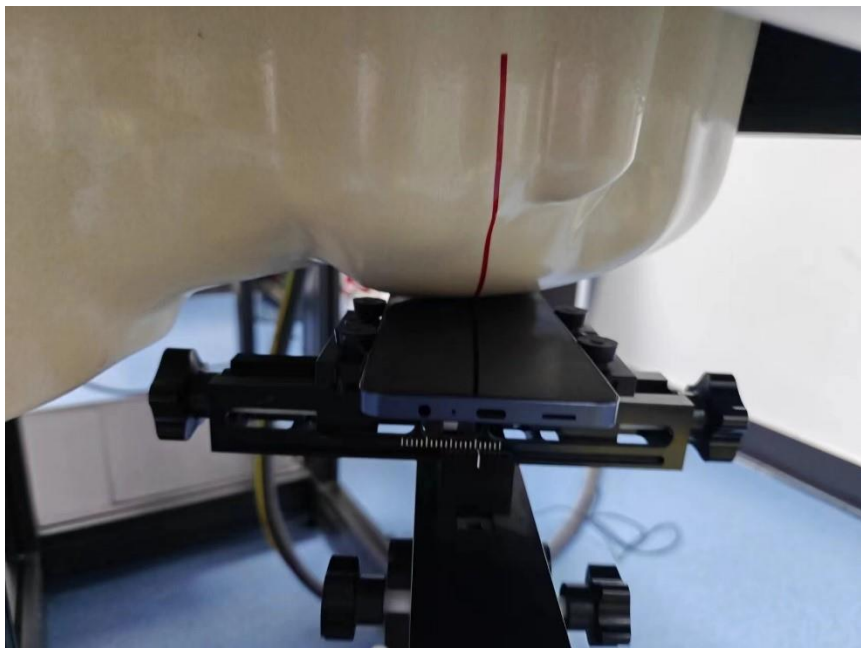


Picture 2: Left Head Touch Cheek Position

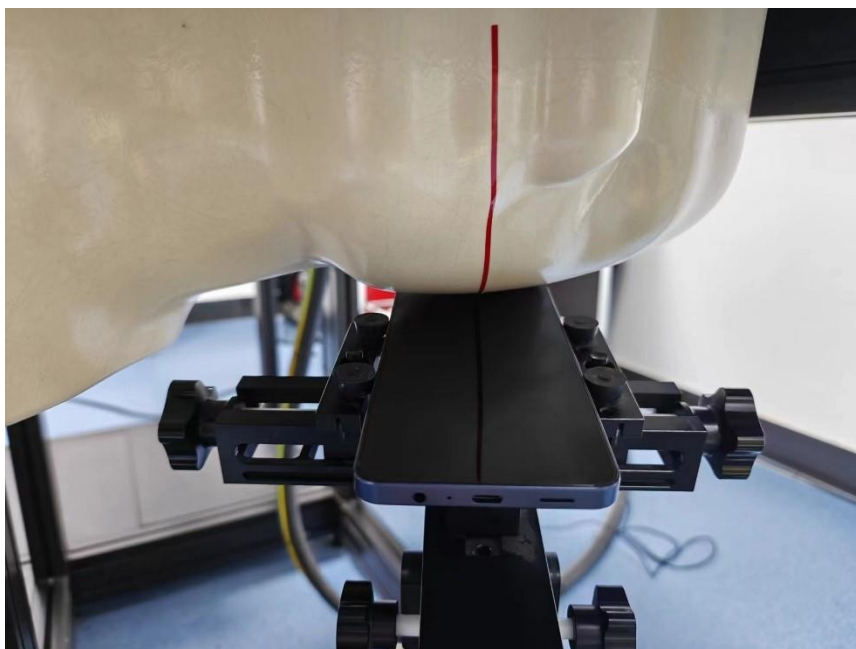

Picture 3: Left Head Tilt 15° Position




Picture 4: Right Head Touch Cheek Position

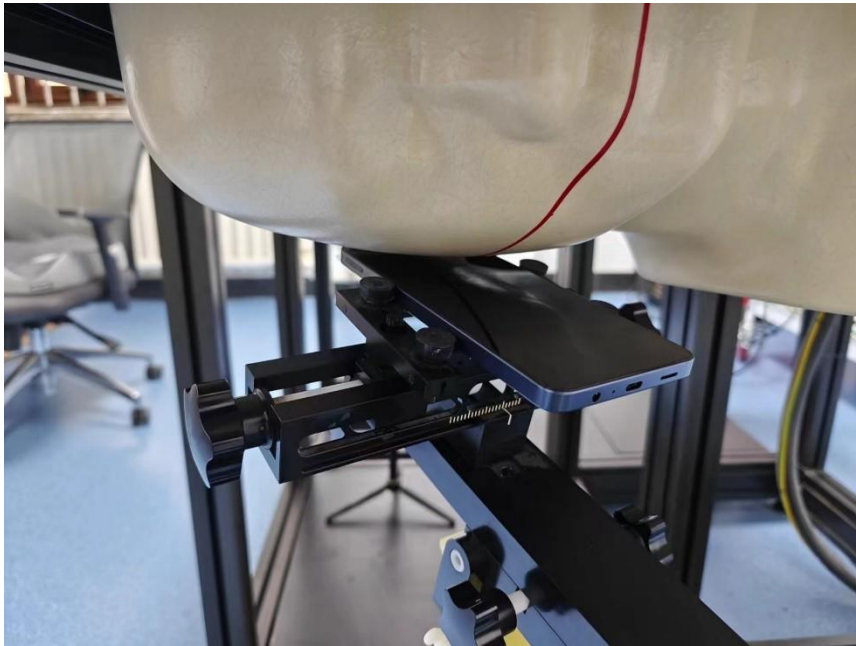


Picture 5: Right Head Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 12 test positions all with the distance =10/11/12/15mm between the EUT and the phantom bottom:

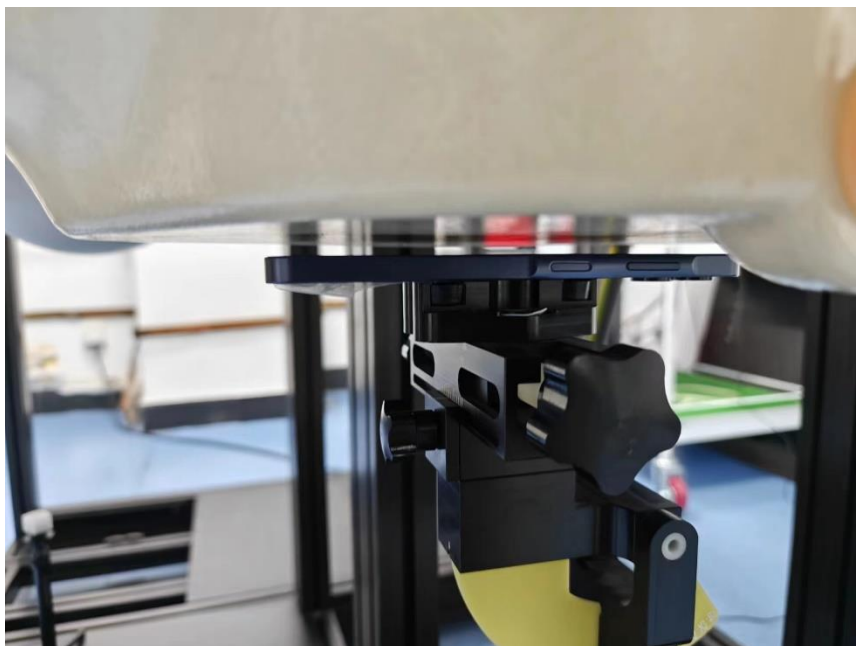


Picture 6: Front 10mm

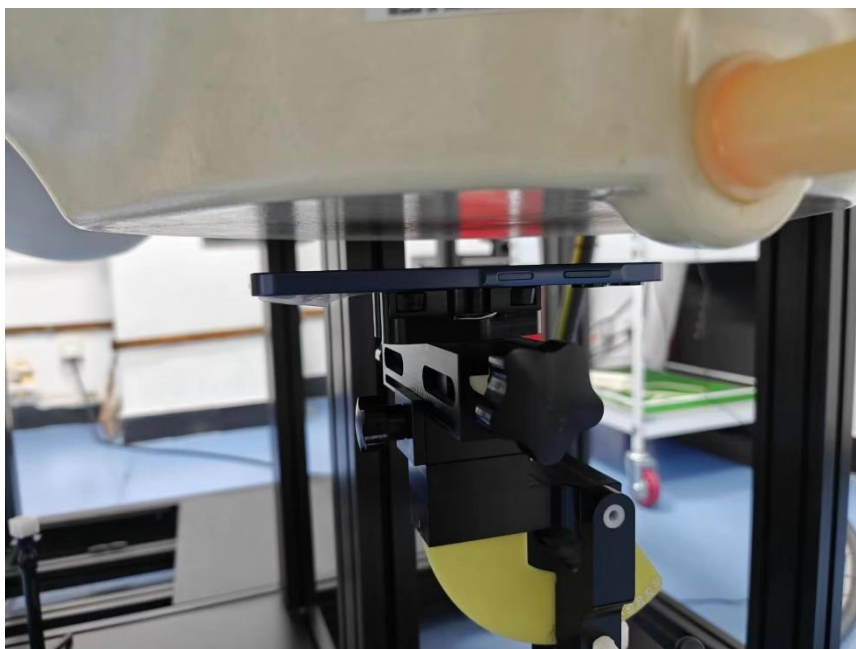


Picture 7: Front 11mm

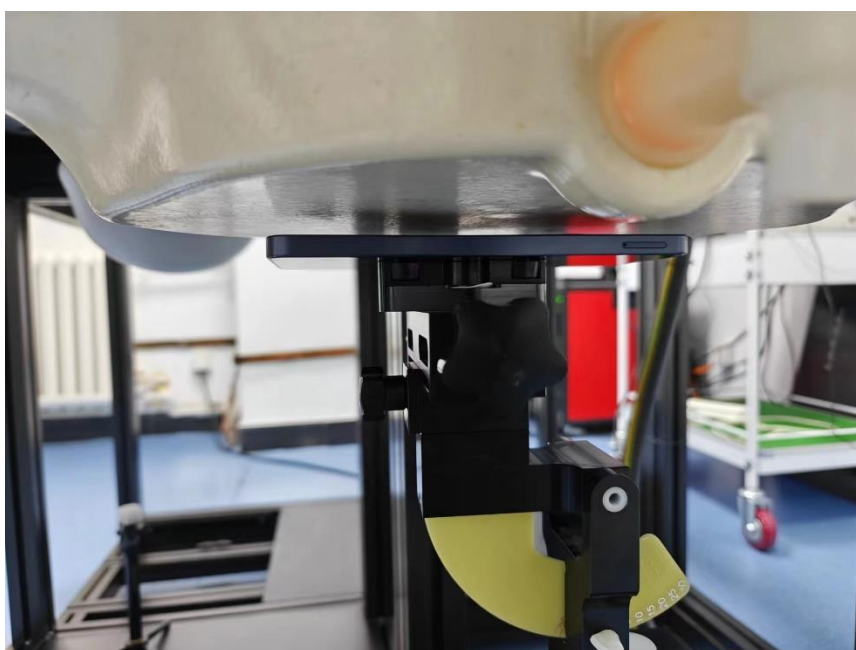

Picture 8: Rear 10mm

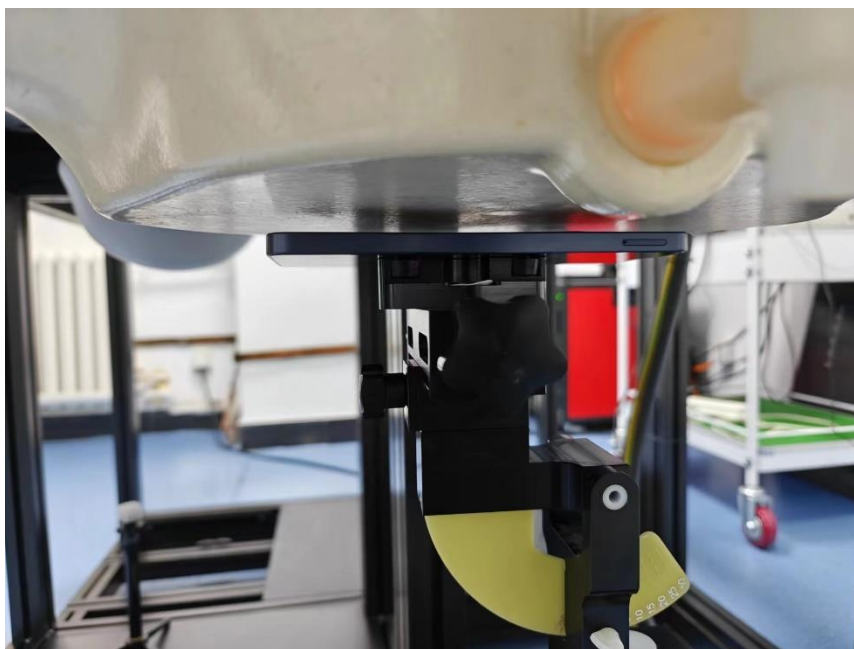


Picture 9: Rear 12mm

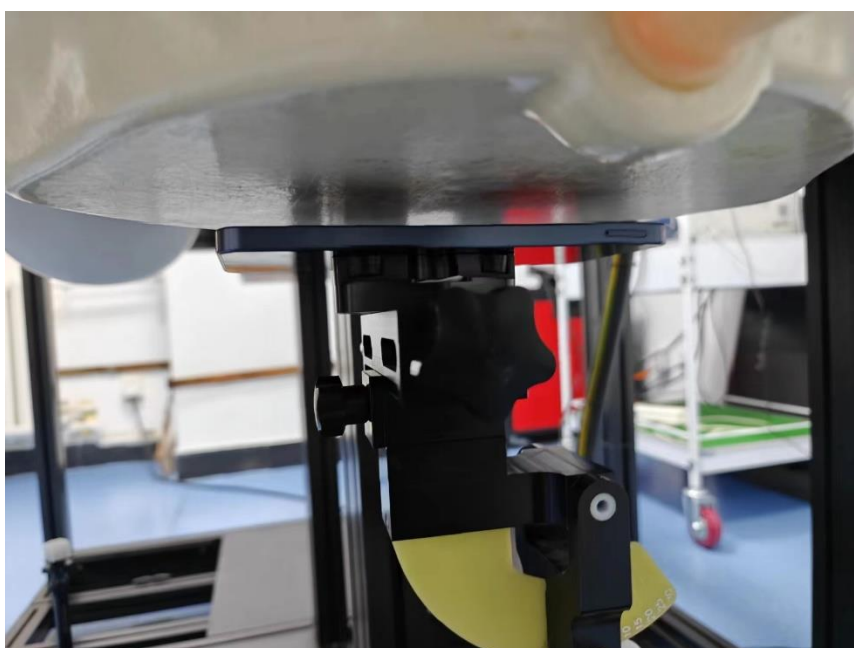


Picture 10: Rear 15mm




Picture 11: Left 10mm

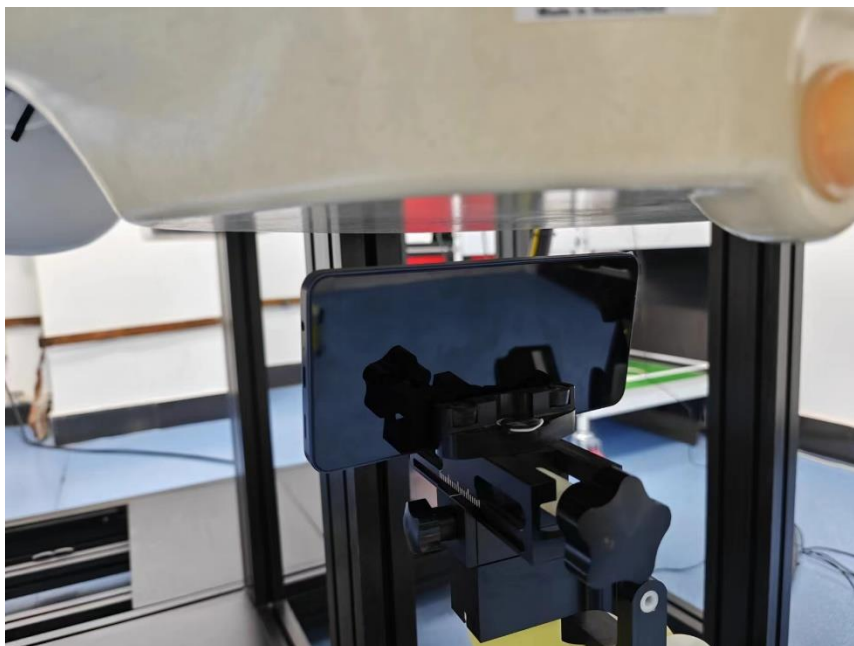


Picture 12: Left 12mm

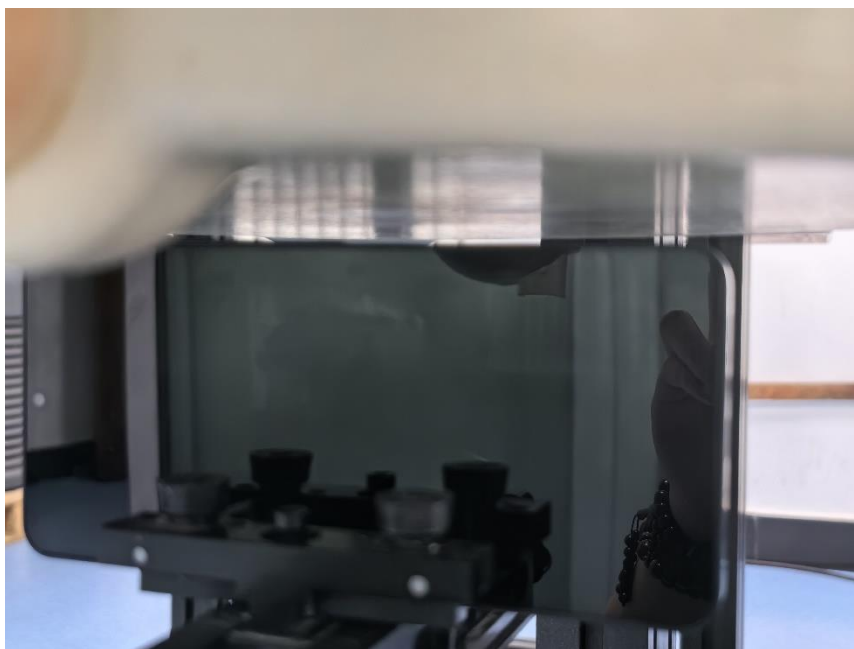


Picture 13: Right 10mm

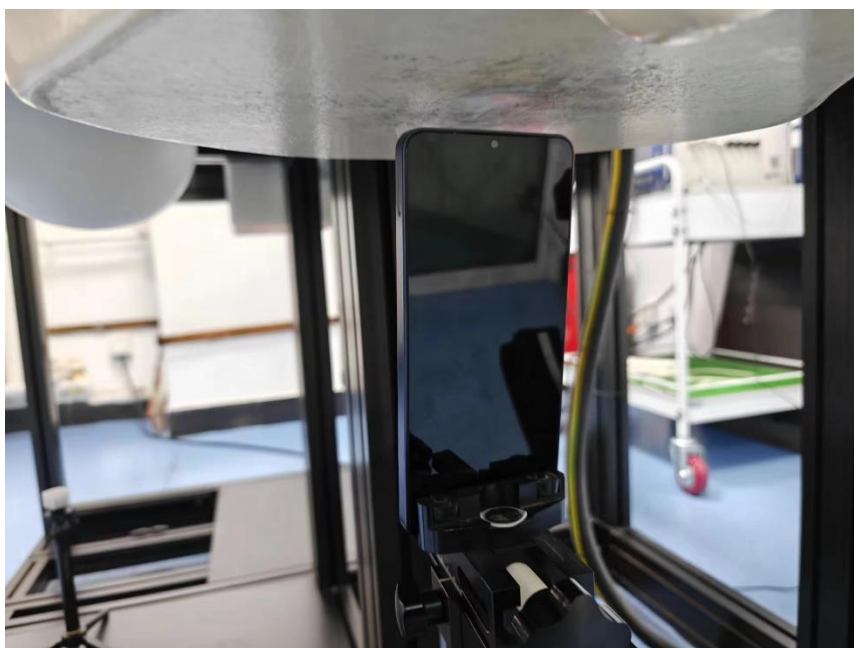


Picture 14: Top 10mm

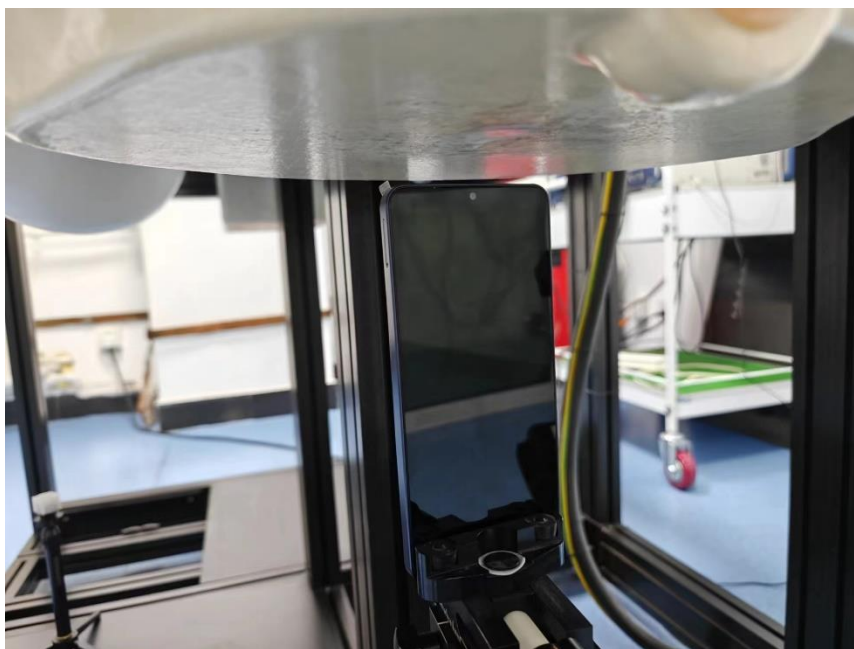

Picture 15: Top 12mm

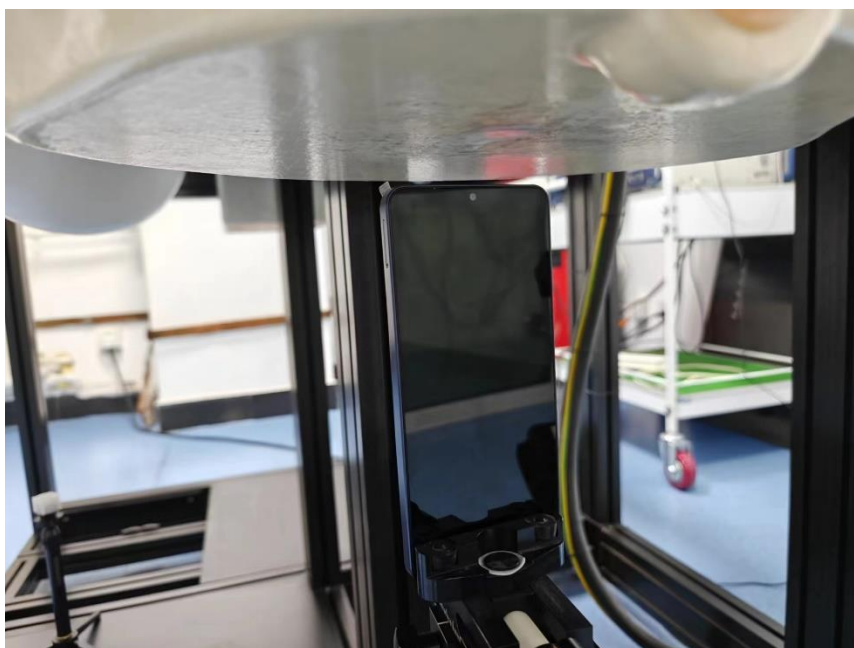

Picture 16: Top 15mm

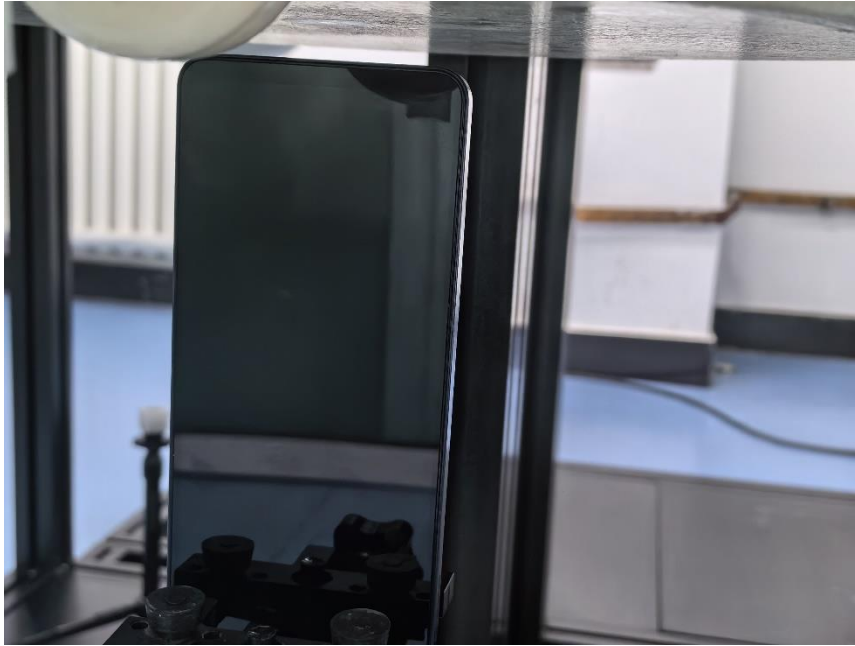

Picture 17: Bottom 10mm

Transmit Antenna Separation Distances

