



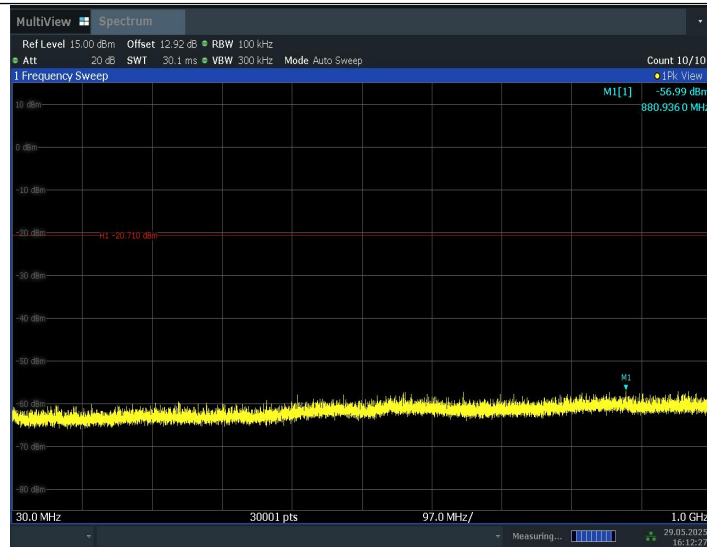


16:12:28 29.05.2025

11N20SISO_2412_1000~26500

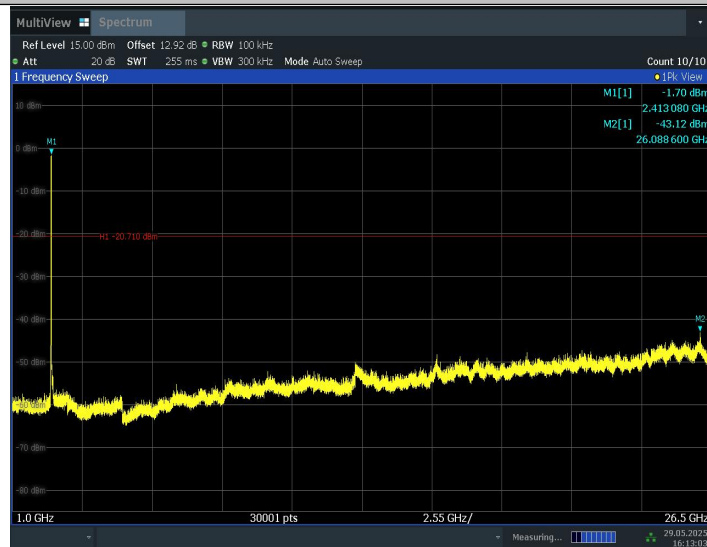


16:13:04 29.05.2025

11N20SISO_2437_0~Reference

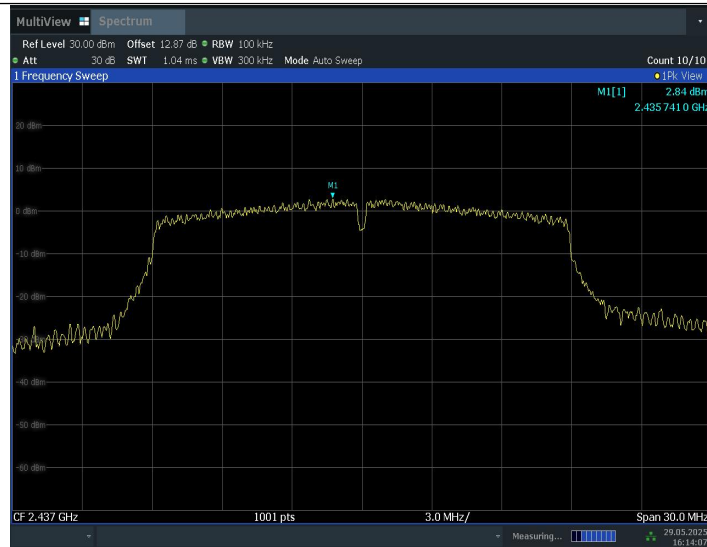


16:14:08 29.05.2025

11N20SISO_2437_30~1000

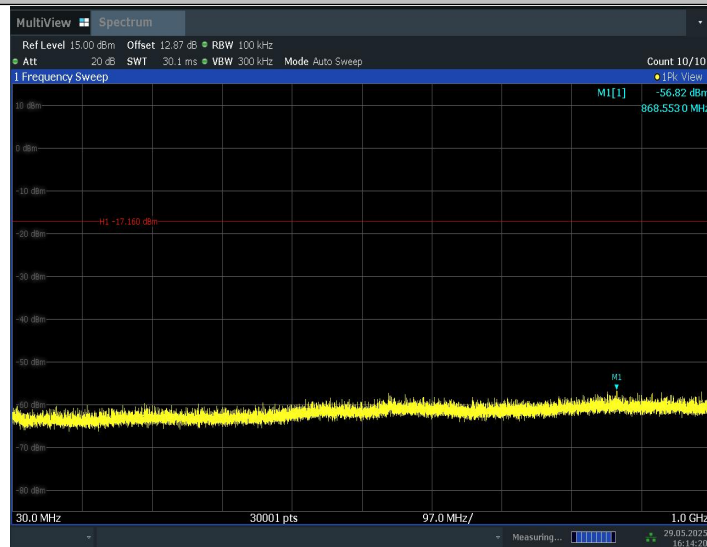


16:14:21 29.05.2025

11N20SISO_2437_1000~26500

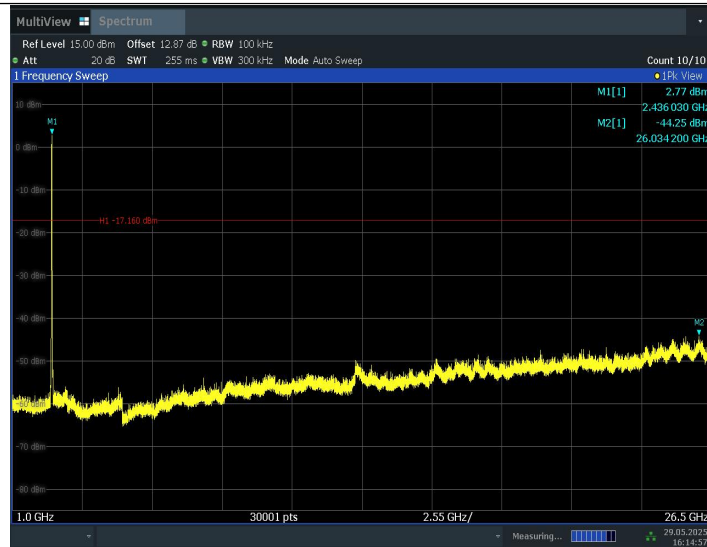


16:14:57 29.05.2025

11N20SISO_2462_0~Reference

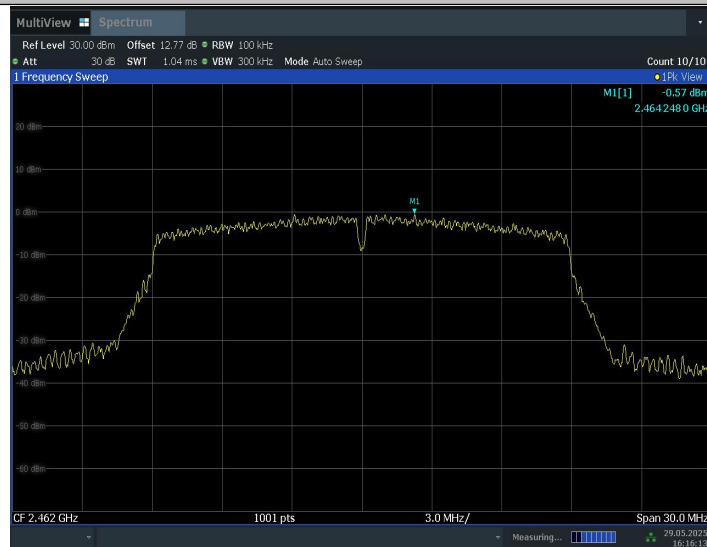


16:16:13 29.05.2025

11N20SISO_2462_30~1000

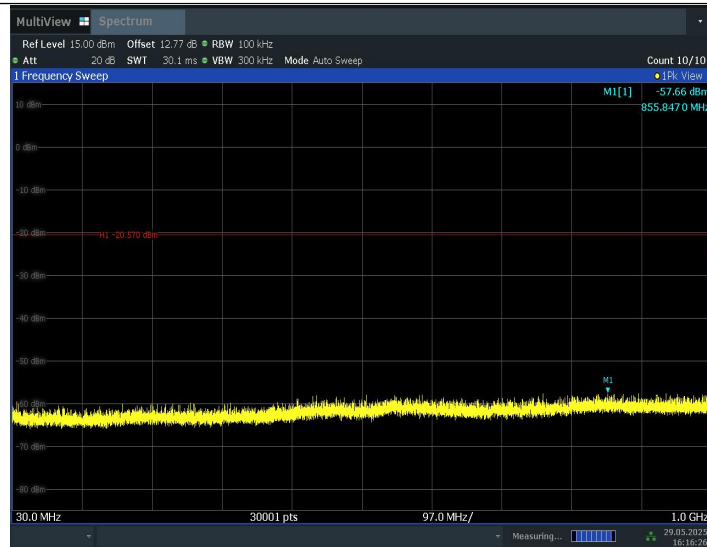

16:16:27 29.05.2025

11N20SISO_2462_1000~26500

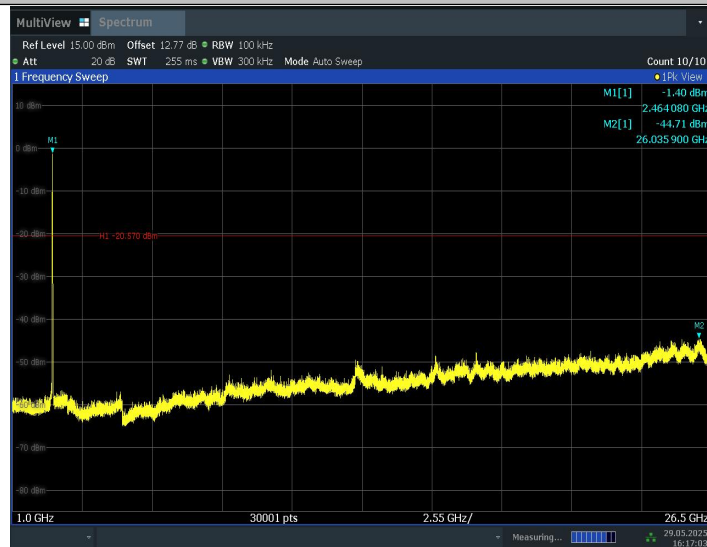

16:17:03 29.05.2025

Conclusion: Pass

A.7. Radiated Unwanted Emission

Limits

Measurement Limit

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band

Frequency (MHz)	Field strength($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength ($\mu\text{V/m}$)	Field strength (dB $\mu\text{V/m}$)	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Note: When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor.

Test setup

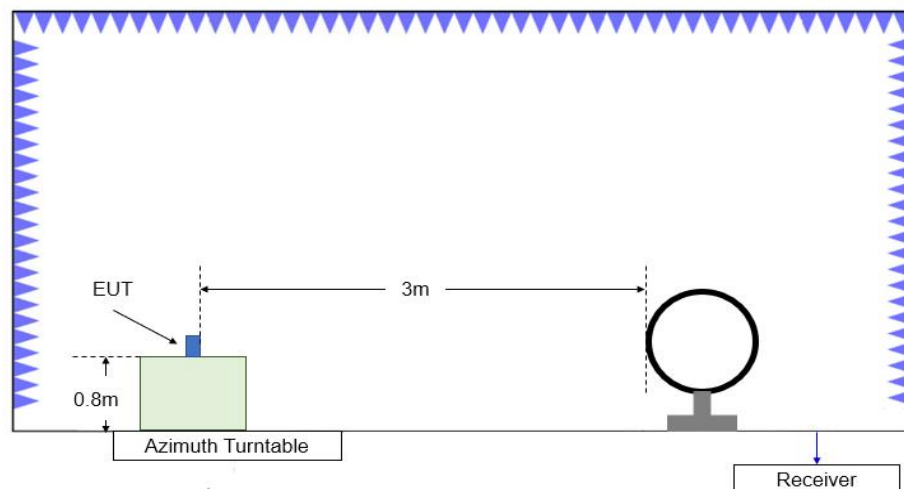


Figure A.2.1. Test Site Diagram (9kHz-30MHz)

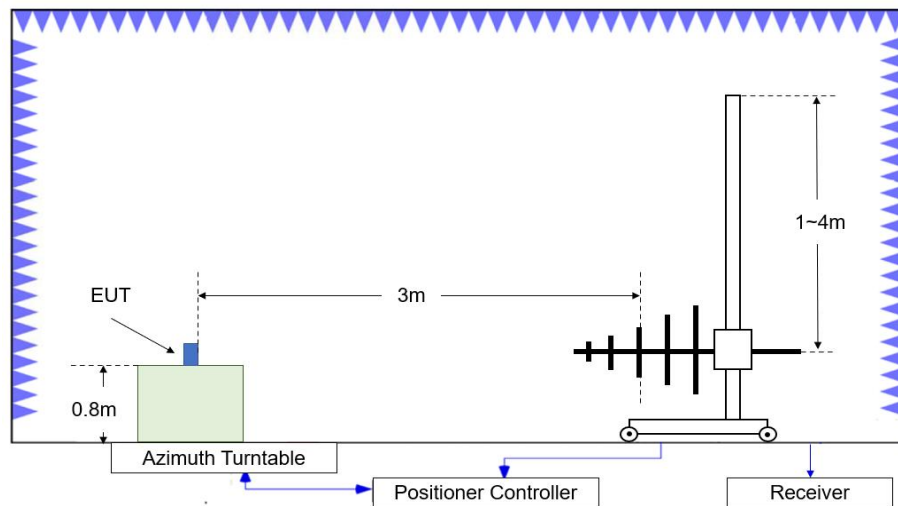


Figure A.2.2. Test Site Diagram (30MHz-1GHz)

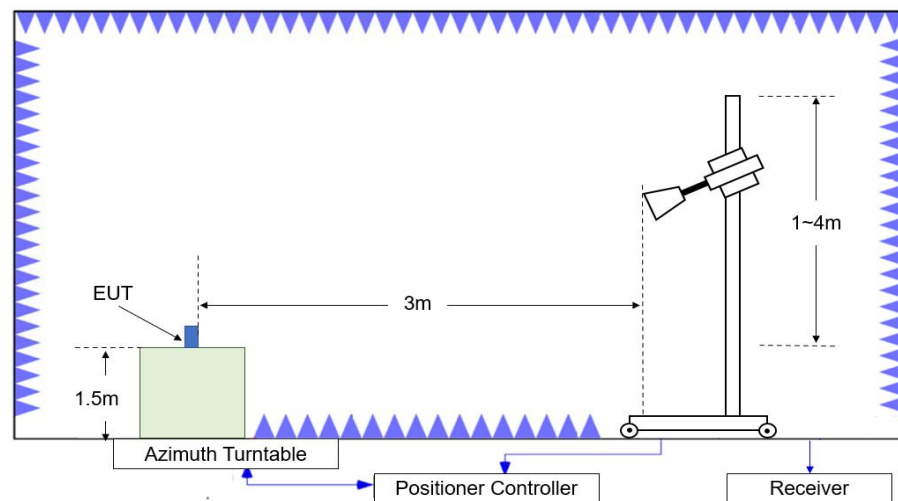


Figure A.2.3. Test Site Diagram (1GHz-40GHz)

Test Procedures

Radiated unwanted emissions from the EUT were measured according to ANSI C63.10.

Test setting

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100kHz/300kHz	5
1000-3000	1MHz/3MHz	15
3000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Sample Calculation

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= $P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + \text{Cable Loss} + \text{Antenna Factor}$

Test note

1. The EUT is operating at its maximum duty cycle and its maximum power control level.
2. Investigation has been done on all modes and modulations/data rates. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.
3. Spurious emissions for all channels were investigated and almost the same below 1GHz. According to FCC 47 CFR §15.31, emission levels are not report much lower than the limit by over 20dB
4. Measurement frequencies were performed from 9 kHz to the 10th harmonic of highest fundamental frequency.

Test Result

Peak
802.11b

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2386.650	54.09	-20.5	31.9	42.63	74.0	19.9	V
2387.200	55.21	-20.5	31.9	43.75	74.0	18.8	H
4823.500	46.70	-32.1	34.3	44.51	74.0	27.3	V
7236.000	42.10	-30.1	35.6	36.64	74.0	31.9	V
9648.000	44.33	-27.5	36.8	35.06	74.0	29.7	V
12060.000	46.60	-24.3	38.7	32.22	74.0	27.4	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2403.600	53.23	-20.5	32.0	41.71	74.0	20.8	H
2474.800	53.53	-20.5	32.2	41.81	74.0	20.5	V
4873.500	48.81	-32.1	34.3	46.65	74.0	25.2	H
7311.000	42.23	-30.3	35.8	36.76	74.0	31.8	H
9748.000	43.53	-27.7	37.1	34.09	74.0	30.5	V
12185.000	45.22	-23.6	38.7	30.07	74.0	28.8	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.500	55.21	-20.5	32.2	43.50	74.0	18.8	V
2483.800	54.47	-20.5	32.2	42.76	74.0	19.5	H
4924.000	50.75	-31.3	34.2	47.92	74.0	23.3	V
7386.000	41.64	-29.8	35.6	35.79	74.0	32.4	V
9848.000	43.05	-26.8	37.1	32.78	74.0	30.9	V
12310.000	45.74	-23.3	38.8	30.27	74.0	28.3	V

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.650	66.35	-20.5	32.0	54.88	74.0	7.7	V
2389.850	67.37	-20.5	32.0	55.90	74.0	6.6	H
4824.000	39.80	-32.1	34.3	37.62	74.0	34.2	H
7236.000	41.64	-30.1	35.6	36.19	74.0	32.4	H
9648.000	42.55	-27.5	36.8	33.27	74.0	31.5	H
12060.000	45.84	-24.3	38.7	31.46	74.0	28.2	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2371.200	52.71	-20.5	31.9	41.31	74.0	21.3	V
2488.400	53.89	-20.5	32.2	42.18	74.0	20.1	V
4872.000	44.73	-32.1	34.3	42.57	74.0	29.3	V
7311.000	42.67	-30.3	35.8	37.20	74.0	31.3	V
9748.000	44.16	-27.7	37.1	34.72	74.0	29.8	V
12185.000	46.20	-23.6	38.7	31.05	74.0	27.8	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.600	66.75	-20.5	32.2	55.04	74.0	7.3	H
2484.250	66.58	-20.5	32.2	54.87	74.0	7.4	H
4932.000	44.03	-30.7	34.1	40.60	74.0	30.0	V
7386.000	41.26	-29.8	35.6	35.42	74.0	32.7	H
9848.000	42.69	-26.8	37.1	32.42	74.0	31.3	H
12310.000	46.47	-23.3	38.8	31.00	74.0	27.5	H

802.11n-HT20

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.300	65.82	-20.5	32.0	54.36	74.0	8.2	V
2389.700	70.81	-20.5	32.0	59.34	74.0	3.2	V
4824.000	40.07	-32.1	34.3	37.89	74.0	33.9	V
7236.000	41.83	-30.1	35.6	36.37	74.0	32.2	H
9648.000	43.03	-27.5	36.8	33.75	74.0	31.0	H
12060.000	45.40	-24.3	38.7	31.01	74.0	28.6	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2380.400	52.14	-20.5	31.9	40.71	74.0	21.9	H
2486.800	53.77	-20.5	32.2	42.06	74.0	20.2	H
4870.000	44.67	-32.1	34.3	42.51	74.0	29.3	V
7311.000	42.15	-30.3	35.8	36.68	74.0	31.8	V
9748.000	43.69	-27.7	37.1	34.25	74.0	30.3	H
12185.000	46.88	-23.6	38.7	31.73	74.0	27.1	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.800	69.83	-20.5	32.2	58.12	74.0	4.2	H
2483.950	68.90	-20.5	32.2	57.19	74.0	5.1	V
4925.500	44.23	-31.2	34.1	41.27	74.0	29.8	H
7386.000	41.71	-29.8	35.6	35.87	74.0	32.3	V
9848.000	43.64	-26.8	37.1	33.36	74.0	30.4	H
12310.000	46.37	-23.3	38.8	30.90	74.0	27.6	H

Average
802.11b

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2386.000	45.40	-20.5	31.9	33.94	54.0	8.6	V
2387.200	44.90	-20.5	31.9	33.44	54.0	9.1	V
4823.500	43.95	-32.1	34.3	41.76	54.0	10.1	V
7236.000	33.26	-30.1	35.6	27.80	54.0	20.7	H
9648.000	34.21	-27.5	36.8	24.94	54.0	19.8	V
12060.000	36.19	-24.3	38.7	21.81	54.0	17.8	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2410.800	44.11	-20.5	32.0	32.56	54.0	9.9	V
2462.000	45.42	-20.5	32.2	33.71	54.0	8.6	V
4873.500	41.96	-32.1	34.3	39.79	54.0	12.0	H
7311.000	32.79	-30.3	35.8	27.32	54.0	21.2	H
9748.000	33.30	-27.7	37.1	23.85	54.0	20.7	V
12185.000	36.50	-23.6	38.7	21.35	54.0	17.5	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2487.200	44.12	-20.5	32.2	32.41	54.0	9.9	V
2510.000	44.10	-20.5	32.2	32.35	54.0	9.9	V
4924.000	44.75	-31.3	34.2	41.92	54.0	9.2	V
7386.000	32.34	-29.8	35.6	26.50	54.0	21.7	H
9848.000	32.96	-26.8	37.1	22.69	54.0	21.0	V
12310.000	36.69	-23.3	38.8	21.22	54.0	17.3	V

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.200	44.29	-20.5	32.0	32.82	54.0	9.7	V
2389.600	44.70	-20.5	32.0	33.23	54.0	9.3	V
4824.000	30.71	-32.1	34.3	28.53	54.0	23.3	V
7236.000	32.04	-30.1	35.6	26.59	54.0	22.0	H
9648.000	34.81	-27.5	36.8	25.53	54.0	19.2	V
12060.000	36.15	-24.3	38.7	21.77	54.0	17.8	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2379.600	42.21	-20.5	31.9	30.78	54.0	11.8	V
2488.400	44.27	-20.5	32.2	32.56	54.0	9.7	V
4871.000	34.07	-32.1	34.3	31.91	54.0	19.9	H
7311.000	33.08	-30.3	35.8	27.61	54.0	20.9	V
9748.000	33.96	-27.7	37.1	24.52	54.0	20.0	V
12185.000	36.84	-23.6	38.7	21.69	54.0	17.2	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.600	49.14	-20.5	32.2	37.43	54.0	4.9	V
2484.800	48.55	-20.5	32.2	36.84	54.0	5.5	V
4924.000	34.75	-31.3	34.2	31.92	54.0	19.2	H
7386.000	32.20	-29.8	35.6	26.36	54.0	21.8	V
9848.000	33.59	-26.8	37.1	23.32	54.0	20.4	H
12310.000	36.93	-23.3	38.8	21.46	54.0	17.1	H

802.11n-HT20
Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.600	48.69	-20.5	32.0	37.22	54.0	5.3	V
2390.000	49.33	-20.5	32.0	37.86	54.0	4.7	V
4824.500	32.08	-32.1	34.3	29.91	54.0	21.9	V
7236.000	32.01	-30.1	35.6	26.55	54.0	22.0	V
9648.000	34.73	-27.5	36.8	25.45	54.0	19.3	V
12060.000	35.67	-24.3	38.7	21.29	54.0	18.3	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2386.400	44.38	-20.5	31.9	32.92	54.0	9.6	V
2484.400	44.64	-20.5	32.2	32.93	54.0	9.4	V
4874.000	34.05	-32.1	34.3	31.88	54.0	20.0	H
7311.000	33.08	-30.3	35.8	27.61	54.0	20.9	H
9748.000	34.01	-27.7	37.1	24.57	54.0	20.0	V
12185.000	37.00	-23.6	38.7	21.85	54.0	17.0	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2485.600	45.02	-20.5	32.2	33.31	54.0	9.0	V
2488.800	44.76	-20.5	32.2	33.04	54.0	9.2	V
4925.000	34.55	-31.2	34.1	31.63	54.0	19.5	H
7386.000	32.89	-29.8	35.6	27.05	54.0	21.1	V
9848.000	34.07	-26.8	37.1	23.79	54.0	19.9	H
12310.000	37.27	-23.3	38.8	21.80	54.0	16.7	V

Conclusion: Pass

Note: the spurious emission above 18G is noise only and did not show on the report.

Band edge compliance

802.11b mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.31GHz~2.43GHz---L	Fig.1	P
	11	2.45GHz~2.50GHz---H	Fig.2	P

802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	1	2.31GHz~2.43GHz---L	Fig.3	P
	2	2.31GHz~2.43GHz---L	Fig.4	P
	3	2.31GHz~2.43GHz---L	Fig.5	P
	9	2.45GHz~2.50GHz---H	Fig.6	P
	10	2.45GHz~2.50GHz---H	Fig.7	P
	11	2.45GHz~2.50GHz---H	Fig.8	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	1	2.31GHz~2.43GHz---L	Fig.9	P
	2	2.31GHz~2.43GHz---L	Fig.10	P
	3	2.31GHz~2.43GHz---L	Fig.11	P
	9	2.45GHz~2.50GHz---H	Fig.12	P
	10	2.45GHz~2.50GHz---H	Fig.13	P
	11	2.45GHz~2.50GHz---H	Fig.14	P

Test graphs as below:

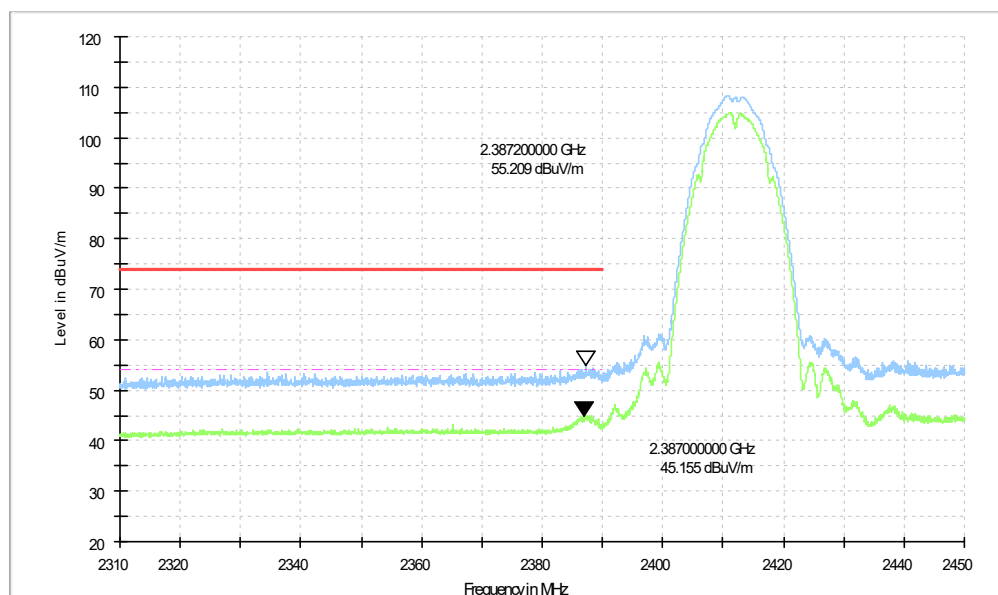


Fig.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.31 GHz – 2.43GHz

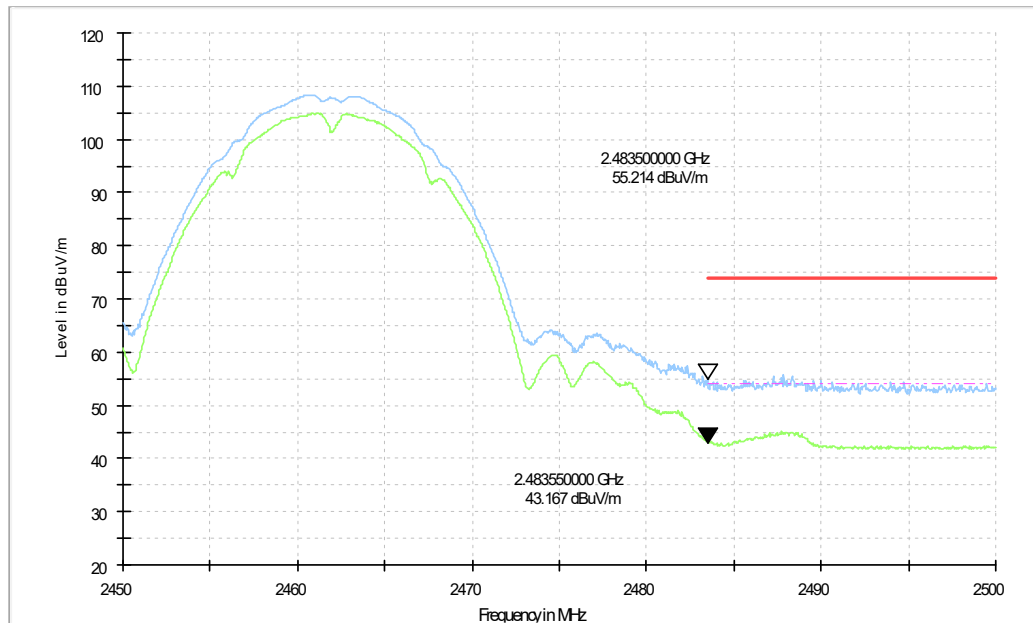


Fig.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

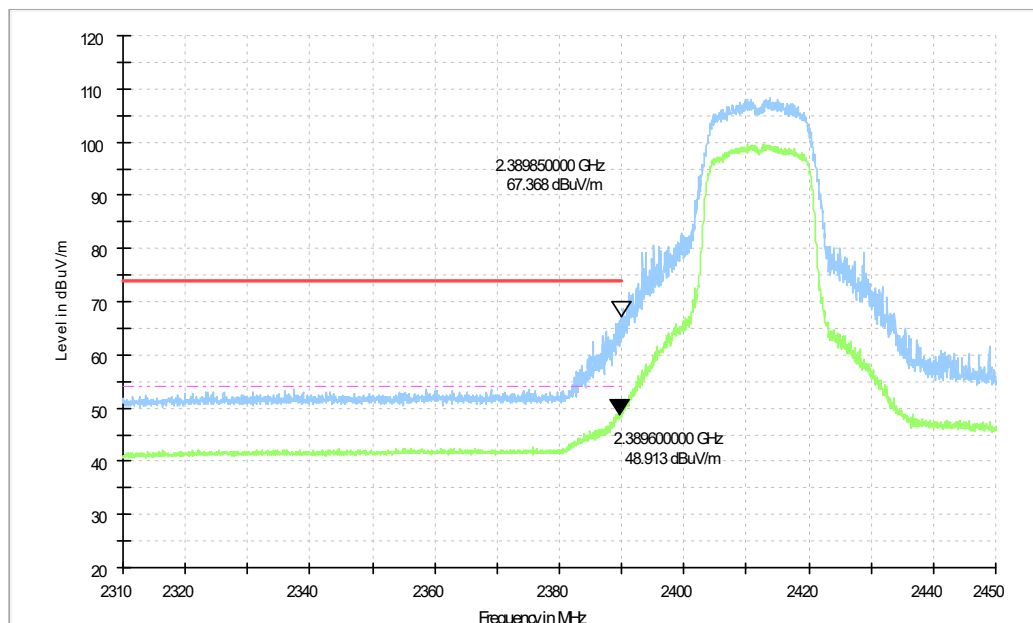


Fig.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.31 GHz - 2.43GHz

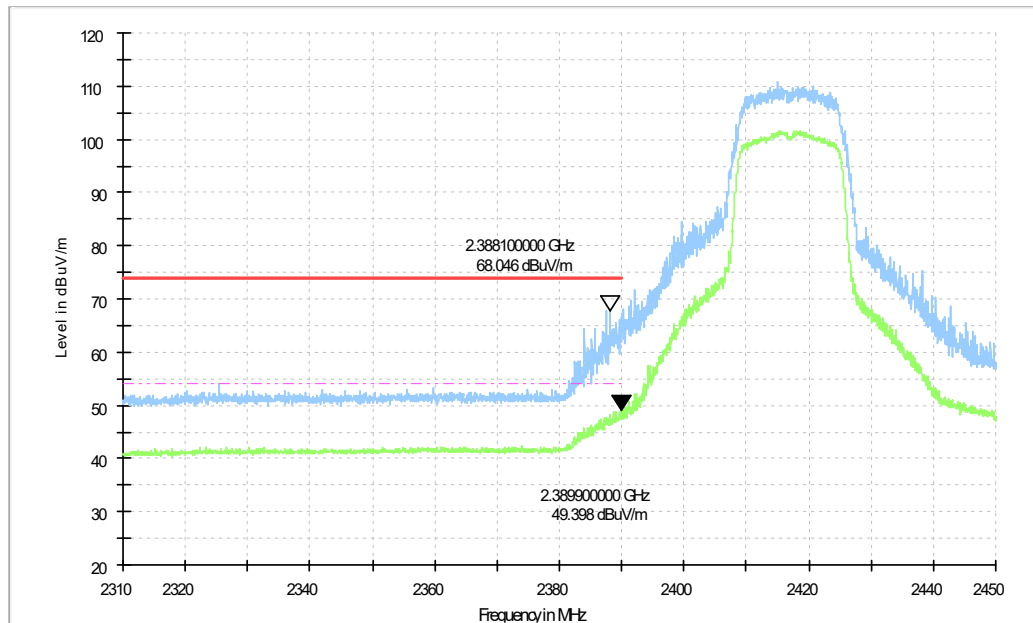


Fig.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch2, 2.31 GHz - 2.43GHz

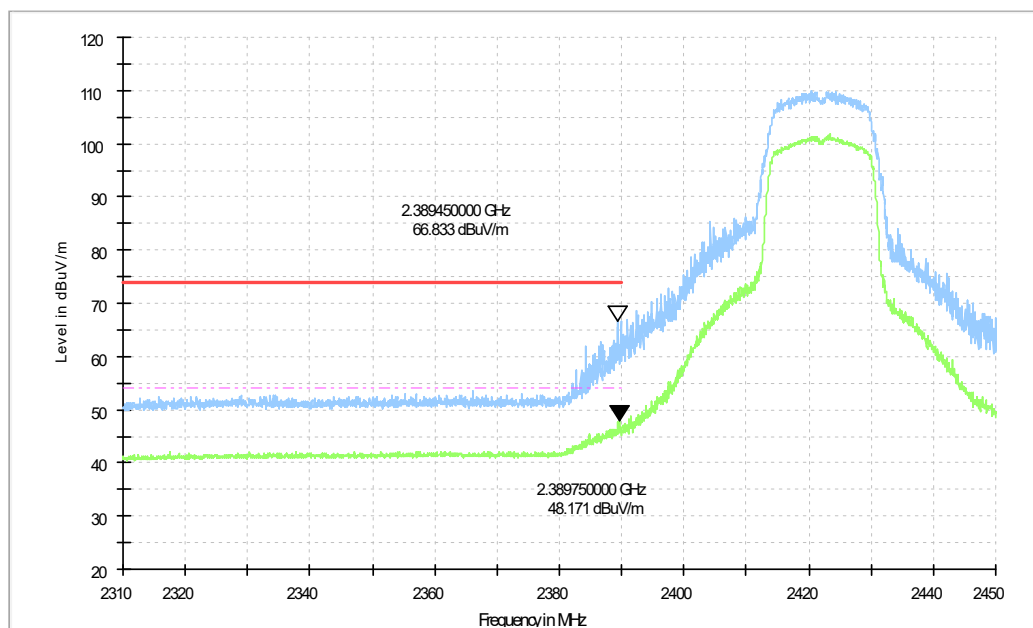


Fig.5 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch3, 2.31 GHz - 2.43GHz

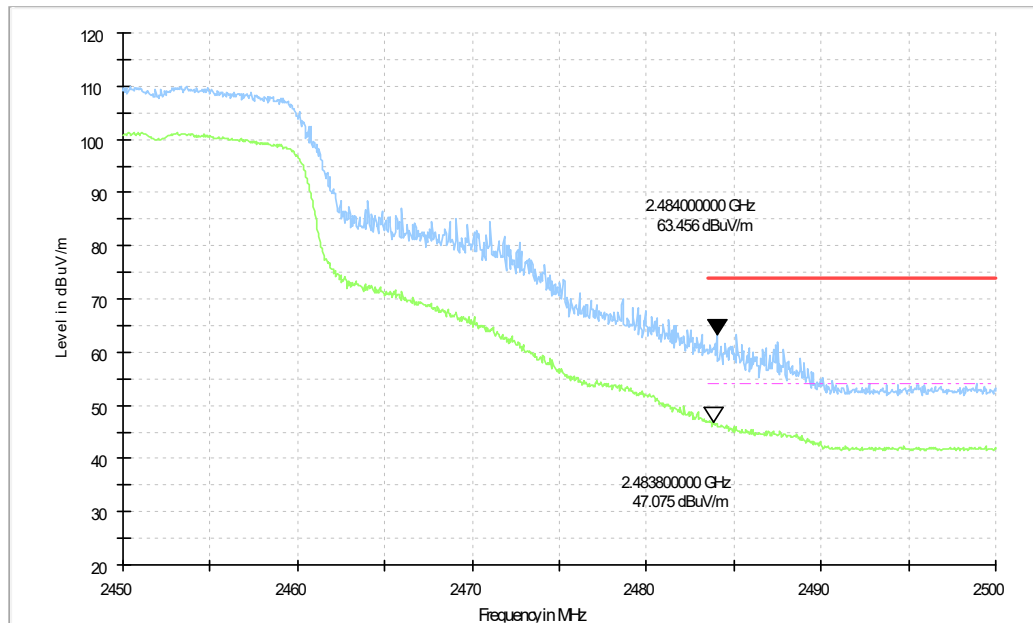


Fig.6 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch9, 2.45 GHz - 2.50GHz

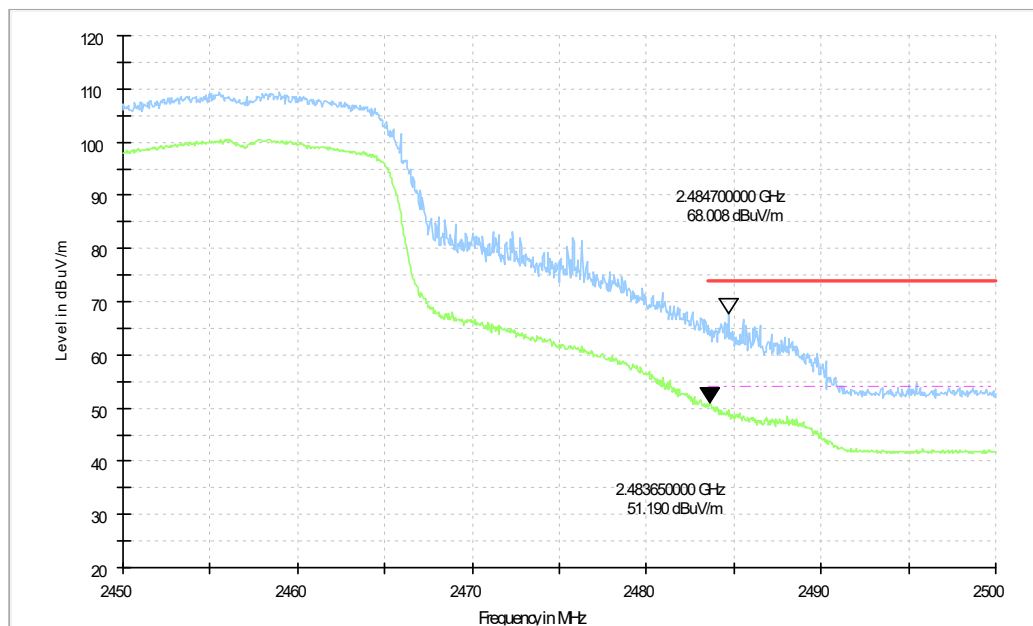


Fig.7 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch10, 2.45 GHz - 2.50GHz

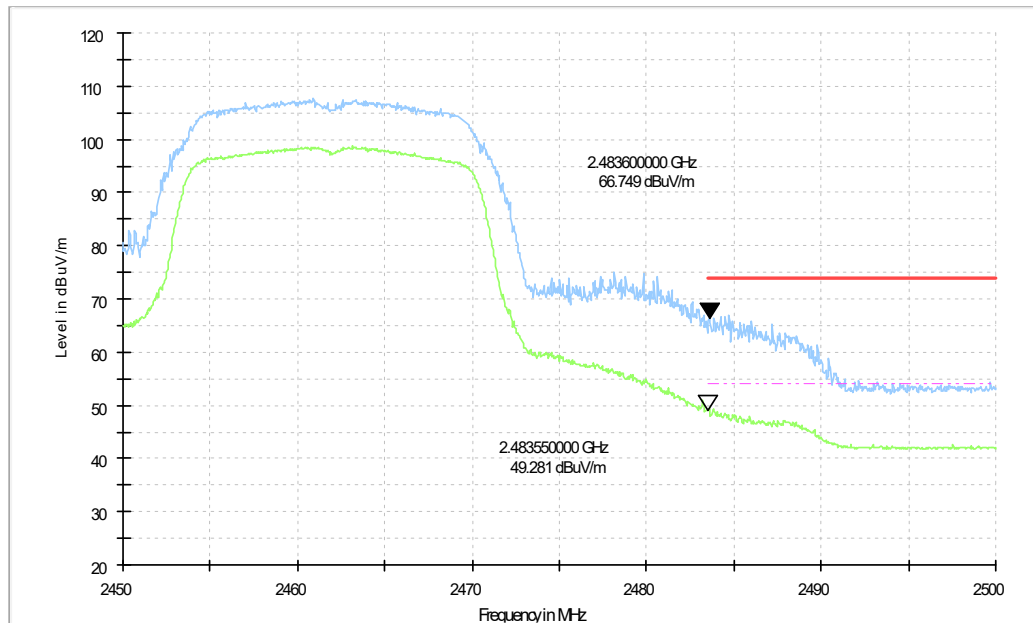


Fig.8 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

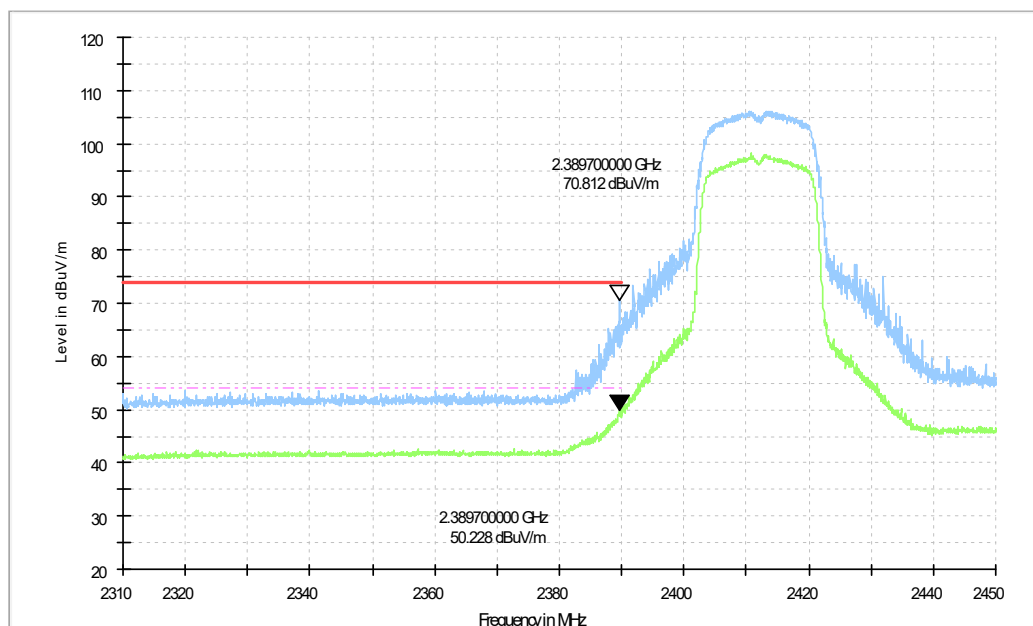


Fig.9 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.31 GHz - 2.43GHz

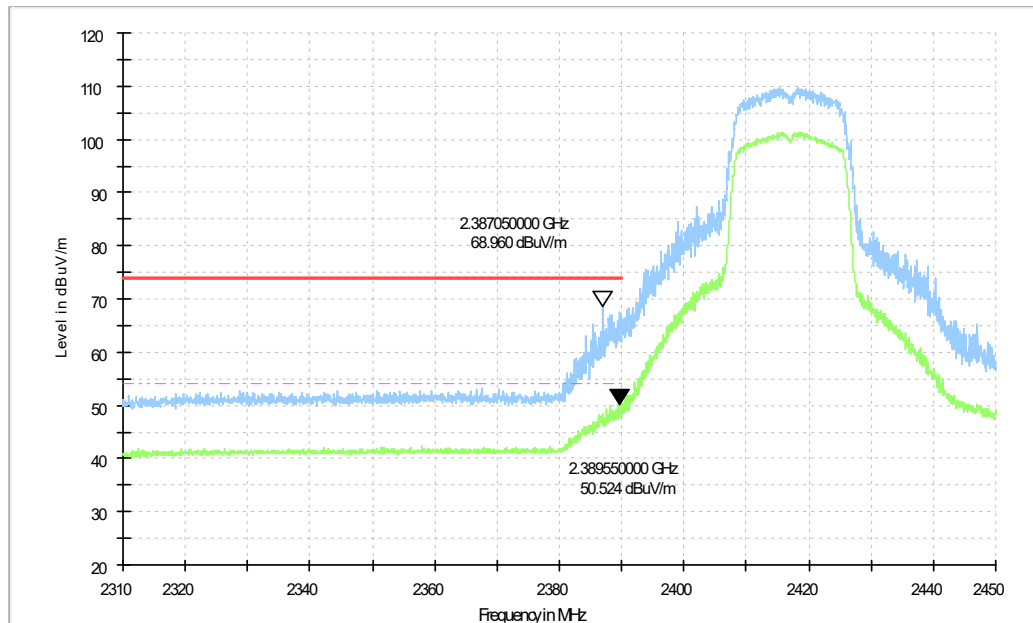


Fig.10 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch2, 2.31 GHz - 2.43GHz

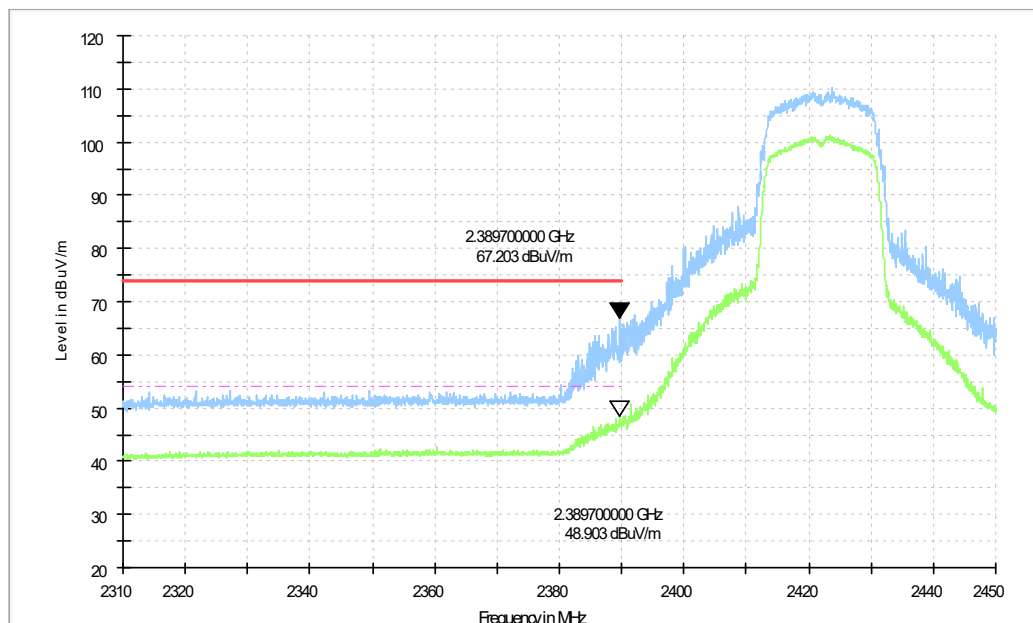


Fig.11 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch3, 2.31 GHz - 2.43GHz

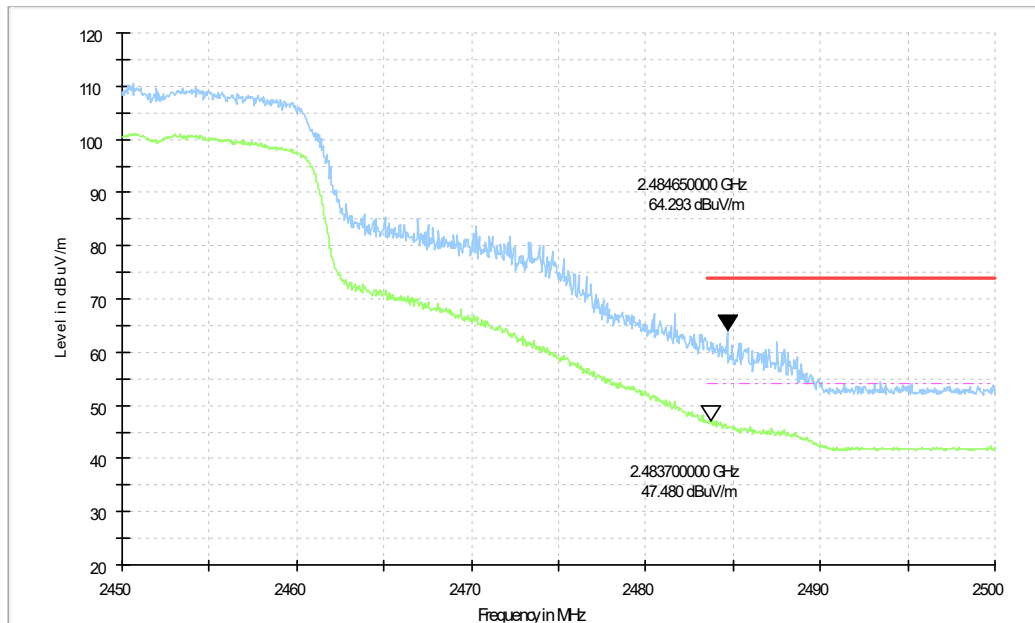


Fig.12 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch9, 2.45 GHz - 2.50GHz

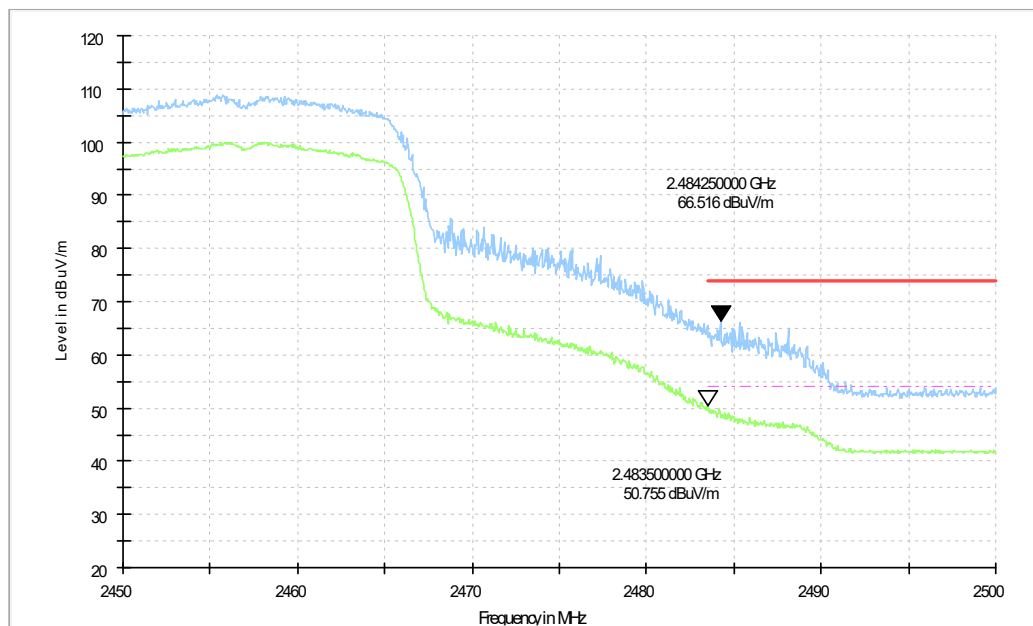


Fig.13 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch10, 2.45 GHz - 2.50GHz

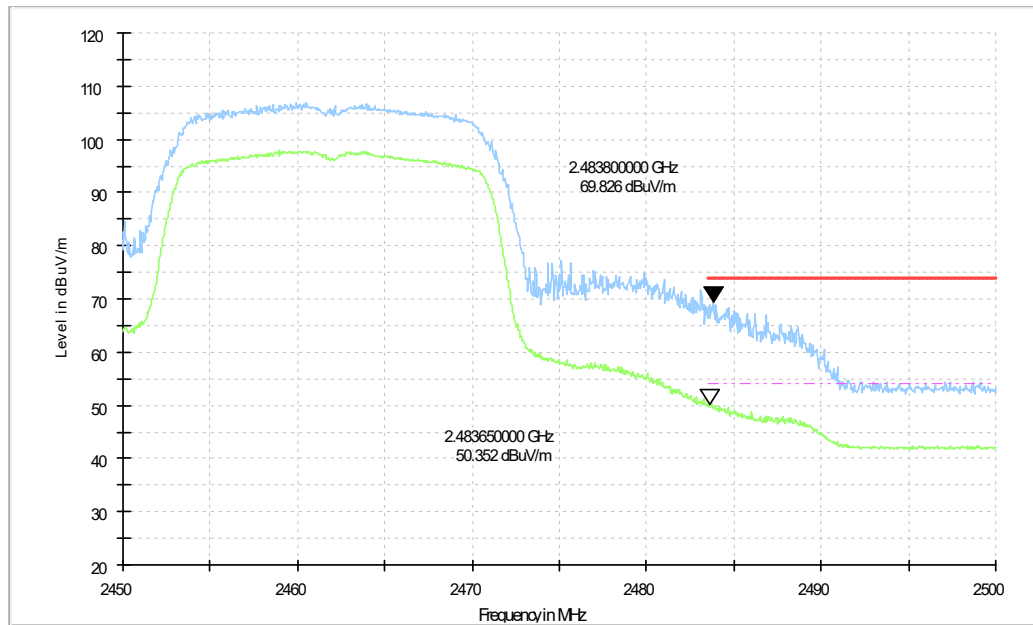


Fig.14 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

A.8. AC Power-line Conducted Emission

Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

Method of Measurement:

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver:
Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Test setup

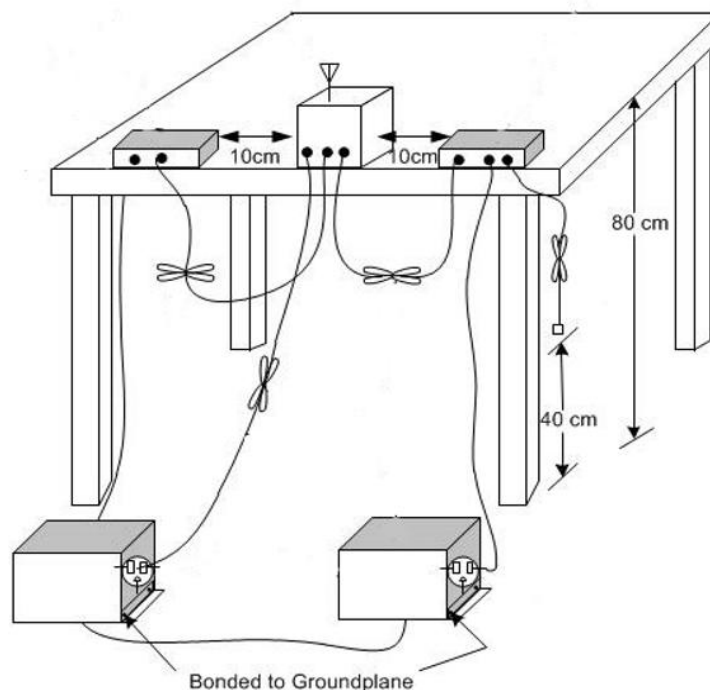

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.8.1	Fig.A.8.2	P
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.8.1	Fig.A.8.2	P
0.5 to 5	46			
5 to 30	50			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

Conclusion: Pass
Test graphs as below:

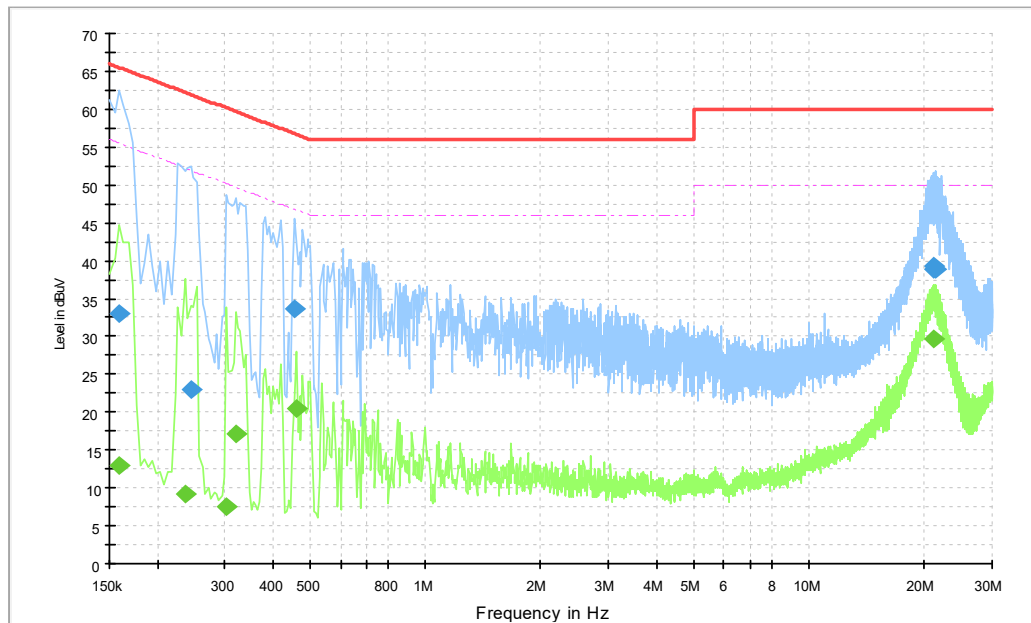


Fig.A.8.1 AC Powerline Conducted Emission-802.11b

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.159000	33.0	2000.0	9.000	L1	20.1	32.5	65.5
0.244500	23.1	2000.0	9.000	L1	20.0	38.9	61.9
0.456000	33.6	2000.0	9.000	L1	20.1	23.2	56.8
21.102000	38.9	2000.0	9.000	L1	20.1	21.1	60.0
21.174000	39.2	2000.0	9.000	L1	20.1	20.8	60.0
21.336000	38.9	2000.0	9.000	L1	20.1	21.1	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.159000	13.0	2000.0	9.000	L1	20.1	42.5	55.5
0.235500	9.1	2000.0	9.000	N	20.0	43.1	52.3
0.303000	7.6	2000.0	9.000	L1	20.0	42.5	50.2
0.321000	17.1	2000.0	9.000	L1	20.0	32.6	49.7
0.460500	20.4	2000.0	9.000	L1	20.1	26.3	46.7
21.106500	29.7	2000.0	9.000	L1	20.1	20.3	50.0

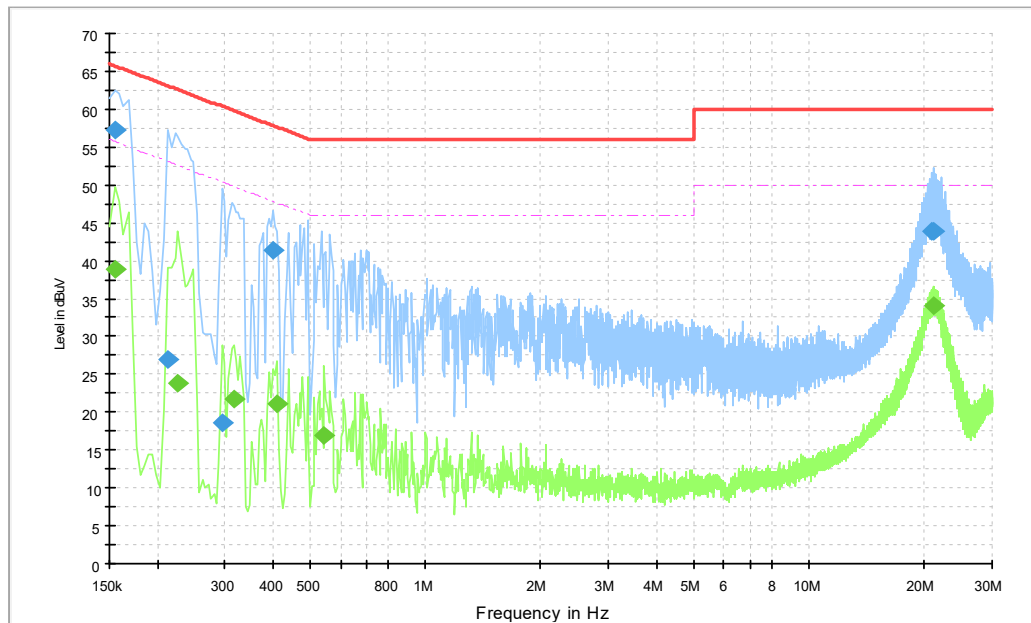


Fig.A.8.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154500	57.2	2000.0	9.000	N	20.2	8.6	65.8
0.213000	26.9	2000.0	9.000	L1	20.0	36.2	63.1
0.294000	18.7	2000.0	9.000	L1	20.0	41.8	60.4
0.402000	41.4	2000.0	9.000	N	20.1	16.4	57.8
20.854500	43.9	2000.0	9.000	L1	20.1	16.1	60.0
21.169500	43.9	2000.0	9.000	L1	20.1	16.1	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154500	39.0	2000.0	9.000	N	20.2	16.8	55.8
0.226500	23.8	2000.0	9.000	L1	20.0	28.8	52.6
0.316500	21.7	2000.0	9.000	L1	20.0	28.1	49.8
0.411000	21.2	2000.0	9.000	N	20.1	26.5	47.6
0.546000	17.0	2000.0	9.000	L1	20.1	29.0	46.0
21.052500	34.1	2000.0	9.000	L1	20.1	15.9	50.0

A.9. Antenna Requirement

The antenna of the device is permanently attached. There are no provisions for connection to an external antenna.

The unit complies with the requirement of FCC Part 15.203.

ANNEX B: EUT parameters

Disclaimer: The antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

TELECOMMUNICATION TECHNOLOGY LABS, CAICT

Beijing, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 23rd day of July 2024.



Mr. Trace McInturf, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 7049.01
Valid to July 31, 2026

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*****END OF REPORT*****