



FCC PART 15E TEST REPORT No.25T04Z200103-006

for

Samsung Electronics Co., Ltd.

Multi-band GSM/WCDMA/LTE Mobile Phone with Bluetooth, WLAN

SM-A075M/DS, SM-A075M

FCC ID:ZCASMA075M

with

Hardware Version: REV1.0

Software Version: A075M.001

Issued Date: 2025-06-09

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
25T04Z200103-006	Rev.0	1st edition	2025-06-09

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT	5
1.4. PROJECT DATE	5
1.5. SIGNATURE	5
2. CLIENT INFORMATION	6
2.1 APPLICANT INFORMATION	6
2.1. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
3.4. GENERAL DESCRIPTION	7
3.5. INTERPRETATION OF THE TEST ENVIRONMENT	8
4. REFERENCE DOCUMENTS	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING	8
5. LABORATORY ENVIRONMENT	8
6. TEST RESULTS	9
6.1. SUMMARY OF TEST RESULTS	9
6.2. STATEMENTS	9
6.3. TEST CONDITIONS	9
7. TEST FACILITIES UTILIZED	10
8. MEASUREMENT UNCERTAINTY	11
8.1 TRANSMITTER OUTPUT POWER	11
8.2 PEAK POWER SPECTRAL DENSITY	11
8.3 26dB EMISSION BANDWIDTH	11
8.4 BAND EDGES COMPLIANCE	11
8.5 SPURIOUS EMISSIONS	11
8.6 RADIATED UNWANTED EMISSION	11
8.7 AC POWER-LINE CONDUCTED EMISSION	11
ANNEX A: DETAILED TEST RESULTS	12
A.1. MEASUREMENT METHOD	12
A.2. MAXIMUM OUTPUT POWER	13
A.2.1 ANTENNA GAIN	13

A.2.2 MAXIMUM OUTPUT POWER-CONDUCTED	13
A.3. PEAK POWER SPECTRAL DENSITY (CONDUCTED)	17
A.4. 26dB EMISSION BANDWIDTH (CONDUCTED)	19
A.5. RADIATED UNWANTED EMISSION	37
A.5.1 LIMITS	37
A.5.2 TEST SETUP	38
A.5.3 TEST PROCEDURES	39
A.5.4 CALCULATION	39
A.6. AC POWERLINE CONDUCTED EMISSION (150kHz- 30MHz)	75
A.6.1 SUMMARY	75
A.6.2 METHOD OF MEASUREMENT	75
A.6.3 TEST CONDITION	75
A.6.4 TEST SETUP	76
A.7. 99% OCCUPIED BANDWIDTH	79
A.8. ANTENNA REQUIREMENT	84
A.9. POWER CONTROL	84
ANNEX B: EUT PARAMETERS	84
ANNEX C: ACCREDITATION CERTIFICATE	85

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

Conducted testing Location:CTTL(Gaolizhang Road)

Address: Cuihu Cloud Center, No.1, Gaolizhang Road, Wenquan,
Haidian District, Beijing, China

Radiated testing Location: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, P. R. China 100176

1.3. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.4. Project date

Testing Start Date: 2025-05-07

Testing End Date: 2025-06-09

1.5. Signature



Yao Xingyu

(Prepared this test report)



Zheng Wei

(Reviewed this test report)



Pang Shuai

(Approved this test report)

2. Client Information

2.1 Applicant Information

Company Name: Samsung Electronics Co., Ltd.
Address: 19 Chapin Rd., Building D Pine Brook, NJ 07058
Contact: Jenni Chun
Email: j1.chun@samsung.com
Telephone: +1-201-937-4203
Fax: /

2.1. Manufacturer Information

Company Name: Samsung Electronics Co., Ltd.
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Republic of Korea
Contact: Kobe Cho
Email: ggobi.cho@samsung.com
Telephone: +82 - 10 - 2722 - 4159
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Multi-band GSM/WCDMA/LTE Mobile Phone with Bluetooth, WLAN
Model name	SM-A075M/DS, SM-A075M
FCC ID	ZCASMA075M
WLAN Frequency Band	ISM Bands: -5150MHz~5250MHz -5250MHz~5350MHz -5470MHz~5725MHz
Type of modulation	OFDM
Antenna	Integral Antenna
Normal Voltage	3.88V
Extreme High Voltage	4.4V
Extreme Low Voltage	3.45V

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
UT11a	2504200103UT11a	REV1.0	A075M.001	2025-05-07
UT02a	2504200103UT02a	REV1.0	A075M.001	2025-05-07

*EUT ID: is used to identify the test sample in the lab internally.

UT11a is used for Conduction test, UT02a is used for Radiation test.

3.3. Internal Identification of AE used during the test

AE ID*	Name	Model	Manufacturer
AE1	Battery	HQ-7160SD	SCUD(Fujian) Electronics Co., Ltd.
AE2*	Adapter	EP-TA800	SOLUM
AE3-1	Date Cable C-C	EP-DN980BWE	Cresyn
AE3-2	Date Cable C-C	EP-DN980BWE	Luxshare

*AE ID: is used to identify the test sample in the lab internally.

*AE2 is not the AE for EUT, provided by the lab for relevant tests.

3.4. General Description

The Equipment under Test (EUT) is a model of Multi-band GSM/WCDMA/LTE Mobile Phone with Bluetooth, WLAN with integrated antenna and inbuilt battery.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor $k=2$.

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C and E:	
	15.205 Restricted bands of operation;	
	15.207 Conducted limits;	2021
	15.209 Radiated emission limits, general requirements;	
	15.403 Definitions;	
	15.407 General technical requirements.	
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from	
	Low-Voltage Electrical and Electronic Equipment in the	2013
	Range of 9 kHz to 40 GHz	
UNII: KDB 789033	General U-NII Test Procedures New Rules v02r01	2017-12
D02		

Note:UNII: KDB 789033 D02 is not in the scope of ISO/IEC 17025 accreditation by A2LA.

5. Laboratory Environment

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. Test Results

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C/E	Sub-clause of IC	Verdict
Maximum Output Power	15.407	/	P
Peak Power Spectral Density	15.407	/	P
26dB Emission Bandwidth	15.403	/	P
Radiated Unwanted Emission	15.407, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.207	/	P
99% Occupied bandwidth	/	/	P
Transmit Power Control	15.407	/	NA

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.88V
Humidity	44%

7. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSW67	104051	Rohde & Schwarz	1 year	2026-06-09
2	Attenuator	10dB/2W	/	Rosenberger	/	/
3	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	R&S	1 year	2025-06-06
2	Test Receiver	ESW44	103015	R&S	1 year	2026-01-15
3	Test Receiver	FSV40	101047	R&S	1 year	2025-06-25
4	Loop Antenna	HFH2-Z2	829324/007	R&S	2 years	2026-01-04
5	EMI Antenna	VULB9163	235	Schwarzbeck	1 year	2025-08-27
6	EMI Antenna	3117	00058888	ETS-Lindgren	1 year	2025-09-18
7	EMI Antenna	LB-180400 -25-C-KF	J211060826	A-INFO	1 year	2025-08-29

AC Power Line Conducted Emission

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	LISN	ENV216	101459	R&S	1 year	2026-05-07
2	Test Receiver	ESCI7	100948	R&S	1 year	2025-12-10

Note: The Test Receiver with series number of 100376 did not exceed the CAL.DUE.DATE when used.

8. Measurement Uncertainty

8.1 Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

8.2 Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

8.3 26dB Emission Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4 Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

8.5 Spurious Emissions

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

8.6 Radiated Unwanted Emission

Frequency Range	Uncertainty(dB) (k=2)
9kHz-30MHz	3.96
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.73
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.62
$18\text{GHz} \leq f \leq 40\text{GHz}$	3.52

8.7 AC Power-line Conducted Emission


Measurement Uncertainty: 3.10dB, k=2

ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

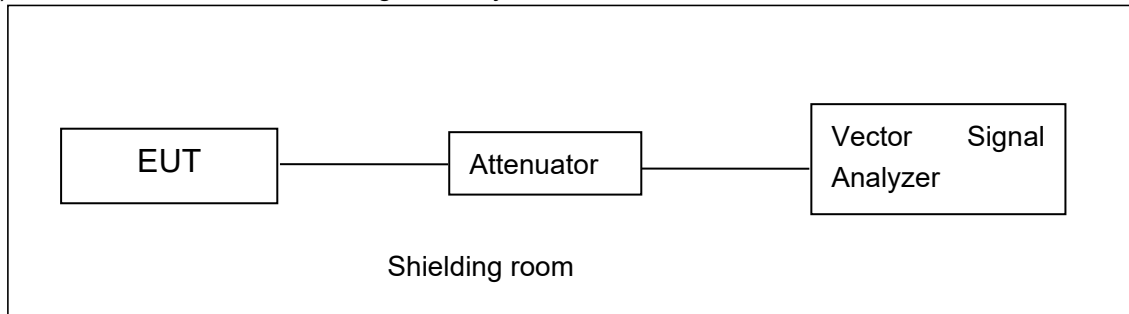

A.1.2. Radiated Emission Measurements

Measurement performed according to Clause 6.4, 6.5, 6.6 in ANSI C63.10 and II.G.4, II.G.5, II.G.6 in KDB 789033.

The radiated emission test is performed in semi-anechoic chamber. The EUT was placed on a non-conductive table with 80cm above the ground plane for measurement below 1GHz and 1.5m above the ground plane for measurement above 1GHz. The measurement antenna was placed at a distance of 3 meters from the EUT. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated from 0° to 360° and the measurement antenna is moved from 1m to 4m to get the maximization result. The maximization process was repeated with the EUT positioned in each of its three orthogonal orientations

A.2. Maximum output Power

Measurement Limit and Method:

Standard	Frequency (MHz)	Limit (dBm)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	24dBm
	5250MHz~5350MHz	24dBm or 11+10logB
	5470MHz~5725MHz	24dBm or 11+10logB

Limit use the less value, and B is the 26dB bandwidth.

The measurement method SA-2 is made according to KDB 789033

A.2.1 Antenna Gain

Antenna gain is -0.7dBi and the value is supplied by the applicant or manufacturer.

A.2.2 Maximum output Power-Conducted

EUT ID: UT11a

Measurement Results:

802.11a mode

Mode	Frequency	Test Result (dBm)							
		Data Rate (Mbps)							
		6	9	12	18	24	36	48	54
802.11a	5180MHz	12.76	12.72	12.72	12.67	12.66	12.67	12.62	12.68
	5200MHz	13.13	/	/	/	/	/	/	/
	5240MHz	13.15	/	/	/	/	/	/	/
	5260MHz	12.95	/	/	/	/	/	/	/
	5280MHz	12.56	/	/	/	/	/	/	/
	5320MHz	12.48	/	/	/	/	/	/	/
	5500MHz	13.21	/	/	/	/	/	/	/
	5580MHz	12.46	/	/	/	/	/	/	/
	5700MHz	12.71	/	/	/	/	/	/	/
	5720MHz	12.46	/	/	/	/	/	/	/

The data rate 6Mbps is selected as worst condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Frequency	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT20)	5180MHz	12.58	12.15	12.53	12.52	12.03	12.01	12.00	12.02
	5200MHz	12.89	/	/	/	/	/	/	/
	5240MHz	13.04	/	/	/	/	/	/	/
	5260MHz	12.79	/	/	/	/	/	/	/
	5280MHz	12.47	/	/	/	/	/	/	/
	5320MHz	12.83	/	/	/	/	/	/	/

	5500MHz	12.68	/	/	/	/	/	/	/
	5580MHz	12.10	/	/	/	/	/	/	/
	5700MHz	12.63	/	/	/	/	/	/	/
	5720MHz	12.33	/	/	/	/	/	/	/

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11ac-VHT20 mode

Mode	Frequency	Test Result (dBm)								
		Data Rate								
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
802.11ac (VHT20)	5180MHz	13.71	13.53	13.59	13.56	13.59	13.46	13.45	13.44	13.43
	5200MHz	13.51	/	/	/	/	/	/	/	/
	5240MHz	13.64	/	/	/	/	/	/	/	/
	5260MHz	13.70	/	/	/	/	/	/	/	/
	5280MHz	13.36	/	/	/	/	/	/	/	/
	5320MHz	13.30	/	/	/	/	/	/	/	/
	5500MHz	13.55	/	/	/	/	/	/	/	/
	5580MHz	12.79	/	/	/	/	/	/	/	/
	5700MHz	13.06	/	/	/	/	/	/	/	/
	5720MHz	13.12	/	/	/	/	/	/	/	/

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Frequency	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT40)	5190MHz	12.91	12.81	12.75	12.73	12.63	12.65	12.43	12.42
	5230MHz	12.73	/	/	/	/	/	/	/
	5270MHz	12.43	/	/	/	/	/	/	/
	5310MHz	12.39	/	/	/	/	/	/	/
	5510MHz	12.60	/	/	/	/	/	/	/
	5550MHz	12.41	/	/	/	/	/	/	/
	5670MHz	12.74	/	/	/	/	/	/	/
	5710MHz	12.46	/	/	/	/	/	/	/

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11ac-VHT40 mode

Mode	Frequency	Test Result (dBm)									
		Data Rate									
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
802.11ac (VHT40)	5190MHz	13.29	13.25	13.20	13.21	13.13	13.07	13.13	12.99	12.98	13.03
	5230MHz	13.10	/	/	/	/	/	/	/	/	/
	5270MHz	13.31	/	/	/	/	/	/	/	/	/
	5310MHz	12.83	/	/	/	/	/	/	/	/	/
	5510MHz	13.14	/	/	/	/	/	/	/	/	/
	5550MHz	13.34	/	/	/	/	/	/	/	/	/
	5670MHz	12.77	/	/	/	/	/	/	/	/	/
	5710MHz	13.03	/	/	/	/	/	/	/	/	/


The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11ac-VHT80 mode

Mode	Frequency	Test Result (dBm)									
		Data Rate									
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
802.11ac (VHT80)	5210MHz	12.67	12.63	12.61	12.56	12.38	12.34	12.16	12.11	12.28	12.26
	5290MHz	12.21	/	/	/	/	/	/	/	/	/
	5530MHz	12.56	/	/	/	/	/	/	/	/	/
	5610MHz	12.04	/	/	/	/	/	/	/	/	/
	5690MHz	12.71	/	/	/	/	/	/	/	/	/

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

The duty cycle of all mode are 100%

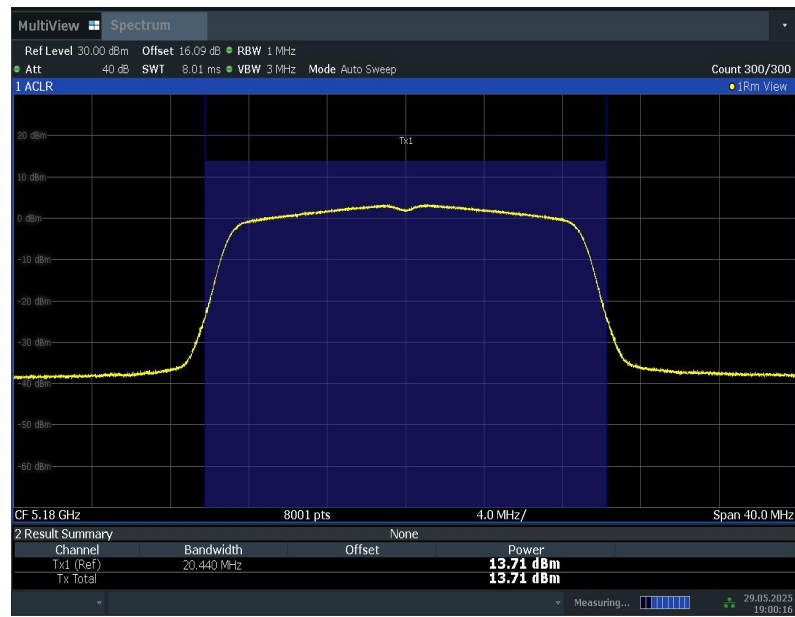

19:00:17 29.05.2025

Maximum output Power: 11ac20 CH36

Conclusion: PASS

A.3. Peak Power Spectral Density (conducted)

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	11
	5250MHz~5350MHz	11
	5470MHz~5725MHz	11

The output power measurement method Section F is made according to KDB 789033

EUT ID: UT11a

Measurement Results:

TestMode	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	5180	2.46	≤11.00	PASS
	5200	2.89	≤11.00	PASS
	5240	2.89	≤11.00	PASS
	5260	2.78	≤11.00	PASS
	5280	2.37	≤11.00	PASS
	5320	2.14	≤11.00	PASS
	5500	2.94	≤11.00	PASS
	5580	2.19	≤11.00	PASS
	5700	2.47	≤11.00	PASS
	5720	2.23	≤11.00	PASS
11AC20SISO	5180	3.29	≤11.00	PASS
	5200	3.05	≤11.00	PASS
	5240	3.23	≤11.00	PASS
	5260	3.42	≤11.00	PASS
	5280	2.96	≤11.00	PASS
	5320	2.84	≤11.00	PASS
	5500	3.17	≤11.00	PASS
	5580	2.23	≤11.00	PASS
	5700	2.79	≤11.00	PASS
	5720	3.11	≤11.00	PASS
11AC40SISO	5190	-0.01	≤11.00	PASS
	5230	-0.17	≤11.00	PASS
	5270	-0.04	≤11.00	PASS
	5310	-0.46	≤11.00	PASS
	5510	-0.12	≤11.00	PASS
	5550	0.18	≤11.00	PASS
	5670	-0.54	≤11.00	PASS
	5710	-0.02	≤11.00	PASS
11AC80SISO	5210	-3.97	≤11.00	PASS
	5290	-4.58	≤11.00	PASS

	5530	-3.90	≤ 11.00	PASS
	5610	-4.28	≤ 11.00	PASS
	5690	-3.67	≤ 11.00	PASS



Peak Power Spectral Density:11ac20 CH52

Conclusion: PASS

A.4. 26dB Emission Bandwidth (conducted)

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.403 (i)	/

The measurement is made according to KDB 789033

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------


EUT ID: UT11a

Measurement Result:

TestMode	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	5180	20.00	5170.00	5190.00	---	---
	5200	19.96	5190.00	5209.96	---	---
	5240	19.96	5230.00	5249.96	---	---
	5260	20.16	5250.00	5270.16	---	---
	5280	20.04	5269.96	5290.00	---	---
	5320	20.00	5310.00	5330.00	---	---
	5500	20.16	5489.84	5510.00	---	---
	5580	20.04	5569.96	5590.00	---	---
	5700	20.04	5690.00	5710.04	---	---
	5720	20.24	5709.80	5730.04	---	---
11AC20SISO	5180	20.44	5169.80	5190.24	---	---
	5200	20.28	5189.88	5210.16	---	---
	5240	20.48	5229.80	5250.28	---	---
	5260	20.52	5249.72	5270.24	---	---
	5280	20.52	5269.76	5290.28	---	---
	5320	20.24	5309.84	5330.08	---	---
	5500	20.32	5489.84	5510.16	---	---
	5580	20.40	5569.76	5590.16	---	---
	5700	20.40	5689.84	5710.24	---	---
	5720	20.32	5709.84	5730.16	---	---
11AC40SISO	5190	40.88	5169.60	5210.48	---	---
	5230	41.28	5209.36	5250.64	---	---
	5270	41.12	5249.60	5290.72	---	---
	5310	41.04	5289.52	5330.56	---	---
	5510	41.12	5489.28	5530.40	---	---
	5550	41.04	5529.52	5570.56	---	---
	5670	41.04	5649.60	5690.64	---	---
	5710	40.88	5689.68	5730.56	---	---
11AC80SISO	5210	81.44	5169.20	5250.64	---	---
	5290	81.44	5249.20	5330.64	---	---

	5530	81.44	5489.20	5570.64	---	---
	5610	81.76	5569.04	5650.80	---	---
	5690	81.76	5649.04	5730.80	---	---

Test graphs as below:

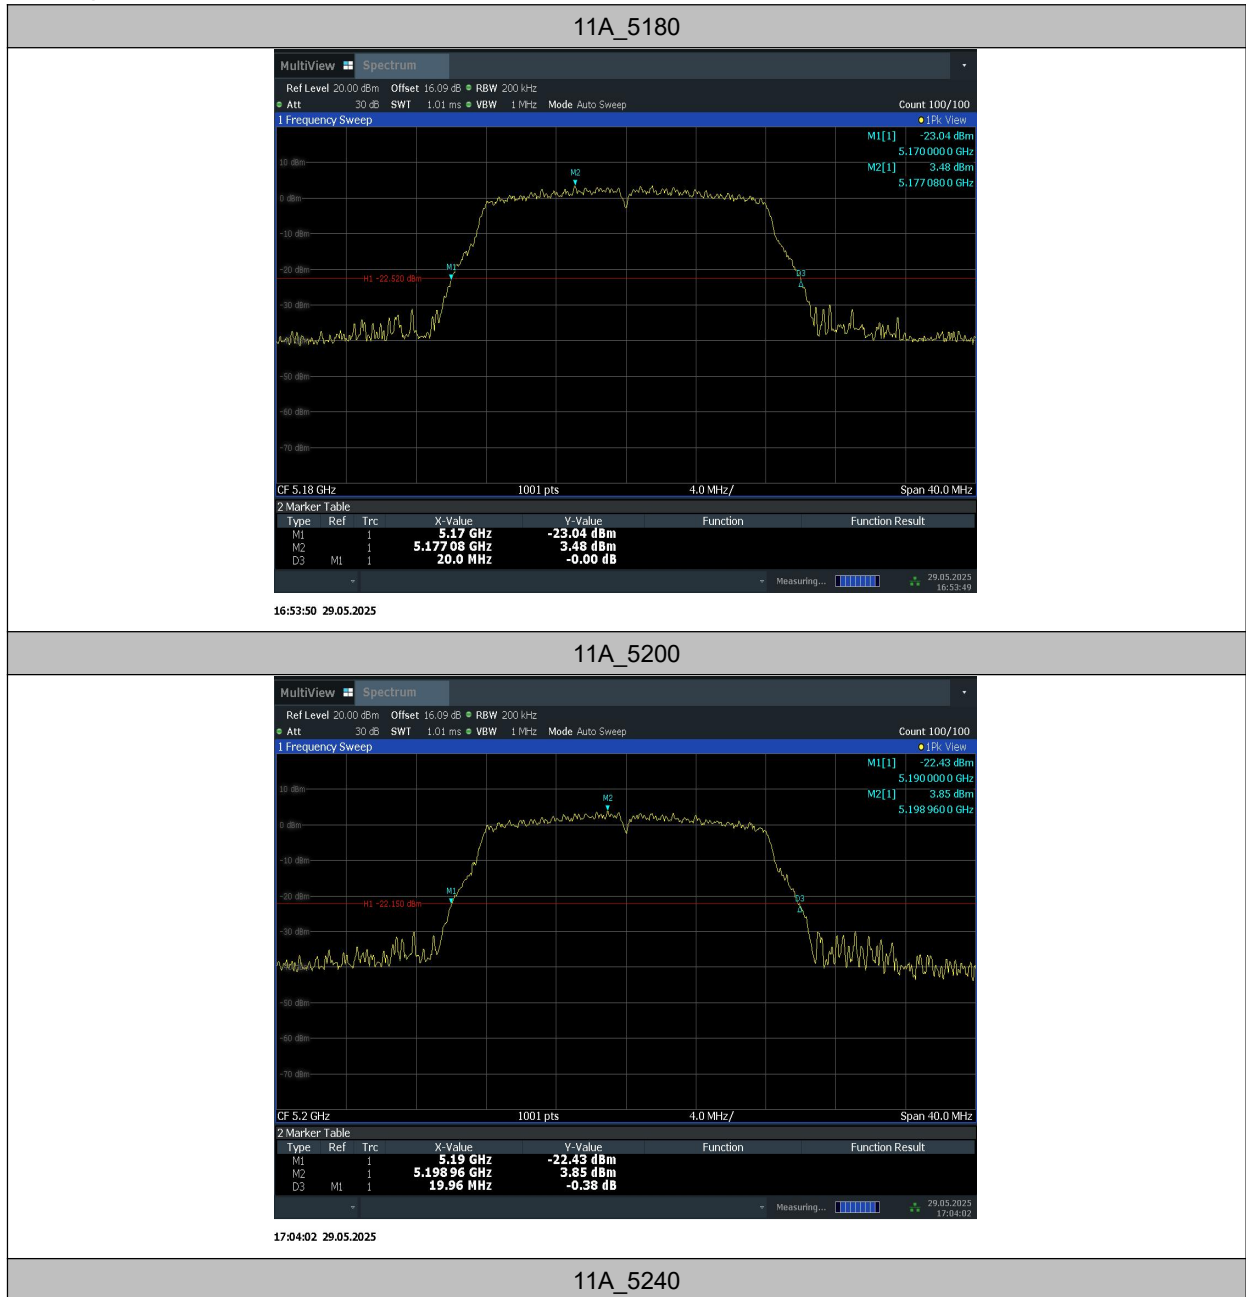



17:05:12 29.05.2025

11A_5260



17:06:19 29.05.2025

11A_5280




17:07:31 29.05.2025

11A_5320



17:08:44 29.05.2025

11A_5500

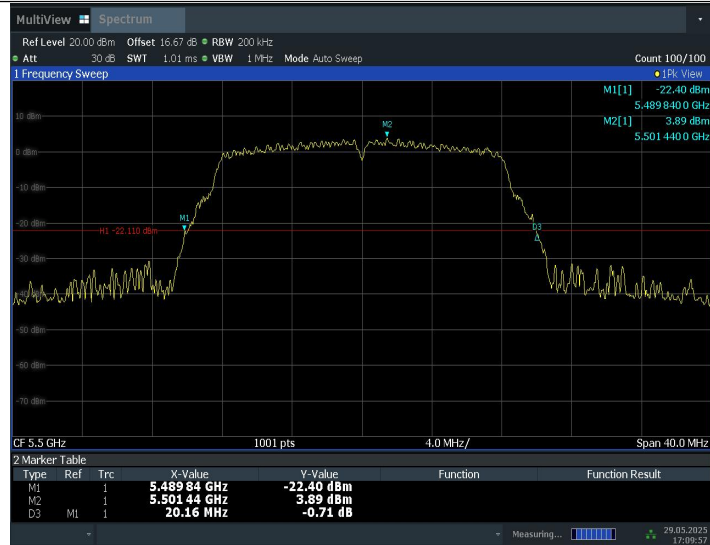

17:09:58 29.05.2025

11A_5580



17:11:07 29.05.2025

11A_5700



17:12:22 29.05.2025

11A_5720



17:13:30 29.05.2025

11AC20SISO_5180



18:04:07 29.05.2025

11AC20SISO_5200




18:05:21 29.05.2025

11AC20SISO_5240




18:06:32 29.05.2025

11AC20SISO_5260

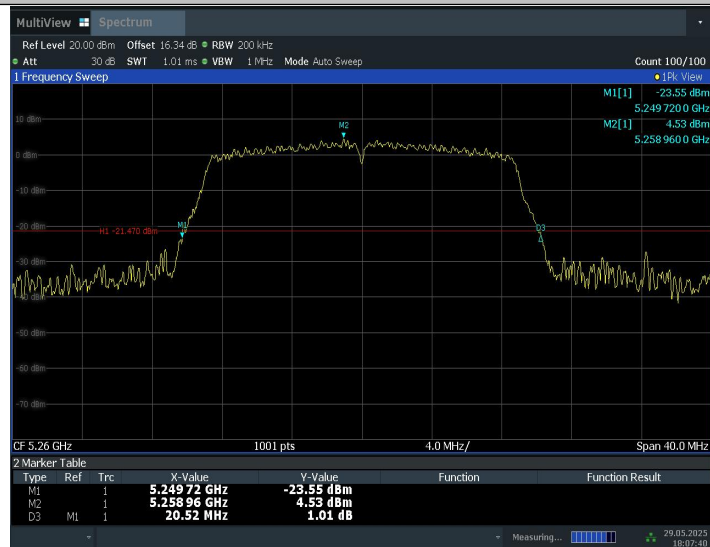

18:07:41 29.05.2025

11AC20SISO_5280

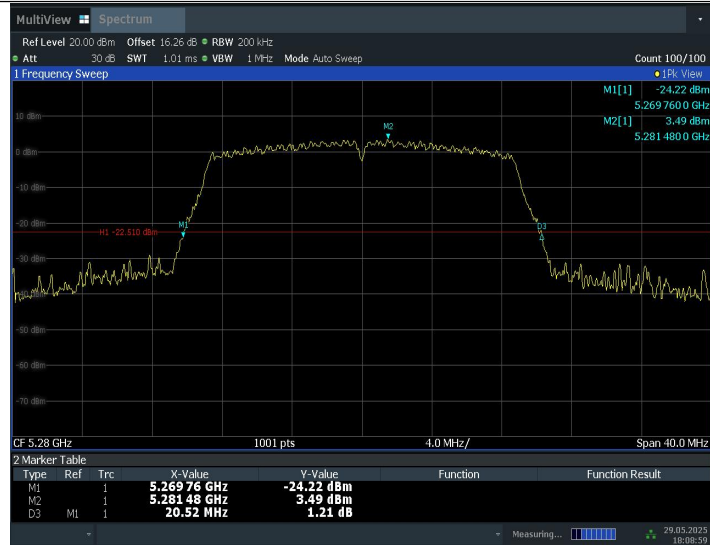


18:09:00 29.05.2025

11AC20SISO_5320



18:10:14 29.05.2025

11AC20SISO_5500

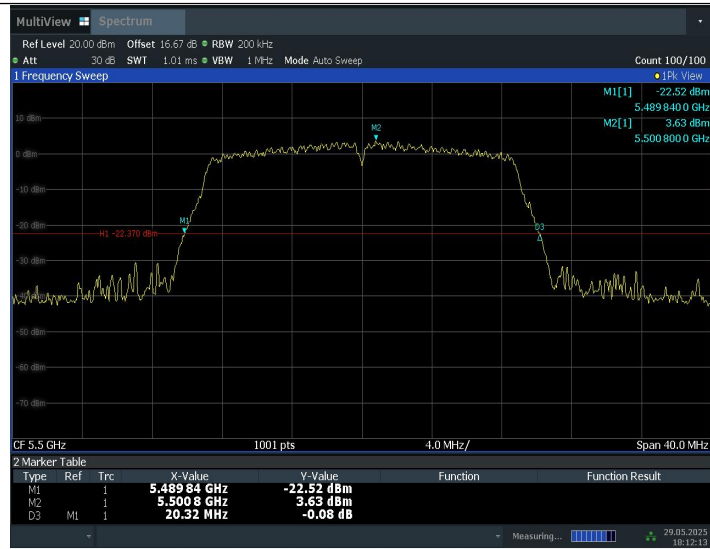


18:12:14 29.05.2025

11AC20SISO_5580



18:13:22 29.05.2025

11AC20SISO_5700

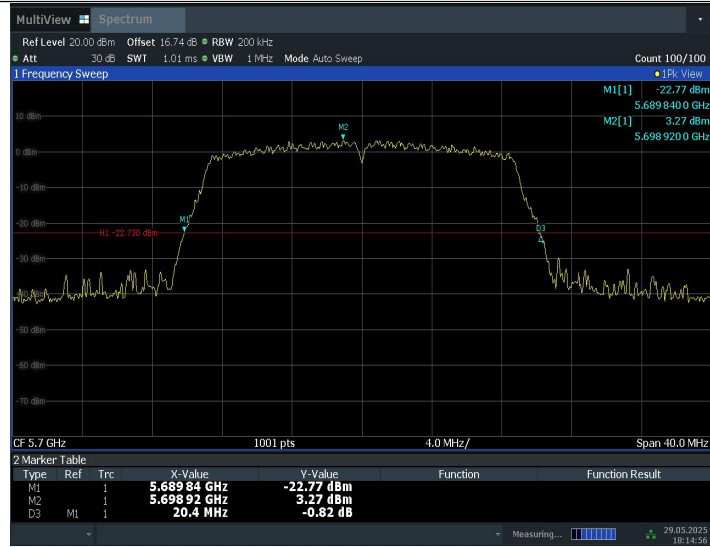

18:14:57 29.05.2025

11AC20SISO_5720



18:19:53 29.05.2025

11AC40SISO_5190




18:27:54 29.05.2025

11AC40SISO_5230



18:29:21 29.05.2025

11AC40SISO_5270

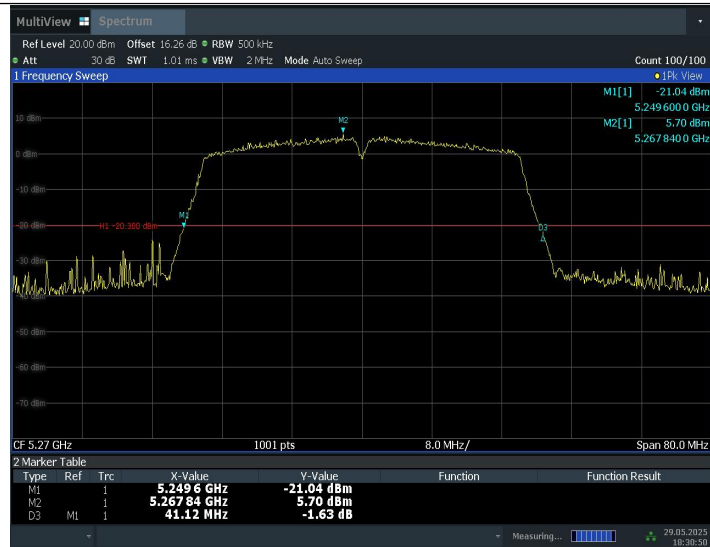

18:30:51 29.05.2025

11AC40SISO_5310




18:32:29 29.05.2025

11AC40SISO_5510



18:33:44 29.05.2025

11AC40SISO_5550

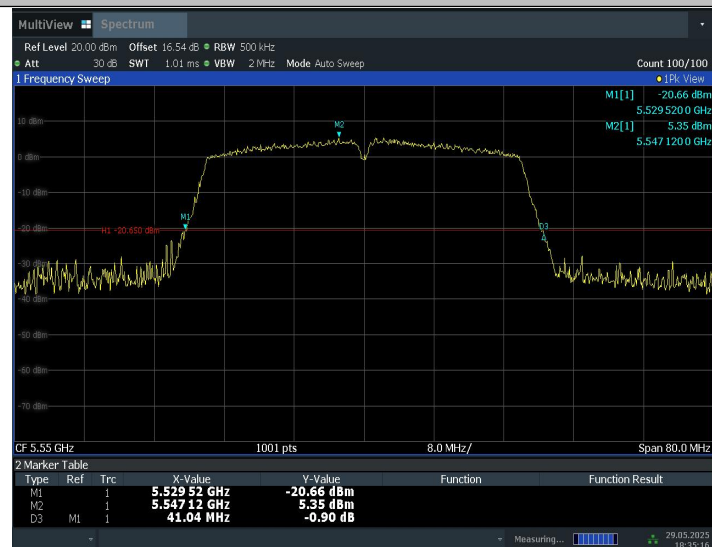

18:35:16 29.05.2025

11AC40SISO_5670




18:36:35 29.05.2025

11AC40SISO_5710



18:37:46 29.05.2025

11AC80SISO_5210

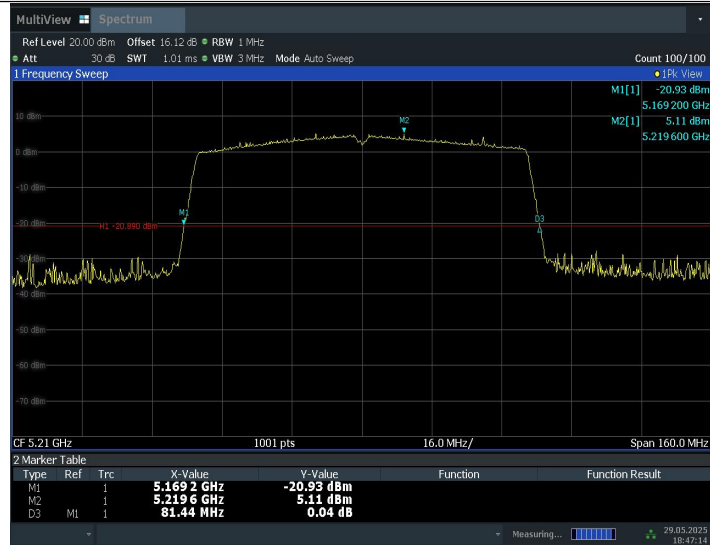


18:47:14 29.05.2025

11AC80SISO_5290



18:48:25 29.05.2025

11AC80SISO_5530

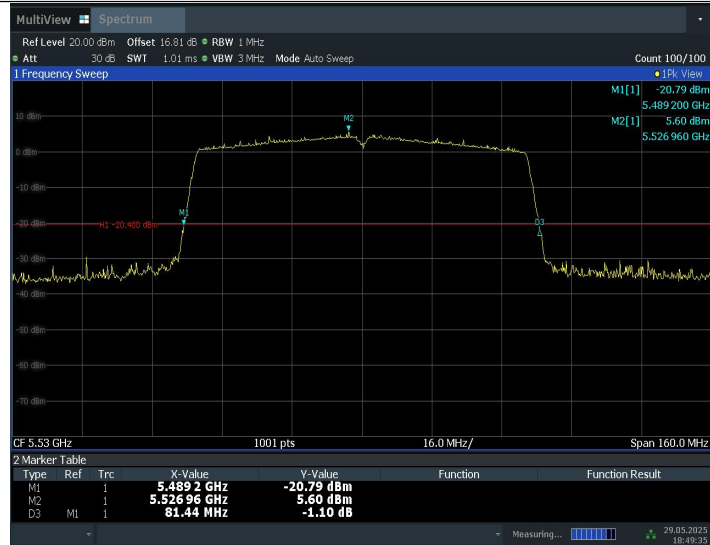

18:49:35 29.05.2025

11AC80SISO_5610



18:50:45 29.05.2025

11AC80SISO_5690



Conclusion: PASS

A.5. Radiated Unwanted Emission

A.5.1 Limits

Unwanted Emissions in the unrestricted bands shall not exceed the limits that shown in 15.407:

Standard	Limit
FCC 47 CFR Part 15.407	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength (μ V/m)	Field strength (dBuV/m)	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Note: When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor (as defined in KDB 789033 II.G.2.d).

A.5.2 Test setup

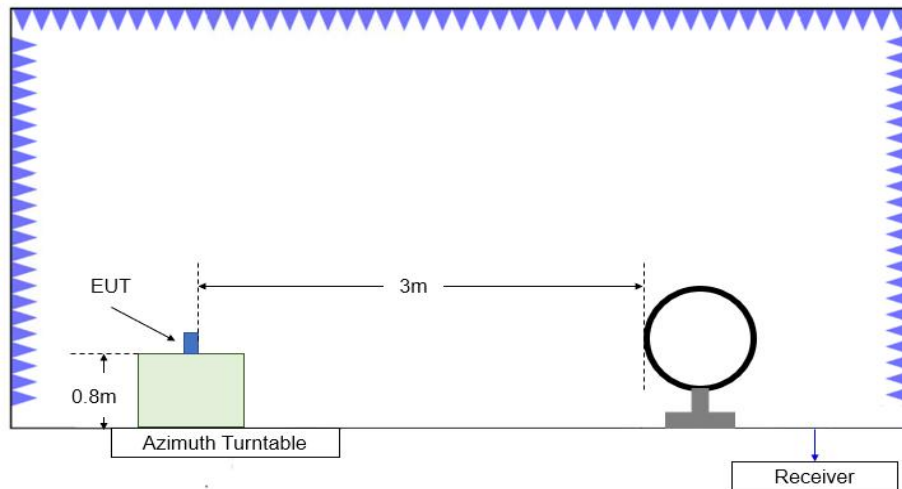


Figure A.5.1. Test Site Diagram (9kHz-30MHz)

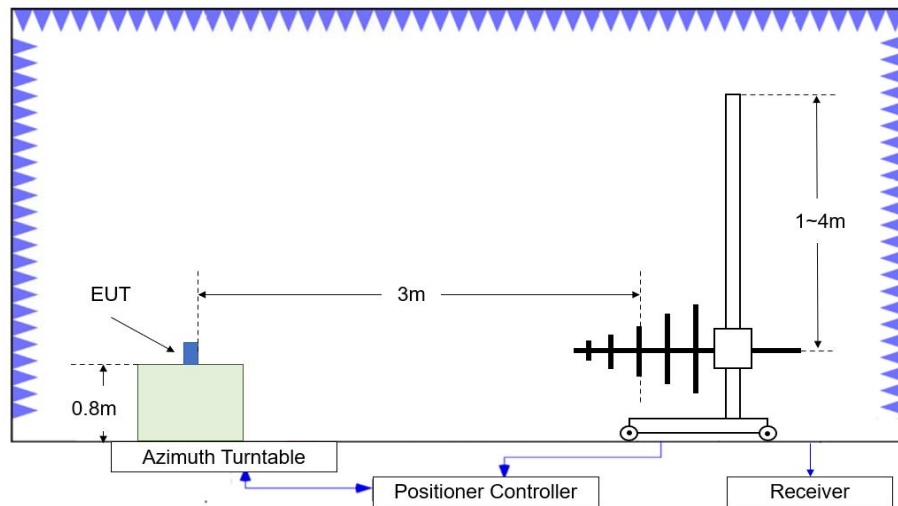


Figure A.5.2. Test Site Diagram (30MHz-1GHz)

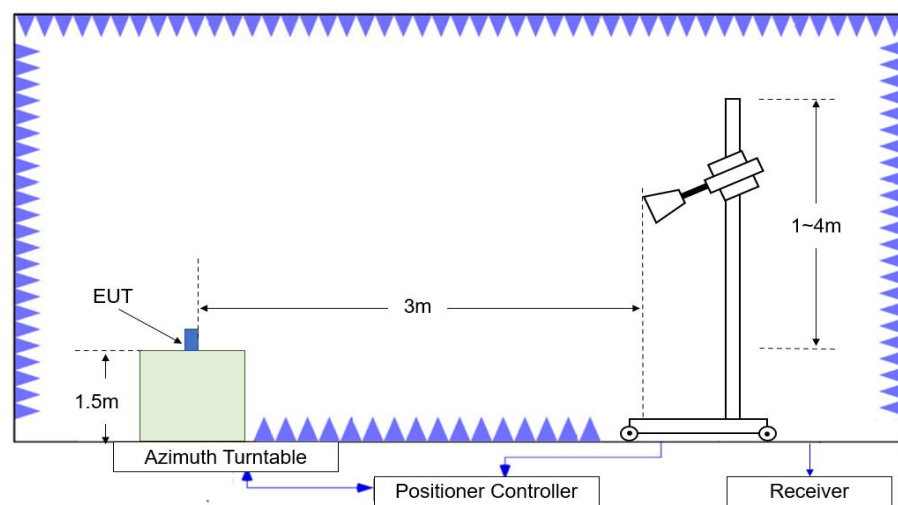


Figure A.5.3. Test Site Diagram (1GHz-40GHz)

A.5.3 Test Procedures

Radiated unwanted emissions from the EUT were measured according to ANSI C63.10 and KDB 789033.

Test setting

Frequency of emission (MHz)	RBW/VBW
30-1000	100kHz/300kHz
1000-4000	1MHz/3MHz
4000-18000	1MHz/3MHz
18000-26500	1MHz/3MHz
26500-40000	1MHz/3MHz

A.5.4 Calculation

1. The measurement results reported below is calculated by:

Measurement Results (dB μ V/m) = $P_{\text{measurement}}$ (dB μ V) + Cable Loss(dB) + Antenna Factor (dB/m)

Where: $P_{\text{measurement}}$ is the field strength recorded from the instrument

2. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log(D) + 104.77$$

Where:

E is the field strength in dB μ V/m

D is the measurement distance in meters

EIRP is the equivalent isotropically radiated power in dBm

Test note

1. The EUT is operating at its maximum duty cycle and its maximum power control level.
2. Investigation has been done on all modes and modulations/data rates. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.
3. Spurious emissions for all channels were investigated and almost the same below 1GHz. According to FCC 47 CFR §15.31, emission levels are not report much lower than the limit by over 20dB
4. Measurement frequencies were performed from 9 kHz to 40GHz.

A.5.5 Measurement Results:

Average Results:

802.11a

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5122.800	47.3	-21.3	34.2	34.31	54.0	6.7	V
5130.800	47.3	-21.4	34.3	34.37	54.0	6.7	V
7250.000	35.0	-29.6	35.6	29.05	54.0	19.0	H
8288.000	44.5	-29.2	36.0	37.74	54.0	9.5	V
10986.000	37.9	-24.2	37.9	24.28	54.0	16.1	V
15542.000	41.5	-20.7	40.1	22.07	54.0	12.5	H

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5378.000	47.2	-21.8	34.5	34.54	54.0	6.8	V
5379.600	47.4	-21.8	34.5	34.75	54.0	6.6	V
10640.000	35.7	-25.0	37.7	23.06	54.0	18.3	V
15963.000	43.9	-20.7	40.7	23.94	54.0	10.1	H
17944.500	43.9	-18.6	41.9	20.53	54.0	10.1	H
17970.500	43.8	-19.5	41.9	21.42	54.0	10.2	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5414.800	47.9	-21.4	34.6	34.68	54.0	6.1	V
5459.200	47.7	-21.4	34.7	34.49	54.0	6.3	V
11000.000	37.2	-24.0	37.9	23.25	54.0	16.8	H
15868.000	41.8	-20.3	40.6	21.52	54.0	12.2	H
17724.000	43.7	-19.2	41.8	21.07	54.0	10.3	V
17823.000	43.7	-18.9	41.9	20.72	54.0	10.3	V

Channel 116

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5405.600	47.3	-21.7	34.6	34.38	54.0	6.7	V
5422.400	47.7	-21.0	34.6	34.01	54.0	6.3	V
11160.000	37.2	-23.7	37.9	22.99	54.0	16.8	H
15887.500	41.5	-20.4	40.6	21.27	54.0	12.5	H
17727.500	43.7	-19.1	41.8	20.97	54.0	10.3	H
17950.000	43.9	-18.5	41.9	20.53	54.0	10.1	H

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5390.800	47.3	-21.3	34.6	34.00	54.0	6.7	V
5430.800	47.7	-21.0	34.7	34.05	54.0	6.3	V
11400.000	35.4	-25.7	38.1	22.94	54.0	18.6	V
15910.000	41.8	-20.3	40.6	21.42	54.0	12.2	V
17743.000	43.7	-19.6	41.8	21.47	54.0	10.3	H
17916.500	43.6	-19.2	42.0	20.83	54.0	10.4	H

Channel 144

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5396.000	46.9	-21.5	34.6	33.83	54.0	7.1	V
5426.400	47.3	-21.0	34.7	33.62	54.0	6.7	V
11440.000	35.3	-25.3	38.1	22.53	54.0	18.7	V
17705.500	43.3	-19.5	41.8	20.96	54.0	10.7	V
17804.500	43.5	-19.0	41.9	20.59	54.0	10.5	H
17944.000	43.7	-18.6	41.9	20.29	54.0	10.3	H

802.11n-HT20
Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5110.400	47.5	-21.4	34.2	34.73	54.0	6.5	V
5123.600	47.7	-21.3	34.2	34.69	54.0	6.3	V
7255.000	34.9	-29.8	35.6	29.14	54.0	19.1	H
8287.500	43.8	-29.2	36.0	37.04	54.0	10.2	V
11970.500	38.9	-23.5	38.6	23.88	54.0	15.1	V
15541.500	44.0	-20.7	40.1	24.54	54.0	10.0	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5422.800	47.5	-21.0	34.6	33.87	54.0	6.5	V
5424.000	47.8	-21.0	34.6	34.08	54.0	6.2	V
10640.000	35.7	-25.0	37.7	23.07	54.0	18.3	H
15959.500	44.5	-20.8	40.7	24.58	54.0	9.5	V
17737.000	43.6	-19.4	41.8	21.15	54.0	10.4	V
17937.500	43.7	-18.7	41.9	20.46	54.0	10.3	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5387.200	47.7	-21.4	34.5	34.52	54.0	6.3	V
5433.200	47.8	-21.2	34.7	34.41	54.0	6.2	V
11000.000	37.0	-24.0	37.9	23.09	54.0	17.0	H
15901.000	41.8	-20.3	40.6	21.49	54.0	12.2	V
17705.500	43.7	-19.5	41.8	21.43	54.0	10.3	V
17965.000	43.6	-19.5	41.9	21.28	54.0	10.4	V

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5421.200	47.8	-21.0	34.6	34.16	54.0	6.2	V
5427.600	47.5	-21.0	34.7	33.84	54.0	6.5	V
11400.000	35.6	-25.7	38.1	23.14	54.0	18.4	V
17730.000	43.7	-19.1	41.8	20.93	54.0	10.3	V
17808.500	43.8	-18.8	41.9	20.69	54.0	10.2	H
17948.000	43.6	-18.5	41.9	20.28	54.0	10.4	V

Channel 144

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5400.400	47.2	-21.7	34.6	34.25	54.0	6.8	V
5431.600	47.1	-21.1	34.7	33.54	54.0	6.9	V
11440.000	35.7	-25.3	38.1	22.94	54.0	18.3	V
17785.500	43.2	-19.3	41.9	20.66	54.0	10.8	H
17952.000	43.5	-18.7	41.9	20.34	54.0	10.5	V
17897.500	43.2	-19.2	42.0	20.43	54.0	10.8	V

802.11n-HT40

Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5146.800	48.8	-21.7	34.3	36.19	54.0	5.2	V
5148.000	49.1	-21.7	34.3	36.50	54.0	4.9	V
7262.500	34.6	-30.0	35.7	29.03	54.0	19.4	H
8304.000	44.0	-28.9	36.0	36.87	54.0	10.0	V
10987.500	38.1	-24.2	37.9	24.41	54.0	15.9	V
15561.500	42.1	-21.0	40.2	22.86	54.0	11.9	H

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5371.600	47.3	-21.9	34.5	34.63	54.0	6.7	V
5392.800	47.4	-21.4	34.6	34.14	54.0	6.6	V
8496.000	43.3	-28.8	35.8	36.24	54.0	10.7	H
10620.000	35.5	-24.5	37.7	22.33	54.0	18.5	V
15922.500	43.1	-20.4	40.6	22.80	54.0	10.9	H
17957.000	43.6	-19.2	41.9	20.92	54.0	10.4	H

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5416.400	47.7	-21.2	34.6	34.36	54.0	6.3	V
5453.600	47.7	-21.8	34.7	34.80	54.0	6.3	V
11020.000	37.1	-24.6	37.9	23.79	54.0	16.9	H
15916.000	41.7	-20.3	40.6	21.41	54.0	12.3	V
17733.000	43.5	-19.2	41.8	20.91	54.0	10.5	H
17967.500	43.6	-19.5	41.9	21.26	54.0	10.4	H

Channel 118

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5392.000	47.2	-21.3	34.6	33.95	54.0	6.8	V
5432.000	47.8	-21.1	34.7	34.25	54.0	6.2	V
11180.000	36.9	-24.5	37.9	23.47	54.0	17.1	V
15844.000	42.1	-20.8	40.6	22.25	54.0	11.9	V
17733.000	43.6	-19.2	41.8	21.03	54.0	10.4	V
17945.000	43.8	-18.6	41.9	20.41	54.0	10.2	H

Channel 134

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5390.400	47.0	-21.2	34.6	33.65	54.0	7.0	V
5423.200	47.2	-21.0	34.6	33.55	54.0	6.8	V
11340.000	36.9	-24.3	38.0	23.20	54.0	17.1	H
17794.000	43.5	-19.4	41.9	20.94	54.0	10.5	H
17917.000	43.6	-19.2	42.0	20.81	54.0	10.4	H
17949.500	43.5	-18.5	41.9	20.16	54.0	10.5	V

Channel 142

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5396.000	46.8	-21.5	34.6	33.74	54.0	7.2	V
5420.800	47.0	-21.0	34.6	33.38	54.0	7.0	V
11420.000	35.8	-25.4	38.1	23.06	54.0	18.2	H
17803.000	43.6	-19.0	41.9	20.71	54.0	10.4	H
17921.000	43.6	-19.2	42.0	20.86	54.0	10.4	H
17956.500	43.7	-19.2	41.9	20.98	54.0	10.3	V

802.11ac-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5107.600	47.3	-21.5	34.2	34.61	54.0	6.7	V
5125.200	47.5	-21.3	34.3	34.53	54.0	6.5	V
7547.000	33.9	-30.0	35.8	28.08	54.0	20.1	H
8287.500	44.1	-29.2	36.0	37.31	54.0	9.9	H
11938.000	38.9	-24.0	38.5	24.42	54.0	15.1	V
15538.000	43.8	-20.6	40.1	24.27	54.0	10.2	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5372.400	47.5	-21.9	34.5	34.86	54.0	6.5	V
5411.600	47.5	-21.6	34.6	34.52	54.0	6.5	V
11945.000	39.0	-23.9	38.5	24.31	54.0	15.0	H
15956.000	44.7	-20.8	40.7	24.76	54.0	9.3	V
17741.000	43.5	-19.6	41.8	21.17	54.0	10.5	V
17864.500	43.3	-19.4	42.0	20.74	54.0	10.7	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5419.600	47.8	-21.0	34.6	34.15	54.0	6.2	V
5432.000	47.5	-21.1	34.7	34.00	54.0	6.5	V
11000.000	37.5	-24.0	37.9	23.53	54.0	16.5	V
16499.000	45.6	-20.5	41.6	24.47	54.0	8.4	H
17808.000	43.6	-18.8	41.9	20.53	54.0	10.4	V
17914.000	43.6	-19.1	42.0	20.75	54.0	10.4	H

Channel 116

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5415.200	47.3	-21.3	34.6	33.99	54.0	6.7	V
5430.000	47.3	-21.0	34.7	33.61	54.0	6.7	V
11160.000	37.0	-23.7	37.9	22.81	54.0	17.0	V
17806.500	43.3	-18.9	41.9	20.23	54.0	10.7	H
17866.500	43.2	-19.5	42.0	20.65	54.0	10.8	H
17953.000	43.6	-18.8	41.9	20.51	54.0	10.4	H

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5378.000	47.2	-21.8	34.5	34.52	54.0	6.8	V
5422.000	47.1	-21.0	34.6	33.39	54.0	6.9	V
11400.000	34.9	-25.7	38.1	22.48	54.0	19.1	H
17731.000	43.7	-19.1	41.8	20.99	54.0	10.3	V
17941.500	43.4	-18.6	41.9	20.07	54.0	10.6	H
17974.500	43.4	-19.3	41.9	20.92	54.0	10.6	H

Channel 144

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5415.600	47.0	-21.3	34.6	33.70	54.0	7.0	V
5432.400	47.1	-21.2	34.7	33.65	54.0	6.9	V
11440.000	36.0	-25.3	38.1	23.20	54.0	18.0	V
17786.000	43.5	-19.3	41.9	20.89	54.0	10.5	H
17892.000	43.4	-19.3	42.0	20.67	54.0	10.6	H
17952.500	43.7	-18.8	41.9	20.60	54.0	10.3	H

802.11ac-HT40

Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5147.600	48.1	-21.7	34.3	35.50	54.0	5.9	V
5149.600	49.1	-21.7	34.3	36.44	54.0	4.9	V
7351.500	33.7	-29.9	35.7	27.84	54.0	20.3	H
8303.500	45.2	-28.9	36.0	38.14	54.0	8.8	H
11922.500	38.5	-23.9	38.5	23.86	54.0	15.5	V
15570.000	42.0	-21.0	40.2	22.82	54.0	12.0	H

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.400	49.1	-22.1	34.4	36.77	54.0	4.9	V
5352.000	48.5	-22.1	34.4	36.21	54.0	5.5	V
8496.000	42.8	-28.8	35.8	35.75	54.0	11.2	H
10620.000	36.3	-24.5	37.7	23.13	54.0	17.7	H
15942.500	45.6	-20.9	40.7	25.83	54.0	8.4	H
17802.500	43.7	-19.1	41.9	20.85	54.0	10.3	V

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5393.600	47.4	-21.4	34.6	34.26	54.0	6.6	V
5455.600	47.5	-21.6	34.7	34.50	54.0	6.5	V
11020.000	37.5	-24.6	37.9	24.15	54.0	16.5	V
17709.000	43.3	-19.6	41.8	21.08	54.0	10.7	V
17798.000	43.5	-19.2	41.9	20.83	54.0	10.5	V
17946.500	43.6	-18.5	41.9	20.20	54.0	10.4	H

Channel 134

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5422.000	48.0	-21.0	34.6	34.32	54.0	6.0	V
5456.400	47.3	-21.6	34.7	34.18	54.0	6.7	V
11340.000	37.2	-24.3	38.0	23.47	54.0	16.8	H
17730.500	43.1	-19.1	41.8	20.34	54.0	10.9	V
17816.000	42.9	-18.8	41.9	19.71	54.0	11.1	H
17941.000	43.5	-18.6	41.9	20.10	54.0	10.5	H

Channel 142

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5392.800	47.0	-21.4	34.6	33.77	54.0	7.0	V
5430.000	47.1	-21.0	34.7	33.41	54.0	6.9	V
11420.000	35.9	-25.4	38.1	23.11	54.0	18.1	H
17723.500	43.8	-19.2	41.8	21.11	54.0	10.2	H
17928.500	43.7	-19.1	41.9	20.87	54.0	10.3	H
17952.000	43.7	-18.7	41.9	20.58	54.0	10.3	V

802.11ac-HT80

Channel 42

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5147.600	49.8	-21.7	34.3	37.17	54.0	4.2	V
5149.600	50.5	-21.7	34.3	37.89	54.0	3.5	V
8336.000	45.0	-28.3	35.9	37.43	54.0	9.0	H
11963.500	38.0	-23.5	38.6	22.86	54.0	16.0	H
15630.000	39.1	-20.3	40.3	19.06	54.0	14.9	H
17942.500	43.5	-18.6	41.9	20.11	54.0	10.5	V

Channel 58

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.400	50.6	-22.1	34.4	38.31	54.0	3.4	V
5358.400	50.3	-22.1	34.4	37.97	54.0	3.7	V
8464.000	43.1	-28.7	35.8	35.99	54.0	10.9	H
11824.500	37.3	-24.1	38.5	22.93	54.0	16.7	V
15870.000	40.1	-20.1	40.6	19.63	54.0	13.9	H
17940.500	43.3	-18.6	41.9	19.99	54.0	10.7	H

Channel 106

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5456.000	48.9	-21.6	34.7	35.82	54.0	5.1	V
5460.000	49.0	-21.4	34.7	35.76	54.0	5.0	V
11060.000	34.7	-25.8	38.0	22.57	54.0	19.3	H
15895.000	40.6	-20.4	40.6	20.43	54.0	13.4	H
17736.500	42.8	-19.4	41.8	20.30	54.0	11.2	H
17939.000	42.9	-18.6	41.9	19.61	54.0	11.1	V

Channel 122

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5423.200	47.5	-21.0	34.6	33.82	54.0	6.5	V
5454.400	47.6	-21.7	34.7	34.63	54.0	6.4	V
11220.000	34.5	-25.5	37.9	22.08	54.0	19.5	V
15875.500	41.2	-20.1	40.6	20.73	54.0	12.8	H
17808.000	42.6	-18.8	41.9	19.47	54.0	11.4	H
17925.500	42.9	-19.1	41.9	20.10	54.0	11.1	V

Channel 138

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5419.600	47.4	-21.0	34.6	33.74	54.0	6.6	V
5433.200	47.2	-21.2	34.7	33.78	54.0	6.8	V
11380.000	34.8	-24.9	38.1	21.69	54.0	19.2	V
15876.500	39.8	-20.1	40.6	19.38	54.0	14.2	V
17804.500	42.7	-19.0	41.9	19.80	54.0	11.3	H
17947.500	43.0	-18.5	41.9	19.68	54.0	11.0	H

PEAK Results:
802.11a
Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5142.500	60.1	-21.7	34.3	47.52	74.0	13.9	V
5148.625	59.7	-21.7	34.3	47.04	74.0	14.3	H
7254.500	44.3	-29.8	35.6	38.52	74.0	29.7	H
8288.000	48.3	-29.2	36.0	41.48	74.0	25.7	H
10360.000	44.9	-25.0	37.8	32.13	68.2	23.3	H
15537.000	58.5	-20.6	40.1	38.98	68.2	9.7	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.625	64.0	-22.1	34.4	51.75	74.0	10.0	H
5352.625	63.6	-22.1	34.4	51.27	74.0	10.4	V
8512.000	46.6	-28.2	35.8	39.03	68.2	21.6	H
10640.000	45.5	-25.0	37.7	32.81	74.0	28.5	H
15957.000	56.4	-20.8	40.7	36.50	74.0	17.6	V
16859.000	54.7	-20.0	42.8	31.95	68.2	13.5	V

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5468.625	63.0	-21.6	34.6	49.90	68.2	5.2	H
5469.875	63.2	-21.6	34.6	50.21	68.2	5.0	H
8800.000	45.9	-27.6	36.0	37.48	68.2	22.3	H
11000.000	47.0	-24.0	37.9	33.05	74.0	27.0	V
16499.000	54.2	-20.5	41.6	33.11	68.2	14.0	V
16632.000	54.7	-20.1	42.1	32.64	68.2	13.5	V

Channel 116

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5545.000	58.9	-21.8	34.5	46.20	68.2	9.3	V
5616.500	59.0	-22.0	34.8	46.22	68.2	9.2	V
11160.000	46.7	-23.7	37.9	32.49	74.0	27.3	H
16741.500	55.9	-20.4	42.6	33.66	68.2	12.3	V
16740.000	53.6	-20.4	42.6	31.35	68.2	14.7	V
17267.500	54.6	-19.1	41.7	31.96	68.2	13.6	H

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5725.875	65.1	-21.3	34.7	51.71	68.2	3.1	H
5731.375	64.1	-21.1	34.7	50.55	68.2	4.1	V
11400.000	44.9	-25.7	38.1	32.45	74.0	29.1	V
16902.000	55.0	-19.9	42.7	32.12	68.2	13.2	H
17100.000	51.7	-19.9	42.1	29.52	68.2	16.5	H
17361.500	55.1	-19.7	41.6	33.11	68.2	13.1	H

Channel 144

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5687.000	58.0	-21.0	34.7	44.34	68.2	10.2	H
5754.000	57.8	-21.5	34.7	44.51	68.2	10.4	V
11440.000	45.2	-25.3	38.1	32.36	74.0	28.8	V
16689.500	55.1	-20.0	42.4	32.64	68.2	13.1	V
16798.000	55.0	-19.3	42.8	31.45	68.2	13.2	V
17160.000	52.2	-19.3	41.9	29.56	68.2	16.0	V

802.11n-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5147.750	62.5	-21.7	34.3	49.88	74.0	11.5	H
5149.125	64.4	-21.7	34.3	51.76	74.0	9.6	V
7251.500	44.7	-29.7	35.6	38.76	74.0	29.3	V
8288.000	47.4	-29.2	36.0	40.64	74.0	26.6	V
10360.000	45.5	-25.0	37.8	32.73	68.2	22.7	H
15535.000	54.8	-20.6	40.1	35.25	68.2	13.4	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5351.875	62.2	-22.1	34.4	49.91	74.0	11.8	H
5352.750	59.6	-22.1	34.4	47.34	74.0	14.4	V
8512.000	47.9	-28.2	35.8	40.35	68.2	20.3	H
10640.000	46.2	-25.0	37.7	33.58	74.0	27.8	V
15965.000	56.6	-20.7	40.7	36.59	74.0	17.4	V
16748.500	54.9	-20.3	42.6	32.59	68.2	13.3	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5466.500	62.3	-21.5	34.6	49.21	68.2	5.9	V
5469.875	63.3	-21.6	34.6	50.29	68.2	4.9	V
8814.500	46.4	-27.9	36.0	38.30	68.2	21.8	V
11000.000	47.0	-24.0	37.9	33.08	74.0	27.0	H
16494.000	55.3	-20.5	41.6	34.17	68.2	12.9	V
16659.500	55.0	-20.0	42.3	32.71	68.2	13.2	V

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5726.500	65.0	-21.2	34.7	51.57	68.2	3.2	H
5730.750	64.4	-21.1	34.7	50.80	68.2	3.8	V
11400.000	44.8	-25.7	38.1	32.35	74.0	29.2	V
16764.500	54.8	-19.7	42.7	31.83	68.2	13.4	H
17100.000	52.2	-19.9	42.1	30.00	68.2	16.0	H
17282.000	54.4	-19.3	41.7	32.03	68.2	13.8	H

Channel 144

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5675.000	57.9	-21.8	34.7	44.98	68.2	10.3	H
5756.000	57.9	-21.3	34.7	44.47	68.2	10.3	H
11440.000	45.6	-25.3	38.1	32.77	74.0	28.4	V
16805.000	54.9	-19.4	42.8	31.55	68.2	13.3	V
17160.000	52.8	-19.3	41.9	30.17	68.2	15.4	H
17667.500	54.2	-19.1	41.8	31.48	68.2	14.0	V

802.11n-HT40

Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5147.375	66.3	-21.7	34.3	53.66	74.0	7.7	V
5149.375	69.2	-21.7	34.3	56.54	74.0	4.8	H
8303.500	48.0	-28.9	36.0	40.86	74.0	26.0	V
10380.000	44.3	-26.7	37.8	33.07	68.2	23.9	H
15570.500	53.5	-21.0	40.2	34.25	74.0	20.5	H
16673.500	54.7	-19.6	42.3	32.00	68.2	13.5	H

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.500	66.3	-22.1	34.4	54.03	74.0	7.7	V
5351.625	66.4	-22.1	34.4	54.09	74.0	7.6	V
8495.500	47.0	-28.8	35.8	40.02	74.0	27.0	V
10620.000	47.1	-24.5	37.7	33.92	74.0	26.9	H
15937.000	57.1	-20.8	40.7	37.27	68.2	11.1	H
16892.500	54.6	-19.6	42.8	31.47	68.2	13.6	H

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5466.125	64.9	-21.5	34.6	51.75	68.2	3.3	V
5467.125	65.1	-21.5	34.6	52.02	68.2	3.1	H
11020.000	47.2	-24.6	37.9	33.86	74.0	26.8	H
16530.000	50.5	-20.4	41.7	29.25	68.2	17.7	H
16608.500	54.9	-20.7	42.0	33.62	68.2	13.3	H
16836.500	55.0	-19.9	42.8	32.08	68.2	13.2	H

Channel 118

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5529.500	57.0	-22.1	34.5	44.65	68.2	11.2	H
5658.000	58.0	-21.4	34.9	44.61	68.2	10.2	H
11180.000	47.0	-24.5	37.9	33.60	74.0	27.0	H
16717.500	54.6	-20.1	42.6	32.09	68.2	13.6	H
16770.000	52.0	-19.8	42.7	29.07	68.2	16.2	V
16794.000	54.1	-19.5	42.8	30.79	68.2	14.1	H

Channel 134

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5467.875	64.9	-21.6	34.6	51.81	68.2	3.3	H
5468.500	65.0	-21.6	34.6	51.93	68.2	3.2	V
11020.000	45.6	-24.6	37.9	32.30	74.0	28.4	H
16530.000	53.3	-20.4	41.7	32.02	68.2	14.9	H
16640.500	54.8	-20.0	42.1	32.70	68.2	13.4	V
17135.500	54.1	-19.7	42.0	31.83	68.2	14.1	V

Channel 142

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5651.500	58.3	-21.4	34.9	44.86	68.2	9.9	H
5762.000	58.6	-21.0	34.8	44.82	68.2	9.6	V
11420.000	44.8	-25.4	38.1	32.02	74.0	29.2	H
16757.500	54.4	-19.8	42.7	31.57	68.2	13.8	H
17130.000	51.8	-19.8	42.0	29.53	68.2	16.4	H
17383.000	54.3	-19.7	41.6	32.36	68.2	13.9	V

802.11ac-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5147.375	62.8	-21.7	34.3	50.23	74.0	11.2	H
5149.875	63.6	-21.7	34.3	51.01	74.0	10.4	V
7254.000	44.6	-29.8	35.6	38.76	68.2	23.6	V
8287.500	48.0	-29.2	36.0	41.21	74.0	26.0	V
10360.000	45.0	-25.0	37.8	32.26	68.2	23.2	H
15540.000	54.5	-20.6	40.1	34.98	68.2	13.7	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.875	61.1	-22.1	34.4	48.79	74.0	12.9	H
5351.250	63.7	-22.1	34.4	51.39	74.0	10.3	V
8512.000	47.3	-28.2	35.8	39.74	74.0	26.7	V
10640.000	45.9	-25.0	37.7	33.29	74.0	28.1	V
15942.500	57.4	-20.9	40.7	37.59	68.2	10.8	V
17079.000	55.2	-20.4	42.2	33.38	68.2	13.0	V

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5469.250	63.6	-21.6	34.6	50.54	68.2	4.6	H
5470.000	64.1	-21.6	34.6	51.09	68.2	4.1	H
11000.000	46.8	-24.0	37.9	32.88	74.0	27.2	H
16506.000	57.6	-20.3	41.6	36.29	68.2	10.6	H
16793.500	54.7	-19.5	42.8	31.40	68.2	13.5	H
17274.000	54.1	-19.1	41.7	31.42	68.2	14.1	H

Channel 116

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5516.500	57.2	-22.1	34.5	44.78	68.2	11.0	V
5645.000	58.0	-21.6	34.9	44.72	68.2	10.2	V
11160.000	46.5	-23.7	37.9	32.30	74.0	27.5	V
16740.000	52.2	-20.4	42.6	30.04	68.2	16.0	V
16835.500	55.3	-19.9	42.8	32.36	68.2	12.9	H
17276.500	54.1	-19.1	41.7	31.50	68.2	14.1	H

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5726.000	63.3	-21.3	34.7	49.93	68.2	4.9	V
5726.375	64.1	-21.3	34.7	50.74	68.2	4.1	V
11400.000	45.2	-25.7	38.1	32.72	74.0	28.8	H
16801.500	54.8	-19.2	42.8	31.23	68.2	13.4	H
17100.000	52.4	-19.9	42.1	30.17	68.2	15.8	V
17314.500	54.4	-19.3	41.7	31.97	68.2	13.8	V

Channel 144

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5686.000	60.3	-21.1	34.7	46.67	68.2	8.0	V
5753.000	59.9	-21.6	34.7	46.77	68.2	8.3	V
11440.000	46.0	-25.3	38.1	33.17	74.0	28.0	H
16729.500	55.0	-20.2	42.6	32.54	68.2	13.2	V
17042.000	54.5	-20.0	42.4	32.07	68.2	13.7	V
17160.000	51.6	-19.3	41.9	28.98	68.2	16.6	V

802.11ac-HT40

Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5149.500	67.6	-21.7	34.3	54.98	74.0	6.4	V
5149.875	67.9	-21.7	34.3	55.25	74.0	6.1	H
7263.500	43.8	-30.0	35.7	38.14	68.2	24.4	V
8304.000	47.9	-28.9	36.0	40.79	74.0	26.1	H
10380.000	44.5	-26.7	37.8	33.32	68.2	23.7	H
15556.000	55.5	-20.9	40.2	36.28	68.2	12.7	V

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.500	67.6	-22.1	34.4	55.32	74.0	6.4	V
5351.000	67.3	-22.1	34.4	54.97	74.0	6.7	V
8495.500	47.5	-28.8	35.8	40.49	74.0	26.5	V
10620.000	45.8	-24.5	37.7	32.65	74.0	28.2	H
15932.000	53.1	-20.6	40.7	33.01	74.0	20.9	H
16834.500	54.8	-19.9	42.8	31.90	68.2	13.4	H

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5467.875	64.9	-21.6	34.6	51.81	68.2	3.3	H
5468.500	65.0	-21.6	34.6	51.93	68.2	3.2	V
11020.000	45.6	-24.6	37.9	32.30	74.0	28.4	H
16530.000	53.3	-20.4	41.7	32.02	68.2	14.9	H
16640.500	54.8	-20.0	42.1	32.70	68.2	13.4	V
17135.500	54.1	-19.7	42.0	31.83	68.2	14.1	V

Channel 134

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5725.750	61.3	-21.3	34.7	47.95	68.2	6.9	V
5728.250	58.8	-21.1	34.7	45.30	68.2	9.4	V
11340.000	46.8	-24.3	38.0	33.08	74.0	27.2	H
16788.500	54.3	-19.8	42.8	31.27	68.2	13.9	H
17010.000	51.7	-19.9	42.6	28.91	68.2	16.5	H
17278.000	54.2	-19.2	41.7	31.67	68.2	14.0	H

Channel 142

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5657.000	58.6	-21.4	34.9	45.20	68.2	9.6	H
5771.000	58.8	-21.2	34.8	45.26	68.2	9.4	V
11420.000	46.4	-25.4	38.1	33.64	68.2	21.8	V
16770.500	55.0	-19.8	42.7	32.02	74.0	19.0	V
17130.000	52.8	-19.8	42.0	30.61	68.2	15.4	V
17548.000	54.2	-19.6	41.7	32.05	68.2	14.0	V

802.11ac-HT80

Channel 42

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5133.625	66.2	-21.5	34.3	53.43	74.0	7.8	H
5146.250	66.7	-21.7	34.3	54.07	74.0	7.3	V
8336.000	47.3	-28.3	35.9	39.74	74.0	26.7	H
10420.000	45.3	-26.3	37.9	33.80	74.0	28.7	V
15630.000	48.8	-20.3	40.3	28.82	68.2	19.4	H
16809.500	54.0	-19.7	42.8	30.90	68.2	14.2	V

Channel 58

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5352.125	68.1	-22.1	34.4	55.80	74.0	5.9	V
5354.750	68.0	-22.1	34.4	55.72	74.0	6.0	V
8464.000	46.4	-28.7	35.8	39.31	74.0	27.6	H
10580.000	44.2	-26.1	37.7	32.60	74.0	29.8	V
15870.000	50.8	-20.1	40.6	30.38	68.2	17.4	V
16775.000	54.2	-19.9	42.7	31.38	68.2	14.0	H

Channel 106

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5463.500	62.7	-21.5	34.6	49.55	68.2	5.5	V
5467.875	61.9	-21.6	34.6	48.86	68.2	6.3	H
11060.000	44.6	-25.8	38.0	32.41	74.0	29.4	V
16590.000	50.4	-20.6	41.9	29.16	68.2	17.8	V
16999.500	52.7	-20.1	42.7	30.06	68.2	15.5	V
17434.000	53.3	-18.7	41.6	30.36	68.2	14.9	H

Channel 122

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5725.750	58.9	-21.3	34.7	45.57	68.2	9.3	V
5730.500	59.0	-21.1	34.7	45.41	68.2	9.2	V
11220.000	43.8	-25.5	37.9	31.45	74.0	30.2	V
16830.000	52.2	-19.9	42.8	29.34	68.2	16.0	V
17037.500	54.1	-19.9	42.5	31.53	68.2	14.1	H
17374.000	54.0	-19.8	41.6	32.14	68.2	14.2	V

Channel 138

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5625.500	62.8	-21.8	34.8	49.80	68.2	5.4	H
5740.000	64.4	-21.8	34.7	51.52	68.2	3.8	V
11380.000	44.8	-24.9	38.1	31.68	74.0	29.2	V
17070.000	51.3	-20.1	42.3	29.09	68.2	16.9	V
17275.500	53.6	-19.1	41.7	30.98	68.2	14.6	H
17412.000	53.3	-19.2	41.6	30.87	68.2	14.9	H

Conclusion: PASS
Note:

1. The spurious emission above 18G is noise only.
2. All emissions below 30MHz are more than 20 dB below the limit

Band edge compliance

Mode	Channel	Test Results	Conclusion
802.11a	5180 MHz	Fig.1	P
	5320 MHz	Fig.2	P
	5500 MHz	Fig.3	P
	5700 MHz	Fig.4	P
802.11n HT20	5180 MHz	Fig.5	P
	5320 MHz	Fig.6	P
	5500 MHz	Fig.7	P
	5700 MHz	Fig.8	P
802.11n HT40	5190 MHz	Fig.9	P
	5310 MHz	Fig.10	P
	5510 MHz	Fig.11	P
	5670 MHz	Fig.12	P
802.11ac HT20	5180 MHz	Fig.13	P
	5320 MHz	Fig.14	P
	5500 MHz	Fig.15	P
	5700 MHz	Fig.16	P
802.11ac HT40	5190 MHz	Fig.17	P
	5310 MHz	Fig.18	P
	5510 MHz	Fig.19	P
	5670 MHz	Fig.20	P
802.11ac HT80	5210MHz	Fig.21	P
	5290MHz	Fig.22	P
	5530MHz	Fig.23	P
	5610MHz	Fig.24	P

Conclusion: PASS

Test graphs as below:

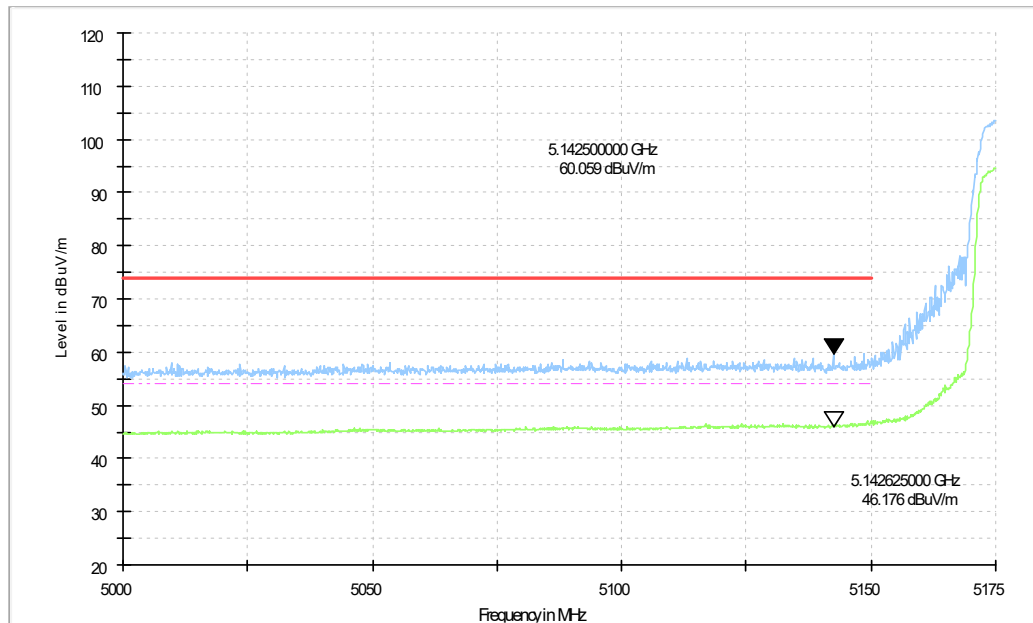


Fig. 1 Band Edges (802.11a Ch36, 5180MHz)

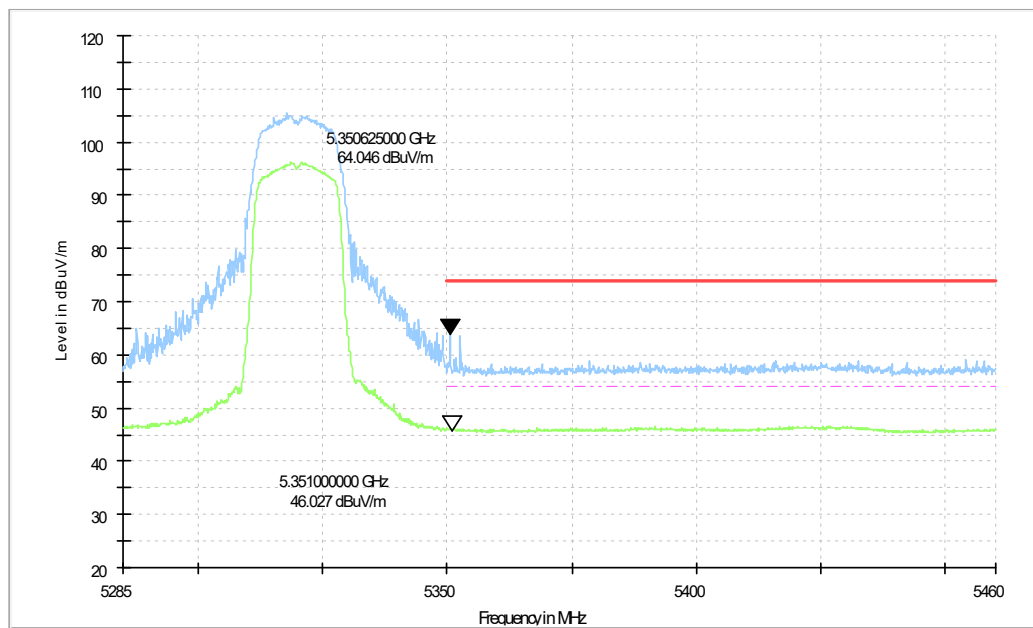


Fig. 2 Band Edges (802.11a Ch64, 5320MHz)

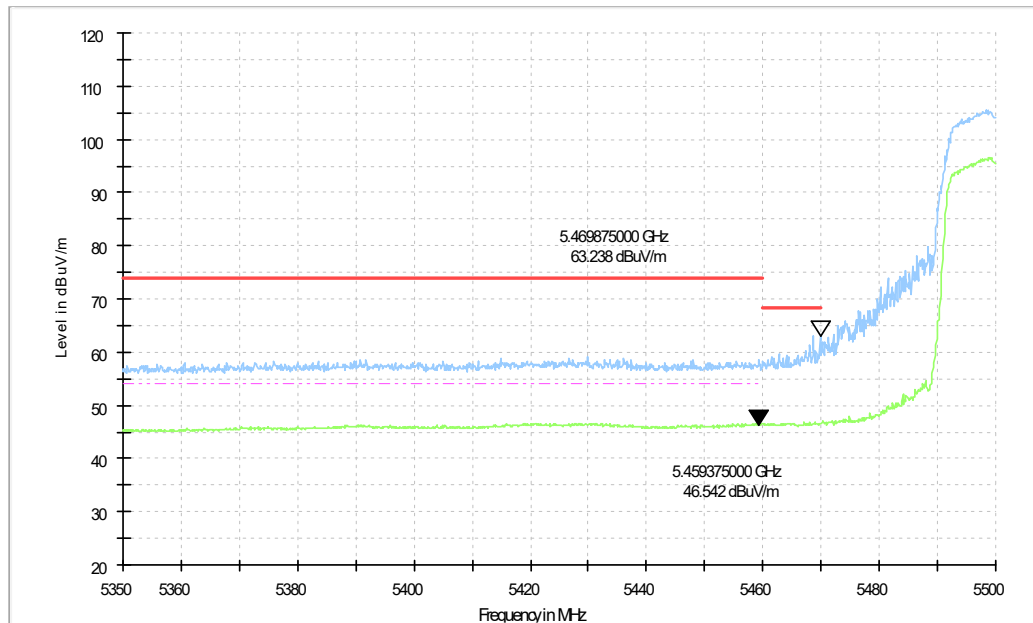


Fig. 3 Band Edges (802.11a Ch100, 5500MHz)

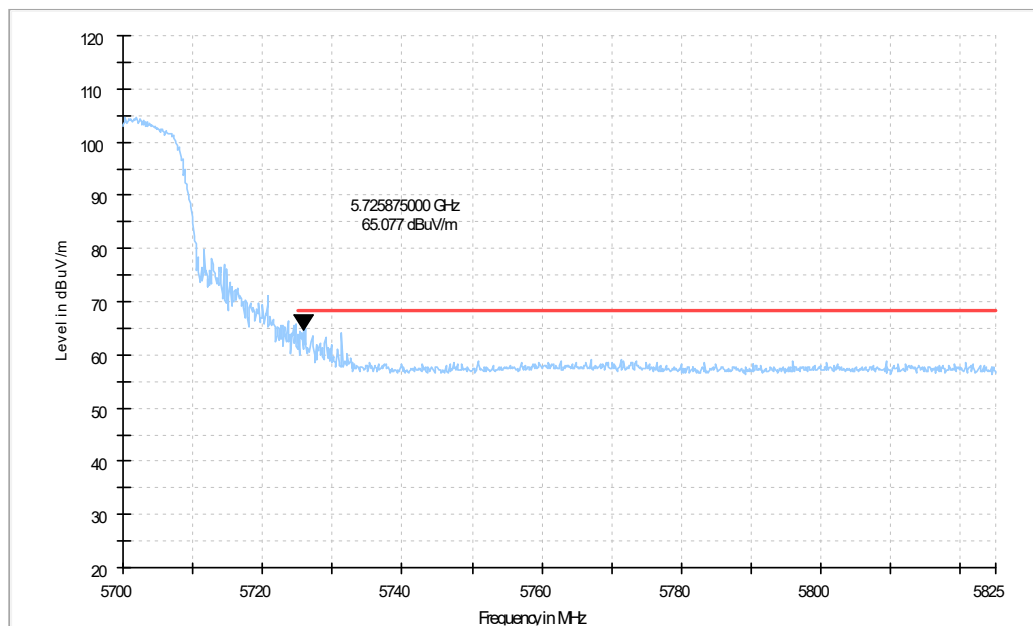


Fig. 4 Band Edges (802.11a Ch140, 5700MHz)

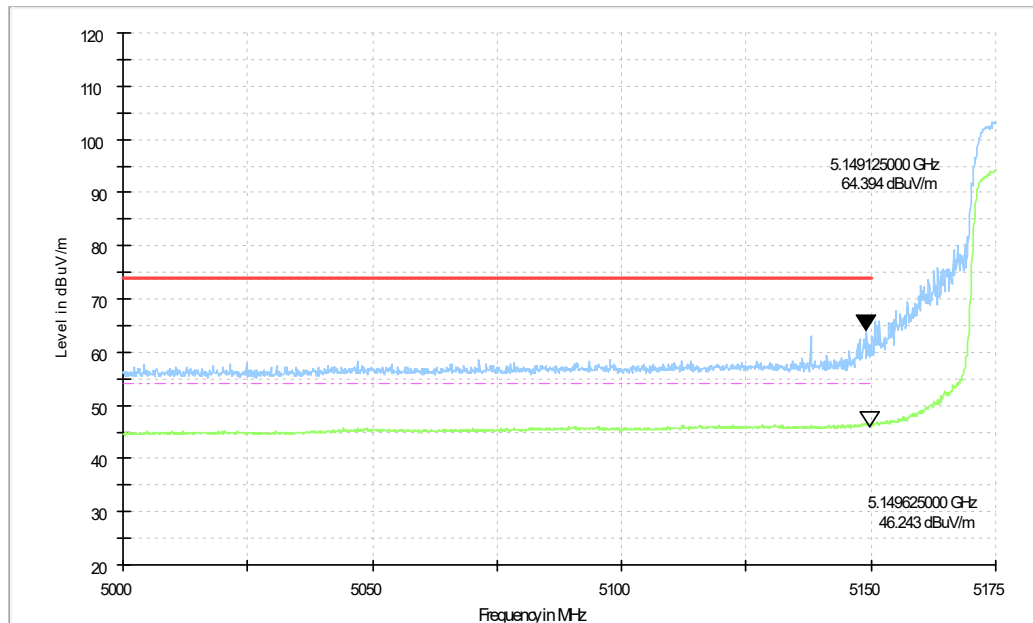


Fig. 5 Band Edges (802.11n-HT20 Ch36, 5180MHz)

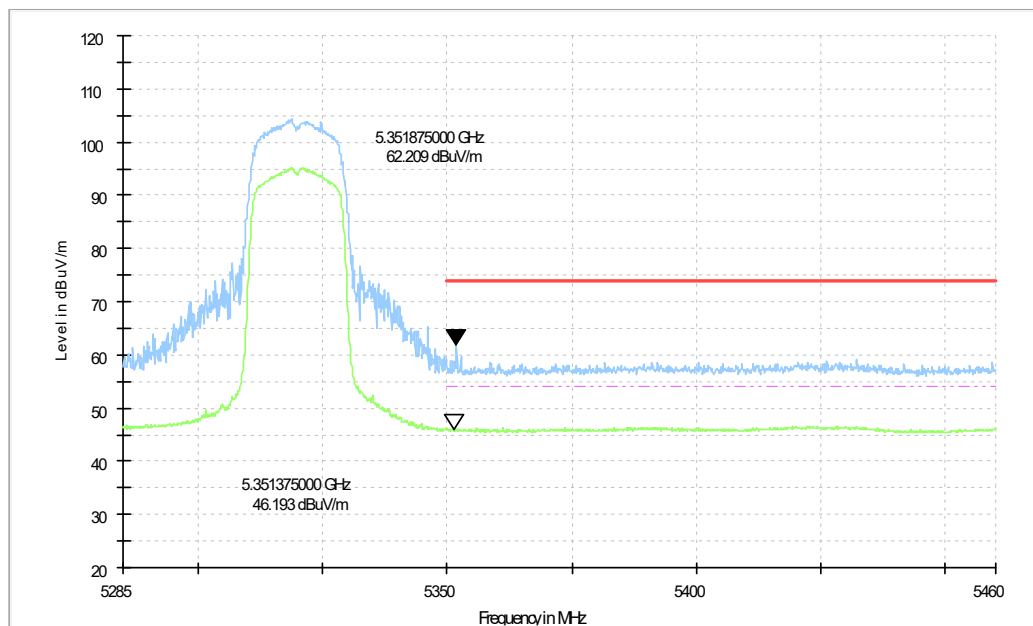


Fig. 6 Band Edges (802.11n-HT20 Ch64, 5320MHz)

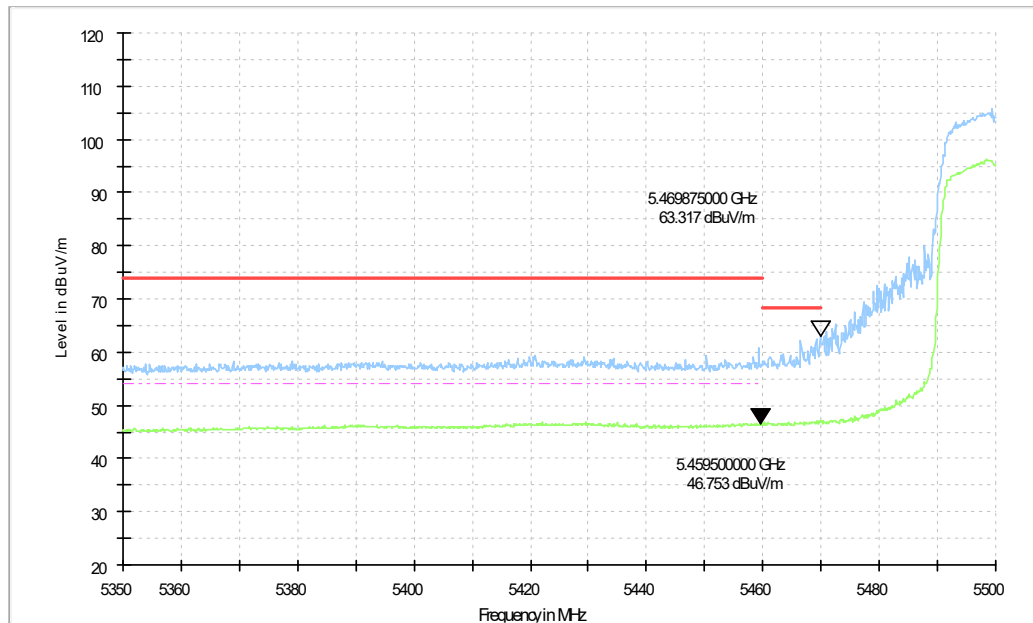


Fig. 7 Band Edges (802.11n-HT20 Ch100, 5500MHz)

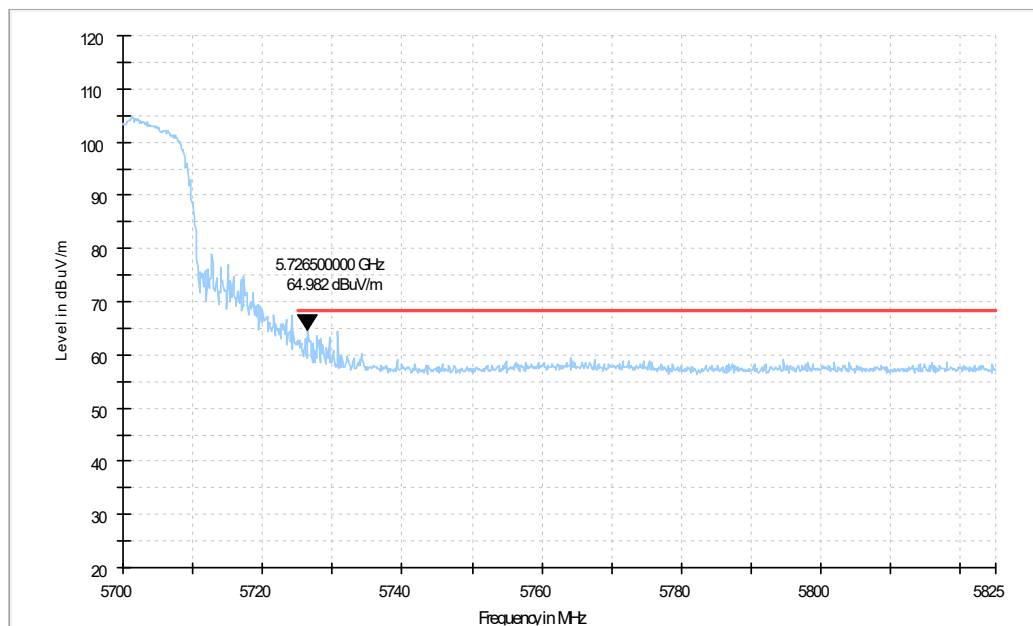


Fig. 8 Band Edges (802.11n-HT20 Ch140, 5700MHz)

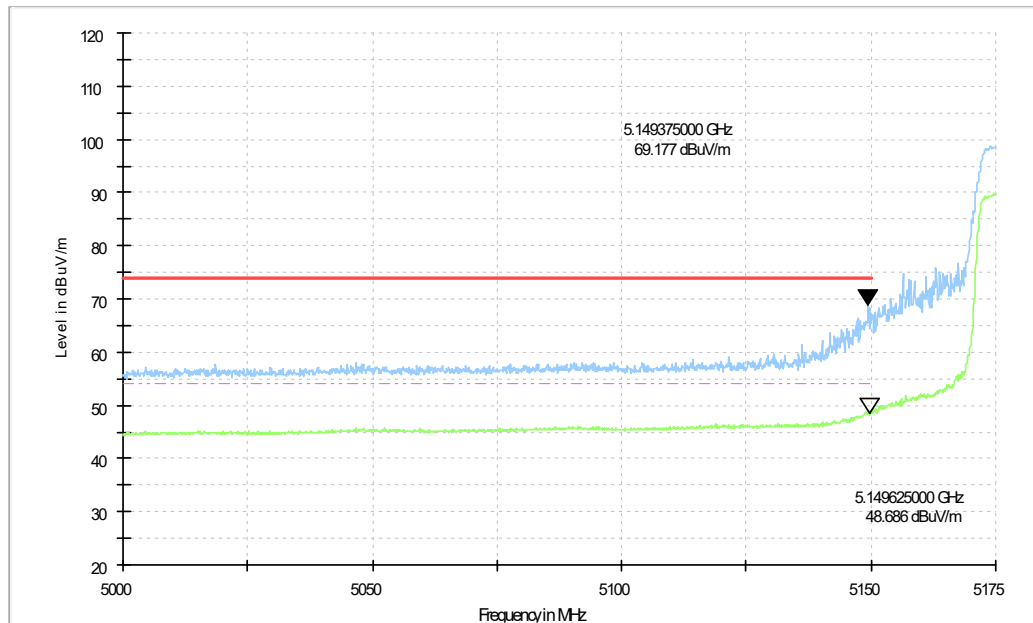


Fig. 9 Band Edges (802.11n-HT40 Ch38, 5190MHz)

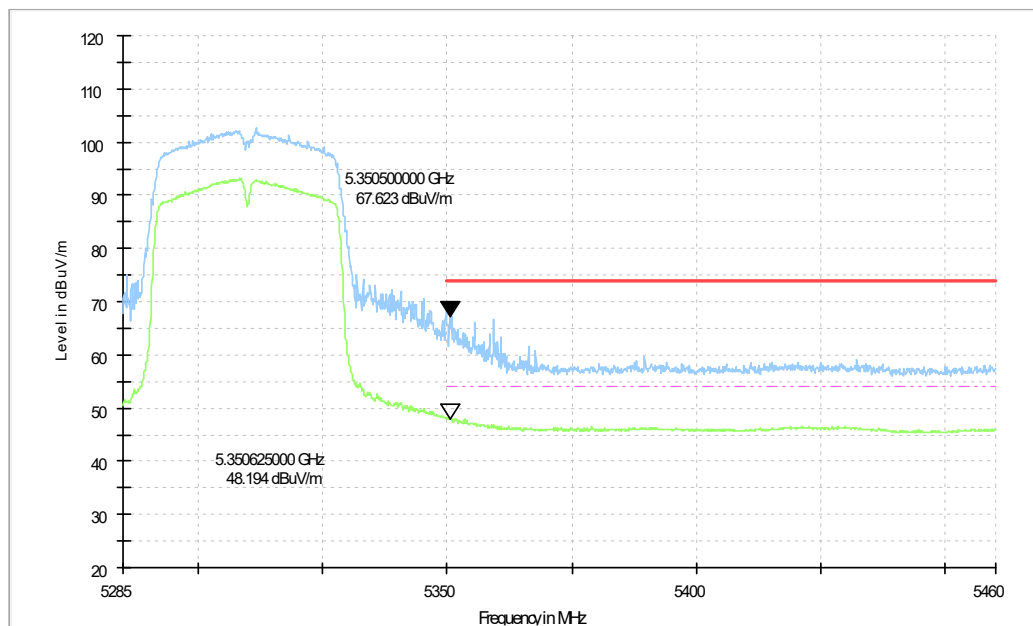


Fig. 10 Band Edges (802.11n-HT40 Ch62, 5310MHz)

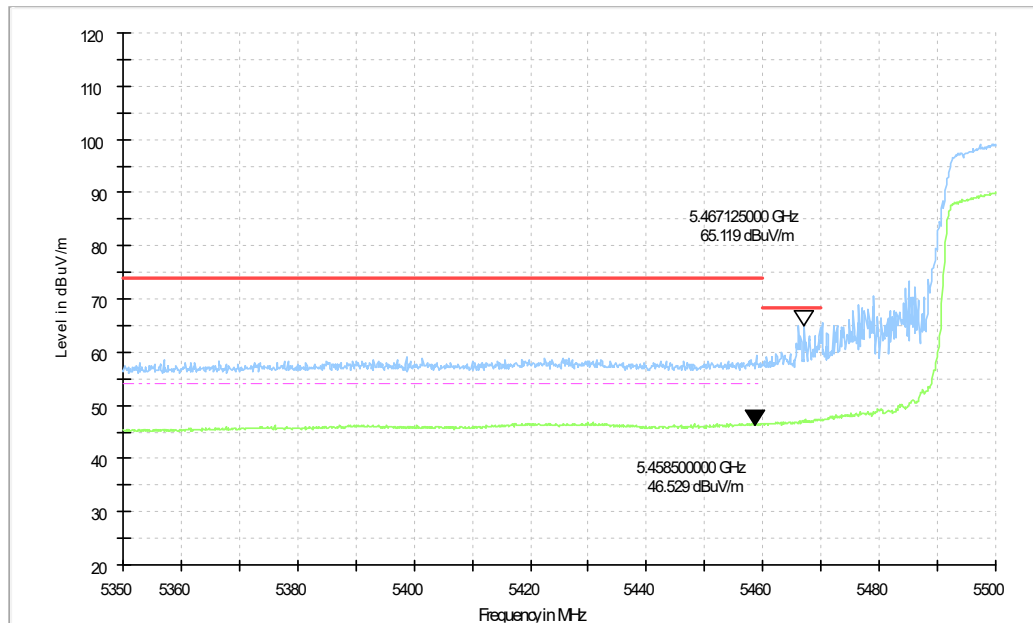


Fig. 11 Band Edges (802.11n-HT40 Ch102, 5510MHz)

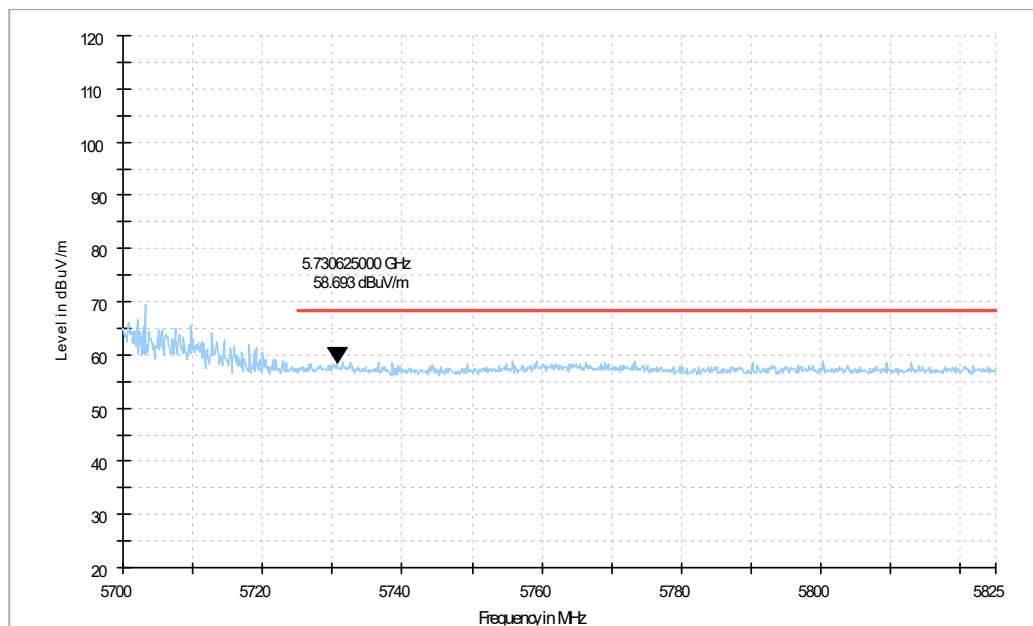


Fig. 12 Band Edges (802.11n-HT40 Ch134, 5670MHz)

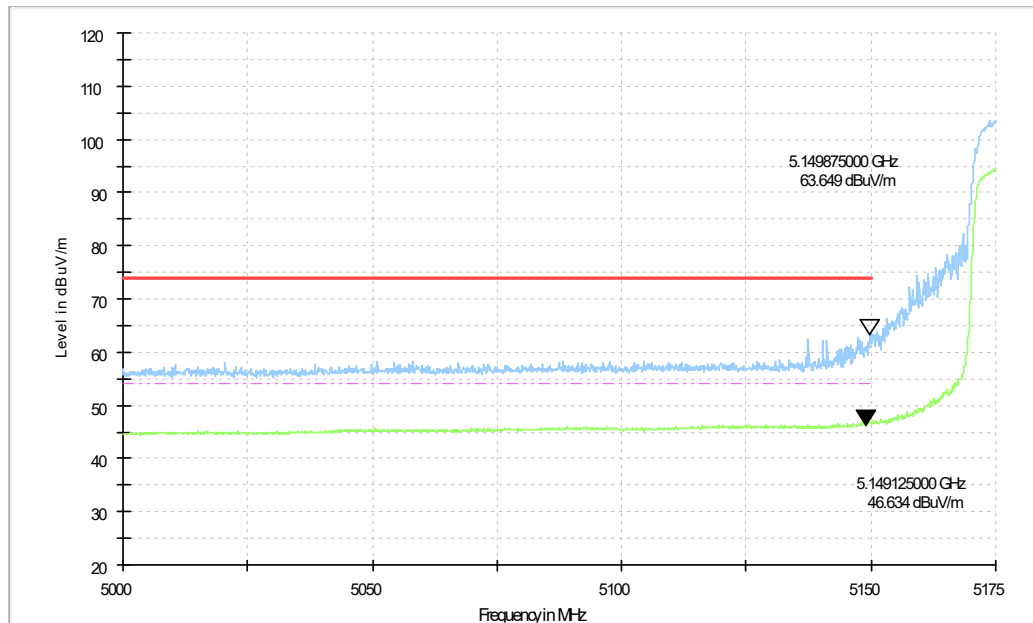


Fig. 13 Band Edges (802.11ac-HT20 Ch36, 5180MHz)

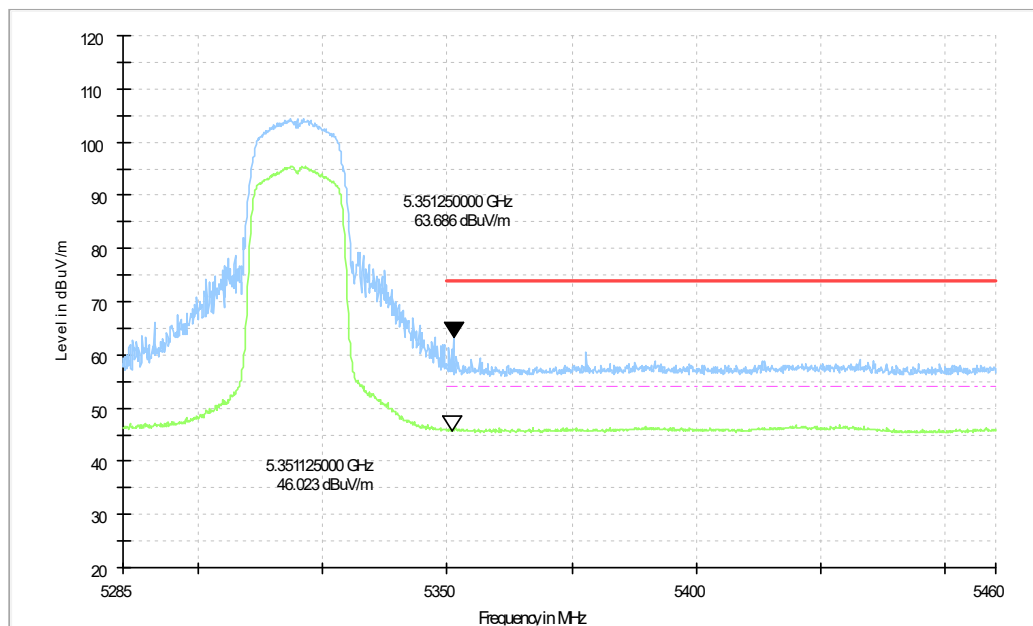


Fig. 14 Band Edges (802.11ac-HT20 Ch64, 5320MHz)

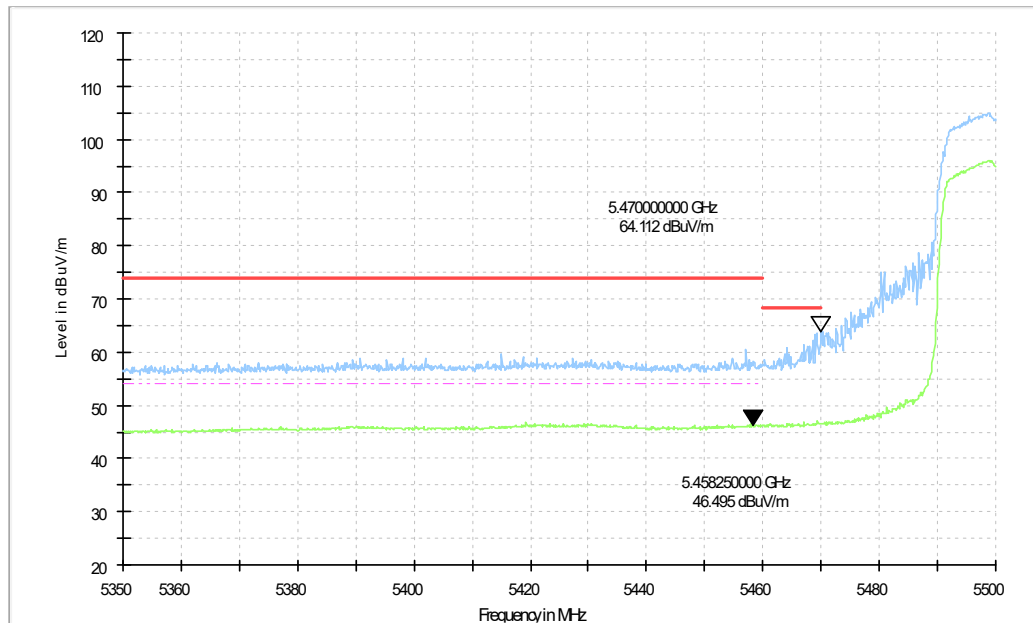


Fig. 15 Band Edges (802.11ac-HT20 Ch100, 5500MHz)

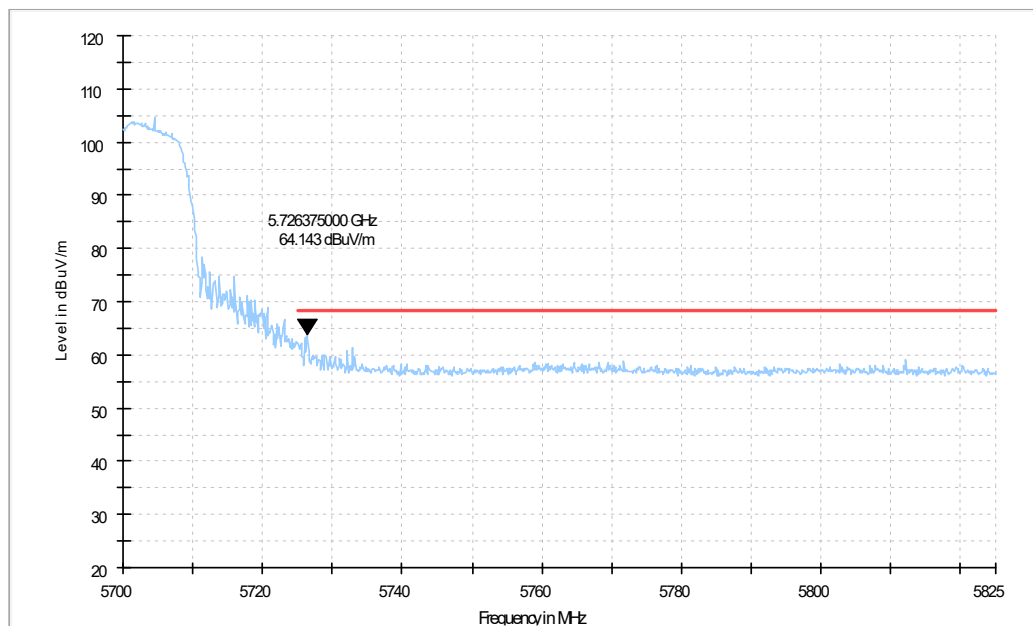


Fig. 16 Band Edges (802.11ac-HT20 Ch140, 5700MHz)

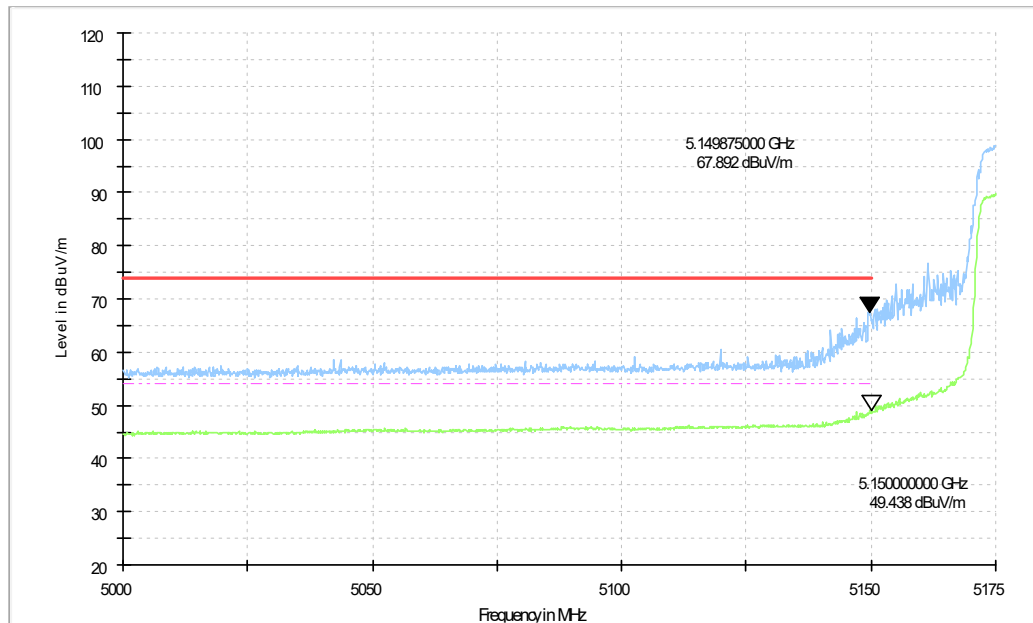


Fig. 17 Band Edges (802.11ac-HT40 Ch38, 5190MHz)

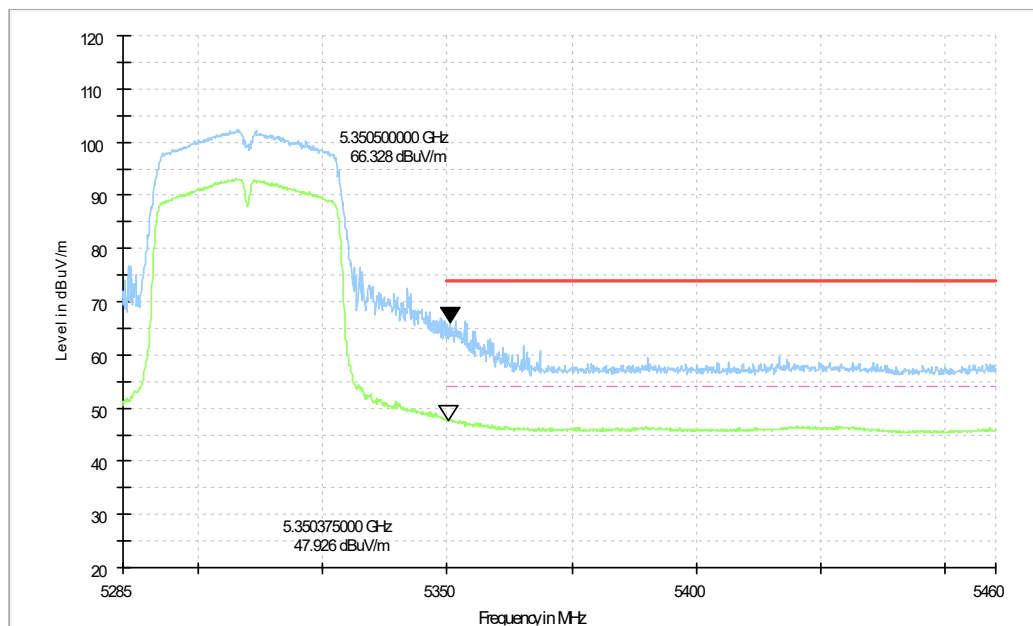


Fig. 18 Band Edges (802.11ac-HT40 Ch62, 5310MHz)

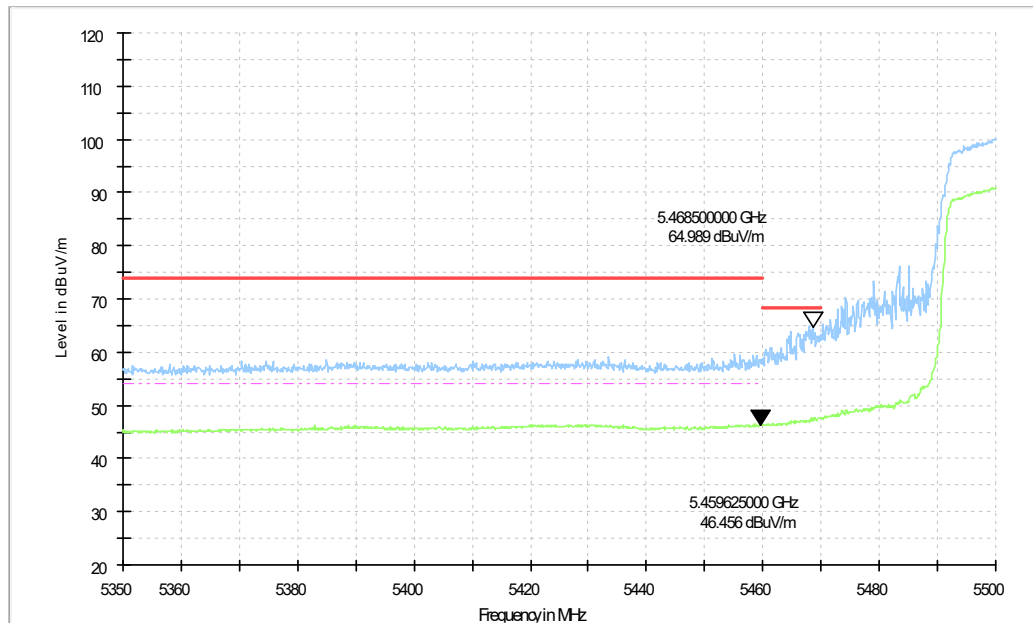


Fig. 19 Band Edges (802.11ac-HT40 Ch102, 5510MHz)

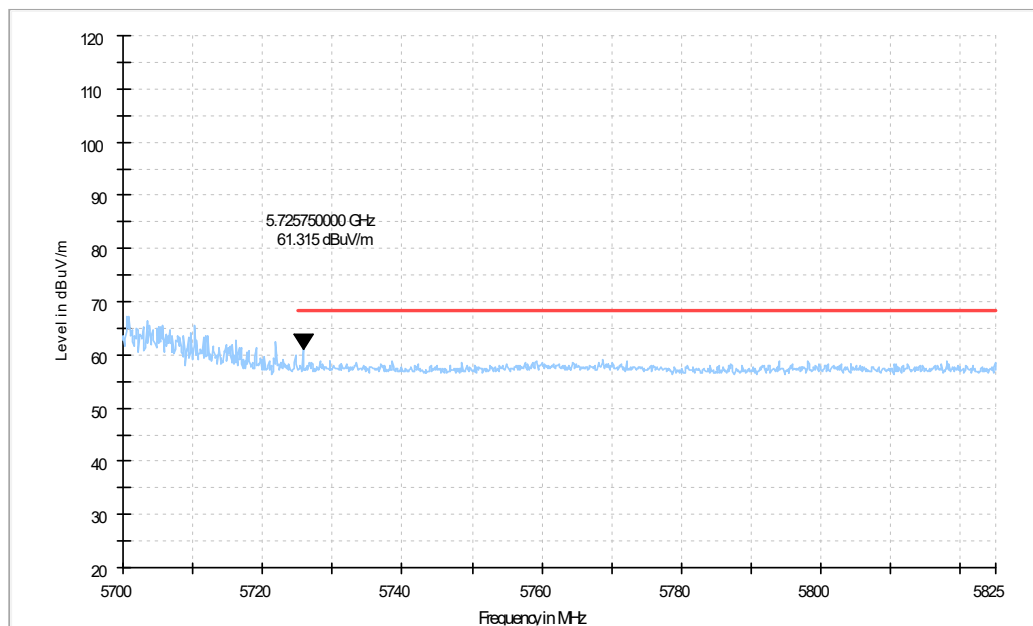


Fig. 20 Band Edges (802.11ac-HT40 Ch134, 5670MHz)

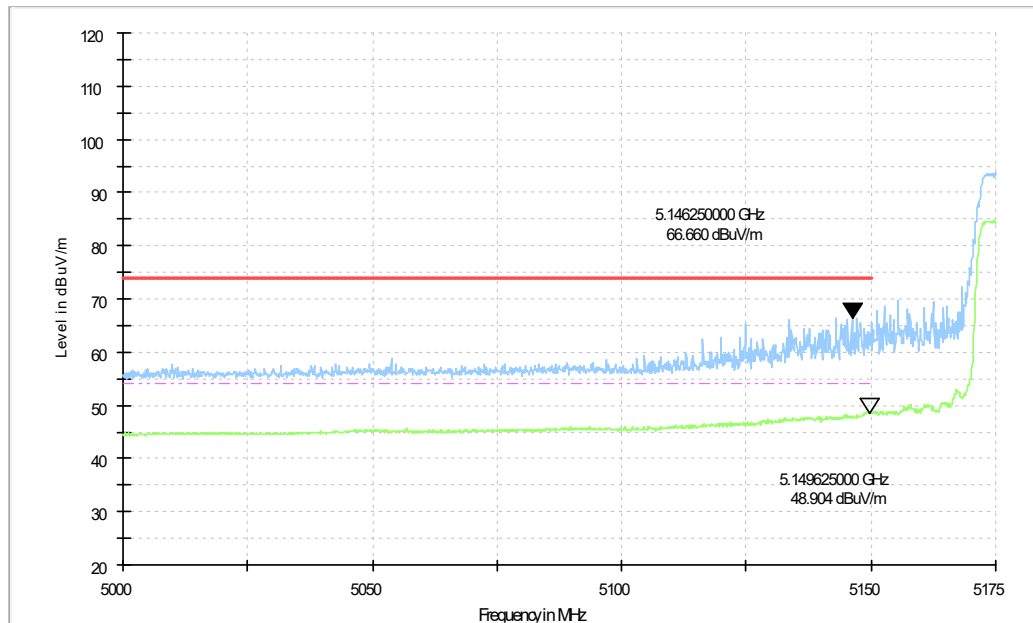


Fig. 21 Band Edges (802.11ac-HT80 Ch42 , 5210MHz)

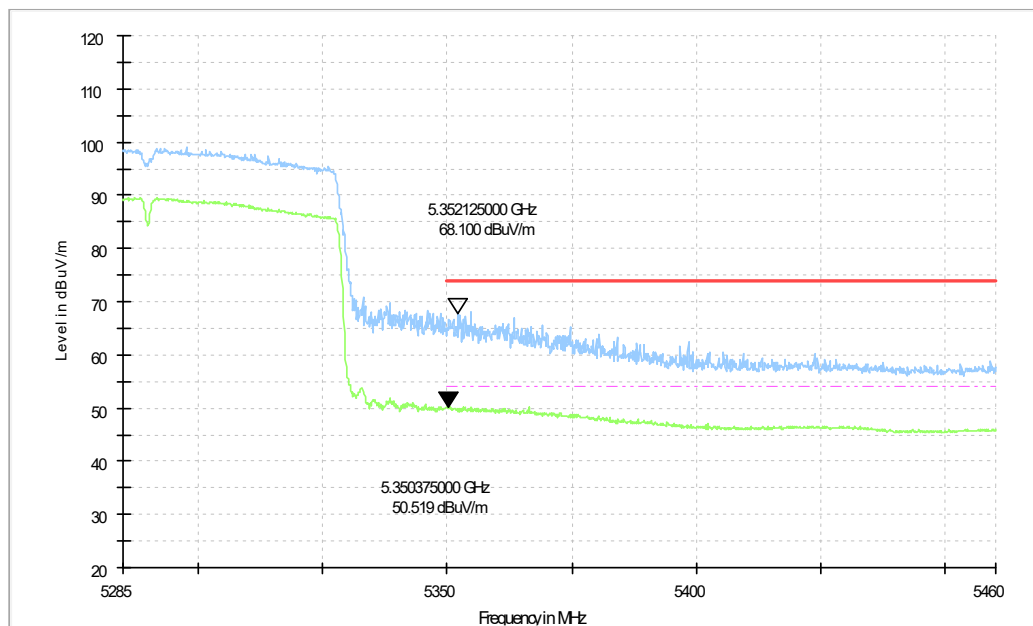


Fig. 22 Band Edges (802.11ac-HT80 Ch58, 5290MHz)

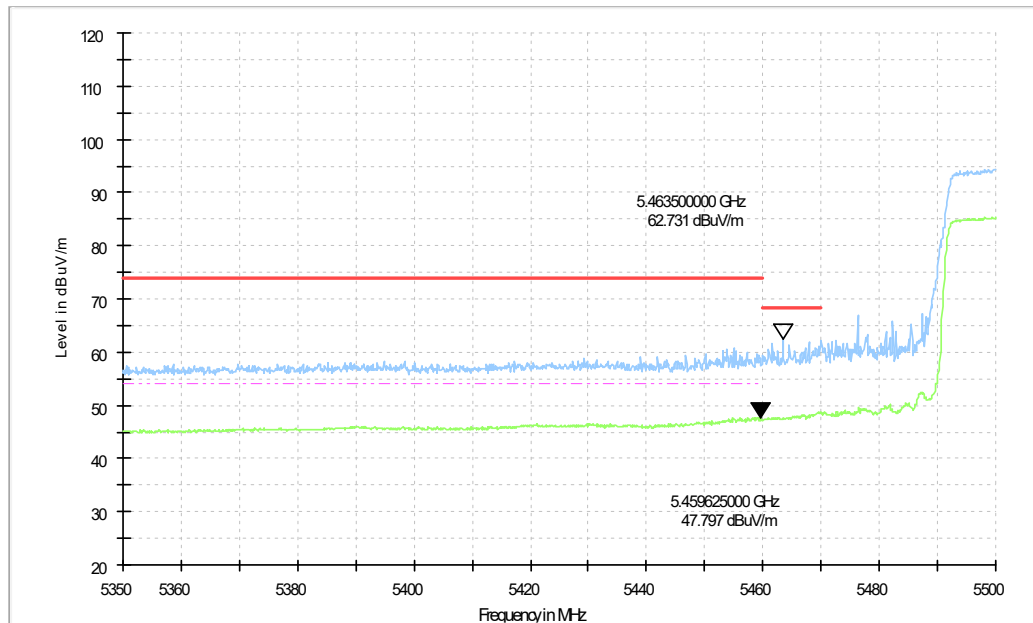


Fig. 23 Band Edges (802.11ac-HT80 Ch106, 5530MHz)

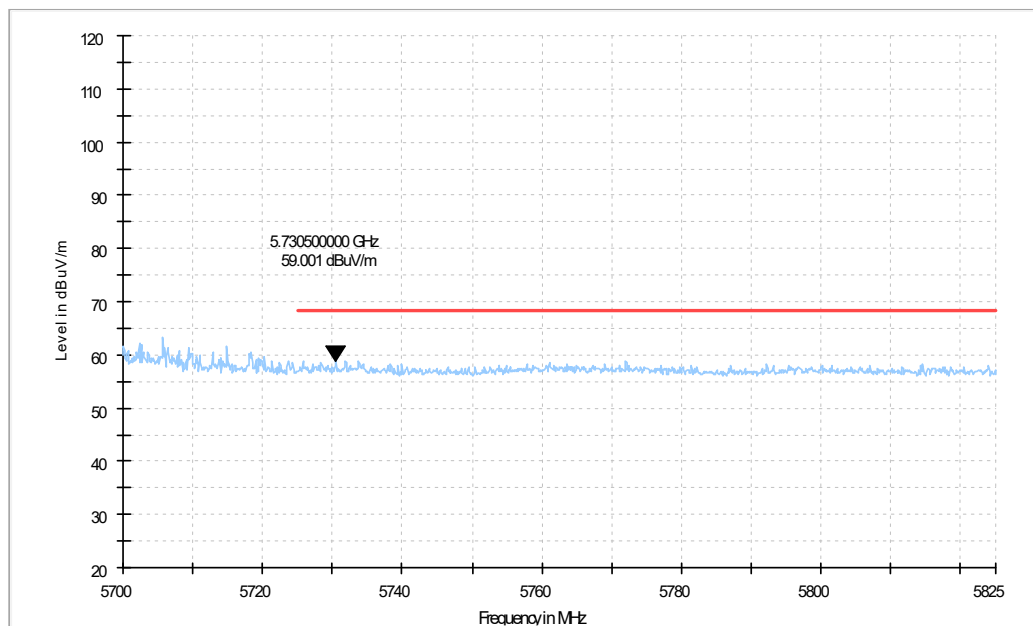


Fig. 24 Band Edges (802.11ac-HT80 Ch122, 5610MHz)

A.6. AC Powerline Conducted Emission (150kHz- 30MHz)

A.6.1 Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

A.6.2 Method of Measurement

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver: Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

A.6.3 Test Condition

Voltage (V)	Frequency (Hz)
120	60

A.6.4 Test setup

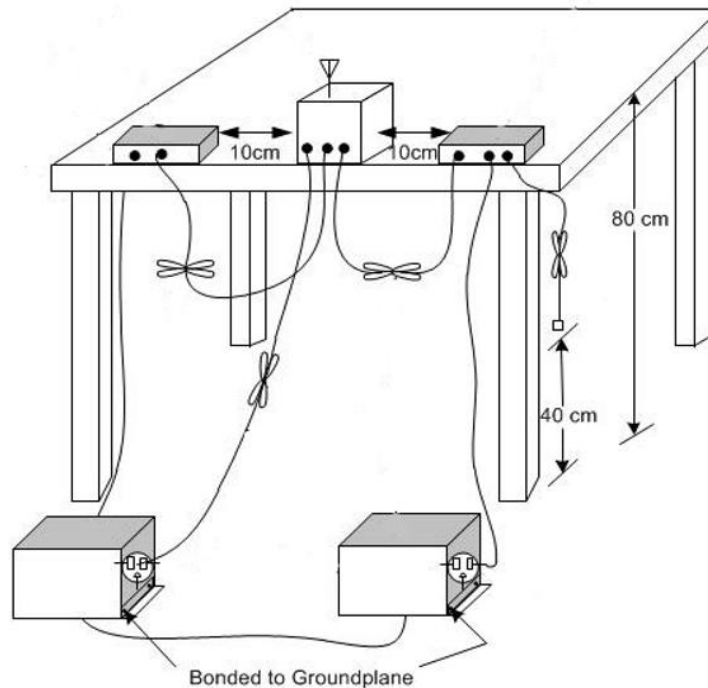

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		11a mode	Idle	
0.15 to 0.5	66 to 56	Fig.25	Fig.26	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		11a mode	Idle	
0.15 to 0.5	56 to 46	Fig.25	Fig.26	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: PASS

Test graphs as below:

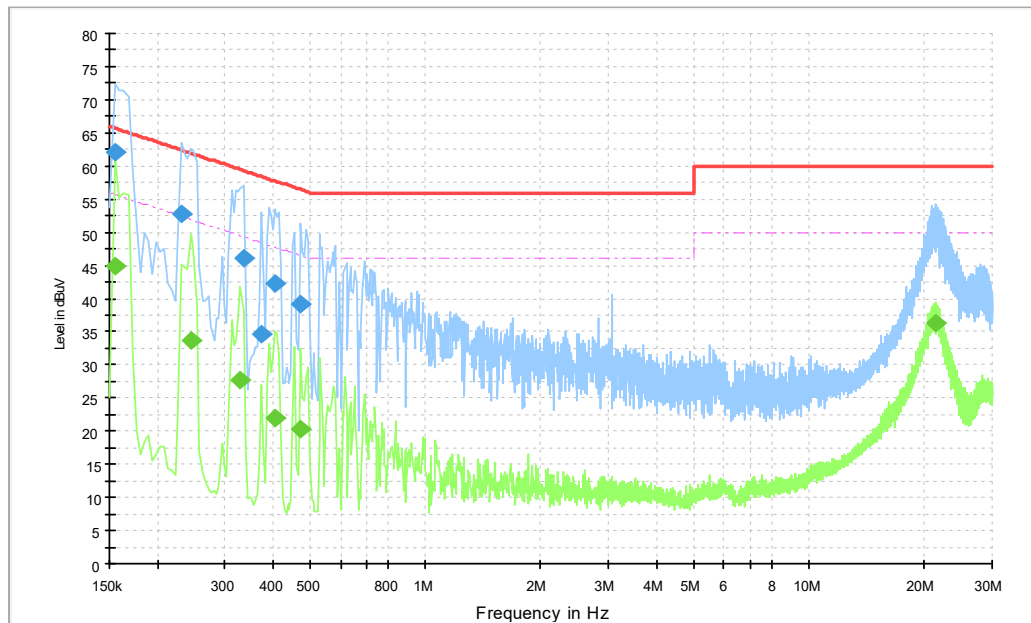


Fig.25 Conducted Emission (802.11a, TX)

Measurement Result:

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154500	62.2	2000.0	9.000	On	L1	20.1	3.6	65.8
0.231000	52.8	2000.0	9.000	On	L1	20.0	9.6	62.4
0.334500	46.0	2000.0	9.000	On	L1	20.0	13.3	59.3
0.375000	34.7	2000.0	9.000	On	L1	20.0	23.7	58.4
0.406500	42.2	2000.0	9.000	On	L1	20.0	15.5	57.7
0.474000	39.2	2000.0	9.000	On	L1	20.1	17.2	56.4

Measurement Result:

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154500	44.8	2000.0	9.000	On	L1	20.1	10.9	55.8
0.244500	33.7	2000.0	9.000	On	L1	20.0	18.2	51.9
0.330000	27.7	2000.0	9.000	On	L1	20.0	21.7	49.5
0.406500	22.1	2000.0	9.000	On	L1	20.0	25.6	47.7
0.474000	20.3	2000.0	9.000	On	L1	20.1	26.2	46.4
21.345000	36.4	2000.0	9.000	On	L1	20.1	13.6	50.0

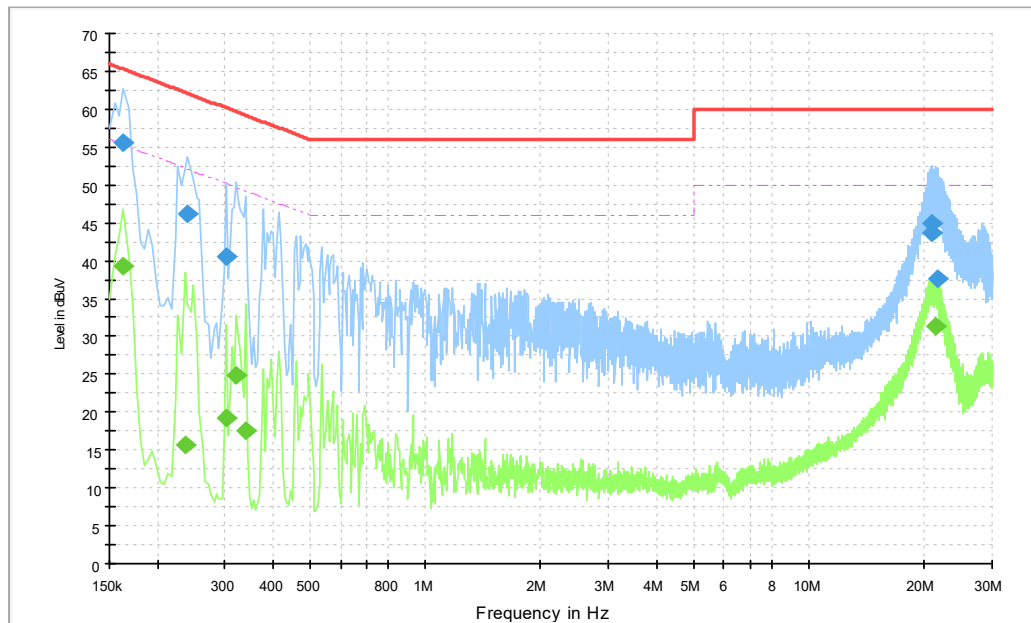


Fig.26 Conducted Emission (802.11a, IDLE)

Measurement Result:

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.163500	55.5	2000.0	9.000	On	L1	20.0	9.8	65.3
0.240000	46.1	2000.0	9.000	On	L1	20.0	16.0	62.1
0.303000	40.5	2000.0	9.000	On	L1	20.0	19.7	60.2
20.818500	45.0	2000.0	9.000	On	L1	20.1	15.0	60.0
20.967000	43.8	2000.0	9.000	On	L1	20.1	16.2	60.0
21.520500	37.6	2000.0	9.000	On	L1	20.1	22.4	60.0

Measurement Result:

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.163500	39.3	2000.0	9.000	On	L1	20.0	15.9	55.3
0.235500	15.8	2000.0	9.000	On	N	20.0	36.5	52.3
0.303000	19.3	2000.0	9.000	On	L1	20.0	30.8	50.2
0.321000	25.0	2000.0	9.000	On	L1	20.0	24.7	49.7
0.339000	17.5	2000.0	9.000	On	L1	20.0	31.7	49.2
21.264000	31.3	2000.0	9.000	On	L1	20.1	18.7	50.0

A.7. 99% Occupied bandwidth

Method of Measurement: See ANSI C63.10-2013-clause 12.4.2.

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

EUT ID: UT11a

Measurement Result:

TestMode	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	5180	17.145	5171.4262	5188.5710	---	---
	5200	17.094	5191.4427	5208.5364	---	---
	5240	17.124	5231.4558	5248.5801	---	---
11AC20SISO	5180	18.043	5171.0030	5189.0457	---	---
	5200	18.021	5190.9496	5208.9704	---	---
	5240	17.991	5231.0017	5248.9928	---	---
11AC40SISO	5190	36.283	5171.8099	5208.0927	---	---
	5230	36.482	5211.7648	5248.2464	---	---
11AC80SISO	5210	75.238	5172.4124	5247.6503	---	---