



TEST REPORT

No. 25T04Z200151-002

for

Samsung Electronics Co., Ltd.

Multi-band GSM/WCDMA/LTE Tablet with Bluetooth,WLAN

Model Name: SM-X135G

with

FCC ID: ZCASM135G

Hardware Version: REV1.0

Software Version: X135G.001

Issued Date: 2025-06-27

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
25T04Z200151-002	Rev.0	1 st edition	2025-06-27

Note: the latest revision of the test report supersedes all previous versions.

CONTENTS

1. TEST LABORATORY	4
1.1. INTRODUCTION & ACCREDITATION	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT	4
1.4. PROJECT DATA	4
1.5. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	6
3.4. EUT SET-UPS	7
4. REFERENCE DOCUMENTS	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING	8
5. SUMMARY OF TEST RESULTS	9
6. TEST FACILITIES UTILIZED	10
7. MEASUREMENT UNCERTAINTY	11
ANNEX A: EUT PARAMETERS	12
ANNEX B: MEASUREMENT RESULTS	13
ANNEX C: PERSONS INVOLVED IN THIS TESTING	37

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

CTTL (BDA)

Address: No. 18A, Kangding Street, Beijing Economic-Technology Development Area, Beijing, 100176, P.R. China

1.3. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.4. Project data

Testing Start Date: 2025-06-09

Testing End Date: 2025-06-26

1.5. Signature



Li Yan

(Prepared this test report)



Zhang Ying

(Reviewed this test report)



Shi Suolan

Deputy Director of the laboratory

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Samsung Electronics Co., Ltd.
Address: 19 Chapin Rd., Building D Pine Brook, NJ 07058
City: /
Postal Code: /
Country: /
Contact Person: Jenni Chun
Contact Email: j1.chun@samsung.com
Telephone: +1-201-937-4203
Fax: /

2.2. Manufacturer Information

Company Name: Samsung Electronics. Co., Ltd.
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Republic of Korea
City: /
Postal Code: /
Country: /
Contact Person: Kobe Cho
Contact Email: ggobi.cho@samsung.com
Telephone: +82-10-2722-4159
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Multi-band GSM/WCDMA/LTE Tablet with Bluetooth,WLAN
Model name	SM-X135G
FCC ID	ZCASM135G

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI/SN	HW Version	SW Version
UT01a	2504200151UT01a	REV1.0	X135G.001
UT02a	2504200151UT02a	REV1.0	X135G.001

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Name	Model	Manufacturer
AE1-1	Battery 1	HQ-3565S	SCUD(Fujian) Electronics Co., Ltd.
AE1-2	Battery 2	HQ-6739SDS	SCUD(Fujian) Electronics Co., Ltd.
AE2-1*	Adapter 1	EP-T1510	DongYang
AE2-2*	Adapter 2	EP-TA200	RFTECH
AE3-1	Date Cable C-C	EP-DN980BWE	Cresyn
AE3-2	Date Cable C-C	EP-DN980BWE	Luxshare
AE4*	Date Cable C-A	EP-DR140AWE	Cresyn
AE5*	Headset	EHS61ASFWE	/
AE6*	PC	/	/
AE7*	SD card	/	/
AE8*	MHD	/	/

* The USB cables are shielded.

*AE ID: is used to identify the test sample in the lab internally.

* AE2-1, AE2-2, AE4 and AE5 are not the AE for EUT, provided by the client for relevant tests.

* AE6, AE7 and AE8 are not the AE for EUT, provided by the Lab for relevant tests.

3.4. EUT set-ups

Set-up

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT + AE2-1 + AE3-1/2 + AE5	Adapter1+ headset
Set.2	EUT + AE2-1 + AE3-1/2	Adapter1
Set.3	EUT + AE2-2 + AE4 + AE5	Adapter2+ headset
Set.4	EUT + AE3-1/2 + EUT + (AE5)	EUT+EUT
Set.5	EUT + AE3-1/2 + MHD+ AE5	EUT+MHD
Set.6	EUT + AE3-1/2 + PC+ SD + AE5	Type C communication with PC
Set.7	EUT + AE4 + PC + SD+ AE5	USB communication with PC+SD

Test mode

Mode No.	Operating mode	Remarks
mode.1	MP4 Play	RE, CE
mode.2	Front Camera	RE, CE
mode.3	Rear Camera	RE, CE
mode.4	OTG Phone to Phone	RE only
mode.5	OTG + Mobile HD+MP4	RE only
mode.6	USB DATA (TYPE C)	RE, CE
mode.7	USB DATA (USB, SD TO PC)	RE, CE
mode.8	CXX RX mode	GSM850, WCDMA Band 5, LTE Band 5, LTE Band 12, LTE Band 17 and LTE Band 26 (Low/Mid/High channel)

4. Reference Documents

4.1. Documents supplied by applicant

EUT parameters are supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC 47 CFR Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2023
ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
	BR	Re-use test data from basic model report.

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	CTTL(BDA)
2	Conducted Emission	15.107(a)	B.2	P	CTTL(BDA)

6. Test Facilities Utilized

Test Equipment

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURER	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESU26	100376	R&S	2026-06-20	1 year
2	Test Receiver	ESCI	100766	R&S	2026-05-07	1 year
3	LISN	ENV216	101459	R&S	2026-05-07	1 year
4	BiLog Antenna	VULB9163	01177	Schwarzbeck	2025-11-19	1 year
5	EMI Antenna	3117	00119021	ETS-Lindgren	2025-09-18	1 year
6	Universal Radio Communication Tester	CMW500	167943	R&S	2026-01-25	1 Year
7	Universal Radio Communication Tester	CMW500	159408	R&S	2026-02-16	1 Year
8	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
9	Keyboard	KU-1601	2048361	Lenovo	N/A	N/A
10	Mouse	EMS-537A	8021S3MC	Lenovo	N/A	N/A
11	PC	M4000e-17	M706RMW2	Lenovo	N/A	N/A
12	PC	T14S	PC-1RP0TY	Lenovo	N/A	N/A

Test Software

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V8.53.0	R&S
Conducted Emission	EMC32 V8.53.0	R&S

7. Measurement Uncertainty

Where relevant, the following measurement uncertainty (worse case) levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Location 1: CTTL (huayuan North Road)

Test item	Frequency ranges	Measurement uncertainty
Radiated Emission	30MHz-1GHz	4.72dB(k=2)
	1GHz-18GHz	4.84dB(k=2)
Conducted Emission	150kHz-30MHz	3.08dB(k=2)

Location 2: CTTL (BDA)

Test item	Frequency ranges	Measurement uncertainty
Radiated Emission	30MHz-1GHz	5.73dB(k=2)
	1GHz-18GHz	5.58dB(k=2)
Conducted Emission	150kHz-30MHz	3.10dB(k=2)

ANNEX A: EUT parameters

Description	Multi-band GSM/WCDMA/LTE Tablet with Bluetooth,WLAN	
Model name	SM-X135G	
Marketing name	Galaxy Tab A11	
Brand name	SAMSUNG	
Cellular Bands	☒ GSM	Bands 850/900/1800/1900MHz
	☐ CDMA	/
	☒ WCDMA	Bands 1/2/4/5/8
	☒ LTE	Bands 1/2/3/4/5/7/8/12/17/20/26/28/38/40/41/66
	☐ 5G NR SA	/
	☐ 5G NR NSA	/
Unlicensed Radio	☒ Wi-Fi 2.4GHz	802.11b/g/n(20MHz)
	☒ Wi-Fi 5GHz	802.11a/n(20MHz,40MHz)/ac(20MHz,40MHz,80MHz)
	☒ Wi-Fi 5.8GHz	802.11a/n(20MHz,40MHz)/ac(20MHz,40MHz,80MHz)
	☒ Bluetooth	☒ EDR ☐ BLE4 ☒ BLE5
Other	☒ GNSS	☒ GPS ☐ BDS ☒ Galileo ☐ Glonass
	☐ FM ☒ MP3 ☒ MP4 ☒ Camera ☒ USB ☐ NFC ☒ External memory	

The device contains receivers which tune and operate between 30MHz-960MHz in the following bands: GSM850, WCDMA Band 5, LTE Band 5, LTE Band 12, LTE Band 17 and LTE Band 26. For more EUT information please refers to the manufacturer's specifications or user's manual.

Disclaimer: The EUT information provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX B: MEASUREMENT RESULTS

B.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

B.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator at distances of 3 meters (for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.

For the test setup photographs please see the test setup photos document.

B.1.2 EUT Operating Mode

The EUT is operating in the USB mode, charging mode, MP3, MP4, CAMERA, OTG, SD and cellular RX mode.

The EUT was tested while operating in licensed band RX mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in the Annex A, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

B.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V/m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance.

B.1.4 Test Condition

Voltage (V)	Frequency (Hz)
120	60

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

B.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Note: all the set-up and operating mode list in section 3.4 were tested, only the worst test data are showed in this section.

Set.1+Mode3, Rear Camera

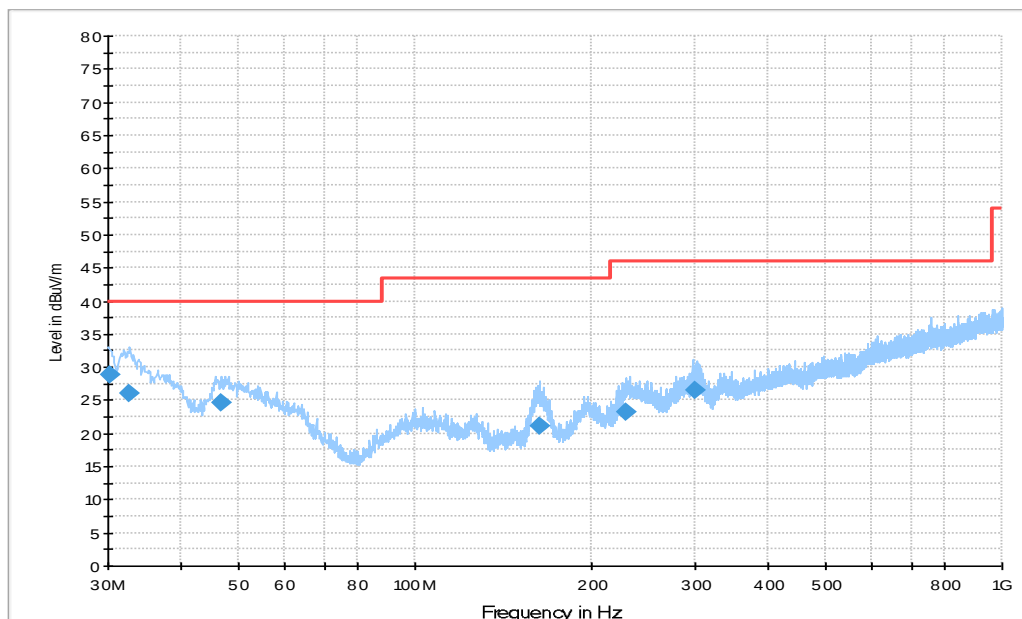


Figure A.1 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
30.120000	28.9	100.0	V	292.0	-3.6	11.1	40.0
32.579000	26.1	100.0	V	260.0	-3.4	13.9	40.0
46.881000	24.6	100.0	V	286.0	0.4	15.4	40.0
163.18400	21.1	100.0	V	180.0	-3.8	22.4	43.5
229.41500	23.2	100.0	H	196.0	0.2	22.8	46.0
30.120000	28.9	100.0	V	292.0	-3.6	11.1	40.0

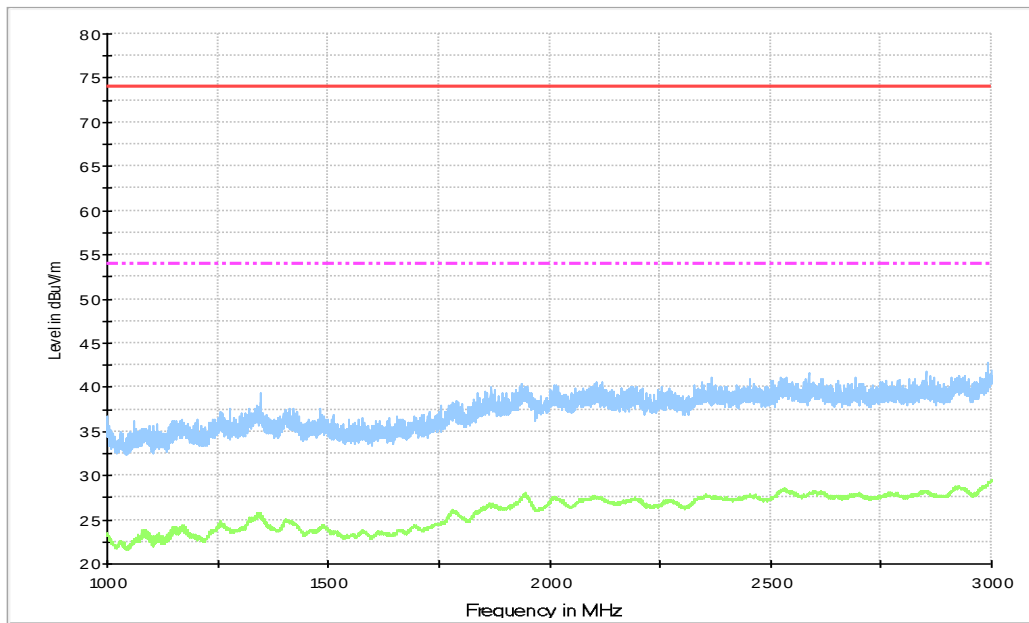


Figure A.2 Radiated Emission from 1GHz to 3GHz

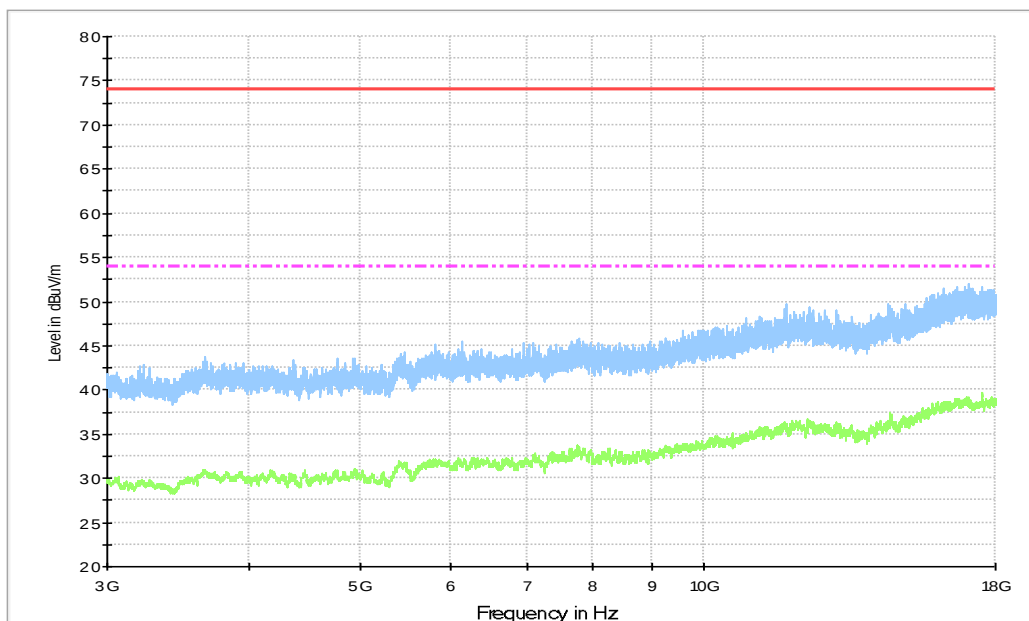


Figure A.3 Radiated Emission from 3GHz to 18GHz

Average detector result

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17540.00	40.60	-20.63	40.76	20.47	54.00	13.40	V
17540.50	40.60	-20.67	40.76	20.50	54.00	13.40	V
17542.00	40.56	-20.79	40.76	20.59	54.00	13.44	V
17539.50	40.47	-20.67	40.76	20.39	54.00	13.53	V
17539.00	40.46	-20.72	40.76	20.42	54.00	13.54	V
17541.00	40.42	-20.71	40.76	20.37	54.00	13.58	V

Peak detector result

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
16948.00	52.77	-22.25	41.26	33.76	74.00	21.23	H
17199.00	52.67	-22.16	40.90	33.93	74.00	21.33	V
17198.50	52.55	-22.17	40.90	33.81	74.00	21.45	V
17721.50	52.50	-21.90	40.52	33.87	74.00	21.50	V
16693.50	52.45	-22.58	41.39	33.64	74.00	21.55	H
17689.00	52.43	-21.57	40.52	33.47	74.00	21.57	V

Set.2+Mode1+Mode8, MP4 + RX LTE Band 12

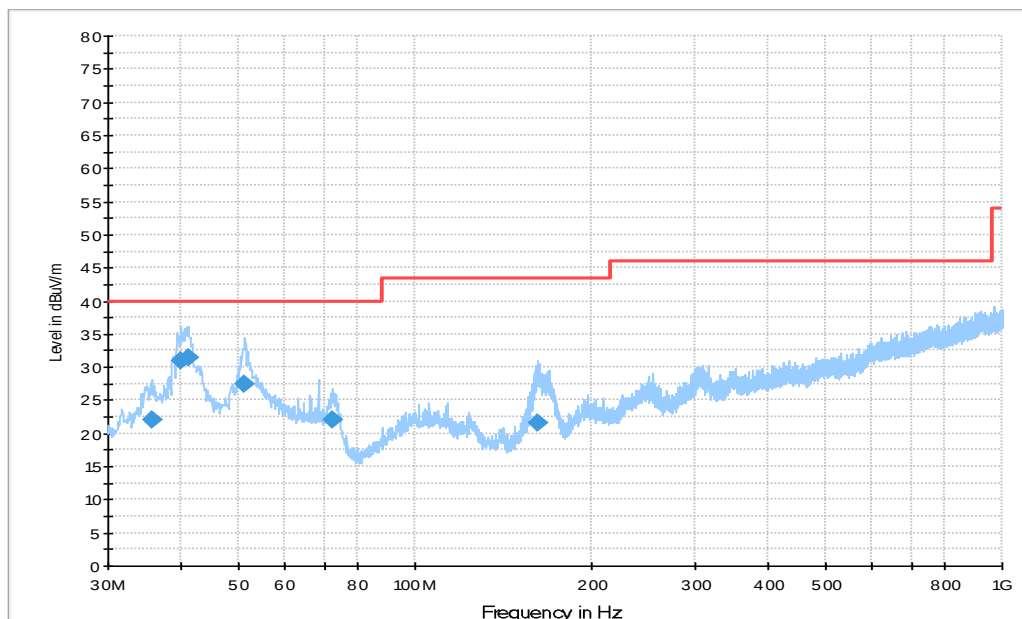


Figure A.4 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
35.586000	22.0	100.0	V	164.0	-2.3	18.0	40.0
39.974000	31.0	100.0	V	87.0	-0.6	9.0	40.0
41.041000	31.5	100.0	V	100.0	-0.4	8.5	40.0
51.360000	27.4	100.0	V	202.0	0.4	12.6	40.0
72.192000	22.0	100.0	V	273.0	-4.9	18.0	40.0
161.91700	21.6	100.0	V	196.0	-3.9	21.9	43.5

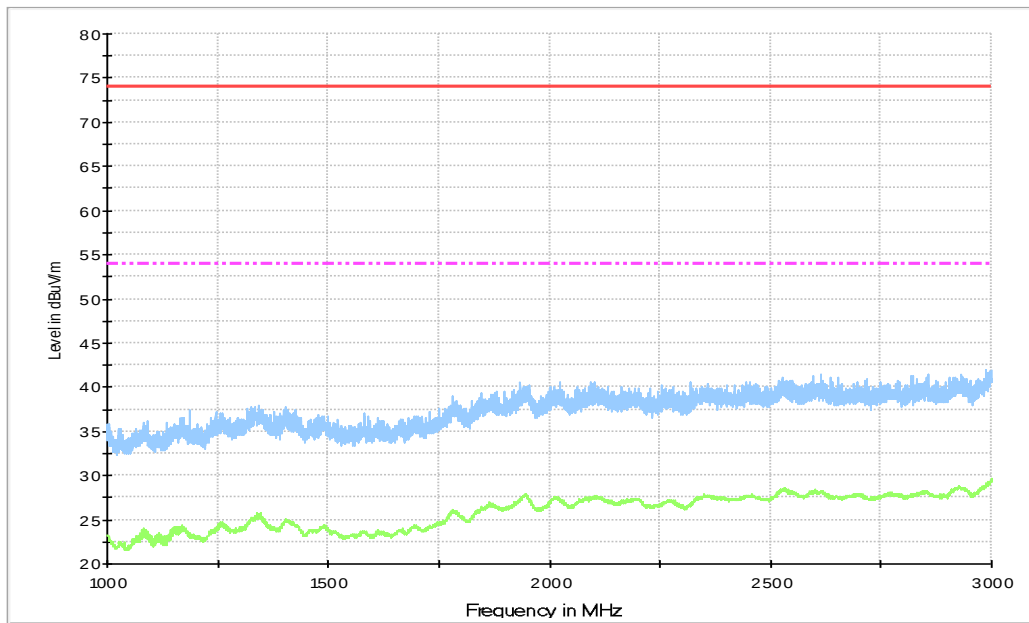


Figure A.5 Radiated Emission from 1GHz to 3GHz

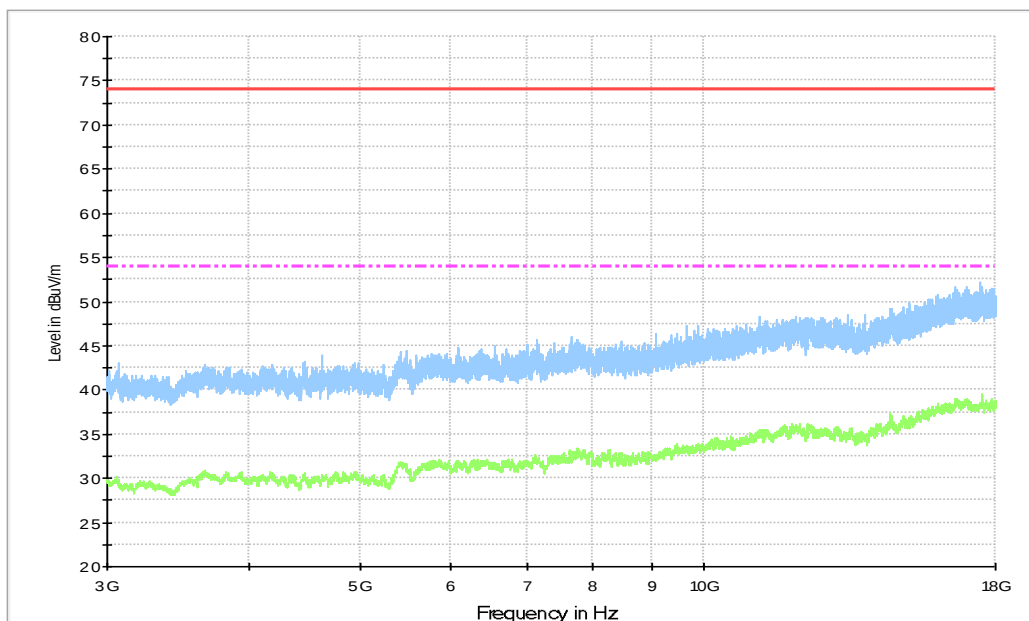


Figure A.6 Radiated Emission from 3GHz to 18GHz

Average detector result

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17540.00	40.38	-20.63	40.76	20.24	54.00	13.62	V
17538.50	40.26	-20.77	40.76	20.27	54.00	13.74	V
17542.50	40.25	-20.83	40.76	20.33	54.00	13.75	V
17540.50	40.13	-20.67	40.76	20.04	54.00	13.87	V
17541.00	40.10	-20.71	40.76	20.05	54.00	13.90	H
17542.00	40.09	-20.79	40.76	20.13	54.00	13.91	V

Peak detector result

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
16694.50	52.63	-22.57	41.39	33.81	74.00	21.37	H
16981.50	52.56	-22.18	41.16	33.59	74.00	21.44	V
17796.00	52.52	-21.36	40.60	33.29	74.00	21.48	V
17536.00	52.48	-21.02	40.76	32.74	74.00	21.52	V
17583.50	52.27	-21.88	40.72	33.43	74.00	21.73	V
17683.00	52.25	-21.34	40.53	33.05	74.00	21.75	H

Set.3+Mode2+Mode8, Front Camera +RX WB5

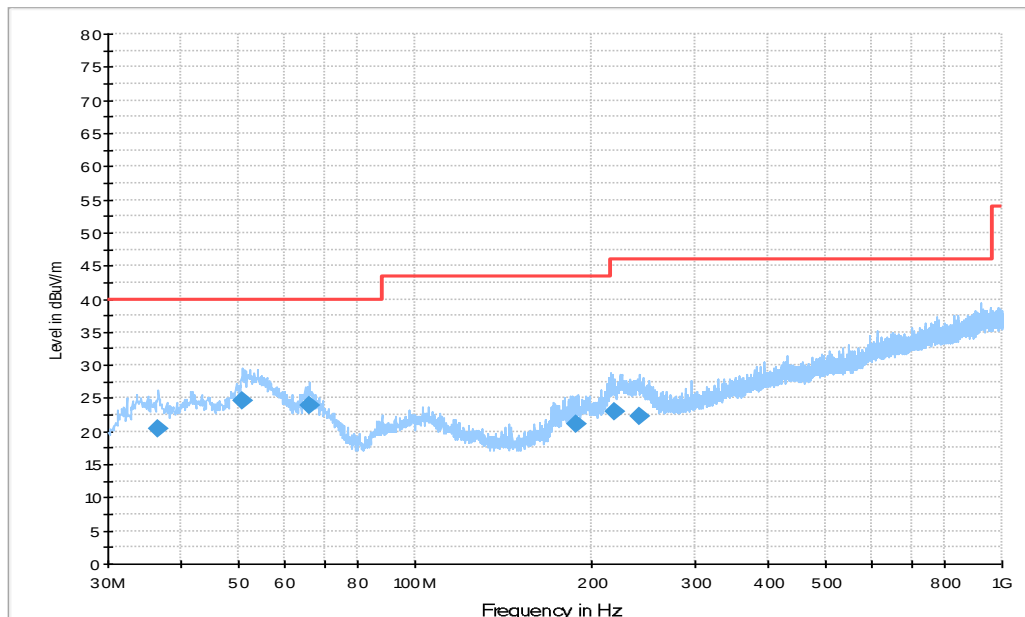


Figure A.7 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
36.616000	20.4	100.0	V	-16.0	-1.9	19.6	40.0
50.658000	24.7	125.0	V	16.0	0.4	15.3	40.0
66.141000	24.0	100.0	V	292.0	-2.7	16.0	40.0
188.77200	21.0	100.0	V	-4.0	-1.7	22.5	43.5
218.33400	23.1	100.0	V	-3.0	-0.7	22.9	46.0
241.44300	22.4	125.0	V	112.0	1.0	23.6	46.0

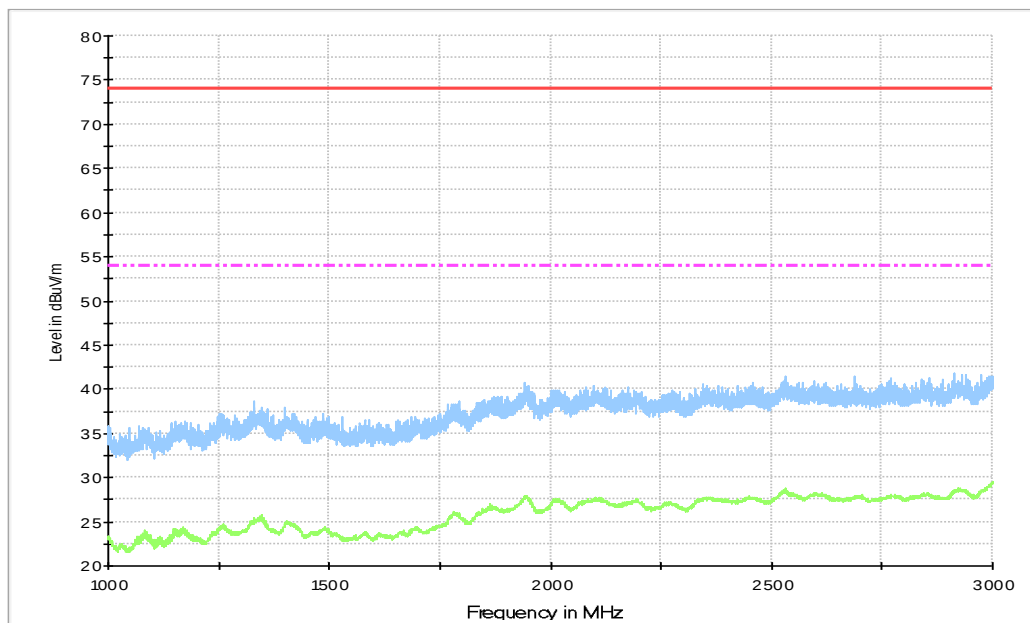


Figure A.8 Radiated Emission from 1GHz to 3GHz

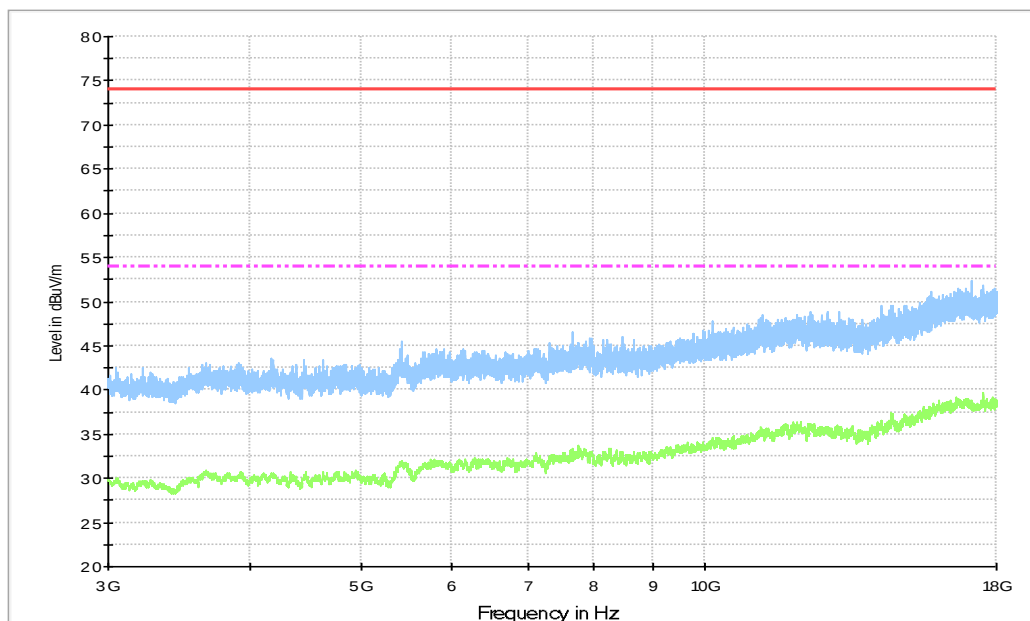


Figure A.9 Radiated Emission from 3GHz to 18GHz

Average detector result

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17541.50	39.97	-20.75	40.76	19.97	54.00	14.03	H
17539.50	39.96	-20.67	40.76	19.87	54.00	14.04	H
17540.00	39.94	-20.63	40.76	19.80	54.00	14.06	H
17537.50	39.93	-20.87	40.76	20.04	54.00	14.07	H
17536.50	39.91	-20.97	40.76	20.12	54.00	14.09	H
17538.00	39.89	-20.82	40.76	19.95	54.00	14.11	H

Peak detector result

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17994.00	52.93	-21.11	40.59	33.45	74.00	21.07	H
16642.00	52.53	-22.67	41.34	33.87	74.00	21.47	H
16660.00	52.31	-22.36	41.36	33.31	74.00	21.69	V
17811.00	52.04	-21.54	40.59	32.99	74.00	21.96	V
16676.50	52.03	-22.51	41.38	33.17	74.00	21.97	H
16602.50	52.02	-22.35	41.30	33.07	74.00	21.98	H

Set.4+Mode4+Mode8, OTG Charging + GSM850

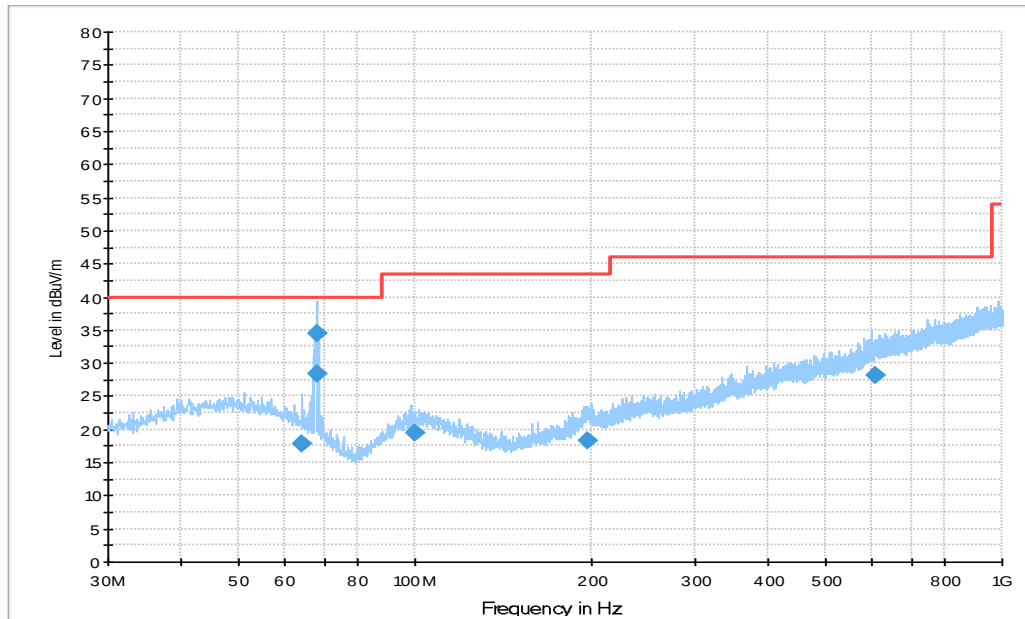


Figure A.10 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
64.104000	17.7	100.0	V	93.0	-2.0	22.3	40.0
67.984000	34.5	100.0	V	292.0	-3.2	5.5	40.0
68.312000	28.5	100.0	V	93.0	-3.4	11.5	40.0
100.01700	19.6	125.0	H	177.0	-1.3	23.9	43.5
197.11400	18.3	113.0	V	286.0	-0.5	25.2	43.5
606.76500	28.2	100.0	V	81.0	9.7	17.8	46.0

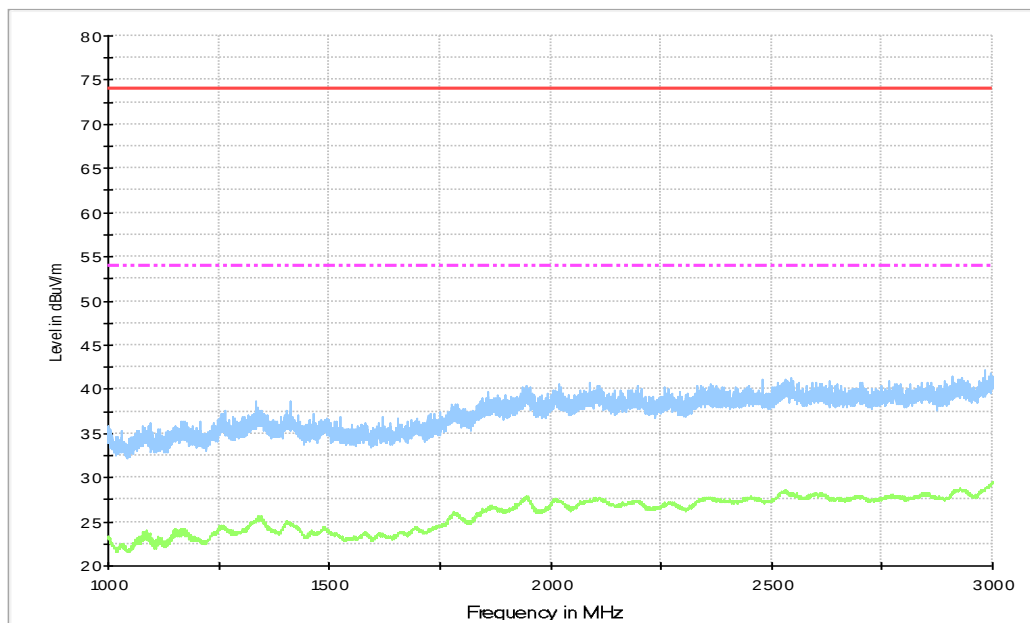


Figure A.11 Radiated Emission from 1GHz to 3GHz

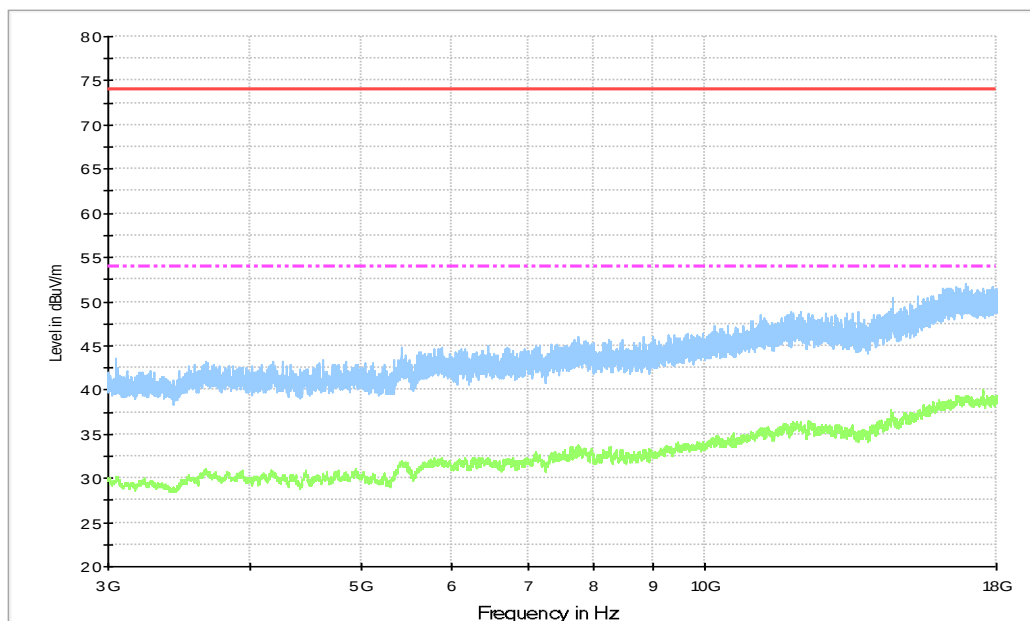


Figure A.12 Radiated Emission from 3GHz to 18GHz

Average detector result

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17540.00	40.00	-20.63	40.76	19.87	54.00	14.00	V
17541.00	39.96	-20.71	40.76	19.91	54.00	14.04	V
17539.50	39.93	-20.67	40.76	19.85	54.00	14.07	V
17541.50	39.90	-20.75	40.76	19.89	54.00	14.10	V
17538.50	39.90	-20.77	40.76	19.91	54.00	14.10	H
17537.50	39.84	-20.87	40.76	19.95	54.00	14.16	V

Peak detector result

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17630.00	53.54	-21.73	40.64	34.63	74.00	20.46	V
17914.50	52.62	-21.24	40.51	33.35	74.00	21.38	H
15976.50	52.51	-23.34	40.82	35.03	74.00	21.49	H
17801.00	52.50	-21.40	40.60	33.30	74.00	21.50	V
17644.50	52.37	-21.43	40.61	33.19	74.00	21.63	H
17910.00	52.36	-21.10	40.51	32.95	74.00	21.64	V

Set.6+Mode6, USB DATA (PC TO SD)

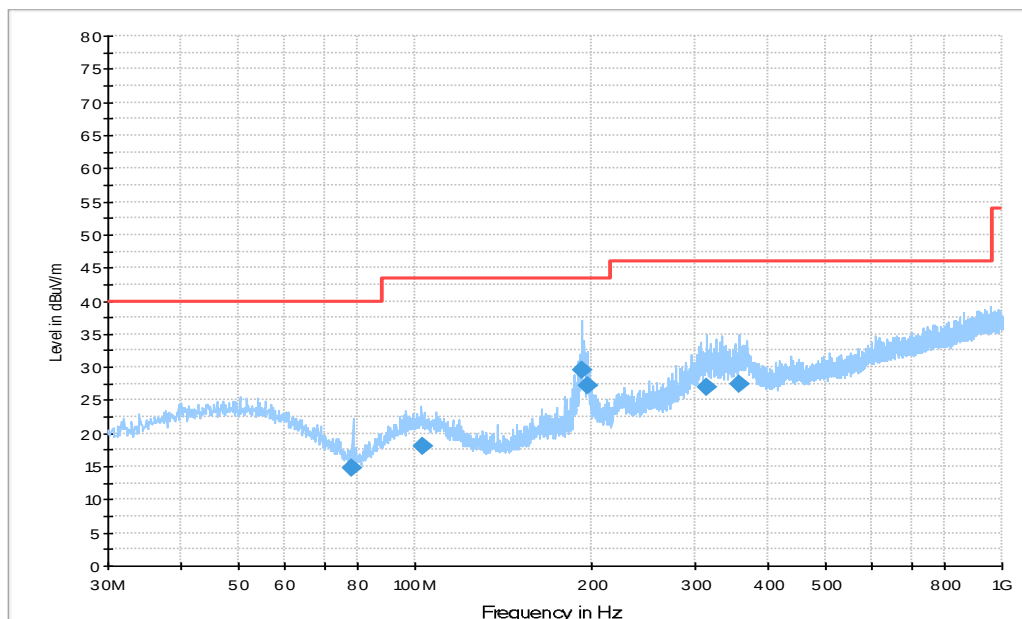


Figure A.13 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
78.266000	14.7	125.0	H	80.0	-6.6	25.3	40.0
102.67300	18.0	125.0	H	10.0	-1.1	25.5	43.5
192.18100	29.6	100.0	H	273.0	-1.1	13.9	43.5
196.54600	27.3	100.0	H	279.0	-0.5	16.2	43.5
312.81200	27.1	100.0	H	286.0	1.9	18.9	46.0
356.49900	27.3	100.0	H	270.0	3.5	18.7	46.0

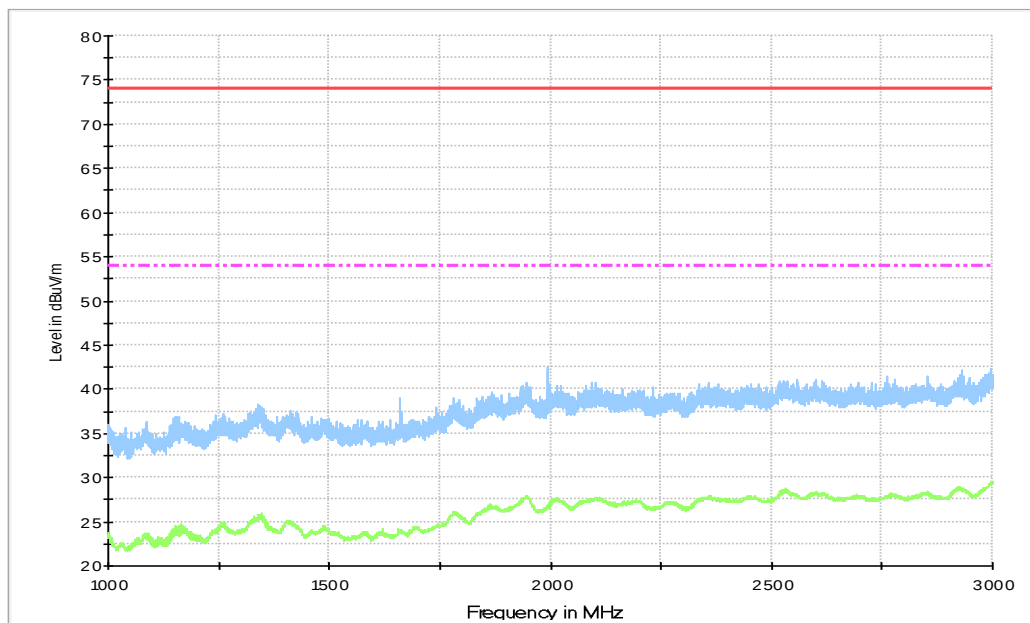


Figure A.14 Radiated Emission from 1GHz to 3GHz

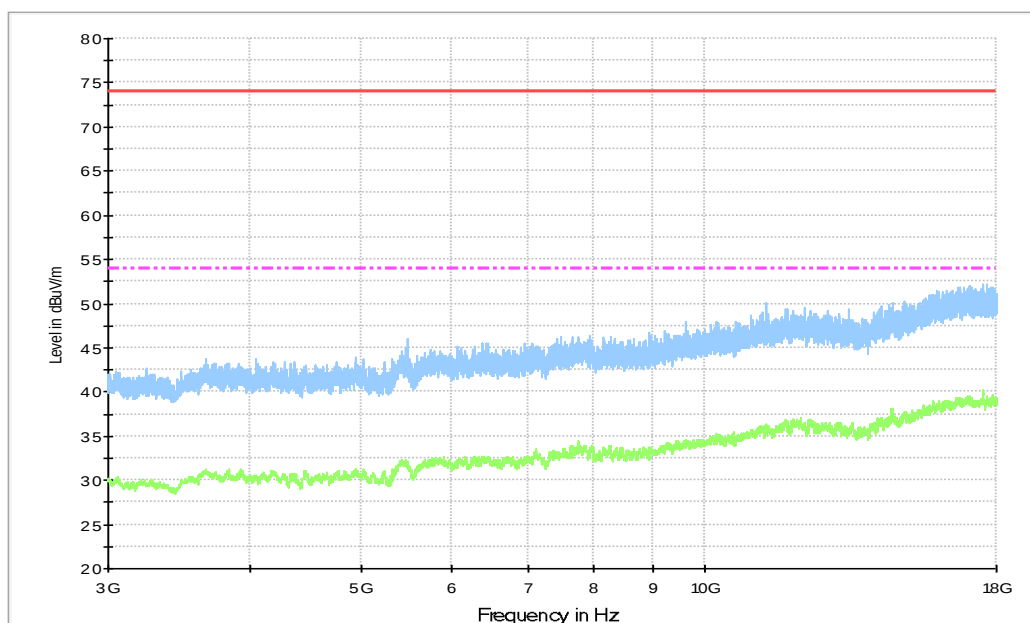


Figure A.15 Radiated Emission from 3GHz to 18GHz

Average detector result

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17540.00	39.86	-20.63	40.76	19.73	54.00	14.14	H
17539.00	39.81	-20.72	40.76	19.78	54.00	14.19	V
16634.50	39.68	-22.62	41.33	20.96	54.00	14.32	V
16626.00	39.67	-22.53	41.33	20.87	54.00	14.33	V
17538.00	39.67	-20.82	40.76	19.73	54.00	14.33	V
17539.50	39.66	-20.67	40.76	19.58	54.00	14.34	V

Peak detector result

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
16398.50	52.25	-22.76	40.90	34.11	74.00	21.75	V
17018.00	52.10	-22.07	41.08	33.09	74.00	21.90	H
16676.00	52.10	-22.51	41.38	33.23	74.00	21.90	V
16726.50	52.04	-22.71	41.40	33.35	74.00	21.96	H
16228.00	52.02	-23.01	40.90	34.13	74.00	21.98	H
16532.00	51.95	-22.61	41.16	33.39	74.00	22.05	V

Set.7+Mode7+Mode8, USB (SD TO PC) +RX LTE Band26

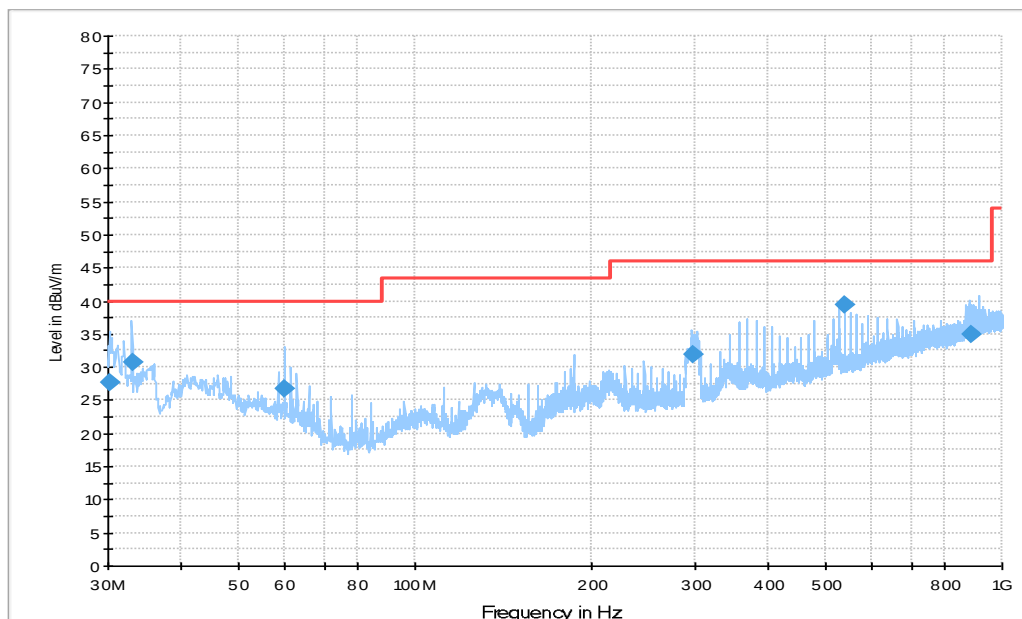


Figure A.16 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
30.294000	27.6	100.0	V	202.0	-3.6	12.4	40.0
32.990000	30.7	100.0	V	92.0	-3.3	9.3	40.0
59.993000	26.7	100.0	V	112.0	-0.9	13.3	40.0
296.65600	32.0	100.0	H	3.0	1.4	14.0	46.0
540.66500	39.3	100.0	V	202.0	7.7	6.7	46.0
889.81100	35.0	100.0	V	180.0	13.0	11.0	46.0

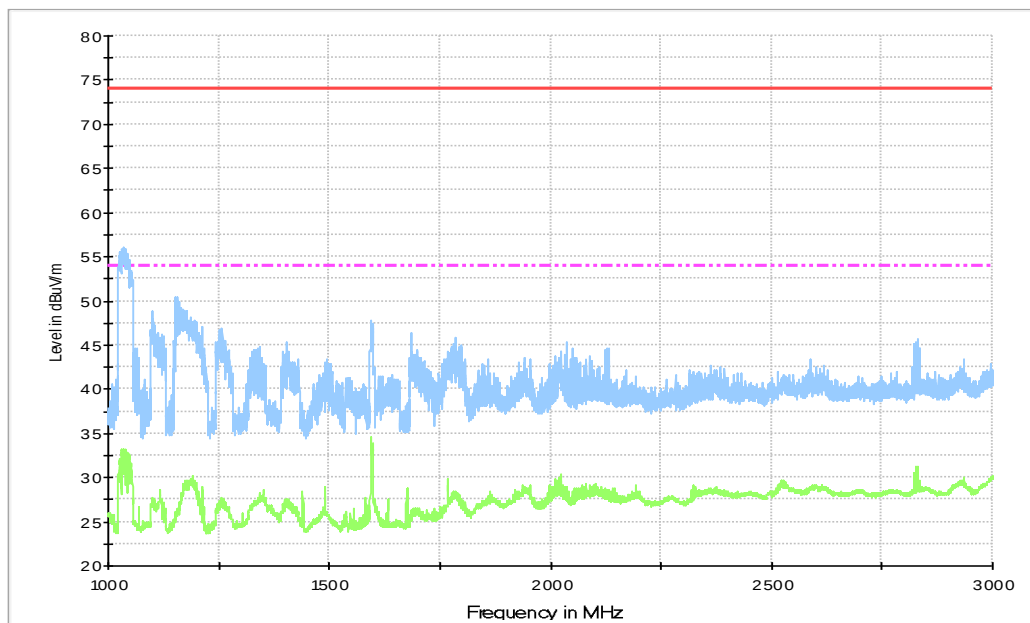


Figure A.17 Radiated Emission from 1GHz to 3GHz

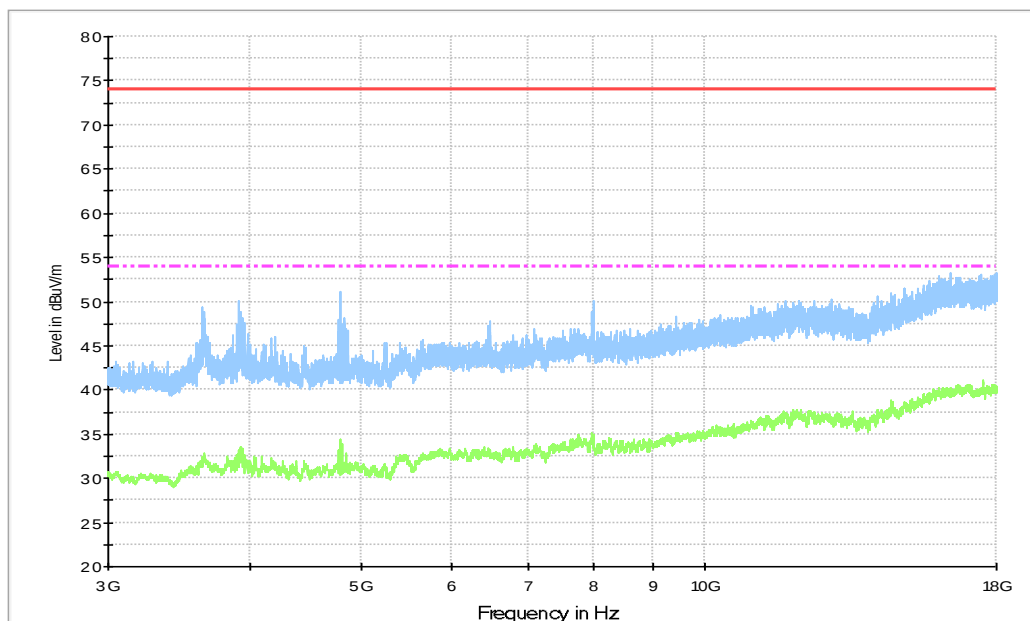


Figure A.18 Radiated Emission from 3GHz to 18GHz

Average detector result

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
1036.20	32.70	-38.04	26.84	43.90	54.00	21.30	V
1212.80	29.88	-37.90	28.08	39.71	54.00	24.12	H
1599.20	34.16	-37.68	27.90	43.94	54.00	19.84	H
3635.00	32.83	-33.93	33.18	33.58	54.00	21.17	V
3913.50	33.38	-33.76	33.47	33.67	54.00	20.62	H
4788.50	35.66	-33.34	33.95	35.05	54.00	18.34	H

Peak detector result

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
1040.20	54.49	-38.31	26.80	66.01	74.00	19.51	V
1165.00	50.31	-38.06	27.72	60.65	74.00	23.69	V
1599.20	46.68	-37.68	27.90	56.46	74.00	27.32	H
3633.50	49.90	-33.97	33.17	50.70	74.00	24.10	V
4789.00	52.62	-33.34	33.94	52.01	74.00	21.39	H
7970.00	49.80	-30.56	35.72	44.63	74.00	24.21	H

B.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

B.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

For the test setup photographs please see the test setup photos document.

B.2.2 EUT Operating Mode

The EUT is operating in the USB mode, charging mode, MP3, MP4, CAMERA, SD and cellular RX mode.

The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

B.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency		

B.2.4 Test Condition in charging mode


Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

B.2.5 Measurement Results

Note: all the set-up and operating mode list in section 3.4 were tested, only the worst test data are showed in this section.

Set.1+Mode3

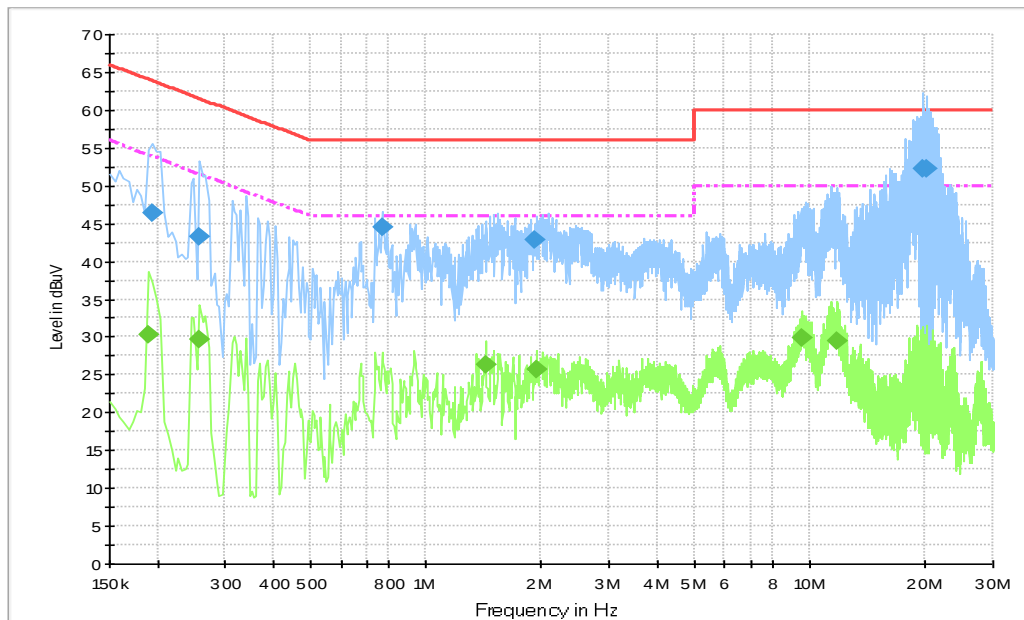

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Figure A.19 Conducted Emission


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.195000	46.5	1000.0	9.000	L1	20.0	17.3	63.8
0.258000	43.3	1000.0	9.000	L1	20.0	18.2	61.5
0.771000	44.6	1000.0	9.000	L1	20.0	11.4	56.0
1.914000	42.9	1000.0	9.000	L1	19.8	13.1	56.0
19.801500	52.2	1000.0	9.000	L1	20.1	7.8	60.0
20.260500	52.2	1000.0	9.000	L1	20.1	7.8	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190500	30.4	1000.0	9.000	L1	20.0	23.6	54.0
0.258000	29.7	1000.0	9.000	L1	20.0	21.8	51.5
1.432500	26.2	1000.0	9.000	L1	19.9	19.8	46.0
1.945500	25.8	1000.0	9.000	L1	19.8	20.2	46.0
9.577500	30.0	1000.0	9.000	L1	19.9	20.0	50.0
11.805000	29.4	1000.0	9.000	L1	20.0	20.6	50.0

Set.3+Mode2+Mode8

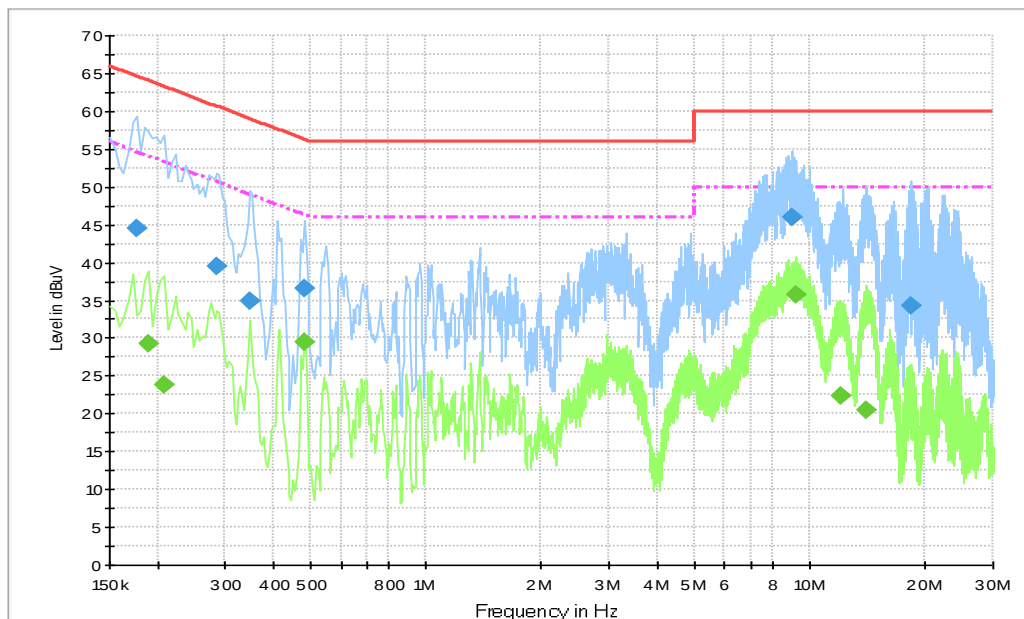

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Figure A.20 Conducted Emission


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.177000	44.6	1000.0	9.000	L1	20.0	20.0	64.6
0.285000	39.5	1000.0	9.000	L1	20.0	21.2	60.7
0.348000	34.8	1000.0	9.000	L1	20.0	24.2	59.0
0.483000	36.6	1000.0	9.000	N	20.2	19.7	56.3
9.006000	46.1	1000.0	9.000	L1	19.9	13.9	60.0
18.289500	34.2	1000.0	9.000	L1	20.1	25.8	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190500	29.3	1000.0	9.000	L1	20.0	24.7	54.0
0.208500	23.8	1000.0	9.000	L1	20.0	29.4	53.3
0.483000	29.5	1000.0	9.000	L1	20.1	16.8	46.3
9.163500	35.8	1000.0	9.000	L1	19.9	14.2	50.0
12.030000	22.3	1000.0	9.000	L1	20.0	27.7	50.0
14.100000	20.6	1000.0	9.000	L1	20.0	29.4	50.0

Set.7+Mode7+Mode8

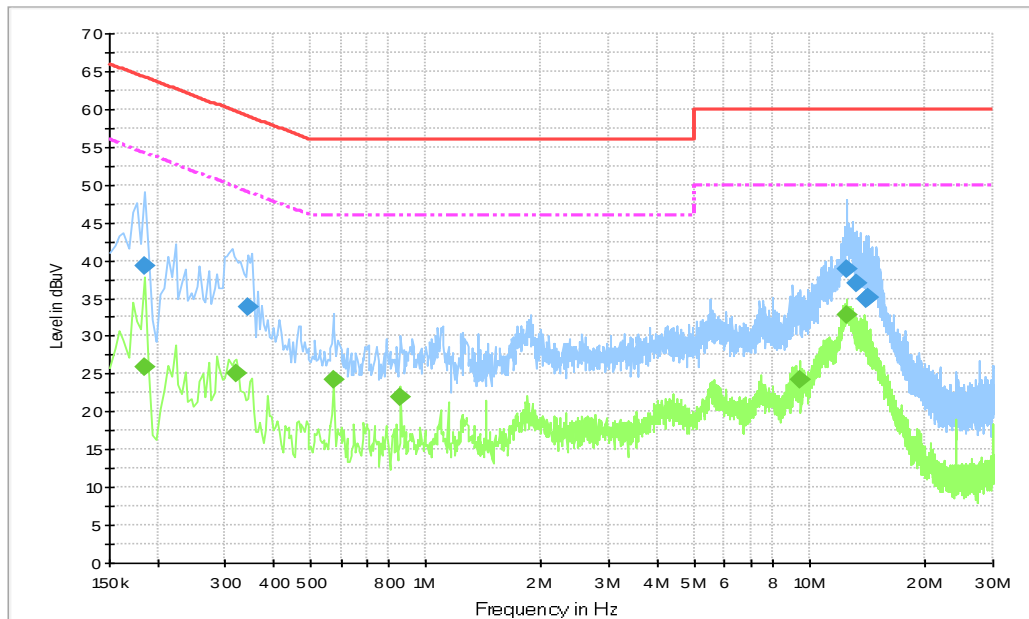

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Figure A.21 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.186000	39.2	1000.0	9.000	L1	20.0	25.0	64.2
0.343500	34.0	1000.0	9.000	N	20.1	25.2	59.1
12.529500	38.9	1000.0	9.000	N	20.2	21.1	60.0
13.245000	36.9	1000.0	9.000	L1	20.0	23.1	60.0
14.019000	34.9	1000.0	9.000	N	20.2	25.2	60.0
14.145000	35.1	1000.0	9.000	N	20.2	24.9	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.186000	26.0	1000.0	9.000	L1	20.0	28.2	54.2
0.321000	25.1	1000.0	9.000	L1	20.0	24.6	49.7
0.573000	24.3	1000.0	9.000	L1	20.0	21.7	46.0
0.861000	21.9	1000.0	9.000	L1	19.9	24.1	46.0
9.420000	24.2	1000.0	9.000	L1	19.9	25.8	50.0
12.480000	32.8	1000.0	9.000	N	20.2	17.2	50.0



ANNEX C: Persons involved in this testing

Test Item	Tester
Radiated Emission	Sun Tianyuan
Conducted Emission	Guo Qian

*****END OF REPORT*****