



LTE TEST REPORT

No.25T04Z200151-013

for

Samsung Electronics Co., Ltd.

Multi-band GSM/WCDMA/LTE Tablet with Bluetooth,WLAN

Model Name: SM-X135G

FCC ID: ZCASM135G

with

Hardware Version: REV1.0

Software Version: X135G.001

Issued Date: 2025-07-21

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
25T04Z200151-013	Rev.0	1 st edition	2025-07-14
25T04Z200151-013	Rev.1	Updated the results of LTE band 2 and 66 in chapter A.1.2	2025-07-21

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	4
1.1. INTRODUCTION & ACCREDITATION	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT	4
1.4. PROJECT DATA	4
1.5. SIGNATURE.....	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
4. REFERENCE DOCUMENTS.....	7
4.1. DOCUMENTS SUPPLIED BY APPLICANT.....	7
4.2. REFERENCE DOCUMENTS FOR TESTING.....	7
5. SUMMARY OF TEST RESULT	8
6. TEST EQUIPMENT UTILIZED	12
7. MEASUREMENT UNCERTAINTY	13
ANNEX A: MEASUREMENT RESULTS	14
A.1 OUTPUT POWER	14
A.2 EMISSION LIMIT	48
A.3 FREQUENCY STABILITY	63
A.4 OCCUPIED BANDWIDTH.....	69
A.5 EMISSION BANDWIDTH.....	116
A.6 BAND EDGE COMPLIANCE	163
A.7 CONDUCTED SPURIOUS EMISSION	219
A.8 PEAK-TO-AVERAGE POWER RATIO	230
ANNEX B: ACCREDITATION CERTIFICATE	232

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

Location 1: CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

Location 2: CTTL (BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, P. R. China 100176

1.3. Testing Environment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

1.4. Project Data

Testing Start Date: 2025-06-06

Testing End Date: 2025-07-07

1.5. Signature



Wang Xing

(Prepared this test report)



Zhou Yu

(Reviewed this test report)



Zhao Hui Lin

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Samsung Electronics Co., Ltd.
Address /Post: 19 Chapin Rd., Building D Pine Brook, NJ 07058
Contact: Jenni Chun
Email: j1.chun@samsung.com
Telephone: +1-201-937-4203

2.2. Manufacturer Information

Company Name: Samsung Electronics Co., Ltd.
Address /Post: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Republic of Korea
Contact: Kobe Cho
Email: ggobi.cho@samsung.com
Telephone: +82-10-2722-4159

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Multi-band GSM/WCDMA/LTE Tablet with Bluetooth,WLAN
Model Name	SM-X135G
FCC ID	ZCASM135G
Antenna	Embedded
Output power	25.16dBm maximum EIRP measured for LTE Band 7
Extreme Voltage	3.45VDC to 4.4VDC (nominal: 3.82VDC)
Extreme Temperature	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN	HW Version	SW Version	Date of receipt
UT10a	2504200151UT10a	REV1.0	X135G.001	2025-06-06
UT03a	2504200151UT03a	REV1.0	X135G.001	2025-06-06
UT04a	2504200151UT04a	REV1.0	X135G.001	2025-06-06

UT03a, UT04a were used for emission limit test and UT10a was used for other testing cases.

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
--------	-------------

AE1	Battery
-----	---------

AE2	Battery
-----	---------

AE1

Model	HQ-3565S-OT9
Manufacturer	SCUD (FUJIAN) Electronics Co., Ltd.
Capacitance	5100mAh

AE2

Model	HQ-6739SDS
Manufacturer	SCUD (FUJIAN) Electronics Co., Ltd.
Capacitance	5100mAh

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Documents supplied by applicant

EUT parameters are supplied by the customer, which are the bases of testing. CAICT is not responsible for the accuracy of customer supplied technical information that may affect the test results (for example, antenna gain and loss of customer supplied cable).

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-23 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-23 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-23 Edition
FCC Part 90	PRIVATE LAND MOBILE RADIO SERVICES	10-1-23 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01

5. Summary of Test Result

LTE Band 2

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	24.232	P
2	Emission Limit	2.1051/24.238	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	24.238	P
6	Band Edge Compliance	24.238	P
7	Conducted Spurious Emission	24.238	P
8	Peak-to-Average Power Ratio	24.232	P

LTE Band 5

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	22.913	P
2	Emission Limit	2.1051/22.917	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	22.917	P
6	Band Edge Compliance	22.917	P
7	Conducted Spurious Emission	22.917	P

LTE Band 7

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	2.1051/27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

LTE Band 12 (17)

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	2.1051/27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

LTE Band 26_Part90 (814MHz~824MHz)

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	90.635	P
2	Emission Limit	2.1051/90.691	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	2.1049	P
6	Band Edge Compliance	90.691	P
7	Conducted Spurious Emission	90.691	P

LTE Band 26_Part22 (824MHz~849MHz)

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	22.913	P
2	Emission Limit	2.1051/22.917	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	22.917	P
6	Band Edge Compliance	22.917	P
7	Conducted Spurious Emission	22.917	P

LTE Band 41 (38)

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	2.1051/27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

LTE Band 66 (4)

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	2.1051/27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

Terms used in Verdict column

P	Pass. The EUT complies with the essential requirements in the standard.
NP	Not Performed. The test was not performed by CTTL.
NA	Not Applicable. The test was not applicable.
BR	Re-use test data from basic model report.
F	Fail. The EUT does not comply with the essential requirements in the standard.

All the test results are based on normal power.

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.

LTE Band 66, Band 12 and Band 41 overlap the entire frequency range of LTE Band 4, Band 17 and Band 38. Therefore, test data provided in this report covers Band 4, Band 17, Band 38 as well as Band 66, Band 12, Band 41.

LTE Band 41 is tested by power class 3.

Explanation of worst-case configuration

The worst-case scenario for all measurements is based on the conducted output power measurement investigation results. Output power was measured on QPSK, 16QAM and 64QAM modulations. It was found that QPSK was the worst case. All testing was performed using QPSK modulations to represent the worst case unless otherwise stated. The test results shown in the following sections represent the worst case emission.

6. Test Equipment Utilized

Description	Type	Series Number	Manufacture	Cal Due Date	Calibration Interval
Wideband Radio Communication Tester	CMW500	159082	R&S	2025-12-03	1 year
Spectrum Analyzer	FSV	101576	R&S	2026-05-05	1 year
PXA Signal Analyzer	N9030B	MY57142378	Keysight	2026-02-20	1 year
Climate chamber	SH-241	92004642	ESPEC	2025-10-29	1 year
Test Receiver	ESW44	103144	R&S	2026-01-15	1 year
Antenna	VULB9163	9163-01223	Schwarzbeck	2025-09-11	1 year
Antenna	LB-7180-NF	2030013000041	A-INFO	2025-10-23	1 year
Antenna	LB-180400-25-C-KF	J211060826	A-INFO	2025-08-29	1 year
Antenna	9117	167	Schwarzbeck	2026-10-15	2 years
Antenna	3117	00119024	ETS-Lindgren	2025-10-23	1 year
Antenna	3116	2663	ETS-Lindgren	2026-03-03	1 year
Signal Generator	SMF100A	101295	R&S	2026-02-16	1 year
Power Amplifier	5S1G4	0341863	AR	/	/
Universal Radio Communication Tester	CMW500	143008	R&S	2026-01-15	1 year
Universal Radio Communication Tester	MT8821C	62724459649	Anritsu	2026-06-06	2 Years

7. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.26. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. Measurement uncertainty is not taken into account when stating conformity with a specified requirement.

Test item		Measurement uncertainty
Output Power(dB)		1.90
Emission Limit(dB)		3.44
Frequency Stability	FE(ppm)	1.16
	F _L F _H (kHz)	173.51
Occupied Bandwidth(%)		0.72
Emission Bandwidth(%)		0.75
Band Edge Compliance(dB)		1.94
Conducted Spurious Emission(dB)		4.77(0-20GHz)
		6.27(20-30GHz)
Peak-to-Average Power Ratio(dB)		2.10

Annex A: Measurement Results

A.1 Output Power

A.1.1 Summary

During the process of testing, the EUT was controlled via communication tester to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

The results below include a correction factor for cable loss that is provided by the customer.

A.1.2.2 Measurement Result

LTE band 2

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	1909.3	23.26	22.60	21.60
		1880.0	23.24	22.61	21.58
		1850.7	23.34	22.63	21.63
	1 RB low	1909.3	23.23	22.44	21.59
		1880.0	23.25	22.59	21.62
		1850.7	23.37	22.58	21.57
	50% RB mid	1909.3	23.40	22.42	21.59
		1880.0	23.41	22.37	21.69
		1850.7	23.50	22.54	21.70
	100% RB	1909.3	22.52	21.61	20.54
		1880.0	22.47	21.59	20.50
		1850.7	22.60	21.71	20.61
3MHz	1 RB high	1908.5	23.19	22.37	21.49
		1880.0	23.15	22.50	21.52
		1851.5	23.21	22.57	21.55
	1 RB low	1908.5	23.15	22.41	21.49
		1880.0	23.17	22.45	21.50
		1851.5	23.27	22.58	21.51
	50% RB mid	1908.5	22.46	21.50	20.52
		1880.0	22.45	21.50	20.53
		1851.5	22.52	21.56	20.55

	100% RB	1908.5	22.40	21.45	20.43
		1880.0	22.41	21.40	20.40
		1851.5	22.45	21.47	20.47
5MHz	1 RB high	1907.5	23.40	22.69	21.62
		1880.0	23.40	22.79	21.61
		1852.5	23.47	22.77	21.61
	1 RB low	1907.5	23.36	22.66	21.54
		1880.0	23.41	22.69	21.66
		1852.5	23.49	22.75	21.64
	50% RB mid	1907.5	22.53	21.54	20.59
		1880.0	22.50	21.54	20.57
		1852.5	22.61	21.62	20.67
	100% RB	1907.5	22.51	21.52	20.51
		1880.0	22.51	21.52	20.53
		1852.5	22.55	21.57	20.60
10MHz	1 RB high	1905.0	23.50	22.76	21.71
		1880.0	23.50	22.70	21.70
		1855.0	23.53	22.83	21.73
	1 RB low	1905.0	23.51	22.75	21.75
		1880.0	23.51	22.81	21.77
		1855.0	23.60	22.86	21.80
	50% RB mid	1905.0	22.56	21.57	20.59
		1880.0	22.50	21.57	20.58
		1855.0	22.61	21.64	20.64
	100% RB	1905.0	22.56	21.55	20.56
		1880.0	22.54	21.54	20.53
		1855.0	22.57	21.57	20.58
15MHz	1 RB high	1902.5	23.44	22.72	21.68
		1880.0	23.44	22.78	21.68
		1857.5	23.46	22.83	21.69
	1 RB low	1902.5	23.42	22.75	21.66
		1880.0	23.47	22.76	21.74
		1857.5	23.51	22.74	21.79
	50% RB mid	1902.5	22.53	21.55	20.59
		1880.0	22.58	21.56	20.63
		1857.5	22.56	21.58	20.60
	100% RB	1902.5	22.51	21.49	20.51
		1880.0	22.54	21.54	20.55
		1857.5	22.59	21.60	20.59
20MHz	1 RB high	1900.0	23.37	22.63	21.52
		1880.0	23.35	22.60	21.55
		1860.0	23.39	22.62	21.63
	1 RB low	1900.0	23.30	22.50	21.44

		1880.0	23.36	22.57	21.50
		1860.0	23.45	22.64	21.66
	50% RB mid	1900.0	22.57	21.55	20.57
		1880.0	22.63	21.59	20.61
		1860.0	22.62	21.61	20.61
	100% RB	1900.0	22.43	21.43	20.45
		1880.0	22.53	21.54	20.54
		1860.0	22.53	21.52	20.54

LTE band 5

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	848.3	23.63	22.96	21.94
		836.5	23.64	23.01	22.05
		824.7	23.77	23.03	22.06
	1 RB low	848.3	23.67	22.88	22.01
		836.5	23.64	22.98	22.04
		824.7	23.74	22.93	21.97
	50% RB mid	848.3	23.76	22.80	22.02
		836.5	23.77	22.79	22.00
		824.7	23.86	22.87	22.06
	100% RB	848.3	22.92	21.98	20.93
		836.5	22.90	22.01	20.90
		824.7	22.94	22.05	20.93
3MHz	1 RB high	847.5	23.57	22.90	21.89
		836.5	23.51	22.92	21.90
		825.5	23.64	22.94	21.96
	1 RB low	847.5	23.55	22.84	21.95
		836.5	23.59	22.95	21.96
		825.5	23.65	22.86	22.00
	50% RB mid	847.5	22.88	21.96	20.97
		836.5	22.87	21.93	20.95
		825.5	22.95	21.97	21.03
	100% RB	847.5	22.84	21.88	20.88
		836.5	22.80	21.81	20.82
		825.5	22.83	21.83	20.86
5MHz	1 RB high	846.5	23.80	23.03	22.05
		836.5	23.79	23.19	22.08
		826.5	23.85	23.14	22.10
	1 RB low	846.5	23.83	23.09	22.10
		836.5	23.85	23.20	22.13
		826.5	23.87	23.13	22.19
	50% RB mid	846.5	22.98	22.01	21.04
		836.5	22.93	21.97	21.02
		826.5	22.95	21.96	20.99
	100% RB	846.5	22.94	21.98	20.99
		836.5	22.92	21.93	20.97
		826.5	22.90	21.92	20.94
10MHz	1 RB high	844.0	23.87	23.07	22.10
		836.5	23.88	23.16	22.18
		829.0	23.91	23.17	22.15
	1 RB low	844.0	23.90	23.32	22.12

		836.5	23.96	23.31	22.11
		829.0	23.98	23.30	22.19
	50% RB mid	844.0	22.98	22.02	21.02
		836.5	22.99	21.99	21.01
		829.0	22.94	21.99	20.98
	100% RB	844.0	22.89	21.91	20.93
		836.5	22.94	21.96	20.98
		829.0	22.86	21.90	20.89

LTE band 7

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)		
			QPSK	16QAM	64QAM
5MHz	1 RB high	2567.5	23.70	22.94	22.00
		2535.0	23.72	22.96	22.01
		2502.5	23.92	23.22	22.13
	1 RB low	2567.5	23.71	22.92	21.92
		2535.0	23.79	23.06	22.02
		2502.5	24.04	23.31	22.27
	50% RB mid	2567.5	22.87	21.93	21.00
		2535.0	22.87	21.94	21.01
		2502.5	23.09	22.15	21.17
	100% RB	2567.5	22.86	21.91	20.93
		2535.0	22.89	21.96	20.97
		2502.5	23.08	22.15	21.14
10MHz	1 RB high	2565.0	23.79	23.08	22.08
		2535.0	23.81	23.09	22.14
		2505.0	24.01	23.25	22.28
	1 RB low	2565.0	23.80	23.00	22.03
		2535.0	23.91	23.16	22.23
		2505.0	24.08	23.37	22.37
	50% RB mid	2565.0	22.87	21.98	20.93
		2535.0	22.91	21.97	21.02
		2505.0	23.10	22.16	21.17
	100% RB	2565.0	22.88	21.92	20.94
		2535.0	22.92	21.96	21.00
		2505.0	23.08	22.10	21.12
15MHz	1 RB high	2562.5	23.69	22.92	21.99
		2535.0	23.74	23.01	21.96
		2507.5	23.93	23.23	22.21
	1 RB low	2562.5	23.74	22.95	22.02
		2535.0	23.89	23.19	22.21
		2507.5	24.04	23.23	22.27
	50% RB mid	2562.5	22.82	21.91	20.94
		2535.0	22.94	21.99	21.04
		2507.5	23.06	22.07	21.13
	100% RB	2562.5	22.82	21.86	20.89
		2535.0	22.91	21.94	20.95
		2507.5	23.02	22.04	21.05
20MHz	1 RB high	2560.0	23.62	22.79	21.89
		2535.0	23.64	22.94	21.88
		2510.0	23.84	23.12	22.10
	1 RB low	2560.0	23.66	22.97	22.00

		2535.0	23.82	23.06	22.04
		2510.0	23.94	23.22	22.21
	50% RB mid	2560.0	22.96	21.94	20.94
		2535.0	23.05	22.03	21.02
		2510.0	23.03	22.15	21.16
	100% RB	2560.0	22.93	21.79	20.80
		2535.0	22.97	21.91	20.95
		2510.0	22.95	21.99	21.00

LTE band 12

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	715.3	23.50	22.84	21.83
		707.5	23.52	22.84	21.91
		699.7	23.56	22.89	21.87
	1 RB low	715.3	23.55	22.82	21.84
		707.5	23.55	22.92	21.97
		699.7	23.64	22.94	22.00
	50% RB mid	715.3	23.66	22.65	21.90
		707.5	23.65	22.73	21.98
		699.7	23.76	22.74	21.97
	100% RB	715.3	22.73	21.88	20.81
		707.5	22.77	21.86	20.84
		699.7	22.80	21.93	20.83
3MHz	1 RB high	714.5	23.43	22.77	21.77
		707.5	23.44	22.79	21.70
		700.5	23.48	22.76	21.85
	1 RB low	714.5	23.44	22.79	21.72
		707.5	23.41	22.78	21.75
		700.5	23.51	22.90	21.92
	50% RB mid	714.5	22.72	21.78	20.78
		707.5	22.72	21.83	20.79
		700.5	22.75	21.83	20.85
	100% RB	714.5	22.65	21.71	20.68
		707.5	22.62	21.69	20.69
		700.5	22.67	21.72	20.75
5MHz	1 RB high	713.5	23.65	22.84	21.95
		707.5	23.65	22.98	21.94
		701.5	23.68	23.07	21.89
	1 RB low	713.5	23.68	22.99	21.99
		707.5	23.75	23.05	21.99
		701.5	23.79	23.11	22.00
	50% RB mid	713.5	22.81	21.83	20.90
		707.5	22.81	21.84	20.88
		701.5	22.83	21.88	20.94
	100% RB	713.5	22.80	21.84	20.84
		707.5	22.72	21.79	20.81
		701.5	22.78	21.81	20.83
10MHz	1 RB high	711.0	23.74	22.94	21.97
		707.5	23.76	23.08	22.01
		704.0	23.76	23.00	22.04
	1 RB low	711.0	23.84	23.13	22.10

		707.5	23.82	23.18	22.04
		704.0	23.83	23.23	22.19
	50% RB mid	711.0	22.80	21.85	20.85
		707.5	22.85	21.86	20.87
		704.0	22.84	21.87	20.89
	100% RB	711.0	22.72	21.73	20.73
		707.5	22.72	21.74	20.75
		704.0	22.83	21.84	20.85

LTE band 26_Part90

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	823.3	23.36	22.42	21.52
		819.0	23.28	22.35	21.40
		814.7	23.27	22.27	21.76
	1 RB low	823.3	23.35	22.48	21.57
		819.0	23.33	22.34	21.35
		814.7	23.28	22.26	21.79
	50% RB mid	823.3	23.45	22.70	21.56
		819.0	23.49	22.65	21.54
		814.7	23.42	22.57	21.65
	100% RB	823.3	22.50	21.72	20.64
		819.0	22.50	21.69	20.64
		814.7	22.50	21.40	20.83
3MHz	1 RB high	822.5	23.17	22.23	21.19
		819.0	23.17	22.20	21.19
		815.5	23.19	22.20	21.18
	1 RB low	822.5	23.16	22.17	21.24
		819.0	23.20	22.15	21.25
		815.5	23.20	22.18	21.26
	50% RB mid	822.5	22.36	21.47	20.34
		819.0	22.37	21.49	20.35
		815.5	22.37	21.46	20.32
	100% RB	822.5	22.35	21.35	20.42
		819.0	22.36	21.35	20.45
		815.5	22.30	21.29	20.39
5MHz	1 RB high	821.5	23.46	22.55	21.68
		819.0	23.47	22.55	21.70
		816.5	23.48	22.55	21.67
	1 RB low	821.5	23.47	22.52	21.67
		819.0	23.42	22.55	21.63
		816.5	23.44	22.48	21.66
	50% RB mid	821.5	22.53	21.57	20.64
		819.0	22.49	21.60	20.61
		816.5	22.46	21.56	20.55
	100% RB	821.5	22.54	21.52	20.60
		819.0	22.53	21.50	20.58
		816.5	22.49	21.49	20.52
10MHz	1 RB high	819.0	23.62	22.59	21.49
	1 RB low	819.0	23.53	22.48	21.38
	50% RB mid	819.0	22.55	21.66	20.65
	100% RB	819.0	22.57	21.55	20.59

LTE band 26_Part22

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	848.3	23.27	22.31	21.36
		836.5	23.29	22.30	21.32
		824.7	23.31	22.30	21.83
	1 RB low	848.3	23.27	22.26	21.29
		836.5	23.31	22.32	21.27
		824.7	23.32	22.33	21.84
	50% RB mid	848.3	23.38	22.61	21.48
		836.5	23.44	22.62	21.50
		824.7	23.49	22.65	21.57
	100% RB	848.3	22.50	21.69	20.61
		836.5	22.47	21.66	20.58
		824.7	22.52	21.72	20.67
3MHz	1 RB high	847.5	23.13	22.19	21.20
		836.5	23.14	22.18	21.17
		825.5	23.18	22.23	21.18
	1 RB low	847.5	23.09	22.12	21.15
		836.5	23.19	22.19	21.20
		825.5	23.23	22.24	21.24
	50% RB mid	847.5	22.38	21.43	20.34
		836.5	22.35	21.45	20.34
		825.5	22.39	21.47	20.33
	100% RB	847.5	22.32	21.29	20.39
		836.5	22.36	21.35	20.44
		825.5	22.38	21.32	20.43
5MHz	1 RB high	846.5	23.39	22.52	21.68
		836.5	23.44	22.51	21.63
		826.5	23.45	22.51	21.67
	1 RB low	846.5	23.42	22.49	21.66
		836.5	23.47	22.50	21.63
		826.5	23.48	22.54	21.69
	50% RB mid	846.5	22.40	21.52	20.54
		836.5	22.46	21.60	20.54
		826.5	22.46	21.55	20.59
	100% RB	846.5	22.45	21.45	20.50
		836.5	22.51	21.52	20.56
		826.5	22.48	21.49	20.56
10MHz	1 RB high	844.0	23.54	22.55	21.45
		836.5	23.58	22.55	21.46
		829.0	23.54	22.56	21.43
	1 RB low	844.0	23.51	22.53	21.43

		836.5	23.55	22.52	21.39
		829.0	23.53	22.53	21.40
	50% RB mid	844.0	22.44	21.65	20.59
		836.5	22.48	21.70	20.60
		829.0	22.45	21.64	20.59
	100% RB	844.0	22.47	21.49	20.54
		836.5	22.52	21.57	20.57
		829.0	22.46	21.53	20.51
15MHz	1 RB high	841.5	23.49	22.90	21.88
		836.5	23.54	22.88	21.89
		831.5	23.49	22.87	21.81
	1 RB low	841.5	23.47	22.83	21.84
		836.5	23.46	22.82	21.82
		831.5	23.45	22.84	21.85
	50% RB mid	841.5	22.54	21.55	20.58
		836.5	22.54	21.53	20.57
		831.5	22.54	21.54	20.53
	100% RB	841.5	22.56	21.57	20.64
		836.5	22.59	21.56	20.62
		831.5	22.51	21.47	20.56

LTE band 41

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)		
			QPSK	16QAM	64QAM
5MHz	1 RB high	2687.5	23.88	23.09	21.97
		2593.0	23.82	23.06	21.85
		2498.5	23.83	23.07	21.99
	1 RB low	2687.5	23.89	23.10	21.99
		2593.0	23.80	23.01	21.86
		2498.5	23.78	23.04	21.93
	50% RB mid	2687.5	22.97	22.10	21.15
		2593.0	22.87	21.96	21.03
		2498.5	22.94	22.02	21.03
	100% RB	2687.5	22.95	22.08	21.16
		2593.0	22.85	21.96	21.01
		2498.5	22.83	21.99	20.99
10MHz	1 RB high	2685.0	23.97	23.18	22.04
		2593.0	23.93	23.14	21.96
		2501.0	23.95	23.21	22.10
	1 RB low	2685.0	23.97	23.16	22.04
		2593.0	23.91	23.12	21.94
		2501.0	23.85	23.12	22.01
	50% RB mid	2685.0	22.96	22.09	21.16
		2593.0	22.89	22.01	21.06
		2501.0	22.92	22.04	21.08
	100% RB	2685.0	22.95	22.07	21.05
		2593.0	22.89	21.99	20.97
		2501.0	22.96	22.03	21.02
15MHz	1 RB high	2682.5	23.92	23.10	22.00
		2593.0	23.88	23.09	21.91
		2503.5	23.90	23.16	22.04
	1 RB low	2682.5	23.89	23.09	21.99
		2593.0	23.84	23.05	21.87
		2503.5	23.79	23.08	21.95
	50% RB mid	2682.5	22.93	22.02	21.06
		2593.0	22.88	21.94	20.95
		2503.5	22.93	22.00	21.01
	100% RB	2682.5	22.90	22.02	21.04
		2593.0	22.86	21.93	20.95
		2503.5	22.90	21.97	20.99
20MHz	1 RB high	2680.0	23.82	23.03	21.92
		2593.0	23.82	23.01	21.83
		2506.0	23.81	23.07	21.94
	1 RB low	2680.0	23.82	23.01	21.90

		2593.0	23.75	22.95	21.78
		2506.0	23.72	22.99	21.85
	50% RB mid	2680.0	22.97	22.09	21.08
		2593.0	23.05	22.02	21.01
		2506.0	23.03	22.06	21.08
	100% RB	2680.0	22.90	22.01	21.00
		2593.0	22.96	21.92	20.95
		2506.0	22.94	21.99	20.97

LTE band 66

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	1779.3	23.40	22.68	21.73
		1745.0	23.34	22.67	21.59
		1710.7	23.36	22.65	21.70
	1 RB low	1779.3	23.41	22.67	21.68
		1745.0	23.32	22.53	21.68
		1710.7	23.34	22.70	21.72
	50% RB mid	1779.3	23.55	22.58	21.74
		1745.0	23.48	22.41	21.71
		1710.7	23.49	22.50	21.75
	100% RB	1779.3	22.63	21.72	20.67
		1745.0	22.55	21.69	20.57
		1710.7	22.59	21.71	20.64
3MHz	1 RB high	1778.5	23.35	22.61	21.56
		1745.0	23.24	22.57	21.48
		1711.5	23.25	22.55	21.57
	1 RB low	1778.5	23.31	22.52	21.66
		1745.0	23.25	22.55	21.51
		1711.5	23.26	22.60	21.60
	50% RB mid	1778.5	22.62	21.68	20.68
		1745.0	22.55	21.58	20.60
		1711.5	22.55	21.65	20.64
	100% RB	1778.5	22.56	21.57	20.56
		1745.0	22.47	21.48	20.47
		1711.5	22.50	21.53	20.52
5MHz	1 RB high	1777.5	23.59	22.93	21.82
		1745.0	23.49	22.78	21.68
		1712.5	23.46	22.68	21.68
	1 RB low	1777.5	23.60	22.78	21.76
		1745.0	23.49	22.80	21.65
		1712.5	23.54	22.82	21.78
	50% RB mid	1777.5	22.71	21.72	20.76
		1745.0	22.62	21.64	20.68
		1712.5	22.62	21.62	20.67
	100% RB	1777.5	22.65	21.65	20.69
		1745.0	22.57	21.59	20.59
		1712.5	22.59	21.60	20.62
10MHz	1 RB high	1775.0	23.68	22.93	21.95
		1745.0	23.63	22.84	21.85
		1715.0	23.53	22.81	21.73
	1 RB low	1775.0	23.68	22.89	21.89

		1745.0	23.57	22.90	21.75
		1715.0	23.63	22.90	21.78
	50% RB mid	1775.0	22.72	21.76	20.72
		1745.0	22.64	21.65	20.64
		1715.0	22.59	21.62	20.61
	100% RB	1775.0	22.67	21.68	20.67
		1745.0	22.56	21.58	20.58
		1715.0	22.56	21.59	20.57
15MHz	1 RB high	1772.5	23.63	22.94	21.81
		1745.0	23.59	22.85	21.81
		1717.5	23.47	22.78	21.70
	1 RB low	1772.5	23.63	22.82	21.82
		1745.0	23.50	22.72	21.71
		1717.5	23.57	22.83	21.74
	50% RB mid	1772.5	22.72	21.72	20.78
		1745.0	22.61	21.62	20.67
		1717.5	22.55	21.55	20.60
	100% RB	1772.5	22.70	21.71	20.70
		1745.0	22.59	21.59	20.60
		1717.5	22.52	21.52	20.54
20MHz	1 RB high	1770.0	23.53	22.70	21.77
		1745.0	23.49	22.68	21.64
		1720.0	23.42	22.77	21.69
	1 RB low	1770.0	23.50	22.69	21.73
		1745.0	23.40	22.61	21.69
		1720.0	23.48	22.62	21.68
	50% RB mid	1770.0	22.77	21.77	20.77
		1745.0	22.79	21.65	20.67
		1720.0	22.62	21.60	20.59
	100% RB	1770.0	22.63	21.60	20.64
		1745.0	22.56	21.56	20.57
		1720.0	22.49	21.46	20.48

LTE CA band 7C

Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB		SCC RB		Conducted Power(dBm)
				Size	Offset	Size	Offset	
10MHz/20MHz	2525.6	2540.0	QPSK	1	49	1	0	23.33
			QPSK	50	0	100	0	21.28
			16QAM	1	49	1	0	22.33
			16QAM	50	0	100	0	20.31
			64QAM	1	49	1	0	20.18
			64QAM	50	0	100	0	20.31
15MHz/10MHz	2530.1	2542.1	QPSK	1	74	1	0	23.30
			QPSK	75	0	50	0	21.37
			16QAM	1	74	1	0	22.44
			16QAM	75	0	50	0	20.32
			64QAM	1	74	1	0	20.58
			64QAM	75	0	50	0	20.34
15MHz/15MHz	2527.5	2542.5	QPSK	1	74	1	0	23.31
			QPSK	75	0	75	0	21.30
			16QAM	1	74	1	0	22.46
			16QAM	75	0	75	0	20.25
			64QAM	1	74	1	0	20.25
			64QAM	75	0	75	0	20.28
15MHz/20MHz	2525.3	2542.4	QPSK	1	74	1	0	23.39
			QPSK	75	0	100	0	21.19
			16QAM	1	74	1	0	22.43
			16QAM	75	0	100	0	20.25
			64QAM	1	74	1	0	20.57
			64QAM	75	0	100	0	20.26
20MHz/10MHz	2530.1	2544.5	QPSK	1	99	1	0	23.42
			QPSK	100	0	50	0	21.30
			16QAM	1	99	1	0	22.36
			16QAM	100	0	50	0	20.24
			64QAM	1	99	1	0	20.55
			64QAM	100	0	50	0	20.30
20MHz/15MHz	2527.6	2544.7	QPSK	1	99	1	0	23.48
			QPSK	100	0	75	0	21.31
			16QAM	1	99	1	0	22.47
			16QAM	100	0	75	0	20.24
			64QAM	1	99	1	0	20.62
			64QAM	100	0	75	0	20.27
20MHz/20MHz	2525.1	2544.9	QPSK	1	99	1	0	23.44
			QPSK	100	0	100	0	21.27
			16QAM	1	99	1	0	22.57
			16QAM	100	0	100	0	20.20



No.25T04Z200151-013

			64QAM	1	99	1	0	20.60
			64QAM	100	0	100	0	20.27

LTE CA band 38C

Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB		SCC RB		Conducted Power(dBm)
				Size	Offset	Size	Offset	
15MHz/15MHz	2587.5	2602.5	QPSK	1	74	1	0	23.49
			QPSK	75	0	75	0	21.35
			16QAM	1	74	1	0	22.60
			16QAM	75	0	75	0	20.30
			64QAM	1	74	1	0	20.30
			64QAM	75	0	75	0	20.35
20MHz/20MHz	2585.1	2604.9	QPSK	1	99	1	0	23.54
			QPSK	100	0	100	0	21.28
			16QAM	1	99	1	0	22.65
			16QAM	100	0	100	0	20.25
			64QAM	1	99	1	0	20.31
			64QAM	100	0	100	0	20.30

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

FDD Band 2: Part 24.232(c) specifies "Mobile and portable stations are limited to 2 watts EIRP".

FDD Band 66: Part 27.50(d)(4) specifies "Fixed, mobile, and portable(handheld) stations operating in the 1710–1755 MHz band and mobile and portable stations operating in the 1695–1710 MHz and 1755–1780 MHz bands are limited to 1 watt EIRP".

FDD Band 5/26_Part22: Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts".


FDD Band 7/TDD Band 41: Part 27.50(h)(2) specifies "Mobile stations are limited to 2.0 watts EIRP".

FDD Band 12: Part 27.50(c) (10) specifies "Portable stations (hand-held devices) in the 600 MHz uplink band and the 698–746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP".


A.1.3.2 Method of Measurement

The measurements procedures in ANSI C63.26 are used.

1. EUT was placed on a 0.8/1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The receiving antenna shall be varied from 1 to 4m in height above the reference ground. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and the EUT is manipulated through all orthogonal planes representative of its typical use. The test is carried out with both vertical and horizontal polarization of the receiving antenna. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with rms detector.

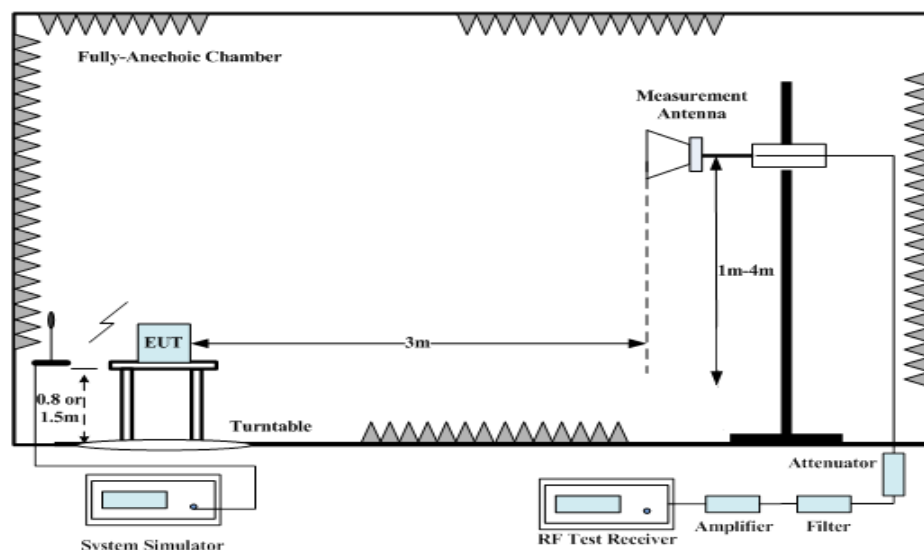

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

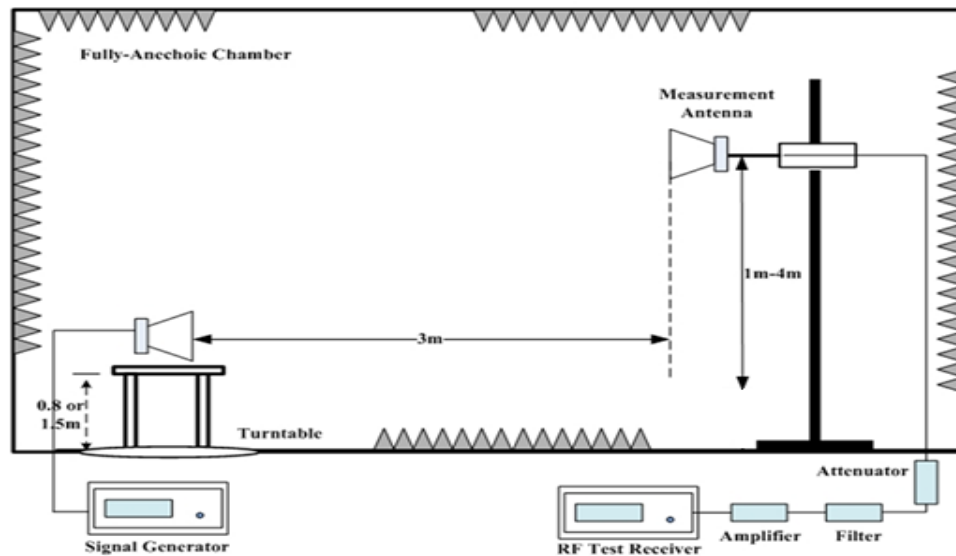

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.
The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15$.

A.1.3.3 Measurement result

LTE Band 2-EIRP

Limits: $\leq 33\text{dBm}$ (2W)

Mod.	Bandwidth (MHz)	Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Ant.Pol
QPSK	1.4	1850.70	-22.75	6.76	43.75	9.29	23.53	33.00	9.47	H
		1880.00	-22.94	6.96	43.75	9.00	22.85	33.00	10.15	H
		1909.30	-23.79	6.88	43.77	8.75	21.84	33.00	11.16	H
	3	1851.50	-22.93	6.76	43.75	9.29	23.33	33.00	9.67	H
		1880.00	-22.87	6.96	43.75	9.00	22.92	33.00	10.08	H
		1908.50	-23.69	6.88	43.77	8.76	21.96	33.00	11.04	H
	5	1852.50	-22.83	6.76	43.75	9.28	23.44	33.00	9.56	H
		1880.00	-22.75	6.96	43.75	9.00	23.04	33.00	9.96	H
		1907.50	-23.46	6.88	43.77	8.77	22.20	33.00	10.80	H
	10	1855.00	-23.14	6.76	43.75	9.25	23.09	33.00	9.91	H
		1880.00	-22.96	6.96	43.75	9.00	22.83	33.00	10.17	H
		1905.00	-23.58	6.88	43.77	8.79	22.10	33.00	10.90	H
	15	1857.50	-23.67	6.76	43.75	9.23	22.54	33.00	10.46	H
		1880.00	-23.18	6.96	43.75	9.00	22.61	33.00	10.39	H
		1902.50	-23.71	6.88	43.77	8.81	21.99	33.00	11.01	H
	20	1860.00	-23.54	6.76	43.75	9.20	22.65	33.00	10.35	H
		1880.00	-23.28	6.96	43.75	9.00	22.51	33.00	10.49	H
		1900.00	-23.95	6.81	43.77	8.83	21.84	33.00	11.16	H
16QAM	1.4	1850.70	-23.58	6.76	43.75	9.29	22.70	33.00	10.30	H
		1880.00	-23.50	6.96	43.75	9.00	22.29	33.00	10.71	H
		1909.30	-24.39	6.88	43.77	8.75	21.24	33.00	11.76	H
	3	1851.50	-23.65	6.76	43.75	9.29	22.61	33.00	10.39	H
		1880.00	-23.59	6.96	43.75	9.00	22.20	33.00	10.80	H
		1908.50	-24.41	6.88	43.77	8.76	21.24	33.00	11.76	H
	5	1852.50	-23.49	6.76	43.75	9.28	22.78	33.00	10.22	H
		1880.00	-23.42	6.96	43.75	9.00	22.37	33.00	10.63	H
		1907.50	-24.13	6.88	43.77	8.77	21.53	33.00	11.47	H
	10	1855.00	-23.81	6.76	43.75	9.25	22.42	33.00	10.58	H
		1880.00	-23.60	6.96	43.75	9.00	22.19	33.00	10.81	H
		1905.00	-24.22	6.88	43.77	8.79	21.46	33.00	11.54	H
	15	1857.50	-24.46	6.76	43.75	9.23	21.75	33.00	11.25	H
		1880.00	-23.98	6.96	43.75	9.00	21.81	33.00	11.19	H
		1902.50	-24.50	6.88	43.77	8.81	21.20	33.00	11.80	H
	20	1860.00	-24.23	6.76	43.75	9.20	21.96	33.00	11.04	H
		1880.00	-23.95	6.96	43.75	9.00	21.84	33.00	11.16	H
		1900.00	-24.64	6.81	43.77	8.83	21.15	33.00	11.85	H
64QAM	1.4	1850.70	-23.58	6.76	43.75	9.29	22.70	33.00	10.30	H
		1880.00	-23.50	6.96	43.75	9.00	22.29	33.00	10.71	H

		1909.30	-24.39	6.88	43.77	8.75	21.24	33.00	11.76	H
	3	1851.50	-24.67	6.76	43.75	9.29	21.59	33.00	11.41	H
		1880.00	-24.65	6.96	43.75	9.00	21.14	33.00	11.86	H
		1908.50	-25.45	6.88	43.77	8.76	20.20	33.00	12.80	H
	5	1852.50	-24.64	6.76	43.75	9.28	21.63	33.00	11.37	H
		1880.00	-24.56	6.96	43.75	9.00	21.23	33.00	11.77	H
		1907.50	-25.27	6.88	43.77	8.77	20.39	33.00	12.61	H
	10	1855.00	-24.98	6.76	43.75	9.25	21.25	33.00	11.75	H
		1880.00	-24.75	6.96	43.75	9.00	21.04	33.00	11.96	H
		1905.00	-25.37	6.88	43.77	8.79	20.31	33.00	12.69	H
	15	1857.50	-25.61	6.76	43.75	9.23	20.60	33.00	12.40	H
		1880.00	-25.17	6.96	43.75	9.00	20.62	33.00	12.38	H
		1902.50	-25.65	6.88	43.77	8.81	20.05	33.00	12.95	H
	20	1860.00	-25.42	6.76	43.75	9.20	20.77	33.00	12.23	H
		1880.00	-25.14	6.96	43.75	9.00	20.65	33.00	12.35	H
		1900.00	-25.86	6.81	43.77	8.83	19.93	33.00	13.07	H

LTE Band 5-ERP

Limits: ≤38.45dBm (7W)

Mod.	Bandwidth (MHz)	Frequency (MHz)	PMea (dBm)	Pcl (dB)	PAg (dB)	Ga (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Ant.Pol
QPSK	1.4	824.70	-23.67	4.04	45.79	-0.67	2.15	15.26	38.45	23.19	H
		836.50	-24.25	4.12	45.66	-0.73	2.15	14.41	38.45	24.04	H
		848.30	-24.14	4.23	45.55	-0.83	2.15	14.20	38.45	24.25	H
	3	825.50	-23.84	4.02	45.78	-0.63	2.15	15.14	38.45	23.31	H
		836.50	-24.31	4.12	45.66	-0.73	2.15	14.35	38.45	24.10	H
		847.50	-24.19	4.23	45.56	-0.82	2.15	14.16	38.45	24.29	H
	5	826.50	-23.67	4.02	45.77	-0.63	2.15	15.29	38.45	23.16	H
		836.50	-24.24	4.12	45.66	-0.73	2.15	14.42	38.45	24.03	H
		846.50	-24.29	4.23	45.56	-0.81	2.15	14.08	38.45	24.37	H
	10	829.00	-23.79	4.02	45.77	-0.63	2.15	15.18	38.45	23.27	H
		836.50	-24.48	4.12	45.66	-0.73	2.15	14.18	38.45	24.27	H
		844.00	-24.37	4.23	45.59	-0.73	2.15	14.11	38.45	24.34	H
16QAM	1.4	824.70	-24.31	4.04	45.79	-0.67	2.15	14.62	38.45	23.83	H
		836.50	-24.84	4.12	45.66	-0.73	2.15	13.82	38.45	24.63	H
		848.30	-24.81	4.23	45.55	-0.83	2.15	13.53	38.45	24.92	H
	3	825.50	-24.33	4.02	45.78	-0.63	2.15	14.65	38.45	23.80	H
		836.50	-24.83	4.12	45.66	-0.73	2.15	13.83	38.45	24.62	H
		847.50	-24.90	4.23	45.56	-0.82	2.15	13.45	38.45	25.00	H
	5	826.50	-24.31	4.02	45.77	-0.63	2.15	14.65	38.45	23.80	H
		836.50	-24.84	4.12	45.66	-0.73	2.15	13.82	38.45	24.63	H
		846.50	-25.08	4.23	45.56	-0.81	2.15	13.29	38.45	25.16	H
	10	829.00	-24.27	4.02	45.77	-0.63	2.15	14.70	38.45	23.75	H
		836.50	-24.76	4.12	45.66	-0.73	2.15	13.90	38.45	24.55	H
		844.00	-25.26	4.23	45.59	-0.73	2.15	13.22	38.45	25.23	H
64QAM	1.4	824.70	-25.25	4.04	45.79	-0.67	2.15	13.68	38.45	24.77	H
		836.50	-25.79	4.12	45.66	-0.73	2.15	12.87	38.45	25.58	H
		848.30	-25.79	4.23	45.55	-0.83	2.15	12.55	38.45	25.90	H
	3	825.50	-24.33	4.02	45.78	-0.63	2.15	14.65	38.45	23.80	H
		836.50	-24.83	4.12	45.66	-0.73	2.15	13.83	38.45	24.62	H
		847.50	-24.90	4.23	45.56	-0.82	2.15	13.45	38.45	25.00	H
	5	826.50	-25.32	4.02	45.77	-0.63	2.15	13.64	38.45	24.81	H
		836.50	-25.76	4.12	45.66	-0.73	2.15	12.90	38.45	25.55	H
		846.50	-25.99	4.23	45.56	-0.81	2.15	12.38	38.45	26.07	H
	10	829.00	-25.28	4.02	45.77	-0.63	2.15	13.69	38.45	24.76	H
		836.50	-24.97	4.12	45.66	-0.73	2.15	13.69	38.45	24.76	H
		844.00	-26.04	4.23	45.59	-0.73	2.15	12.44	38.45	26.01	H

LTE Band 7- EIRP

Limits: ≤33 dBm (2W)

Mod.	Bandwidth (MHz)	Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Ant.Pol
QPSK	5	2502.50	-21.91	7.84	44.80	10.11	25.16	33.00	7.84	V
		2535.00	-22.64	7.81	44.82	10.17	24.54	33.00	8.46	V
		2567.50	-21.78	8.24	44.92	9.93	24.83	33.00	8.17	V
	10	2505.00	-22.48	7.84	45.25	10.11	25.05	33.00	7.95	V
		2535.00	-22.88	7.81	44.82	10.17	24.30	33.00	8.70	V
		2565.00	-22.00	8.24	44.97	9.94	24.67	33.00	8.33	V
	15	2507.50	-22.45	7.84	44.90	10.12	24.73	33.00	8.27	V
		2535.00	-23.09	7.81	44.82	10.17	24.09	33.00	8.91	V
		2562.50	-23.05	7.95	45.67	9.96	24.63	33.00	8.37	V
	20	2510.00	-23.32	7.84	45.11	10.12	24.08	33.00	8.92	V
		2535.00	-23.18	7.81	44.82	10.17	24.00	33.00	9.00	V
		2560.00	-23.35	7.95	45.98	9.97	24.65	33.00	8.35	V
16QAM	5	2502.50	-22.53	7.84	44.80	10.11	24.54	33.00	8.46	V
		2535.00	-23.25	7.81	44.82	10.17	23.93	33.00	9.07	V
		2567.50	-22.43	8.24	44.92	9.93	24.18	33.00	8.82	V
	10	2505.00	-23.10	7.84	45.25	10.11	24.43	33.00	8.57	V
		2535.00	-23.49	7.81	44.82	10.17	23.69	33.00	9.31	V
		2565.00	-22.64	8.24	44.97	9.94	24.03	33.00	8.97	V
	15	2507.50	-23.29	7.84	44.90	10.12	23.89	33.00	9.11	V
		2535.00	-23.84	7.81	44.82	10.17	23.34	33.00	9.66	V
		2562.50	-23.81	7.95	45.67	9.96	23.87	33.00	9.13	V
	20	2510.00	-23.99	7.84	45.11	10.12	23.41	33.00	9.59	V
		2535.00	-23.84	7.81	44.82	10.17	23.34	33.00	9.66	V
		2560.00	-24.01	7.95	45.98	9.97	23.99	33.00	9.01	V
64QAM	5	2502.50	-23.61	7.84	44.80	10.11	23.46	33.00	9.54	V
		2535.00	-24.35	7.81	44.82	10.17	22.83	33.00	10.17	V
		2567.50	-23.51	8.24	44.92	9.93	23.10	33.00	9.90	V
	10	2505.00	-24.21	7.84	45.25	10.11	23.32	33.00	9.68	V
		2535.00	-24.59	7.81	44.82	10.17	22.59	33.00	10.41	V
		2565.00	-23.74	8.24	44.97	9.94	22.93	33.00	10.07	V
	15	2507.50	-24.35	7.84	44.90	10.12	22.83	33.00	10.17	V
		2535.00	-24.98	7.81	44.82	10.17	22.20	33.00	10.80	V
		2562.50	-24.93	7.95	45.67	9.96	22.75	33.00	10.25	V
	20	2510.00	-24.08	7.84	45.11	10.12	23.32	33.00	9.68	V
		2535.00	-24.94	7.81	44.82	10.17	22.24	33.00	10.76	V
		2560.00	-25.11	7.95	45.98	9.97	22.89	33.00	10.11	V

LTE CA Band 7C- EIRP

Limits: ≤33 dBm (2W)

Mod.	Bandwidth (MHz)	Frequency (MHz)	Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Ant.Pol
QPSK	10+20	2505.5	2519.9	-28.59	7.81	45.41	10.13	19.14	33.00	13.86	V
		2525.6	2540	-28.09	7.81	44.97	10.17	19.23	33.00	13.77	V
		2545.6	2560	-28.35	7.95	45.66	10.02	19.38	33.00	13.62	V
	20+10	2510	2524.4	-28.88	7.81	45.21	10.13	18.66	33.00	14.34	V
		2530.1	2544.5	-28.35	7.81	44.96	10.17	18.97	33.00	14.03	V
		2550.1	2564.5	-28.39	7.95	45.00	9.99	18.65	33.00	14.35	V
	15+10	2507.5	2519.5	-28.63	7.81	45.31	10.13	19.00	33.00	14.00	V
		2530.1	2542.1	-28.20	7.81	44.88	10.17	19.04	33.00	13.96	V
		2552.7	2564.7	-27.87	7.95	44.74	9.98	18.89	33.00	14.11	V
	15+15	2507.5	2522.5	-27.81	7.81	44.48	10.13	19.00	33.00	14.00	V
		2527.5	2542.5	-28.13	7.81	44.90	10.17	19.14	33.00	13.86	V
		2547.5	2562.5	-28.71	7.95	45.54	10.00	18.89	33.00	14.11	V
	15+20	2507.8	2524.9	-28.41	7.81	45.23	10.13	19.14	33.00	13.86	V
		2525.3	2542.4	-27.91	7.81	44.83	10.17	19.29	33.00	13.71	V
		2542.9	2560	-27.87	7.95	45.12	10.02	19.33	33.00	13.67	V
	20+15	2510	2527.1	-28.06	7.81	45.18	10.14	19.45	33.00	13.55	V
		2527.6	2544.7	-28.15	7.81	44.88	10.17	19.10	33.00	13.90	V
		2545.1	2562.2	-28.50	7.95	45.77	10.01	19.33	33.00	13.67	V
	20+20	2510	2529.8	-28.06	7.81	45.18	10.14	19.45	33.00	13.55	V
		2525.1	2544.9	-28.15	7.81	44.88	10.17	19.10	33.00	13.90	V
		2540.2	2560	-28.50	7.95	45.77	10.01	19.33	33.00	13.67	V
16QAM	10+20	2505.5	2519.9	-28.46	7.81	45.41	10.13	19.27	33.00	13.73	V
		2525.6	2540	-27.98	7.81	44.97	10.17	19.34	33.00	13.66	V
		2545.6	2560	-28.16	7.95	45.66	10.02	19.57	33.00	13.43	V
	20+10	2510	2524.4	-28.85	7.81	45.21	10.13	18.69	33.00	14.31	V
		2530.1	2544.5	-28.21	7.81	44.96	10.17	19.11	33.00	13.89	V
		2550.1	2564.5	-28.28	7.95	45.00	9.99	18.76	33.00	14.24	V
	15+10	2507.5	2519.5	-29.41	7.81	45.31	10.13	18.22	33.00	14.78	V
		2530.1	2542.1	-28.04	7.81	44.88	10.17	19.20	33.00	13.80	V
		2552.7	2564.7	-27.47	7.95	44.74	9.98	19.29	33.00	13.71	V
	15+15	2507.5	2522.5	-28.60	7.81	44.48	10.13	18.21	33.00	14.79	V
		2527.5	2542.5	-28.46	7.81	44.90	10.17	18.81	33.00	14.19	V
		2547.5	2562.5	-28.33	7.95	45.54	10.00	19.27	33.00	13.73	V
	15+20	2507.8	2524.9	-28.95	7.81	45.23	10.13	18.60	33.00	14.40	V
		2525.3	2542.4	-28.40	7.81	44.83	10.17	18.80	33.00	14.20	V
		2542.9	2560	-27.67	7.95	45.12	10.02	19.53	33.00	13.47	V
	20+15	2510	2527.1	-28.92	7.81	45.18	10.14	18.59	33.00	14.41	V
		2527.6	2544.7	-28.71	7.81	44.88	10.17	18.54	33.00	14.46	V

	20+20	2545.1	2562.2	-28.59	7.95	45.77	10.01	19.24	33.00	13.76	V
		2510	2529.8	-28.92	7.81	45.18	10.14	18.59	33.00	14.41	V
		2525.1	2544.9	-28.71	7.81	44.88	10.17	18.54	33.00	14.46	V
		2540.2	2560	-28.59	7.95	45.77	10.01	19.24	33.00	13.76	V
64QAM	10+20	2505.5	2519.9	-28.73	7.81	45.41	10.13	19.00	33.00	14.00	V
		2525.6	2540	-28.28	7.81	44.97	10.17	19.04	33.00	13.96	V
		2545.6	2560	-28.52	7.95	45.66	10.02	19.21	33.00	13.79	V
	20+10	2510	2524.4	-29.00	7.81	45.21	10.13	18.54	33.00	14.46	V
		2530.1	2544.5	-28.58	7.81	44.96	10.17	18.74	33.00	14.26	V
		2550.1	2564.5	-28.54	7.95	45.00	9.99	18.50	33.00	14.50	V
	15+10	2507.5	2519.5	-29.20	7.81	45.31	10.13	18.43	33.00	14.57	V
		2530.1	2542.1	-28.48	7.81	44.88	10.17	18.76	33.00	14.24	V
		2552.7	2564.7	-27.54	7.95	44.74	9.98	19.22	33.00	13.78	V
	15+15	2507.5	2522.5	-28.24	7.81	44.48	10.13	18.57	33.00	14.43	V
		2527.5	2542.5	-28.72	7.81	44.90	10.17	18.55	33.00	14.45	V
		2547.5	2562.5	-28.58	7.95	45.54	10.00	19.02	33.00	13.98	V
	15+20	2507.8	2524.9	-28.91	7.81	45.23	10.13	18.64	33.00	14.36	V
		2525.3	2542.4	-28.59	7.81	44.83	10.17	18.61	33.00	14.39	V
		2542.9	2560	-28.02	7.95	45.12	10.02	19.18	33.00	13.82	V
	20+15	2510	2527.1	-28.92	7.81	45.18	10.14	18.59	33.00	14.41	V
		2527.6	2544.7	-28.24	7.81	44.88	10.17	19.01	33.00	13.99	V
		2545.1	2562.2	-29.42	7.95	45.77	10.01	18.41	33.00	14.59	V
	20+20	2510	2529.8	-28.92	7.81	45.18	10.14	18.59	33.00	14.41	V
		2525.1	2544.9	-28.24	7.81	44.88	10.17	19.01	33.00	13.99	V
		2540.2	2560	-29.42	7.95	45.77	10.01	18.41	33.00	14.59	V

LTE Band 12 - ERP

Limits: $\leq 34.77\text{dBm}$ (3W)

Mod.	Bandwidth (MHz)	Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Ant.Pol
QPSK	1.4	699.70	-21.81	3.66	44.67	-0.67	2.15	16.39	34.77	18.38	V
		707.50	-22.70	3.66	45.17	-0.54	2.15	16.11	34.77	18.66	H
		715.30	-22.98	3.77	45.26	-0.46	2.15	15.90	34.77	18.87	H
	3	700.50	-22.16	3.66	44.71	-0.66	2.15	16.08	34.77	18.69	V
		707.50	-22.87	3.66	45.17	-0.54	2.15	15.94	34.77	18.83	H
		714.50	-23.09	3.77	45.25	-0.49	2.15	15.75	34.77	19.02	H
	5	701.50	-22.07	3.66	44.77	-0.64	2.15	16.26	34.77	18.51	V
		707.50	-22.78	3.66	45.17	-0.54	2.15	16.03	34.77	18.74	H
		713.50	-22.95	3.77	45.22	-0.50	2.15	15.86	34.77	18.91	H
	10	704.00	-22.59	3.66	44.98	-0.59	2.15	15.99	34.77	18.78	V
		707.50	-22.98	3.66	45.17	-0.54	2.15	15.83	34.77	18.94	H
		711.00	-23.19	3.77	45.31	-0.52	2.15	15.68	34.77	19.09	H
16QAM	1.4	699.70	-22.45	3.66	44.67	-0.67	2.15	15.75	34.77	19.02	V
		707.50	-23.38	3.66	45.17	-0.54	2.15	15.43	34.77	19.34	V
		715.30	-23.66	3.77	45.26	-0.46	2.15	15.22	34.77	19.55	H
	3	700.50	-22.83	3.66	44.71	-0.66	2.15	15.41	34.77	19.36	V
		707.50	-23.64	3.66	45.17	-0.54	2.15	15.17	34.77	19.60	H
		714.50	-23.78	3.77	45.25	-0.49	2.15	15.06	34.77	19.71	H
	5	701.50	-22.70	3.66	44.77	-0.64	2.15	15.63	34.77	19.14	V
		707.50	-23.42	3.66	45.17	-0.54	2.15	15.39	34.77	19.38	H
		713.50	-23.58	3.77	45.22	-0.50	2.15	15.23	34.77	19.54	H
	10	704.00	-23.23	3.66	44.98	-0.59	2.15	15.35	34.77	19.42	V
		707.50	-23.62	3.66	45.17	-0.54	2.15	15.19	34.77	19.58	H
		711.00	-23.82	3.77	45.31	-0.52	2.15	15.05	34.77	19.72	H
64QAM	1.4	699.70	-23.50	3.66	44.67	-0.67	2.15	14.70	34.77	20.07	V
		707.50	-24.41	3.66	45.17	-0.54	2.15	14.40	34.77	20.37	H
		715.30	-24.69	3.77	45.26	-0.46	2.15	14.19	34.77	20.58	H
	3	700.50	-23.86	3.66	44.71	-0.66	2.15	14.38	34.77	20.39	V
		707.50	-24.58	3.66	45.17	-0.54	2.15	14.23	34.77	20.54	H
		714.50	-24.82	3.77	45.25	-0.49	2.15	14.02	34.77	20.75	H
	5	701.50	-23.84	3.66	44.77	-0.64	2.15	14.49	34.77	20.28	V
		707.50	-24.54	3.66	45.17	-0.54	2.15	14.27	34.77	20.50	H
		713.50	-24.71	3.77	45.22	-0.50	2.15	14.10	34.77	20.67	H
	10	704.00	-24.42	3.66	44.98	-0.59	2.15	14.16	34.77	20.61	V
		707.50	-24.75	3.66	45.17	-0.54	2.15	14.06	34.77	20.71	H
		711.00	-24.92	3.77	45.31	-0.52	2.15	13.95	34.77	20.82	H

LTE Band 26_Part22 - ERP

Limits: ≤38.45dBm (7W)

Mod.	Bandwidth (MHz)	Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Ant.Pol
QPSK	1.4	824.70	-23.23	4.04	45.79	-0.67	2.15	15.70	38.45	22.75	H
		836.50	-23.74	4.12	45.66	-0.73	2.15	14.92	38.45	23.53	H
		848.30	-24.19	4.23	45.55	-0.83	2.15	14.15	38.45	24.30	H
	3	825.50	-23.18	4.02	45.78	-0.63	2.15	15.80	38.45	22.65	H
		836.50	-23.63	4.12	45.66	-0.73	2.15	15.03	38.45	23.42	H
		847.50	-23.99	4.23	45.56	-0.82	2.15	14.36	38.45	24.09	H
	5	826.50	-23.15	4.02	45.77	-0.63	2.15	15.81	38.45	22.64	H
		836.50	-23.41	4.12	45.66	-0.73	2.15	15.25	38.45	23.20	H
		846.50	-24.02	4.23	45.59	-0.73	2.15	14.46	38.45	23.99	H
	10	829.00	-23.48	4.02	45.77	-0.63	2.15	15.49	38.45	22.96	H
		836.50	-23.74	4.12	45.66	-0.73	2.15	14.92	38.45	23.53	H
		844.00	-24.06	4.23	45.61	-0.73	2.15	14.44	38.45	24.01	H
	15	831.50	-23.64	4.02	45.71	-0.67	2.15	15.24	38.45	23.21	H
		836.50	-23.75	4.12	45.66	-0.73	2.15	14.91	38.45	23.54	H
		841.50	-23.90	4.23	45.61	-0.73	2.15	14.60	38.45	23.85	H
16QAM	1.4	824.70	-23.83	4.04	45.79	-0.67	2.15	15.10	38.45	23.35	H
		836.50	-24.40	4.12	45.66	-0.73	2.15	14.26	38.45	24.19	H
		848.30	-24.86	4.23	45.55	-0.83	2.15	13.48	38.45	24.97	H
	3	825.50	-23.89	4.02	45.78	-0.63	2.15	15.09	38.45	23.36	H
		836.50	-24.38	4.12	45.66	-0.73	2.15	14.28	38.45	24.17	H
		847.50	-24.74	4.23	45.56	-0.82	2.15	13.61	38.45	24.84	H
	5	826.50	-23.79	4.02	45.77	-0.63	2.15	15.17	38.45	23.28	H
		836.50	-24.16	4.12	45.66	-0.73	2.15	14.50	38.45	23.95	H
		846.50	-24.70	4.23	45.59	-0.73	2.15	13.78	38.45	24.67	H
	10	829.00	-24.11	4.02	45.77	-0.63	2.15	14.86	38.45	23.59	H
		836.50	-24.40	4.12	45.66	-0.73	2.15	14.26	38.45	24.19	H
		844.00	-24.72	4.23	45.61	-0.73	2.15	13.78	38.45	24.67	H
	15	831.50	-24.26	4.02	45.71	-0.67	2.15	14.62	38.45	23.83	H
		836.50	-24.42	4.12	45.66	-0.73	2.15	14.24	38.45	24.21	H
		841.50	-24.56	4.23	45.61	-0.73	2.15	13.94	38.45	24.51	H
64QAM	1.4	824.70	-24.81	4.04	45.79	-0.67	2.15	14.12	38.45	24.33	H
		836.50	-25.40	4.12	45.66	-0.73	2.15	13.26	38.45	25.19	H
		848.30	-25.92	4.23	45.55	-0.83	2.15	12.42	38.45	26.03	H
	3	825.50	-24.92	4.02	45.78	-0.63	2.15	14.06	38.45	24.39	H
		836.50	-25.39	4.12	45.66	-0.73	2.15	13.27	38.45	25.18	H
		847.50	-25.77	4.23	45.56	-0.82	2.15	12.58	38.45	25.87	H
	5	826.50	-24.92	4.02	45.77	-0.63	2.15	14.04	38.45	24.41	H
		836.50	-25.23	4.12	45.66	-0.73	2.15	13.43	38.45	25.02	H

		846.50	-25.80	4.23	45.59	-0.73	2.15	12.68	38.45	25.77	H
	10	829.00	-25.26	4.02	45.77	-0.63	2.15	13.71	38.45	24.74	H
		836.50	-25.53	4.12	45.66	-0.73	2.15	13.13	38.45	25.32	H
		844.00 g	-25.88	4.23	45.61	-0.73	2.15	12.62	38.45	25.83	H
	15	831.50	-25.43	4.02	45.71	-0.67	2.15	13.45	38.45	25.00	H
		836.50	-25.51	4.12	45.66	-0.73	2.15	13.15	38.45	25.30	H
		841.50	-25.65	4.23	45.61	-0.73	2.15	12.85	38.45	25.60	H

LTE CA band 38C- EIRP

Limits: $\leq 33\text{dBm}$ (2W)

Mod.	Bandwidth (MHz)	Frequency (MHz)	Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Ant.Pol
QPSK	15+15	2577.5	2592.5	-27.91	8.24	44.92	9.82	18.59	33.00	14.41	V
		2587.5	2602.5	-29.20	8.41	44.93	9.76	17.09	33.00	15.91	V
		2597.5	2612.5	-29.22	8.41	44.94	9.89	17.21	33.00	15.79	V
	20+20	2580	2599.8	-28.65	8.41	44.93	9.79	17.67	33.00	15.33	V
		2585.1	2604.9	-29.20	8.41	44.93	9.76	17.09	33.00	15.91	V
		2590.2	2610	-29.22	8.41	44.94	9.90	17.21	33.00	15.79	V
16QAM	15+15	2577.5	2592.5	-27.86	8.24	44.92	9.82	18.64	33.00	14.36	V
		2587.5	2602.5	-28.71	8.41	44.93	9.76	17.58	33.00	15.42	V
		2597.5	2612.5	-28.49	8.41	44.94	9.89	17.93	33.00	15.07	V
	20+20	2580	2599.8	-28.74	8.41	44.93	9.79	17.58	33.00	15.42	V
		2585.1	2604.9	-28.98	8.41	44.93	9.76	17.31	33.00	15.69	V
		2590.2	2610	-29.11	8.41	44.94	9.90	17.32	33.00	15.68	V
64QAM	15+15	2577.5	2592.5	-27.78	8.24	44.92	9.82	18.72	33.00	14.28	V
		2587.5	2602.5	-28.81	8.41	44.93	9.76	17.48	33.00	15.52	V
		2597.5	2612.5	-29.36	8.41	44.94	9.89	17.06	33.00	15.94	V
	20+20	2580	2599.8	-28.86	8.41	44.93	9.79	17.46	33.00	15.54	V
		2585.1	2604.9	-29.17	8.41	44.93	9.76	17.12	33.00	15.88	V
		2590.2	2610	-29.49	8.41	44.94	9.90	16.94	33.00	16.06	V

LTE band 41 - EIRP

Limits: ≤33dBm (2W)

Mod.	Bandwidth (MHz)	Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Ant.Pol
QPSK	5	2498.50	-23.65	7.84	45.59	10.18	24.29	33.00	8.71	V
		2593.00	-21.80	8.41	44.93	9.78	24.50	33.00	8.50	V
		2687.50	-21.87	8.77	44.98	10.12	24.47	33.00	8.53	V
	10	2501.00	-24.04	7.84	45.65	10.10	23.88	33.00	9.12	V
		2593.00	-22.23	8.41	44.93	9.78	24.07	33.00	8.93	V
		2685.00	-21.95	8.77	44.98	10.11	24.38	33.00	8.62	V
	15	2503.50	-24.74	7.84	45.65	10.11	23.18	33.00	9.82	V
		2593.00	-23.31	8.41	44.93	9.78	22.99	33.00	10.01	V
		2682.50	-23.01	8.77	44.98	10.10	23.30	33.00	9.70	V
	20	2506.00	-24.55	7.84	45.15	10.11	22.87	33.00	10.13	V
		2593.00	-23.59	8.41	44.93	9.78	22.71	33.00	10.29	V
		2680.00	-22.91	8.77	44.97	10.08	23.37	33.00	9.63	V
16QAM	5	2498.50	-24.50	7.84	45.59	10.18	23.44	33.00	9.56	V
		2593.00	-22.66	8.41	44.93	9.78	23.64	33.00	9.36	V
		2687.50	-22.71	8.77	44.98	10.12	23.63	33.00	9.37	V
	10	2501.00	-24.73	7.84	45.65	10.10	23.19	33.00	9.81	V
		2593.00	-22.86	8.41	44.93	9.78	23.44	33.00	9.56	V
		2685.00	-22.74	8.77	44.98	10.11	23.59	33.00	9.41	V
	15	2503.50	-25.88	7.84	45.65	10.11	22.04	33.00	10.96	V
		2593.00	-24.47	8.41	44.93	9.78	21.83	33.00	11.17	V
		2682.50	-23.99	8.77	44.98	10.10	22.32	33.00	10.68	V
	20	2506.00	-25.42	7.84	45.15	10.11	22.00	33.00	11.00	V
		2593.00	-24.51	8.41	44.93	9.78	21.79	33.00	11.21	V
		2680.00	-23.67	8.77	44.97	10.08	22.61	33.00	10.39	V
64QAM	5	2498.50	-26.03	7.84	45.59	10.18	21.91	33.00	11.09	V
		2593.00	-24.17	8.41	44.93	9.78	22.13	33.00	10.87	V
		2687.50	-24.30	8.77	44.98	10.12	22.04	33.00	10.96	V
	10	2501.00	-25.91	7.84	45.65	10.10	22.01	33.00	10.99	V
		2593.00	-24.12	8.41	44.93	9.78	22.18	33.00	10.82	V
		2685.00	-23.89	8.77	44.98	10.11	22.44	33.00	10.56	V
	15	2503.50	-26.90	7.84	45.65	10.11	21.02	33.00	11.98	V
		2593.00	-25.26	8.41	44.93	9.78	21.04	33.00	11.96	V
		2682.50	-25.01	8.77	44.98	10.10	21.30	33.00	11.70	V
	20	2506.00	-26.40	7.84	45.15	10.11	21.02	33.00	11.98	V
		2593.00	-25.12	8.41	44.93	9.78	21.18	33.00	11.82	V
		2680.00	-24.81	8.77	44.97	10.08	21.47	33.00	11.53	V

LTE Band 66- EIRP

Limits: ≤30dBm (1W)

Mod.	Bandwidth (MHz)	Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Ant.Pol
QPSK	1.4	1710.70	-24.66	6.39	44.08	9.32	22.35	30.00	7.65	H
		1745.00	-24.09	6.25	44.46	9.49	23.61	30.00	6.39	H
		1779.30	-22.41	6.43	44.03	9.71	24.89	30.00	5.11	H
	3	1711.50	-24.60	6.39	44.10	9.32	22.43	30.00	7.57	H
		1745.00	-24.07	6.25	44.46	9.49	23.63	30.00	6.37	H
		1778.50	-22.49	6.43	44.03	9.70	24.81	30.00	5.19	H
	5	1712.50	-25.14	6.39	44.90	9.33	22.70	30.00	7.30	H
		1745.00	-23.90	6.25	44.46	9.49	23.80	30.00	6.20	H
		1777.50	-22.68	6.43	44.18	9.69	24.76	30.00	5.24	H
	10	1715.00	-24.71	6.39	44.37	9.34	22.62	30.00	7.38	H
		1745.00	-24.11	6.25	44.46	9.49	23.59	30.00	6.41	H
		1775.00	-23.51	6.43	44.83	9.68	24.56	30.00	5.44	H
	15	1717.50	-24.08	6.39	44.11	9.35	22.99	30.00	7.01	H
		1745.00	-24.08	6.25	44.46	9.49	23.62	30.00	6.38	H
		1772.50	-23.01	6.36	44.06	9.66	24.35	30.00	5.65	H
	20	1720.00	-24.12	6.39	44.18	9.37	23.04	30.00	6.96	H
		1745.00	-24.15	6.25	44.46	9.49	23.55	30.00	6.45	H
		1770.00	-23.41	6.36	44.13	9.64	23.99	30.00	6.01	H
16QAM	1.4	1710.70	-25.28	6.39	44.08	9.32	21.73	30.00	8.27	H
		1745.00	-24.68	6.25	44.46	9.49	23.02	30.00	6.98	H
		1779.30	-22.98	6.43	44.03	9.71	24.32	30.00	5.68	H
	3	1711.50	-25.26	6.39	44.10	9.32	21.77	30.00	8.23	H
		1745.00	-24.76	6.25	44.46	9.49	22.94	30.00	7.06	H
		1778.50	-23.00	6.43	44.03	9.70	24.30	30.00	5.70	H
	5	1712.50	-25.80	6.39	44.90	9.33	22.04	30.00	7.96	H
		1745.00	-24.59	6.25	44.46	9.49	23.11	30.00	6.89	H
		1777.50	-23.15	6.43	44.18	9.69	24.29	30.00	5.71	H
	10	1715.00	-25.38	6.39	44.37	9.34	21.95	30.00	8.05	H
		1745.00	-24.81	6.25	44.46	9.49	22.89	30.00	7.11	H
		1775.00	-24.17	6.43	44.83	9.68	23.90	30.00	6.10	H
	15	1717.50	-24.84	6.39	44.11	9.35	22.23	30.00	7.77	H
		1745.00	-24.78	6.25	44.46	9.49	22.92	30.00	7.08	H
		1772.50	-23.74	6.36	44.06	9.66	23.62	30.00	6.38	H
	20	1720.00	-24.38	6.39	44.18	9.37	22.78	30.00	7.22	H
		1745.00	-24.73	6.25	44.46	9.49	22.97	30.00	7.03	H
		1770.00	-24.09	6.36	44.13	9.64	23.31	30.00	6.69	H
64QAM	1.4	1710.70	-26.31	6.39	44.08	9.32	20.70	30.00	9.30	H
		1745.00	-25.69	6.25	44.46	9.49	22.01	30.00	7.99	H

		1779.30	-24.03	6.43	44.03	9.71	23.27	30.00	6.73	H
	3	1711.50	-26.31	6.39	44.10	9.32	20.72	30.00	9.28	H
		1745.00	-25.83	6.25	44.46	9.49	21.87	30.00	8.13	H
		1778.50	-24.05	6.43	44.03	9.70	23.25	30.00	6.75	H
	5	1712.50	-26.95	6.39	44.90	9.33	20.89	30.00	9.11	H
		1745.00	-25.70	6.25	44.46	9.49	22.00	30.00	8.00	H
		1777.50	-24.35	6.43	44.18	9.69	23.09	30.00	6.91	H
	10	1715.00	-26.51	6.39	44.37	9.34	20.82	30.00	9.18	H
		1745.00	-25.95	6.25	44.46	9.49	21.75	30.00	8.25	H
		1775.00	-25.36	6.43	44.83	9.68	22.71	30.00	7.29	H
	15	1717.50	-26.06	6.39	44.11	9.35	21.01	30.00	8.99	H
		1745.00	-25.95	6.25	44.46	9.49	21.75	30.00	8.25	H
		1772.50	-24.92	6.36	44.06	9.66	22.44	30.00	7.56	H
	20	1720.00	-26.03	6.39	44.18	9.37	21.13	30.00	8.87	H
		1745.00	-25.95	6.25	44.46	9.49	21.75	30.00	8.25	H
		1770.00	-25.20	6.36	44.13	9.64	22.20	30.00	7.80	H

A.2 Emission Limit


A.2.1 Measurement Method

The measurement procedures in ANSI C63.26 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of each LTE Band.

The procedure of radiated spurious emissions is as follows:

For measurements performed at frequencies less than or equal to 1 GHz, the EUT was placed on a 80cm-high non-conductive support; For measurements performed at frequencies above 1GHz,EUT was placed on a 1.5-meter-high non-conductive support. A measurement antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. In the initial test, the height of the measurement antenna was varied from 1 m to 4 m for the relative positioning that produces the maximum radiated signal level. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

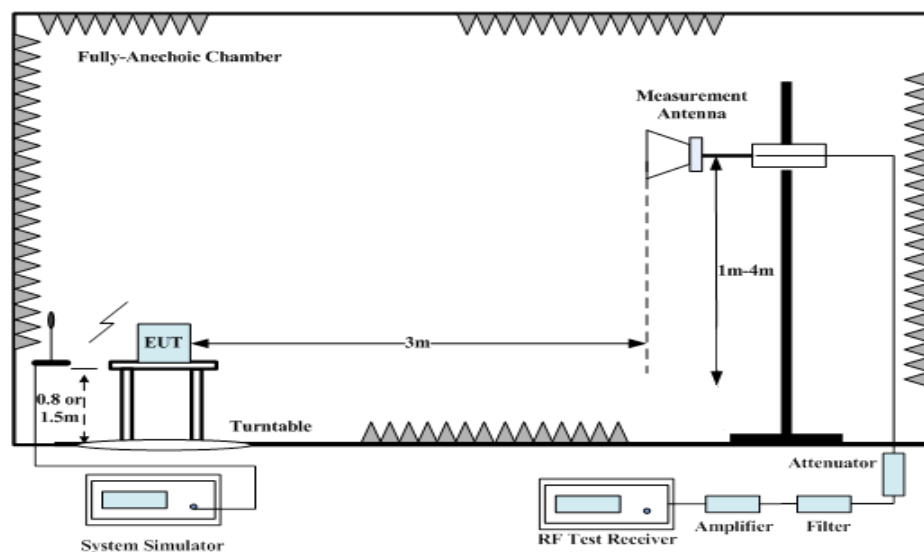

1. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
2. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

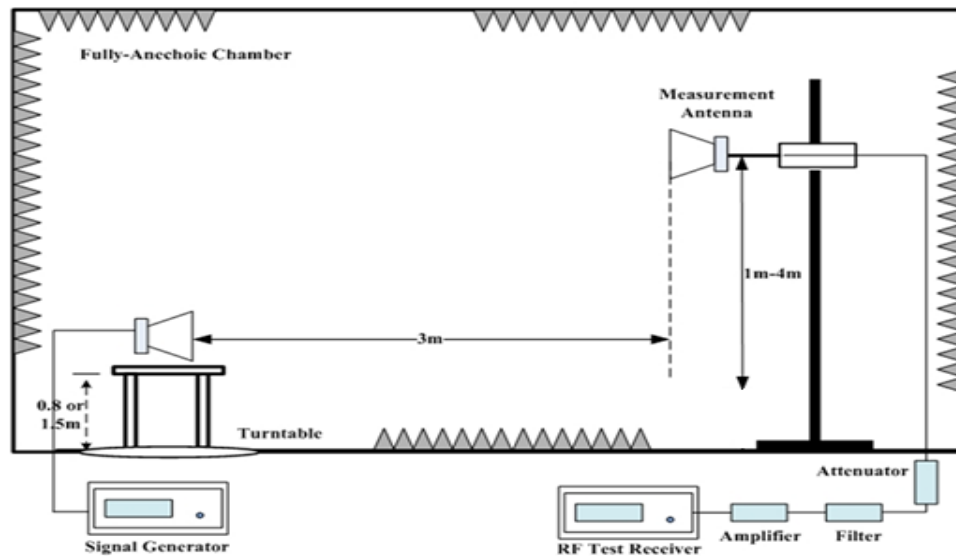

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. The height of measurement antenna varied between 1 m to 4 m to maximize the received signal amplitude for each emission that was detected and measured in the initial test. A power (P_{Mea}) is applied to the input of the substitution antenna and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test was performed with the measurement antenna in both vertical and horizontal polarization.

3. The Path loss (P_{pl}) between the Signal Source and the Substitution Antenna and the Substitution Antenna Gain (G_a) were recorded after test. A amplifier was connected in for the test. The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.
4. The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{pl} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.2.2 Measurement Limit

FDD Band 2: Part 24.238 specifies that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

FDD Band 66: Part 27.53(h) specifies that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

FDD Band 5/26_Part22: Part 22.917 specifies that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

FDD Band 7/TDD Band 41: Part 27.53(m) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and

X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FDD Band 12: Part 27.53(g) states for operations in the 600 MHz band and the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FDD Band 26_Part90: Part 90.691 states that out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows: For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz. For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of each LTE Band. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of each LTE Band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The range of evaluated frequency is from 9 kHz to 26GHz.

Note 1: Both of Vertical and Horizontal polarizations are evaluated, but only the worst case is recorded in this report.

A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
LTE Bands	Low	9kHz-26GHz	Pass
	Middle	9kHz-26GHz	Pass
	High	9kHz-26GHz	Pass

A.2.5 Sweep Table

Subrange	RBW	VBW
9~150 kHz	0.2kHz	0.6kHz
150kHz~30MHz	9kHz	27kHz
30MHz~1 GHz	100KHz	300KHz
1~26 GHz	1 MHz	3 MHz

A.2.6 Measurement Result

LTE Band 2, 1.4MHz, QPSK, Channel 18607

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3701.50	-63.54	3.47	10.39	-56.62	-13.00	43.62	V
5552.00	-61.63	5.32	11.20	-55.75	-13.00	42.75	H
7416.50	-52.70	8.00	10.10	-50.60	-13.00	37.60	V
9249.00	-51.37	8.85	11.70	-48.52	-13.00	35.52	H
11098.50	-49.99	9.70	12.60	-47.09	-13.00	34.09	V
12956.50	-45.05	12.51	12.74	-44.82	-13.00	31.82	V

LTE Band 2, 1.4MHz, QPSK, Channel 18900

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.00	-64.34	3.81	10.16	-57.99	-13.00	44.99	H
5643.50	-61.11	5.60	11.39	-55.32	-13.00	42.32	V
7505.50	-52.88	7.70	10.21	-50.37	-13.00	37.37	H
9414.00	-50.74	9.06	11.56	-48.24	-13.00	35.24	H
11289.50	-49.05	10.62	12.61	-47.06	-13.00	34.06	V
13170.00	-45.51	13.18	12.53	-46.16	-13.00	33.16	V

LTE Band 2, 1.4MHz, QPSK, Channel 19193

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3833.00	-63.13	3.91	9.93	-57.11	-13.00	44.11	H
5723.50	-60.71	5.90	11.35	-55.26	-13.00	42.26	V
7650.00	-54.02	6.85	10.40	-50.47	-13.00	37.47	V
9549.50	-51.64	9.10	11.90	-48.84	-13.00	35.84	V
11448.50	-46.36	12.39	12.55	-46.20	-13.00	33.20	V
13367.00	-43.09	13.10	12.43	-43.76	-13.00	30.76	V

LTE Band 5, 1.4MHz, QPSK, Channel 20407

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1649.00	-58.66	2.60	9.49	2.15	-53.92	-13.00	40.92	H
2483.00	-54.19	4.34	10.33	2.15	-50.35	-13.00	37.35	V
5760.00	-60.02	5.81	11.24	2.15	-56.74	-13.00	43.74	V
6612.00	-56.45	6.99	10.32	2.15	-55.27	-13.00	42.27	V
7433.00	-52.55	7.91	10.10	2.15	-52.51	-13.00	39.51	V
8249.00	-53.44	7.59	11.20	2.15	-51.98	-13.00	38.98	H

LTE Band 5, 1.4MHz, QPSK, Channel 20525

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1673.00	-54.35	2.78	9.45	2.15	-49.83	-13.00	36.83	V
2510.00	-54.02	4.42	10.30	2.15	-50.29	-13.00	37.29	H
4183.00	-60.16	4.07	10.07	2.15	-56.31	-13.00	43.31	H
6679.50	-55.60	6.37	10.46	2.15	-53.66	-13.00	40.66	H
7522.50	-53.09	7.71	10.24	2.15	-52.71	-13.00	39.71	H
8373.00	-53.05	8.17	11.30	2.15	-52.07	-13.00	39.07	V

LTE Band 5, 1.4MHz, QPSK, Channel 20643

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1697.00	-53.34	2.92	9.41	2.15	-49.00	-13.00	36.00	V
2558.50	-54.60	4.53	10.30	2.15	-50.98	-13.00	37.98	H
5935.00	-59.54	6.02	10.73	2.15	-56.98	-13.00	43.98	V
6782.50	-54.92	6.40	10.36	2.15	-53.11	-13.00	40.11	H
7620.50	-53.75	6.65	10.34	2.15	-52.21	-13.00	39.21	V
8468.50	-53.17	8.02	11.30	2.15	-52.04	-13.00	39.04	V

LTE Band 7, 5 MHz, QPSK, Channel 20775

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
4998.00	-61.01	5.17	11.30	-54.88	-25.00	29.88	V
7498.50	-53.09	7.70	10.20	-50.59	-25.00	25.59	V
10010.00	-49.88	9.35	11.79	-47.44	-25.00	22.44	V
12513.50	-44.98	12.37	13.56	-43.79	-25.00	18.79	V
15029.00	-45.40	14.73	14.69	-45.44	-25.00	20.44	V
17517.50	-33.71	19.70	13.12	-40.29	-25.00	15.29	V

LTE Band 7, 5 MHz, QPSK, Channel 21100

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5071.50	-62.11	5.30	11.60	-55.81	-25.00	30.81	V
7593.00	-53.05	7.56	10.30	-50.31	-25.00	25.31	V
10128.00	-50.81	8.93	11.76	-47.98	-25.00	22.98	V
12662.00	-45.81	11.63	13.18	-44.26	-25.00	19.26	V
15198.00	-46.80	15.13	15.00	-46.93	-25.00	21.93	V
17746.00	-34.49	19.56	13.45	-40.60	-25.00	15.60	V

LTE Band 7, 5 MHz, QPSK, Channel 21425

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5126.00	-61.85	5.58	11.60	-55.83	-25.00	30.83	V
7697.00	-54.76	6.70	10.59	-50.87	-25.00	25.87	V
10279.50	-49.59	10.68	11.90	-48.37	-25.00	23.37	V
12840.00	-44.73	13.03	12.92	-44.84	-25.00	19.84	V
15414.50	-47.57	14.91	15.43	-47.05	-25.00	22.05	V
17968.00	-33.23	20.00	13.46	-39.77	-25.00	14.77	V

LTE CA Band 7C_ CH20850+21408_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5020.00	-56.65	11.66	11.23	-57.08	-25.00	32.08	H
7530.00	-49.71	13.22	10.33	-52.60	-25.00	27.60	V
10040.00	-49.97	12.03	12.03	-49.97	-25.00	24.97	V
12550.00	-42.52	17.35	13.34	-46.52	-25.00	21.52	H
15060.00	-44.04	18.41	14.72	-47.72	-25.00	22.72	H
17570.00	-37.04	18.35	12.64	-42.75	-25.00	17.75	V

LTE CA Band 7C_ CH21001+21199_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5050.00	-57.36	11.46	11.27	-57.55	-25.00	32.55	V
7575.00	-49.62	12.96	10.38	-52.19	-25.00	27.19	V
10100.00	-49.07	12.07	12.07	-49.07	-25.00	24.07	V
12625.00	-41.72	17.00	13.28	-45.44	-25.00	20.44	H
15150.00	-44.68	18.17	14.84	-48.01	-25.00	23.01	V
17675.00	-36.08	18.65	12.85	-41.88	-25.00	16.88	H

LTE CA Band 7C_ CH21152+21350_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5082.00	-58.36	11.46	11.27	-58.55	-25.00	33.55	V
7623.00	-48.96	13.72	10.40	-52.28	-25.00	27.28	H
10164.00	-48.35	12.03	12.03	-48.35	-25.00	23.35	H
12705.00	-43.53	16.88	13.23	-47.18	-25.00	22.18	H
15246.00	-44.89	18.36	15.06	-48.19	-25.00	23.19	H
17787.00	-36.86	18.81	12.84	-42.82	-25.00	17.82	V

LTE Band 12, 1.4MHz, QPSK, Channel 23017

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
2100.00	-52.46	3.52	7.80	2.15	-50.33	-13.00	37.33	V
2802.50	-51.89	5.25	10.40	2.15	-48.89	-13.00	35.89	V
4209.50	-60.78	4.63	10.14	2.15	-57.42	-13.00	44.42	H
5610.50	-60.95	5.64	11.32	2.15	-57.42	-13.00	44.42	H
6296.00	-59.05	6.07	10.80	2.15	-56.47	-13.00	43.47	V
7010.00	-54.57	7.66	10.42	2.15	-53.96	-13.00	40.96	V

LTE Band 12, 1.4MHz, QPSK, Channel 23095

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1415.00	-60.89	2.31	8.19	2.15	-57.16	-13.00	44.16	H
2123.00	-53.08	3.72	8.17	2.15	-50.78	-13.00	37.78	H
2824.00	-51.71	5.11	10.45	2.15	-48.52	-13.00	35.52	H
5657.00	-59.75	5.73	11.40	2.15	-56.23	-13.00	43.23	V
6367.50	-58.14	5.76	10.94	2.15	-55.11	-13.00	42.11	V
7071.50	-55.07	6.87	10.41	2.15	-53.68	-13.00	40.68	V

LTE Band 12, 1.4MHz, QPSK, Channel 23173

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
2146.50	-52.87	3.71	8.54	2.15	-50.19	-13.00	37.19	V
2866.00	-51.57	5.48	10.60	2.15	-48.60	-13.00	35.60	H
4995.00	-60.86	5.18	11.29	2.15	-56.90	-13.00	43.90	H
5730.00	-60.14	5.89	11.34	2.15	-56.84	-13.00	43.84	H
6434.00	-57.10	6.91	10.86	2.15	-55.30	-13.00	42.30	H
7143.00	-54.67	6.66	10.21	2.15	-53.27	-13.00	40.27	V

LTE Band 26_Part22, 1.4MHz, QPSK, Channel 26797

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1649.50	-59.14	2.60	9.50	2.15	-54.39	-13.00	41.39	H
2468.00	-54.38	4.32	10.36	2.15	-50.49	-13.00	37.49	H
5761.50	-60.20	5.81	11.23	2.15	-56.93	-13.00	43.93	H
6601.00	-55.74	7.08	10.30	2.15	-54.67	-13.00	41.67	V
7428.50	-52.03	7.93	10.10	2.15	-52.01	-13.00	39.01	V
8261.00	-52.66	7.60	11.20	2.15	-51.21	-13.00	38.21	H

LTE Band 26_Part22, 1.4MHz, QPSK, Channel 26915

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1673.00	-56.22	2.78	9.45	2.15	-51.70	-13.00	38.70	V
2503.00	-55.20	4.44	10.30	2.15	-51.49	-13.00	38.49	H
4180.50	-60.52	4.05	10.06	2.15	-56.66	-13.00	43.66	V
6703.50	-55.81	6.22	10.49	2.15	-53.69	-13.00	40.69	V
7540.50	-52.96	7.47	10.28	2.15	-52.30	-13.00	39.30	H
8373.50	-51.75	8.17	11.30	2.15	-50.77	-13.00	37.77	H

LTE Band 26_Part22, 1.4MHz, QPSK, Channel 27033

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1696.50	-55.03	2.92	9.41	2.15	-50.69	-13.00	37.69	V
2557.00	-54.90	4.54	10.30	2.15	-51.29	-13.00	38.29	H
5933.00	-60.03	6.03	10.73	2.15	-57.48	-13.00	44.48	V
6781.50	-55.59	6.40	10.36	2.15	-53.78	-13.00	40.78	H
7634.50	-54.29	6.75	10.37	2.15	-52.82	-13.00	39.82	V
8471.00	-53.24	8.03	11.30	2.15	-52.12	-13.00	39.12	H

LTE Band 26_Part90, 1.4MHz, QPSK, Channel 26697

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1629.50	-57.59	2.39	9.34	2.15	-52.79	-13.00	39.79	H
2444.50	-54.42	4.55	10.38	2.15	-50.74	-13.00	37.74	H
4884.50	-60.76	4.78	10.97	2.15	-56.72	-13.00	43.72	H
6519.50	-57.52	6.27	10.60	2.15	-55.34	-13.00	42.34	V
7344.50	-53.36	7.63	9.90	2.15	-53.24	-13.00	40.24	H
8134.00	-52.23	8.23	11.13	2.15	-51.48	-13.00	38.48	V

LTE Band 26_Part90, 1.4MHz, QPSK, Channel 26740

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1638.00	-59.56	2.40	9.40	2.15	-54.71	-13.00	41.71	V
2453.00	-54.96	4.46	10.39	2.15	-51.18	-13.00	38.18	H
5730.00	-59.82	5.89	11.34	2.15	-56.52	-13.00	43.52	V
6538.50	-57.06	6.29	10.60	2.15	-54.90	-13.00	41.90	V
7365.50	-52.67	7.48	9.96	2.15	-52.34	-13.00	39.34	V
8194.50	-53.25	7.34	11.19	2.15	-51.55	-13.00	38.55	V

LTE Band 26_Part90, 1.4MHz, QPSK, Channel 26783

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1646.50	-59.09	2.62	9.47	2.15	-54.39	-13.00	41.39	H
2473.50	-54.04	4.33	10.35	2.15	-50.17	-13.00	37.17	H
5769.00	-60.45	5.67	11.19	2.15	-57.08	-13.00	44.08	V
6600.50	-56.27	7.09	10.30	2.15	-55.21	-13.00	42.21	V
7408.00	-52.37	8.05	10.10	2.15	-52.47	-13.00	39.47	H
8221.50	-52.99	7.53	11.20	2.15	-51.47	-13.00	38.47	V

LTE Band 38, 5MHz, QPSK, Channel 37775

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5145.50	-59.29	5.52	11.60	-53.21	-25.00	28.21	H
7719.50	-54.36	6.76	10.64	-50.48	-25.00	25.48	V
10280.50	-48.44	10.67	11.90	-47.21	-25.00	22.21	H
12865.50	-45.84	12.27	12.87	-45.24	-25.00	20.24	V
15433.00	-47.32	14.95	15.47	-46.80	-25.00	21.80	H
17995.50	-34.55	19.94	13.41	-41.08	-25.00	16.08	H

LTE Band 38, 5MHz, QPSK, Channel 38000

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5190.50	-57.63	5.73	11.68	-51.68	-25.00	26.68	V
7794.00	-53.66	7.31	10.79	-50.18	-25.00	25.18	V
10375.00	-49.88	10.72	11.98	-48.62	-25.00	23.62	H
12967.00	-45.53	12.53	12.73	-45.33	-25.00	20.33	V
15559.00	-44.63	16.71	15.60	-45.74	-25.00	20.74	H
17995.00	-33.55	19.94	13.41	-40.08	-25.00	15.08	H

LTE Band 38, 5MHz, QPSK, Channel 38225

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5235.00	-56.16	4.70	11.70	-49.16	-25.00	24.16	V
7866.00	-53.43	7.91	11.00	-50.34	-25.00	25.34	V
10464.00	-50.12	10.35	11.94	-48.53	-25.00	23.53	H
13082.00	-46.19	12.48	12.62	-46.05	-25.00	21.05	H
15709.50	-45.04	16.64	15.51	-46.17	-25.00	21.17	H
17979.50	-33.56	19.98	13.44	-40.10	-25.00	15.10	H

LTE CA Band 38C_ CH37825+37975_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5156.00	-57.84	11.33	11.52	-57.65	-25.00	32.65	H
7734.00	-49.47	13.41	10.87	-52.01	-25.00	27.01	H
10312.00	-49.15	12.13	12.13	-49.15	-25.00	24.15	V
5186.00	-58.33	11.33	11.64	-58.02	-25.00	33.02	V
7779.00	-48.95	13.09	10.96	-51.08	-25.00	26.08	V
10372.00	-46.70	15.15	12.13	-49.72	-25.00	24.72	V

LTE CA Band 38C_ CH37925+38075_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5176.00	-56.42	11.33	11.60	-56.15	-25.00	31.15	H
7764.00	-49.87	13.51	10.93	-52.45	-25.00	27.45	V
10352.00	-49.99	12.13	12.13	-49.99	-25.00	24.99	V
5206.00	-55.70	11.91	11.53	-56.08	-25.00	31.08	H
7809.00	-48.82	14.03	10.98	-51.87	-25.00	26.87	H
10412.00	-46.22	15.29	12.13	-49.39	-25.00	24.39	V

LTE CA Band 38C_ CH38025+38175_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5196.00	-56.19	11.84	11.68	-56.35	-25.00	31.35	V
7794.00	-50.22	13.59	10.99	-52.83	-25.00	27.83	V
10392.00	-49.58	12.13	12.13	-49.58	-25.00	24.58	V
5226.00	-56.59	11.91	11.51	-56.99	-25.00	31.99	H
7839.00	-48.67	13.52	11.01	-51.19	-25.00	26.19	H
10452.00	-46.00	15.43	12.11	-49.32	-25.00	24.32	H

LTE Band 41, 5MHz, QPSK, Channel 39657

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
4997.00	-53.63	5.17	11.29	-47.51	-25.00	22.51	V
7496.00	-53.47	7.70	10.19	-50.98	-25.00	25.98	H
9991.00	-50.04	9.37	11.78	-47.63	-25.00	22.63	H
12506.00	-45.81	12.36	13.58	-44.59	-25.00	19.59	H
14983.50	-44.21	14.77	14.53	-44.45	-25.00	19.45	V
17485.50	-33.58	19.75	13.09	-40.24	-25.00	15.24	H

LTE Band 41, 5MHz, QPSK, Channel 40620

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5186.50	-57.57	5.75	11.67	-51.65	-25.00	26.65	V
7788.50	-54.51	7.33	10.78	-51.06	-25.00	26.06	H
10386.00	-49.69	10.68	11.99	-48.38	-25.00	23.38	H
12960.50	-45.40	12.52	12.74	-45.18	-25.00	20.18	V
15557.00	-45.34	16.72	15.60	-46.46	-25.00	21.46	H
17973.00	-33.73	19.99	13.45	-40.27	-25.00	15.27	H

LTE Band 41, 5MHz, QPSK, Channel 41565

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5380.50	-62.51	5.42	11.64	-56.29	-25.00	31.29	H
8064.00	-53.43	7.87	11.13	-50.17	-25.00	25.17	V
10745.50	-48.82	9.85	12.15	-46.52	-25.00	21.52	V
13434.00	-44.60	12.55	12.37	-44.78	-25.00	19.78	V
16112.50	-43.74	17.09	15.10	-45.73	-25.00	20.73	V
17998.50	-34.39	19.94	13.40	-40.93	-25.00	15.93	H

LTE Band 66, 1.4MHz QPSK, Channel 131979

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
8560.50	-62.62	8.49	11.20	-59.91	-13.00	46.91	V
10275.00	-59.14	10.72	11.90	-57.96	-13.00	44.96	V
11960.00	-56.87	12.36	13.02	-56.21	-13.00	43.21	V
13694.50	-53.57	13.04	12.20	-54.41	-13.00	41.41	H
15401.50	-57.38	14.89	15.40	-56.87	-13.00	43.87	V
17119.00	-47.28	18.45	13.48	-52.25	-13.00	39.25	H

LTE Band 66, 1.4MHz, QPSK, Channel 132322

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
8739.00	-62.21	7.86	11.10	-58.97	-13.00	45.97	H
10465.00	-59.69	10.35	11.94	-58.10	-13.00	45.10	H
12216.00	-58.09	12.17	13.40	-56.86	-13.00	43.86	H
13965.50	-50.85	14.59	12.17	-53.27	-13.00	40.27	H
15703.50	-55.22	16.65	15.50	-56.37	-13.00	43.37	V
17463.00	-44.08	19.26	13.06	-50.28	-13.00	37.28	H

LTE Band 66, 1.4MHz, QPSK, Channel 132665

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
8885.00	-61.26	8.03	11.54	-57.75	-13.00	44.75	H
10679.00	-59.38	10.03	12.08	-57.33	-13.00	44.33	H
12460.00	-55.54	12.87	13.52	-54.89	-13.00	41.89	H
14226.00	-54.84	13.09	12.63	-55.30	-13.00	42.30	H
16028.50	-53.83	17.41	15.31	-55.93	-13.00	42.93	V
17781.00	-44.39	19.55	13.48	-50.46	-13.00	37.46	H

Note: Peak EIRP (dBm) = P_{Mea}(dBm) - Path Loss(dB) + Antenna Gain(dBi)

A.3 Frequency Stability

A.3.1 Method of Measurement

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage. Two reference points are established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channel of operation shall be identified as F_L and F_H respectively.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of CMW500.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500, and in a simulated call on middle channel for each LTE band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the center channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C decrements from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of the lower, higher and nominal voltage. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.