

---

# FCC Test Report

---

Report No.: AGC03X110301F2B

**FCC ID** : ZCN-ECG300  
**PRODUCT DESIGNATION** : Cellphone TV  
**BRAND NAME** : Ring  
**TEST MODEL** : ECG300  
**CLIENT** : Starmarket S.A.  
**DATE OF ISSUE** : Mar.14, 2011  
**STANDARD(S)** : FCC Part 15 Rules

Attestation of Global Compliance Co., Ltd.

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.


## VERIFICATION OF COMPLIANCE

Applicant	Starmarket S.A. Av Juan Tanca Marengo Km 4 1/2 CC Saibaba Ic 22
Manufacturer	Easybuy China LTD. Rm. 1413-1415, 14F, WanDe Building, ShenNan Millde Rd., FuTian Dist., Shen Zhen
Product Designation	Cellphone TV
Brand Name	Ring
Model Name	ECG300
FCC ID	ZCN-ECG300
Report Number	AGC03X110301F2B
Date of Test	Mar 05, 2011 to Mar.12, 2011

### WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Checked By:



Mary Liu Mar.14, 2011

Authorized By



Forrest Lei Mar.14, 2011

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION.....	4
1.2 TABLE OF CARRIER FREQUENCIES .....	4
1.3 RECEIVER INPUT BANDWIDTH.....	4
1.4 EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE .....	5
1.5 EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR.....	5
1.6 RELATED SUBMITTAL(S) / GRANT (S) .....	5
1.7 TEST METHODOLOGY .....	5
1.8 TEST FACILITY .....	6
1.9 SPECIAL ACCESSORIES.....	6
1.10 EQUIPMENT MODIFICATIONS .....	6
<b>2. SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
2.1 CONFIGURATION OF TESTED SYSTEM.....	7
2.2 EQUIPMENT USED IN TESTED SYSTEM.....	7
<b>3. SUMMARY OF TEST RESULTS.....</b>	<b>8</b>
<b>4. DESCRIPTION OF TEST MODES .....</b>	<b>8</b>
<b>5. MAXIMUM OUTPUT POWER .....</b>	<b>9</b>
5.1 MEASUREMENT PROCEDURE .....	9
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	9
5.3 MEASUREMENT EQUIPMENT USED .....	10
5.4 LIMITS AND MEASUREMENT RESULT .....	11
<b>6. 20 DB BANDWIDTH .....</b>	<b>12</b>
6.1 MEASUREMENT PROCEDURE .....	12
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	12
6.3 MEASUREMENT EQUIPMENT USED .....	12
6.4 LIMITS AND MEASUREMENT RESULTS .....	12
<b>7. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY (N/A) .....</b>	<b>14</b>
7.1 MEASUREMENT PROCEDURE .....	14
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	14
7.3 MEASUREMENT EQUIPMENT USED .....	14
7.4 LIMITS AND MEASUREMENT RESULT .....	14
<b>8. OUT OF BAND EMISSION .....</b>	<b>15</b>
8.1 MEASUREMENT PROCEDURE .....	15
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	15
8.3 MEASUREMENT EQUIPMENT USED .....	15
8.4 LIMITS AND MEASUREMENT RESULT .....	15
<b>9. BAND EDGE EMISSION .....</b>	<b>22</b>
9.1 MEASUREMENT PROCEDURE .....	22
9.2 TEST SET-UP .....	22
9.3 TEST RESULT .....	22
<b>10. NUMBER OF HOPPING FREQUENCY .....</b>	<b>25</b>
10.1 MEASUREMENT PROCEDURE .....	25
10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) .....	25

10.3 MEASUREMENT EQUIPMENT USED .....	25
10.4 LIMITS AND MEASUREMENT RESULT .....	25
<b>11. TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>27</b>
11.1 MEASUREMENT PROCEDURE .....	27
11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) .....	27
11.3 MEASUREMENT EQUIPMENT USED .....	27
11.4 LIMITS AND MEASUREMENT RESULT .....	27
<b>12. FREQUENCY SEPARATION .....</b>	<b>30</b>
12.1 MEASUREMENT PROCEDURE .....	30
12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) .....	30
12.3 MEASUREMENT EQUIPMENT USED .....	30
12.4 LIMITS AND MEASUREMENT RESULT .....	30
<b>13. FCC LINE CONDUCTED EMISSION TEST .....</b>	<b>31</b>
13.1 LIMITS OF LINE CONDUCTED EMISSION TEST .....	31
13.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST .....	31
13.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST.....	32
13.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	32
13.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST.....	33
<b>14. FCC RADIATED EMISSION TEST.....</b>	<b>35</b>
14.1 LIMITS OF RADIATED EMISSION TEST .....	35
14.2 BLOCK DIAGRAM OF RADIATED EMISSION TEST .....	35
14.3 PRELIMINARY PROCEDURE OF RADIATED EMISSION TEST .....	36
14.4 FINAL PROCEDURE OF RADIATED EMISSION TEST .....	36
14.5 TEST RESULT OF RADIATED EMISSION TEST .....	37
<b>APPENDIX I.....</b>	<b>39</b>
<b>PHOTOGRAPHS OF THE EUT .....</b>	<b>39</b>
<b>APPENDIX II .....</b>	<b>46</b>
<b>PHOTOGRAPHS OF THE TEST SETUP .....</b>	<b>46</b>

## 1. GENERAL INFORMATION

### 1.1 PRODUCT DESCRIPTION

The EUT is a **Cellphone TV** designed as an “Communication Device”. It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
Rated Output Power	-2.0dBm
Modulation	GFSK
Number of channels	79
Antenna Designation	Integrated Antenna (PCB Antenna)
Antenna Gain	1.02dBi
Power Supply	DC3.7V by Built-in Li-ion Battery (and DC 5V by Adapter)
Adapter Input	AC100-240V, 50-60Hz
Adapter Output	DC5V, 500mA

### 1.2 TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

### 1.3 RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1MHZ, In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single or multislots packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

#### 1.4 EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode:

40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67  
56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59  
72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75  
09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06  
01,51,03,55,05,04

#### 1.5 EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:  
1 LAP/UAP of the master of the connection

2 Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronisation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about One day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire.

LAP(24 bits),4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures(permuations, additions, XOR-operations)are performed to generate te

Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behaviour:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter)than the minimum resolution of the clock(312.5us).The hopping sequence will always Differ from the first one.

#### 1.6 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: ZCN-ECG300** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

#### 1.7 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

## **1.8 TEST FACILITY**

All measurement facilities used to collect the measurement data are located at  
Attestation of Global Compliance Co., Ltd.  
1F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei, Xixiang, Baoan District, Shenzhen  
The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003.  
FCC register No.: 259865

## **1.9 SPECIAL ACCESSORIES**

Not available for this EUT intended for grant.

## **1.10 EQUIPMENT MODIFICATIONS**

Not available for this EUT intended for grant.

**2. SYSTEM TEST CONFIGURATION****2.1 CONFIGURATION OF TESTED SYSTEM****2.2 EQUIPMENT USED IN TESTED SYSTEM**

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID
1	Cellphone TV	Ring	ECG300	ZCN-ECG300

### 3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.207	Conduction Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Maximum Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Band Edges	Compliant
§15.247	Spurious Emission	Compliant
§15.247	Frequency Separation	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant

### 4. DESCRIPTION OF TEST MODES

1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency individually.
2. The EUT stays in continuous transmitting mode on the operation frequency being set.

## 5. MAXIMUM OUTPUT POWER

### 5.1 MEASUREMENT PROCEDURE


#### CONDUCTED METHOD

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Set SPA Centre Frequency = Operation Frequency, RBW= 3 MHz,  
VBW= 3 MHz.
5. Set SPA Trace 1 Max hold, then View.

#### RADIATED METHOD

According to ANSI C63.4:2003

### 5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

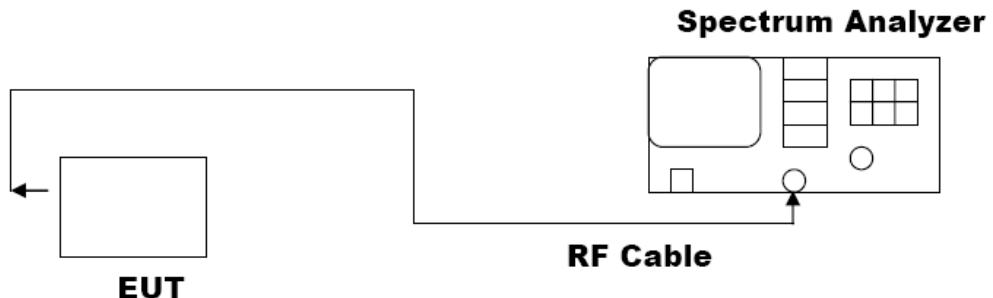

### 5.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	06/29/2010	06/28/2011
Amplifier	EM	EM30180	0607030	06/29/2010	06/28/2011
Horn Antenna	EM	EM-AH-10180	N/A	06/29/2010	06/28/2011
EMI Test Receiver	Rohde & Schwarz	ESCI	N/A	06/29/2010	06/28/2011
Amplifier	EM	EM30180	N/A	06/29/2010	06/28/2011
Biological Antenna	A.H. Systems Inc.	SAS-521-4	N/A	06/29/2010	06/28/2011
Loop Antenna	Daze	ZN30900N	SEL0097	06/29/2010	06/28/2011
Isolation Transformer	LETEAC	LTBK	--	06/08/2010	06/07/2011

#### 5.4 LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT			
Frequency (GHz)	Result (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	-3.12	30	Pass
2.441	-2.95	30	Pass
2.480	-2.18	30	Pass

## 20 DB BANDWIDTH

### 6.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz,  
VBW= 100 KHz.
4. Set SPA Trace 1 Max hold, then View.

### 6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The Same as described in Section 5.2


### 6.3 MEASUREMENT EQUIPMENT USED

The same as described in Section 5.3


### 6.4 LIMITS AND MEASUREMENT RESULTS

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
N/A	Low Channel	1.047	PASS
	Middle Channel	1.120	PASS
	High Channel	1.103	PASS


#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

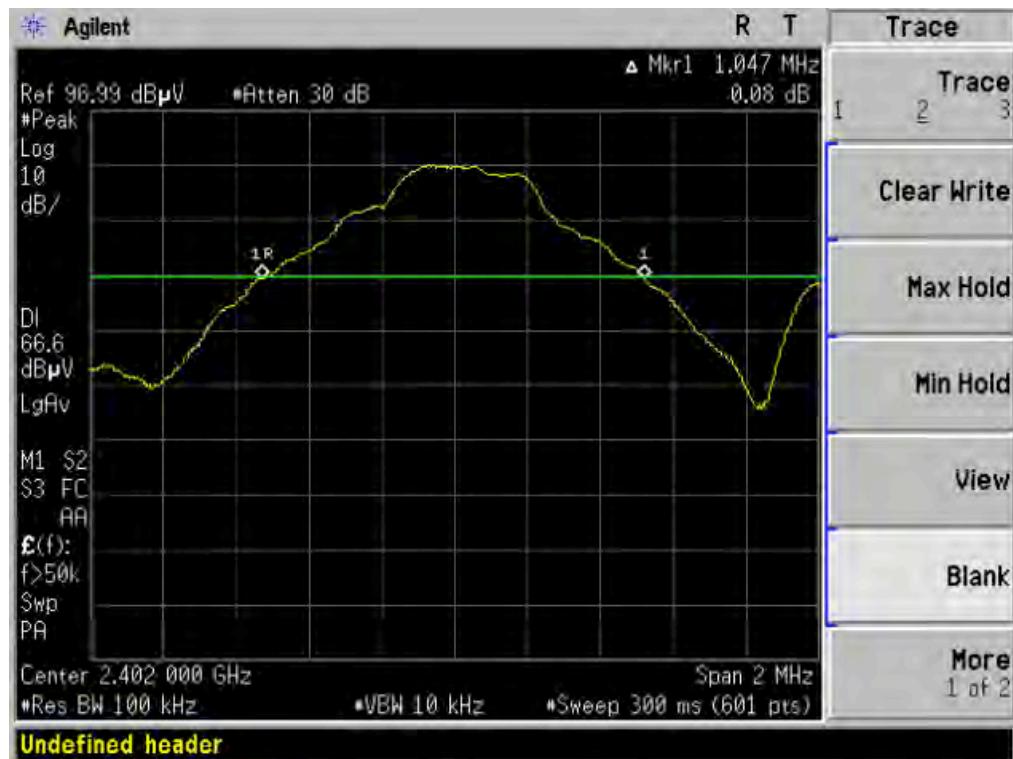

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

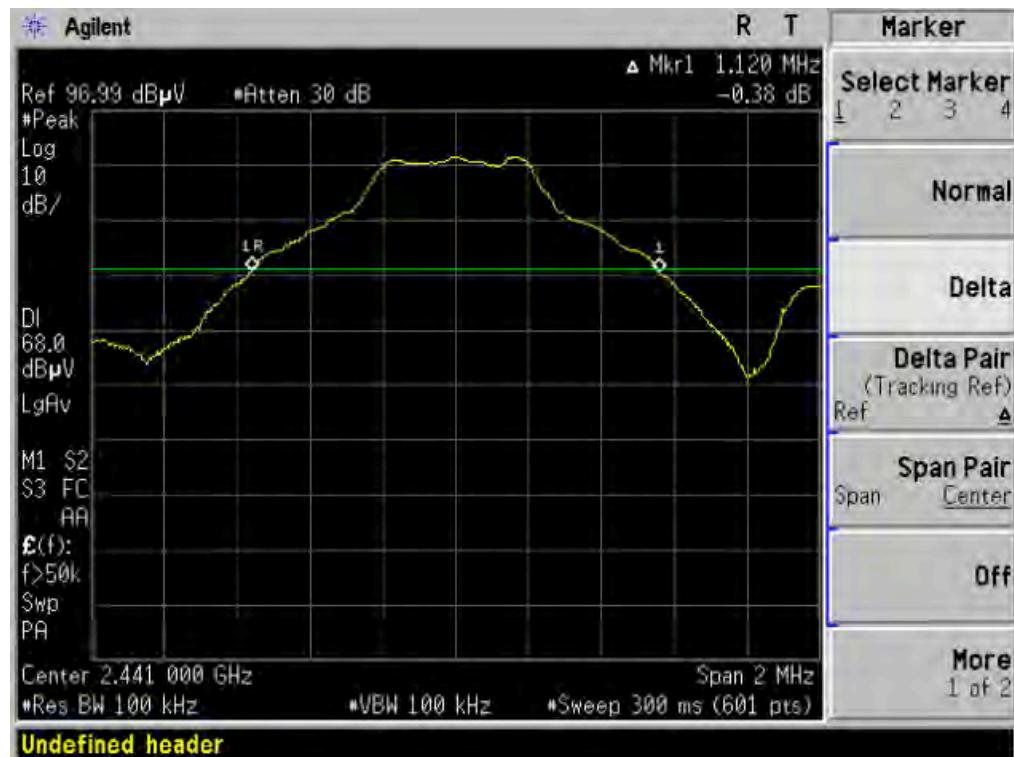

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

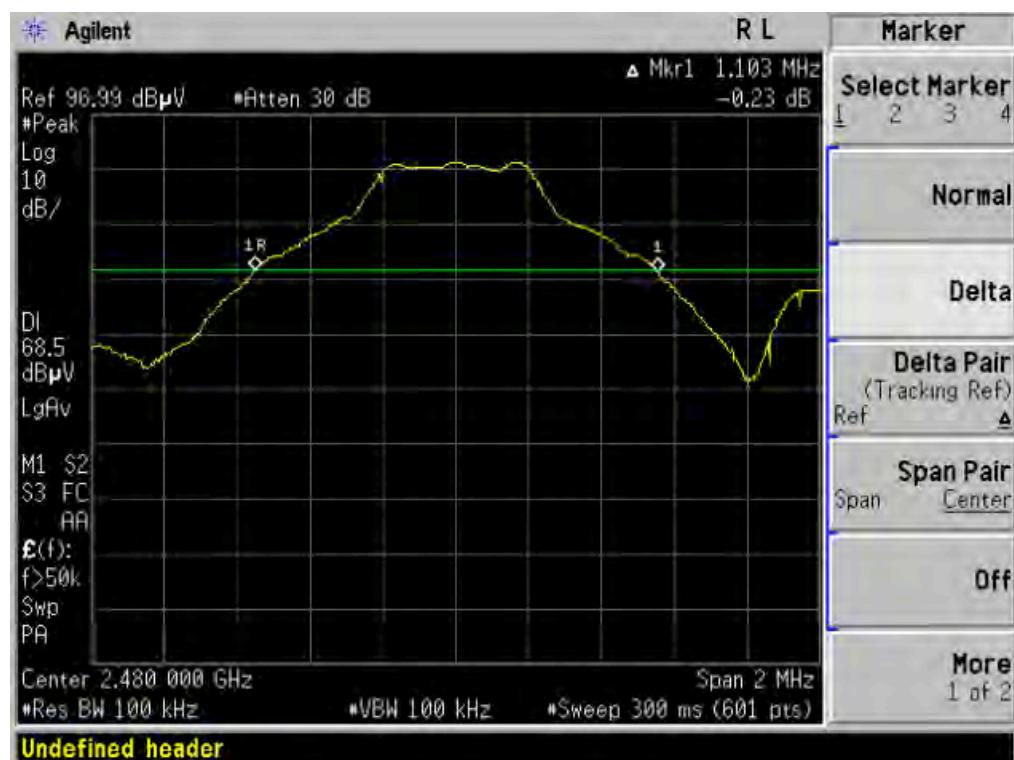


## 7. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY (N/A)

### 7.1 MEASUREMENT PROCEDURE

- (1). The EUT was placed on a turn table which is 0.8m above ground plane.
- (2). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (3). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (4). Set SPA Centre Frequency = Operation Frequency, RBW= 3 KHz,  
VBW= 10 KHz., Sweep time= Auto
- (5). Set SPA Trace 1 Max hold, then View.

### 7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

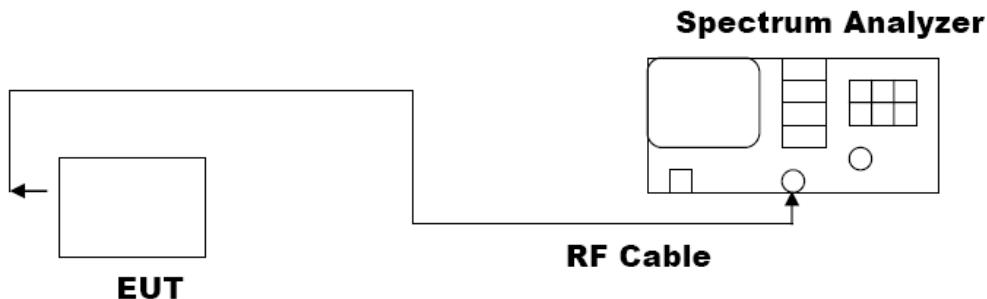

### 7.3 MEASUREMENT EQUIPMENT USED

SHIELDING ROOM					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4440A	N/A	06/29/2010	06/28/2011

### 7.4 LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (dBm/3KHz)		Criteria
8 dBm / 3KHz	Low Channel	N/A	N/A
	Middle Channel	N/A	N/A
	High Channel	N/A	N/A

## 8. OUT OF BAND EMISSION

### 8.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz,  
VBW= 100 KHz.
4. Set SPA Trace 1 Max hold, then View.

### 8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The Same as described in section 5.2

1. Conducted test setup
2. Radiated Emission test Setup below 1GHz and Above 1GHz



### 8.3 MEASUREMENT EQUIPMENT USED

The Same as described in section 5.3



### 8.4 LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Criteria
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS
In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS



TEST PLOT OF OUT OF BAND EMISSIONS FOR LOW CHANNEL

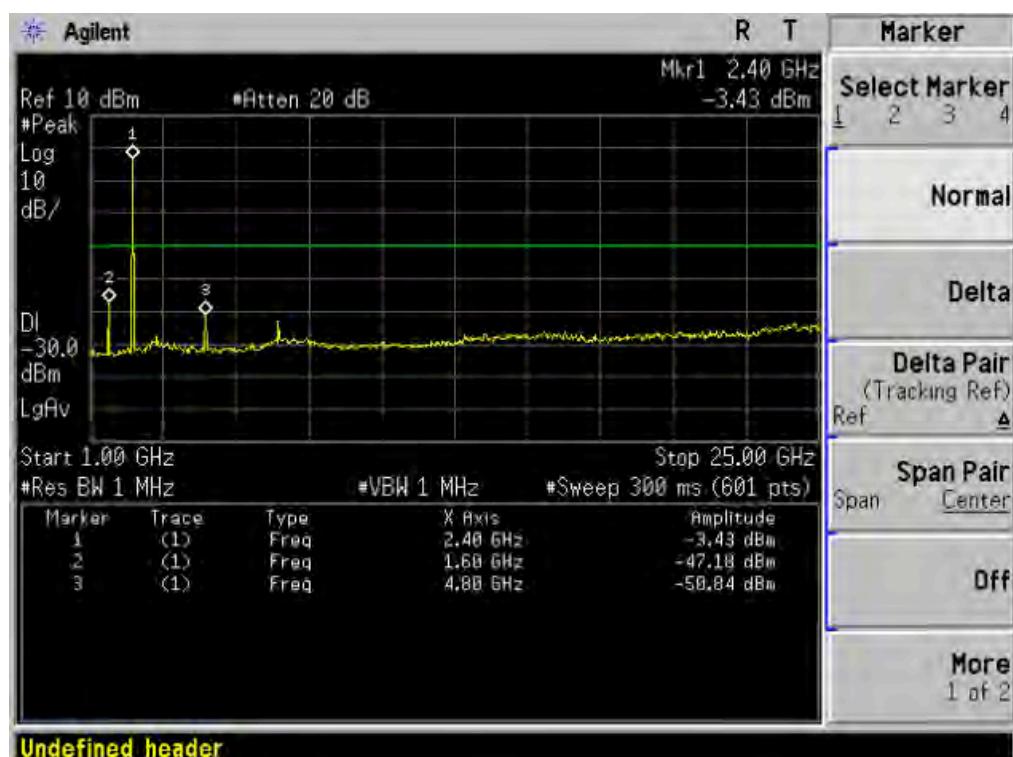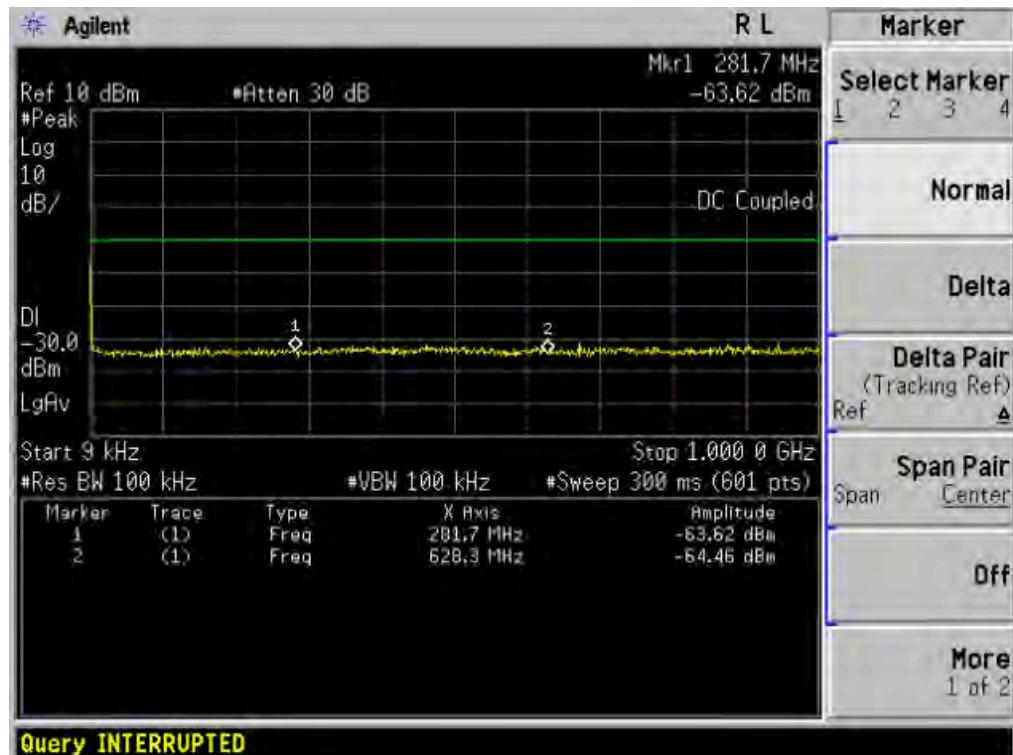

TEST PLOT OF OUT OF BAND EMISSIONS FOR MIDDLE CHANNEL

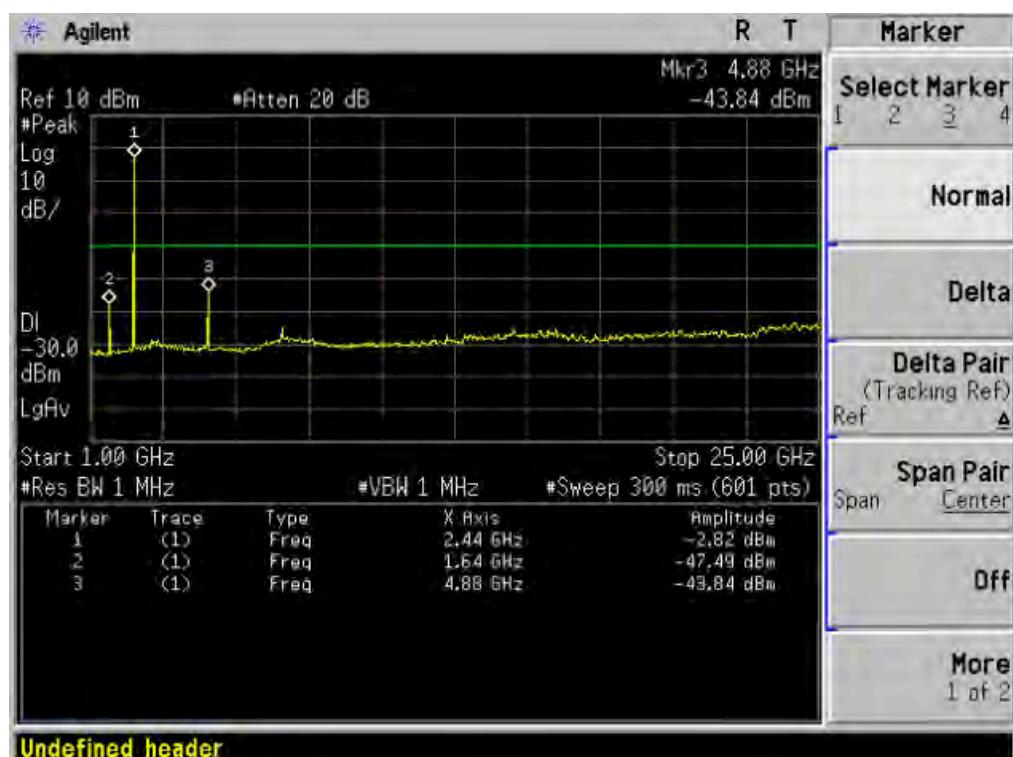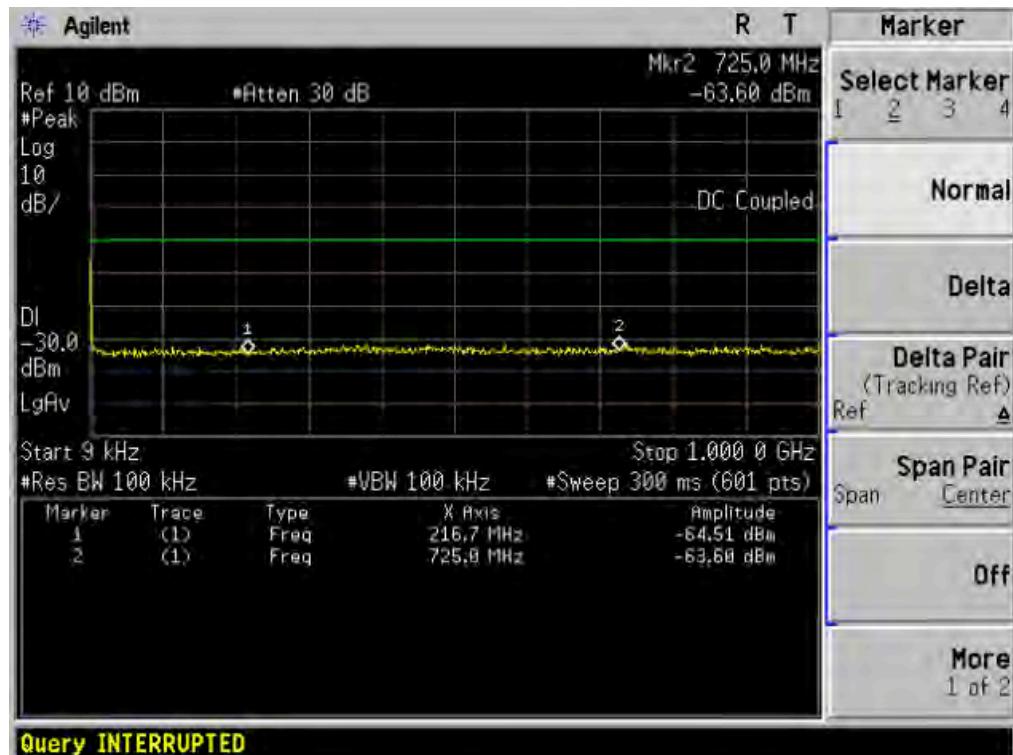

TEST PLOT OF OUT OF BAND EMISSIONS FOR HIGH CHANNEL

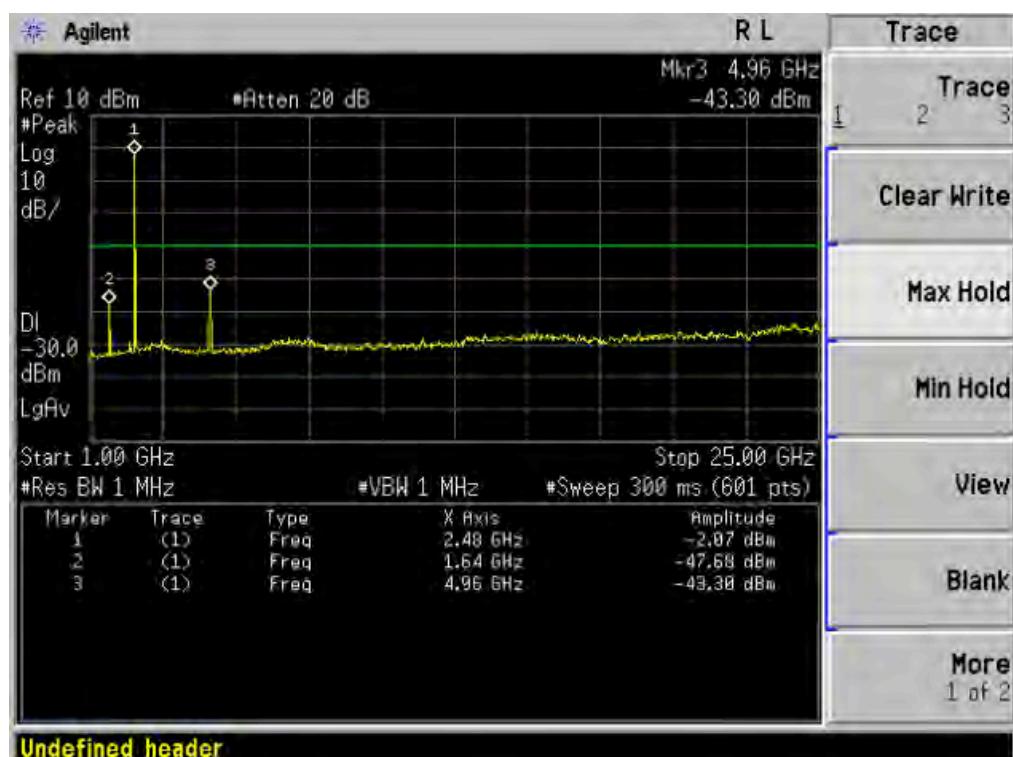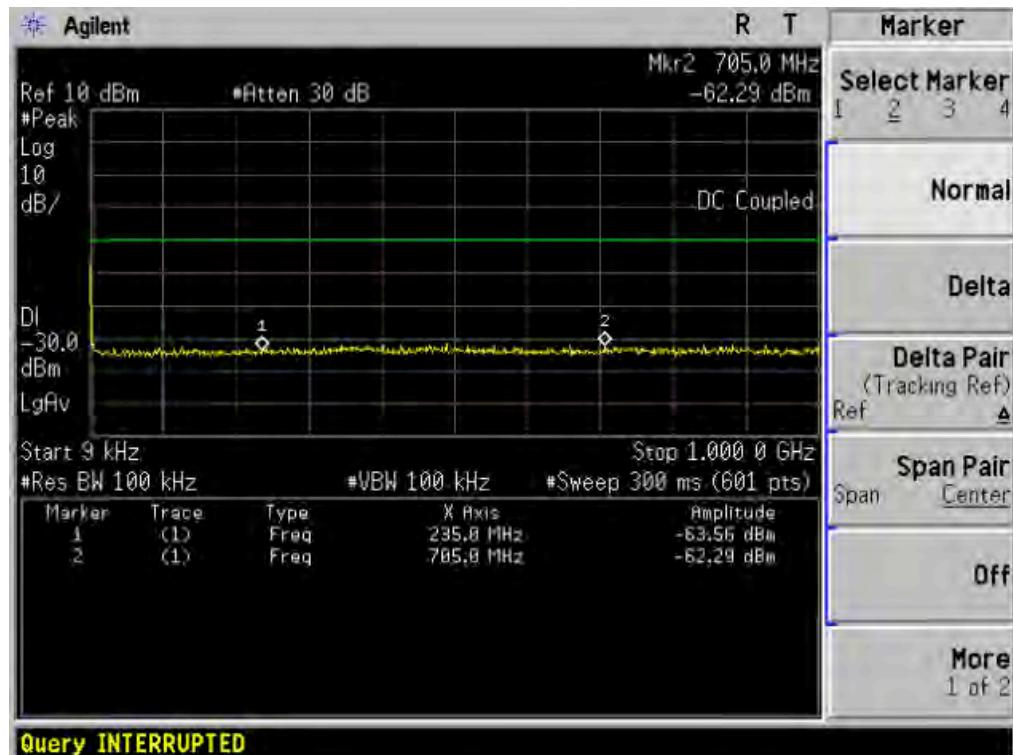

### RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequency to 30MHz.

### RADIATED EMISSION BELOW 1GHZ

EUT	Cellphone TV	Model Name	ECG300
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	DC3.7V
Test Mode	BT2402MHZ	Modulation	GFSK

Freq. (MHZ)	Ant.Pol. H/V	Detector (PK/QP)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
42.77	H	Peak	15.02	15.33	30.35	40	-9.65
124.78	H	Peak	16.03	14.11	30.14	43.5	-13.36
175.02	H	Peak	10.97	15.66	26.63	43.5	-16.87
421.74	H	Peak	12.85	18.74	31.95	46	-14.05
640.89	H	Peak	9.36	26.02	35.38	46	-10.62
917.25	H	Peak	8.48	25.14	33.62	46	-12.38
<hr/>							
56.25	V	Peak	15.45	10.25	25.70	40	-14.30
78.03	V	Peak	18.25	10.74	28.99	40	-11.01
132.78	V	Peak	19.62	13.88	33.50	43.5	-10.00
174.00	V	Peak	13.47	18.76	32.23	43.5	-11.27
725.12	V	Peak	6.87	25.33	32.20	46	-13.80
940.28	V	Peak	5.02	27.02	32.04	46	-13.96

EUT	Cellphone TV	Model Name	ECG300
	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	DC3.7V
Test Mode	BT2441MHZ	Modulation	GFSK

Freq. (MHZ)	Ant.Pol. H/V	Detector (PK/QP)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
--	H	Peak	--	--	--	--	--
--	H	Peak	--	--	--	--	--
--	V	Peak	--	--	--	--	--
--	V	Peak	--	--	--	--	--

EUT	Cellphone TV	Model Name	ECG300
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	DC3.7V
Test Mode	BT2480MHZ	Modulation	GFSK

Freq. (MHZ)	Ant.Pol. H/V	Detector (PK/QP)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
--	H	Peak	--	--	--	--	--
--	H	Peak	--	--	--	--	--
--	V	Peak	--	--	--	--	--
--	V	Peak	--	--	--	--	--

**Note:** "--"means the mode at least have 20dB margin.

**RADIATED EMISSION ABOVE 1GHZ**

EUT	Cellphone TV	Model Name	ECG300
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	DC3.7V
Test Mode	BT2402/2441/2480MHZ	Modulation	GFSK

Freq. (MHZ)	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Result		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin
					Peak (dBuV/m)	AV (dBuV/m)			
--	H	--	--	--	--	--	--	--	--
--	H	--	--	--	--	--	--	--	--
--	V	--	--	--	--	--	--	--	--
--	V	--	--	--	--	--	--	--	--

**Note:** This Handheld EUT was tested in 3 orthogonal positions and the worst-case data was presented.

Note: "--" means the mode at least have 20dB margin.

## 9 BAND EDGE EMISSION

### 9.1 MEASUREMENT PROCEDURE


1. Set the EUT Work on the top, the bottom operation frequency individually.
2. Set SPA Start or Stop Frequency = Operation Frequency, RBW= 1MHz, VBW= 1MHz.
3. The band edges was measured and recorded.

### 9.2 TEST SET-UP


The Same as described in section 5.2

### 9.3 TEST RESULT

TEST PLOT OF BAND ELDG FOR LOW CHANNEL

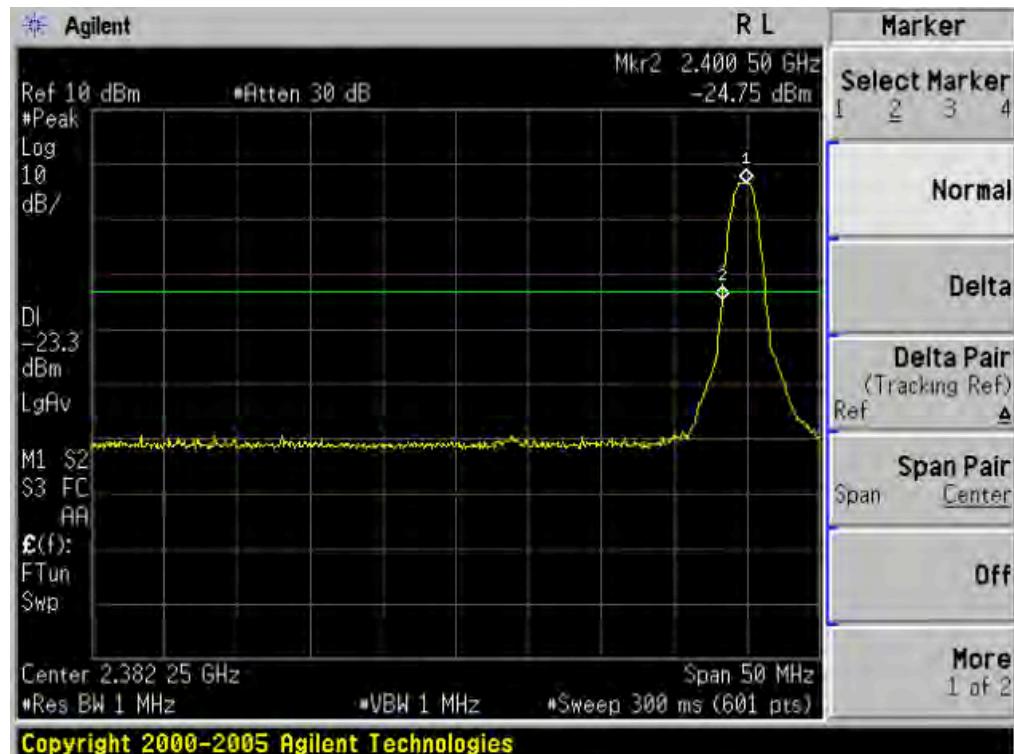

TEST PLOT OF BAND ELDG FOR HIGH CHANNEL

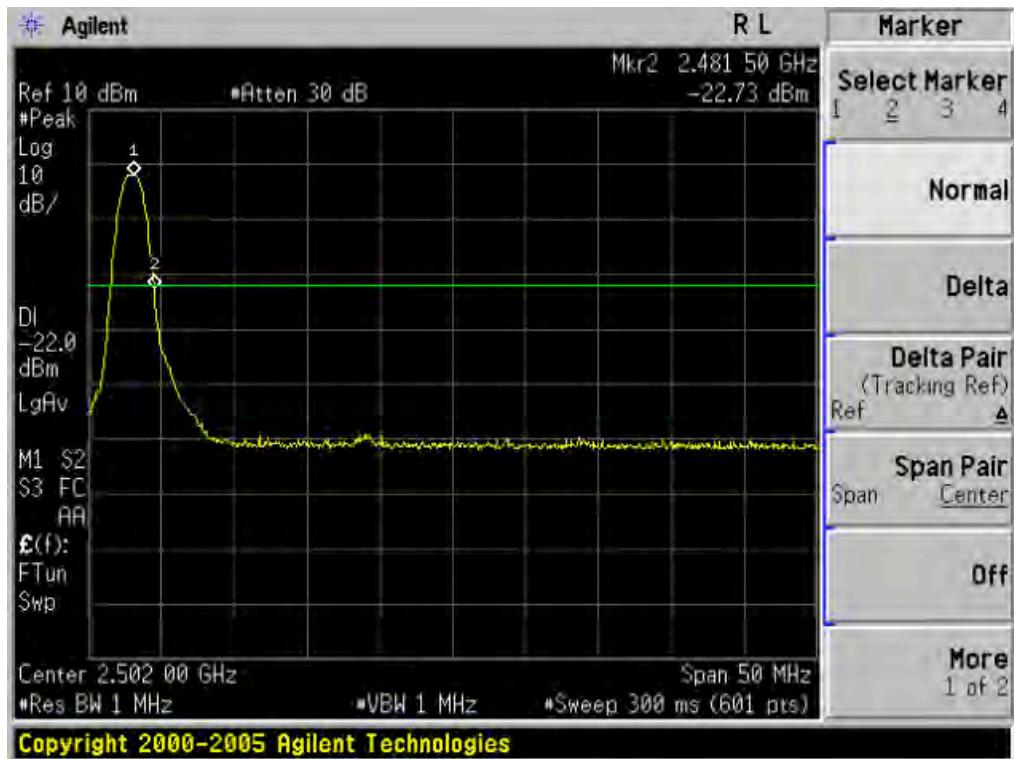

EUT		Cellphone TV		Model Name		ECG300	
Temperature		25° C		Relative Humidity		55%	
Pressure		960hPa		Test Voltage		DC3.7V	
Test Mode		BT2402MHZ		Modulation		GFSK	

Freq. (MHZ)	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Result		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin
					Peak (dBuV/m)	AV (dBuV/m)			
--	H	--	--	--	--	--	--	--	--
--	H	--	--	--	--	--	--	--	--
--	V	--	--	--	--	--	--	--	--
--	V	--	--	--	--	--	--	--	--

EUT		Cellphone TV		Model Name		ECG300	
Temperature		25° C		Relative Humidity		55%	
Pressure		960hPa		Test Voltage		DC3.7V	
Test Mode		BT2480MHZ		Modulation		GFSK	

Freq. (MHZ)	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Result		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin
					Peak (dBuV/m)	AV (dBuV/m)			
--	H	--	--	--	--	--	--	--	--
--	H	--	--	--	--	--	--	--	--
--	V	--	--	--	--	--	--	--	--
--	V	--	--	--	--	--	--	--	--

**Note:** "--"means other frequencies at least have 20dB margin.

The other modulation modes comply with standard requirement and at least have 20dB margin.

## 10 NUMBER OF HOPPING FREQUENCY

### 10.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
4. Set the Spectrum Analyzer as RBW = 100KHZ

### 10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2

1. Conducted Method.



### 10.3 MEASUREMENT EQUIPMENT USED

The Same as described in section 5.3

### 10.4 LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF HOPPING CHANNEL	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
	>=15	79	PASS

TEST PLOT FOR NO. OF TOTAL CHANNELS

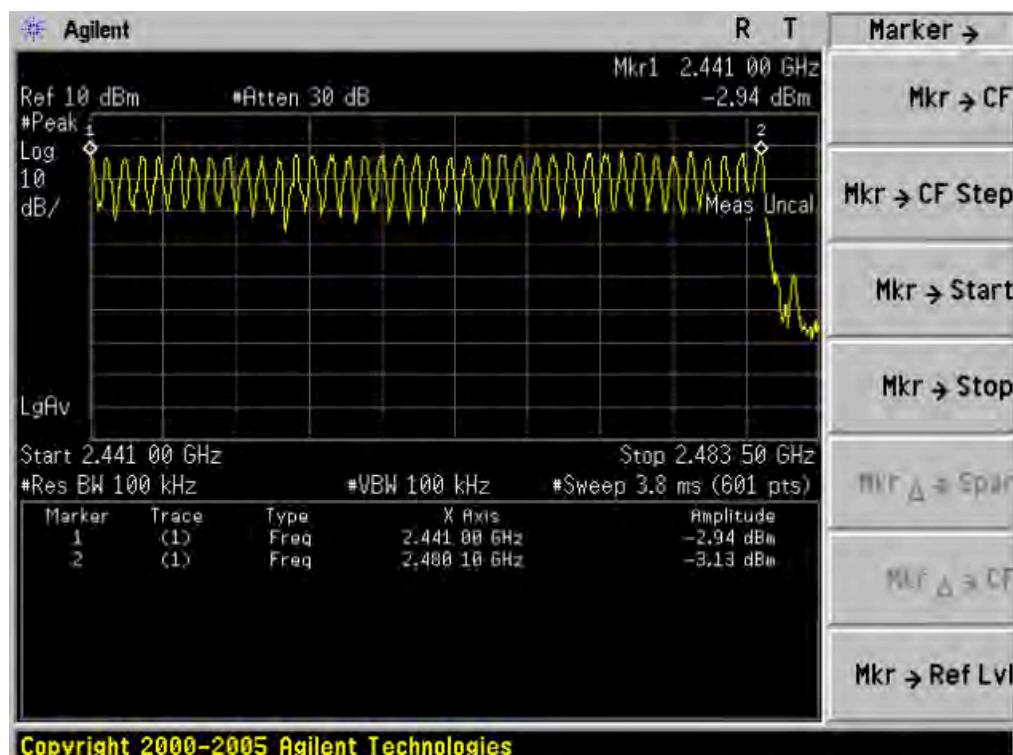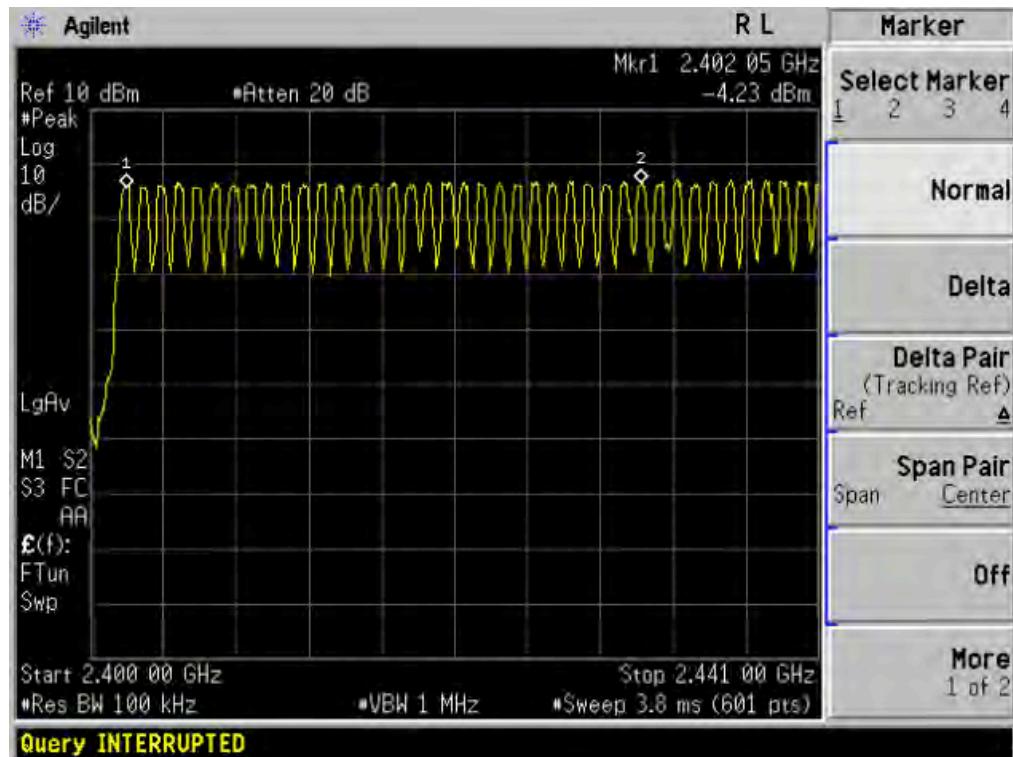

## 11 TIME OF OCCUPANCY (DWELL TIME)

### 11.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set center frequency of spectrum analyzer = Operating frequency
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0 Hz,

### 11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2  
Conducted Method

### 11.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3

### 11.4 LIMITS AND MEASUREMENT RESULT

Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)
Low	2.90	31.6	309.33	400
Middle	2.86	31.6	305.07	400
High	2.88	31.6	307.20	400

Low Channel Time

$2.90 * (1600/6) / 79 * 31.6 = 309.33\text{ms}$


Middle Channel Time

$2.86 * (1600/6) / 79 * 31.6 = 305.07\text{ms}$


High Channel Time

$2.88 * (1600/6) / 79 * 31.6 = 307.20\text{ms}$


TEST PLOT OF LOW CHANNEL

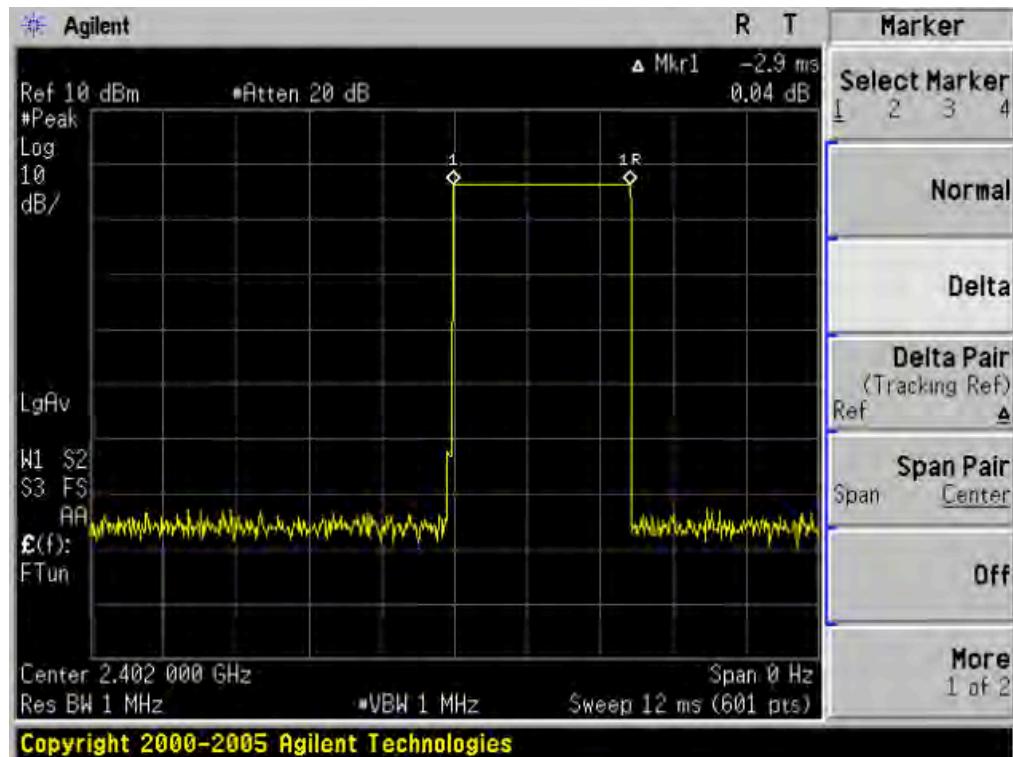

TEST PLOT OF MIDDLE CHANNEL

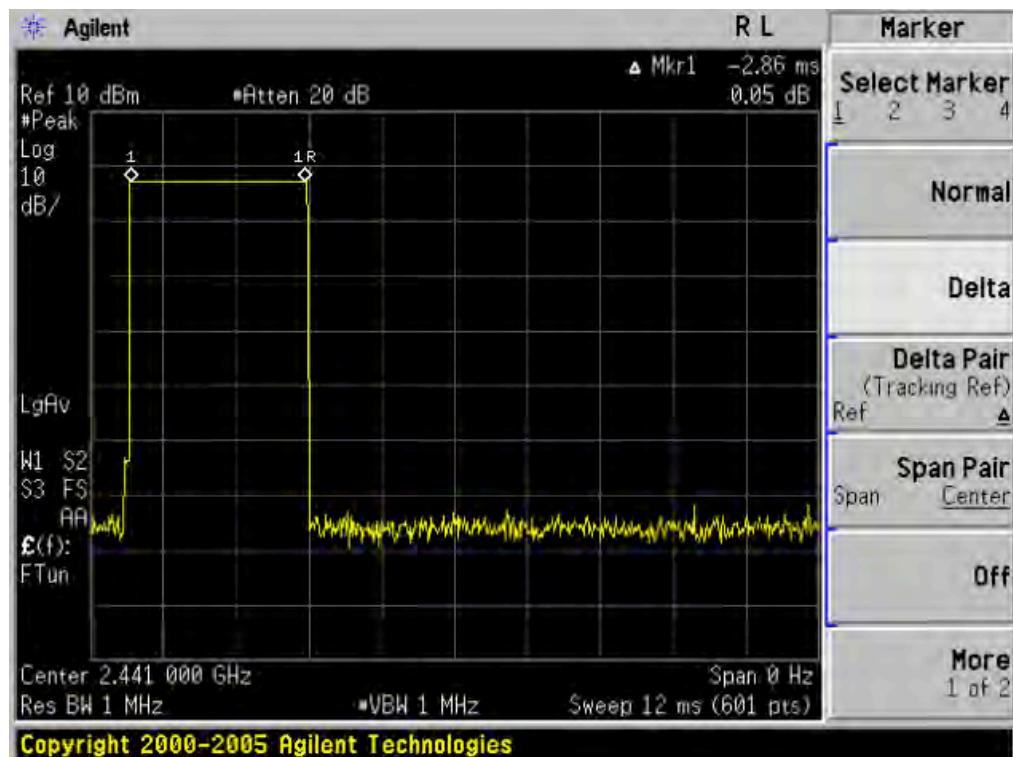

TEST PLOT OF HIGH CHANNEL

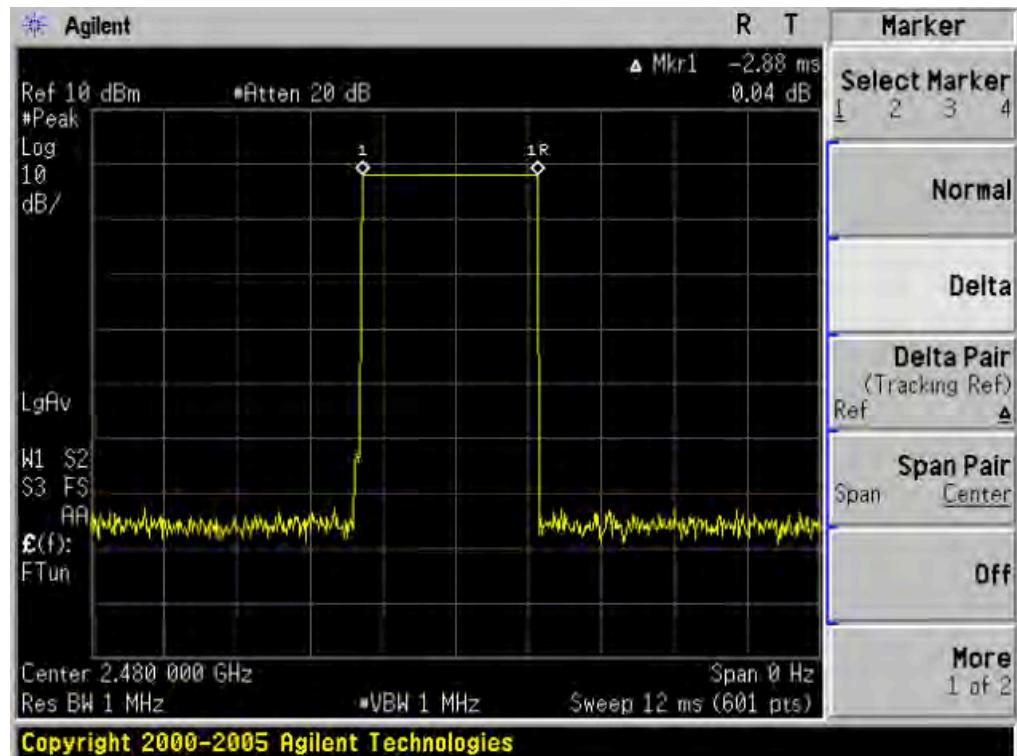

## 12. FREQUENCY SEPARATION

### 12.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set center frequency of spectrum analyzer = Middle of Operating frequency
4. Set the spectrum analyzer as RBW, VBW=100KHz, Span = 5 MHz,

### 12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2


### 12.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3

### 12.4 LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT
	KHz	KHz	
CH00-CH01	1025	>=25 KHz or 2/3 20 dB BW	Pass

TEST PLOT FOR FREQUENCY SEPARATION

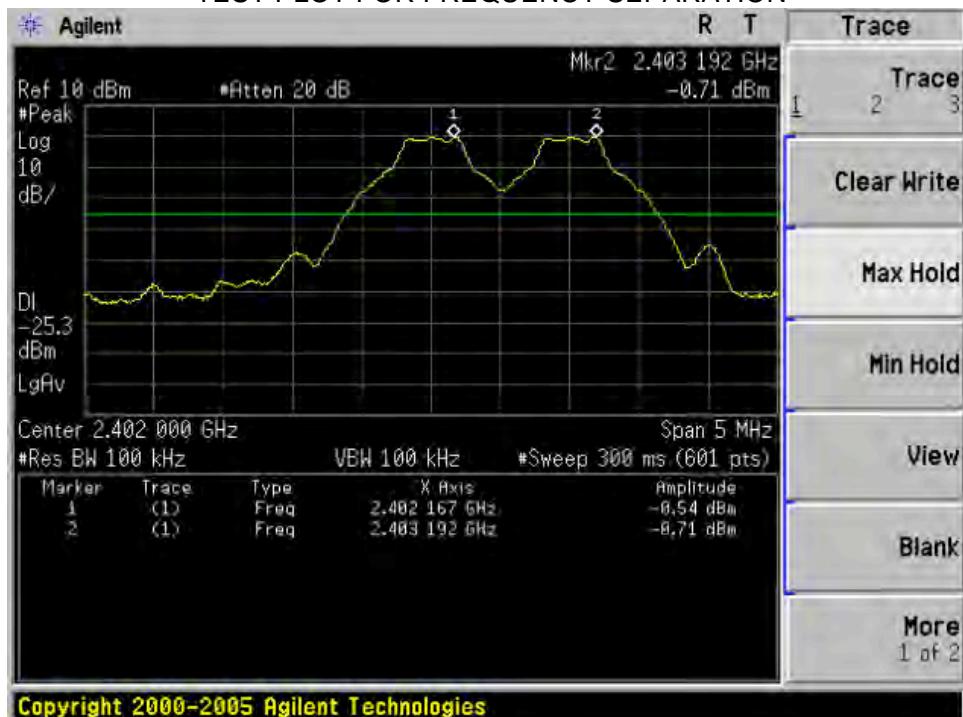

## 13 FCC LINE CONDUCTED EMISSION TEST


### 13.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average (dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

\*\*Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

### 13.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

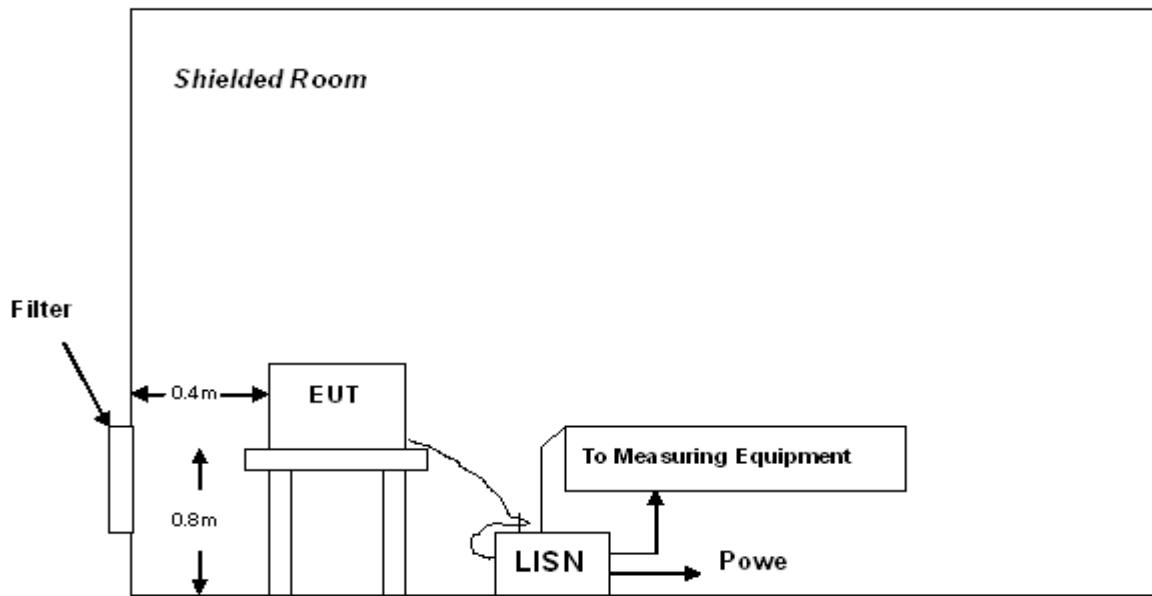

A: Powered through filter

### 13.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received power by adapter.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test:


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### 13.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3) The test data of the worst case condition(s) was reported on the Summary Data page.

### 13.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST


Line Conducted Emission Test Line 1-L

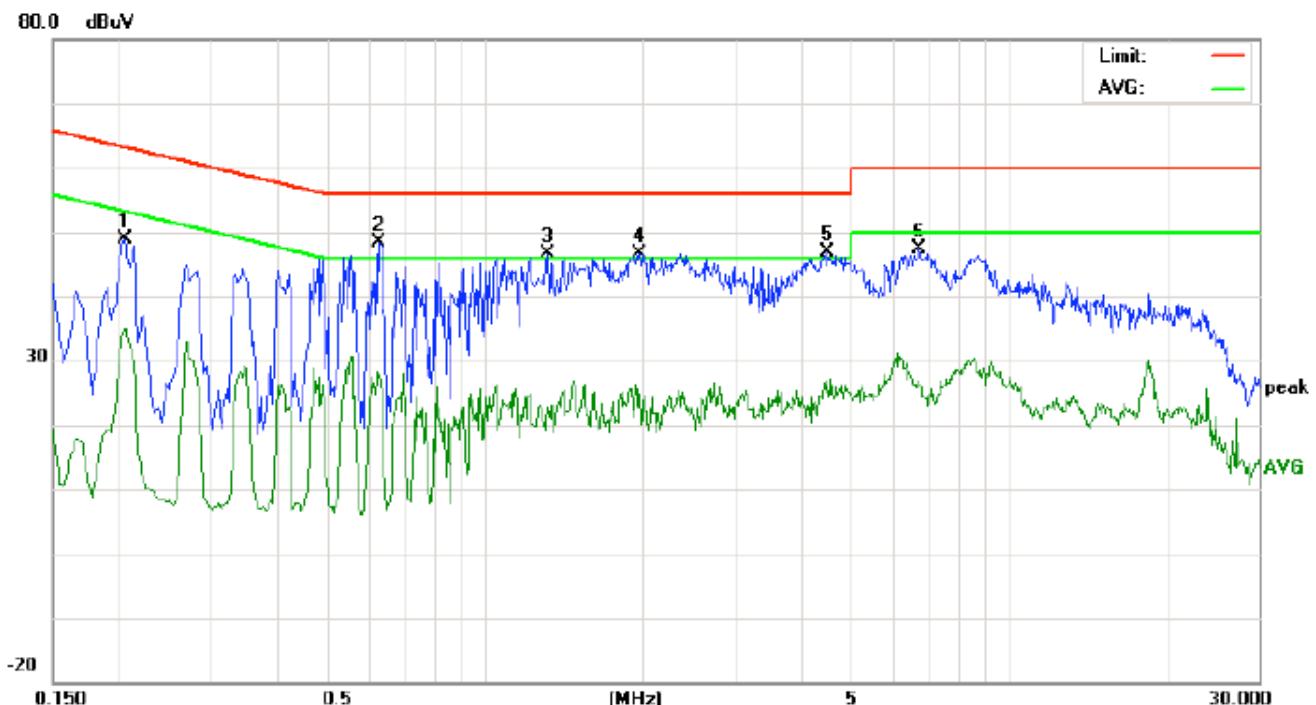

Site: Conduction Phase: *L1* Temperature: 26  
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2060	38.55		24.62	10.22	48.77		34.84	63.36	53.36	-14.59	-18.52	P	
2	0.6300	38.12		17.30	10.32	48.44		27.62	56.00	46.00	-7.56	-18.38	P	
3	1.3220	36.16		12.54	10.38	46.54		22.92	56.00	46.00	-9.46	-23.08	P	
4	1.9780	36.44		14.56	10.23	46.67		24.79	56.00	46.00	-9.33	-21.21	P	
5	4.5219	36.54		16.78	10.21	46.75		26.99	56.00	46.00	-9.25	-19.01	P	
6	6.7459	36.94		15.51	10.33	47.27		25.84	60.00	50.00	-12.73	-24.16	P	

Line Conducted Emission Test Line 2-N

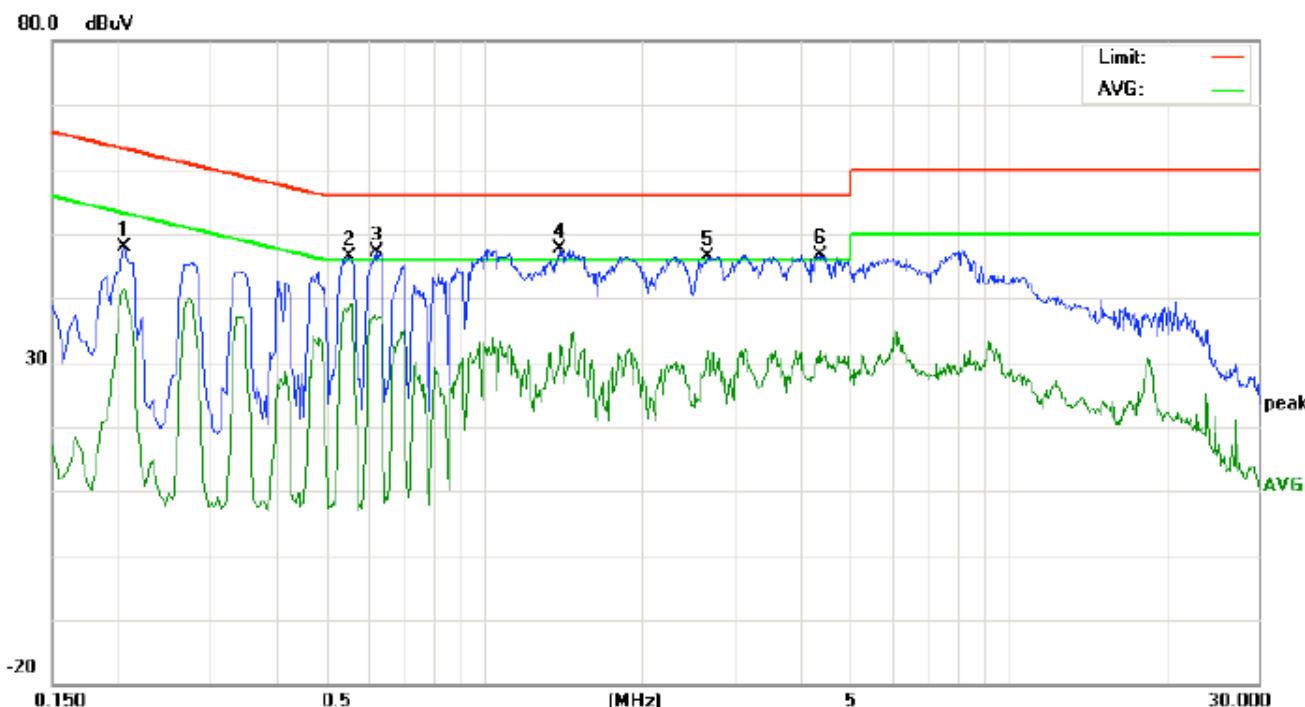

Site: Conduction Phase: *N* Temperature: 26  
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2060	37.76		31.11	10.22	47.98		41.33	63.36	53.36	-15.38	-12.03	P	
2	0.5540	36.09		27.73	10.35	46.44		38.08	56.00	46.00	-9.56	-7.92	P	
3	0.6260	36.81		26.41	10.32	47.13		36.73	56.00	46.00	-8.87	-9.27	P	
4	1.3940	37.33		19.77	10.38	47.71		30.15	56.00	46.00	-8.29	-15.85	P	
5	2.6740	36.00		21.51	10.47	46.47		31.98	56.00	46.00	-9.53	-14.02	P	
6	4.3659	36.26		21.73	10.27	46.53		32.00	56.00	46.00	-9.47	-14.00	P	


## 14 FCC RADIATED EMISSION TEST

### 14.1 LIMITS OF RADIATED EMISSION TEST

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m/ Q.P.)
30~88	3	40.0
88~216	3	43.5
216~960	3	46.0
Above 960	3	54.0

\*\*Note: The lower limit shall apply at the transition frequency.

### 14.2 BLOCK DIAGRAM OF RADIATED EMISSION TEST

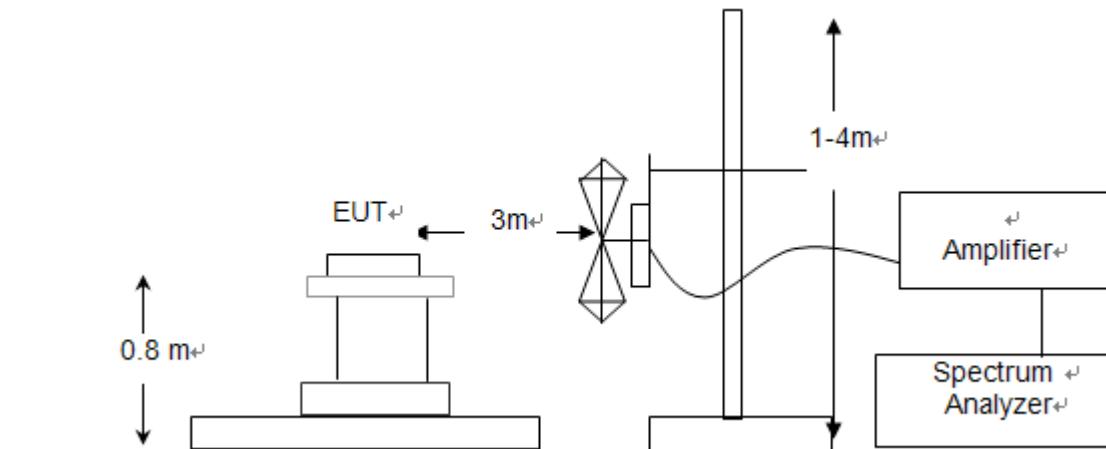

#### **14.3 PRELIMINARY PROCEDURE OF RADIATED EMISSION TEST**

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used).
- 2) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 3) The EUT received DC power.
- 4) The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- 5) The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 6) The test mode was scanned during the preliminary test.

Then, the EUT and cable(s) configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for final testing.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### **14.4 FINAL PROCEDURE OF RADIATED EMISSION TEST**

EUT and support equipment were set up on the turntable as per step 6 of the preliminary test.

The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P/Peak. reading is presented.

The test data of the worst case condition(s) was reported on the Summary Data page.


## 14.5 TEST RESULT OF RADIATED EMISSION TEST

Test Result of Radiated Emission Test-Horizontal-3m



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	47.7832	14.73	15.73	30.46	40.00	-9.54	peak			
2		59.1000	9.43	18.84	28.27	40.00	-11.73	peak			
3		104.3666	6.31	15.90	22.21	43.50	-21.29	peak			
4		172.2666	15.68	16.41	32.09	43.50	-11.41	peak			
5		232.0833	18.20	15.86	34.06	46.00	-11.94	peak			
6		314.5332	7.66	17.95	25.61	46.00	-20.39	peak			

## Test Result of Radiated Emission Test-Vertical-3m

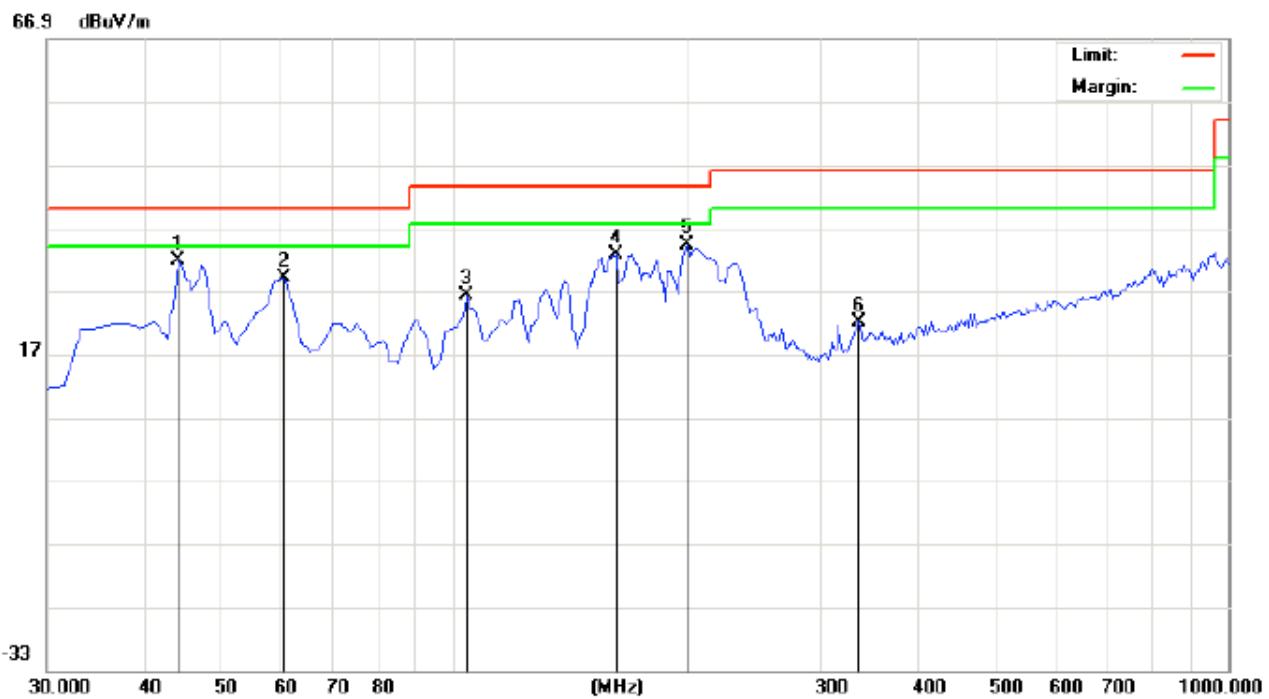

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation

Power: AC 120V/60Hz

Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	44.5499	19.15	12.51	31.66	40.00	-8.34	peak			
2		60.7167	11.32	17.71	29.03	40.00	-10.97	peak			
3		104.3666	15.25	11.05	26.30	43.50	-17.20	peak			
4		162.5665	19.44	13.30	32.74	43.50	-10.76	peak			
5		201.3667	19.22	15.12	34.34	43.50	-9.16	peak			
6		333.9331	3.22	18.78	22.00	46.00	-24.00	peak			

**APPENDIX I**  
**PHOTOGRAPHS OF THE EUT**

TOP VIEW OF SAMPLE



BOTTOM VIEW OF SAMPLE



LEFT VIEW OF SAMPLE



RIGHT VIEW OF SAMPLE



FRONT VIEW OF SAMPLE



BACK VIEW OF SAMPLE



ALL VIEW OF SAMPLE



OPEN PHOTO OF SAMPLE – 1




OPEN PHOTO OF SAMPLE – 2



OPEN PHOTO OF SAMPLE – 3



INTERNAL PHOTO OF SAMPLE – 1

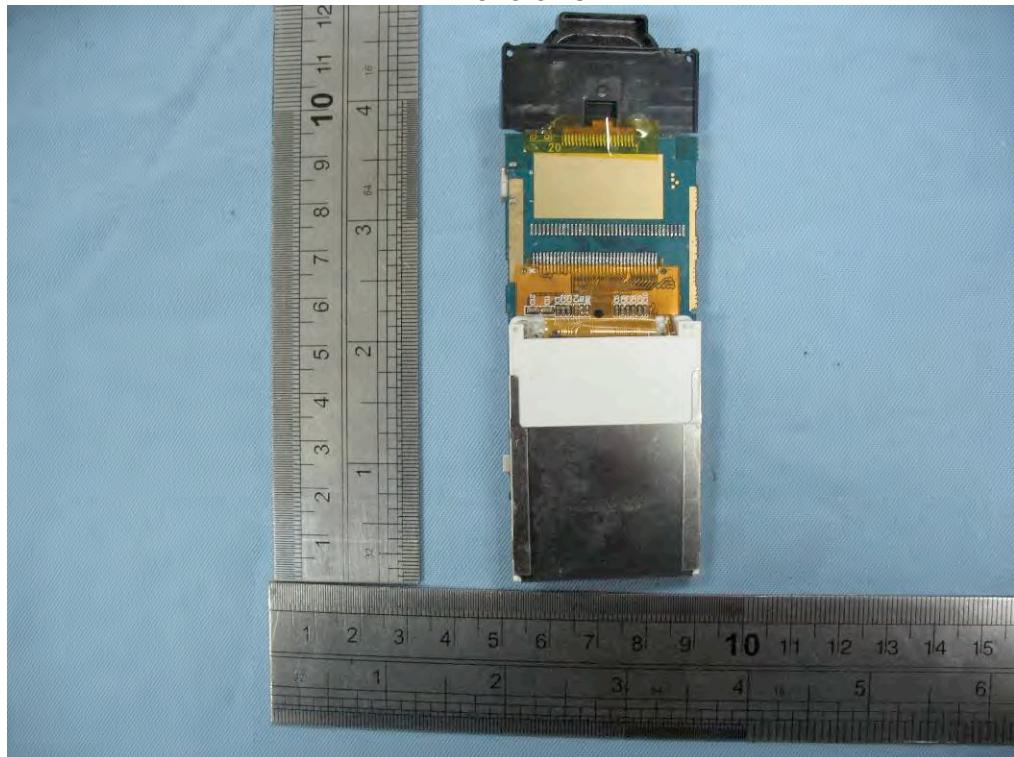

INTERNAL PHOTO OF SAMPLE – 2

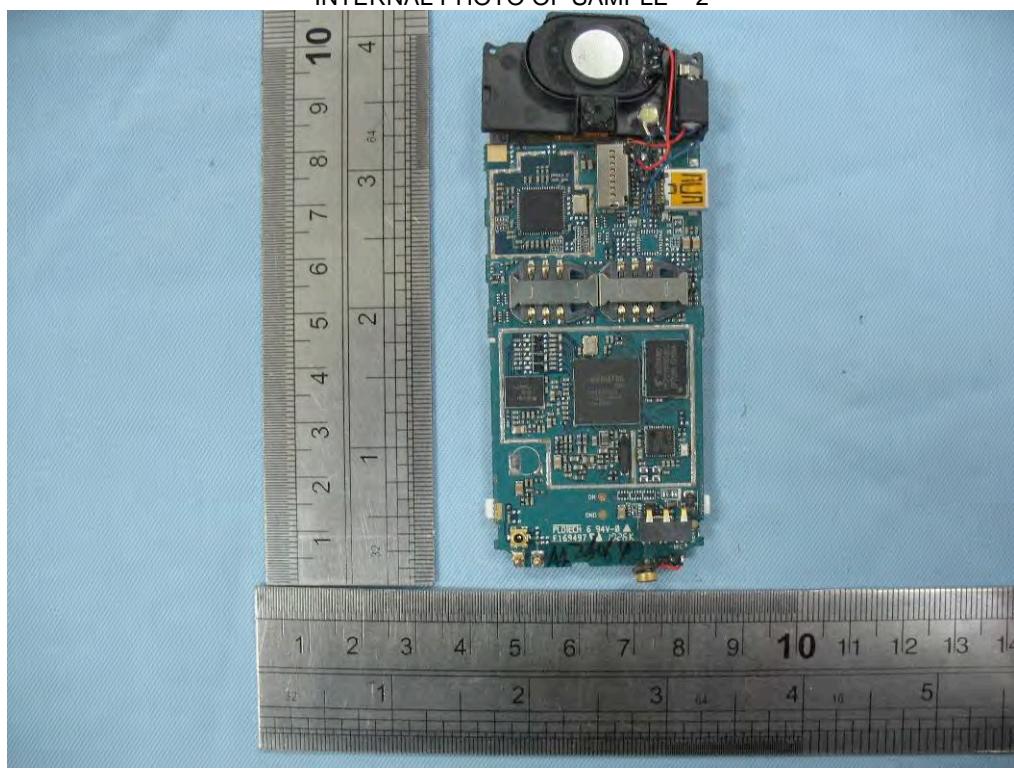


PHOTO OF ANTENNA – 1

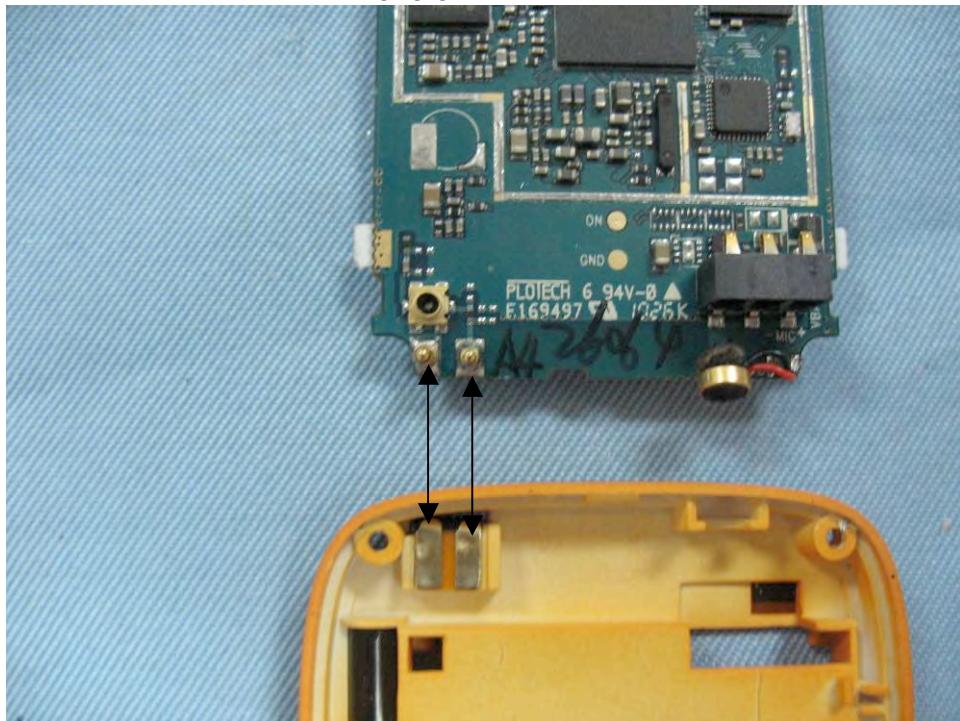


PHOTO OF ANTENNA – 2




**APPENDIX II**  
**PHOTOGRAPHS OF THE TEST SETUP**

LINE CONDUCTED EMISSION TEST SETUP



RADIATED EMISSION TEST SETUP

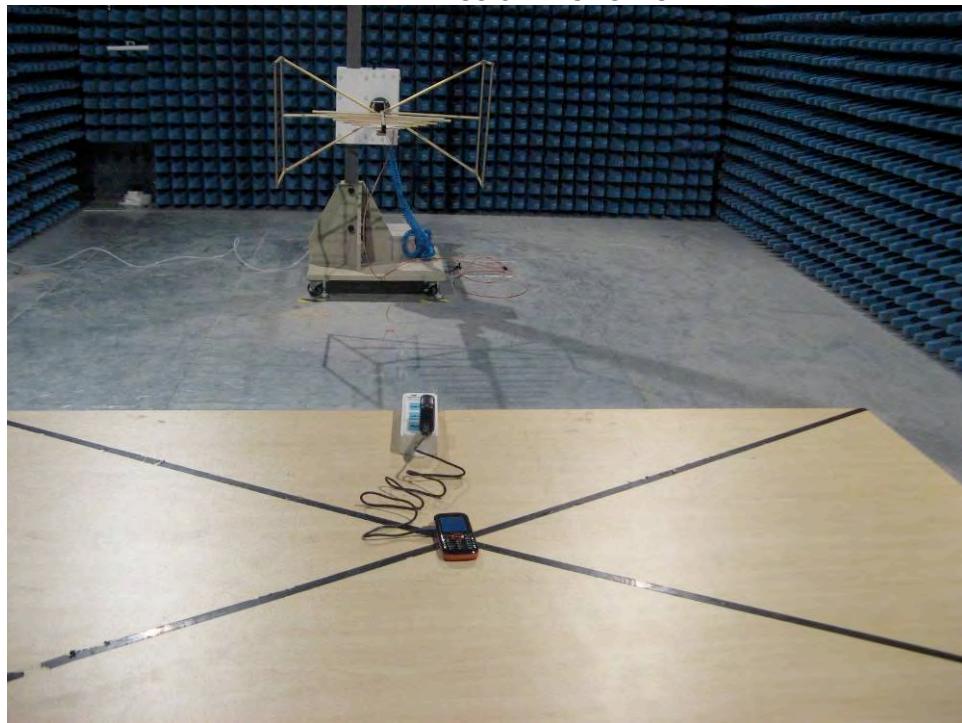

**----END OF REPORT----**