



FCC RADIO TEST REPORT

Applicant : FAVEPC Inc

Address : No.176, Taihe Rd., Jhubei City, Hsinchu County,
30267, Taiwan

Equipment : UHF one port reader module

Model No. : FS-GM701-00

Trade Name : FAVEPC

FCC ID : ZDD-FS-GM701-00

I HEREBY CERTIFY THAT :

The sample was received on Jan. 11, 2024 and the testing was completed on Jan. 22, 2024 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory





CONTENTS

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test	6
2.2 Carrier Frequency of Channels	6
2.3 Test Mode and Test Software	7
2.4 Description of Test System	7
2.5 General Information of Test	8
2.6 Measurement Uncertainty	8
3. Test Equipment and Ancillaries Used for Tests	9
4. Antenna Requirements	11
4.1 Standard Applicable	11
4.2 Antenna Construction and Directional Gain	11
5. Test of AC Power Line Conducted Emission	12
5.1 Test Limit	12
5.2 Test Procedures	12
5.3 Typical Test Setup	13
5.4 Test Result and Data	14
5.5 Test Photographs	16
6. Test of Spurious Emission (Radiated)	17
6.1 Test Limit	17
6.2 Test Procedures	18
6.3 Typical Test Setup	19
6.4 Test Result and Data (9kHz ~ 30MHz)	20
6.5 Test Result and Data (30MHz ~ 1GHz)	20
6.6 Test Result and Data (1GHz ~ 10GHz)	22
6.7 Restricted Bands of Operation	28
6.8 Test Photographs (30MHz ~ 1GHz)	29
6.9 Test Photographs (1GHz ~ 10GHz)	30
7. Test of Spurious Emission (Conducted)	32
7.1 Test Limit	32
7.2 Test Procedure	32
7.3 Test Setup Layout	32
7.4 Test Result and Data	32
8. On Time, Duty Cycle and Measurement methods	35
8.1 Test Limit	35
8.2 Test Procedure	35
8.3 Test Setup Layout	35
8.4 Test Result and Data	35
9. 20dB Bandwidth Measurement Data	36
9.1 Test Limit	36



9.2	Test Procedures	36
9.3	Test Setup Layout	36
9.4	Test Result and Data.....	36
10.	Frequencies Separation	38
10.1	Test Limit	38
10.2	Test Procedures	38
10.3	Test Setup Layout	38
10.4	Test Result and Data.....	38
11.	Dwell Time on each channel	40
11.1	Test Limit	40
11.2	Test Procedures	40
11.3	Test Setup Layout	40
11.4	Test Result and Data.....	40
12.	Number of Hopping Channels	42
12.1	Test Limit	42
12.2	Test Procedures	42
12.3	Test Setup Layout	42
12.4	Test Result and Data.....	42
13.	Maximum Peak Output Power	43
13.1	Test Limit	43
13.2	Test Procedures	43
13.3	Test Setup Layout	43
13.4	Test Result and Data.....	43
14.	Radio Frequency Exposure	44
14.1	Applicable Standards	44
14.2	EUT Specification.....	45
14.3	Result	45



History of this test report

Report No.	Issued Date	Description
24010225-TRFCC01	Jan. 29, 2024	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(1)	. Channel Carrier Frequencies Separation	PASS
15.247(a)(1)	. 20dB Bandwidth	PASS
15.247(a)(1)	. Dwell Time	PASS
15.247(b)	. Number of Hopping Channels	PASS
15.247(b)	. Peak Output Power Measurement Data	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement, measurement uncertainty evaluation is not considered.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Frequency Range	902MHz – 928MHz
Modulation Type	ASK
Antenna Type	Quadrifilar Antenna
Antenna Gain	4.00 dBi (Antenna Gain 5dBi - Antenna Cable Loss 1dB)

Note: For more details, please refer to the User's manual of the EUT.

2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)
*01	902.75	26	915.25
02	903.25	27	915.75
03	903.75	28	916.25
04	904.25	29	916.75
05	904.75	30	917.25
06	905.25	31	917.75
07	905.75	32	918.25
08	906.25	33	918.75
09	906.75	34	919.25
10	907.25	35	919.75
11	907.75	36	920.25
12	908.25	37	920.75
13	908.75	38	921.25
14	909.25	39	921.75
15	909.75	40	922.25
16	910.25	41	922.75
17	910.75	42	923.25
18	911.25	43	923.75
19	911.75	44	924.25
20	912.25	45	924.75
21	912.75	46	925.25
22	913.25	47	925.75
23	913.75	48	926.25
24	914.25	49	926.75
*25	914.75	*50	927.25

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- Enter the test command under Windows OS system was executed to transmit and receive data via RFID.
- The test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode 1	TX Mode, Power: DC 5V/3A from Power Supply (AC 120V/60Hz)
Test Mode 2	TX Mode, Power: DC 5V/3A from Power Supply (AC 240V/60Hz)
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiated Emissions (30MHz ~ 1GHz)	
Test Mode 1	TX Mode, Power: DC 5V/3A from Power Supply (AC 120V/60Hz)
Test Mode 2	TX Mode, Power: DC 5V/3A from Power Supply (AC 240V/60Hz)
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiated Emissions (1GHz ~ 10GHz)	
Test Mode 1	TX Mode, Power: DC 5V/3A from Power Supply (AC 120V/60Hz)

Modulation Type	TX CONFIGURATION
ASK	1TX

2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	lenovo	S1GL2W	N/A	N/A
DC Power Supply	Gwinstek	GPR-360600	N/A	N/A

Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude E5470	N/A	Adapter / 1.8m / NS
USB A to USB B 2.0 Cable	N/A	N/A	1.0m / NS	N/A
DC Power Supply	Gwinstek	GPR-360600	N/A	N/A
Test Fixture	N/A	N/A	N/A	N/A

AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude E5470	N/A	Adapter / 1.8m / NS
USB A to USB B 2.0 Cable	N/A	N/A	1.0m / NS	N/A
Test Fixture	N/A	N/A	N/A	N/A
DC Power Supply	Gwinstek	GPR-360600	N/A	N/A



2.5 General Information of Test

☒ Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
Frequency Range Investigated	Conducted: from 150kHz to 30 MHz Radiation: from 9 kHz to 10,000MHz	
Test Distance	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2024/01/17 ~2024/01/22	20.6 ~ 24.2°C / 40 ~ 47%	Leon Huang
Radiated Emissions	3M02-NK	2024/01/15 ~2024/01/16	19.3 ~ 20.4°C / 45 ~ 48%	Leon Huang
AC Power Line Conducted Emission	CON02-NK	2024/01/19	22°C / 55%	Park

2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.12dB
Radiated Spurious Emission(9KHz~30MHz)	±3.5dB
Radiated Spurious Emission(30MHz~1GHz)	±5.1dB
Radiated Spurious Emission(1GHz~25GHz)	±5.2dB
Conducted Spurious Emission	±2.1dB
20dB Bandwidth	±4.4%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time	±7.6%
Duty Cycle	±3.5%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2023/03/15	2024/03/14
Active Loop Antenna	Schwarzbeck	FMZB 1513	414	2023/02/03	2024/02/02
Horn Antenna	EMCO	3115	31589	2023/03/23	2024/03/22
Horn Antenna	EMCO	3116	31970	2023/03/03	2024/03/02
EMI Receiver	R&S	ESCI	101423	2023/07/05	2024/07/04
Spectrum Analyzer	R&S	FSV 40-N	102151	2023/08/15	2024/08/14
Preamplifier	Agilent	8449B	3008A01954	2023/03/08	2024/03/07
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2023/10/13	2024/10/12
Preamplifier	EM Electronics corp.	EM330	60659	2023/03/10	2024/03/09
Cable-6m (9kHz-300MHz)	NA	EMC5D-BM-BM-6	130606	2023/03/13	2024/03/12
Cable-3in1 (30MHz-1GHz)	HARBOUR INDUSTRIES	LL142	CCE1315	2023/02/25	2024/02/24
Cable-0.5m (1GHz-40GHz)	HUBER SUHNER	SUCOFLEX 104	805443/4	2023/03/07	2024/03/06
Cable-3m (1GHz-40GHz)	HUBER SUHNER	SUCOFLEX 104	805796/4	2023/03/07	2024/03/06
Cable-8m (1GHz-26.5GHz)	WOKEN	WCBA-WCA203SM	CCE1374	2023/03/07	2024/03/06
Cable-1m (1GHz-40GHz)	HUBER SUHNER	HUBER SUHNER / SF102	552450	2023/06/08	2024/06/07
Cable-3m (1GHz-40GHz)	HUBER SUHNER	HUBER SUHNER / SF102	552451	2023/06/08	2024/06/07
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	Warison	WFIL-H3000-18000F-03	WRJ5CFWC2J1	2023/07/03	2024/07/02
Notch Filter	Warison	WFIL-N5925-7125F-04	WRQ4BFWC4M1	2023/03/13	2024/03/12
Hipass Filter	Warison	WFIL-H7500-18000F	WRQ4BFWC2J1	2023/03/13	2024/03/12



Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2023/11/06	2024/11/05
Power Meter	Anritsu	ML2495A	1224005	2023/03/07	2024/03/06
Power Sensor	Anritsu	MA2411B	1207295	2023/03/07	2024/03/06
Attenuator	KEYSIGHT	8491B	MY39250703	2023/03/08	2024/03/07

Test Item	AC Power Line Conducted Emission				
Test Site	CON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	R&S	ESR 7	101906	2023/05/08	2024/05/07
TWO-LINE V-NETWORK	R&S	ENV216	102185	2023/08/29	2024/08/28
Cable-4m (9kHz-3GHz)	EMEC	RG-223	18274M	2023/07/31	2024/07/30
E3	AUDIX	v8.2014-8-6	RK-000536	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	Quadrifilar Antenna
Antenna Gain	4.00 dBi (Antenna Gain 5dBi - Antenna Cable Loss 1dB)



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

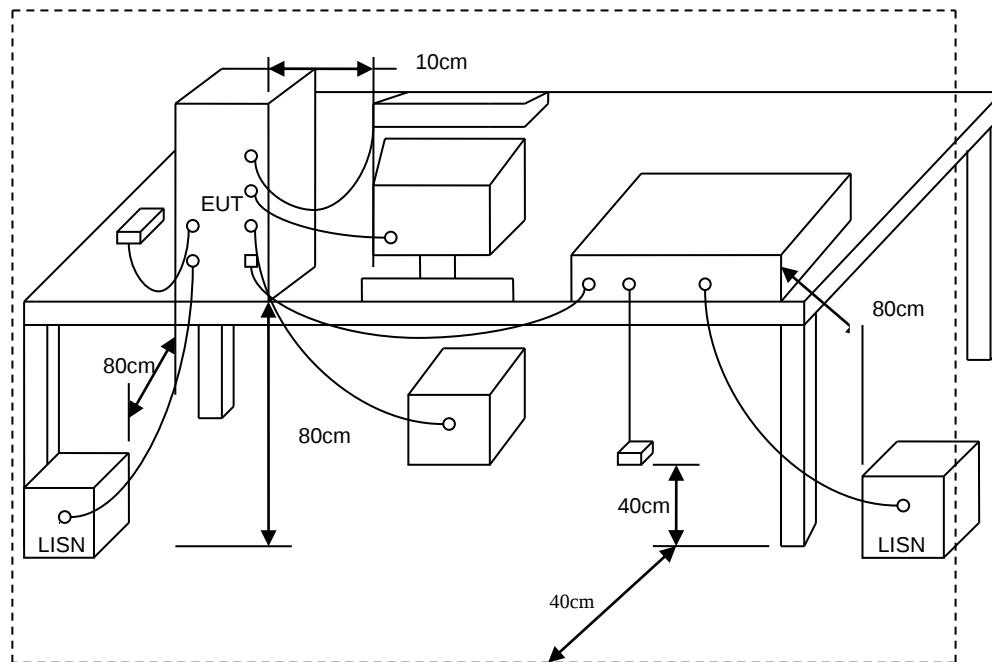



5.4 Test Result and Data

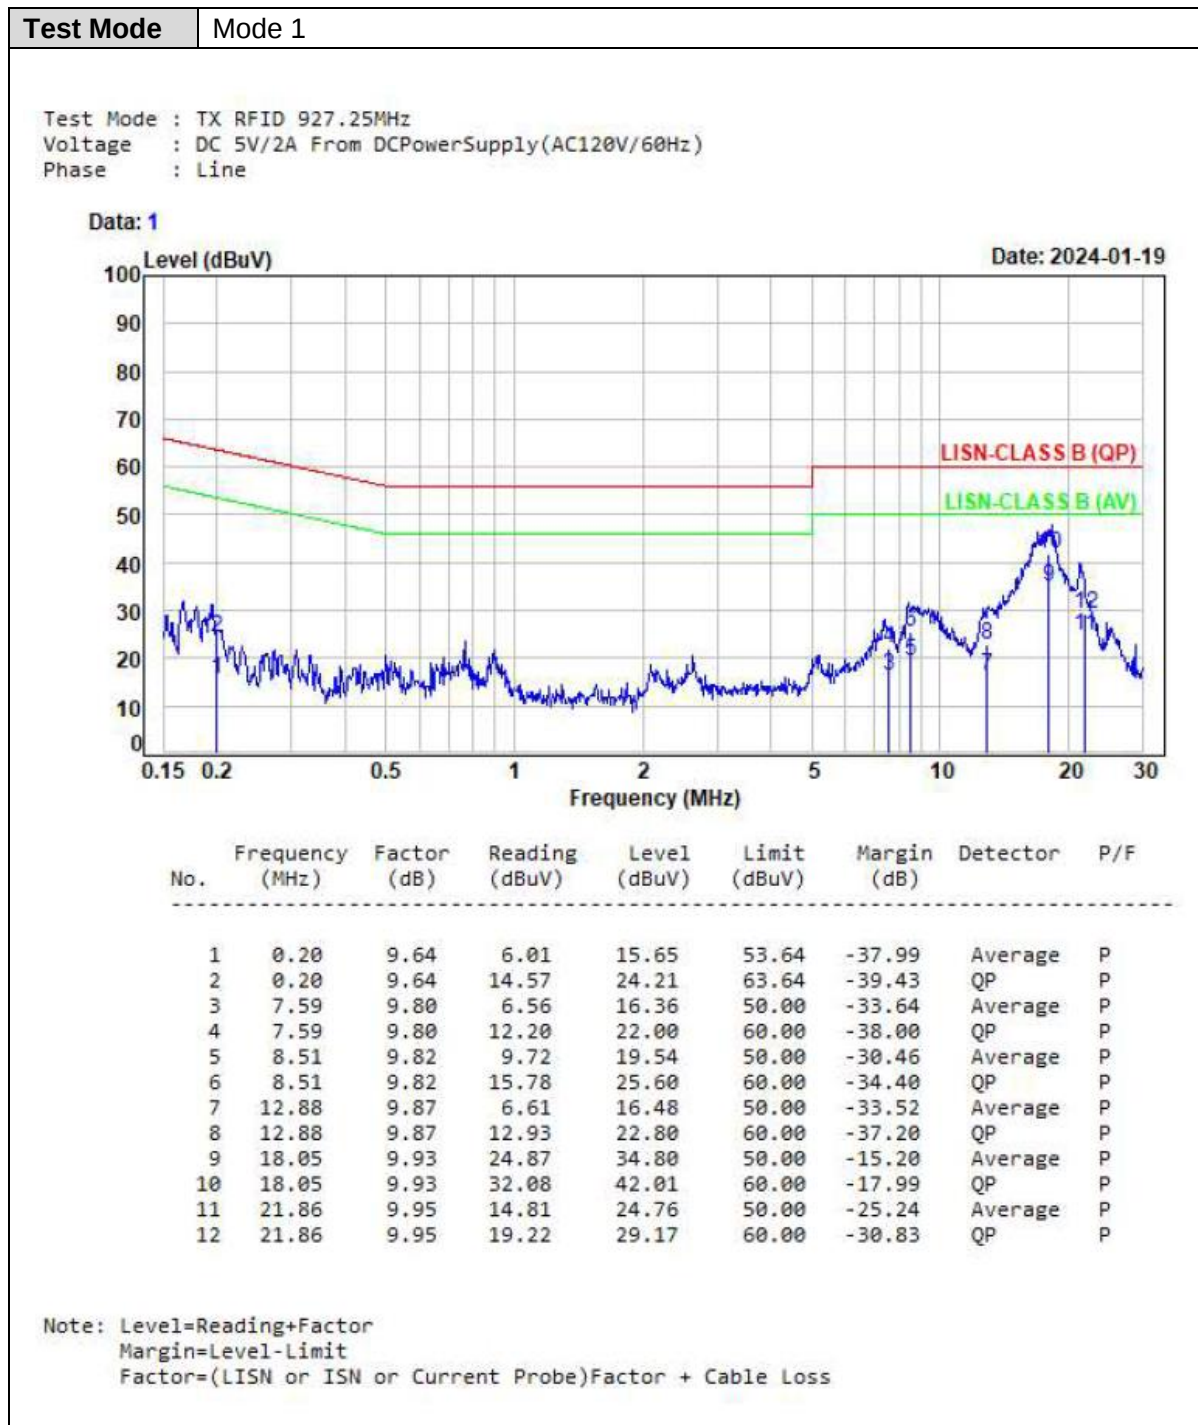




Test Mode

Mode 1

Test Mode : TX RFID 927.25MHz
Voltage : DC 5V/2A From DCPowerSupply(AC120V/60Hz)
Phase : Neutral

Data: 2

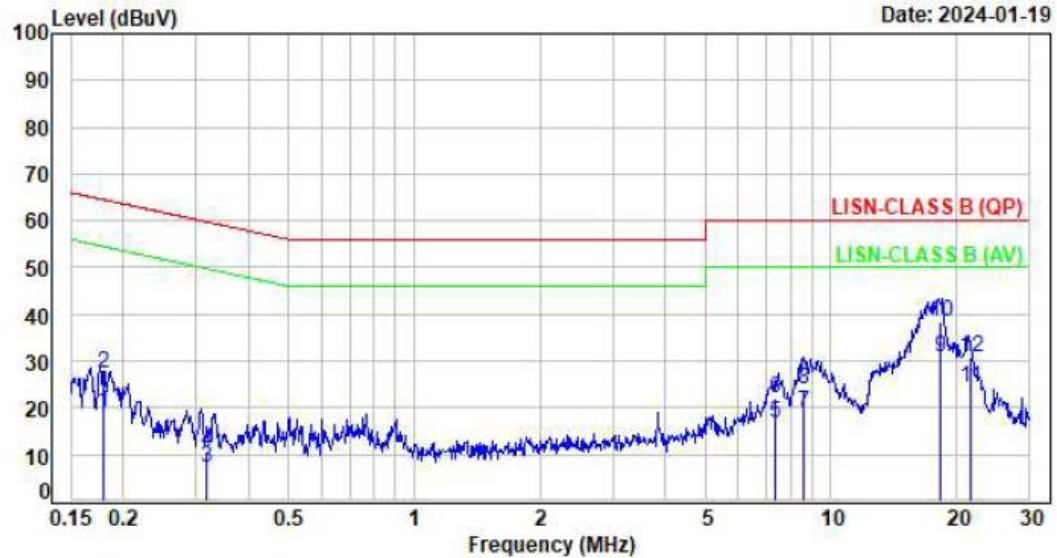

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.18	9.58	9.31	18.89	54.48	-35.59	Average	P
2	0.18	9.58	17.76	27.34	64.48	-37.14	QP	P
3	0.32	9.57	-2.16	7.41	49.79	-42.38	Average	P
4	0.32	9.57	0.89	10.46	59.79	-49.33	QP	P
5	7.32	9.76	6.97	16.73	50.00	-33.27	Average	P
6	7.32	9.76	12.27	22.03	60.00	-37.97	QP	P
7	8.62	9.78	9.09	18.87	50.00	-31.13	Average	P
8	8.62	9.78	14.12	23.90	60.00	-36.10	QP	P
9	18.26	9.95	21.03	30.98	50.00	-19.02	Average	P
10	18.26	9.95	28.43	38.38	60.00	-21.62	QP	P
11	21.59	10.00	14.39	24.39	50.00	-25.61	Average	P
12	21.59	10.00	20.72	30.72	60.00	-29.28	QP	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Spurious Emission (Radiated)

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized. (X-AXIS is the worst.)
- 2.Due to the test software function limit the operation band setting(200dBuV/m).
There's no corresponding limitation in the actual test item.




6.3 Typical Test Setup


Below 30MHz test setup

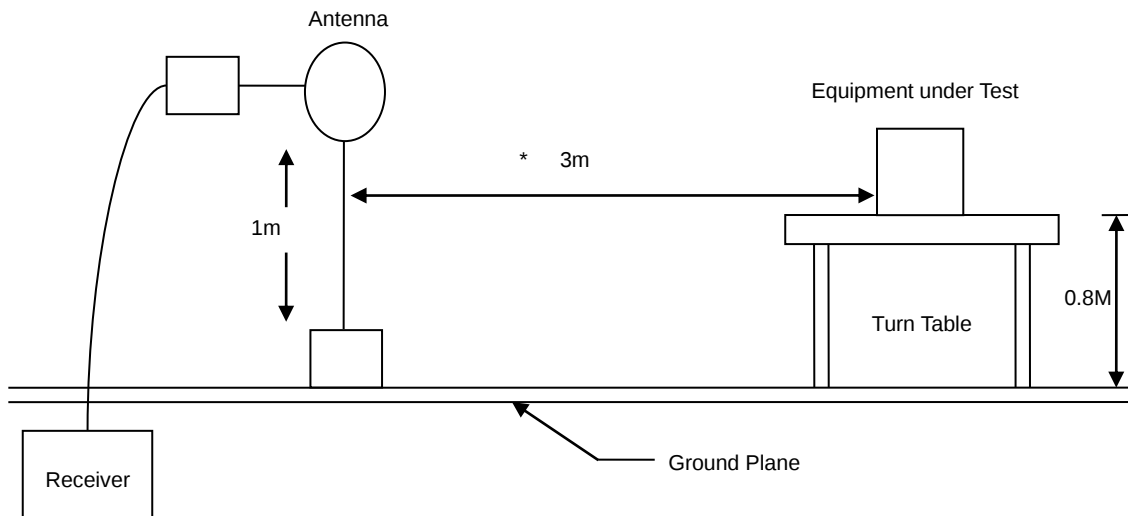

30MHz- 1GHz Test Setup

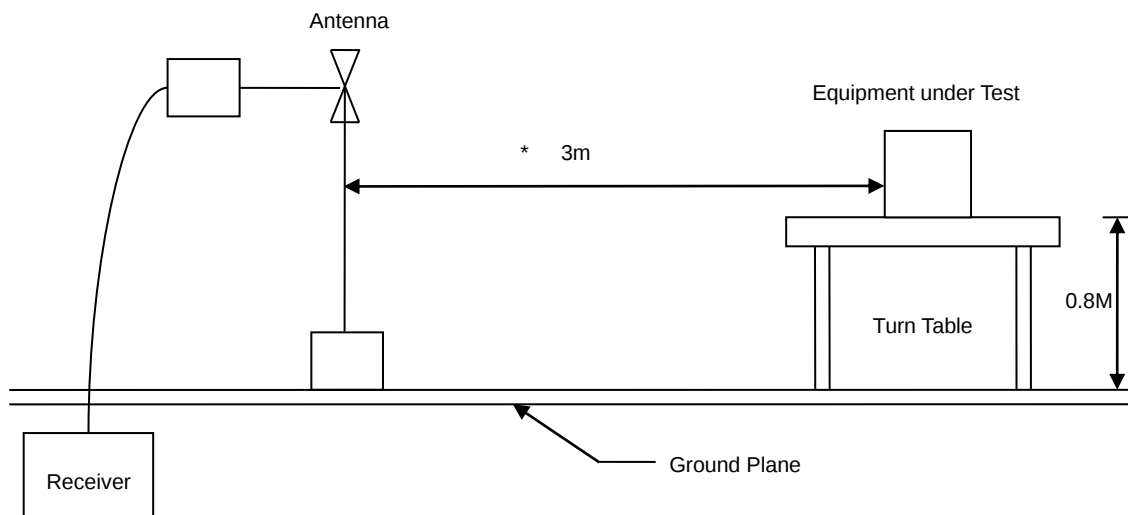

Above 1GHz Test Setup

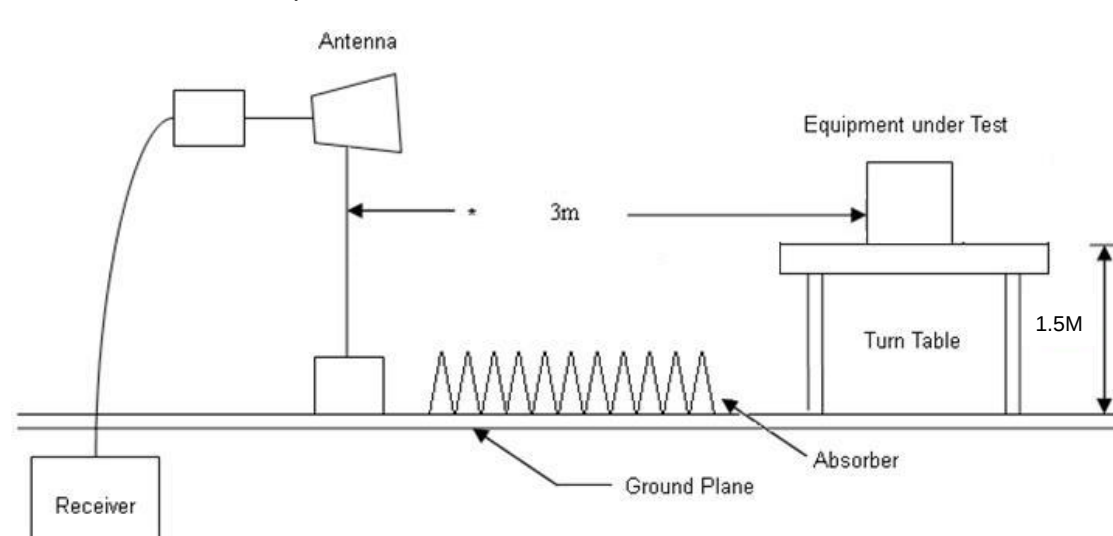





6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.


6.5 Test Result and Data (30MHz ~ 1GHz)

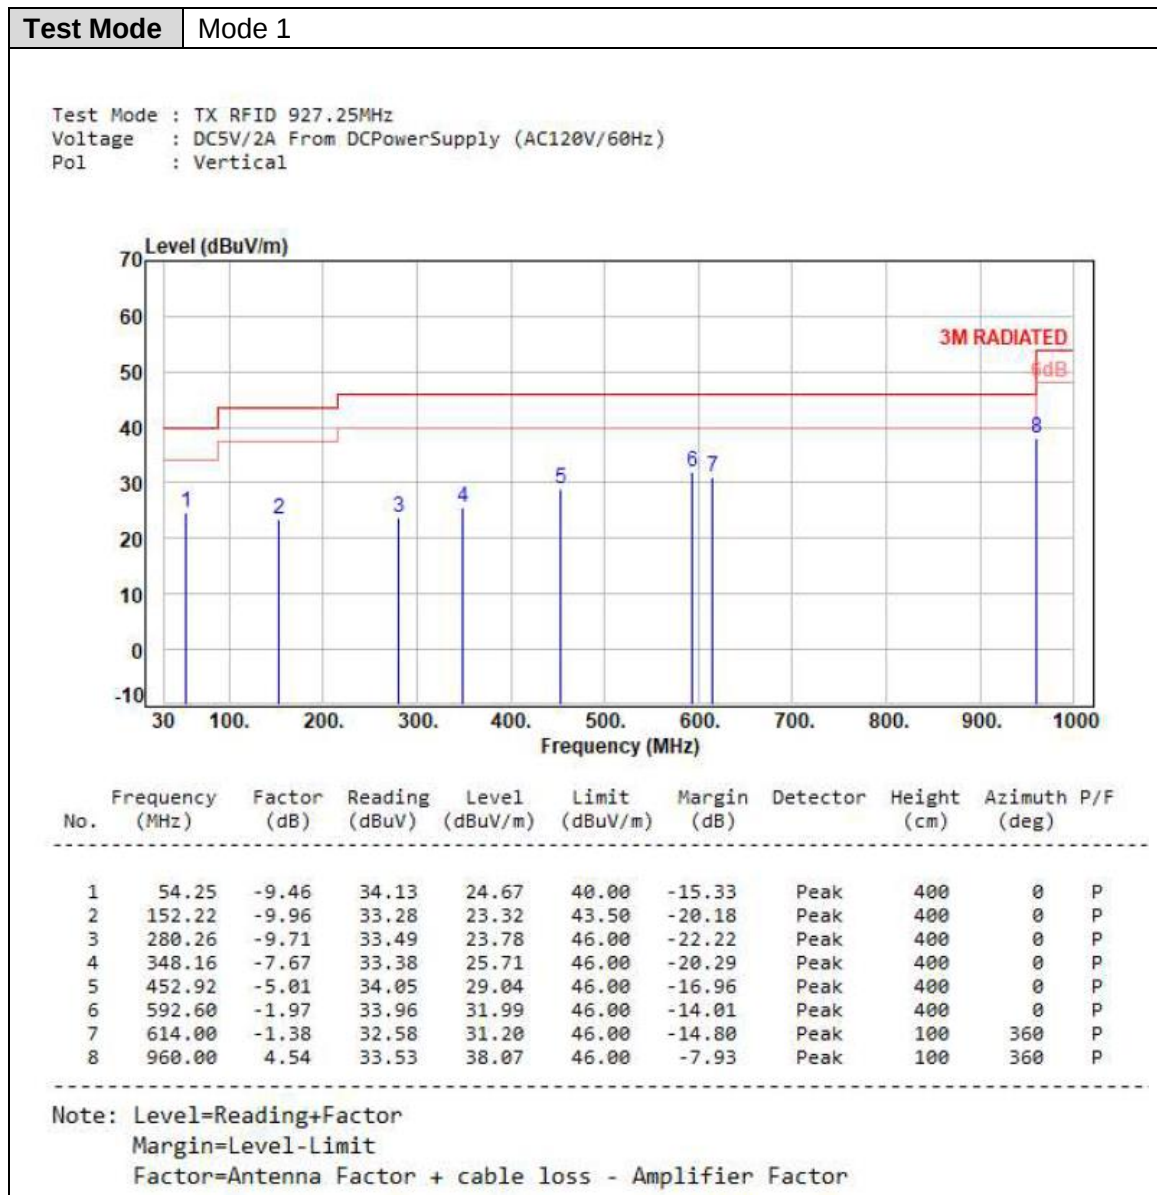


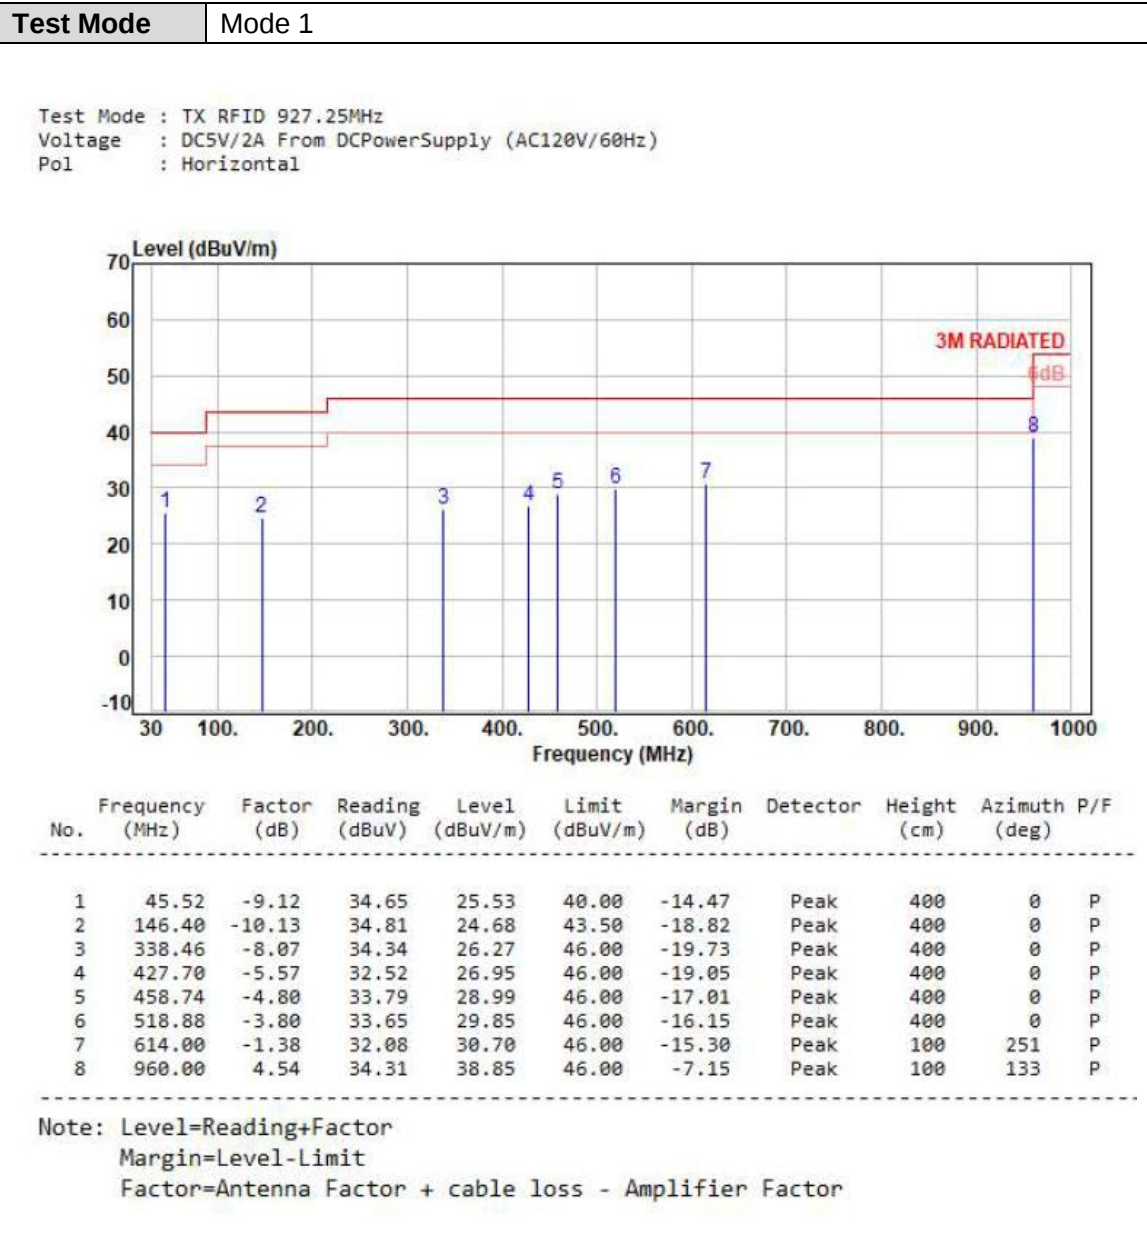





6.6 Test Result and Data (1GHz ~ 10GHz)

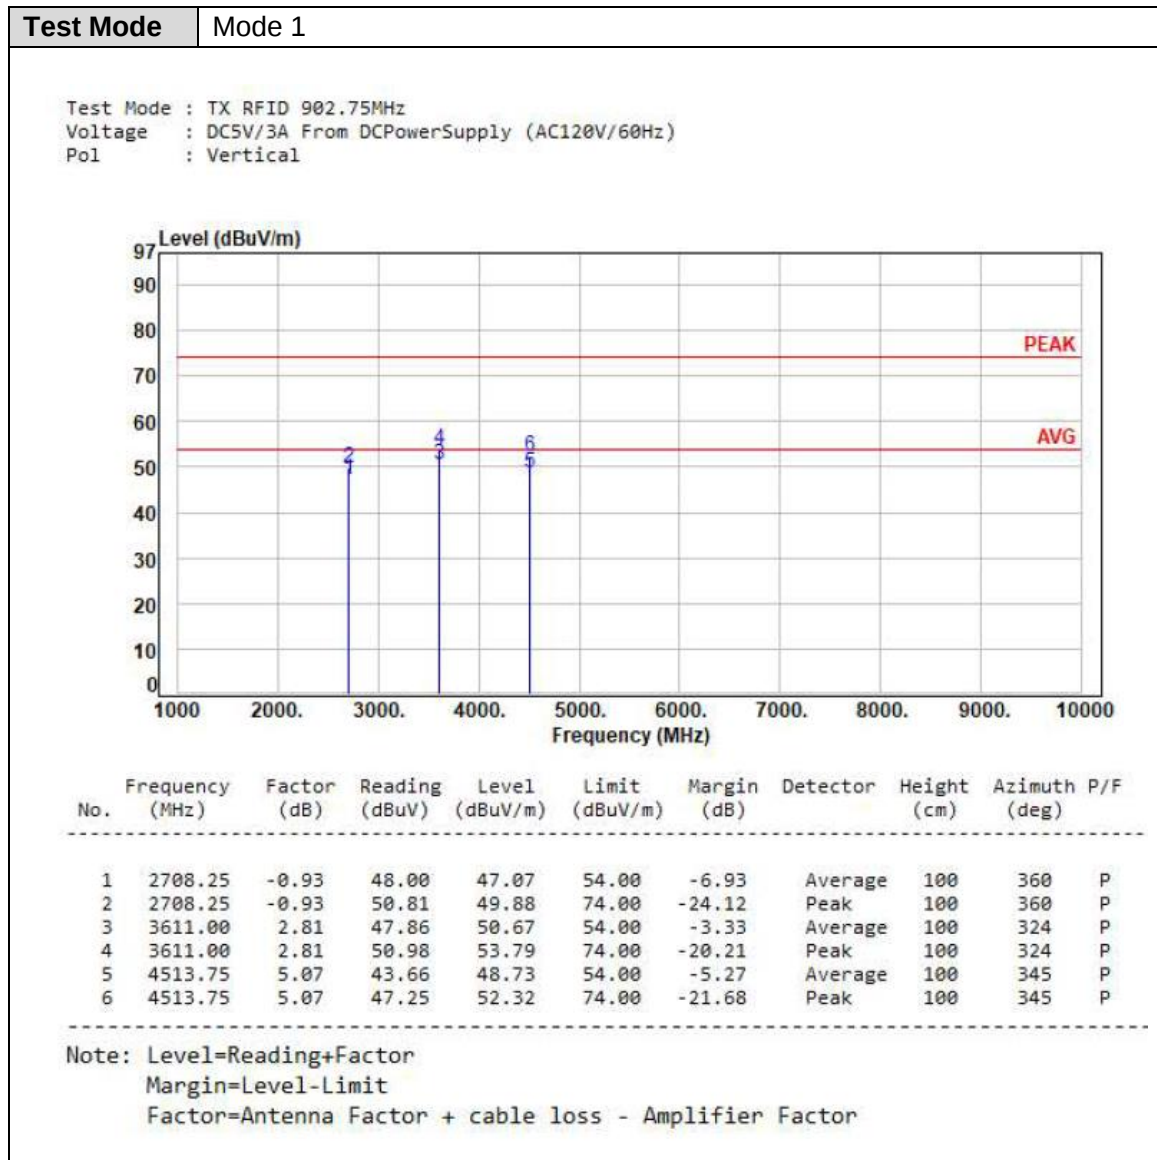

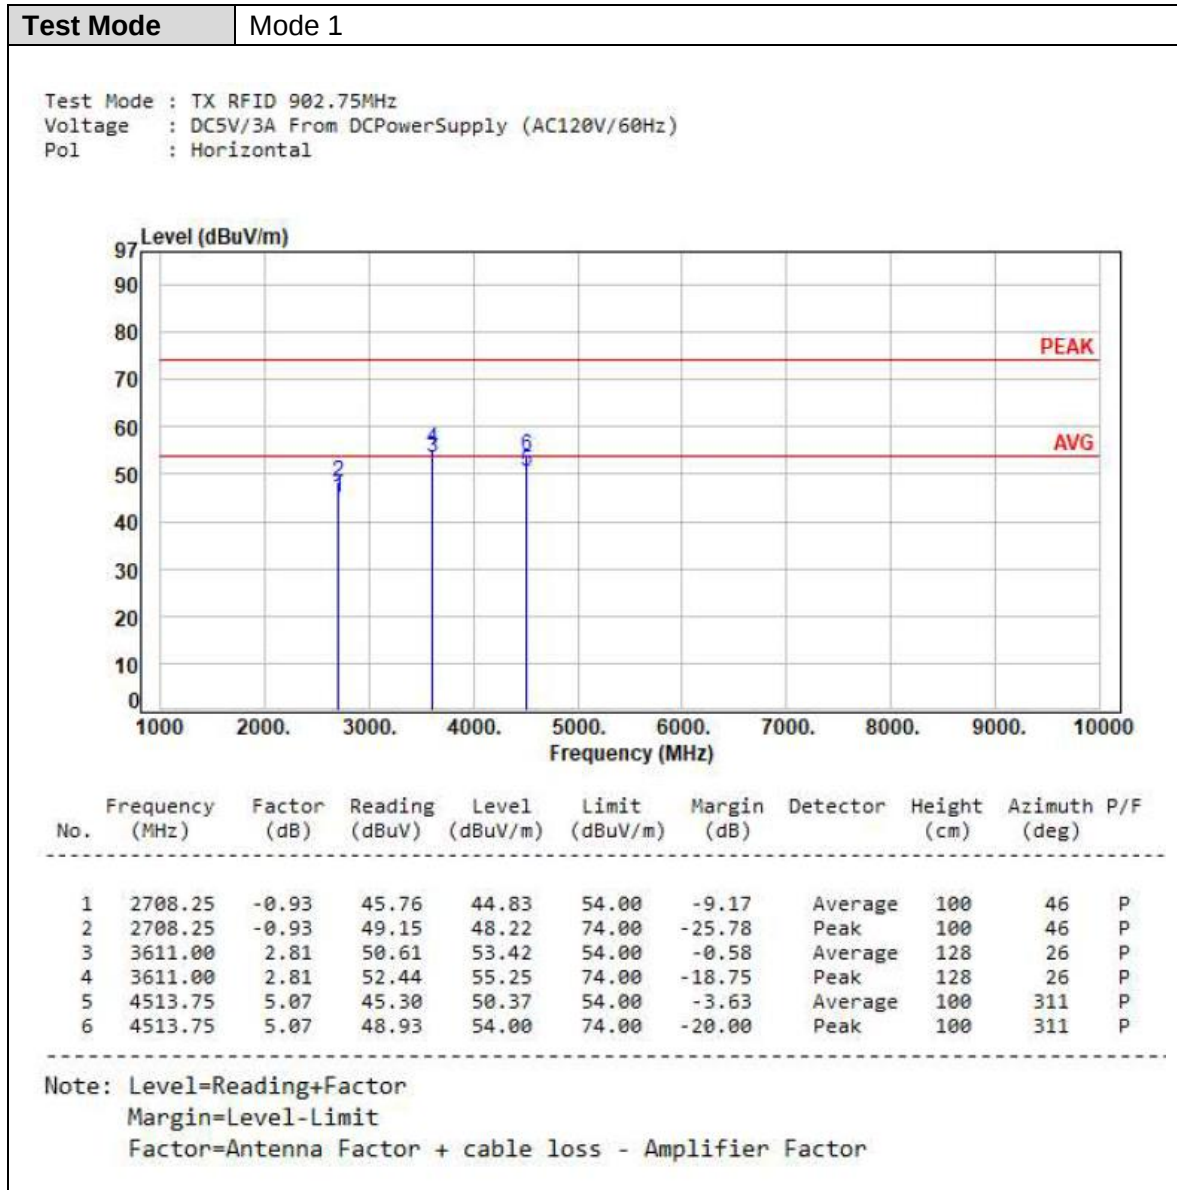


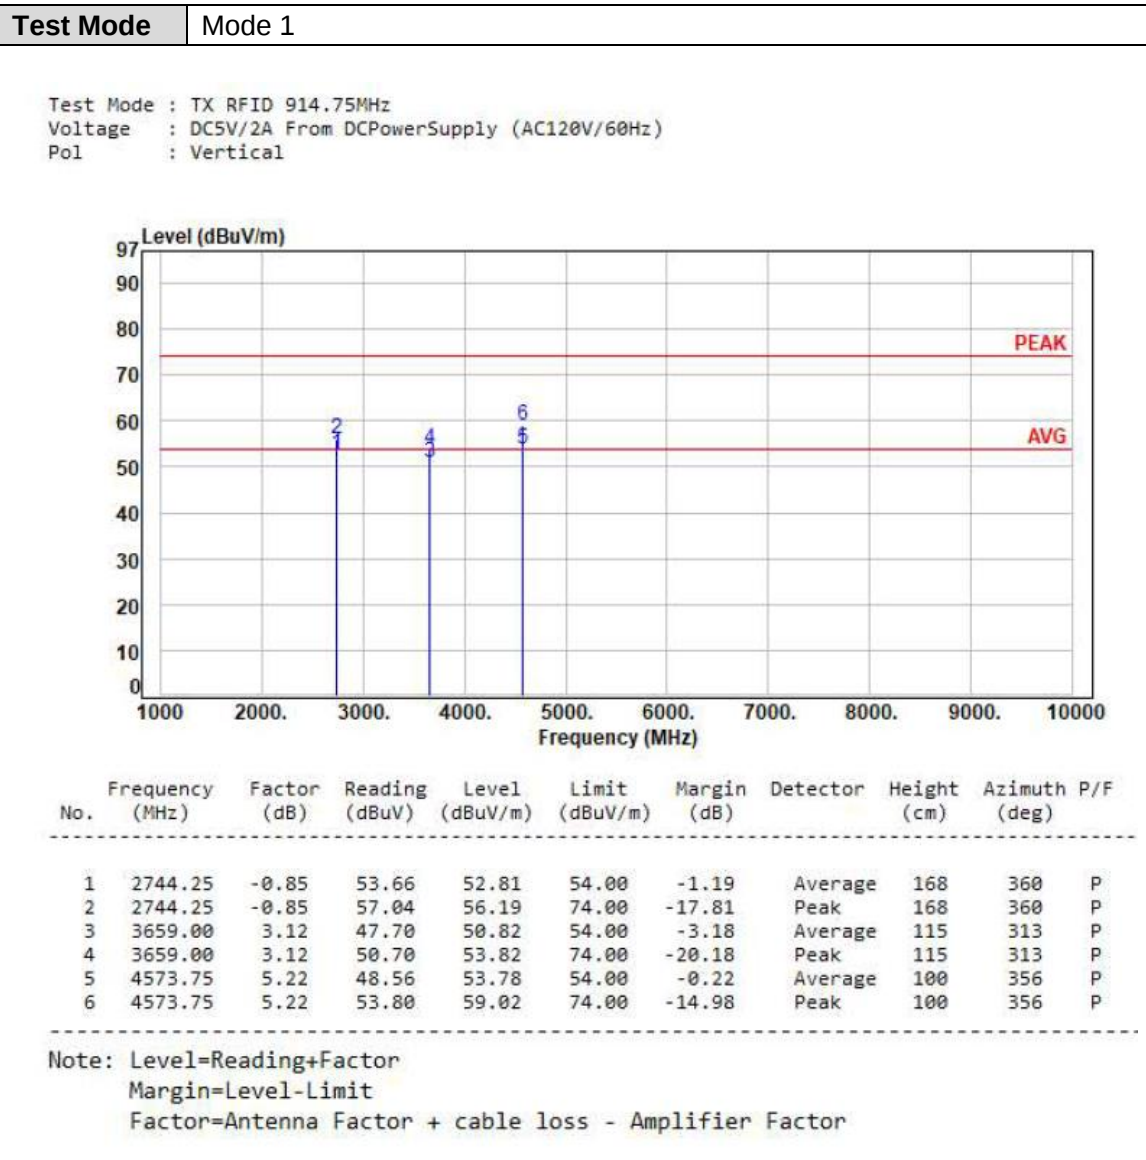

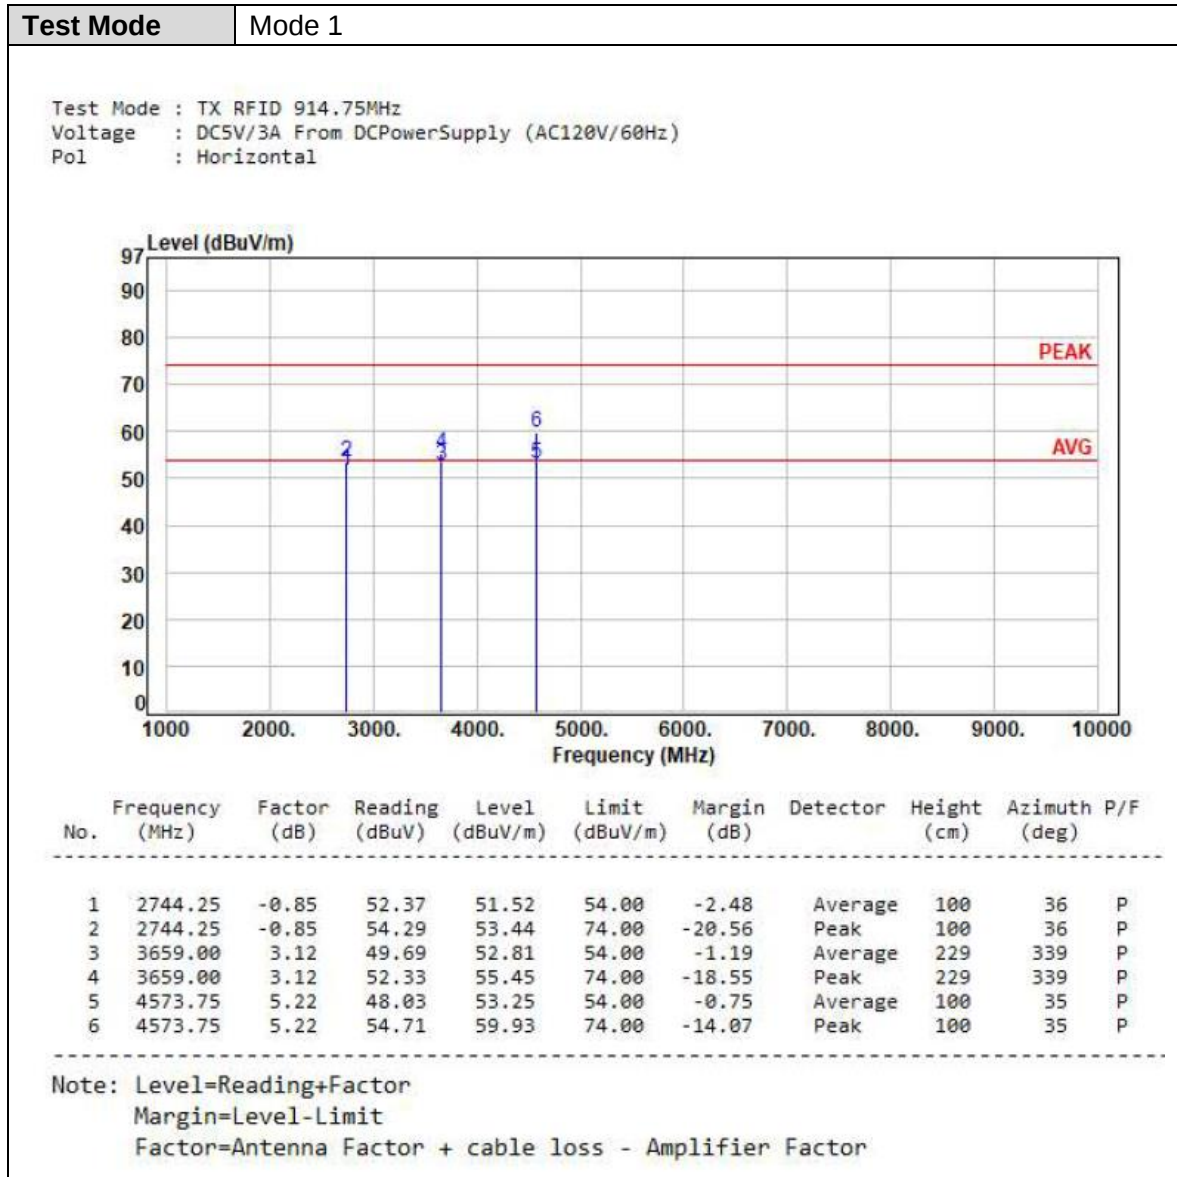

**Test Mode** Mode 1

Test Mode : TX RFID 927.25MHz
Voltage : DC5V/3A From DCPowerSupply (AC120V/60Hz)
Pol : Vertical

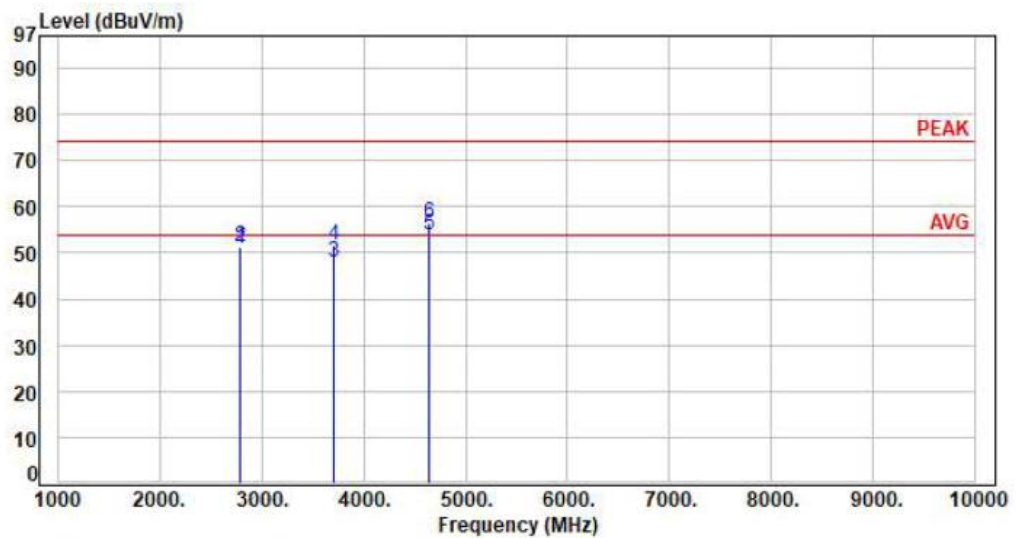


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2781.75	-0.65	51.56	50.91	54.00	-3.09	Average	100	360	P
2	2781.75	-0.65	52.07	51.42	74.00	-22.58	Peak	100	360	P
3	3709.00	3.58	44.53	48.11	54.00	-5.89	Average	100	331	P
4	3709.00	3.58	48.15	51.73	74.00	-22.27	Peak	100	331	P
5	4636.25	5.35	48.51	53.86	54.00	-0.14	Average	100	353	P
6	4636.25	5.35	51.05	56.40	74.00	-17.60	Peak	100	353	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

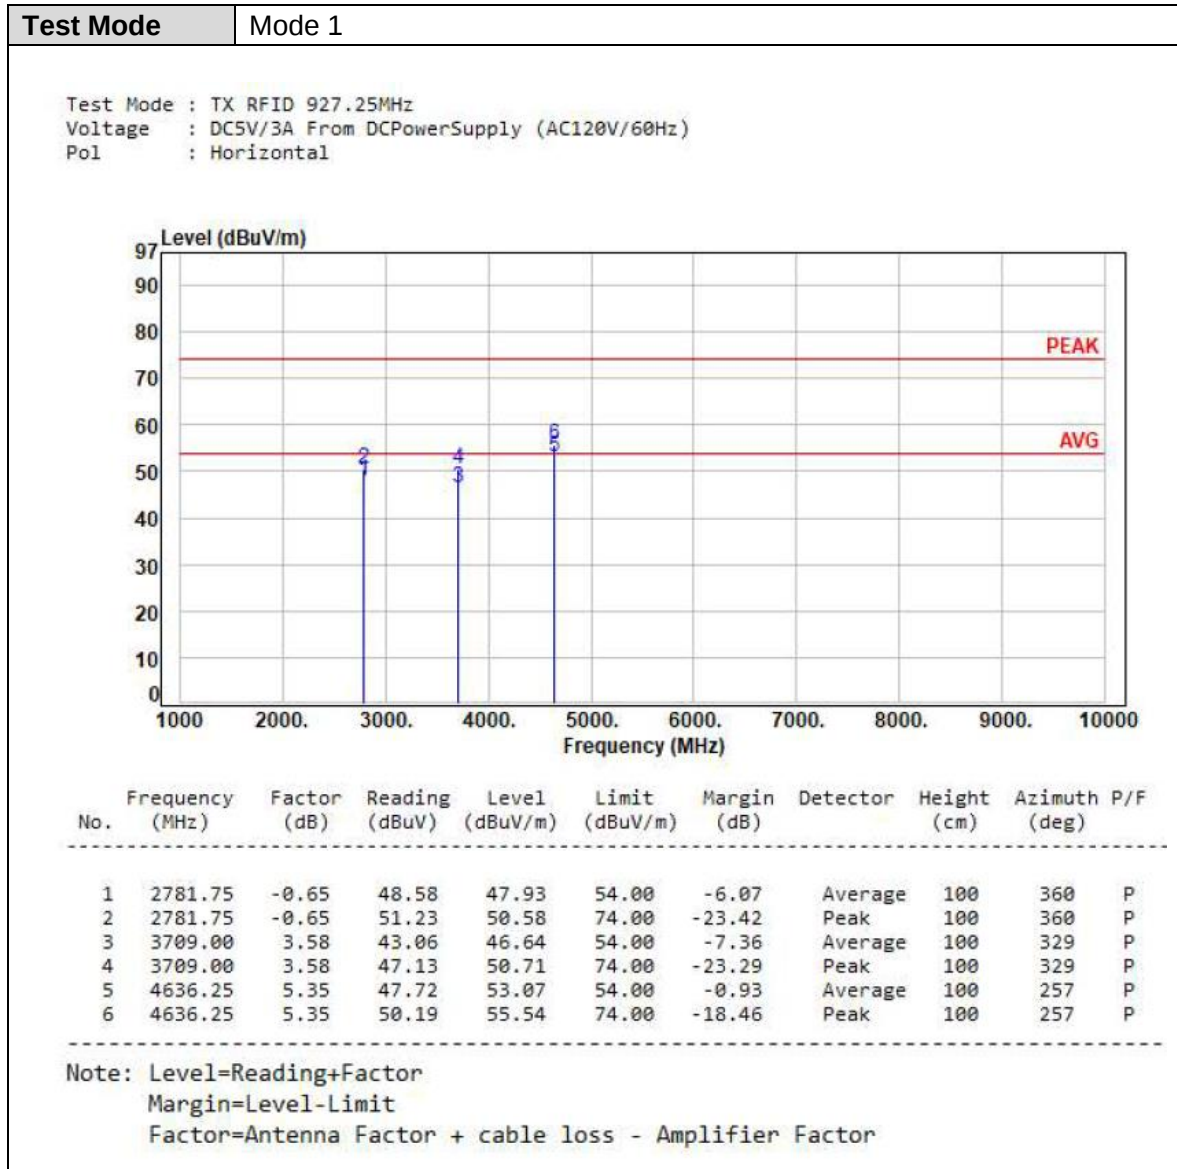



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Spurious Emission (Conducted)

7.1 Test Limit

According to the methods defined in ANSI C63.10-2013 Section 11.11.1


Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.11.2 & 11.11.3

- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- The band edges was measured and recorded.

7.3 Test Setup Layout





7.4 Test Result and Data



Note: Test plots refer to the following pages.

Modulation Type: ASK
CH01


CH01

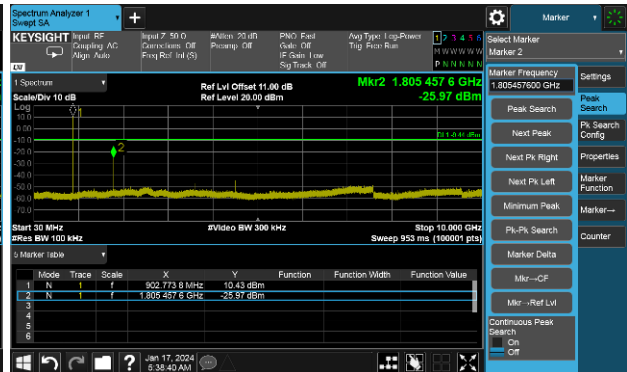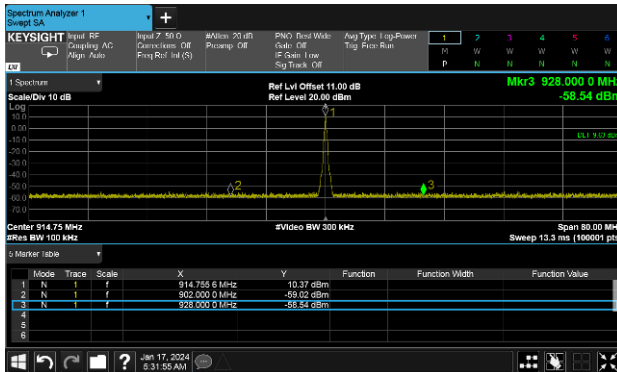
Modulation Type: ASK
CH25

CH25

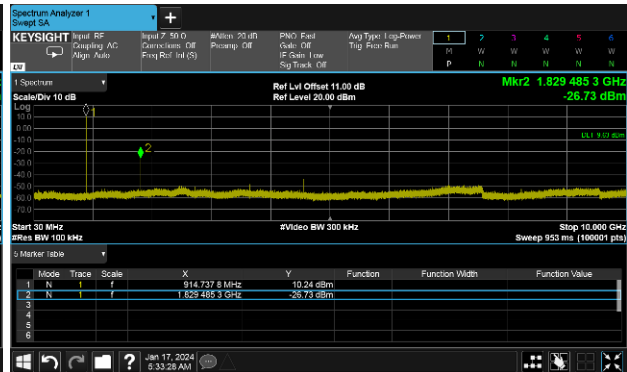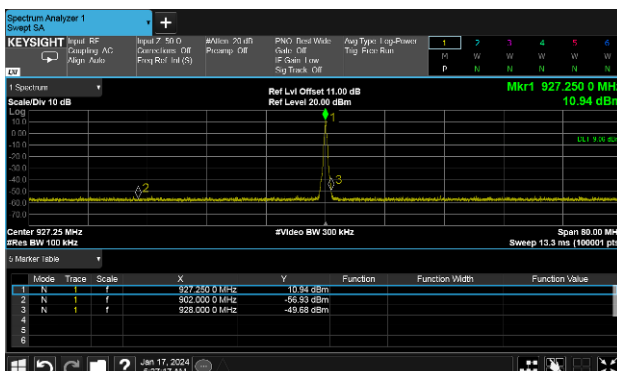Modulation Type: ASK
CH50

CH50

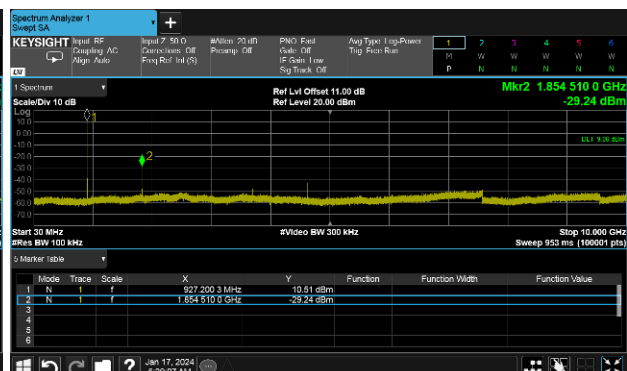

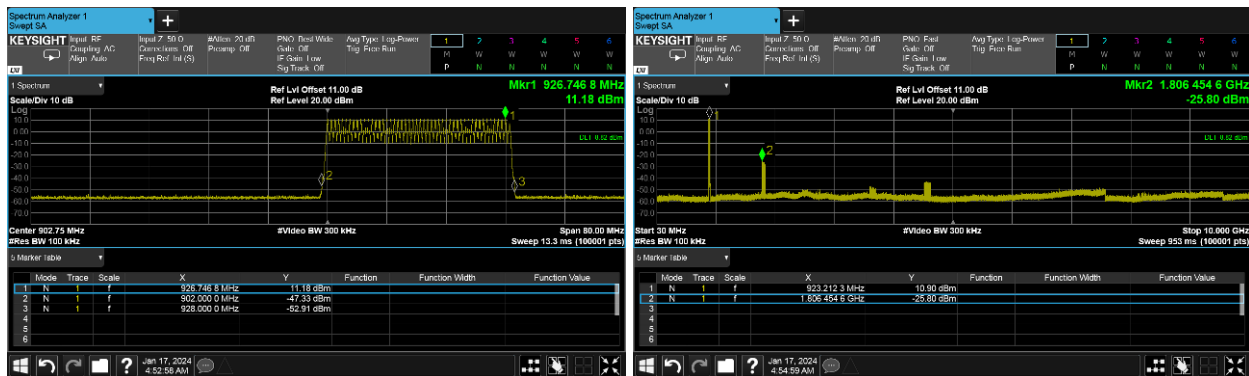



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.6
Zero-Span Spectrum Analyzer Method.


8.3 Test Setup Layout



8.4 Test Result and Data

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
ASK	100.00	100.00	100.00%

Modulation Type: ASK

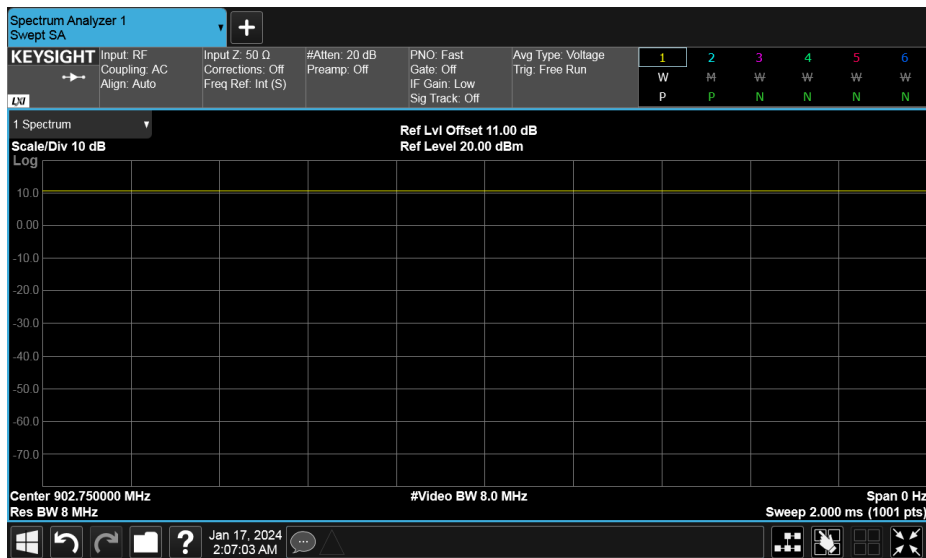



9. 20dB Bandwidth Measurement Data

9.1 Test Limit


The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

9.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 6.9

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 10 KHz and VBW to 30 KHz.
- The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

9.3 Test Setup Layout



9.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
ASK	1	902.75	0.369	0.5
	25	914.75	0.373	0.5
	50	927.25	0.371	0.5



Modulation Type: ASK
CH01



Modulation Type: ASK
CH25



Modulation Type: ASK
CH50





10. Frequencies Separation

10.1 Test Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

10.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 7.8.2

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels.

10.3 Test Setup Layout




10.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
ASK	1	902.75	0.50	0.3685
	25	914.75	0.50	0.3732
	50	927.25	0.50	0.3709




Modulation Type: ASK
CH01

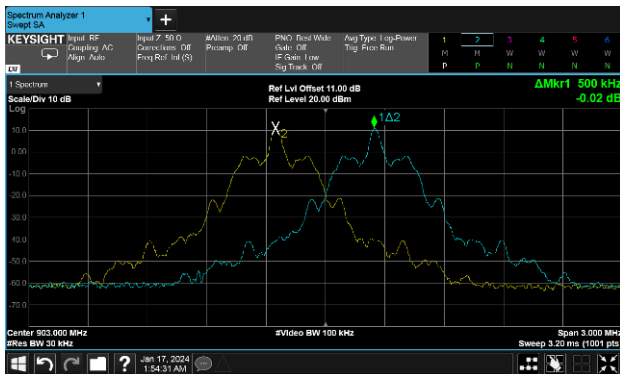

Modulation Type: ASK
CH25

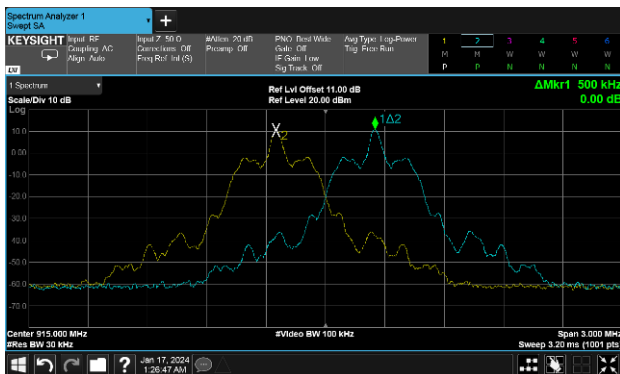

Modulation Type: ASK
CH50

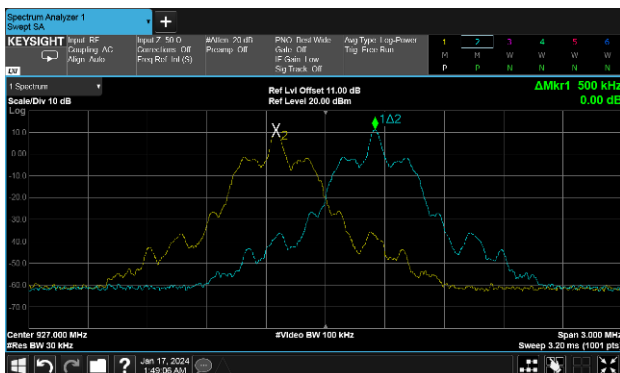



11. Dwell Time on each channel

11.1 Test Limit


The average time of occupancy on any channel shall not be greater than 0.4 seconds within 10 seconds.

11.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 7.8.4


1. The transmitter output was connected to the spectrum analyzer.
2. Adjust the center frequency to measure frequency, then set zero span mode.
2. Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz.
4. Measure the time duration of one transmission on the measured frequency.

11.3 Test Setup Layout





11.4 Test Result and Data



Channel	Frequency (MHz)	Length of transmission time (ms)	Number of transmission in a 10 sec	Dwell Time(ms)	Limit (ms)
1	902.75	204.000	1.00	204.00	400
25	914.75	204.000	1.00	204.00	400
50	927.25	204.000	1.00	204.00	400

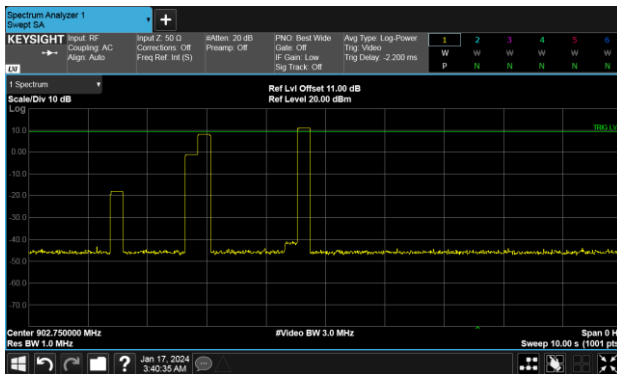Modulation Type: ASK
CH01


CH01

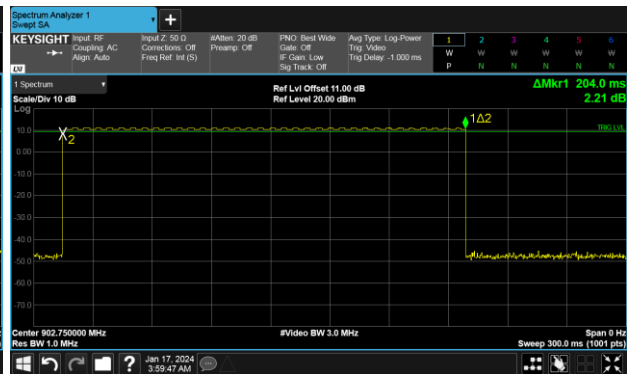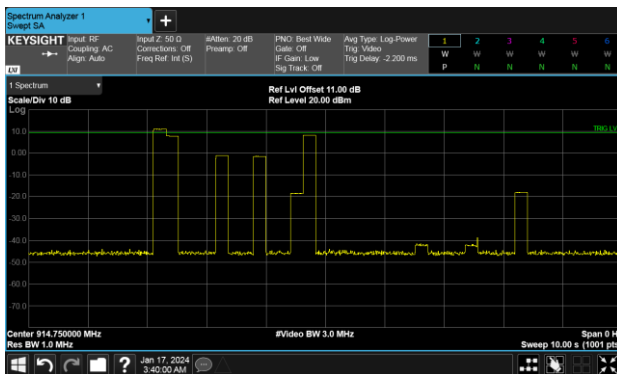Modulation Type: ASK
CH25

CH25

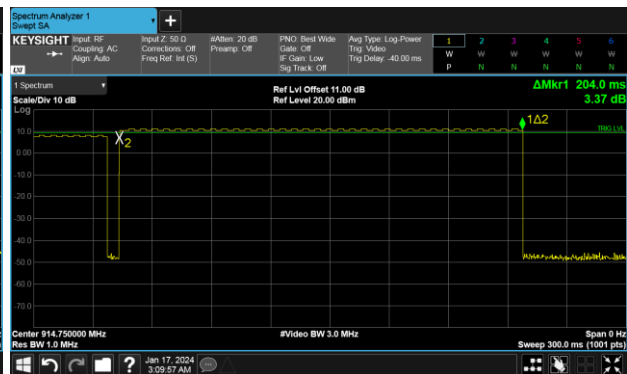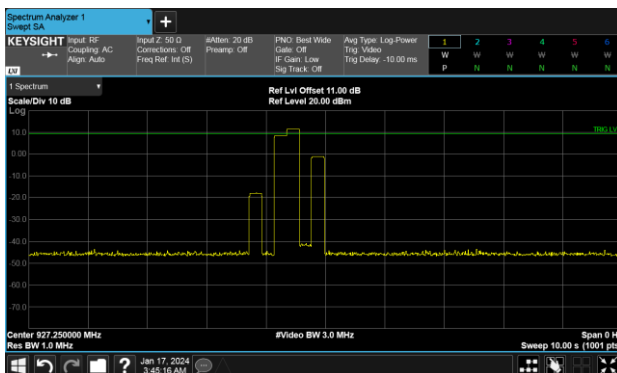Modulation Type: ASK
CH50

CH50

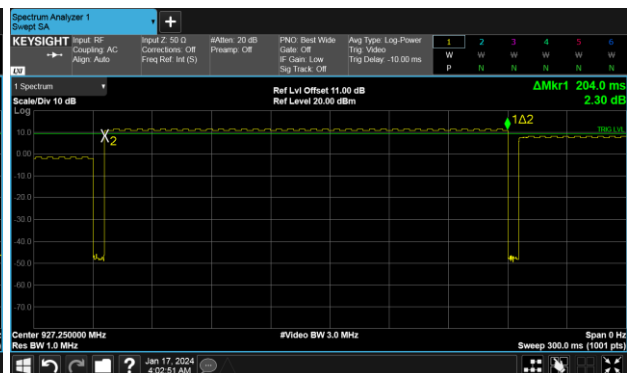



12. Number of Hopping Channels

12.1 Test Limit


Frequency hopping systems in the 902 ~ 928MHz band shall use at least 25 channels.

12.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 7.8.3

- The transmitter output was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
3. Set the MaxHold function, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been record.


12.3 Test Setup Layout



12.4 Test Result and Data

Modulation Type	Hopping Channels	Limit
ASK	50	25

Modulation Type: ASK

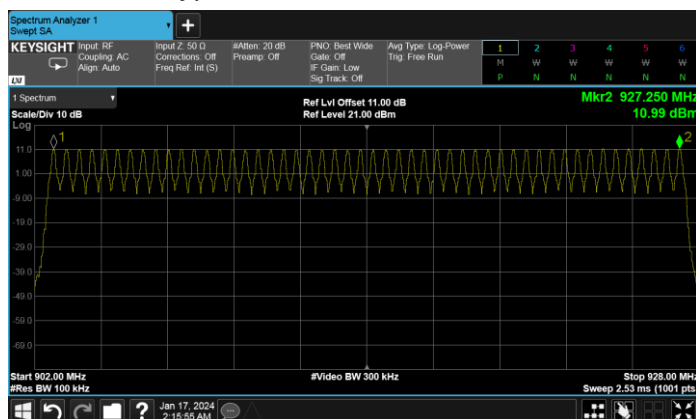



13. Maximum Peak Output Power

13.1 Test Limit


The Maximum Peak Output Power Measurement is 30dBm.

13.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 7.8.5

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

13.3 Test Setup Layout



13.4 Test Result and Data

Setting	Modulation Type	Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Limit (dBm)
29.5	ASK	1	902.75	29.45	881.049	30.000
29.5		25	914.75	29.46	883.080	30.000
29.5		50	927.25	29.48	887.156	30.000

Setting	Modulation Type	Channel	Frequency (MHz)	AV Output Power (dBm)	AV Output Power (mW)	Power Limit (dBm)
29.5	ASK	1	902.75	28.39	690.240	NA
29.5		25	914.75	28.40	691.831	NA
29.5		50	927.25	28.39	690.240	NA

*Average power is for reference only.



14. Radio Frequency Exposure

14.1 Applicable Standards

☐ §1.1307(b)(3)(i)(A)	The available maximum time-averaged power is no more than 1 mW, regardless of separation distance.																																																	
☐ §1.1307(b)(3)(i)(c)	ERP is below a threshold calculated based on the distance , R between the person and the antenna / radiating structure, where $R > \lambda / 2 \pi$. TABLE B.1—THRESHOLDS FOR SINGLE RF SOURCES SUBJECT TO ROUTINE ENVIRONMENTAL EVALUATION <table><tr><th colspan="3">RF Source Frequency</th><th colspan="3">Minimum Distance</th><th>Threshold ERP</th></tr><tr><th>f_L MHz</th><th></th><th>f_H MHz</th><th>$\lambda_L / 2\pi$</th><th></th><th>$\lambda_H / 2\pi$</th><th>W</th></tr><tr><td>0.3</td><td>–</td><td>1.34</td><td>159 m</td><td>–</td><td>35.6 m</td><td>1,920 R²</td></tr><tr><td>1.34</td><td>–</td><td>30</td><td>35.6 m</td><td>–</td><td>1.6 m</td><td>3,450 R²/f^2</td></tr><tr><td>30</td><td>–</td><td>300</td><td>1.6 m</td><td>–</td><td>159 mm</td><td>3.83 R²</td></tr><tr><td>300</td><td>–</td><td>1,500</td><td>159 mm</td><td>–</td><td>31.8 mm</td><td>0.0128 R²f</td></tr><tr><td>1,500</td><td>–</td><td>100,000</td><td>31.8 mm</td><td>–</td><td>0.5 mm</td><td>19.2R²</td></tr></table> Subscripts L and H are low and high; λ is wavelength. From § 1.1307(b)(3)(i)(C), modified by adding Minimum Distance columns.	RF Source Frequency			Minimum Distance			Threshold ERP	f_L MHz		f_H MHz	$\lambda_L / 2\pi$		$\lambda_H / 2\pi$	W	0.3	–	1.34	159 m	–	35.6 m	1,920 R ²	1.34	–	30	35.6 m	–	1.6 m	3,450 R ² / f^2	30	–	300	1.6 m	–	159 mm	3.83 R ²	300	–	1,500	159 mm	–	31.8 mm	0.0128 R ² f	1,500	–	100,000	31.8 mm	–	0.5 mm	19.2R ²
RF Source Frequency			Minimum Distance			Threshold ERP																																												
f_L MHz		f_H MHz	$\lambda_L / 2\pi$		$\lambda_H / 2\pi$	W																																												
0.3	–	1.34	159 m	–	35.6 m	1,920 R ²																																												
1.34	–	30	35.6 m	–	1.6 m	3,450 R ² / f^2																																												
30	–	300	1.6 m	–	159 mm	3.83 R ²																																												
300	–	1,500	159 mm	–	31.8 mm	0.0128 R ² f																																												
1,500	–	100,000	31.8 mm	–	0.5 mm	19.2R ²																																												
☒ § 1.1307(b)(3)(i)(B).	Device operates between 300 MHz and 6 GHz and the maximum time-averaged power or effective radiated power (ERP), whichever is greater, $\leq P_{th}$ $P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$ Where $x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$ and $ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$ d = the separation distance (cm);																																																	



14.2 EUT Specification

Frequency band (Operating)	☐ WLAN: 2412MHz ~ 2462MHz ☐ WLAN: 5150MHz ~ 5250MHz ☐ WLAN: 5250MHz ~ 5350MHz ☐ WLAN: 5470MHz ~ 5725MHz ☐ WLAN: 5725MHz ~ 5850MHz ☐ Bluetooth: 2402MHz ~ 2480MHz ☒ 902MHz~928MHz
Device category	☐ Portable (<20cm separation) ☒ Mobile (>20cm separation)
Antenna diversity	☒ Single antenna ☐ Multiple antennas ☐ Tx diversity ☐ Rx diversity ☐ Tx/Rx diversity
Evaluation applied	☐ Blanket 1 mW Blanket Exemption ☒ MPE-based Exemption ☐ SAR-based Exemption
Remark: The maximum conducted output power is <u>29.48dBm (887.156mW)</u> at <u>927.25MHz</u> (with <u>4dBi antenna gain</u> .)	

14.3 Result

Modulation Type	Frequency (MHz)	Max. Conducted output power(dBm)	Max. Tune up power (dBm)	Antenna Gain(dBi)	Max. Tune up e.r.p. Power (dBm)	Max. Tune up e.r.p power (mW)	Limit (mW)
ASK	902.75	29.45	29.95	4	31.80	1513.56	1841.61
	915	29.46	29.96	4	31.81	1517.05	1866.09
	927.25	29.48	29.98	4	31.83	1524.05	1891.59

-----THE END OF REPORT-----