



## TEST REPORT

**Applicant:** Shenzhen Foscam Intelligent Technology Co., Ltd.

**Address:** Room 902, Building 1B, Shenzhen International Innovation Valley, Xingke 1st Street, Nanshan Dist, Shenzhen, China, 518055

**Product Name:** Wireless IP Camera

**FCC ID:** ZDER8M

**Standard(s):** 47 CFR Part 15, Subpart C(15.249)  
ANSI C63.10-2013

**Report Number:** 2402Y98708E-RF-00C

**Report Date:** 2025/1/14

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

**Reviewed By:** Pedro Yun

**Approved By:** Gavin Xu

Title: Project Engineer

Title: RF Engineer

---

**Bay Area Compliance Laboratories Corp. (Dongguan)**  
No.12, Pulong East 1<sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

[www.baclcorp.com.cn](http://www.baclcorp.com.cn)

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

## CONTENTS

<b>DOCUMENT REVISION HISTORY</b>	4
<b>1. GENERAL INFORMATION</b>	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 ACCESSORY INFORMATION	5
1.3 ANTENNA INFORMATION DETAIL▲:	5
1.4 EQUIPMENT MODIFICATIONS	5
<b>2. SUMMARY OF TEST RESULTS</b>	6
<b>3. DESCRIPTION OF TEST CONFIGURATION</b>	7
3.1 OPERATION FREQUENCY DETAIL	7
3.2 EUT OPERATION CONDITION	7
3.3 EUT EXERCISE SOFTWARE	7
3.4 SUPPORT EQUIPMENT LIST AND DETAILS	7
3.5 SUPPORT CABLE LIST AND DETAILS	7
3.6 BLOCK DIAGRAM OF TEST SETUP	8
3.7 TEST FACILITY	9
3.8 MEASUREMENT UNCERTAINTY	9
<b>4. REQUIREMENTS AND TEST RESULTS</b>	10
4.1 AC LINE CONDUCTED EMISSIONS	10
4.1.1 Applicable Standard	10
4.1.2 EUT Setup	11
4.1.3 EMI Test Receiver Setup	11
4.1.4 Test Procedure	12
4.1.5 Corrected Amplitude & Margin Calculation	12
4.1.6 Test Result	13
4.2 RADIATED EMISSIONS	16
4.2.1 Applicable Standard	16
4.2.2 EUT Setup	16
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup	19
4.2.4 Test Procedure	20
4.2.5 Corrected Amplitude & Margin Calculation	21
4.2.6 Test Result	22
4.3 20 DB EMISSION BANDWIDTH	38
4.3.1 Applicable Standard	38
4.3.2 EUT Setup	38
4.3.3 Test Procedure	38
4.3.4 Test Result	39
4.4 ANTENNA REQUIREMENT	41
4.4.1 Applicable Standard	41
4.4.2 Judgment	41

<b>EXHIBIT A - EUT PHOTOGRAPHS.....</b>	<b>42</b>
<b>EXHIBIT B - TEST SETUP PHOTOGRAPHS .....</b>	<b>43</b>

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2402Y98708E-RF-00C	Original Report	2025/1/14

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>	Wireless IP Camera
<b>EUT Model:</b>	R8M
<b>Multiple Model:</b>	R8S, R8C, R8P, L8M
<b>Operation Frequency:</b>	24094-24223MHz
<b>Modulation Type:</b>	CW
<b>Rated Input Voltage:</b>	5Vdc from adapter
<b>Serial Number:</b>	For AC line conducted emissions and Radiated Spurious Emissions Below 1G Tests: 2SMR-1 For Radiated Spurious Emissions Above 1G Test: 2SMR-7
<b>EUT Received Date:</b>	2024/10/12
<b>EUT Received Status:</b>	Good

Note: The multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.

### 1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
Adapter	SHENZHEN SHI YING YUAN ELECTRONICS CO.,LTD	SAW12-050-2000UB	Input: 100-240Vac,50/60Hz0.3A Output: 5.0Vdc 2.0A

### 1.3 Antenna Information Detail ▲ :

Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Shenzhen Foscam Intelligent Technology Co., Ltd.	PCB	50	24.05~24.25GHz	2.37dBi
<b>The design of compliance with §15.203:</b>				
<input checked="" type="checkbox"/> Unit uses a permanently attached antenna.				
<input type="checkbox"/> Unit uses a unique coupling to the intentional radiator.				
<input type="checkbox"/> Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.				

### 1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

## 2. SUMMARY OF TEST RESULTS

Standard(s)/Rule(s)	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conduction Emissions	Compliant
15.205, §15.209, §15.249	Radiated Spurious Emissions	Compliant
§15.215 (c)	20 dB Bandwidth	Compliant

### 3. DESCRIPTION OF TEST CONFIGURATION

#### 3.1 Operation Frequency Detail

The device built in two identical Radar modules, which operates in the frequency range: 24094-24223MHz:

The below frequencies were test:

Low Channel	24094MHz
Middle Channel	24139MHz
High Channel	24223MHz

The two Radar modules transmits simultaneously.

#### 3.2 EUT Operation Condition

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

#### 3.3 EUT Exercise Software

No software was used in test.

#### 3.4 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
TENDA	Router	F6	E6895010048000097
SanDisk	SD Card	UHS-I-16G	9292DVDSV0XZ

#### 3.5 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	NO	NO	1.7	EUT	Adapter
RJ45 Cable	NO	NO	5	EUT	Router

### 3.6 Block Diagram of Test Setup

AC Line Conduction Emissions:

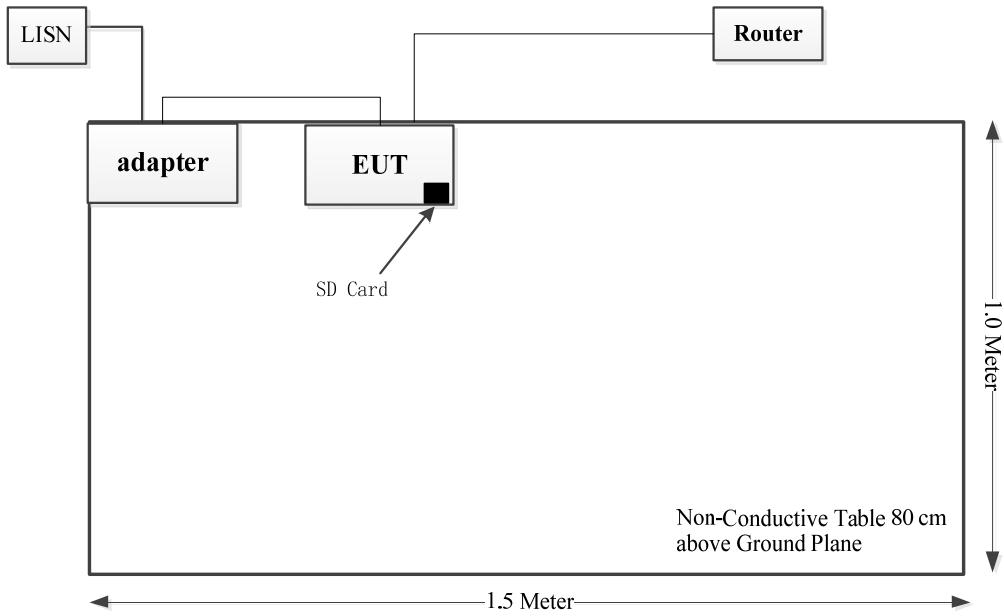

Radiated Spurious Emissions:

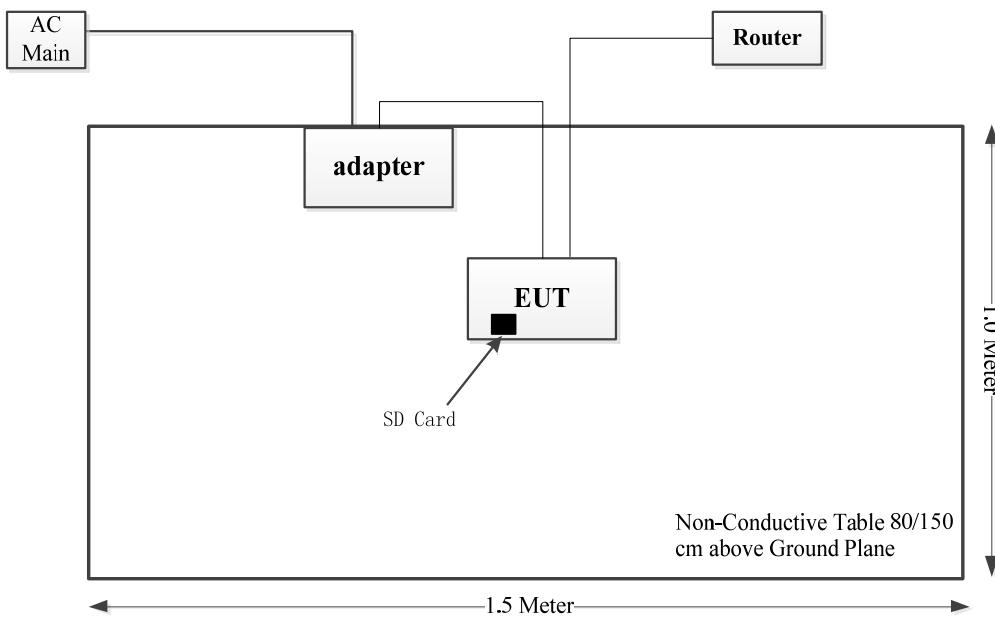

### 3.7 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

### 3.8 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz: 5.47 dB, 26.5GHz~40GHz: 5.63 dB 40~60G: 4.83dB, 60G~90G: 4.94dB, 90G-140G: 5.46dB, 140G-220G: 6.00dB, 220G-325G: 7.35dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

## 4. REQUIREMENTS AND TEST RESULTS

### 4.1 AC Line Conducted Emissions

#### 4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

#### 4.1.2 EUT Setup

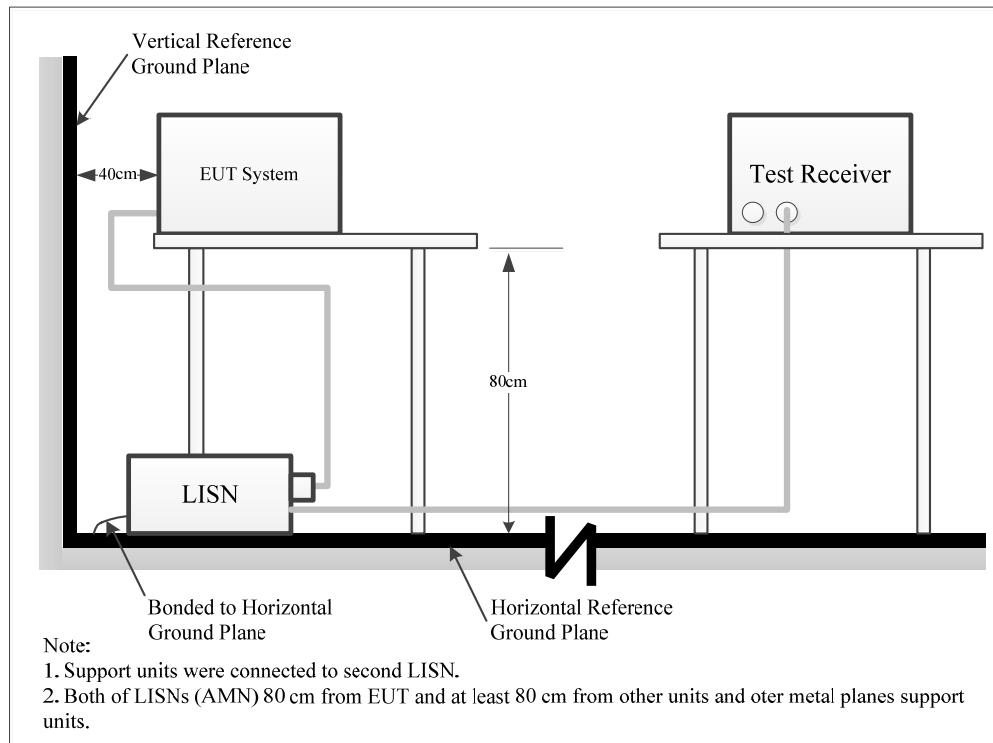

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

#### 4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

#### 4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground[protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

#### 4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor=attenuation caused by cable loss + voltage division factor of AMN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

#### 4.1.6 Test Result

Serial Number:	2SMR-1	Test Date:	2024/10/15
Test Site:	CE	Test Mode:	Transmitting
Tester:	Yolo Fan	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	26.5	Relative Humidity: (%)	58	ATM Pressure: (kPa)	101.3
-------------------	------	------------------------	----	---------------------	-------

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2024/9/5	2025/9/4
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2024/9/5	2025/9/4
R&S	EMI Test Receiver	ESCI	100035	2024/8/18	2025/8/17
Audix	Test Software	E3	191218 V9	N/A	N/A

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


#### Test data:

**All Radar Modules transmit simultaneously:**

High channel was tested:

Project No.: 2402Y98708E-RF  
 Port: Line  
 Test Mode: Transmitting  
 Note:


Serial No.: 2SMR-1  
 Tester: Yolo Fan

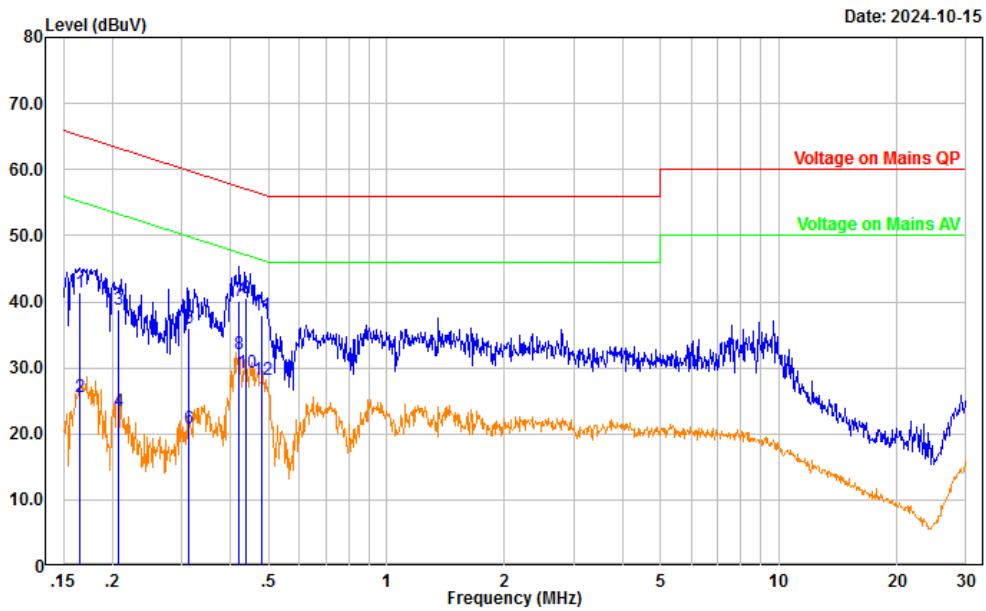

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.165	30.53	10.78	41.31	65.22	23.91	QP
2	0.165	14.76	10.78	25.54	55.22	29.68	Average
3	0.207	27.86	10.85	38.71	63.31	24.60	QP
4	0.207	12.65	10.85	23.50	53.31	29.81	Average
5	0.312	25.08	10.82	35.90	59.91	24.01	QP
6	0.312	10.08	10.82	20.90	49.91	29.01	Average
7	0.421	29.38	10.84	40.22	57.43	17.21	QP
8	0.421	21.23	10.84	32.07	47.43	15.36	Average
9	0.439	29.68	10.84	40.52	57.07	16.55	QP
10	0.439	18.33	10.84	29.17	47.07	17.90	Average
11	0.481	27.05	10.84	37.89	56.33	18.44	QP
12	0.481	17.33	10.84	28.17	46.33	18.16	Average

Project No.: 2402Y98708E-RF  
Port: neutral  
Test Mode: Transmitting  
Note:

Serial No.: 2SMR-1  
Tester: Yolo Fan

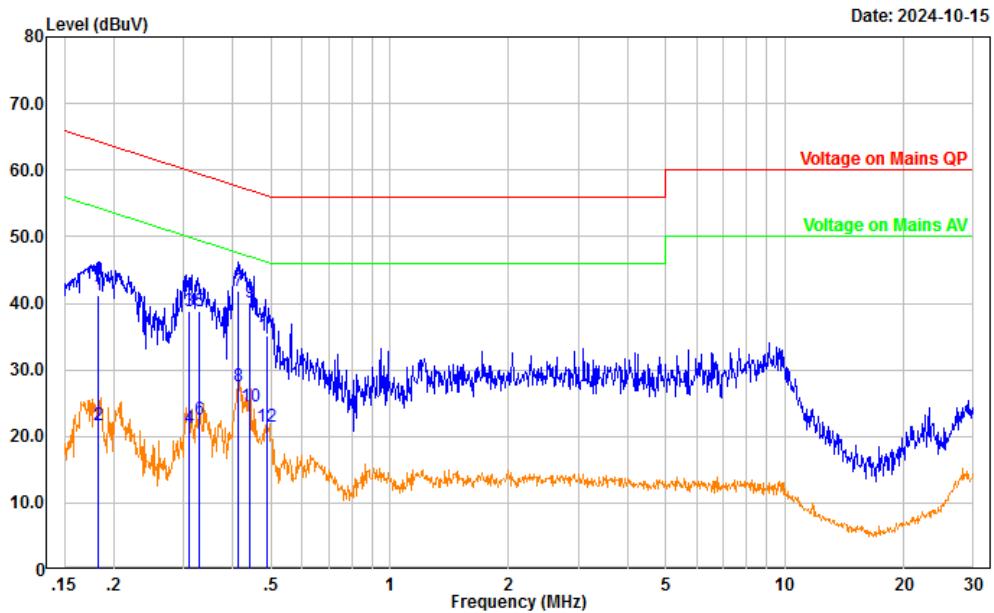

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.182	30.31	10.85	41.16	64.39	23.23	QP
2	0.182	10.89	10.85	21.74	54.39	32.65	Average
3	0.312	28.12	10.78	38.90	59.93	21.03	QP
4	0.312	10.55	10.78	21.33	49.93	28.60	Average
5	0.328	27.99	10.79	38.78	59.49	20.71	QP
6	0.328	11.69	10.79	22.48	49.49	27.01	Average
7	0.413	31.05	10.77	41.82	57.59	15.77	QP
8	0.413	16.78	10.77	27.55	47.59	20.04	Average
9	0.441	29.29	10.76	40.05	57.04	16.99	QP
10	0.441	13.80	10.76	24.56	47.04	22.48	Average
11	0.487	24.49	10.74	35.23	56.22	20.99	QP
12	0.487	10.80	10.74	21.54	46.22	24.68	Average

## 4.2 Radiated Emissions

### 4.2.1 Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500



As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.



(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


### 4.2.2 EUT Setup

9kHz~30MHz:

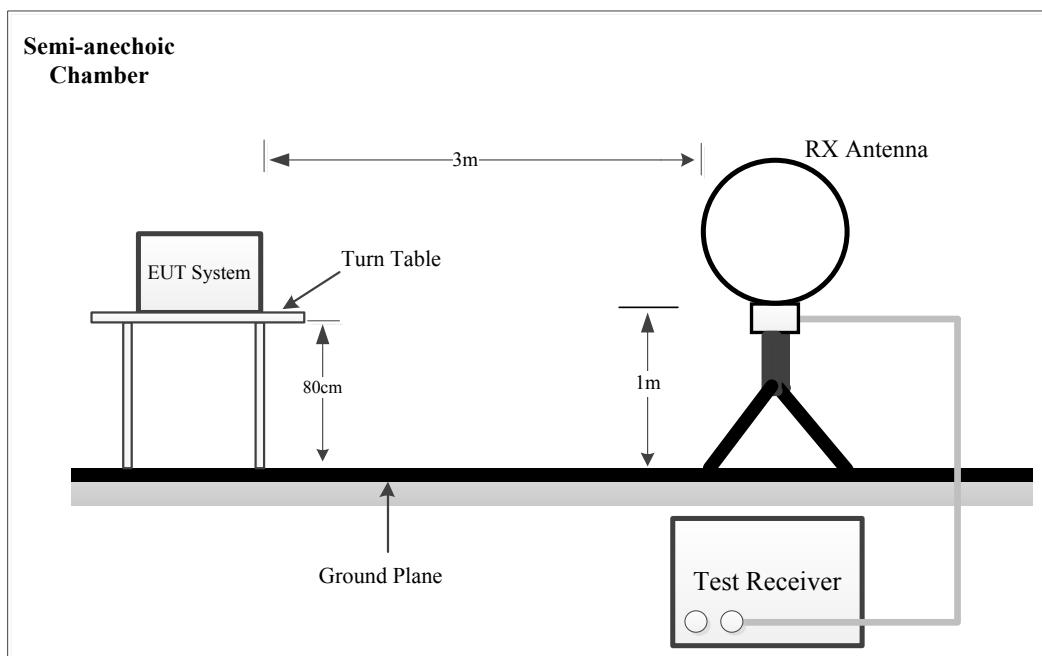

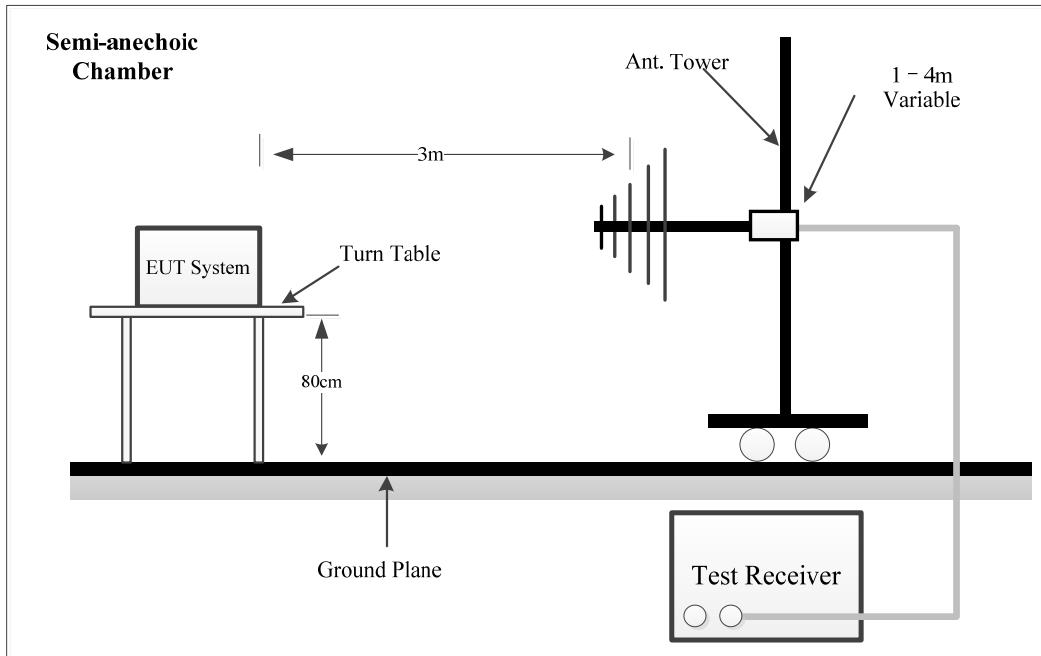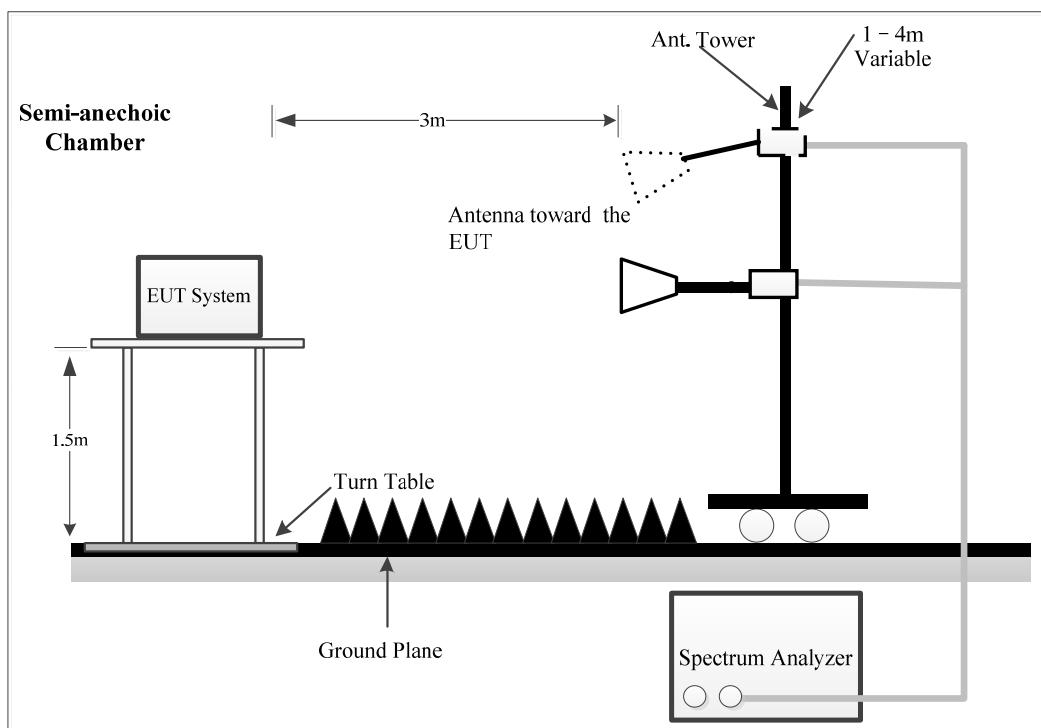**Below 1GHz:****1-26.5GHz:**

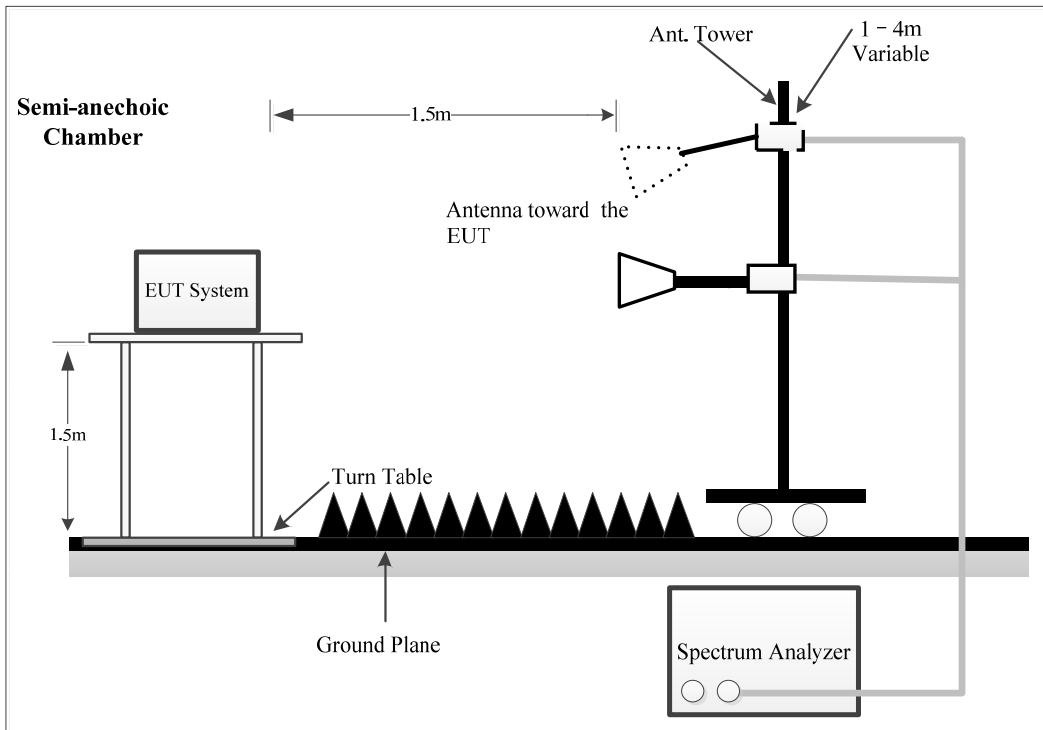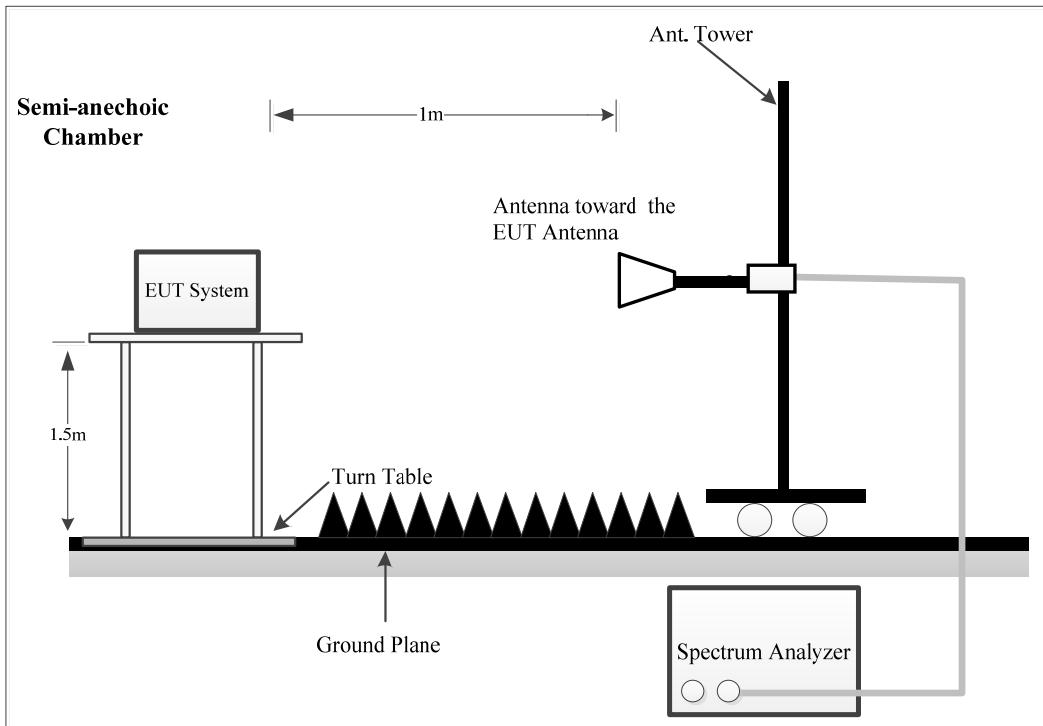**26.5-40GHz:****40~90 GHz:**

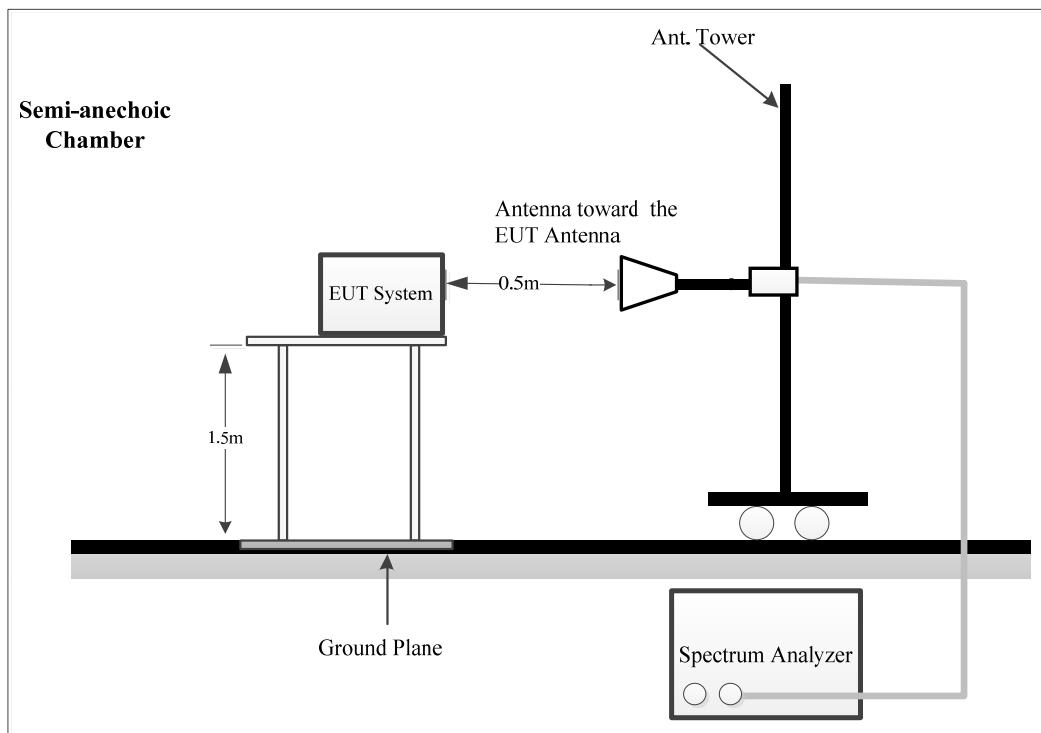**90~100 GHz:**

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

For above 40GHz: The antenna is scanned around the entire perimeter surface of the EUT, in both horizontal and vertical polarizations, at the distance of 1.0 m from 40 GHz to 90 GHz, and 0.5 m from 90 GHz to 100 GHz.

The radiated emission test was performed in the 3 meters chamber, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205, FCC 15.249 limits.

#### 4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 100 GHz.

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9 kHz-150 kHz	QP/AV	200 Hz	1 kHz	200 Hz	QP/AV
150 kHz-30 MHz	QP/AV	9 kHz	30 kHz	9 kHz	QP/AV
30 MHz-1000 MHz	Peak	100 kHz	300 kHz	/	PK
	QP	/	/	120 kHz	QP

Above 1GHz:

Pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
Above 1 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	5kHz	PK

Final measurement for emission identified during the pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
Above 1 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	10 Hz	PK

#### 4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was required in Quasi-peak measurement for frequency range of 9 kHz-1 GHz except 9-90 kHz, 110-490 kHz, employing an average measurement, peak and Average measurement for frequencies above 1 GHz.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

For Radiated 26.5-40GHz test:

Which was performed at 1.5 m distance, according to C63.10, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor = $20 \log \left( \frac{\text{specific distance [3m]}}{\text{test distance [1.5m]}} \right) \text{ dB} = 6.0 \text{ dB}$

For 40-90GHz:

Test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log \left( \frac{\text{specific distance [3m]}}{\text{test distance [1m]}} \right) \text{ dB} = 9.54 \text{ dB}$ .

For 90-100GHz:

Test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 0.5m.

Distance extrapolation factor = $20 \log \left( \frac{\text{specific distance [3m]}}{\text{test distance [0.5m]}} \right) \text{ dB} = 15.56 \text{ dB}$ .

External harmonic mixers are utilized. The antenna is scanned around the entire perimeter surface of the EUT, in both horizontal and vertical polarizations. The Mixers and it's RF cables is compose a system for calibration, the conversion factor was added into the test Spectrum Analyzer in testing.

The far-field boundary is given in ANSI C63.10-2013:

$$R_m = 2D^2 / \lambda$$

Where:

D is the largest dimension of the antenna aperture in m and

$\lambda$  is the free-space wavelength in m at the frequency of measurement.

The minimum test distance for the frequency range 40GHz-100GHz determine as below:

Model	Frequency Range (GHz)	Largest Dimension of the Horn Antenna (mm)	Minimum Test Distance $R_m$ (m)
M19RH	40-60	46.3	0.86
M12RH	60-90	30.02	0.55
M08RH	90-140	19.7	0.39

Note: the test distances used were 1.0 m from 40 GHz to 90 GHz, and 0.5 m from 90 GHz to 100GHz, it can be seen that the EUT was always in the Far-field of the Receive Antenna during all Radiated Emissions Tests.

#### 4.2.5 Corrected Amplitude & Margin Calculation

The basic equation except 26.5-100GHz test is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For Radiated 26.5-100GHz test:

Factor = Antenna Factor + Cable Loss- Distance extrapolation Factor

Result = Reading + Factor

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

#### 4.2.6 Test Result

Serial Number:	2SMR-1, 2SMR-7	Test Date:	Below 1GHz: 2024/10/28 Above 1GHz: 2024/11/19~2024/12/4
Test Site:	Chamber A, Chamber B	Test Mode:	Transmitting
Tester:	Alan Xie, Colin Yang	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	22.9~26.4	Relative Humidity: (%)	37~56	ATM Pressure: (kPa)	101.2~102
-------------------	-----------	------------------------	-------	---------------------	-----------

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
9kHz~1000MHz					
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Sunol Sciences	Hybrid Antenna	JB3	A060611-2	2024/4/16	2027/4/15
Narda	Coaxial Attenuator	757C-6dB	34010	2024/4/16	2027/4/15
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	372193	2024/8/16	2025/8/15
R&S	EMI Test Receiver	ESR3	102453	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A
Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2024/11/17	2025/11/16
AH	Preamplifier	PAM-0118P	469	2024/4/15	2025/4/14
Audix	Test Software	E3	191218 V9	N/A	N/A
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2023/2/22	2026/2/21
OML	Waveguide Mixer	WR19/M19HWD	U60313-1	2023/2/16	2026/2/15
OML	Horn Antenna	M19RH	11648-01	2023/2/27	2026/2/26
OML	Waveguide Mixer	WR12/M12HWD	E60120-1	2023/2/16	2026/2/15
OML	Horn Antenna	M12RH	E60120-2	2023/2/27	2026/2/26
OML	Waveguide Mixer	WR08/M08HWD	F60313-1	2023/2/16	2026/2/15
OML	Horn Antenna	M08RH	F60313-2	2023/2/27	2026/2/26
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2023/12/11	2024/12/10
AH	Preamplifier	PAM-1840VH	191	2024/9/5	2025/9/4
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2024/8/27	2025/8/26

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


**Test Data:**

Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

**1) 9kHz~30MHz(High channel was tested):****All Radar Modules transmit simultaneously:**


Three antenna orientations (parallel, perpendicular, and ground-parallel) was measured, the worst orientations was below:

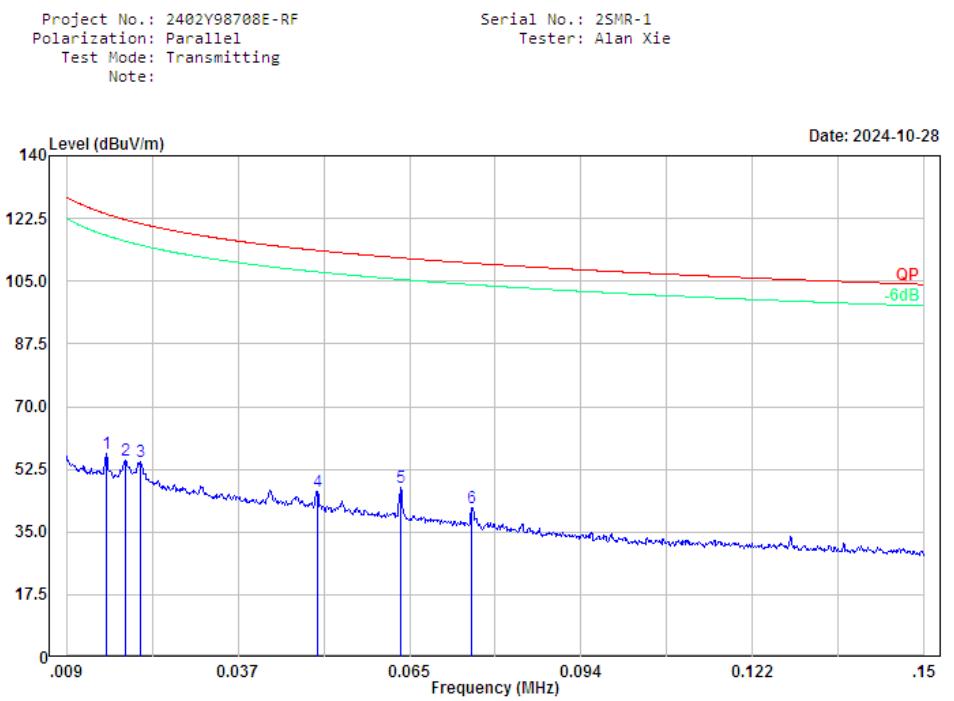

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	0.02	6.77	50.12	56.89	123.73	66.84	Peak
2	0.02	5.56	49.32	54.88	122.15	67.27	Peak
3	0.02	5.89	48.75	54.64	121.11	66.47	Peak
4	0.05	2.99	43.39	46.38	113.57	67.19	Peak
5	0.06	6.43	41.15	47.58	111.48	63.90	Peak
6	0.08	2.69	39.14	41.83	110.02	68.19	Peak


Project No.: 2402Y98708E-RF  
Polarization: Parallel  
Test Mode: Transmitting  
Note:

Serial No.: 2SMR-1  
Tester: Alan Xie

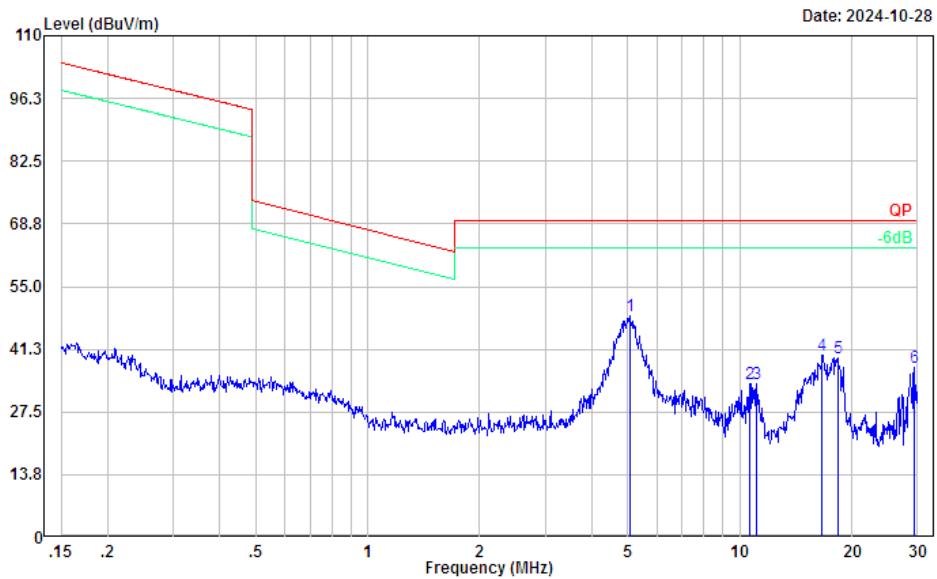


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	5.06	42.83	5.66	48.49	69.54	21.05	Peak
2	10.62	29.73	3.96	33.69	69.54	35.85	Peak
3	11.08	30.00	3.82	33.82	69.54	35.72	Peak
4	16.66	36.29	3.70	39.99	69.54	29.55	Peak
5	18.33	35.67	3.66	39.33	69.54	30.21	Peak
6	29.37	33.82	3.39	37.21	69.54	32.33	Peak

**2) 30MHz-1GHz(High channel was tested):  
All Radar Modules transmit simultaneously:**

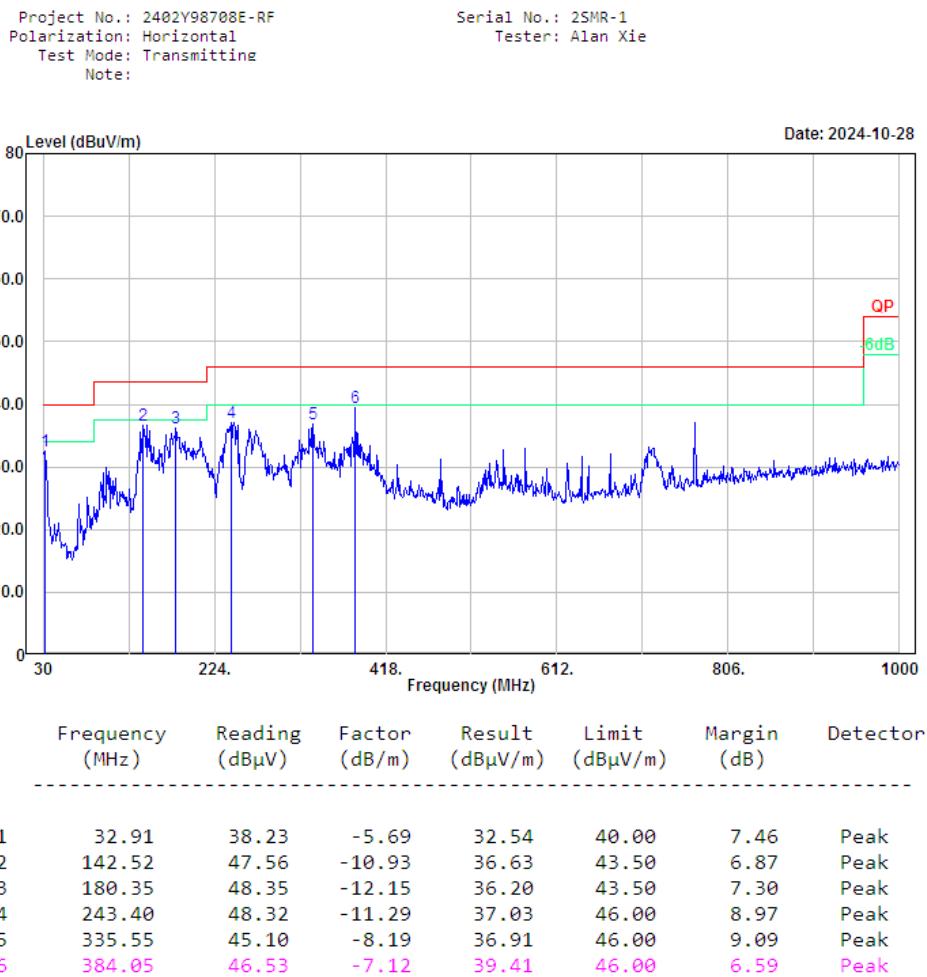

Project No.: 2402Y98708E-RF  
Polarization: Vertical  
Test Mode: Transmitting  
Note:


Serial No.: 2SMR-1  
Tester: Alan Xie

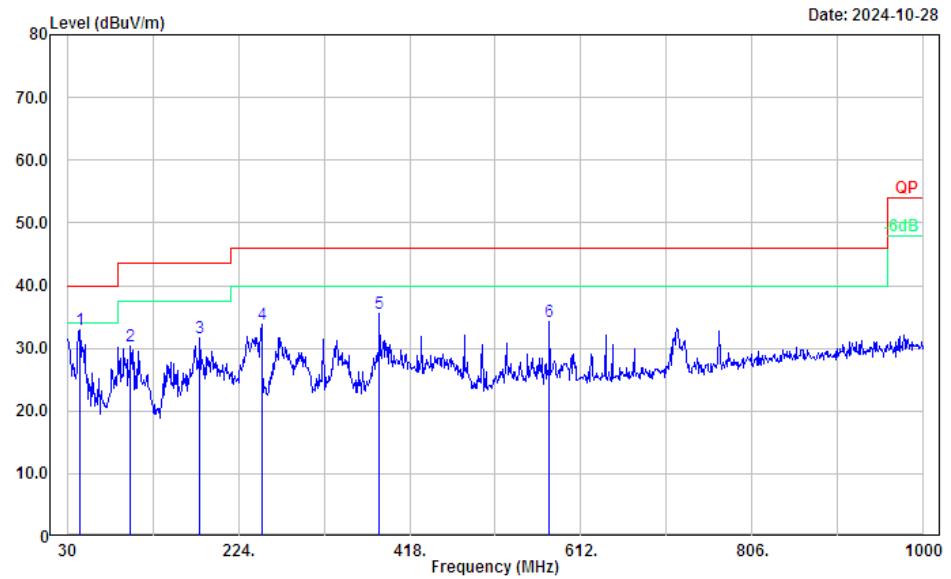



No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
<hr/>							
1	44.55	45.99	-13.09	32.90	40.00	7.10	Peak
2	101.78	43.49	-13.19	30.30	43.50	13.20	Peak
3	180.35	43.88	-12.15	31.73	43.50	11.77	Peak
4	250.19	45.08	-11.27	33.81	46.00	12.19	Peak
5	384.05	42.59	-7.12	35.47	46.00	10.53	Peak
6	576.11	37.23	-3.01	34.22	46.00	11.78	Peak


## 3) 1-40GHz:


All Radar Modules transmit simultaneously:

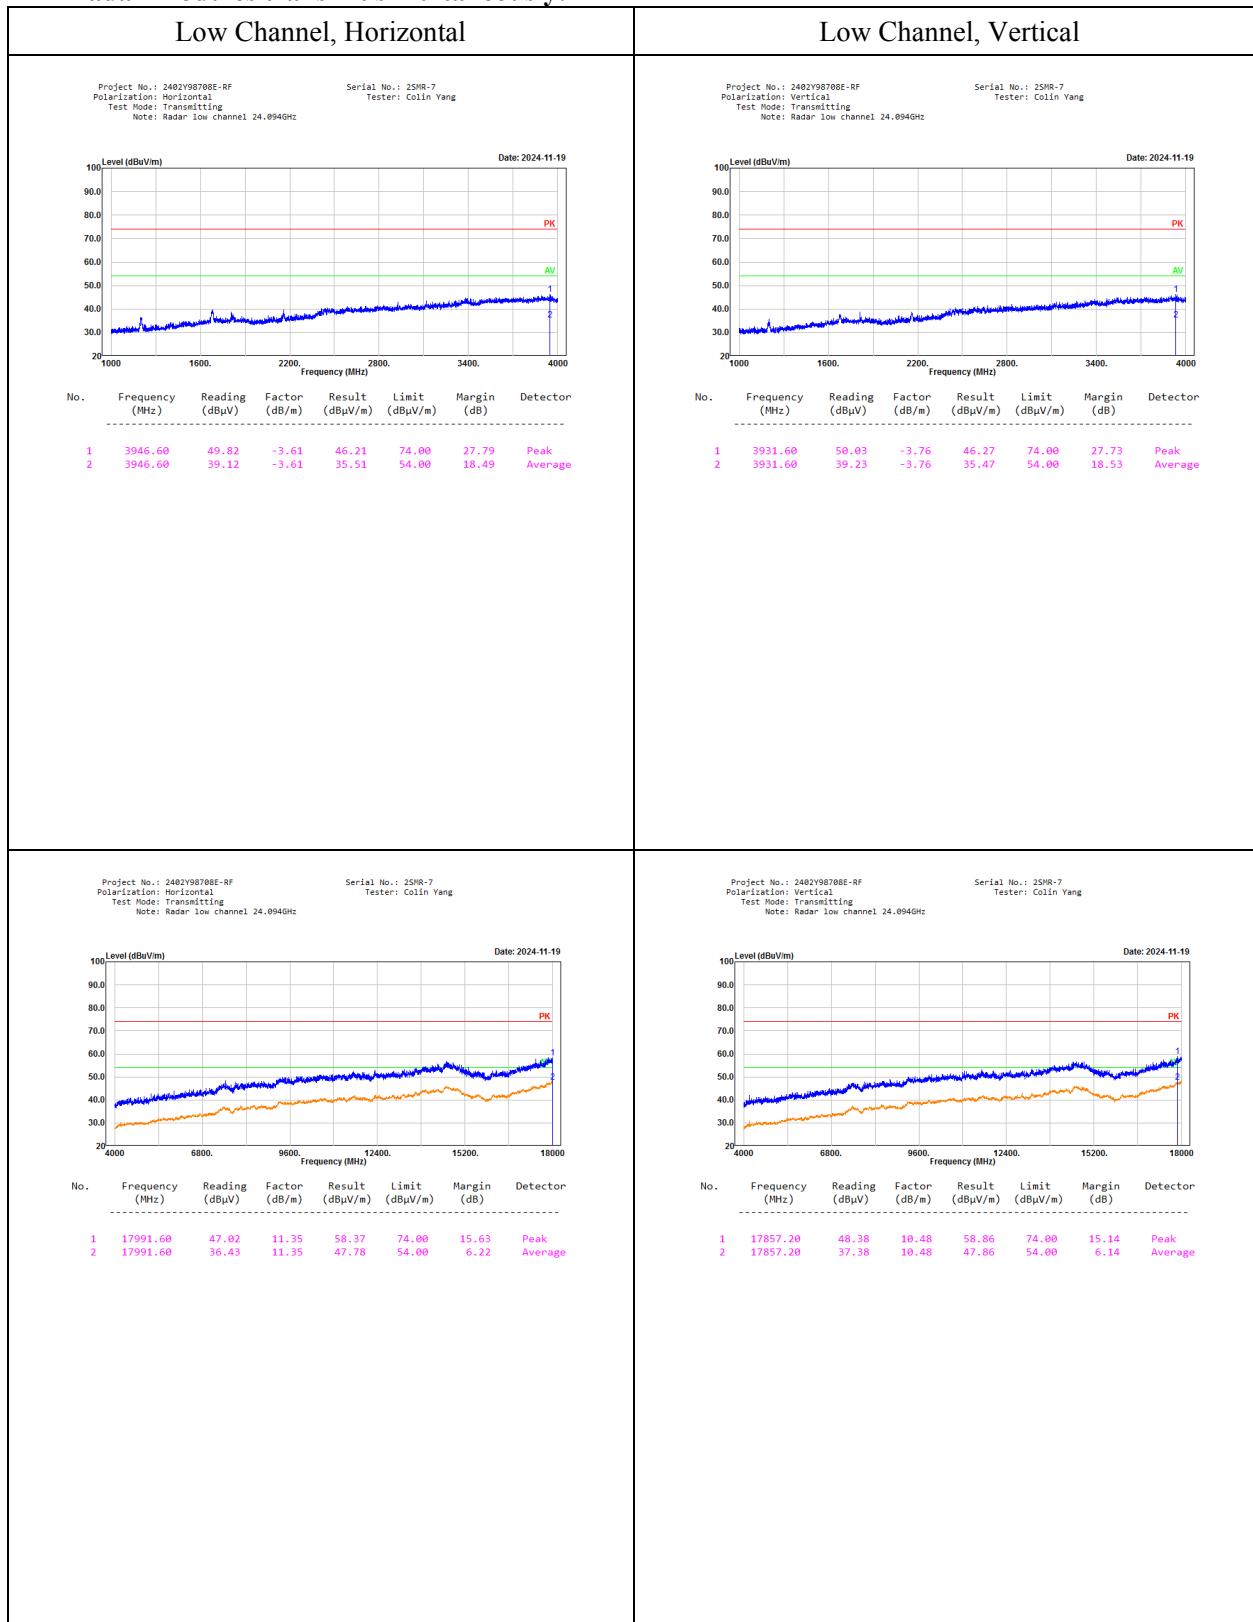





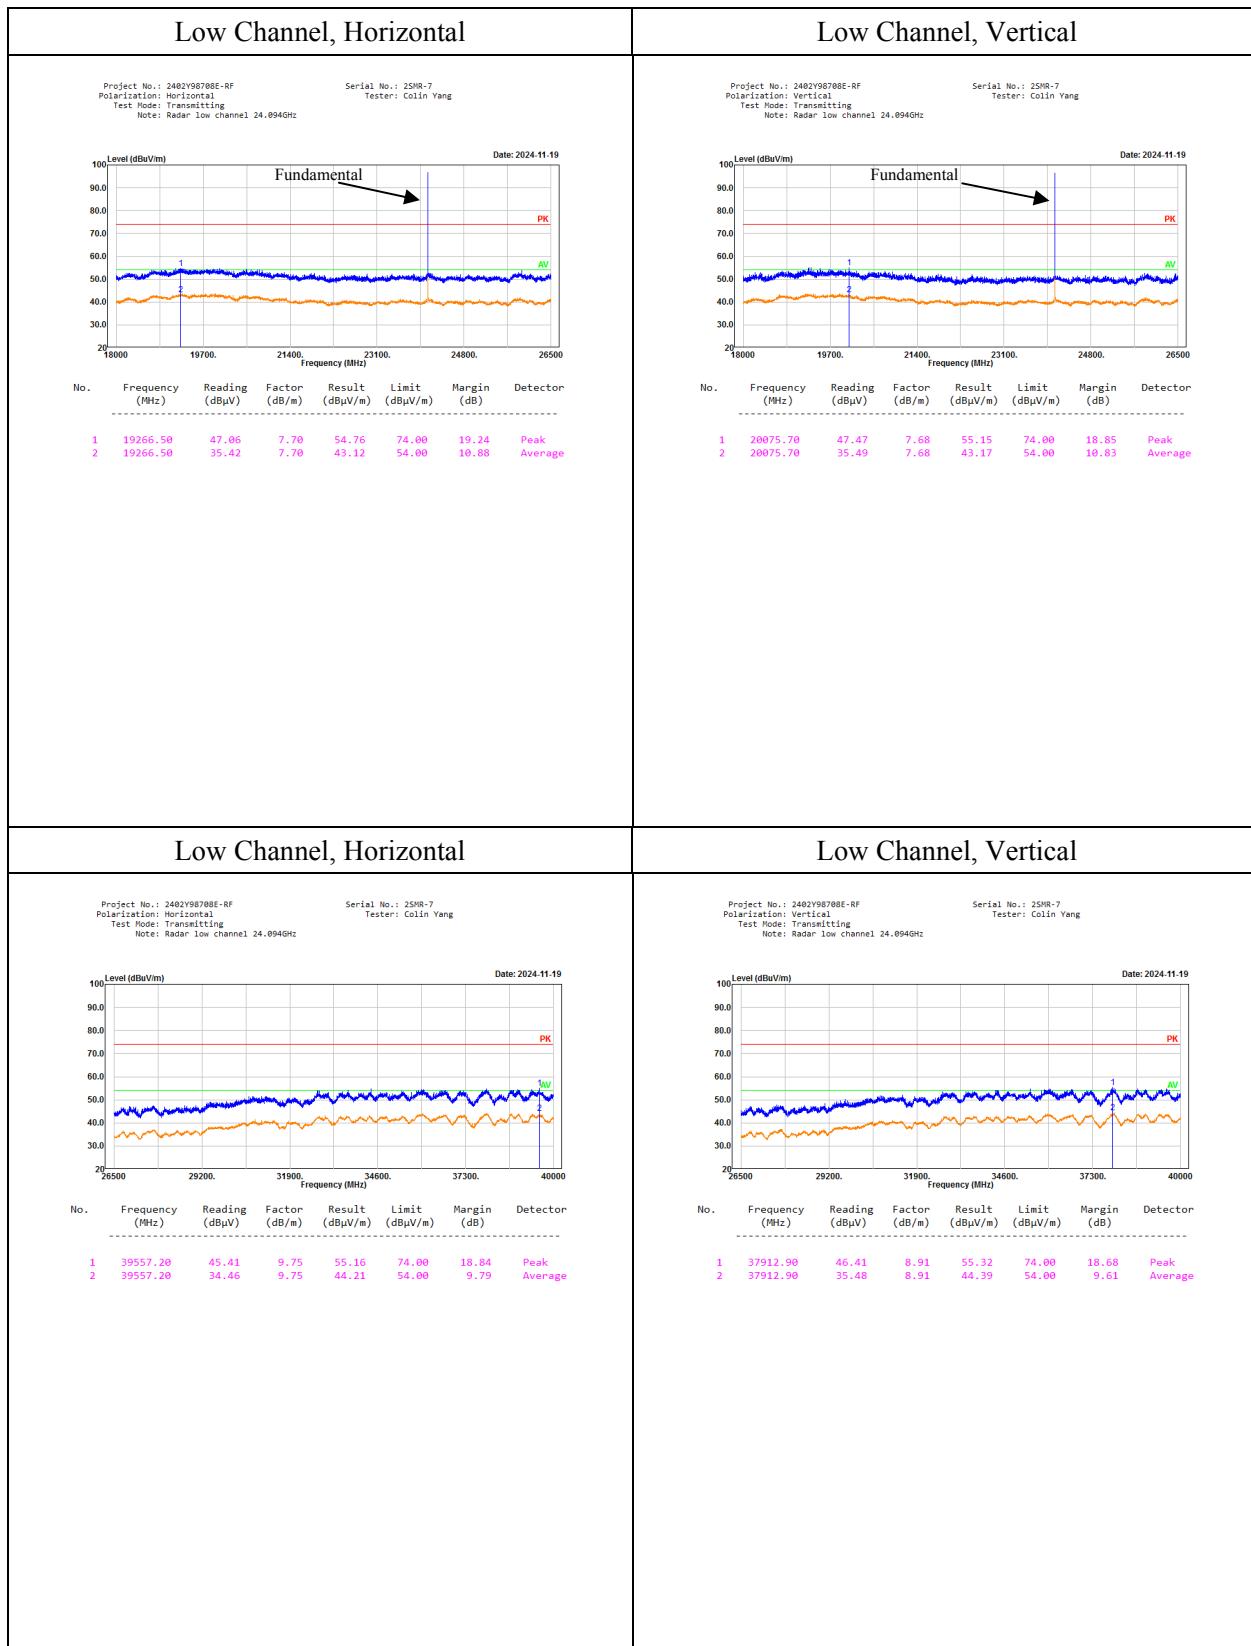


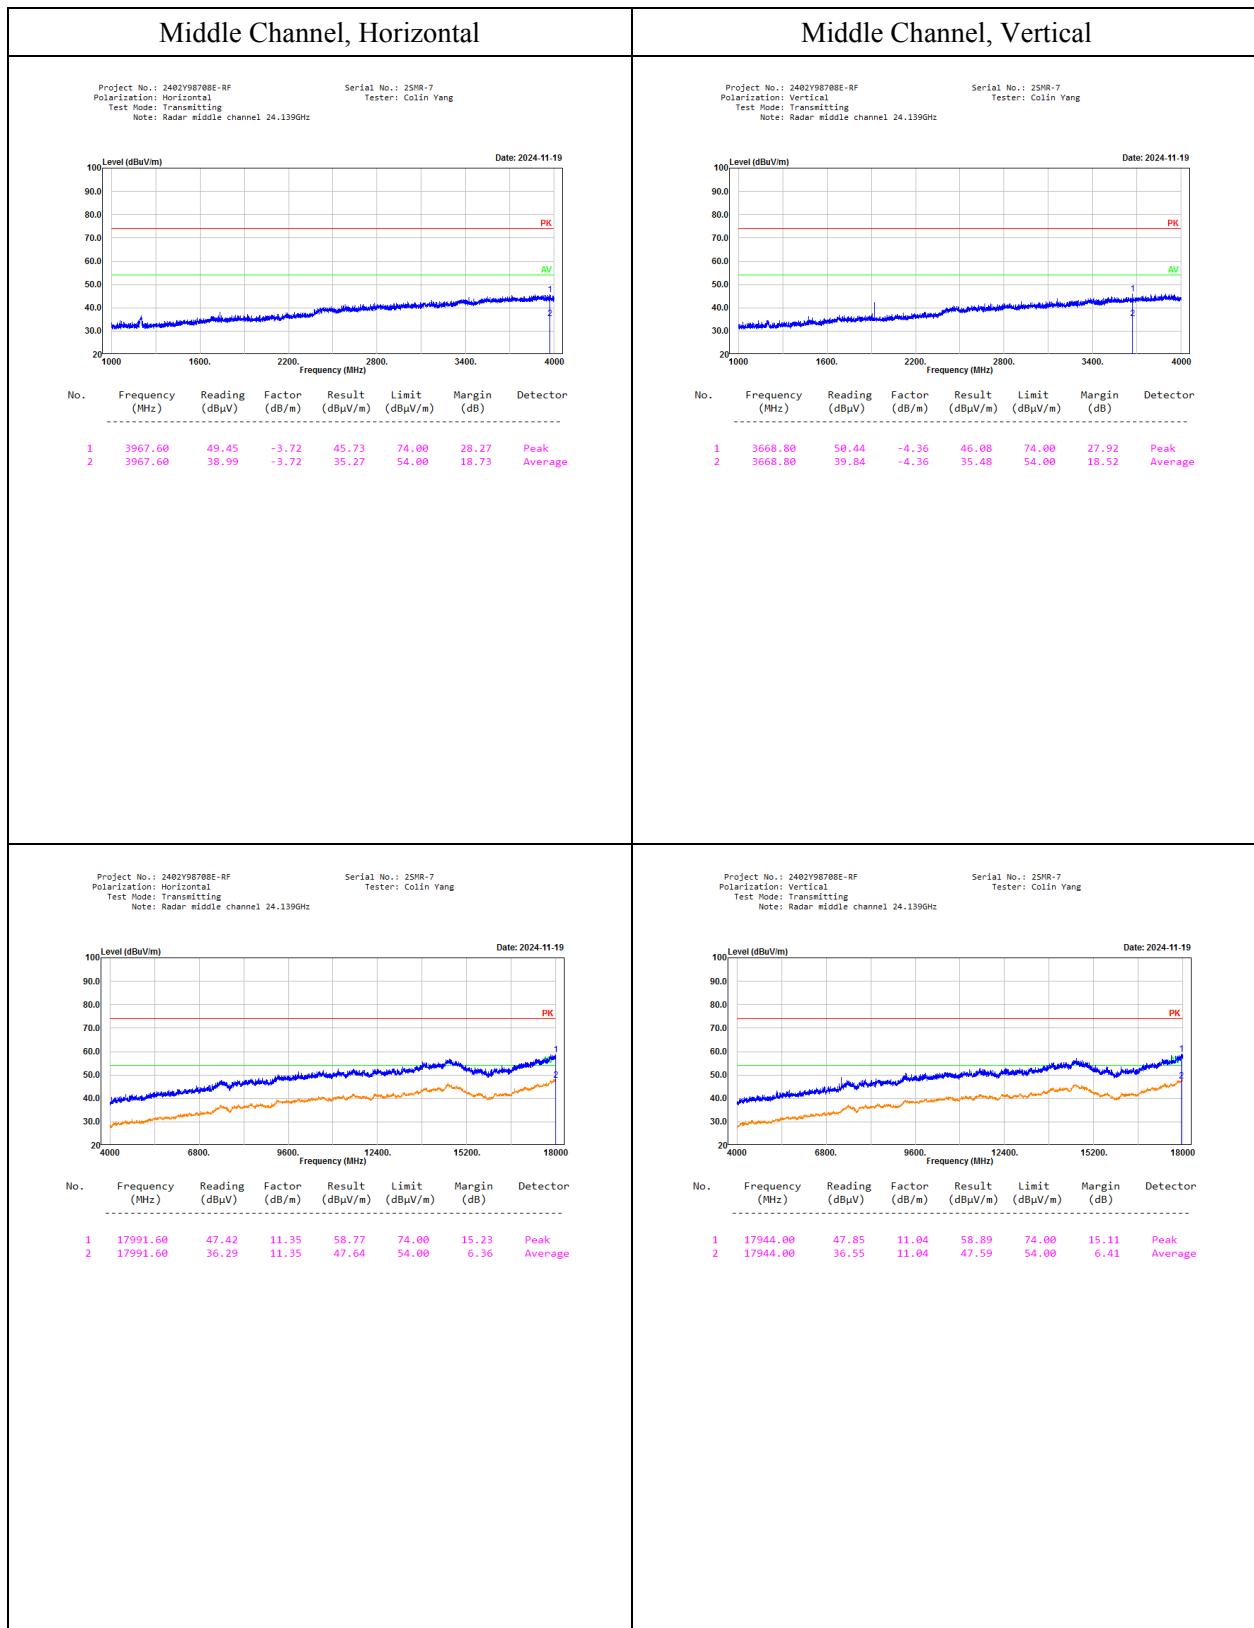


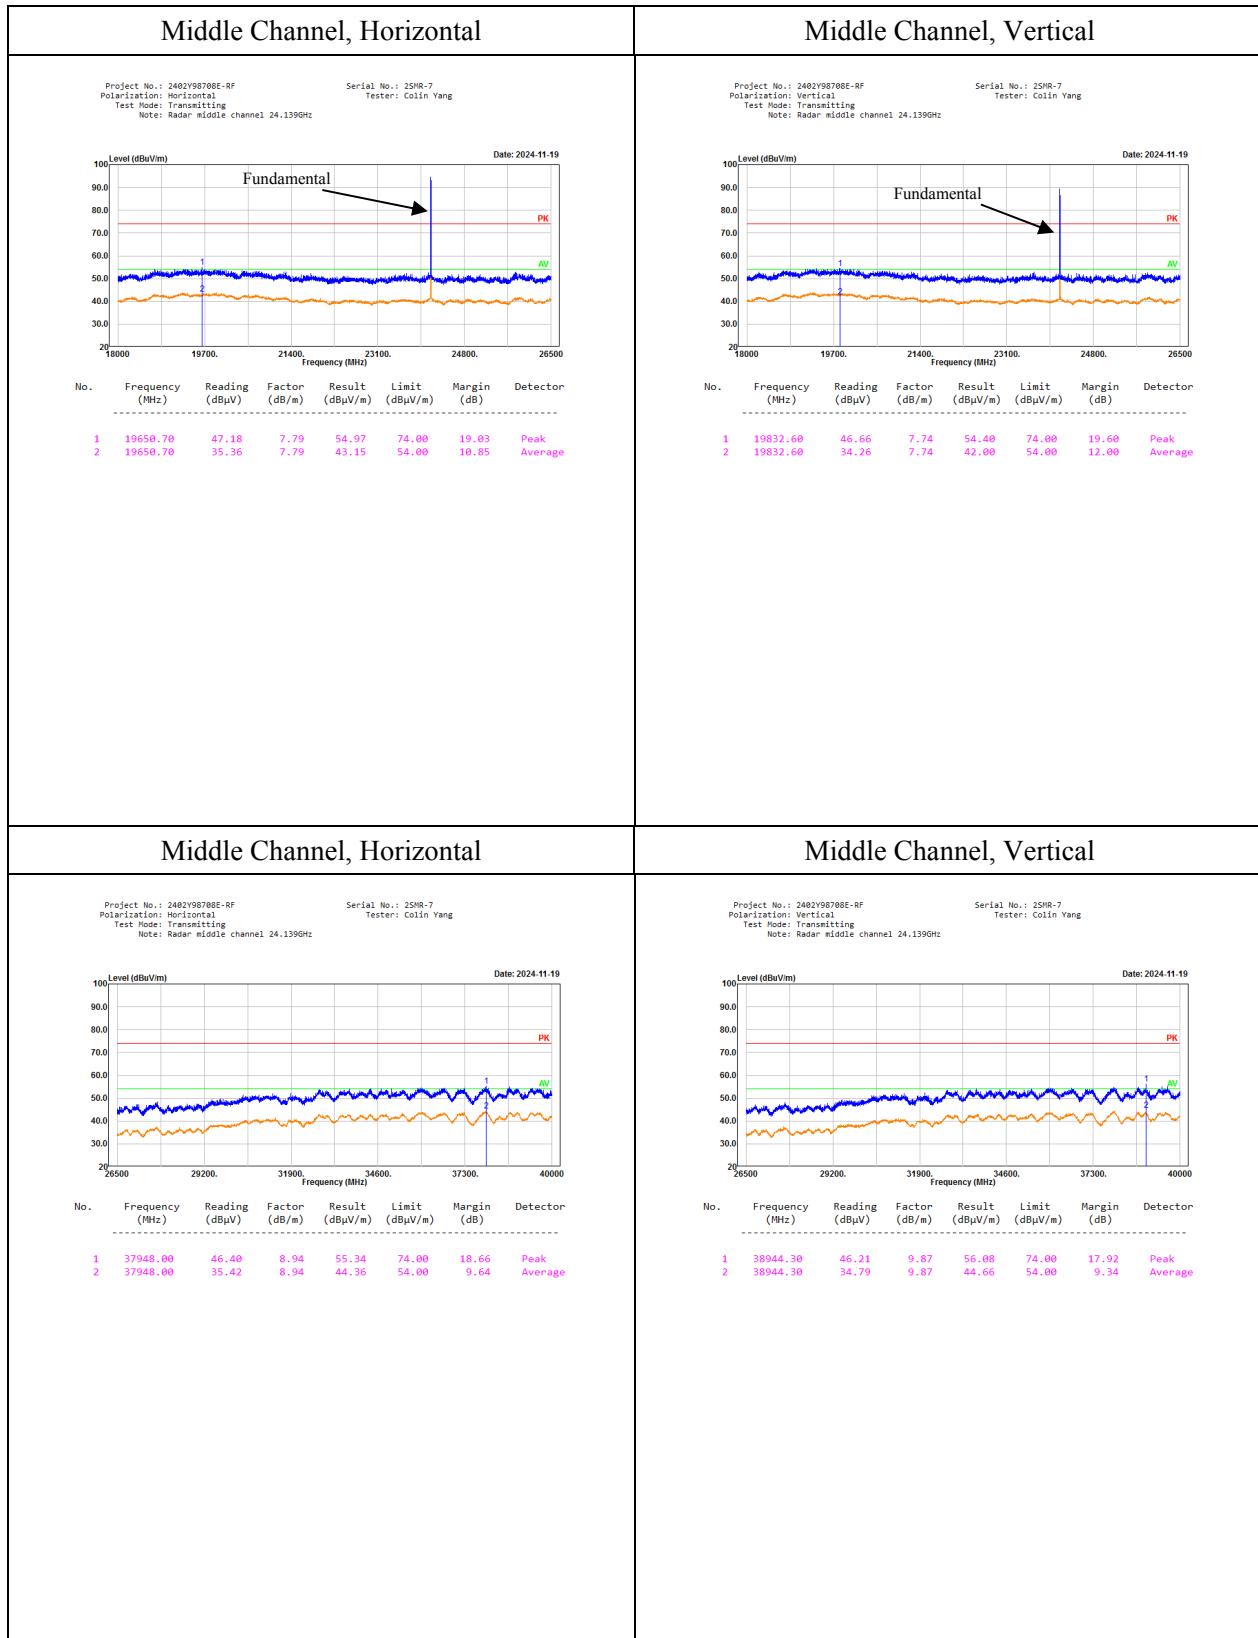

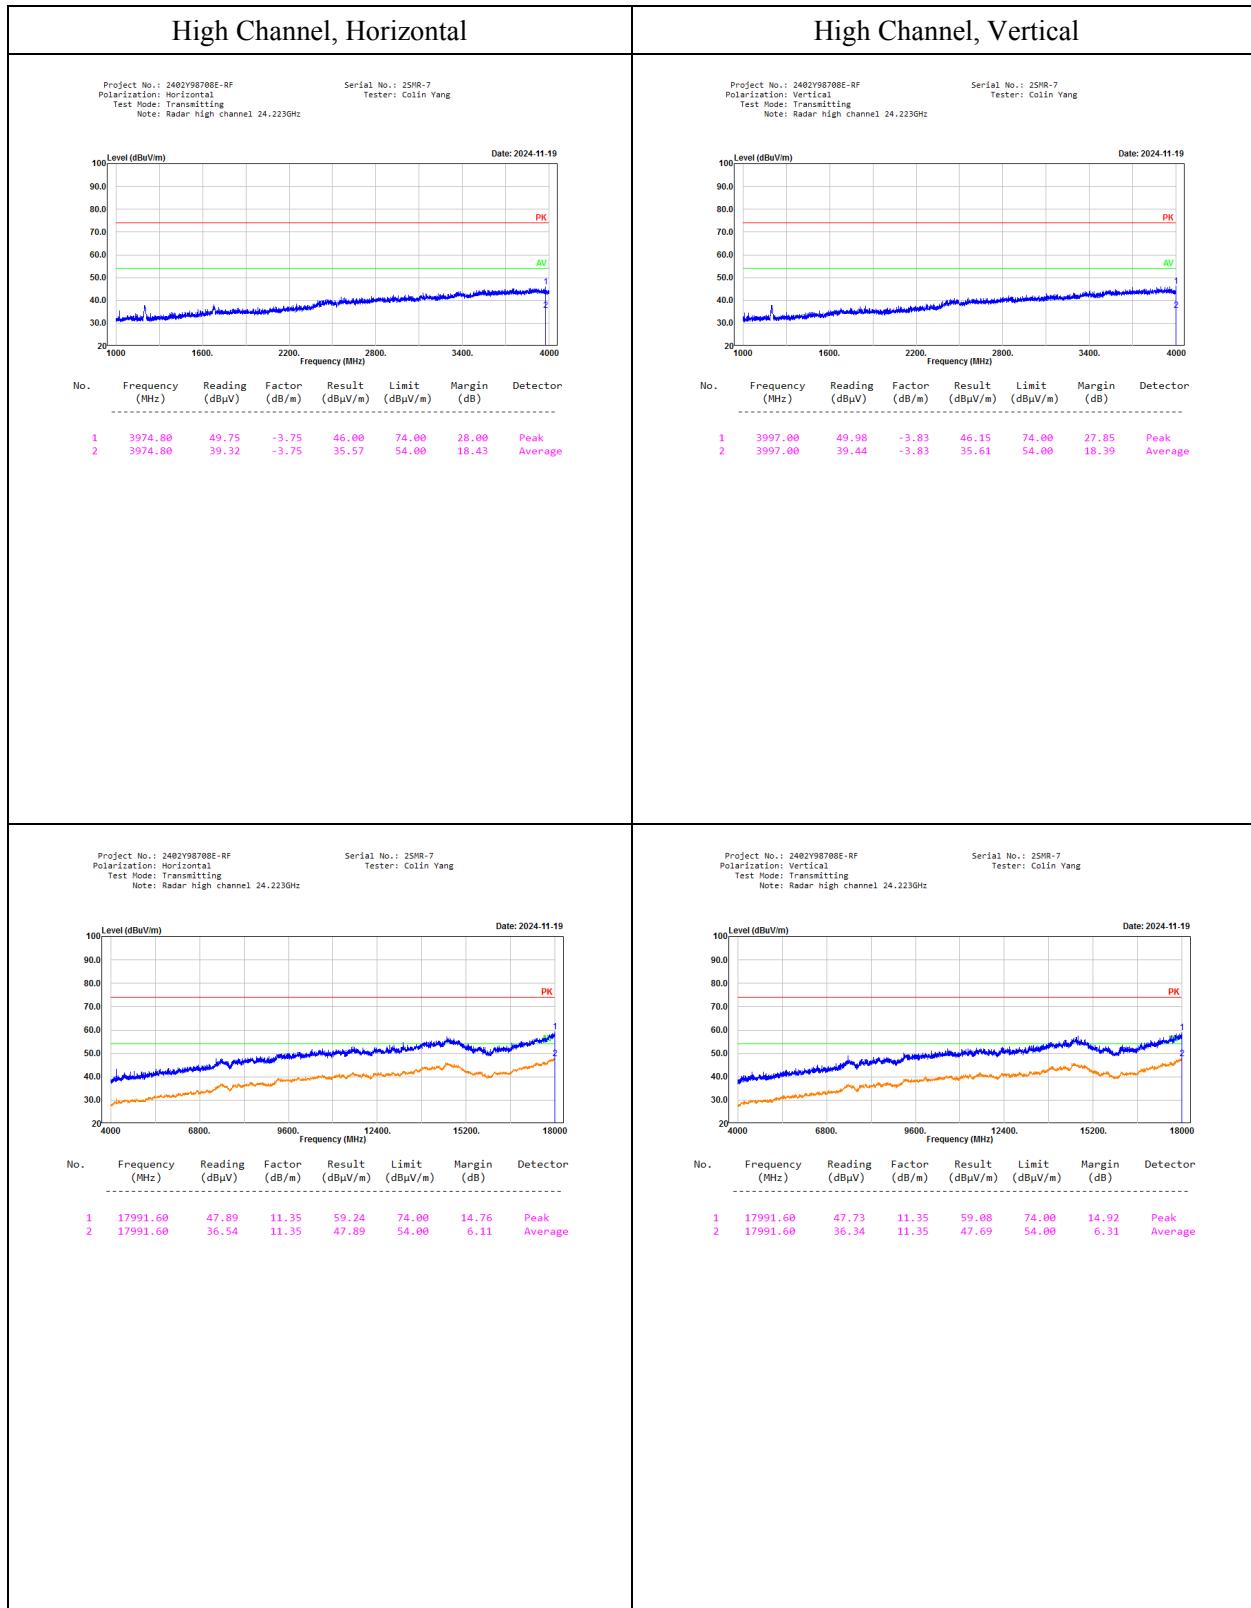

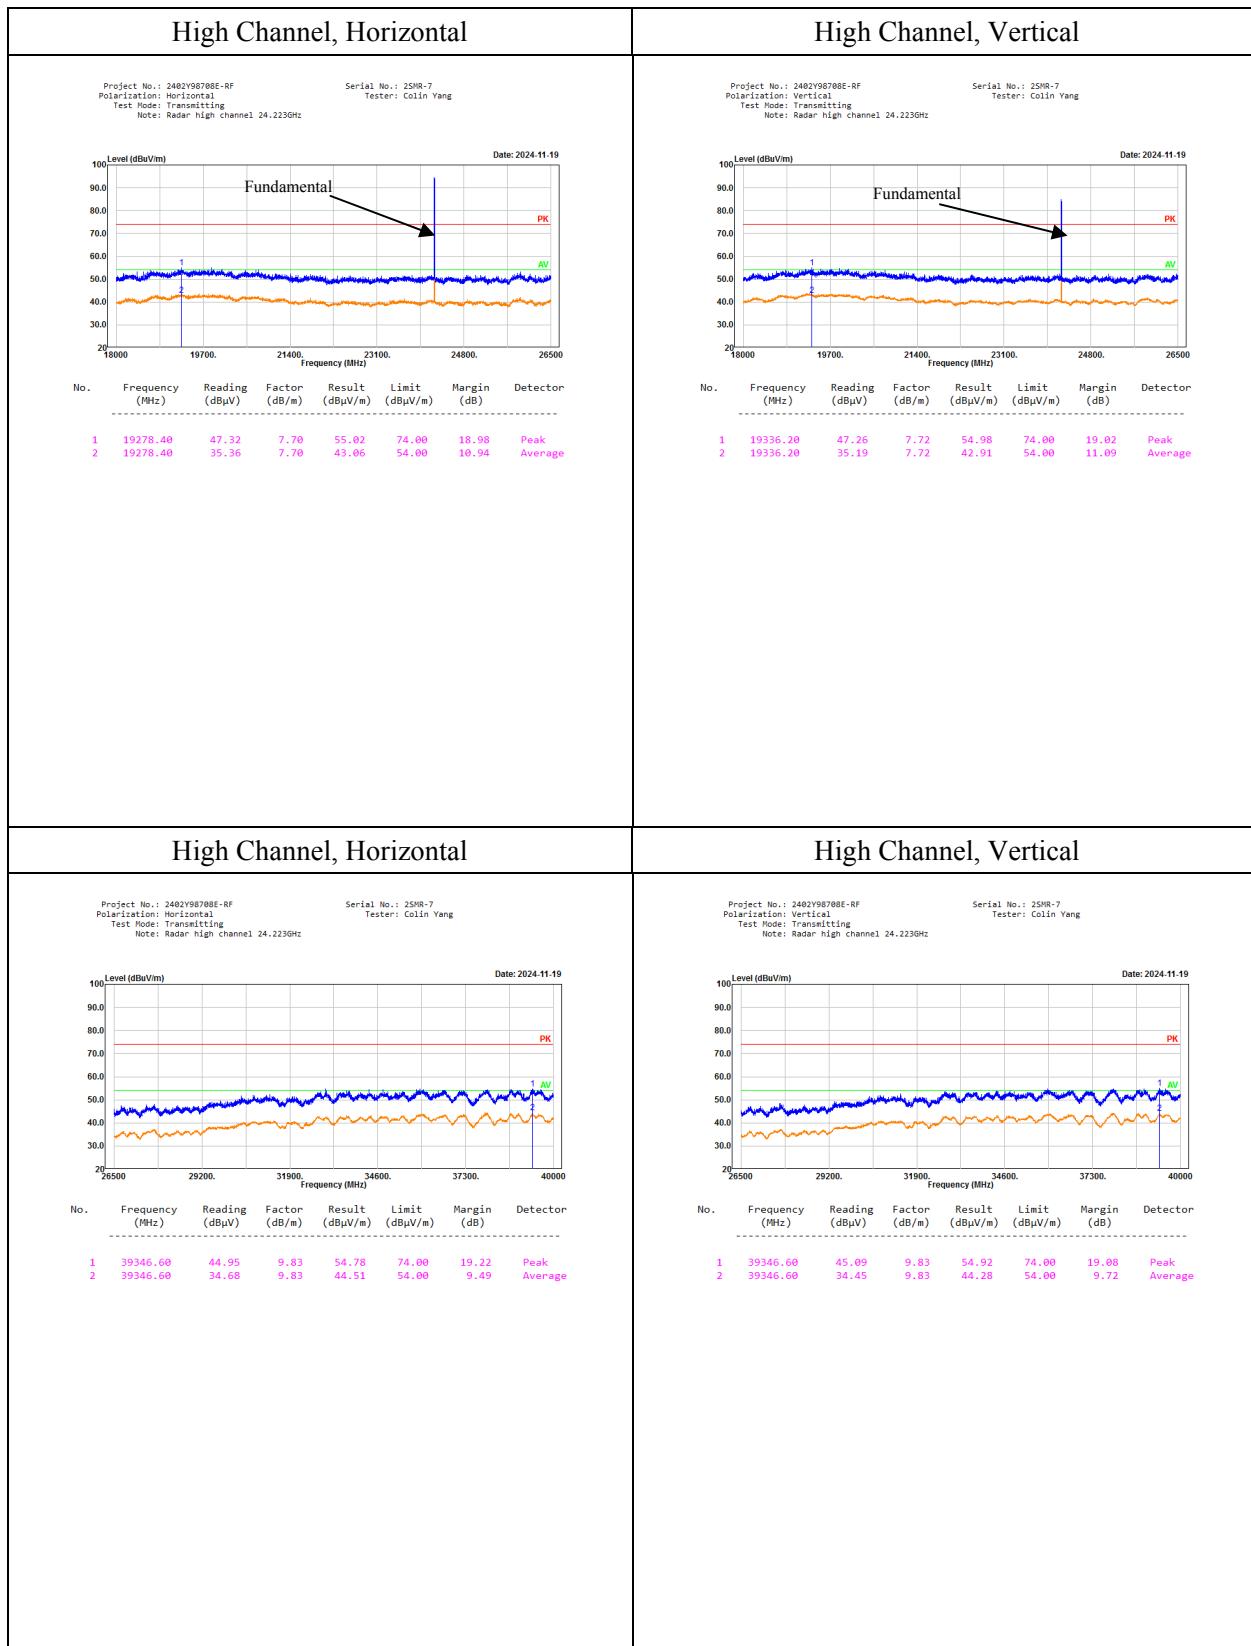
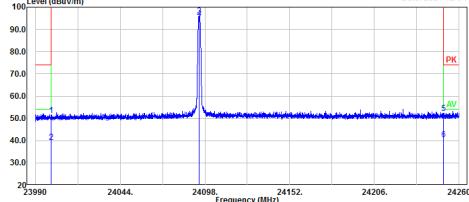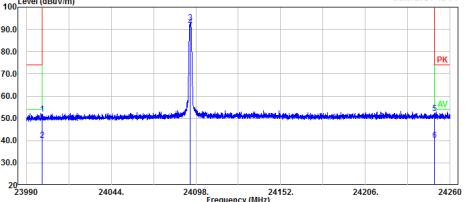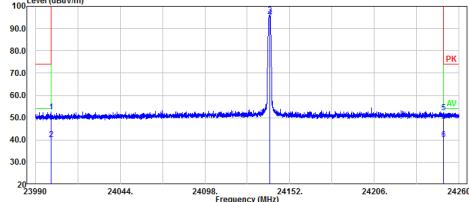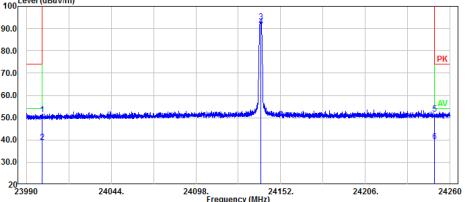
<h3>Fundamental And Bandedge, Low Channel, Horizontal</h3>	<h3>Fundamental And Bandedge, Low Channel, Vertical</h3>																																																																																																																
<p>Project No.: 2402Y98708E-RF Polarization: Horizontal Test Mode: Transmitting Note: Radar 1m channel 24.094GHz</p> <p>Serial No.: 2SHR-7 Tester: Colin Yang</p> <p>Date: 2024-12-04</p>  <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBµV)</th> <th>Factor (dB/m)</th> <th>Result (dBµV/m)</th> <th>Limit (dBµV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr><td>1</td><td>24000.00</td><td>42.49</td><td>8.76</td><td>51.25</td><td>74.00</td><td>22.75</td><td>Peak</td></tr> <tr><td>2</td><td>24000.00</td><td>30.71</td><td>8.76</td><td>39.47</td><td>54.00</td><td>14.53</td><td>Average</td></tr> <tr><td>3</td><td>24094.44</td><td>87.33</td><td>8.82</td><td>96.15</td><td>127.96</td><td>31.81</td><td>Peak</td></tr> <tr><td>4</td><td>24094.44</td><td>86.14</td><td>8.82</td><td>94.96</td><td>107.96</td><td>13.00</td><td>Average</td></tr> <tr><td>5</td><td>24250.00</td><td>43.53</td><td>8.92</td><td>52.45</td><td>74.00</td><td>21.55</td><td>Peak</td></tr> <tr><td>6</td><td>24250.00</td><td>31.61</td><td>8.92</td><td>40.53</td><td>54.00</td><td>13.47</td><td>Average</td></tr> </tbody> </table>	No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	1	24000.00	42.49	8.76	51.25	74.00	22.75	Peak	2	24000.00	30.71	8.76	39.47	54.00	14.53	Average	3	24094.44	87.33	8.82	96.15	127.96	31.81	Peak	4	24094.44	86.14	8.82	94.96	107.96	13.00	Average	5	24250.00	43.53	8.92	52.45	74.00	21.55	Peak	6	24250.00	31.61	8.92	40.53	54.00	13.47	Average	<p>Project No.: 2402Y98708E-RF Polarization: Vertical Test Mode: Transmitting Note: Radar 1m channel 24.094GHz</p> <p>Serial No.: 2SHR-7 Tester: Colin Yang</p> <p>Date: 2024-12-04</p>  <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBµV)</th> <th>Factor (dB/m)</th> <th>Result (dBµV/m)</th> <th>Limit (dBµV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr><td>1</td><td>24000.00</td><td>43.35</td><td>8.76</td><td>52.11</td><td>74.00</td><td>21.89</td><td>Peak</td></tr> <tr><td>2</td><td>24000.00</td><td>31.34</td><td>8.76</td><td>40.10</td><td>54.00</td><td>13.98</td><td>Average</td></tr> <tr><td>3</td><td>24094.49</td><td>84.38</td><td>8.82</td><td>93.28</td><td>127.96</td><td>34.76</td><td>Peak</td></tr> <tr><td>4</td><td>24094.49</td><td>82.41</td><td>8.82</td><td>91.23</td><td>107.96</td><td>16.73</td><td>Average</td></tr> <tr><td>5</td><td>24250.00</td><td>43.39</td><td>8.92</td><td>52.31</td><td>74.00</td><td>21.69</td><td>Peak</td></tr> <tr><td>6</td><td>24250.00</td><td>31.25</td><td>8.92</td><td>40.17</td><td>54.00</td><td>13.83</td><td>Average</td></tr> </tbody> </table>	No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	1	24000.00	43.35	8.76	52.11	74.00	21.89	Peak	2	24000.00	31.34	8.76	40.10	54.00	13.98	Average	3	24094.49	84.38	8.82	93.28	127.96	34.76	Peak	4	24094.49	82.41	8.82	91.23	107.96	16.73	Average	5	24250.00	43.39	8.92	52.31	74.00	21.69	Peak	6	24250.00	31.25	8.92	40.17	54.00	13.83	Average
No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector																																																																																																										
1	24000.00	42.49	8.76	51.25	74.00	22.75	Peak																																																																																																										
2	24000.00	30.71	8.76	39.47	54.00	14.53	Average																																																																																																										
3	24094.44	87.33	8.82	96.15	127.96	31.81	Peak																																																																																																										
4	24094.44	86.14	8.82	94.96	107.96	13.00	Average																																																																																																										
5	24250.00	43.53	8.92	52.45	74.00	21.55	Peak																																																																																																										
6	24250.00	31.61	8.92	40.53	54.00	13.47	Average																																																																																																										
No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector																																																																																																										
1	24000.00	43.35	8.76	52.11	74.00	21.89	Peak																																																																																																										
2	24000.00	31.34	8.76	40.10	54.00	13.98	Average																																																																																																										
3	24094.49	84.38	8.82	93.28	127.96	34.76	Peak																																																																																																										
4	24094.49	82.41	8.82	91.23	107.96	16.73	Average																																																																																																										
5	24250.00	43.39	8.92	52.31	74.00	21.69	Peak																																																																																																										
6	24250.00	31.25	8.92	40.17	54.00	13.83	Average																																																																																																										
<h3>Fundamental, Middle Channel, Horizontal</h3>	<h3>Fundamental, Middle Channel, Vertical</h3>																																																																																																																
<p>Project No.: 2402Y98708E-RF Polarization: Horizontal Test Mode: Transmitting Note: Radar middle channel 24.139GHz</p> <p>Serial No.: 2SHR-7 Tester: Colin Yang</p> <p>Date: 2024-12-04</p>  <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBµV)</th> <th>Factor (dB/m)</th> <th>Result (dBµV/m)</th> <th>Limit (dBµV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr><td>1</td><td>24090.00</td><td>42.78</td><td>8.76</td><td>52.54</td><td>74.00</td><td>21.46</td><td>Peak</td></tr> <tr><td>2</td><td>24090.00</td><td>31.35</td><td>8.76</td><td>40.11</td><td>54.00</td><td>13.89</td><td>Average</td></tr> <tr><td>3</td><td>24139.36</td><td>87.31</td><td>8.85</td><td>96.16</td><td>127.96</td><td>31.80</td><td>Peak</td></tr> <tr><td>4</td><td>24139.36</td><td>86.17</td><td>8.85</td><td>95.92</td><td>107.96</td><td>12.94</td><td>Average</td></tr> <tr><td>5</td><td>24250.00</td><td>43.37</td><td>8.92</td><td>52.29</td><td>74.00</td><td>21.71</td><td>Peak</td></tr> <tr><td>6</td><td>24250.00</td><td>31.34</td><td>8.92</td><td>40.26</td><td>54.00</td><td>13.74</td><td>Average</td></tr> </tbody> </table>	No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	1	24090.00	42.78	8.76	52.54	74.00	21.46	Peak	2	24090.00	31.35	8.76	40.11	54.00	13.89	Average	3	24139.36	87.31	8.85	96.16	127.96	31.80	Peak	4	24139.36	86.17	8.85	95.92	107.96	12.94	Average	5	24250.00	43.37	8.92	52.29	74.00	21.71	Peak	6	24250.00	31.34	8.92	40.26	54.00	13.74	Average	<p>Project No.: 2402Y98708E-RF Polarization: Vertical Test Mode: Transmitting Note: Radar middle channel 24.139GHz</p> <p>Serial No.: 2SHR-7 Tester: Colin Yang</p> <p>Date: 2024-12-04</p>  <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBµV)</th> <th>Factor (dB/m)</th> <th>Result (dBµV/m)</th> <th>Limit (dBµV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr><td>1</td><td>24090.00</td><td>42.62</td><td>8.76</td><td>51.38</td><td>74.00</td><td>22.62</td><td>Peak</td></tr> <tr><td>2</td><td>24090.00</td><td>30.34</td><td>8.76</td><td>39.10</td><td>54.00</td><td>14.98</td><td>Average</td></tr> <tr><td>3</td><td>24139.31</td><td>84.35</td><td>8.85</td><td>93.20</td><td>127.96</td><td>34.76</td><td>Peak</td></tr> <tr><td>4</td><td>24139.31</td><td>82.24</td><td>8.85</td><td>91.09</td><td>107.96</td><td>16.87</td><td>Average</td></tr> <tr><td>5</td><td>24250.00</td><td>42.78</td><td>8.92</td><td>51.70</td><td>74.00</td><td>22.30</td><td>Peak</td></tr> <tr><td>6</td><td>24250.00</td><td>30.46</td><td>8.92</td><td>39.38</td><td>54.00</td><td>14.62</td><td>Average</td></tr> </tbody> </table>	No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	1	24090.00	42.62	8.76	51.38	74.00	22.62	Peak	2	24090.00	30.34	8.76	39.10	54.00	14.98	Average	3	24139.31	84.35	8.85	93.20	127.96	34.76	Peak	4	24139.31	82.24	8.85	91.09	107.96	16.87	Average	5	24250.00	42.78	8.92	51.70	74.00	22.30	Peak	6	24250.00	30.46	8.92	39.38	54.00	14.62	Average
No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector																																																																																																										
1	24090.00	42.78	8.76	52.54	74.00	21.46	Peak																																																																																																										
2	24090.00	31.35	8.76	40.11	54.00	13.89	Average																																																																																																										
3	24139.36	87.31	8.85	96.16	127.96	31.80	Peak																																																																																																										
4	24139.36	86.17	8.85	95.92	107.96	12.94	Average																																																																																																										
5	24250.00	43.37	8.92	52.29	74.00	21.71	Peak																																																																																																										
6	24250.00	31.34	8.92	40.26	54.00	13.74	Average																																																																																																										
No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector																																																																																																										
1	24090.00	42.62	8.76	51.38	74.00	22.62	Peak																																																																																																										
2	24090.00	30.34	8.76	39.10	54.00	14.98	Average																																																																																																										
3	24139.31	84.35	8.85	93.20	127.96	34.76	Peak																																																																																																										
4	24139.31	82.24	8.85	91.09	107.96	16.87	Average																																																																																																										
5	24250.00	42.78	8.92	51.70	74.00	22.30	Peak																																																																																																										
6	24250.00	30.46	8.92	39.38	54.00	14.62	Average																																																																																																										

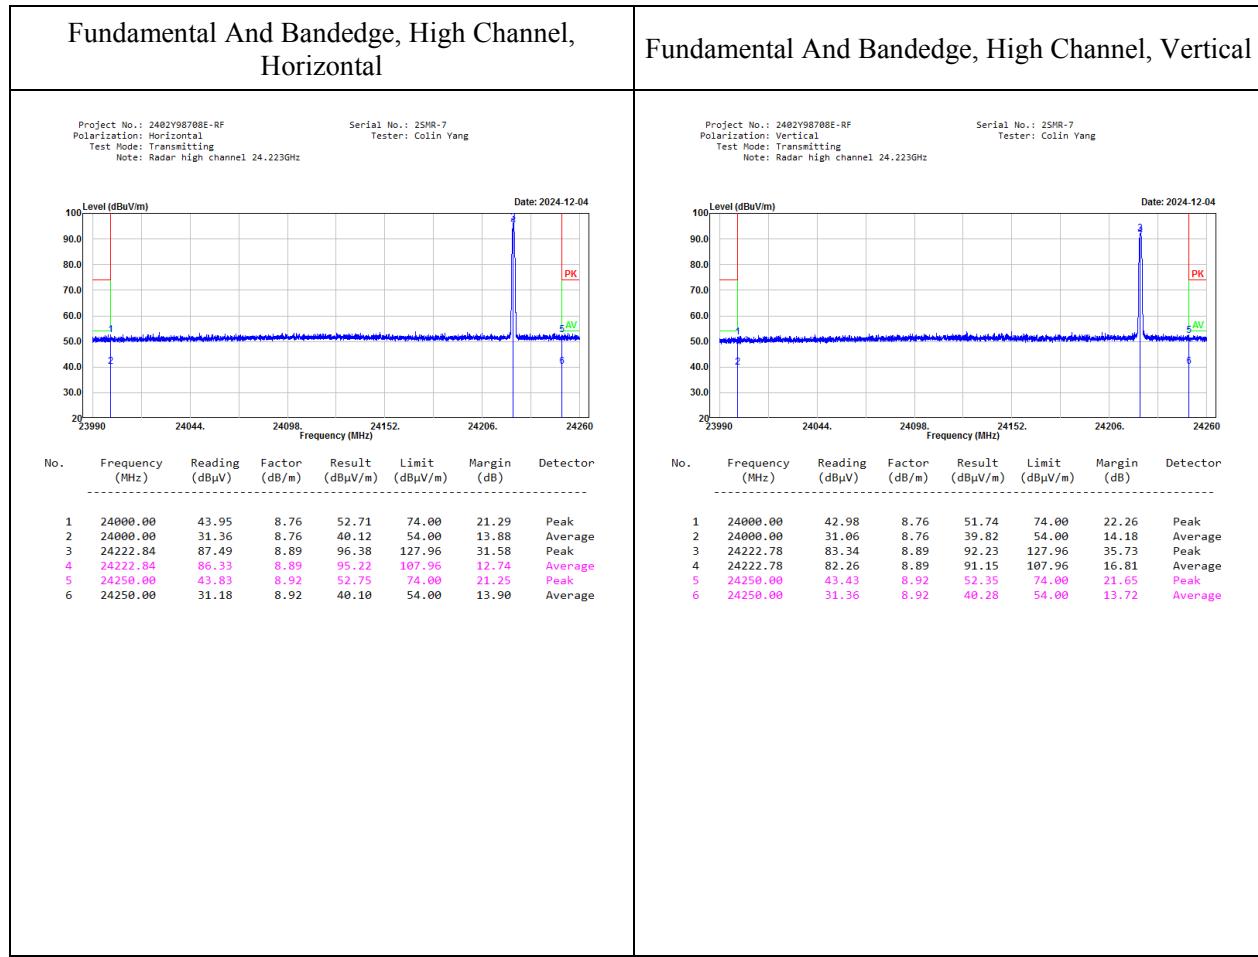

## 4) 40-100GHz:

All Radar Modules transmit simultaneously:

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
low channel				24.094	GHz		
48.188	45.33	PK	H	40.07	75.86	87.96	12.10
48.188	33.12	AV	H	40.07	63.65	67.96	4.31
48.188	45.76	PK	V	40.07	76.29	87.96	11.67
48.188	33.08	AV	V	40.07	63.61	67.96	4.35
72.282	41.25	PK	H	43.83	75.54	87.96	12.42
72.282	29.85	AV	H	43.83	64.14	67.96	3.82
72.282	41.43	PK	V	43.83	75.72	87.96	12.24
72.282	29.42	AV	V	43.83	63.71	67.96	4.25

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
middle channel				24.139	GHz		
48.278	45.16	PK	H	40.08	75.70	87.96	12.26
48.278	33.32	AV	H	40.08	63.86	67.96	4.10
48.278	45.19	PK	V	40.08	75.73	87.96	12.23
48.278	33.01	AV	V	40.08	63.55	67.96	4.41
72.417	41.19	PK	H	43.85	75.50	87.96	12.46
72.417	29.89	AV	H	43.85	64.20	67.96	3.76
72.417	41.74	PK	V	43.85	76.05	87.96	11.91
72.417	29.63	AV	V	43.85	63.94	67.96	4.02

Frequency (GHz)	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
high channel 24.223 GHz							
48.446	45.30	PK	H	40.11	75.87	87.96	12.09
48.446	33.20	AV	H	40.11	63.77	67.96	4.19
48.446	45.36	PK	V	40.11	75.93	87.96	12.03
48.446	33.22	AV	V	40.11	63.79	67.96	4.17
72.669	41.45	PK	H	43.89	75.80	87.96	12.16
72.669	29.89	AV	H	43.89	64.24	67.96	3.72
72.669	41.18	PK	V	43.89	75.53	87.96	12.43
72.669	29.43	AV	V	43.89	63.78	67.96	4.18

*Result = Reading + Factor- Distance extrapolation Factor*

*For 40-90GHz:*

*Distance extrapolation Factor =20 log (specific distance [3m]/test distance [1m]) dB= 9.54 dB*

*For 90-100GHz:*

*Distance extrapolation Factor =20 log (specific distance [3m]/test distance [0.5m]) dB= 15.56 dB*


### 4.3 20 dB Emission Bandwidth

#### 4.3.1 Applicable Standard

FCC §15.215

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

#### 4.3.2 EUT Setup

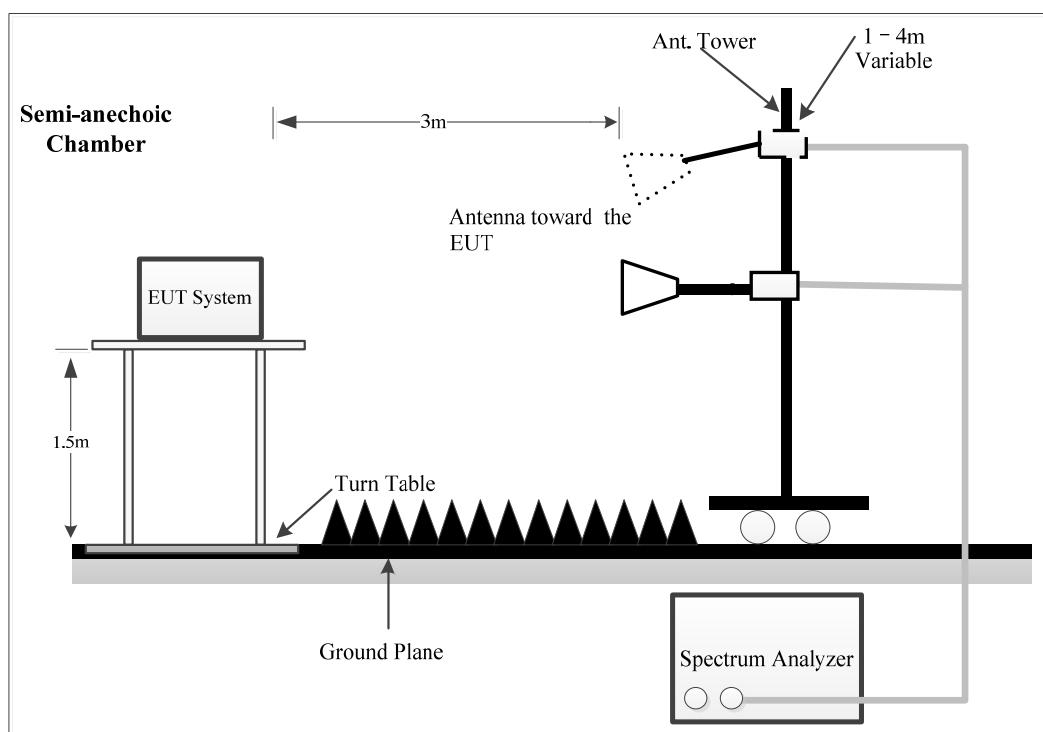

#### 4.3.3 Test Procedure

According to ANSI C63.10-2013 Section 6.9.2

- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, unless otherwise specified by the applicable requirement.
- Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

#### 4.3.4 Test Result

<b>Serial No.:</b>	2SMR-7	<b>Test Date:</b>	2025/1/14
<b>Test Site:</b>	Chamber B	<b>Test Mode:</b>	Transmitting
<b>Tester:</b>	Colin Yang	<b>Test Result:</b>	Pass

#### Environmental Conditions:

<b>Temperature:</b> (°C)	20	<b>Relative Humidity:</b> (%)	31	<b>ATM Pressure:</b> (kPa)	101.5
-----------------------------	----	----------------------------------	----	-------------------------------	-------

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
AH	Preamplifier	PAM-1840VH	191	2024/9/5	2025/9/4
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2024/12/9	2025/12/8
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5


\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:


All Radar Modules transmit simultaneously:

Test Mode	20 dB Bandwidth (kHz)	F <sub>L</sub> (MHz)	F <sub>L</sub> Limit (MHz)	F <sub>H</sub> (MHz)	F <sub>H</sub> Limit (MHz)
Low	480.700	24093.95761	24000	24094.43831	24250
Middle	406.700	24138.89922	24000	24139.30594	24250
High	433.510	24222.67487	24000	24223.10838	24250


## 20 dB Bandwidth-Low

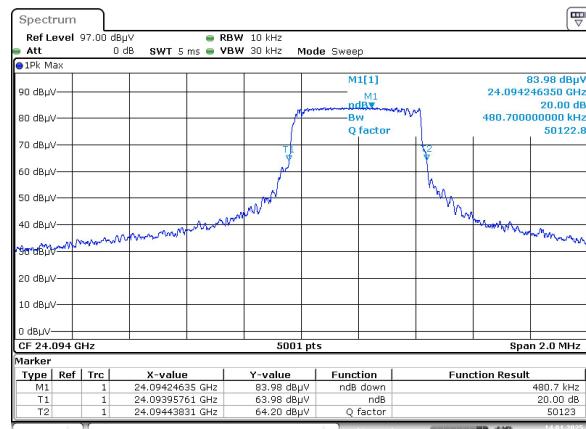

## 20 dB Bandwidth- Middle

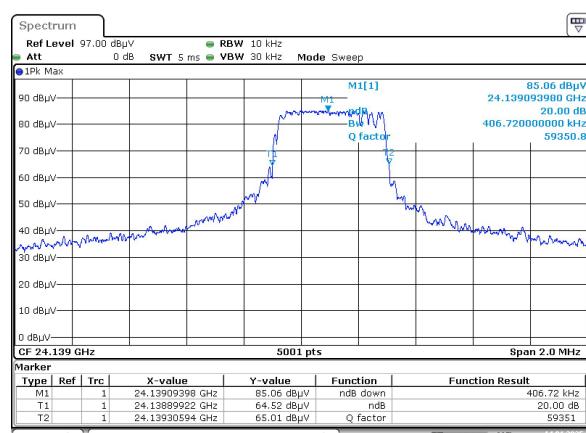

## 20 dB Bandwidth-High

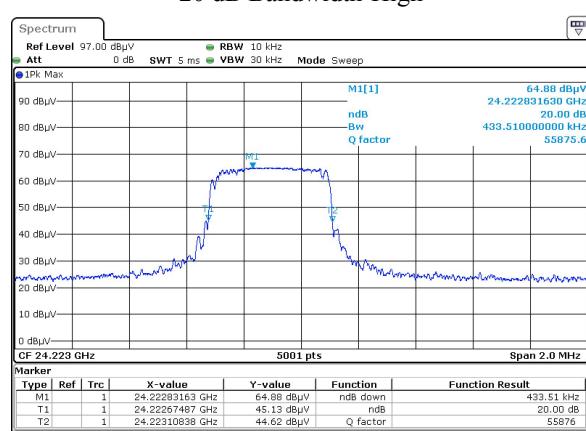

## 4.4 Antenna Requirement

### 4.4.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### 4.4.2 Judgment

**Compliant.** Please refer to the Antenna Information detail in Section 1.3.

---

## **EXHIBIT A - EUT PHOTOGRAPHS**

---

Please refer to the attachment 2402Y98708E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2402Y98708E-RF-INP EUT INTERNAL PHOTOGRAPHS

## **EXHIBIT B - TEST SETUP PHOTOGRAPHS**

Please refer to the attachment 2402Y98708E-RF-00C-TSP TEST SETUP PHOTOGRAPHS.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***