

# FCC Test Report

**Report No.:** RWAQ202400251B

**Applicant:** ShenZhen Foscam Intelligent Technology Co., Ltd.

**Address:** Room 902, Building 1B, Shenzhen International Innovation Valley,  
Xingke 1st Street, Nanshan Dist, Shenzhen, China, 518000

**Product Name:** Wireless IP Camera

**Product Model:** V8P

**Multiple Models:** V8S, V9908P, V9918P

**Trade Mark:** FOSCAM

**FCC ID:** ZDEV8P

**Standards:** FCC CFR Title 47 Part 15E (§15.407)

**Test Date:** 2024-03-22 to 2024-03-29

**Test Result:** Complied

**Issue Date:** 2024-04-07

**Reviewed by:**

Abel Chen

**Approved by:**

Jacob Kong

Abel Chen

Project Engineer

Jacob Kong

Manager

**Prepared by:**

World Alliance Testing & Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen,  
Guangdong, People's Republic of China



This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk “★”

## Announcement

1. This test report shall not be reproduced in full or partial, without the written approval of World Alliance Testing & Certification (Shenzhen) Co., Ltd
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
5. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

## Revision History

Version No.	Issued Date	Description
00	2024-04-07	<i>Original</i>

## Contents

<b>1</b>	<b>General Information</b>	<b>4</b>
1.1	Client Information	4
1.2	Product Description of EUT	4
1.3	Antenna information	4
1.4	Related Submittal(s)/Grant(s)	5
1.5	Measurement Uncertainty	5
1.6	Laboratory Location	5
1.7	Test Methodology	5
<b>2</b>	<b>Description of Measurement</b>	<b>6</b>
2.1	Test Configuration	6
2.2	Test Auxiliary Equipment	6
2.3	Test Setup	7
2.4	Test Procedure	9
2.5	Measurement Method	10
2.6	Measurement Equipment	10
<b>3</b>	<b>Test Results</b>	<b>12</b>
3.1	Test Summary	12
3.2	Limit	13
3.3	AC Line Conducted Emissions Test Data	14
3.4	Radiated emission Test Data	16
3.5	RF Conducted Test Data	24
3.5.1	26dB/6dB Emission Bandwidth and 99% Occupied Bandwidth	24
3.5.2	Maximum conducted output power	24
3.5.3	Power Spectral Density	24
3.5.4	Duty Cycle	25
<b>4</b>	<b>Test Setup Photo</b>	<b>33</b>
<b>5</b>	<b>E.U.T Photo</b>	<b>34</b>

# 1 General Information

## 1.1 Client Information

Applicant:	ShenZhen Foscam Intelligent Technology Co., Ltd.
Address:	Room 902, Building 1B, Shenzhen International Innovation Valley, Xingke 1st Street, Nanshan Dist, Shenzhen, China, 518000
Manufacturer:	ShenZhen Foscam Intelligent Technology Co., Ltd.
Address:	Room 902, Building 1B, Shenzhen International Innovation Valley, Xingke 1st Street, Nanshan Dist, Shenzhen, China, 518000

## 1.2 Product Description of EUT

The EUT is Wireless IP Camera that contains 2.4G and 5G WLAN radios, this report covers the full testing of the 5G WLAN radio.

Sample Serial number	6X-1 for CE test, 6X-2 for RE and RF conducted test (assigned by WATC)
Sample Received Date	2024-03-21
Sample Status	Good Condition
Frequency Range	5725 MHz - 5850MHz (802.11a,802.11n-HT20, 802.11n-HT40)
Maximum Conducted Output Power	5725 MHz - 5850MHz: 16.45dBm
Modulation Technology	OFDM
Spatial Streams	SISO (1TX, 1RX)
Antenna Gain <sup>#</sup>	2.33dBi
Power Supply	DC 12V from adapter
Operating temperature <sup>#</sup>	-10 deg.C to +40 deg.C
Adapter Information	Model: SAW15A-120-1000UD Input: AC100-240V, 50/60Hz, 0.5A Output: DC 12V/1000mA,
Modification	Sample No Modification by the test lab

## 1.3 Antenna information

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### Device Antenna information:

The Wi-Fi antenna is an external antenna with unique antenna connector. Please see product internal photos for details.

## 1.4 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart C, Equipment Class: DTS, FCC ID: ZDEV8P

## 1.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
AC Power Lines Conducted Emissions	±3.14dB
Emissions, Radiated	Below 30MHz
	Below 1GHz
	Above 1GHz
Emissions, Conducted	1.75dB
Conducted Power	0.74dB
Frequency Error	150Hz
Bandwidth	0.34%
Power Spectral Density	0.74dB

**Note:** The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

## 1.6 Laboratory Location

World Alliance Testing & Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Tel: +86-755-29691511, Email: [qa@wutc.com.cn](mailto:qa@wutc.com.cn)

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 463912, the FCC Designation No. : CN5040.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0160.

## 1.7 Test Methodology

FCC CFR 47 Part 2

FCC CFR 47 Part 15

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

ANSI C63.10-2020

## 2 Description of Measurement

### 2.1 Test Configuration

Operating channels: (5725-5850MHz)					
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
149	5745	157	5785	161	5805
151	5755	159	5795	165	5825
153	5765	/	/	/	/

According to ANSI C63.10-2020 chapter 5.6.1 Table 11 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:					
<b>802.11a, 802.11n-HT20</b>					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
149	5745	157	5785	165	5825
<b>802.11n-HT40</b>					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
151	5755	/	/	159	5795

Test Mode:						
Transmitting mode:		Keep the EUT in continuous transmitting with modulation				
Exercise software <sup>#</sup> :		SecureCRT				
Mode		Data rate		Power Level Setting <sup>#</sup>		
				Low Channel	Middle Channel	High Channel
802.11a		6Mbps		default	default	default
802.11n-HT20		MCS0		default	default	default
802.11n-HT40		MCS0		default	default	default

The exercise software and the maximum power setting that provided by manufacturer.


Worst-Case Configuration:					
For radiated emissions, EUT was investigated in three orthogonal orientation, the worst-case orientation was recorded in report					
For AC power line conducted emission and radiated emission 9kHz-1GHz and above 18GHz were performed with the EUT transmits at the channel with highest output power as worst-case scenario.					

### 2.2 Test Auxiliary Equipment

Manufacturer	Description	Model	Serial Number
/	/	/	/

## 2.3 Test Setup


### 1) Conducted emission measurement:

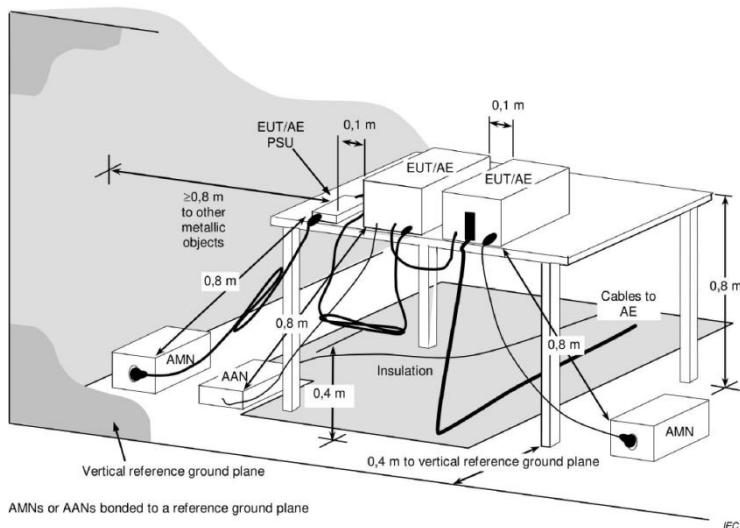


**Note:** The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.


## 2) Radiated emission measurement:

### Below 30MHz (3m SAC)

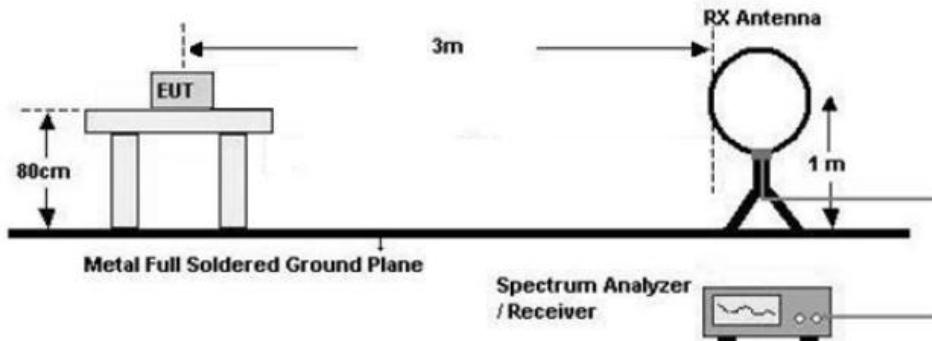

0MHz-1GHz (3m SAC)

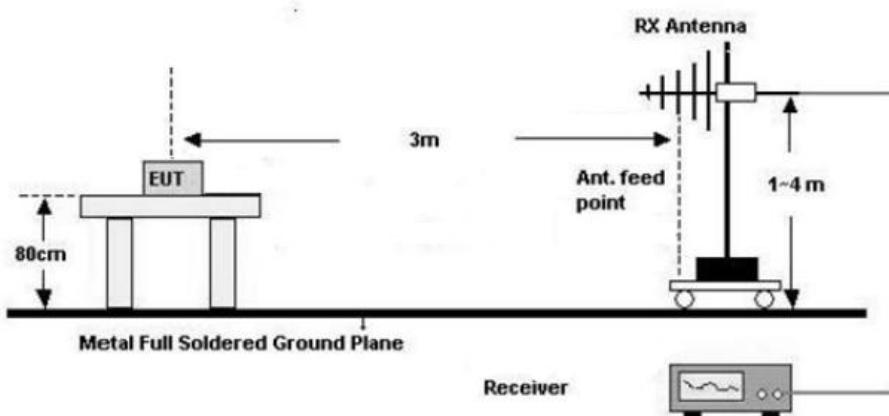

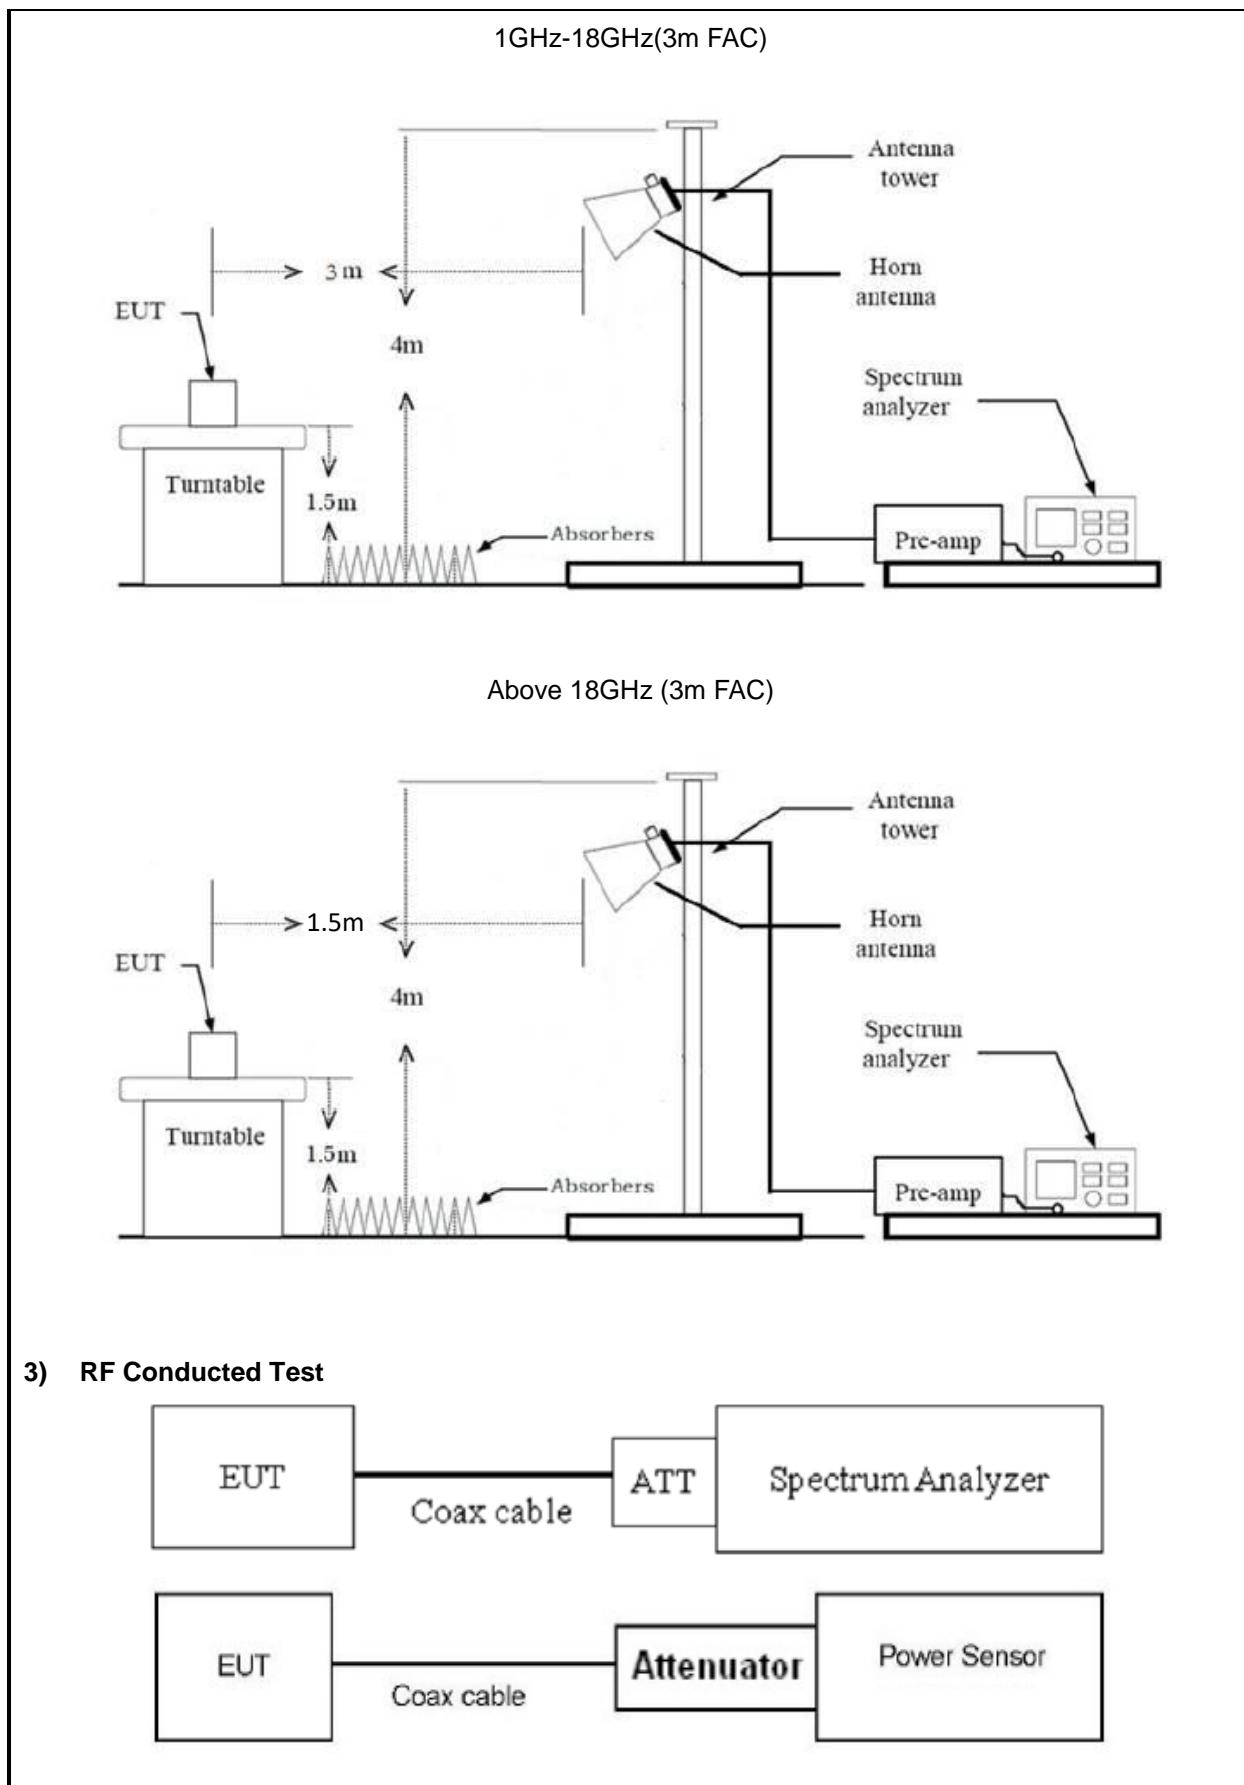

## 2.4 Test Procedure

### Conducted emission:

1. The E.U.T is placed on a non-conducting table 40cm from the vertical ground plane and 80cm above the horizontal ground plane (Please refer to the block diagram of the test setup and photographs).
2. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
3. Line conducted data is recorded for both Line and Neutral

### Radiated Emission Procedure:

#### a) For below 30MHz

1. All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz- 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were  $40 \times \log_{10}(\text{test distance} / \text{specification distance})$ .
2. Loop antenna use, investigation was done on the three antenna orientations (parallel, perpendicular, ground-parallel)

#### b) For 30MHz-1GHz:

1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

#### c) For above 1GHz:

1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m (1-18GHz) and 1.5 m (above 18GHz).
2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
4. Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

### RF Conducted Test:

1. The antenna port of EUT was connected to the RF port of the test equipment (Power Meter or

Spectrum analyzer) through Attenuator and RF cable.

2. The cable assembly insertion loss of 8.0dB (including 6.0dB Attenuator and 2.0dB cable) was entered as an offset in the power meter. Note: Actual cable loss was unavailable at the time of testing, therefore a loss of 2.0dB was assumed as worst case. This was later verified to be true by laboratory. ( if the RF cable provided by client, the cable loss declared by client)
3. The EUT is keeping in continuous transmission mode and tested in all modulation modes.

## 2.5 Measurement Method

Description of Test	Measurement Method
AC Line Conducted Emissions	ANSI C63.10-2020 Section 6.2
Maximum Conducted Output Power	KDB 789033 D02 v02r01 section E.3. b)
Power Spectral Density	KDB 789033 D02 v02r01 section F
26 dB Emission Bandwidth	KDB 789033 D02 v02r01 section C.1
6 dB Emission Bandwidth	KDB 789033 D02 v02r01 section C.2
99% Occupied Bandwidth	KDB 789033 D02 v02r01 section D.
Unwanted Emissions	KDB 789033 D02 v02r01 section G.
Duty Cycle	KDB 789033 D02 v02r01 section B.

## 2.6 Measurement Equipment

Manufacturer	Description	Model	Management No.	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
ROHDE & SCHWARZ	EMI TEST RECEIVER	ESR	101817	2023/7/3	2024/7/2
R&S	LISN	ENV216	101748	2023/8/1	2024/7/31
N/A	Coaxial Cable	NO.12	N/A	2023/7/3	2024/7/2
Farad	Test Software	EZ-EMC	Ver. EMEC-3A1	/	/
Radiated Emission Test					
R&S	EMI test receiver	ESR3	102758	2023/7/3	2024/7/2
ROHDE & SCHWARZ	SPECTRUM ANALYZER	FSV40-N	101608	2023/7/3	2024/7/2
SONOMA INSTRUMENT	Low frequency amplifier	310	186014	2023/7/12	2024/7/11
COM-POWER	preamplifier	PAM-118A	18040152	2023/8/21	2024/8/20
COM-POWER	Amplifier	PAM-840A	461306	2023/8/8	2024/8/7
BACL	Loop Antenna	1313-1A	4010611	2024/2/7	2027/2/6
SCHWARZBECK	Log - periodic	VULB 9163	9163-872	2023/7/7	2024/7/6

	wideband antenna				
Astro Antenna Ltd	Horn antenna	AHA-118S	3015	2023/7/6	2024/7/5
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2023/7/10	2024/7/9
Ducommun technologies	Horn Antenna	ARH-2823-02	1007726-03	2023/7/10	2024/7/9
Oulitong	Band Reject Filter	OBSF-5150-585 0-S	OE02104371	2023/9/15	2024/9/14
N/A	Coaxial Cable	N/A	NO.9	2023/8/8	2024/8/7
N/A	Coaxial Cable	N/A	NO.10	2023/8/8	2024/8/7
N/A	Coaxial Cable	N/A	NO.11	2023/8/8	2024/8/7
Audix	Test Software	E3	191218 V9	/	/
RF Conducted Test					
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSU-26	200680/026	2023/7/12	2024/7/11
ANRITSU	USB Power Sensor	MA24418A	12620	2023/7/12	2024/7/11
narda	6dB attenuator	603-06-1	N/A	2023/7/26	2024/7/25

Note: All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or International standards.

## 3 Test Results

### 3.1 Test Summary


FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a) §15.407 (b)(9)	AC Line Conducted Emissions	Compliance
§15.407 (a)(1)(iv),(3)(i)	Conducted Peak Output Power Power Spectral Density	Compliance
§15.407 (a)(12)	99% Occupied Bandwidth	Compliance
§15.407 (a)	26 dB Emission Bandwidth	Compliance
§15.407 (e)	6 dB Emission Bandwidth	Compliance
§15.205, §15.209, §15.407 (b)(1), (4), (9), (10)	Unwanted Emissions	Compliance
/	Duty Cycle	Report only

### 3.2 Limit

Test items	Limit
AC Power Line Conducted Emission	See details §15.207 (a)
Conducted Peak Output Power  Power Spectral Density	<p><b>For the band 5.725-5.895 GHz:</b></p> <p>For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, Fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p>
26dB Emission Bandwidth 99% Occupied Bandwidth	N/A
6dB Emission Bandwidth	Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.
Unwanted Emissions	<p>For transmitters operating in the 5.15–5.25 GHz band: All emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>For transmitters operating in the 5.25–5.35 GHz band: All emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>For transmitters operating in the 5.47–5.725 GHz band: All emissions outside of the 5.47–5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>For transmitters operating solely in the 5.725–5.850 GHz band:</p> <p>All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p> <p>Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.</p> <p>The provisions of § 15.205 apply to intentional radiators operating under this section.</p>

### 3.3 AC Line Conducted Emissions Test Data

Test Date:	2024-03-22	Test By:	Lirou Li
Environment condition:	Temperature: 24.5°C; Relative Humidity:60%; ATM Pressure: 101.2kPa		

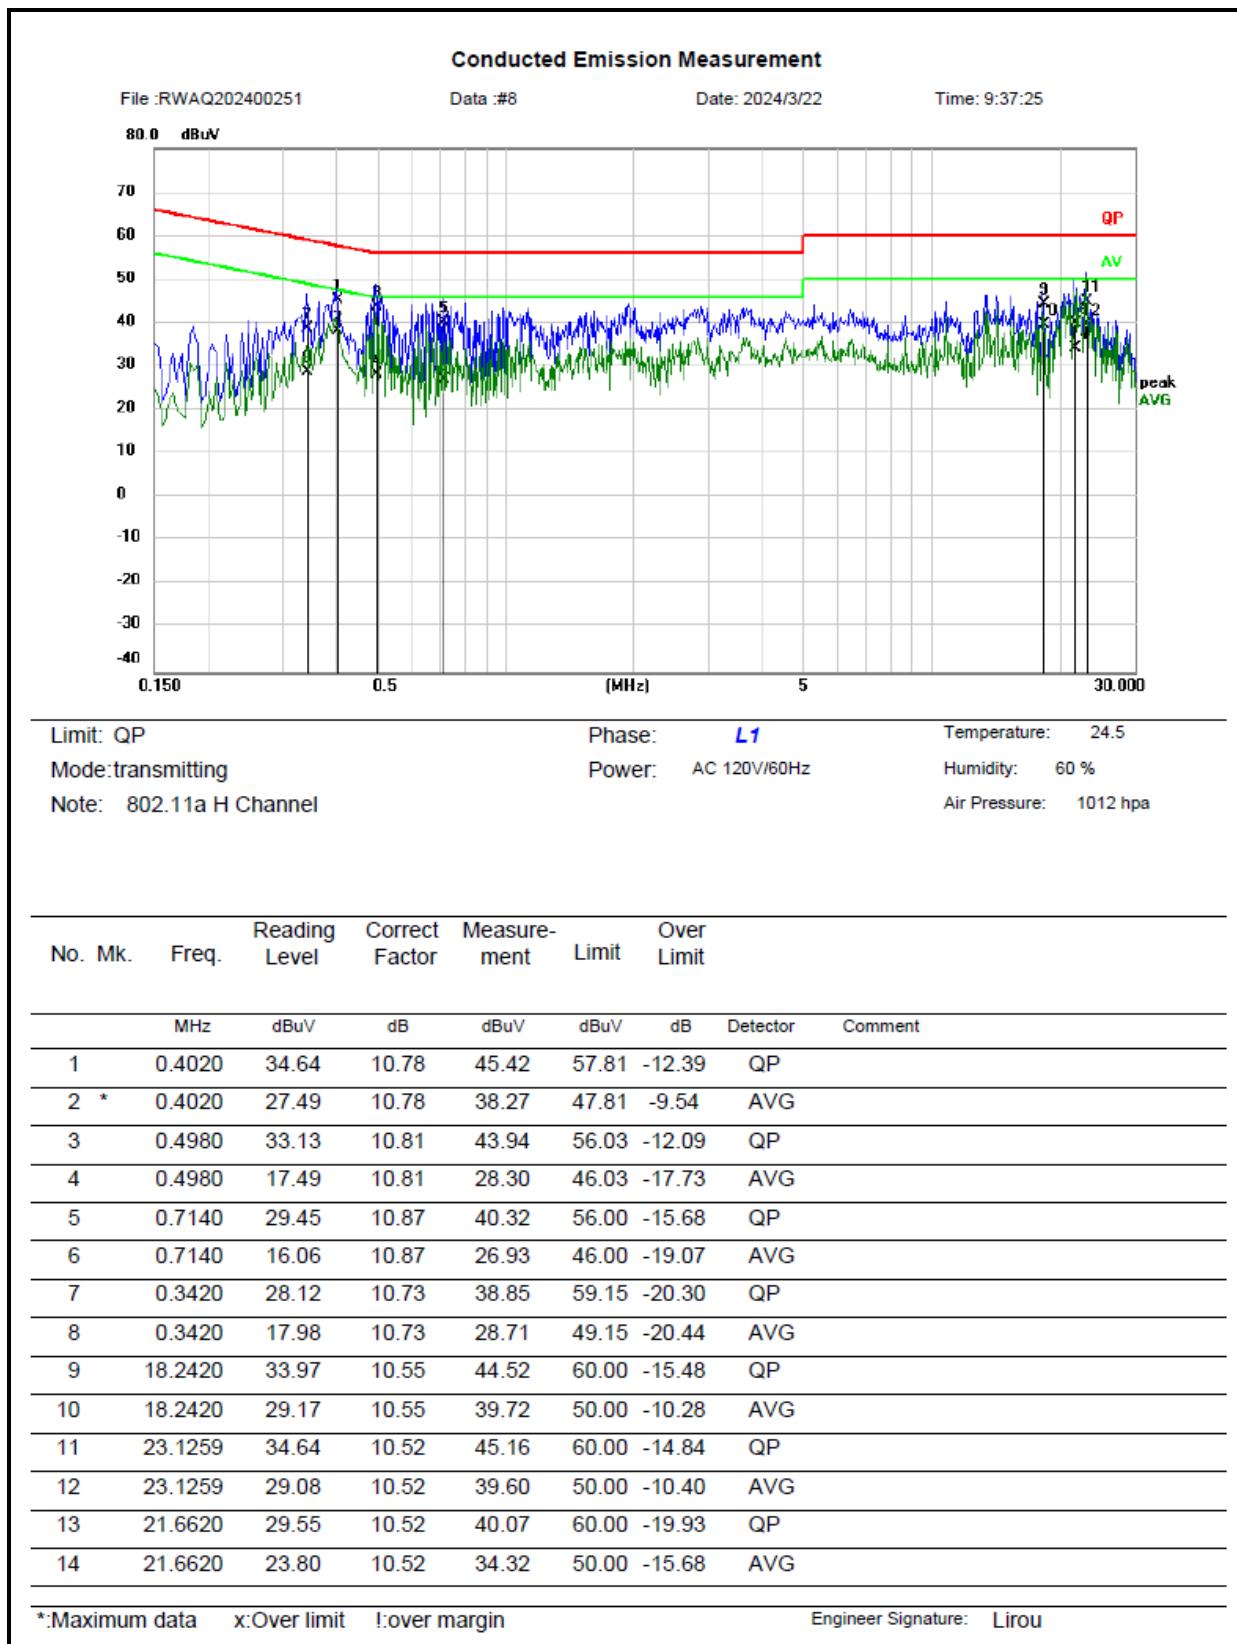

Conducted Emission Measurement


File :RWAQ202400251

Data :#7

Date: 2024/3/22

Time: 9:33:59

80.0 dBuV

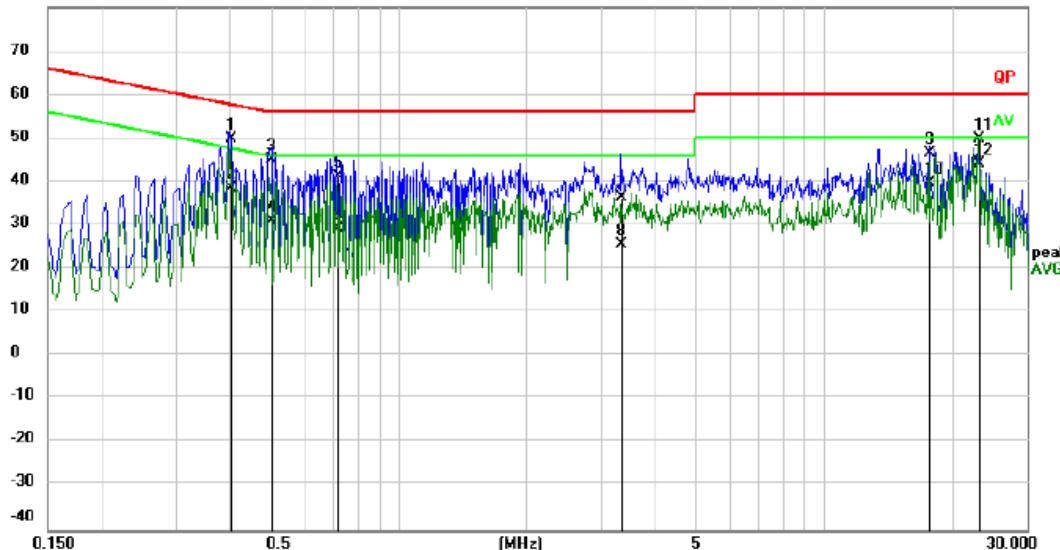

Limit: QP

Phase: *N*

Temperature: 24.5

Mode:transmitting

Power: AC 120V/60Hz

Humidity: 60 %

Note: 802.11a H Channel

Air Pressure: 1012 hpa

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over Limit	
		MHz	dBuV	dB	dBuV	dB	Detector	Comment
1		0.4020	39.11	10.65	49.76	57.81	-8.05	QP
2		0.4020	27.95	10.65	38.60	47.81	-9.21	AVG
3		0.5020	34.22	10.71	44.93	56.00	-11.07	QP
4		0.5020	20.36	10.71	31.07	46.00	-14.93	AVG
5		0.7180	30.67	10.57	41.24	56.00	-14.76	QP
6		0.7180	18.54	10.57	29.11	46.00	-16.89	AVG
7		3.3300	25.90	10.50	36.40	56.00	-19.60	QP
8		3.3300	14.91	10.50	25.41	46.00	-20.59	AVG
9		17.6939	35.78	10.74	46.52	60.00	-13.48	QP
10		17.6939	28.82	10.74	39.56	50.00	-10.44	AVG
11		23.1299	39.24	10.71	49.95	60.00	-10.05	QP
12	*	23.1299	33.59	10.71	44.30	50.00	-5.70	AVG

\*:Maximum data x:Over limit !:over margin

Engineer Signature: Lirou

**Remark:**

Measurement (dBuV)= Reading Level (dBuV) + Correct Factor(dB)

Correct Factor(dB)= LISN Voltage Division Factor (dB)+ Cable loss(dB)

Over Limit = Measurement – Limit

### 3.4 Radiated emission Test Data


#### 9 kHz-30MHz:

<b>Test Date:</b>	2024-03-27	<b>Test By:</b>	Bard Huang
<b>Environment condition:</b>	Temperature: 21.5°C; Relative Humidity:68%; ATM Pressure: 101.5kPa		

For radiated emissions below 30MHz, there were no emissions found within 20dB of limit.

30MHz-1GHz:


<b>Test Date:</b>	2024-03-27	<b>Test By:</b>	Bard Huang
<b>Environment condition:</b>	Temperature: 21.5°C; Relative Humidity:68%; ATM Pressure: 101.5kPa		

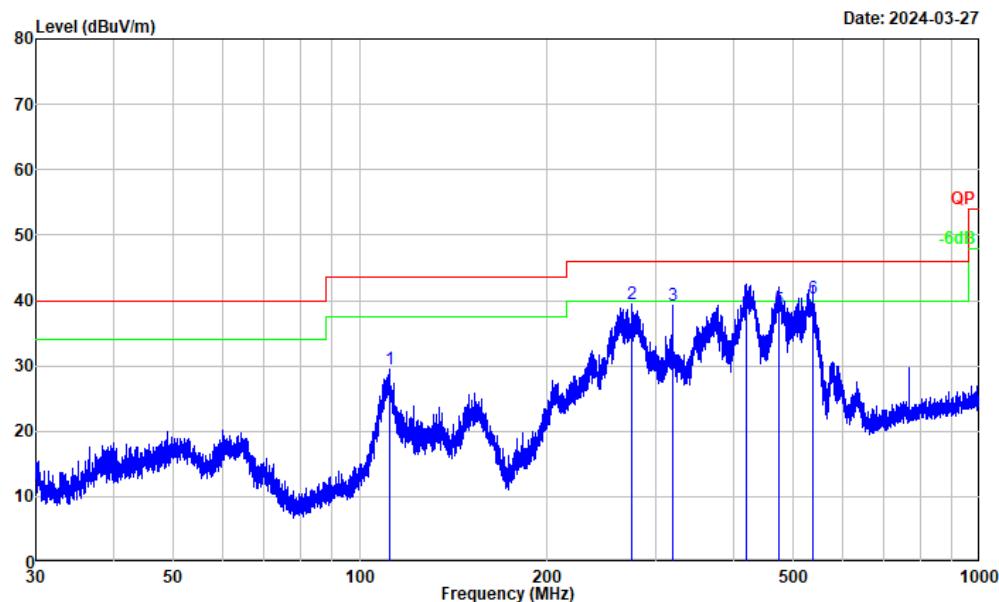

Project No. : RWAQ202400251  
 Test Mode : Transmitting  
 Test Voltage : AC 120V/60Hz  
 Environment : 21.5°C/68%R.H./101.5kPa  
 Tested by : Bard Huang  
 Polarization : horizontal  
 Remark : 802.11a High channel

--No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Detector
1	111.414	44.66	-15.20	29.46	43.50	-14.04	Peak
2	274.631	52.61	-13.13	39.48	46.00	-6.52	Peak
3	320.032	51.47	-12.20	39.27	46.00	-6.73	Peak
4	421.088	48.50	-9.86	38.64	46.00	-7.36	QP
5	472.960	48.10	-9.60	38.50	46.00	-7.50	QP
6	537.312	48.80	-8.42	40.38	46.00	-5.62	QP

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

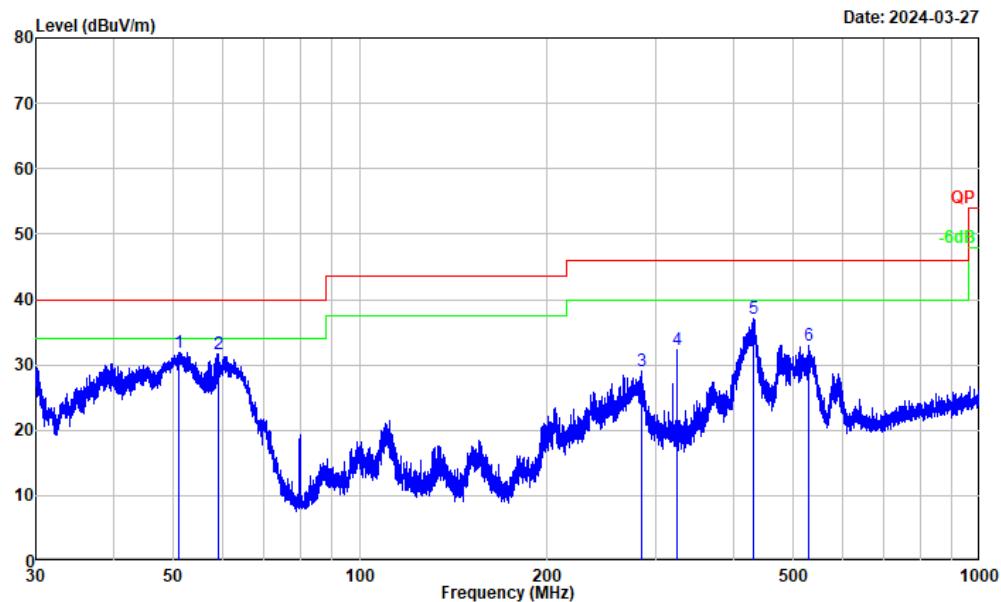

Project No. : RWAQ202400251  
 Test Mode : Transmitting  
 Test Voltage : AC 120V/60Hz  
 Environment : 21.5°C/68%R.H./101.5kPa  
 Tested by : Bard Huang  
 Polarization : vertical  
 Remark : 802.11a High channel

--No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Detector
-----							
1	51.102	44.63	-12.70	31.93	40.00	-8.07	Peak
2	59.263	45.84	-14.16	31.68	40.00	-8.32	Peak
3	284.682	41.88	-12.94	28.94	46.00	-17.06	Peak
4	323.984	44.25	-12.03	32.22	46.00	-13.78	Peak
5	431.743	46.88	-9.87	37.01	46.00	-8.99	Peak
6	529.363	41.40	-8.47	32.93	46.00	-13.07	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

**Remark:**

Result = Reading + Factor

Factor = Antenna factor + Cable loss - Amplifier gain

Margin = Result - Limit

**Above 1GHz:**

<b>Test Date:</b>	2024-03-27	<b>Test By:</b>	Luke Li
<b>Environment condition:</b>	Temperature:21.5 °C; Relative Humidity:68%; ATM Pressure: 101.5kPa		

Frequency (MHz)	Reading level (dB $\mu$ V)	Polar (H/V)	Corrected Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Remark
802.11a							
Low Channel							
5634.768	49.79	horizontal	11.90	61.69	68.20	-6.51	Peak
5651.276	48.12	horizontal	11.90	60.02	69.15	-9.13	Peak
5700.800	47.75	horizontal	12.00	59.75	105.42	-45.67	Peak
5721.061	52.25	horizontal	12.03	64.28	113.22	-48.94	Peak
5648.899	48.06	vertical	11.91	59.97	68.20	-8.23	Peak
5651.401	47.40	vertical	11.90	59.30	69.24	-9.94	Peak
5701.050	49.80	vertical	12.00	61.80	105.49	-43.69	Peak
5721.311	60.25	vertical	12.03	72.28	113.79	-41.51	Peak
11490.000	42.93	horizontal	6.46	49.39	74.00	-24.61	Peak
11490.000	42.59	vertical	6.46	49.05	74.00	-24.95	Peak
Middle Channel							
11570.000	44.99	horizontal	6.52	51.51	74.00	-22.49	Peak
11570.000	44.96	vertical	6.52	51.48	74.00	-22.52	Peak
High Channel							
5854.352	49.67	horizontal	12.31	61.98	112.28	-50.30	Peak
5874.162	47.54	horizontal	12.38	59.92	105.43	-45.51	Peak
5923.824	47.49	horizontal	12.44	59.93	69.07	-9.14	Peak
5944.322	49.53	horizontal	12.41	61.94	68.20	-6.26	Peak
5853.389	58.60	vertical	12.31	70.91	114.47	-43.56	Peak
5874.437	48.43	vertical	12.38	60.81	105.36	-44.55	Peak
5923.824	47.91	vertical	12.44	60.35	69.07	-8.72	Peak
5939.507	50.23	vertical	12.42	62.65	68.20	-5.55	Peak
11650.000	46.77	horizontal	6.55	53.32	74.00	-20.68	Peak
11650.000	46.75	vertical	6.55	53.30	74.00	-20.70	Peak
802.11n20							
Low Channel							
5648.649	47.89	horizontal	11.91	59.80	68.20	-8.40	Peak
5654.277	49.95	horizontal	11.91	61.86	71.38	-9.52	Peak

5700.675	47.63	horizontal	12.00	59.63	105.39	-45.76	Peak
5721.186	52.13	horizontal	12.03	64.16	113.50	-49.34	Peak
5638.269	49.42	vertical	11.91	61.33	68.20	-6.87	Peak
5651.276	47.76	vertical	11.90	59.66	69.15	-9.49	Peak
5701.176	49.02	vertical	12.00	61.02	105.53	-44.51	Peak
5720.811	58.43	vertical	12.03	70.46	112.65	-42.19	Peak
11490.000	42.76	horizontal	6.46	49.22	74.00	-24.78	Peak
11490.000	42.85	vertical	6.46	49.31	74.00	-24.69	Peak
Middle Channel							
11570.000	45.01	horizontal	6.52	51.53	74.00	-22.47	Peak
11570.000	44.20	vertical	6.52	50.72	74.00	-23.28	Peak
High Channel							
5854.352	47.65	horizontal	12.31	59.96	112.28	-52.32	Peak
5874.575	48.07	horizontal	12.38	60.45	105.32	-44.87	Peak
5924.100	47.90	horizontal	12.43	60.33	68.86	-8.53	Peak
5944.047	49.47	horizontal	12.41	61.88	68.20	-6.32	Peak
5854.352	53.59	vertical	12.31	65.90	112.28	-46.38	Peak
5874.162	47.41	vertical	12.38	59.79	105.43	-45.64	Peak
5923.824	47.37	vertical	12.44	59.81	69.07	-9.26	Peak
5932.079	49.70	vertical	12.43	62.13	68.20	-6.07	Peak
11650.000	46.63	horizontal	6.55	53.18	74.00	-20.82	Peak
11650.000	47.03	vertical	6.55	53.58	74.00	-20.42	Peak
802.11n40							
Low Channel							
5606.003	49.73	horizontal	11.91	61.64	68.20	-6.56	Peak
5651.401	48.42	horizontal	11.90	60.32	69.24	-8.92	Peak
5701.301	50.40	horizontal	12.00	62.40	105.56	-43.16	Peak
5721.436	51.15	horizontal	12.03	63.18	114.07	-50.89	Peak
5643.271	50.00	vertical	11.90	61.90	68.20	-6.30	Peak
5650.650	48.38	vertical	11.90	60.28	68.68	-8.40	Peak
5701.551	50.57	vertical	12.00	62.57	105.63	-43.06	Peak
5721.186	57.43	vertical	12.03	69.46	113.50	-44.04	Peak
11510.000	43.69	horizontal	6.48	50.17	74.00	-23.83	Peak
11510.000	43.88	vertical	6.48	50.36	74.00	-23.64	Peak
High Channel							
5854.490	47.16	horizontal	12.31	59.47	111.96	-52.49	Peak
5874.575	48.50	horizontal	12.38	60.88	105.32	-44.44	Peak
5923.824	48.49	horizontal	12.44	60.93	69.07	-8.14	Peak

5937.031	49.35	horizontal	12.42	61.77	68.20	-6.43	Peak
5854.352	48.20	vertical	12.31	60.51	112.28	-51.77	Peak
5874.024	46.95	vertical	12.38	59.33	105.47	-46.14	Peak
5924.375	48.34	vertical	12.43	60.77	68.66	-7.89	Peak
5954.502	49.31	vertical	12.38	61.69	68.20	-6.51	Peak
11590.000	45.44	horizontal	6.53	51.97	74.00	-22.03	Peak
11590.000	46.85	vertical	6.53	53.38	74.00	-20.62	Peak

Remark:

Corrected Amplitude= Reading level + corrected Factor

Corrected Factor = Antenna factor + Cable loss – Amplifier gain


Margin = Corrected Amplitude – Limit


For the test result of Peak below the Peak limit more than 20dB, which can compliance with the average limit, just the Peak level was recorded.

The emission levels of other frequencies that were lower than the limit 20dB, not show in test report.

For emissions in 18GHz-40GHz range, all emissions were investigated and in the noise floor level.

Test plot for example as below:

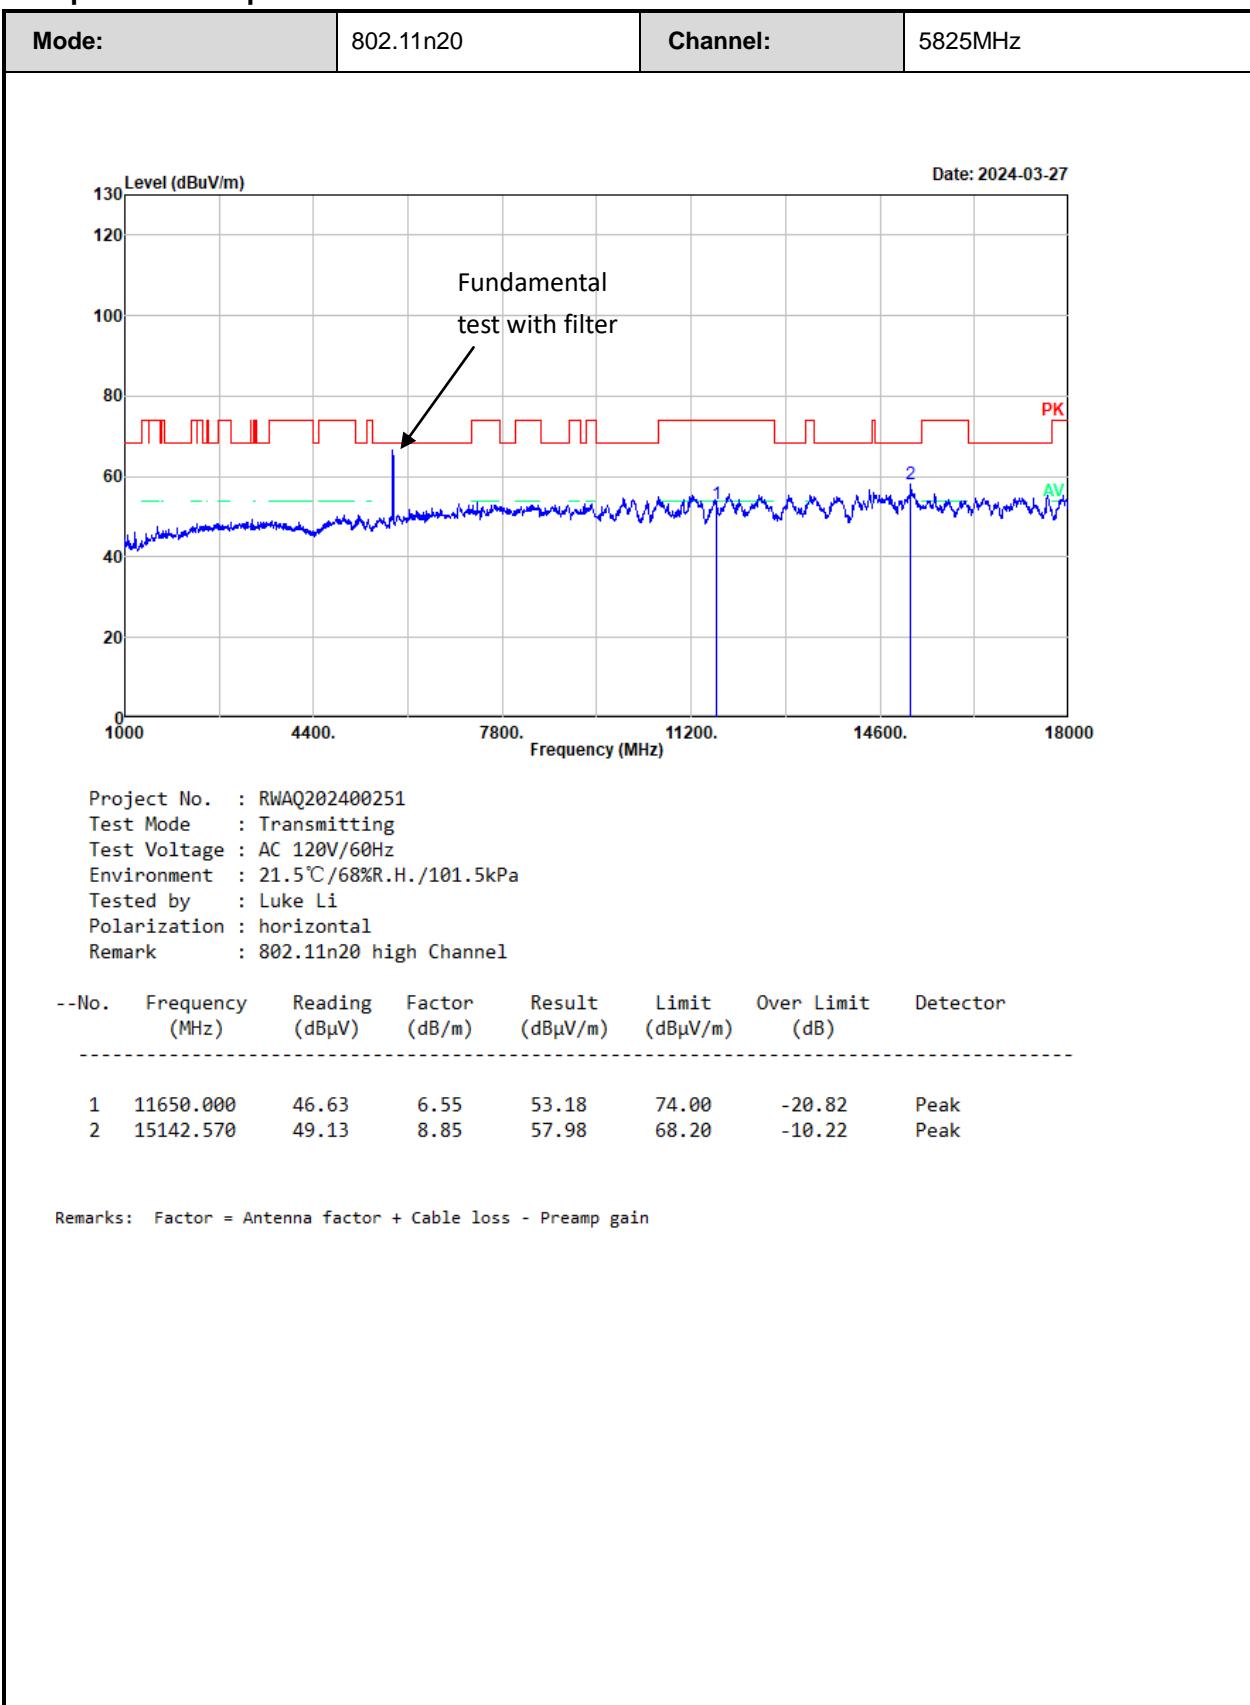

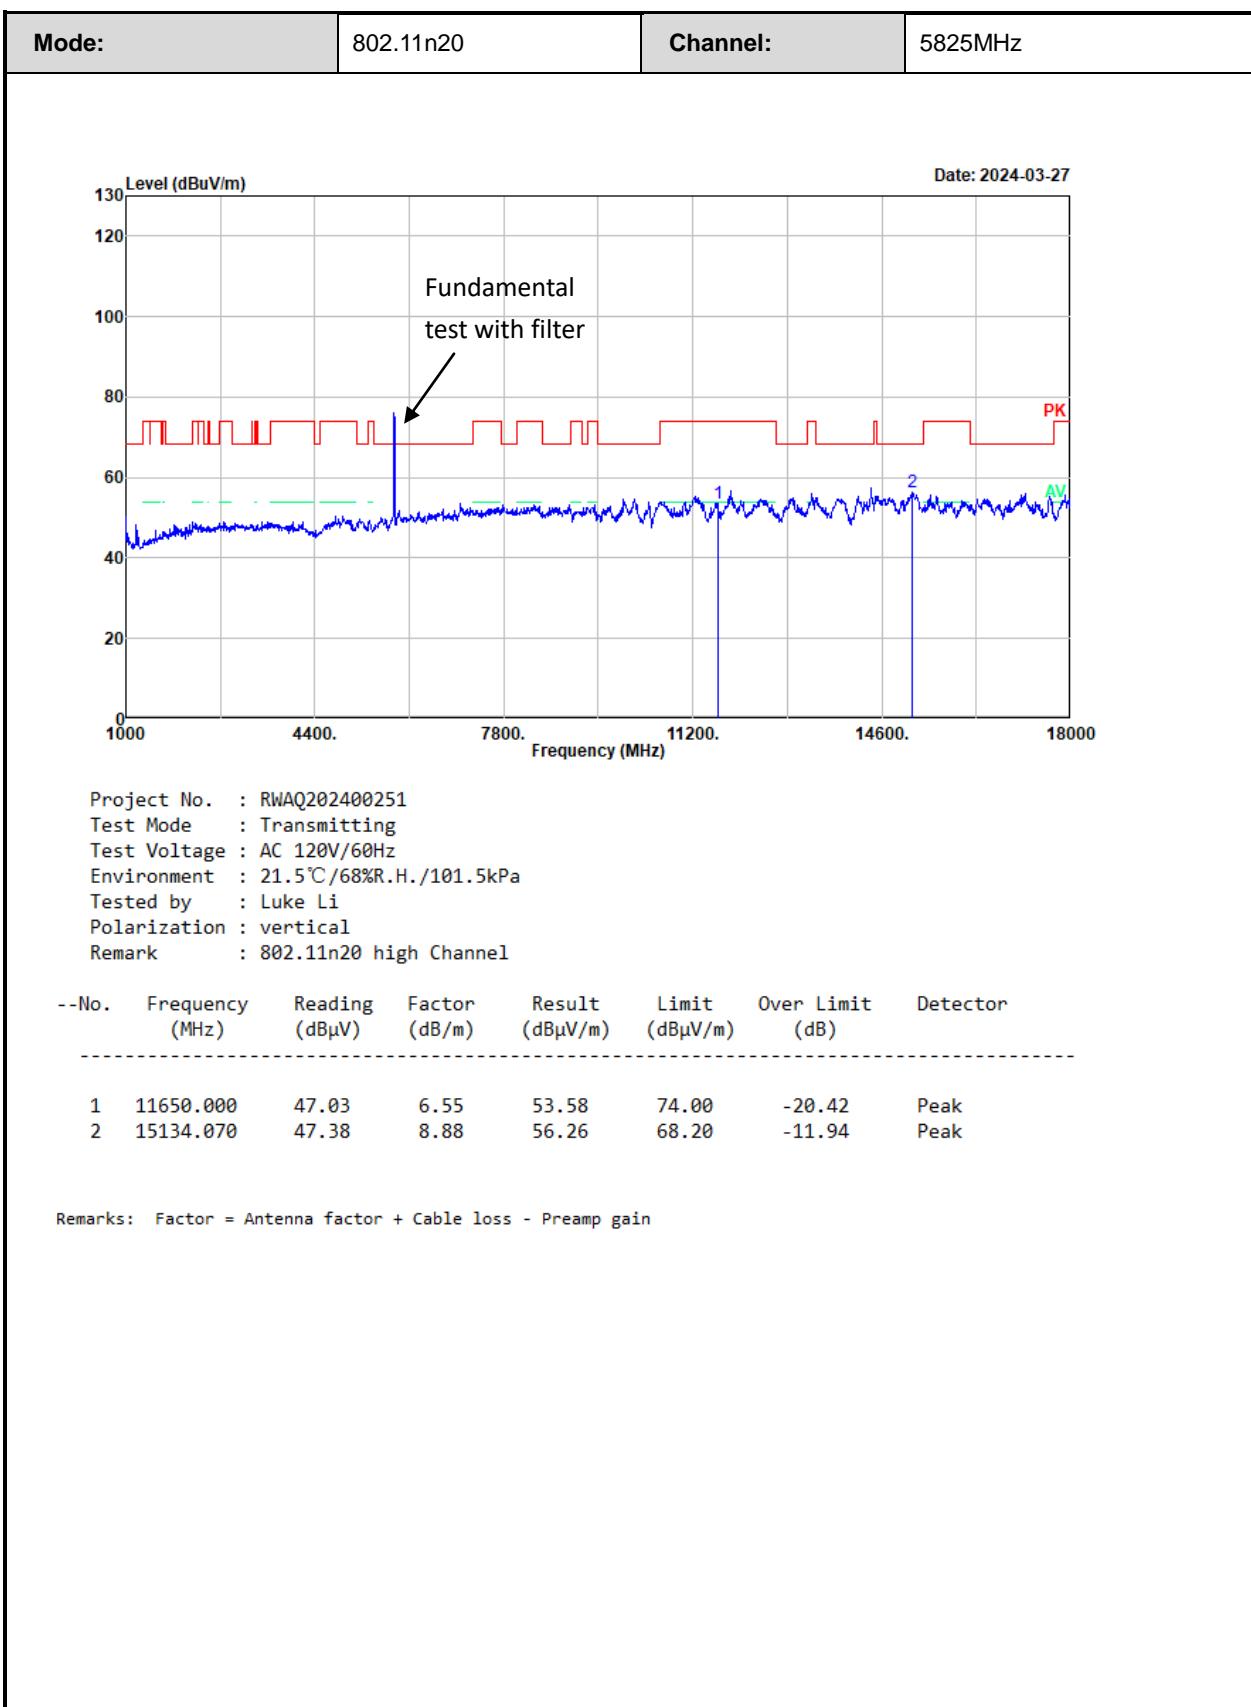

### 3.5 RF Conducted Test Data

Test Date:	2024-03-29	Test By:	Ryan Zhang
Environment condition:	Temperature: 25.9°C; Relative Humidity: 72%; ATM Pressure: 101.2kPa		

#### 3.5.1 26dB/6dB Emission Bandwidth and 99% Occupied Bandwidth

Test Mode	Antenna	Channel [MHz]	6dB BW [MHz]	99% OBW [MHz]	6dB BW Limit [MHz]	Verdict
802.11a	Ant1	5745	14.880	16.640	0.5	pass
		5785	15.040	17.440	0.5	pass
		5825	15.120	17.200	0.5	pass
802.11n HT20	Ant1	5745	15.200	17.760	0.5	pass
		5785	15.040	17.760	0.5	pass
		5825	14.960	18.160	0.5	pass
802.11n HT40	Ant1	5755	32.640	36.000	0.5	pass
		5795	32.480	40.800	0.5	pass

#### 3.5.2 Maximum conducted output power

Test Mode	Antenna	Channel [MHz]	Result [dBm]	Limit [dBm]	Verdict
802.11a	Ant1	5745	14.18	30	Pass
		5785	13.12	30	Pass
		5825	16.45	30	Pass
802.11n HT20	Ant1	5745	13.97	30	Pass
		5785	13.06	30	Pass
		5825	16.41	30	Pass
802.11n HT40	Ant1	5755	13.44	30	Pass
		5795	13.66	30	Pass

#### 3.5.3 Power Spectral Density

Test Mode	Antenna	Channel [MHz]	Result [dBm/500kHz]	Limit [dBm/500kHz]	Verdict
802.11a	Ant1	5745	2.03	30	Pass
		5785	0.82	30	Pass
		5825	4.50	30	Pass
802.11n HT20	Ant1	5745	1.90	30	Pass
		5785	0.79	30	Pass
		5825	3.23	30	Pass
802.11n HT40	Ant1	5755	-1.92	30	Pass
		5795	-2.12	30	Pass


### 3.5.4 Duty Cycle


Test Mode	Antenna	Channel (MHz)	Ton (ms)	Ton+off (ms)	Duty Cycle [%]	1/T [kHz]	VBW setting* [Hz]
802.11a	Ant1	5785	1.397	1.428	97.83	0.716	1000
802.11n HT20	Ant1	5785	1.289	1.324	97.36	0.776	1000
802.11n HT40	Ant1	5785	0.641	0.687	93.30	1.560	2000

Note\*: Radiated emission test with average value, the Spectrum analyzer VBW setting information.


**Test Plots:**


6dB Emission Bandwidth

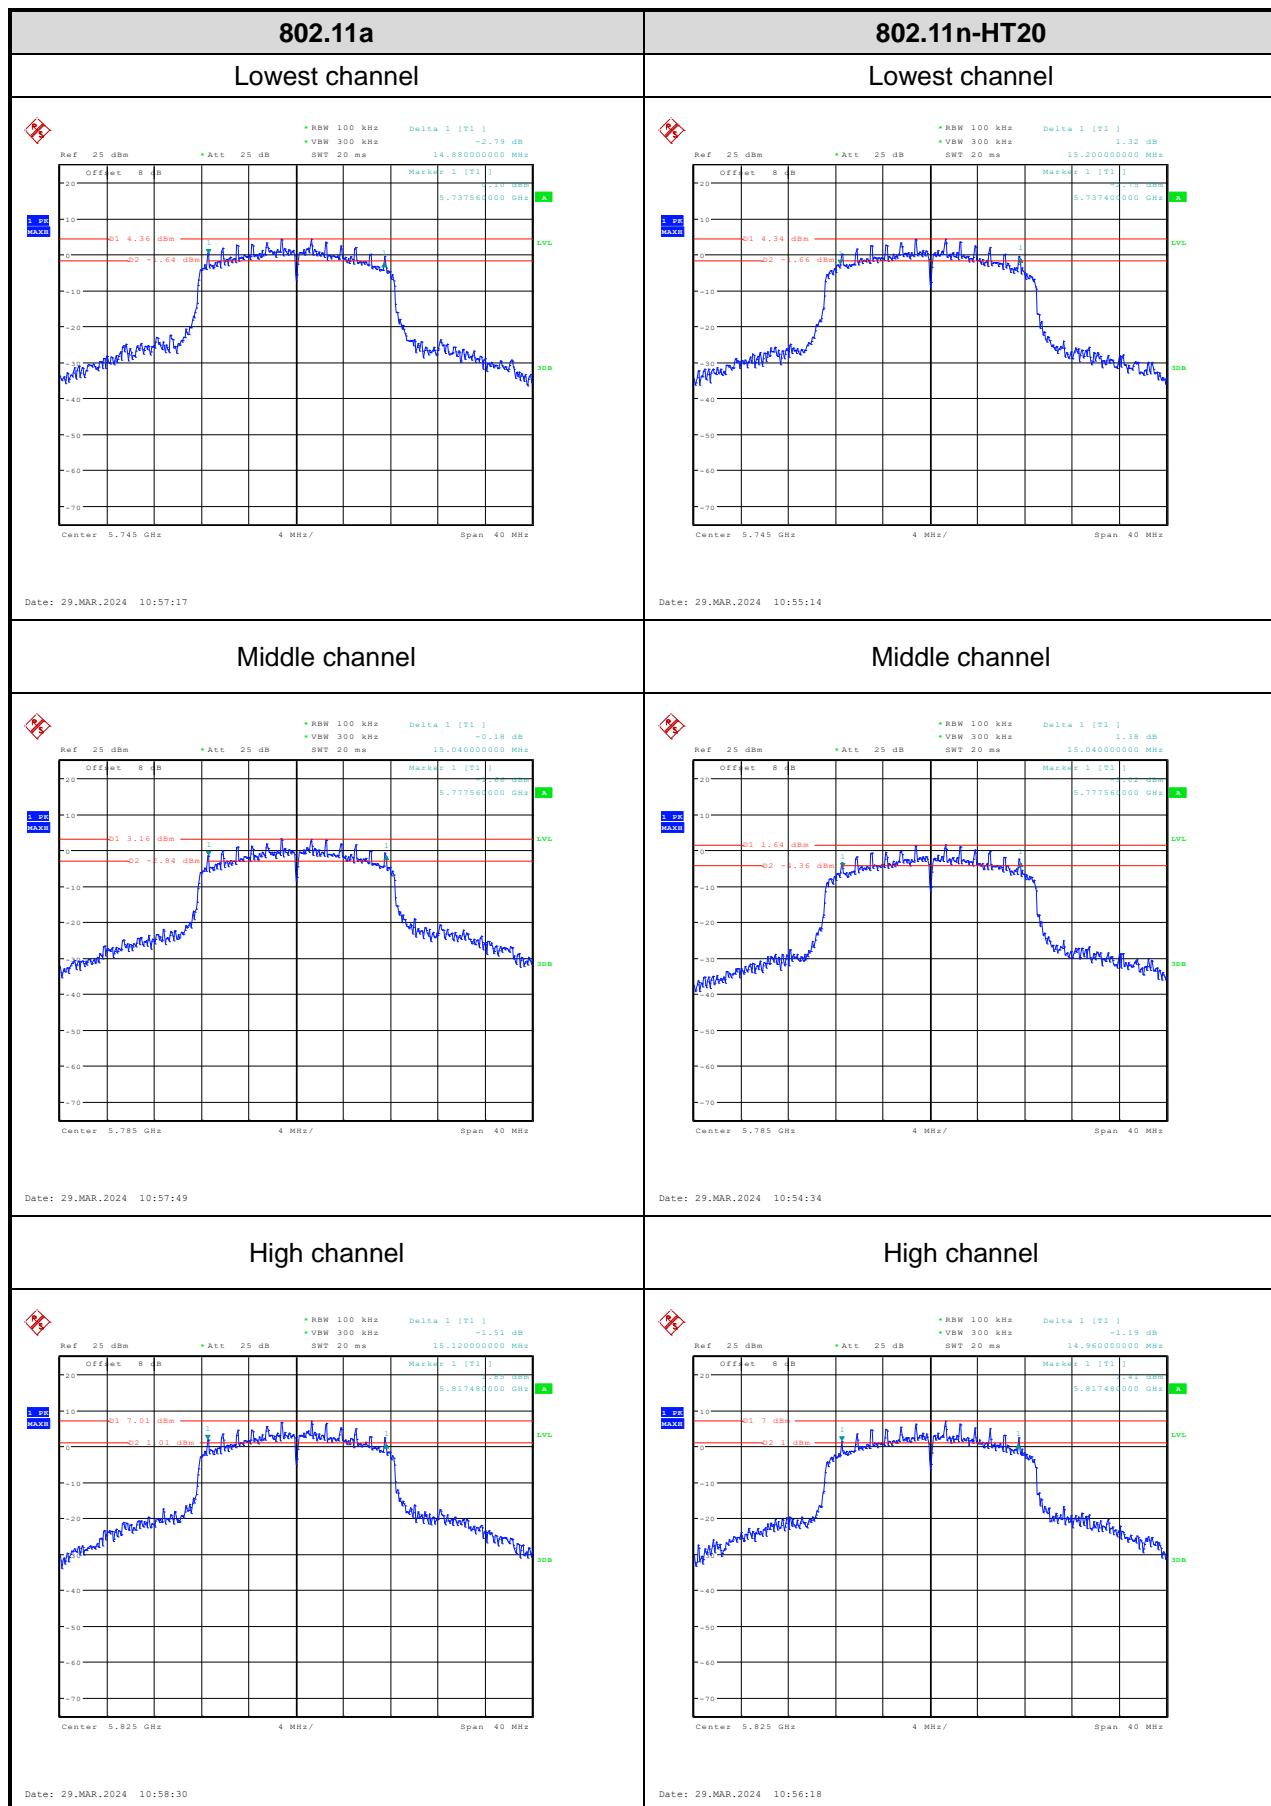

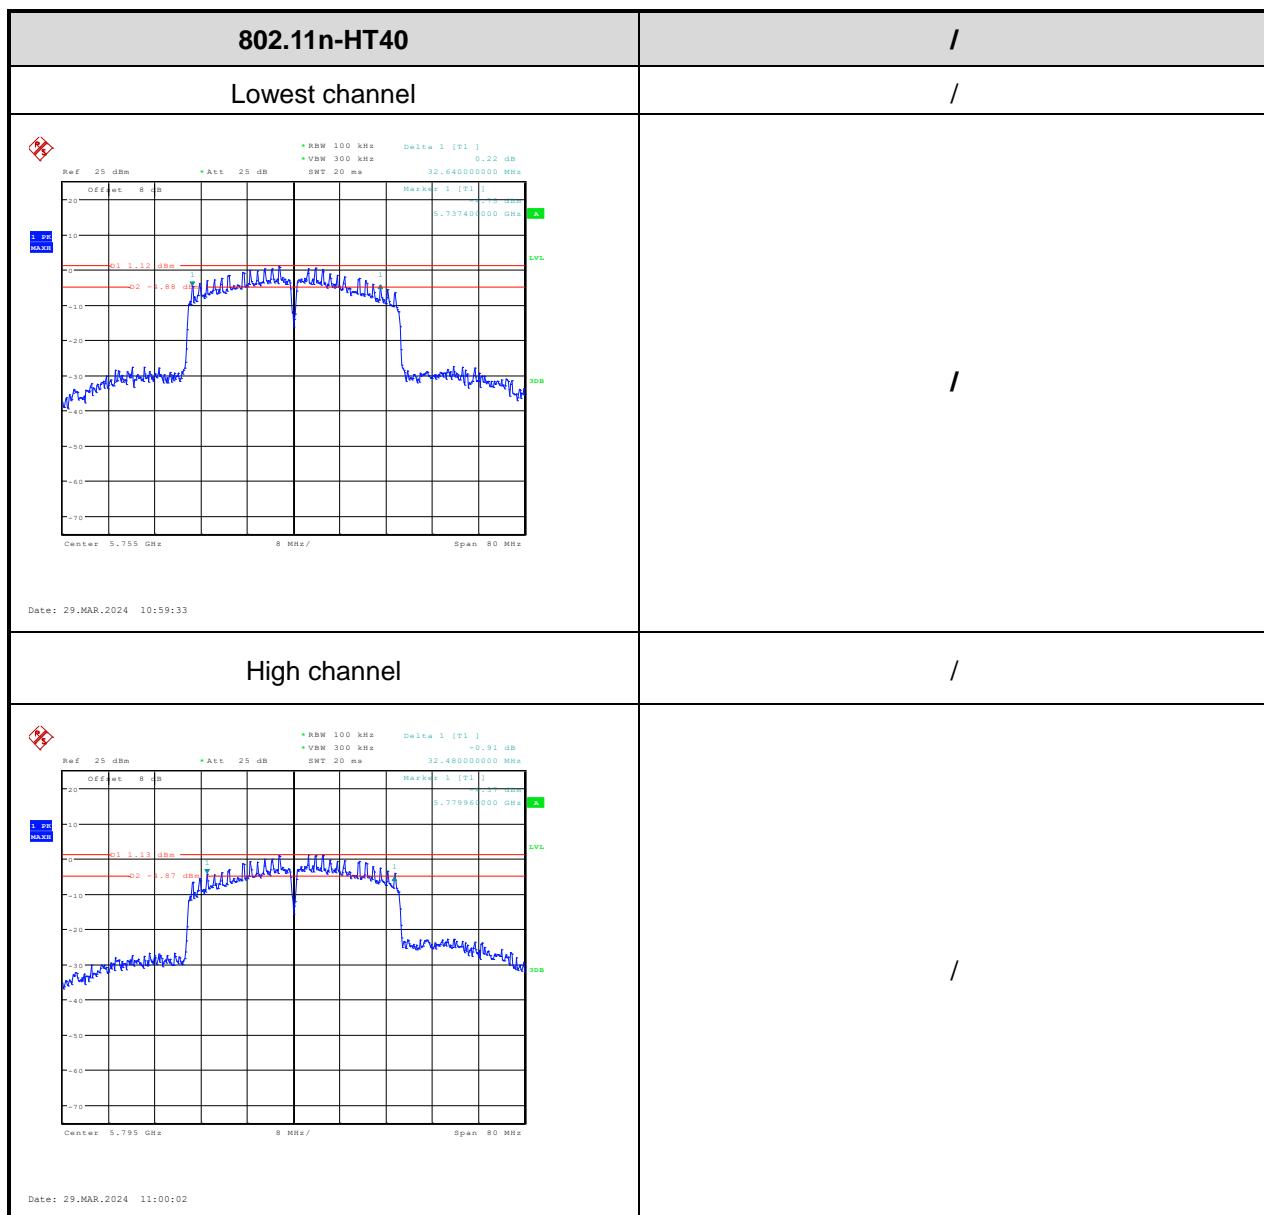



99% Occupied Bandwidth

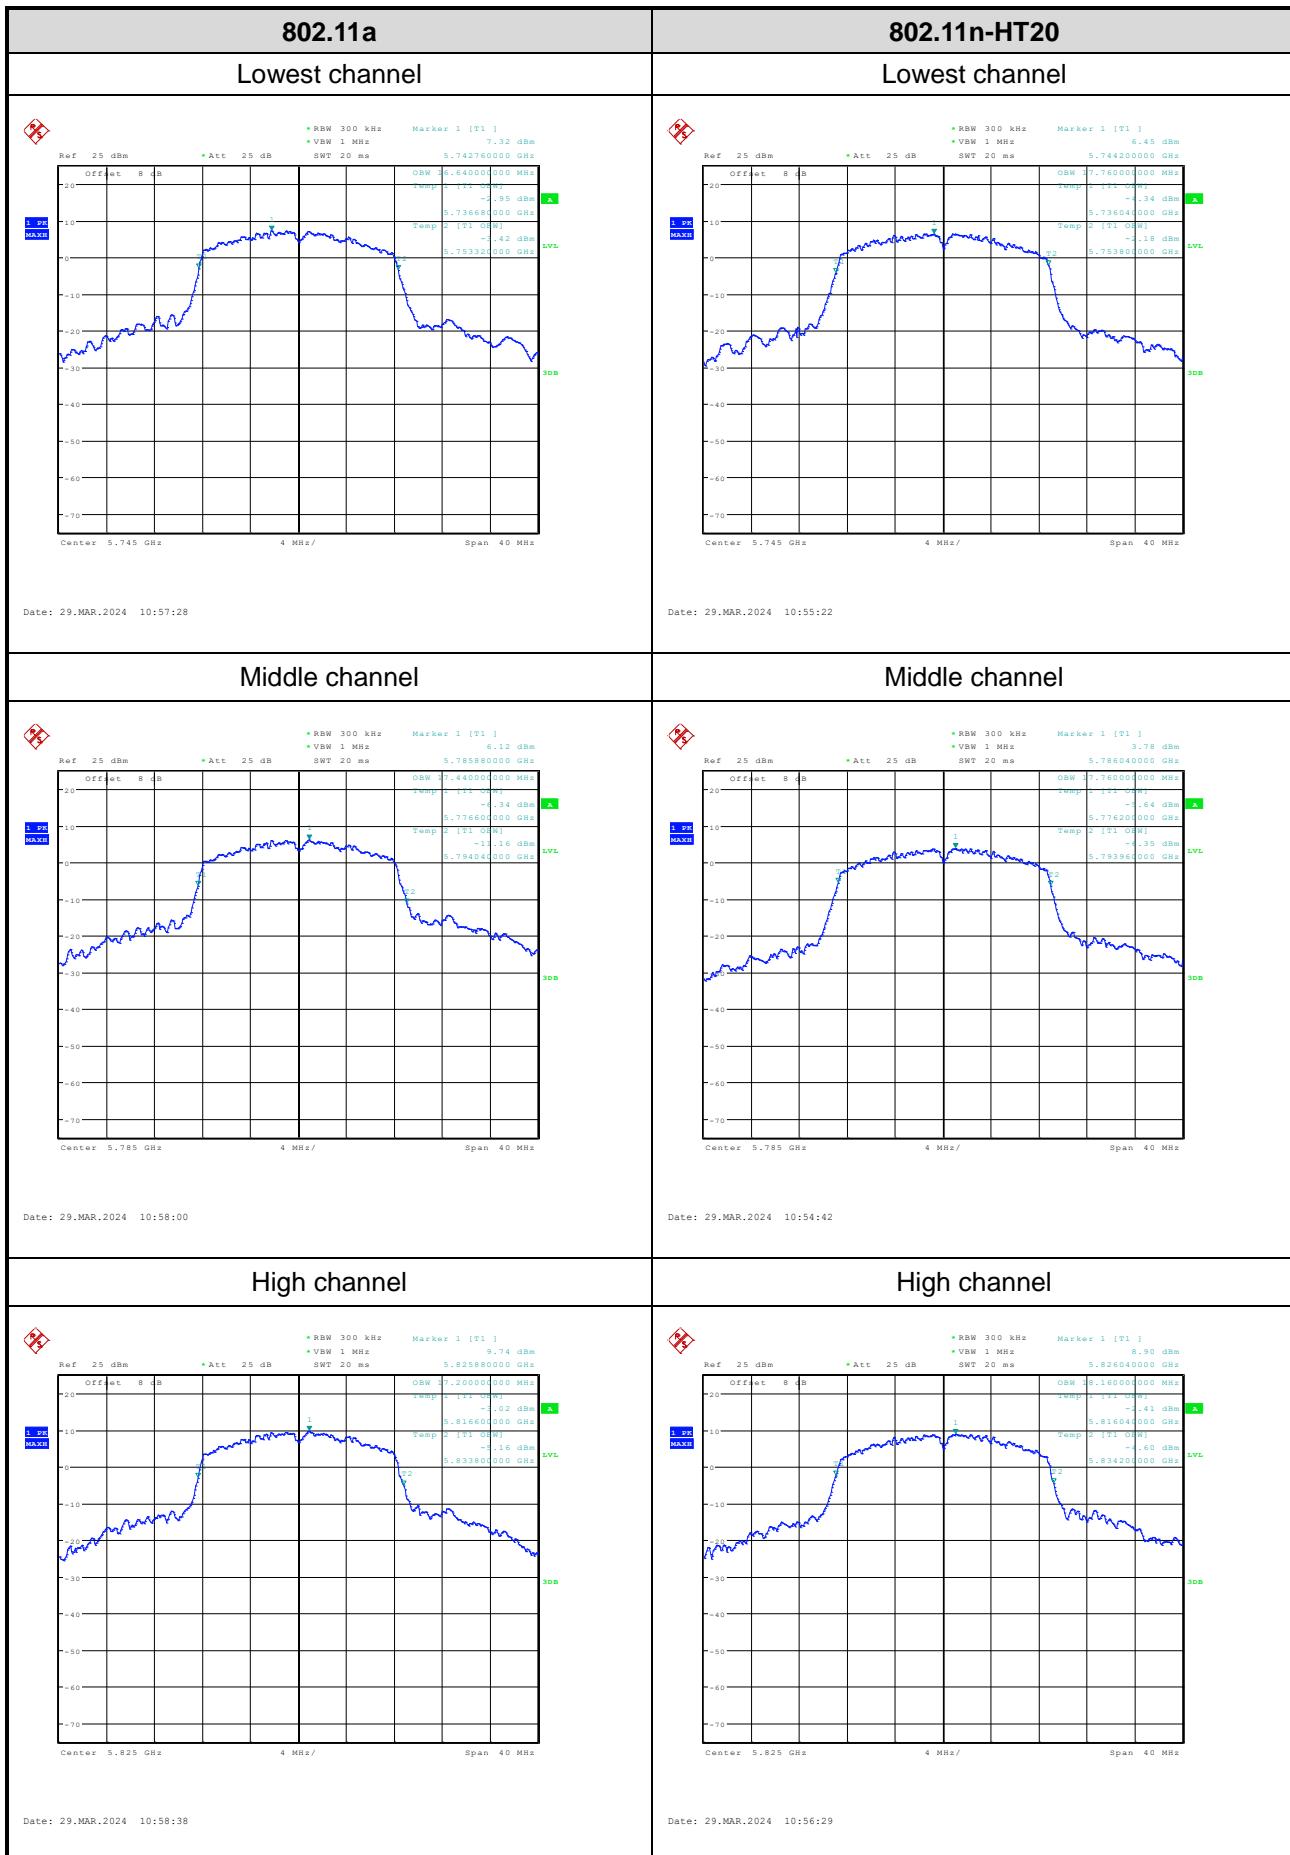

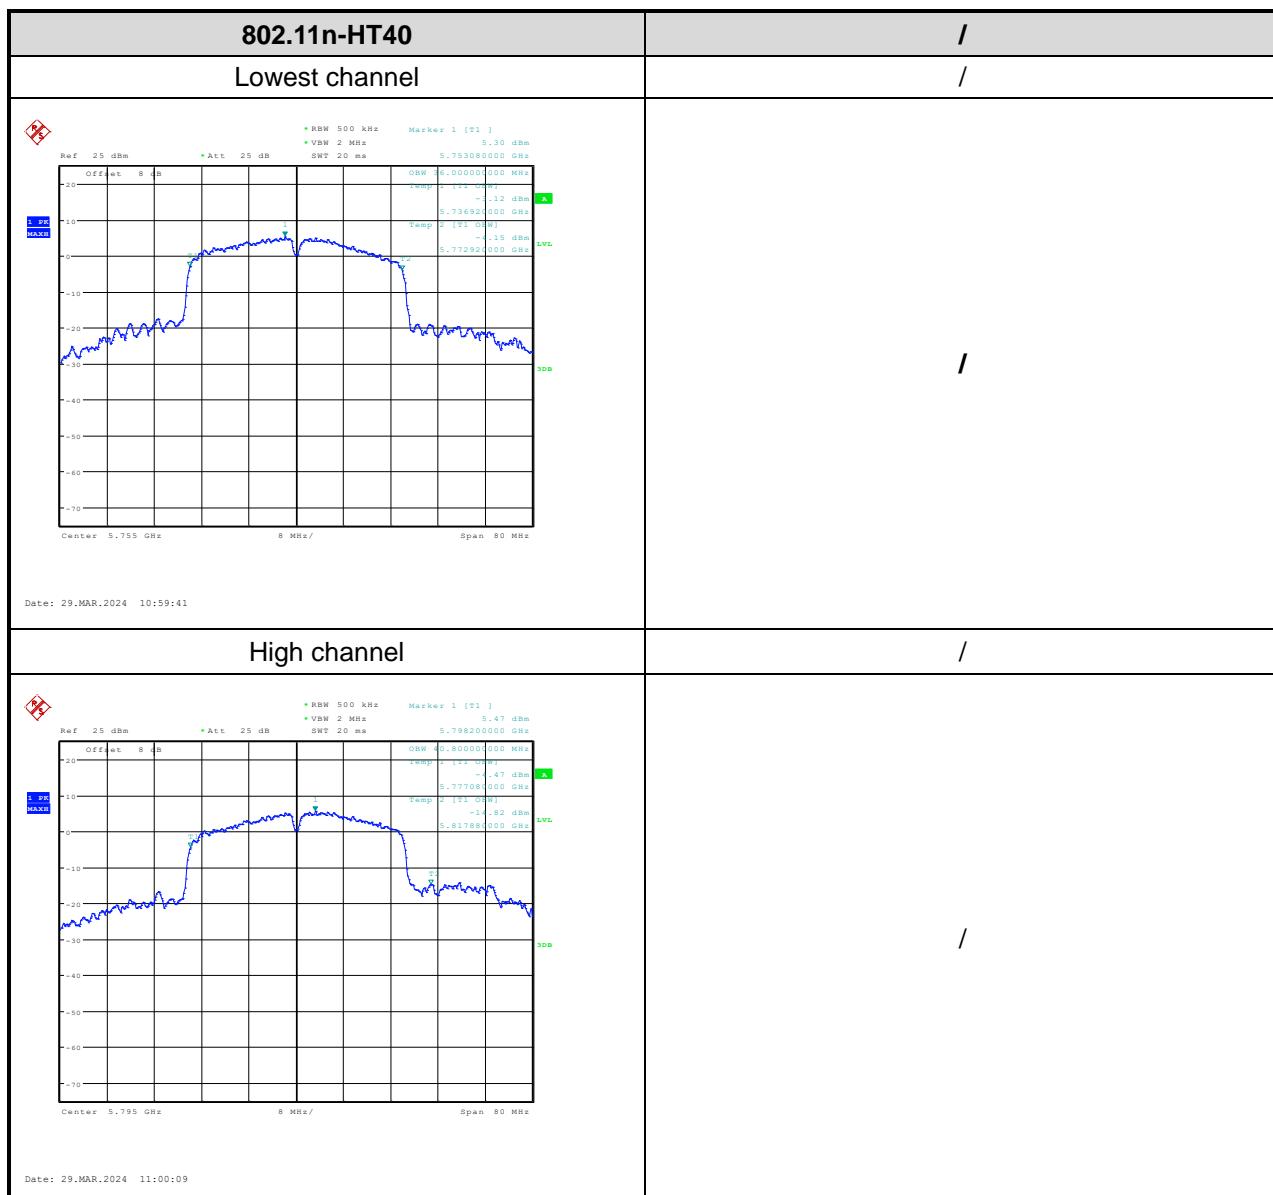

Power Spectral Density

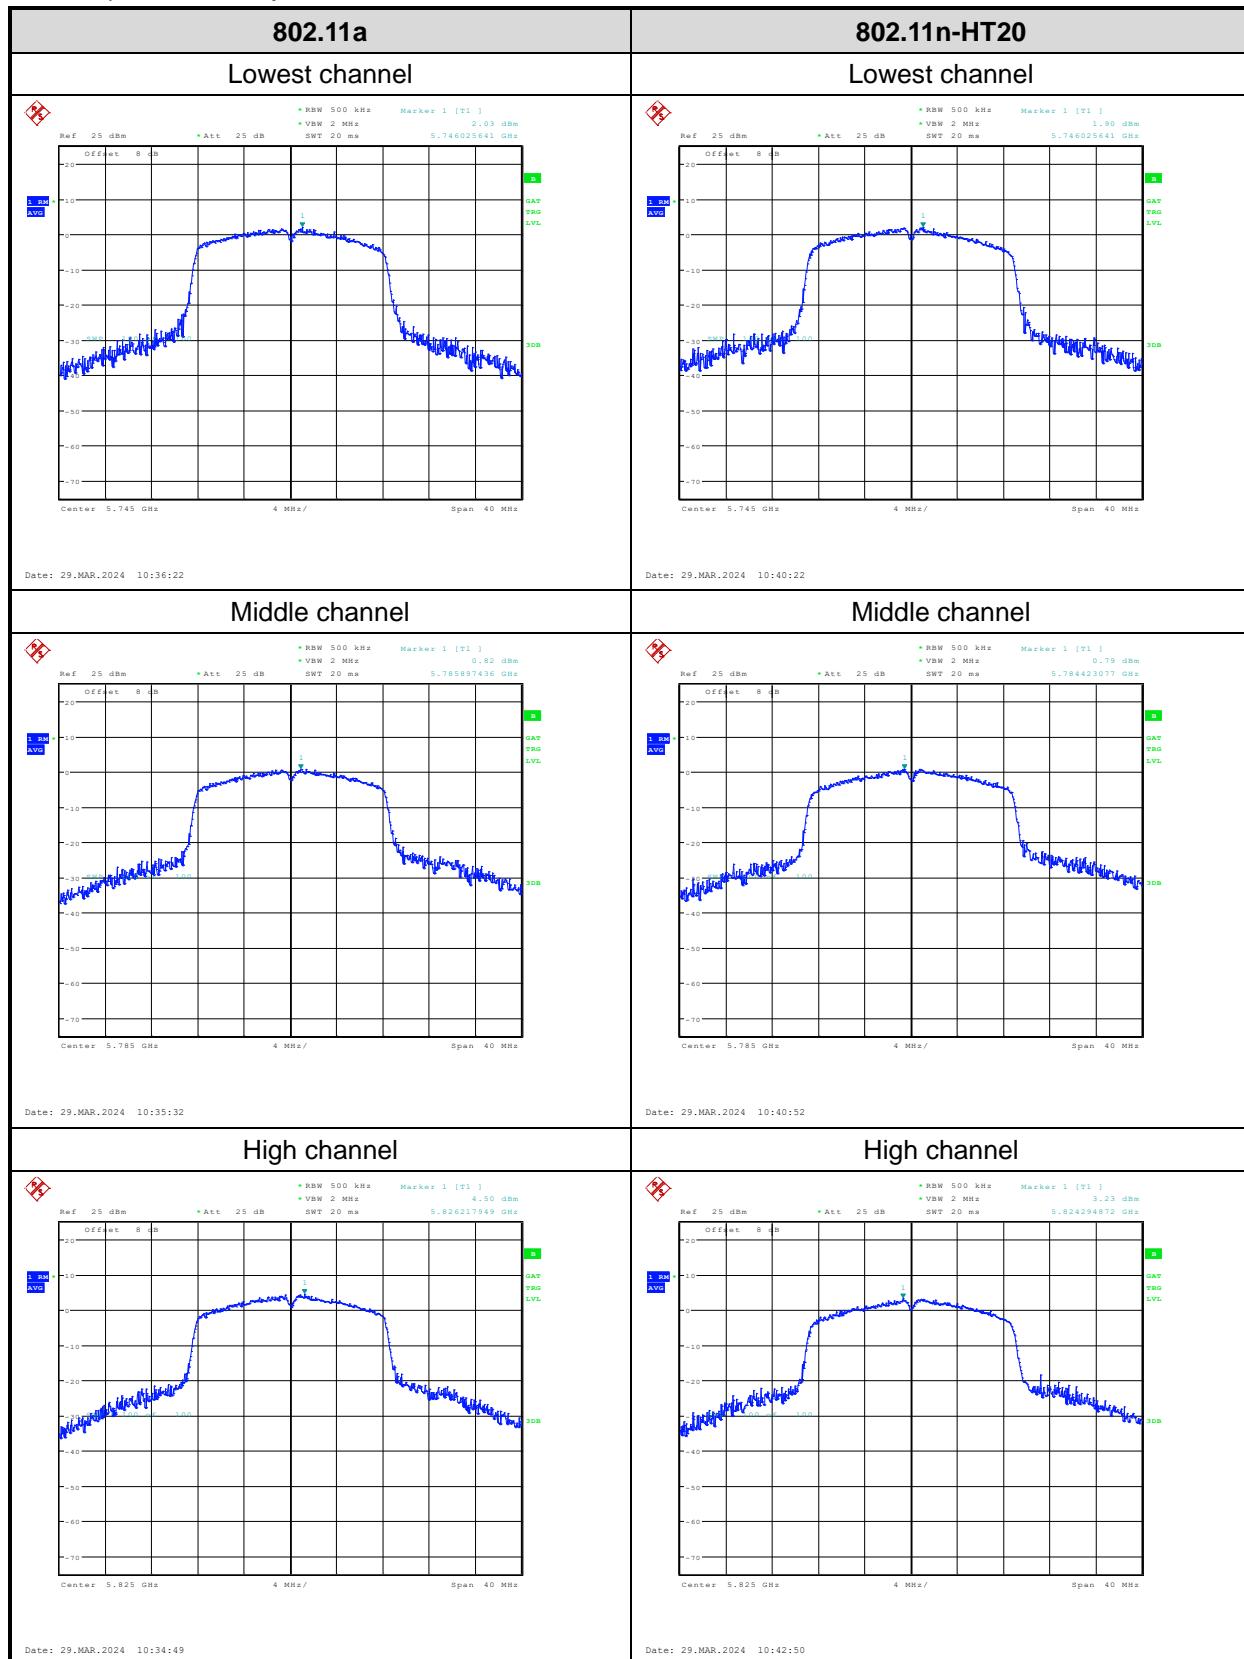

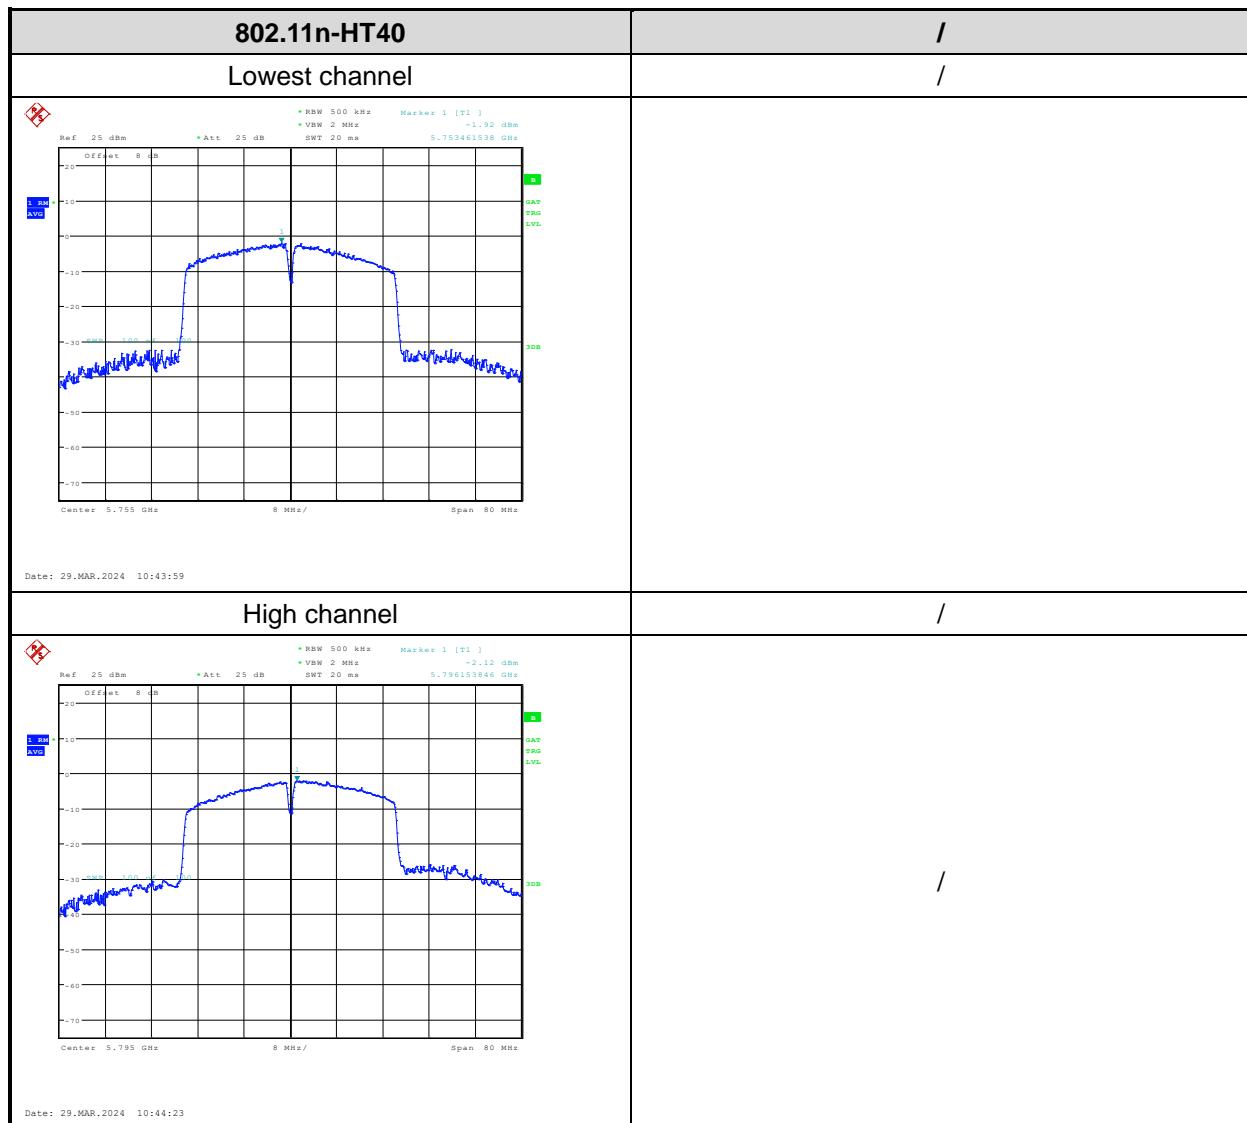

Duty Cycle



## 4 Test Setup Photo

Please refer to the attachment RWAQ202400251Test Setup photo.

## 5 E.U.T Photo

Please refer to the attachment RWAQ202400251 External photo and RWAQ202400251 Internal photo.

**---End of Report---**