

Page: 1 of 41

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Applicant: Brinno Incorporated

4F,No.107,Zhou Zi St.,Taipei City 11493, Taiwan

Product Name: Motion Activated Sensor

Brand Name: Brinno Model No.: MAS200 Model Difference: N/A

FCC ID: ZDX-MAS200 **Report Number:** E2/2017/900614

FCC Rule Part: §15.249

Issue Date: Oct. 19, 2017

Date of Test: Sep. 15, 2017~ Oct. 06, 2017

Date of EUT Received: Sep. 15, 2017

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Prepared By

Stefanie Yu / Clerk

Jim Chang / Asst. Manager





0513

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹0天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



Page: 2 of 41

Revision History

Report Number	Revision	Description	Issue Date
E2/2017/90061	Rev.00	Initial creation of document	Oct. 19, 2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⑪天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without price wither approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this decument is undertile and effective ment in the present of the industry of the content of the lower of the industry of the company. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sqs.com



Page: 3 of 41

Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	9
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	11
6	CONDUCTED EMISSION TEST	12
7	Radiated Emission Test	14
8	20 dB Bandwidth Measurement	38
9	Antenna Requirement	41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate of this decument is undertically the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate of this decument. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



Page: 4 of 41

GENERAL INFORMATION

1.1 Product Description

General:

Product Name:	Motion Activated Sensor
Brand Name:	Brinno
Model No.:	MAS200
Model Difference:	N/A
Product SW/HW version:	N/A / N/A
Power Supply:	3Vdc from CR2450 Lithium Coin Battery
Antenna Designation:	Internal Antenna, Gain: 1.62 dBi

2.4GHz

Transmit Power	99.26dBuV/m (Peak)
Operation Frequency:	2408 ~ 2468MHz
Channel number:	4 channels
Channel space:	1MHz
Modulation Type:	GFSK

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate of this decument is undertically the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate of this decument. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Page: 5 of 41

Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.249 ANSI C63.10:2013

Note:

All test items have been performed and record as per the above standards.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory

No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333 (TAF code 0513)

FCC Registration Number and Designation are: 735305 / TW0002

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488



Page: 6 of 41

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 **Test Procedure**

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-

tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, intention is drawn to the limitation of liability, intention is drawn to the limitation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. f (886-2) 2298-0488



Page: 7 of 41

2.5 Limitation

(1) Conducted Emission

Conducted Emission Limits is as following.

Frequency	Conducted	d Limit (dBuV)		
(MHz)	Quasi-Peak	Average		
0.15 – 0.5	66 - 56	56 - 46		
0.5 – 5	56	46		
5 - 30	60	50		

(2) Radiated Emission

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following.

Frequency (MHz)	Field strength of Fundamental	Field strength of Harmonics	Distance (m)
902 – 928	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
2400 – 2483.5	50 mV/m 500 uV/m		3
	(94dBuV/m)	(54dBuV/m)	
5725 – 5875	50 mV/m 500 uV/m		3
	(94dBuV/m)	(54dBuV/m)	
24.0 – 24.25 GHz	250 mV/m	2500 uV/m	3
	(107.95dBuV/m)	(67.95dBuV/m)	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 8 of 41

(3) Radiated Emission

Emission Radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits as below, whichever is the lesser attenuation.

Frequency	Field strength	Distance (m)	Field strength at
(MHz)	μ V/m		3m dBμV/m
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

(4) Radiated Emission

For frequencies above 1000MHz, the above field strength limits are based on average limits. The peak filed strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

Re-

Emission level in dBuV/m=20 log (uV/m)

mark:

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of \$ 15.205 and RSS-Gen § 8.10
- 4. Emission spurious frequency which appearing within the Restricted Bands specified in provision of ξ15.205 and RSS-Gen § 8.10, then the general radiated emission limits in ξ 15.209 and RSS-Gen \S 8.9 apply.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, intention is drawn to the limitation of liability, intention is drawn to the limitation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Page: 9 of 41

2.6 Configuration of Tested System

Fig. 2-1 Radiated Emission & Conducted (Antenna Port) Configuration



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	2.4GHz Wireless Test Software	N/A	N/A	N/A	N/A	N/A

SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	N/A
§15.249(a)(d)(e)	Radiated Emission	Compliant
§15.215(c)	20dB bandwidth Measurement	Compliant

DESCRIPTION OF TEST MODES

4.1 Operated in 2405 ~ 2477MHz Band

4 channels are provided.

Channel	Frequency
1	2408MHz
2	2421MHz
3	2437MHz
4	2468MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Page: 10 of 41

4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

RADIATED EMISSION TEST:

	7.5.7.1.2.5 Elimosion 1.20.11							
	RADIATED EMISSION TEST (BELOW 1 GHz)							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT			
2.4G	1 to 4	1.3.4	GFSK	1	MAIN			
	RADIATED EMISSION TEST (ABOVE 1 GHz)							
MODE AVAILABLE TESTED MODULATION RATE (Mbps) PORT								
2.4G	1 to 4	1.3.4	GFSK	1	MAIN			

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT
2.4G	1 to 4	1.3.4	GFSK	1	MAIN

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

www.tw.sqs.com



Page: 11 of 41

MEASUREMENT UNCERTAINTY

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
20dB & 99% Bandwidth	+/- 51.33 Hz
100 kHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	9kHz – 30MHz: +/- 2.87 dB		
	30MHz - 180MHz: +/- 3.37dB		
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB		
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB		
	1GHz - 18GHz: +/- 4.04dB		
	18GHz - 40GHz: +/- 4.04dB		

	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 12 of 41

CONDUCTED EMISSION TEST

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Note

- 1. The lower limit shall apply at the transition frequencies
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT	MFR MODEL SERIAL		LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCI 7	100950	12/12/2016	12/11/2017			
Coaxial Cables	N/A	N30N30-1042-150cm	N/A	08/30/2017	08/29/2018			
LISN	Schwarzbeck	NSLK 8127	8127-648	06/18/2017	06/17/2018			
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.			

6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

www.tw.sqs.com



Page: 13 of 41

6.4 Test SET-UP (Block Diagram of Configuration)

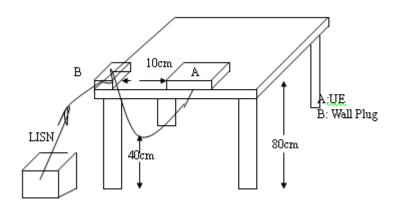

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

N/A, This device is powered by 3Vdc CR3032 Battery coin.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Page: 14 of 41

Radiated Emission Test

7.1. Measurement Procedure


- 1. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 4. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 5. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.

Band	Duty Cycle(%)	T(µs)	1/T(kHz)	VBW Setting
2.4G	39.17	210	4.76	5.1kHz

- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency measured were complete.

7.2. Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

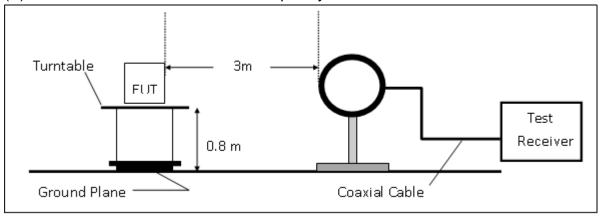

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279


台灣檢驗科技股份有限公司

f (886-2) 2298-0488




Page: 15 of 41

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

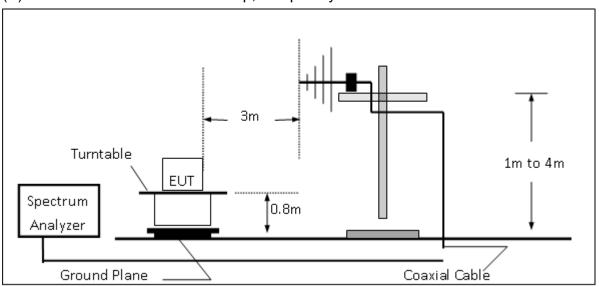

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

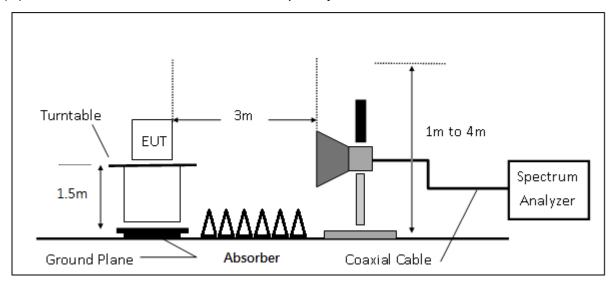

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

t (886-2) 2299-3279

www.tw.sgs.com



Page: 16 of 41

7.3. Measurement Equipment Used:

966 Chamber								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESU 40	100363	04/18/2017	04/17/2018			
Loop Antenna	ETS-Lindgren	6502	00143303	12/23/2016	12/22/2017			
Broadband Antenna	TESEQ	CBL 6112D	35240	11/03/2016	11/02/2017			
Horn Antenna	ETS-Lindgren	3117	00143272	12/15/2016	12/16/2017			
Horn Antenna	Schwarzbeck	BBHA9170	185	08/01/2017	07/31/2018			
Pre Amplifier	EMC Instruments	EMC330	980096	12/12/2016	12/11/2017			
Pre Amplifier	EMC Instruments	EMC0011830	980199	12/12/2016	12/11/2017			
Pre Amplifier	R&S	SCU-18	10204	12/12/2016	12/11/2017			
Pre Amplifier	R&S	SCU-26	100780	12/12/2016	12/11/2017			
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/12/2016	12/11/2017			
Coaxial Cable	Huber+Suhner	RG 214/U	0000, 2014 20	40/40/0046	40/44/0047			
Odaziai Gabic		SUCOFLEX 104	966Rx 30M-3G	12/12/2016	12/11/2017			
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Rx 1G-18G	12/12/2016	12/11/2017			
Coaxial Cable	Huber+Suhner	mini 141-12	066Dy 19C 40C	12/12/2016	12/11/2017			
- Coaxiai Cabic	Trabel Tourner	SUCOFLEX 104	966Rx 18G-40G	12/12/2016	12/11/2017			
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Tx 30M-18G	12/12/2016	12/11/2017			
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	966Tx 18G-40G	12/12/2016	12/11/2017			
Attenuator	WOKEN	218FS-10	RF27	12/12/2016	12/11/2017			
Site NSA	SGS	966 Chamber C	SAC-C	03/02/2017	03/01/2018			
Site VSWR	SGS	966 Chamber C	SAC-C	03/02/2017	03/01/2018			
DC Power Supply	HOLA	DP-3003	D7070035	05/04/2017	05/03/2018			
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.			
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.			
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.			
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.			

Note: N.C.R refers to Not Calibrated Required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488 www.tw.sqs.com



Page: 17 of 41

7.4. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	9	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

7.5. Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Note: There is a comparison data of both open-field test site and semi-Anechoic, and test result came out very similar.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.


No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Page: 18 of 41

Radiated Emission - Band Edge

Operation Mode: 2.4G Test Date: 2017/11/24 Fundamental Frequency: 2408 MHz Temp. / Humi. : 24.3/51 Operation Band: Test Engineer: BE ch Low Aken EUT Pol.: E2 Measurement Antenna Pol. : Vertical

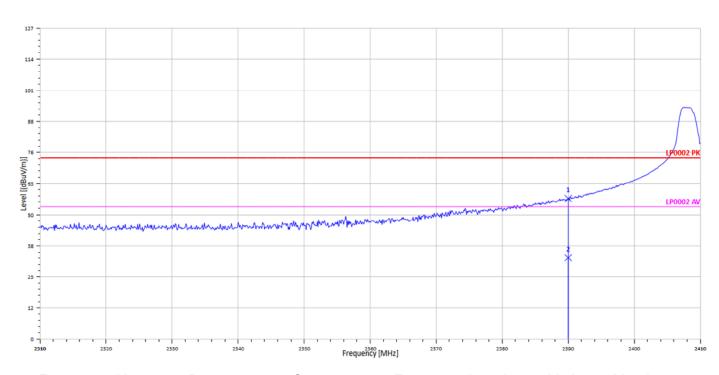

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2385.50	S	Peak	67.16	-6.86	60.30	74	-13.70
2385.50	S	Average	55.99	-6.86	49.13	54	-4.87
2390.00	E	Peak	54.52	-6.84	47.68	74	-26.32
2390.00	Е	Average	42.54	-6.84	35.70	54	-18.30
2400.00	S	Peak	56.34	-6.81	49.53	74	-24.47
2400.00	S	Average	36.39	-6.81	29.58	54	-24.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Page: 19 of 41

Operation Mode: 2.4G Test Date: 2017/11/24 Fundamental Frequency: 2408 MHz Temp. / Humi. : 24.3/51 Operation Band: Test Engineer: BE ch Low Aken EUT Pol.: E2 Measurement Antenna Pol. : Horizontal

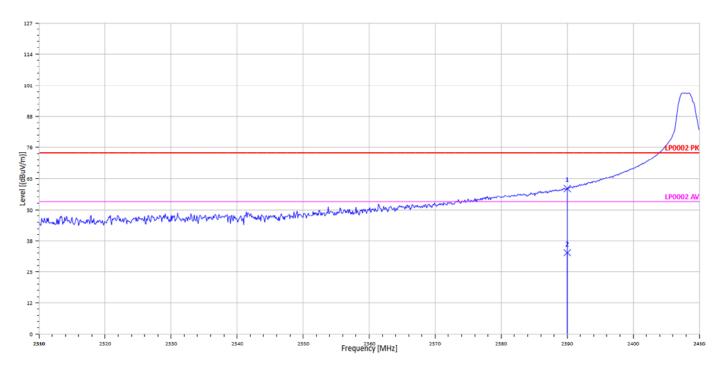

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2385.50	S	Peak	68.61	-6.86	61.75	74	-12.25
2385.50	S	Average	57.12	-6.86	50.26	54	-3.74
2390.00	E	Peak	54.92	-6.84	48.08	74	-25.92
2390.00	E	Average	43.13	-6.84	36.29	54	-17.71
2400.00	S	Peak	57.14	-6.81	50.33	74	-23.67
2400.00	S	Average	37.56	-6.81	30.75	54	-23.25


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 20 of 41

Radiated Spurious Emission Measurement Result (MAIN)

Operation Mode: Test Date: 2.4G 2017/9/28 Fundamental Frequency: 2408 MHz Temp. / Humi. : 24.3/51 Operation Band: Main ch Low Test Engineer: Aken EUT Pol.: Measurement Antenna Pol. : Vertical

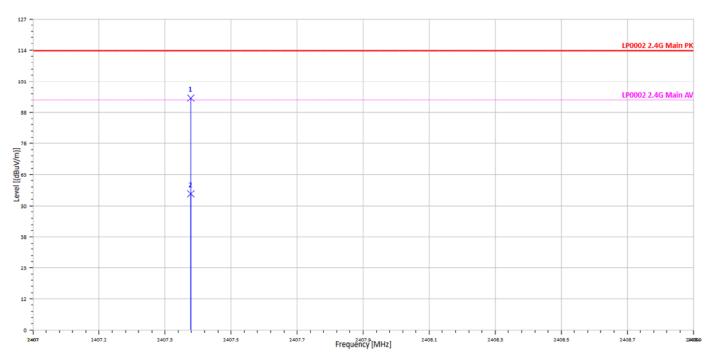


Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2407.48	F	Peak	101.56	-6.77	94.78	114	-19.22
2407.48	F	Average	62.35	-6.77	55.58	94	-38.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 21 of 41

Operation Mode: 2.4G Test Date: 2017/9/28 Fundamental Frequency: 2408 MHz Temp. / Humi.: 24.3/51 Operation Band: Main ch Low Test Engineer: Aken EUT Pol.: Measurement Antenna Pol.: Horizontal

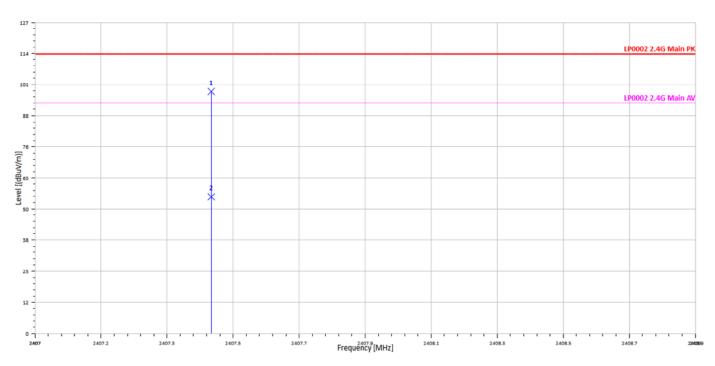


Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2407.53	F	Peak	105.44	-6.77	98.67	114	-15.33
2407.53	F	Average	62.53	-6.77	55.76	94	-38.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 22 of 41

Test Date: Operation Mode: 2.4G 2017/9/28 Fundamental Frequency: 2437 MHz Temp. / Humi.: 24.3/51 Operation Band: Main ch Mid Test Engineer: Aken EUT Pol.: Measurement Antenna Pol.: Vertical

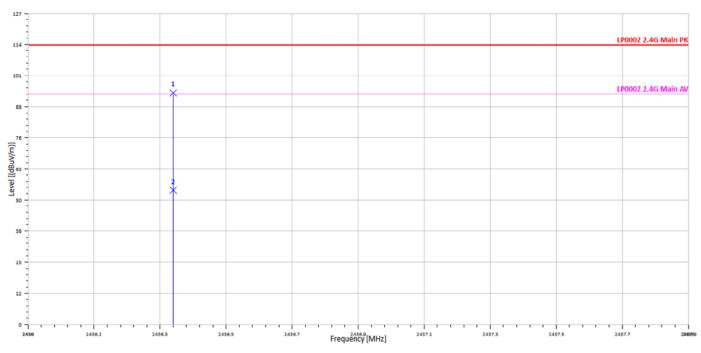


	Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2436.44	F	Peak	101.05	-6.62	94.42	114	-19.58
	2436.44	F	Average	61.36	-6.62	54.74	94	-39.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 23 of 41

Operation Mode: 2.4G Test Date: 2017/9/28 Fundamental Frequency: 2437 MHz Temp. / Humi. : 24.3/51 Operation Band: Main ch Mid Test Engineer: Aken EUT Pol.: Measurement Antenna Pol. : Horizontal

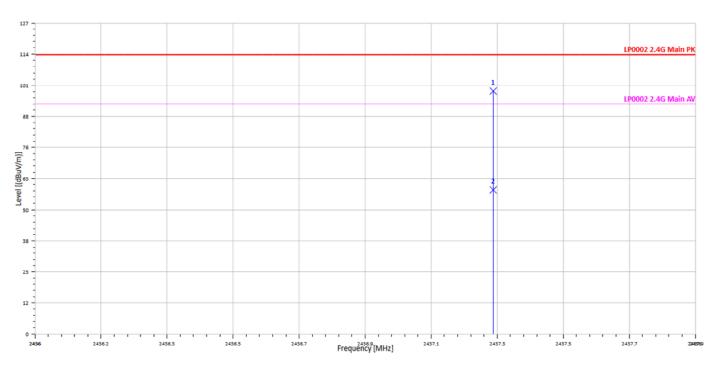


Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dΒμV/m	dBµV/m	dB
2437.39	F	Peak	105.88	-6.62	99.26	114	-14.74
2437.39	F	Average	65.44	-6.62	58.82	94	-35.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 24 of 41

2.4G Test Date: Operation Mode: 2017/9/28 Fundamental Frequency: 2468 MHz Temp. / Humi.: 24.3/51 Main ch High Test Engineer: Operation Band: Aken EUT Pol.: Measurement Antenna Pol.: Vertical

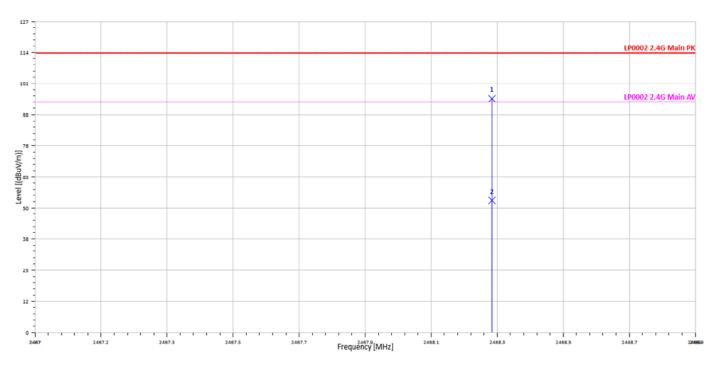


Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2468.38	F	Peak	101.85	-6.46	95.38	114	-18.62
2468.38	F	Average	60.30	-6.46	53.84	94	-40.16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 25 of 41

2.4G Test Date: Operation Mode: 2017/9/28 Fundamental Frequency: 2468 MHz Temp. / Humi.: 24.3/51 Main ch High Test Engineer: Operation Band: Aken EUT Pol.: Measurement Antenna Pol.: Horizontal

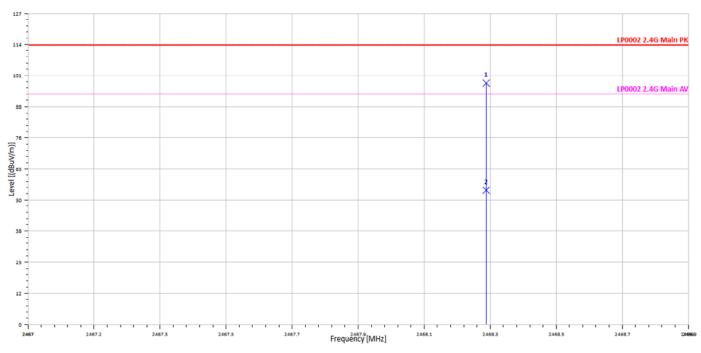

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2468.39	F	Peak	104.90	-6.46	98.44	114	-15.56
2468.39	F	Average	61.19	-6.46	54.73	94	-39.27


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 26 of 41

Radiated Spurious Emission Measurement Result

Operation Mode: 2.4G Test Date: 2017/9/28 Fundamental Frequency: 2408 MHz Temp. / Humi. : 24.3/51 Operation Band: Tx ch Low Test Engineer: Aken EUT Pol.: Measurement Antenna Pol. : Vertical

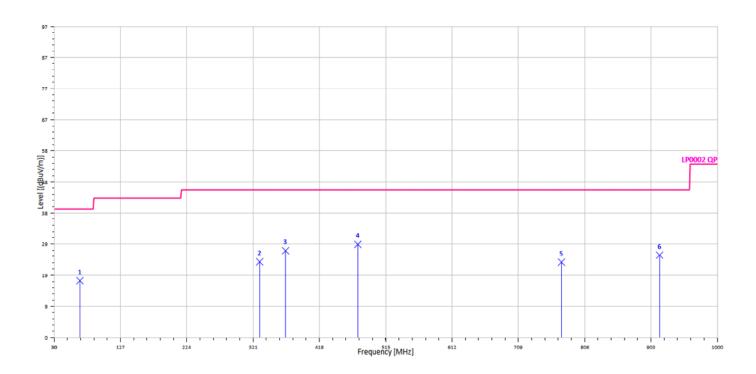

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
67.83	S	Peak	42.92	-25.18	17.74	40	-22.26
330.70	S	Peak	44.04	-20.48	23.55	46	-22.45
368.53	S	Peak	46.65	-19.67	26.98	46	-19.02
474.26	S	Peak	45.98	-17.03	28.95	46	-17.05
772.05	S	Peak	35.04	-11.62	23.42	46	-22.58
915.61	S	Peak	35.63	-10.04	25.59	46	-20.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279



Page: 27 of 41

Operation Mode: 2.4G Test Date: 2017/9/28 Fundamental Frequency: 2408 MHz Temp. / Humi.: 24.3/51 Operation Band: Tx ch Low Test Engineer: Aken EUT Pol.: Measurement Antenna Pol.: Horizontal E2

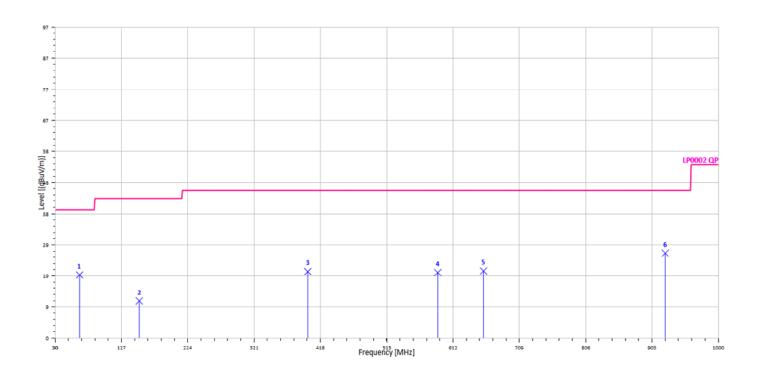


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
65.89	S	Peak	44.74	-25.02	19.71	40	-20.29
153.19	S	Peak	33.74	-22.18	11.56	43.5	-31.94
399.57	S	Peak	39.49	-18.73	20.76	46	-25.24
589.69	S	Peak	34.87	-14.41	20.46	46	-25.54
656.62	S	Peak	34.50	-13.55	20.95	46	-25.05
922.40	S	Peak	36.44	-9.92	26.52	46	-19.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 28 of 41

Operation Mode: 2.4G Test Date: 2017/9/28 Fundamental Frequency: 2437 MHz Temp. / Humi.: 24.3/51 Operation Band: Tx ch Mid Test Engineer: Aken EUT Pol.: Measurement Antenna Pol.: Vertical E2

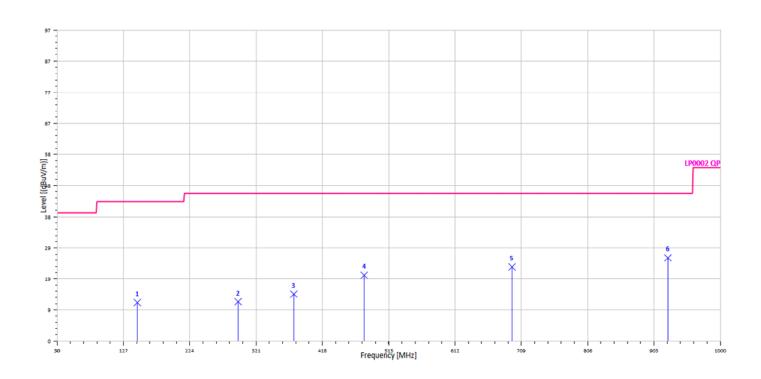

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
147.37	S	Peak	34.39	-22.42	11.97	43.5	-31.53
294.81	S	Peak	33.87	-21.61	12.26	46	-33.74
376.29	S	Peak	34.07	-19.42	14.65	46	-31.35
479.11	S	Peak	37.61	-17.03	20.58	46	-25.42
695.42	S	Peak	36.34	-13.22	23.13	46	-22.87
923.37	S	Peak	35.88	-9.89	25.99	46	-20.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


t (886-2) 2299-3279

f (886-2) 2298-0488



Page: 29 of 41

Operation Mode: 2.4G Test Date: 2017/9/28 Fundamental Frequency: 2437 MHz Temp. / Humi.: 24.3/51 Operation Band: Tx ch Mid Test Engineer: Aken EUT Pol.: Measurement Antenna Pol.: Horizontal E2

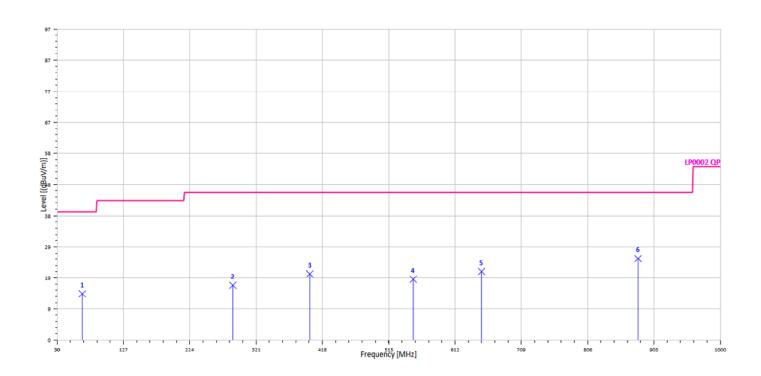


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
66.86	S	Peak	39.55	-25.10	14.45	40	-25.55
287.05	S	Peak	38.76	-21.65	17.10	46	-28.90
399.57	S	Peak	39.38	-18.73	20.65	46	-25.35
550.89	S	Peak	35.34	-16.38	18.96	46	-27.04
650.80	S	Peak	34.82	-13.40	21.42	46	-24.58
879.72	S	Peak	36.69	-11.23	25.46	46	-20.54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 30 of 41

Operation Mode: 2.4G Test Date: 2017/9/28 Fundamental Frequency: 2468 MHz Temp. / Humi.: 24.3/51 Operation Band: Tx ch High Test Engineer: Aken EUT Pol.: Measurement Antenna Pol.: Vertical

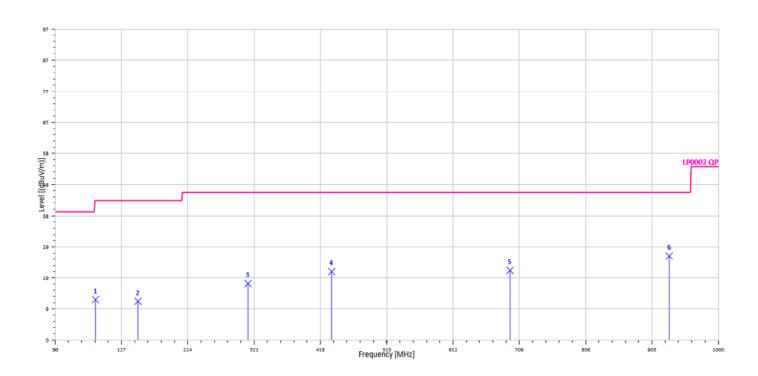


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dΒμV/m	dBµV/m	dB
89.17	S	Peak	40.30	-27.71	12.59	43.5	-30.91
151.25	S	Peak	34.27	-22.20	12.07	43.5	-31.43
312.27	S	Peak	38.75	-21.14	17.62	46	-28.38
434.49	S	Peak	39.95	-18.56	21.39	46	-24.61
695.42	S	Peak	34.99	-13.22	21.78	46	-24.22
928.22	S	Peak	36.00	-9.74	26.26	46	-19.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 31 of 41

Operation Mode: 2.4G Test Date: 2017/9/28 Fundamental Frequency: 2468 MHz Temp. / Humi.: 24.3/51 Operation Band: Tx ch High Test Engineer: Aken EUT Pol.: Measurement Antenna Pol.: Horizontal

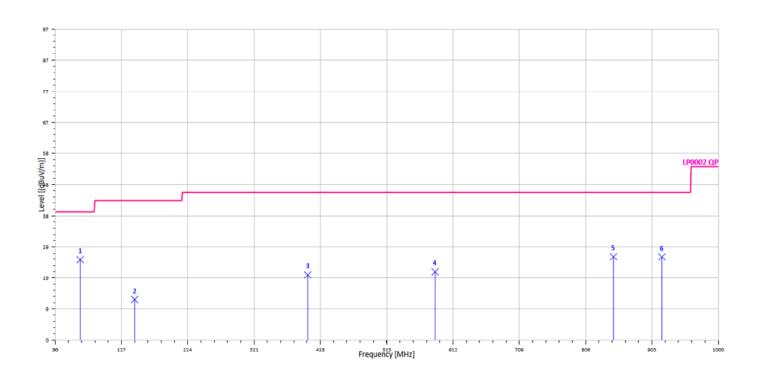


Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
MHz	F/H/E/S	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
66.86	S	Peak	50.20	-25.10	25.10	40	-14.90
146.40	S	Peak	35.10	-22.50	12.60	43.5	-30.90
399.57	S	Peak	39.09	-18.73	20.36	46	-25.64
585.81	S	Peak	35.83	-14.49	21.34	46	-24.66
846.74	S	Peak	37.14	-11.11	26.03	46	-19.97
917.55	S	Peak	35.98	-10.02	25.97	46	-20.03

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 32 of 41

2.4G Test Date: Operation Mode: 2017/10/12 Fundamental Frequency: 2408 MHz Temp. / Humi. : 24.3/51 Operation Band: Tx ch Low Test Engineer: Aken EUT Pol.: Measurement Antenna Pol.: E2 Vertical

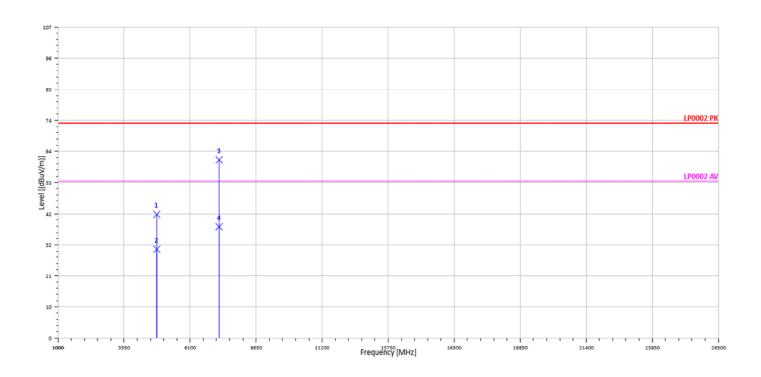

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4816.00	Н	Peak	43.72	-1.09	42.64	74	-31.36
4816.00	Н	Average	31.72	-1.09	30.64	54	-23.36
7224.00	Н	Peak	55.82	5.54	61.35	74	-12.65
7224.00	Н	Average	32.82	5.54	38.35	54	-15.65

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


t (886-2) 2299-3279

www.tw.sgs.com



Page: 33 of 41

2.4G Test Date: Operation Mode: 2017/10/12 Fundamental Frequency: 2408 MHz Temp. / Humi. : 24.3/51 Operation Band: Tx ch Low Test Engineer: Aken EUT Pol.: Measurement Antenna Pol.: E2 Horizontal

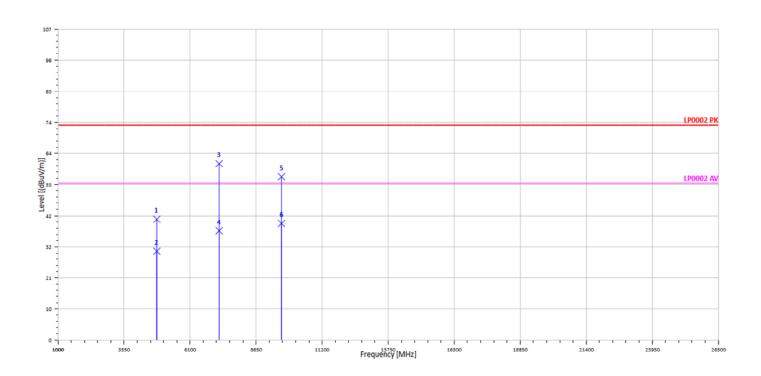

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4816.00	Н	Peak	42.72	-1.09	41.64	74	-32.36
4816.00	Н	Average	31.72	-1.09	30.64	54	-23.36
7224.00	Н	Peak	56.15	5.54	60.68	74	-13.32
7224.00	Н	Average	32.15	5.54	37.68	54	-16.32
9632.00	Н	Peak	47.56	8.62	56.18	74	-17.82
9632.00	Н	Average	31.56	8.62	40.18	54	-13.82

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279



Page: 34 of 41

2.4G Test Date: Operation Mode: 2017/10/12 Fundamental Frequency: 2437 MHz Temp. / Humi. : 24.3/51 Operation Band: Tx ch Mid Test Engineer: Aken EUT Pol.: Measurement Antenna Pol.: E2 Vertical

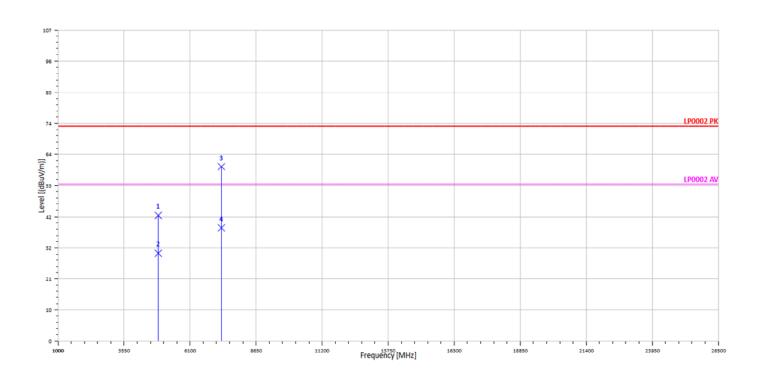

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4874.00	Н	Peak	44.03	-0.75	43.28	74	-30.72
4874.00	Н	Average	31.03	-0.75	30.28	54	-23.72
7311.00	Н	Peak	53.90	6.10	59.99	74	-14.01
7311.00	Н	Average	32.90	6.10	38.99	54	-15.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


t (886-2) 2299-3279

f (886-2) 2298-0488



Page: 35 of 41

2.4G Test Date: Operation Mode: 2017/10/12 Fundamental Frequency: 2437 MHz Temp. / Humi. : 24.3/51 Operation Band: Tx ch Mid Test Engineer: Aken EUT Pol.: Measurement Antenna Pol.: E2 Horizontal

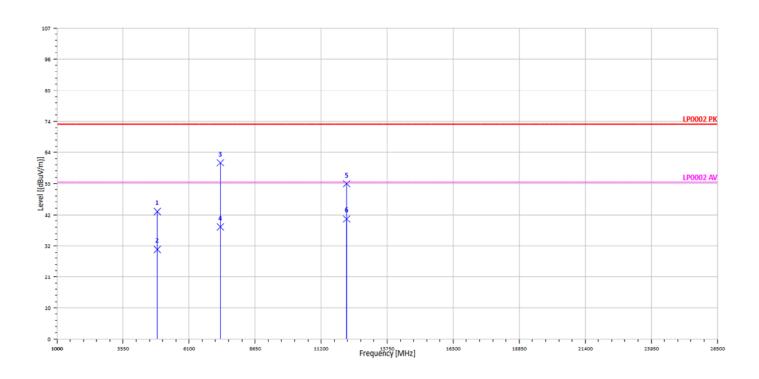


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4874.00	Н	Peak	44.61	-0.72	43.88	74	-30.12
4874.00	Н	Average	31.61	-0.72	30.88	54	-23.12
7311.00	Н	Peak	54.54	6.10	60.63	74	-13.37
7311.00	Н	Average	32.54	6.10	38.63	54	-15.37
12185.00	Н	Peak	43.31	10.08	53.39	74	-20.61
12185.00	Н	Average	31.31	10.08	41.39	54	-12.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 36 of 41

2.4G Test Date: Operation Mode: 2017/10/12 Fundamental Frequency: 2468 MHz Temp. / Humi. : 24.3/51 Operation Band: Tx ch High Test Engineer: Aken EUT Pol.: Measurement Antenna Pol.: Vertical

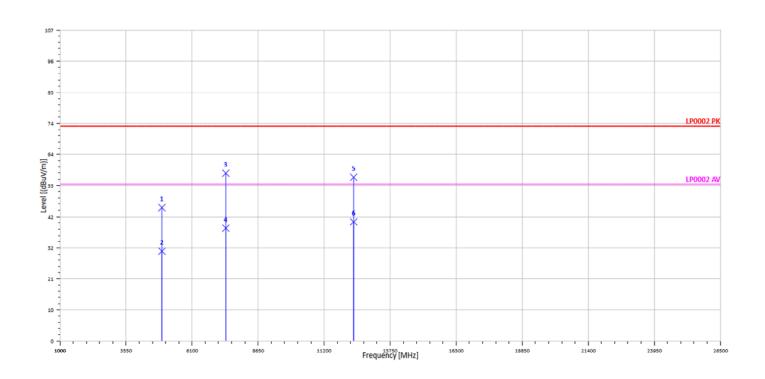


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4936.00	Н	Peak	46.46	-0.63	45.83	74	-28.17
4936.00	Н	Average	31.60	-0.63	30.97	54	-23.03
7404.00	Н	Peak	51.50	6.19	57.69	74	-16.31
7404.00	Н	Average	32.70	6.19	38.89	54	-15.11
12340.00	Н	Peak	46.53	9.80	56.33	74	-17.67
12340.00	Н	Average	31.28	9.80	41.08	54	-12.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 37 of 41

2.4G Test Date: Operation Mode: 2017/10/12 Fundamental Frequency: 2468 MHz Temp. / Humi.: 24.3/51 Operation Band: Tx ch High Test Engineer: Aken EUT Pol.: Measurement Antenna Pol.: Horizontal

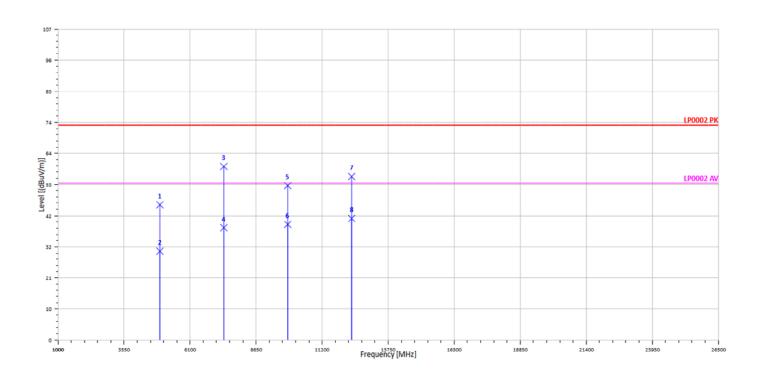

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4936.00	Н	Peak	47.11	-0.63	46.48	74	-27.52
4936.00	Н	Average	31.28	-0.63	30.65	54	-23.35
7404.00	Н	Peak	53.50	6.19	59.69	74	-14.31
7404.00	Н	Average	32.52	6.19	38.71	54	-15.29
9872.00	Н	Peak	44.50	8.57	53.07	74	-20.93
9872.00	Н	Average	31.28	8.57	39.85	54	-14.15
12340.00	Н	Peak	46.46	9.80	56.26	74	-17.74
12340.00	Н	Average	32.12	9.80	41.92	54	-12.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488



Page: 38 of 41

20 dB Bandwidth Measurement

8.1 Measurement Procedure

- The EUT was placed on a turn table which is 0.8m above ground plane.
- Set ETU normal operating mode.
- 3. Set SPA Center Frequency = fundamental frequency, RBW = 100kHz, VBW = 300kHz, Span = 5MHz.
- 4. Set SPA Max hold. Mark peak, -20dB.

8.2 Test SET-UP (Block Diagram of Configuration)

Refer to section 7.2 for the plot.

8.3 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL SERI		LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	KEYSIGHT	N9010A	MY51440113	06/20/2017	06/19/2018		
Power Meter	Anritsu	ML2496A	1326001	06/23/2017	06/22/2018		
Power Sensor	Anritsu	MA2411B	1315048	06/23/2017	06/22/2018		
Power Sensor	Anritsu	MA2411B	1315049	06/23/2017	06/22/2018		
Coaxial Cable 30cm	WOKEN	00100A1F1A1 95C	RF01	12/12/2016	12/11/2017		
DC Block	PASTERNACK	PE8210	RF29	12/12/2016	12/11/2017		
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/12/2016	12/11/2017		
Attenuator	WOKEN	218FS-10	RF23	12/12/2016	12/11/2017		

8.4 Measurement Results:

Frequency (GHz)	20dB Bandwidth (kHz)
2408	2114
2437	2342
2468	2148

Refer to attached data chart.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488




Page: 39 of 41

2408MHz



2437MHz

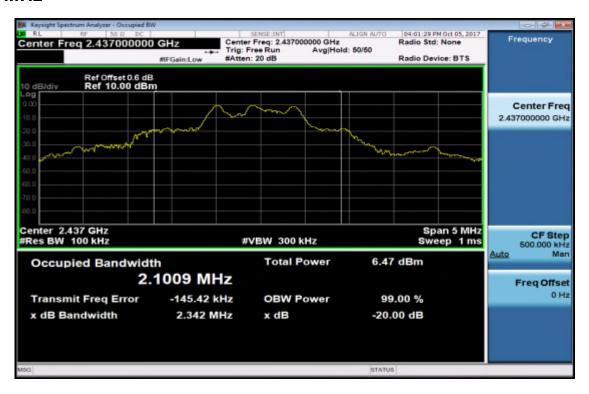

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, intention is drawn to the limitation of liability, intention is drawn to the limitation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.tw.sgs.com



Page: 40 of 41

2468MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留99天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for elec-Inis document is sisued by the Company subject to its General Conditions of Service printed overlear, available on request of accessible at www.sgs.com/tems and conditions for Electronic Documents at www.sgs.com/tems e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488



Page: 41 of 41

Antenna Requirement

9.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

9.2 Antenna Connected Construction:

embedded-in antenna design is used.

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT ph

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.