FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Time Lapse Camera TLC120

Model: TLC120A

Trade Name: brinno

Issued to

Brinno Incorporated 4F, No.107, Zhouzi St., Taipei City, 11493, Taiwan, (R.O.C.)

Issued by

Compliance Certification Services Inc.
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)
http://www.ccsrf.com
service@ccsrf.com

Issued Date: March 15, 2016





Revision History

	Issue		Effect	
Rev.	Date	Revisions	Page	Revised By
00	March 15, 2016	Initial Issue	ALL	Doris Chu

Page 2 Rev. 00

TABLE OF CONTENTS

1. T	EST RESULT CERTIFICATION	4
2. E	UT DESCRIPTION	5
3. T	EST METHODOLOGY	
3.2 3.3	EUT EXERCISEGENERAL TEST PROCEDURES	6
3.4 3.5	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS DESCRIPTION OF TEST MODES	
4. II	NSTRUMENT CALIBRATION	9
4.1 4.2 4.3	MEASUREMENT EQUIPMENT USED	9
5. F	ACILITIES AND ACCREDITATIONS	11
5.2	FACILITIESEQUIPMENTTABLE OF ACCREDITATIONS AND LISTINGS	11
6. S	ETUP OF EQUIPMENT UNDER TEST	13
6.1 6.2	SETUP CONFIGURATION OF EUTSUPPORT EQUIPMENT	_
7. F	CC PART 15.247 REQUIREMENTS	14
7.1		
7.2 7.3	PEAK POWERAVERAGE POWER	
7.4	BAND EDGES MEASUREMENT	24
7.5		
7.6 7.7		48 66
APPE	ENDIX I PHOTOGRAPHS OF TEST SETUP	70
۸DDI	ENDIY 1 - DHOTOGRADHS OF FIIT	

1. TEST RESULT CERTIFICATION

Applicant: Brinno Incorporated

4F, No.107, Zhouzi St., Taipei City, 11493, Taiwan, (R.O.C.)

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

Equipment Under Test: Time Lapse Camera TLC120

Trade Name: brinno

Model: TLC120A

Date of Test: November 12, 2015 ~ February 26, 2016

APPLICABLE STANDARDS				
STANDARD TEST RESULT				
FCC 47 CFR Part 15 Subpart C	No non-compliance noted			

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.203, 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by: Reviewed by:

Miller Lee

Manager

Compliance Certification Services Inc.

Miller Lee

Angel Cheng Section Manager

Compliance Certification Services Inc.

noted Chent

Page 4 Rev. 00

2. EUT DESCRIPTION

Product	Time Lapse Camera TLC120	
Trade Name	brinno	
Model Number	TLC120A	
Received Date	January 18, 2016	
Power Rating	DC 3.7V powered from Host device.	
Frequency Range	IEEE 802.11b/g Mode: 2412 ~ 2462 MHz	
Transmit Power	IEEE 802.11b mode: 19.09 dBm IEEE 802.11g mode: 22.43 dBm	
Number of Channels	IEEE 802.11b/g mode: 11 Channels	
Antenna Specification	CIRO / PCAK0000-12 Gain: 1.0 dBi	
Antenna Designation	Print Chip Antenna	

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

Remark:

- 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
- 2. This submittal(s) (test report) is intended for FCC ID: <u>ZDX-TLC120A</u> filing to comply with Section 15.203, 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

Page 5 Rev. 00

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC CFR 47 Part 15.203, 15.207, 15.209, 15.247, KDB 558074 D01 DTS Meas Guidance v03r04.

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

According to the requirements in ANSI C63.10: 2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI C63.10: 2013.

Page 6 Rev. 00

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

Page 7 Rev. 00

² Above 38.6

⁽b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (model: TLC120A) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

> Page 8 Rev. 00

Reference No.: T150529W04-RP1 FCC ID: ZDX-TLC120A Report No.: T160118W01-RP1

4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due		
Spectrum Analyzer	Agilent	E4446A	US42510252	12/07/2016		
Thermostatic/Humidity Chamber	TAICHY	MHG-150LF	930619	10/07/2016		
AC Power Source EXTECH		6205	1140845	N.C.R		
DC Power Supply	ABM	8301HD	D011531	N.C.R		
Power Meter	Anritsu	ML2495A	1012009	07/07/2016		
Power Sensor	Anritsu	MA2411A	0917072	07/07/2016		
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101073	07/19/2016		

Wugu 966 Chamber A							
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due			
Spectrum Analyzer	Agilent	E4446A	US42510268	02/14/2017			
EMI Test Receiver	R&S	ESCI	100064	06/03/2016			
Bilog Antenna	Sunol Sciences	JB3	A030105	08/05/2016			
Horn Antenna	EMCO	3117	00055165	02/23/2017			
Horn Antenna	EMCO	3116	26370	01/14/2017			
Turn Table	CCS	CC-T-1F	N/A	N.C.R			
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R			
Controller CCS		CC-C-1F	N/A	N.C.R			
Pre-Amplifier	MITEQ	1652-3000	1490939	08/09/2016			
Pre-Amplifier	EMC	EMC 012635	980151	06/04/2016			
Pre-Amplifier	MITEQ	AMF-6F-260400- 40-8P	985646	01/13/2017			
Coaxial Cable	Huber+Suhner	102	29212/2	01/11/2017			
Coaxial Cable	Huber+Suhner	102	29406/2	01/11/2017			
Test S/W		EZ-EMC (CCS-3A1RE)				

Page 9 Rev. 00

Conducted Emission room # B						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due		
EMI Test Receiver	R&S	ESCI	101073	09/08/2016		
LISN	R&S	ENV216	101054	06/06/2016		
LISN	SCHWARZBECK	NSLK 8127	8127-541	11/22/2016		
Capacitive Voltage Probe	FCC	F-CVP-1	100185	03/12/2016		
Test S/W	CCS-3A1-CE					

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2575
3M Semi Anechoic Chamber / <200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Page 10 Rev. 00

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All	measurement facilities used to collect the measurement data are located at
	No.139, Wugong Rd., Wugu Dist., New Taipei City 24891, Taiwan (R.O.C.) Tel: 886-2-2298-4086 / Fax: 886-2-2298-1470
\boxtimes	No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
	No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN R.O.C. Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2013 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, ridged waveguide, horn and/or Loop. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

Page 11 Rev. 00

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA		3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12,2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	Testing Laboratory 1309
i anana		penonii	Canada IC 2324G-1 IC 2324G-2

^{*} No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.

Page 12 Rev. 00

6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

6.2 SUPPORT EQUIPMENT

No	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC	TOSHIBA	Satellite M840	N/A	PPD-AR5B225	N/a	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

Page 13 Rev. 00

7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH


LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100 kHz, VBW= 300kHz, Span = 50 MHz, Sweep = auto.
- 4. Mark the peak frequency and –6dB (upper and lower) frequency.
- 5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

Page 14 Rev. 00

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	12.1153		PASS
Mid	2437	12.1153	>500	PASS
High	2462	12.1153		PASS


Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.3461		PASS
Mid	2437	16.3461	>500	PASS
High	2462	16.3461		PASS

Page 15 Rev. 00


IEEE 802.11b mode

6dB Bandwidth (CH Low)

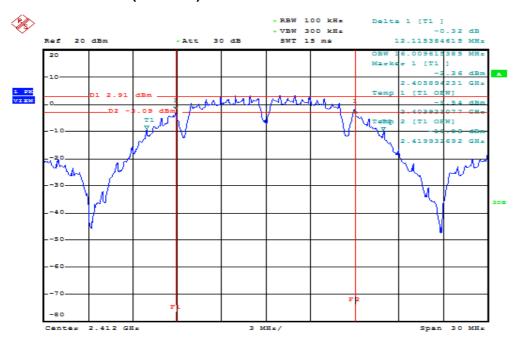

Date: 12.NOV.2015 15:03:11

6dB Bandwidth (CH Mid)

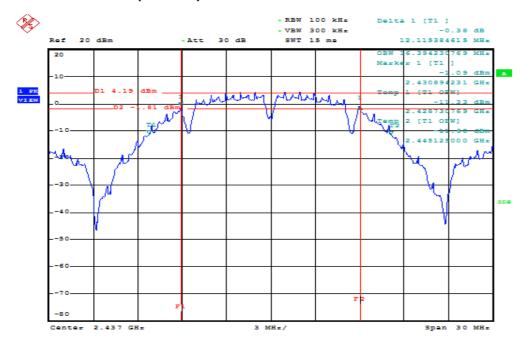


Date: 12.NOV.2015 15:15:07

Page 16 Rev. 00

FCC ID: ZDX-TLC120A

Reference No.: T150529W04-RP1 Report No.: T160118W01-RP1

6dB Bandwidth (CH High)

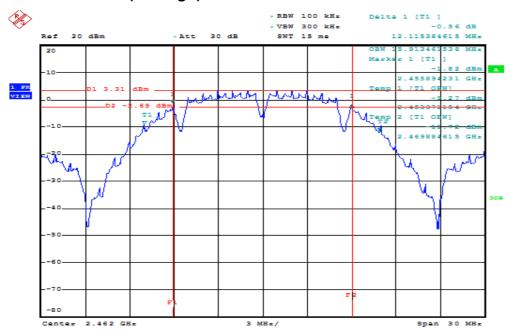


Date: 12.NOV.2015 15:53:45

Page 17 Rev. 00

Compliance Certification Services Inc. Reference No.: T150529W04-RP1 FCC ID: ZDX-TLC120A Report No.: T160118W01-RP1


IEEE 802.11g mode

6dB Bandwidth (CH Low)

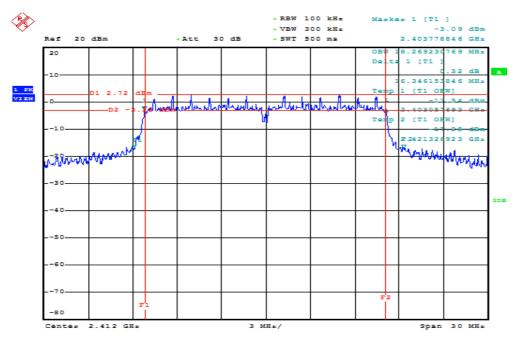

Date: 21. JAN. 2016 11:46:13

6dB Bandwidth (CH Mid)

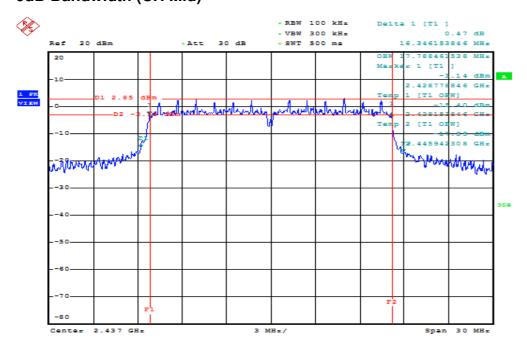


Date: 21.JAN.2016 11:49:05

Page 18 Rev. 00

Reference No.: T150529W04-RP1 FCC ID: ZDX-TLC120A Report No.: T160118W01-RP1

6dB Bandwidth (CH High)

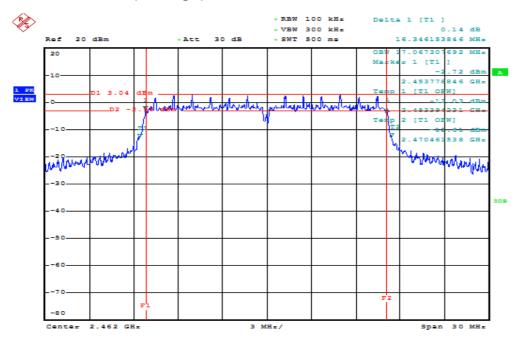

Date: 21.JAN.2016 11:51:05

Page 19 Rev. 00 7.2 PEAK POWER

LIMIT


The maximum peak output power of the intentional radiator shall not exceed the following:

- 1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
- 2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Page 20 Rev. 00

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	18.30	0.0676		PASS
Mid	2437	*19.09	0.0811	1.00	PASS
High	2462	19.07	0.0807		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	21.32	0.1355		PASS
Mid	2437	21.68	0.1472	1.00	PASS
High	2462	*22.43	0.1750		PASS


Page 21 Rev. 00

7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the avg power detection.

Page 22 Rev. 00

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	17.02	0.0504
Mid	2437	17.44	0.0555
High	2462	17.31	0.0538

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	15.61	0.0364
Mid	2437	15.76	0.0377
High	2462	16.17	0.0414

Page 23 Rev. 00

Reference No.: T150529W04-RP1 FCC ID: ZDX-TLC120A Report No.: T160118W01-RP1


7.4 BAND EDGES MEASUREMENT

LIMIT


According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

For Radiated Emission above 1GHz

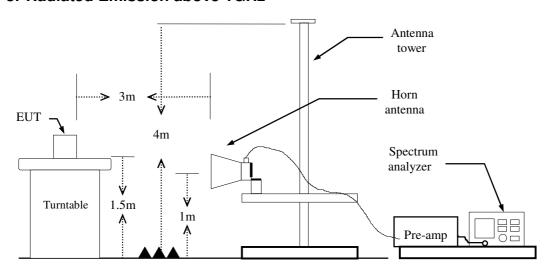

For Conducted



Page 24 Rev. 00 **TEST PROCEDURE**

For Radiated

- 1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz,

if duty cycle ≥ 98%, VBW=10Hz.

if duty cycle<98% VBW=1/T.

IEEE 802.11b mode: ≥98%, VBW=10Hz **IEEE 802.11g mode:** =89%, VBW=680Hz

- Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.
- 6. Result = Spectrum Reading + cable loss(spectrum to Amp) Amp Gain + Cable loss(Amp to receive Ant) + Receive Ant

For Conducted

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

TEST RESULTS

Refer to attach spectrum analyzer data chart.

Page 25 Rev. 00

Reference No.: T150529W04-RP1 FCC ID: ZDX-TLC120A Report No.: T160118W01-RP1

Band Edges (IEEE 802.11b mode / CH Low)


Detector mode: Peak



No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2388.960	54.84	-2.50	52.34	74.00	-21.66	peak
2	2410.800	99.97	-2.42	97.55	74.00	23.55	peak

Page 26 Rev. 00

Detector mode: Average

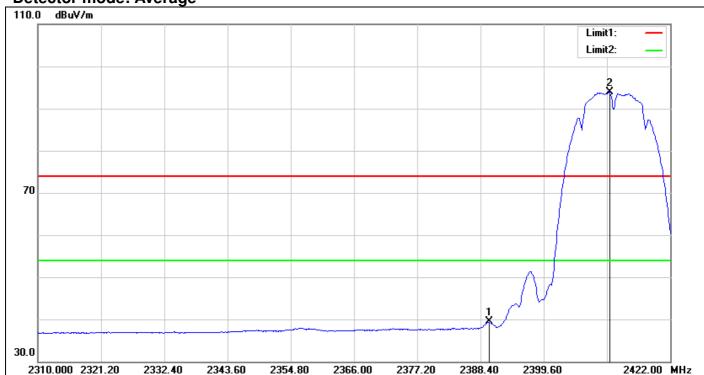


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	41.96	-2.49	39.47	54.00	-14.53	AVG
2	2411.248	96.24	-2.42	93.82	54.00	39.82	AVG

Page 27 Rev. 00

Band Edges (IEEE 802.11b mode / CH Mid)


Detector mode: Peak

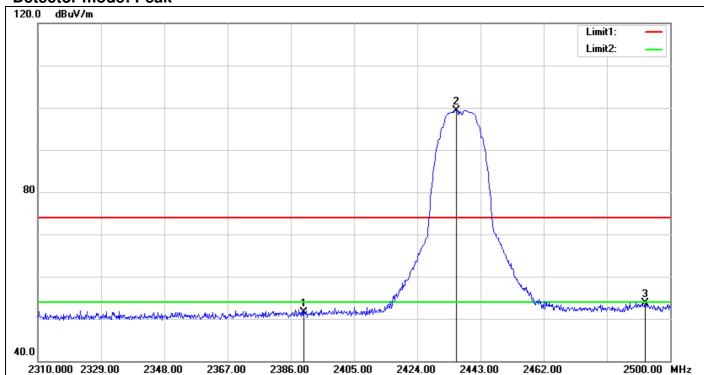

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	53.93	-2.49	51.44	74.00	-22.56	peak
2	2435.780	101.63	-2.24	99.39	74.00	25.39	peak
3	2492.400	55.59	-1.91	53.68	74.00	-20.32	peak

Page 28 Rev. 00

Detector mode: Average

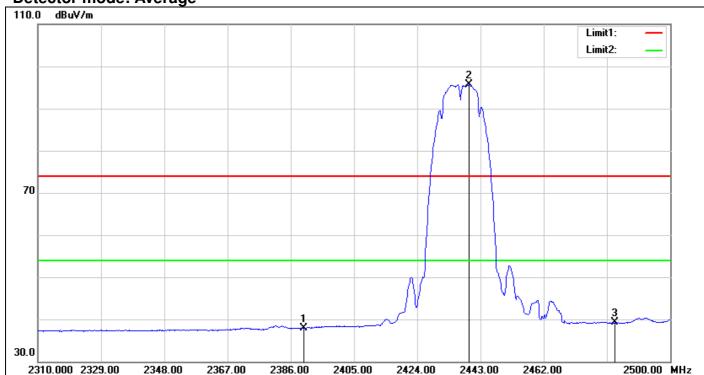

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	40.38	-2.49	37.89	54.00	-16.11	AVG
2	2439.580	97.98	-2.22	95.76	54.00	41.76	AVG
3	2483.500	41.19	-1.99	39.20	54.00	-14.80	AVG

Page 29 Rev. 00

tification Services Inc.

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

Band Edges (IEEE 802.11b mode / CH High)

Detector mode: Peak



No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2464.600	99.81	-2.09	97.72	74.00	23.72	peak
2	2490.700	51.56	-1.93	49.63	74.00	-24.37	peak

Page 30 Rev. 00

Reference No.: T150529W04-RP1 FCC ID: ZDX-TLC120A Report No.: T160118W01-RP1

Detector mode: Average



No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2464.700	98.64	-2.09	96.55	54.00	42.55	AVG
2	2483.500	44.97	-1.99	42.98	54.00	-11.02	AVG

Page 31 Rev. 00

Band Edges (IEEE 802.11g mode / CH Low)

Detector mode: Peak



No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	61.26	-2.49	58.77	74.00	-15.23	peak
2	2407.216	105.57	-2.42	103.15	74.00	29.15	peak

Page 32 Rev. 00

Detector mode: Average




No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	47.66	-2.49	45.17	54.00	-8.83	AVG
2	2410.688	95.74	-2.43	93.31	54.00	39.31	AVG

Page 33 Rev. 00

Band Edges (IEEE 802.11g mode / CH Mid)


Detector mode: Peak

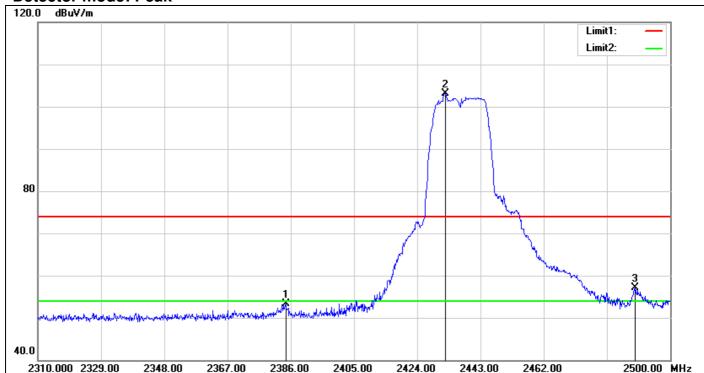

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2384.480	55.86	-2.54	53.32	74.00	-20.68	peak
2	2432.360	105.42	-2.27	103.15	74.00	29.15	peak
3	2489.550	58.95	-1.93	57.02	74.00	-16.98	peak

Page 34 Rev. 00

Detector mode: Average

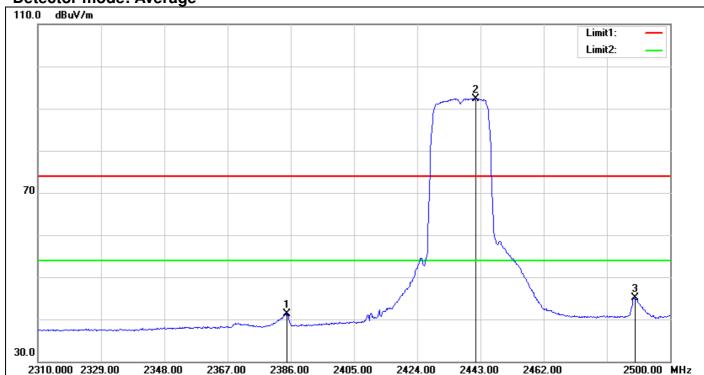

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2384.860	43.78	-2.54	41.24	54.00	-12.76	AVG
2	2441.670	94.49	-2.20	92.29	54.00	38.29	AVG
3	2489.550	46.94	-1.93	45.01	54.00	-8.99	AVG

Page 35 Rev. 00

Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak



No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2457.200	105.92	-2.11	103.81	74.00	29.81	peak
2	2483.500	75.26	-1.99	73.27	74.00	-0.73	peak

Page 36 Rev. 00

Detector mode: Average

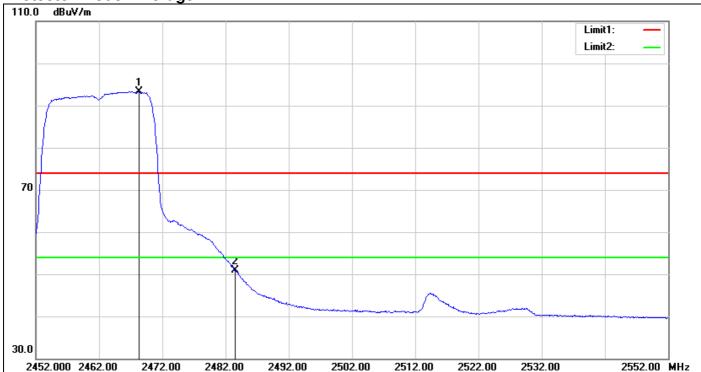

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2468.300	95.42	-2.07	93.35	54.00	39.35	AVG
2	2483.500	52.89	-1.99	50.90	54.00	-3.10	AVG

Page 37 Rev. 00

Test Plot


Conducted Band Edges (IEEE 802.11b mode / CH Low)



No.	Frequency	Reading	Correct	Result	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	
1	2396.912	54.15	-2.43	51.72	peak
2	2411.024	94.87	-2.42	92.45	peak

Page 38 Rev. 00


Conducted Band Edges (IEEE 802.11b mode / CH High)

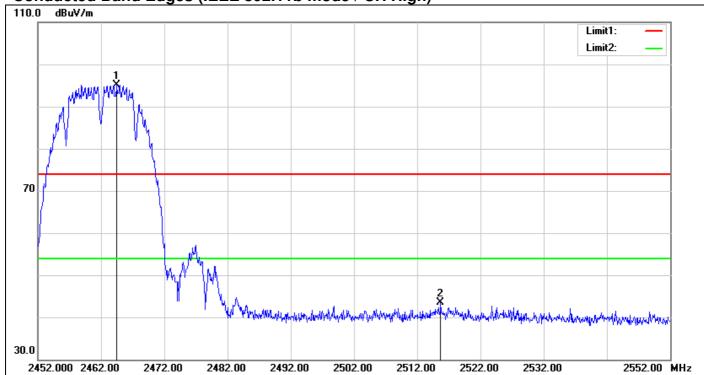

No.	Frequency	Reading	Correct	Result	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	
1	2464.500	97.22	-2.09	95.13	peak
2	2515.700	45.30	-1.82	43.48	peak

Page 39 Rev. 00


Conducted Band Edges (IEEE 802.11g mode / CH Low)

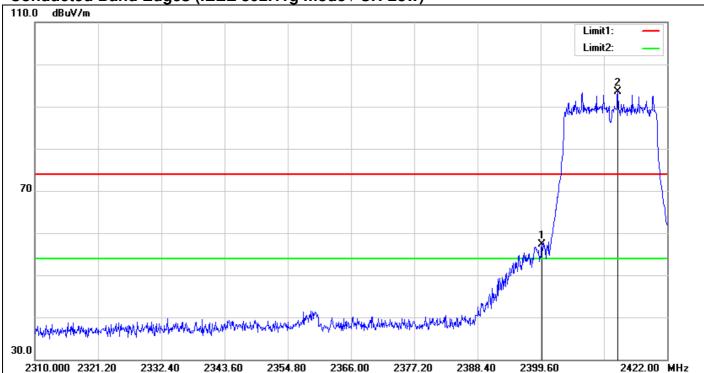

No.	Frequency	Reading	Correct	Result	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	
1	2399.824	59.73	-2.41	57.32	peak
2	2413.264	95.83	-2.41	93.42	peak

Page 40 Rev. 00

Conducted Band Edges (IEEE 802.11g mode / CH High)

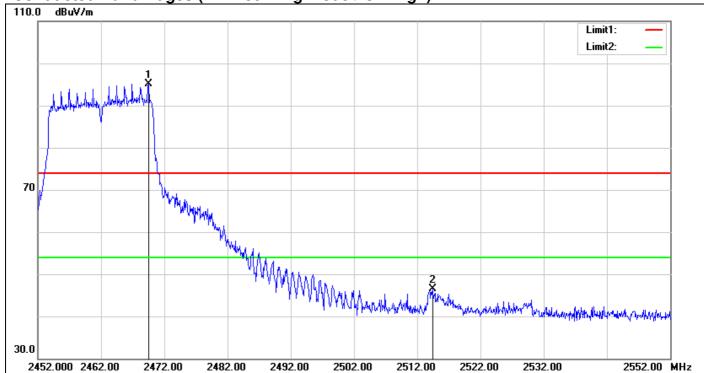

No.	Frequency	Reading	Correct	Result	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	
1	2469.500	97.21	-2.07	95.14	peak
2	2514.400	48.37	-1.82	46.55	peak

Page 41 Rev. 00

7.5 PEAK POWER SPECTRAL DENSITY

LIMIT


1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

- Place the EUT on the table and set it in transmitting mode.
 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set the spectrum analyzer as RBW = 3 kHz, VBW = 30 kHz, Span = 300 kHz, Sweep time = 100 s
- 3. Record the max reading.
- 4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Page 42 Rev. 00

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-10.56		PASS
Mid	2437	-8.42	8.00	PASS
High	2462	-11.44		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-14.00		PASS
Mid	2437	-8.66	8.00	PASS
High	2462	-15.25		PASS


Page 43 Rev. 00

Reference No.: T150529W04-RP1 FCC ID: ZDX-TLC120A Report No.: T160118W01-RP1

Test Plot


IEEE 802.11b mode

PPSD (CH Low)

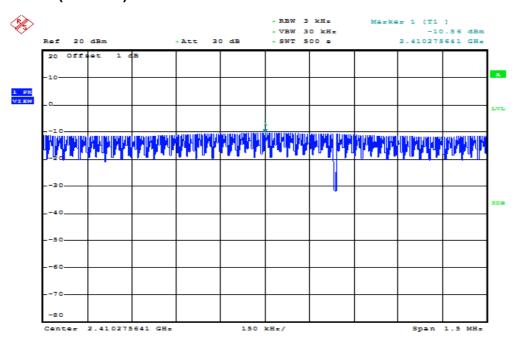

Date: 21.JAN.2016 15:39:32


PPSD (CH Mid)

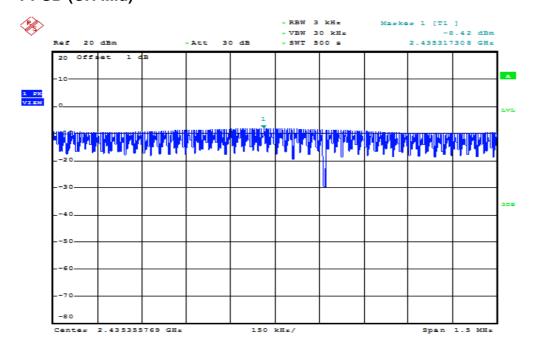

Date: 21.JAN.2016 15:45:51

Page 44 Rev. 00

PPSD (CH High)

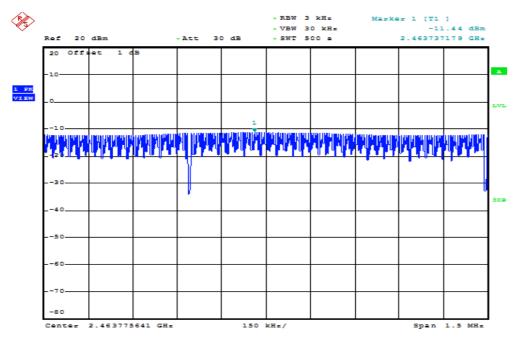


Date: 21.JAN.2016 15:48:07

Page 45 Rev. 00


IEEE 802.11g mode

PPSD (CH Low)

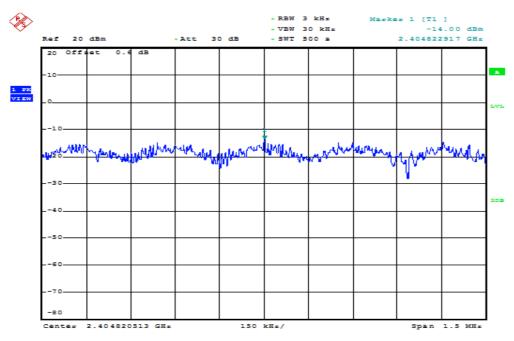

Date: 21.JAN.2016 15:59:12

PPSD (CH Mid)

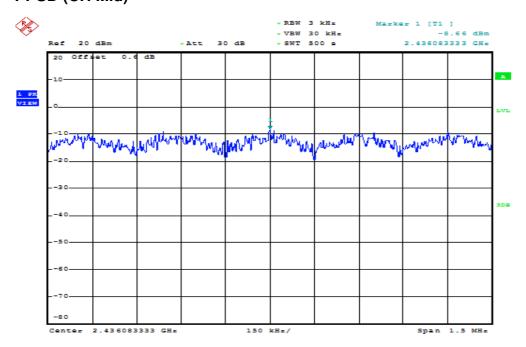


Date: 21. JAN. 2016 16:05:11

Page 46 Rev. 00

Compliance Certification Services Inc. FCC ID: ZDX-TLC120A Reference No.: T150529W04-RP1 Report No.: T160118W01-RP1

PPSD (CH High)

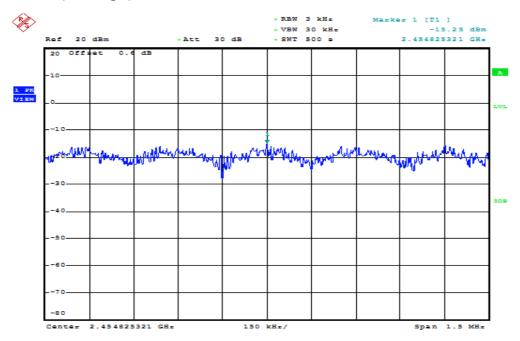

Date: 21. JAN. 2016 16:06:54

Page 47 Rev. 00

7.6 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
0.009 - 0.490	2400/F(kHz) +80	20LOG((2400/F(kHz))+80)
0.490 - 1.705	24000/F(kHz) +40	20LOG((24000/F(kHz))+40)
1.705 – 30.0	30	69.54
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


Page 48 Rev. 00

Test Configuration

9kHz ~ 30MHz

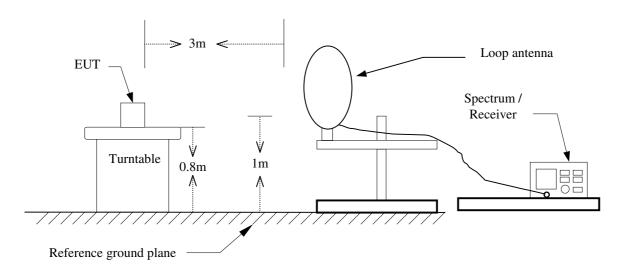


30MHz ~ 1GHz

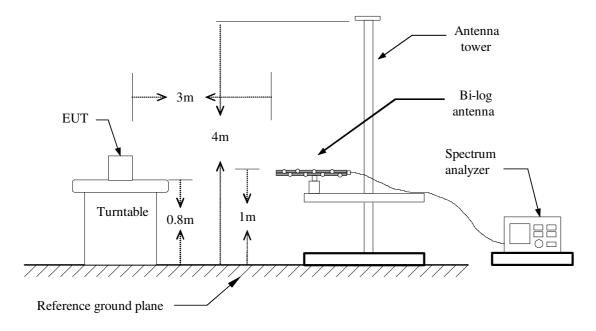

Page 49 Rev. 00

Above 1 GHz

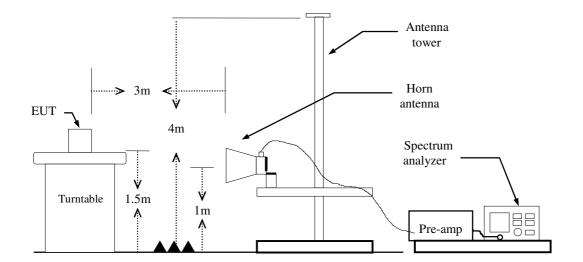

Page 50 Rev. 00

TEST PROCEDURE

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m high and below 1 GHz is 0.8m high above ground plane.

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz, if duty cycle≥98%, VBW=10Hz. if duty cycle<98% VBW=1/T.

IEEE 802.11b mode: ≥98%, VBW=10Hz **IEEE 802.11g mode:** =89%, VBW=680Hz

- 7. Repeat above procedures until the measurements for all frequencies are complete.
- 8. Result = Spectrum Reading + cable loss(spectrum to Amp) Amp Gain + Cable loss(Amp to receive Ant) + Receive Ant

Note: We checked every harmonics frequencies from Fundamental frequencies with reduced VBW, and we mark a point to prove pass or not if we find any emission. For this case, there are no emissions hidden in the noise floor.

Page 51 Rev. 00

Reference No.: T150529W04-RP1 FCC ID: ZDX-TLC120A Report No.: T160118W01-RP1


TEST RESULTS

Below 1GHz

Operation Mode: Normal Link Test Date: January 28, 2016

Temperature: 27°C Tested by: Jason Lu

Humidity: 53% RH **Polarity:** Ver.

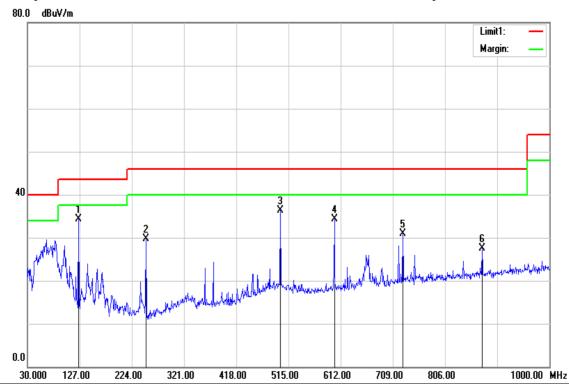

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
125.0600	49.97	-15.57	34.40	43.50	-9.10	peak	V
250.1900	46.02	-16.27	29.75	46.00	-16.25	peak	V
500.4500	45.57	-9.23	36.34	46.00	-9.66	peak	V
600.3600	42.01	-7.75	34.26	46.00	-11.74	peak	V
727.4300	36.31	-5.44	30.87	46.00	-15.13	peak	V
874.8700	30.90	-3.49	27.41	46.00	-18.59	peak	V

Remark:

- No emission found between lowest internal used/generated frequency to 1. *30MHz* (9kHz~30MHz)
- Radiated emissions measured in frequency range from 30 MHz to 1000MHz 2. were made with an instrument using peak/quasi-peak detector mode.
- 3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Margin (dB) = Result (dBuV/m) Limit (dBuV/m).


Page 52 Rev. 00

Reference No.: T150529W04-RP1 Report No.: T160118W01-RP1 FCC ID: ZDX-TLC120A

Operation Mode: Normal Link Test Date: January 28, 2016

Temperature: 27°C Tested by: Jason Lu

Humidity: 53% RH **Polarity:** Hor.

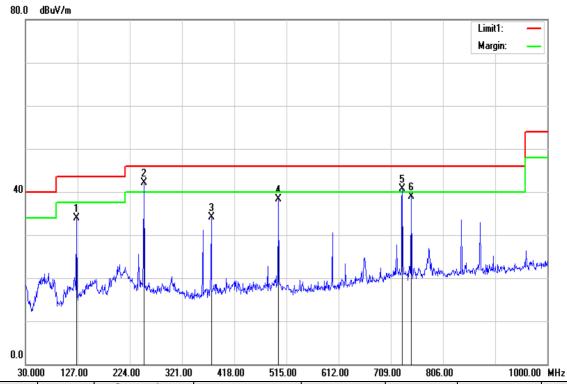

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
125.0600	49.55	-15.57	33.98	43.50	-9.52	peak	Н
250.1900	58.36	-16.27	42.09	46.00	-3.91	peak	Н
375.3200	46.37	-12.29	34.08	46.00	-11.92	peak	Н
500.4500	47.58	-9.23	38.35	46.00	-7.65	peak	Н
730.3400	46.17	-5.37	40.80	46.00	-5.20	peak	Н
746.8300	43.97	-4.99	38.98	46.00	-7.02	peak	Н

Remark:

- No emission found between lowest internal used/generated frequency to 1. 30MHz (9kHz~30MHz)
- Radiated emissions measured in frequency range from 30 MHz to 1000MHz 2. were made with an instrument using peak/quasi-peak detector mode.
- Quasi-peak test would be performed if the peak result were greater than the 3. quasi-peak limit or as required by the applicant.
- Measurements above show only up to 6 maximum emissions noted, or would 4. be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Margin (dB) = Result (dBuV/m) - Limit (dBuV/m).


Page 53 Rev. 00 FCC ID: ZDX-TLC120A

Reference No.: T150529W04-RP1 Report No.: T160118W01-RP1


Above 1 GHz

TX / IEEE 802.11b / CH Low

Polarity: Vertical

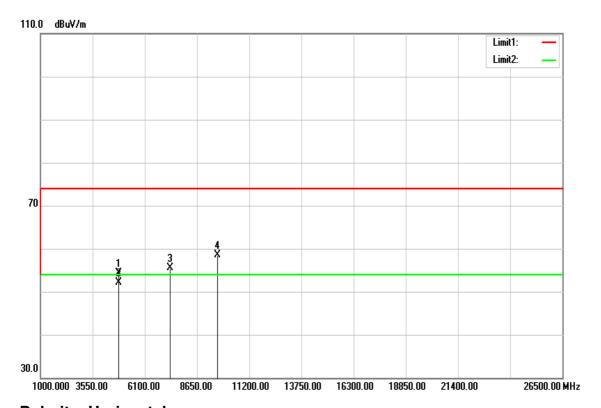

Polarity: Horizontal

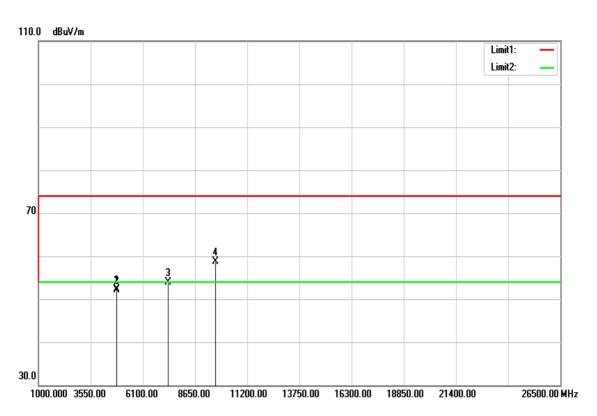

Page 54 Rev. 00 Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low Test Date: January 19, 2016

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

Temperature:27 °CTested by: Jason LuHumidity:53% RHPolarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4827.000	49.21	5.11	54.32	74.00	-19.68	peak	V
4827.000	46.94	5.11	52.05	54.00	-1.95	AVG	V
7326.000	42.47	12.98	55.45	74.00	-18.55	peak	V
9648.000	40.81	17.60	58.41	74.00	-15.59	peak	V
N/A							
4824.000	47.19	5.10	52.29	74.00	-21.71	peak	Н
4824.000	46.93	5.10	52.03	54.00	-1.97	AVG	Н
7326.000	40.88	12.98	53.86	74.00	-20.14	peak	Н
9648.000	41.18	17.60	58.78	74.00	-15.22	peak	Н
N/A							


Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).


Page 55 Rev. 00

TX / IEEE 802.11b / CH Mid

Polarity: Vertical

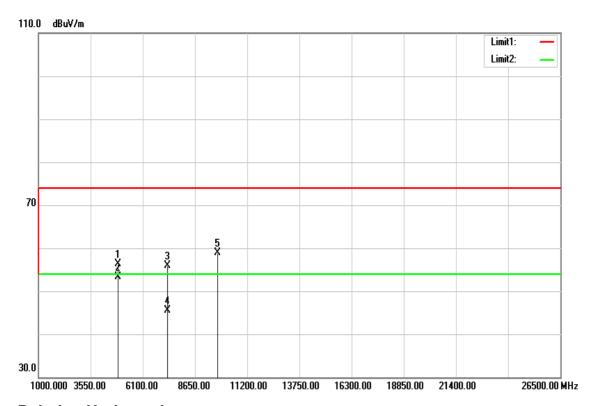

Polarity: Horizontal

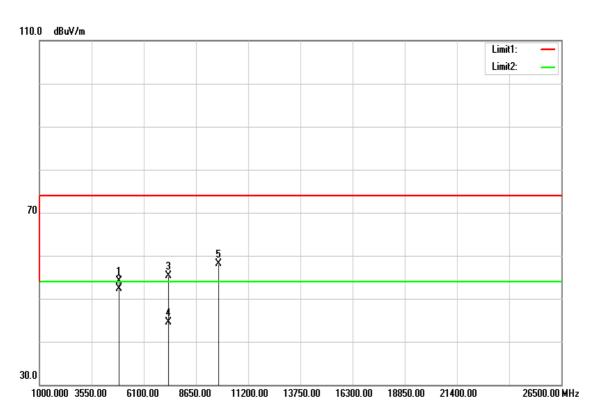

Page 56 Rev. 00 Operation Mode: TX / IEEE 802.11b / CH Mid Test Date: January 19, 2016

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

Temperature:27 °CTested by: Jason LuHumidity:53% RHPolarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4876.000	51.08	5.24	56.32	74.00	-17.68	peak	V
4876.000	48.00	5.24	53.24	54.00	-0.76	AVG	V
7311.000	43.03	12.94	55.97	74.00	-18.03	peak	V
7311.000	32.51	12.94	45.45	54.00	-8.55	AVG	V
9748.000	41.24	17.60	58.84	74.00	-15.16	peak	V
N/A							
4876.000	48.83	5.24	54.07	74.00	-19.93	peak	Н
4876.000	47.15	5.24	52.39	54.00	-1.61	AVG	Н
7311.000	42.44	12.94	55.38	74.00	-18.62	peak	Н
7311.000	31.56	12.94	44.50	54.00	-9.50	AVG	Н
9748.000	40.46	17.60	58.06	74.00	-15.94	peak	Н
N/A							


Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).


Page 57 Rev. 00

TX / IEEE 802.11b / CH High

Polarity: Vertical

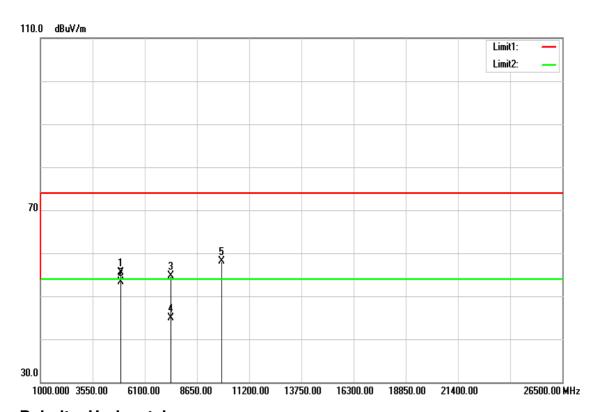

Polarity: Horizontal

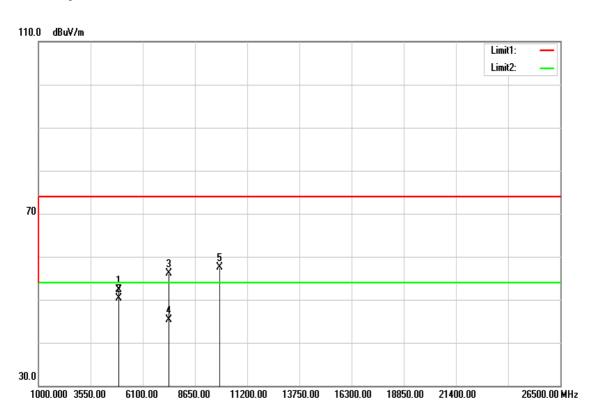

Page 58 Rev. 00

Operation Mode: TX / IEEE 802.11b / CH High Test Date: January 19, 2016

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

Temperature:27 °CTested by: Jason LuHumidity:53% RHPolarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4925.000	50.07	5.37	55.44	74.00	-18.56	peak	V
4925.000	47.89	5.37	53.26	54.00	-0.74	AVG	V
7386.000	41.62	13.17	54.79	74.00	-19.21	peak	V
7386.000	31.72	13.17	44.89	54.00	-9.11	AVG	V
9848.000	40.54	17.60	58.14	74.00	-15.86	peak	V
N/A							
4925.000	46.86	5.37	52.23	74.00	-21.77	peak	Н
4925.000	44.92	5.37	50.29	54.00	-3.71	AVG	Н
7386.000	42.91	13.17	56.08	74.00	-17.92	peak	Н
7386.000	32.08	13.17	45.25	54.00	-8.75	AVG	Н
9848.000	39.87	17.60	57.47	74.00	-16.53	peak	Н
N/A							

Remark:


- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 59 Rev. 00


Compliance Certification Services Inc. Reference No.: T150529W04-RP1 FCC ID: ZDX-TLC120A Report No.: T160118W01-RP1

TX / IEEE 802.11g / CH Low

Polarity: Vertical

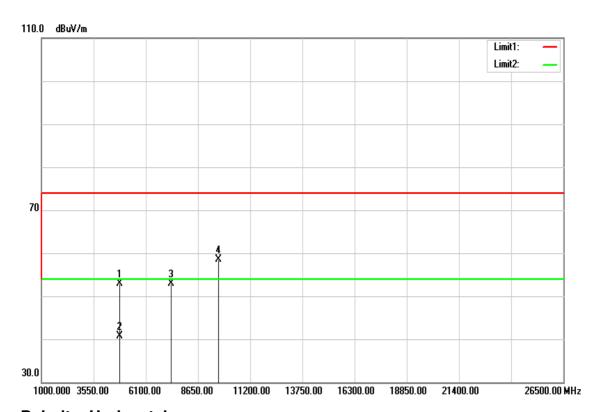

Polarity: Horizontal

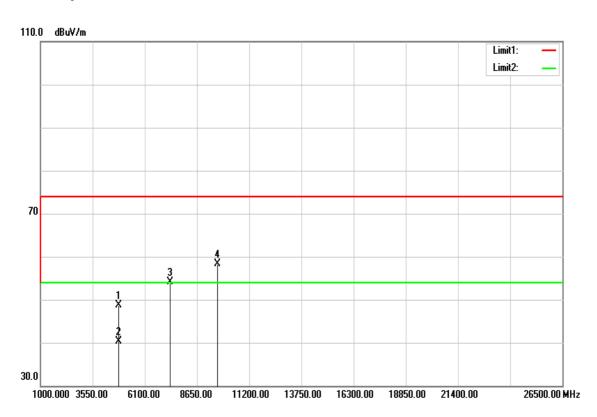

Page 60 Rev. 00 Operation Mode: TX / IEEE 802.11g / CH Low Test Date: January 19, 2016

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

Temperature:27 °CTested by: Jason LuHumidity:53% RHPolarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4820.000	47.86	5.09	52.95	74.00	-21.05	peak	V
4820.000	35.68	5.09	40.77	54.00	-13.23	AVG	V
7326.000	39.97	12.98	52.95	74.00	-21.05	peak	V
9648.000	40.81	17.60	58.41	74.00	-15.59	peak	V
N/A							
4824.000	43.57	5.10	48.67	74.00	-25.33	peak	Н
4824.000	35.13	5.10	40.23	54.00	-13.77	AVG	Н
7326.000	41.04	12.98	54.02	74.00	-19.98	peak	Н
9648.000	40.62	17.60	58.22	74.00	-15.78	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).


Page 61 Rev. 00

e Certification Services Inc.Reference No.: T150529W04-RP1


Report No.: T160118W01-RP1

TX / IEEE 802.11g / CH Mid

Polarity: Vertical

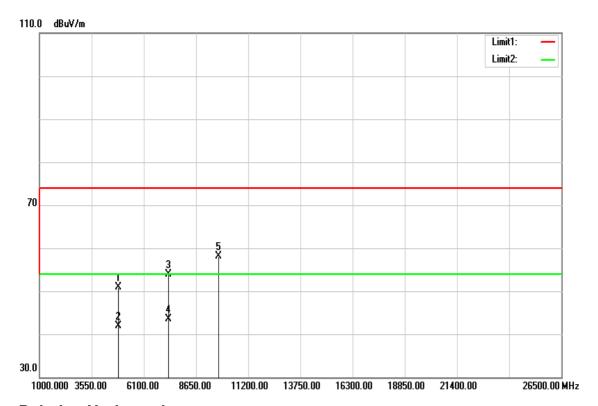

Polarity: Horizontal

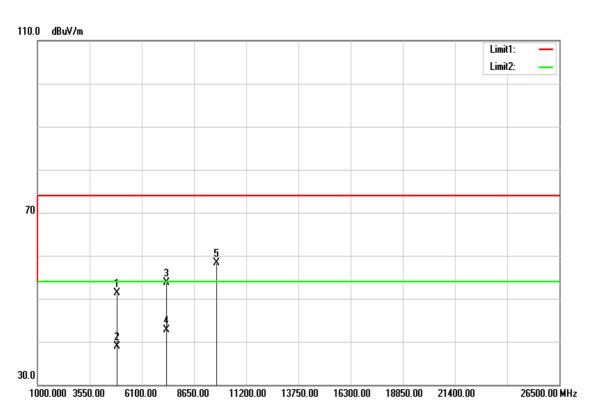

Page 62 Rev. 00

Operation Mode: TX / IEEE 802.11g / CH Mid Test Date: January 19, 2016

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

Temperature:27 °CTested by: Jason LuHumidity:53% RHPolarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4869.000	45.74	5.22	50.96	74.00	-23.04	peak	V
4869.000	36.76	5.22	41.98	54.00	-12.02	AVG	V
7311.000	40.97	12.94	53.91	74.00	-20.09	peak	V
7311.000	30.62	12.94	43.56	54.00	-10.44	AVG	V
9748.000	40.42	17.60	58.02	74.00	-15.98	peak	V
N/A							
4876.000	46.04	5.24	51.28	74.00	-22.72	peak	Н
4876.000	33.59	5.24	38.83	54.00	-15.17	AVG	Н
7311.000	40.78	12.94	53.72	74.00	-20.28	peak	Н
7311.000	29.84	12.94	42.78	54.00	-11.22	AVG	Н
9748.000	40.74	17.60	58.34	74.00	-15.66	peak	Н
N/A							


Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).


Page 63 Rev. 00

TX / IEEE 802.11g / CH High

Polarity: Vertical

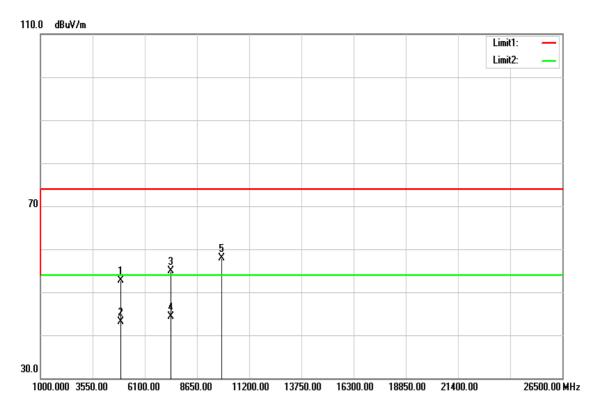

Polarity: Horizontal

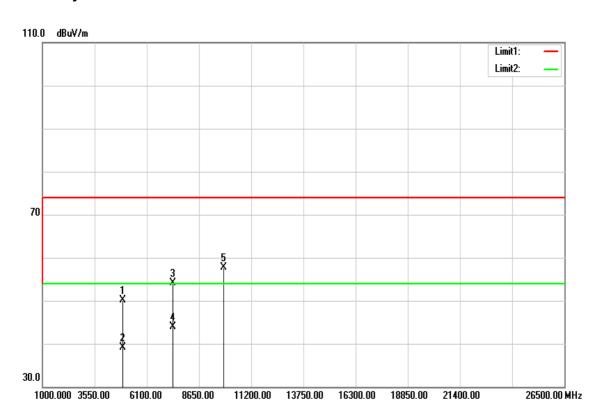

Page 64 Rev. 00

Operation Mode: TX / IEEE 802.11g / CH High Test Date: January 19, 2016

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

Temperature:27 °CTested by:Jason LuHumidity:53% RHPolarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4918.000	47.41	5.35	52.76	74.00	-21.24	peak	V
4918.000	37.73	5.35	43.08	54.00	-10.92	AVG	V
7386.000	41.71	13.17	54.88	74.00	-19.12	peak	V
7386.000	31.18	13.17	44.35	54.00 -9.65		AVG	V
9848.000	40.31	17.60	57.91	74.00	-16.09	peak	V
N/A							
4924.000	44.77	5.37	50.14	74.00	-23.86	peak	Н
4924.000	33.76	5.37	39.13	54.00	-14.87	AVG	Н
7386.000	40.97	13.17	54.14	74.00	-19.86	peak	Н
7386.000	30.70	13.17	43.87	54.00	-10.13	AVG	Н
9848.000	40.08	17.60	57.68	74.00	-16.32	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 65 Rev. 00

7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

Frequency Range (MHz)	Limits (dBµV)					
(IVIITZ)	Quasi-peak	Average				
0.15 to 0.50	66 to 56*	56 to 46*				
0.50 to 5	56	46				
5 to 30	60	50				

^{*} Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

- 1. The EUT was placed on a table, which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

Page 66 Rev. 00

FCC ID: ZDX-TLC120A

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

Test Data

February 26, 2016 **Operation Mode:** Normal Link **Test Date:**

Temperature: 24℃ Tested by: Dennis Li

Humidity: 50% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1525	46.95	40.83	9.69	56.64	50.52	65.86	55.86	-9.22	-5.34	L1
0.1665	48.10	39.14	9.69	57.79	48.83	65.13	55.13	-7.34	-6.30	L1
0.4178	34.33	21.96	9.71	44.04	31.67	57.49	47.49	-13.45	-15.82	L1
0.4860	36.86	26.25	9.81	46.67	36.06	56.24	46.24	-9.57	-10.18	L1
0.5100	33.88	22.29	9.84	43.72	32.13	56.00	46.00	-12.28	-13.87	L1
0.5899	39.50	27.70	9.95	49.45	37.65	56.00	46.00	-6.55	-8.35	L1
0.6460	35.71	24.39	10.03	45.74	34.42	56.00	46.00	-10.26	-11.58	L1
0.7820	33.68	23.55	10.22	43.90	33.77	56.00	46.00	-12.10	-12.23	L1
0.9220	30.36	22.16	10.41	40.77	32.57	56.00	46.00	-15.23	-13.43	L1
1.0339	35.87	26.21	10.49	46.36	36.70	56.00	46.00	-9.64	-9.30	L1
1.4140	31.19	18.04	10.20	41.39	28.24	56.00	46.00	-14.61	-17.76	L1
1.6300	31.90	21.45	10.04	41.94	31.49	56.00	46.00	-14.06	-14.51	L1
1.9300	33.66	23.74	9.81	43.47	33.55	56.00	46.00	-12.53	-12.45	L1
2.2180	32.29	21.80	9.76	42.05	31.56	56.00	46.00	-13.95	-14.44	L1
2.6580	32.70	20.78	9.78	42.48	30.56	56.00	46.00	-13.52	-15.44	L1
3.7660	32.57	20.92	9.82	42.39	30.74	56.00	46.00	-13.61	-15.26	L1
4.7260	31.74	21.09	9.83	41.57	30.92	56.00	46.00	-14.43	-15.08	L1

Remark:

- 1. Measuring frequencies from 0.15 MHz to 30MHz.
- 2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
- The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF 3. bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz:
- L1 = Line One (Live Line) / L2 = Line Two (Neutral Line) 4.

Page 67 Rev. 00 Operation Mode: Normal Link Test Date: February 26, 2016

Reference No.: T150529W04-RP1

Report No.: T160118W01-RP1

Temperature: 24 ℃ Tested by: Dennis Li

Humidity: 50% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1660	40.90	32.05	9.64	50.54	41.69	65.15	55.16	-14.61	-13.47	L2
0.2097	34.56	22.79	9.64	44.20	32.43	63.21	53.22	-19.01	-20.79	L2
0.4660	34.24	22.05	9.74	43.98	31.79	56.58	46.58	-12.60	-14.79	L2
0.5019	36.57	23.08	9.79	46.36	32.87	56.00	46.00	-9.64	-13.13	L2
0.5581	34.78	20.27	9.87	44.65	30.14	56.00	46.00	-11.35	-15.86	L2
0.5897	37.71	25.40	9.91	47.62	35.31	56.00	46.00	-8.38	-10.69	L2
0.6496	34.87	24.26	10.00	44.87	34.26	56.00	46.00	-11.13	-11.74	L2
0.7018	26.79	11.66	10.07	36.86	21.73	56.00	46.00	-19.14	-24.27	L2
0.7824	32.65	20.47	10.18	42.83	30.65	56.00	46.00	-13.17	-15.35	L2
1.0062	26.31	17.64	10.48	36.79	28.12	56.00	46.00	-19.21	-17.88	L2
1.3300	31.50	19.30	10.23	41.73	29.53	56.00	46.00	-14.27	-16.47	L2
1.4980	27.58	15.29	10.10	37.68	25.39	56.00	46.00	-18.32	-20.61	L2
2.5820	32.62	20.45	9.74	42.36	30.19	56.00	46.00	-13.64	-15.81	L2


Remark:

- 1. Measuring frequencies from 0.15 MHz to 30MHz.
 - 2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
 - 3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
 - 4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)


Page 68 Rev. 00

Test Plots

Conducted emissions (Line 1)

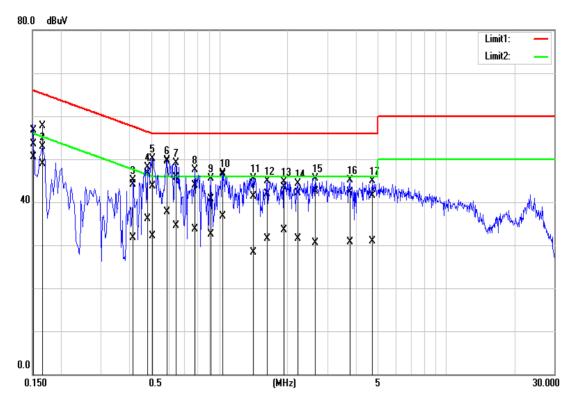

Conducted emissions (Line 2)

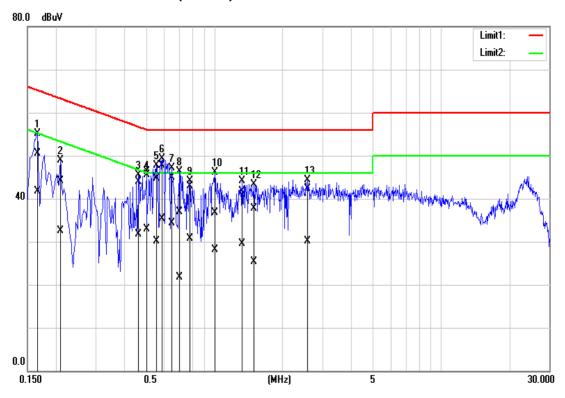

Page 69 Rev. 00