

Report No.: EESZD02230002-2 Page 1 of 44

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT INTENTIONAL RADIATOR CERTIFICATION

Product Name : WIFI & Bluetooth

Model Number : GM10

Trade Name : N/A

FCC ID : ZDYGM1X

Report Number : EESZD02230002-2

Date : Mar. 25, 2011

Regulations: See below

Standards	Results
☑ 47 CFR FCC Part 15 Subpart C 15.247:2009	PASS

Prepared for

Shenzhen Leader Digital-tech Weitong Co., Ltd 4 Floor, Dongjiang Environmental Building, Central Langshan Road, HI-Tech Park, Nanshan District, ShenZhen, China

Prepared by

CENTRE TESTING INTERNATIONAL (SHENZHEN) CORPORATION
Building C, Hongwei Industrial Zone, Baoan 70 District,
Shenzhen, Guangdong, China

TEL: 86-755-3368 3362 FAX: 86-755-3368 3368

Check No.: 57123012

This report shall not be reproduced, except in full, without the written approval of CENTRE TESTING INTERNATIONAL (SHENZHEN) CORPORATION

Building C, Hongwei Industrial Zone, Baoan 70 District, Shenzhen





Report No.: EESZD02230002-2

Page 2 of 44

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION	6
5. SYSTEM TEST CONFIGURATION	6
5.1 JUSTIFICATION	6
5.2 EUT EXERCISING SOFTWARE	
7. TEST EQUIPMENT LIST	
8. SUPPORT EQUIPMENT LIST	
9. CONDUCTED EMISSION TEST	
9.1 LIMITS 9.2 BLOCK DIAGRAM OF TEST SETUP	9
9.3 PROCEDURE OF CONDUCTED EMISSION TES	
9.4 GRAPHS AND DATA	
10. 20DB BANDWIDTH MEASUREMENT	12
10.1 LIMITS	
10.2 BLOCK DIAGRAM OF TEST SETUP 10.3 TEST PROCEDURE	
10.4 TEST RESULT	
11. CARRIER FREQUENCY SEPARATION	15
11.1 LIMITS	15
11.2 BLOCK DIAGRAM OF TEST SETUP	
11.3 TEST PROCEDURE	
12. NUMBER OF HOPPING FREQUENCY	
12.1 LIMITS	18
12.2 BLOCK DIAGRAM OF TEST SETUP	18
12.3 TEST PROCEDURE	
13. TIME OF OCCUPANCY (DWELL TIME)	
13.1 LIMITS 13.2 BLOCK DIAGRAM OF TEST SETUP	19 1c
13.3 TEST PROCEDURE	
13.4 TEST RESULT	



Report No.: EESZD02230002-2	Page 3 of 44
14. MAXIMUM PEAK CONDUCTED OUTPUT POWER MEASUREMENT	23
14.1 LIMITS	23
14.2 BLOCK DIAGRAM OF TEST SETUP	23
14.3 TEST PROCEDURE	
14.4 TEST RESULT	23
15. BAND EDGE EMISSION MEASUREMENT	26
15.1 LIMITS (FCC 's requirement)	26
15.2 BLOCK DIAGRAM OF TEST SETUP	
15.3 TEST PROCEDURE	26
15.4 TEST RESULT	26
16. SPURIOUS RF CONDUCTED EMISSIONS MEASUREMENT	28
16.1 LIMITS	28
16.2 BLOCK DIAGRAM OF TEST SETUP	
16.3 TEST PROCEDURE	28
16.4 TEST RESULT	28
17. RADIATED EMISSIONS MEASUREMENT	32
17.1 LIMITS	32
17.2 BLOCK DIAGRAM OF TEST SETUP	32
17.3 TEST PROCEDURE	33
17.4 TEST RESULT	34
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	42
APPENDIX 2 PHOTOGRAPHS OF EUT	44
(Note: N/A means not applicable)	



Report No.: EESZD02230002-2 Page 4 of 44

1. GENERAL INFORMATION

Applicant: Shenzhen Leader Digital-tech Weitong Co., Ltd

4 Floor, Dongjiang Environmental Building, Central Langshan Road,

HI-Tech Park, Nanshan District, ShenZhen, China

Manufacturer: Shenzhen Leader Digital-tech Weitong Co., Ltd

4 Floor, Dongjiang Environmental Building, Central Langshan Road,

HI-Tech Park, Nanshan District, ShenZhen, China

Product Name: WIFI & Bluetooth

Model Name: GM10

Trade Name: N/A

FCC ID: ZDYGM1X

Report Number: EESZD02230002-2

Date of Test: Mar. 01, 2011 to Mar. 25, 2011

The above equipment was tested by CENTRE TESTING INTERNATIONAL (SHENZHEN) CORPORATION for compliance with the requirements set forth in FCC Rules and the measurement procedure according to ANSI C63.4-2009.

The test results of this report relate only to the tested sample identified in this report.

Prepared by :

Christy Chen

Reviewed by:

Louisa Lu

Approved by:

Supervisor

Date

Mar. 25, 2011





Report No.: EESZD02230002-2 Page 5 of 44

2. TEST SUMMARY

The complete list of measurements is given below:

Clause	Test Item	Rule	Result
9	Conducted Emission	FCC 15.207	PASS
10	20dB Bandwidth / 99% occupied bandwidth	FCC 15.247(a)(1)	PASS
11	Carrier Frequency Separation	FCC15.247(a)(1)	PASS
12	Number of Hopping Frequency	FCC 15.247(a)(iii)	PASS
13	Time of Occupancy (Dwell Time)	FCC 15.247(a)(iii)	PASS
14	Maximum Peak Conducted Output Power	FCC 15.247(b)(1)	PASS
15	Band edge Emission	FCC 15.247(d)	PASS
16	Spurious RF Conducted Emission	FCC 15.247(d)	PASS
17	Radiated Emission	FCC 15.247(d)	PASS

3. MEASUREMENT UNCERTAINTY

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement items	Uncertainty						
Conducted Emission	2.6						
Maximum Peak Conducted Output Power	0.22dB						
Radiated Emissions / Band edge Emission	4.4 dB						





Page 6 of 44 Report No.: EESZD02230002-2

4. PRODUCT INFORMATION

Items	Description
Intentional Transceiver	Intentional Transceiver
Modulation	Frequency Hopping Spread Spectrum (FHSS) 1. GFSK 2.π/4-DQPSK 3. 8DPSK
Data Rate (Mbps)	GFSK: 1; π/4-DQPSK: 2; 8DPSK: 3
Frequency Range	2402 ~ 2480 MHz
Channel Number	79 (at intervals of 1MHz)
Туре	PCB Inverted-F Antenna
Connector	fixed on board
Gain	1.5dBi

5. SYSTEM TEST CONFIGURATION

5.1 JUSTIFICATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables were manipulated to produce worst case emissions. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.





Report No.: EESZD02230002-2 Page 7 of 44

5.2 EUT EXERCISING SOFTWARE

The EUT exercise program CSR, (provided by client) used during testing was designed to exercise the various system components in a manner similar to a typical use.

The parameters of test software setting:

During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.

Channel No.	Data rate	Modulation Type
1 to 79	1 Mbps / 2 Mbps / 3 Mbps	GFSK / π/4-DQPSK / 8DPSK

6. TABLE OF TEST MODE

Preliminary tests were performed the entire possible configuration in different modulation type and different data rate according to the following table to find the worst cases. And only one group of the worst - case data for each test item is shown in the report.

Test Items	Mode	Data Rate	Channel
20dB Bandwidth	GFSK / π/4-DQPSK / 8DPSK	1 Mbps / 2 Mbps / 3 Mbps	1 / 40 / 79
Carrier Frequency Separation	8DPSK	3 Mbps	1 and 2 / 40 and 41 / 78 and 79
Number of Hopping Frequency	8DPSK	3 Mbps	1 to 79
Time of Occupancy (Dwell Time)	GFSK / π/4-DQPSK / 8DPSK	1 Mbps / 2 Mbps / 3 Mbps	1 / 40 / 79
Maximum Peak Conducted Output Power	GFSK / π/4-DQPSK / 8DPSK	1 Mbps / 2 Mbps / 3 Mbps	1 / 40 / 79
Band edge Emission	GFSK / π/4-DQPSK / 8DPSK	1 Mbps / 2 Mbps / 3 Mbps	1 / 79
Spurious RF Conducted Emission	GFSK	1 Mbps	1 / 40 / 79
Radiated Emission	GFSK	1 Mbps	1 / 40 / 79





Report No.: EESZD02230002-2 Page 8 of 44

7. TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Due Date
3M Chamber & Accessory Equipment	ETS-LINDGREN	FACT-3	3510	07/09/2012
Spectrum Analyzer	Agilent	E4440A	MY46185649	04/09/2011
Spectrum Analyzer	R&S	FSP40	100416	07/10/2011
Biconilog Antenna	ETS-LINGREN	3142C	00044562	07/31/2011
Multi device Controller	ETS-LINGREN	2090	00057230	N/A
Horn Antenna	ETS-LINGREN	3117	00057407	06/07/2011
Microwave Preamplifier	Agilent	8449B	3008A02425	N/A
Receiver	R&S	ESCI	100009	07/10/2011
LISN	R&S	ENV216	100098	07/10/2011

8. SUPPORT EQUIPMENT LIST

No special auxiliary equipment used.





Report No.: EESZD02230002-2 Page 9 of 44

9. CONDUCTED EMISSION TEST

9.1 LIMITS


Limits for Class B digital devices

Frequency range	Limits dB(μ V)								
(MHz)	Quasi-peak	Average								
0,15 to 0,50	66 to 56	56 to 46								
0,50 to 5	56	46								
5 to 30	60	50								

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

9.2 BLOCK DIAGRAM OF TEST SETUP

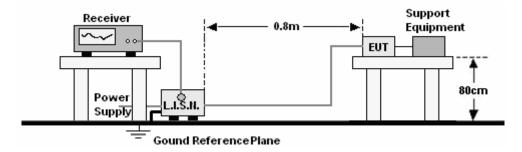


9.3 PROCEDURE OF CONDUCTED EMISSION TEST

- a. The EUT was placed on a nonconductive table above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from EUT in all power lines in the full band.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.



Report No.: EESZD02230002-2 Page 10 of 44

9.4 GRAPHS AND DATA

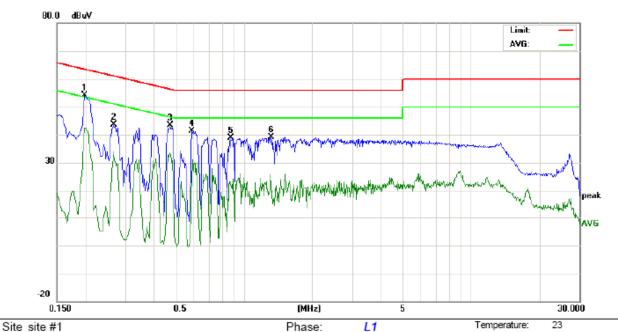

AC 120V/60Hz

Limit: FCC Class B Conduction (QP)

EUT: WIFI & Bluetooth

M/N: GM10 Mode: BT Note:

No.	Freq.			Reading_Level Correct Measureme (dBuV) Factor (dBuV)		Measurement (dBuV)		Lin (dB			rgin dB)			
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
1	0.1980	44.25		32.56	9.81	54.06		42.37	63.69	53.69	-9.63	-11.32	Р	
2	0.2660	33.84		24.18	9.81	43.65		33.99	61.24	51.24	-17.59	-17.25	Р	
3	0.4740	33.53		23.45	9.81	43.34		33.26	56.44	46.44	-13.10	-13.18	Р	
4	0.5899	31.66		13.19	9.82	41.48		23.01	56.00	46.00	-14.52	-22.99	Р	
5	0.8780	28.99		12.24	9.85	38.84		22.09	56.00	46.00	-17.16	-23.91	Р	
6	1.3180	29.28		12.21	9.87	39.15		22.08	56.00	46.00	-16.85	-23.92	Р	

Power:


Humidity:

59 %



Report No.: EESZD02230002-2

Page 11 of 44

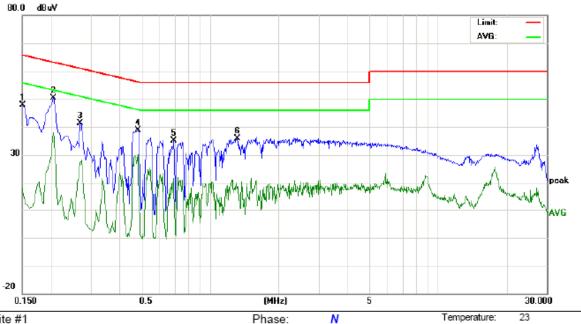

AC 120V/60Hz

Site site #1

Limit: FCC Class B Conduction (QP)

EUT: WIFI & Bluetooth

M/N: GM10 Mode: BT Note:

No.	Freq.	Reading_Level (dBuV)		vel	Correct Factor	Measurement (dBuV)		Lin (dB			rgin dB)			
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
1	0.1500	38.19		8.46	9.79	47.98		18.25	65.99	55.99	-18.01	-37.74	Р	
2	0.2060	40.66		28.36	9.81	50.47		38.17	63.36	53.36	-12.89	-15.19	Р	
3	0.2700	31.68		17.51	9.81	41.49		27.32	61.12	51.12	-19.63	-23.80	Ρ	
4	0.4820	29.12		20.42	9.81	38.93		30.23	56.30	46.30	-17.37	-16.07	Р	
5	0.6940	25.39		6.25	9.84	35.23		16.09	56.00	46.00	-20.77	-29.91	Р	
6	1.3180	25.88		8.23	9.87	35.75		18.10	56.00	46.00	-20.25	-27.90	Р	

Power:

Humidity:

59 %




Report No.: EESZD02230002-2 Page 12 of 44

10. 20DB BANDWIDTH MEASUREMENT

10.1 LIMITS

None

10.2 BLOCK DIAGRAM OF TEST SETUP



10.3 TEST PROCEDURE

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. Set spectrum analyzer's RBW and VBW to applicable value with Peak in Max Hold.
- 3. A PEAK output reading was taken, a DISPLAY line was drawn 20 dB lower than PEAK level.
- 4. The 20dB bandwidth was determined from where the channel output spectrum intersected the display line.

10.4 TEST RESULT


Worst case-- Modulation Type: 8DPSK Data Rate: 3Mbps

Channel	Frequency (MHz)	20 dB BW (MHz)	Result
CH1	2402	1.32	
CH40	2441	1.26	1.32MHz
CH79	2480	1.30	






Report No.: EESZD02230002-2 Page 13 of 44

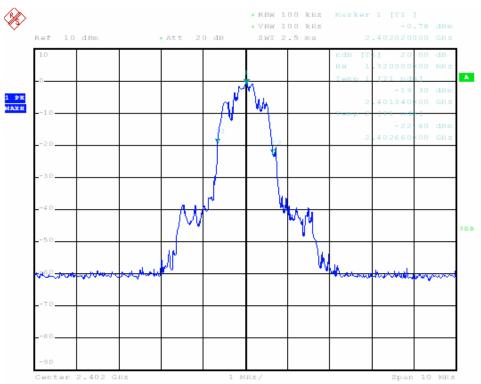


Channel 1 2402 MHz

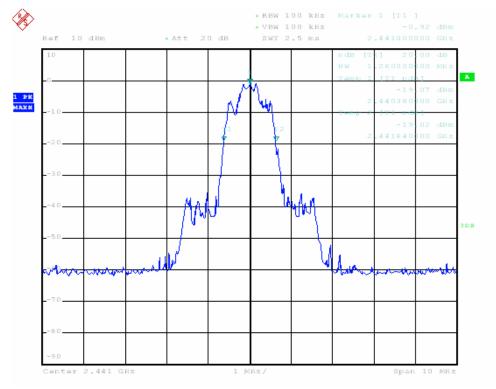

Channel 40_2441 MHz



Report No.: EESZD02230002-2 Page 14 of 44

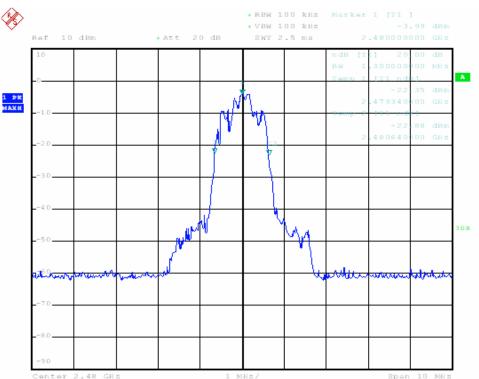

Channel 79_ 2480 MHz



Report No.: EESZD02230002-2 Page 15 of 44


11. CARRIER FREQUENCY SEPARATION

11.1 LIMITS

Frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

As the system's 20 dB bandwidth is 1.32MHz, thus, Carrier Frequency Separation should be greater than 880 kHz.

11.2 BLOCK DIAGRAM OF TEST SETUP



11.3 TEST PROCEDURE

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. Set spectrum analyzer's RBW and VBW to applicable value with Peak in Max Hold. The original channel's carrier frequency was taken.
- 3. Make EUT transmit in adjacent channel.
- 4. Use the delta maker button on spectrum analyzer to read the channel separation from the adjacent channel to original channel.

11.4 TEST RESULT

Worst case-- Modulation Type: 8DPSK Data Rate: 3Mbps


Carrier Frequency Separation: 1 MHz

Test Result: Pass






Report No.: EESZD02230002-2 Page 16 of 44

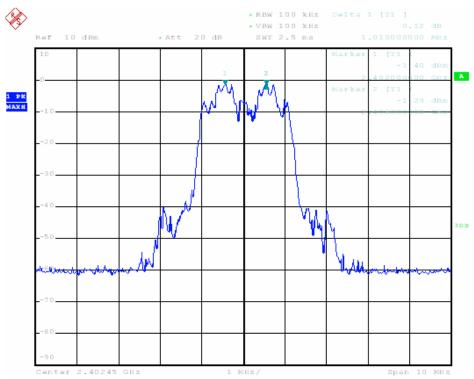


Channel 1 2402 MHz

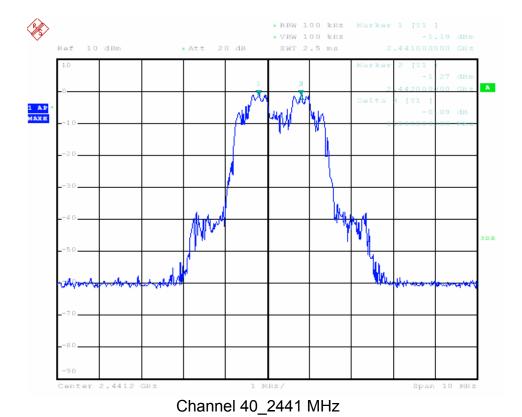



Report No. : EESZD02230002-2 Page 17 of 44

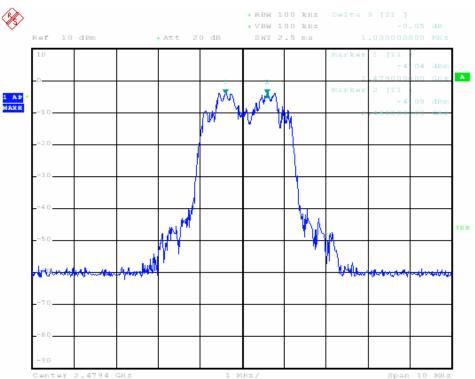

Channel 79_ 2480 MHz




Report No.: EESZD02230002-2 Page 18 of 44

12. NUMBER OF HOPPING FREQUENCY

12.1 LIMITS

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.2 BLOCK DIAGRAM OF TEST SETUP




12.3 TEST PROCEDURE

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. Set spectrum analyzer to Peak in Max Hold.
- 3. Make EUT work continually, till all operation channels were recorded.

12.4 TEST RESULT

Worst case-- Modulation Type: 8DPSK Data Rate: 3Mbps Number of Hopping Frequency is 79, with frequency space = 1MHz.

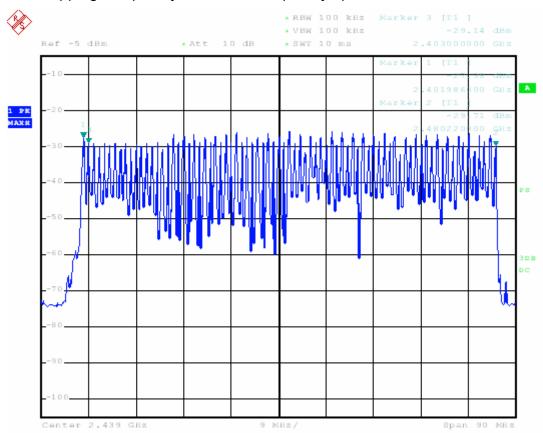






Report No.: EESZD02230002-2 Page 19 of 44

13. TIME OF OCCUPANCY (DWELL TIME)

13.1 LIMITS

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

13.2 BLOCK DIAGRAM OF TEST SETUP



13.3 TEST PROCEDURE

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. Set spectrum analyzer's RBW and VBW to applicable value with Peak in Max Hold.
- 3. Measured pulse time and Time separation.

13.4 TEST RESULT


Worst case-- Modulation Type: 8DPSK Data Rate: 3Mbps


Channel _ Freq. (MHz)	Pulse Wide (ms)	Number of Hopping Pulses in 0.4s*channel number	Dwell Time (s)	Limit (s)	Result (Pass / Fail)
CH0 _ 2402	0.188	1485.2	0.279	0.4	Pass
CH39 _ 2441	0.185	1485.2	0.274	0.4	Pass
CH78_ 2480	0.187	1485.2	0.283	0.4	Pass





Report No.: EESZD02230002-2 Page 20 of 44

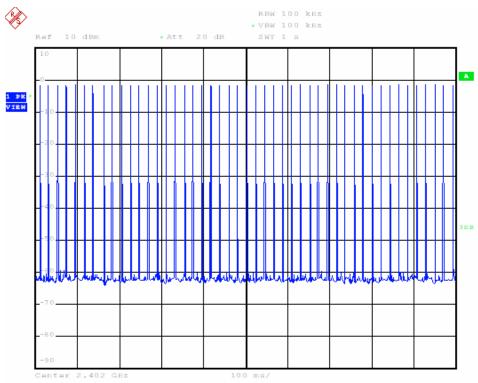

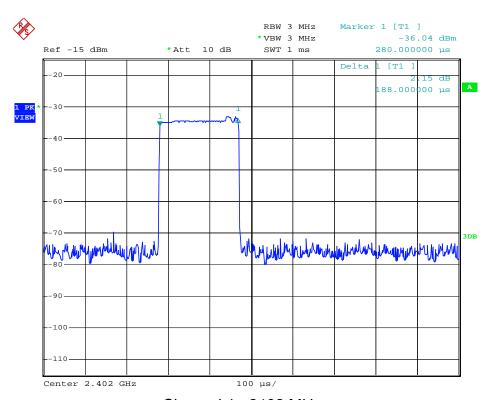



Channel 1_ 2402 MHz





Report No.: EESZD02230002-2 Page 21 of 44

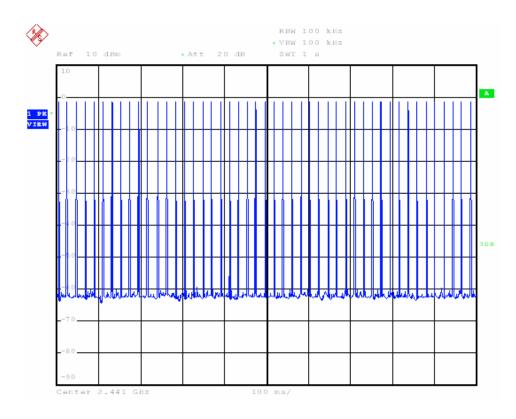


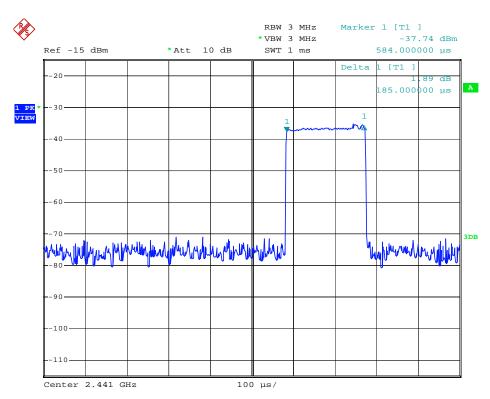


Channel 40_2441 MHz



Report No.: EESZD02230002-2 Page 22 of 44

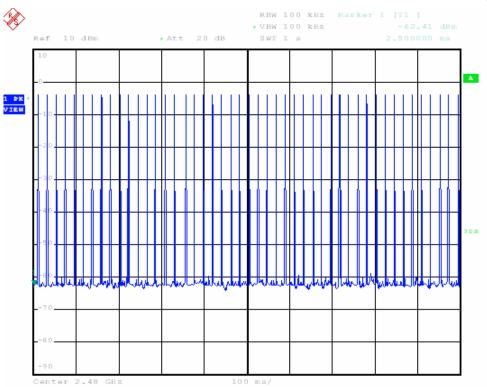

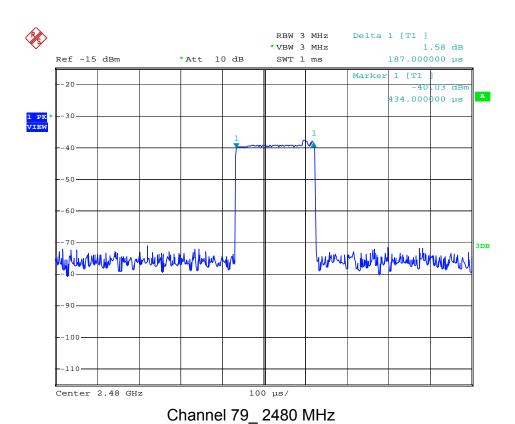

Hotline 400-6788-333




Report No.: EESZD02230002-2 Page 23 of 44

14. MAXIMUM PEAK CONDUCTED OUTPUT POWER MEASUREMENT

14.1 LIMITS

The limit for peak output power is 0.125Watt (21dBm).

14.2 BLOCK DIAGRAM OF TEST SETUP



14.3 TEST PROCEDURE

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. Set spectrum analyzer's RBW and VBW to applicable value with Peak in Max Hold.
- 3. Record the channel power directly from the spectrum analyzer.

14.4 TEST RESULT

Worst case-- Modulation Type: GFSK Data Rate: 1Mbps

Channel _ Freq. (MHz)	Reading Power (dBm)	Cable Loss (dB)	Measured Power (dBm)	Limit (dBm)	Result (Pass / Fail)
CH1 _ 2402	-1.62	1.8	0.18	21	Pass
CH40 _ 2441	-1.86	1.8	-0.06	21	Pass
CH79_ 2480	-1.83	1.8	-0.03	21	Pass


Remark:

Factor= Cable loss + Attenuator






Report No.: EESZD02230002-2 Page 24 of 44

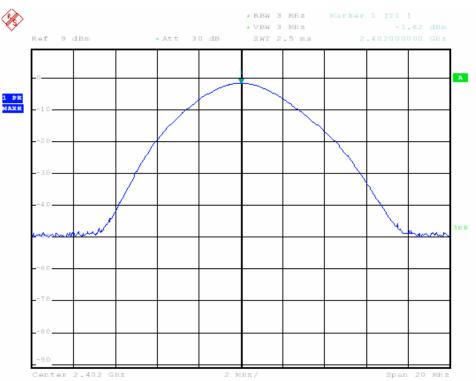

CH1 _ 2402MHz

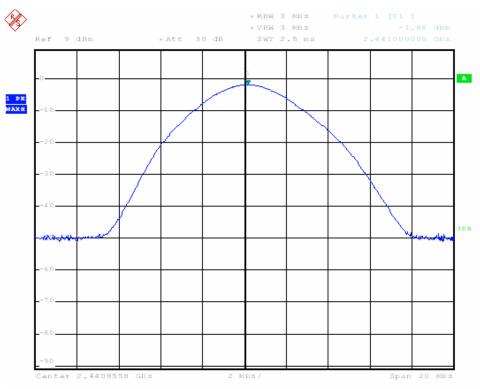


CH40 _ 2441MHz





Report No. : EESZD02230002-2 Page 25 of 44

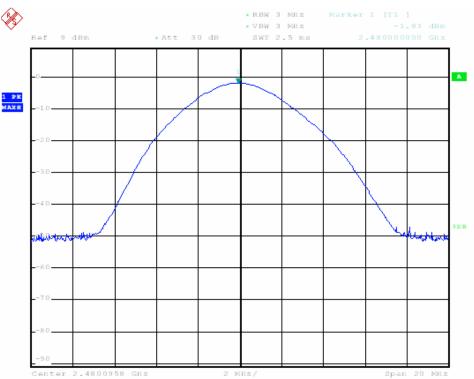

CH79 2480MHz




Report No.: EESZD02230002-2 Page 26 of 44

15. BAND EDGE EMISSION MEASUREMENT

15.1 LIMITS (FCC 's requirement)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

15.2 BLOCK DIAGRAM OF TEST SETUP



15.3 TEST PROCEDURE

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. Set spectrum analyzer's RBW and VBW to applicable value with Peak in Max Hold.
- 3. Record the emission drops at the band-edge relative to the highest fundamental emission level.
- 4. Use the marker-delta method to determine band-edge compliance as required.


15.4 TEST RESULT

Worst case-- Modulation Type: GFSK Data Rate: 1Mbps All the band edge emissions are very low, please see the plots in next pages.






Report No.: EESZD02230002-2 Page 27 of 44

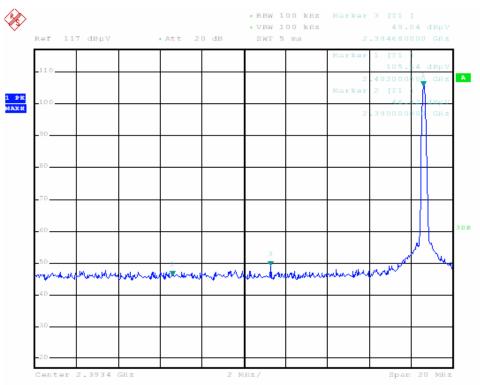

CH1 2402MHz

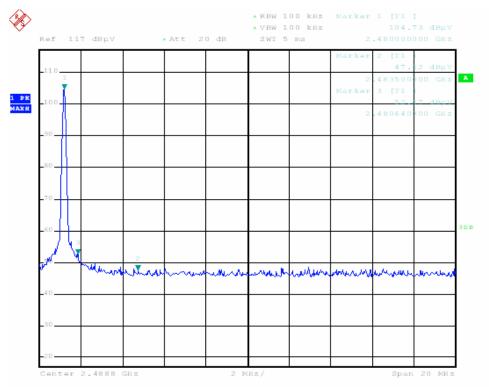

CH79_ 2480MHz




Report No.: EESZD02230002-2 Page 28 of 44

16. SPURIOUS RF CONDUCTED EMISSIONS MEASUREMENT

16.1 LIMITS

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

16.2 BLOCK DIAGRAM OF TEST SETUP



16.3 TEST PROCEDURE

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. Set spectrum analyzer's RBW and VBW to applicable value with Peak in Max Hold.
- 3. Record the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.

16.4 TEST RESULT


Worst case-- Modulation Type: GFSK Data Rate: 1Mbps


Please see the following plots.






Report No.: EESZD02230002-2 Page 29 of 44

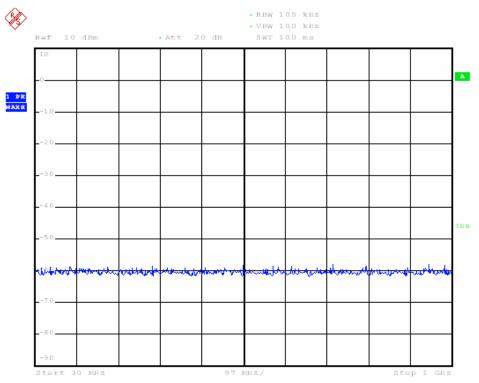


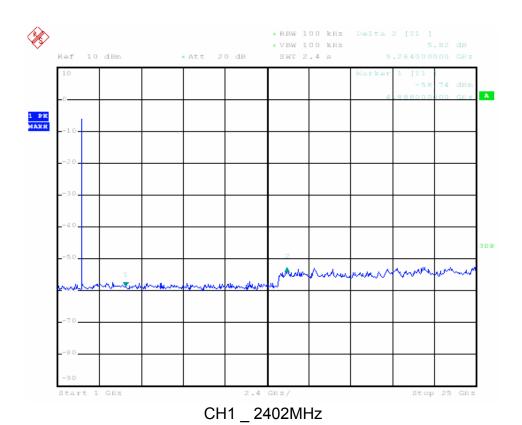




Report No.: EESZD02230002-2 Page 30 of 44

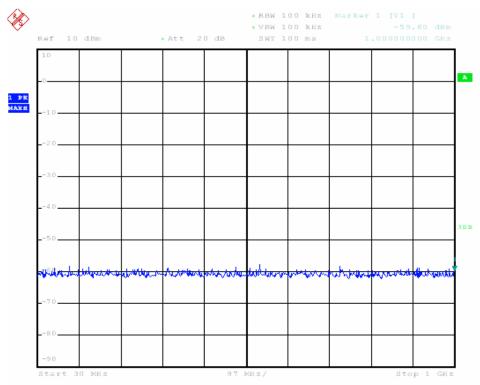


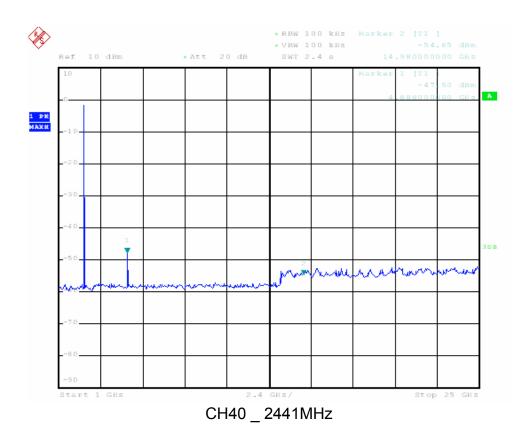



Report No.: EESZD02230002-2 Page 31 of 44

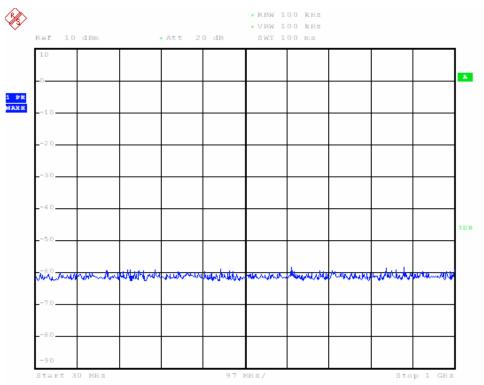

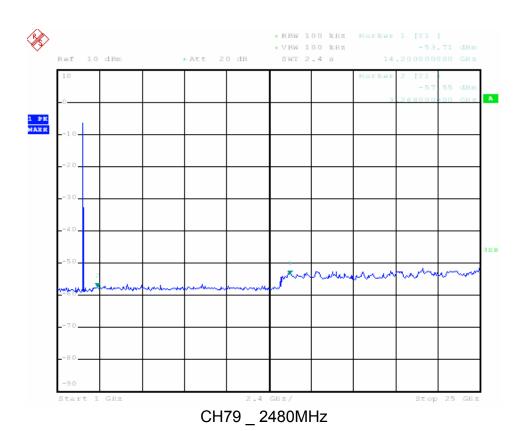



Report No.: EESZD02230002-2 Page 32 of 44

17. RADIATED EMISSIONS MEASUREMENT

17.1 LIMITS


The field strength of any emissions, which appear outside of operating frequency band and restricted band specified on FCC 15.205(a) and RSS-210 2.7, shall not exceed the general radiated emission limits as below.

Frequency (MHz)	Field strength (μV/m)	Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Note: the tighter limit applies at the band edges.

17.2 BLOCK DIAGRAM OF TEST SETUP

For radiated emissions from 9kHz to 30MHz

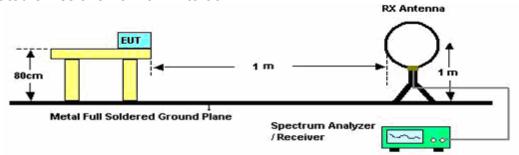

For radiated emissions from 30 - 1000MHz

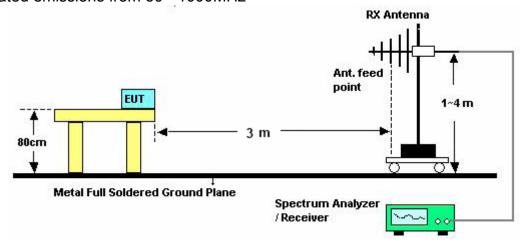






Report No.: EESZD02230002-2 Page 33 of 44

For radiated emissions from 1GHz to 25GHz

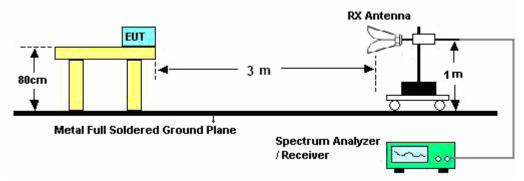

17.3 TEST PROCEDURE Below 30MHz

- a. The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 1 meter away from the antenna (loop antenna). The maximum values of the field strength are recorded by adjusting the polarizations of the test antenna and rotating the turntable.
- b. For each suspected emission, the EUT was arranged to its worst case and then turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- c. The test frequency analyzer system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

30MHz ~ 1GHz:

- a. The EUT was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where EUT radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

Above 1GHz:

- a. The EUT was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.





Report No. : EESZD02230002-2 Page 34 of 44

c. For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where EUT radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

17.4 TEST RESULT

Worst case-- Modulation Type: GFSK Data Rate: 1Mbps

Pass.





Report No.: EESZD02230002-2 Page 35 of 44

Frequency	Antenna Polarization	Detector	Final Emission	Limit (dBµV/m)		Result	
(MHZ)	(H / V)	(PK / QP / AV)	(dBµV/m)	PK	QP	AV	(Pass / Fail)
80.1167	Н	QP	31.02		40.0		Pass
479.4333	Н	QP	36.12		46.0		Pass
1116.677	Н	PK	36.02	74.0		54.0	Pass
2402.000	Н	PK	85.23				Pass
3695.000	Н	PK	41.00	74.0		54.0	Pass
4804.000	Н	PK	42.32	74.0		54.0	Pass
7812.333	Н	PK	45.20	74.0		54.0	Pass
78.5000	V	QP	33.12		40.0		Pass
479.4333	V	QP	32.08		46.0		Pass
1220.113	V	PK	34.63	74.0		54.0	Pass
2402.000	V	PK	84.63				Pass
4804.000	V	PK	43.02	74.0		54.0	Pass
7887.110	V	PK	44.20	74.0		54.0	Pass
8753.336	V	PK	45.74	74.0		54.0	Pass

CH1 _ 2402MHz

Remark:

No emissions were found higher than the background below 30MHz and background is lower than the limit, so it deems to compliance with the limit without recorded.





Report No.: EESZD02230002-2 Page 36 of 44

Frequency	Antenna Polarization	Detector (PK / QP / AV)	Final Emission	Limit (dBµV/m)			Result
(MHZ)	(H / V)		(dBµV/m)	PK	QP	AV	(Pass / Fail)
80.1167	Н	QP	32.01		40.0		Pass
479.4333	Н	QP	35.02		46.0		Pass
1200.000	Н	PK	35.02	74.0		54.0	Pass
2441.000	Н	PK	83.69				Pass
4882.000	Н	PK	40.02	74.0		54.0	Pass
5678.222	Н	PK	41.02	74.0		54.0	Pass
7813.333	Н	PK	44.01	74.0		54.0	Pass
79.2000	V	QP	32.02		40.0		Pass
479.4333	V	QP	33.69		46.0		Pass
1203.333	V	PK	32.63	74.0		54.0	Pass
2441.000	V	PK	82.96				Pass
4882.000	V	PK	42.63	74.0		54.0	Pass
7966.667	V	PK	43.02	74.0		54.0	Pass
9088.120	V	PK	46.36	74.0		54.0	Pass

CH40 _ 2441MHz

Remark:

No emissions were found higher than the background below 30MHz and background is lower than the limit, so it deems to compliance with the limit without recorded.





Report No.: EESZD02230002-2 Page 37 of 44

Frequency	Antenna Polarization	Detector	Final Emission	(dRuV/m)			Result
(MHZ)	(H / V)	(PK / QP / AV)	(dBµV/m)	PK	QP	AV	(Pass / Fail)
80.1167	Н	QP	32.02		40.0		Pass
479.4333	Н	QP	34.96		46.0		Pass
1325.667	Н	PK	34.25	74.0		54.0	Pass
2480.000	Н	PK	84.02				Pass
4960.000	Н	PK	40.36	74.0		54.0	Pass
6712.223	Н	PK	41.33	74.0		54.0	Pass
7813.333	Н	PK	43.33	74.0		54.0	Pass
80.3333	V	QP	31.23		40.0		Pass
479.4333	V	QP	34.02		46.0		Pass
1367.667	V	PK	33.01	74.0		54.0	Pass
2480.000	V	PK	83.01				Pass
4960.000	V	PK	42.01	74.0		54.0	Pass
8022.333	V	PK	42.99	74.0		54.0	Pass
9011.333	V	PK	45.02	74.0		54.0	Pass

CH79 _ 2480MHz

Remark:

No emissions were found higher than the background below 30MHz and background is lower than the limit, so it deems to compliance with the limit without recorded.



Report No.: EESZD02230002-2 Page 38 of 44

Declaration for Bluetooth

1. Output power and channel separation of a Bluetooth device in the different operating modes:

The different operating modes (data-mode, acquisition-mode) of a Bluetooth device has no influence on the output power and the channel spacing. There is only one transmitter which is driven by identical input parameters concerning these two parameters.

Only a different hopping sequence will be used. For this reason the check of these RF parameters in one op-mode is sufficient.

2. Frequency range of a Bluetooth device:

Hereby we declare that the maximum frequency of this device is: 2402 - 2480 MHz. This is according to the Bluetooth Core Specification (+ critical errata) for devices which will be operated in the USA.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/04-E). Other frequency ranges (e.g. for Spain, France, Japan) which are allowed according the Core Specification are not supported by this device.

3 Co-ordination of the hopping sequence in data mode to avoid simultaneous occupancy by multiple transmitters:

Bluetooth units which want to communicate with other units must be organized in a structure called piconet. This piconet consist of max. 8 Bluetooth units. One unit is the master the other seven are the slaves. The master co-ordinates frequency occupation in this piconet for all units. As the master hop sequence is derived from its BD address which is unique for each Bluetooth device, additional masters intending to establish new piconets will always use different hop sequences.

4. Example of a hopping sequence in data mode:

Example of a 79 hopping sequence in data mode:

40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67, 56, 37, 60, 39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59, 72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75, 09, 45, 13, 47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06, 01, 51, 03, 55, 05, 04

5. Equally average use of frequencies in data mode and behaviour for short transmissions:

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection
- 2. Internal master clock





Report No.: EESZD02230002-2 Page 39 of 44

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD_ADDRESS.

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronisation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5 µs. The clock has a cycle of about one day (23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR- operations) are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behaviour: The first connection between the two devices is established, a hopping sequencewas generated. For transmitting the wanted data the complete hopping sequencewas not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact that the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5 µs). The hopping sequence will always differ from the first one.

6. Receiver input bandwidth and behaviour for repeated single or multiple packets:

The input bandwidth of the receiver is 1 MHz. In every connection one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence (see chapter 5). The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master.

Additionally the type of connection (e.g. single or multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

7. Dwell time in data mode

The dwell time of 0.3797s within a 30 second period in data mode is independent from the packet type (packet length). The calculation for a 30 second period is a follows:

Dwell time = time slot length * hop rate / number of hopping channels *30s





Report No.: EESZD02230002-2 Page 40 of 44

Example for a DH1 packet (with a maximum length of one time slot) Dwell time =625 μ s * 1600 1/s / 79 * 30s = 0.3797s (in a 30s period) For multislot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots Dwell time = 5 * 625 s * 1600 * 1/5 * 1/s / 79 * 30s = 0.3797s (in a 30s period).

This is according the Bluetooth Core Specification V 1.0B (+ critical errata) for all Bluetooth devices. Therefor all Bluetooth devices comply with the FCC dwell time requirement in data mode. This was checked during the Bluetooth Qualification tests. The Dwell time in hybrid mode is measured and stated in the test report.

8. Channel Separation in hybrid mode

The nominal channel spacing of the Bluetooth system is 1Mhz independent of the operating mode.

The maximum "initial carrier frequency tolerance" which is allowed for Bluetooth is fcenter = 75 kHz.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/07-E) for three frequencies (2402, 2441, 2480 MHz). Additionally an example for the channel separation is given in the test report

9. Derivation and examples for a hopping sequence in hybrid mode

For the generation of the inquiry and page hop sequences the same procedures as described for the data mode are used (see chapter 5), but this time with different input vectors:

- For the inquiry hop sequence, a predefined fixed address is always used. This results in the same 32 frequencies used by all devices doing an inquiry but every time with a different start frequency and phase in this sequence.
- For the page hop sequence, the device address of the paged unit is used as input vector. This results in the use of a subset of 32 frequencies which is specific for that initial state of the connection establishment between the two units. A page to different devices would result in a different subset of 32 frequencies.

So it is ensured that also in hybrid mode the frequency use equally averaged.

Example of a hopping sequence in inquiry mode:

48, 50, 09, 13, 52, 54,41, 45, 56, 58, 11, 15, 60, 62, 43, 47, 00, 02, 64, 68, 04, 06, 17, 21, 08, 10, 66, 70, 12, 14, 19, 23

Example of a hopping sequence in paging mode:

08, 57, 68, 70, 51, 02, 42, 40, 04, 61, 44, 46, 63, 14, 50, 48, 16, 65, 52, 54, 67, 18, 58, 56, 20, 53, 60, 62, 55, 06, 66, 64





Report No.: EESZD02230002-2 Page 41 of 44

10. Receiver input bandwidth and synchronisation in hybrid mode:

The receiver input bandwidth is the same as in the data mode (1 MHz). When two Bluetooth devices establish contact for the first time, one device sends an inquiry access code, the other device is scanning for this inquiry access code. If two devices have been connected previously and want to start a new transmission, asimilar procedure takes place. The only difference is, instead of the inquiry access code, an special access code, derived from the BD ADDRESS of the paged device will be, will be sent by the master of this connection.

Due to the fact that both units have been connected before (in the inquiry procedure) the paging unit has timing and frequency information about the page scan of the paged unit. For this reason the time to establish the connection is reduced considerable.

11. Spread rate / data rate of the direct sequence signal

The Spread rate / Data rate in inquiry and paging mode can be defined via the access code. The access code is the only criterion for the system to check if there is a valid transmission or not. If you regard the presence of a valid access code as one bit of information, and compare it with the length of the access code of 68 bits, the Spread rate / Data rate will be 68/1.

12 Spurious emission in hybrid mode

The dwell time in hybrid mode is shorter than in data mode. For this reason the spurious emissions average level in data mode is worst case. The spurious emissions peak level is the same for both modes.

13. Peak power spectral density measurement

Since the transmitter is only active for some milliseconds on one channel you would get a result with many interruptions if using a sweep time of e.g. 1s as stated in the FCC rules. Therefore a fast sweep in maxhold function is used instead and the EUT is activated several times until the measurement curve has stabilized.






Report No.: EESZD02230002-2 Page 42 of 44

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

TEST SETUP OF CONDUCTED EMISSION



TEST SETUP OF RADIATED EMISSION (Below 30MHz)

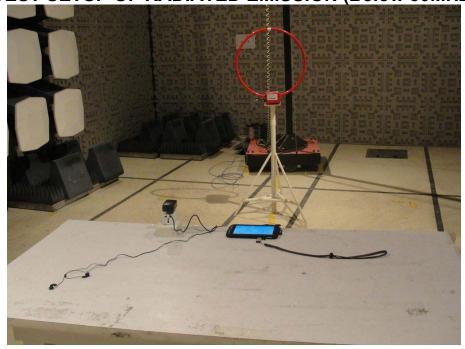







Report No.: EESZD02230002-2 Page 43 of 44

TEST SETUP OF RADIATED EMISSION (30MHz \sim 1GHz)

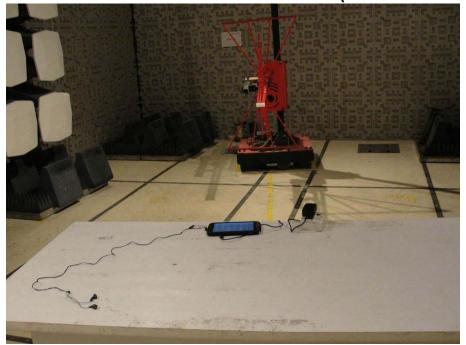

TEST SETUP OF RADIATED EMISSION (Above1GHz)

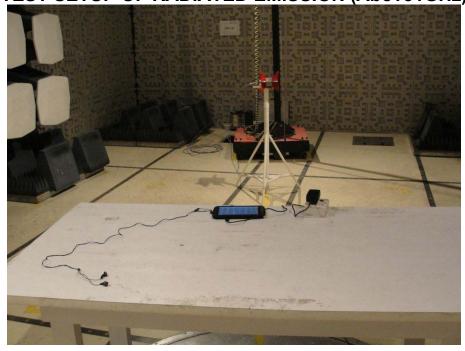


CENTRE TESTING INTERNATIONAL CORPORATION



Report No. : EESZD02230002-2 Page 44 of 44

APPENDIX 2 PHOTOGRAPHS OF EUT

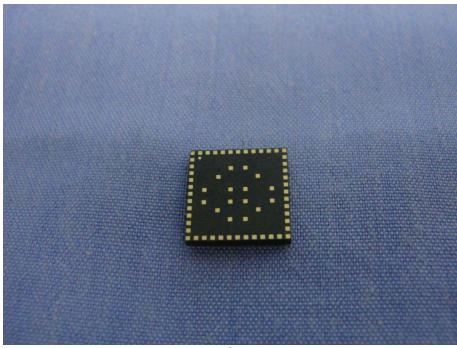

View of EUT-1



View of EUT-2

----- End of report -----

