

Radio Test Report

Report No.: STS2312343W03

Issued for

SARIANA LLC

7365 Mission Gorge Road Suite G San Diego, CA 92120,
USA

Product Name: SM1 Mechanical Keyboard

Brand Name: Satechi

Model Name: ST-KSM1LT-EN

Series Model(s): See page eight, fourth line

FCC ID: ZE9-ST-KSM1

Test Standards: FCC Part 15.249

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the ShenZhen STS Test Services Co., Ltd.



TEST REPORT

Applicant's Name : SARIANA LLC
 Address : 7365 Mission Gorge Road Suite G San Diego, CA 92120, USA
Manufacturer's Name : SARIANA LLC
 Address : 7365 Mission Gorge Road Suite G San Diego, CA 92120, USA

Product Description

Product Name : SM1 Mechanical Keyboard
 Brand Name : Satechi
 Model Name : ST-KSM1LT-EN
 Series Model(s) : See page eight, fourth line

Test Standards..... : FCC Part15.249
 Test Procedure : ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
 The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the ShenZhen STS Test Services Co., Ltd.

Date of Test :
 Date of receipt of test item..... : 27 Dec.2023
 Date of performance of tests . : 27 Dec.2023 ~ 07 Jan. 2024
 Date of Issue : 07 Jan. 2024
 Test Result : **Pass**

Testing Engineer : *Aaron Bu*

(Aaron Bu)

Technical Manager : *Chris Chen*

(Chris Chen)

Authorized Signatory : *Bovey Yang*

(Bovey Yang)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 TEST SOFTWARE AND POWER LEVEL	9
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3. EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 RADIATED EMISSION MEASUREMENT	17
4. BANDWIDTH TEST	33
4.1 TEST PROCEDURE	33
4.2 TEST SETUP	33
4.3 EUT OPERATION CONDITIONS	33
4.4 TEST RESULTS	34
5. ANTENNA REQUIREMENT	36
5.1 STANDARD REQUIREMENT	36
5.2 EUT ANTENNA	36
APPENDIX- PHOTOS OF TEST SETUP	37



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	07 Jan. 2024	STS2311343W03	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part 15.249 , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.203	Antenna Requirement	PASS	
15.249	Radiated Spurious Emission	PASS	
15.249	Radiated Band Edge Emission	PASS	
15.249	Field Strength of fundamental	PASS	
15.215(c)	20dB Bandwidth	PASS	

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 1.197\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.896\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.84\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 3.94\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.59\text{dB}$
6	All emissions, radiated >6G	$\pm 5.22\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.14\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.54\text{dB}$
9	Power Spectral Density, Conducted	$\pm 1.25\text{dB}$
10	Occupied Channel Bandwidth	$\pm 3.5\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	SM1 Mechanical Keyboard
Brand Name	Satechi
Model Name	ST-KSM1LT-EN
Series Model(s)	ST-KSM1DK-EN, ST-KSM1DK-CA, ST-KSM1LT-CA, ST-KSM1DK-CN, ST-KSM1LT-CN, ST-KSM1DK-KR, ST-KSM1LT-KR, ST-KSM1DK-CZ, ST-KSM1LT-CZ, ST-KSM1DK-HU, ST-KSM1LT-HU, ST-KSM1DK-QC, ST-KSM1LT-QC, ST-KSM1DK-UK, ST-KSM1LT-UK, ST-KSM1DK-ES, ST-KSM1LT-ES, ST-KSM1DK-FR, ST-KSM1LT-FR, ST-KSM1DK-DE, ST-KSM1LT-DE, ST-KSM1DK-IT, ST-KSM1LT-IT, ST-KSM1DK-NL, ST-KSM1LT-NL, ST-KSM1DK-PT, ST-KSM1LT-PT, ST-KSM1DK-SE, ST-KSM1LT-SE, ST-KSM1DK-NO, ST-KSM1LT-NO, ST-KSM1DK-DK, ST-KSM1LT-DK, ST-KSM1DK-FI, ST-KSM1LT-FI, ST-KSM1DK-PL, ST-KSM1LT-PL, ST-KSM1DK-GR, ST-KSM1LT-GR, ST-KSM1DK-RU, ST-KSM1LT-RU, ST-KSM1DK-TR, ST-KSM1LT-TR, ST-KSM1DK-AR, ST-KSM1LT-AR, ST-KSM1DK-HE, ST-KSM1LT-HE, ST-KSM1DK-MX, ST-KSM1LT-MX, ST-KSM1DK-BR, ST-KSM1LT-BR, ST-KSMYZZ-XX ("Y" is Arabian number 1, 2 or 3 and ZZ is English letter means color, XX means layout / country)
Model Difference	Only the color and export country are different
Product Description	The EUT is a SM1 Mechanical Keyboard.
	Operation Frequency: 2403~2480 MHz
	Modulation Type: GFSK
	Antenna Designation: PCB
	Antenna Gain(Peak): -1dBi
	Based on the application, features, or specification exhibited in User Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User Manual.
Battery	Rated Voltage: 3.85V Charge Limit Voltage: 4.35V Capacity: 2500mAH
Rating	Input: DC 5V
Connecting I/O Port(s)	Please refer to the Note 1.
Hardware version number	AK-M01-BT983(US)VER1.0
Software version number	V2.47

Note:

1. For a more detailed features description, please refer to the manufacturer’s specifications or the User Manual.
- 2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2403	2	2426	3	2441
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
4	2463	5	2407	6	2422
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
7	2445	8	2466	9	2414
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
10	2436	11	2459	12	2473
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
13	2419	14	2439	15	2453
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
16	2480	--	--	--	--

- 3.

Test channel List		
Test Channel	EUT Channel	Test Frequency (MHz)
lowest	CH01	2403
middle	CH03	2441
highest	CH16	2480

Note: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions
Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Pretest Mode	Description	Data/Modulation
Mode 1	TX/CH01	GFSK
Mode 2	TX/CH03	GFSK
Mode 3	TX/CH16	GFSK

Note:

(1) All above mode have been measurement, only worst data was reported.

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 4 : Keeping TX

2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
Other SRD	2.4G	GFSK	-1	Default	The EUT has signal transmission when it is powered on


2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters.

Radiated Spurious Emission Test



Conducted Emission Test

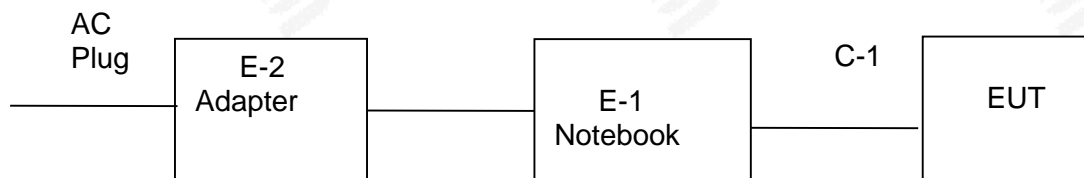

2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
	Notebook Adapter	LENOVO	ADLX45DLC3A	N/A	N/A
	Notebook	LENOVO	Think Pad E470	N/A	N/A
	USB Cable	N/A	N/A	150cm	NO

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2023.03.03	2024.03.02
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2023.02.28	2024.02.27
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2023.09.26	2024.09.25
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2023.03.06	2024.03.05
Active loop Antenna	ZHINAN	ZN30900C	16035	2023.02.28	2024.02.27
Bilog Antenna	TESEQ	CBL6111D	34678	2022.09.30	2024.09.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2023.09.24	2025.09.23
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2023.10.10	2025.10.09
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2023.09.26	2024.09.25
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENGFENG	DPS-305AF	17064939	2023.09.26	2024.09.25
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2023.09.25	2024.09.24
LISN	R&S	ENV216	101242	2023.09.25	2024.09.24
LISN	EMCO	3810/2NM	23625	2023.09.25	2024.09.24
Temperature & Humidity	SW-108	SuWei	N/A	2023.03.03	2024.03.02
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2023.03.01	2024.02.28
Power Sensor	Keysight	U2021XA	MY55520005	2023.09.26	2024.09.25
Temperature & Humidity	SW-108	SuWei	N/A	2023.03.03	2024.03.02
Test SW	MW	MTS 8310_2.0.0.0			

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “*” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN is at least 80 cm from the nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

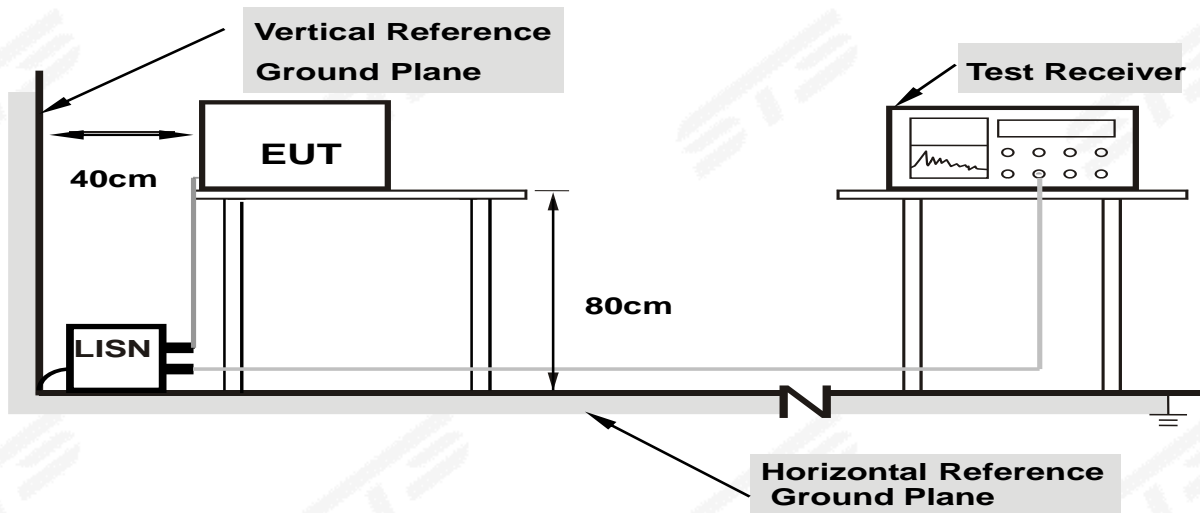

- Note: 1.Support units were connected to second LISN.**
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support.

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5 TEST RESULT


Temperature:	24.3(C)	Relative Humidity:	41%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 4		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	38.85	19.77	58.62	66.00	-7.38	QP
2	0.1500	18.92	19.77	38.69	56.00	-17.31	AVG
3	0.4820	18.53	20.00	38.53	56.30	-17.77	QP
4	0.4820	6.86	20.00	26.86	46.30	-19.44	AVG
5	1.6900	16.98	19.76	36.74	56.00	-19.26	QP
6	1.6900	6.13	19.76	25.89	46.00	-20.11	AVG
7	3.2260	10.36	19.78	30.14	56.00	-25.86	QP
8	3.2260	0.10	19.78	19.88	46.00	-26.12	AVG
9	7.9660	9.72	20.07	29.79	60.00	-30.21	QP
10	7.9660	-0.62	20.07	19.45	50.00	-30.55	AVG
11	15.7700	12.68	20.35	33.03	60.00	-26.97	QP
12	15.7700	1.92	20.35	22.27	50.00	-27.73	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor)–Limit

100.0 dBuV

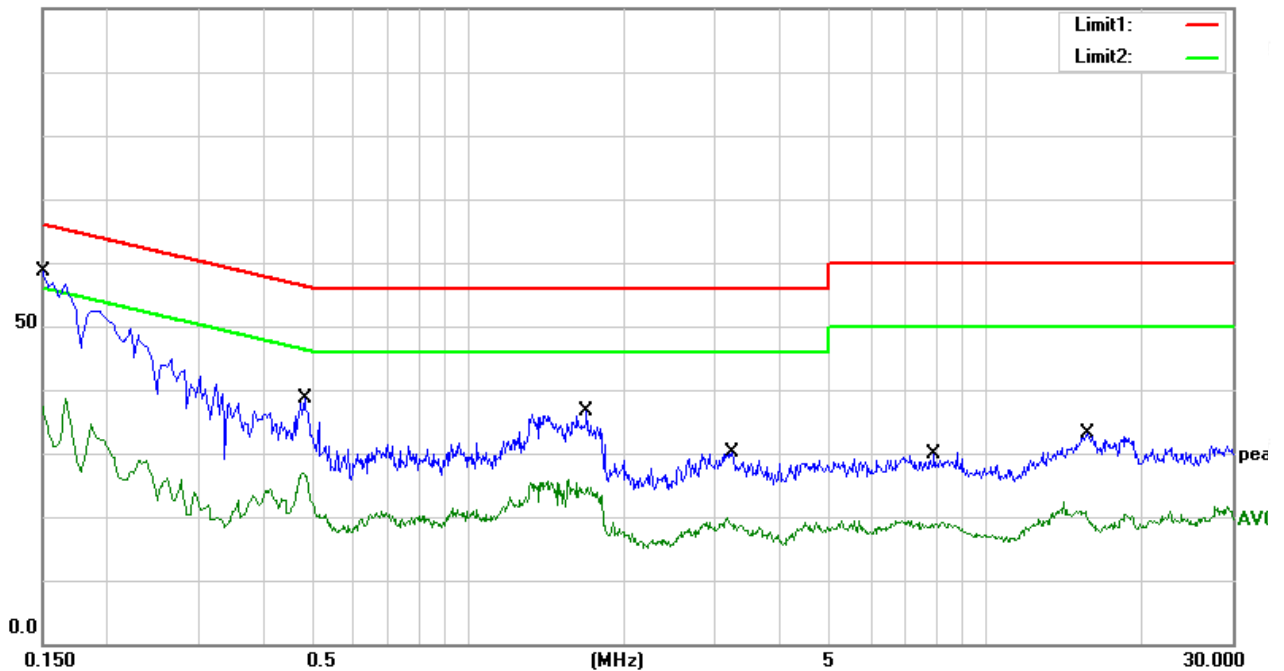




Temperature:	24.3(C)	Relative Humidity:	41%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 4		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1540	37.24	19.77	57.01	65.78	-8.77	QP
2	0.1540	15.71	19.77	35.48	55.78	-20.30	AVG
3	0.4780	18.32	20.00	38.32	56.37	-18.05	QP
4	0.4780	7.07	20.00	27.07	46.37	-19.30	AVG
5	1.9860	9.58	19.75	29.33	56.00	-26.67	QP
6	1.9860	-0.52	19.75	19.23	46.00	-26.77	AVG
7	4.8780	10.06	19.83	29.89	56.00	-26.11	QP
8	4.8780	1.13	19.83	20.96	46.00	-25.04	AVG
9	8.1100	9.65	20.09	29.74	60.00	-30.26	QP
10	8.1100	0.39	20.09	20.48	50.00	-29.52	AVG
11	15.6940	18.67	20.35	39.02	60.00	-20.98	QP
12	15.6940	5.83	20.35	26.18	50.00	-23.82	AVG

Remark:

- 1. All readings are Quasi-Peak and Average values.
- 2. Margin = Result (Result =Reading + Factor)–Limit

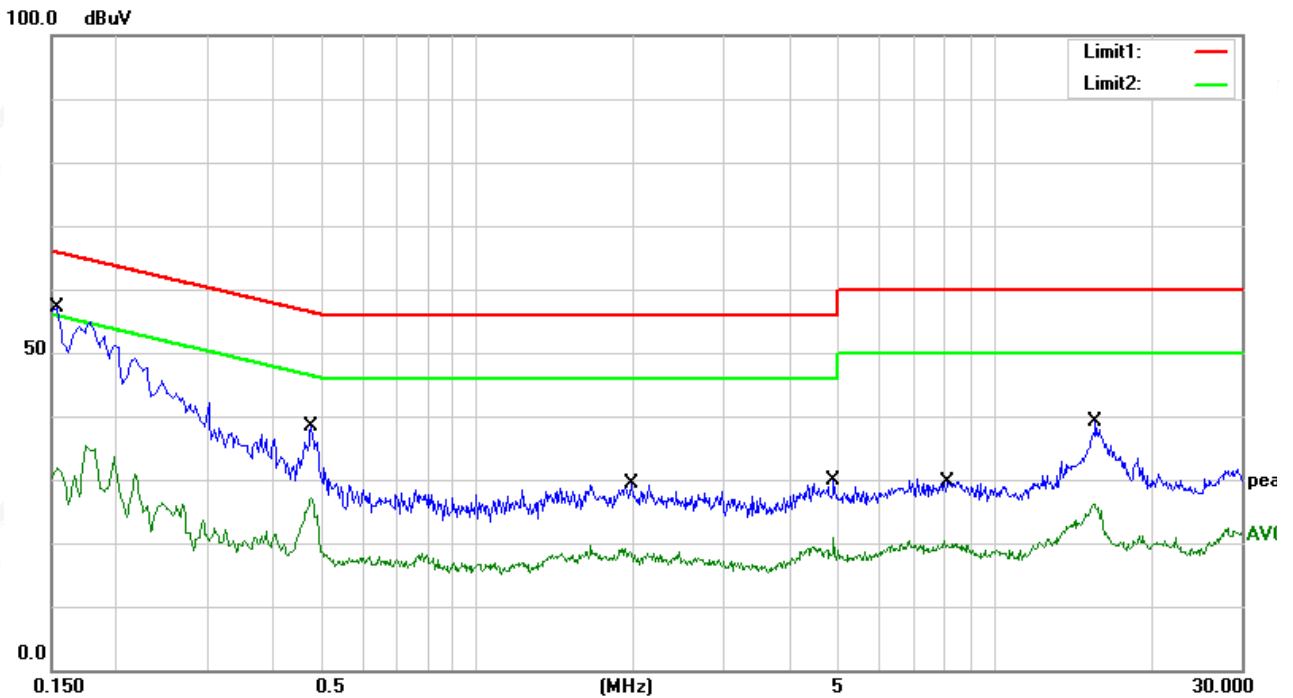

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 and the Part 15.209(a) limit in the table below has to be followed.

Standard FCC 15.209

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3
Above 1000	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	3

Standard FCC 15.249

Frequency of Emission (MHz)	Field Strength of fundamental (millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
900~928	50	500
2400~2483.5	50	500
5725~5875	50	500
24000~242500	250	2500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7



6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Spectrum Parameter	Setting
Detector	Peak/AV
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB (emission in restricted band)	>20BW
VB (emission in restricted band)	=3xRB

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
	90kHz~110kHz / RB 200Hz for QP
	110kHz~490kHz / RB 200Hz for PK & AV
	490kHz~30MHz / RB 9kHz for QP
	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Below 1GHz)
- b. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Above 1GHz)
- c. The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading complies with the QP limits and then QP Mode measurement didn't perform (Below 1GHz)



f. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

g. For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

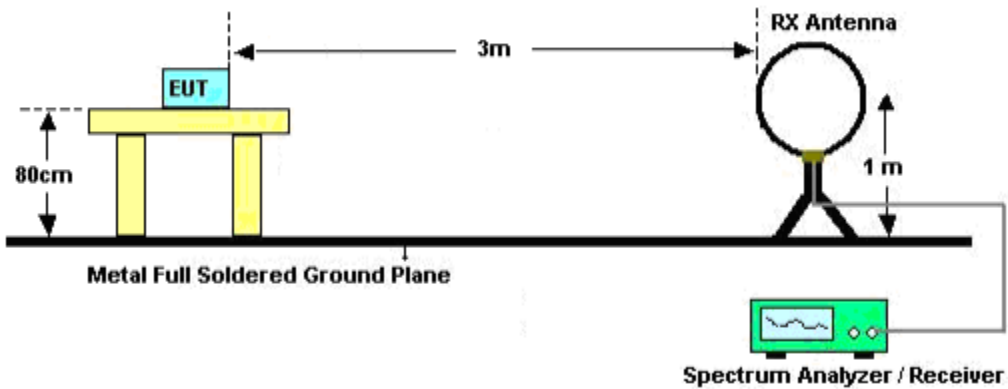

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

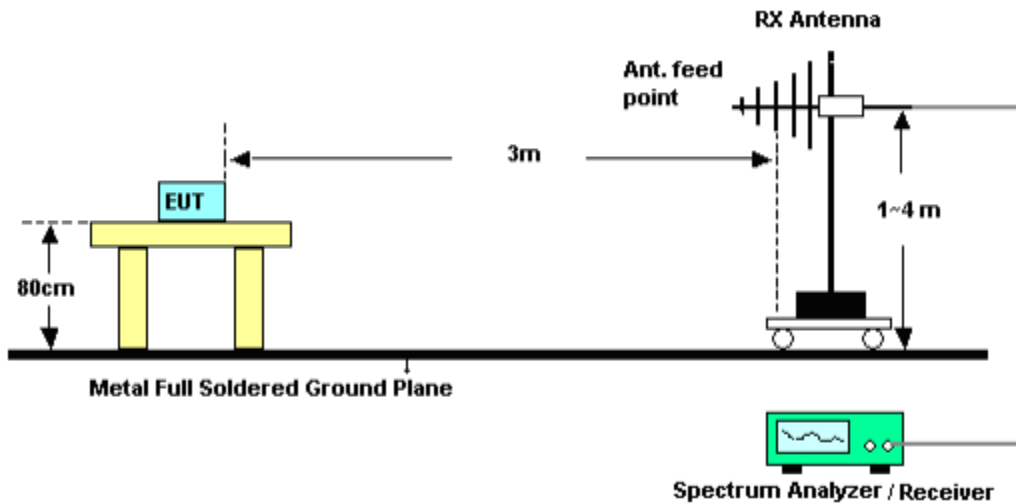

(C) Radiated Emission Test-Up Frequency Above 1GHz

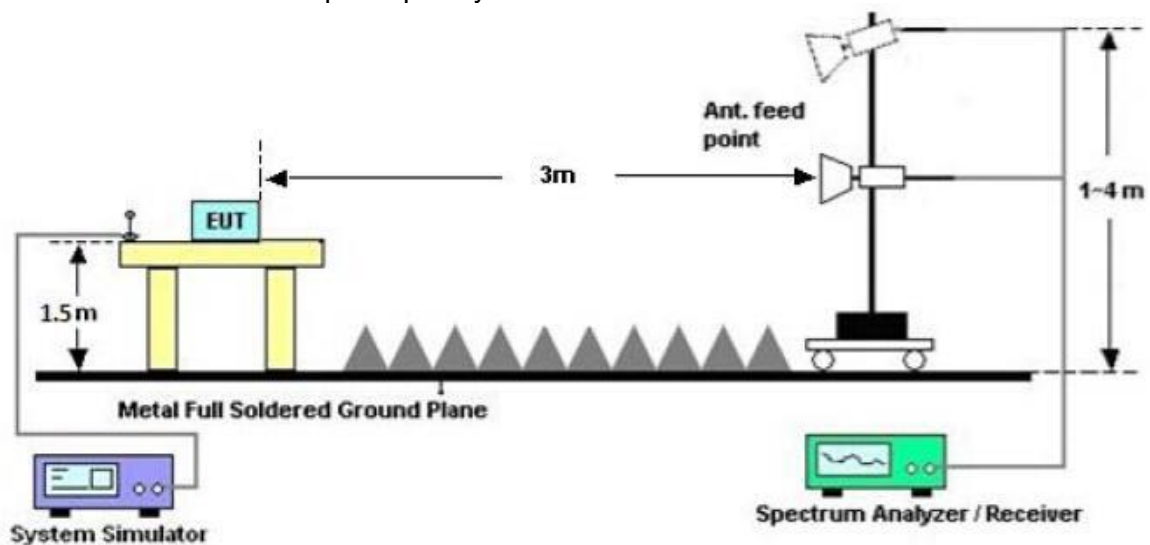



3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

Margin=PL-PK L or AL- AV L; Margin only shown the worst case.

Where

PR = Peak Reading

AR = Average Reading

PL = Peak Level

AL = Average Level

AF = Antenna Factor

PK L = Peak Limit

AV L = AV Limit

For example

Frequency	PR	AR	AF	PL	AL	PK L	AV L	Margin
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)
2178	40.23	30.31	9.83	50.06	40.14	74.00	54.00	-13.86



3.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Below 30 MHz

Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.85V	Polarization:	---
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.




Between 30MHz – 1000 MHz Radiation Spurious

Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.85V	Phase:	Horizontal
Test Mode:	Mode 1		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	37.03	-14.80	22.23	40.00	-17.77	peak
2	83.3500	48.99	-22.52	26.47	40.00	-13.53	peak
3	95.9600	48.12	-20.67	27.45	43.50	-16.05	peak
4	159.9800	41.42	-18.81	22.61	43.50	-20.89	peak
5	572.2300	29.58	-5.63	23.95	46.00	-22.05	peak
6	902.0300	38.81	-0.40	38.41	46.00	-7.59	peak

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

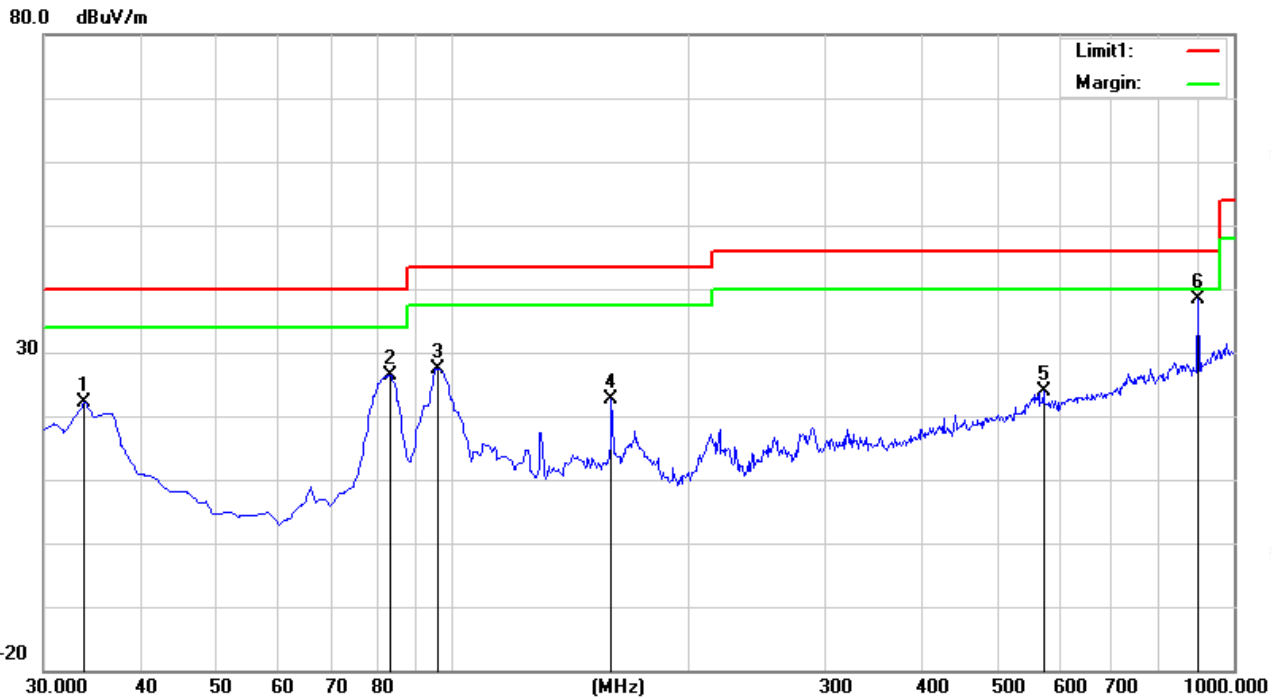




Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.85V	Phase:	Vertical
Test Mode:	Mode 1		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	44.67	-13.35	31.32	40.00	-8.68	peak
2	95.9600	38.83	-20.67	18.16	43.50	-25.34	peak
3	258.9200	31.18	-14.90	16.28	46.00	-29.72	peak
4	493.6600	29.40	-8.15	21.25	46.00	-24.75	peak
5	741.0100	28.45	-2.11	26.34	46.00	-19.66	peak
6	973.8100	28.23	2.25	30.48	54.00	-23.52	peak

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

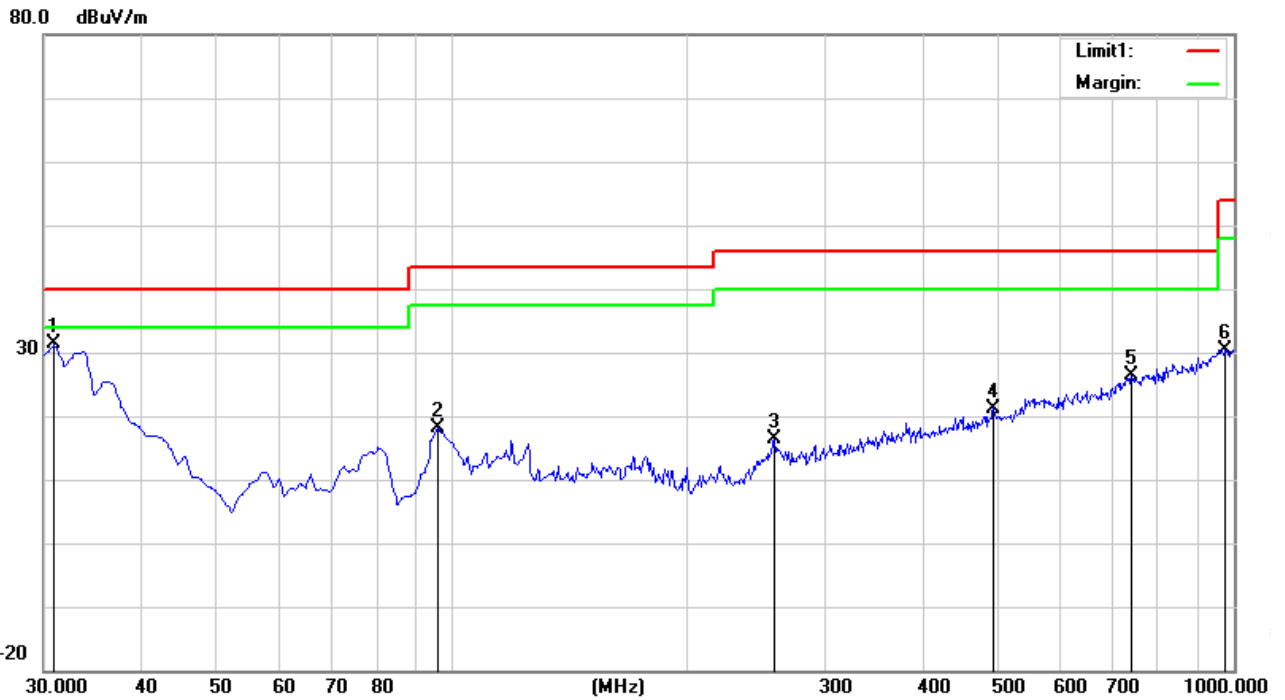



Above 1G Radiation Spurious

2403.00MHz

Frequency (MHz)	Meter Reading (dBμV/m)	Detector (PK/QP/AV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.249/15.209/205		RX Antenna
								Limit (dBμV/m)	Margin (dB)	Polar (H/V)
4805.95	71.35	PK	50.33	8.84	31.22	-10.27	61.08	74	-12.92	H
4805.95	70.59	PK	50.33	8.84	31.22	-10.27	60.32	74	-13.68	V
7209.08	68.23	PK	55.48	9.31	34.05	-12.12	56.11	74	-17.89	H
7209.08	66.88	PK	55.48	9.31	34.05	-12.12	54.76	74	-19.24	V
9612.08	71.28	PK	59.13	9.89	36.99	-12.25	59.03	74	-14.97	H
9612.08	70.39	PK	59.13	9.89	36.99	-12.25	58.14	74	-15.86	V

2441.00MHz

Frequency (MHz)	Meter Reading (dBμV/m)	Detector (PK/QP/AV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.249/15.209/205		RX Antenna
								Limit (dBμV/m)	Margin (dB)	Polar (H/V)
4882.21	71.16	PK	50.33	8.84	31.22	-10.27	60.89	74	-13.11	H
4882.21	70.26	PK	50.33	8.84	31.22	-10.27	59.99	74	-14.01	V
7323.24	68.08	PK	55.48	9.31	34.05	-12.12	55.96	74	-18.04	H
7323.24	66.60	PK	55.48	9.31	34.05	-12.12	54.48	74	-19.52	V
9764.15	71.60	PK	59.13	9.89	36.99	-12.25	59.35	74	-14.65	H
9764.15	70.44	PK	59.13	9.89	36.99	-12.25	58.19	74	-15.81	V


2408.00MHz

Frequency (MHz)	Meter Reading (dBμV/m)	Detector (PK/QP/AV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.249/15.209/205		RX Antenna
								Limit (dBμV/m)	Margin (dB)	Polar (H/V)
4960.07	71.47	PK	50.33	8.84	31.22	-10.27	61.20	74	-12.80	H
4960.07	70.41	PK	50.33	8.84	31.22	-10.27	60.14	74	-13.86	V
7439.96	68.34	PK	55.48	9.31	34.05	-12.12	56.22	74	-17.78	H
7439.96	66.71	PK	55.48	9.31	34.05	-12.12	54.59	74	-19.41	V
9920.09	71.34	PK	59.13	9.89	36.99	-12.25	59.09	74	-14.91	H
9920.09	70.52	PK	59.13	9.89	36.99	-12.25	58.27	74	-15.73	V

Note: The peak value is less than the AV limit, so AV data does not need to be tested.



Duty cycle

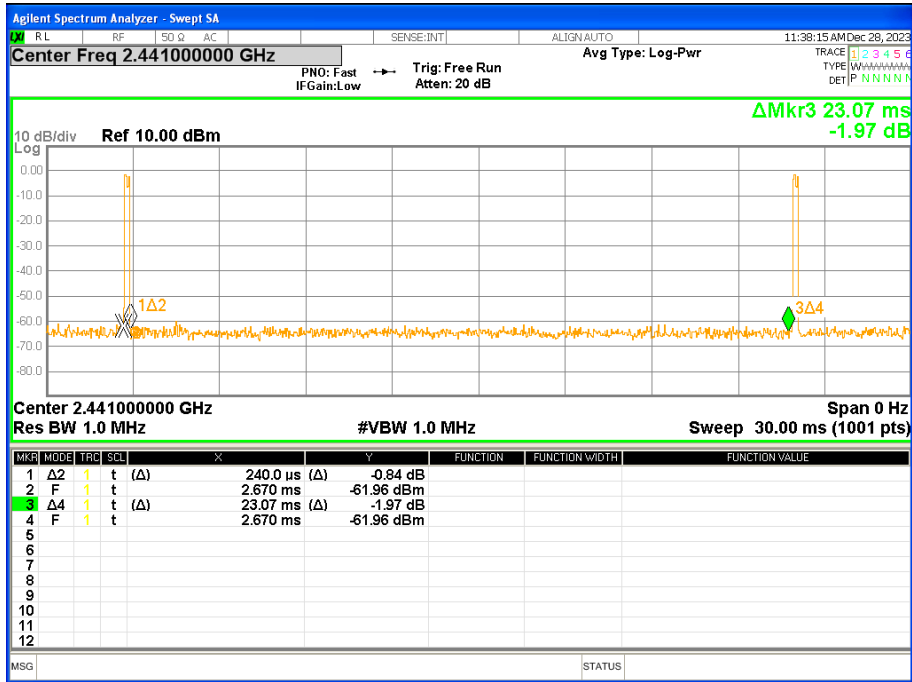


Ton (μs)	Tp (μs)	Duty Factor
0.24	23.07	39.66

Note: Duty Factor=20*LOG10(1/(Ton/Tp))



(Radiation Band edge)

2403.00MHz
Horizontal

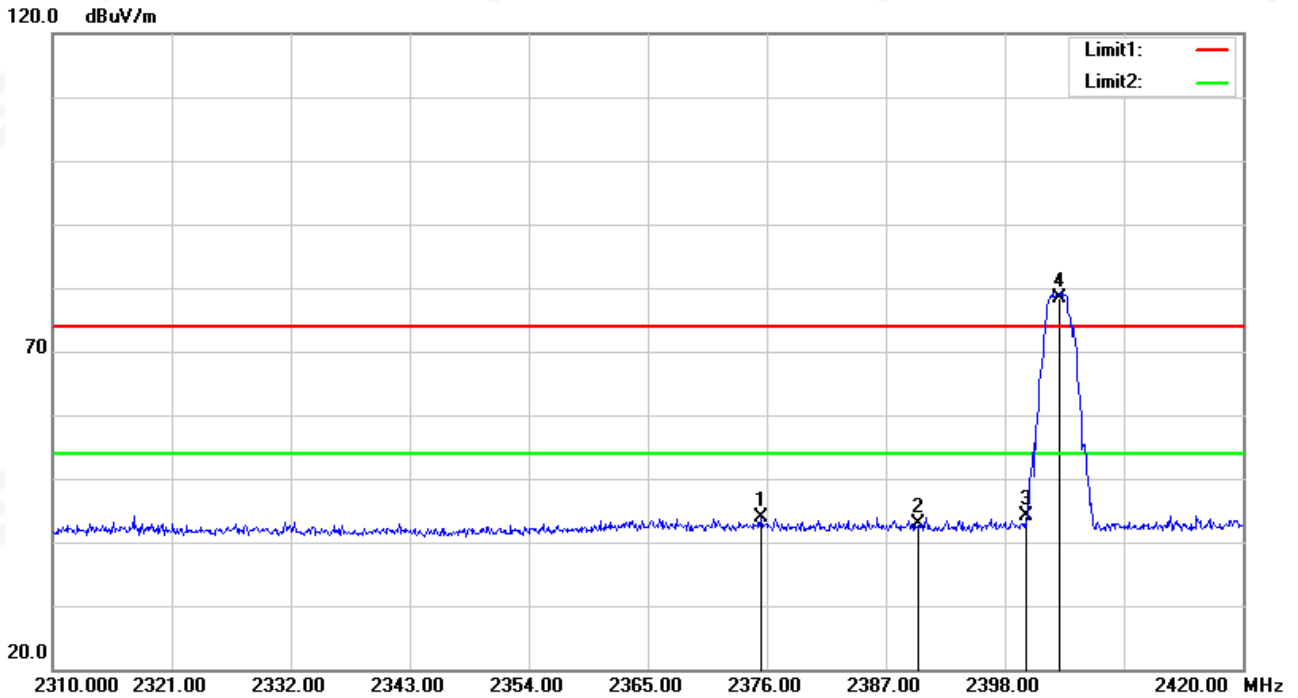


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2375.450	39.63	4.13	43.76	74.00	-30.24	peak
2	2390.000	38.65	4.34	42.99	74.00	-31.01	peak
3	2400.000	39.76	4.49	44.25	74.00	-29.75	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4	2403.000	73.98	4.49	-	78.47	114	-35.53	peak
5	2403.000	73.98	4.49	39.66	38.81	94	-55.19	AVG

Vertical

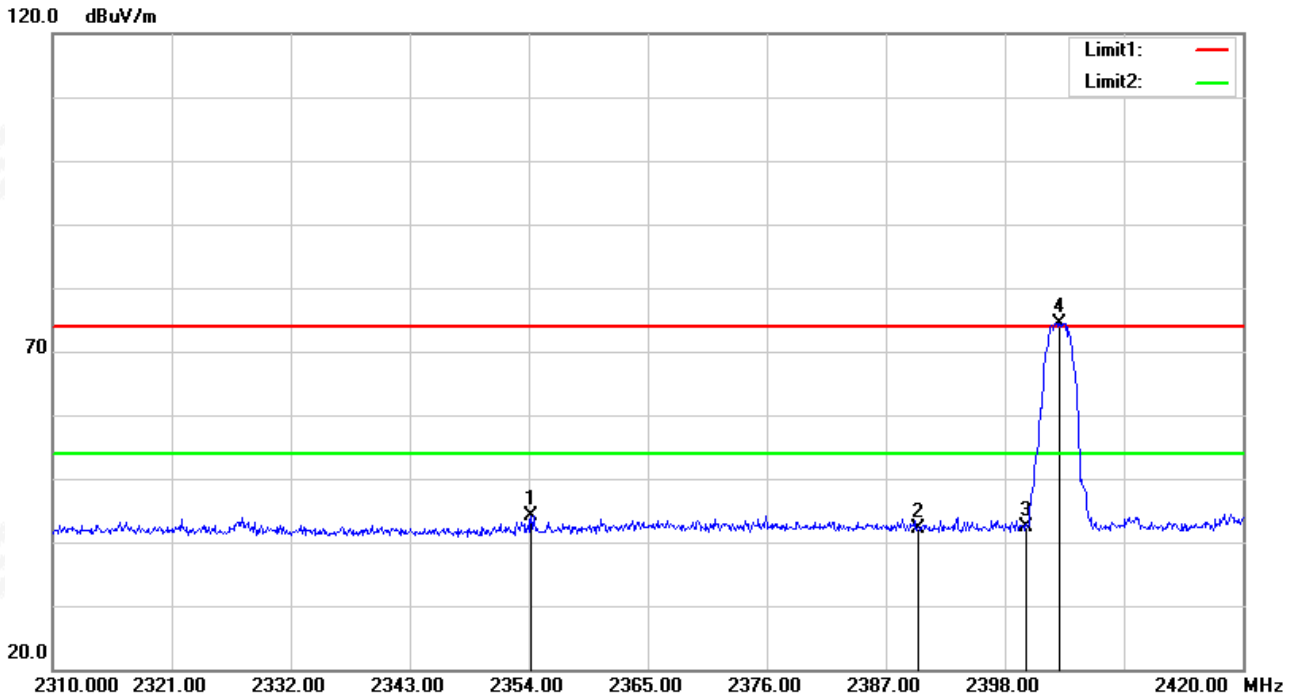


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2354.220	40.41	3.80	44.21	74.00	-29.79	peak
2	2390.000	37.80	4.34	42.14	74.00	-31.86	peak
3	2400.000	37.95	4.49	42.44	74.00	-31.56	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4	2403.000	69.78	4.49	-	74.27	114	-39.73	peak
5	2403.000	69.78	4.49	39.66	34.61	94	-59.39	AVG



2441.00MHz
Horizontal

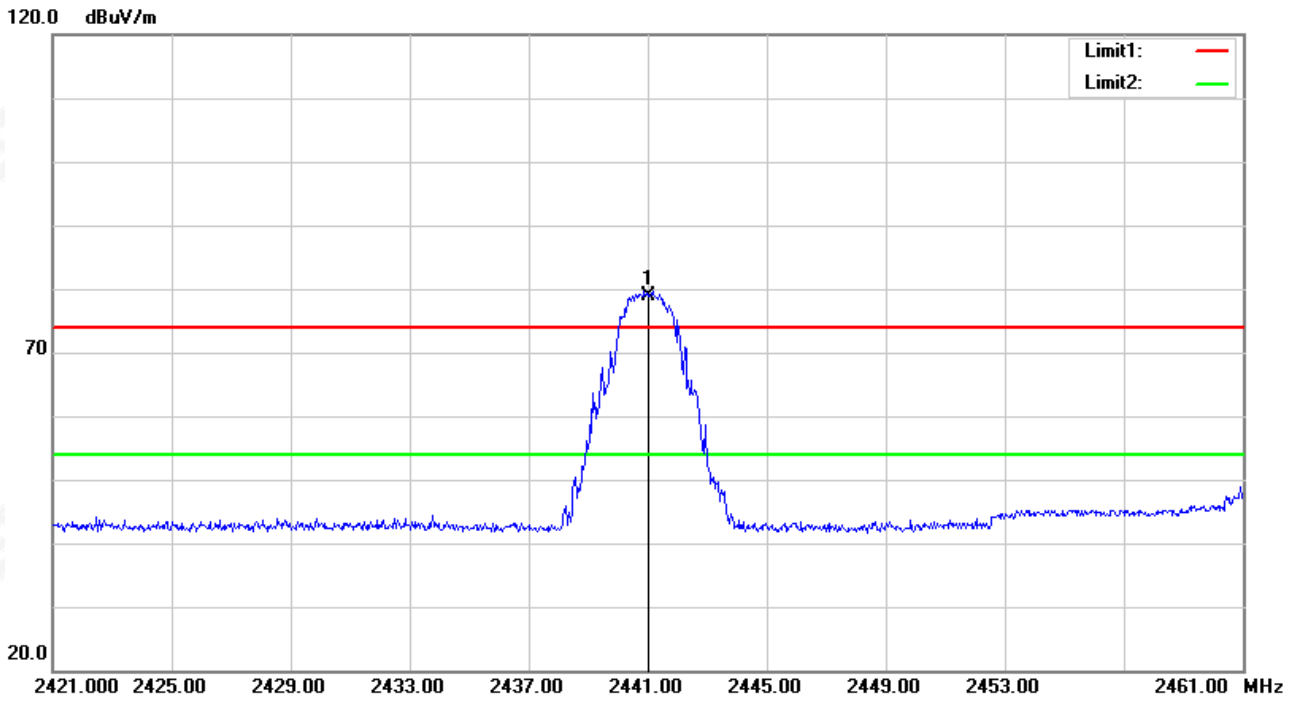


Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2441.000	74.38	4.52	-	78.90	114	-35.10	peak
2	2441.000	74.38	4.52	39.66	39.24	94	-54.76	AVG




Vertical

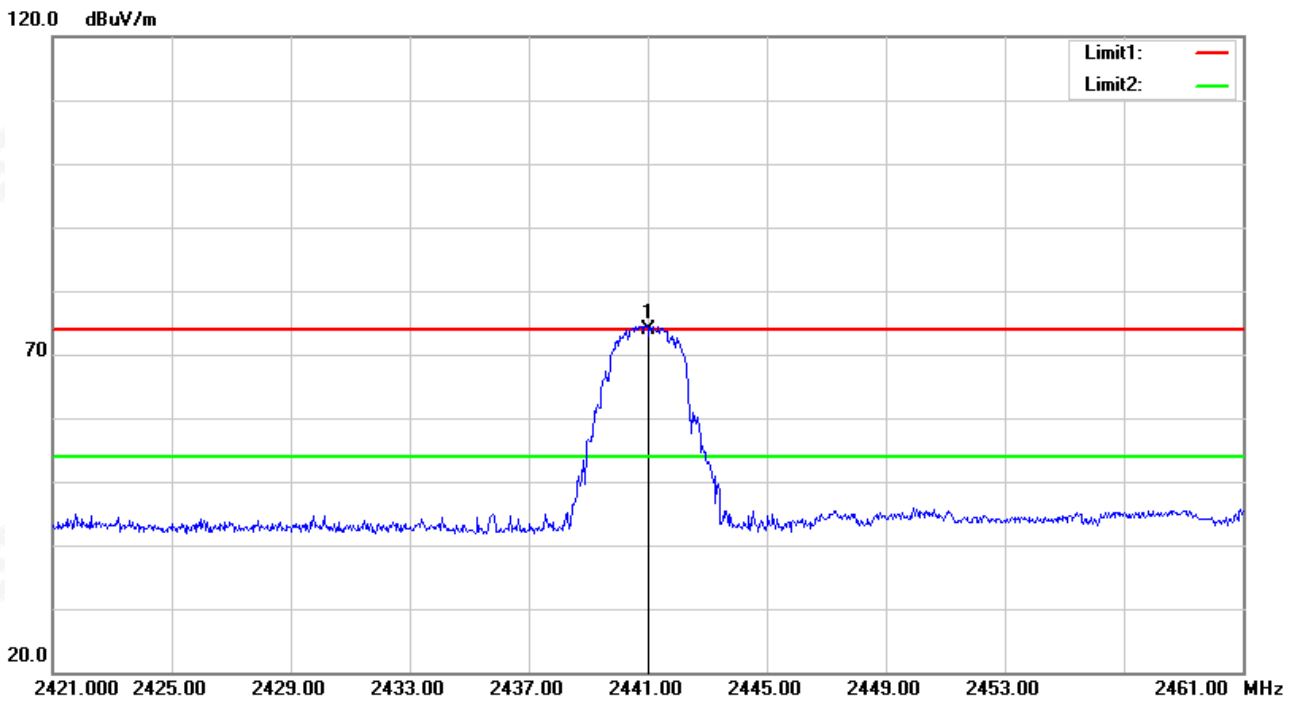

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2441.000	69.36	4.52	-	73.88	114	-40.12	peak
2	2441.000	69.36	4.52	39.66	34.22	94	-59.78	AVG

2480.00MHz
Horizontal

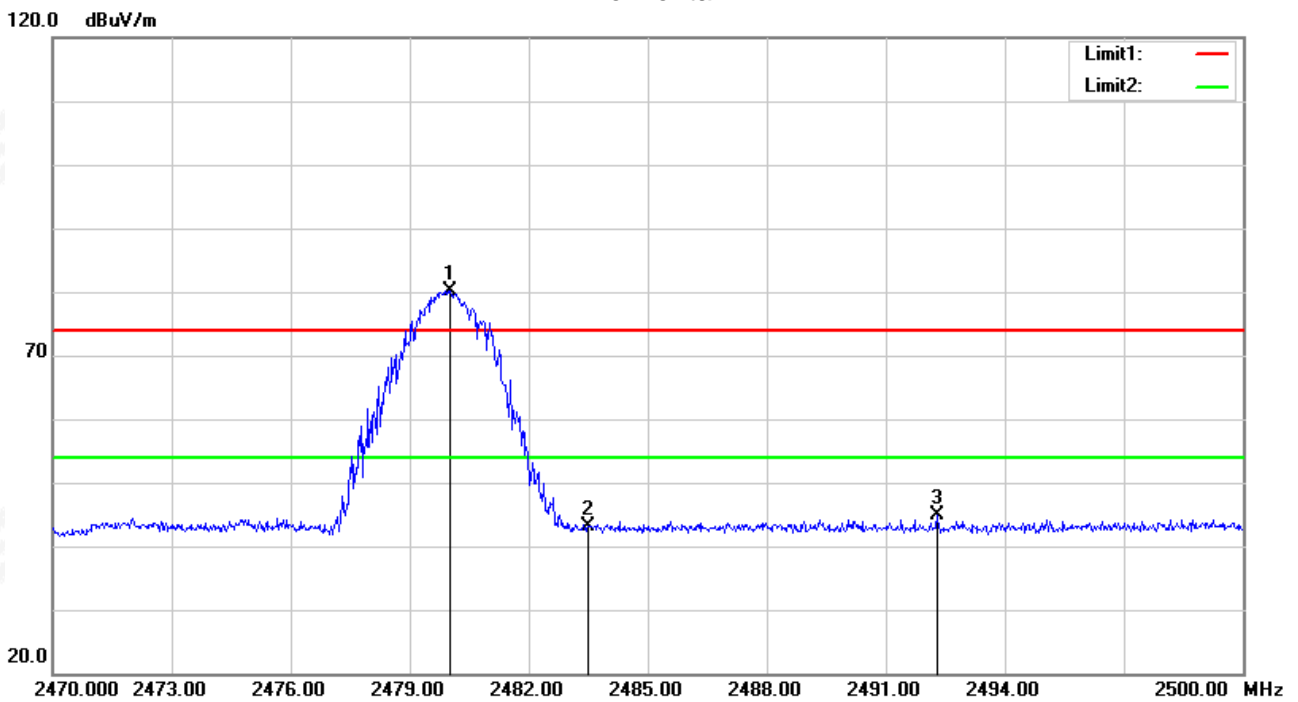


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	2483.500	38.62	4.60	43.22	74.00	-30.78	peak
3	2492.290	40.13	4.63	44.76	74.00	-29.24	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	75.62	4.60	-	80.22	114	-33.78	peak
4	2480.000	75.62	4.60	39.66	40.56	94	-53.44	AVG

Vertical

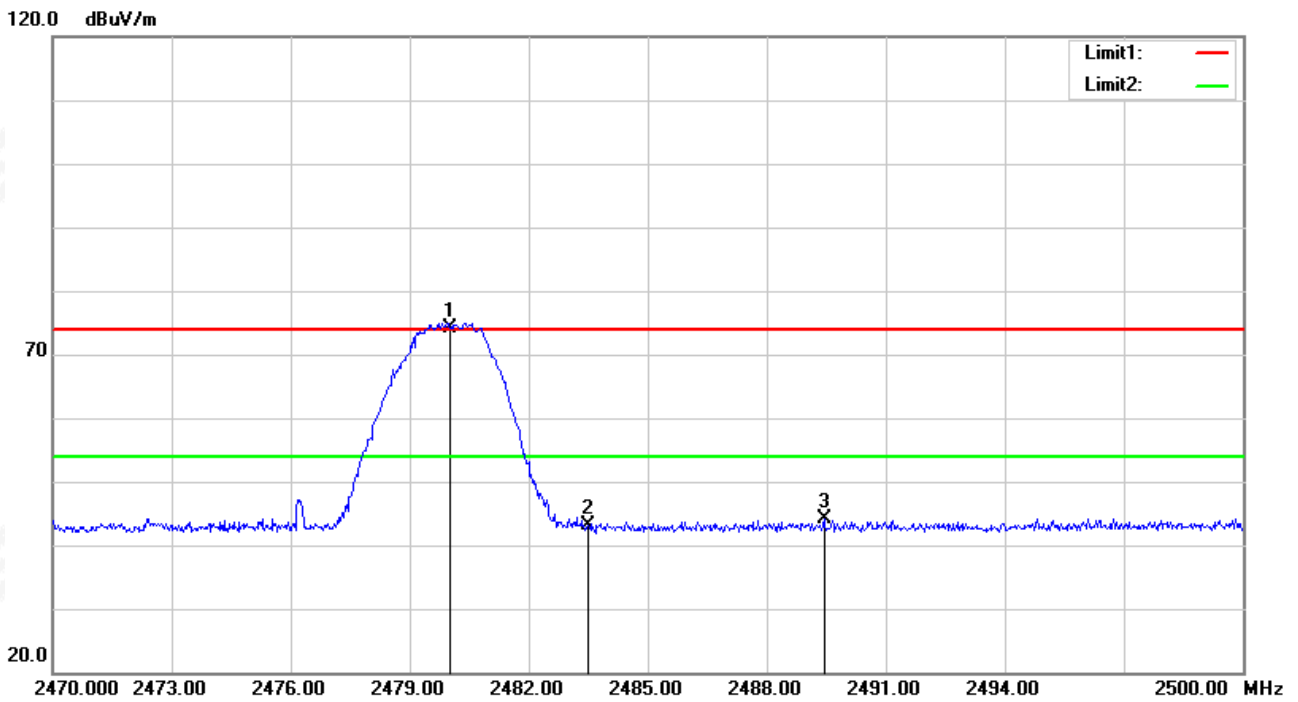

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	2483.500	38.41	4.60	43.01	74.00	-30.99	peak
3	2489.440	39.51	4.62	44.13	74.00	-29.87	peak

Fundamental Frequency


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	69.61	4.60	-	74.21	114	-39.79	peak
4	2480.000	69.61	4.60	39.66	34.55	94	-59.45	AVG

4. BANDWIDTH TEST

4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting : RBW= 1% to 5% OBW, VBW \geq RBW, Sweep time = Auto.

4.2 TEST SETUP

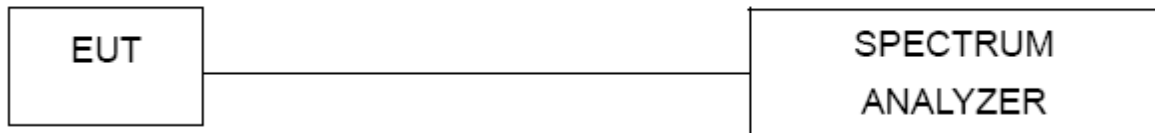

4.3 EUT OPERATION CONDITIONS

TX mode.




4.4 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	50%
Test Voltage:	DC 3.85V		


Test Channel	Frequency(MHz)	20 dB Bandwidth(MHz)
CH01	2403 MHz	1.63
CH03	2441 MHz	1.62
CH16	2480 MHz	1.582

CH01

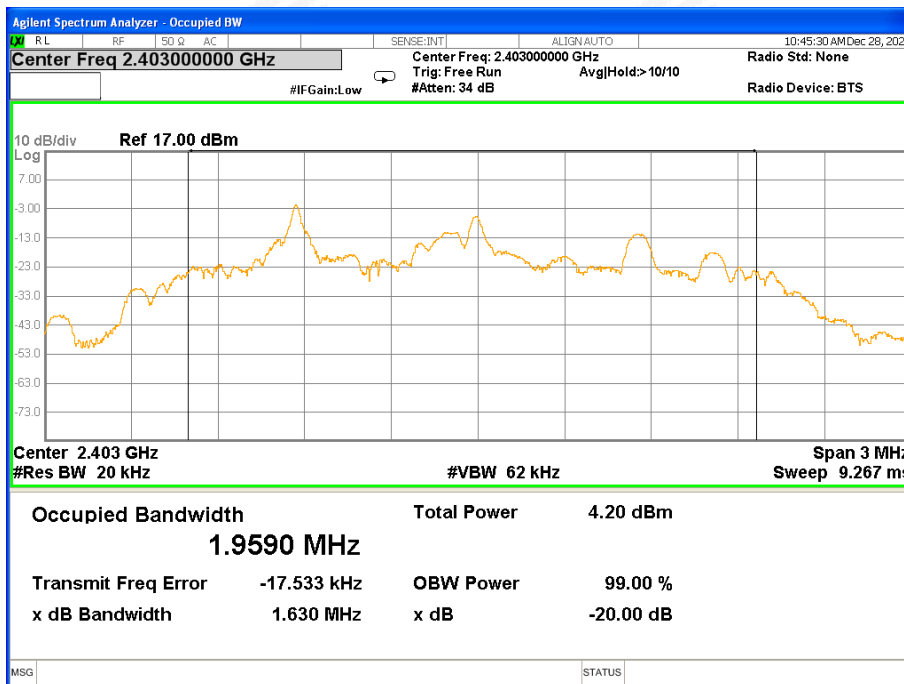




CH03

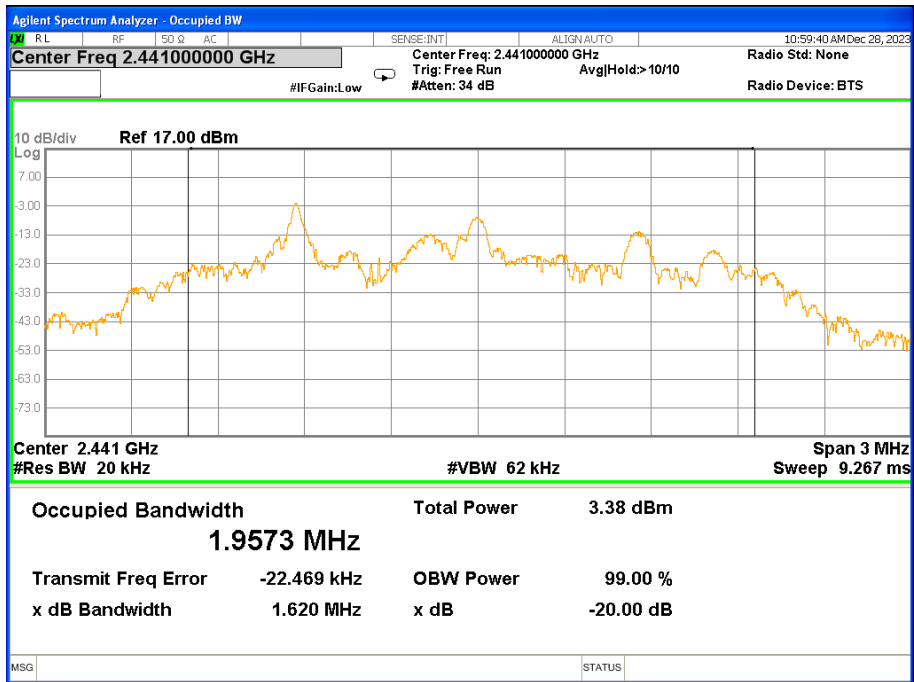

CH016

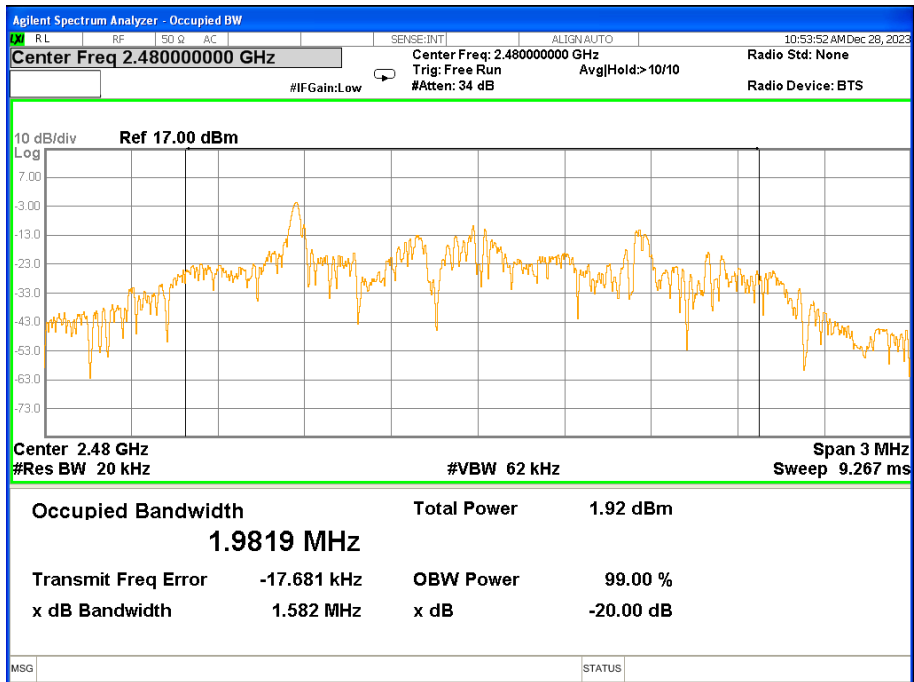



5. ANTENNA REQUIREMENT

5.1 STANDARD REQUIREMENT

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It conforms to the standard requirements.



APPENDIX- PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****