

# FCC Part 15 Subpart C Requirement Measurement and Test Report

For

## Shenzhen KDS Model Technologies Co., Ltd

Block 4, Fengmen Industrial Park, Egongling Village, Pinghu Town,  
Longgang, Shenzhen, China

**FCC ID: ZEDKDS-7XII**

June 18, 2011

|  |  |
|--|--|
| <b>This Report Concerns:</b><br><input checked="" type="checkbox"/> Original Report  | <b>Equipment Type:</b><br>Radio Control System |
| <b>Test Engineer:</b> Eric Yang  |  |
| <b>Report Number:</b> SE11F-005F   |  |
| <b>Test Date:</b> June 07 to 10, 2011  |  |
| <b>Reviewed By:</b><br>   | Karbon Y. Chung (Senior Manager)               |
| <b>Prepared By:</b><br>S&E Technologies Laboratory Ltd<br>Room 407, Block A Shennan Garden, Hi-Tech Industrial Park,<br>Shenzhen 518057, P.R. China.<br>Tel: 86-755-26636573, 26630631<br>Fax: 86-755-26630557 |  |



**Note:** This test report is limited to the above client company and the product model only. It may not be duplicated without prior written consent of S&E Technologies Laboratory Ltd.

## Table of Contents

|   |          |
|---|----------|
| <b>1-TEST RESULT CERTIFICATION.....</b>                                       | <b>3</b> |
| <b>2- EUT DESCRIPTION.....</b>  | <b>4</b> |
| <b>3-TEST SYSTEM .....</b>  | <b>5</b> |
| 3.1 TEST MODE .....   | 5        |
| 3.2 TEST SETUP DIAGRAM .....  | 5        |
| 3.3 BLOCK DIAGRAM OF EUT SYSTEM.....  | 6        |
| 3.4 LIST OF CABLES .....  | 6        |
| <b>4- TEST EQUIPMENT AND CALIBRATION.....</b>                                 | <b>7</b> |
| <b>5- LABORATORY ACCREDITATIONS AND MEASUREMENT UNCERTAINTY .....</b>         | <b>8</b> |
| 5.1 LABORATORY ACCREDITATION.....   | 8        |
| 5.2 MEASUREMENT UNCERTAINTY .....   | 8        |
| <b>6- TECHNICAL REQUIREMENTS AND RESULTS.....</b>                             | <b>9</b> |
| 6.1 CARRIER FREQUENCY SEPARATION MEASUREMENT.....                             | 9        |
| 6.2 NUMBER OF HOPPING FREQUENCIES MEASUREMENT .....                           | 11       |
| 6.3 TIME OF OCCUPY (DWELL TIME) MEASUREMENT .....                             | 13       |
| 6.4 PEAK OUTPUT POWER MEASUREMENT.....  | 16       |
| 6.5 BAND EDGE OF CONDUCTED EMISSION AND SPURIOUS RF CONDUCTED EMISSIONS ..... | 19       |
| 6.6 SPURIOUS RADIATED EMISSION MEASUREMENT.....                               | 27       |
| 6.7 BAND EDGE AND RESTRICTED BAND OF RADIATED EMISSION MEASUREMENT .....      | 33       |
| 6.8 20DB BANDWIDTH MEASUREMENT .....  | 39       |
| 6.9 RF EXPOSURE .....   | 42       |
| 6.10 ANTENNA REQUIREMENT.....   | 42       |

## 1-Test Result Certification

Applicant: Shenzhen KDS Model Technologies Co., Ltd  
Block 4, Fengmen Industrial Park, Egongling Village,  
Pinghu Town, Longgang, Shenzhen, China

Equipment Under Test: Radio Control System

Trade Name: KDS

Model: KDS-7XII

Type of Modulation: FHSS

Number of Channels: 76

Channel Separation: 1MHz

Operation Frequency: 2403 ~2478MHz

Antenna Designation: Non-user replaceable (fixed)

Battery Voltage: DC12.0V [1.5V\*8 "AA" Ni-MH battery]

Date of Test: June 07 to 10, 2011

| Applicable Standards                  |                         |
|---------------------------------------|-------------------------|
| Standard                              | Test Result             |
| FCC 47 CFR Part 15 Subpart C, §15.247 | No non-compliance noted |

### We hereby certify that:

The above equipment was tested at ATC Lab Co., Ltd (Guangdong, China). The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4-2003 and Public Notice DA 00-705. The energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15C: 2007, §15.247.

The test results of this report relate only to the tested sample identified in this report.

## 2- EUT Description

|                     |   |
|---------------------|---|
| Product             | Radio Control System                            |
| Trade Name          | KDS   |
| Model Number        | KDS-7XII  |
| Model Difference    | N/A   |
| Type of Modulation: | FHSS  |
| Number of Channels: | 76  |
| Channel Separation: | 1MHz  |
| Power Supply        | 12.0V DC power from [1.5V*8 "AA" Ni-MH battery] |
| Frequency Range     | 2403 ~2478 MHz                                  |
| Antenna Designation | Non-user replaceable (fixed)                    |

**Remark:** This submittal(s) test report is intended for FCC ID: ZEDKDS-7XII filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 3-Test System

### 3.1 Test Mode

The compliance test was performed under test modes:

Mode 1: Transmitting at 2403MHz without hopping.

Mode 2: Transmitting at 2441MHz without hopping.

Mode 3: Transmitting at 2478MHz without hopping.

Mode 4: Transmitting with hopping.


The EUT is designed both of horizontally placed and vertically place. In radiated emission measurement, each condition was conducted.

As a result, the below operation that produce the maximum emission were reported.

- a) Carrier Frequency Separation measurement ---Mode 4
- b) Number of Hopping Frequencies measurement --- Mode 4
- c) Time of Occupancy measurement --- Mode 4
- d) Peak Output Power measurement --- Mode 1, Mode 2, Mode 3
- e) Band Edge of RF Conducted measurement --- Mode 1, Mode 3 and Mode 4
- f) Radiated Emission measurement --- Mode 1, Mode 2, Mode 3
- g) Band Edge and Restricted Band of Radiated Emission measurement--- Mode 1, Mode 3
- h) 20dB Bandwidth measurement --- Mode 1, Mode 2, Mode 3


### 3.2 Test Setup Diagram

- . Carrier Frequency Separation
- . Number of Hopping Frequencies
- . Time of Occupancy (Dwell Time)
- . Peak Output Power
- . Band Edge of RF Conducted Emission
- . 20dB Bandwidth

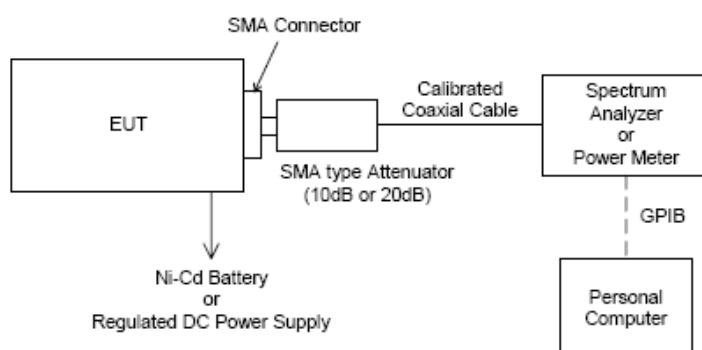


*Note: Regulated DC power supply is not used in this report.*

## . Radiated Emission

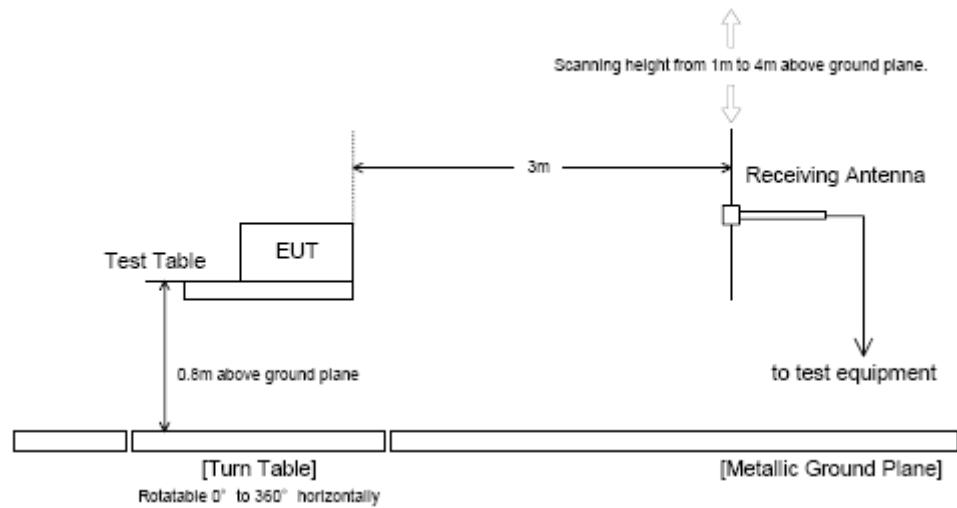

### 3.3 Block Diagram of EUT System

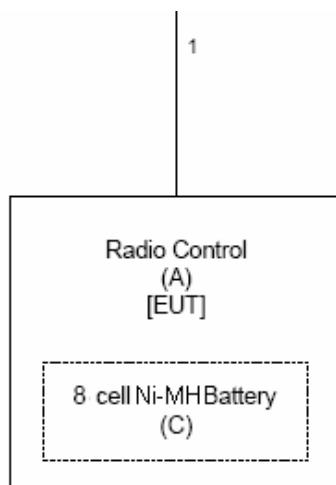

### 3.4 List of Cables

| No | Cable Name | Shielded (Y/N) | Length (m) | Note | Remark |
|----|------------|----------------|------------|------|--------|
| 1  | Antenna    | Y              | 0.1        | -    | -      |

## 4- Test Equipment and Calibration

| Equipment type                         | Manufacturer | Model    | Serial Number | Calibration Due |
|--|--------------|----------|---------------|-----------------|
| Biconilog Antenna                      | ETS          | 3142C    | 00042672      | 2010/09         |
| Receiver                               | SCHAFFNER    | SMR4503  | 11725         | 2010/07         |
| Spectrum Analyzer                      | R/S          | FSP30    | 100755        | 2010/11         |
| Double-Ridged-Wave- guide Horn Antenna | ETS          | 3115     | 6587          | 2010/08         |
| Amplifier                              | Agilent      | 83017A   | MY39500438    | 2010/11         |
| Band-pass Filter                       | Micro-Tronic | BRM50702 | S/N-030       | 2010/11         |

## 5- Laboratory Accreditations and Measurement Uncertainty

### 5.1 Laboratory Accreditation

FCC-Registration No.: 415467

ATC Lab Co., Ltd (Guangdong, China) EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 415467. Listing date October 10, 2008.

IC-Registration No.: 7949A

The 3m Alternate Test Site of ATC Lab Co., Ltd (Guangdong, China) has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7949A on January 25th, 2011.

### 5.2 Measurement Uncertainty

of +/- 3×10<sup>-9</sup> for Carrier Frequency Separation Measurement  
of +/- 3×10<sup>-9</sup> for Number of Hopping Frequencies Measurement  
of +/- 3×10<sup>-9</sup> for 20dB Bandwidth Measurement  
of +/- 3×10<sup>-9</sup> for Time of Occupancy (Dwell time) Measurement  
of +/- 0.8 dB for Peak Output Power Measurement  
of +/- 0.8 dB for Band Edge RF Conducted Measurement  
of +/- 0.8 dB for Spurious RF Conducted Emission Measurement  
of +/- 0.8 dB for Power Density  
of +/- 4.8 dB for Radiated Emissions  
of +/- 2.3 dB for Conducted Emissions

## 6- Technical Requirements and Results

### 6.1 Carrier Frequency Separation Measurement

#### Applicable Standard:

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater

#### Test Procedure:

1. Connect the EUT RF output port to spectrum analyzer via calibrated coaxial cable and suitable attenuator (if necessary).
2. Activates the EUT System and execute the software prepared for test, if necessary.
3. To find out the maximum emission condition, the transmitting data rate of EUT is set to maximum data rate.
4. The Spectrums are scanned and allow the trace stabilized.
5. The separation between the peaks of the peaks of adjacent channel were measured by using delta-maker function of the spectrum analyzer

Spectrum analyzer setup condition :

Frequency Span : 2MHz  
Resolution bandwidth : 100kHz  
Video bandwidth :  $\geq$  RBW  
Sweep : Auto  
Detector function : Peak  
Trace Mode : Max Hold


#### Test Result:

|                |                             |
|----------------|-----------------------------|
| Temperature:   | 25 °C                       |
| Humidity:      | 53%                         |
| EUT Operation: | Data Transmission (hopping) |
| Test Date:     | June 07, 2011               |

| Carrier Frequency Separation [ MHz ] | [ MHz ] Limit |
|--------------------------------------|---------------|
| 1.004                                | > 0.025       |

Note: Test plot shown in figure 1 on page 10.

Figure 1: Channel Separation

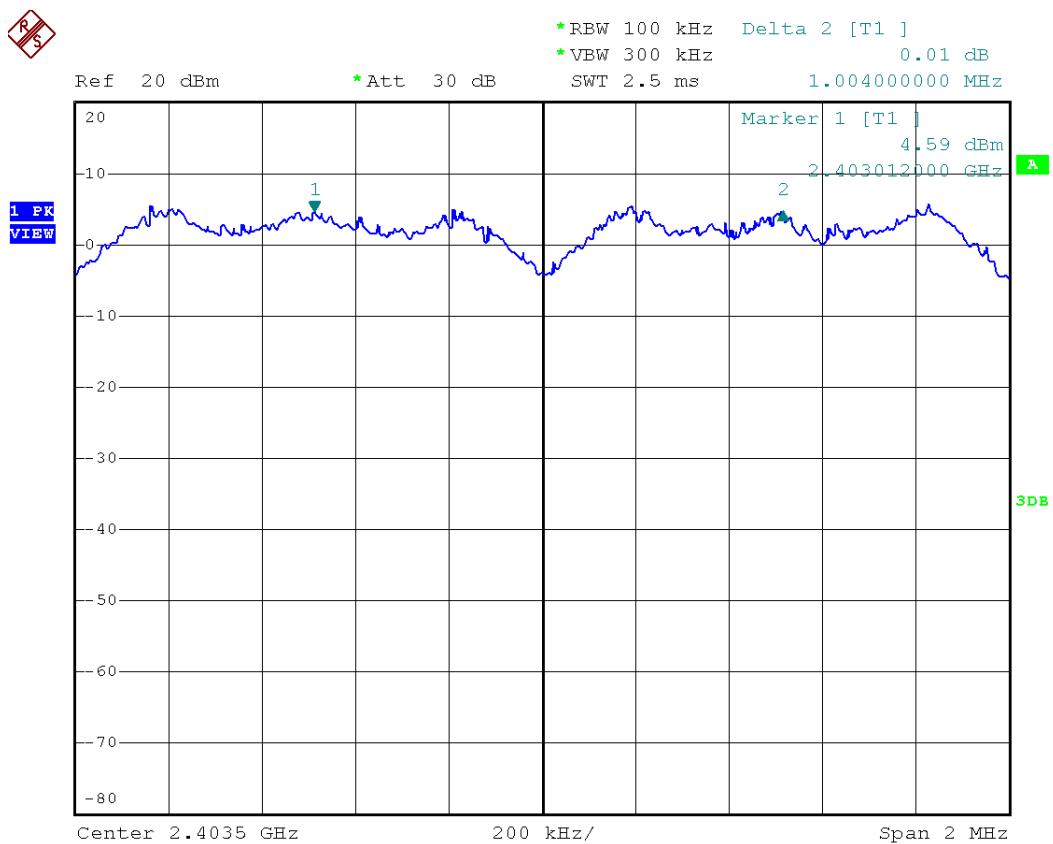

## 6.2 Number of Hopping Frequencies Measurement

### Applicable Standard:

According to §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

### Test Procedure:

1. Connect the EUT RF output port to spectrum analyzer via calibrated coaxial cable and suitable attenuator (if necessary).
2. Activates the EUT System and executes the software prepared for test, if necessary.
3. To find out the maximum emission condition, the transmitting data rate of EUT is set to maximum data rate.
4. The spectrums are scanned and allow the trace to stabilize.
5. The number of hopping frequencies were counted on the spectrum analyzer and recorded.

Spectrum analyzer setup condition :

Frequency Span : 81MHz

Resolution bandwidth : 300KHz

Sweep : Auto

Detector function : Peak

Trace Mode : Max Hold


### Test Result:

|                |                             |
|----------------|-----------------------------|
| Temperature:   | 23 °C                       |
| Humidity:      | 52%                         |
| EUT Operation: | Data Transmission (hopping) |
| Test Date:     | June 07, 2011               |

| Number of Hopping Frequencies | [ MHz ] Limit |
|-------------------------------|---------------|
| 76                            | > 15          |

Note: Test plot shown in figure 2 on page 12.

Figure 2: Number of Hopping Frequencies

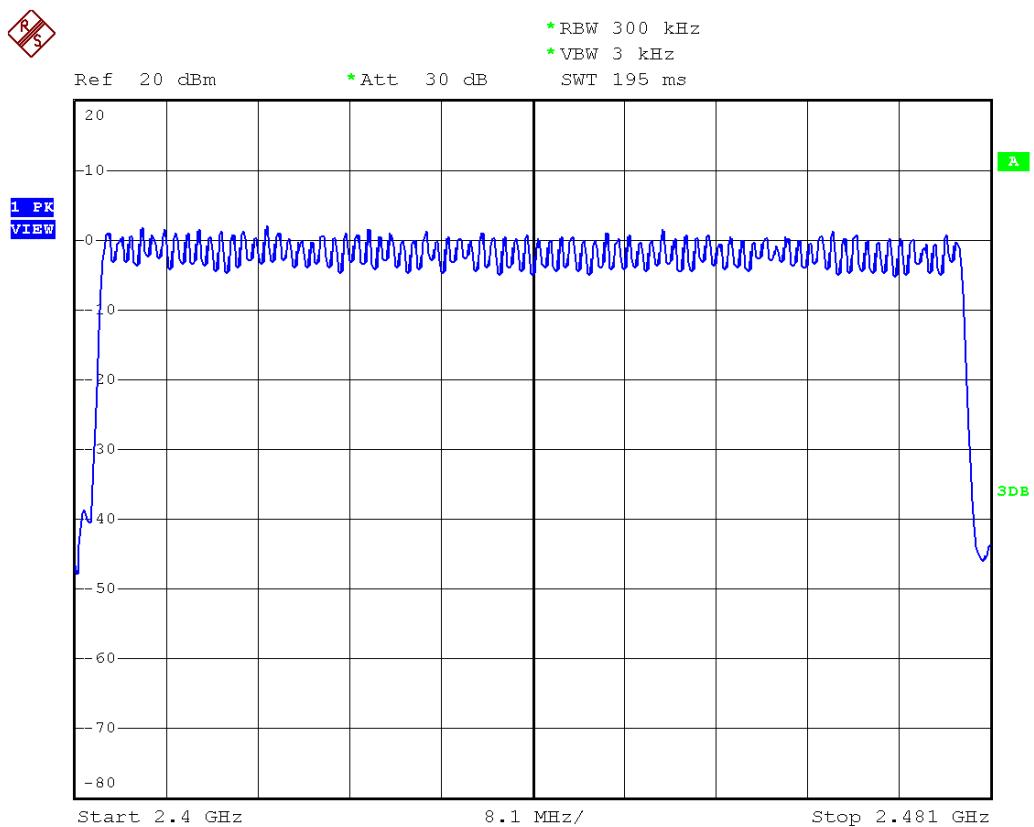

### 6.3 Time of Occupy (Dwell Time) Measurement

#### Applicable Standard:

According to §15.247(a)(1)(iii), for frequency hopping systems operating in the 2400MHz-2483.5 MHz, the average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

#### Test Procedure:

1. Connect the EUT RF output port to spectrum analyzer via calibrated coaxial cable and suitable attenuator (if necessary).
2. Activates the EUT System and execute the software prepared for test, if necessary.
3. To find out the maximum emission condition, the transmitting data rate of EUT is set to maximum data rate.
4. The span of spectrum analyzer was set to zero (sweep time 30msec). The occupied time at center on a hopping frequency was observed and recorded as "Ton".
5. The spectrums are scanned by using the spectrum analyzer (\*1). And the numbers of occupied channel per N sec (period of 0.4 seconds multiplied by the number of hopping channels employed) were counted by using the delta-marker function of spectrum analyzer and recorded as "N".
6. The dwell time was calculated by  $Ton \times N$ .

Spectrum analyzer setup condition:

Frequency Span : Zero span

Resolution bandwidth : 10KHz

Video bandwidth :  $\geq$  RBW

Sweep : as necessary to capture the entire dwell time per hopping channel.

Detector function : Peak

Trace Mode : Max Hold

#### Test Result:

|                |                             |
|----------------|-----------------------------|
| Temperature:   | 23 °C                       |
| Humidity:      | 52%                         |
| EUT Operation: | Data Transmission (hopping) |
| Test Date:     | June 08, 2011               |

| [ ms ] Dwell Time  | [ ms ] Limit |
|--|--------------|
| 1.42ms x 132 = 187.4                                       | < 400        |
| Note: Test plots shown in figures 3, 4, 5 on pages 14, 15. |              |

Figure 3: Duration of One Transmission

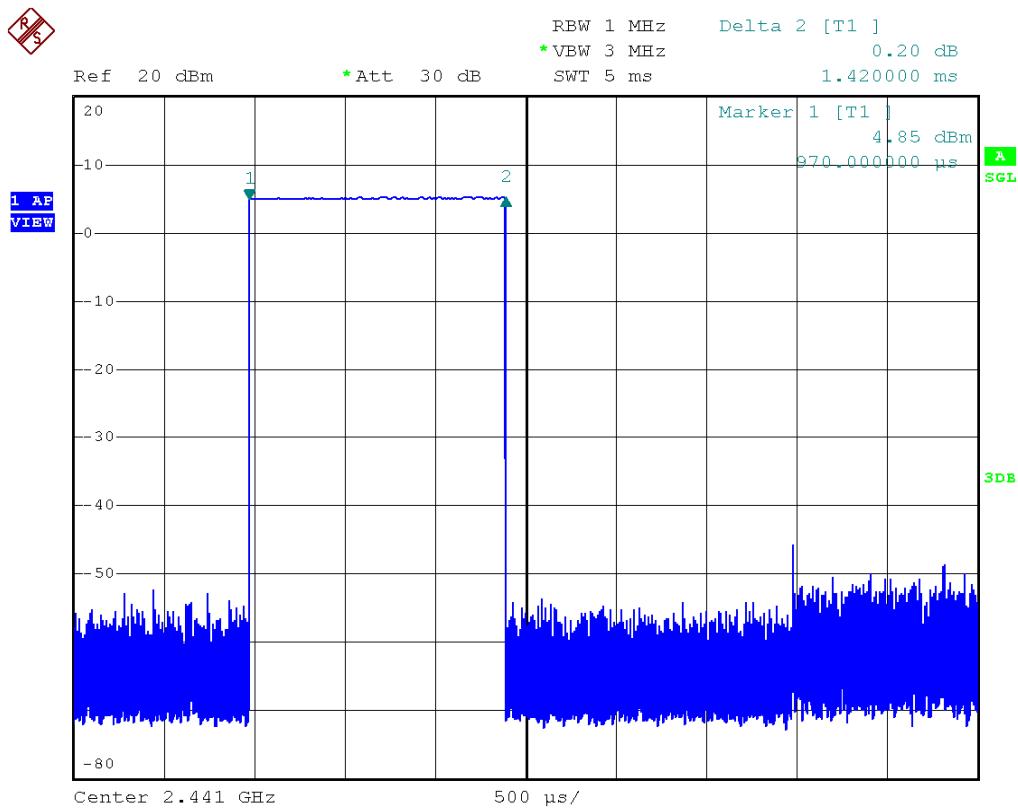


Figure 4: Number of Transmission at 30.4 s


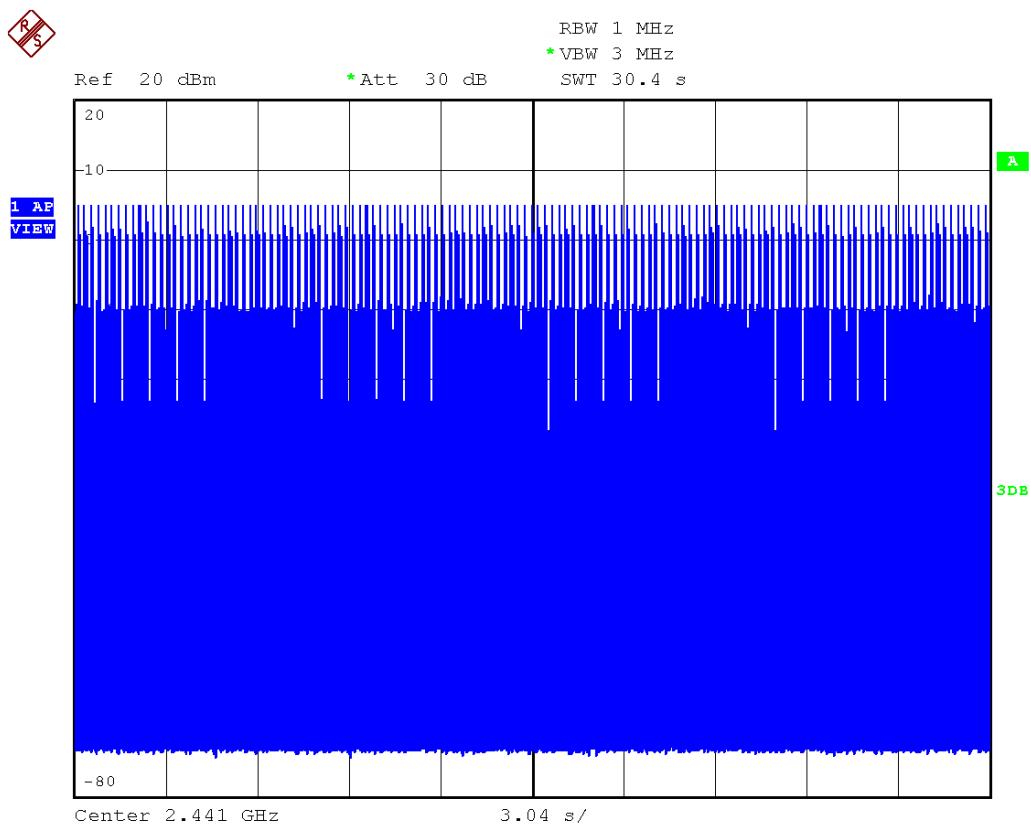


Figure 5: Number of Transmission at 7.6 s

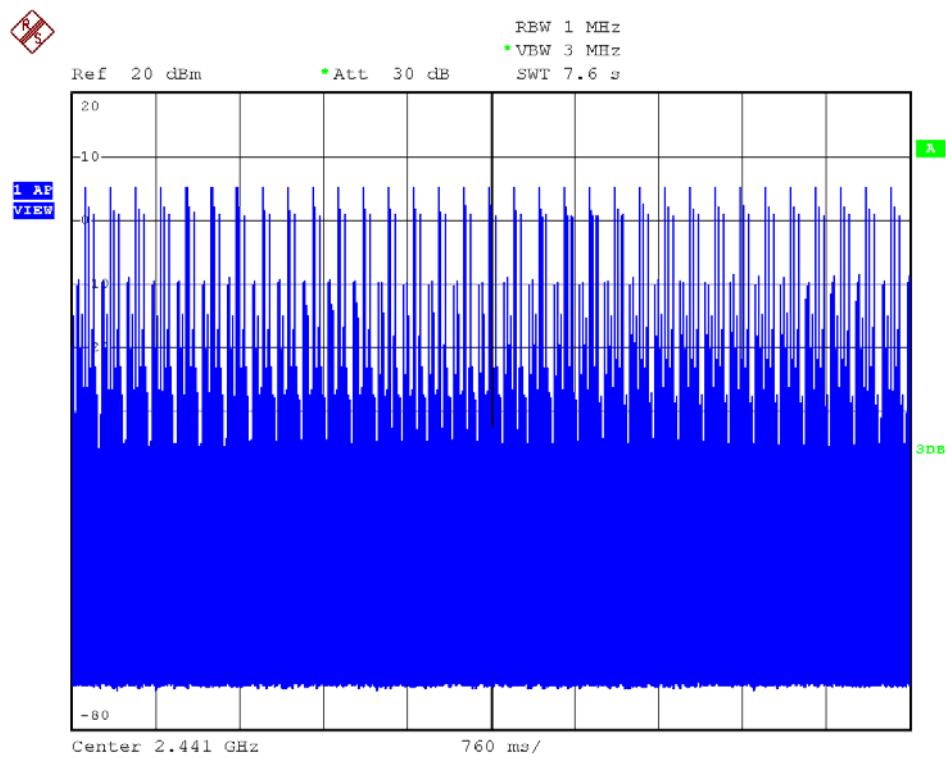

## 6.4 Peak Output Power Measurement

### Applicable Standard:

According to §15.247(b), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. for all other frequency hopping systems in the 2400-2483.5MHz band: 0.125 Watts.

### Test Procedure:

1. Connect the EUT RF output port to spectrum analyzer via calibrated coaxial cable and suitable attenuator (if necessary).
2. Activates the EUT System and executes the software prepared for test, if necessary.
3. To find out the worst case, the transmitting data rate of EUT is varied with the different modes of operation. The final test condition is recorded in this report.
4. The spectrums are scanned and allow the trace to stabilize.
5. The peak output power was determined by using the marker-data function of spectrum analyzer or peak type power meter.

#### Spectrum Analyzer Set Up Conditions

Frequency Span : 5 times 20dB bandwidth of the emission being measured

Resolution bandwidth : 1MHz

Video bandwidth :  $\geq$  RBW

Sweep : Auto

Detector function : Peak

Trace Mode : Max Hold

### Test Result:

|                |                                     |
|----------------|-------------------------------------|
| Temperature:   | 23 °C                               |
| Humidity:      | 53%                                 |
| EUT Operation: | Data Transmission (without hopping) |
| Test Date:     | June 08, 2011                       |

| Frequency | Factor | Reading | Power   | Limit   | Margin |
|-----------|--------|---------|---------|---------|--------|
| [ MHz ]   | [ dB ] | [ dBm ] | [ dBm ] | [ dBm ] | [ dB ] |
| 2403      | 1.0    | 7.00    | 8.00    | 20.97   | 12.97  |
| 2441      | 1.0    | 6.35    | 7.35    | 20.97   | 13.62  |
| 2478      | 1.0    | 6.53    | 7.53    | 20.97   | 13.44  |

Note: Test plots shown in figures 6, 7 and 8 on pages 17, 18.

Figure 6: Peak Output Power - low channel

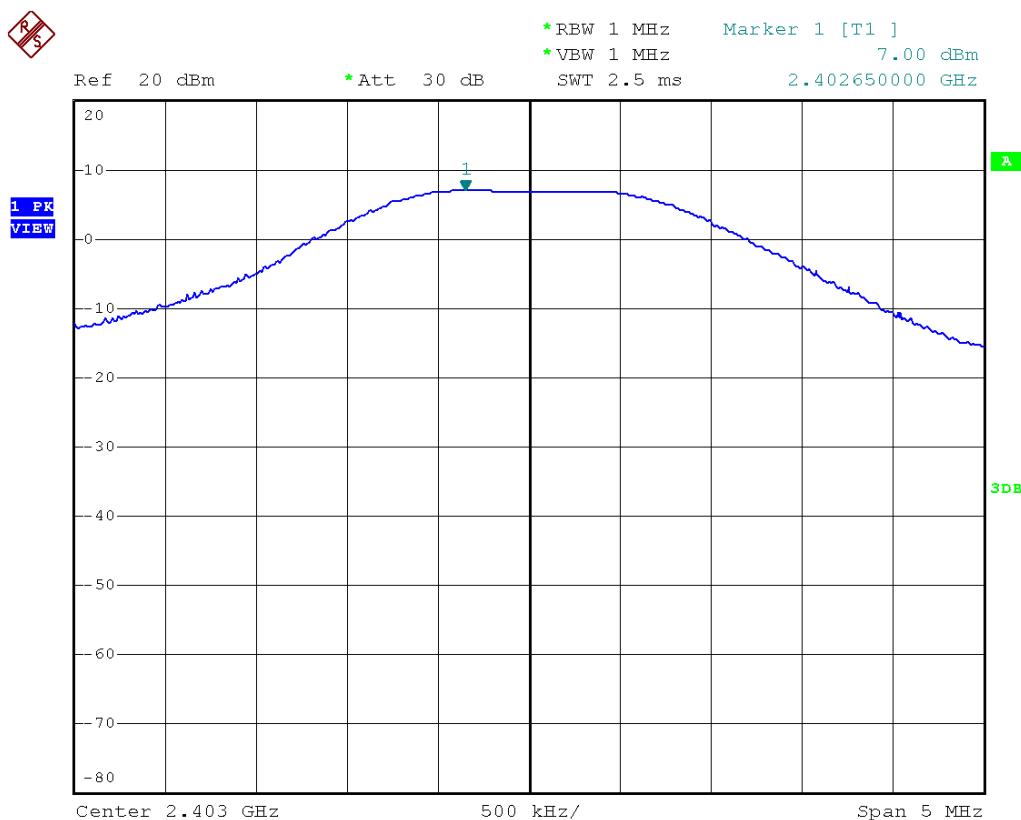


Figure 7: Peak Output Power - middle channel


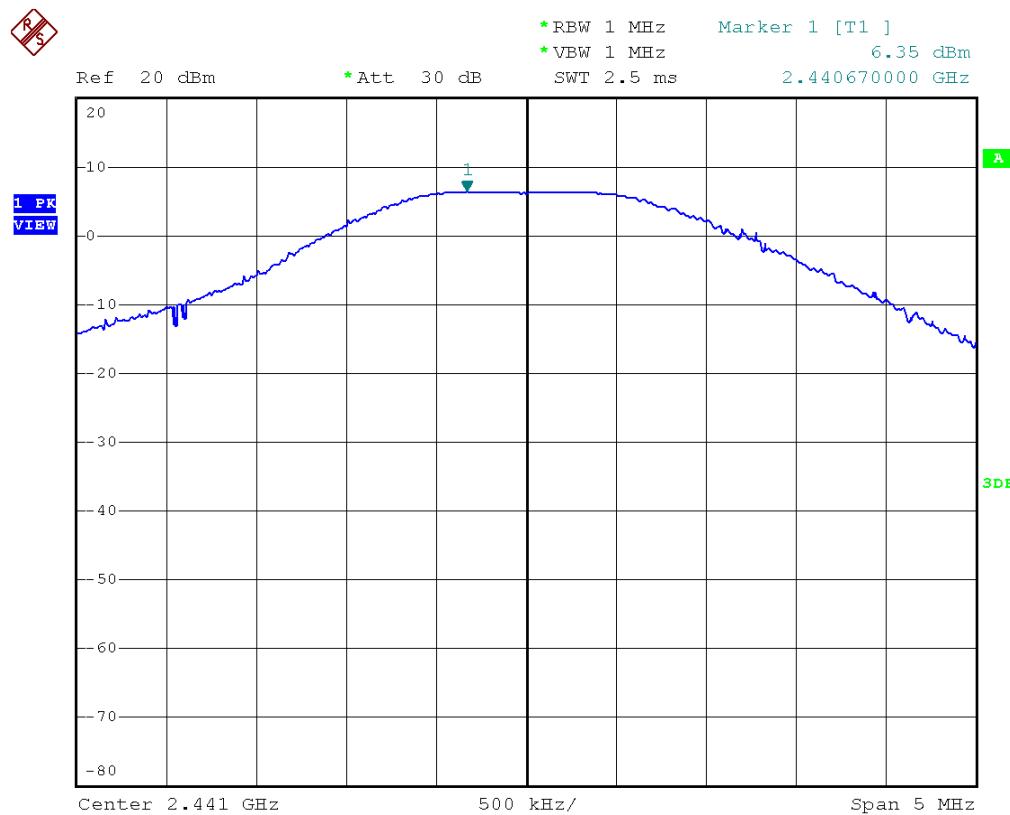


Figure 8: Peak Output Power - high channel

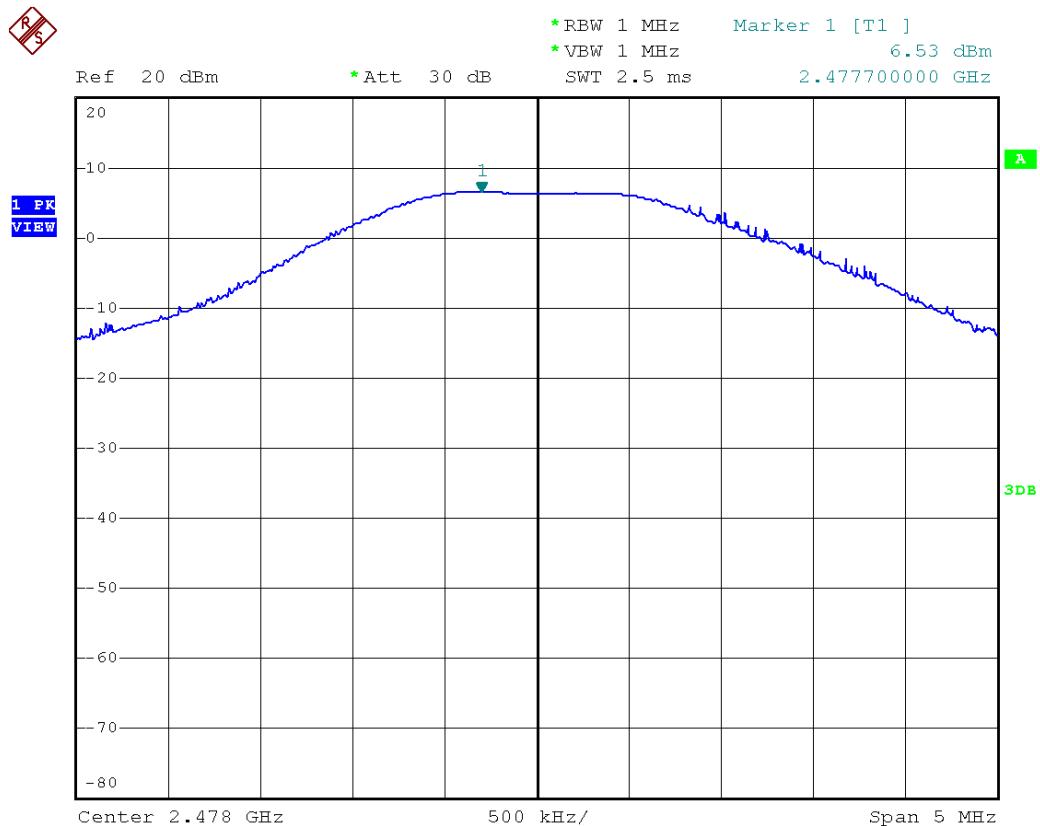

## 6.5 Band Edge of Conducted Emission and Spurious RF Conducted Emissions

### Applicable Standard:

According to §15.247(d), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### Test Procedure:

1. Connect the EUT RF output port to the spectrum analyzer via calibrated coaxial cable and suitable attenuator (if necessary).
2. Activates the EUT System and executes the software prepared for test, if necessary.
3. To find out the maximum emission condition, the transmitting data rate of EUT is set to maximum data rate.
4. The spectrum is scanned.
5. The emission at the band edge or the highest modulation product outside of band were measured by using the marker function of spectrum analyzer (\*1).
6. The peak of the in-band emission was measured by using the marker to peak function of spectrum analyzer.
7. Above measurement were repeated at other side band edge.

Frequency Span : Wide enough to capture the peak level of emission on the band edge

Resolution bandwidth : 100kHz

Video bandwidth :  $\geq$  RBW

Sweep : Auto

Detector function : Peak

Trace Mode : Max Hold

|                |                                     |
|----------------|-------------------------------------|
| Temperature:   | 24 °C                               |
| Humidity:      | 52%                                 |
| EUT Operation: | Data Transmission (without hopping) |
| Test Date:     | June 09, 2011                       |

The unit does meet the requirements. Test data shown in figures 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21 on pages 20, 21, 22, 23, 24, 25, 26.

Figure 9: Band Edge - low frequency side without hopping

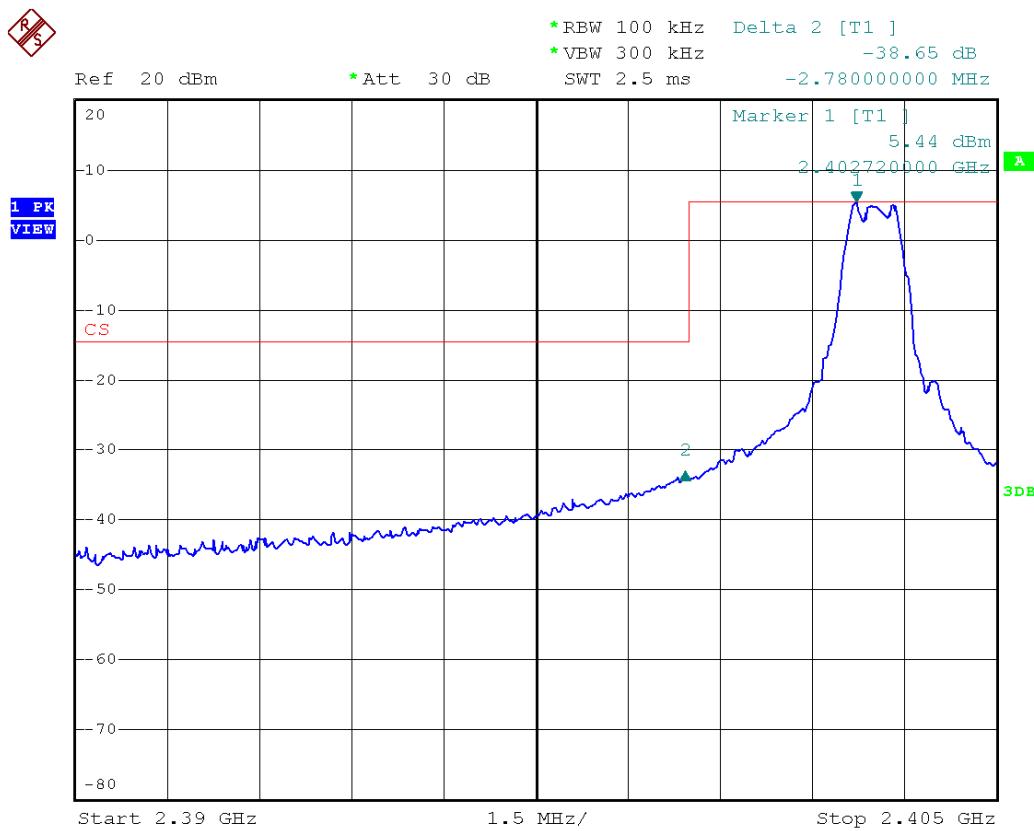


Figure 10: Band Edge – high frequency side without hopping

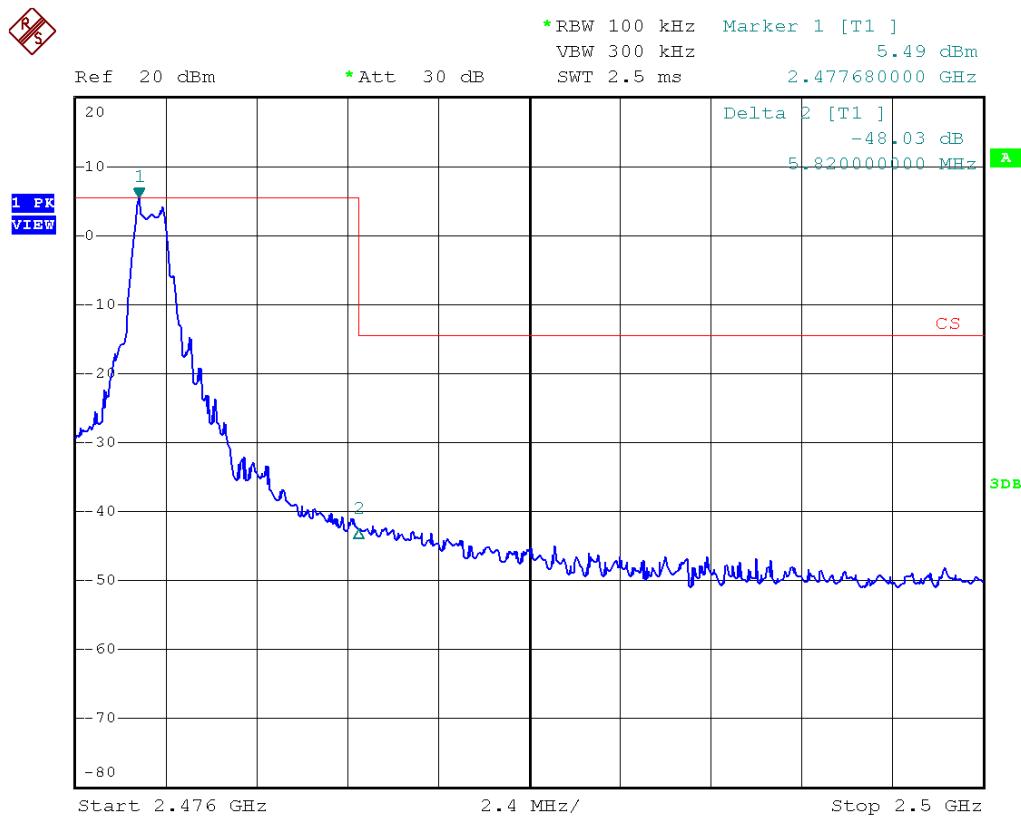


Figure 11: Band Edge – low frequency side with hopping

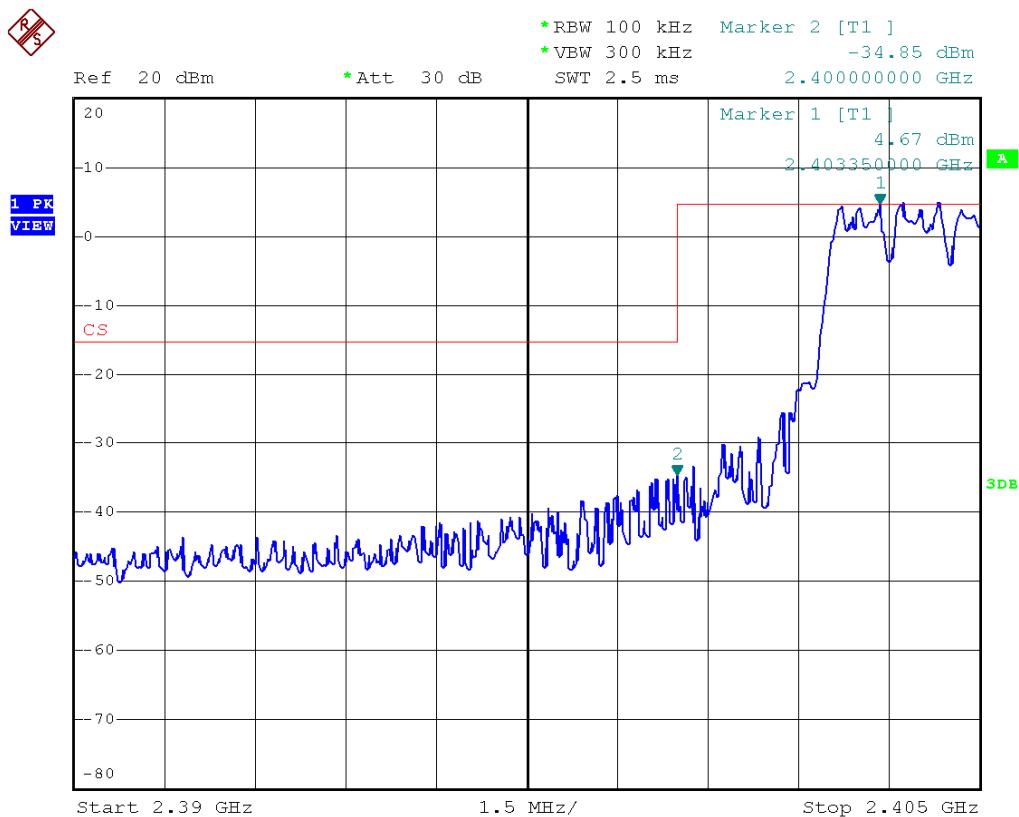


Figure 12: Band Edge – high frequency side with hopping



Figure 13 Conducted Spurious Emissions, low channel 30M – 2.4GHz

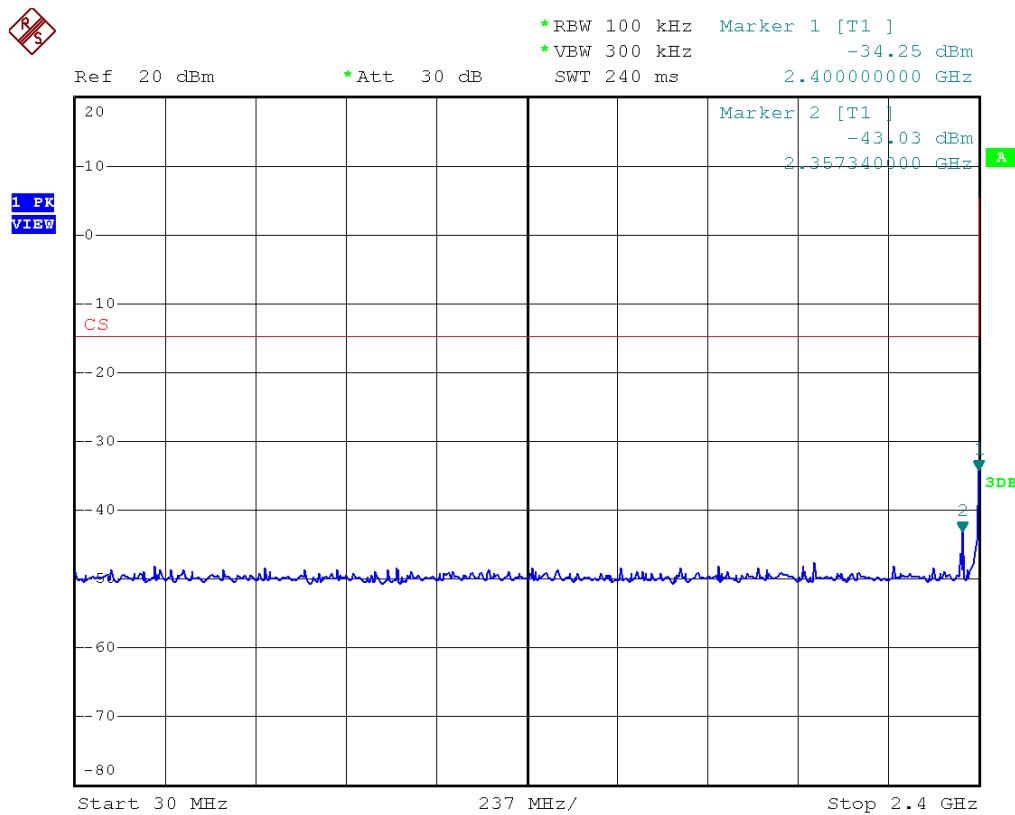


Figure 14 Conducted Spurious Emissions, low channel 2.4G – 2.4835GHz

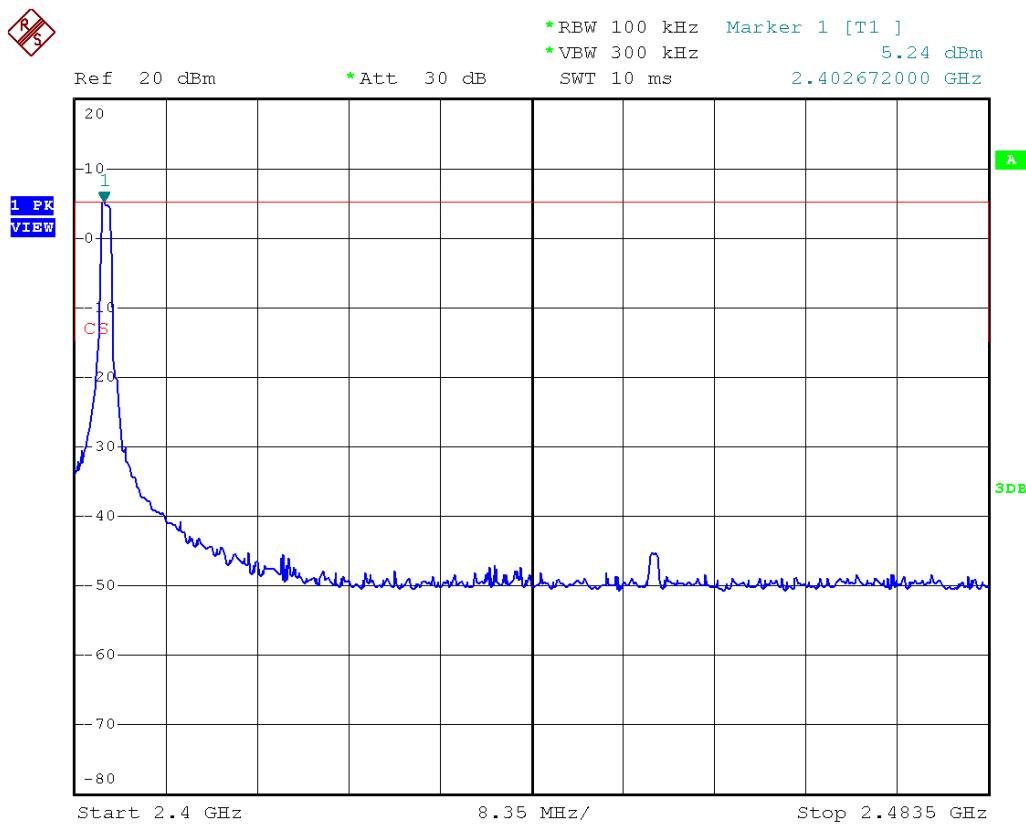


Figure 15 Conducted Spurious Emissions, low channel 2.4835G – 25GHz

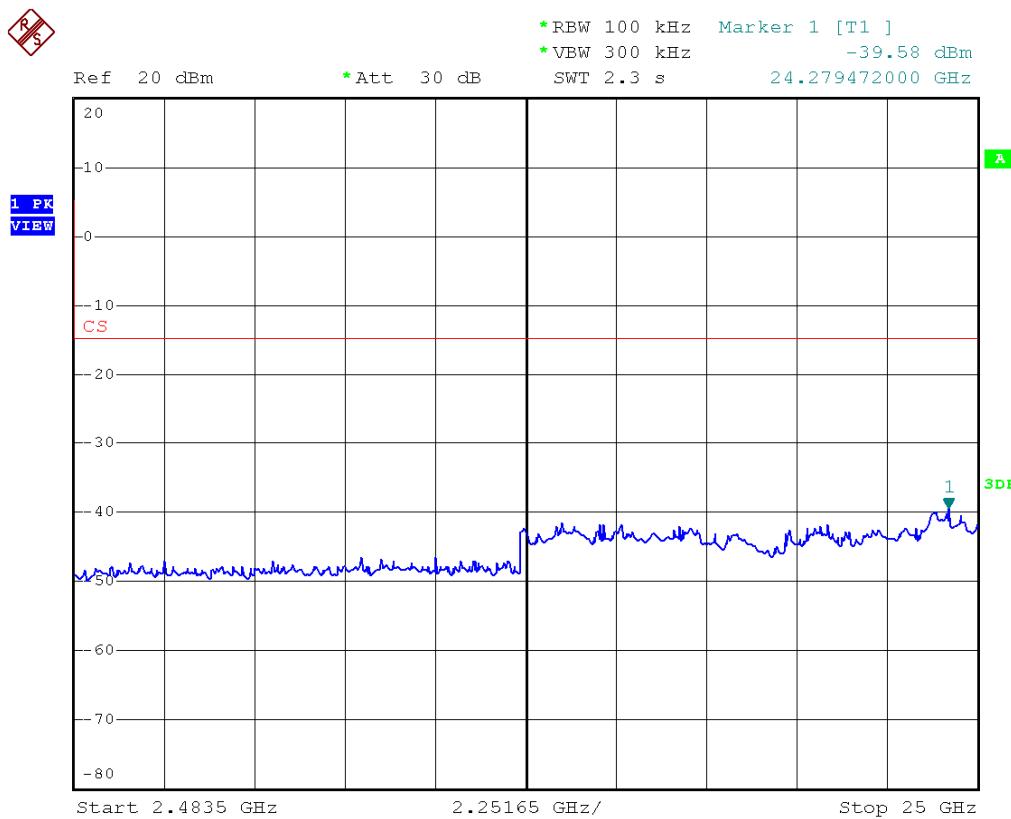


Figure 16 Conducted Spurious Emissions, middle channel 30M– 2.4GHz

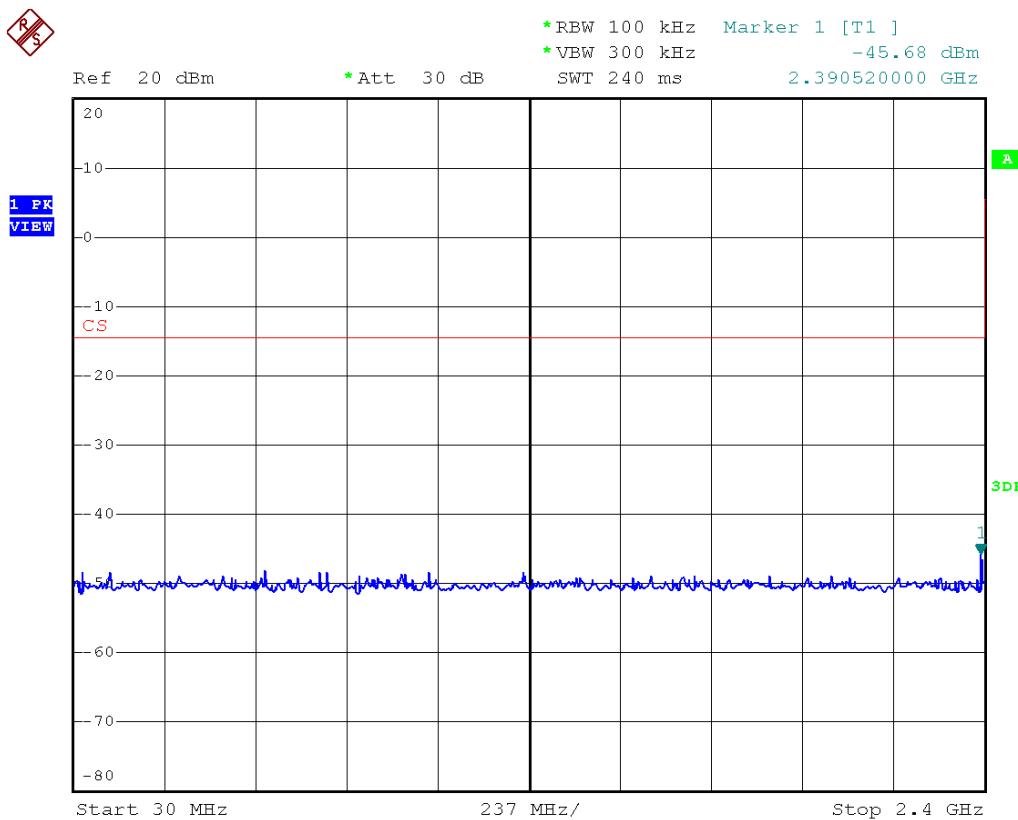


Figure 17 Conducted Spurious Emissions, middle channel 2.4G – 2.4835GHz

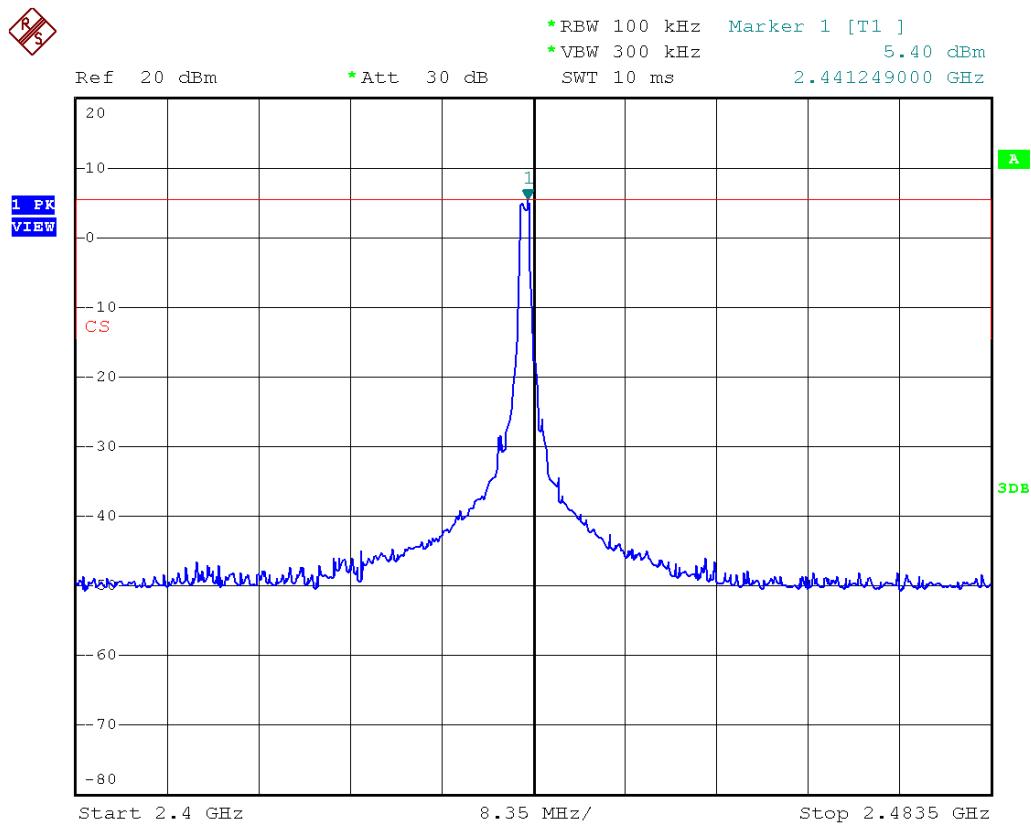


Figure 18 Conducted Spurious Emissions, middle channel 2.4835G – 25GHz

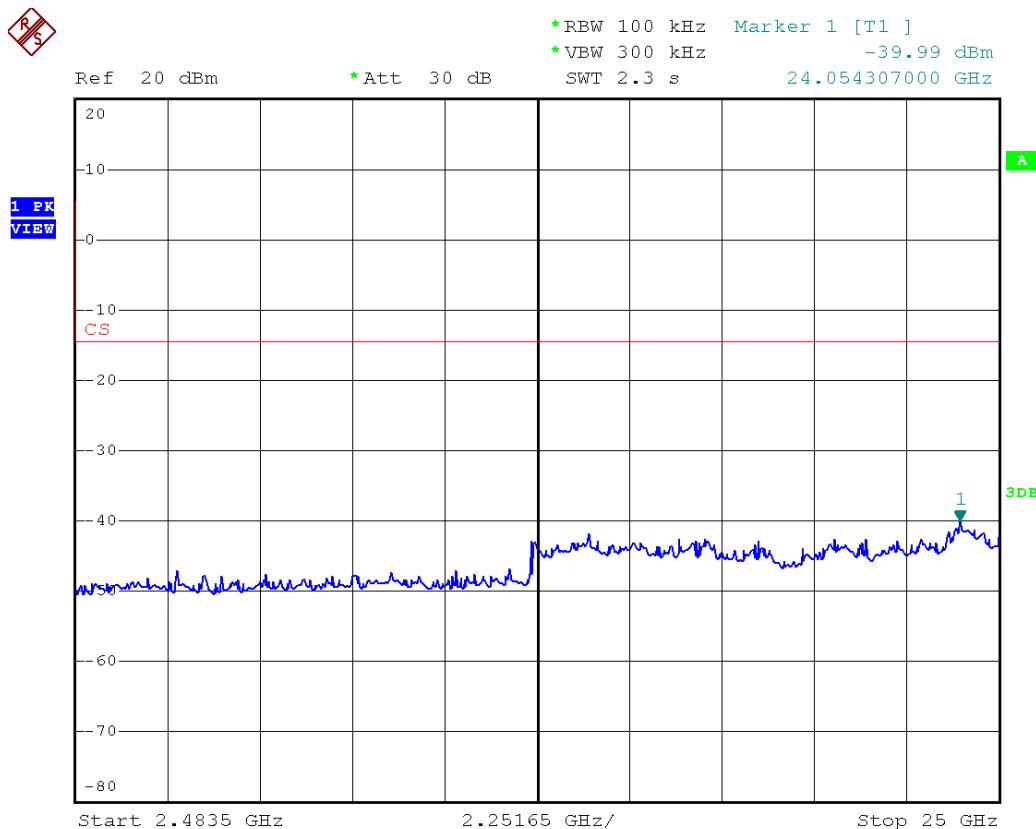


Figure 19 Conducted Spurious Emissions, high channel 30M – 2.4GHz

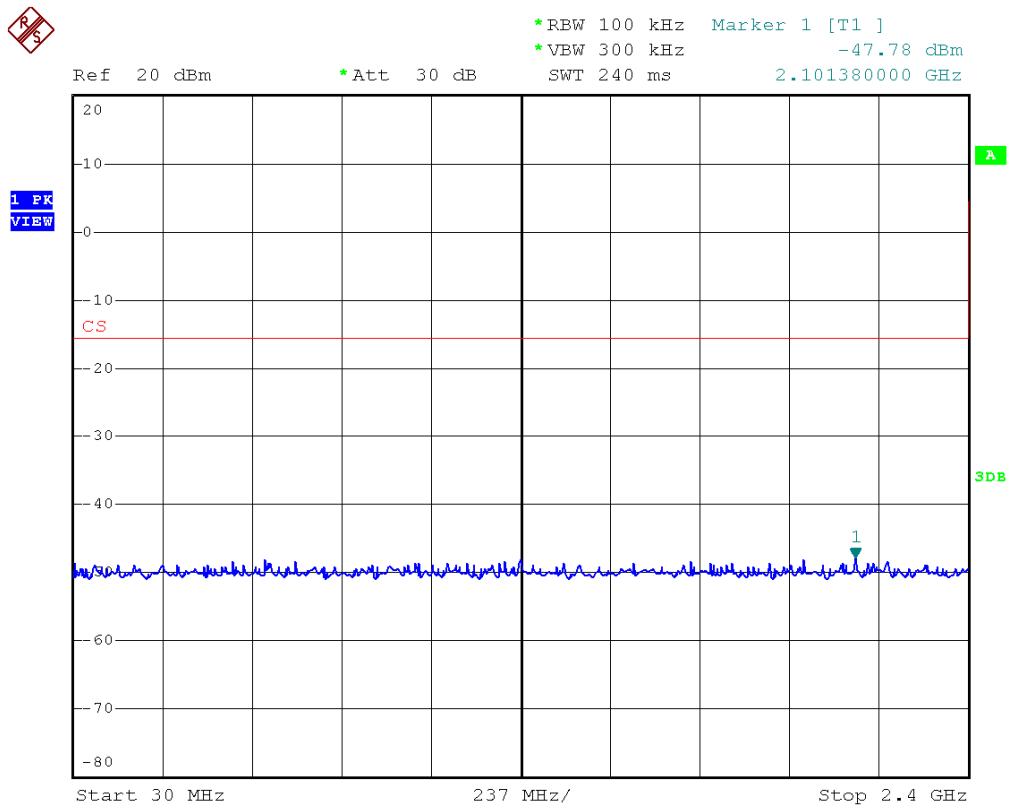


Figure 20 Conducted Spurious Emissions, high channel 2.4G – 2.4835GHz


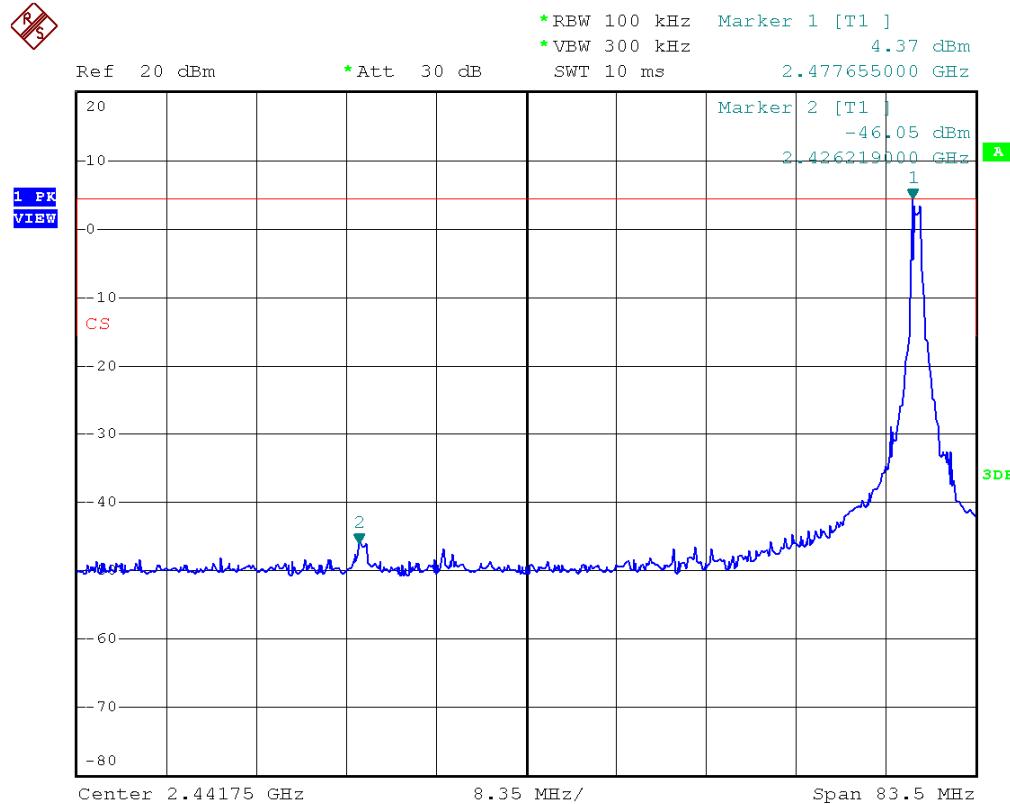


Figure 21 Conducted Spurious Emissions, high channel 2.4835G – 25GHz

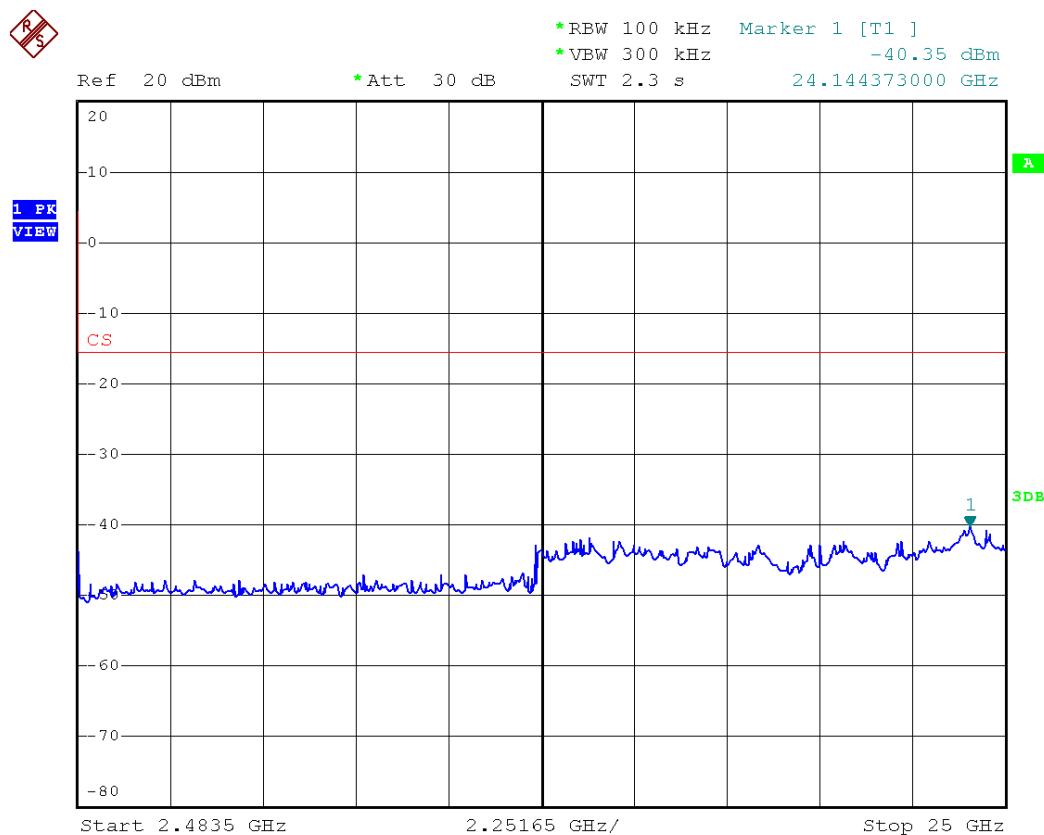

## 6.6 Spurious Radiated Emission Measurement

### Applicable Standard:

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

### Test Procedure:


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until all frequency measured were complete.

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:


$$FS = RA + AF + CL - AG$$

|                           |  |
|---------------------------|--|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |  |

## Test Configuration Below 1 GHz:

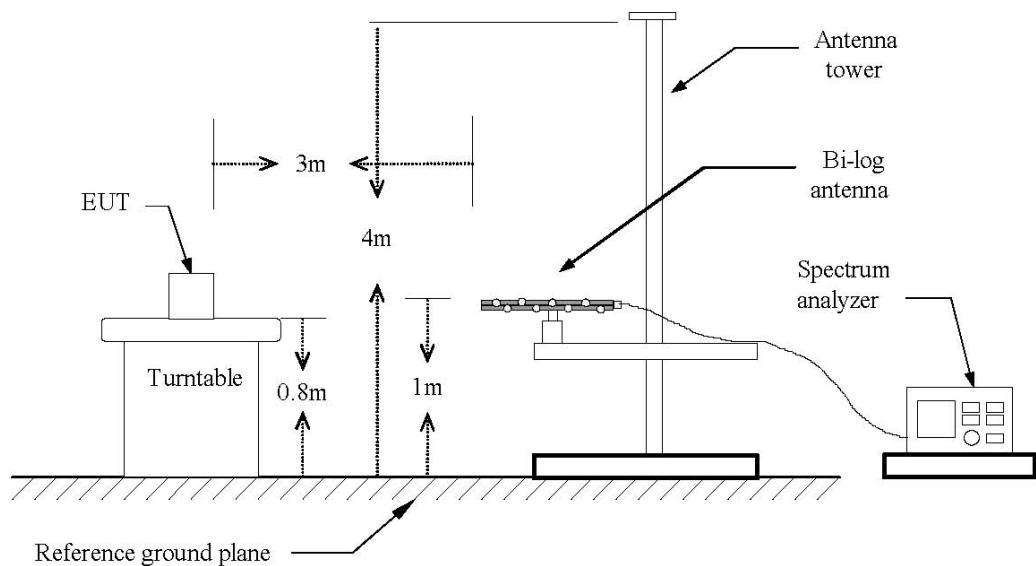

## Test Configuration Above 1 GHz:

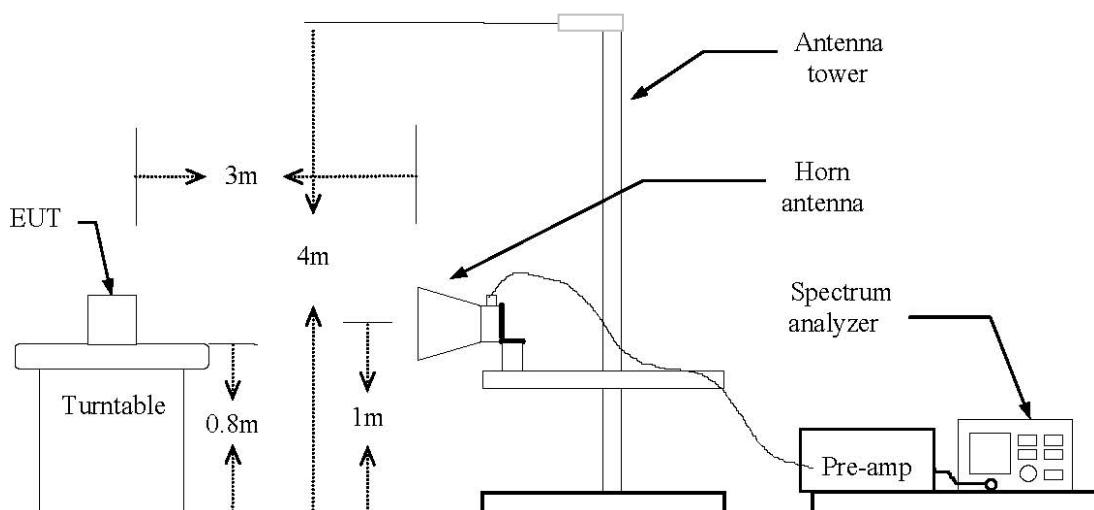

## Test Results:

|                |                                     |
|----------------|-------------------------------------|
| Temperature:   | 24°C                                |
| Humidity:      | 53%                                 |
| EUT Operation: | Data Transmission (without hopping) |
| Test Date:     | June 08, 2011                       |

**Spurious Emission In the Frequency Rang Below 1GHz:**

Fc= 2403MHz Transmitting Operation

| Freq.<br>(MHz) | Ant.Pol.<br>(H/V) | Detector<br>Mode<br>(PK/QP) | Reading<br>(dBuV) | Ant./CL/<br>Amp.CF<br>(dB) | Actual<br>FS<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Margin<br>(dB) |
|----------------|-------------------|-----------------------------|-------------------|----------------------------|--------------------------|----------------------|----------------|
| 38.25          | H                 | QP                          | 1.5               | 12.4                       | 13.9                     | 40.0                 | -26.1          |
| 638.75         | H                 | QP                          | 0.6               | 19.4                       | 20.0                     | 46.0                 | -26.0          |
| 954.70         | H                 | QP                          | 0.9               | 23.5                       | 24.4                     | 46.0                 | -21.6          |
| 174.00         | V                 | QP                          | 10.7              | 11.5                       | 22.2                     | 43.5                 | -21.3          |
| 339.75         | V                 | QP                          | 5.2               | 14.9                       | 20.1                     | 46.0                 | -25.9          |
| 954.65         | V                 | QP                          | 1.1               | 23.5                       | 24.6                     | 46.0                 | -21.4          |

Fc= 2441MHz Transmitting Operation

| Freq.<br>(MHz) | Ant.Pol.<br>(H/V) | Detector<br>Mode<br>(PK/QP) | Reading<br>(dBuV) | Ant./CL/<br>Amp.CF<br>(dB) | Actual<br>FS<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Margin<br>(dB) |
|----------------|-------------------|-----------------------------|-------------------|----------------------------|--------------------------|----------------------|----------------|
| 38.25          | H                 | QP                          | 1.7               | 12.4                       | 14.1                     | 40.0                 | -25.9          |
| 335.95         | H                 | QP                          | 5.4               | 14.9                       | 20.3                     | 46.0                 | -25.7          |
| 954.70         | H                 | QP                          | 0.8               | 23.5                       | 24.3                     | 46.0                 | -21.7          |
| 37.05          | V                 | QP                          | 3.5               | 12.4                       | 15.9                     | 40.0                 | -24.1          |
| 178.00         | V                 | QP                          | 9.5               | 11.5                       | 21.0                     | 43.5                 | -22.5          |
| 304.55         | V                 | QP                          | 5.5               | 14.8                       | 20.3                     | 46.0                 | -25.7          |

Fc= 2478MHz Transmitting Operation

| Freq.<br>(MHz) | Ant.Pol.<br>(H/V) | Detector<br>Mode<br>(PK/QP) | Reading<br>(dBuV) | Ant./CL/<br>Amp.CF<br>(dB) | Actual<br>FS<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Margin<br>(dB) |
|----------------|-------------------|-----------------------------|-------------------|----------------------------|--------------------------|----------------------|----------------|
| 38.25          | H                 | QP                          | 2.1               | 12.4                       | 14.5                     | 40.0                 | -25.5          |
| 335.95         | H                 | QP                          | 5.7               | 14.9                       | 20.6                     | 46.0                 | -25.4          |
| 954.70         | H                 | QP                          | 1.6               | 23.5                       | 25.1                     | 46.0                 | -20.9          |
| 174.50         | V                 | QP                          | 9.2               | 11.5                       | 20.7                     | 43.5                 | -22.8          |
| 316.50         | V                 | QP                          | 5.8               | 14.8                       | 20.6                     | 46.0                 | -25.4          |
| 955.45         | V                 | QP                          | 0.1               | 23.6                       | 23.7                     | 46.0                 | -22.3          |

**Note:** For spurious emission measurement, the compliance tests were performed both of horizontally placed and vertically placed in EUT (X position, Y position, Z position). As a result, the data of operation mode that produce the maximum emission were reported. The other emissions are more than 25dB below the limit.

**Spurious Emission In the Frequency Range above 1GHz:**

Fc= 2403MHz Transmitting Operation- Horizontal

| Freq.<br>(MHz) | Peak<br>Reading<br>(dBuV) | AV<br>Reading<br>(dBuV) | Ant./CL/<br>Amp.CF<br>(dB) | Actual FS        |                | Peak<br>Limit<br>(dBuV/m) | AV Limit<br>(dBuV/m) | Margin |
|----------------|---------------------------|-------------------------|----------------------------|------------------|----------------|---------------------------|----------------------|--------|
|                |                           |                         |                            | Peak<br>(dBuV/m) | AV<br>(dBuV/m) |                           |                      |        |
| 4806.00        | 45.52                     | -                       | 1.20                       | 46.72            | -              | 74.00                     | 54.00                | -27.28 |
| 7209.00        | 51.56                     | 32.34                   | 4.22                       | 55.78            | 36.56          | 74.00                     | 54.00                | -18.22 |
| 9612.00        | 44.22                     | -                       | 6.64                       | 50.86            | -              | 74.00                     | 54.00                | -23.14 |
| -              | -                         | -                       | -                          | -                | -              | -                         | -                    | -      |

Fc= 2403MHz Transmitting Operation- Vertical

| Freq.<br>(MHz) | Peak<br>Reading<br>(dBuV) | AV<br>Reading<br>(dBuV) | Ant./CL/<br>Amp.CF<br>(dB) | Actual FS        |                | Peak<br>Limit<br>(dBuV/m) | AV Limit<br>(dBuV/m) | Margin |
|----------------|---------------------------|-------------------------|----------------------------|------------------|----------------|---------------------------|----------------------|--------|
|                |                           |                         |                            | Peak<br>(dBuV/m) | AV<br>(dBuV/m) |                           |                      |        |
| 4806.00        | 45.36                     | -                       | 1.20                       | 46.56            | -              | 74.00                     | 54.00                | -27.44 |
| 7209.00        | 50.43                     | 30.07                   | 4.22                       | 54.65            | 34.29          | 74.00                     | 54.00                | -19.35 |
| 9612.00        | 44.16                     | -                       | 6.64                       | 50.80            | -              | 74.00                     | 54.00                | -23.20 |
| -              | -                         | -                       | -                          | -                | -              | -                         | -                    | -      |

**Note:** Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 25dB below the permissible limits or the field strength is too small to be measured.

Fc= 2441MHz Transmitting Operation- Horizontal

| Freq.<br>(MHz) | Peak<br>Reading<br>(dBuV) | AV<br>Reading<br>(dBuV) | Ant./CL/<br>Amp.CF<br>(dB) | Actual FS        |                | Peak<br>Limit<br>(dBuV/m) | AV Limit<br>(dBuV/m) | Margin |
|----------------|---------------------------|-------------------------|----------------------------|------------------|----------------|---------------------------|----------------------|--------|
|                |                           |                         |                            | Peak<br>(dBuV/m) | AV<br>(dBuV/m) |                           |                      |        |
| 4882.00        | 45.13                     | -                       | 1.0                        | 46.13            | -              | 74.00                     | 54.00                | -27.87 |
| 7323.00        | 52.77                     | 32.28                   | 4.22                       | 56.99            | 36.50          | 74.00                     | 54.00                | -17.01 |
| 9764.00        | 46.71                     | -                       | 6.70                       | 53.41            | -              | 74.00                     | 54.00                | -20.59 |
| -              | -                         | -                       | -                          | -                | -              | -                         | -                    | -      |

Fc= 2441MHz Transmitting Operation- Vertical

| Freq.<br>(MHz) | Peak<br>Reading<br>(dBuV) | AV<br>Reading<br>(dBuV) | Ant./CL/<br>Amp.CF<br>(dB) | Actual FS        |                | Peak<br>Limit<br>(dBuV/m) | AV Limit<br>(dBuV/m) | Margin |
|----------------|---------------------------|-------------------------|----------------------------|------------------|----------------|---------------------------|----------------------|--------|
|                |                           |                         |                            | Peak<br>(dBuV/m) | AV<br>(dBuV/m) |                           |                      |        |
| 4882.00        | 45.29                     | -                       | 1.0                        | 46.29            | -              | 74.00                     | 54.00                | -27.71 |
| 7323.00        | 50.81                     | 30.09                   | 4.22                       | 55.03            | 34.31          | 74.00                     | 54.00                | -18.97 |
| 9764.00        | 44.43                     | -                       | 6.70                       | 51.13            | -              | 74.00                     | 54.00                | -22.87 |
| -              | -                         | -                       | -                          | -                | -              | -                         | -                    | -      |

**Note:** Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 25dB below the permissible limits or the field strength is too small to be measured.

Fc= 2478MHz Transmitting Operation- Horizontal

| Freq.<br>(MHz) | Peak<br>Reading<br>(dBuV) | AV<br>Reading<br>(dBuV) | Ant./CL/<br>Amp.CF<br>(dB) | Actual FS        |                | Peak<br>Limit<br>(dBuV/m) | AV Limit<br>(dBuV/m) | Margin |
|----------------|---------------------------|-------------------------|----------------------------|------------------|----------------|---------------------------|----------------------|--------|
|                |                           |                         |                            | Peak<br>(dBuV/m) | AV<br>(dBuV/m) |                           |                      |        |
| 4956.00        | 44.81                     | -                       | 0.92                       | 45.73            | -              | 74.00                     | 54.00                | -28.27 |
| 7434.00        | 50.54                     | 29.80                   | 4.22                       | 54.76            | 34.02          | 74.00                     | 54.00                | -19.24 |
| 9912.00        | 47.10                     | -                       | 7.50                       | 52.77            | -              | 74.00                     | 54.00                | -21.23 |
| -              | -                         | -                       | -                          | -                | -              | -                         | -                    | -      |

Fc= 2478MHz Transmitting Operation- Vertical

| Freq.<br>(MHz) | Peak<br>Reading<br>(dBuV) | AV<br>Reading<br>(dBuV) | Ant./CL/<br>Amp.CF<br>(dB) | Actual FS        |                | Peak<br>Limit<br>(dBuV/m) | AV Limit<br>(dBuV/m) | Margin |
|----------------|---------------------------|-------------------------|----------------------------|------------------|----------------|---------------------------|----------------------|--------|
|                |                           |                         |                            | Peak<br>(dBuV/m) | AV<br>(dBuV/m) |                           |                      |        |
| 4956.00        | 45.52                     | -                       | 0.92                       | 46.44            | -              | 74.00                     | 54.00                | -27.56 |
| 7434.00        | 48.81                     | -                       | 4.22                       | 53.03            | -              | 74.00                     | 54.00                | -20.97 |
| 9912.00        | 46.34                     | -                       | 7.50                       | 53.84            | -              | 74.00                     | 54.00                | -20.16 |
| -              | -                         | -                       | -                          | -                | -              | -                         | -                    | -      |

**Note:** Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 25dB below the permissible limits or the field strength is too small to be measured.

## 6.7 Band Edge and Restricted Band of Radiated Emission Measurement

### Applicable Standard:

According to §15.247(d), radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

According to DA 00-705, in making radiated band-edge measurements, the following technique for determining band-edge compliance.

Step 1) Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function required by C63.4 and our Rules for the frequency being measured. For transmitters operating above 1 GHz, use a 1 MHz RBW, a 1 MHz VBW, and a peak detector (as required by Section 15.35). Repeat the measurement with an average detector (i.e., 1 MHz RBW with 10 Hz VBW).

Step 2) Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 1% of the total span (but never less than 30 kHz) with a video bandwidth equal to or greater than the RBW. Record the peak levels of the fundamental emission and the relevant band-edge emission (i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement, it is only a relative measurement to determine the amount by which the emission drops at the band-edge relative to the highest fundamental emission level.

Step 3) Subtract the delta measured in step (2) from the field strengths measured in step (1). The resultant field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge compliance as required by Section 15.205.

Step 4) The above "delta" measurement technique may be used for measuring emissions that are up to two "standard" bandwidths away from the band-edge, where a "standard" bandwidth is the bandwidth specified by C63.4 for the frequency being measured.

### Test Procedure:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the highest emissions in restricted band to ensure EUT compliance.

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

|                           |  |
|---------------------------|--|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |  |

**Test Results:**

|                |                                     |
|----------------|-------------------------------------|
| Temperature:   | 24°C                                |
| Humidity:      | 52%                                 |
| EUT Operation: | Data Transmission (without hopping) |
| Test Date:     | June 09, 2011                       |

The unit does meet the requirements. Test data shown in figures 22, 23, 24, 25, 26, 27, 28, 29 on pages 35, 36, 37, 38.

**The Peak Electric Field Strength at Low Channel and High Channel**

| Freq. (MHz) | Peak Reading (dBuV) | AV Reading (dBuV) | Ant./CL/Amp.CF (dB) | Actual FS     |             |
|-------------|---------------------|-------------------|---------------------|---------------|-------------|
|             |                     |                   |                     | Peak (dBuV/m) | AV (dBuV/m) |
| 2403        | 101.62              | 65.25             | 2.60                | 104.22        | 67.85       |
| 2478        | 101.37              | 66.50             | 2.40                | 103.77        | 68.90       |

Note: Refer to figures 22, 23, 24, 25, 26, 27, 28, 29.

**Restricted Band of Radiated Emission – Low frequency side (2310 –2390MHz)**

Refer to above table, the peak electric field strength at 2403 MHz is 104.22 dBuV/m and the AV strength is 67.85 dBuV/m. Because the peak signal at 2399.86 MHz is 39.24 dB down (figure 26) and the AV signal at 2398.28 MHz is 21.29 dB down (figure 27), its peak and AV field strength are 64.98 dBuV/m and 46.56 dBuV/m. They are less than the peak limit of 74 dBuV/m and the AV limit of 54 dBuV/m at those frequency. Therefore the EUT passes this requirement.

Upper Restricted Band Passing Margin, Peak = 74 – 64.98 = 9.02 dB; AV= 54-46.56=7.44 dB.

**Band Edge and Resticted Band of Radiated Emission – High frequency side (2483.5 –2500MHz)**

Refer to above table, the peak electric field strength at 2478 MHz is 103.77 dBuV/m and the AV strength is 68.90 dBuV/m. Because the signal at 2484.036 MHz is 46.39 dB down (figure 28) and the AV signal at 2483.500 MHz is 27.38 dB down (figure 29), its peak and AV field strength are 57.38 dBuV/m and 41.52 dBuV/m. They are less than the peak limit of 74 dBuV/m and the AV limit of 54 dBuV/m at those frequency. Therefore the EUT passes this requirement.

Upper Restricted Band Passing Margin, Peak = 74 – 57.38= 16.62 dB; AV= 54-41.52=12.48 dB

Figure 22 Peak Electric Field Strength at Low Channel 2403MHz

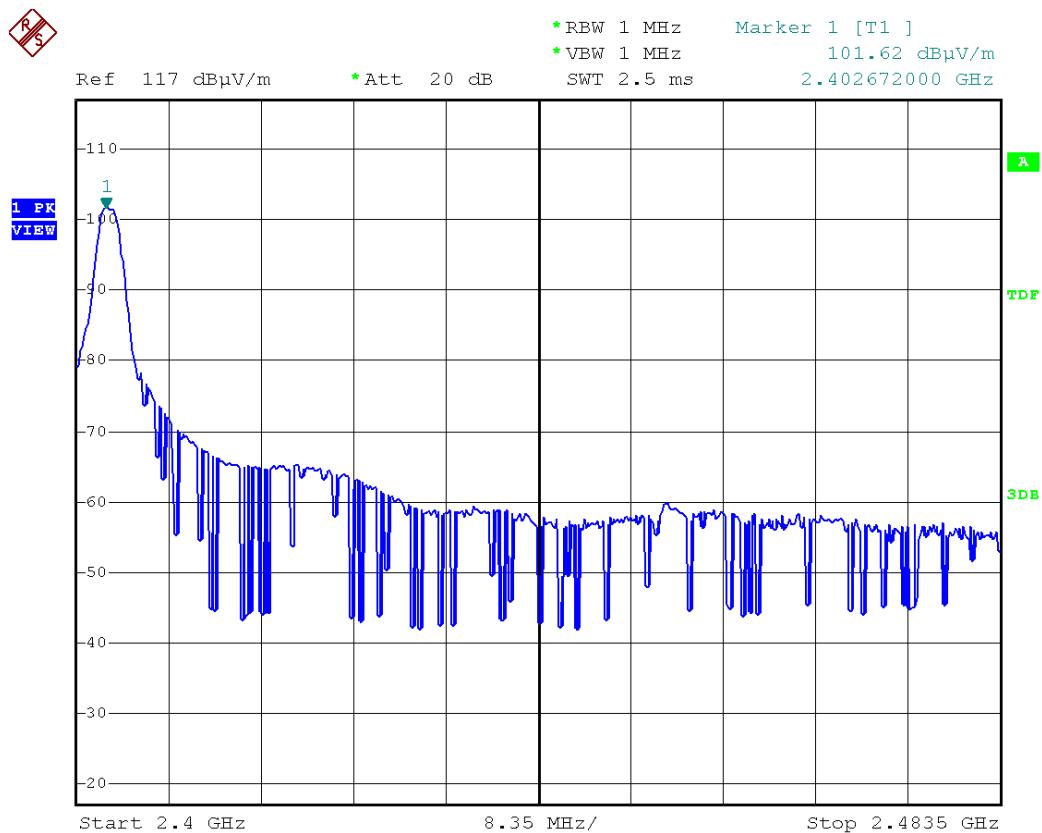


Figure 23 AV Electric Field Strength at High Channel 2403MHz

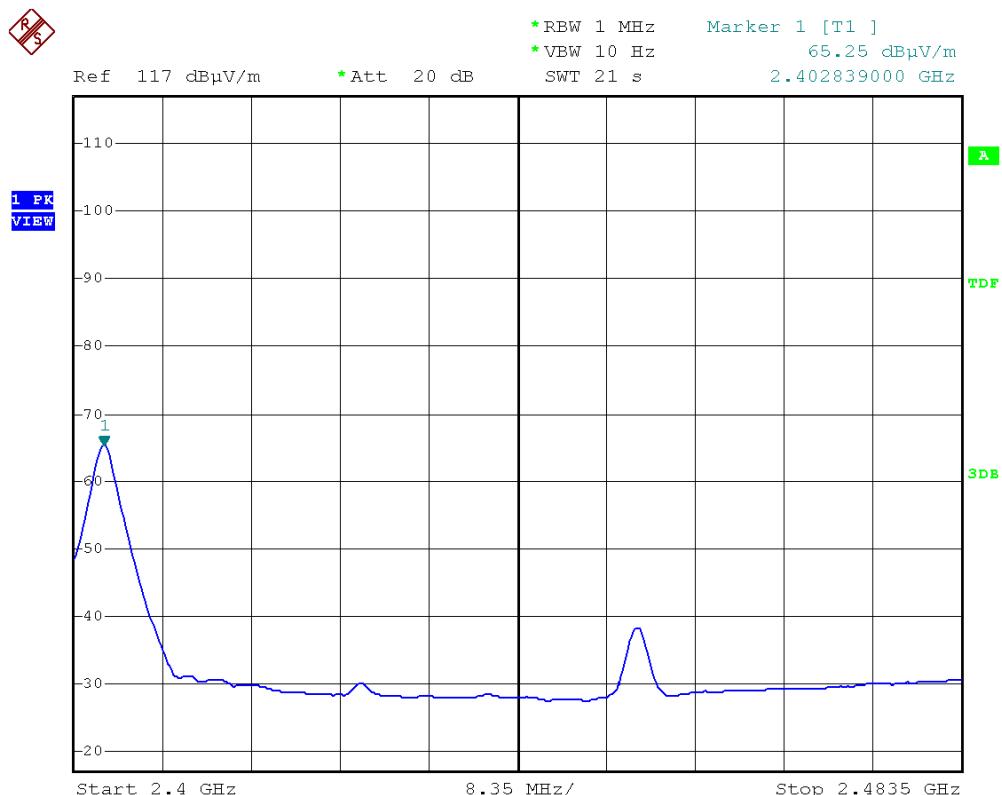


Figure 24 Peak Electric Field Strength at High Channel 2478MHz

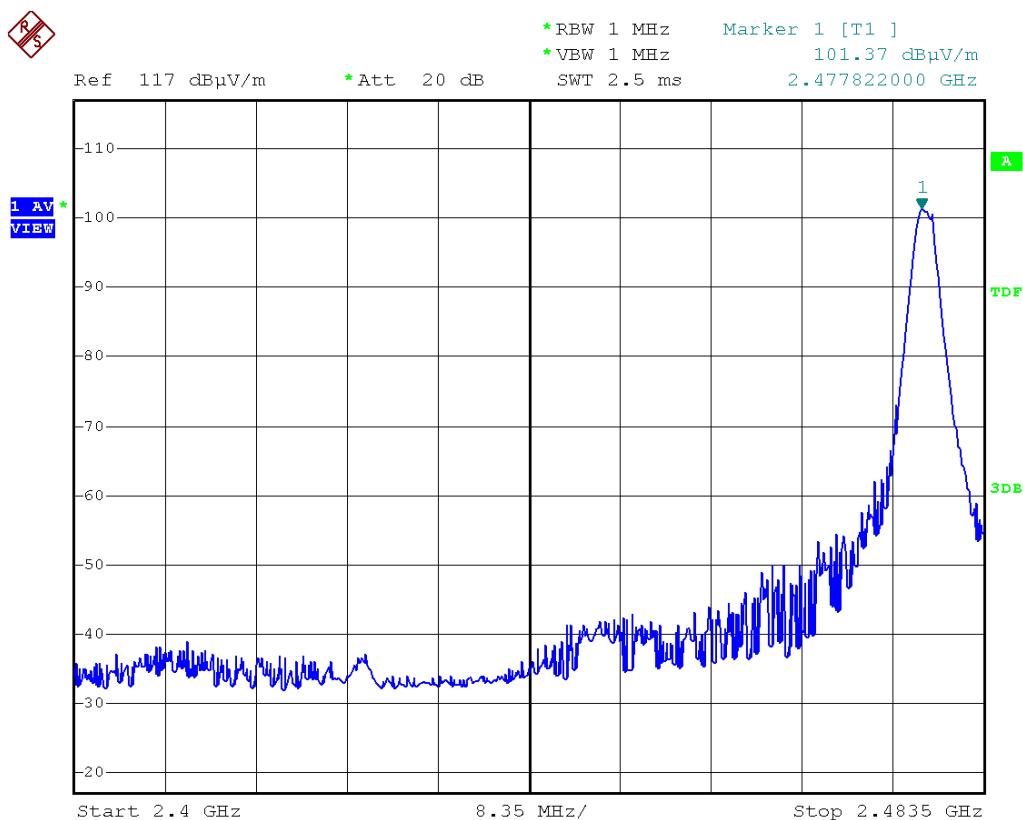


Figure 25 AV Electric Field Strength at High Channel 2478MHz

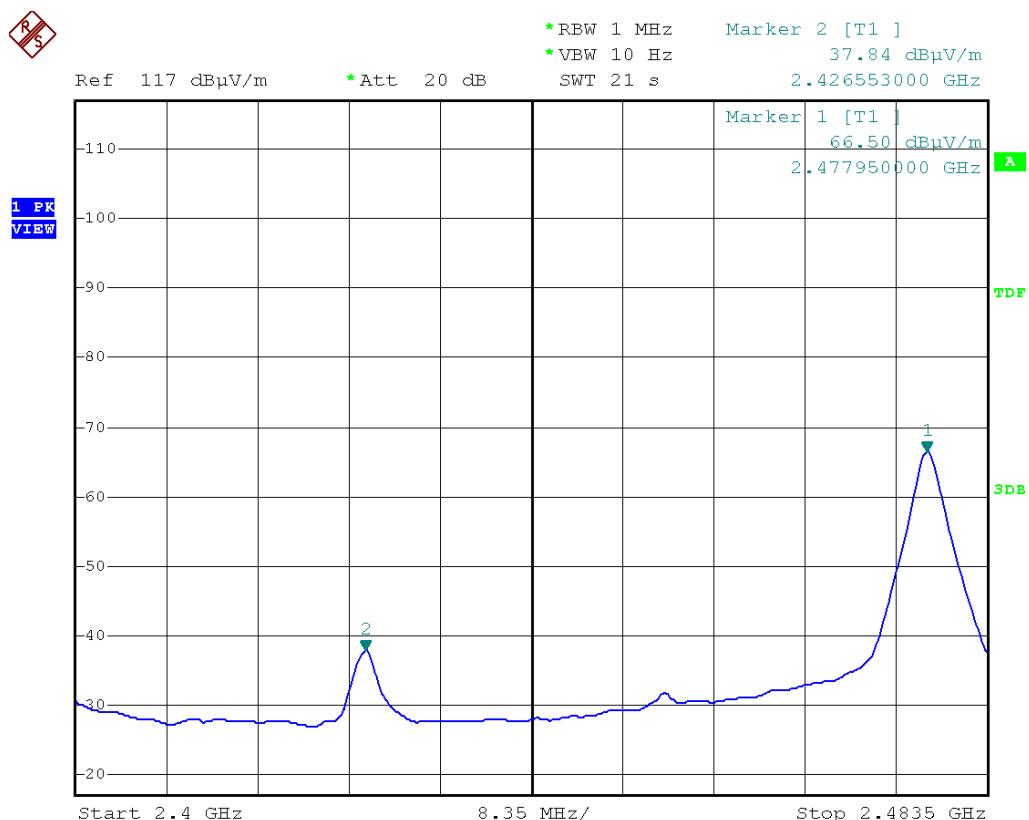


Figure 26 Band Edge of Radiated Emission – Low frequency side without hopping (peak value)

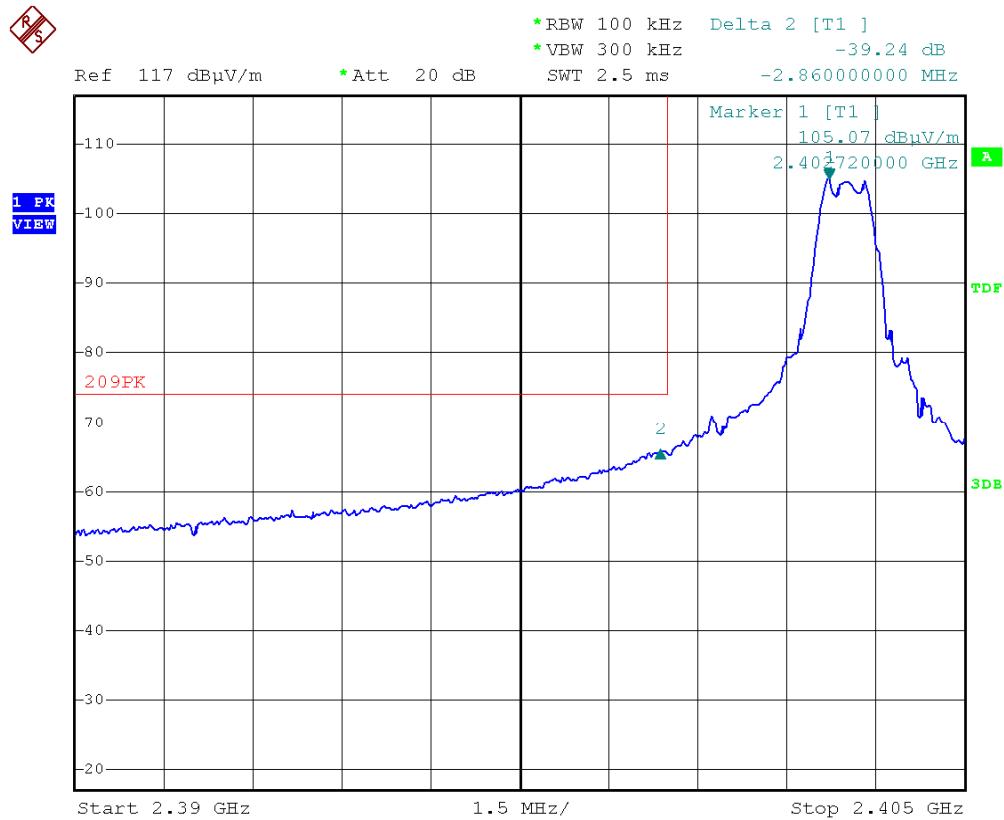


Figure 27 Band Edge of Radiated Emission – Low frequency side without hopping (AV Value)

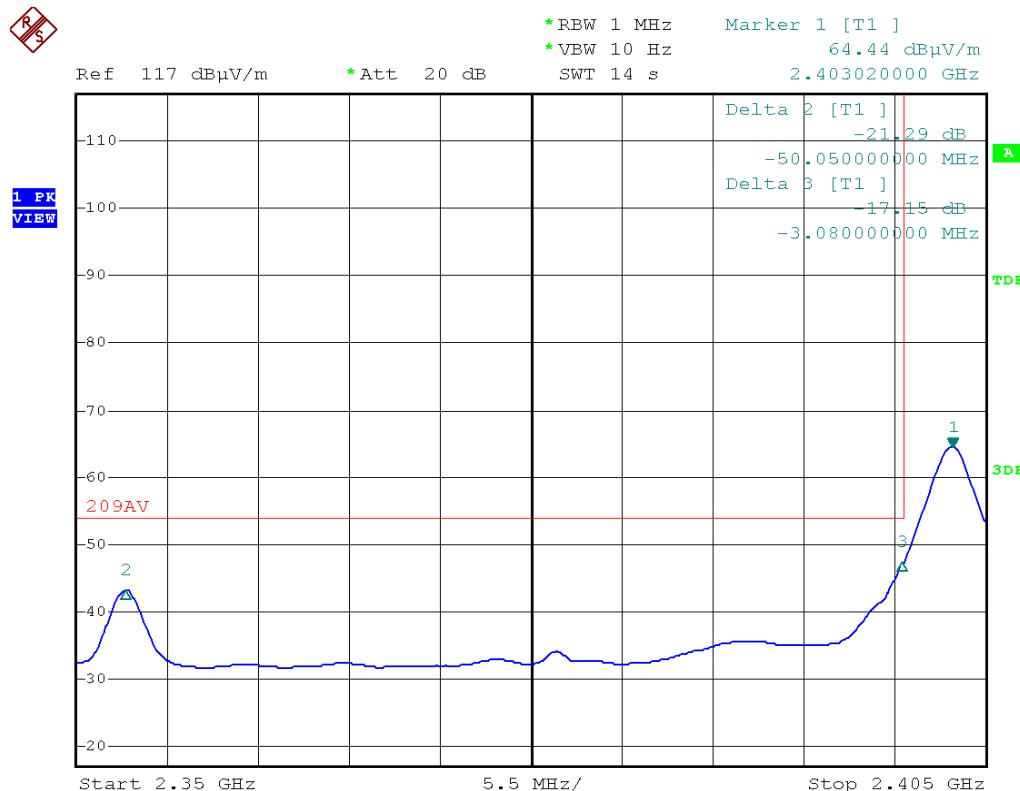


Figure 28 Band Edge of Radiated Emission – high frequency side without hopping (peak value)


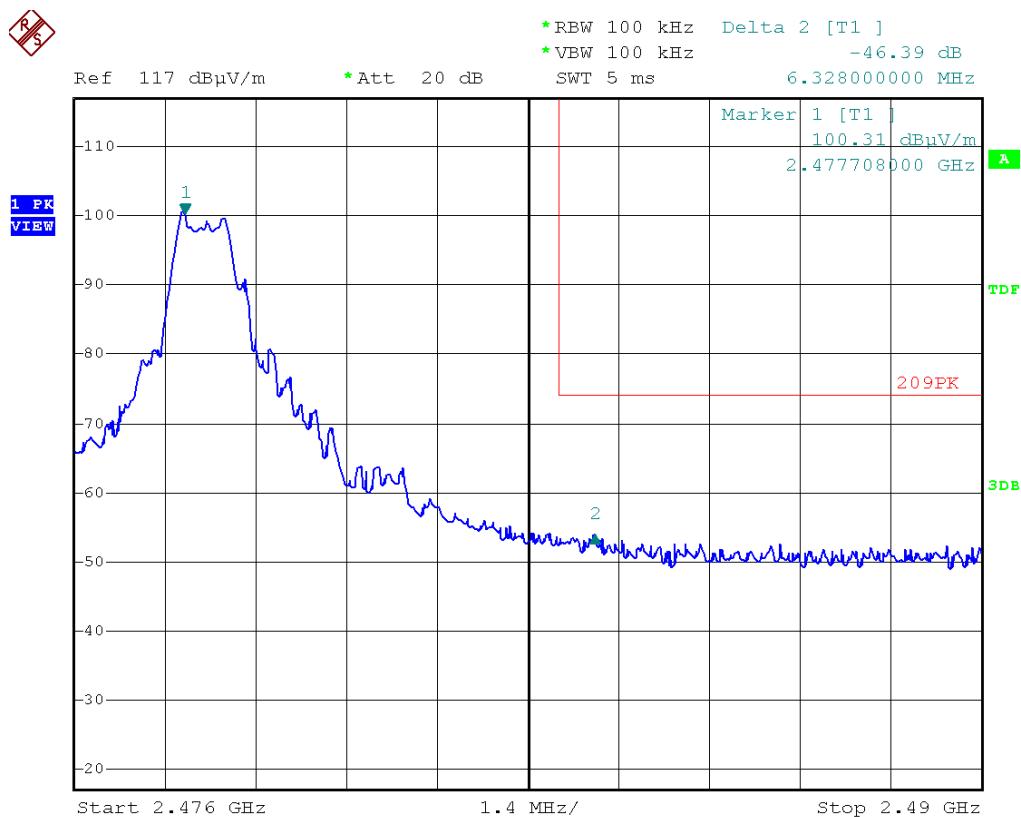


Figure 29 Band Edge of Radiated Emission – High frequency side without hopping (AV Value)

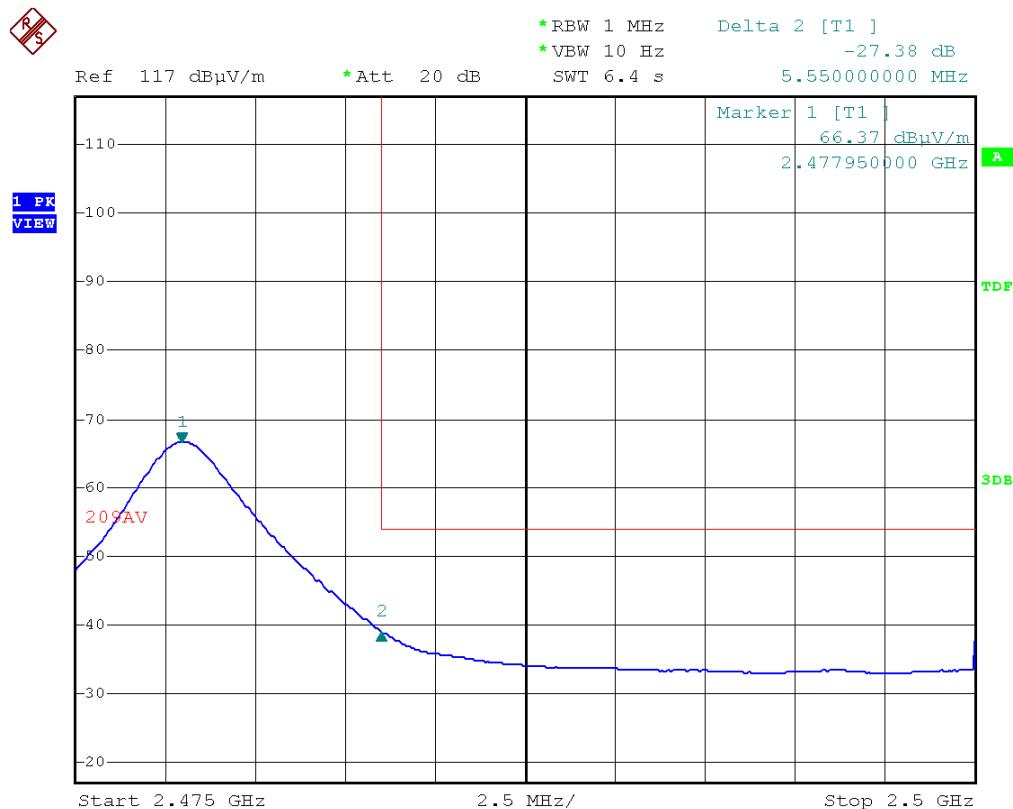

## 6.8 20dB Bandwidth Measurement

### Standard Applicable:

For frequency hopping spread spectrum systems, FCC Part 15.247 requires the frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Occupied bandwidth was performed by connecting the output of the EUT to the input of a spectrum analyzer.

### Test Procedure:

Use the following spectrum analyzer settings:

Span = 2MHz  
Resolution Bandwidth = 30KHz  
Video Bandwidth = 100KHz  
Sweep = auto  
Detector function = peak  
Trace = max hold

### Test Results:

|                |                                     |
|----------------|-------------------------------------|
| Temperature:   | 23°C                                |
| Humidity:      | 53%                                 |
| EUT Operation: | Data Transmission (without hopping) |
| Test Date:     | June 09, 2011                       |

| Frequency (MHz) | 20dB Bandwidth (MHz) |
|-----------------|----------------------|
| 2403            | 1.10                 |
| 2441            | 1.09                 |
| 2478            | 1.12                 |

Note: Test plots see next page figures 11, 12 and 13.

Figure 11- 20dB bandwidth Measurement (fc=2403MHz)

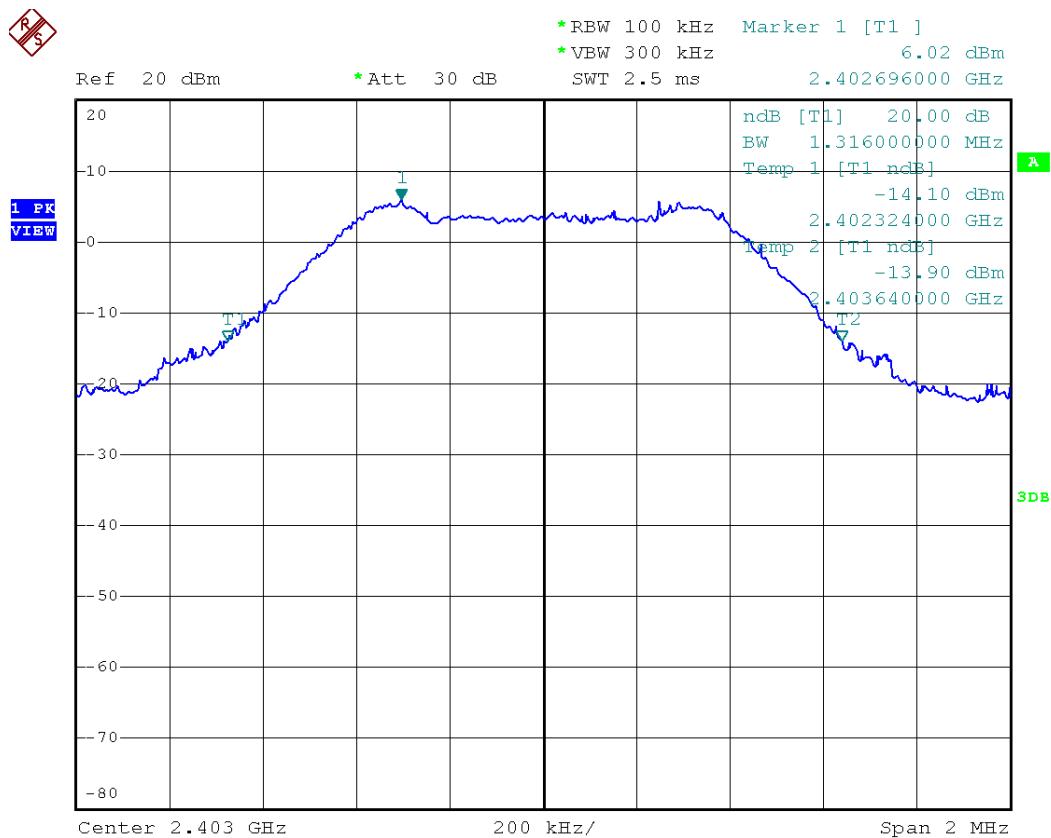


Figure 12- 20dB bandwidth Measurement (fc=2441MHz)


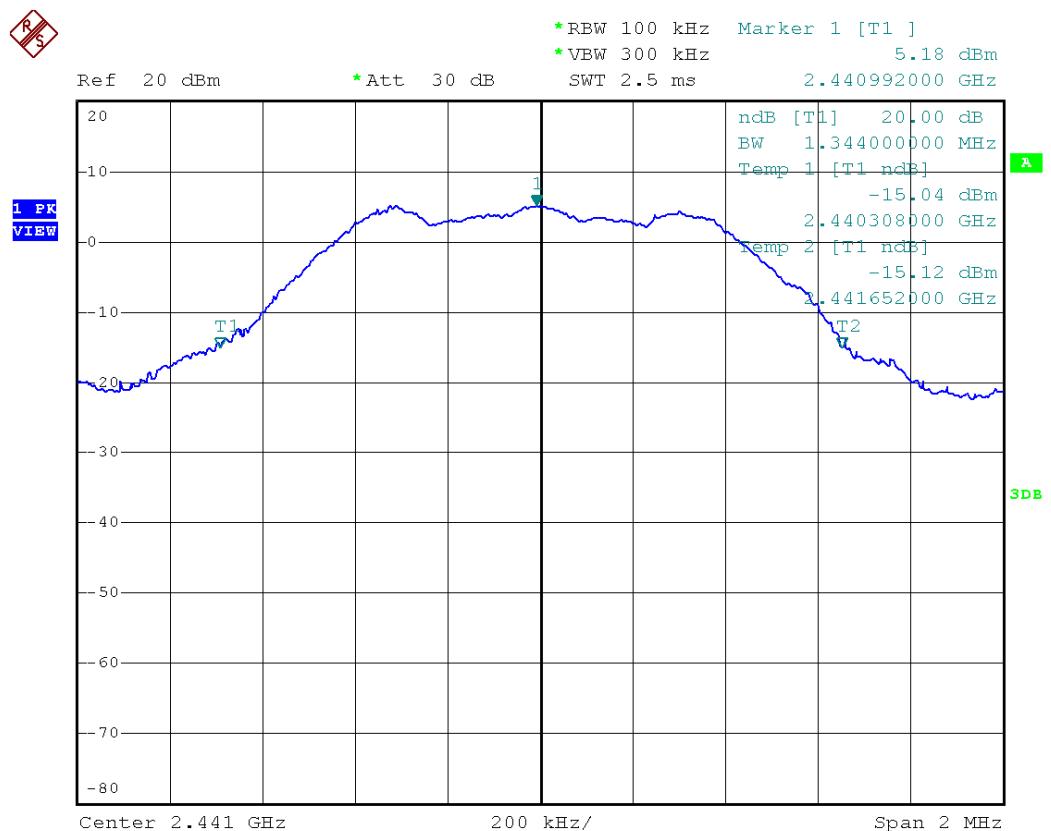


Figure 13- 20dB bandwidth Measurement (fc=2478MHz)

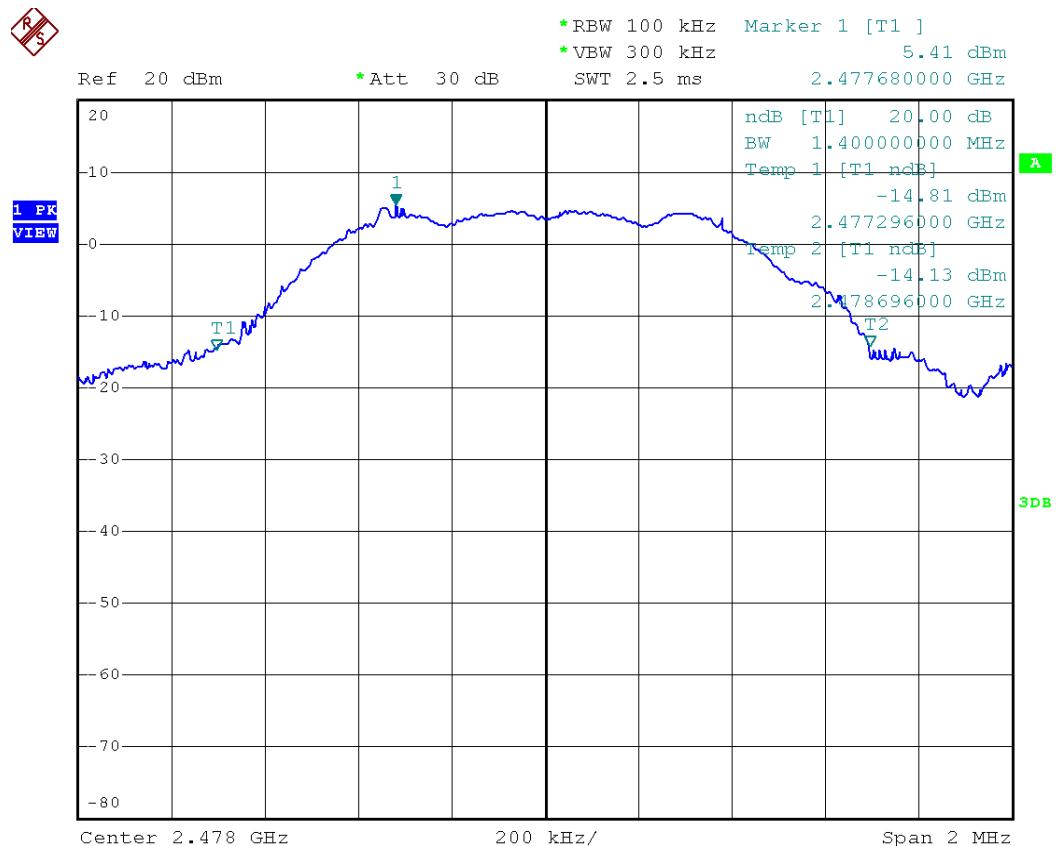

## **6.9 RF Exposure**

### **Standard Applicable**

According to 1.1307 (b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a portable device.

### **Measurement Result:**

This is a portable device and the max peak output power is 8.0dBm = (6.31mW), lower than low threshold 60/f GHz mW = (24.21mW), d <2.5 cm general population category.

The SAR/MPE measurement is not necessary.

## **6.10 Antenna Requirement**

### **Standard Applicable**

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. And according to §15.246(1), if transmitting antennas of directional gain greater than 6dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Construction:**

The directional gain of antenna used for transmitting is 1.1~1.9 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

The unit does meet the requirement.