

Gakkiku Technology Company

Flat B, 5/F., Selwyn Factory Building,

No. 404 Kwun Tong Road,

Kwun Tong, Kowloon,

**Hong Kong** 

Tel: (852) 8113 2281

Fax: (852) 2797 0192

Email: info@gakkiku.com

# **Test Report**

Applicant	Bear River International LLC	
	1011 West 400 North, Suite 110,	
Address	Logan, Utah 84321,	
	United States	
FCC ID Number	FCC ID: ZEZB1441R	
Brand Name(s)	None	
Model Number(s)/Item Number(s)	B1441	
Product Description	433 MHz Wireless Device - RX	
Operating Frequency	433.929 MHz	
Rules/Standards	Part 15.109 of the FCC Rules	
Received Date	10th April, 2013	
Tested Date	11th April, 2013	
Approved by	Dick Chan (Director of Gakkiku)	
Tested by	Lahm Peng (Engineer of SEM. Test)	
Signed by	Jandy So (Manager of SEM.Test)	
Report Number	GKK201304100D	
Test Results	□ PASSED □ FAILED	

#### **GENERAL**

The report is written by Gakkiku Technology Company. The tested device complies with the general approval requirements of the FCC Rules and the Industry Canada as identified in this test report.

### **TEST LOCATION**

The tested device was tested at the test site of the SEM.Test Compliance Service Co., Ltd., 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, 518101, Guangdong, China. The FCC Recognized 2.948 Listed Test Firm Registration Number is 994117. The Industry Canada IC OATS Filing Number/Assigned Code is 7673A.

# **TABLE OF CONTENTS**

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT	")4
1.2 TEST STANDARDS	
1.3 Test Methodology	
1.4 EUT Exercise Software	
1.5 ACCESSORIES EQUIPMENT LIST AND DETAILS	5
1.6 EUT CABLE LIST AND DETAILS	5
2. SUMMARY OF TEST RESULTS	6
L. SUMMARI OF IESI RESULIS	······································
3. PART 15.109(A) - RADIATED EMISSION	
3. PART 15.109(A) - RADIATED EMISSION	
3. PART 15.109(A) - RADIATED EMISSION	
3. PART 15.109(A) - RADIATED EMISSION	
3. PART 15.109(A) - RADIATED EMISSION	
3. PART 15.109(A) - RADIATED EMISSION	
3. PART 15.109(A) - RADIATED EMISSION	

## 1. GENERAL INFORMATION

#### 1.1 Product Description for Equipment Under Test (EUT)

#### **Client Information**

Applicant: Bear River International LLC
Address of applicant: 1011 West 400 North, Suite 110,
Logan, Utah 84321, United States

Manufacturer: Bear River International LLC
Address of manufacturer: 1011 West 400 North, Suite 110,
Logan, Utah 84321, United States

#### **General Description of EUT**

Item	Description			
Product Description:	433 MHz Wireless Device - RX			
Brand Name(s):	None			
Model Number(s)/Item Number(s):	B1441			
Power Source:	2 X DC 3V CR2032-Size Batteries			
Rated Current:	/			
For more information refer to the circuit diagram form and the user's manual.				

The test data is gathered from a production sample, provided by the manufacturer.

#### 1.2 Test Standards

The following report is prepared on behalf of the Bear River International LLC in accordance with Part 2 Subpart J and Part 15 Subparts B of the FCC Rules.

The objective is to determine compliance with Part 15.109 of the FCC Rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

### 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI Standard C63.4-2009, American National Standard Institute for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible susceptibility against the tested phenomena. The test modes were adapted accordingly in reference to the Operating Instructions.

#### **1.4 EUT Exercise Software**

The EUT exercise program used during the testing was designed to exercise the system components. The test software is started while the whole system is on.

# 1.5 Accessories Equipment List and Details

Description Manufacturer		Model	Serial Number		
/	/	/	/		

### 1.6 EUT Cable List and Details

Cable Description	Cable Description Length (M)		With Core/ Without Core	
/	/ /		/	

# 2. SUMMARY OF TEST RESULTS

Description of Test	Result
Part 15.107(a) Conducted Emission	N/A
Part 15.109(a) Radiated Emission	Compliant

# 3. Part 15.109(a) - RADIATED EMISSION

### 3.1 Measurement Uncertainty

Base on NIS 81, the Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is  $\pm$  5.10 dB.

3.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2013-03-28	2014-03-27
EMI Test Receiver	R&S	ESVB	825471/005	2013-03-28	2014-03-27
Positioning Controller	C&C	CC-C-1F	N/A	2013-03-28	2014-03-27
RF Switch	EM	EMSW18	SW060023	2013-03-28	2014-03-27
Pre-amplifier	Agilent	8447F	3113A06717	2013-03-28	2014-03-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2013-03-28	2014-03-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2013-02-25	2014-02-24
Horn Antenna	ETS	3117	00086197	2013-02-25	2014-02-24
Signal Generator	HP	8648A	3642U01277	2013-03-28	2014-03-27

#### 3.3 Test Procedure

The setup of EUT is according with ANSI Standard C63.4-2009 measurement procedure. The specification used was with the limits of Part 15.109 & 15.205 of the FCC Rules.

According to ANSI Standard C63.4-2009 § 12.1.1.1 (SUPERREGENERATIVE RECEIVER): A Signal Generator was set to the unit under test operating frequency. An unmodulated continuous wave (CW) signal was radiated at the superregenerative receiver operating frequency to cohere the characteristic broadband emissions from the receiver.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

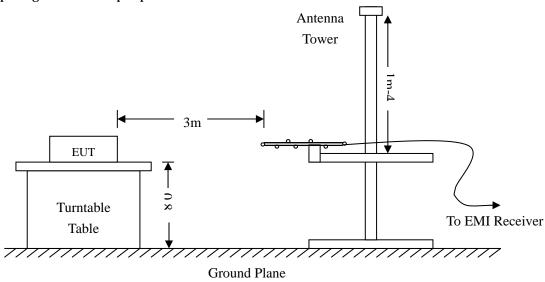

#### 3.4 Test Receiver Setup

During the radiated emission test, the test receiver was set with the following configurations:

Start Frequency	30 MHz
Stop Frequency	1000 MHz
Sweep Speed	Auto
IF Bandwidth	100 kHz
Quasi-Peak Adapter Bandwidth	120 kHz
Quasi-Peak Adapter Mode	Normal

### 3.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

Corr. Ampl. = Indicated Reading – Corr. Factor

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-6dB_{\mu}V$  means the emission is  $6dB_{\mu}V$  below the maximum limit for Part 15. The equation for margin calculation is as follows:

Margin = Corr. Ampl. – Limit of Part 15

#### 3.6 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55%
ATM Pressure:	1011 mbar

### 3.7 Summary of Test Results/Plots

According to the data, the <u>EUT is complied with the standards under Part 15.109 of the FCC Rules</u>, and had the worst margin of:

-10.06 dBμV at 893.8567 MHz in the Vertical polarization, 30 MHz to 5 GHz, 3 Meters

### Plot of Radiated Emissions Test Data (From 30 MHz to 1 GHz)

Radiated Disturbance

Product Description: 433 MHz Wireless Device - RX


Model Number(s)/Item Number(s): B1441

Operating Condition: Receiving

Test Specification: Horizontal & Vertical

Power Source: 2 X DC 3V CR2032-Size Batteries


#### Horizontal

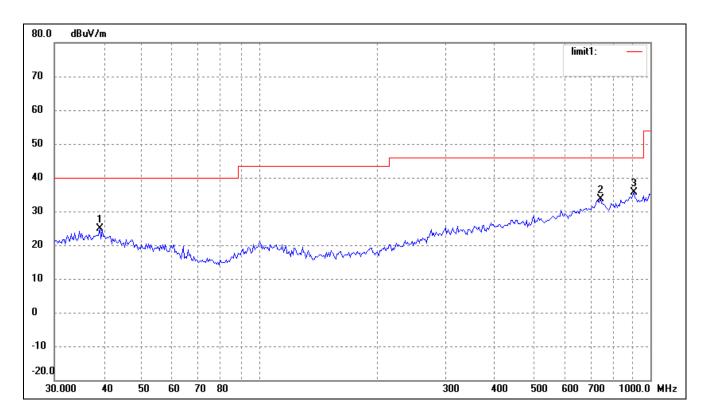

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	39.1616	15.38	9.54	24.92	40.00	-15.08	148	100	Peak
2	744.8661	15.56	17.95	33.51	46.00	-12.49	259	100	Peak
3	906.4824	16.57	19.15	35.72	46.00	-10.28	61	100	Peak

Note: Emissions attenuated more than 20 dB below the permissible value are not reported.

### Vertical

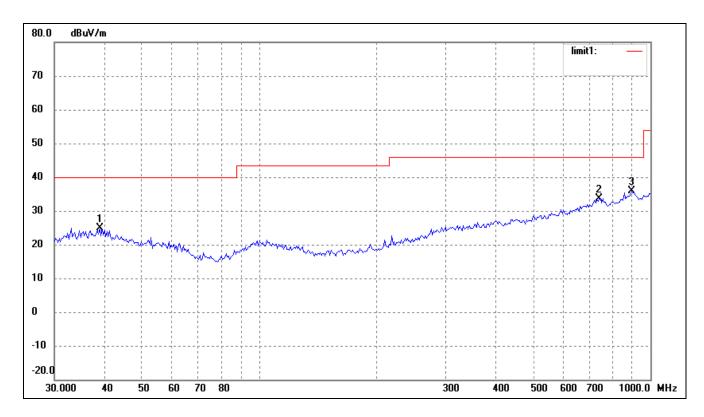


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	39.1616	15.38	9.54	24.92	40.00	-15.08	158	100	Peak
2	739.6605	15.67	18.07	33.74	46.00	-12.26	62	100	Peak
3	893.8567	16.67	19.27	35.94	46.00	-10.06	14	100	Peak

Note: Emissions attenuated more than 20 dB below the permissible value are not reported.

### Plot of Radiated Emissions Test Data (From 1 GHz to 5 GHz)


### Horizontal

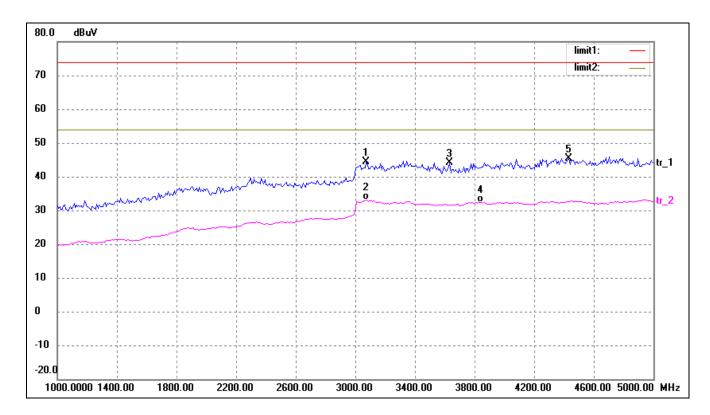

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)	(°)	(cm)	
1	3072.000	50.60	-6.20	44.40	74.00	-29.60	236	100	Peak
2	3072.000	39.33	-6.20	33.13	54.00	-20.87	54	100	Average
3	3632.000	49.98	-5.76	44.22	74.00	-29.78	24	100	Peak
4	3840.000	38.03	-5.53	32.50	54.00	-21.50	125	100	Average
5	4432.000	50.32	-4.97	45.35	74.00	-28.65	45	100	Peak

Note: Emissions attenuated more than 20 dB below the permissible value are not reported.

### Vertical

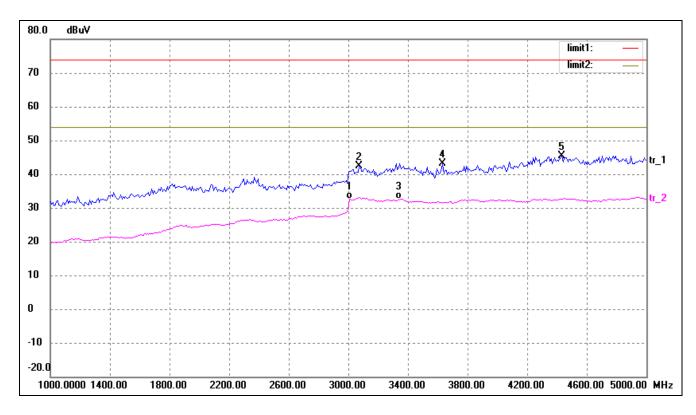

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)	(°)	(cm)	
1	3008.000	38.88	-6.24	32.64	54.00	-21.36	360	100	Average
2	3072.000	48.60	-6.20	42.40	74.00	-31.60	25	100	Peak
3	3336.000	38.63	-6.01	32.62	54.00	-21.38	321	100	Average
4	3632.000	48.98	-5.76	43.22	74.00	-30.78	26	100	Peak
5	4432.000	50.32	-4.97	45.35	74.00	-28.65	79	100	Peak

Note: Emissions attenuated more than 20 dB below the permissible value are not reported.

#### \*\*\*\*\* END OF REPORT \*\*\*\*\*