FCC 47 CFR PART 15 SUBPART C

Report No.: SZ120504B02-RP

for

Laser Pointer
Model: PC-044475
Brand: PERFECT CHOICE
<u>Test Report Number:</u>
SZ120504B02-RP

Issued for:

MASTER CHOICE, S.A.de C.V.

Magallanes #1155Col Santa Anita. ,45603,Tlaquepaque,Jalisco,Mexico

Issued by:

COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.

No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China

> TEL: 86-755-28055000 FAX: 86-755-28055221 Issued Date: May 11, 2012



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test result of this report relate only to the tested sample identified in this report.

FCC ID: ZF8-PC-044475 Page 1/26

Revision History

Report No.: SZ120504B02-RP

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	SZ120504B02-RP	Initial Issue	ALL	Ruby Zhang

FCC ID: ZF8-PC-044475 Page 2/26

TABLE OF CONTENTS

1		TEST CERTIFICATION	4
2		EUT DESCRIPTION	5
3		TEST METHODOLOGY	
		DESCRIPTION OF TEST MODES	
4		TEST METHODOLOGY	7
	4.1.	EUT EXERCISE	7
	4.2.	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
5		INSTRUMENT CALIBRATION	8
6		SETUP OF EQUIPMENT UNDER TEST	8
		DESCRIPTION OF SUPPORT UNITS	
		CONFIGURATION OF SYSTEM UNDER TEST	
7		FACILITIES AND ACCREDITATIONS	8
	7.1.	FACILITIES	8
	7.2.	ACCREDITATIONS	9
		MEASUREMENT UNCERTAINTY	
8		FCC PART 15.249 REQUIREMENTS	9
		BAND EDGES MEASUREMENT	
		POWER LINE CONDUCTED EMISSIONS MEASUREMENT	
	8.3	SPURIOUS EMISSIONS MEASUREMENT	19

Report No.: SZ120504B02-RP

1 TEST CERTIFICATION

Product	Laser Pointer
Model	PC-044475
Brand	PERFECT CHOICE
Tested	May 4~11, 2012
Applicant	MASTER CHOICE, S.A.de C.V. Magallanes #1155Col Santa Anita. ,45603,Tlaquepaque,Jalisco,Mexico
Manufacturer	Sysgration (Shenzhen) Ltd. Egongling Village, Pinghu Town, Longgang Dist. Shenzhen City. China

APPLICABLE STANDARDS			
STANDARD	TEST RESULT		
FCC 47 CFR Part 15 Subpart C	No non-compliance noted		
DEVIATION FROM APPLICABLE STANDARD			
None			

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.249.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Tom Gan

Supervisor of EMC Dept.

Compliance Certification Service Inc.

Reviewed by:

Aven Zhou

Supervisor of Report Dept.

Compliance Certification Service Inc.

Report No.: SZ120504B02-RP

2 EUT DESCRIPTION

Product	Laser Pointer
Model Number	PC-044475
Brand	PERFECT CHOICE
Model Discrepancy	N/A
Serial Number	SZ120504B02-RP
Power Supply	DC1.5V supplied by the battery
Frequency Range	2412-2472 MHz
Transmit Power	Peak: 80.06 dBuV/m (Max.) Average: 79.13 dBuV/m (Max.)
Modulation Technique	GFSK
Number of Channels	5 Channels
Antenna Specification	PCB Antenna with 2.02 dBi gain(MAX)
Temperature Range	0°C ~ +40°C

Report No.: SZ120504B02-RP

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

FCC ID: ZF8-PC-044475 Page 5/26

^{2.} This submittal(s) (test report) is intended for <u>FCC ID: ZF8-PC-044475</u> filing to comply with Section 15.207, 15.209 and 15.249 of the FCC Part 15, Subpart C Rules.

3 TEST METHODOLOGY

3.1. DESCRIPTION OF TEST MODES

The EUT had been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

The following test mode(s) were scanned during the preliminary test below 1G:

Report No.: SZ120504B02-RP

Test Item	Test mode	Worse mode
Conducted Emission	Not applicable since the EUT supplied by the batteries.	
Radiated Emission	Mode 1: TX	\boxtimes

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in TX mode only.

Channel Low (2412MHz), Channel Mid (2452MHz) and Channel High (2472MHz) were chosen for the final testing.

The field strength of spurious radiation emission was measured in the following position: EUT stand-up position (Y mode) and lie-down position (X, Z mode) The following data show only the worst case setup.

The worst case (X axis) was reported.

FCC ID: ZF8-PC-044475 Page 6/26

4 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4:2009 and FCC CFR 15.209 and 15.249.

4.1. EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

Report No.: SZ120504B02-RP

According to its specifications, the EUT must comply with the requirements of the Section 15.209, 15.249 under the FCC Rules Part 15 Subpart C.

4.2. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

r i de 	e frequency barras list		
MHz	MHz	MHz	GHz
0.090 - 0.110 10.495 - 0.505 2.1735 - 2.1905 4.125 - 4.128 4.17725 - 4.17775	16.42 - 16.423 16.69475 - 16.69525 16.80425 - 16.80475 25.5 - 25.67 37.5 - 38.25	399.9 - 410 608 - 614 960 - 1240 1300 - 1427 1435 - 1626.5	4.5 - 5.15 5.35 - 5.46 7.25 - 7.75 8.025 - 8.5 9.0 - 9.2
4.20725 - 4.20775 6.215 - 6.218 6.26775 - 6.26825 6.31175 - 6.31225 8.291 - 8.294 8.362 - 8.366	73 - 74.6 74.8 - 75.2 108 - 121.94 123 - 138 149.9 - 150.05 156.52475 -	1645.5 - 1646.5 1660 - 1710 1718.8 - 1722.2 2200 - 2300 2310 - 2390 2483.5 - 2500	9.0 - 9.2 9.3 - 9.5 10.6 - 12.7 13.25 - 13.4 14.47 - 14.5 15.35 - 16.2 17.7 - 21.4
8.37625 - 8.38675 8.41425 - 8.41475 12.29 - 12.293 12.51975 - 12.52025 12.57675 - 12.57725 13.36 - 13.41	156.52525 156.7 - 156.9 162.0125 - 167.17 167.72 - 173.2 240 - 285 322 - 335.4	2655 - 2900 3260 - 3267 3332 - 3339 3345.8 - 3358 3600 - 4400	22.01 - 23.12 23.6 - 24.0 31.2 - 31.8 36.43 - 36.5 (²)

Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC ID: ZF8-PC-044475 Page 7/26

² Above 38.6

5 INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Report No.: SZ120504B02-RP

6 SETUP OF EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	N/A						

Note: Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

6.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

7 FACILITIES AND ACCREDITATIONS

7.1. FACILITIES

All measurement facilities used to collect the measurement data are located at

FCC ID: ZF8-PC-044475 Page 8/26

No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China

Report No.: SZ120504B02-RP

The sites are constructed in conformance with the requirements of ANSI C63.4:2009, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

7.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA A2LA China CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA FCC

Japan VCCI(C-3478, R-3135, T-652)

Canada INDUSTRY CANADA

Taiwan BSMI Norway Nemko

Copies of granted accreditation certificates are available for downloading from our web site, http://www.ccsrf.com

7.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty	
Conducted emissions	9kHz~30MHz	+/- 3.18dB	
Radiated emissions	30MHz ~ 200MHz	+/- 3.79dB	
	200MHz ~1000MHz	+/- 3.62dB	
	Above 1000MHz	+/- 5.04dB	
Band Edges	+/-0.182 dB		

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.

8 FCC PART 15.249 REQUIREMENTS

8.1. BAND EDGES MEASUREMENT

LIMIT

FCC ID: ZF8-PC-044475 Page 9/26

1. In the above emission table, the tighter limit applies at the band edges.

Fraguency (Hz)	Field Strength	Field Strength	
Frequency (Hz)	(μV/m at 3-meter)	(dBµV/m at 3-meter)	
30-88	100	40	
88-216	150	43.5	
216-960	200	46	
Above 960	500	54	

Report No.: SZ120504B02-RP

- 2. As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.
- 3. As shown in Section 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.


MEASUREMENT EQUIPMENT USED

	Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2012	03/19/2013	
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2012	03/18/2013	
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R	
Controller	СТ	N/A	N/A	N.C.R	N.C.R	
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2012	03/18/2013	
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/17/2012	03/17/2013	
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/17/2012	03/17/2013	
Loop Antenna	A、R、A	PLA-1030/B	1029	03/23/2012	03/23/2013	
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/19/2012	03/19/2013	
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R	
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2				

Remark: Each piece of equipment is scheduled for calibration once a year.

FCC ID: ZF8-PC-044475 Page 10/26

Test Configuration

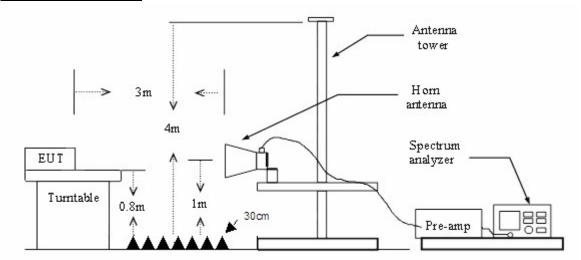

Report No.: SZ120504B02-RP

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
- Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.


FCC ID: ZF8-PC-044475 Page 11/26

Report No.: SZ120504B02-RP


Test Data

Band Edges (CH-Low)

Detector mode: Peak Polarity: Vertical

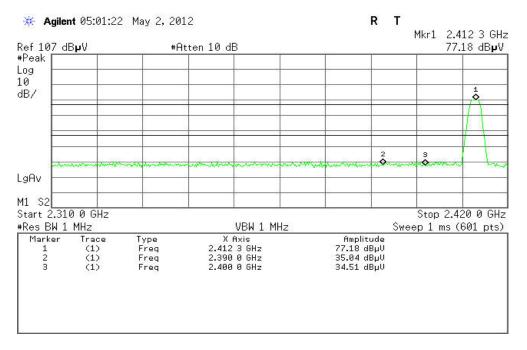


Detector mode: Average Polarity: Vertical

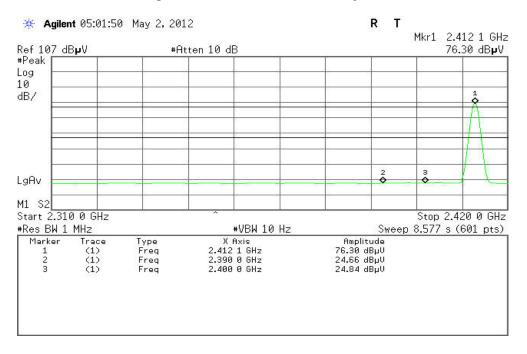


FCC ID: ZF8-PC-044475 Page 12/26

Report No.: SZ120504B02-RP

Detector mode: Peak Polarity: Horizontal

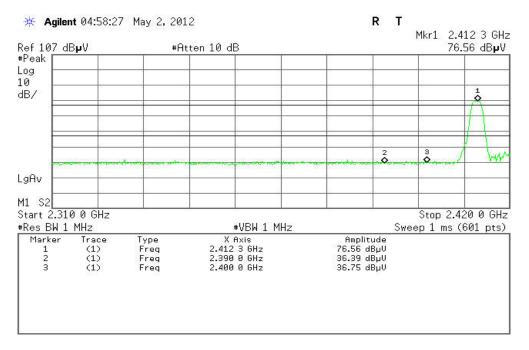

Detector mode: Average Polarity: Horizontal

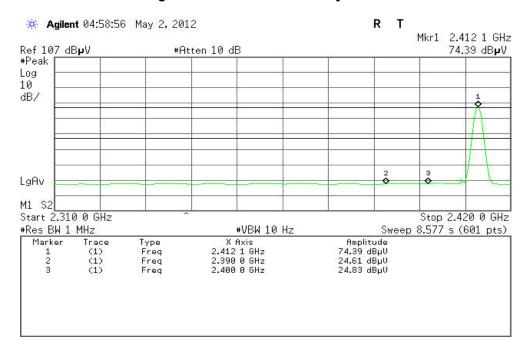


FCC ID: ZF8-PC-044475 Page 13/26


Report No.: SZ120504B02-RP

Band Edges (CH-High)

Detector mode: Peak Polarity: Vertical

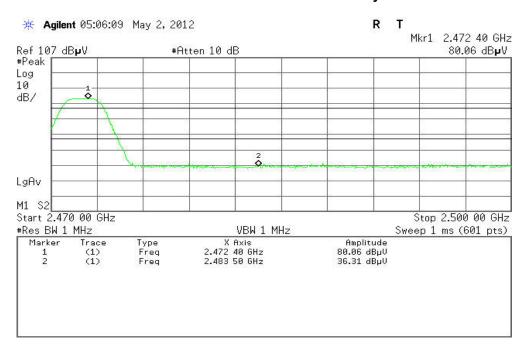


Detector mode: Average Polarity: Vertical

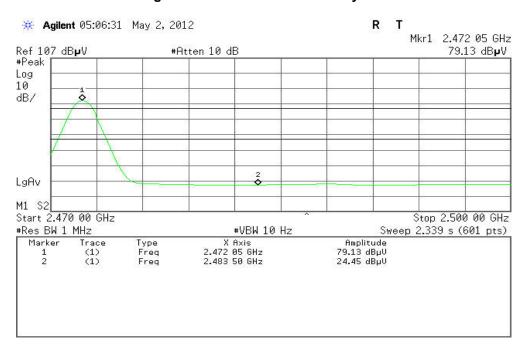


FCC ID: ZF8-PC-044475 Page 14/26

Detector mode: Peak Polarity: Horizontal

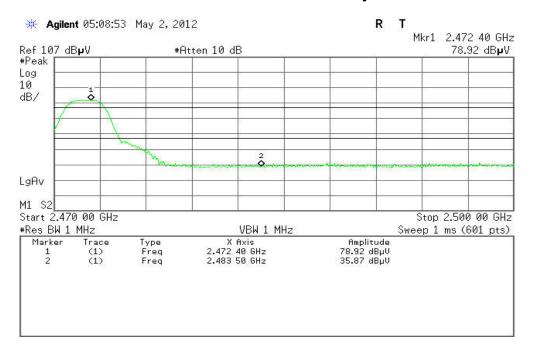

Detector mode: Average Polarity: Horizontal

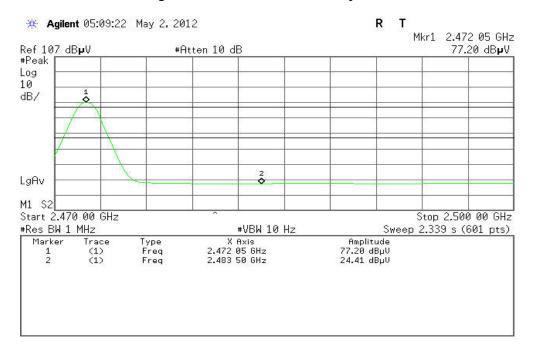

FCC ID: ZF8-PC-044475 Page 15/26

Compliance Certification Services Inc. Report No.:SZ120504B02-RP

8.2. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

8.2.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range	Limits (dΒμV)			
(MHz)	Quasi-peak	Average		
0.15 to 0.50	66 to 56*	56 to 46*		
0.50 to 5	56	46		
5 to 30	60	50		

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

8.2.2. TEST INSTRUMENTS

	Conducted Emission Test Site									
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration					
ESCI EMI TEST RECEIVE.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/17/2012	03/17/2013					
LISN	SCHAFFNER	NNB42	2001/001	03/19/2012	03/19/2013					
LISN	EMCO	3825/2	8901-1459	03/19/2012	03/19/2013					
Temp. / Humidity Meter	VICTOR	HTC-1	2	03/20/2012	03/20/2013					
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE								

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. N.C.R = No Calibration Request.

FCC ID: ZF8-PC-044475 Page 16/26



Report No.:SZ120504B02-RP


8.2.3. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.

FCC ID: ZF8-PC-044475 Page 17/26

Report No.:SZ120504B02-RP

8.2.4. TEST SETUP

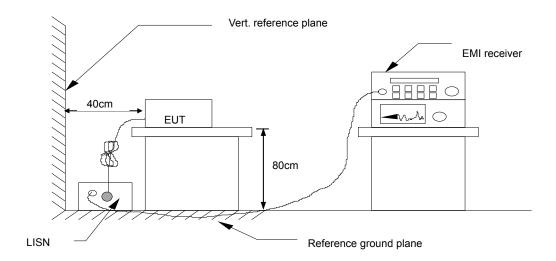

 For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

8.2.5. DATA SAMPLE

Frequency (MHz)		Average Reading (dBuV)		QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Margin	Remark (Pass/Fail)
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass

Factor = Insertion loss of LISN + Cable Loss

Result = Quasi-peak Reading/ Average Reading + Factor

Limit = Limit stated in standard Margin = Result (dBuV) – Limit (dBuV)

8.2.6. TEST RESULTS

Not applicable, since the EUT supplied by the battery.

FCC ID: ZF8-PC-044475 Page 18/26

8.3. SPURIOUS EMISSIONS MEASUREMENT

8.3.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

1. In the section 15.249(a):

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental	Field Strength of Fundamental	Field Strength of Harmonics		
Frequency	Field Strength (mV/m)	(µV/m)		
902-928 MHz	50	500		
2400 - 2483.5 MHz	50	500		
5725 - 5875 MHz	50	500		
24.0 - 24.25 GHz	250	2500		

2. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)		
0.009-0.490	2400/F(kHz)	300		
0.490-1.705	24000/F(kHz)	30		
1.705-30.0	30	30		
30-88	100*	3		
88-216	150*	3		
216-960	200*	3		
Above 960	500	3		

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

3. In the above emission table, the tighter limit applies at the band edges.

Fraguanay (Hz)	Field Strength	Field Strength
Frequency (Hz)	(μV/m at 3-meter)	(dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

FCC ID: ZF8-PC-044475 Page 19/26



Report No.:SZ120504B02-RP

8.3.2. TEST INSTRUMENTS

	Radiated	Emission Tes	t Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration			
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2012	03/19/2013			
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2012	03/18/2013			
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R			
Controller	СТ	N/A	N/A	N.C.R	N.C.R			
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2012	03/18/2013			
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/17/2012	03/17/2013			
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/17/2012	03/17/2013			
Loop Antenna	A、R、A	PLA-1030/B	1029	03/23/2012	03/23/2013			
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/19/2012	03/19/2013			
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R			
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2						

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

- 2. The FCC Site Registration number is 101879.
- 3. N.C.R = No Calibration Required.

8.3.3 TEST PROCEDURE (please refer to measurement standard)

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


7. Repeat above procedures until the measurements for all frequencies are complete.

FCC ID: ZF8-PC-044475 Page 20/26




8.3.2.1. TEST SETUP

Below 30MHz

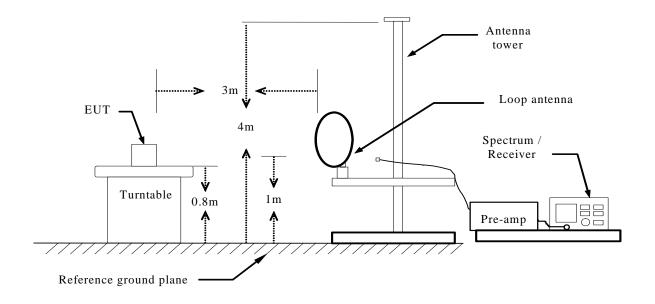


Below 1 GHz

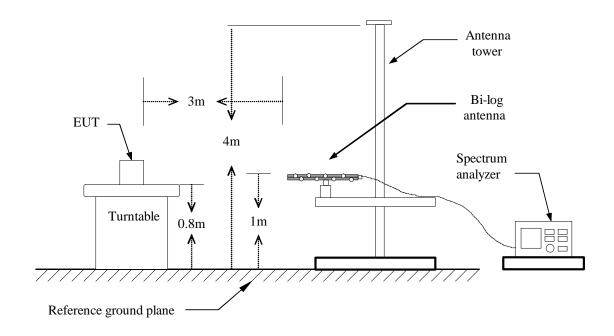

FCC ID: ZF8-PC-044475 Page 21/26

Above 1 GHz

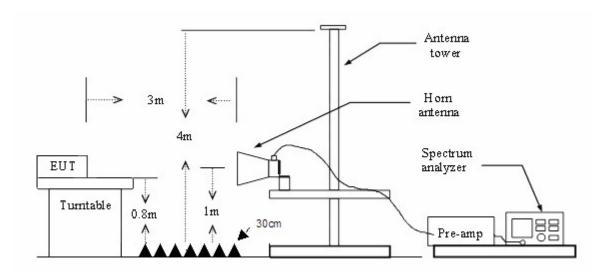

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

8.3.2.2. DATA SAMPLE

Below 1GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXX.XXXX	37.47	-16.41	21.06	40.00	-18.94	V	QP

Above 1GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXXX.XXXX	55.54	4.56	60.10	74.00	-13.90	V	Peak
XXXX.XXXX	29.66	4.56	34.22	54.00	-19.78	V	AVG

Frequency (MHz) = Emission frequency in MHz

Reading (dBuV) = Uncorrected Analyzer / Receiver reading
Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)

Limit (dBuV/m) = Limit stated in standard

Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)

Q.P. = Quasi-peak Reading Peak = Peak Reading AVG = Average Reading

FCC ID: ZF8-PC-044475 Page 22/26



Report No.:SZ120504B02-RP

8.3.2.3. TEST RESULTS

Below 1 GHz

Operation Mode: TX Test Date: May 10, 2012

Temperature: 24°C **Tested by:** Sunday Hu

Humidity: 52% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
393.7500	32.39	-15.69	16.70	46.00	-29.30	V	QP
552.1833	33.19	-12.85	20.34	46.00	-25.66	V	QP
613.6167	32.63	-12.23	20.40	46.00	-25.60	V	QP
781.7500	33.13	-10.21	22.92	46.00	-23.08	V	QP
872.2833	33.19	-9.43	23.76	46.00	-22.24	V	QP
991.9167	32.59	-7.96	24.63	54.00	-29.37	V	QP
		•					
338.7833	32.77	-17.59	15.18	46.00	-30.82	Н	QP
481.0500	32.35	-13.91	18.44	46.00	-27.56	Η	QP
578.0500	33.33	-12.46	20.87	46.00	-25.13	Н	QP
660.5000	33.06	-11.98	21.08	46.00	-24.92	Н	QP
854.5000	33.07	-9.39	23.68	46.00	-22.32	Н	QP
938.5667	33.57	-8.98	24.59	46.00	-21.41	Н	QP

Remark: No emission found between lowest internal used/generated frequency to 30MHz.

Notes:

- 1. Measuring frequencies from 9kHz to the 1GHz.
- 2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Quasi-peak detector mode.
- 3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

FCC ID: ZF8-PC-044475 Page 23/26



Report No.:SZ120504B02-RP

Above 1 GHz

Operation Mode: TX / CH Low Test Date: May 10, 2012

Temperature: 24°C **Tested by:** Sunday Hu

Humidity: 52% RH **Polarity:** Ver. / Hor.

Fundamental

- unaumonte	••						
Frequency (MHz)	Reading	Correction Factor	Result	Limit	Margin (dB)	Antenna Pole	Remark
	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)		(V/H)	
2412.0000	86.90	-9.72	77.18	114.00	-36.82	V	Peak
2412.0000	86.02	-9.72	76.30	94.00	-17.70	V	AVG
2412.0000	86.28	-9.72	76.56	114.00	-37.44	Н	Peak
2412.0000	84.11	-9.72	74.39	94.00	-19.61	Н	AVG

Frequency	Reading	Correction Factor	Result	Limit	Margin	Antenna Pole	Remark
(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(V/H)	
1765.0000	47.60	-10.19	37.41	74.00	-36.59	V	Peak
2955.0000	46.94	-6.27	40.67	74.00	-33.33	V	Peak
3691.6667	44.94	-3.84	41.10	74.00	-32.90	V	Peak
4825.0000	54.52	-0.57	53.95	74.00	-20.05	V	Peak
4825.0000	51.83	-0.57	51.26	54.00	-2.74	V	AVG
6185.0000	44.72	3.75	48.47	74.00	-25.53	V	Peak
6780.0000	44.63	4.29	48.92	74.00	-25.08	V	Peak
1510.0000	47.75	-10.31	37.44	74.00	-36.56	Н	Peak
3351.6667	47.02	-5.17	41.85	74.00	-32.15	Н	Peak
4825.0000	57.30	-0.57	56.73	74.00	-17.27	Н	Peak
4825.0000	52.31	-0.57	51.74	54.00	-2.26	Н	AVG
5590.0000	43.89	1.48	45.37	74.00	-28.63	Н	Peak
6241.6667	44.04	3.79	47.83	74.00	-26.17	Н	Peak
8225.0000	44.90	7.22	52.12	74.00	-21.88	Н	Peak

REMARKS:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

FCC ID: ZF8-PC-044475 Page 24/26



Report No.:SZ120504B02-RP

Operation Mode: TX / CH Mid Test Date: May 10, 2012

Temperature: 24°C **Tested by:** Sunday Hu **Humidity:** 52% RH **Polarity:** Ver. / Hor.

Fundamental

Frequency (MHz)	Reading	Correction Factor	Result	Limit	Margin (dB)	Antenna Pole	Remark
	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)		(V/H)	
2452.0000	89.61	-9.77	79.84	114.00	-34.16	V	Peak
2452.0000	87.42	-9.77	77.65	94.00	-16.35	V	AVG
2452.0000	87.11	-9.77	77.34	114.00	-36.66	Н	Peak
2452.0000	86.63	-9.77	76.86	94.00	-17.14	Н	AVG

Frequency	Reading	Correction Factor	Result	Limit	Margin	Antenna Pole	Remark
(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(V/H)	
1283.3333	48.71	-10.98	37.73	74.00	-36.27	V	Peak
3720.0000	44.78	-3.85	40.93	74.00	-33.07	V	Peak
4910.0000	55.16	-0.30	54.86	74.00	-19.14	V	Peak
4910.0000	49.10	-0.30	48.80	54.00	-5.20	V	AVG
6128.3333	44.64	3.50	48.14	74.00	-25.86	V	Peak
7176.6667	44.10	4.90	49.00	74.00	-25.00	V	Peak
8395.0000	44.26	7.05	51.31	74.00	-22.69	V	Peak
1821.6667	47.57	-10.07	37.50	74.00	-36.50	Н	Peak
3975.0000	45.19	-3.61	41.58	74.00	-32.42	Н	Peak
4910.0000	51.37	-0.30	51.07	74.00	-22.93	Н	Peak
6156.6667	43.93	3.63	47.56	74.00	-26.44	Н	Peak
6836.6667	44.06	4.32	48.38	74.00	-25.62	Н	Peak
7970.0000	44.43	7.21	51.64	74.00	-22.36	Н	Peak

REMARKS:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

FCC ID: ZF8-PC-044475 Page 25/26



Report No.:SZ120504B02-RP

Operation Mode: TX / CH High Test Date: May 10, 2012

Temperature: 24°C Tested by: Sunday Hu

Humidity: 52% RH **Polarity:** Ver. / Hor.

Fundamental

Frequency (MHz)	Reading	Correction Factor	Result	Limit	Margin (dB)	Antenna Pole	Remark
	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)		(V/H)	
2472.0000	89.84	-9.78	80.06	114.00	-33.94	V	Peak
2472.0000	88.91	-9.78	79.13	94.00	-14.87	V	AVG
2472.0000	88.70	-9.78	78.92	114.00	-35.08	Н	Peak
2472.0000	86.98	-9.78	77.20	94.00	-16.80	Н	AVG

Frequency	Reading	Correction Factor	Result	Limit	Margin	Antenna Pole	Remark
(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(V/H)	
1481.6667	48.23	-10.30	37.93	74.00	-36.07	V	Peak
3465.0000	47.28	-4.66	42.62	74.00	-31.38	V	Peak
4938.3333	52.57	-0.21	52.36	74.00	-21.64	V	Peak
6241.6667	44.78	3.79	48.57	74.00	-25.43	V	Peak
6525.0000	45.21	4.00	49.21	74.00	-24.79	V	Peak
7743.3333	44.01	5.98	49.99	74.00	-24.01	V	Peak
1821.6667	47.24	-10.07	37.17	74.00	-36.83	Н	Peak
2955.0000	46.72	-6.27	40.45	74.00	-33.55	Н	Peak
3493.3333	45.70	-4.48	41.22	74.00	-32.78	Н	Peak
4938.3333	50.14	-0.21	49.93	74.00	-24.07	Н	Peak
6156.6667	43.17	3.63	46.80	74.00	-27.20	Н	Peak
6496.6667	44.87	3.93	48.80	74.00	-25.20	Н	Peak

REMARKS:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

FCC ID: ZF8-PC-044475 Page 26/26