

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan
District Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: sgs_internet_operations@sgs.com

Report No.: SZEM111200528501
Page : 1 of 71

FCC REPORT

Application No: SZEM1112005285RF
Applicant: MASTER CHOICE, S.A. de C.V.
Product Name: Bluetooth® Hi-Fi Speakers 2.0
Operation Frequency: 2402MHz to 2480MHz
FCC ID: ZF8-PC-112037
Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247: 2010
Date of Receipt: 2011-12-14
Date of Test: 2011-12-16 to 2011-12-21
Date of Issue: 2011-12-27

Test Result:	PASS *
---------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS	2
3 TEST SUMMARY	3
4 GENERAL INFORMATION	4
4.1 CLIENT INFORMATION.....	4
4.2 GENERAL DESCRIPTION OF E.U.T.....	4
4.3 E.U.T OPERATION MODE.....	6
4.4 DESCRIPTION OF SUPPORT UNITS.....	6
4.5 TEST FACILITY	7
4.6 TEST LOCATION	7
4.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	7
4.8 TEST INSTRUMENTS LIST.....	8
5 TEST RESULTS AND MEASUREMENT DATA.....	10
5.1 ANTENNA REQUIREMENT:	10
5.2 CONDUCTED EMISSIONS.....	11
5.3 CONDUCTED PEAK OUTPUT POWER.....	14
5.4 20dB OCCUPY BANDWIDTH.....	21
5.5 CARRIER FREQUENCIES SEPARATION.....	27
5.6 HOPPING CHANNEL NUMBER	34
5.7 DWELL TIME	37
5.8 BAND EDGE.....	43
5.9 RF ANTENNA CONDUCTED SPURIOUS EMISSIONS.....	50
5.10 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	56
5.11 RADIATED EMISSION.....	57
5.11.1 Radiated emission below 1GHz.....	59
5.11.2 Transmitter emission above 1GHz.....	61
5.11.3 Band edge (Radiated Emission)	64-71

3 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (b)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remark: Pass: The EUT complies with the essential requirements in the standard.

Fail: The EUT does not comply with the essential requirements in the standard.

4 General Information

4.1 Client Information

Applicant:	MASTER CHOICE, S.A. de C.V.
Address of Applicant:	Magallanes # 1155 Col Santa Anita Tlaquepaque, Jalisco Mexico 45603
Manufacturer:	MASTER CHOICE, S.A. de C.V.
Address of Manufacturer	Magallanes # 1155 Col Santa Anita Tlaquepaque, Jalisco Mexico 45603

4.2 General Description of E.U.T.

Product Name:	Bluetooth® Hi-Fi Speakers 2.0
Model No.:	PC-112037
Trade Mark:	Perfect Choice
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V2.0+EDR
Channel Spacing:	1MHz
Channel Numbers:	79
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Antenna Type:	Integral
Antenna Gain:	0.5dBi
AC Adapter:	MODEL:YJS11-1802000U INPUT:100-240V~50/60Hz 1000mA OUTPUT:18.0V 2000mA
DC Port:	<3m unshield
Audio Line:	<3m unshield
AUX in Line:	<3m unshield

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel for testing see below:

Channel	Frequency
Lowest channel	2402MHz
Middle channel	2441MHz
Highest channel	2480MHz

4.3 E.U.T Operation mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	1015mbar
Test mode:	
Transmitting:	The EUT transmitted the continuous modulation test signal at the specific channel

4.4 Description of Support Units

The EUT was tested with associated equipment as below:

Description	Manufacturer	Model No.
Mobile	Nokia	6300

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **VCCI**

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab
No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

No tests were sub-contracted.

4.7 Other Information Requested by the Customer

None.



4.8 Test Instruments list

RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2012-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2012-05-26
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2012-05-29
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2012-10-29
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2012-10-29
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2012-10-29
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2012-05-26
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2012-10-26
11	Band filter	Amindeon	82346	SEL0094	2012-05-26


Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2012-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2012-10-23
3	Two-Line V-Network	ETS-LINDGREN	3816/2	SEL0021	2012-05-26
4	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2012-05-26
5	Coaxial Cable	SGS	N/A	SEL0024	2012-05-29

RF conducted					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2012-10-23
2	Coaxial cable	SGS	N/A	SEL0028	2012-05-29

General used equipment					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2012-10-27
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2012-10-27
3	Barometer	ChangChun	DYM3	SEL0088	2012-05-18

5 Test results and Measurement Data

5.1 Antenna requirement:

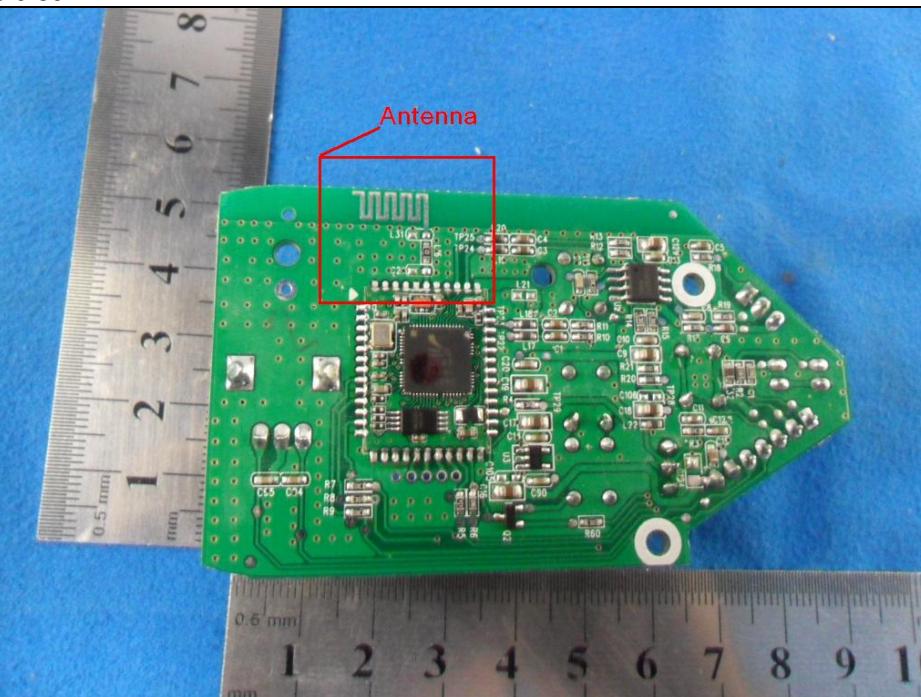Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement:	<i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i>
15.247(c) (1)(i) requirement:	<i>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</i>
E.U.T Antenna:	
	The antenna is integrated on the main PCB and no consideration of replacement. The best gain of the antenna is 0.5dBi.
	

5.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207																	
Test Method:	ANSI C63.10: 2009																	
Test Frequency Range:	150kHz to 30MHz																	
Class / Severity:	Class B																	
Limit:	<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th></th> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)			Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																	
	Quasi-peak	Average																
0.15-0.5	66 to 56*	56 to 46*																
0.5-5	56	46																
5-30	60	50																
	* Decreases with the logarithm of the frequency.																	
Test procedure:	<p>The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). They provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.</p>																	
Test setup:	<p>Reference Plane</p> <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>																	
Test Instruments:	Refer to section 4.8 for details.																	
Test mode:	Transmitting mode																	
Test results:	Pass																	


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

Data: 4

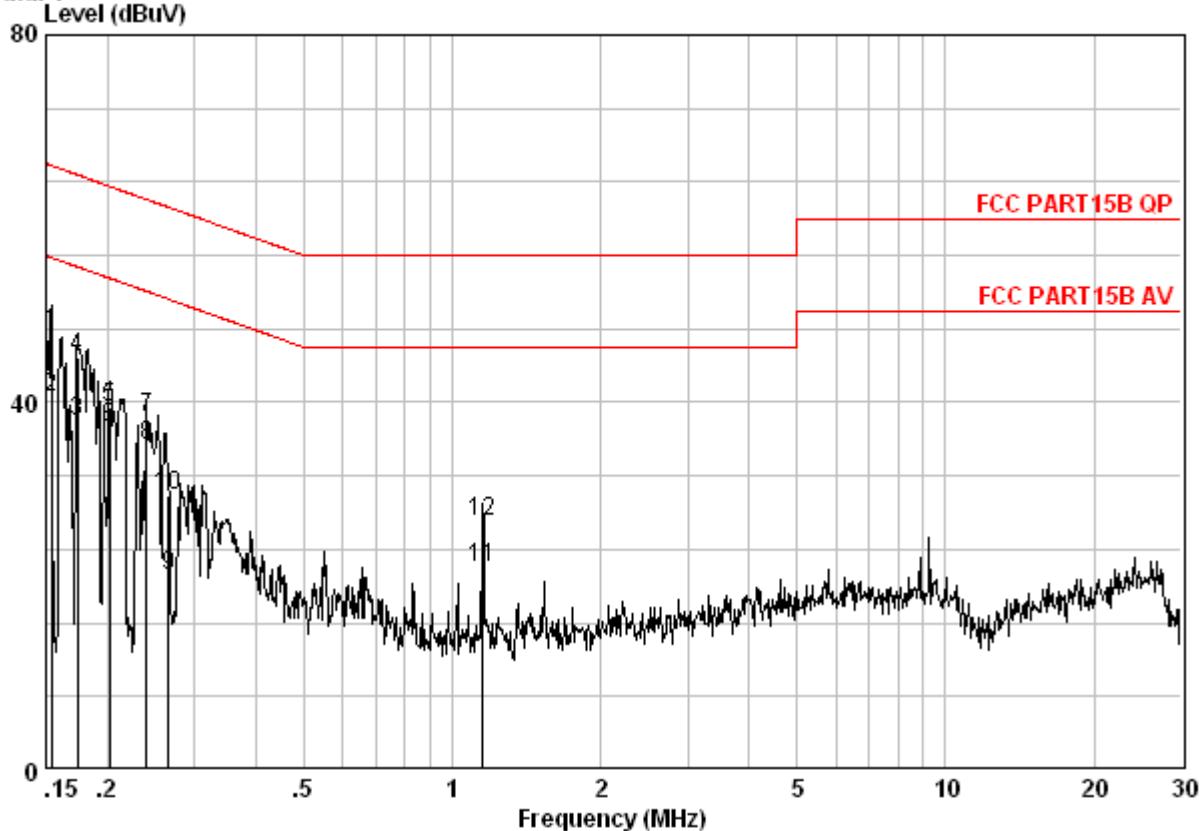


	Freq	Cable	LISN	Read		Limit	Over	
		Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15403	0.04	9.60	37.94	47.58	65.78	-18.20	QP
2	0.15403	0.04	9.60	30.94	40.58	55.78	-15.20	Average
3	0.17399	0.04	9.60	28.27	37.91	54.77	-16.86	Average
4	0.17399	0.04	9.60	35.27	44.91	64.77	-19.86	QP
5	0.20181	0.04	9.60	29.71	39.35	63.54	-24.19	QP
6	0.20181	0.04	9.60	27.71	37.35	53.54	-16.19	Average
7	0.24037	0.04	9.60	28.69	38.33	62.08	-23.75	QP
8	0.24037	0.04	9.60	25.69	35.33	52.08	-16.75	Average
9	0.26583	0.05	9.60	11.54	21.19	51.25	-30.06	Average
10	0.26583	0.05	9.60	20.23	29.87	61.25	-31.37	QP
11	1.153	0.09	9.70	12.25	22.03	46.00	-23.97	Average
12	1.153	0.09	9.70	17.25	27.03	56.00	-28.97	QP




"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Neutral line:

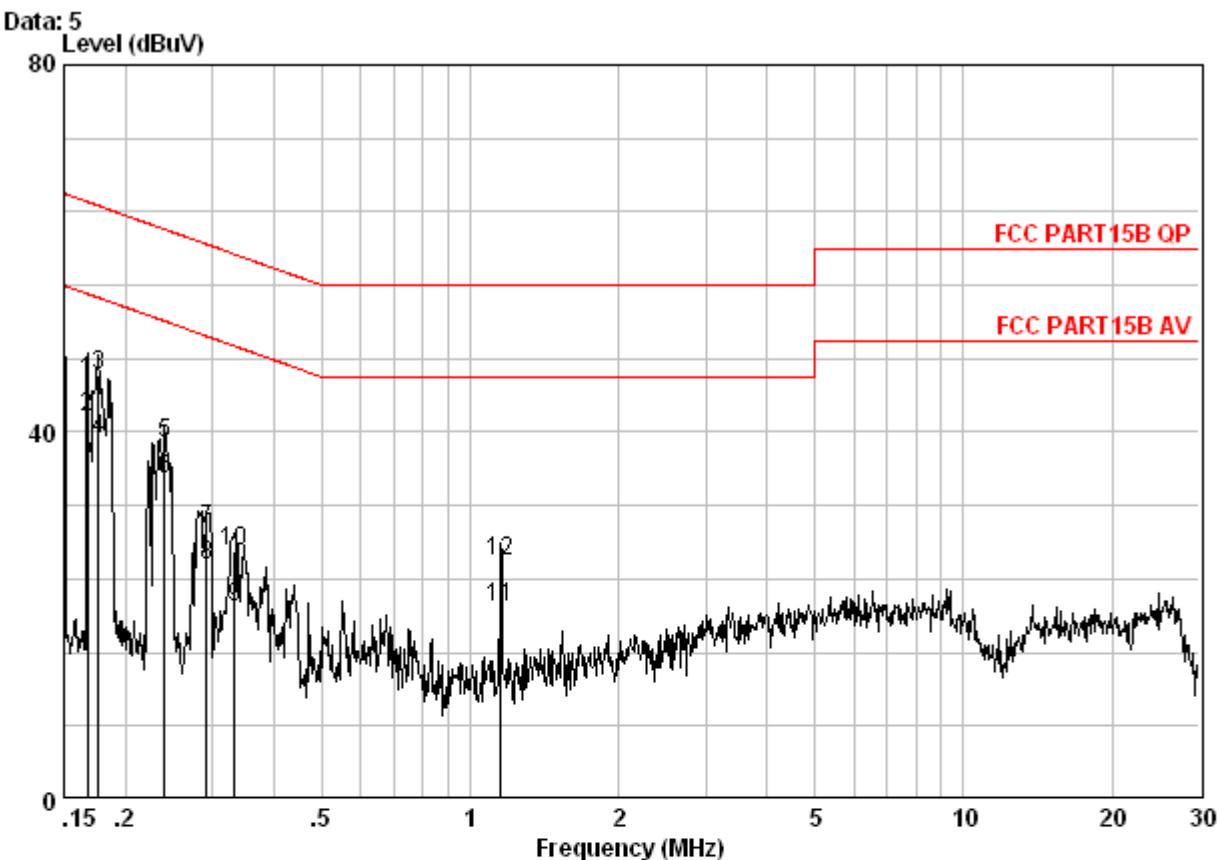

Freq	Cable	LISN	Read	Limit	Over	Remark
	Loss	Factor	Level			
	MHz	dB	dB	dBuV	dBuV	dB
1	0.16765	0.04	9.60	36.02	45.66	65.08 -19.42 QP
2	0.16765	0.04	9.60	32.02	41.66	55.08 -13.42 Average
3	0.17584	0.04	9.60	36.67	46.31	64.68 -18.37 QP
4	0.17584	0.04	9.60	29.67	39.31	54.68 -15.37 Average
5	0.24037	0.04	9.60	29.17	38.81	62.08 -23.27 QP
6	0.24037	0.04	9.60	25.17	34.81	52.08 -17.27 Average
7	0.29243	0.05	9.60	19.85	29.49	60.46 -30.96 QP
8	0.29243	0.05	9.60	15.85	25.49	50.46 -24.96 Average
9	0.33208	0.05	9.60	11.32	20.97	49.40 -28.43 Average
10	0.33208	0.05	9.60	17.32	26.97	59.40 -32.43 QP
11	1.153	0.09	9.70	11.05	20.84	46.00 -25.16 Average
12	1.153	0.09	9.70	16.05	25.84	56.00 -30.16 QP

5.3 Conducted Peak Output Power

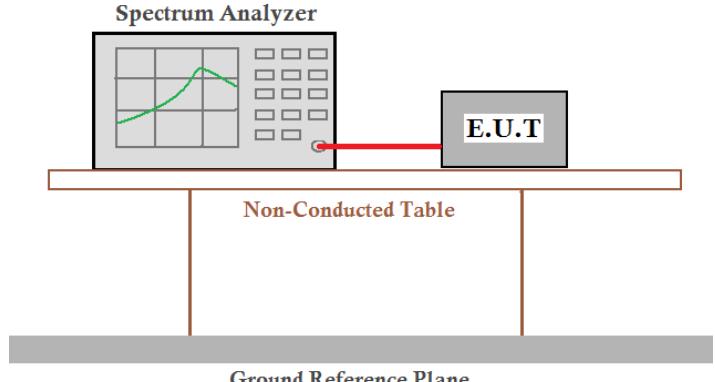
Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2009
Limit:	30dBm
Test setup:	 <p>Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane</p> <p><i>Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 4.8 for details.
Test state:	Non-hopping transmitting with all kinds of modulation.
Test results:	Pass

Measurement Data


GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	8.52	30.00	Pass
Middle	7.59	30.00	Pass
Highest	6.22	30.00	Pass
$\pi/4$ DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	7.22	30.00	Pass
Middle	6.28	30.00	Pass
Highest	4.57	30.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	7.48	30.00	Pass
Middle	6.56	30.00	Pass
Highest	4.99	30.00	Pass

Test plot as follows:


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

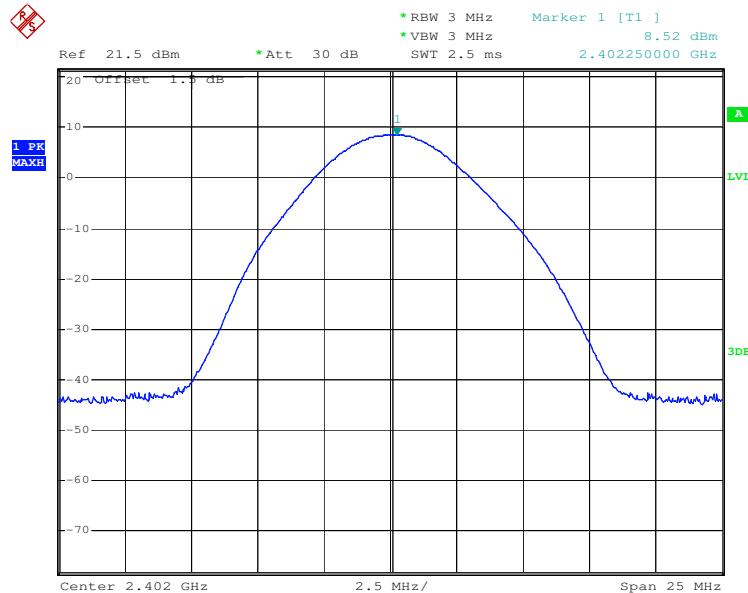


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

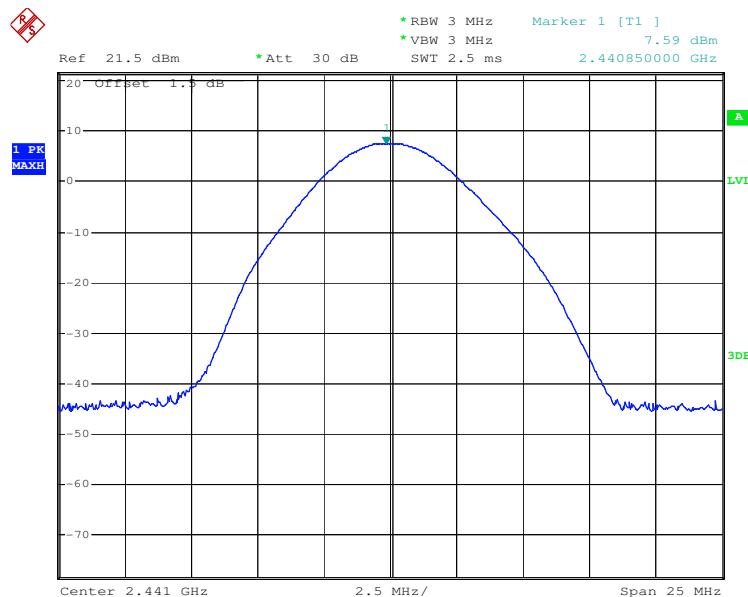


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

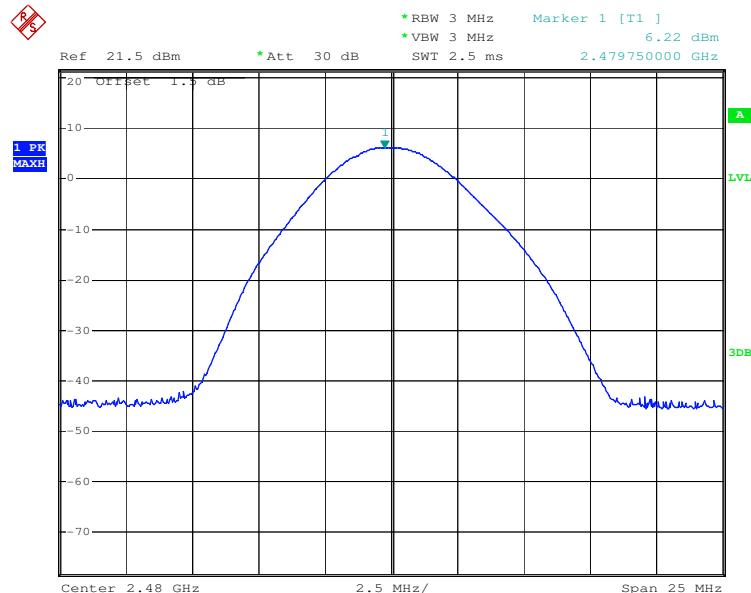


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

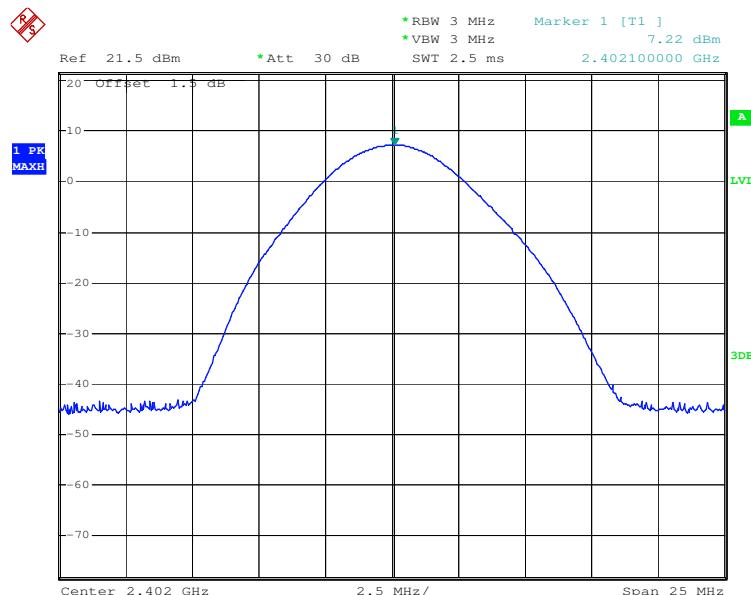


Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

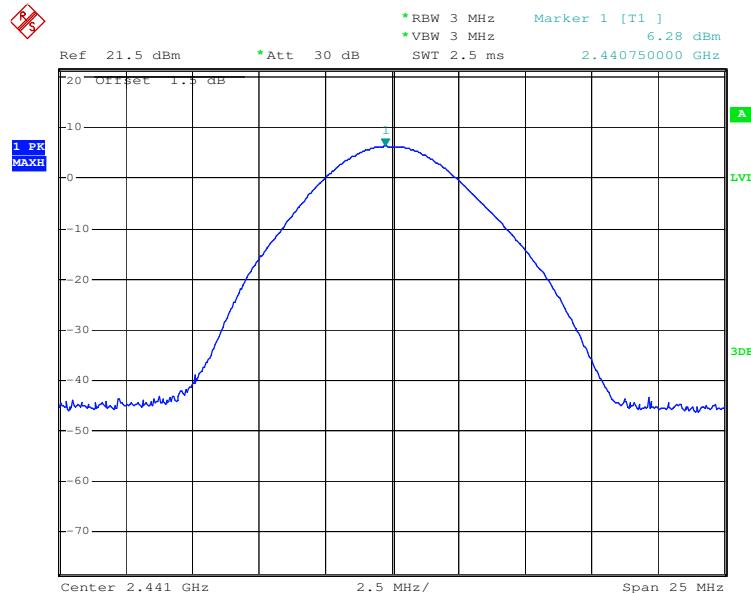


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

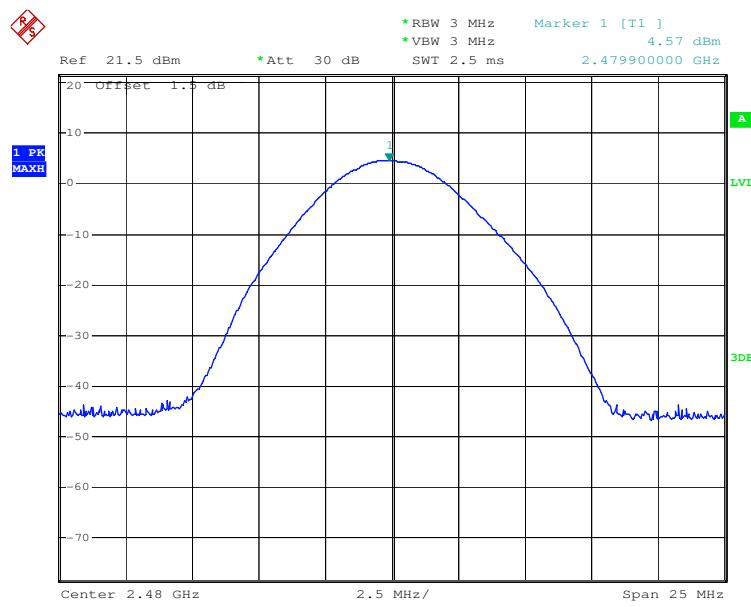


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

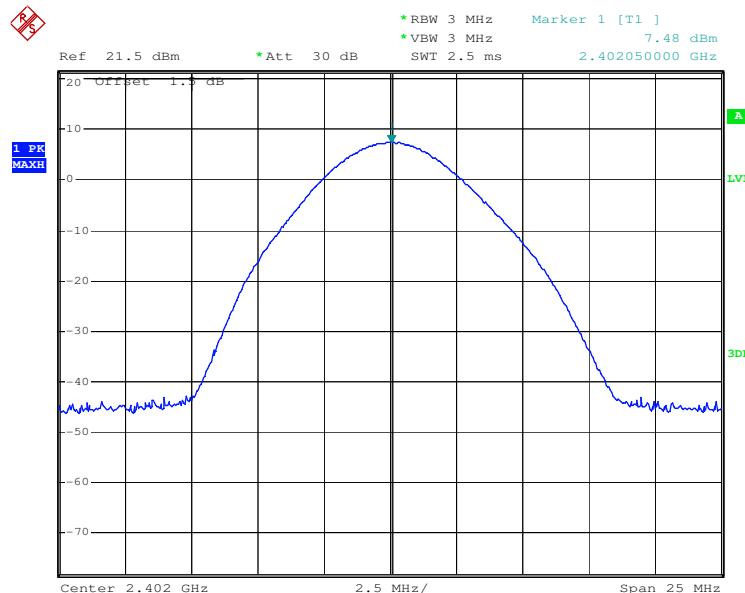


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

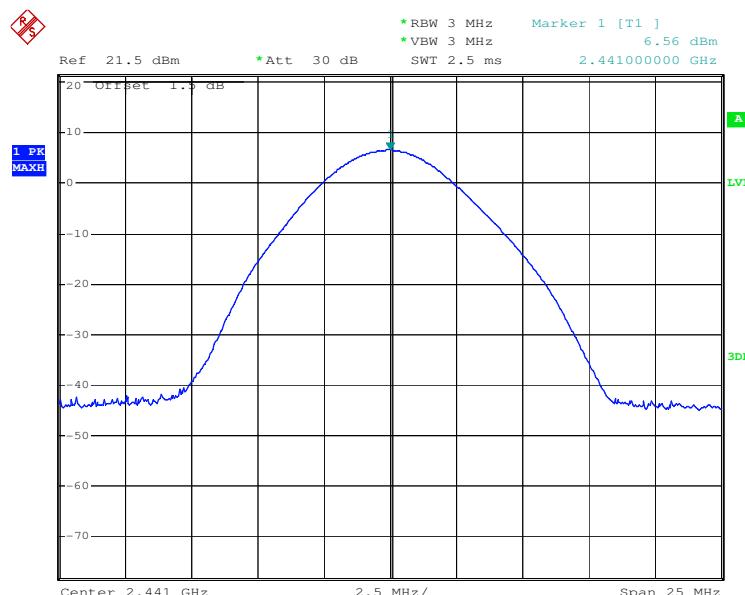

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

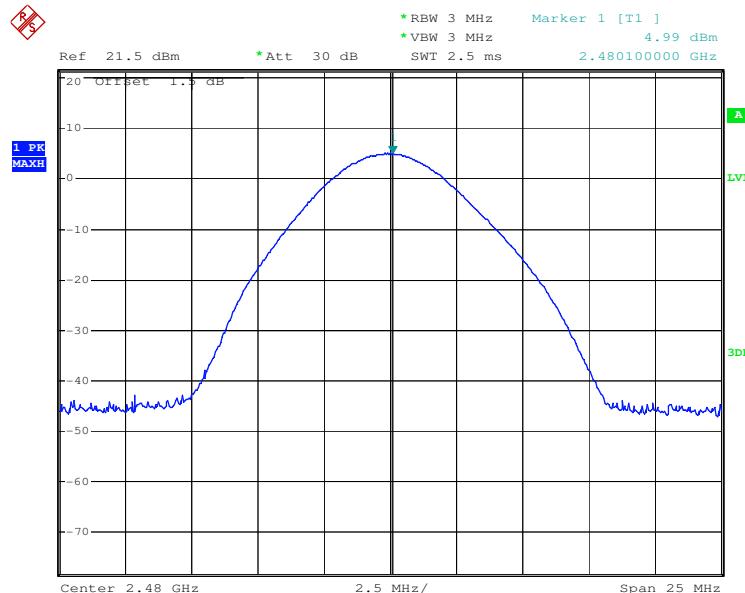

5.4 20dB Occupy Bandwidth

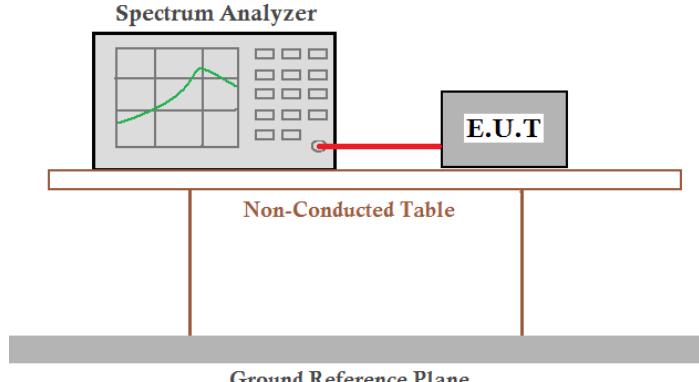
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Limit:	NA
Test setup:	
Test Instruments:	Refer to section 4.8 for details.
Test state:	Non-hopping transmitting with all kinds of modulation.

Measurement Data


Test channel	20dB Occupy Bandwidth (kHz)		
	GFSK	$\pi/4$ DQPSK	8DPSK
Lowest	798	1200	1200
Middle	792	1218	1212
Highest	798	1218	1212

Test plot as follows:


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

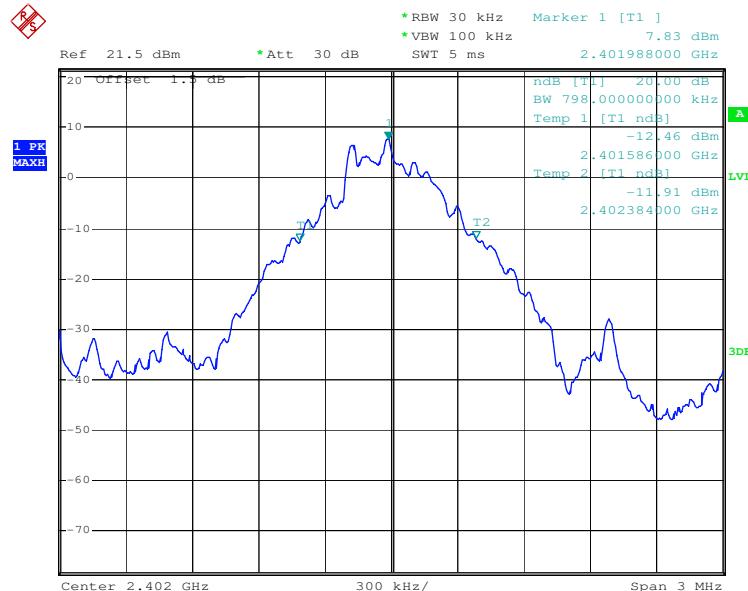


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

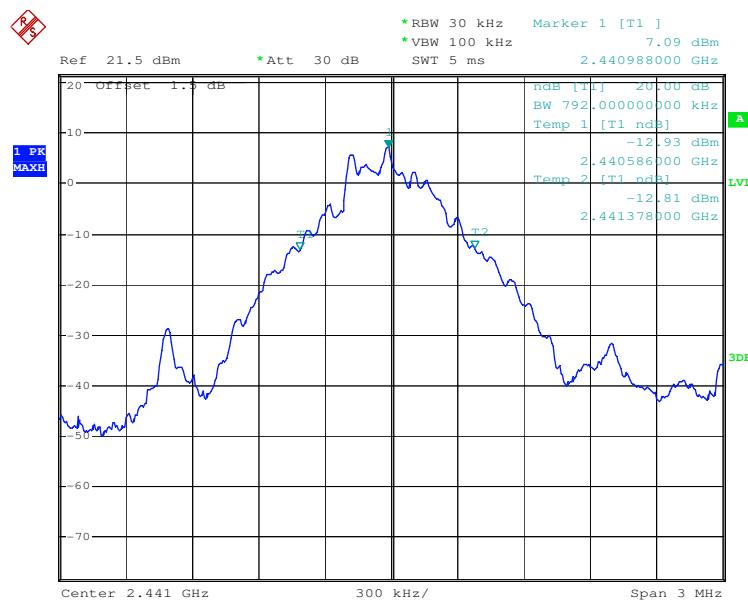


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

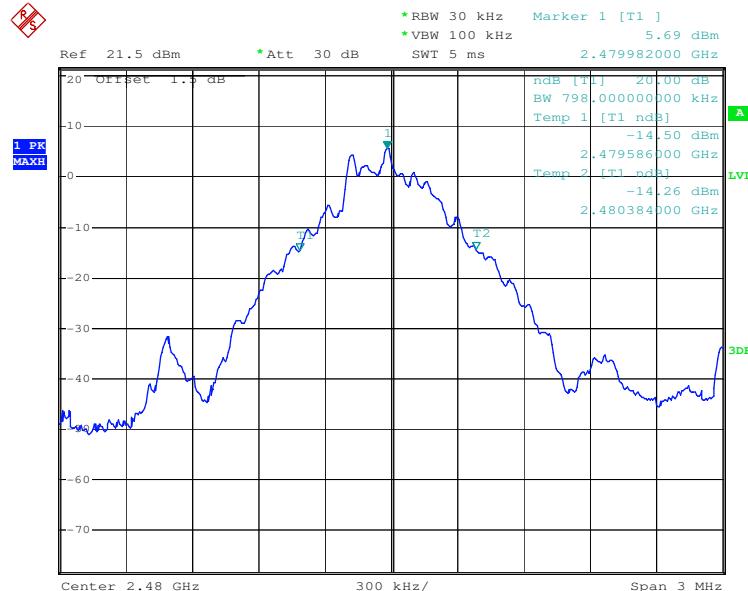


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

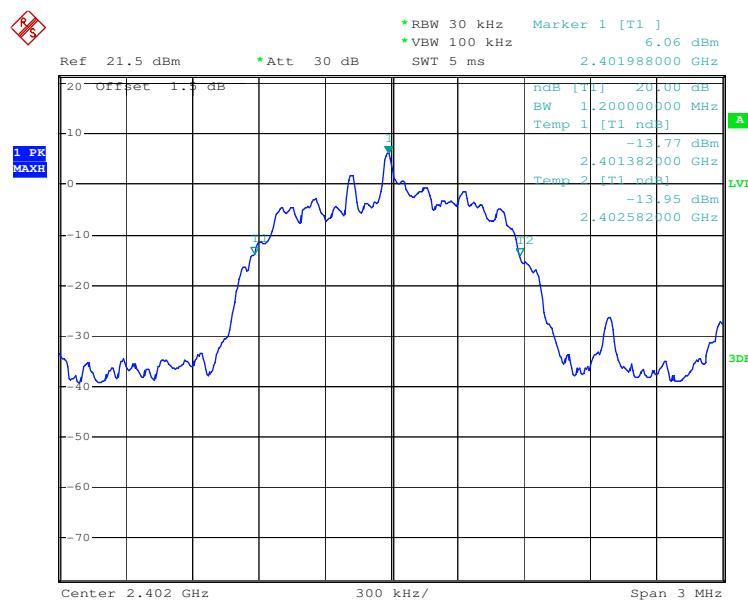


Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

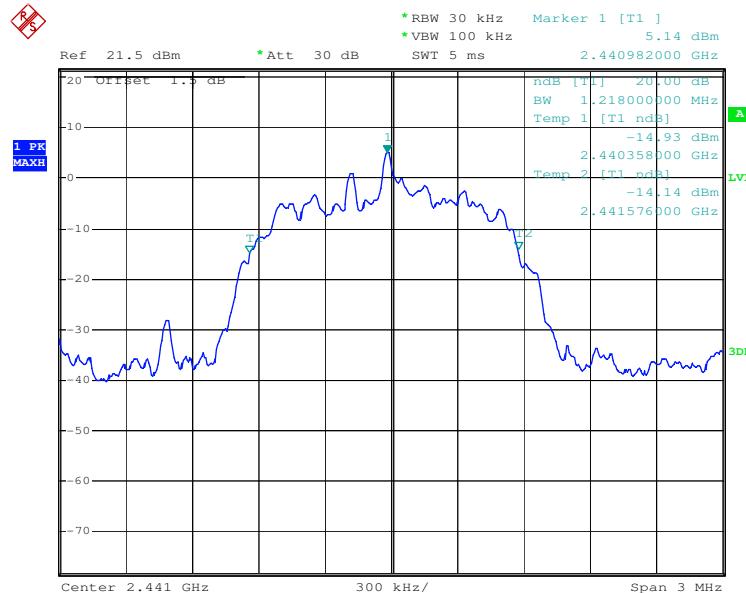


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

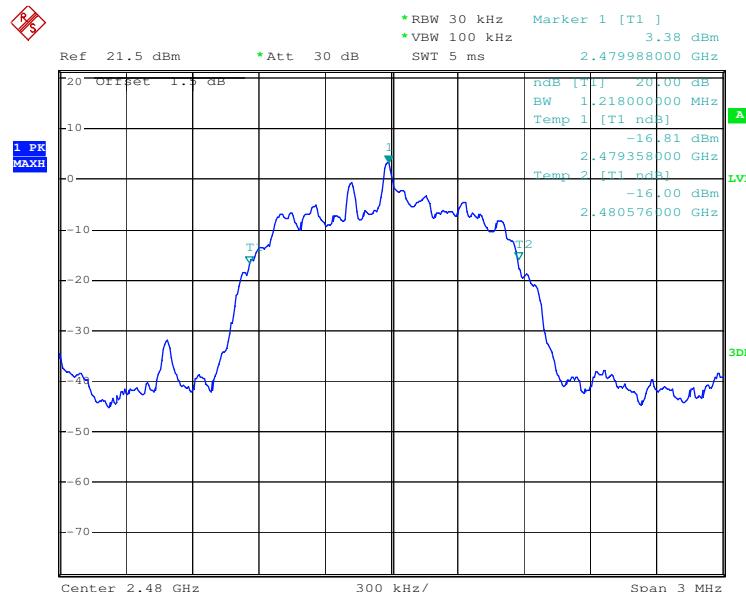


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

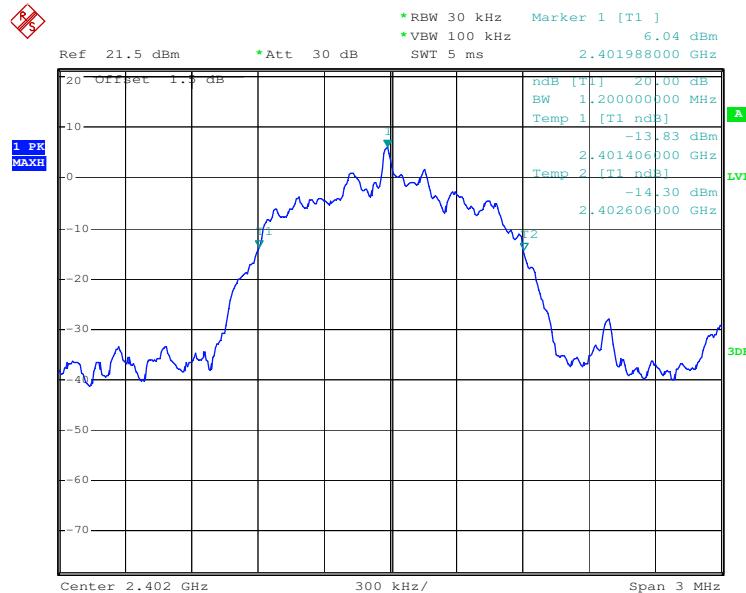


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

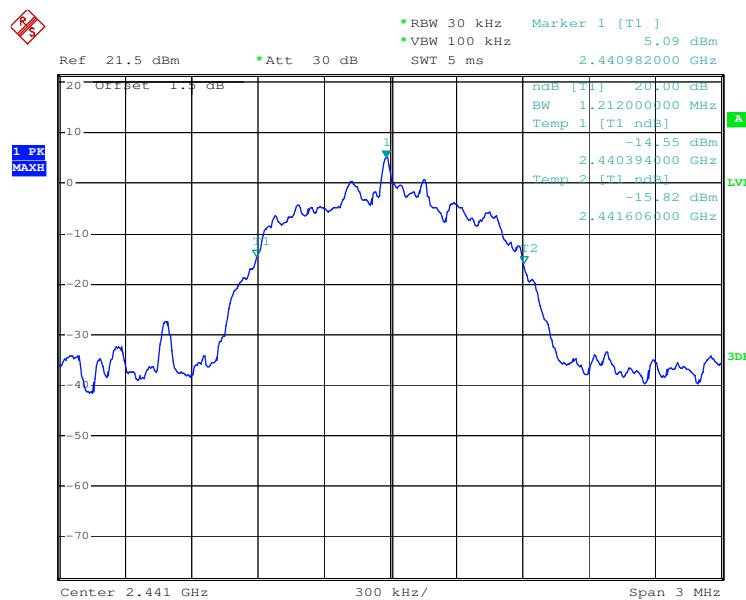

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

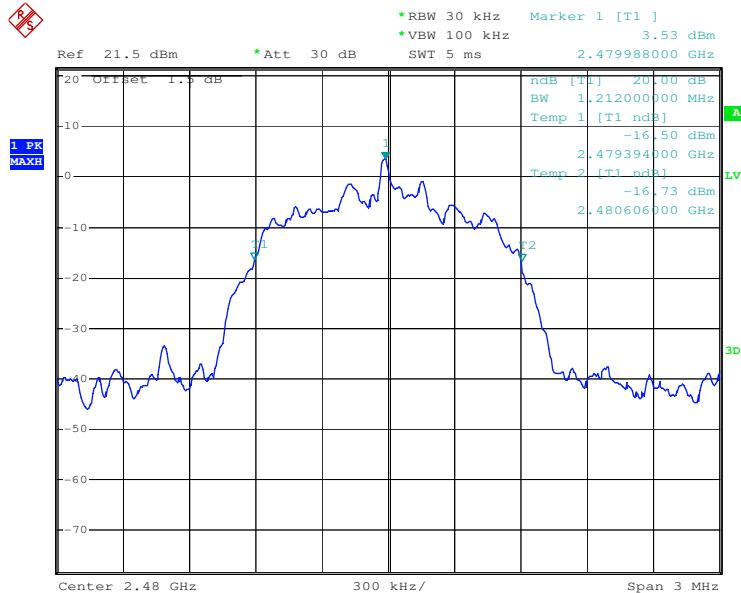

5.5 Carrier Frequencies Separation

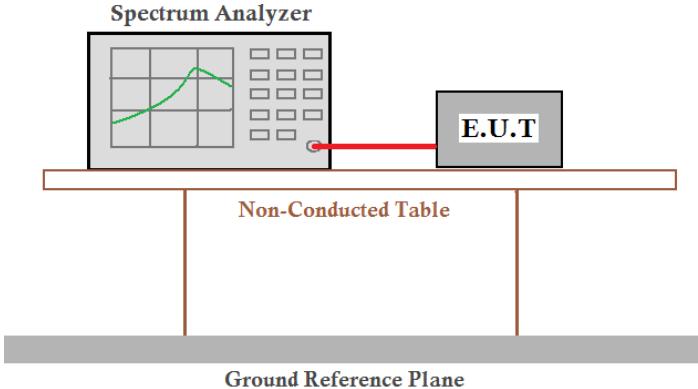Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Test state:	Hopping transmitting with all kind of modulation.
Test setup:	
Test Instruments:	Refer to section 4.8 for details.
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test results:	Pass



Measurement Data

GFSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1000	≥812	Pass
Middle	1002	≥812	Pass
Highest	1000	≥812	Pass

π/4DQPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1000	≥812	Pass
Middle	1002	≥812	Pass
Highest	1000	≥812	Pass


8DPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1000	≥812	Pass
Middle	1000	≥812	Pass
Highest	1005	≥812	Pass

Note: According to section 5.4,


Mode	20dB bandwidth (KHz) (worse case)	Limit (KHz) (Carrier Frequencies Separation)
GFSK	798	532
π/4DQPSK	1218	812
8DPSK	1212	808

Test plot as follows:


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

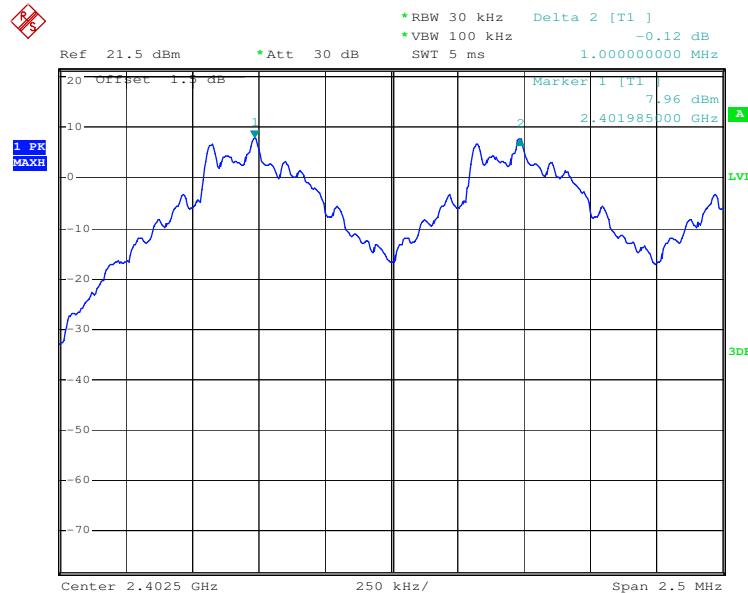


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

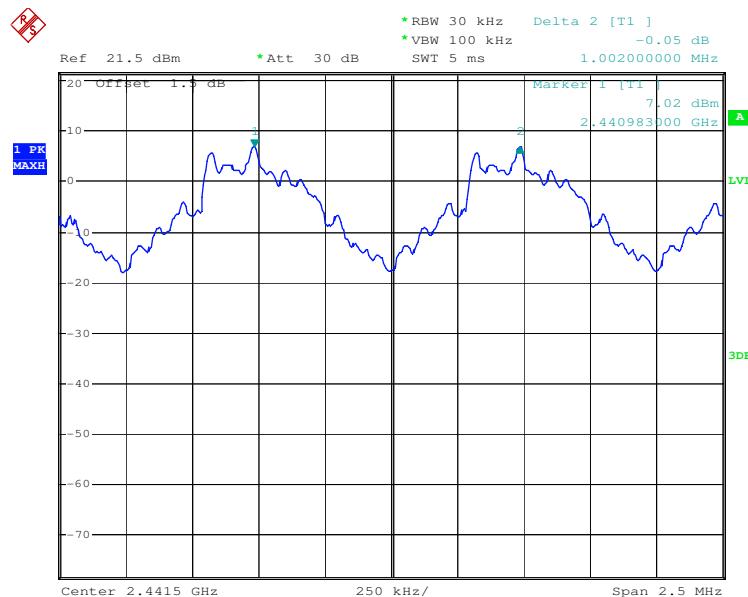


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

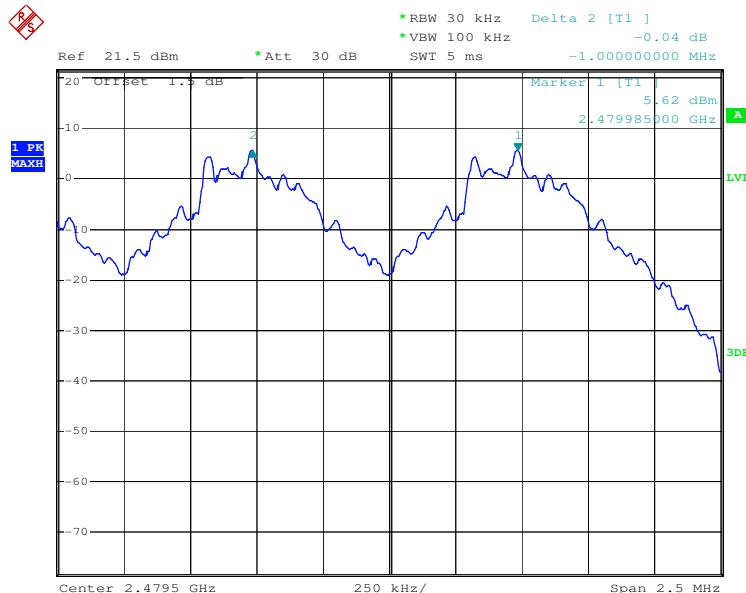


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

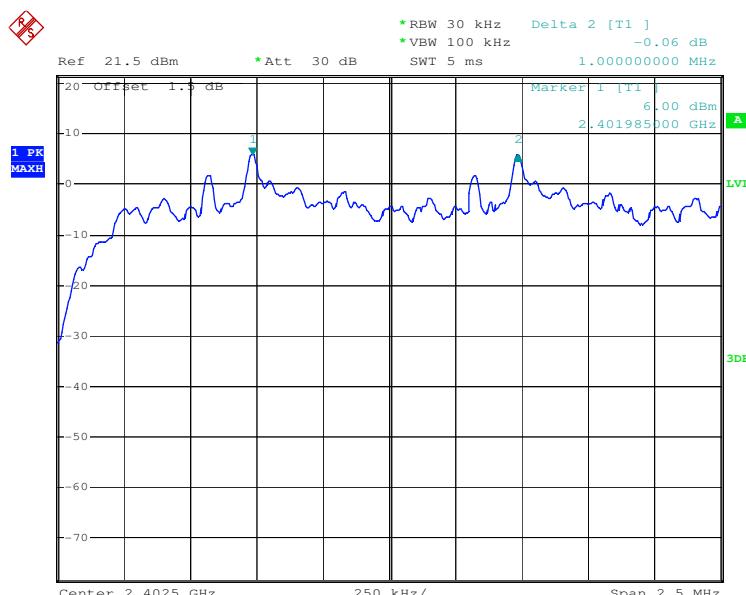


Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

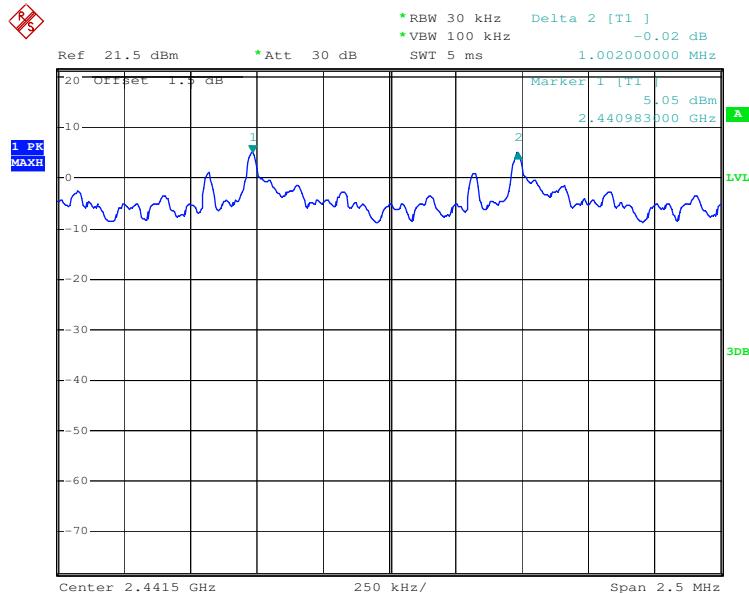


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

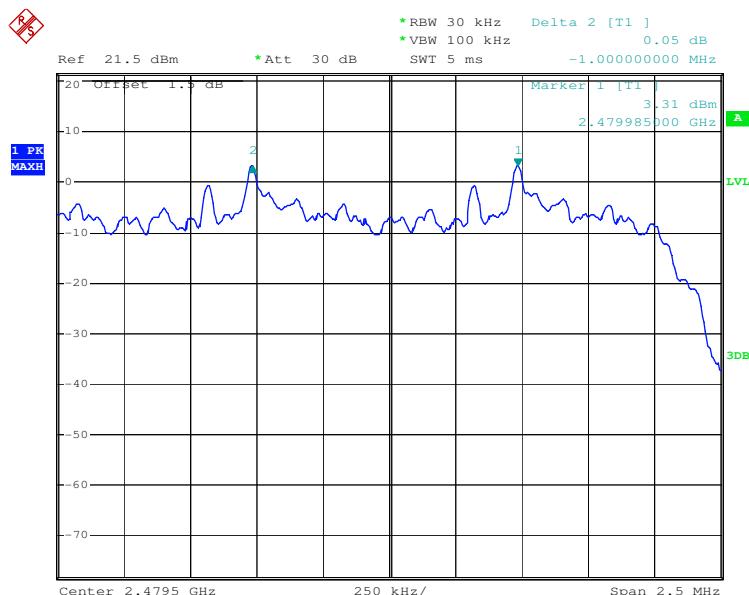


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

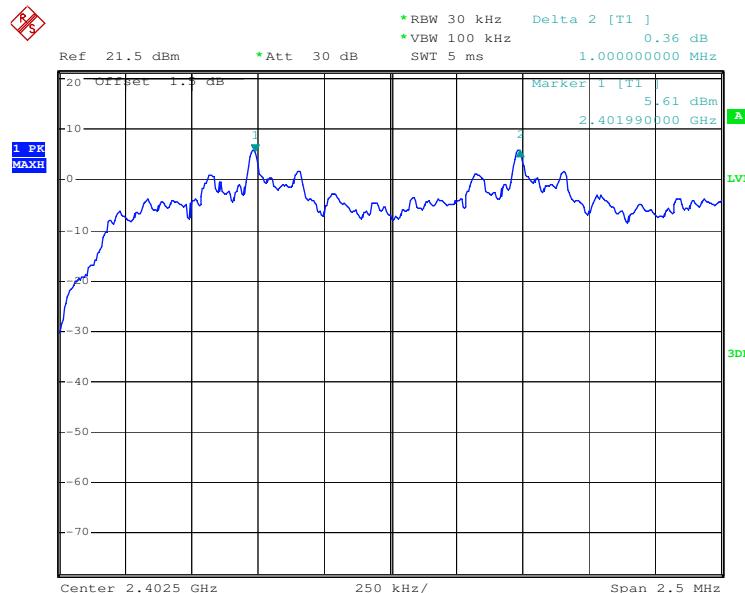

Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

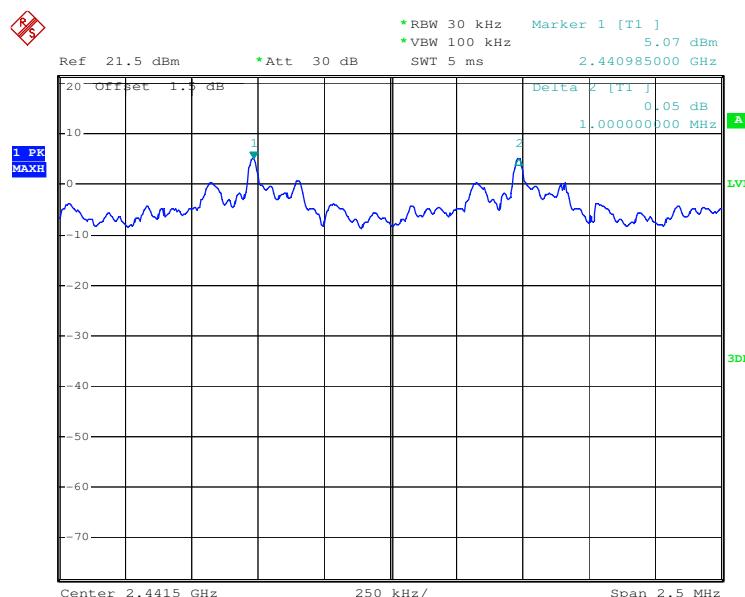

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

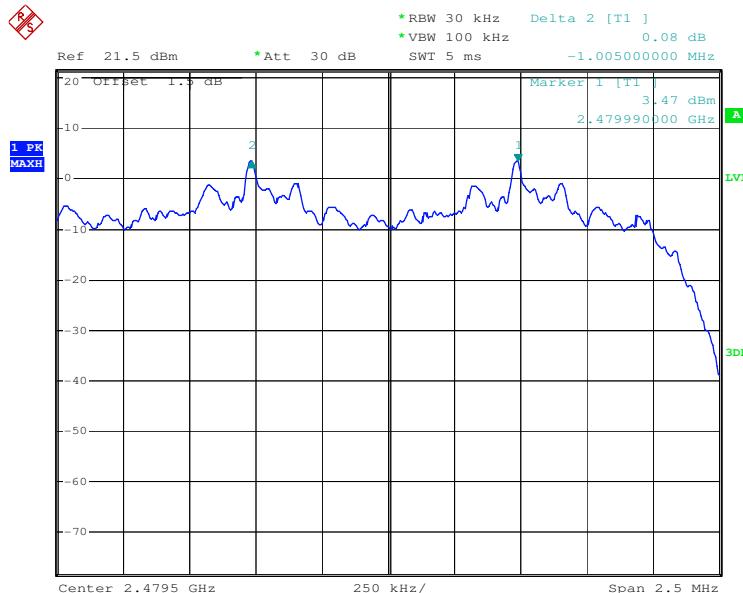

5.6 Hopping Channel Number


Test Requirement:	FCC Part15 C Section 15.247 (b)
Test Method:	ANSI C63.10:2009
Requirement:	≥ 75 channels
Test setup:	<p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a cable. The entire setup is placed on a Non-Conducted Table, which sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 4.8 for details.
Test state:	Hopping transmitting with all kind of modulation.
Test results:	Pass

Measurement Data


Mode	Hopping channel	Requirement
GFSK	79	≥ 75
$\pi/4$ DQPSK	79	≥ 75
8DPSK	79	≥ 75

Test plot as follows


Test mode:	GFSK
------------	------

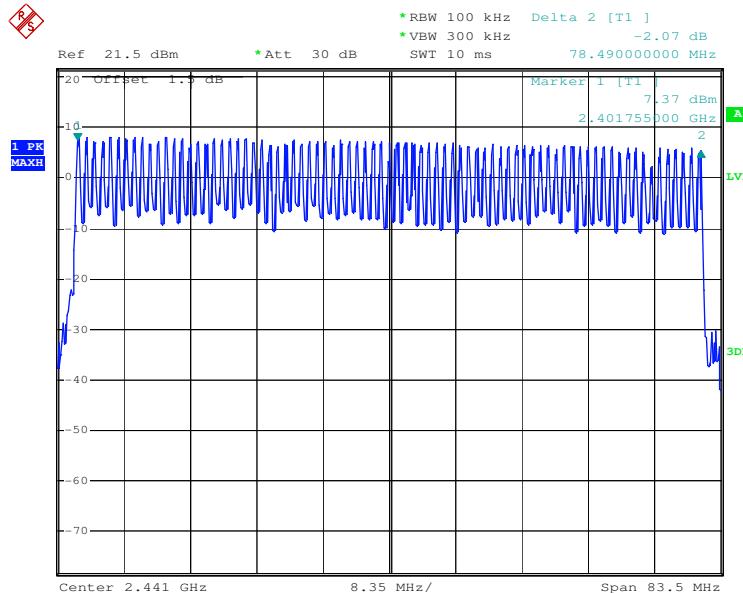


Test mode:	$\pi/4$ DQPSK
------------	---------------

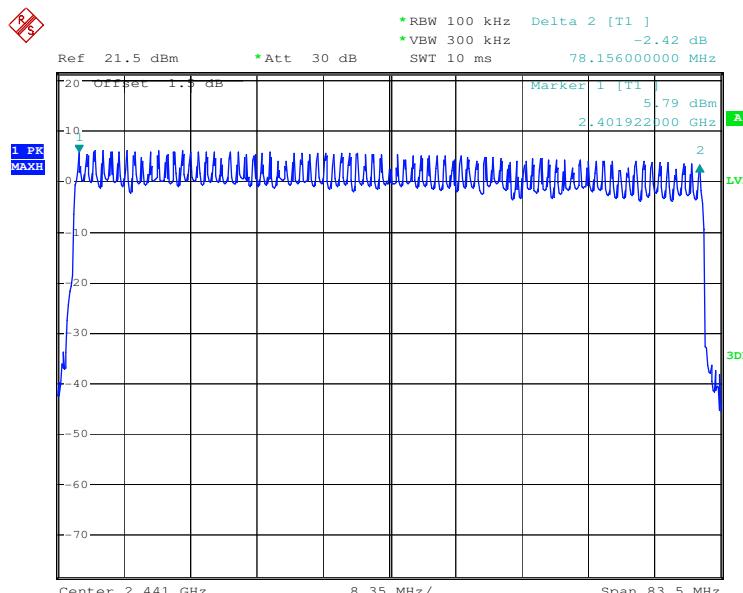

Test mode:	8DPSK	
------------	-------	--

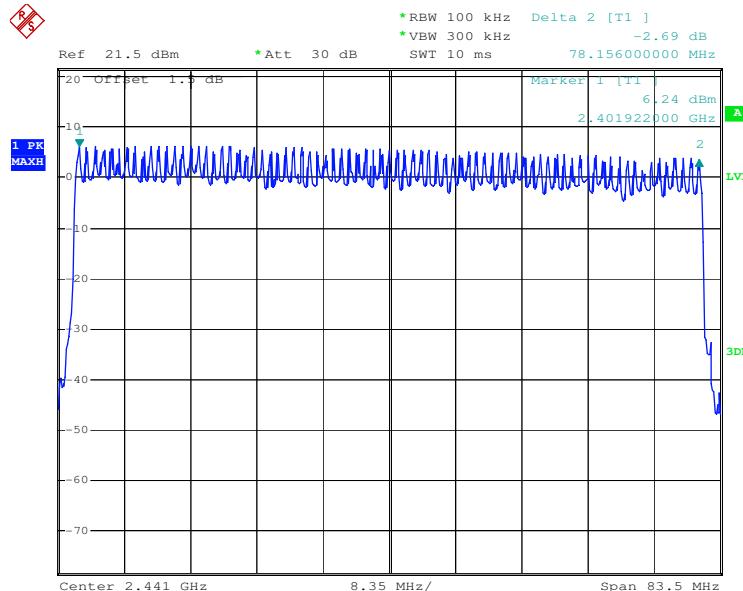

5.7 Dwell Time

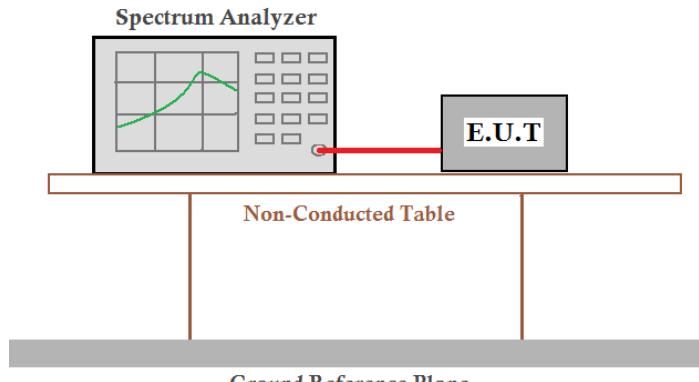Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Limit:	≤ 0.4 Second
Test setup:	
Test Instruments:	Refer to section 4.8 for details.
Test state:	Hopping transmitting with all kind of modulation.
Test results:	Pass

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.1648	≤ 0.4
	DH3	0.2776	≤ 0.4
	DH5	0.3214	≤ 0.4
$\pi/4$ DQPSK	2-DH1	0.1680	≤ 0.4
	2-DH3	0.2888	≤ 0.4
	2-DH5	0.1946	≤ 0.4
8DPSK	3-DH1	0.1696	≤ 0.4
	3-DH3	0.2864	≤ 0.4
	3-DH5	0.3209	≤ 0.4

Test Result:

The test period: $T = 0.4$ Second/Channel \times 79 Channel = 31.6 s

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below


$$\text{DH1 time slot} = 0.515(\text{ms}) * (1600 / (2 * 79)) * 31.6 = 164.8\text{ms}$$

$$\text{DH3 time slot} = 1.735(\text{ms}) * (1600 / (4 * 79)) * 31.6 = 277.6\text{ms}$$


$$\text{DH5 time slot} = 3.015(\text{ms}) * (1600 / (6 * 79)) * 31.6 = 321.4\text{ms}$$

Test plot as follows


Test mode:	GFSK	Test Packet:	DH1
------------	------	--------------	-----

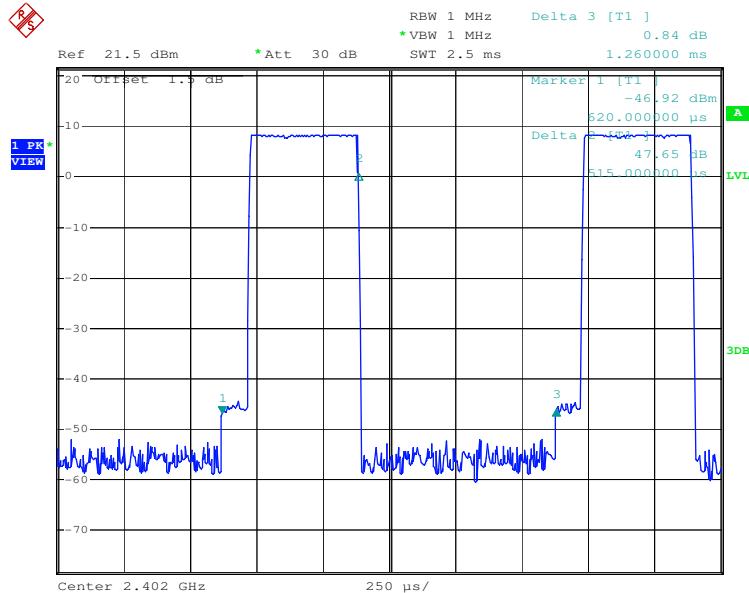


Test mode:	GFSK	Test Packet:	DH3
------------	------	--------------	-----

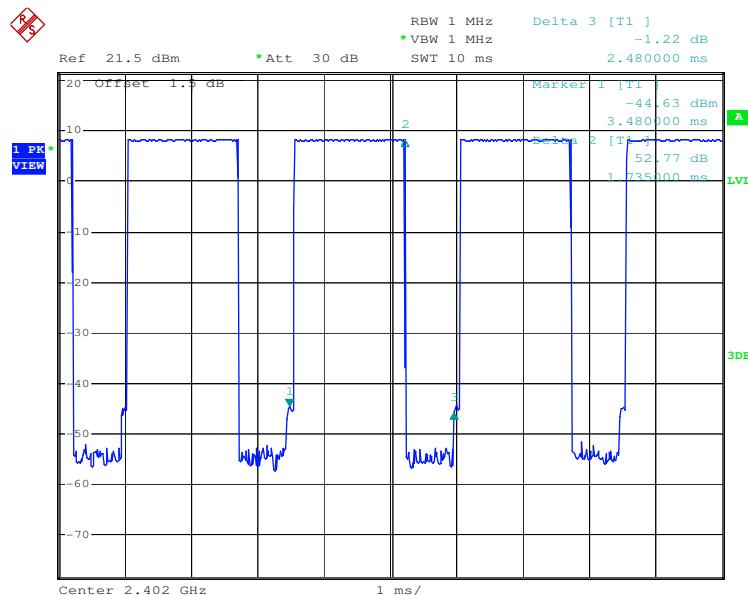


Test mode:	GFSK	Test Packet:	DH5
------------	------	--------------	-----

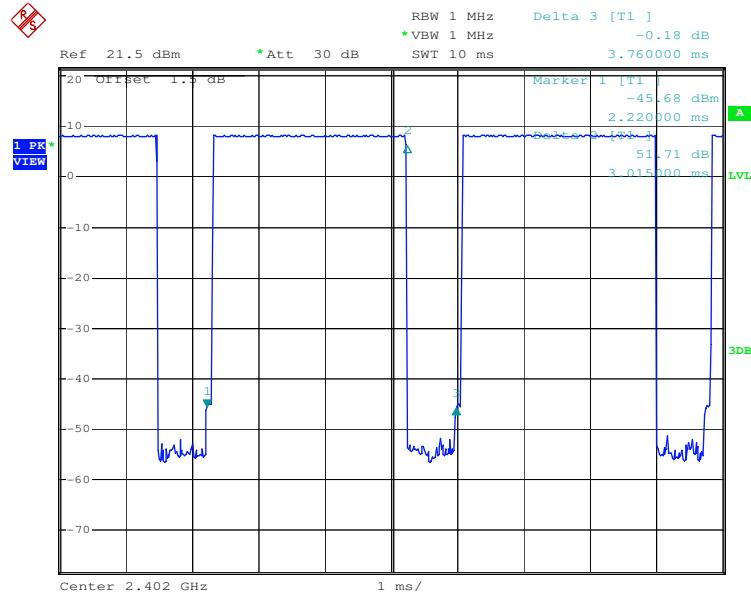


Test mode:	$\pi/4$ DQPSK	Test Packet:	2-DH1
------------	---------------	--------------	-------

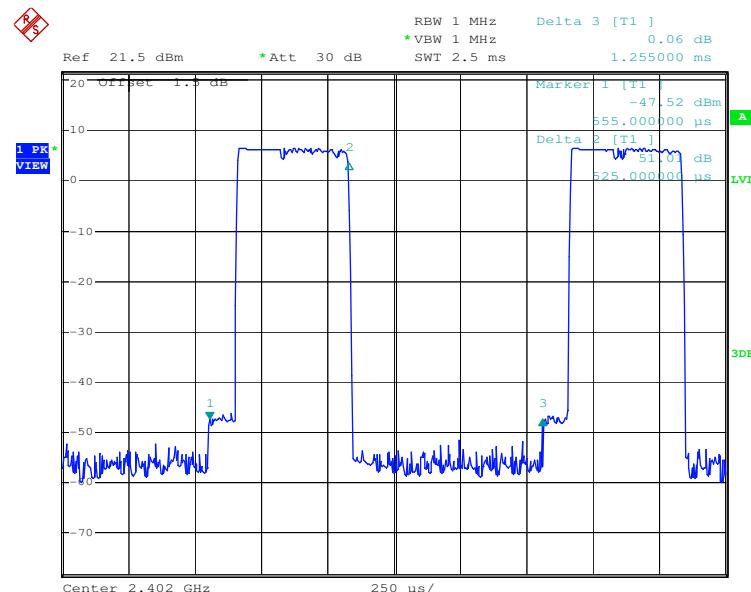


Test mode:	$\pi/4$ DQPSK	Test Packet:	2-DH3
------------	---------------	--------------	-------

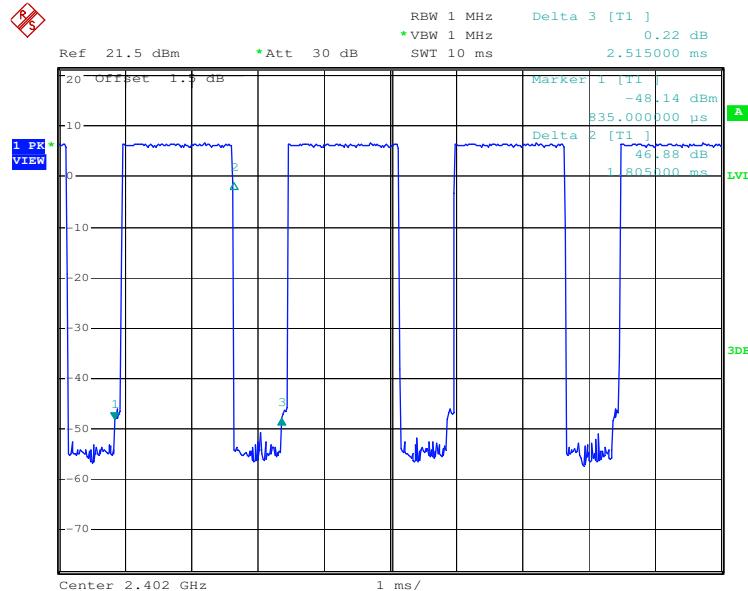


Test mode:	$\pi/4$ DQPSK	Test Packet:	2-DH5
------------	---------------	--------------	-------

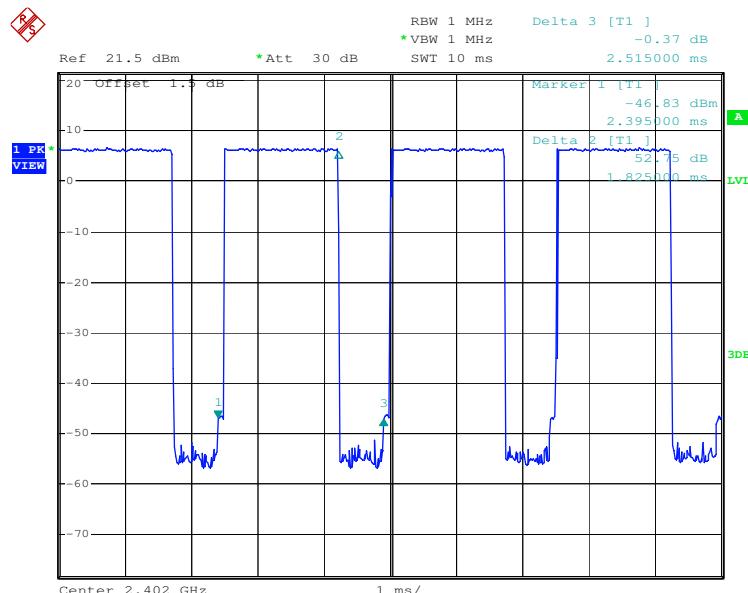


Test mode:	8DPSK	Test Packet:	3-DH1
------------	-------	--------------	-------

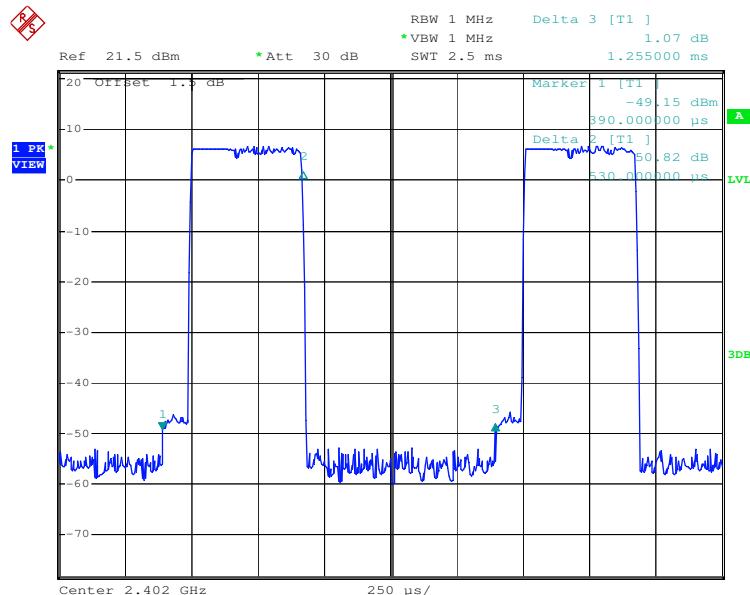

Test mode:	8DPSK	Test Packet:	3-DH3
------------	-------	--------------	-------

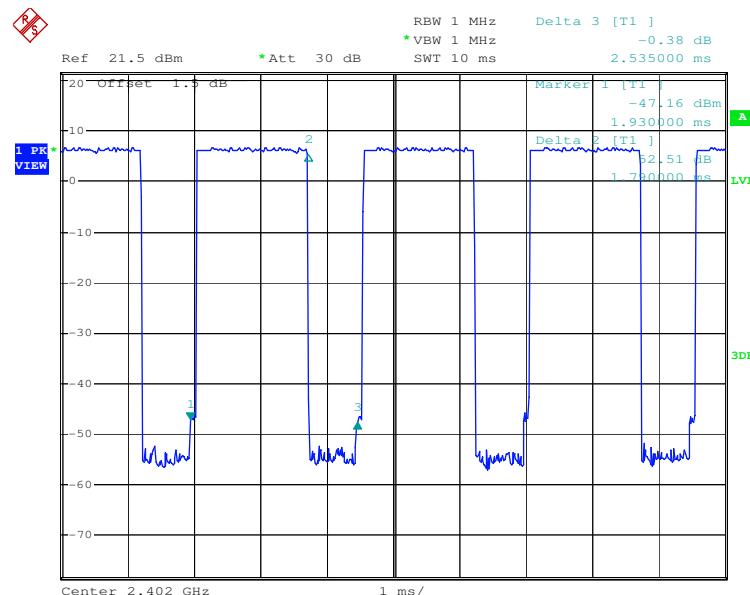



Test mode:	8DPSK	Test Packet:	3-DH5
------------	-------	--------------	-------

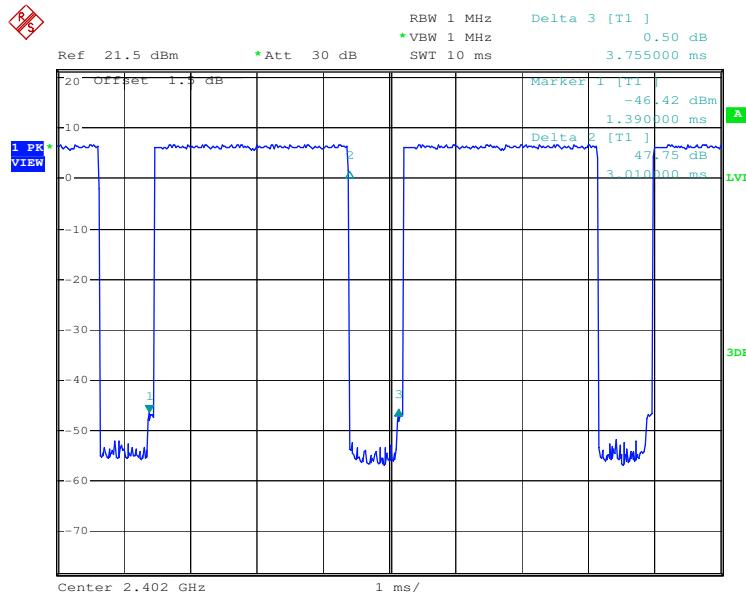



"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

5.8 Band Edge


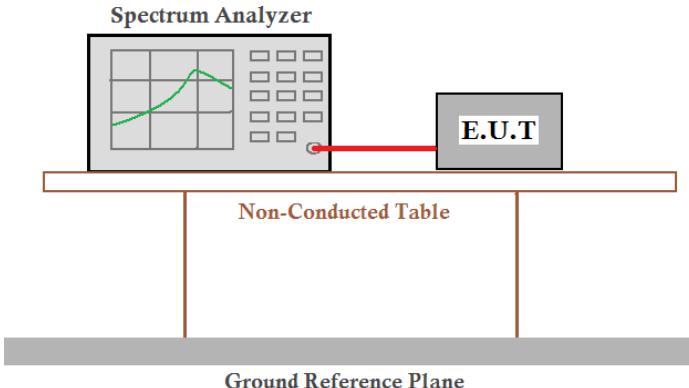
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10: 2009
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 4.8 for details.
Test results:	Pass

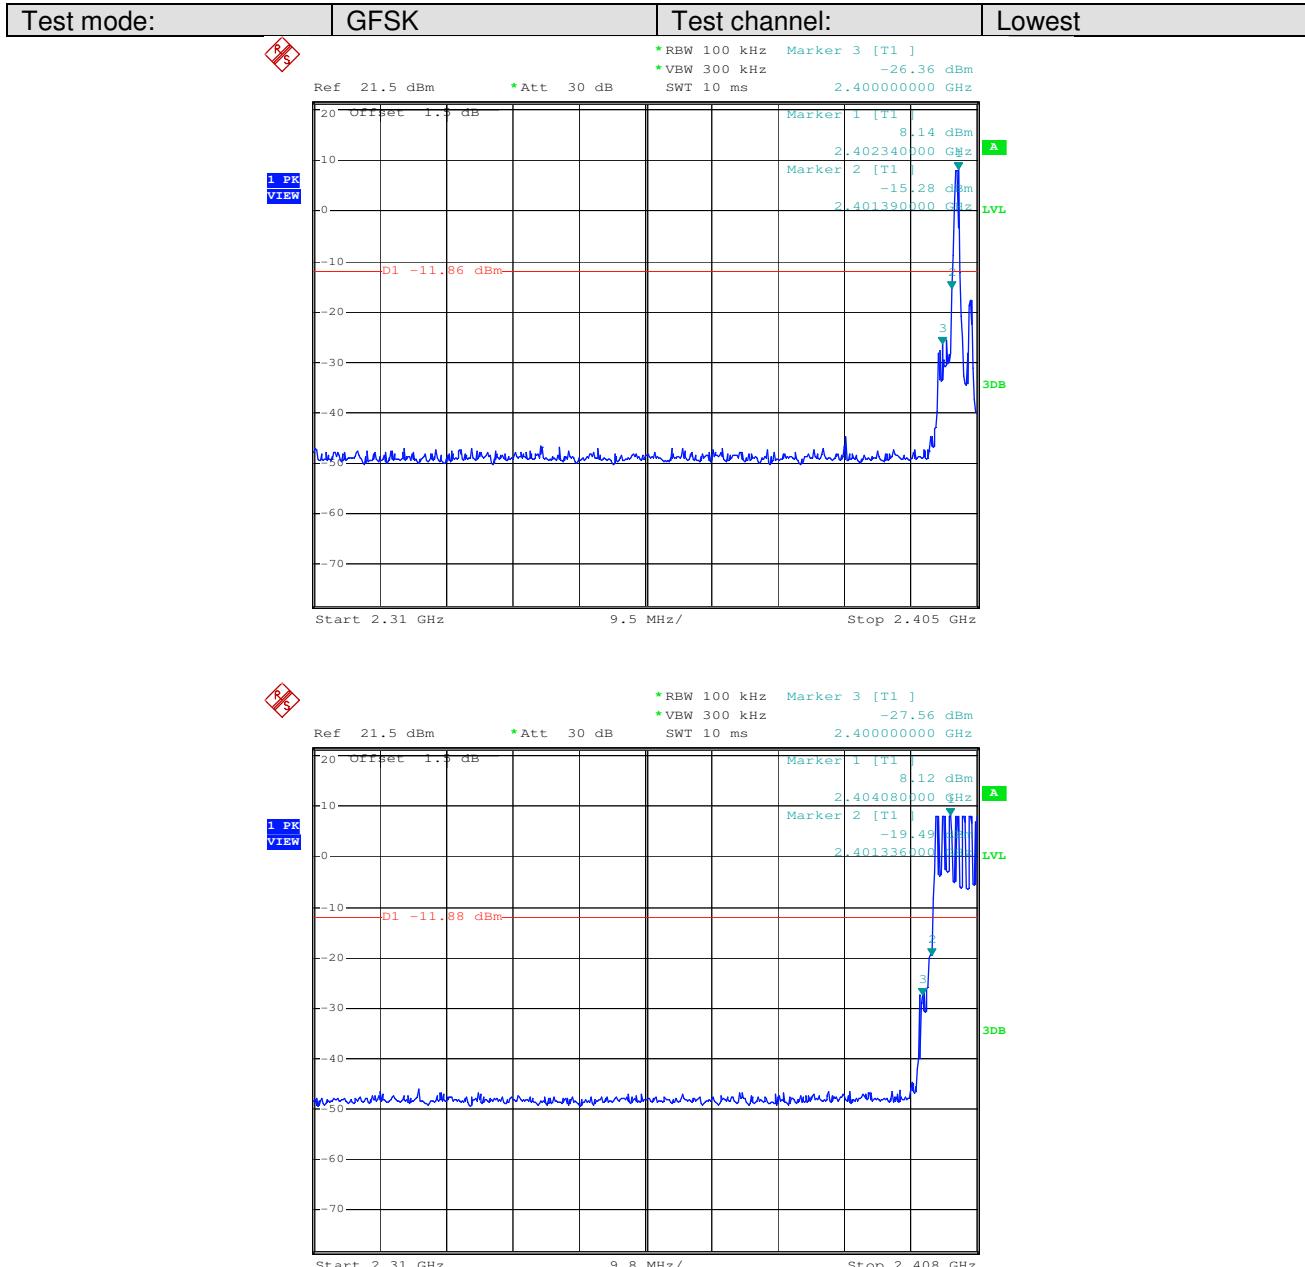Test plot as follows:


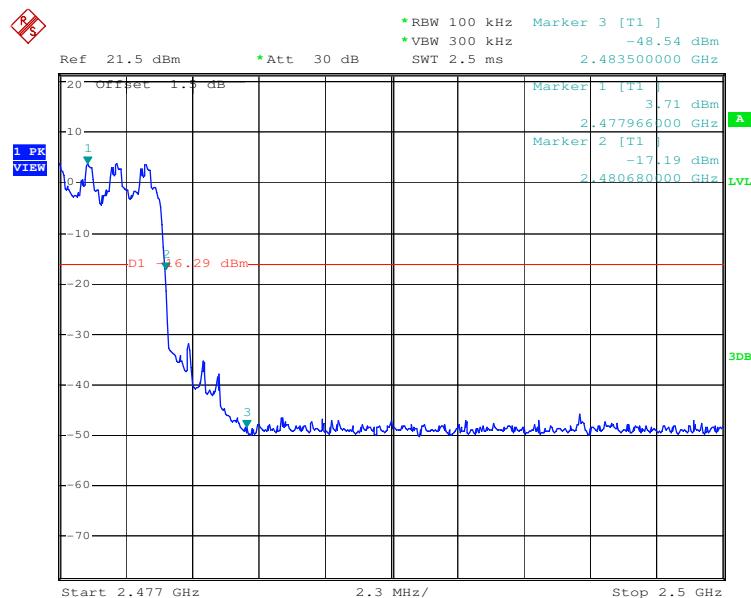
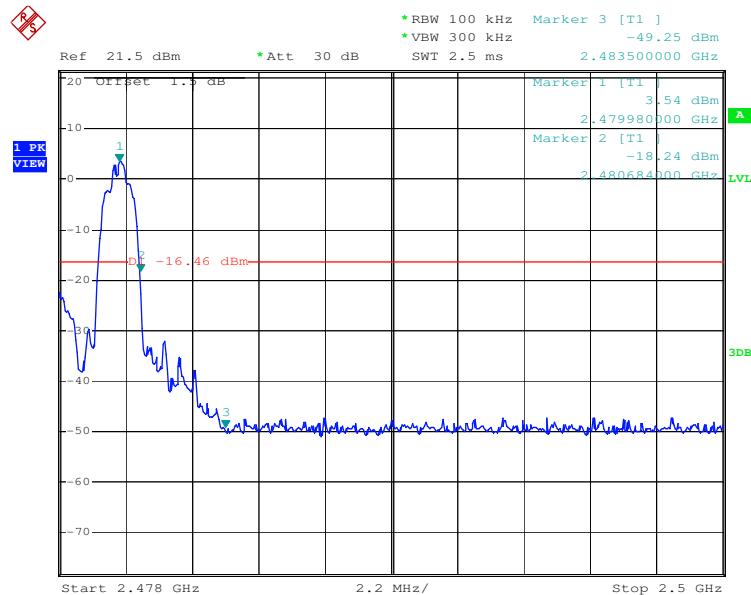
Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

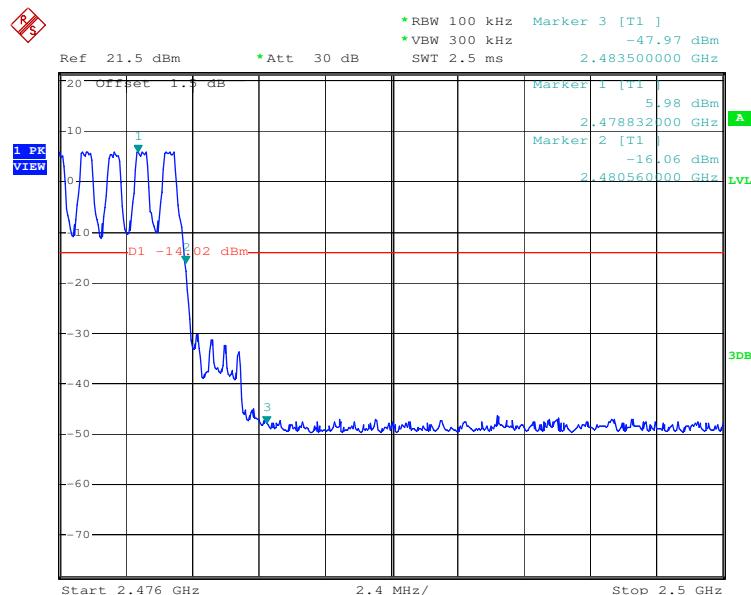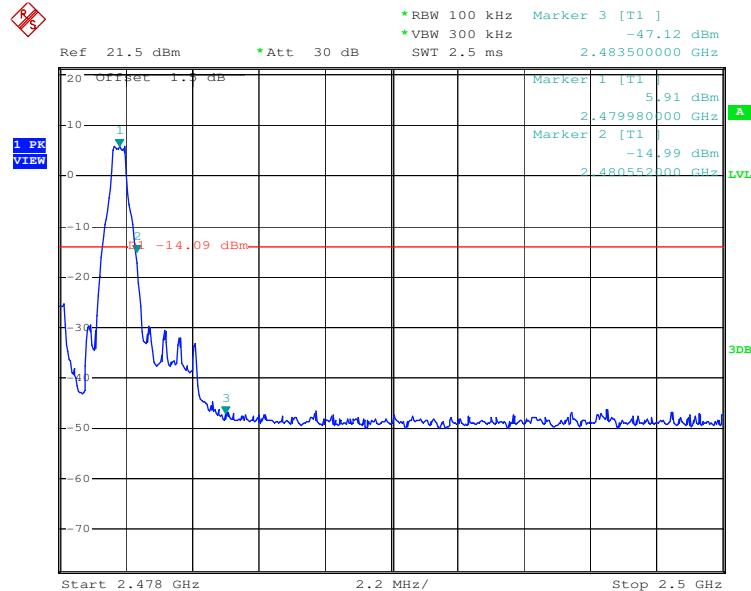



Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

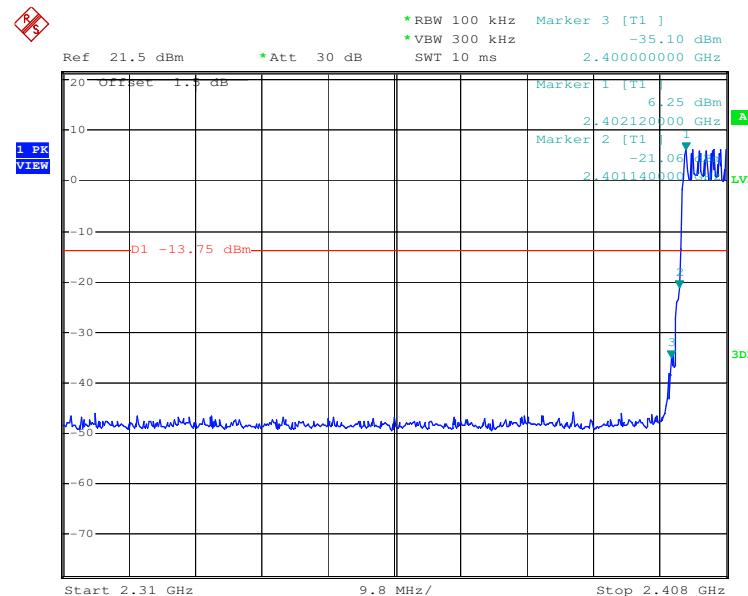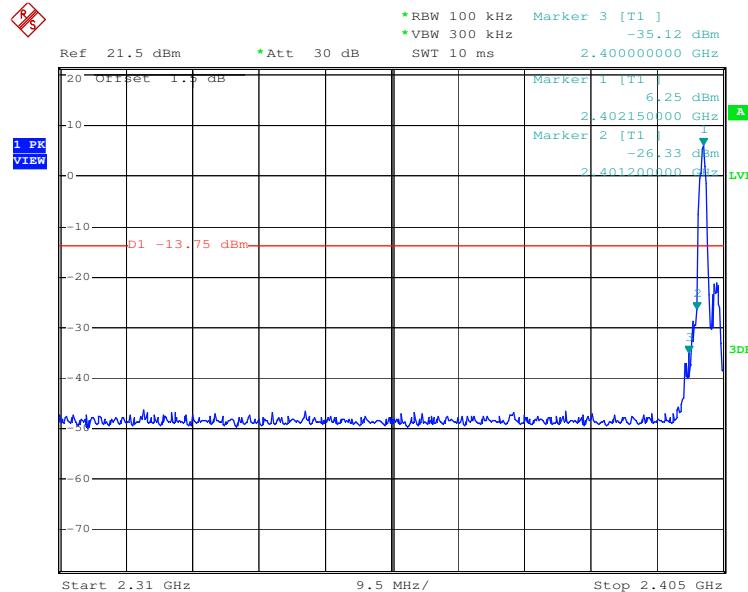



Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------




Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

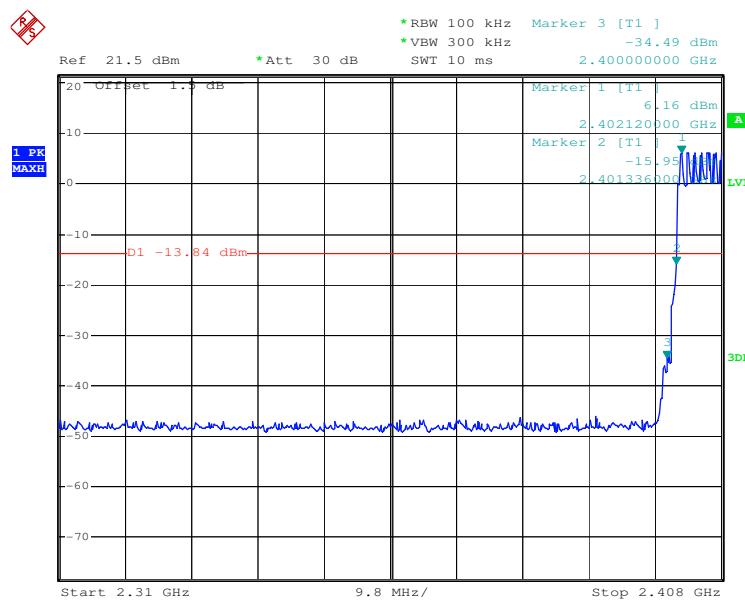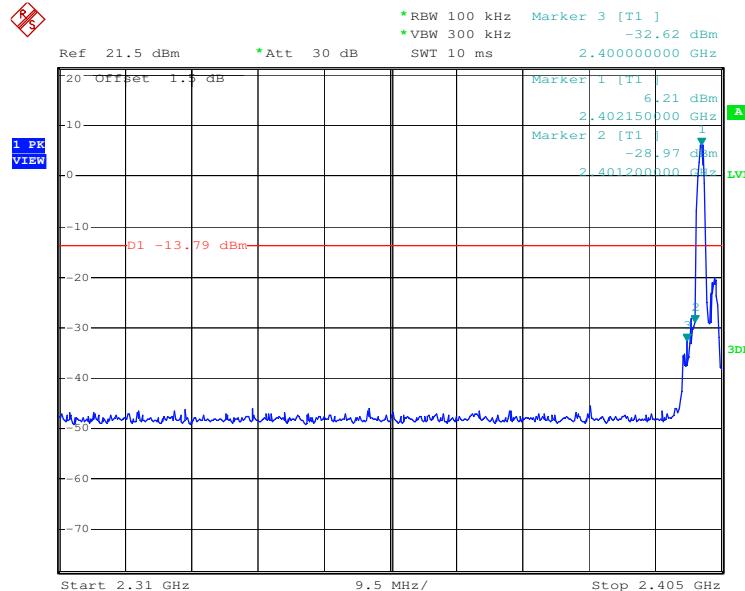


Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

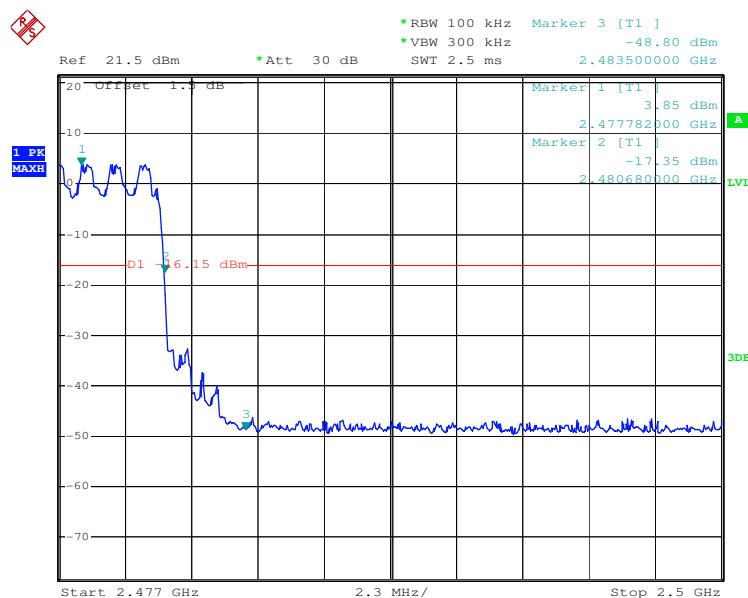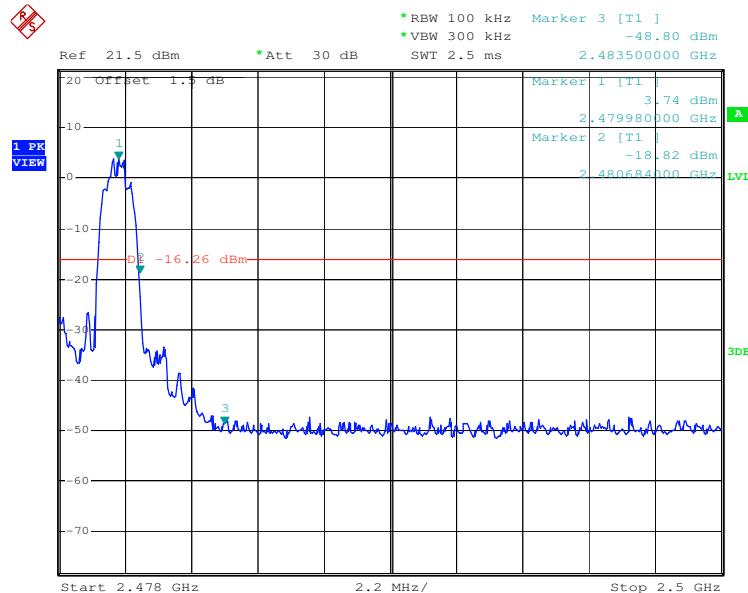


5.9 RF Antenna Conducted spurious emissions

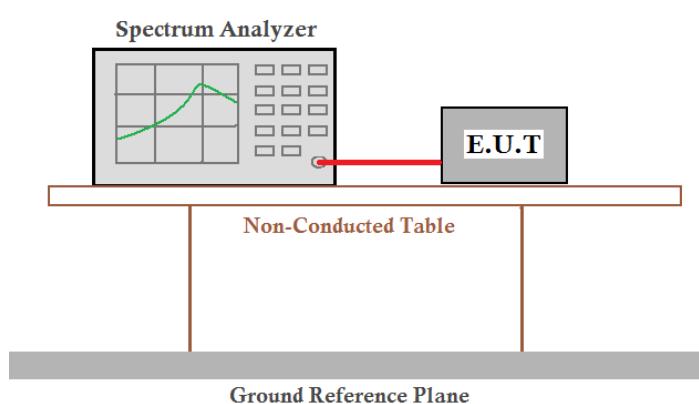Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2009
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 4.8 for details.
Test results:	Pass


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

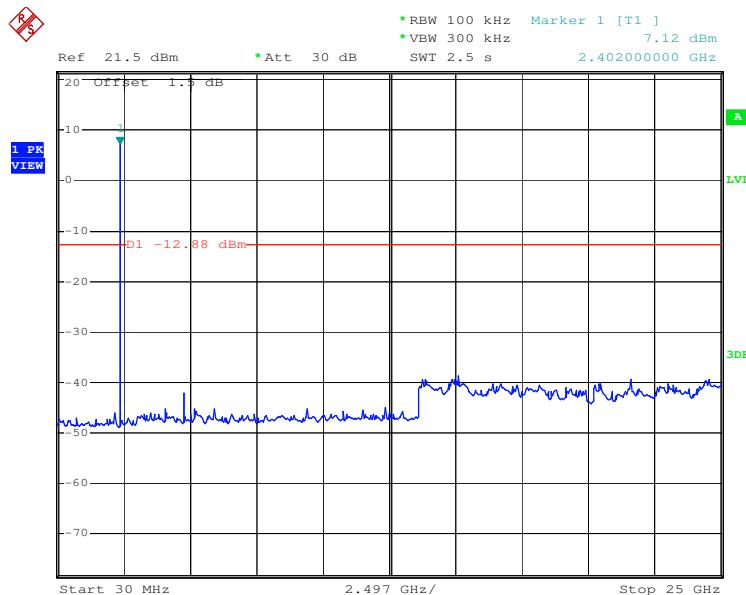


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

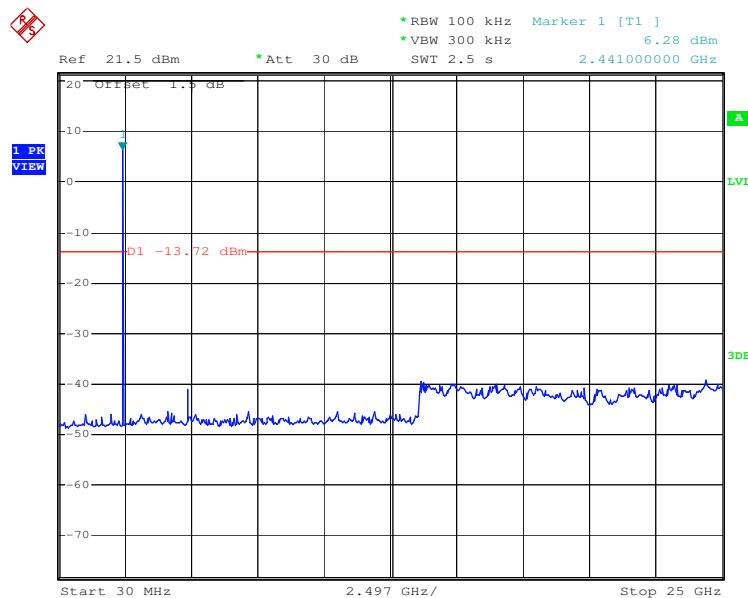


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

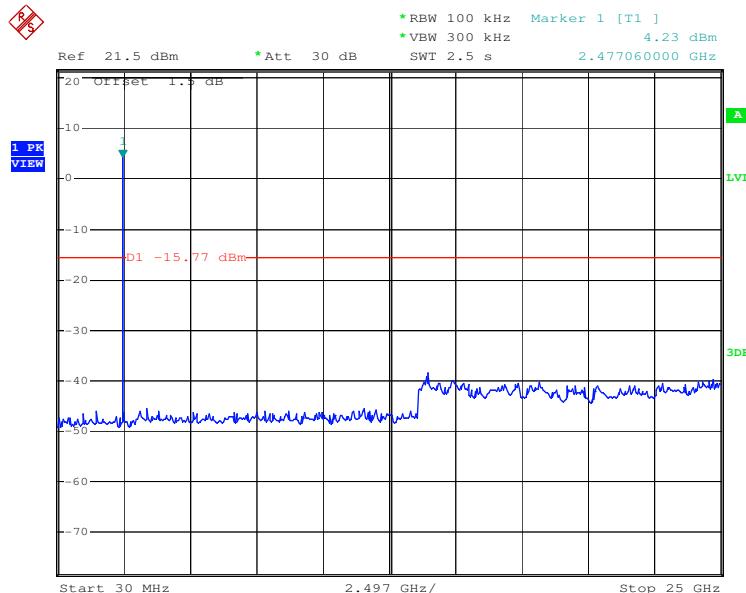


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

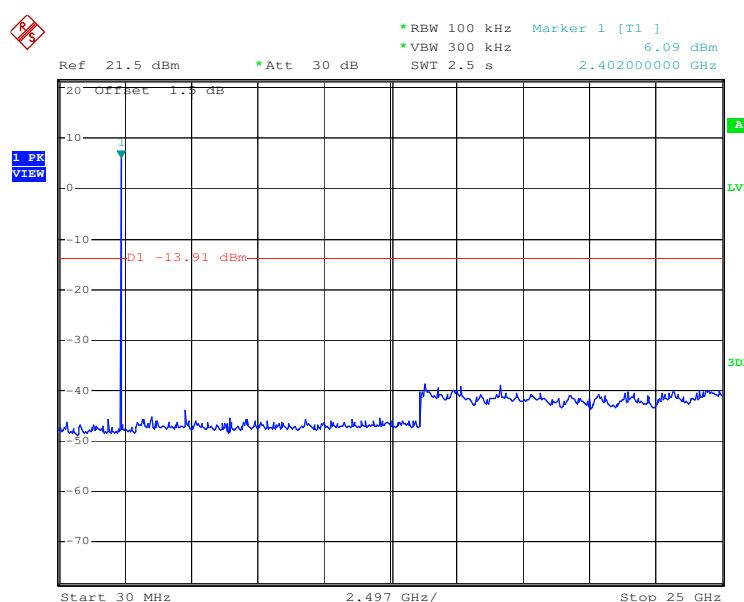


Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

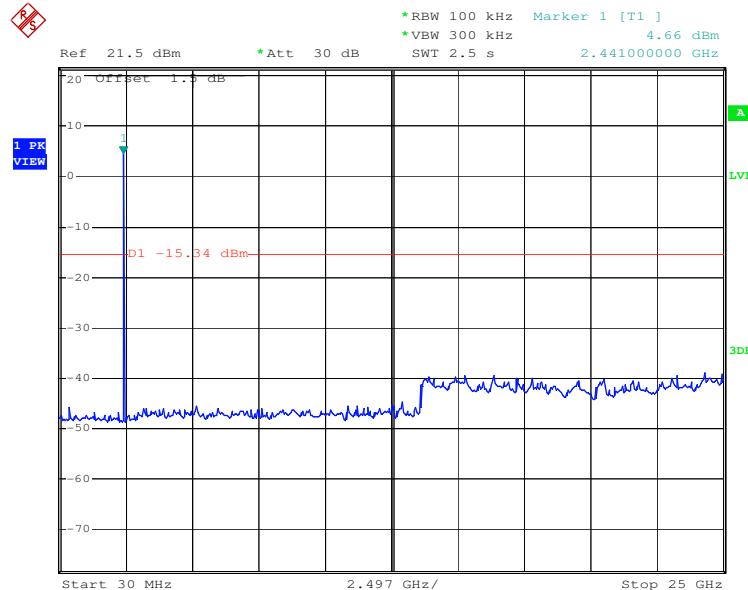


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

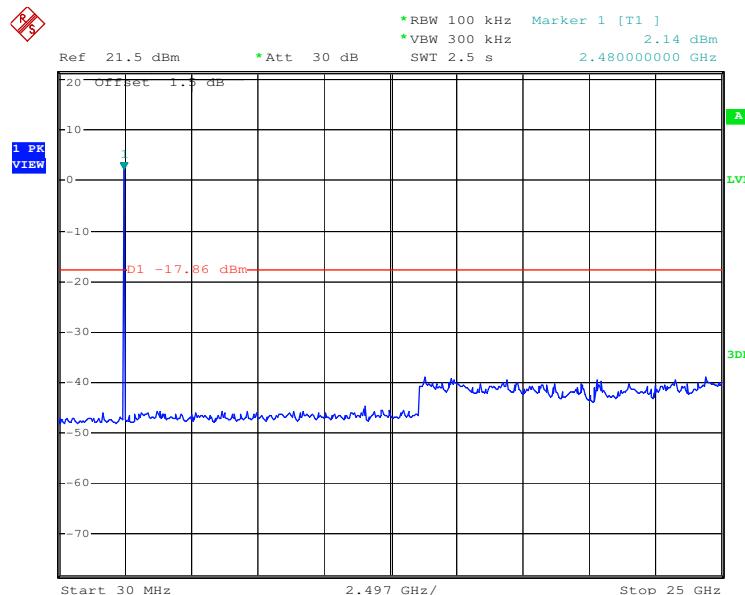


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

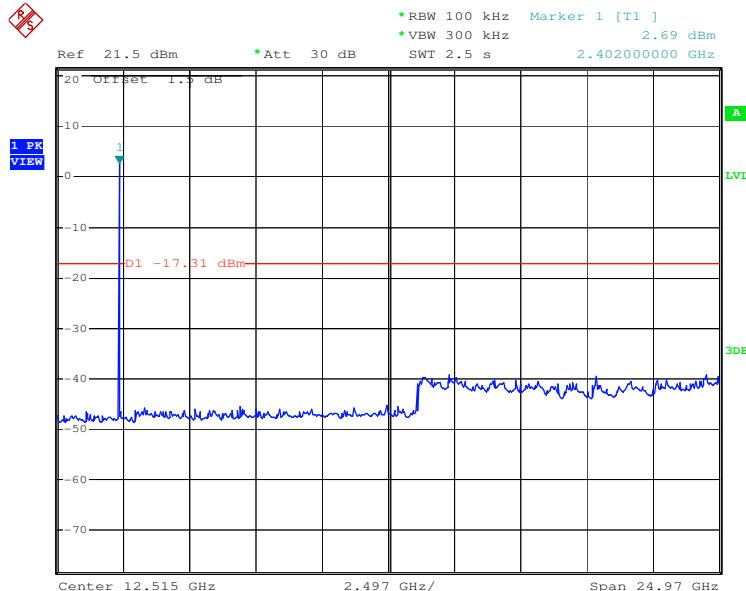


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

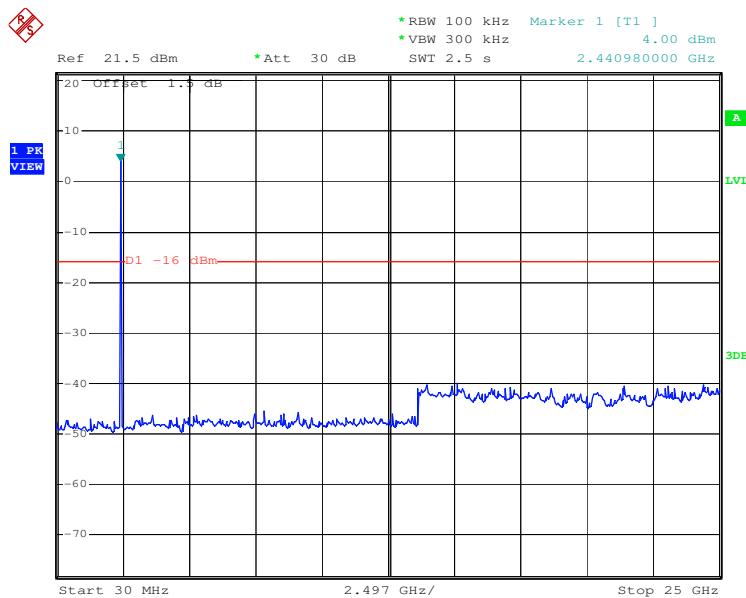

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

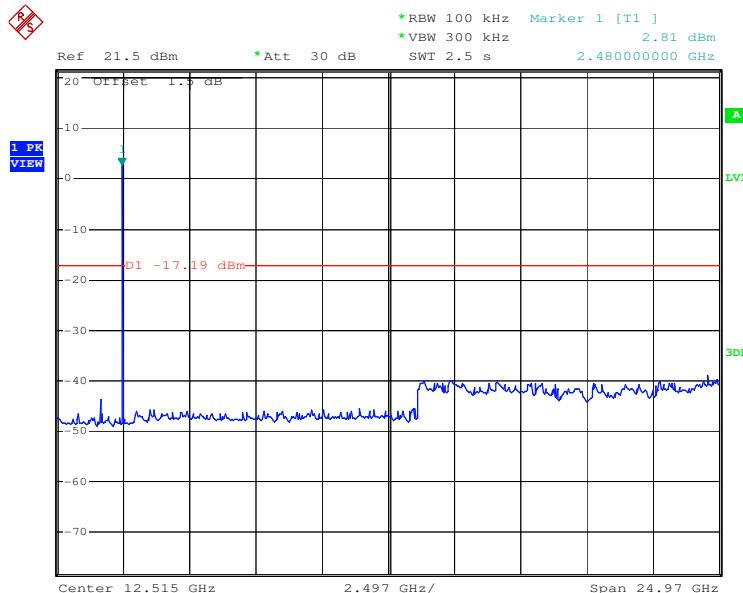

5.10 Pseudorandom Frequency Hopping Sequence

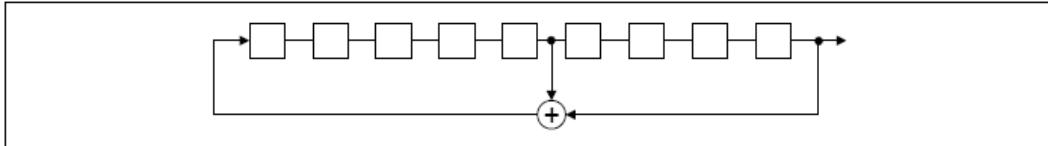Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:																						
	<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>																						
EUT Pseudorandom Frequency Hopping Sequence																							
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> Number of shift register stages: 9 Length of pseudo-random sequence: $2^9 - 1 = 511$ bits Longest sequence of zeros: 8 (non-inverted signal)  <p>Linear Feedback Shift Register for Generation of the PRBS sequence</p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <table border="1" style="width: 100%; text-align: center;"> <tr> <td>0</td><td>2</td><td>4</td><td>6</td><td colspan="2">62 64</td><td>78</td><td>1</td><td colspan="3">73 75 77</td> </tr> <tr> <td> </td><td> </td> </tr> </table> <p>Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>		0	2	4	6	62 64		78	1	73 75 77													
0	2	4	6	62 64		78	1	73 75 77															

5.11 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205																								
Test Method:	ANSI C63.10: 2009 and PUBLIC NOTICE DA 00-705																								
Test Frequency Range:	30MHz to 25GHz																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table border="1"><thead><tr><th>Frequency</th><th>Detector</th><th>RBW</th><th>VBW</th><th>Remark</th></tr></thead><tbody><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average Value</td></tr></tbody></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	Peak	1MHz	10Hz	Average Value																					
Limit:	<table border="1"><thead><tr><th>Frequency</th><th>Limit (dBuV/m @3m)</th><th>Remark</th></tr></thead><tbody><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>74.0</td><td>Peak Value</td></tr></tbody></table>					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	74.0	Peak Value																							
Test Procedure:	<ol style="list-style-type: none">The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.																								
Test Instruments:	Refer to section 4.8 for details.																								

Test mode:	Non-hopping transmitting with modulation. 1. Pre-scan the EUT in GFSK, $\pi/4$ DQPSK and 8DPSK modes and find out the worst case is GFSK mode. 2. Transmitting mode.
Test results:	Pass
Test setup:	<p>Below 1GHz</p> <p>Above 1GHz</p>


Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor


5.11.1 Radiated emission below 1GHz

Vertical

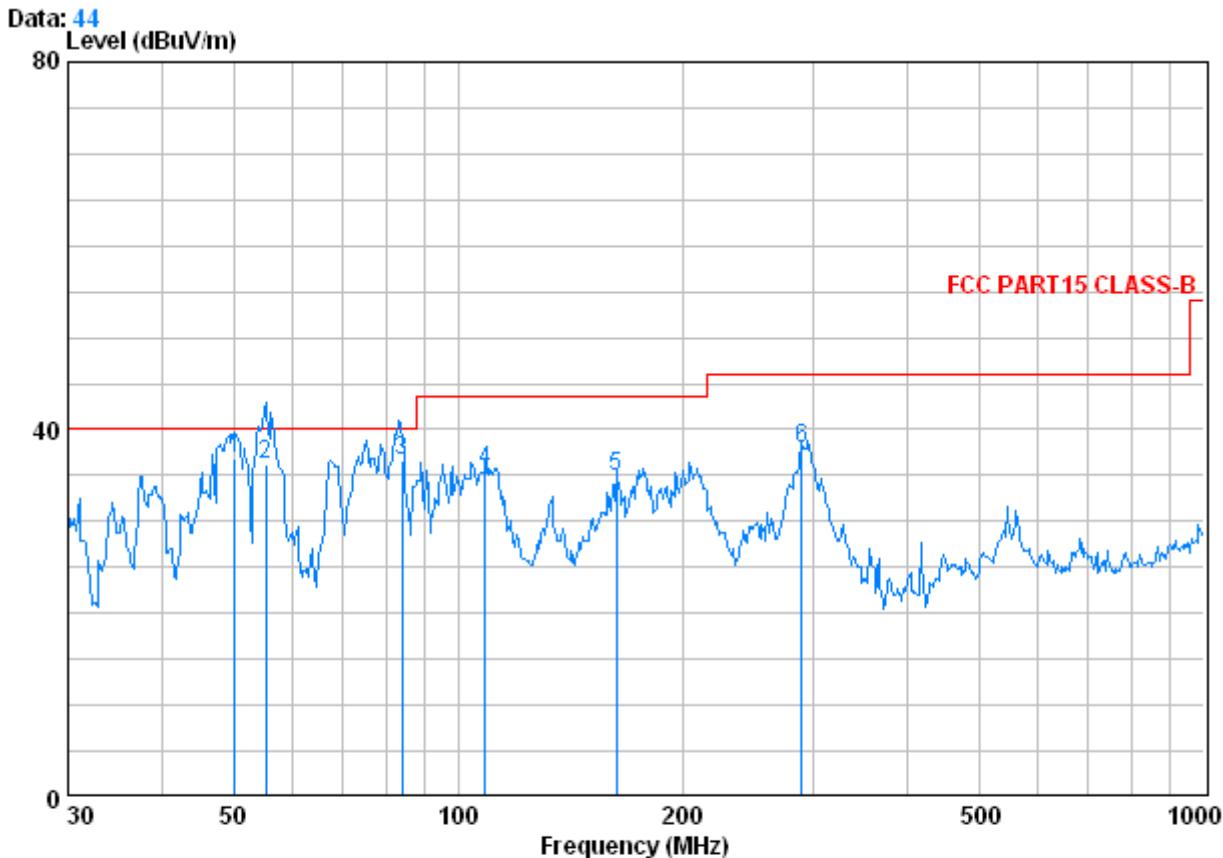

Freq	Cable		Antenna	Preamp	Read	Limit	Over	
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	50.232	0.80	7.98	27.29	55.27	36.77	40.00	-3.23
2	55.220	0.80	7.56	27.28	55.20	36.28	40.00	-3.72
3	84.020	1.10	8.14	27.22	54.60	36.61	40.00	-3.39
4	108.647	1.23	8.68	27.14	52.78	35.54	43.50	-7.96
5	163.182	1.34	9.56	26.85	50.76	34.83	43.50	-8.67
6	289.002	1.85	13.40	26.43	49.08	37.90	46.00	-8.10

Horizontal

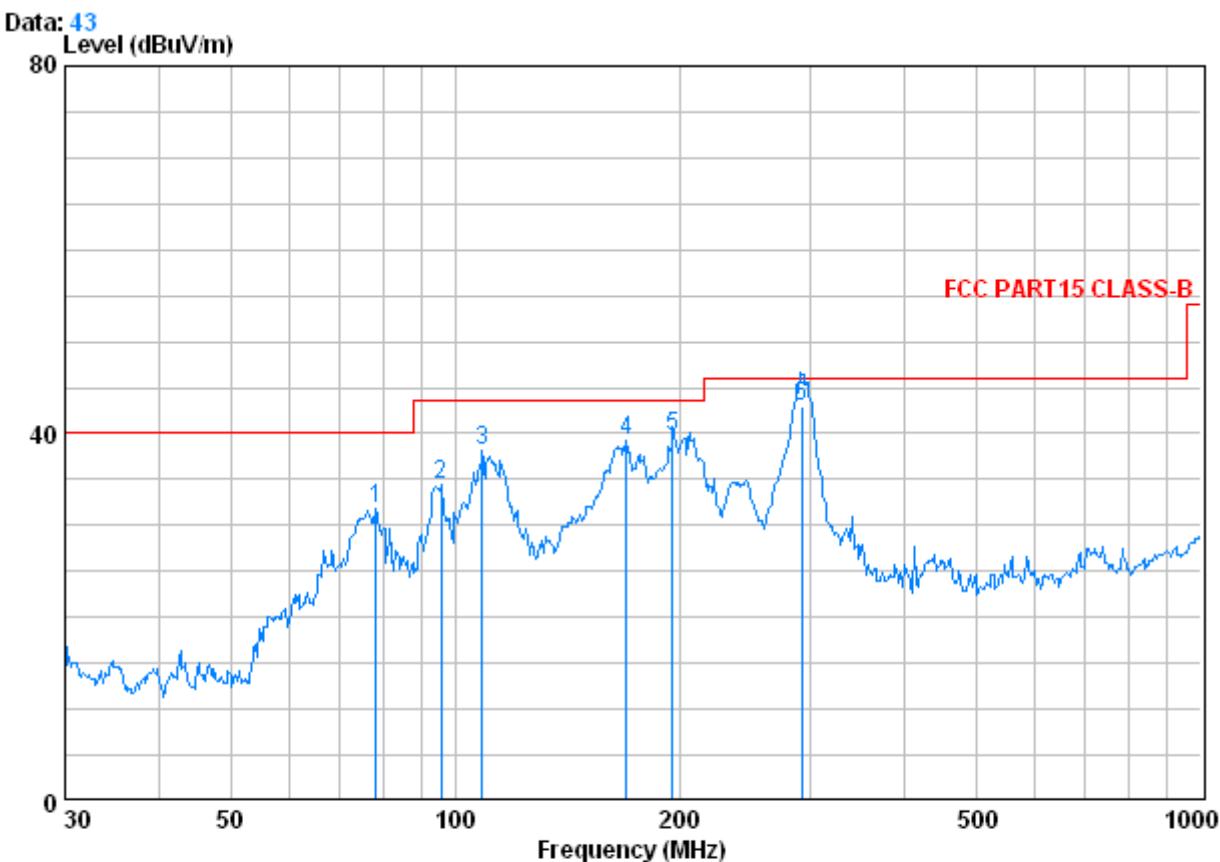

	Cable Freq	Antenna Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
--	------------	--------------	----------------	---------------	------------	-------------	------------	------------

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	78.413	1.05	7.59	27.23	50.45	31.86	40.00	-8.14
2	95.762	1.16	8.93	27.21	51.52	34.41	43.50	-9.09
3	108.647	1.23	8.68	27.14	55.30	38.06	43.50	-5.44
4	169.599	1.35	9.51	26.82	55.12	39.16	43.50	-4.34
5	195.822	1.39	10.16	26.71	54.83	39.67	43.50	-3.83
6	291.750	1.86	13.53	26.42	54.00	42.98	46.00	-3.02

**5.11.2 Transmitter emission above 1GHz**

Worst case mode:		GFSK		Test channel:		Lowest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization		
3021.000	3.33	33.39	40.31	46.81	43.22	74.00	-30.78	Vertical		
3996.250	4.16	33.80	41.04	47.64	44.56	74.00	-29.44	Vertical		
4804.000	4.69	34.70	41.63	55.30	53.06	74.00	-20.94	Vertical		
6040.750	5.14	35.76	40.89	49.35	49.36	74.00	-24.64	Vertical		
7556.500	6.19	36.00	39.57	46.73	49.35	74.00	-24.65	Vertical		
8954.750	6.16	36.56	38.36	44.85	49.21	74.00	-24.79	Vertical		
2997.500	3.32	33.40	40.30	53.03	49.45	74.00	-24.55	Horizontal		
3749.500	3.95	33.51	40.86	48.24	44.84	74.00	-29.16	Horizontal		
4804.000	4.69	34.70	41.63	56.78	54.54	74.00	-19.46	Horizontal		
6217.000	5.18	35.96	40.73	50.18	50.59	74.00	-23.41	Horizontal		
7685.750	6.22	36.00	39.46	48.40	51.16	74.00	-22.84	Horizontal		
9248.500	6.08	36.89	38.11	46.18	51.04	74.00	-22.96	Horizontal		

Worst case mode:		GFSK		Test channel:		Lowest		Remark:		Average
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization		
3021.000	3.33	33.39	40.31	35.16	31.57	54.00	-22.43	Vertical		
3996.250	4.16	33.80	41.04	38.66	35.58	54.00	-18.42	Vertical		
4804.000	4.69	34.70	41.63	52.37	50.13	54.00	-3.87	Vertical		
6040.750	5.14	35.76	40.89	38.50	38.51	54.00	-15.49	Vertical		
7556.500	6.19	36.00	39.57	37.15	39.77	54.00	-14.23	Vertical		
8954.750	6.16	36.56	38.36	33.61	37.97	54.00	-16.03	Vertical		
2997.500	3.32	33.40	40.30	51.25	47.67	54.00	-6.33	Horizontal		
3749.500	3.95	33.51	40.86	45.31	41.91	54.00	-12.09	Horizontal		
4804.000	4.69	34.70	41.63	51.93	49.69	54.00	-4.31	Horizontal		
6217.000	5.18	35.96	40.73	46.52	46.93	54.00	-7.07	Horizontal		
7685.750	6.22	36.00	39.46	40.22	42.98	54.00	-11.02	Horizontal		
9248.500	6.08	36.89	38.11	38.16	43.02	54.00	-10.98	Horizontal		

Worst case mode:	GFSK		Test channel:		Middle	Remark:	Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization
2997.500	3.32	33.40	40.30	49.97	46.39	74.00	-27.61	Vertical
4043.250	4.20	33.94	41.07	50.91	47.98	74.00	-26.02	Vertical
4882.000	4.72	34.59	41.68	60.10	57.73	74.00	-16.27	Vertical
7709.250	6.22	36.00	39.44	49.33	52.11	74.00	-21.89	Vertical
9718.500	5.98	37.42	37.70	46.19	51.89	74.00	-22.11	Vertical
11692.500	6.39	38.59	38.15	46.01	52.84	74.00	-21.16	Vertical
2997.500	3.32	33.40	40.30	49.94	46.36	74.00	-27.64	Horizontal
4137.250	4.25	34.22	41.14	49.54	46.87	74.00	-27.13	Horizontal
4887.500	4.72	34.59	41.68	59.63	57.26	74.00	-16.74	Horizontal
6569.500	5.27	36.23	40.43	50.00	51.07	74.00	-22.93	Horizontal
8872.500	6.16	36.49	38.44	46.90	51.11	74.00	-22.89	Horizontal
11375.250	6.31	38.43	38.02	45.46	52.18	74.00	-21.82	Horizontal

Worst case mode:	GFSK		Test channel:		Middle	Remark:	Average	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization
2997.500	3.32	33.40	40.30	38.46	34.88	54.00	-19.12	Vertical
4043.250	4.20	33.94	41.07	41.33	38.40	54.00	-15.60	Vertical
4882.000	4.72	34.59	41.68	52.96	50.59	54.00	-3.41	Vertical
7709.250	6.22	36.00	39.44	36.25	39.03	54.00	-14.97	Vertical
9718.500	5.98	37.42	37.70	35.22	40.92	54.00	-13.08	Vertical
11692.500	6.39	38.59	38.15	38.90	45.73	54.00	-8.27	Vertical
2997.500	3.32	33.40	40.30	38.52	34.94	54.00	-19.06	Horizontal
4137.250	4.25	34.22	41.14	36.86	34.19	54.00	-19.81	Horizontal
4882.000	4.72	34.59	41.68	55.32	52.95	54.00	-1.05	Horizontal
6569.500	5.27	36.23	40.43	37.64	38.71	54.00	-15.29	Horizontal
8872.500	6.16	36.49	38.44	37.53	41.74	54.00	-12.26	Horizontal
11375.250	6.31	38.43	38.02	36.21	42.93	54.00	-11.07	Horizontal





Worst case mode:	GFSK		Test channel:		Highest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
3432.250	3.69	33.23	40.62	47.43	43.73	74.00	-30.27	Vertical	
4337.000	4.38	34.73	41.29	48.36	46.18	74.00	-27.82	Vertical	
4960.000	4.76	34.46	41.74	55.54	53.02	74.00	-20.98	Vertical	
6510.750	5.26	36.30	40.48	49.39	50.47	74.00	-23.53	Vertical	
8719.750	6.17	36.37	38.57	46.00	49.97	74.00	-24.03	Vertical	
11645.500	6.38	38.54	38.13	45.13	51.92	74.00	-22.08	Vertical	
3314.750	3.58	33.28	40.54	47.32	43.64	74.00	-30.36	Horizontal	
4172.500	4.28	34.31	41.16	48.35	45.78	74.00	-28.22	Horizontal	
4960.000	4.76	34.46	41.74	56.89	54.37	74.00	-19.63	Horizontal	
6123.000	5.16	35.84	40.81	49.39	49.58	74.00	-24.42	Horizontal	
7556.500	6.19	36.00	39.57	46.55	49.17	74.00	-24.83	Horizontal	
9930.000	5.98	37.63	37.52	44.51	50.60	74.00	-23.40	Horizontal	

Worst case mode:	GFSK		Test channel:		Highest		Remark:		Average
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
3432.250	3.69	33.23	40.62	38.91	35.21	54.00	-18.79	Vertical	
4337.000	4.38	34.73	41.29	39.63	37.45	54.00	-16.55	Vertical	
4960.000	4.76	34.46	41.74	52.68	50.16	54.00	-3.84	Vertical	
6510.750	5.26	36.30	40.48	41.23	42.31	54.00	-11.69	Vertical	
8719.750	6.17	36.37	38.57	37.52	41.49	54.00	-12.51	Vertical	
11645.500	6.38	38.54	38.13	36.41	43.20	54.00	-10.80	Vertical	
3314.750	3.58	33.28	40.54	38.65	34.97	54.00	-19.03	Horizontal	
4172.500	4.28	34.31	41.16	36.95	34.38	54.00	-19.62	Horizontal	
4960.000	4.76	34.46	41.74	53.14	50.62	54.00	-3.38	Horizontal	
6123.000	5.16	35.84	40.81	38.54	38.73	54.00	-15.27	Horizontal	
7556.500	6.19	36.00	39.57	35.84	38.46	54.00	-15.54	Horizontal	
9930.000	5.98	37.63	37.52	36.21	42.30	54.00	-11.70	Horizontal	


Remark: The disturbance above 12GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

5.11.3 Band edge (Radiated Emission)

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak	Vertical
------------	--------------	---------------	--------	---------	------	----------

Data: 16

Level (dBuV/m)

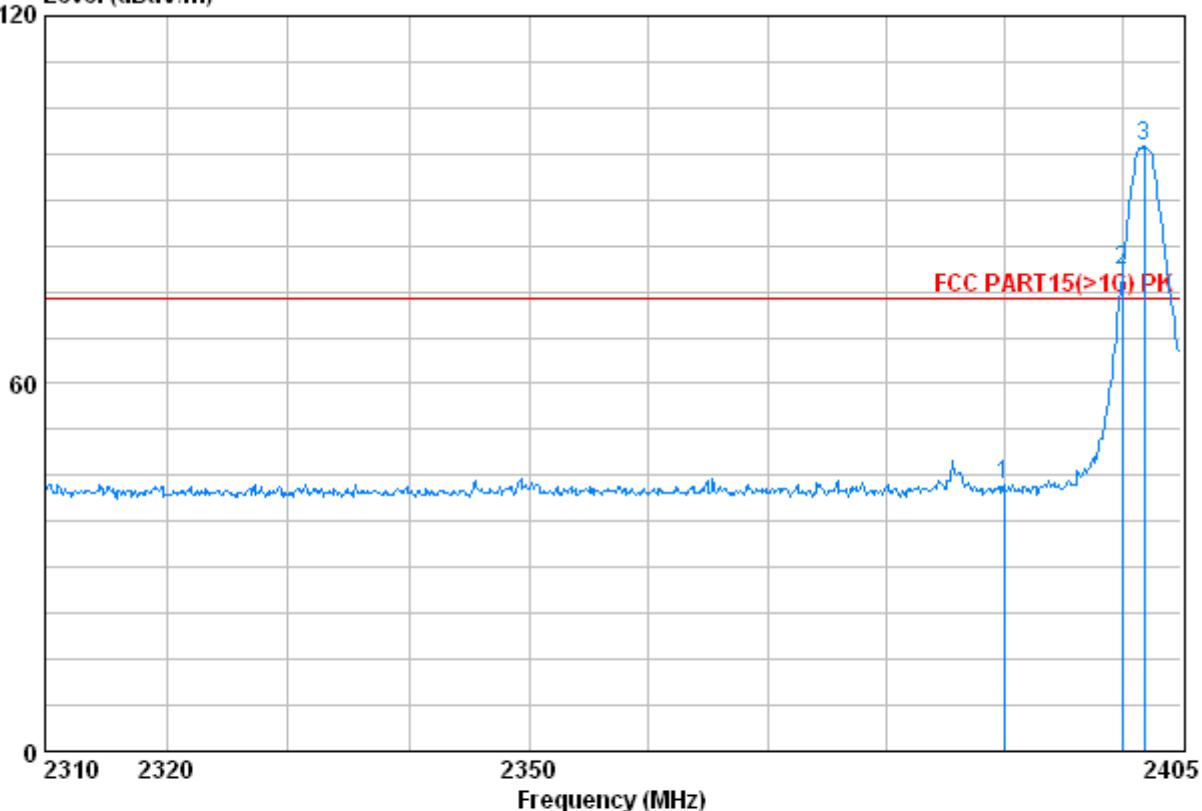


Cable	Antenna	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Level	Level	Line	Limit

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
Freq	Loss	Factor	Factor	Read	Limit	Line	Over	Limit
1	2390.000	2.98	32.51	39.85	47.79	43.44	74.00	-30.56
2 X	2400.000	2.98	32.51	39.86	82.75	78.38	74.00	4.38
3 0	2401.865	2.98	32.51	39.86	102.96	98.59	74.00	24.59

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak	Horizontal
------------	--------------	---------------	--------	---------	------	------------


Data: 15
Level (dBuV/m)

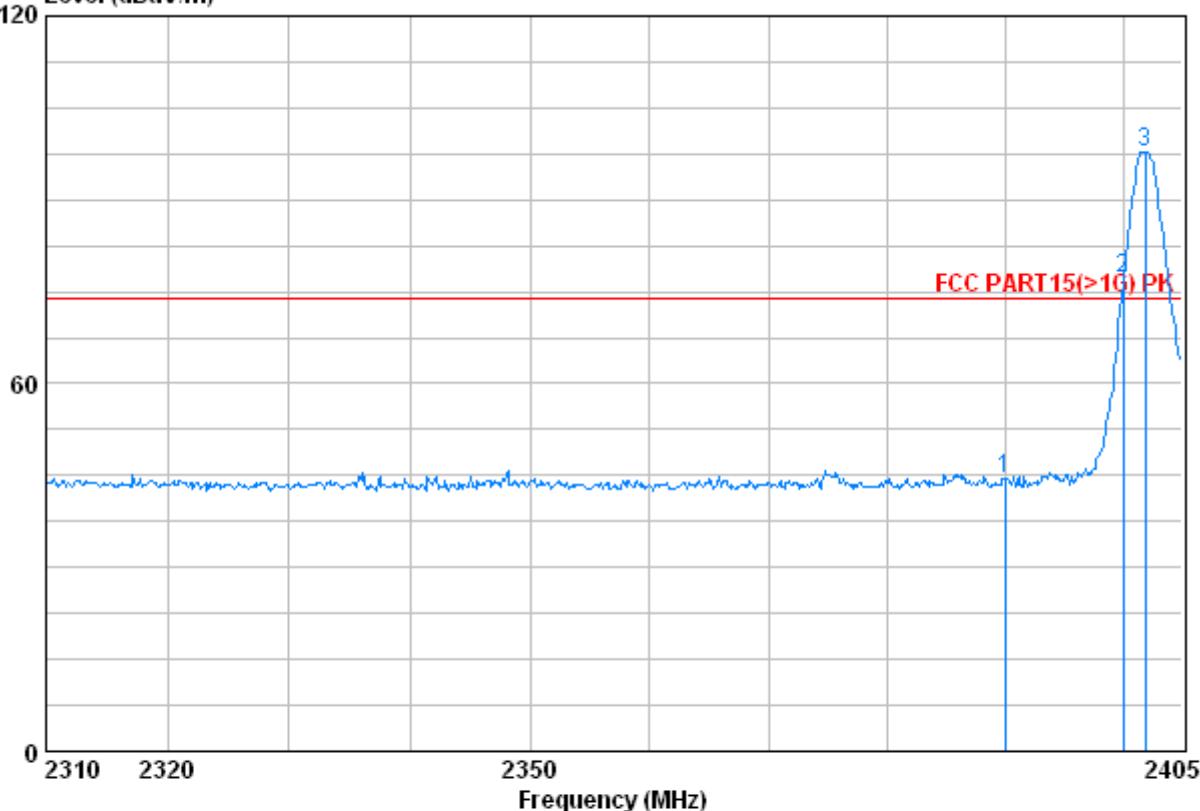

Freq	Cable			Antenna	Preamp	Read	Limit	Line	Over
	Loss	Antenna	Preamp	Factor	Factor	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	2.98	32.51	39.85	48.68	44.32	74.00	-29.68	
2 X	2400.000	2.98	32.51	39.86	81.54	77.17	74.00	3.17	
3 0	2401.865	2.98	32.51	39.86	102.12	97.75	74.00	23.75	

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Average	Vertical
------------	--------------	---------------	--------	---------	---------	----------


Data: 17
Level (dBuV/m)

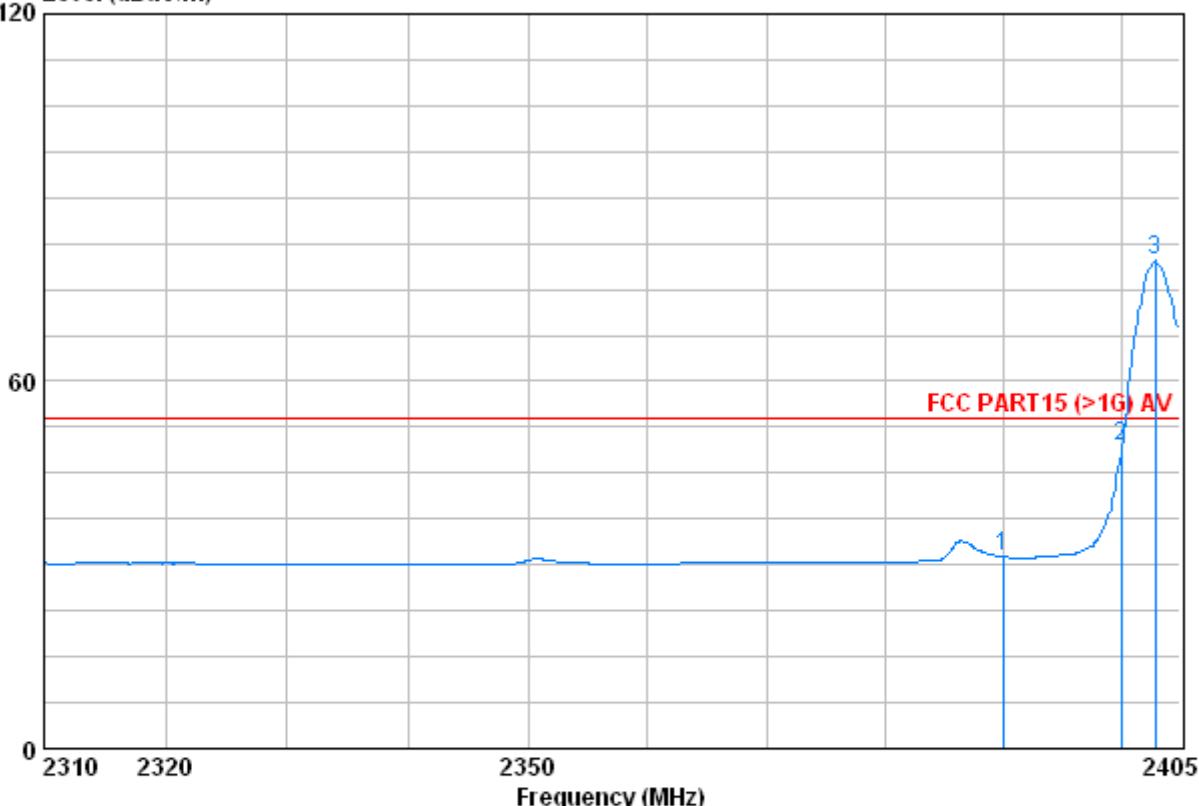

Freq	Cable		Antenna	Preamp	Read	Limit	Line	Over
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	35.61	31.26	54.00	-22.74
2	2400.000	2.98	32.51	39.86	53.79	49.42	54.00	-4.58
3	2402.910	2.98	32.54	39.86	84.01	79.68	54.00	25.68

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Average	Horizontal
------------	--------------	---------------	--------	---------	---------	------------

Data: 18
Level (dBuV/m)

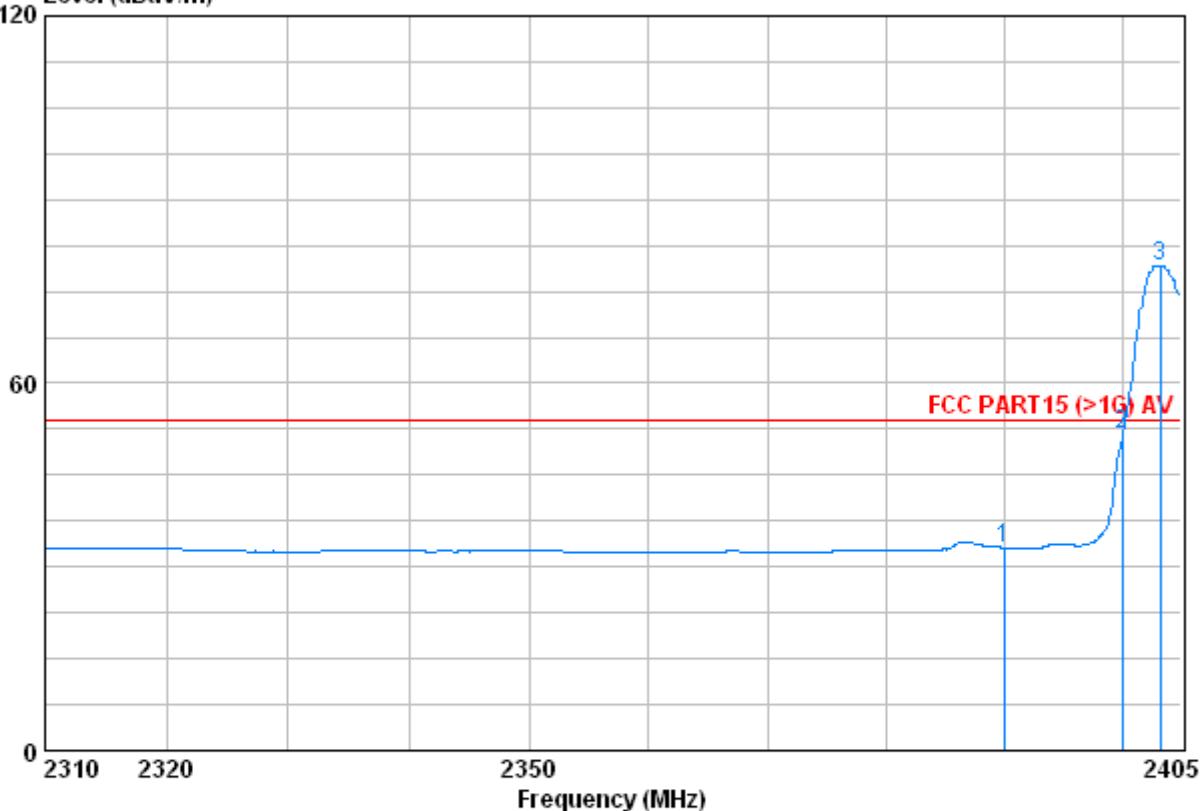

Freq	Cable		Antenna	Preamp	Read	Limit	Over	
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	37.46	33.10	54.00	-20.90
2	2400.000	2.98	32.51	39.86	56.14	51.77	54.00	-2.23
3 0	2403.290	2.99	32.54	39.86	83.59	79.26	54.00	25.26

Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak	Vertical
------------	--------------	---------------	---------	---------	------	----------

Data: 25

Level (dBuV/m)

120

60


0

2478

2500


Frequency (MHz)

FCC PART15(>1G) PK

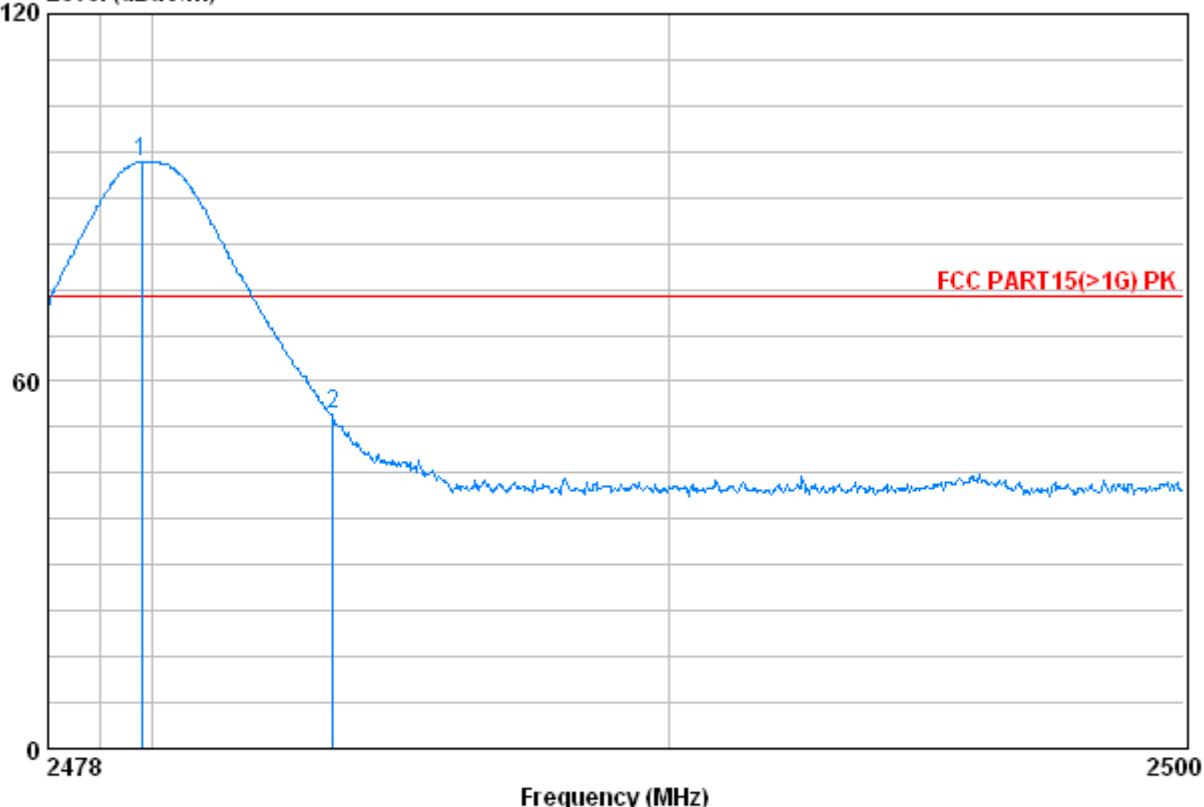

Freq	Cable	Antenna	Preamp	Read	Limit	Over		
	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2479.804	3.03	32.67	39.92	100.04	95.82	74.00	21.82
2	2483.500	3.03	32.67	39.92	58.67	54.45	74.00	-19.55


Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak	Horizontal
------------	--------------	---------------	---------	---------	------	------------

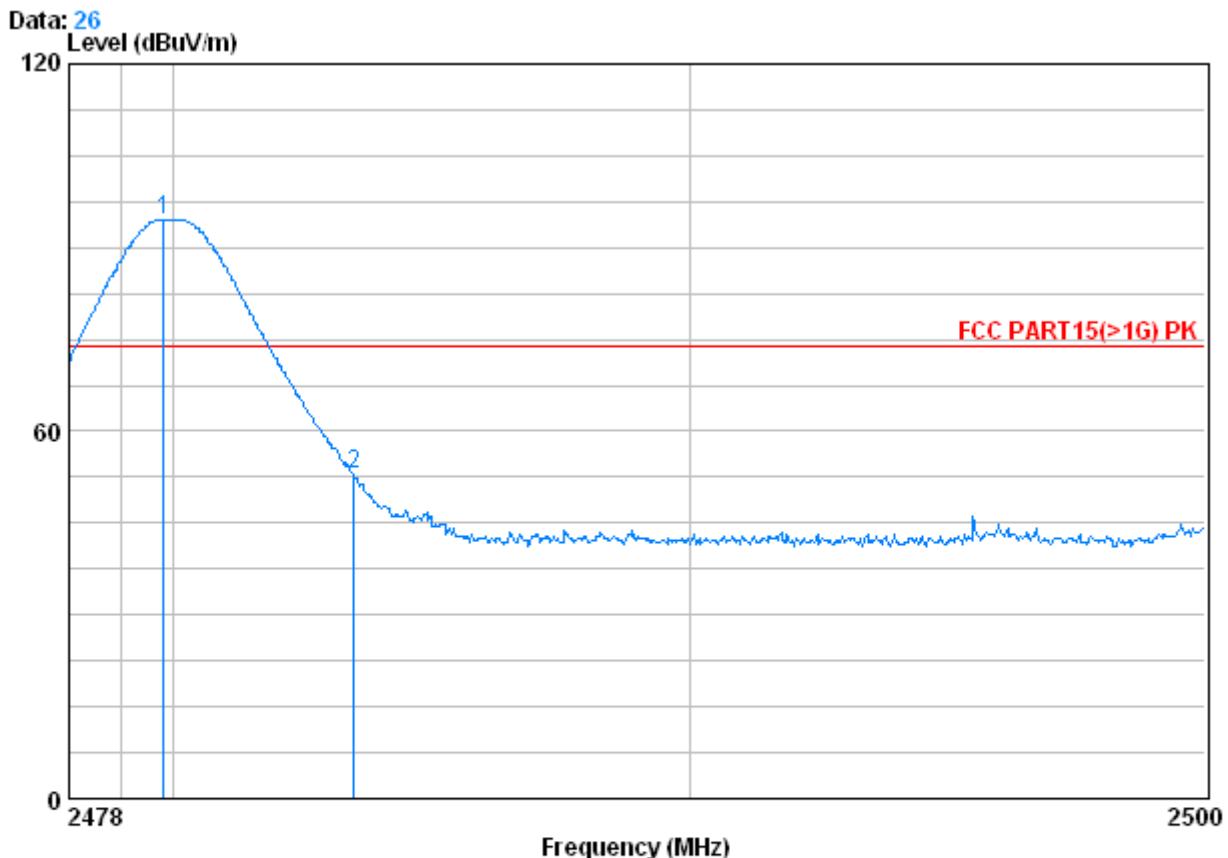

Freq	Cable	Antenna	Preamp	Read	Limit	Over		
	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X		2479.826	3.03	32.67	39.92	98.83	94.61	74.00 20.61
2		2483.500	3.03	32.67	39.92	57.13	52.91	74.00 -21.09


Test mode:	Transmitting	Test channel:	Highest	Remark:	Average	Vertical
------------	--------------	---------------	---------	---------	---------	----------

Data: 28
Level (dBuV/m)

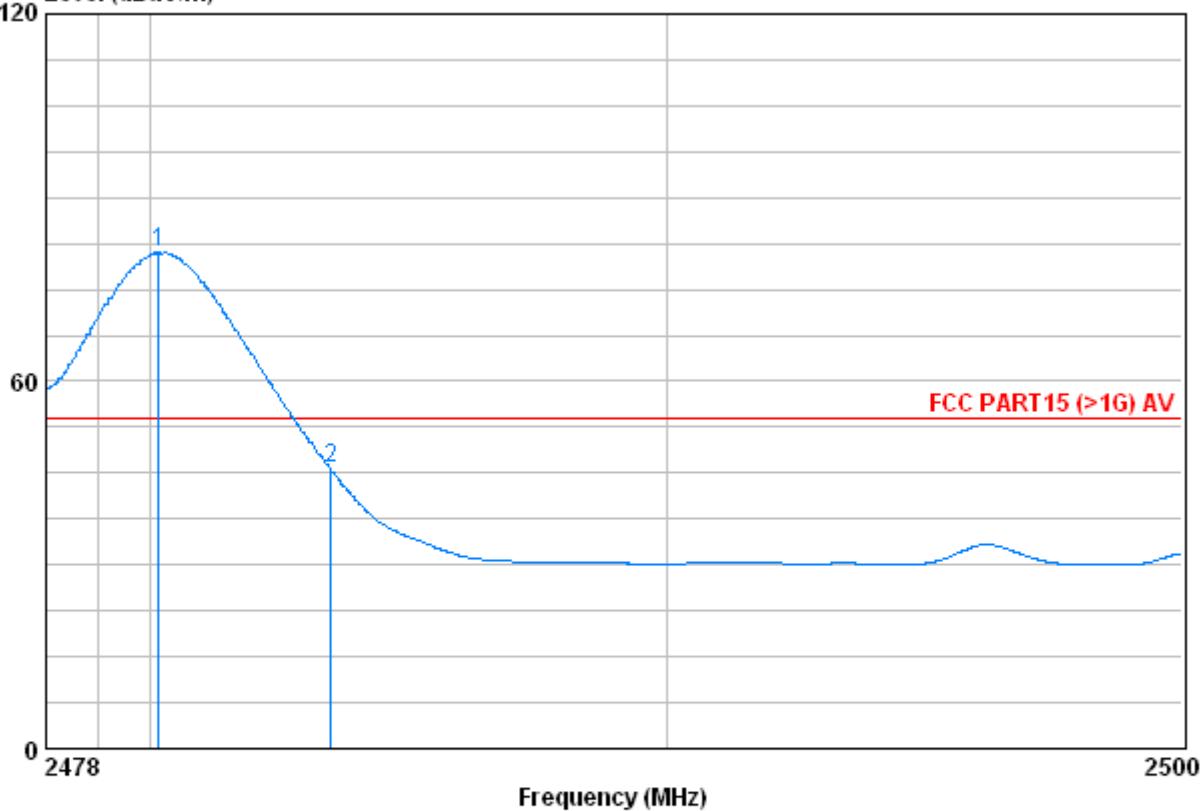

Freq	Cable	Antenna	Preamp	Read	Limit	Over			
	Loss	Factor	Factor	Level			Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	0	2480.178	3.03	32.67	39.92	85.27	81.05	54.00	27.05
2		2483.500	3.03	32.67	39.92	49.89	45.67	54.00	-8.33

Test mode:	Transmitting	Test channel:	Highest	Remark:	Average	Horizontal
------------	--------------	---------------	---------	---------	---------	------------

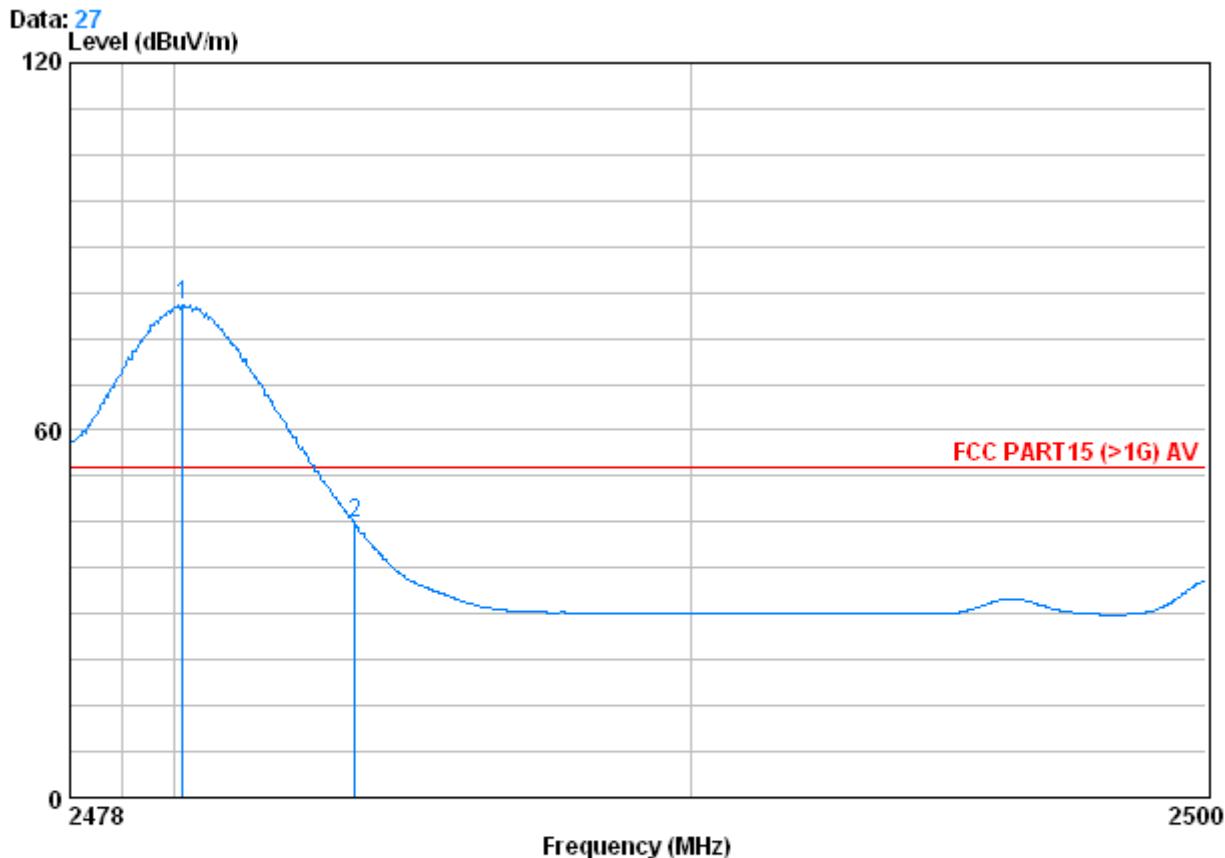

Freq	Cable	Antenna	Preamp	Read	Limit	Over		
	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X		2480.178	3.03	32.67	39.92	84.62	80.40	54.00
2		2483.500	3.03	32.67	39.92	49.02	44.80	54.00
								-9.20