



FCC RADIO TEST REPORT

FCC ID: ZFN-ELL1401

Product : Laptop

Trade Name : N/A

Model Name : NT14W

Serial Model : N/A

Report No. : PTC802081160811E-FC02

Prepared for

Huike Electronics(shenzhen)Co.,Ltd

Huike industrial park, Minying industrial park, Shui tian country, Shiyan, Baoan
District, Shenzhen, China

Prepared by

DongGuan Precise testing &Certification Corp. Ltd

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community
Dongcheng District, Dongguan, Guangdong, China

TEST RESULT CERTIFICATION

Applicant's name : Huike Electronics(shenzhen)Co.,Ltd
Address : Huike industrial park, Minying industrial park, Shui tian country, Shiyan, Baoan District, Shenzhen, China
Manufacture's Name : Huike Electronics(shenzhen)Co.,Ltd
Address : Huike industrial park, Minying industrial park, Shui tian country, Shiyan, Baoan District, Shenzhen, China

Product description

Product name : Laptop
Model and/or type reference : NT14W

Serial Model : N/A

Standards : FCC Part15.247

Test procedure ANSI C63.10-2013

This device described above has been tested by PTS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTS, this document may be altered or revised by PTS, personal only, and shall be noted in the revision of the document.

Date of Test :

Date (s) of performance of tests : 01 Sep. 2016 ~06 Sep. 2016

Date of Issue : 06 Sep. 2016

Test Result : **Pass**

Testing Engineer

August Qiu

Technical Manager

Hack Ye

Authorized Signatory

Chris Du

August Qiu

Hack Ye

Chris Du

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3 . EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
3.1.2 TEST PROCEDURE	13
3.1.3 DEVIATION FROM TEST STANDARD	13
3.1.4 TEST SETUP	13
3.1.5 EUT OPERATING CONDITIONS	13
3.1.6 TEST RESULTS	14
3.2 RADIATED EMISSION MEASUREMENT	16
3.2.1 RADIATED EMISSION LIMITS	16
3.2.2 TEST PROCEDURE	17
3.2.3 DEVIATION FROM TEST STANDARD	17
3.2.4 TEST SETUP	18
3.2.5 EUT OPERATING CONDITIONS	19
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	20
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	21
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	23
4 . POWER SPECTRAL DENSITY TEST	25
4.1 APPLIED PROCEDURES / LIMIT	25
4.1.1 TEST PROCEDURE	25
4.1.2 DEVIATION FROM STANDARD	25
4.1.3 TEST SETUP	25
4.1.4 EUT OPERATION CONDITIONS	25
4.1.5 TEST RESULTS	26
5 . BANDWIDTH TEST	28
5.1 APPLIED PROCEDURES / LIMIT	28
5.1.1 TEST PROCEDURE	28
5.1.2 DEVIATION FROM STANDARD	28

Table of Contents

	Page
5.1.3 TEST SETUP	28
5.1.4 EUT OPERATION CONDITIONS	28
5.1.5 TEST RESULTS	29
6 . PEAK OUTPUT POWER TEST	31
6.1 APPLIED PROCEDURES / LIMIT	31
6.1.1 TEST PROCEDURE	31
6.1.2 DEVIATION FROM STANDARD	31
6.1.3 TEST SETUP	31
6.1.4 EUT OPERATION CONDITIONS	31
6.1.5 TEST RESULTS	32
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	33
7.1 DEVIATION FROM STANDARD	33
7.2 TEST SETUP	33
7.3 EUT OPERATION CONDITIONS	33
7.4 TEST RESULTS	34
8 . ANTENNA REQUIREMENT	35
8.1 STANDARD REQUIREMENT	35
8.2 EUT ANTENNA	35
9 . EUT TEST PHOTO	36

1.. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

1.1. TEST FACILITY

Dongguan Precise Testing Service Co., Ltd.

Address: Building D, Baoding Technology Park, Guangming Road 2, Dongcheng District, Dongguan, Guangdong, China, Dongguan, China

FCC-Registration No.: 371540

1.2. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated (<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated (>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

2.. GENERAL INFORMATION

2.1. GENERAL DESCRIPTION OF EUT

Equipment	Laptop	
Trade Name	N/A	
Model Name	NT14W	
Serial Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a Laptop Operation Frequency:	2402~2480 MHz
	Modulation Type:	GFSK
	Bluetooth	Bluetooth 4.0
	Number Of Channel	40CH
	Antenna Designation:	Please see Note 3.
	Output Power(Peak):	1.21dbm
Channel List	Please refer to the Note 2.	
Adapter	Model:BI18-050300-AdU AC Power Input: 100-240V~, 50/60Hz, 0.8A Output: 5.0V---, 3.0A	
Battery	DC3.7V,4000mAh	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	Internal Antenna	N/A	2.14	BT Antenna

2.2. DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX 2402
Mode 2	TX 2440
Mode 3	TX 2480
Mode 4	Keeping TX mode


For Conducted Emission	
Final Test Mode	Description
Mode 4	Keeping TX mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX 2402
Mode 2	TX 2440
Mode 3	TX 2480

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.

2.3. BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



2.4. DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Laptop	N/A	NT14W	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in «Length» column.

2.5. EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY4510840	2016.07.06	2017.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2016.06.07	2017.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2016.07.06	2017.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.07	2017.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2016.06.07	2017.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2016.07.06	2017.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2015.12.22	2016.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2016.06.08	2017.06.07	1 year
10	USB RF power sensor	DARE	RPR3006W	15I00325S NO06	2016.07.06	2017.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2016.06.06	2017.06.05	1 year
2	LISN	R&S	ENV216	101313	2016.08.24	2017.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2016.08.24	2017.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.06.07	2017.06.06	1 year

3.. EMC EMISSION TEST

3.1. CONDUCTED EMISSION MEASUREMENT

3.1.1. POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2. TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3. DEVIATION FROM TEST STANDARD

No deviation

3.1.4. TEST SETUP

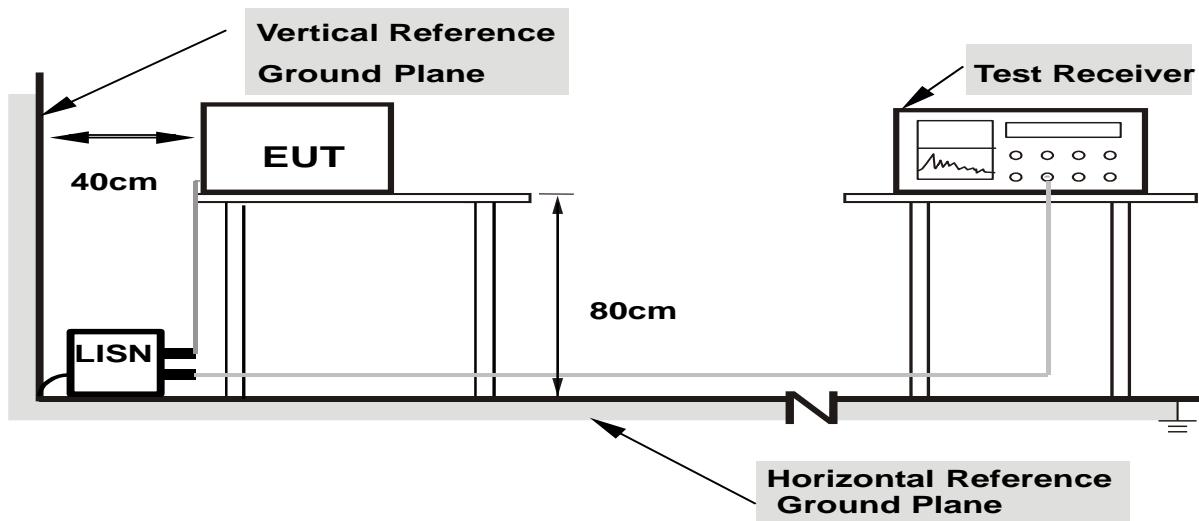

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5. EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6. TEST RESULTS

EUT:	Laptop	Model Name. :	NT14W
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 4

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor (dB)	Measure-ment (dB μ V)	Limits (dB μ V)	Margin (dB)	Detector Type
						QP
0.1900	36.87	10.00	46.87	64.03	-17.16	QP
0.1900	31.16	10.00	41.16	54.03	-12.87	AVG
0.5060	34.63	10.02	44.65	56.00	-11.35	QP
0.5060	28.61	10.02	38.63	46.00	-7.37	AVG
1.1140	30.67	10.06	40.73	56.00	-15.27	QP
1.1140	19.17	10.06	29.23	46.00	-16.77	AVG
2.4380	28.88	10.05	38.93	56.00	-17.07	QP
2.4380	20.14	10.05	30.19	46.00	-15.81	AVG
14.4820	34.15	10.25	44.40	60.00	-15.60	QP
14.4820	16.25	10.25	26.50	50.00	-23.50	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

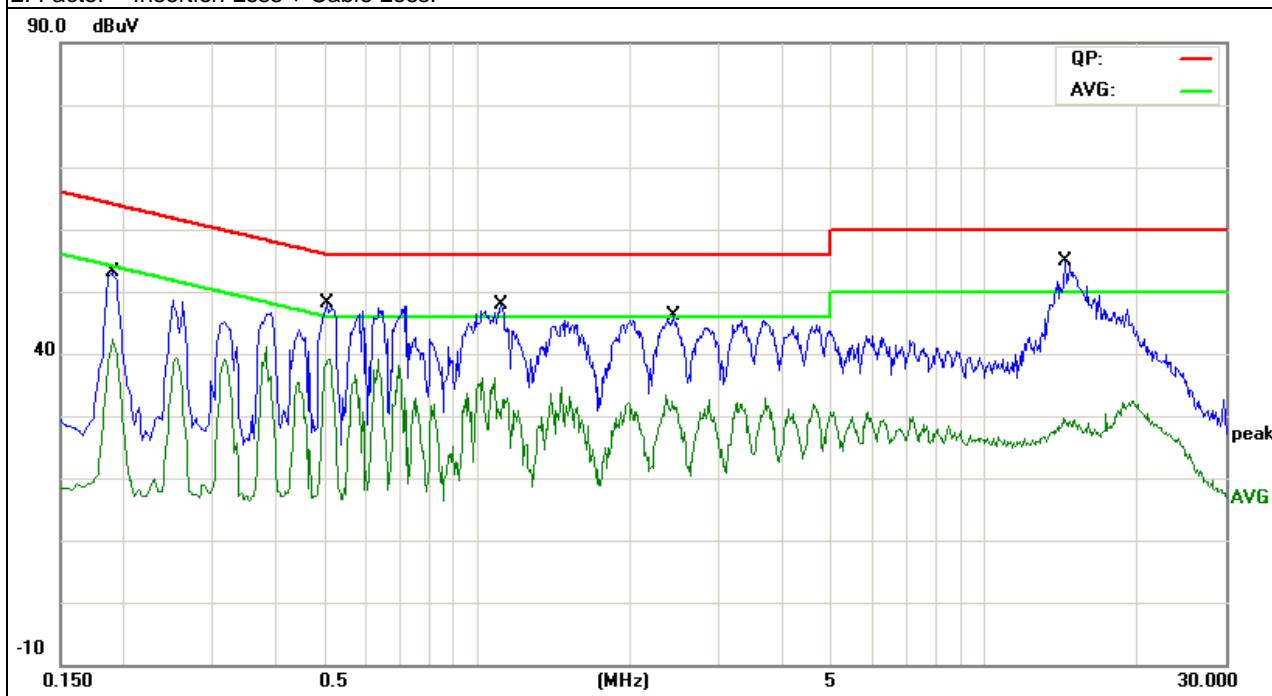


EUT:	Laptop	Model Name. :	NT14W
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 4

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V)	(dB μ V)	(dB)	
0.5020	33.19	10.02	43.21	56.00	-12.79	QP
0.5020	24.57	10.02	34.59	46.00	-11.41	AVG
1.0100	30.88	10.06	40.94	56.00	-15.06	QP
1.0100	20.01	10.06	30.07	46.00	-15.93	AVG
2.3900	27.30	10.05	37.35	56.00	-18.65	QP
2.3900	16.10	10.05	26.15	46.00	-19.85	AVG
2.4539	27.03	10.04	37.07	56.00	-18.93	QP
2.4539	15.21	10.04	25.25	46.00	-20.75	AVG
4.6140	28.47	9.97	38.44	56.00	-17.56	QP
4.6140	16.89	9.97	26.86	46.00	-19.14	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

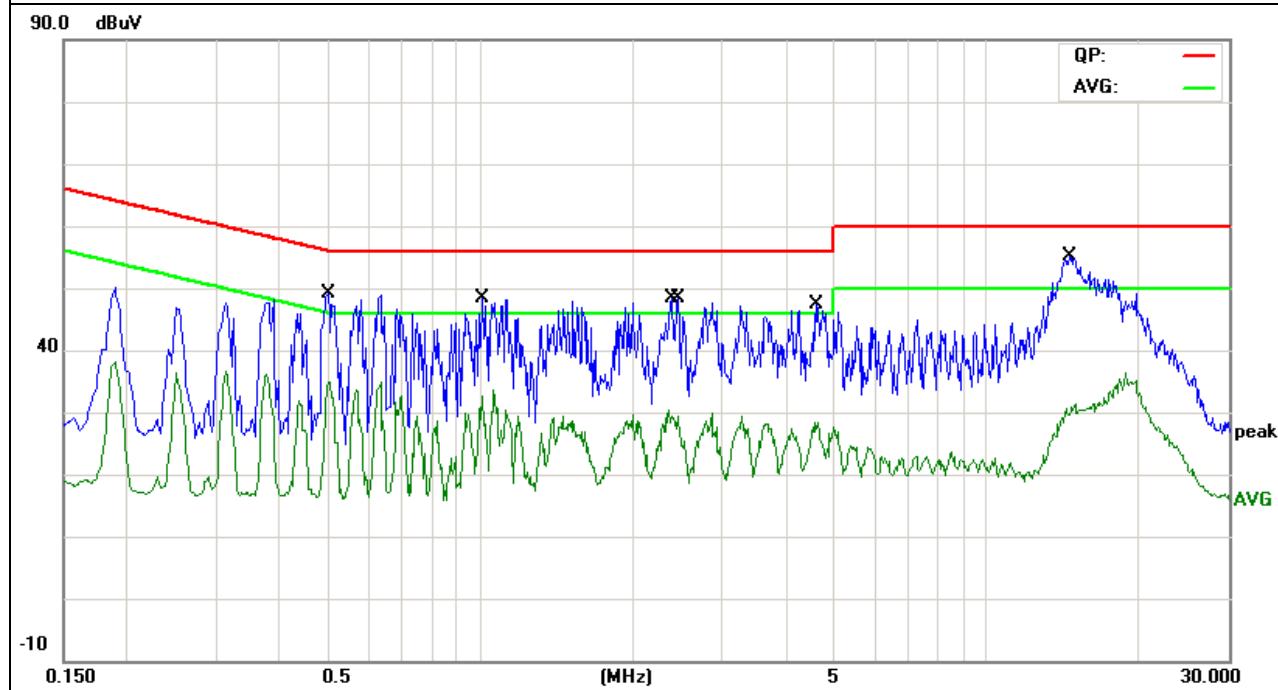

3.2. RADIATED EMISSION MEASUREMENT

3.2.1. RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	RBW 1 MHz VBW 3MHz Peak detector for Peak, RMS detector for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2. TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3. DEVIATION FROM TEST STANDARD


No deviation

3.2.4. TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

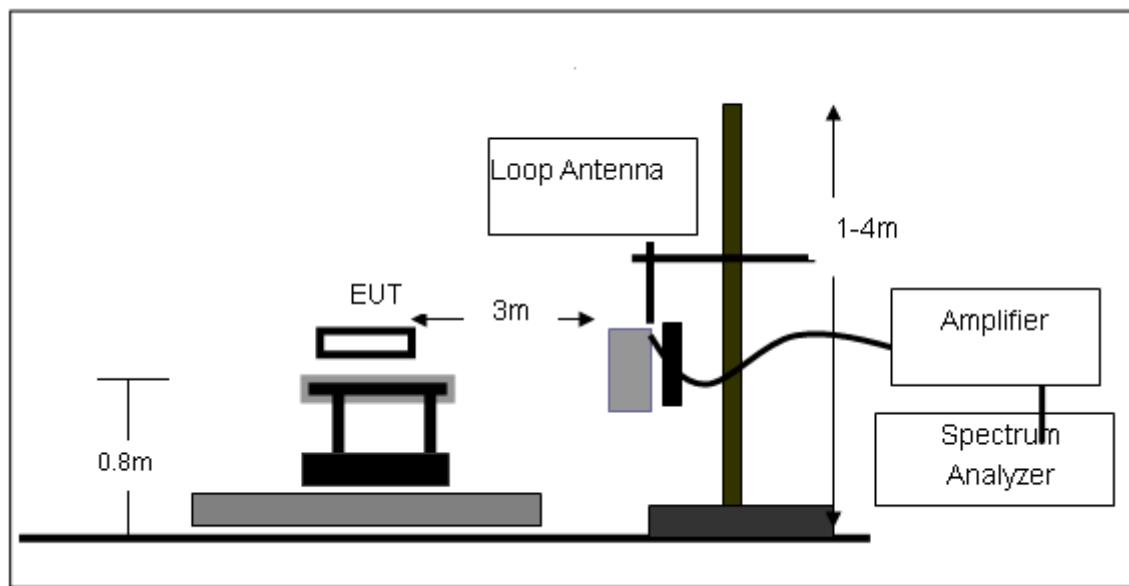

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

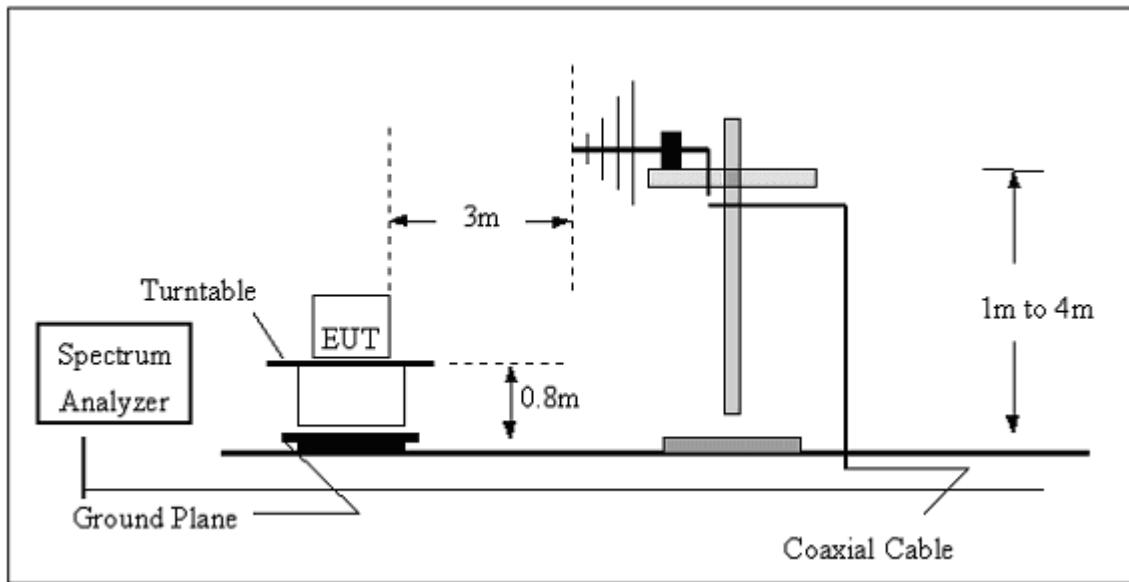

(C) Radiated Emission Test-Up Frequency Above 1GHz

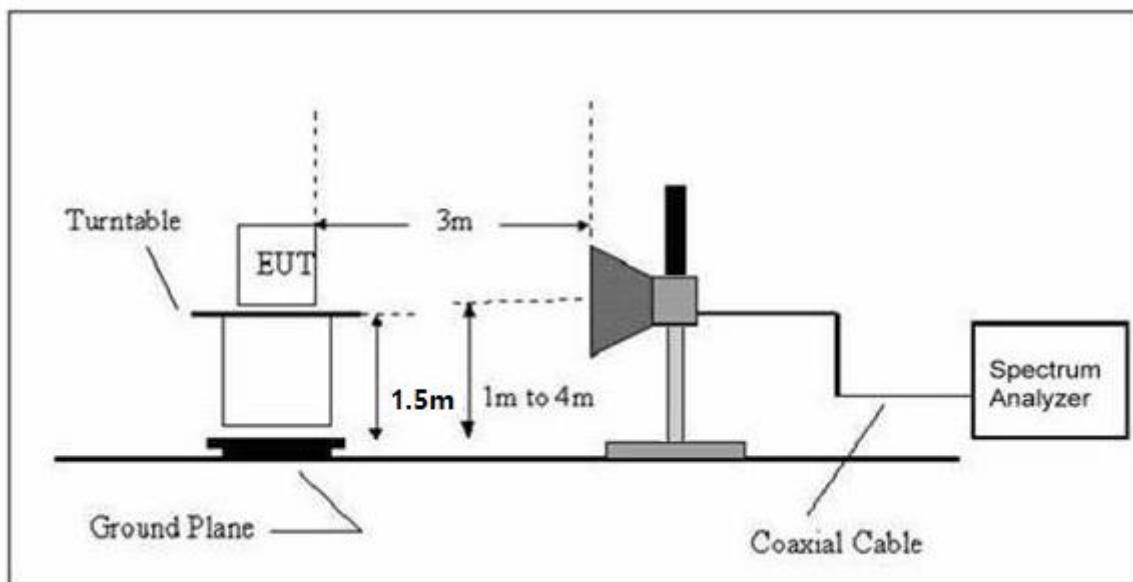

3.2.5. EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6. TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT:	Laptop	Model Name. :	NT14W
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 2(Worst case)	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.


3.2.7. TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	Laptop	Model Name :	NT14W
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 2(Worst case)	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
55.6094	9.32	6.1	15.42	40	-24.58	QP
130.3788	6.74	12.2	18.94	43.5	-24.56	QP
261.0582	6.45	14.85	21.3	46	-24.7	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

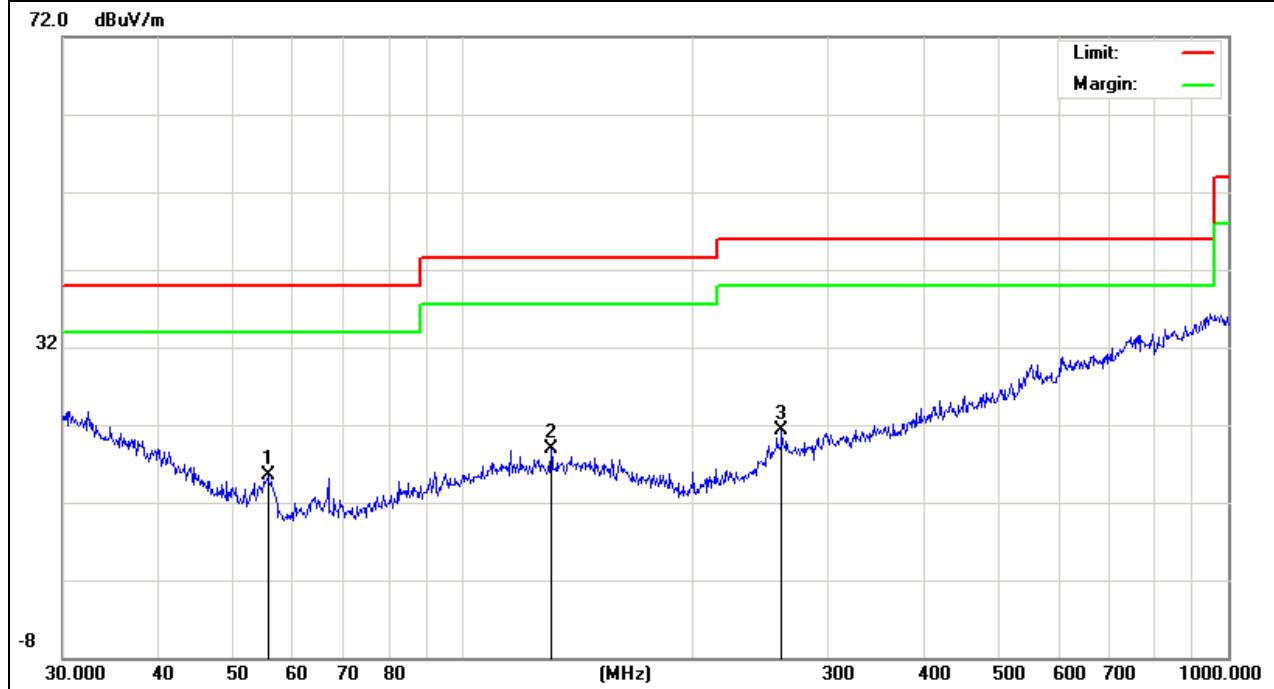


EUT :	Laptop	Model Name :	NT14W
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 2(Worst case)	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
117.7724	4.01	12.04	16.05	43.5	-27.45	QP
258.3263	4.48	14.71	19.19	46	-26.81	QP
595.1327	6.07	22.6	28.67	46	-17.33	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

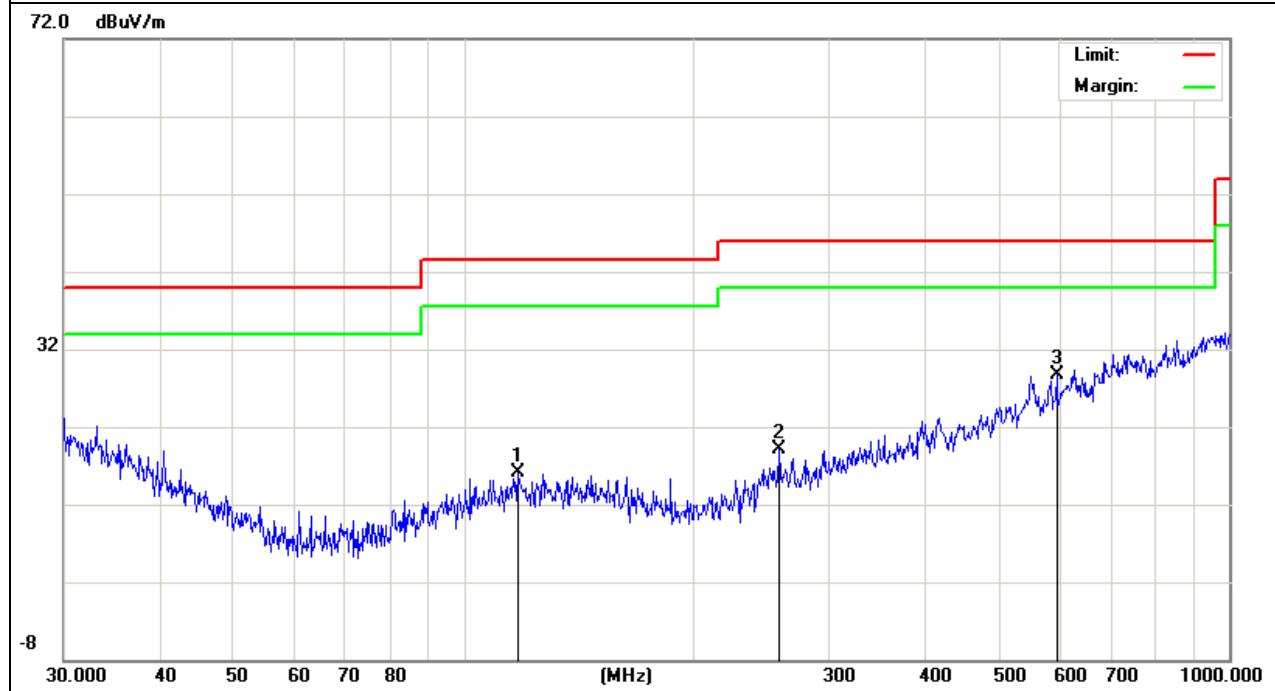

3.2.8. TEST RESULTS (ABOVE 1000 MHZ)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark	Comment
Low Channel (2402 MHz)-Above 1G							
4804.59	56.10	-3.64	52.46	74.00	-21.54	Pk	Vertical
4804.59	40.10	-3.64	36.46	54.00	-17.54	AV	Vertical
7206.54	60.99	-0.95	60.04	74.00	-13.96	Pk	Vertical
7206.54	42.10	-0.95	41.15	54.00	-12.85	AV	Vertical
4804.70	59.32	-3.64	55.68	74.00	-18.32	Pk	Horizontal
4804.70	42.43	-3.64	38.79	54.00	-15.21	AV	Horizontal
7206.62	57.89	-0.95	56.94	74.00	-17.06	Pk	Horizontal
7206.62	42.07	-0.95	41.12	54.00	-12.88	AV	Horizontal
Mid Channel (2440 MHz)-Above 1G							
4880.64	60.99	-3.68	57.31	74.00	-18.69	Pk	Vertical
4880.64	39.32	-3.68	35.64	54.00	-18.36	AV	Vertical
7320.54	59.32	-0.82	58.50	74.00	-15.50	Pk	Vertical
7320.54	41.99	-0.82	41.17	54.00	-12.83	AV	Vertical
4880.62	59.07	-3.68	55.39	74.00	-18.61	Pk	Horizontal
4880.62	41.76	-3.68	38.08	54.00	-15.92	AV	Horizontal
7320.47	58.10	-0.82	57.28	74.00	-16.72	Pk	Horizontal
7320.47	41.99	-0.82	41.17	54.00	-12.83	AV	Horizontal
High Channel (2480 MHz)- Above 1G							
4960.95	57.89	-3.59	54.30	74.00	-19.70	Pk	Vertical
4960.95	40.76	-3.59	37.17	54.00	-16.83	AV	Vertical
7440.66	58.07	-0.68	57.39	74.00	-18.61	Pk	Vertical
7440.66	40.07	-0.68	39.39	54.00	-14.61	AV	Vertical
4960.54	58.32	-3.59	54.73	74.00	-19.27	Pk	Horizontal
4960.54	40.40	-3.59	36.81	54.00	-17.19	AV	Horizontal
7440.70	61.76	-0.68	61.08	74.00	-12.92	Pk	Horizontal
7440.70	41.21	-0.68	40.53	54.00	-13.47	AV	Horizontal

Note:

(1)All other emissions more than 20dB below the limit.

Bandedge

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type	Comment
Low CH							
2326.72	61.39	-13.06	48.33	74	-25.67	Pk	Vertical
2326.72	55.53	-13.06	42.47	54	-11.53	AV	Vertical
2400	64.57	-13.06	51.51	74	-22.49	Pk	Vertical
2400	55.04	-13.06	41.98	54	-12.02	AV	Vertical
2378.23	61.27	-13.06	48.21	74	-25.79	Pk	Horizontal
2378.23	56.42	-13.06	43.36	54	-10.64	AV	Horizontal
2400	65.02	-13.06	51.96	74	-22.04	Pk	Horizontal
2400	55.85	-13.06	42.79	54	-11.21	AV	Horizontal
High CH							
2483.5	62.1	-12.78	49.32	74	-24.68	Pk	Vertical
2483.5	61.62	-12.78	48.84	54	-5.16	AV	Vertical
2483.5	61.82	-12.78	49.04	74	-24.96	Pk	Horizontal
2483.5	61.48	-12.78	48.7	54	-5.30	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.

4.. POWER SPECTRAL DENSITY TEST

4.1. APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


4.1.1. TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW ≥ 3 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2. DEVIATION FROM STANDARD

No deviation.

4.1.3. TEST SETUP

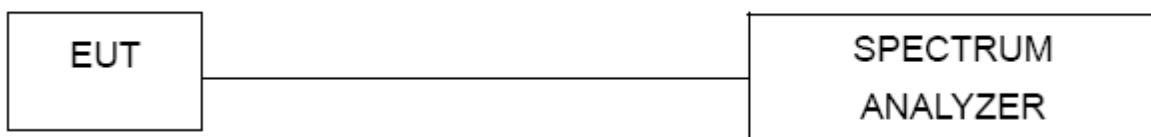


4.1.4. EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5. TEST RESULTS

EUT :	Laptop	Model Name :	NT14W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode /CH00, CH19, CH39		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2402 MHz	-13.11	8	PASS
2440 MHz	-11.55	8	PASS
2480 MHz	-12.11	8	PASS

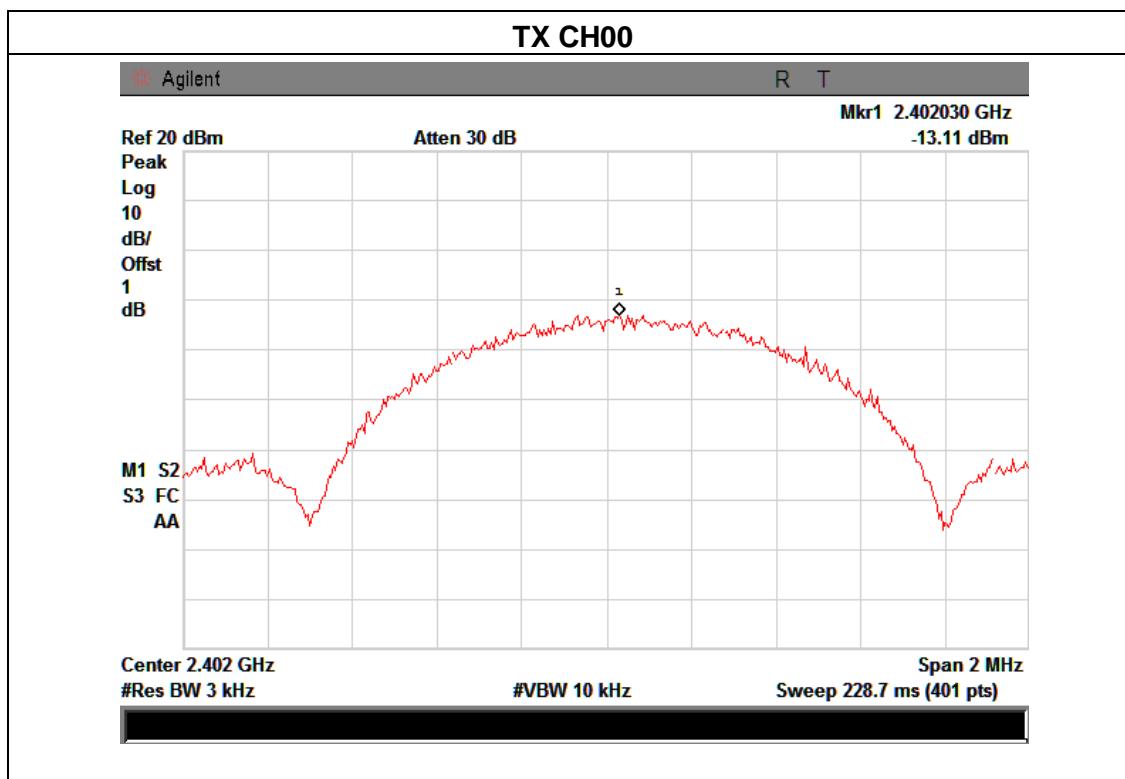

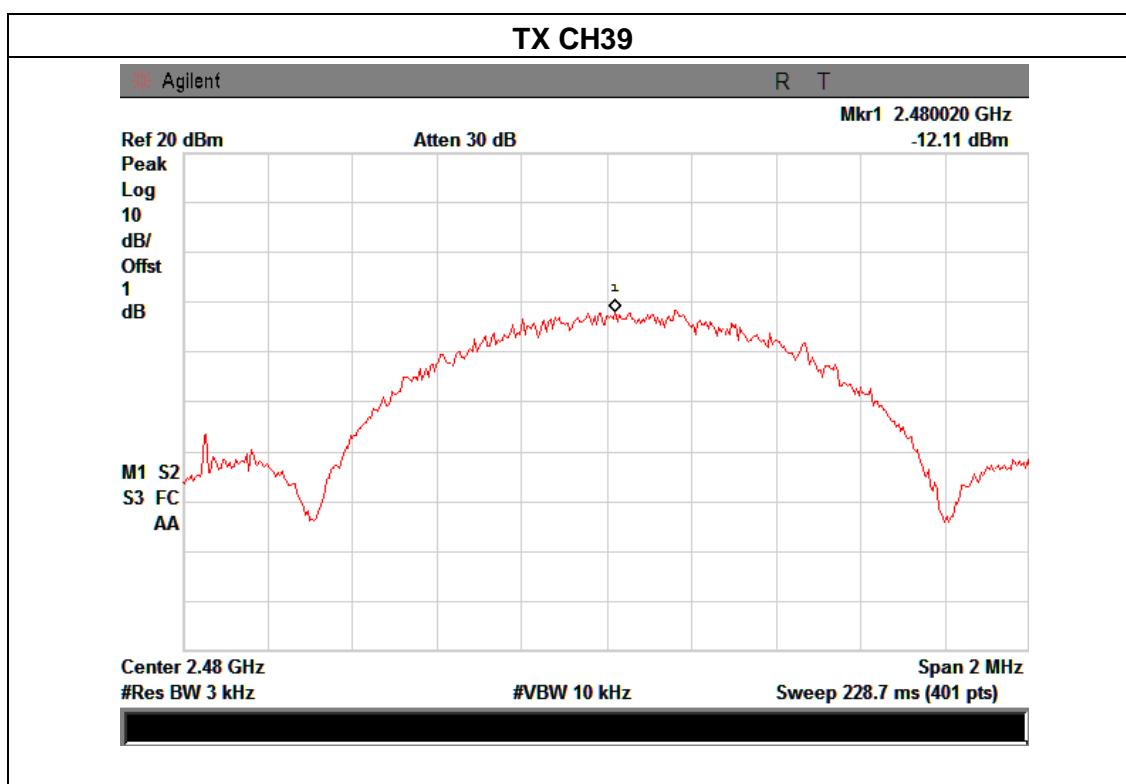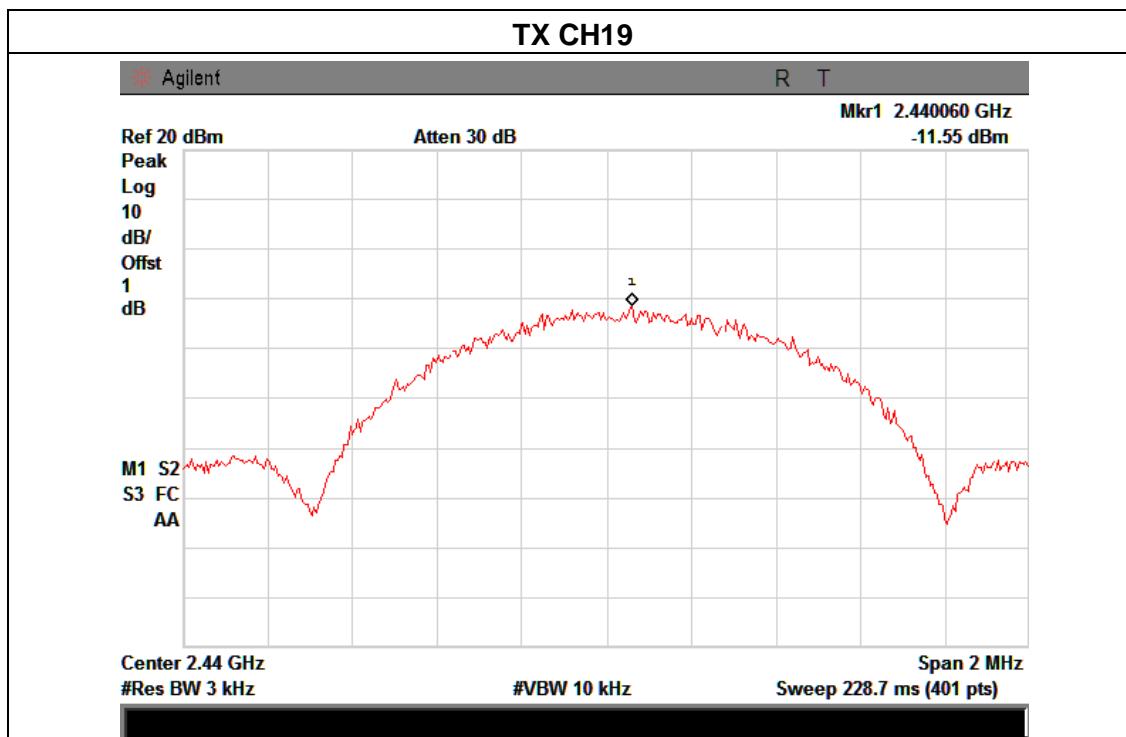

5.. BANDWIDTH TEST

5.1. APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS


5.1.1. TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2. DEVIATION FROM STANDARD

No deviation.

5.1.3. TEST SETUP

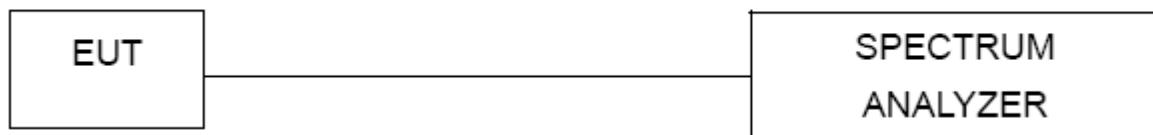


5.1.4. EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5. TEST RESULTS

EUT :	Laptop	Model Name :	NT14W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode/CH00, CH19, CH39		

Frequency	6dB Bandwidth (kHz)	99% Bandwidth (MHz)	Channel Separation (MHz)	Result
2402 MHz	731.55	1.0827	>=500KHz	PASS
2440 MHz	734.24	1.0843	>=500KHz	PASS
2480 MHz	710.50	1.0814	>=500KHz	PASS

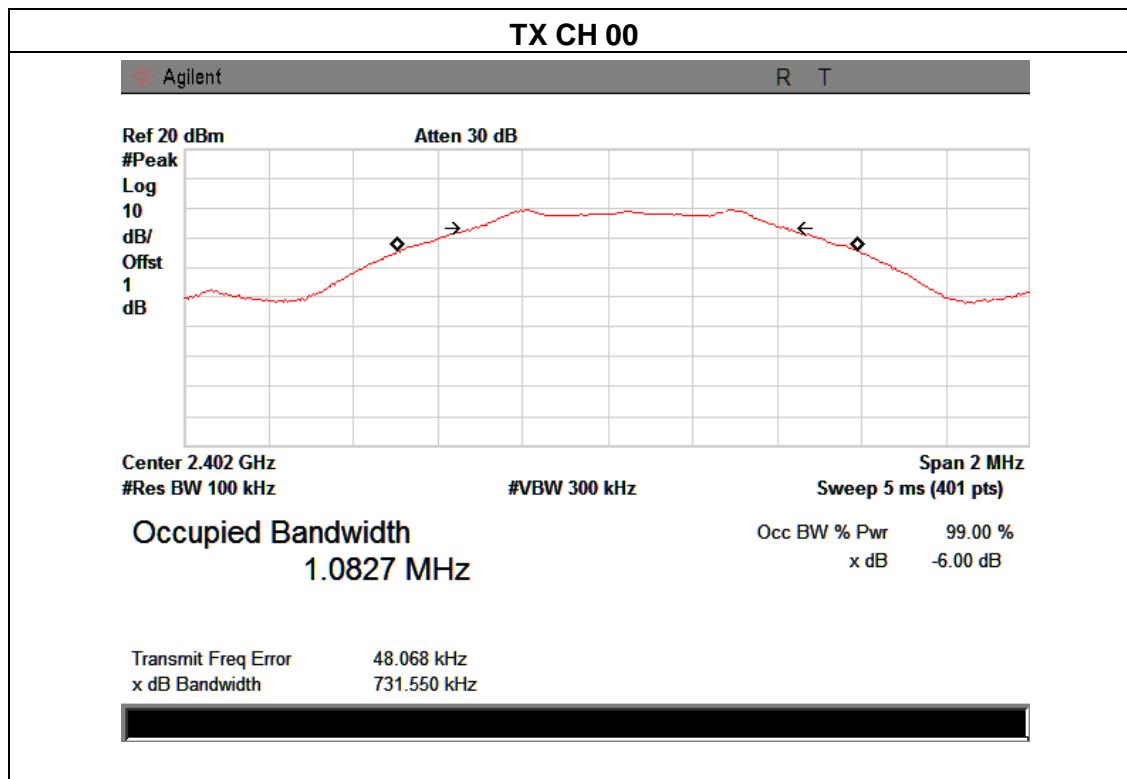

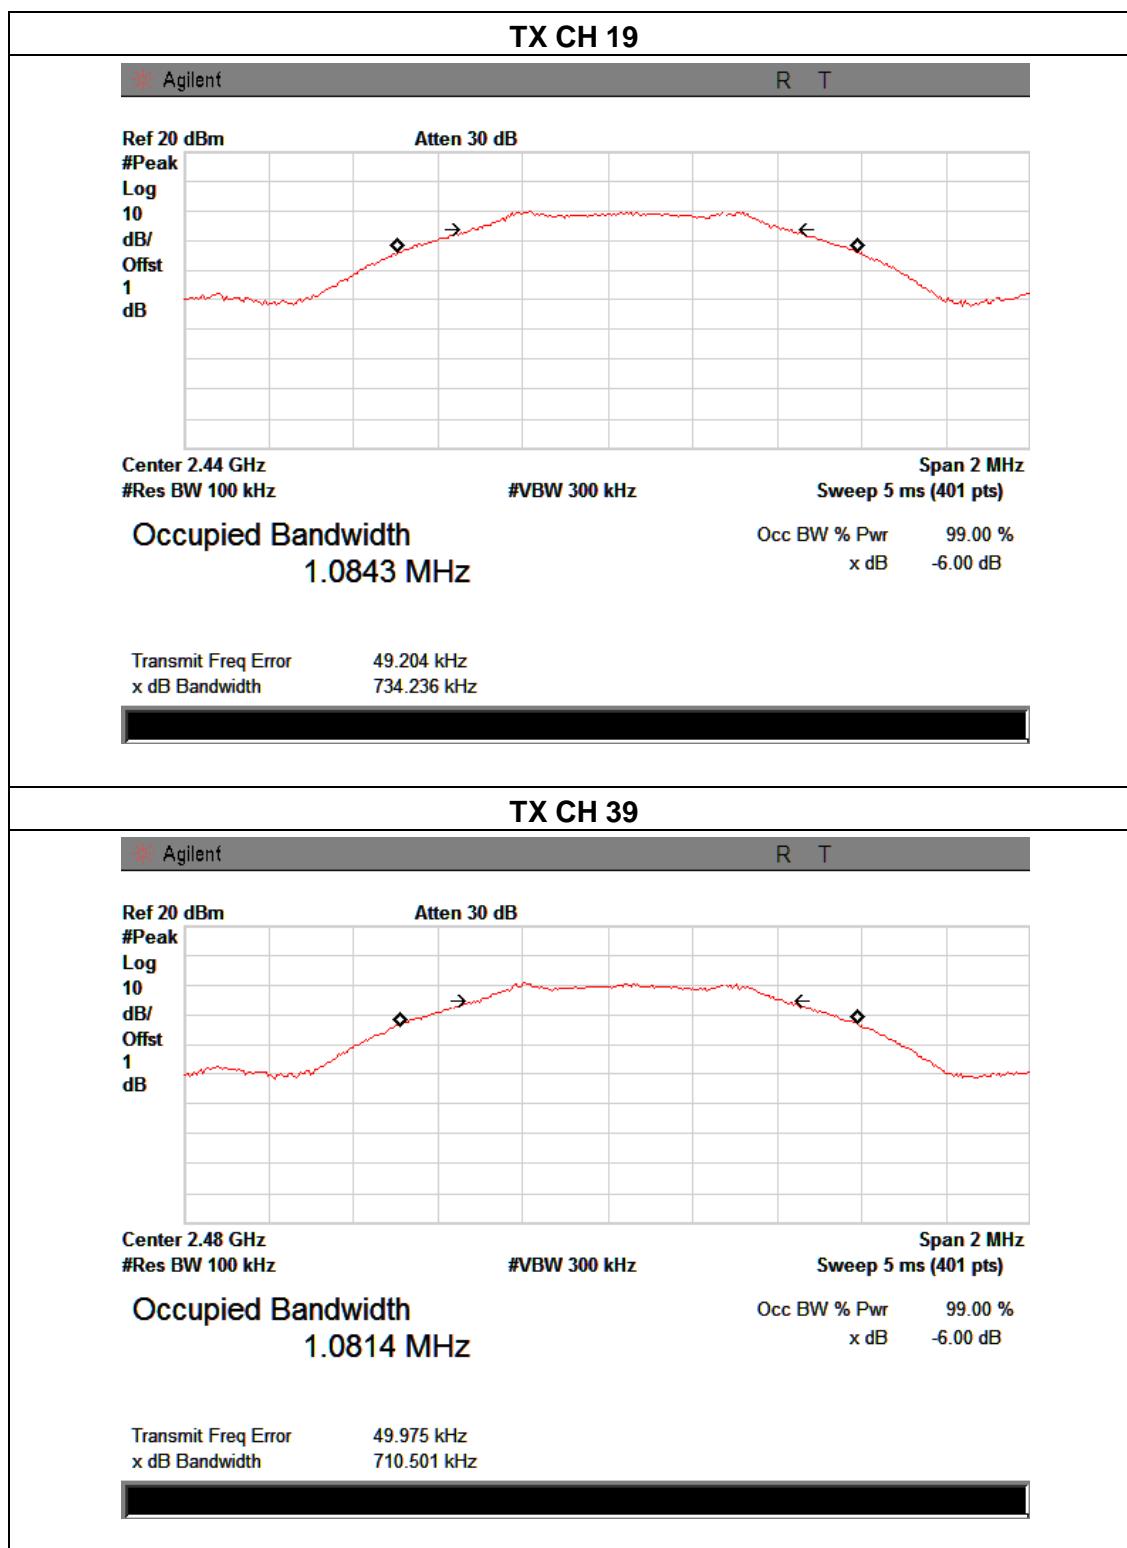

6.. PEAK OUTPUT POWER TEST

6.1. APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1. TEST PROCEDURE

- a. The EUT was directly connected to the PK power sensor+ PC

6.1.2. DEVIATION FROM STANDARD

No deviation.

6.1.3. TEST SETUP



6.1.4. EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5. TEST RESULTS

EUT :	Laptop	Model Name :	NT14W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode /CH00, CH19, CH39		

Test Channe	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
CH00	2402	1.21	30
CH19	2440	1.11	30
CH39	2480	1.09	30

7.. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

7.1. DEVIATION FROM STANDARD

No deviation.

7.2. TEST SETUP

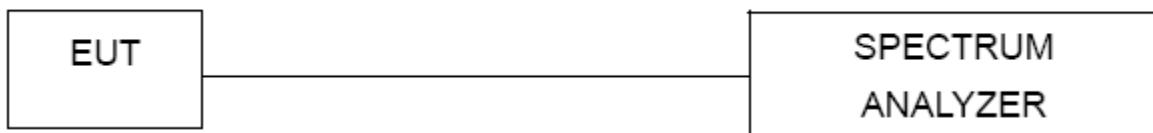


7.3. EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


7.4. TEST RESULTS

EUT :	Laptop	Model Name :	NT14W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC 120V

Band Edge, Left Side

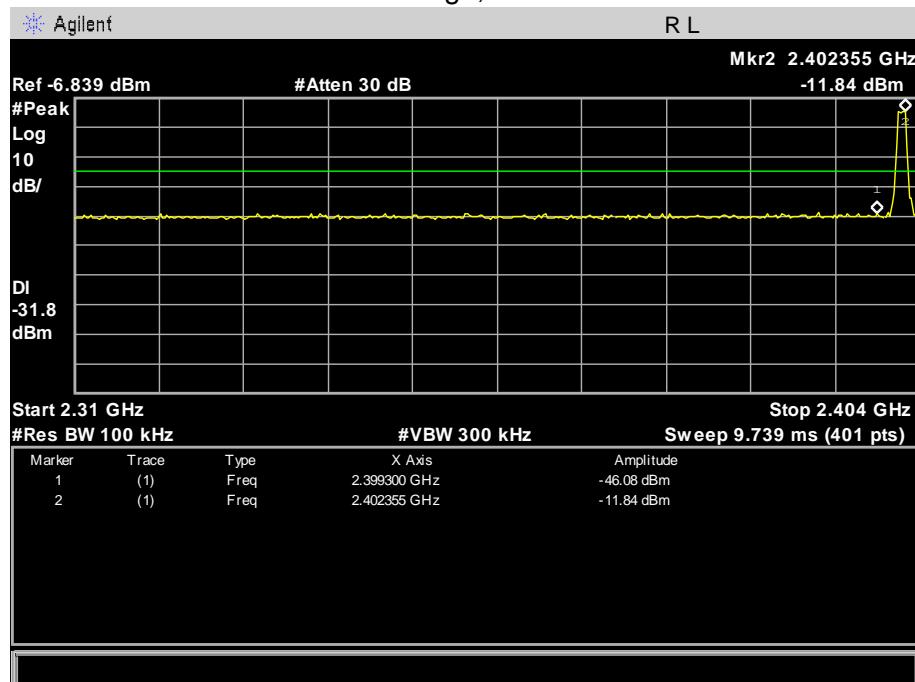

Band Edge, Right Side

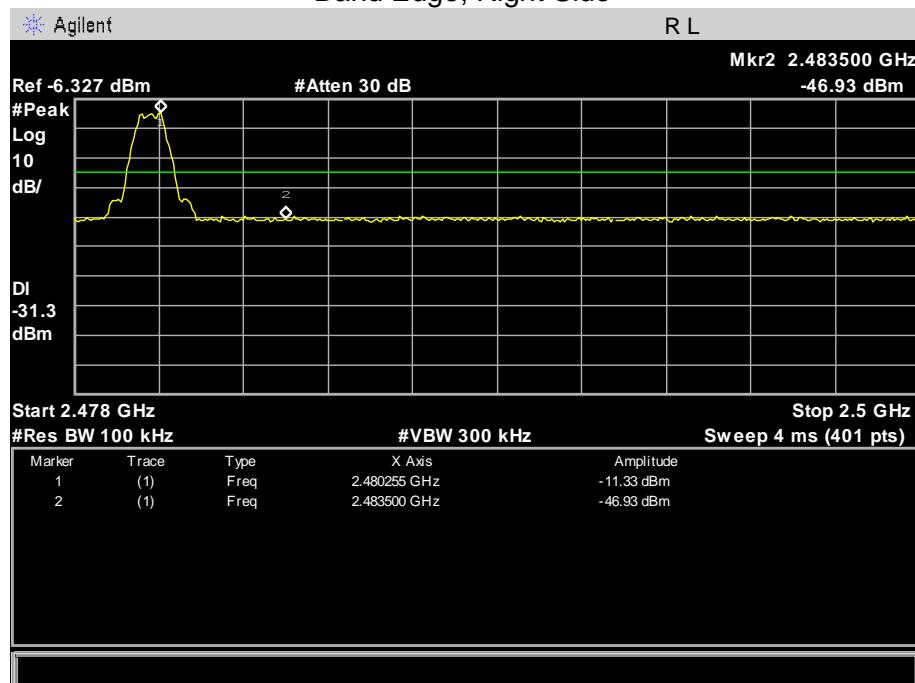

8.. ANTENNA REQUIREMENT

8.1. STANDARD REQUIREMENT



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2. EUT ANTENNA

The EUT antenna is Internal Antenna. It comply with the standard requirement.

9.. EUT TEST PHOTO

Radiated Measurement Photos

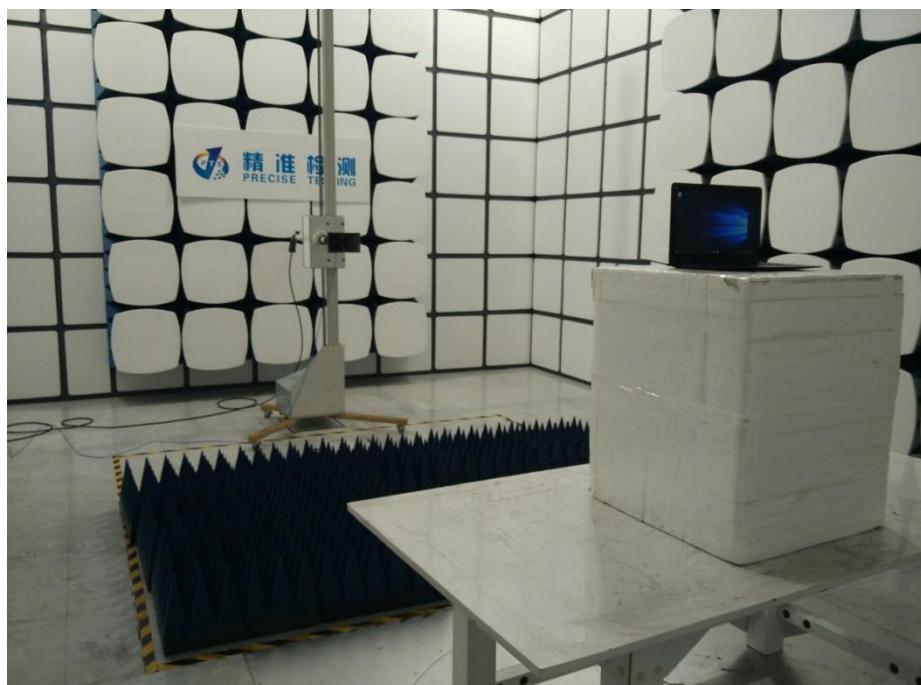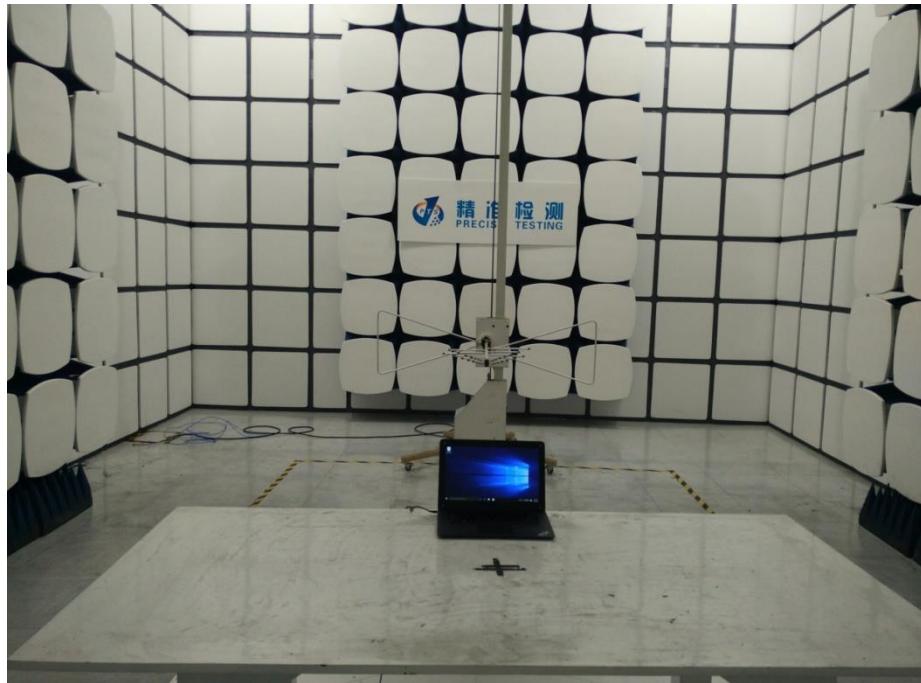

Conducted Measurement Photos

