



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Applicant : Shaoxing LongXin Electronics Co., Ltd.

Address : Xujiadai Village, Sundun Town, Shaoxing County, Zhejiang, China

Product Name : Tablet PC

Model Name : SX-SP715A, PC Tab703B, PC Tab702B, PC Tab709, PC Tab710, PC Tab711, PC Tab712, PC Tab803, PC Tab804, PC Tab9701, PC Tab9702, Tab703B, Tab702B, Tab709, Tab710, Tab711, Tab712, Tab803, Tab804, Tab9701, Tab9702

Brand Name : N/A

FCC ID : ZGU-SX-SP715A

Report No. : MOST111112F2

Date of Issue : December. 14, 2011

Issued by : Most Technology Service Co., Ltd.

Address : No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China

Tel : 86-755-8617 0306

Fax : 86-755-8617 0310

The report consists 71 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by MOST. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY.....	3
2. GENERAL INFORMATION.....	4
2.1 Product Information.....	4
2.2 Objective.....	5
2.3 Test Standards and Results.....	5
2.4 Environmental Conditions.....	5
3. TEST FACILITY.....	6
4. TEST EQUIPMENT LIST.....	7
5. 47 CFR Part 15 C 15.247 Requirements.....	8
5.1 6dB Bandwidth.....	8
5.2 Peak Output Power.....	15
5.3 Conducted Spurious Emission.....	17
5.4 Band Edge.....	23
5.5 Power Spectral Density (PSD).....	36
5.6 Conducted Emission.....	42
5.7 Radiated Emission.....	45
APPENDIX 1.....	60
PHOTOGRAPHS OF TEST SETUP.....	60
APPENDIX 2.....	63
PHOTOGRAPHS OF EUT.....	63

1. VERIFICATION OF CONFORMITY

Equipment Under Test: Tablet PC
Brand Name: N/A
Model Number: SX-SP715A
Series Number: PC Tab703B, PC Tab702B, PC Tab709, PC Tab710, PC Tab711, PC Tab712, PC Tab803, PC Tab804, PC Tab9701, PC Tab9702, Tab703B, Tab702B, Tab709, Tab710, Tab711, Tab712, Tab803, Tab804, Tab9701, Tab9702
Model Difference description: The series models are different in appearance and color with the same functions.
FCC ID: ZGU-SX-SP715A
Applicant: Shaoxing LongXin Electronics Co., Ltd.
Xujiadai Village, Sundun Town, Shaoxing County, Zhejiang, China
Manufacturer: Shaoxing LongXin Electronics Co., Ltd.
Xujiadai Village, Sundun Town, Shaoxing County, Zhejiang, China
Technical Standards: 47 CFR Part 15 Subpart C
File Number: MOST111112F2
Date of test: November. 24 – December 9, 2011
Deviation: None
Condition of Test Sample: Normal
Test Result: PASS

The above equipment was tested by *Most Technology Service Co., Ltd.* for compliance with the requirements set forth in FCC rules and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested by (+ signature):




Zhang Ling December. 14, 2011

Review by (+ signature):



July Wen December. 14, 2011

Approved by (+ signature):



Terry Yang December. 14, 2011

2. GENERAL INFORMATION

2.1 Product Information

Description:	Tablet PC
Model Name:	SX-SP715A
Power Supply:	DC: 3.7V by Li-ion Battery; DC: 5V by AC Adapter(100V-240V 50/60Hz);
Frequency Range:	IEEE 802.11b/g/n: 2412MHz – 2462MHz
Number of Channels:	IEEE 802.11b/g/n mode: 11 Channels
Modulation Technique:	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) IEEE 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 13, 19.5, 26, 39, 52, 58.5, 65.0Mbps)
Antenna Gain:	2.5 dBi
Antenna Type:	Internal
Test Channel:	Low: 2412MHz, Middle: 2437MHz, High: 2462MHz
Temperature Range:	-20°C ~ +40°C

NOTE:

1. For a more detailed features description about the EUT, please refer to User's Manual.

2.2 Objective

The objective of the report is to perform tests according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15(10-1-05 Edition)	Radio Frequency Devices

2.3 Test Standards and Results

Test items and the results are as bellow:

No.	Section	Description	Result	Date of Test
1	15.247(a)(2)	6dB Bandwidth	PASS	2010-12-09
2	15.247(b)(3)	Peak Output Power	PASS	2010-12-09
3	15.247(d)	conducted spurious emission	PASS	2010-12-09
4	15.247(d)	Band Edge	PASS	2010-12-09
5	15.247(e)	Power Spectral Density	PASS	2010-12-09
6	15.207	Conducted Emission	PASS	2011-12-07
7	15.247(d) 15.205 15.209	Radiated Emission	PASS	2011-12-07

Note: 1. The test result judgment is decided by the limit of measurement standard
2. The information of measurement uncertainty is available upon the customer's request.

2.4 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

3. TEST FACILITY

Test Site: Most Technology Service Co., Ltd.

Location: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Shenzhen, Guangdong, China

Description: There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009 and CISPR 16 requirements.

The FCC Registration Number is **490827**.

Site Filing: The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.

Instrument Tolerance: All measuring equipment is in accord with ANSI C63.4:2009 and CISPR 16 requirements that meet industry regulatory agency and accreditation agency requirement.

Ground Plane: Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna.

4. TEST EQUIPMENT LIST

Instrumentation: The following list contains equipment used at MOST for testing. The equipment conforms to the CISPR 16-1/ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

No.	Equipment	Manufacturer	Model No.	S/N	Calculator due date
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2012/03/14
2	Spectrum Analyzer	Agilent	E7405A	US44210471	201203/14
3	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2012/03/14
4	Coaxial Switch	Anritsu Corp	MP59B	6200283933	201203/14
5	Terminator	Hubersuhner	50Ω	No.1	2012/03/14
6	RF Cable	SchwarzBeck	N/A	No.1	201203/14
7	Test Receiver	Rohde & Schwarz	ESPI	101202	2012/03/14
8	EPM Series Power Meter	Agilent	E4418B	GB43318055	201203/14
9	Bilog Antenna	Sunol	JB3	A121206	201203/14
10	Horn Antenna	TRC	N/A	N/A	2012/03/14
11	Cable	Resenberger	N/A	NO.1	201203/14
12	Cable	SchwarzBeck	N/A	NO.2	2012/03/14
13	Cable	SchwarzBeck	N/A	NO.3	201203/14
14	DC Power Filter	DuoJi	DL2×30B	N/A	2012/03/14
15	Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	201203/14
16	3 Phase Power Line Filter	DuoJi	FNF 402B30	N/A	2012/03/14
17	Test Receiver	Rohde & Schwarz	ESCI	100492	201203/14
18	Absorbing Clamp	Luthi	MDS21	3635	2012/03/14
19	Coaxial Switch	Anritsu Corp	MP59B	6200283933	201203/14
20	AC Power Source	Kikusui	AC40MA	LM003232	2012/03/14
21	Test Analyzer	Kikusui	KHA1000	LM003720	201203/14
22	Line Impedence Network	Kikusui	LIN40MA-PCR-L	LM002352	2012/03/14
23	ESD Tester	Kikusui	KES4021	LM003537	201203/14
24	EMCPRO System	EM Test	UCS-500-M4	V0648102026	2012/03/14
25	Signal Generator	IFR	2032	203002/100	201203/14
26	Amplifier	A&R	150W1000	301584	2012/03/14
27	CDN	FCC	FCC-801-M2-25	47	201203/14
28	CDN	FCC	FCC-801-M3-25	107	2012/03/14
29	EM Injection Clamp	FCC	F-203I-23mm	403	201203/14
30	RF Cable	MIYAZAKI	N/A	No.1/No.2	2012/03/14
31	Universal Radio Communication Tester	ROHDE&SCHWARZ	CMU200	0304789	2012/03/14
32	Telecommunication Antenna	European Antennas	PSA 75301R/170	0304213	201203/14

NOTE: Equipments listed above have been calibrated and are in the period of validation.

5. 47 CFR Part 15 C 15.247 Requirements

5.1 6dB Bandwidth

5.1.1 Definition

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.1.2 Test Description

The EUT is powered by the Battery, is coupled to the Spectrum Analyzer (SA) through the Attenuator/DC Block. The path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated and is set to operate at maximum power. The RF load attached to the EUT antenna terminal is 50Ω.

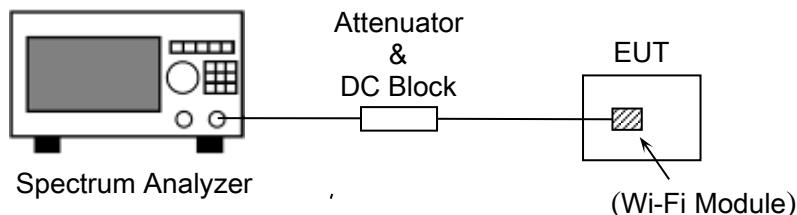


Figure 1: RF Test Setup

5.1.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.


5.1.3.1 802.11b Test Mode

The minimum occupied bandwidth for the fundamental frequency 2437MHz is 9.5MHz. This occupied bandwidth complies with the FCC requirement.

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	9.9	≥500	PASS
6	2437	9.5	≥500	PASS
11	2462	9.9	≥500	PASS


B. Test Plot:

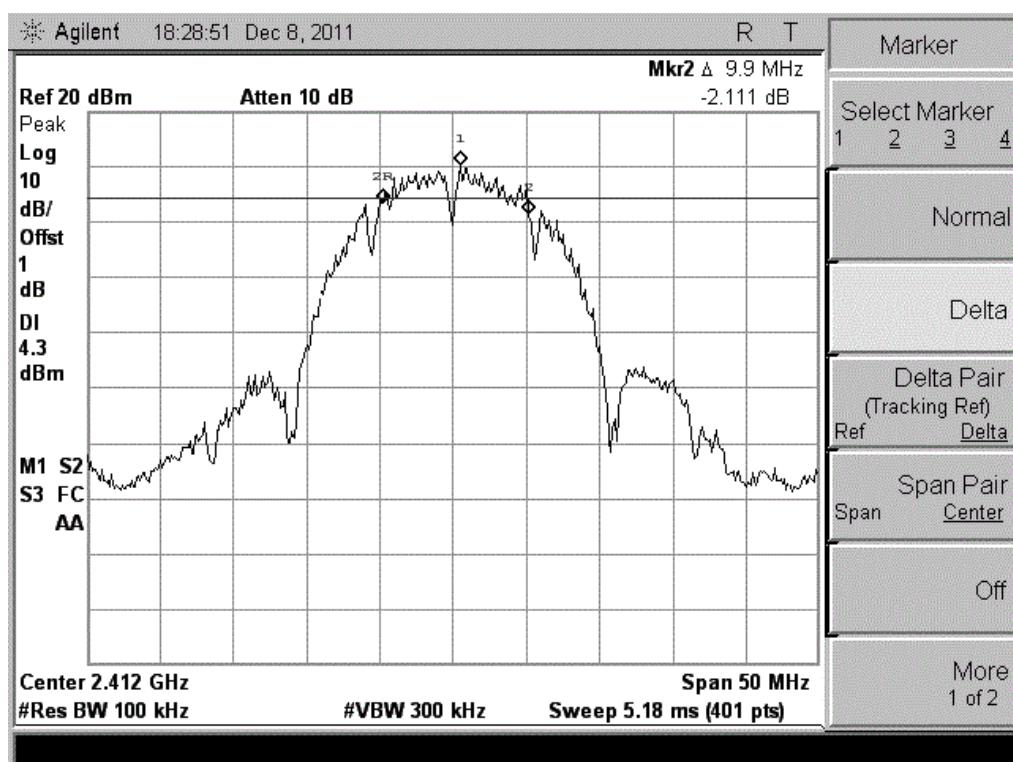

(CH Low)



(CH Mid)

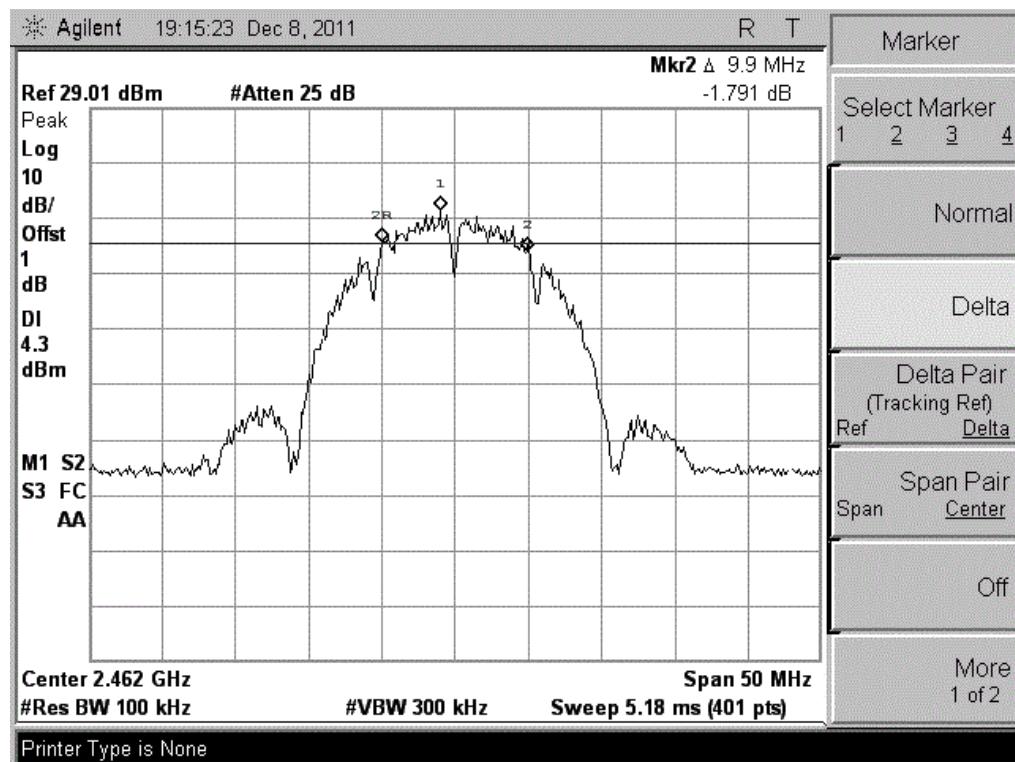

(CH High)


5.1.3.2 802.11g Test Mode


The minimum occupied bandwidth for the fundamental frequency 2437MHz is 16.6MHz. This occupied bandwidth complies with the FCC requirement.

A. Test Verdict:


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	16.6	≥500	PASS
6	2437	16.6	≥500	PASS
11	2462	16.6	≥500	PASS

B. Test Plot:

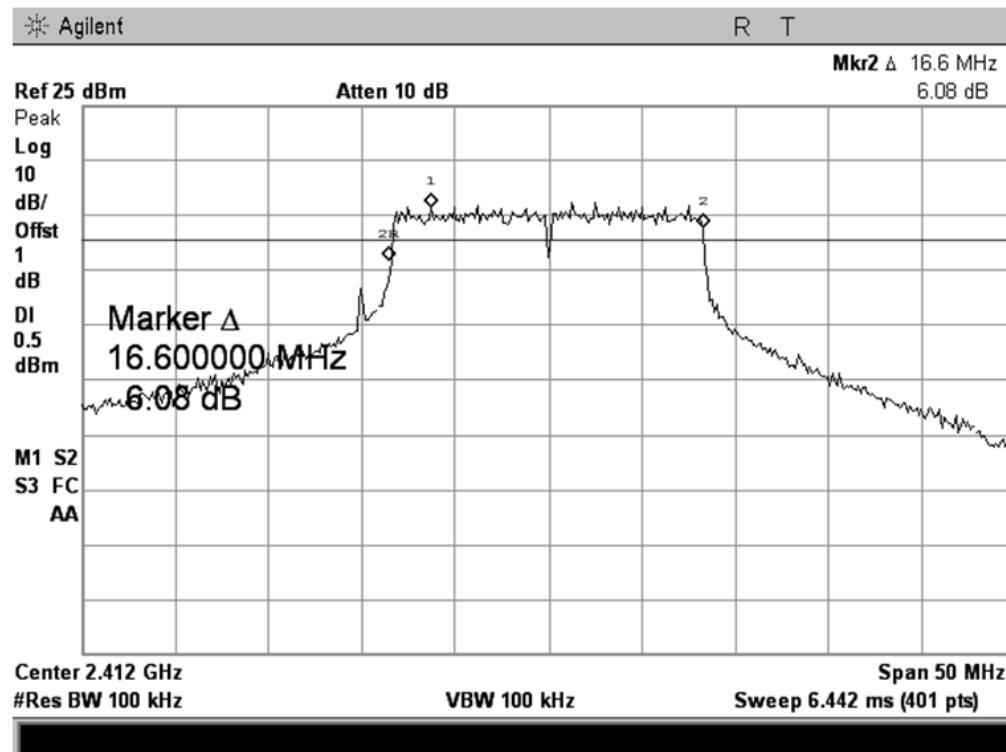

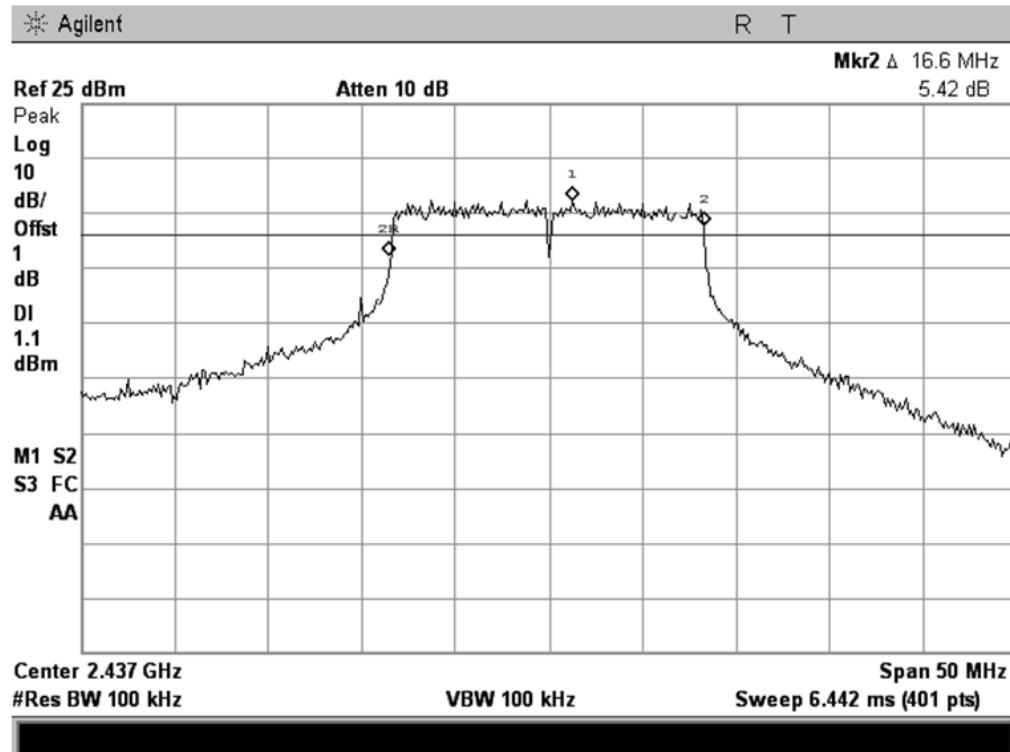

(CH Mid)

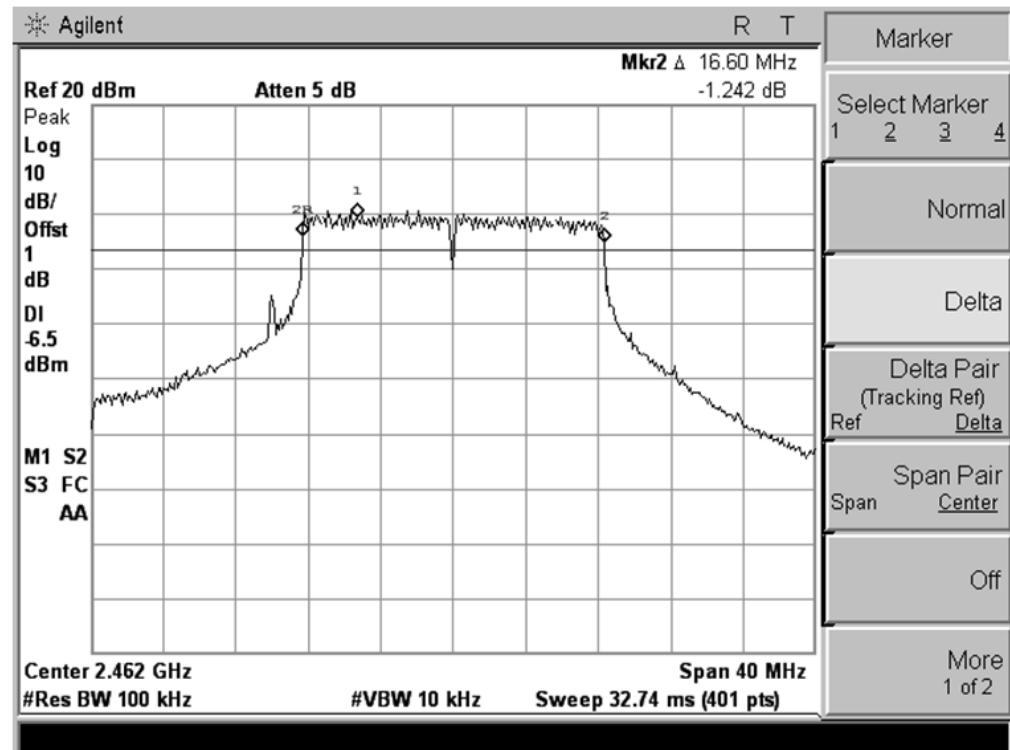

(CH High)


5.1.3.3 802.11n Test Mode (Standard-20 MHz Channel mode)

The minimum occupied bandwidth for the fundamental frequency 2437MHz is 17.8MHz. This occupied bandwidth complies with the FCC requirement.


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	17.9	≥500	PASS
6	2437	17.8	≥500	PASS
11	2462	17.9	≥500	PASS


B. Test Plot:

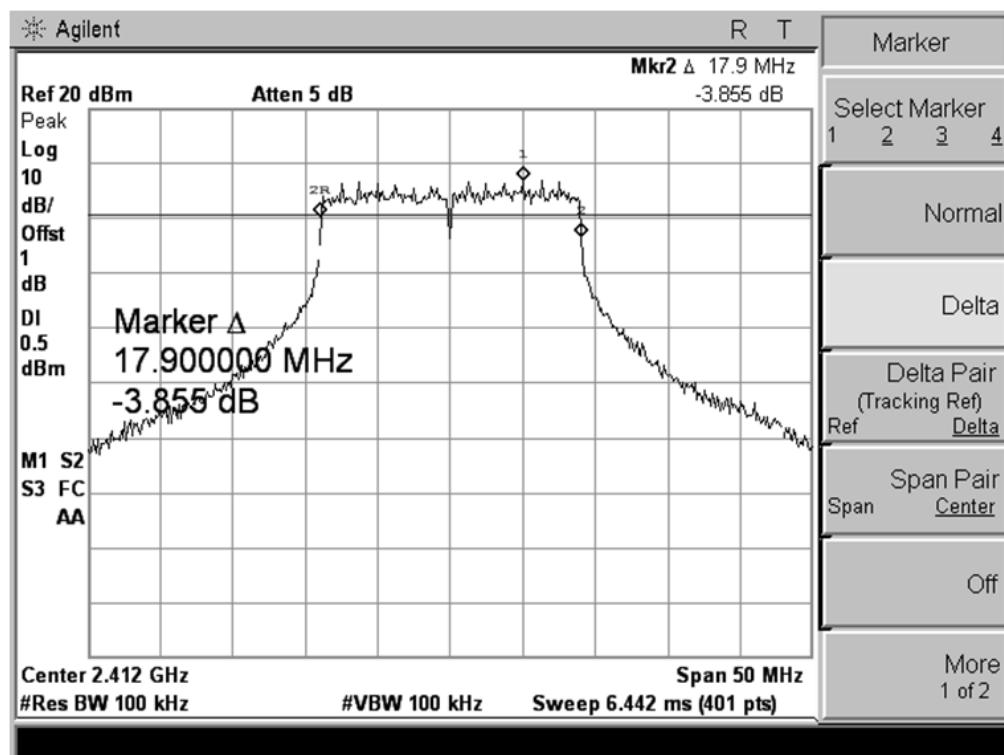

(CH Low)

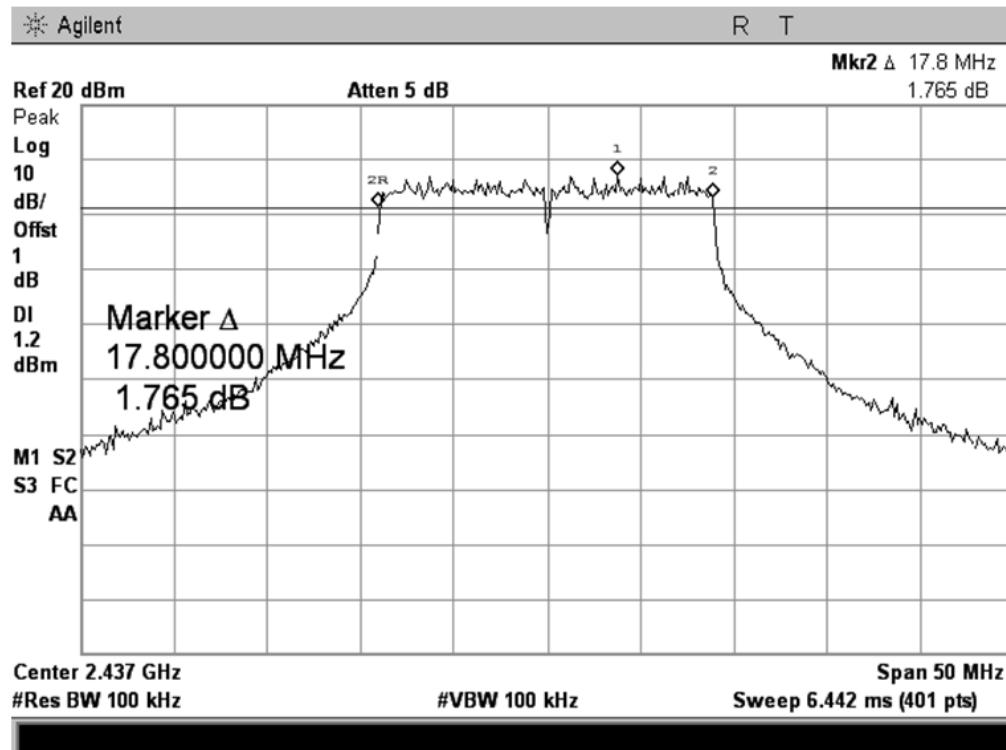

(CH Mid)

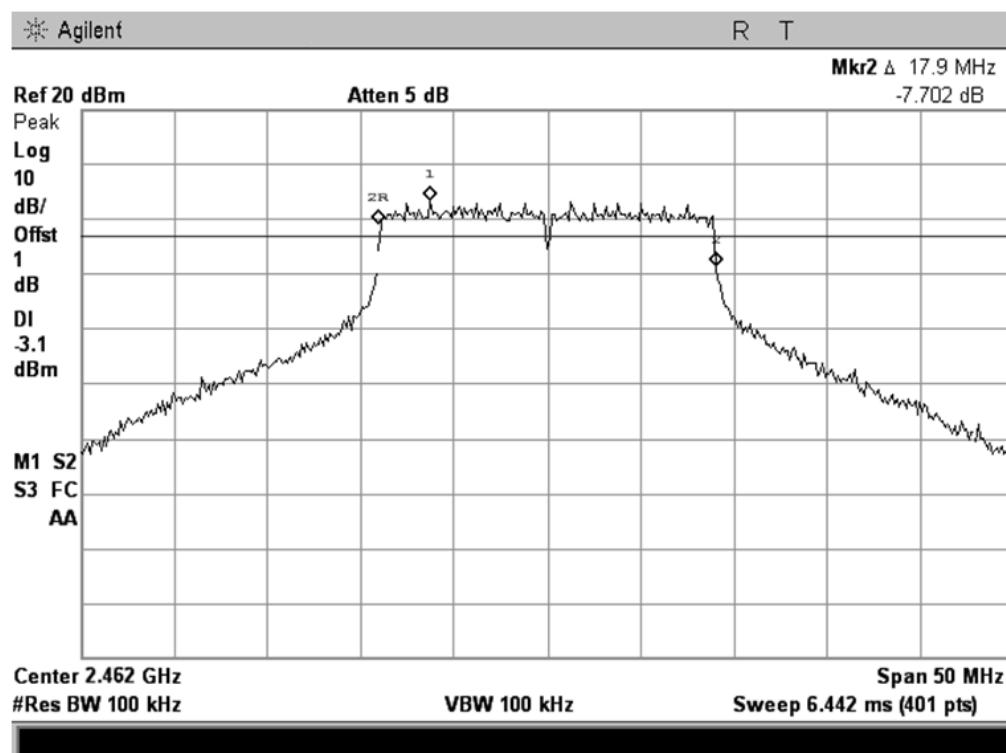


(CH High)

5.2 Peak Output Power

5.2.1 Definition

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

5.2.2 Test Description

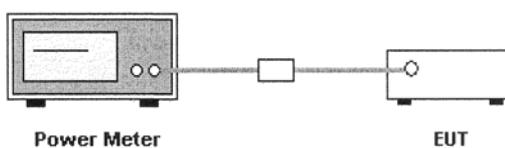

The EUT which is powered by AC adapter, is coupled to the Power Meter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

5.2.3 Test Result

The EUT operates at maximum output power mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

5.2.3.1 802.11b Test Mode

The maximum output power for the fundamental frequency 2412MHz is 11.56dBm. This power complies with the FCC requirement.

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	11.56	0.0143	30	1	PASS
6	2442	11.21	0.0132			PASS
11	2472	11.43	0.0139			PASS

5.2.3.2 802.11g Test Mode

The maximum output power for the fundamental frequency 2437 MHz is 11.66dBm. This power complies with the FCC requirement.

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	11.35	0.0136	30	1	PASS
6	2437	11.66	0.0147			PASS
11	2462	11.31	0.0135			PASS

5.2.3.3 802.11n Test Mode (Standard-20 MHz Channel mode)

The maximum output power for the fundamental frequency 2462MHz is 11.53dBm. This power complies with the FCC requirement.

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	11.45	0.0140	30	1	PASS
6	2437	11.37	0.0137			PASS
11	2462	11.53	0.0142			PASS

5.3 Conducted Spurious Emission

5.3.1 Definition

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

5.3.2 Test Description


See section 5.1.2 of this report.

5.3.3 Test Result


The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

5.2.3.1 802.11b Test Mode


Test Plot:

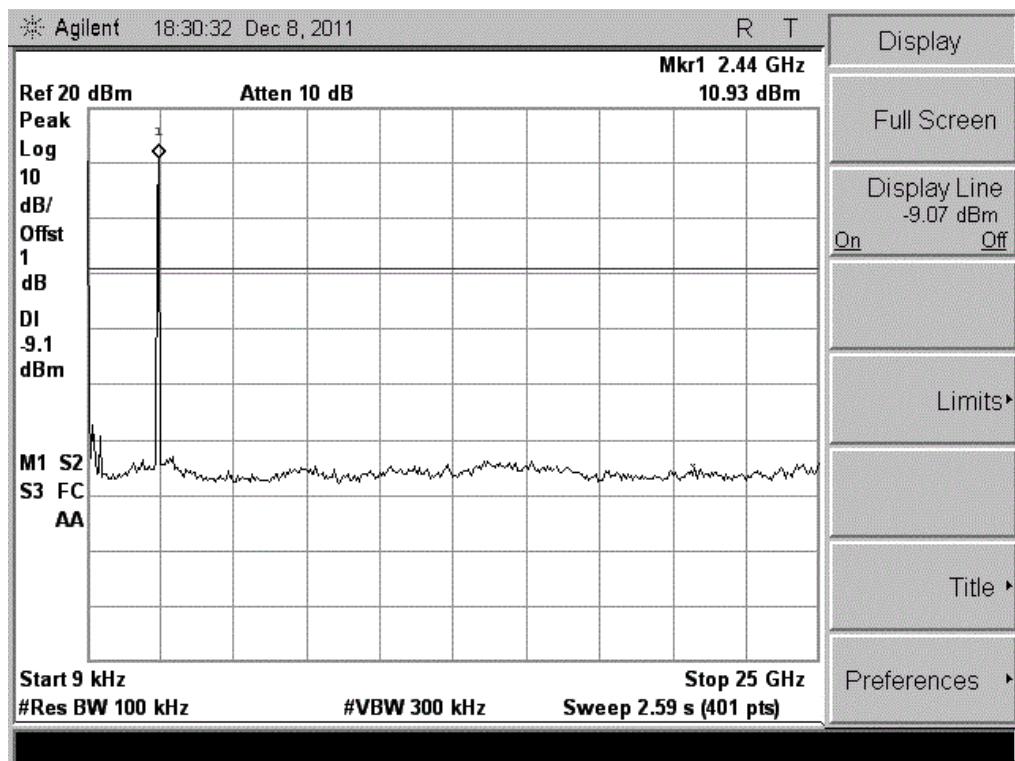

(CH Low, 30MHz to 25GHz)

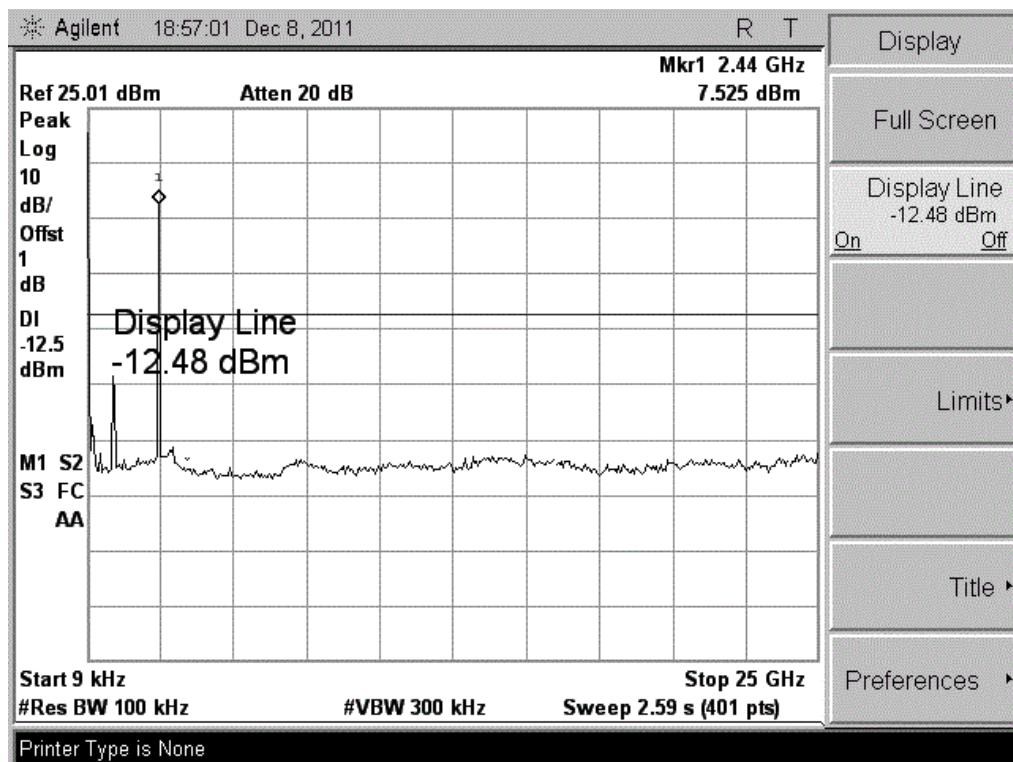

(CH Mid, 30MHz to 25GHz)

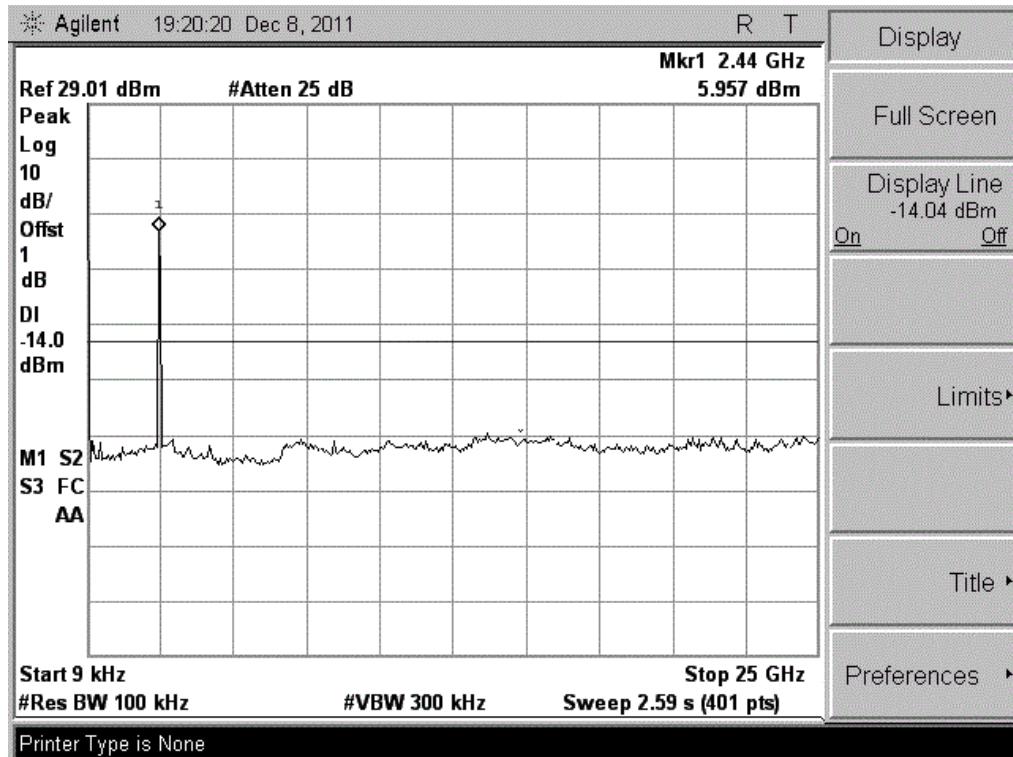


(CH High, 30MHz to 25GHz)

Note:


1. The power of the Module transmitting frequency should be ignored.

5.2.3.2 802.11g Test Mode


Test Plot:

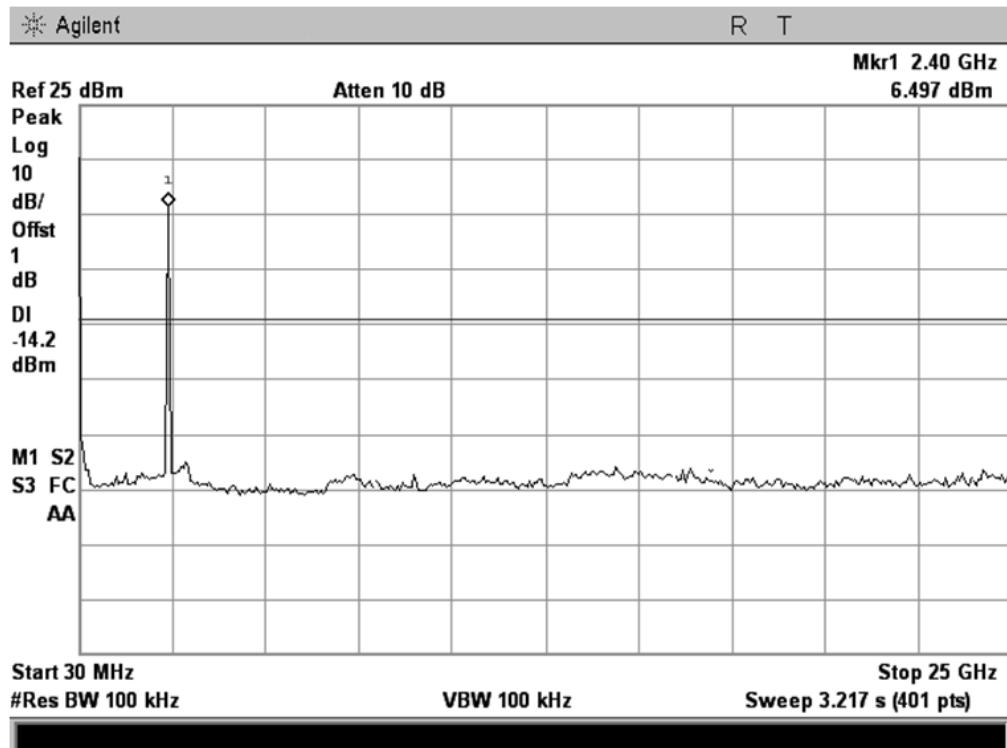

(CH Low, 30MHz to 25GHz)

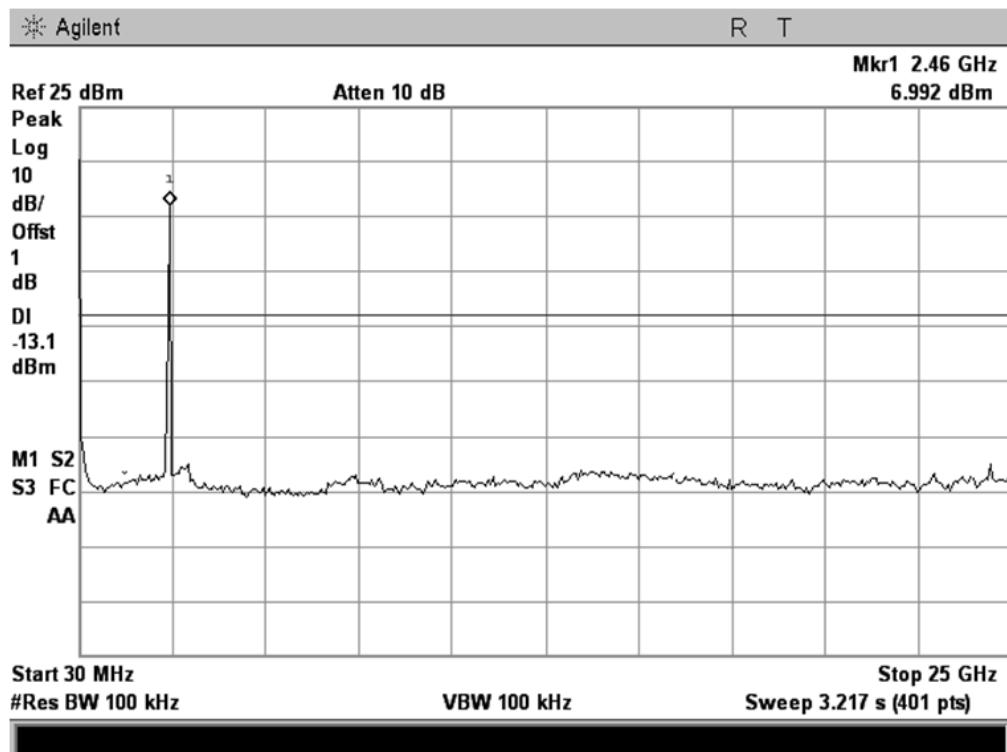

(CH Mid, 30MHz to 25GHz)

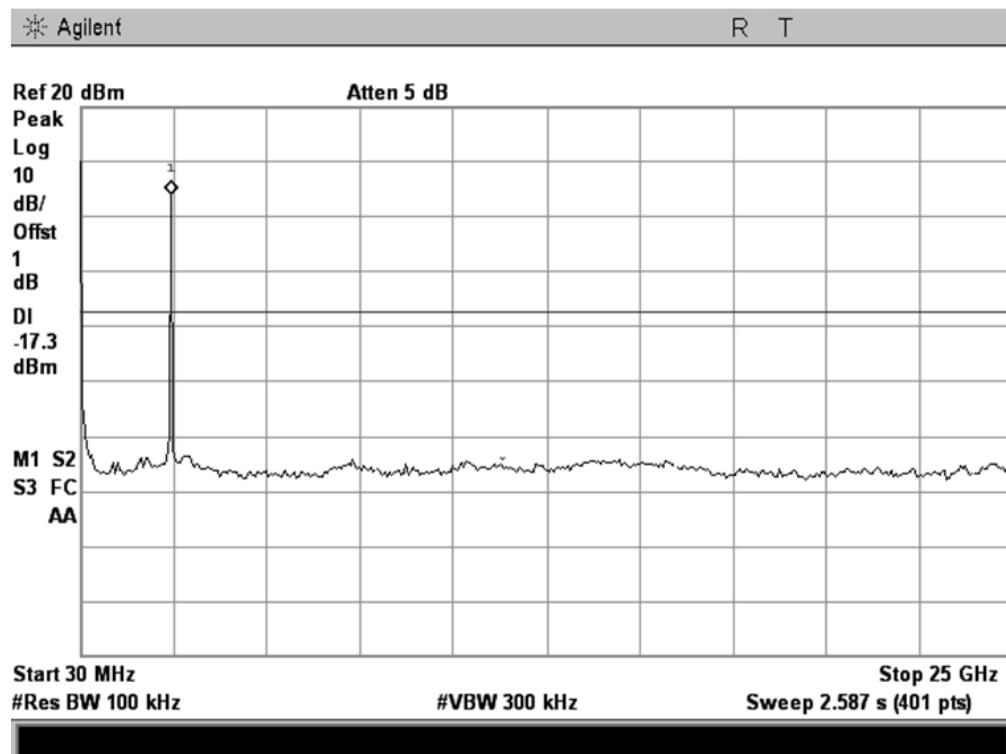


(CH High, 30MHz to 25GHz)

Note:


1. The power of the Module transmitting frequency should be ignored.

5.2.3.3 802.11n Test Mode(Standard-20 MHz Channel mode)


Test Plot:

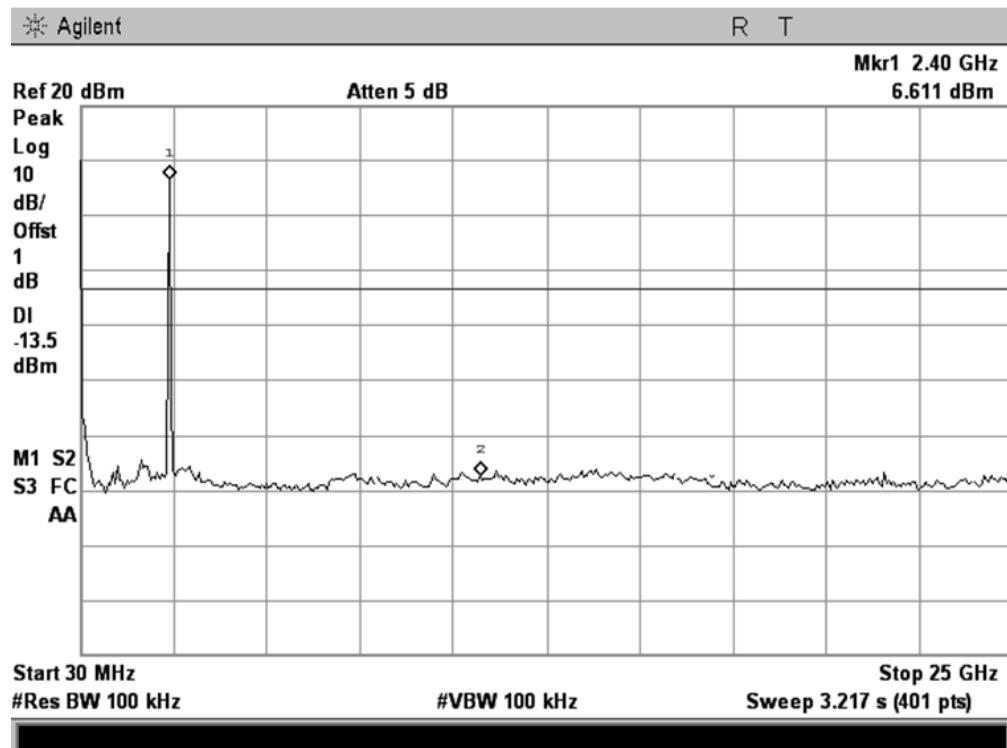

(CH Low, 30MHz to 25GHz)

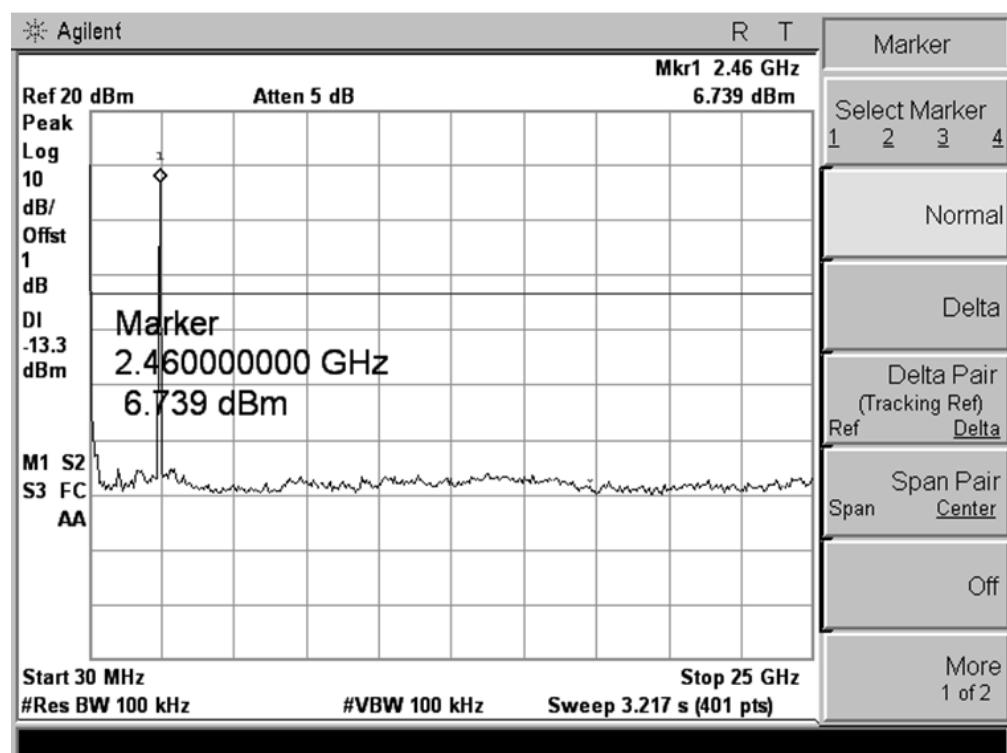

(CH Mid, 30MHz to 25GHz)

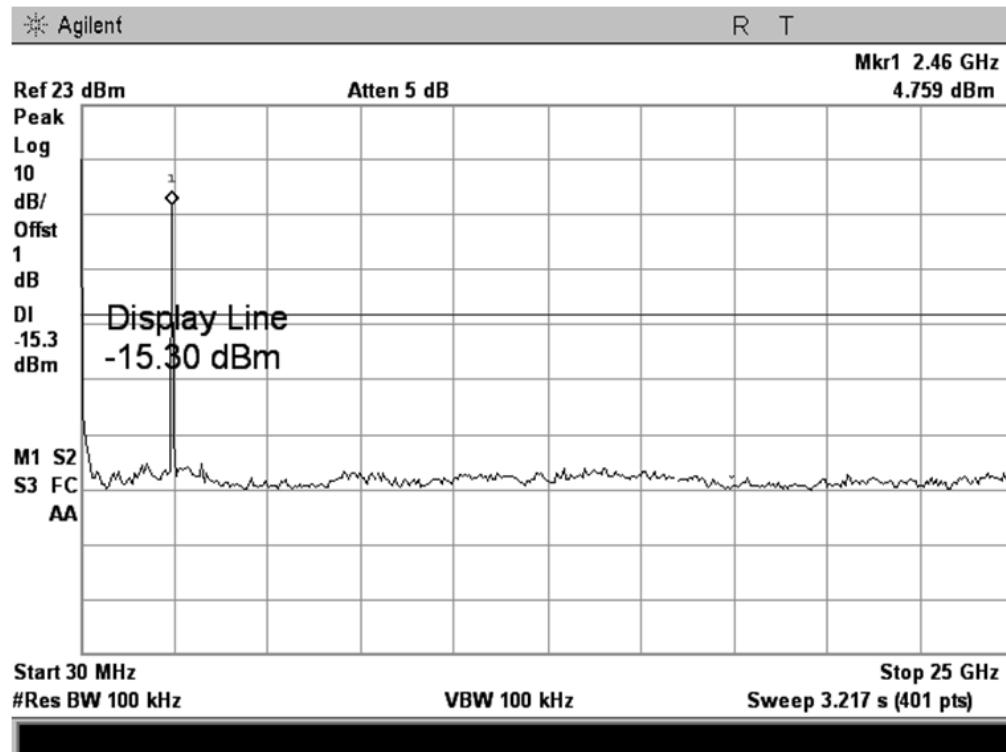

(CH High, 30MHz to 25GHz)

Note:


1. The power of the Module transmitting frequency should be ignored.

5.4 Band Edge

5.4.1 Definition

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

5.4.2 Test Description


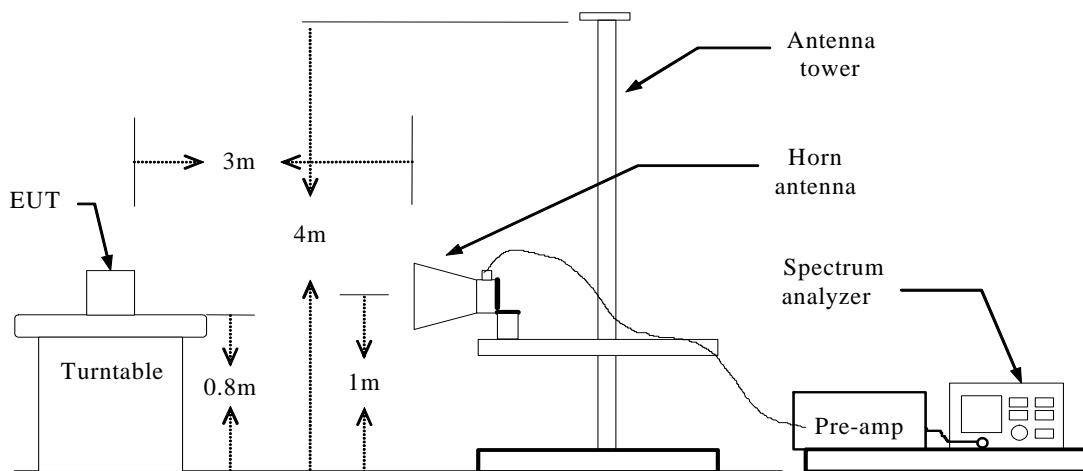



5.4.3 Test Result

The EUT operates at continuous transmit test mode. The lowest and highest channels are tested to verify the band edge emissions.


5.4.3.1 802.11b Test Mode

Test Plot:

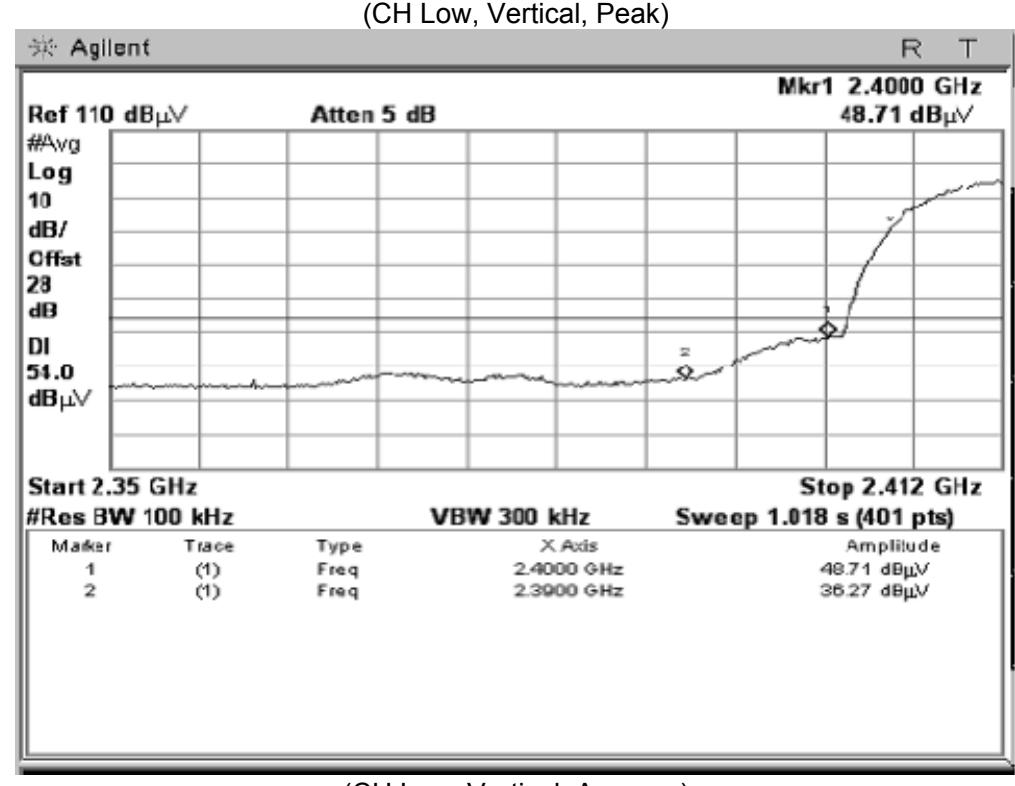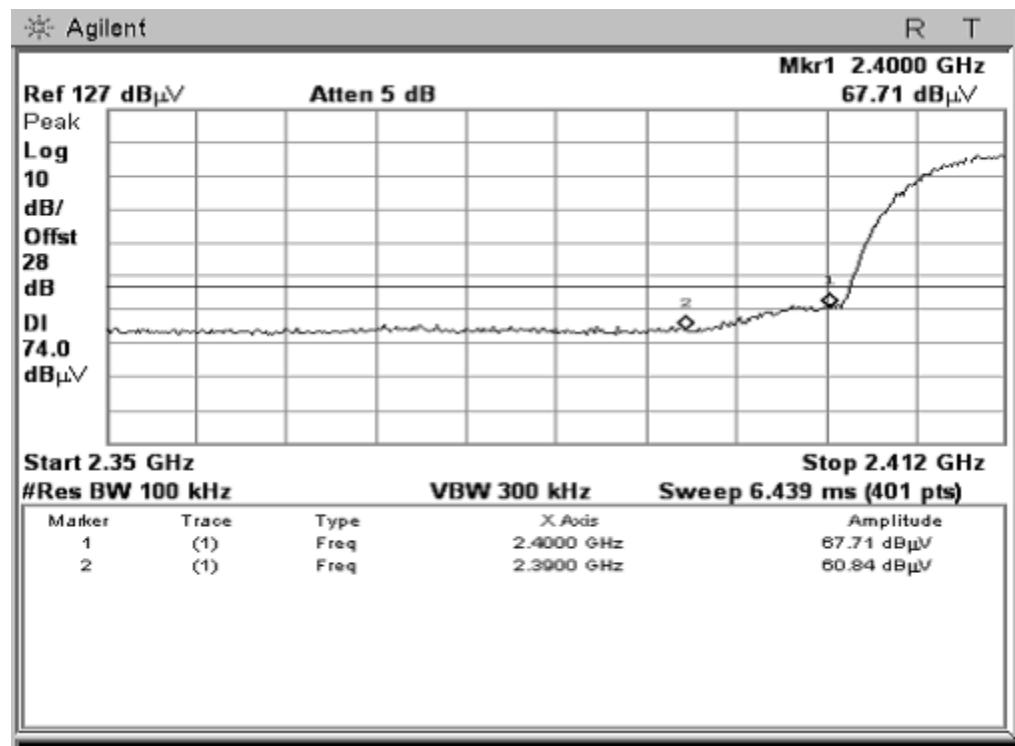


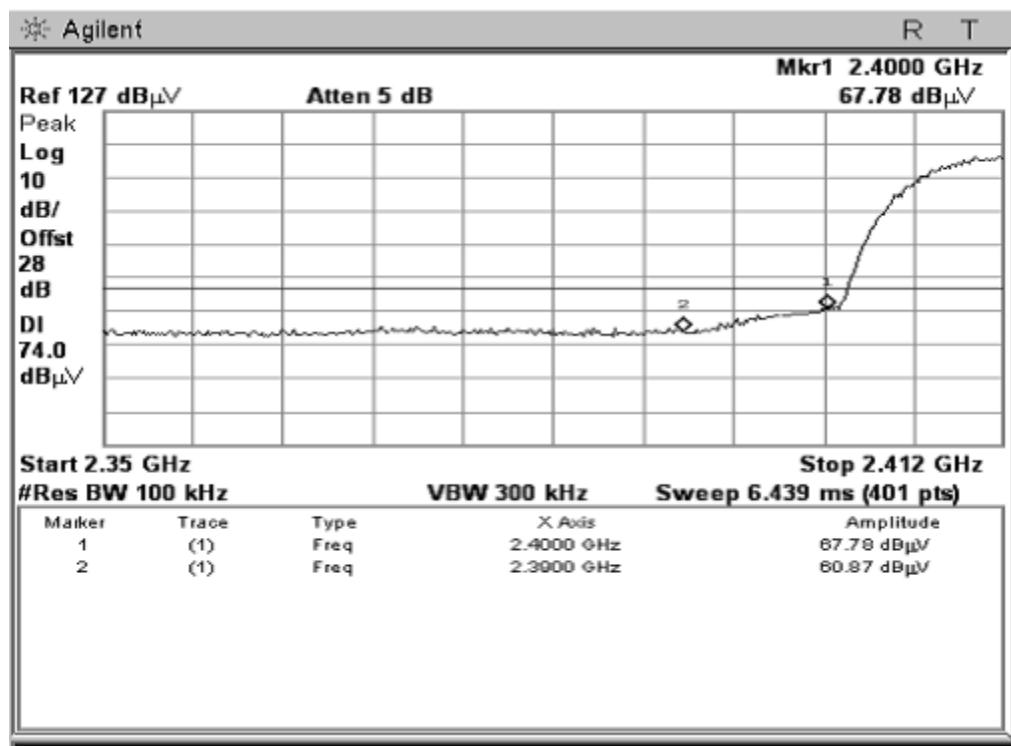


(CH Low, Horizontal, Peak)

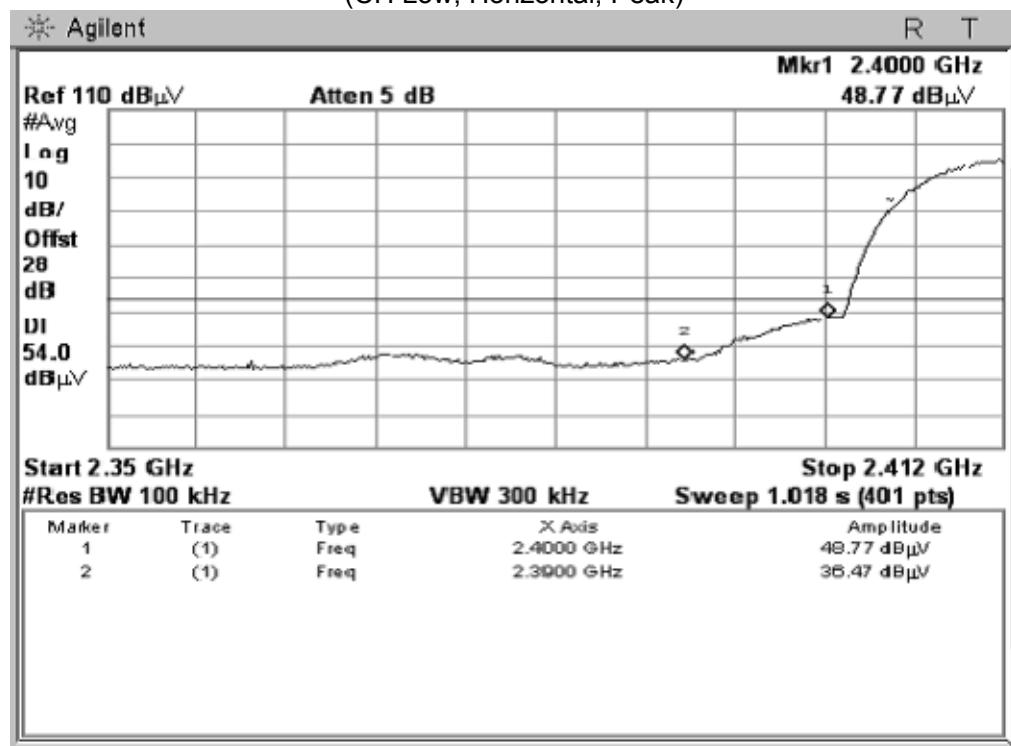


(CH Low, Horizontal, Average)

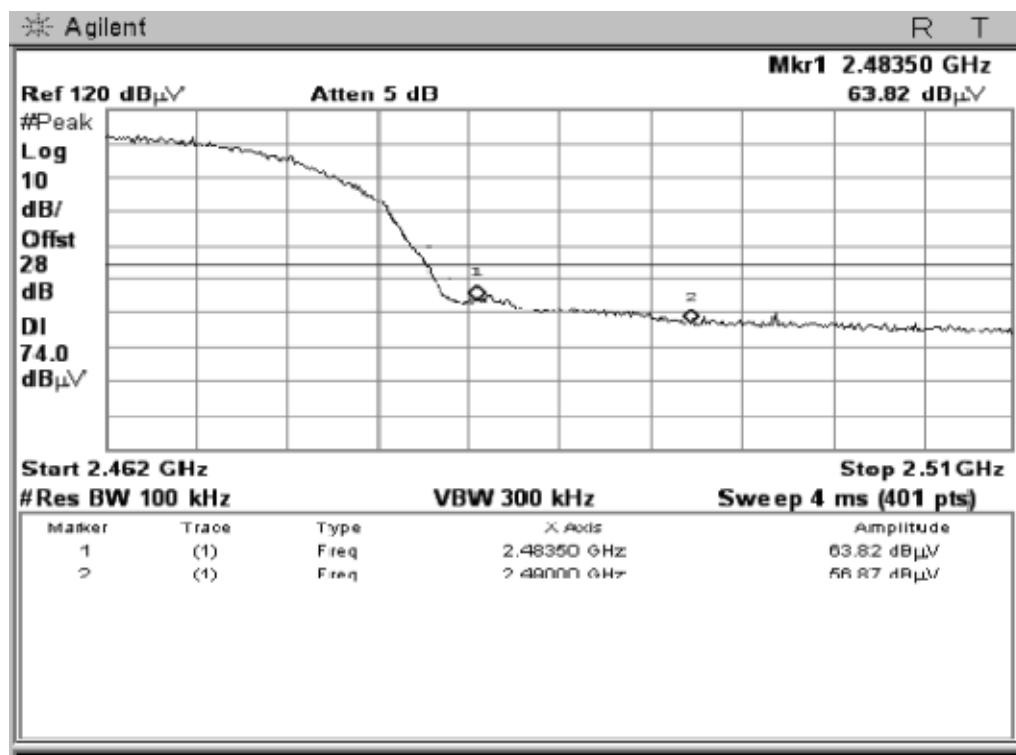


(CH High, Vertical, Peak)

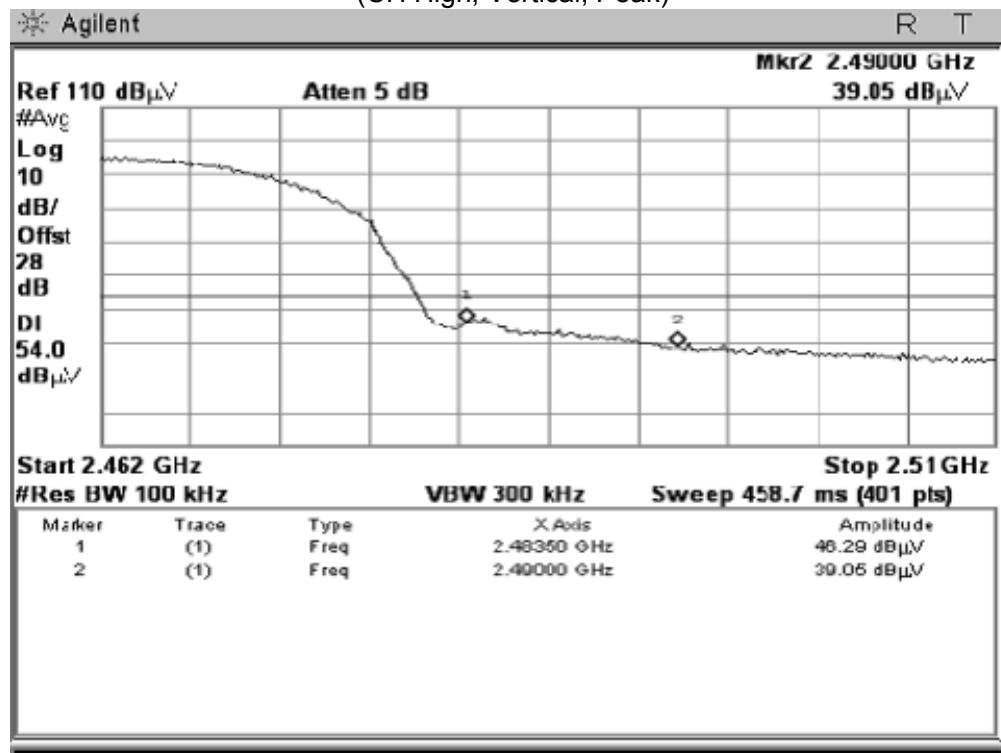

(CH High, Vertical, Average)

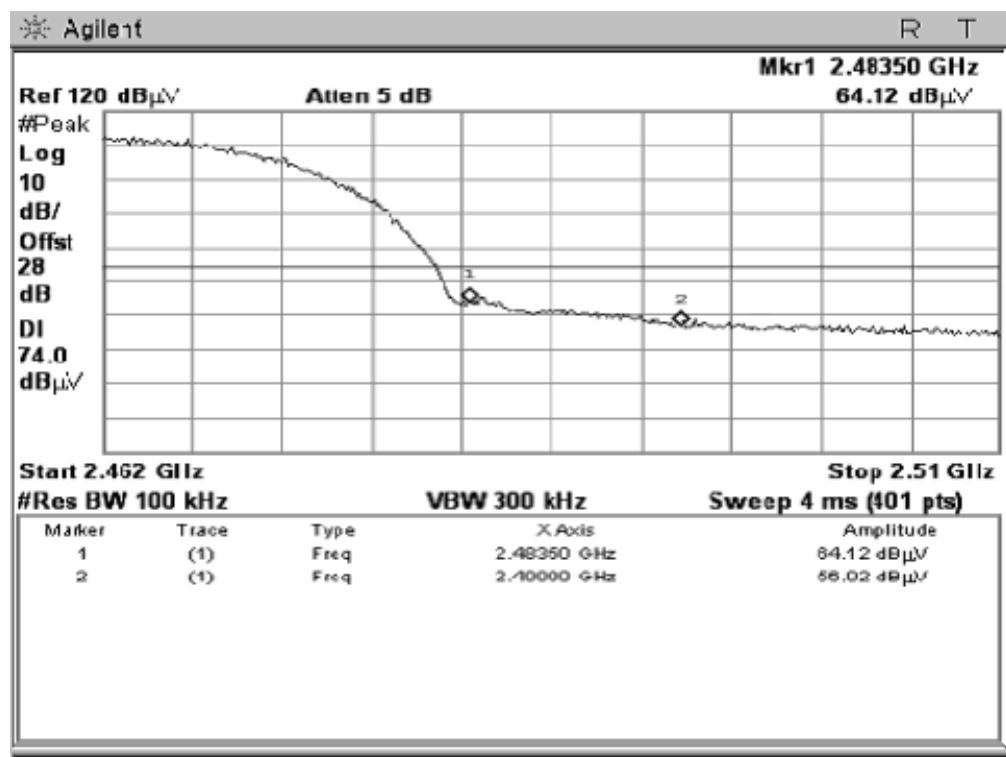



(CH High, Horizontal, Peak)

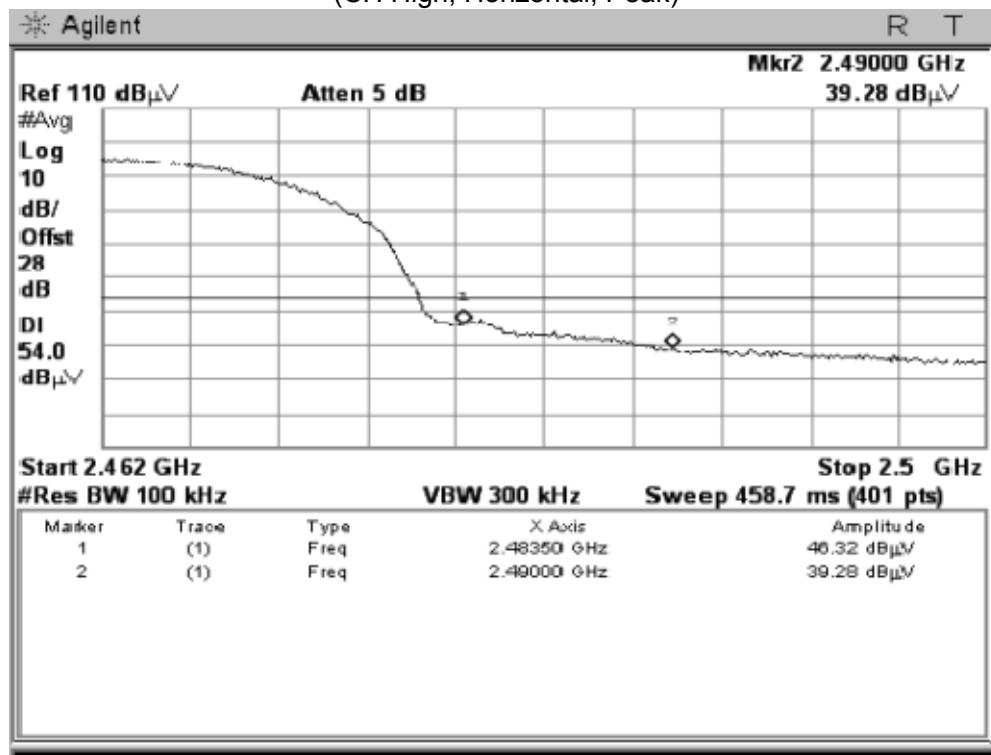


(CH High, Horizontal, Average)


5.4.3.2 802.11g Test Mode

Test Plot:

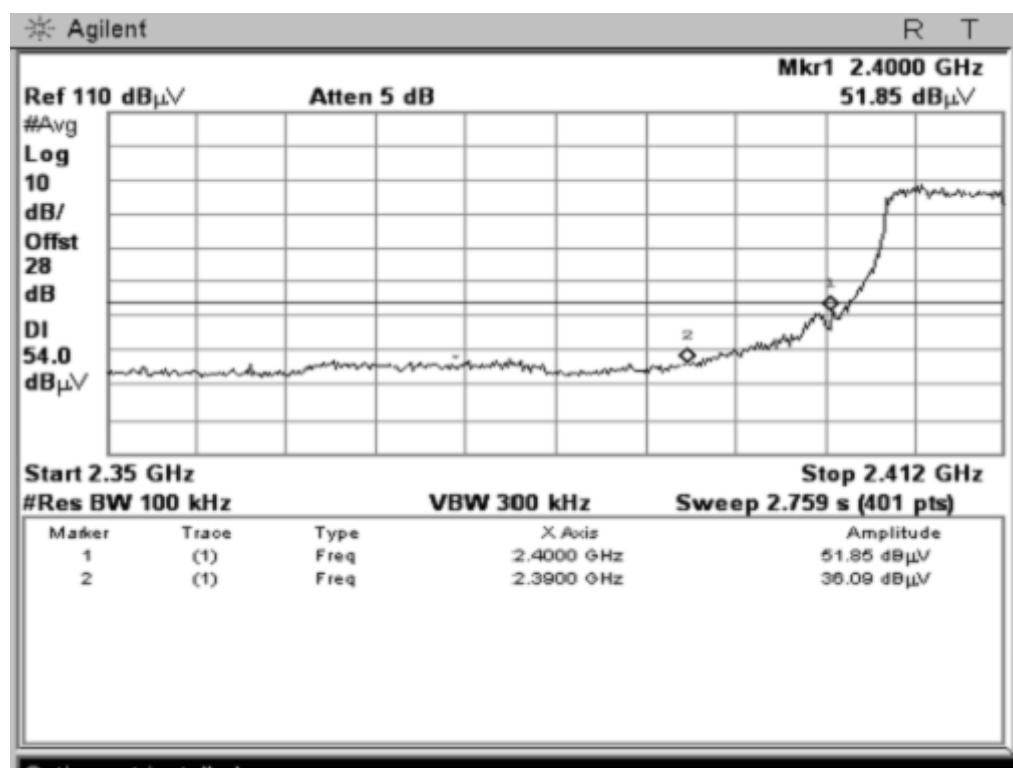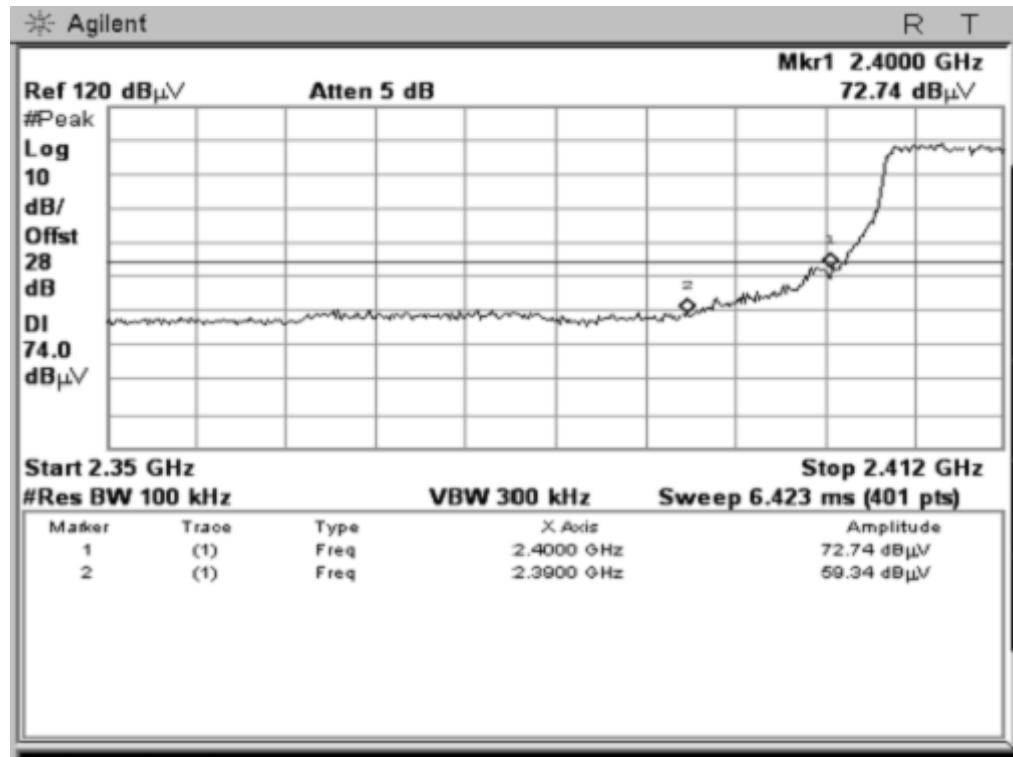


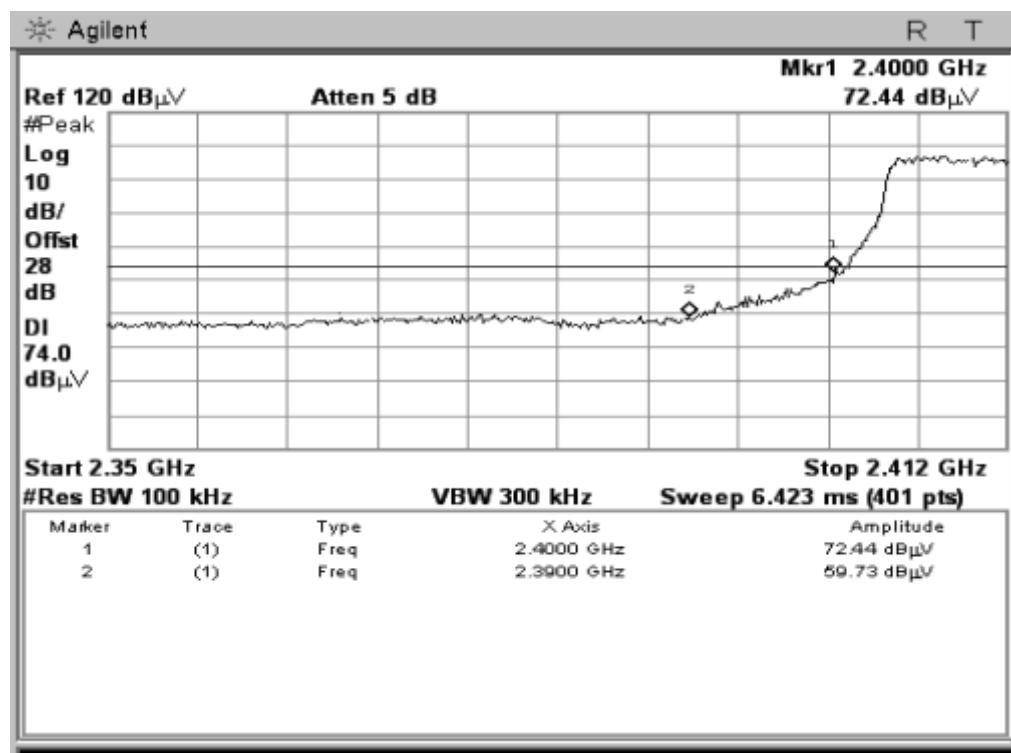


(CH Low, Vertical, Peak)

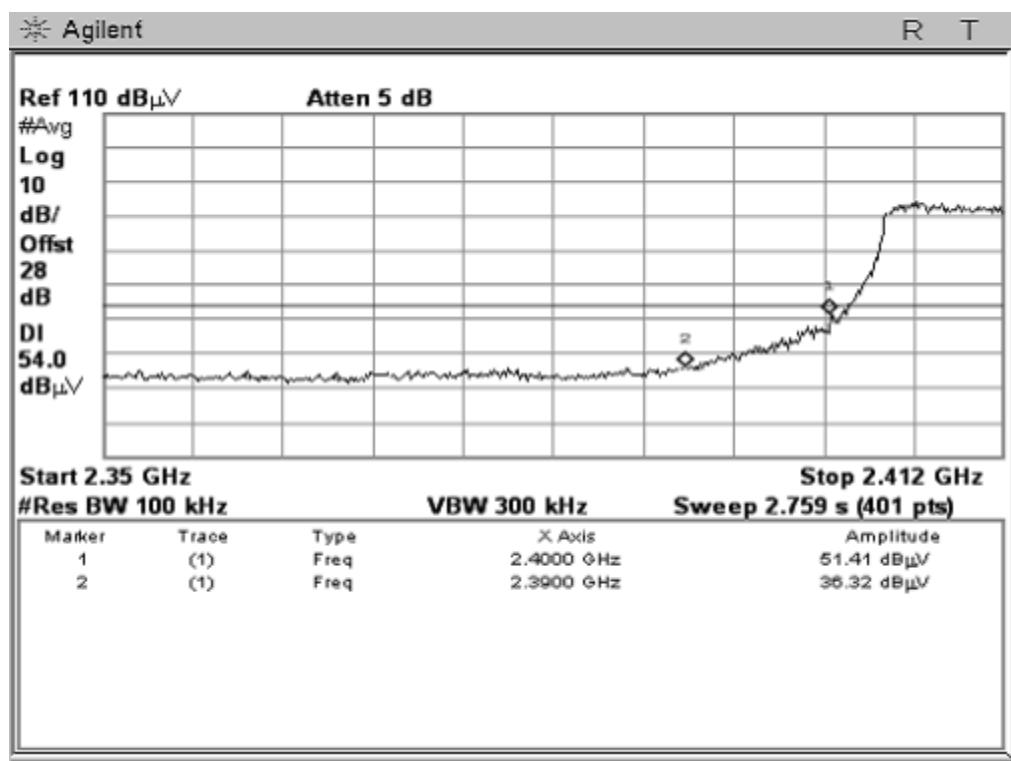


(CH Low, Vertical, Average)

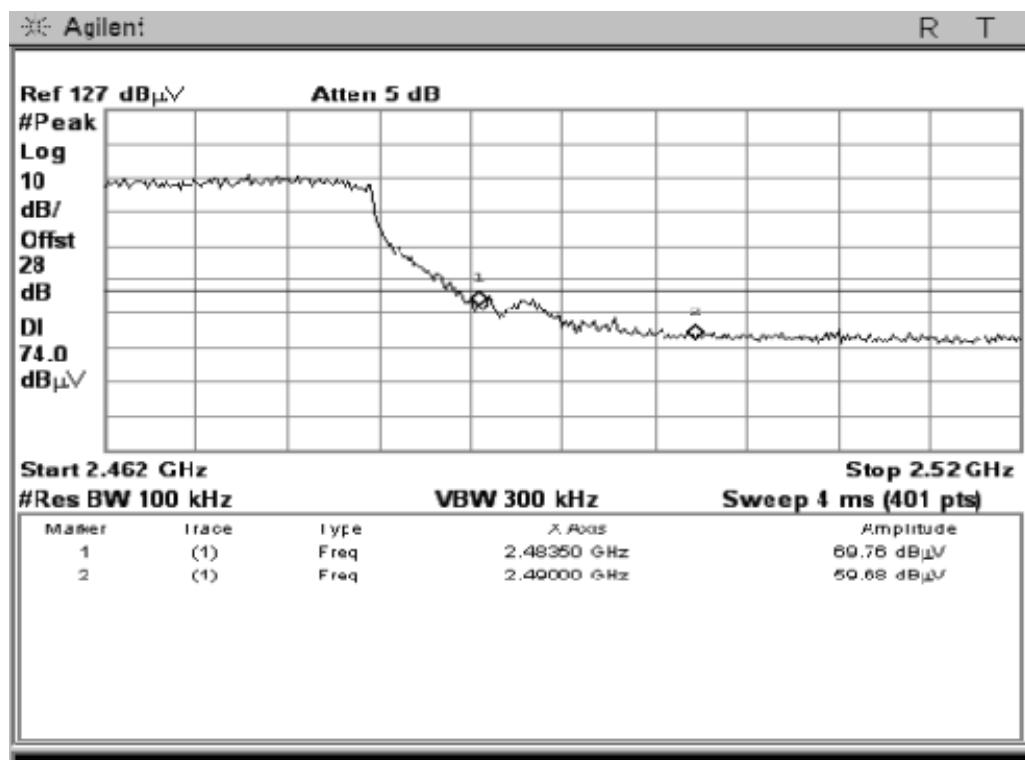


(CH High, Horizontal, Peak)

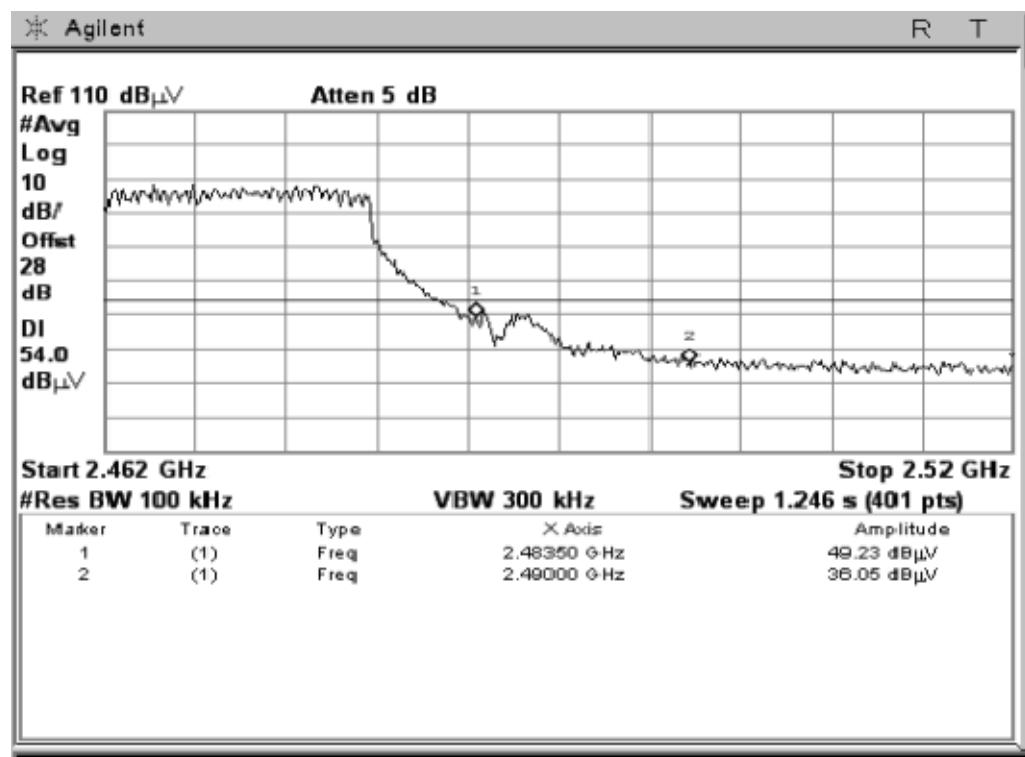

(CH High, Horizontal, Average)

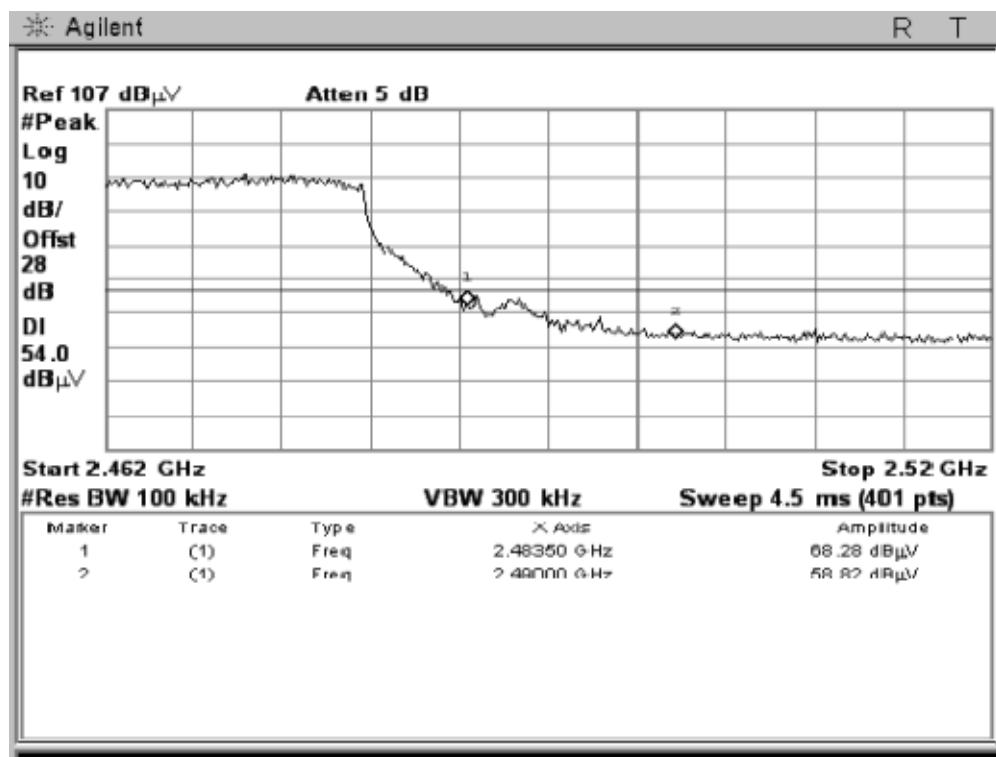


(CH High, Vertical, Peak)

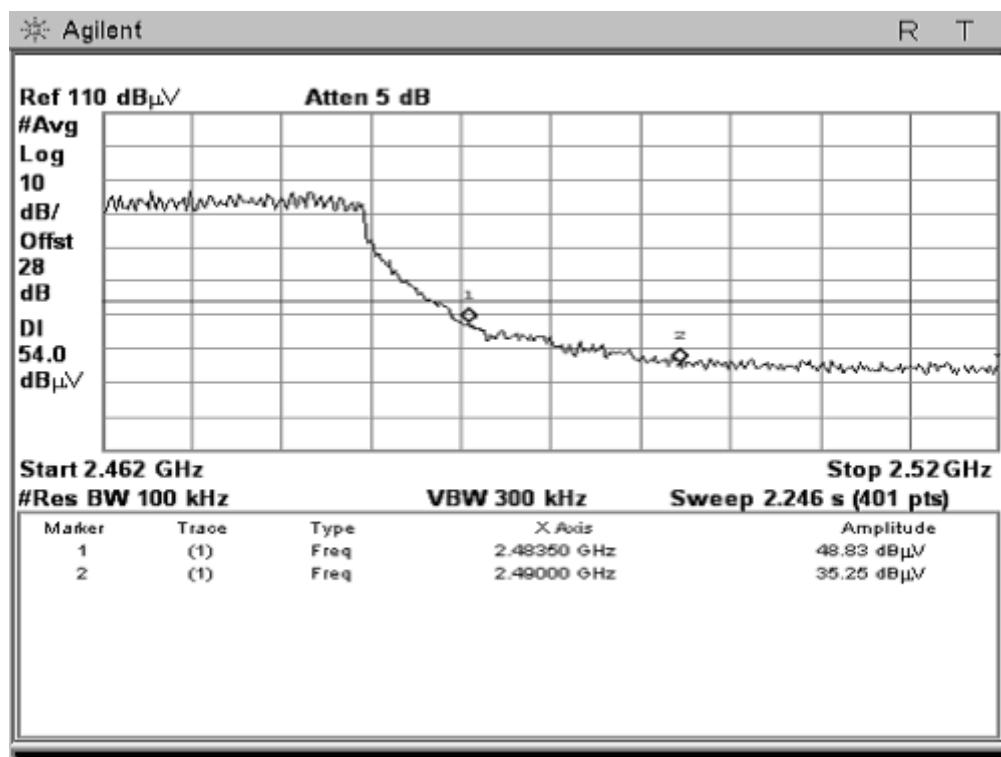


(CH High, Vertical, Average)

5.4.3.3 802.11n Test Mode (Standard-20 MHz Channel mode)


Test Plot:

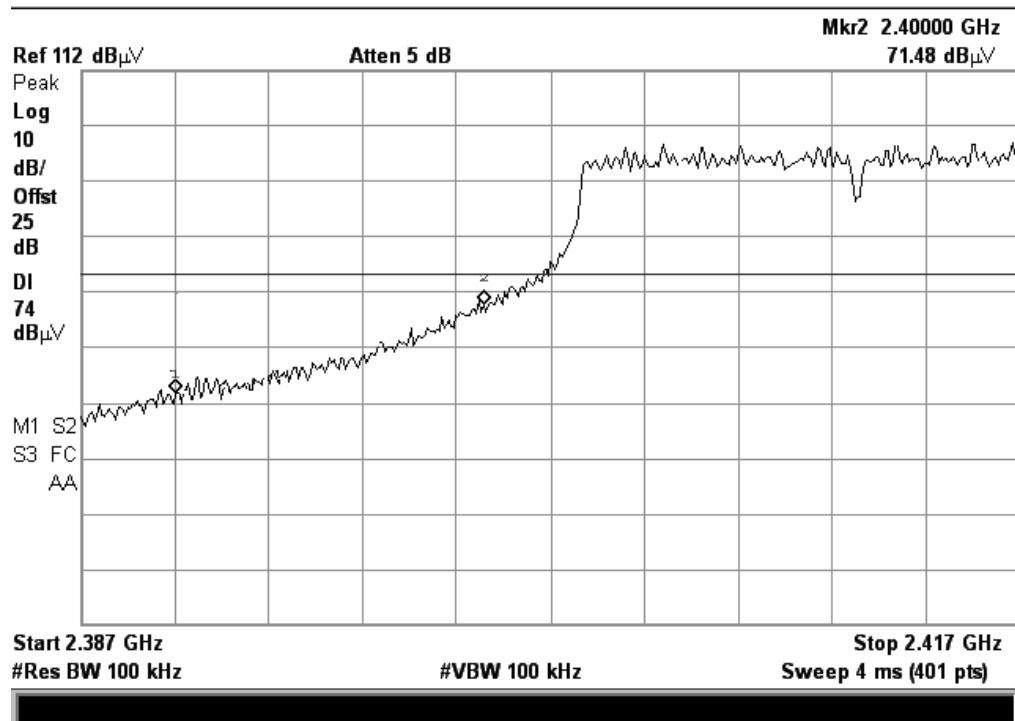


(CH Low, Horizontal, Peak)

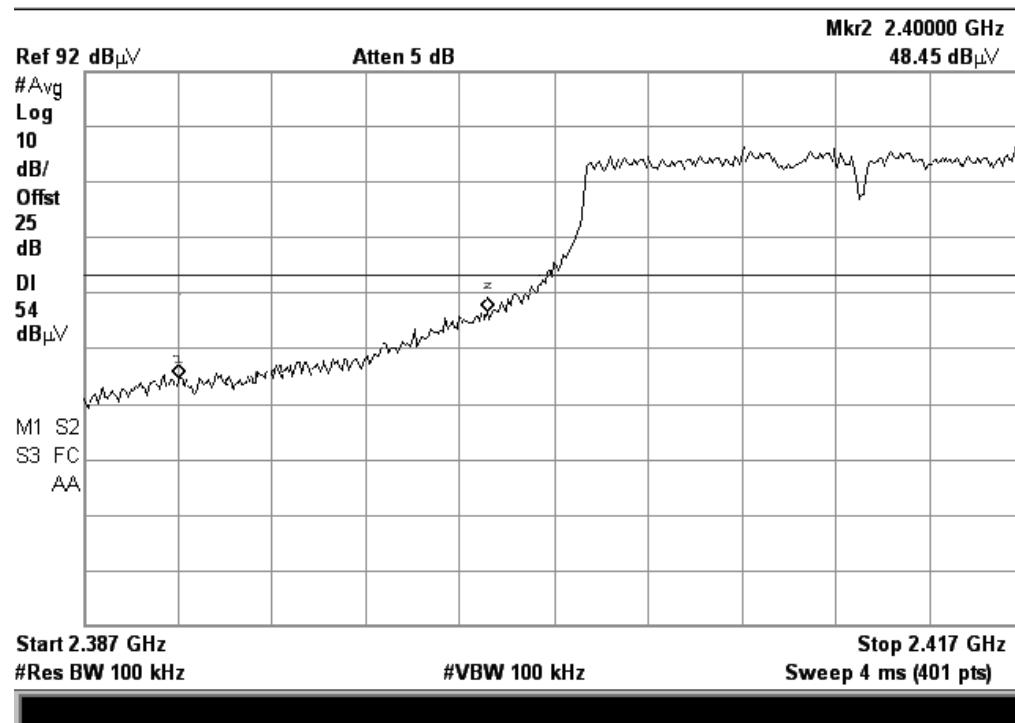



(CH Low, Horizontal, Average)


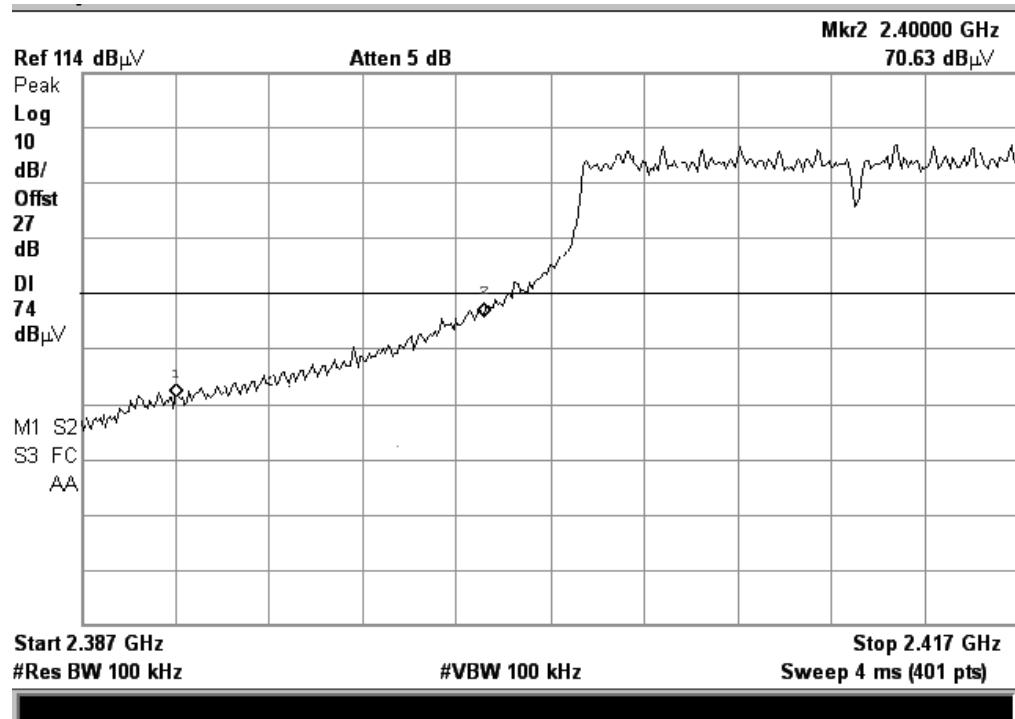


(CH Low, Vertical, Peak)

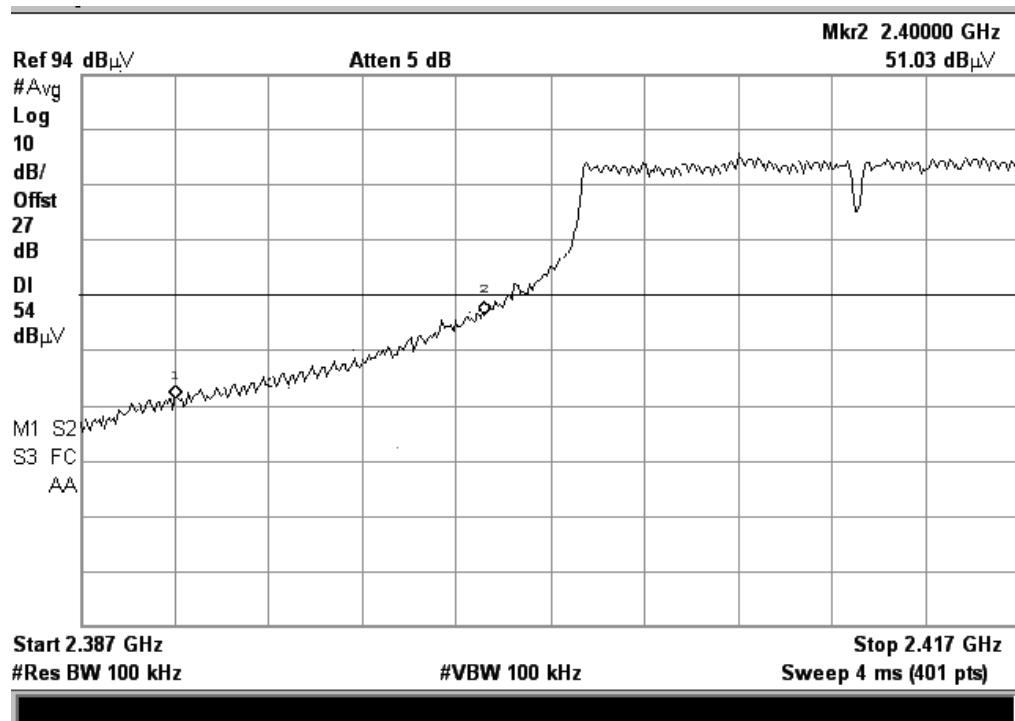

(CH Low, Vertical, Average)

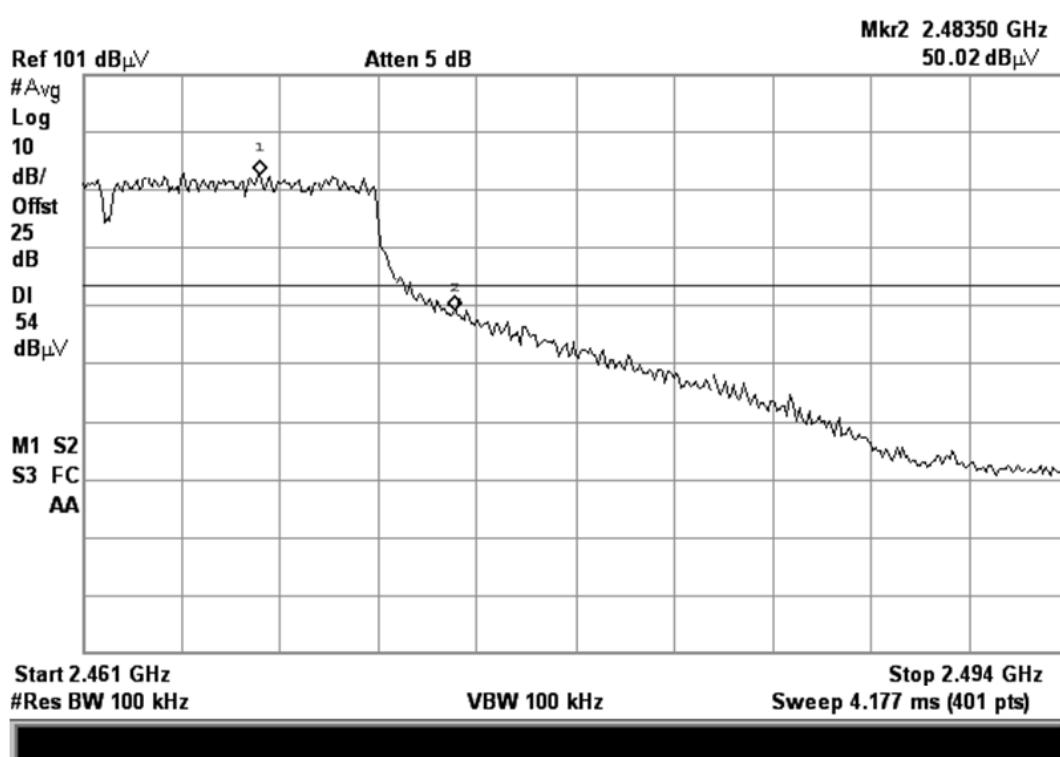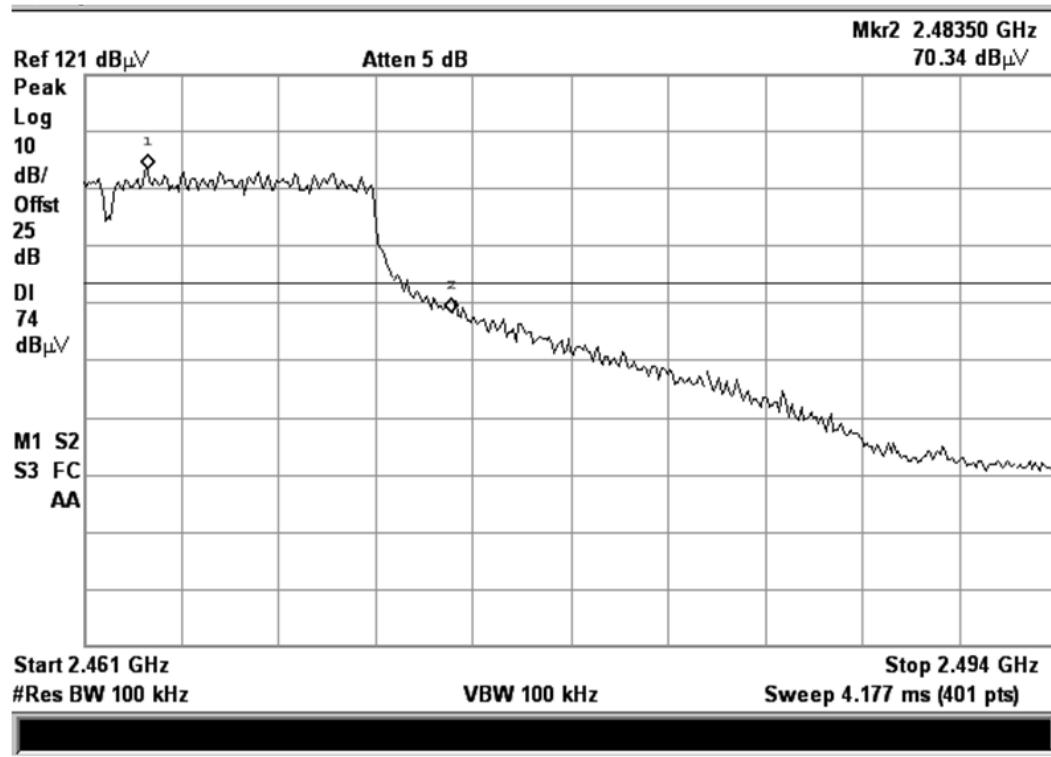

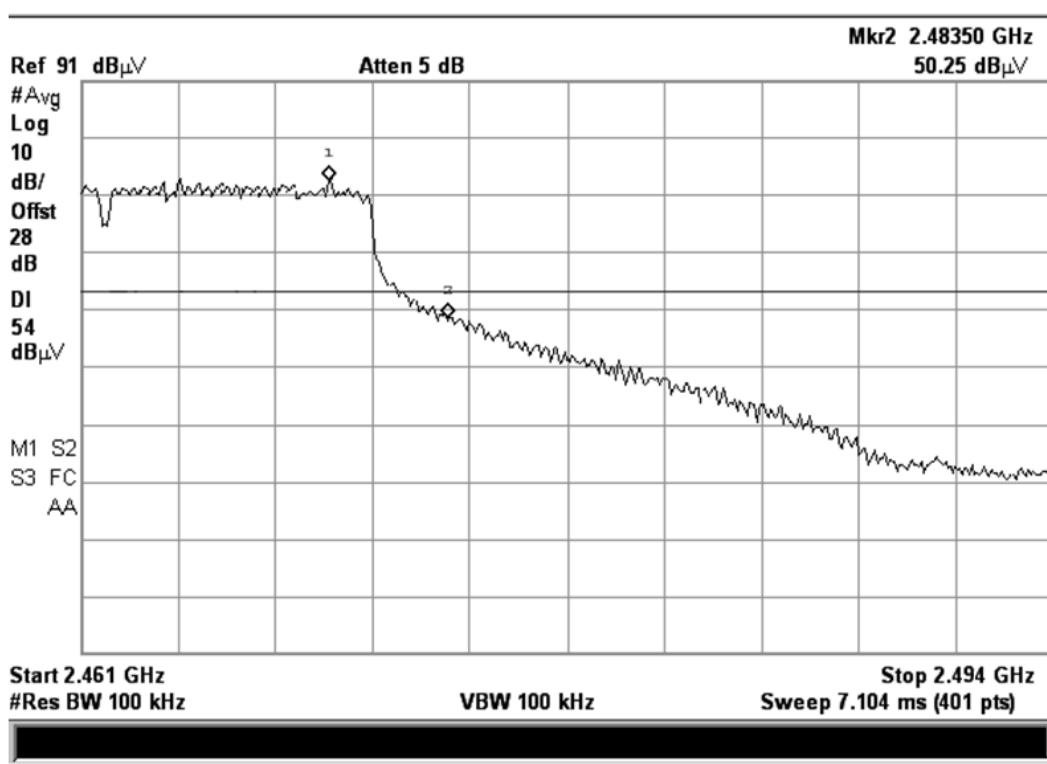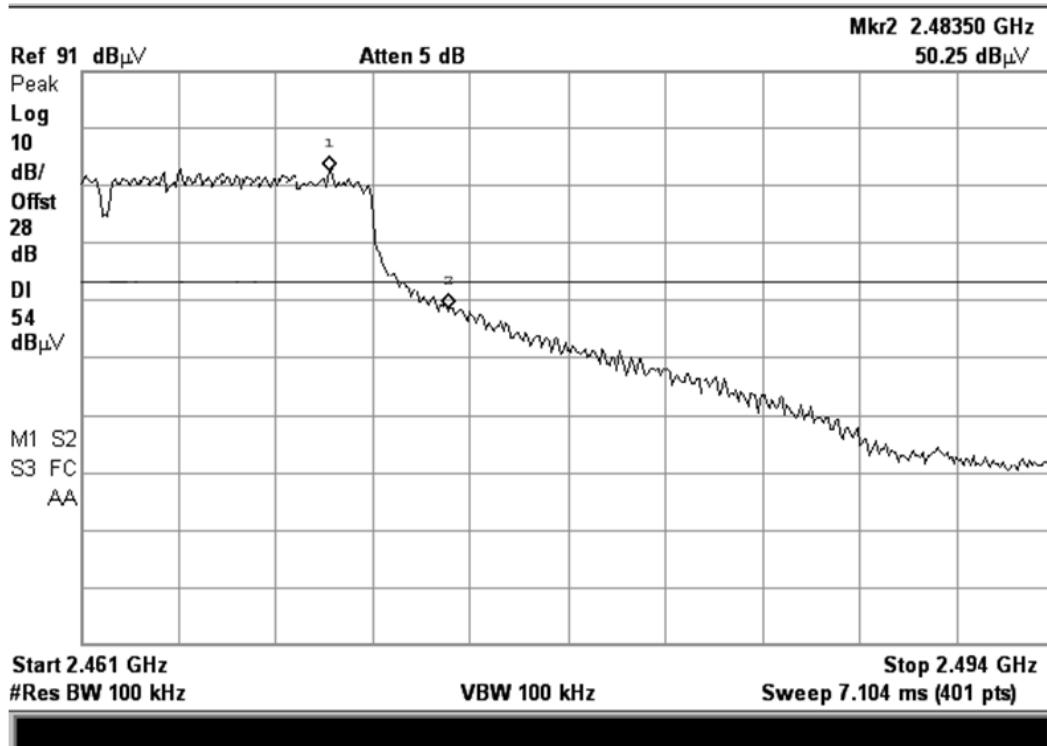

5.5 Power Spectral Density (PSD)

5.5.1 Definition

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.5.2 Test Description

See section 5.1.2 of this report.

5.5.3 Test Result


The lowest, middle and highest channels are tested to verify the power spectral density.


5.5.3.1 802.11b Test Mode

A. Test Verdict:


Channel	Frequency (MHz)	PSD (dBm)	Limits(dBm)	Result
1	2412	-12.31	≤8	PASS
6	2437	-14.18	≤8	PASS
11	2462	-11.11	≤8	PASS

B. Test Plot:

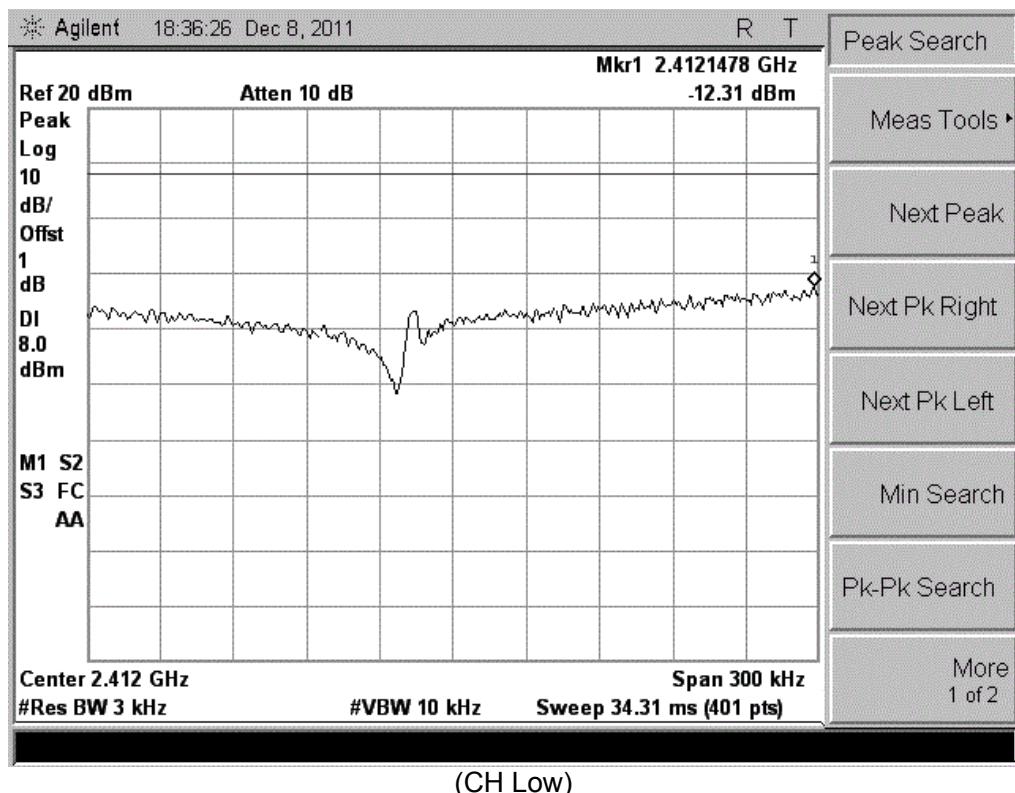

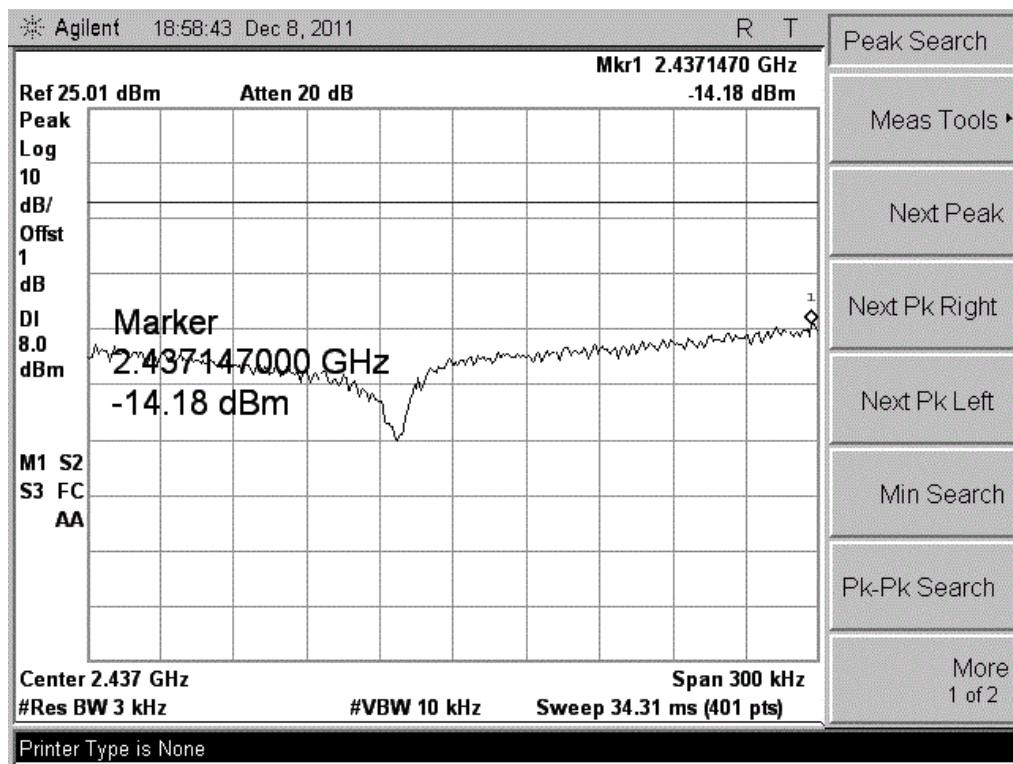

(CH Mid)

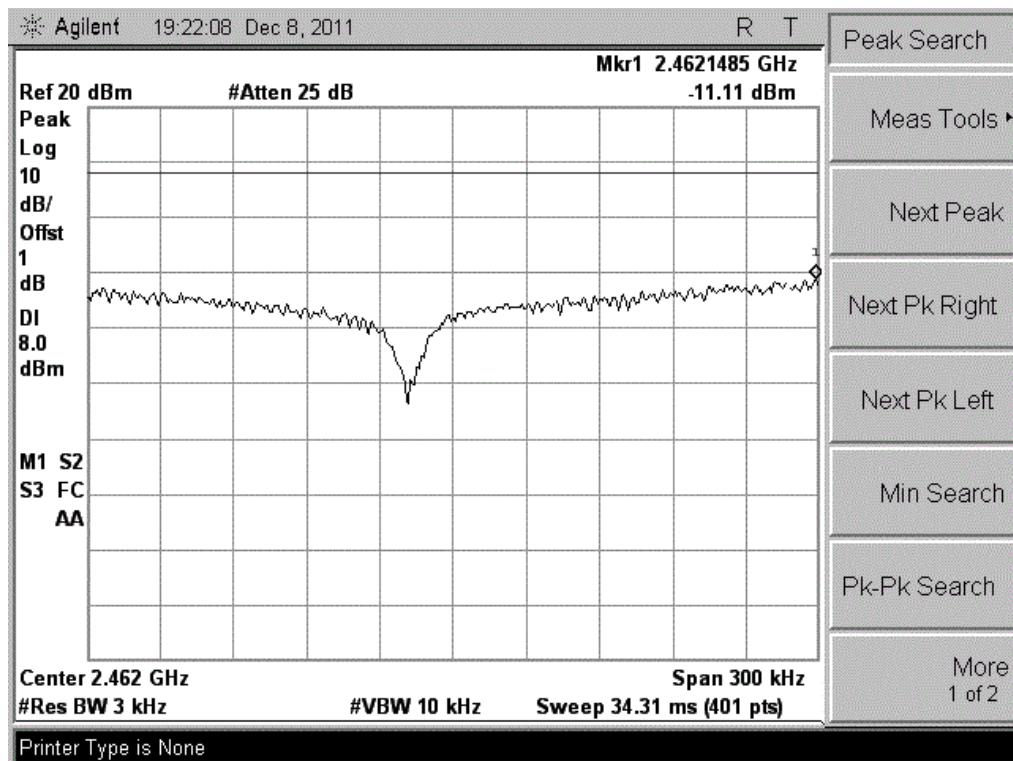


(CH High)

5.5.3.2 802.11g Test Mode



A. Test Verdict:

Channel	Frequency (MHz)	PSD (dBm)	Limits(dBm)	Result
1	2412	-8.812	≤8	PASS
6	2437	-8.017	≤8	PASS
11	2462	-7.414	≤8	PASS

B. Test Plot:

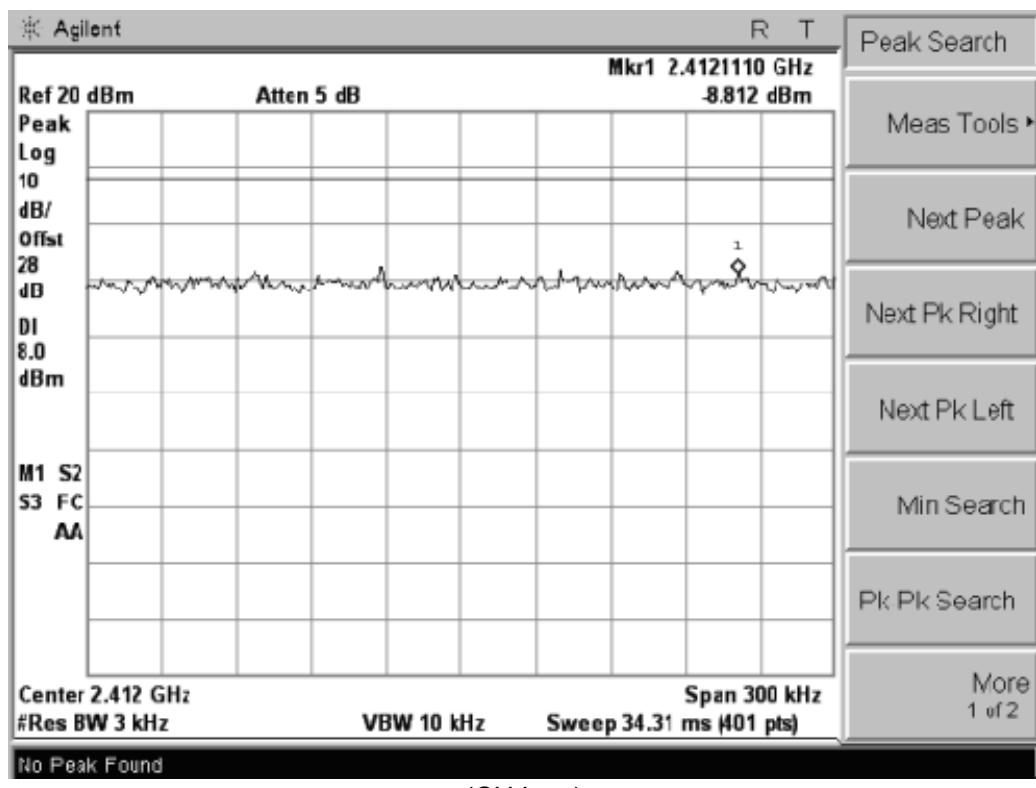

(CH Low)

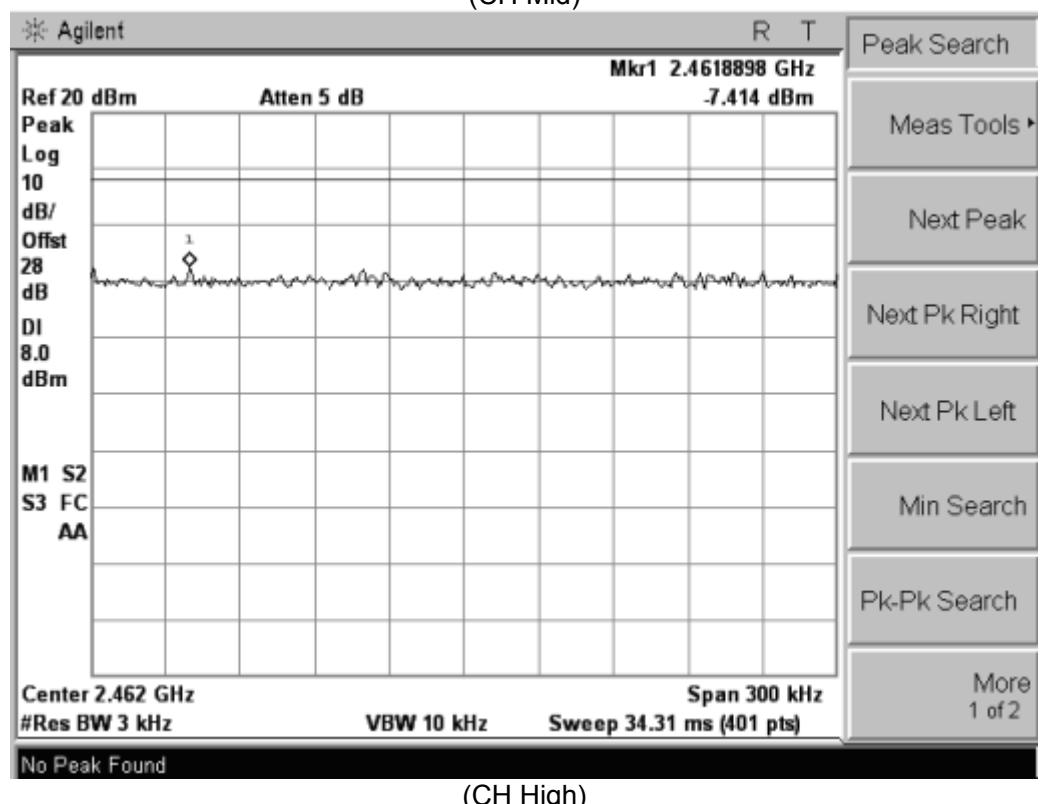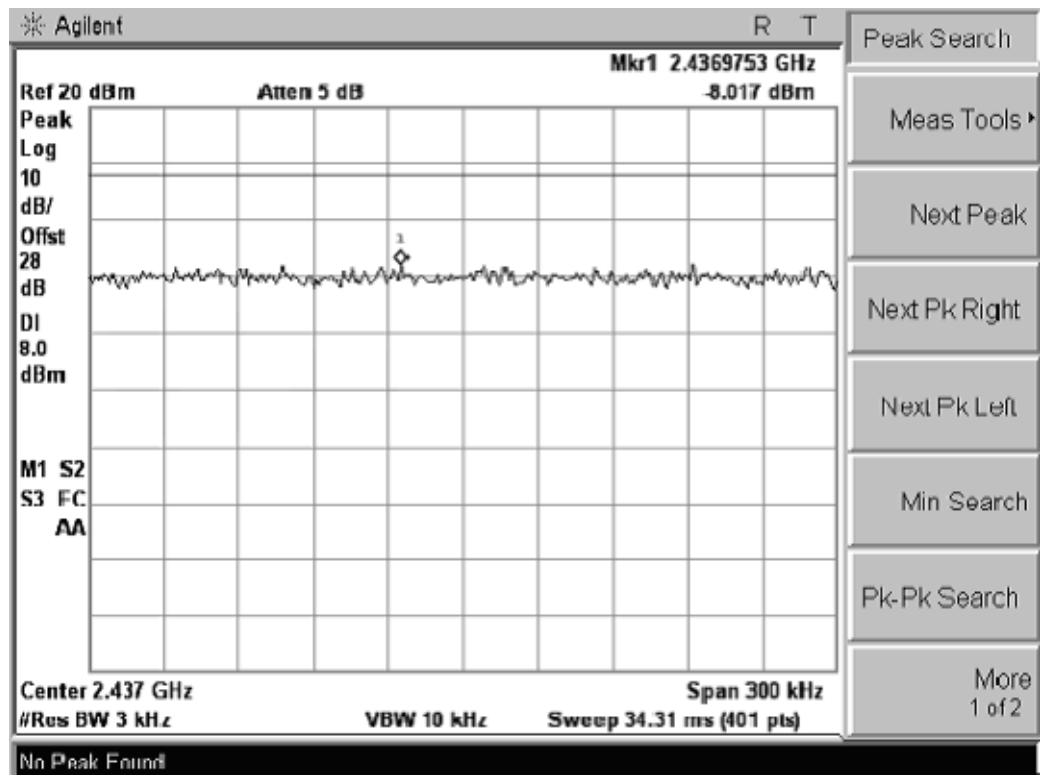




5.5.3.3 802.11n Test Mode (Standard-20 MHz Channel mode)

A. Test Verdict: A.

Channel	Frequency (MHz)	PSD (dBm)	Limits(dBm)	Result
1	2412	-11.23	≤8	PASS
6	2437	-11.45	≤8	PASS
11	2462	-12.97	≤8	PASS

B. Test Plot:

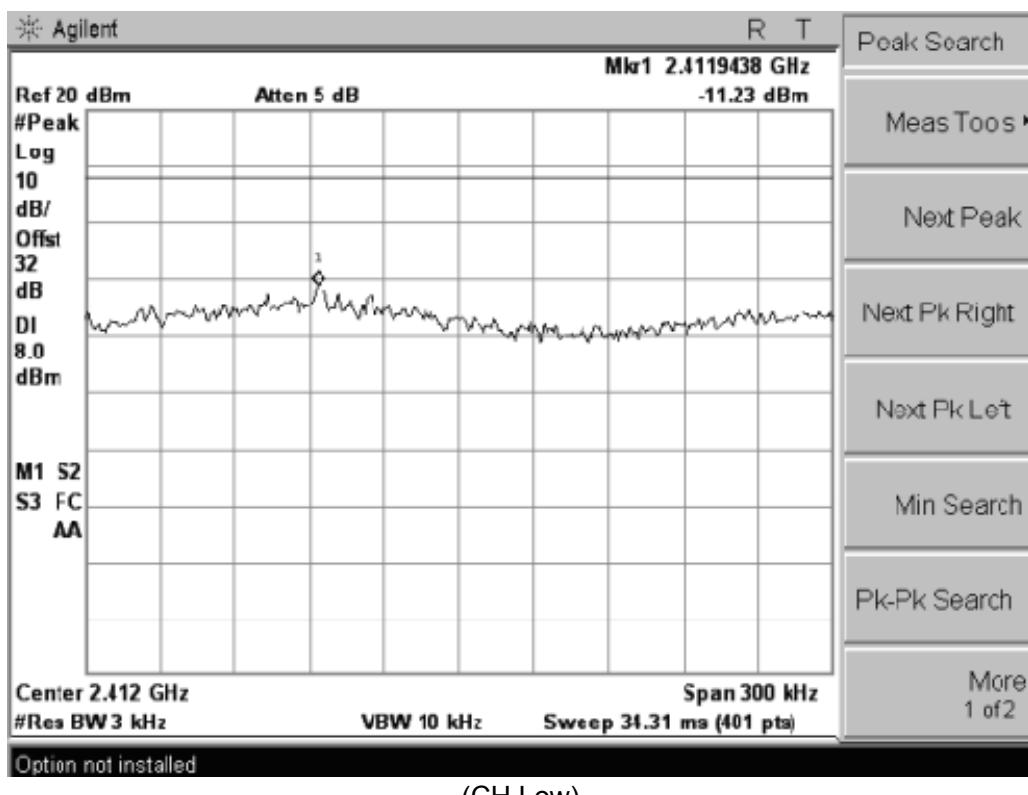

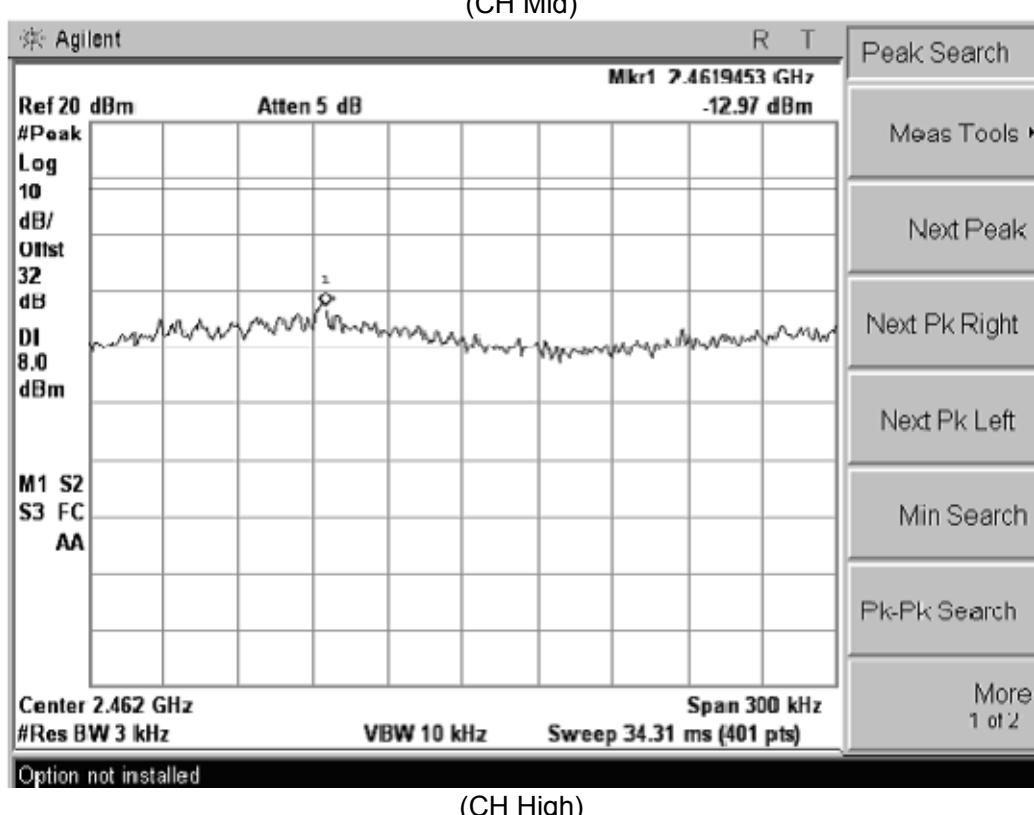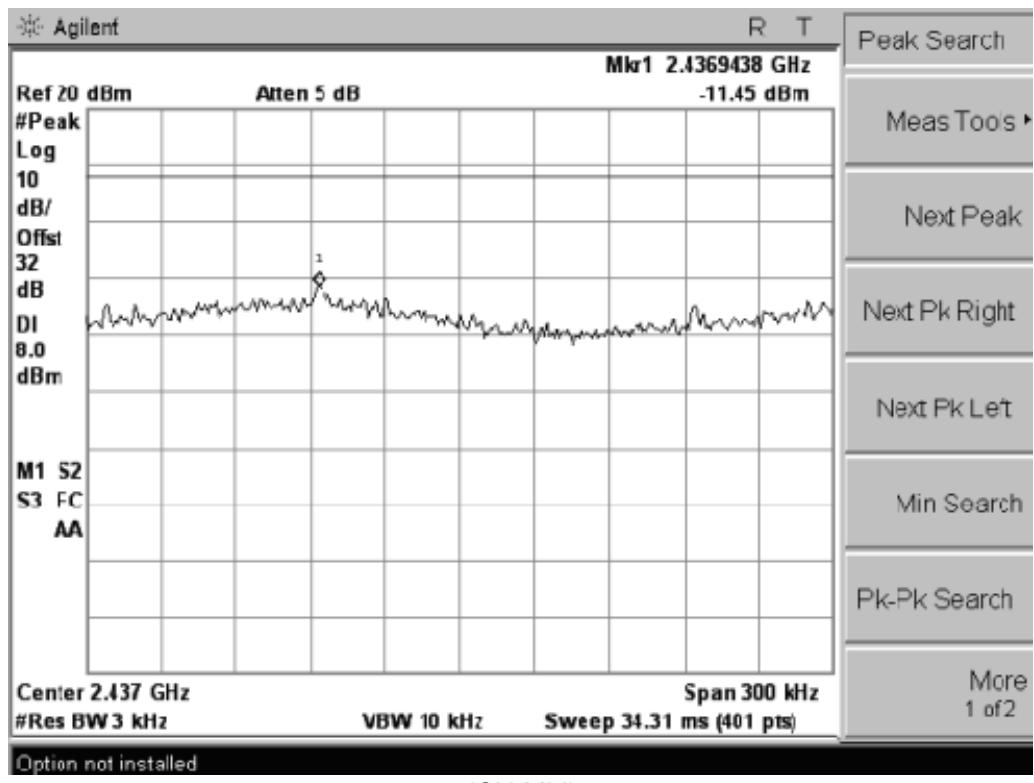

5.6 Conducted Emission

5.6.1 Definition

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).


Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average (dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

5.6.2 Test Description

The EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated and is set to operate at maximum power.

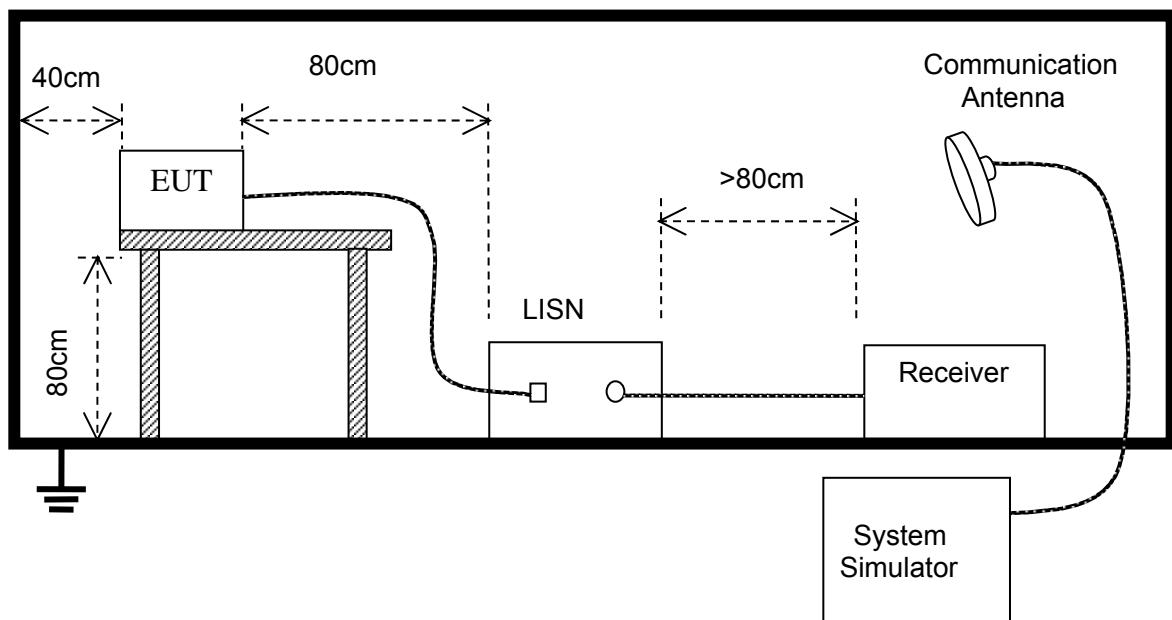

5.6.3 Test Result

A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310


Conducted Emission Measurement

File :sx-sp715A

Data :#5

Date: 2011/12/01

Time: 21:04:52

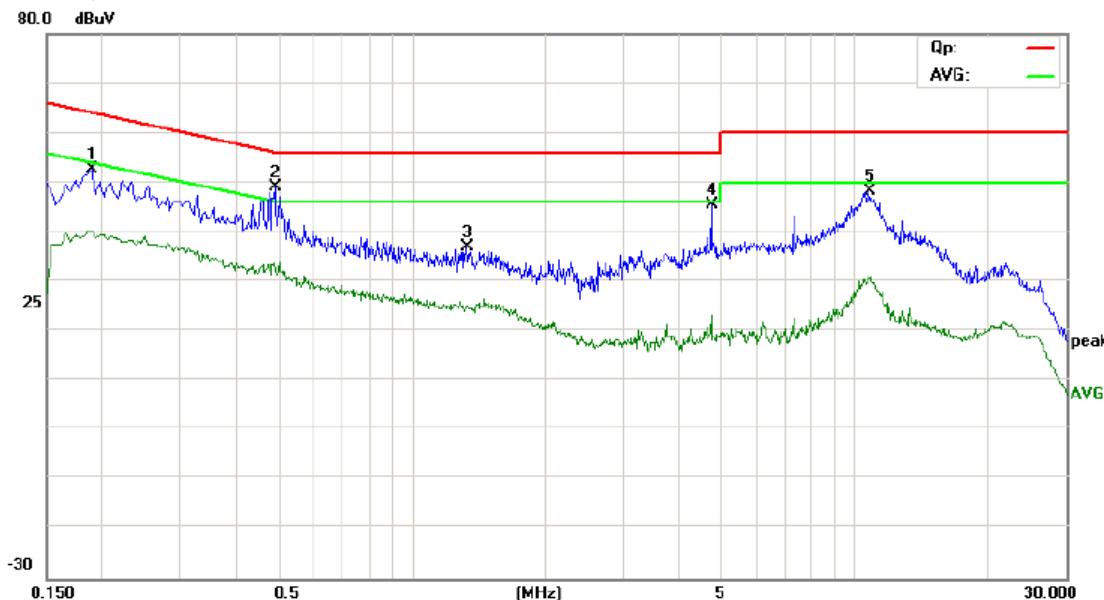

Site site #1 Phase: *L1* Temperature: 26

Limit: FCC Part15 B Class B QP Power: AC 120V/60Hz Humidity: 60 %

EUT: Tablet PC

M/N: SX-SP715A

Mode: WIFI

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1900	41.28	11.40	52.68	64.04	-11.36	peak	
2	*	0.4940	38.91	10.04	48.95	56.10	-7.15	peak	
3		1.3300	27.25	9.67	36.92	56.00	-19.08	peak	
4		4.7620	33.78	11.76	45.54	56.00	-10.46	peak	
5		10.7860	39.13	9.00	48.13	60.00	-11.87	peak	

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Conducted Emission Measurement


File: sx-sp715A

Data #: 6

Date: 2011/12/01

Time: 21:06:44

80.0 dBuV

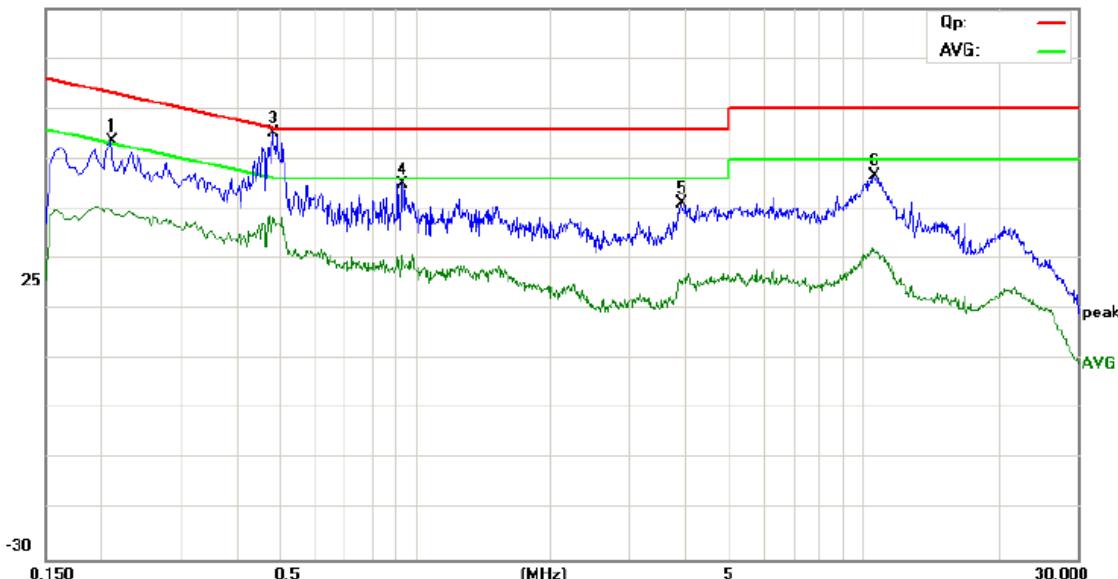

Site: site #1

Phase: *N*

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Tablet PC

M/N: SX-SP715A

Mode: WIFI

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dB			
1		0.2100	41.41	11.93	53.34	63.21	-9.87	peak	
2		0.4800	41.32	10.13	51.45	56.34	-4.89	QP	
3 *		0.4820	44.90	10.12	55.02	56.30	-1.28	peak	
4		0.9340	34.95	10.00	44.95	56.00	-11.05	peak	
5		3.9220	30.17	10.92	41.09	56.00	-14.91	peak	
6		10.5220	37.67	9.00	46.67	60.00	-13.33	peak	

*:Maximum data x:Over limit !:over margin

5.7 Radiated Emission

5.7.1 Definition

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).


According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.


5.7.2 Test Description

A. Test Setup:

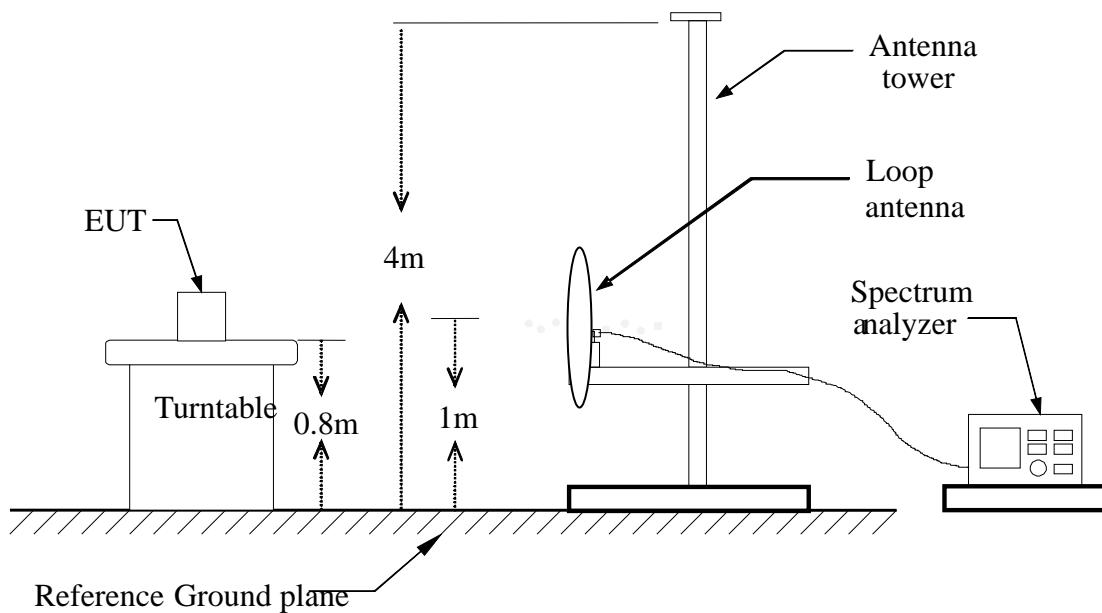

Blow 1GHz:

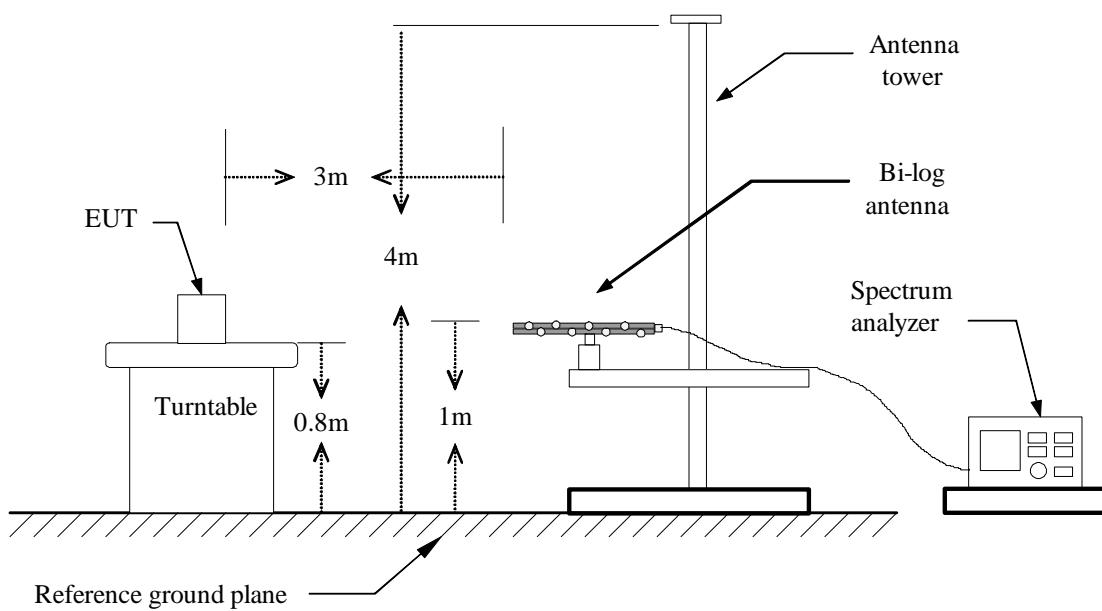

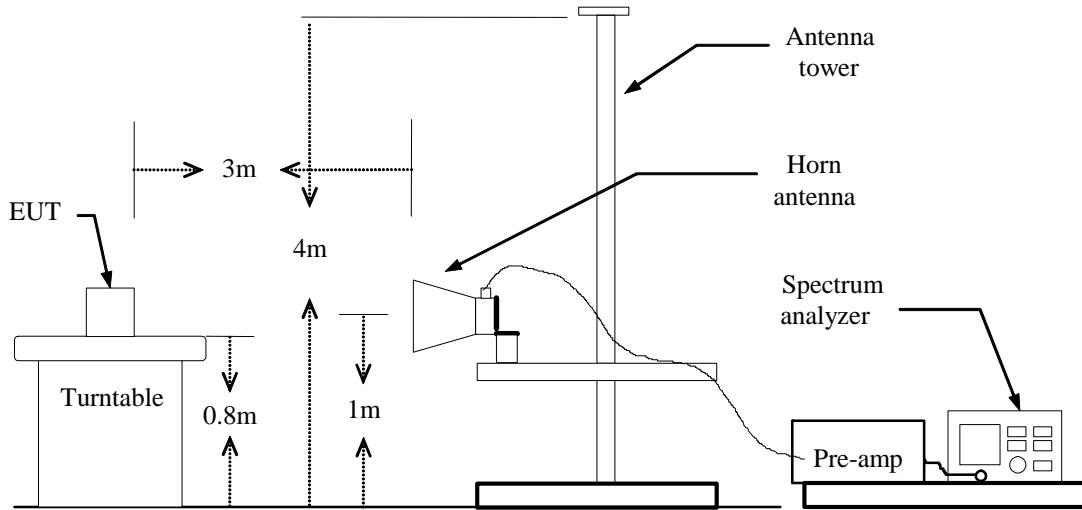Above 1GHz:**B. Test procedures**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
 - Below 1GHz: RBW=100 kHz / VBW=300 kHz / Sweep=AUTO
 - Above 1GHz : (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

5.7.3 Test Result


Form 9KHz to 30MHz:

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
NA	H								>20
NA	V								>20

-No detected in below 30MHz.

Below 1 GHz

Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

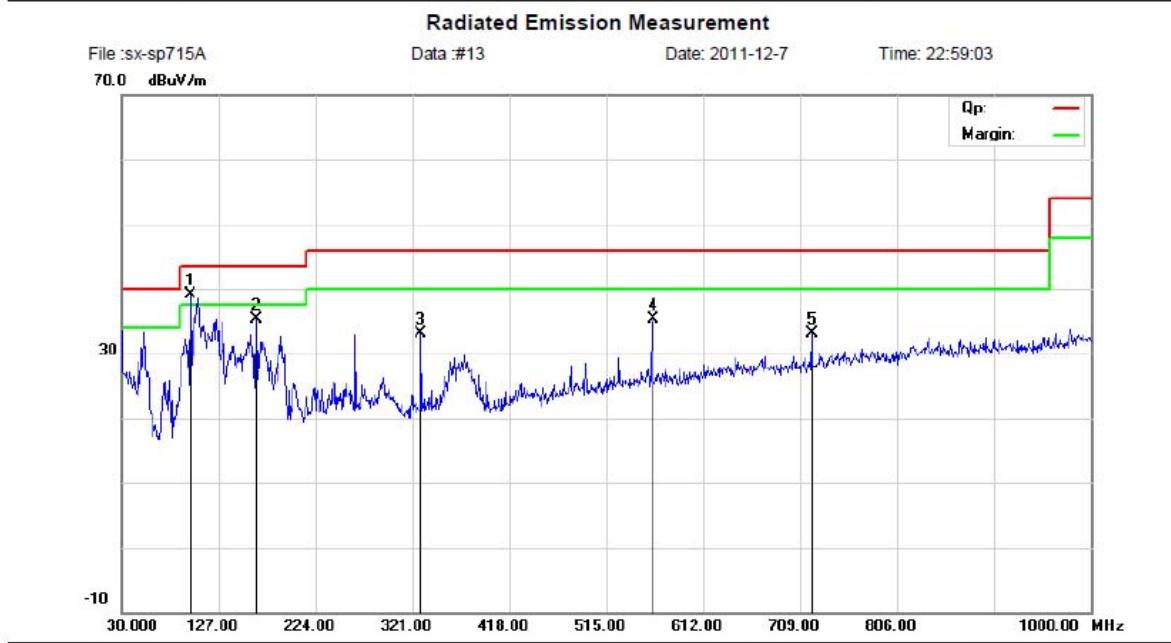

Site site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: AC 120V/60Hz

Humidity: 61 %

EUT: Tablet PC

Distance:

M/N: SX-SP715A

Mode: WIFI

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	Degree
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	98.8700	26.09	12.94	39.03	43.50	-4.47	peak		0
2		164.8300	18.02	17.21	35.23	43.50	-8.27	peak		0
3		329.7300	16.08	17.00	33.08	46.00	-12.92	peak		0
4		561.5600	12.53	22.72	35.25	46.00	-10.75	peak		0
5		720.6400	8.45	24.71	33.16	46.00	-12.84	peak		0

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement


File :sx-sp715A

Data #:14

Date: 2011-12-7

Time: 23:00:50

70.0 dBuV/m

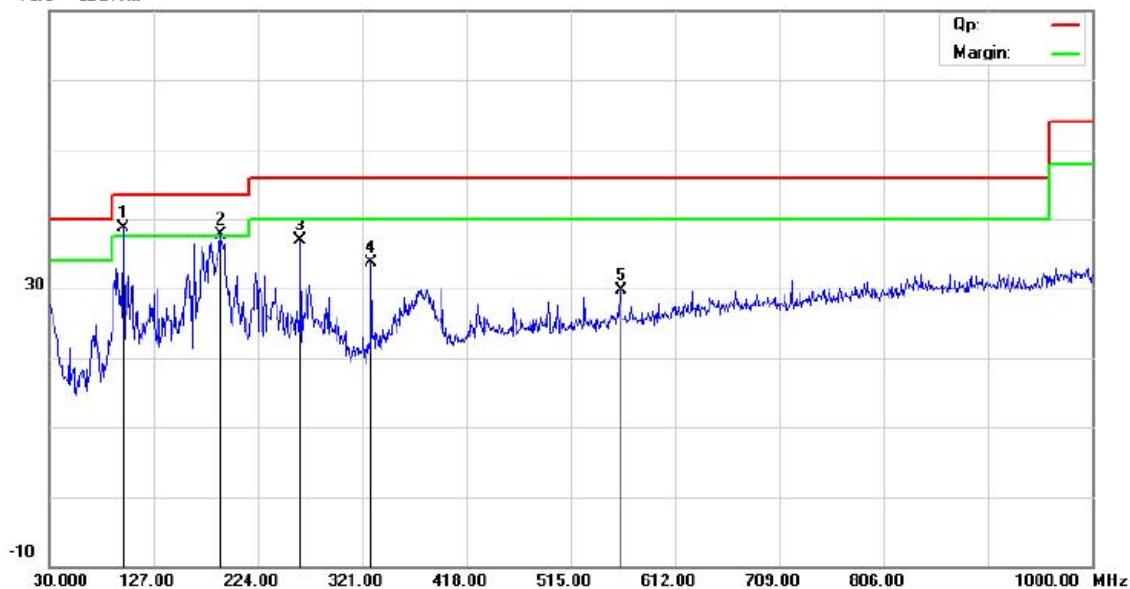

Site site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: AC 120V/60Hz

Humidity: 61 %

EUT: Tablet PC

Distance:

M/N: SX-SP715A

Mode: WIFI

Note:

No.	Mk.	Reading Freq. MHz	Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Detector	Table Height cm	Table Degree degree	Comment
1	*	98.8700	25.72	12.94	38.66	43.50	-4.84	peak		0	
2	!	189.0800	21.13	16.60	37.73	43.50	-5.77	peak		0	
3		263.7700	18.79	18.09	36.88	46.00	-9.12	peak		0	
4		329.7300	16.61	17.00	33.61	46.00	-12.39	peak		0	
5		561.5600	7.01	22.72	29.73	46.00	-16.27	peak		0	

*:Maximum data

x:Over limit

!:over margin

Above 1 GHz

Operation Mode:	TX/ IEEE 802.11b/CH Low	Test Date:	December. 7, 2011
Temperature:	20°C	Tested by:	Habby Guo
Humidity:	70 % RH	Polarity:	Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF	Actual Fs		Peak	AV	AV
							Limit	Limit	Margin
					Peak (dBuV/m)	AV (dBuV/m)			
4825.31	H	57.68	35.79	10.45	68.13	46.24	74.00	54.00	-7.76
N/A	H								
4825.31	V	55.14	34.06	10.45	65.59	44.51	74.00	54.00	-9.49
N/A	V								

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX/ IEEE 802.11b/CH Mid **Test Date:** December. 7, 2011
Temperature: 20°C **Tested by:** Habby Guo
Humidity: 70 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak (dBuV)	AV (dBuV)	Ant. / CL CF	Actual Fs		Peak (dBuV/m)	AV (dBuV/m)	AV (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1337.50	H	60.39	37.51	5.02	65.41	42.53	74.00	54.00	-11.47
N/A	H								
1337.50	V	63.43	42.13	5.02	68.45	47.15	74.00	54.00	-6.85
N/A	V								

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX/ IEEE 802.11b/CH High **Test Date:** December. 7, 2011
Temperature: 20°C **Tested by:** Habby Guo
Humidity: 70 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak	AV	AV
							Limit	Limit	Margin
					(dBuV/m)	(dBuV/m)			
4960.00	H	55.39	30.83	17.34	72.73	48.17	74.00	54.00	-5.83
N/A	H								
4960.00	V	52.94	29.77	17.34	70.28	47.11	74.00	54.00	-6.89
N/A	V								

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX/ IEEE 802.11g/CH Low **Test Date:** December. 7, 2011
Temperature: 20°C **Tested by:** Habby Guo
Humidity: 70 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
4876.50	H	54.56	33.66	12.86	67.42	46.52	74.00	54.00	-7.48
N/A	H								
4876.50	V	51.62	31.06	12.86	64.48	43.92	74.00	54.00	-10.08
N/A	V								

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX/ IEEE 802.11g/CH Mid **Test Date:** December. 7, 2011
Temperature: 20°C **Tested by:** Habby Guo
Humidity: 70 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak	AV	Ant. / CL CF	Actual Fs		Peak	AV	AV
		Reading (dBuV)	Reading (dBuV)	(dB)			Peak (dBuV/m)	AV (dBuV/m)	Limit (dB)
4882.50	H	53.59	29.77	17.76	71.35	47.53	74.00	54.00	-6.47
N/A	H								
4882.50	V	51.72	25.27	17.76	69.48	43.03	74.00	54.00	-10.97
N/A	V								

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX/ IEEE 802.11g/CH High **Test Date:** December. 7, 2011
Temperature: 20°C **Tested by:** Habby Guo
Humidity: 70 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak	AV	Ant. / CL	Actual Fs		Peak	AV	AV
		Reading (dBuV)	Reading (dBuV)	CF (dB)			Limit (dBuV/m)	Limit (dBuV/m)	Margin (dB)
					(dBuV/m)	(dBuV/m)			
2417.50	H	62.93	38.78	9.09	72.02	47.87	74.00	54.00	-6.13
3227.50	H	55.64	30.84	12.14	67.78	42.98	74.00	54.00	-11.02
N/A	H								
2417.50	V	60.38	37.80	9.09	69.47	46.89	74.00	54.00	-7.11
3227.50	V	53.98	29.63	12.14	66.12	41.77	74.00	54.00	-12.23
N/A	V								

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX/ IEEE 802.11n(Standard-20MHz)/CH Low
Temperature: 20°C
Humidity: 70 % RH

Test Date: December. 7, 2011
Tested by: Habby Guo
Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
4654.50	H	55.39	31.03	17.49	72.88	48.52	74.00	54.00	-5.48
N/A	H								
5140.50	V	51.65	28.78	17.38	69.03	46.16	74.00	54.00	-7.84
N/A	V								

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX/ IEEE 802.11n(Standard-20MHz)/CH Mid **Test Date:** December. 7, 2011
Temperature: 20oC **Tested by:** Habby Guo
Humidity: 70 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak	AV	AV
							Limit	Limit	Margin
					(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4882.50	H	51.34	30.69	17.76	69.10	48.45	74.00	54.00	-5.55
N/A	H								
4882.50	V	47.63	25.38	17.76	65.39	43.14	74.00	54.00	-10.86
N/A	V								

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX/ IEEE 802.11n(Standard-20MHz)/CH High **Test Date:** December. 7, 2011
Temperature: 20°C **Tested by:** Habby Guo
Humidity: 70 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF	Actual Fs		Peak	AV	AV
							Limit	Limit	Margin
					(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
1300.00	H	62.72	37.40	4.86	67.58	42.26	74.00	54.00	-11.74
5668.00	H	54.43	30.73	17.13	71.56	47.86	74.00	54.00	-6.14
N/A	H								
1337.50	V	60.12	35.87	5.02	65.14	40.89	74.00	54.00	-13.11
5828.00	V	51.86	29.16	17.52	69.38	46.68	74.00	54.00	-7.32
N/A	V								

Notes:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).


APPENDIX 1
PHOTOGRAPHS OF TEST SETUP

CE TEST SETUP



RE TEST SETUP

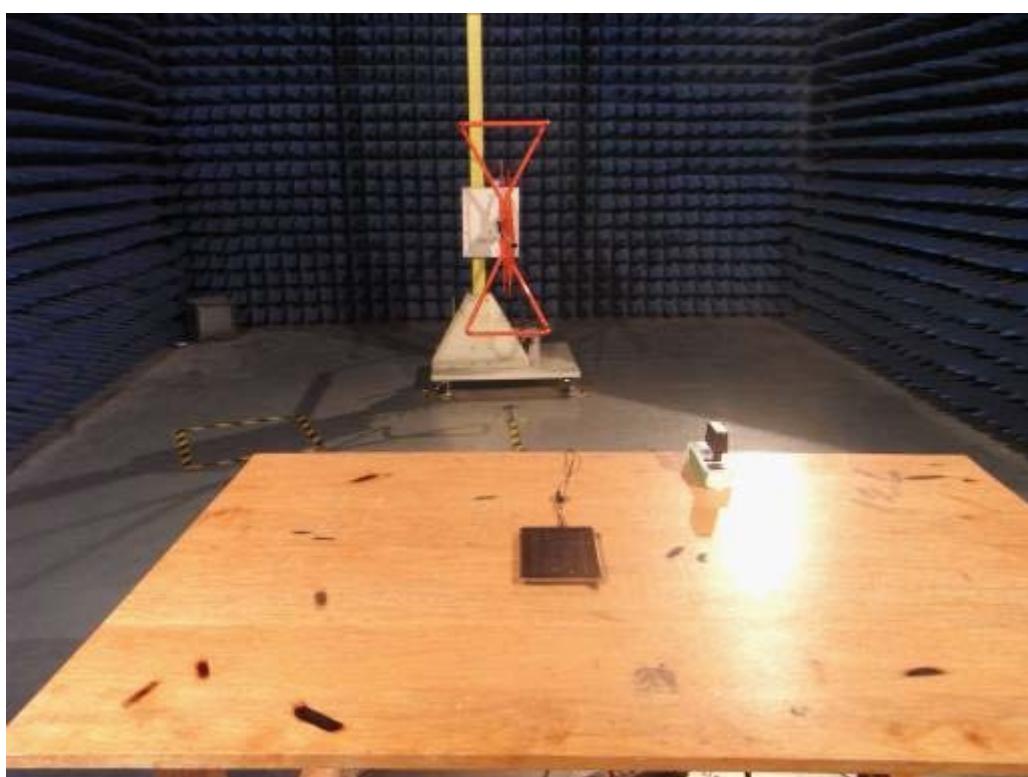

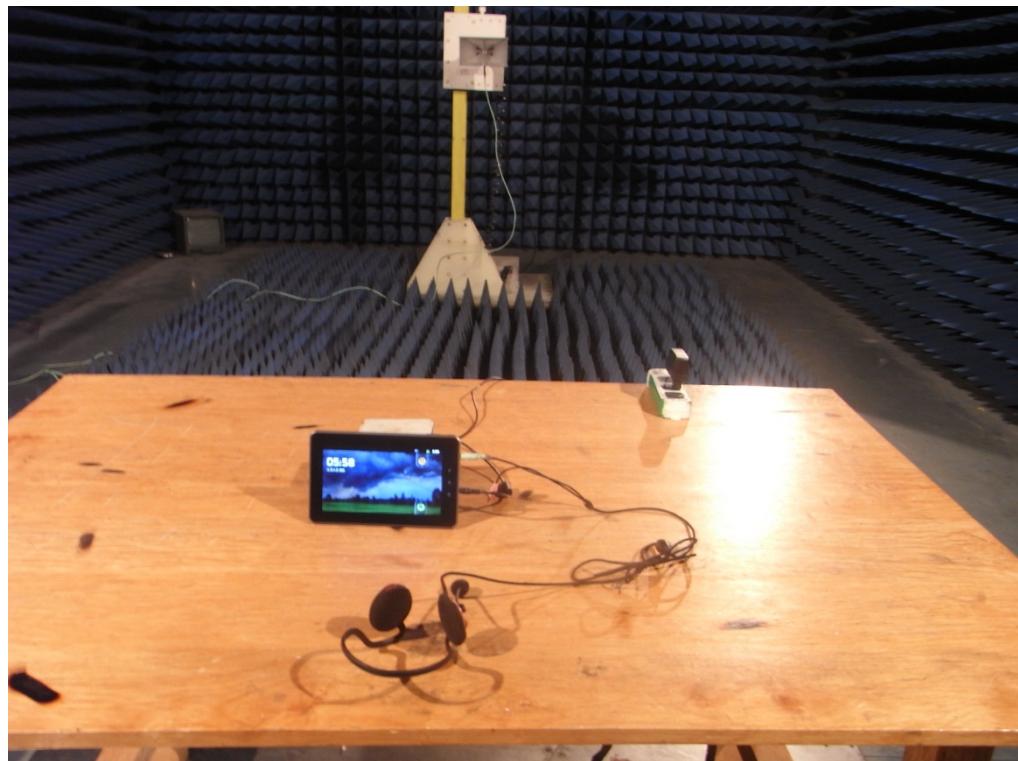

CONDUCTED SPURIOUS EMISSION TEST SETUP




APPENDIX 2
PHOTOGRAPHS OF EUT


FRONT VIEW OF SAMPLE



BACK VIEW OF SAMPLE

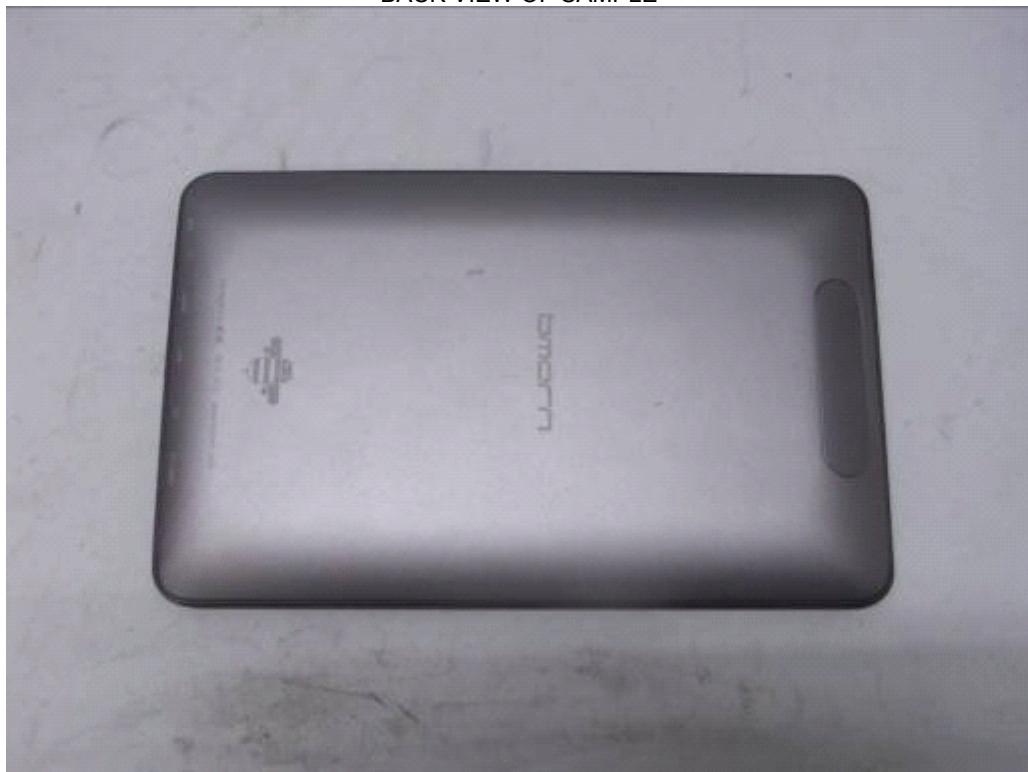

LEFT VIEW OF SAMPLE

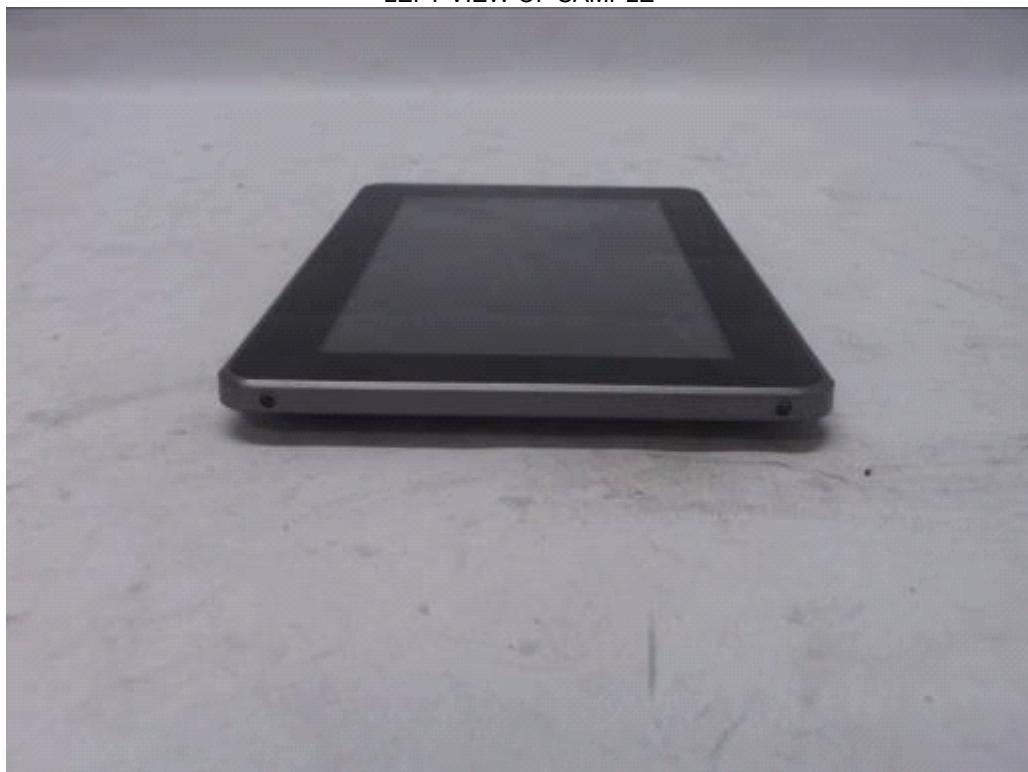

RIGHT VIEW OF SAMPLE



TOP VIEW OF SAMPLE



BOTTOM VIEW OF SAMPLE



PHOTO OF POWER SUPPLY



PHOTO OF HDMI CABLE



PHOTO OF BATTERY




PHOTO OF THE ENTIRE SAMPLE




INTERNAL PHOTO OF SAMPLE – 1




INTERNAL PHOTO OF SAMPLE -2

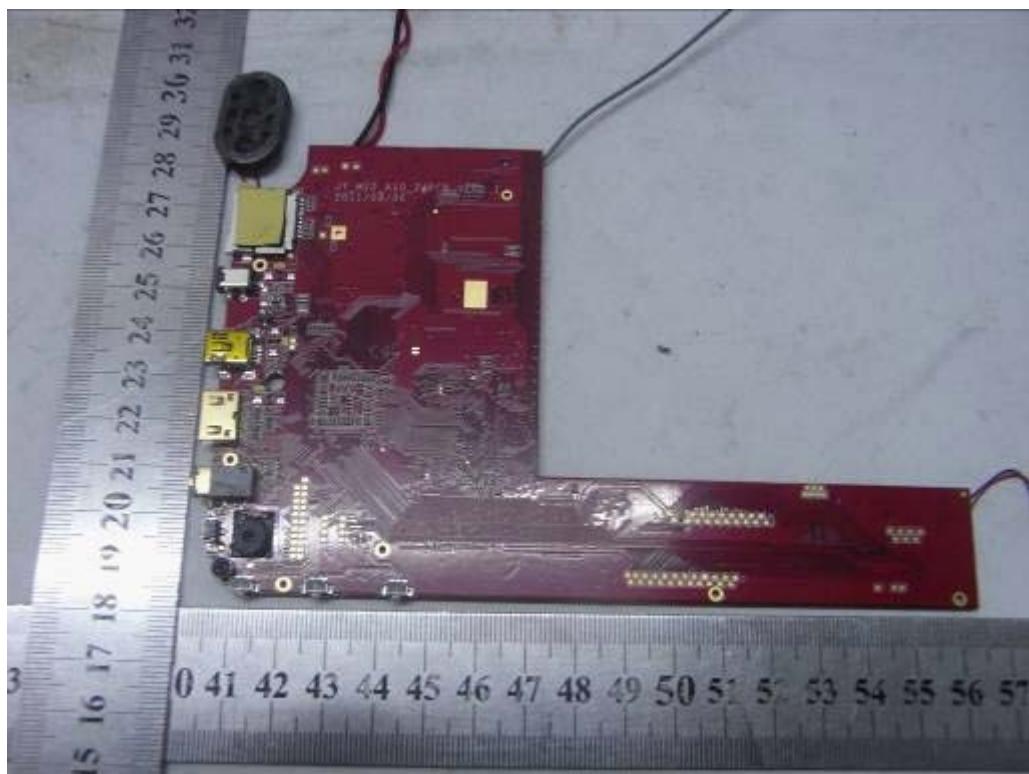


INTERNAL PHOTO OF SAMPLE -3

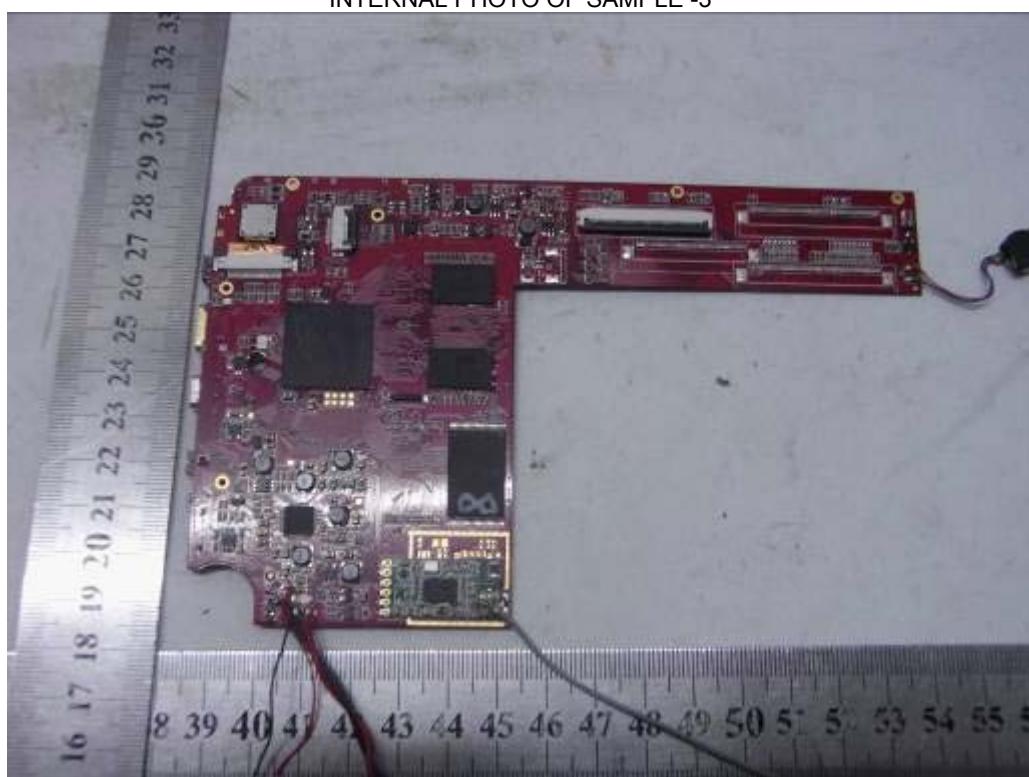


INTERNAL PHOTO OF SAMPLE -4

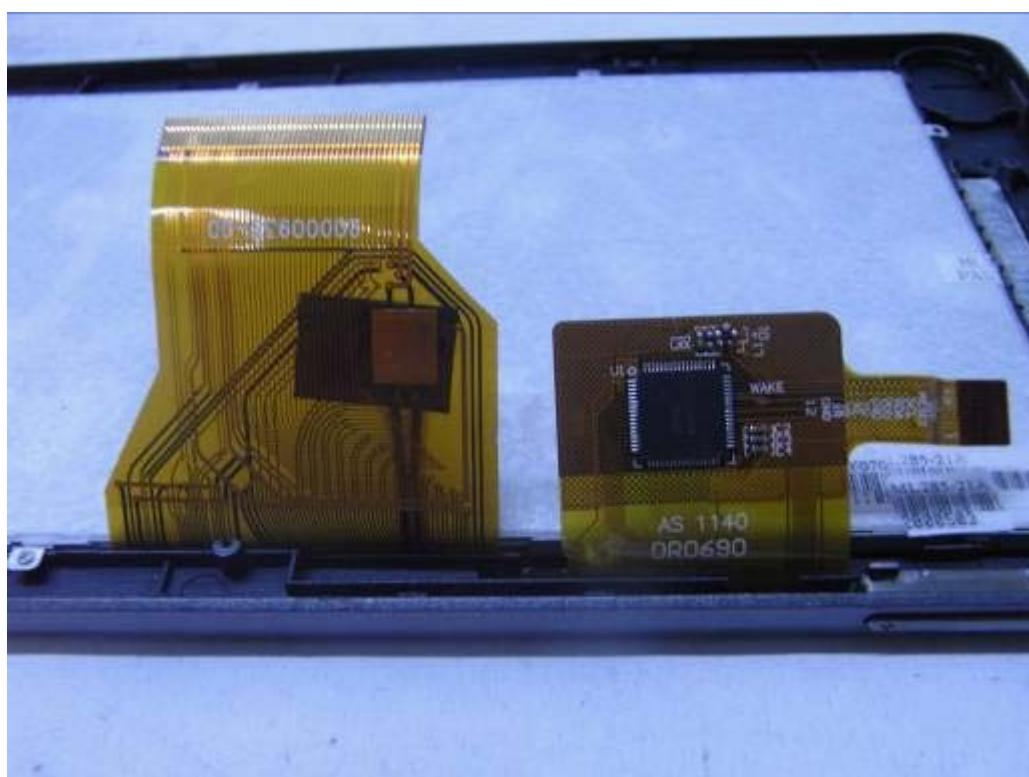

INTERNAL PHOTO OF POWER SUPPLY-1

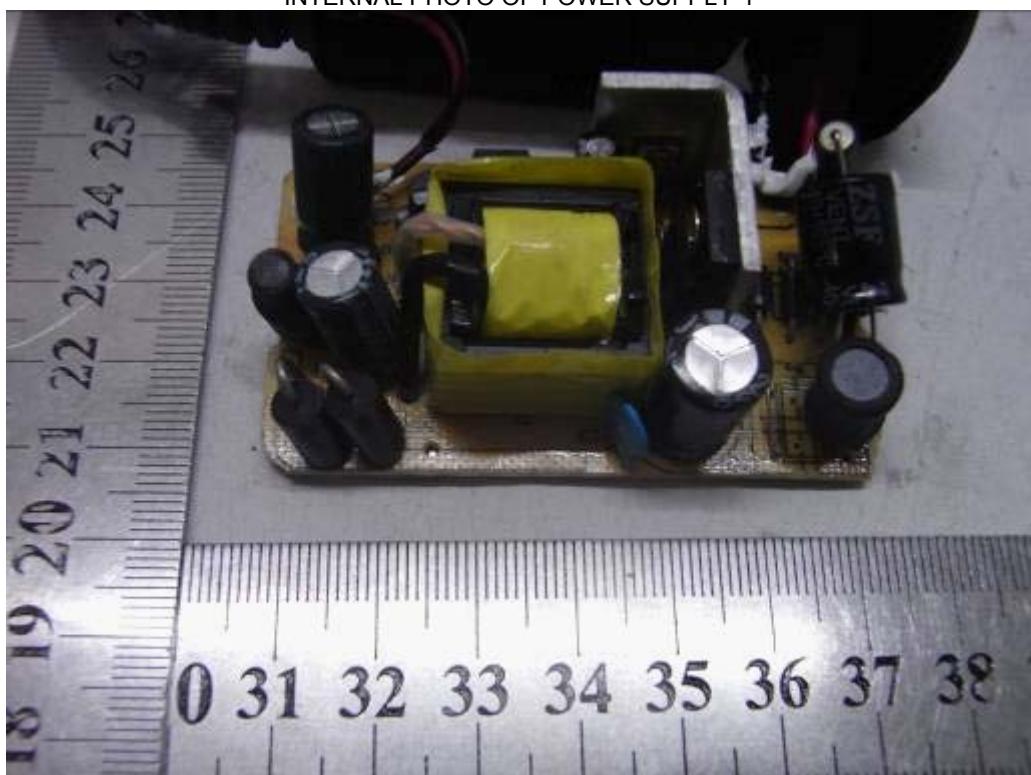

INTERNAL PHOTO OF POWER SUPPLY-2

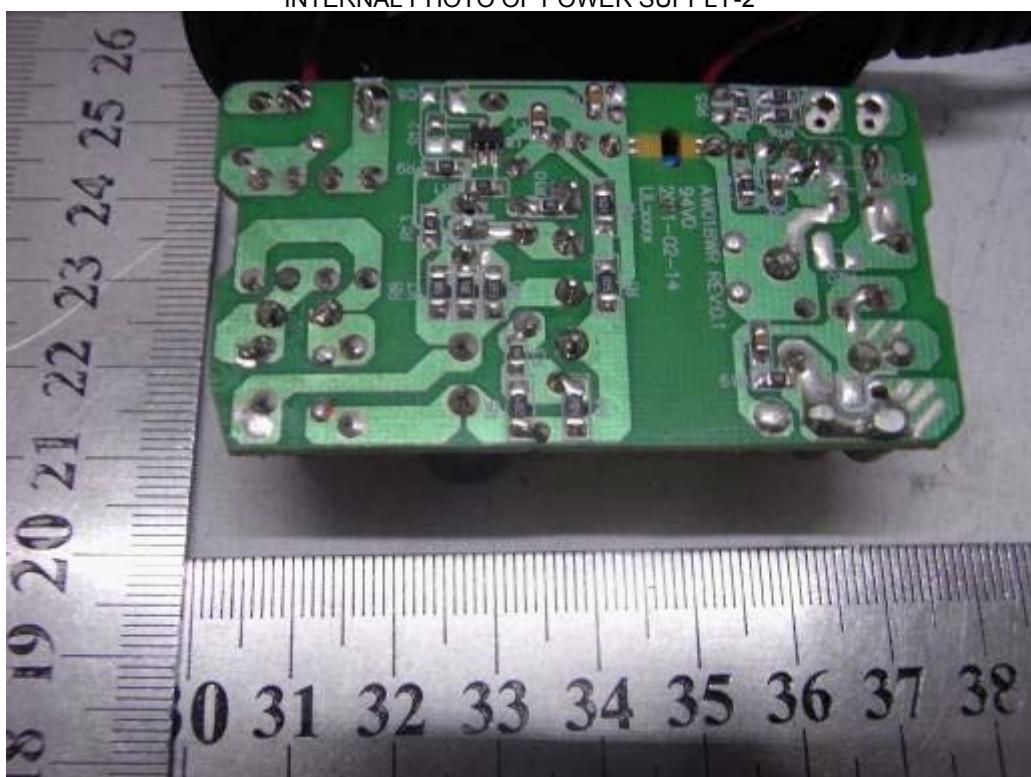

-----END OF REPORT-----