DECLARATION OF CONFORMITY On Behalf of Nanjing Panda Information Industry Co., Ltd.

Tablet Model No.: R70B200

Prepared for : Nanjing Panda Information Industry Co., Ltd.

Address : East of 2F, 17 Building, 301 East Zhongshan Road Nanjing

P.R. China

Prepared By : Anbotek Compliance Laboratory Limited

Address : 1/F, 1 /Build, SEC Industrial Park, No. 4 Qianhai Road,

Nanshan District, Shenzhen, 518054, China

Tel: (86) 755-26014771 Fax: (86) 755-26014772

Report Number : 201106811F

Date of Test : Jun. 30~Jul.09, 2011

Date of Report : Jul. 11, 2011

TABLE OF CHONTENTS

Description

	Page
Test Report Verification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT)	
1.2. Auxiliary Equipment Used during Test	
1.3. Description of Test Facility	
1.4. Measurement Uncertainty	
1.5. Test Summary	
2. POWER LINE CONDUCTED MEASUREMENT	,
2.1. Test Equipment	,
2.2. Block Diagram of Test Setup	
2.3. Power Line Conducted Emission Measurement Limits (FCC Part 15 Class B)	
2.4. Configuration of EUT on Measurement	
2.5. Operating Condition of EUT	
2.6. Test Procedure	
2.7. Power Line Conducted Emission Measurement Results	
3. RADIATED EMISSION MEASUREMENT	
3.1. Test Equipment	13
3.2. Block Diagram of Test Setup	
3.3. Test Procedure	
3.4. Radiated Emission Measurement Results	14
4. PHOTOGRAPH	1′
4.1. Photo of Power Line Conducted Emission Test	
4.2 Photo of Positional Emission Test	

APPENDIX I (Photos of EUT) (7 Pages)

TEST REPORT VERIFICATION

Applicant : Nanjing Panda Information Industry Co., Ltd.

Manufacturer : Nanjing Panda Information Industry Co., Ltd.

EUT : Tablet

Model No. : R70B200

Rating : 5V==, 2.0A

Trade Mark : N.A.

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart B 2010 & FCC / ANSI C63.4-2009

The device described above is tested by Anbotek Compliance Laboratory Limited To determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and Anbotek Compliance Laboratory Limited Is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Anbotek Compliance Laboratory Limited

Date of Test :	Jun. 30~Jul.09, 2011					
Prepared by :	Wen wang					
_	(Engineer/ Well Wang)					
Reviewer:	Coas. Xiang					
_	(Project Manager/ Coco Xiang)					
Approved & Authorized Signer :	70 m. Chen					
_	(Manager/ Tom Chen)					

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description : Tablet

Model Number : R70B200

Test Power Supply : 120V~, 60Hz for Adapter

Switching Adapter : Model: ADS-12G-06 05010GPCU

Input: 100~240V~ 50/60Hz Max. 0.3A

Output: 5V== 2.0A

UL, FCC

Applicant : Nanjing Panda Information Industry Co., Ltd.

Address : East of 2F, 17 Building, 301 East Zhongshan Road

Nanjing P.R. China

Manufacturer : Nanjing Panda Information Industry Co., Ltd.

Address : East of 2F, 17 Building, 301 East Zhongshan Road

Nanjing P.R. China

Date of Sample received: Jun. 30, 2011

Date of Test : Jun. 30~Jul.09, 2011

1.2. Auxiliary Equipment Used during Test

PC : Manufacturer: DELL

M/N: OPTIPLEX 380

S/N: 1J63X2X CE , FCC: DOC

MONITOR : Manufacturer: DELL

M/N: E170Sc

S/N: CN-00V539-64180-055-0UPS

CE, FCC: DOC

KEYBOARD : Manufacturer: DELL

M/N: SK-8115

S/N: CN-0DJ313-71616-06C-02XN

CE, FCC: DOC

MOUSE : Manufacturer: DELL

M/N: M-UARDEL7

S/N: N/A

CE, FCC: DOC

Earphone : Manufacturer: Ouyun

M/N: OH601 S/N: N/A

CE, FCC: DOC

SD card Manufacturer: Kingston

M/N: SD4/4GBFE

S/N: N/A

CE, FCC: DOC

USB Cable : 0.5m, SHIELD

Monitor Lenovo

MODEL NO.: X61 S/N: L3-L3729 08/03

HDMI Cable Shielded, 2.0m, with two ferrite cores bonded.

1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 752021

Anbotek Compliance Laboratory Limited, EMC Laboratory has been registed and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, August 20, 2010

IC-Registration No.: 8058A-1

Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, August 30, 2010

Test Location

All Emissions tests were performed

Anbotek Compliance Laboratory Limited. at 1/F, 1 /Build, SEC Industrial Park, No. 4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

1.4. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB

Conduction Uncertainty : Uc = 3.4dB

1.5. Test Summary

For the EUT described above. The standards used were FCC Part 15 Subpart B for Emissions.

Table 1 : Tests Carried Out Under FCC Part 15 Subpart B

Standard	Test Items	Status
FCC Part 15 Subpart B	Power Line Conducted Emission Test (150KHz To 30MHz)	\checkmark
FCC Part 15 Subpart B	Radiated Emission Test	$\sqrt{}$
	(30MHz To 1000MHz)	

 $[\]sqrt{}$ Indicates that the test is applicable

x Indicates that the test is not applicable

2. POWER LINE CONDUCTED MEASUREMENT

2.1. Test Equipment


The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2010	1 Year
2.	Two-Line	Rohde & Schwarz	ENV216	10055	May 19, 2011	1 Year
	V-network					
3.	RF Switching	Compliance	RSU-M2	38303	May 19, 2011	1 Year
	Unit	Direction				
4.	EMI Test	ES-K1	N/A	N/A	N/A	N/A
	Software					


2.2. Block Diagram of Test Setup

2.2.1. Block diagram of connection between the EUT and simulators

2.2.1.1. during test, data exchange via USB between EUT and PC



(EUT: Tablet)
2.2.1.2. Single playing via HDMI between EUT and Monitor



2.3. Power Line Conducted Emission Measurement Limits (FCC Part 15

Class B)

Frequency	Limits $dB(\mu V)$			
MHz	Quasi-peak Level	Average Level		
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*		

0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

2.4. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : Tablet Model Number : R70B200

Applicant : Nanjing Panda Information Industry Co., Ltd.

2.5. Operating Condition of EUT

- 2.5.1. Setup the EUT and simulator as shown as Section 2.2.
- 2.5.2. Turn on the power of all equipment.
- 2.5.3. Let the EUT work in test mode (during test, data exchange via USB between EUT and PC / Single playing via HDMI between EUT and Monitor) and measure it.

2.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2009 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test result are reported on Section 2.7.

2.7. Power Line Conducted Emission Measurement Results **PASS.**

The frequency range from 150KHz to 30 MHz is investigated.

The test curves are shown in the following pages.

EUT: Tablet M/N:R70B200

Operating Condition: during test, data exchange via USB between EUT and PC


Test Site: 1# Shielded Room Operator: **WELL WANG**

120V~, 60Hz for Adapter Test Specification:

Comment:

Tem:25°C Hum:50%

SCAN TABLE: "Voltage(150K~30M)FIN"
Short Description: 150K-30M Disturbance Voltages

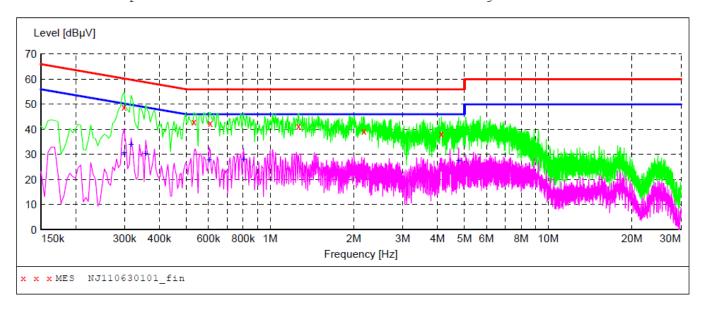

MEASUREMENT RESULT: "NJ110630101 fin"

6/30/2011 10	:47AM						
Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
MHz	dΒμV	dB	dΒμV	dB			
0.298500	49.00	10.2	60	11.3	QP	L1	GND
0.532500	43.10	10.2	56	12.9	QP	L1	GND
0.609000	42.50	10.2	56	13.5	QP	L1	GND
1.266000	41.40	10.3	56	14.6	QP	L1	GND
2.175000	39.50	10.4	56	16.5	QP	L1	GND
4.129500	38.10	10.5	56	17.9	QP	L1	GND

MEASUREMENT RESULT: "NJ110630101 fin2"

6/30/2011 Frequenc MF	4		Limit dBµV	Margin dB	Detector	Line	PE
0.29850	30.50	10.2	50	19.8	AV	L1	GND
0.31650	00 34.10	10.2	50	15.7	AV	L1	GND
0.35700	00 30.20	10.2	49	18.6	AV	L1	GND
0.60450	00 27.70	10.2	46	18.3	AV	L1	GND
0.80250	00 28.20	10.2	46	17.8	AV	L1	GND
4.76400	00 27.40	10.5	46	18.6	AV	L1	GND

EUT: Tablet M/N:R70B200

Operating Condition: during test, data exchange via USB between EUT and PC

Test Site: 1# Shielded Room Operator: **WELL WANG**


Test Specification: 120V~, 60Hz for Adapter

Comment:

Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"
Short Description: 150K-30M

150K-30M Disturbance Voltages

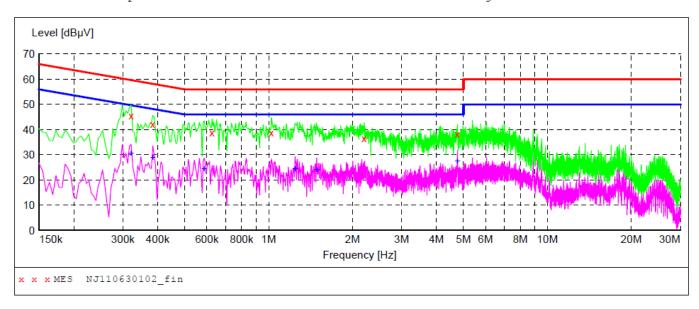

MEASUREMENT RESULT: "NJ110630102 fin"

6/30/2011 1 Frequency MHz	Level	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.321000	45.50	10.2	60	14.2	QP	N	GND
0.384000	42.20	10.2	58	16.0	QP	N	GND
0.627000	38.80	10.2	56	17.2	QP	N	GND
1.023000	38.80	10.3	56	17.2	QP	N	GND
2.202000	36.60	10.4	56	19.4	QP	N	GND
4.755000	38.10	10.5	56	17.9	QP	N	GND

MEASUREMENT RESULT: "NJ110630102 fin2"

Frequen	10:52AM ncy Level MHz dBµV		Limit dBµV	Margin dB	Detector	Line	PE
0.3210	30.50	10.2	50	19.2	AV	N	GND
0.3840	000 28.80	10.2	48	19.4	AV	N	GND
0.5865	24.30	10.2	46	21.7	AV	N	GND
1.2435	000 24.40	10.3	46	21.6	AV	N	GND
1.4865	000 24.10	10.4	46	21.9	AV	N	GND
4.7550	27.50	10.5	46	18.5	AV	N	GND

EUT: Tablet M/N:R70B200

Operating Condition: Single playing via HDMI between EUT and Monitor


Test Site: 1# Shielded Room Operator: **WELL WANG**

120V~, 60Hz for Adapter Test Specification:

Comment:

Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"
Short Description: 150K-30M Disturbance Voltages

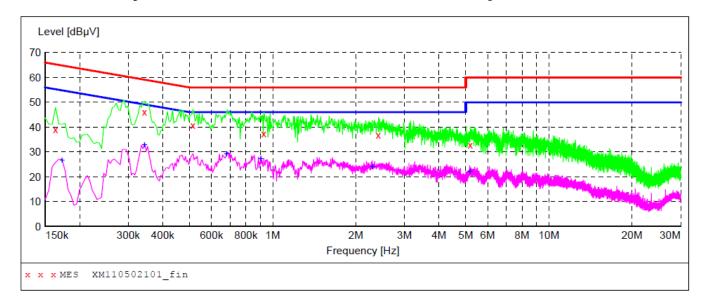

MEASUREMENT RESULT: "XM110502101 fin"

6/	30/2011 5:	20PM						
	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dΒμV	dB	dΒμV	dB			
	0.163500	39.20	10.2	65	26.1	QP	L1	GND
	0.343500	46.10	10.2	59	13.0	QP	L1	GND
	0.514500	40.60	10.2	56	15.4	QP	L1	GND
	0.928500	37.30	10.2	56	18.7	QP	L1	GND
	2.413500	36.80	10.4	56	19.2	QP	L1	GND
	5.191500	33.00	10.5	60	27.0	QP	L1	GND

MEASUREMENT RESULT: "XM110502101 fin2"

6/	/30/2011 5:2 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.172500	26.60	10.2	55	28.2	AV	L1	GND
	0.343500	32.80	10.2	49	16.3	AV	L1	GND
	0.681000	29.10	10.2	46	16.9	AV	L1	GND
	0.906000	27.20	10.2	46	18.8	AV	L1	GND
	2.292000	24.10	10.4	46	21.9	AV	L1	GND
	5.169000	22.20	10.5	50	27.8	AV	L1	GND

EUT: Tablet M/N:R70B200

Operating Condition: Single playing via HDMI between EUT and Monitor


Test Site: 1# Shielded Room Operator: **WELL WANG**

Test Specification: 120V~, 60Hz for Adapter

Comment:

Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"
Short Description: 150K-30M Disturbance Voltages

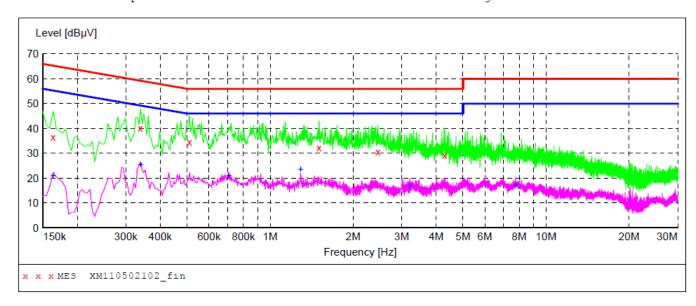

MEASUREMENT RESULT: "XM110502102 fin"

6/30/2011 5: Frequency MHz	23PM Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.163500	36.50	10.2	65	28.8	QP	N	GND
0.339000	40.20	10.2	59	19.0	QP	N	GND
0.510000	34.70	10.2	56	21.3	QP	N	GND
1.504500	32.40	10.4	56	23.6	QP	N	GND
2.458500	30.60	10.4	56	25.4	QP	N	GND
4.296000	29.20	10.5	56	26.8	QP	N	GND

MEASUREMENT RESULT: "XM110502102 fin2"

Frequen	5:23PM cy Level Hz dBµV		Limit dBµV	Margin dB	Detector	Line	PE
0.1635	00 21.00	10.2	55	34.3	AV	N	GND
0.3390	00 25.60	10.2	49	23.6	AV	N	GND
0.7080	00 20.90	10.2	46	25.1	AV	N	GND
1.2885	00 23.50	10.3	46	22.5	AV	N	GND
3.2070	00 16.80	10.5	46	29.2	AV	N	GND
7.7520	00 17.00	10.6	50	33.0	AV	N	GND

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment

The following test equipments are used during the radiated emission measurement:

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2010	1 Year
2	Bilog Broadband	Schwarzbeck	VULB9163	100015	May 17, 2011	1 Year
	Antenna					
3	RF Switching	Compliance	RSU-M2	38303	May 19, 2011	1 Year
	Unit	Direction				
4	EMI Test	ES-K1	N/A	N/A	N/A	N/A
	Software					

3.2. Block Diagram of Test Setup


3.2.1. Block diagram of connection between the EUT and simulators

3.2.1.1. For during test, data exchange via USB between EUT and PC Mode.



(EUT: Tablet)


3.2.1.2. Single playing via HDMI between EUT and Monitor




(EUT: Tablet)

3.2.2. Anechoic Chamber Test Setup Diagram

3.2.2.1. 30M to 1G emissions:

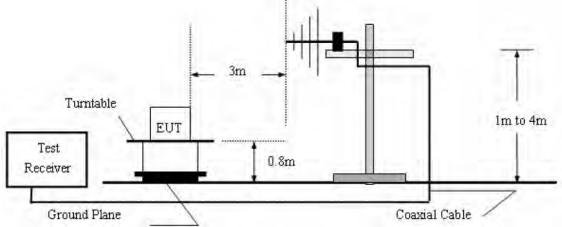

3.2.2.2. 1G to 40G emissions:

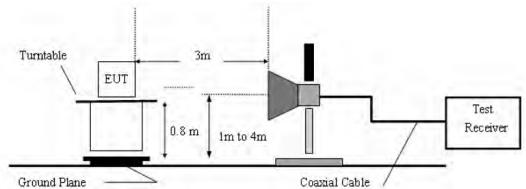

3.3. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz. The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 3.4.

3.4. Radiated Emission Measurement Results

PASS.

The test data Please refer the following pages.

Data: For data exchange via USB between EUT and PC Mode.

Horizont	al							
Frequency	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
MHz	dB	dB/m	dB	$dB\mu V$	$dB\mu V/m$	$dB\mu V/m$	dB	
					-	-		
300.37	3.0	13.29	40.42	64.16	40.03	46.00	-5.97	QP
366.82	3.02	13.27	40.00	62.65	38.94	46.00	-7.06	QP
1301.76	3.00	21.32	38.30	58.02	44.04	54.00	-9.96	peak
2169.96	3.11	25.75	38.82	50.11	40.15	54.0	-13.85	Peak
4825.00	3.11	31.61	34.70	37.12	37.14	54.0	-16.86	Peak
6000.00								

Vertical								
Frequency	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
MHz	dB	dB/m	dB	$dB\mu V$	$dB\mu V/m \\$	$dB\mu V/m \\$	dB	
143.83	2.92	13.10	41.00	63.60	38.62	43.50	-4.88	QP
366.82	3.02	13.10	40.00	64.65	40.94	46.00	- 4 .86	QP QP
1735.68	3.10	24.05	38.41	73.45	52.19	60.8	-8.61	Peak
2412.00	3.11	31.24	36.00	89.57	87.88	94.0	-6.12	Peak
4810.00	3.11	31.60	34.70	36.24	36.25	54.0	-17.75	Peak
6000.00								

Data: For Single playing via HDMI between EUT and Monitor Mode. Horizontal

Frequency	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
MHz	dB	dB/m	dB	$dB\mu V$	$dB\mu V/m$	$dB\mu V/m$	dB	
366.82	3.02	13.27	40.00	64.85	41.14	46.00	-4.86	QP
741.00	2.36	18.56	39.95	60.68	41.65	46.00	-4.35	2.36
1482.00	3.00	21.32	38.30	58.02	44.04	54.00	-9.96	peak
2223.00	3.11	25.75	38.82	50.11	40.15	54.00	-13.85	Peak
2964.00	3.11	26.12	38.46	47.10	37.87	54.00	-16.13	Peak
3705.00								
4446.00								
5187.00								
5928.00								
6669.00								
7410.00								

Vertical								
Frequency	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
MHz	dB	dB/m	dB	$dB\mu V$	$dB\mu V/m \\$	$dB\mu V/m \\$	dB	
266.92	2.02	12.27	40.00	64.85	41 14	46.00	1.06	ΩD
366.82	3.02	13.27	40.00	04.83	41.14	46.00	-4.86	QP
741.00	2.36	18.56	39.95	59.23	40.20	46.00	-5.80	2.36
1482.00	3.00	21.32	38.30	58.00	44.02	54.00	-9.98	peak
2223.00	3.11	25.75	38.82	49.01	39.05	54.00	-14.95	Peak
2964.00	3.11	26.12	38.46	47.55	38.32	54.00	-15.68	Peak
3705.00								
4446.00								
5187.00								
5928.00								
6669.00								
7410.00								

NOTE:


1. "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

4. PHOTOGRAPH





4.2. Photo of Radiated Emission Test

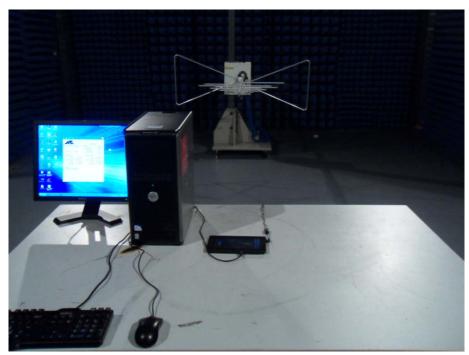

APPENDIX I (Photos of EUT)

Figure 1
The EUT-Front View



Figure 2
The EUT-Back View



Figure 3
The EUT-Side View



Figure 4
The EUT-Side View



Figure 5
The EUT-Side View



Figure 6
The EUT-Side View



Figure 7
The EUT-Inside View



Figure 8
PCB of the EUT-Front View



Figure 9
PCB of the EUT-Back View



Figure 10 PCB of the EUT-Front View (WIFI Module)



Figure 11
PCB of the EUT-Front View (WIFI Module)



Figure 12 PCB of the EUT-Front View



Figure 13 PCB of the EUT-Back View

