

FCC PART 15.247 MEASUREMENT AND TEST REPORT

For

EYO ASIA ELECTRONIC CO.,LTD

Room 2128, Block A, QunXing Plaza, HuaQiangNorth Road, Futian District, Shenzhen

Report Type: **Product Type:** Original Report **GSM Mobile Phone** simon mo Simon Mo **Test Engineer: Report Number:** BATT201105101R-1-15.247 **Report Date:** 2011-06-21 Mike Yong Mike Yong **Reviewed By:** EMC Engineer SHENZHEN BATT TESTING TECHNOLOGY CO.,LTD. 11F,Bldg.B,Xinbaoyuan,XinanhuCommercialcity,Bao'an Prepared By: District, Shenzhen, Guangdong, China Tel.:86-755-27754004(100 lines) Fax.:86-755-27754182

Note: This report shall not be reproduced except in full ,without the written approval of by SHENZHEN BATT TESTING TECHNOLOGY CO.,LTD . This document may be altered or revised by SHENZHEN BATT TESTING TECHNOLOGY CO.,LTD. personnel only, and shall be noted in the revision section of the document.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
Objective	
TEST METHODOLOGY	
TEST FACILITY	
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT Exercise Software	5
EQUIPMENT MODIFICATIONS	
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	
EXTERNAL I/O CABLE	
CONFIGURATION OF TEST SETUPBLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	
FCC §15.247 (i) and §2.1093 – RF Exposure	
APPLICABLE STANDARD	
RESULT:	
FCC §15.203 - ANTENNA REQUIREMENT	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	
Measurement Uncertainty	
EUT SETUP	
EMI TEST RECEIVER SETUP	
TEST EQUIPMENT LIST AND DETAILS	
TEST PROCEDURE TEST RESULTS SUMMARY	
TEST DATA	
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	
APPLICABLE STANDARD	
Measurement Uncertainty	
EUT Setup	
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	
TEST EQUIPMENT LIST AND DETAILS	
TEST PROCEDURE	
TEST RESULTS SUMMARY	
TEST DATA	
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	
APPLICABLE STANDARD	
TEST EQUIPMENT LIST AND DETAILS	
TEST PROCEDURE	
TEST DATA	
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	23
x	

FCC ID: ZJN-E207 EYO ASIA ELECTRONIC CO..LTD TEST EQUIPMENT LIST AND DETAILS 23 TEST PROCEDURE 23 FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST.......26 APPLICABLE STANDARD 26 Test Procedure 26 Test Data ______26 Test Procedure 28 FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT......34 TEST PROCEDURE 34 Test Data 34 Test Procedure 37

TEST DATA 38

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The EYO ASIA ELECTRONIC CO.,LTD's product, model number: E207 or the "EUT" as referred to in this report is a GSM Mobile Phone, which measures approximately:

102.4 mm (L) x 55.0 mm (W) x 14.0 mm (H), rated input voltage: DC 3.7V Rechargeable Li-ion battery or DC 5.0 V adapter for charging.

Adapter information:

Input: 90-240VAC 50/60Hz 150mA;

Output: 5.0V 600mA

Objective

This Type approval report is prepared on behalf of *EYO ASIA ELECTRONIC CO.,LTD in* accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurements were performed at ShenZhen Emtek Co.,Ltd . The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by ShenZhen Emtek Co.,Ltd to collect test data is located in Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China.

Test site at ShenZhen Emtek Co.,Ltd has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on March 18, 2008 and October 28, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 709623 and 406365. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which is provided by manufacturer.

EUT Exercise Software

N/A

Equipment Modifications

No modification was made to the unit tested.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
R & S	Universal Radio CommutationTester	CMU200	102910	DOC


External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Detachable Power Cable	0.8	EUT	Adapter

Configuration of Test Setup

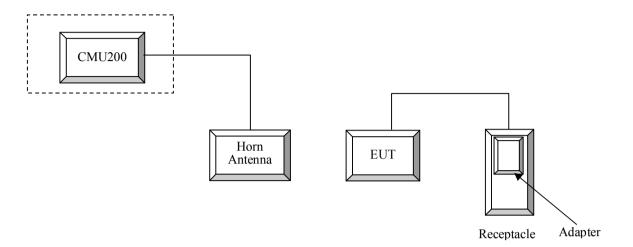

Block Diagram of Test Setup

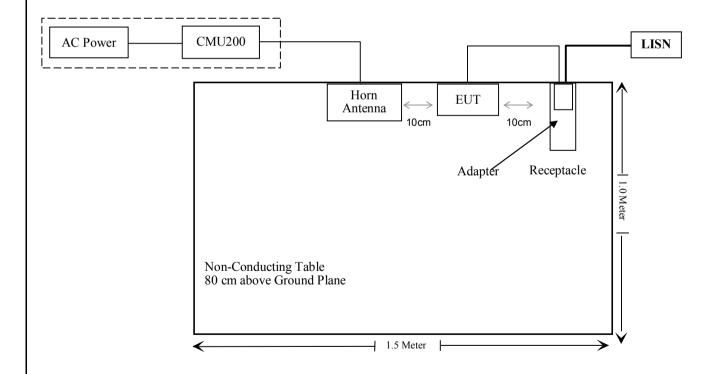

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

Note: The uncertainty of any RF test which use conducted method measurement is ± 1.0 dB. The uncertainty of any radiation emissions measurement is ± 4.0 dB.

Page 7 of 39

FCC §15.247 (i) and §2.1093 – RF Exposure

Applicable Standard

According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Table 2 - Summary of SAR Evaluation Requirements for a Cell Phone with Multiple Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	Routine evaluation required	SAR not required: Unlicensed only
Unlicensed Transmitters	When there is no simultaneous transmission — o output ≤ 60/f: SAR not required o output > 60/f: stand-alone SAR required When there is simultaneous transmission — Stand-alone SAR not required when o output ≤ 2·P _{Ref} and antenna is ≥ 5.0 cm from other antennas o output ≤ P _{Ref} and antenna is ≥ 2.5 cm from other antennas o output ≤ P _{Ref} and antenna is < 2.5 cm from other antennas o output ≤ P _{Ref} and antenna is < 2.5 cm from other antennas, each with either output power ≤ P _{Ref} or 1-g SAR < 1.2 W/kg Otherwise stand-alone SAR is required When stand-alone SAR is required o test SAR on highest output channel for each wireless mode and exposure condition o if SAR for highest output channel is > 50% of SAR limit, evaluate all channels according to normal procedures	o when stand-alone 1-g SAR is not required and antenna is ≥ 5 cm from other antennas Licensed & Unlicensed o when the sum of the 1-g SAR is < 1.6 W/kg for all simultaneous transmitting antennas o when SAR to peak location separation ratio of simultaneous transmitting antenna pair is < 0.3 SAR required: Licensed & Unlicensed antenna pairs with SAR to peak location separation ratio ≥ 0.3; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply
Jaw, Mouth and Nose	Flat phantom SAR required o when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues o position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

EYO ASIA ELECTRONIC CO.,LTD	FCC ID: ZJN-E207
Result:	
Please refer to SAR report released by Compliance Certification S	Service Inc., Report No: KS110608B01-SF
The SAR measurement is exempt.	

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a dipole antenna of Bluetooth, the gain is 2.0 dBi, which are in accordance to section 15.203, please refer to the EUT internal photos.

Result: Compliance.

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at ShenZhen Emtek Co.,Ltd is ± 2.4 dB.

EUT Setup

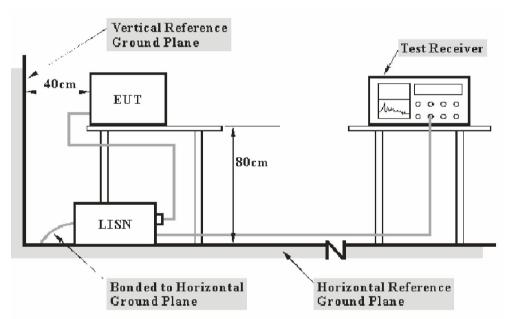

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	834549/006	2010-09-07	2011-09-06
Rohde &Schwarz	L.I.S.N.	ENV216	834548/112	2010-09-07	2011-09-06
Rohde & Schwarz	EMI Test Receiver	ESCS30	828985/018	2010-09-07	2011-09-06

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

7.40 dB at 0.345 MHz in the Neutral conducted mode

Test Data


Environmental Conditions

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	100.0kPa

^{*} The testing was performed by Simon Mo on 2011-05-31.


Test Mode: Charging & communicating

AC 120V/60 Hz, Line

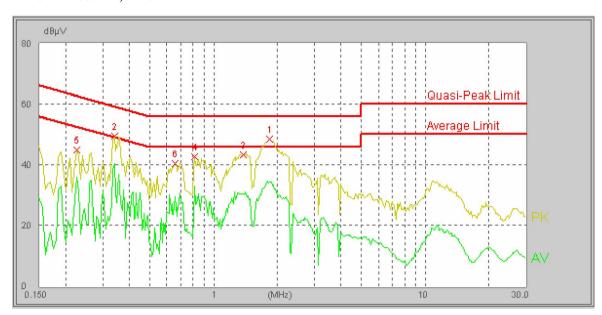

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Factor (dB)	Corrected Result (dBµV)	Limit (dBµV)	Margin (dB)	Remark (PK/ QP/Ave.)
1.840	10.10	43.97	56.00	12.03	QP
1.835	10.10	34.24	46.00	11.76	Ave
0.340	10.00	46.64	60.57	13.93	QP
0.340	10.00	40.52	50.57	10.05	Ave
1.380	10.10	39.48	56.00	16.52	QP
1.375	10.10	30.53	46.00	15.47	Ave
0.810	10.20	37.98	56.00	18.02	QP
0.810	10.20	33.11	46.00	12.89	Ave
0.225	10.10	43.16	63.86	20.70	QP
0.225	10.10	36.16	53.86	17.70	Ave
0.660	10.20	34.55	56.00	21.45	QP
0.655	10.20	29.70	46.00	16.30	Ave

AC 120V/60 Hz, Neutral

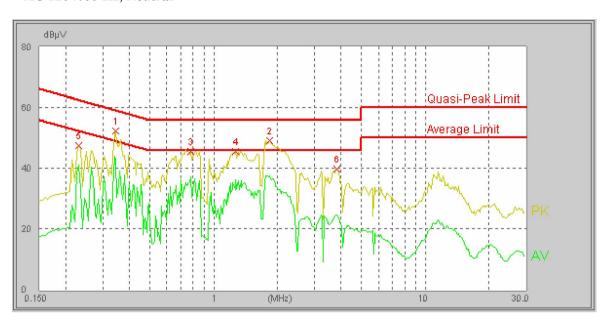

Co	Conducted Emissions			FCC Part 15.20) 7
Frequency (MHz)	Corrected Factor (dB)	Corrected Result (dBµV)	Limit (dBµV)	Margin (dB)	Remark (PK/ QP/Ave.)
0.345	10.00	49.53	60.43	10.90	QP
0.345	10.00	43.03	50.43	7.40	Ave
1.845	10.10	45.83	56.00	10.17	QP
1.845	10.10	37.63	46.00	8.37	Ave
0.780	10.20	42.28	56.00	13.72	QP
0.780	10.20	37.28	46.00	8.72	Ave
1.275	10.10	42.35	56.00	13.65	QP
1.270	10.10	36.23	46.00	9.77	Ave
0.230	10.10	44.67	63.71	19.04	QP
0.230	10.10	41.00	53.71	12.71	Ave
3.810	10.20	35.90	56.00	20.10	QP
3.805	10.20	24.67	46.00	21.33	Ave

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at ShenZhen Emtek Co.,Ltd is ±4.0 dB.

EUT Setup

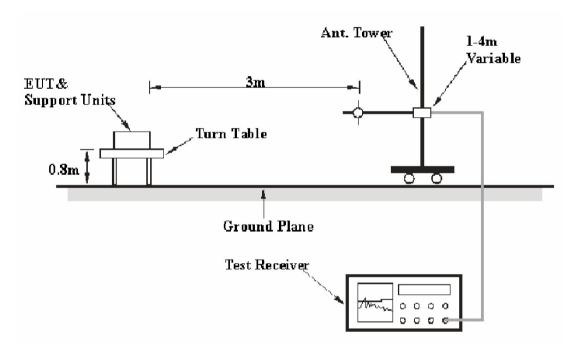

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP30	839511/010	2010-09-26	2011-09-25
Rohde & Schwarz	EMI Test Receiver	ESCI	100005	2011-03-08	2012-03-07
HP	Amplifier	8447D	2944A07999	2010-10-02	2011-10-02
HP	Amplifier	8449B	2624A00116	2011-03-03	2012-03-02
Schwardzbeck	Horn Antenna	BBHA 9120	D143	2010-06-04	2011-06-03
Schwardzbeck	Bilog Antenna	VULB9163	142	2011-04-12	2012-04-12
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2011-03-11	2012-03-10

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).

Test Procedure

For the radiated emissions test, the adapter was connected to the outlet of the LISN

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the recorded data in following table, the EUT complied with the <u>FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247</u>, with the worst margin reading of:

Below 1GHz:

11.90 dB at 400.8515 MHz in the Vertical polarization

Above 1GHz:

9.10 dB at 4960 MHz in the Horizontal polarization

Test Data


Environmental Conditions

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	100.0kPa

The testing was performed by Simon Mo on 2011-05-31.

Test Mode: Charging & Communicating

Below 1 GHz

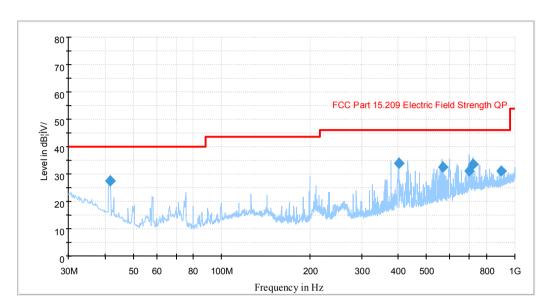

Frequency	Corrected	Test An	tenna	Turntable	Correction	Limit	Margin
(MHz)	Amplitude (dBµV/m)	Height (cm)	Polarity (H/V)	Position (degree)	Factor (dB)	(dBµV/m)	(dB)
400.851500	34.1	100.0	V	9.0	-9.9	46.0	11.9
718.290500	33.6	195.0	V	164.0	-2.8	46.0	12.4
41.690250	27.5	100.0	V	9.0	-13.2	40.0	12.5
565.356500	32.6	119.0	V	14.0	-7.2	46.0	13.4
698.761250	31.2	163.0	V	223.0	-3.1	46.0	14.8
895.250000	31.0	104.0	Н	60.0	-1.0	46.0	15.0

Above 1 GHz

Indic	ated	_ Table		Ante	nna	Cor	rrection	Factor	F	CC Part 15.	247/15.2	09
Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/Ave.)	Angle	Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Comment
				L	ow Cha	nnel (24	02 MH	z)				
4804	29.04	Ave	344	1.3	V	32.8	4.3	26.75	39.39	54	14.61	Harmonic
4804	24.36	Ave	225	1.2	Н	36.3	4.3	26.75	38.21	54	15.79	Harmonic
4804	41.40	PK	344	1.3	V	35.0	4.3	26.75	53.95	74	20.05	Harmonic
4804	38.93	PK	225	1.2	Н	36.3	4.3	26.75	52.78	74	21.22	Harmonic
				Mi	ddle Cł	nannel (2	441 M	Hz)				
4882	30.06	Ave	126	1.1	Н	36.6	4.37	26.75	44.28	54	9.72	Harmonic
4882	26.54	Ave	44	1.2	V	35.4	4.37	26.75	39.56	54	14.44	Harmonic
4882	42.63	PK	126	1.1	Н	36.6	4.37	26.75	56.85	74	17.15	Harmonic
4882	40.74	PK	44	1.2	V	35.4	4.37	26.75	53.76	74	20.24	Harmonic
				Н	igh Cha	nnel (24	80 MH	z)				
4960	30.68	Ave	254	1.2	Н	36.6	4.37	26.75	44.90	54	9.10	Harmonic
4960	27.88	Ave	46	1.2	V	35.4	4.37	26.75	40.90	54	13.10	Harmonic
4960	44.16	PK	254	1.2	Н	36.6	4.37	26.75	58.38	74	15.62	Harmonic
4960	41.87	PK	46	1.3	V	35.4	4.37	26.75	54.89	74	19.11	Harmonic

Restricted Band Emission

Indic	cated		Table	Ante	nna	Cor	rection	Factor	FCC Part 15.205/15.209		09	
Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/Ave.)	Angle	Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Comment
2484.78	20.75	Ave	223	2.2	Н	30.6	3.10	26.85	27.60	54	26.40	spurious
2484.78	20.57	Ave	146	1.7	V	30.6	3.10	26.85	27.42	54	26.58	Spurious
2389.88	20.82	Ave	360	1.3	Н	30.1	2.98	26.85	27.05	54	26.95	Spurious
2389.88	20.17	Ave	360	1.4	V	30.1	2.98	26.85	26.40	54	27.60	Spurious
2484.78	32.79	PK	223	2.2	Н	30.6	3.10	26.85	39.64	74	34.36	Spurious
2389.88	33.02	PK	360	1.3	Н	30.1	2.98	26.85	39.25	74	34.75	Spurious
2389.88	32.60	PK	360	1.4	V	30.1	2.98	26.85	38.83	74	35.17	Spurious
2484.78	31.28	PK	146	1.7	V	30.6	3.10	26.85	38.13	74	35.87	Spurious

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hoping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100005	2011-03-08	2012-03-07

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).

Test Procedure

- 1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
- 2. Set the adjacent channel of the EUT maxhold another truce
- 3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	100.9kPa

^{*} The testing was performed by Simon Mo on 2011-05-27.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low	2402	1.004	0.699	Pass
Adjacent	2403	1.004	0.099	1 455
Middle	2441	1.004	0.699	Pass
Adjacent	2442	1.004		rass
High	2480	1.004	0.701	D
Adjacent	2479	1.004	0.701	Pass


Please refer to the following plots.

Low Channel

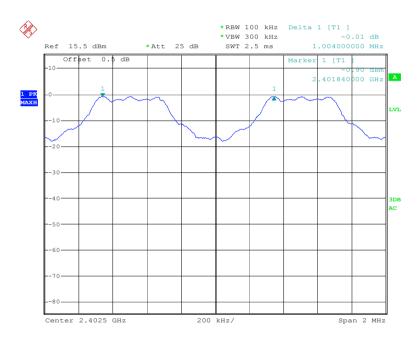


Date: 27.MAY.2011 14:51:28

Middle Channel

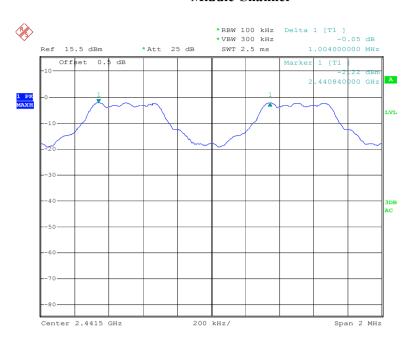

Date: 27.MAY.2011 14:52:26

High Channel

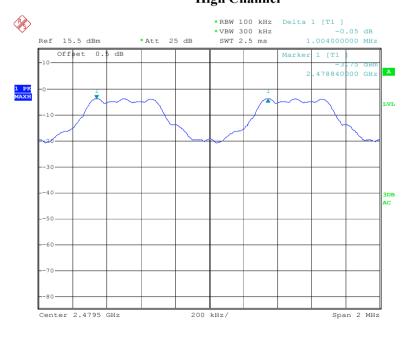

Date: 27.MAY.2011 14:53:29

FCC $\S15.247(a)$ (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100005	2011-03-08	2012-03-07

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	100.9kPa

^{*} The testing was performed by Simon Mo on 2011-05-27.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	1.048
Middle	2441	1.048
High	2480	1.052


Please refer to the following plots.

Low Channel

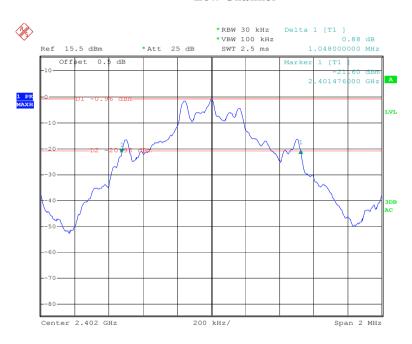


Date: 27.MAY.2011 14:57:55

Middle Channel

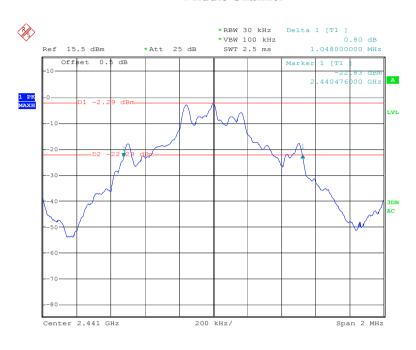

Date: 27.MAY.2011 14:55:55

High Channel

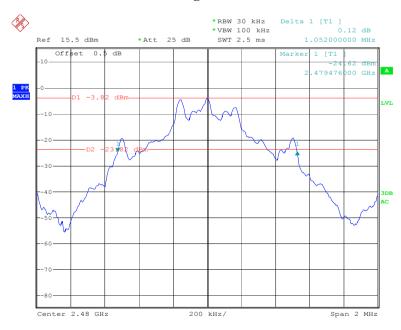

Date: 27.MAY.2011 14:54:46

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100005	2011-03-08	2012-03-07

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).

Test Procedure

- 1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- 2. Set the EUT in hopping mode from first channel to last.
- 3. By using the Max-Hold function record the Quantity of the channel.

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	100.9kPa

The testing was performed by Simon Mo on 2011-05-27.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

Number of Hopping Channels

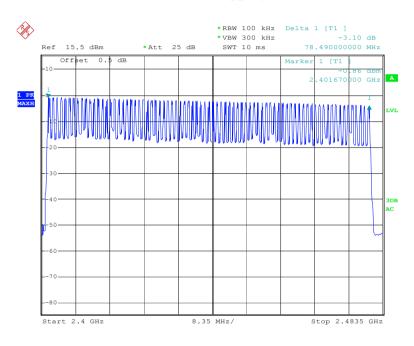

Date: 27.MAY.2011 14:44:29

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100005	2011-03-08	2012-03-07

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 * channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s Hop rate=1600/s

Test Data

Environmental Conditions

Temperature:	26 °C	
Relative Humidity:	50 %	
ATM Pressure:	100.0kPa	

^{*} The testing was performed by Simon Mo on 2011-05-27.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
	Low	0.402	0.1286	0.4	Pass
DH 1	Middle	0.406	1.1299	0.4	Pass
Diri	High	0.402	0.1286	0.4	Pass
	Note	: DH1:Dwell time = Pt	ulse time*(1600/2	/79)*31.6s	
	Low	1.659	0.2654	0.4	Pass
DH 3	Middle	1.670	0.2672	0.4	Pass
DITS	High	1.666	0.2666	0.4	Pass
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6s				
	Low	2.931	0.3126	0.4	Pass
DH 5	Middle	2.930	0.3125	0.4	Pass
DI13	High	2.926	0.3121	0.4	Pass
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6s				


Please refer to the following plots.

Low Channel for DH1

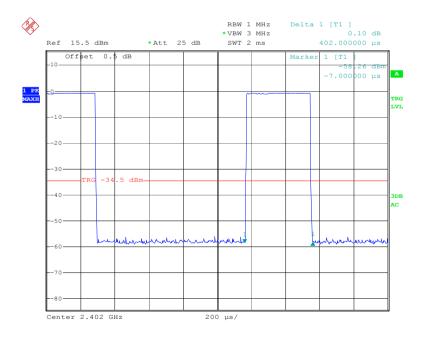


Date: 27.MAY.2011 15:06:49

Middle Channel for DH1

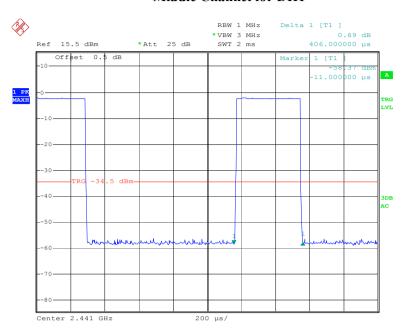


Date: 27.MAY.2011 15:03:09

High Channel for DH1

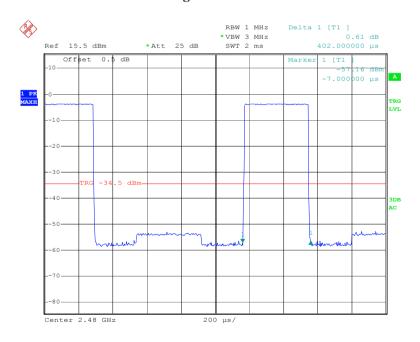


Date: 27.MAY.2011 15:05:18

Low Channel for DH3

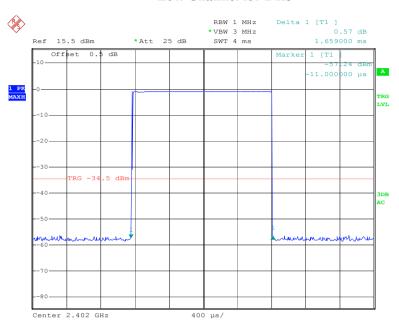


Date: 27.MAY.2011 15:01:28

Middle Channel for DH3

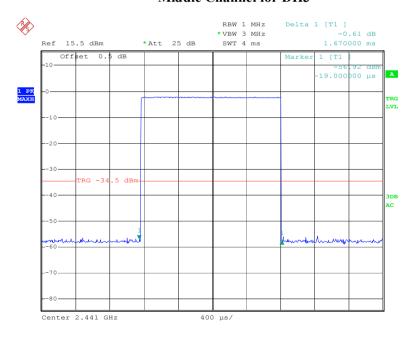


Date: 27.MAY.2011 15:03:42

High Channel for DH3

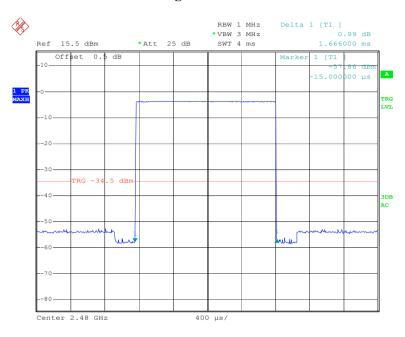


Date: 27.MAY.2011 15:05:50

Low Channel for DH5

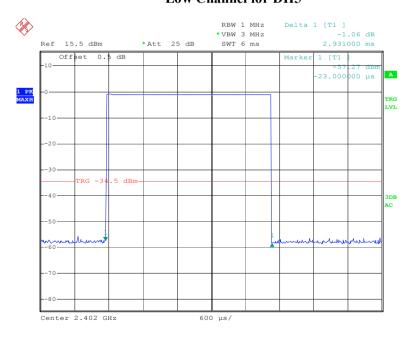


Date: 27.MAY.2011 15:02:07

Middle Channel for DH5

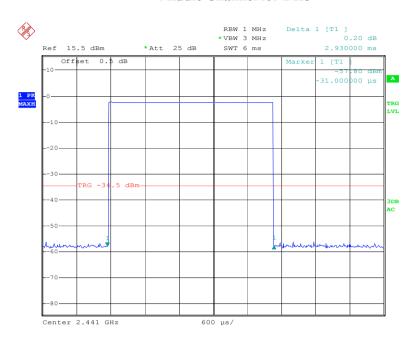

Date: 27.MAY.2011 15:04:07

High Channel for DH5

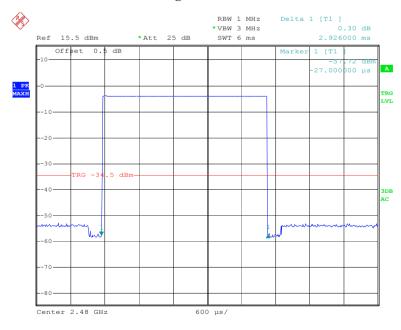

Date: 27.MAY.2011 15:06:13

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100005	2011-03-08	2012-03-07

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).

Test Procedure

- 1. Place the EUT on a bench and set in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
- 3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	100.9kPa

^{*} The testing was performed by Simon Mo on 2011-05-27.


Test Result: Compliance.

Test Mode: Transmitting

channel	Channel Frequency (MHz)	Reading Output Power (dBm)	Output Power (mW)	Limit (mW)
Low channel	2402	-0.96	0.802	125
Middle channel	2441	-2.33	0.585	125
High channel	2480	-3.46	0.451	125


Note: The data above was tested in conducted mode.

Low Channel

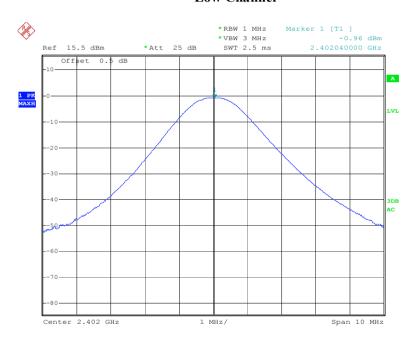


Date: 27.MAY.2011 14:40:29

Middle Channel

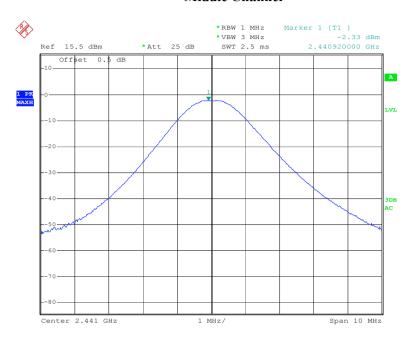

Date: 27.MAY.2011 14:41:08

High Chanel

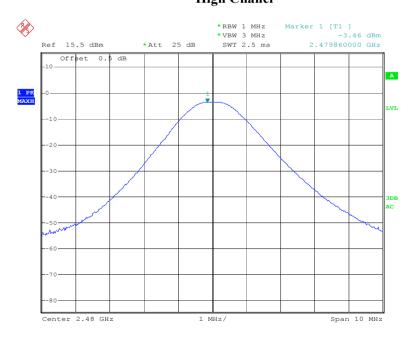

Date: 27.MAY.2011 14:48:44

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100005	2011-03-08	2012-03-07

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	26 °C	
Relative Humidity:	50 %	
ATM Pressure:	100.9 kPa	

^{*}The testing was performed by Simon Mo on 2011-06-01.


Test Result: Compliance.

Please refer to the following table and plots.

Test Mode: Transmitting


Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)
2395.82	48.15	20
2485.66	45.11	20

Band Edge: Left Side

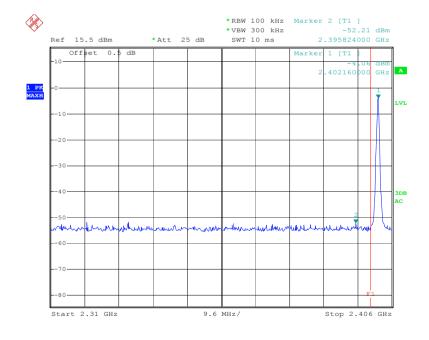

Date: 1.JUN.2011 12:07:05

Band Edge: Right Side

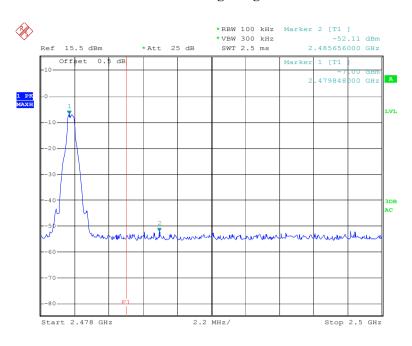

Date: 1.JUN.2011 12:08:43

*****END OF REPORT *****