

Report Number:

F690501/RF-RTL004690

Page: 1

27

TEST REPORT

of

FCC Part 15 Subpart C §15.247

FCC ID: ZK2GT12

Equipment Under Test : Remote Controller

Model Name

: GT-12

Serial No.

: N/A

Applicant

: GIYOUNG Electronics Co., Ltd.

Manufacturer

: GIYOUNG Electronics Co., Ltd.

Date of Test(s)

: 2011.05.11 ~ 2011.05.18

Date of Issue

: 2011.05.18

In the configuration tested, the EUT complied with the standards specified above.

Tested By:

Date

2011.05.18

Wonsuk Kim

Approved By:

Charles Kim

Date

2011.05.18

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



Report Number: F690501/RF-RTL004690 Page: 2 of 27

INDEX

Table of contents

1. General information	3
2. Transmitter radiated spurious emissions and conducted spurious emission	6
3. 6 dB bandwidth	15
4. Maximum peak output power	19
5. Power Spectral Density	21
6. Antenna Requirement	25
7. RF Exposure evaluation	26



Report Number: F690501/RF-RTL004690 Page: 3 of 27

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 705, Dongchun-Dong Sooji-Gu, Yongin-Shi, Kyungki-Do, South Korea.

- Wireless Div. 2FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040

www.kr.sgs.com/ee

Telephone : +82 +31 428 5700 FAX : +82 +31 427 2371

1.2. Details of Applicant

Applicant : GIYOUNG Electronics Co., Ltd.

Address : RM319, The O Valley, 555-9, Hogye-dong, Dongan-gu, Anyang-si, Gyeonggi-do, Korea

Contact Person : Yoo-Seok Jeong Phone No. : +82 +31 479 3757 Fax : +82 +31 479 3759

1.3. Description of EUT

Kind of Product	Remote Controller
Model Name	GT-12
Serial Number	N/A
Power Supply	DC 3.3 V
Frequency Range	2 405 ~ 2 480 MHz
Modulation Technique	DSSS
Number of Channels	76
Antenna Type	Connector type (Helical Antenna)
Antenna Gain	3.76 dBi

1.4. Declaration by the manufacturer

- N/A



Report Number: F690501/RF-RTL004690 Page: 4 of 27

1.5. Test Equipment List

EQUIPMENT	MANUFACTURER	MODEL	CAL DUE.
Signal Generator	Agilent	E4438C	Mar. 31, 2012
Signal Generator	Rohde & Schwarz	SMR40	Jul. 15, 2011
Spectrum Analyzer	R & S	FSV30	Apr. 01, 2012
Power sensor	R&S	NRP-Z81	Aug. 14, 2011
DC power Supply	Agilent	U8002A	Jan. 05, 2012
Preamplifier	H.P	8447F	Jul. 05, 2011
Preamplifier	Agilent	8449B	Mar. 31, 2012
High Pass Filter	Wainwright	WHK3.0/18G-10SS	Sep. 29, 2011
Test Receiver	R&S	ESU26	Feb. 21, 2012
Bilog Antenna	SCHWARZBECK MESSELEKTRONIK	396	Jul. 22, 2011
Horn Antenna	R&S	HF 906	Oct. 08, 2011
Horn Antenna	SCHWARZBECK MESSELEKTRONIK	BBHA9170	Mar. 17, 2012
Anechoic Chamber	SY Corporation	L × W × H (9.6 m×6.4 m×6.6 m)	N.C.R.



Report Number: F690501/RF-RTL004690 Page: 5 of 27

1.6. Summary of Test Results

The EUT has been tested according to the following specifications:

	APPLIED STANDARD:FCC Part15 subpart C										
Standard section	Test Item	Result									
15.205(a) 15.209 15.247(d)	Transmitter Radiated Spurious Emissions Conducted Spurious Emission	Complied									
15.247(a)(2)	6 dB Bandwidth	Complied									
15.247(b)(3)	Maximum Peak Output Power	Complied									
15.247(e)	Power Spectral Density	Complied									

1.7. Test report revision

Revision	Report number	Description
0	F690501/RF-RTL004690	Initial




Report Number: F690501/RF-RTL004690 Page: 6 of 27

2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission


2.1. Test Setup

2.1.1. Transmitter Radiated Spurious Emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 $\,\text{Mb}$ to 1 $\,\text{GHz}$ Emissions.

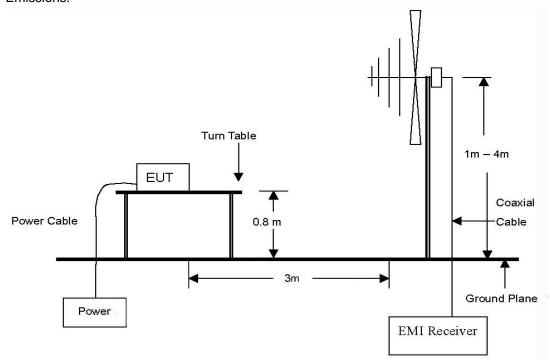

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 \times to 24 \times Emissions.

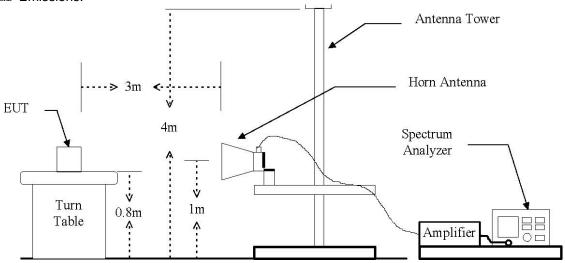


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



Report Number: F690501/RF-RTL004690 Page: 7 of 27

2.1.2. Conducted Spurious Emission



2.2. Limit

According to §15.247(d), in any 100 $\,\mathrm{klz}$ bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 $\,\mathrm{dB}$ below that in the 100 $\,\mathrm{klz}$ bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement , provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval , as permitted under paragraph(b)(3) of this section , the attenuation required under this paragraph shall be 30 $\,\mathrm{dB}$ instead of 20 $\,\mathrm{dB}$. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.205(c))

According to § 15.209(a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (船)	Distance (Meters)	Field Strength (dB <i>µ</i> V/m)	Field Strength (μV/m)
30 - 88	3	40.0	100
88 – 216	3	43.5	150
216 – 960	3	46.0	200
Above 960	3	54.0	500



Report Number: F690501/RF-RTL004690 Page: 8 of 27

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

2.3.1. Test Procedures for Radiated Spurious Emissions

- 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2. During performing radiated emission below 1 % the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 % the EUT was set 3 meter away from the interference-receiving antenna.
- 3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE;

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 \(\text{klz} \) for Peak detection (PK) or Quasi-peak detection (QP) at frequency below 1 \(\text{Glz} \).
- 2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 Mb for Peak detection and frequency above 1 Gb.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 Mb and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 Gb.

2.3.2. Test Procedures for Conducted Spurious Emissions

- 1. The transmitter output was connected to the spectrum analyzer.
- 2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 kHz, VBW = 100 kHz.



Report Number: F690501/RF-RTL004690 Page: 9 of 27

2.4. Test Results

Ambient temperature : (23 ± 2) °C Relative humidity : 46 % R.H.

2.4.1. Spurious Radiated Emission

The frequency spectrum from 30 Mb to 1 000 Mb was investigated. Emission levels are not reported much lower than the limits by over 30 dB. All reading values are peak values.

Radiated Emissions		Ant	Correction Factors		Total	FCC Li	imit	
Frequency (畑)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dBµN/m)	Limit (dBµN/m)	Margin (dB)
163.456	42.76	Peak	V	8.17	-26.13	24.80	43.50	18.70
Above 200.000	Not Detected	-	-	-	-	-	-	-

Remark:

- 1. All spurious emission at channels are almost the same below 1 \mbox{GHz} , so that the channel was chosen at representative in final test.
- 2. Actual = Reading + AF + AMP + CL



Report Number: F690501/RF-RTL004690 Page: 10 of 27

2.4.2. Spurious Radiated Emission

The frequency spectrum above 1000 $\, \text{Mb} \,$ was investigated. Emission levels are not reported much lower than the limits by over 30 $\, \text{dB} .$

Low Channel (2 405 Mb)

Radiated Emissions		Ant	Correction Factors		Total	FCC L	mit	
Frequency (畑)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dBµN/m)	Limit (dBµV/m)	Margin (dB)
*2 390.00	23.12	Peak	V	28.09	6.23	57.44	74.00	16.56
*2 390.00	11.74	Average	V	28.09	6.23	46.06	54.00	7.94

Radiated Emissions		Ant	Correction Factors		Total	FCC Li	imit	
Frequency (Mb)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dΒμV/m)	Limit (dΒμV/m)	Margin (dB)
4 806.218	46.30	Peak	V	32.60	-25.05	53.85	74.00	20.15
Above 4 900.000	Not Detected	-	-	-	-	-	-	-

Middle Channel (2 445 Mb)

Radiated Emissions		Ant	Correction Factors		Total	FCC L	imit	
Frequency (Mb)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dBµN/m)	Limit (dB <i>µ</i> V/m)	Margin (dB)
4 889.647	46.18	Peak	V	32.94	-25.24	53.88	74.00	20.12
Above 4 900.000	Not Detected	-	-	-	-	-	-	-



Report Number: F690501/RF-RTL004690 Page: 11 of 27

High Channel (2 480 Mb)

Radiated Emissions		Ant	Correction Factors		Total	FCC L	imit	
Frequency (Mb)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dBµV/m)	Limit (dBµV/m)	Margin (dB)
*2 483.50	26.29	Peak	V	28.09	6.36	60.74	74.00	13.26
*2 483.50	16.94	Average	V	28.09	6.36	51.39	54.00	2.61

Radiated Emissions		Ant	Correction Factors		Total	FCC L	mit	
Frequency (Mb)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4 960.019	45.35	Peak	٧	33.22	-24.64	53.93	74.00	20.07
Above 5 000.000	Not Detected	-	-	-	-	-	-	-

Remarks;


- 1. "*" means the restricted band.
- 3. Radiated emissions measured in frequency above 1 000 Mb were made with an instrument using peak/average detector mode.
- 4. Average test would be performed if the peak result were greater than the average limit.
- 5. Actual = Reading + AF + AMP + CL



Report Number: F690501/RF-RTL004690 Page: 12 of 27

2.4.3. Spurious RF Conducted Emissions: Plot of Spurious RF Conducted Emission


Low Channel

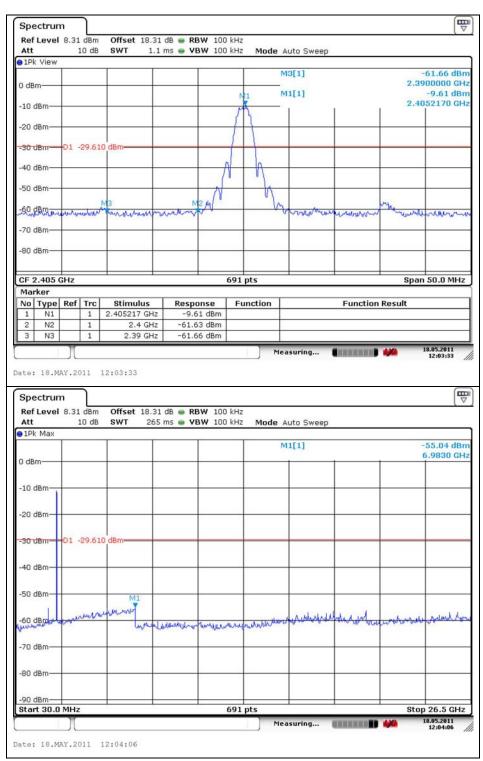



Report Number: F690501/RF-RTL004690 Page: 13 of 27


Middle Channel

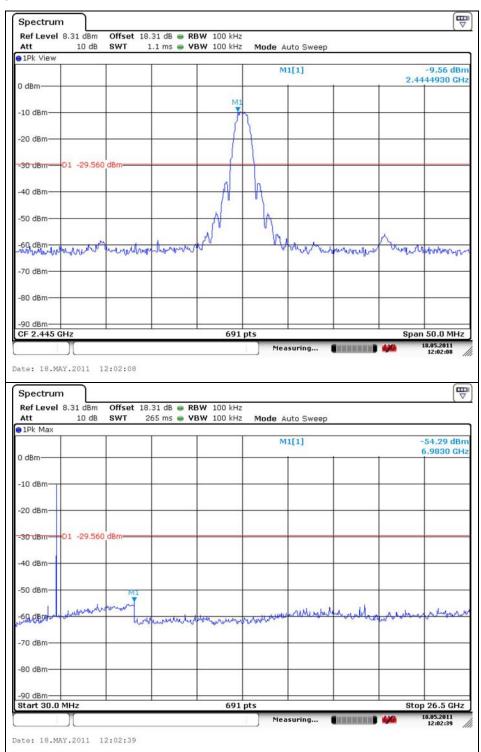



Report Number: F690501/RF-RTL004690 Page: 14 of 27

High Channel

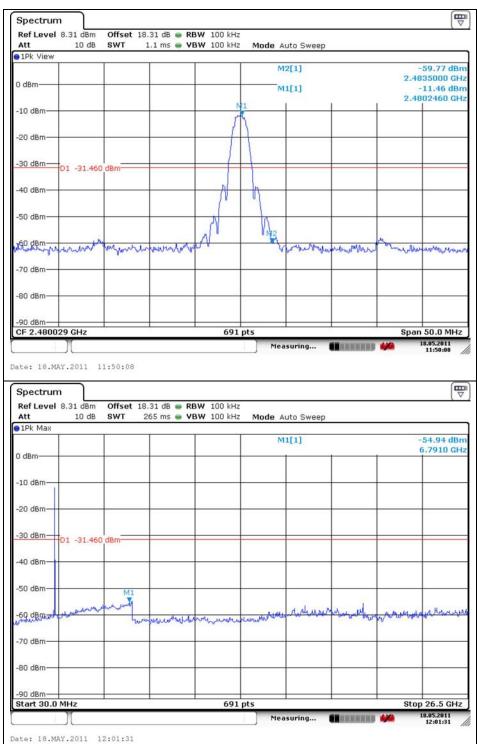




Report Number: F690501/RF-RTL004690 Page: 15 of 27

3. 6 dB Bandwidth Measurement

3.1. Test Setup



3.2. Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 ~928 Mb, 2 400 ~ 2 483.5 Mb, and 5 725 ~ 5 825 Mb bands. The minimum of 6 dB Bandwidth shall be at least 500 kb

3.3. Test Procedure

- 1. The 6 dB band width was measured with a spectrum analyzer connected to RF antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 6 dB band width of the emission was determined.
- 2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 $\,\text{kHz}$, VBW = 100 $\,\text{kHz}$, Span = 10 $\,\text{MHz}$.



Report Number: F690501/RF-RTL004690 Page: 16 of 27

3.4. Test Results


Ambient temperature : (23 ± 2) °C Relative humidity : 46 % R.H.

Operation Mode	Channel	Channel Frequency (쌘)	6 dB Bandwidth (Mb)	Minimun Limit (쌘)	
DSSS	Low	2 405	1.58	0.5	
	Middle	2 445	1.58		
	High	2 480	1.58		




Report Number: F690501/RF-RTL004690 Page: 17 of 27

Low Channel

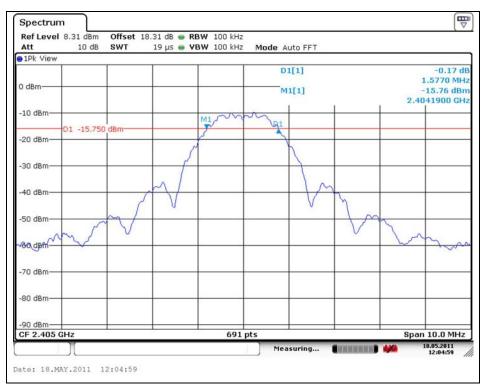


Middle Channel

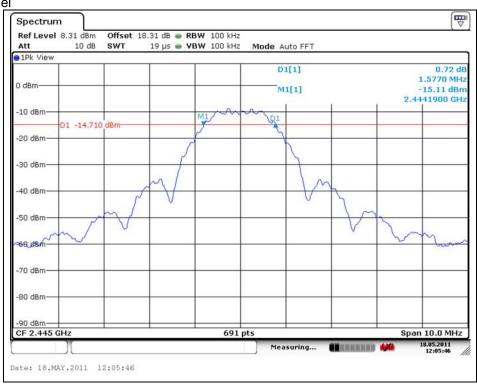



Report Number: F690501/RF-RTL004690 Page: 18 of 27

High Channel

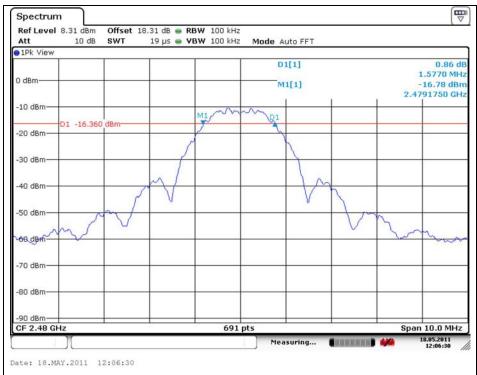




Report Number: F690501/RF-RTL004690 Page: 19 of 27

4. Maximum Peak Output Power Measurement

4.1. Test Setup



4.2. Limit

According to §15.247(b)(3), for systems using digital modulation in the 902 ~ 928 MHz, 2 400 ~2 483.5 MHz, and 5 725 ~ 5 850 MHz band: 1 Watt. As an alternative to a peak power measurement, compliance with the one watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antenna elements. The average must not include any intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to $\S15.247(b)(4)$, the conducted output power limit specified in paragraph(b) of this section is based on the use of antenna with directional gains that do not exceed 6 dBi. Except as shown in paragraph(c) of this section, if transmitting antenna of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.3. Test Procedure

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to power sensor.



Report Number: F690501/RF-RTL004690 Page: 20 of 27

4.4. Test Results

Ambient temperature : (23 ± 2) °C Relative humidity : 46 % R.H.


Operation Mode	Channel	Channel Frequency (쌘)	Attenuator + Cable offset (dB)	Peak Power Result (dB m)	Peak Power Limit (dB m)	
DSSS	Low	2 405	16.82	-2.25	30	
	Middle	2 445	16.82	-1.90		
	High	2 480	16.82	-2.40		



Report Number: F690501/RF-RTL004690 Page: 21 of 27

5. POWER SPECTRAL DENSITY MEASUREMENT

5.1. Test Setup



5.2. Limit

§15.247(e) For digitally modulated system, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dB m in any 3 klk band any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.3. Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- 3. By using the Max Hold function record the separation of adjacent channels.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using; RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz and Sweep = 100 s.



Report Number: F690501/RF-RTL004690 Page: 22 of 27

5.4. Test Results


Ambient temperature : (23 ± 2) °C Relative humidity : 46 % R.H.

Operation Mode	Frequency	Final RF Power Level in 3 kHz BW (dB m)	Maximum Limit (dB m)	
DSSS	2 405 MHz	-18.68	8	
	2 445 MHz	-16.74		
	2 480 MHz	-18.81		




Report Number: F690501/RF-RTL004690 Page: 23 of 27

Low Channel

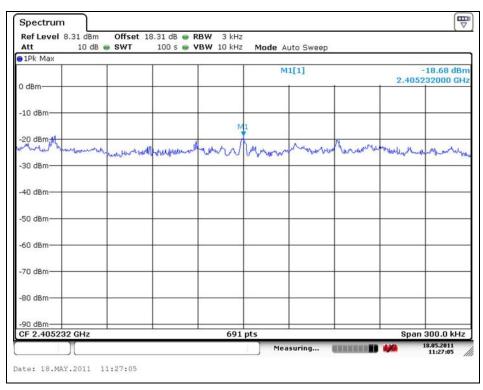


Middle Channel

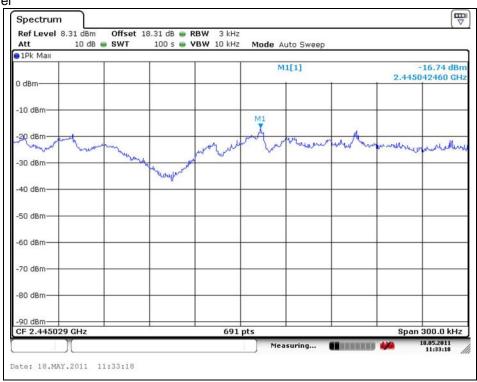



Report Number: F690501/RF-RTL004690 Page: 24 of 27

High Channel

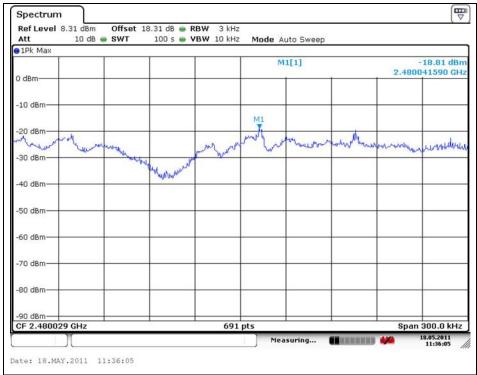



Report Number: F690501/RF-RTL004690 Page: 25 of 27

6. Antenna Requirement

6.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6 dB i are used, the power shall be reduced by the amount in dB that the gain of the antenna exceeds 6 dB i.

6.2. Antenna Connected Construction

Antenna used in this product is Connector type (Helical Antenna) gain of 3.76 dB i.



Report Number: F690501/RF-RTL004690 Page: 26 of 27

7. RF Exposure Evaluation

7.1 Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b)

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (썐)	Electric Field Strength(V/m)	Magnetic Field Strength (A/m)	Power Density (nW/cm²)	Average Time	
(A) Limits for Occupational /Control Exposures					
300 – 1 500			F/300	6	
1 500 – 100 000			5	6	
(B) Limits for General Population/Uncontrol Exposures					
300 – 1 500			F/1500	6	
1 500 – 100 000			1	<u>30</u>	

7.1.1. Friis transmission formula: $Pd = (Pout*G)/(4*pi*R^2)$

Where Pd = power density in mW/cm²

Pout = output power to antenna in mW

G = gain of antenna in linear scale

Pi = 3.1416

R = distance between observation point and center of the radiator in cm

Pd the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.



Report Number: F690501/RF-RTL004690 Page: 27 of 27

7.1.2. Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data

Test Mode : Normal Operation

7.1.3. Output Power into Antenna & RF Exposure Evaluation Distance

Channel	Channel Frequency (쌘)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm)	LIMITS (mW/cm²)
Low	2 405	-6.01	3.76	0.000 12	1
Middle	2 445	-5.28	3.76	0.000 14	1
High	2 480	-6.55	3.76	0.000 10	1

Note:

1. The power density Pd (5th column) at a distance of 20 cm calculated from the friis transmission formula is far below the limit of 1 mW/cm².