



REPORT No.: SZ17090131W02

FCC RF TEST REPORT

APPLICANT : Haier US Appliance Solutions, Inc.

PRODUCT NAME : BT Module Ph2 with harness connection

MODEL NAME : 191D9618G001

TRADE NAME : 

BRAND NAME : Haier

FCC ID : ZKJ-BLEC001

STANDARD(S) : 47 CFR Part 15 Subpart C

ISSUE DATE : 2017-10-10

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	4
1. TECHNICAL INFORMATION	5
1.1 APPLICANT INFORMATION	5
1.2 EQUIPMENT UNDER TEST (EUT) DESCRIPTION	5
1.2.1 IDENTIFICATION OF ALL USED EUTS	5
1.3 TEST STANDARDS AND RESULTS	6
1.3.1 TEST ENVIRONMENT CONDITIONS	6
2. 47 CFR PART 15C REQUIREMENTS	7
2.1 ANTENNA REQUIREMENT	7
2.1.1 APPLICABLE STANDARD	7
2.1.2 RESULT: COMPLIANT	7
2.2 NUMBER OF HOPPING FREQUENCY	7
2.2.1 REQUIREMENT	7
2.2.2 TEST DESCRIPTION	7
2.2.3 TEST PROCEDURE	8
2.2.4 TEST RESULT	8
2.3 PEAK OUTPUT POWER	11
2.3.1 REQUIREMENT	11
2.3.2 TEST DESCRIPTION	11
2.3.3 TEST RESULT	11
2.4 20dB BANDWIDTH	13
2.4.1 DEFINITION	13
2.4.2 TEST DESCRIPTION	13
2.4.3 TEST PROCEDURE	13
2.4.4 TEST RESULT	13
2.5 CARRIED FREQUENCY SEPARATION	23
2.5.1 DEFINITION	23
2.5.2 TEST DESCRIPTION	23
2.5.3 TEST PROCEDURE	23
2.5.4 TEST RESULT	24
2.6 TIME OF OCCUPANCY (DWEIL TIME)	27



2.6.1	REQUIREMENT	27
2.6.2	TEST DESCRIPTION	27
2.6.3	TEST PROCEDURE	27
2.6.4	TEST RESULT	28
2.7	CONDUCTED SPURIOUS EMISSIONS	40
2.7.1	REQUIREMENT	40
2.7.2	TEST DESCRIPTION	40
2.7.3	TEST PROCEDURE	40
2.7.4	TEST RESULT	41
2.8	RESTRICTED FREQUENCY BANDS	53
2.8.1	REQUIREMENT	53
2.8.2	TEST DESCRIPTION	53
2.8.3	TEST PROCEDURE	54
2.8.4	TEST RESULT	54
2.9	CONDUCTED EMISSION	62
2.9.1	REQUIREMENT	62
2.9.2	TEST DESCRIPTION	62
2.9.3	TEST RESULT	63
2.10	RADIATED EMISSION	64
2.10.1	REQUIREMENT	64
2.10.2	TEST DESCRIPTION	65
2.10.3	TEST PROCEDURE	67
2.10.4	TEST RESULT	67
ANNEX A GENERAL INFORMATION		77

Change History		
Issue	Date	Reason for change
1.0	2017-10-10	First edition

**TEST REPORT DECLARATION**

Applicant	Haier US Appliance Solutions, Inc.
Applicant Address	Appliance Park AP5-2N-67, Louisville, KY, United States (Zip Code : 40225)
Manufacturer	iTON Technology Corp.
Manufacturer Address	7 Floor East, Building C, No. 1006 Shennan Road, Shenzhen International Innovation Center, Shenzhen, China.
Product Name	BT Module Ph2 with harness connection
Model Name	191D9618G001
Brand Name	Haier
HW Version	Ver 1.1
SW Version	1.0
Test Standards	47 CFR Part 15 Subpart C
Test Date	2017-09-28 to 2017-10-10
Test Result	PASS

Tested by : Tu Yanan
Tu Yanan (Test Engineer)

Approved by : Andy Yeh
Andy Yeh (Technical Director)



1. TECHNICAL INFORMATION

Note: Provide by applicant.

1.1 Applicant Information

Company:	Haier US Appliance Solutions, Inc.
Address:	Appliance Park AP5-2N-67, Louisville, KY, United States (Zip Code : 40225)

1.2 Equipment under Test (EUT) Description

Brand Name:	Haier
Trade Name:	
Model Name:	191D9618G001
Frequency Range:	The frequency range used is 2402MHz – 2480MHz (79 channels, at intervals of 1MHz); The frequency block is 2400MHz to 2483.5MHz.
Modulation Type:	Bluetooth: FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))
Bluetooth Version:	Bluetooth 4.2 + EDR
Antenna Type:	PCB
Antenna Gain:	1.43 dBi

NOTE 1: The EUT is a BT Module Ph2 with harness connection. It contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

NOTE 2: The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT into the test mode, and then use MT8852B base station to control the EUT continuous transmission.

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
01	Ver 1.1	1.0



1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Test Date	Result
1	15.203	Antenna Requirement	N/A	<u>PASS</u>
2	15.247(a)	Number of Hopping Frequency	Sep 29, 2017	<u>PASS</u>
3	15.247(b)	Peak Output Power	Sep 29, 2017	<u>PASS</u>
4	15.247(a)	20dB Bandwidth	Sep 29, 2017	<u>PASS</u>
5	15.247(a)	Carrier Frequency Separation	Sep 29, 2017	<u>PASS</u>
6	15.247(a)	Time of Occupancy (Dwell time)	Sep 29, 2017	<u>PASS</u>
7	15.247(d)	Conducted Spurious Emission	Sep 29, 2017	<u>PASS</u>
8	15.247(d)	Restricted Frequency Bands	Oct 10, 2017	<u>PASS</u>
9	15.209 15.247(d)	Radiated Emission	Oct 10, 2017	<u>PASS</u>
10	15.207	Conducted Emission	N/A	<u>N/A</u>

Note: Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

NOTE: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013.

1.3.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2 Number of Hopping Frequency

2.2.1 Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.2.2 Test Description

A. Test Setup:

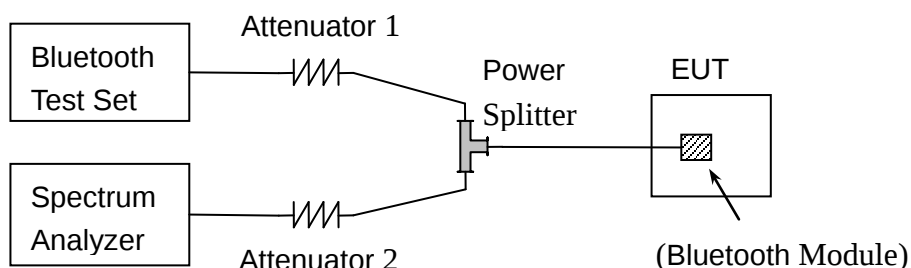

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).



2.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize


2.2.4 Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.


A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	15	Plot A	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	Plot B	PASS
8-DPSK	2400 - 2483.5	79	15	Plot C	PASS


B. Test Plots:

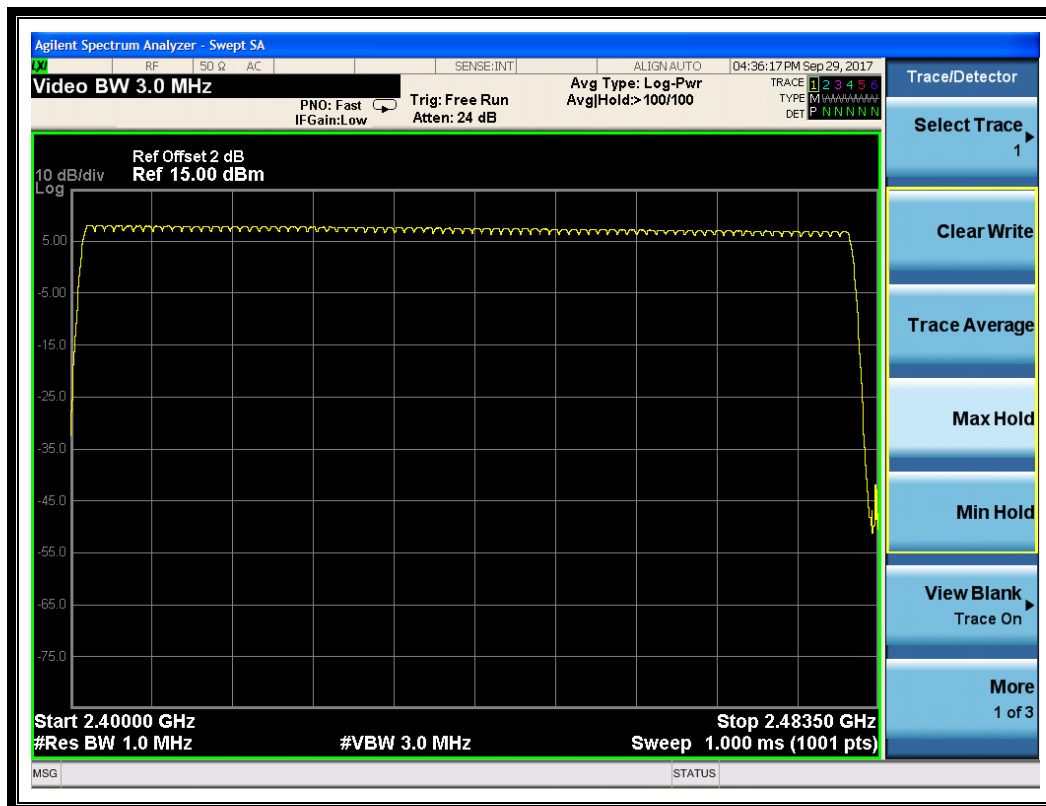

(Plot A: GFSK)

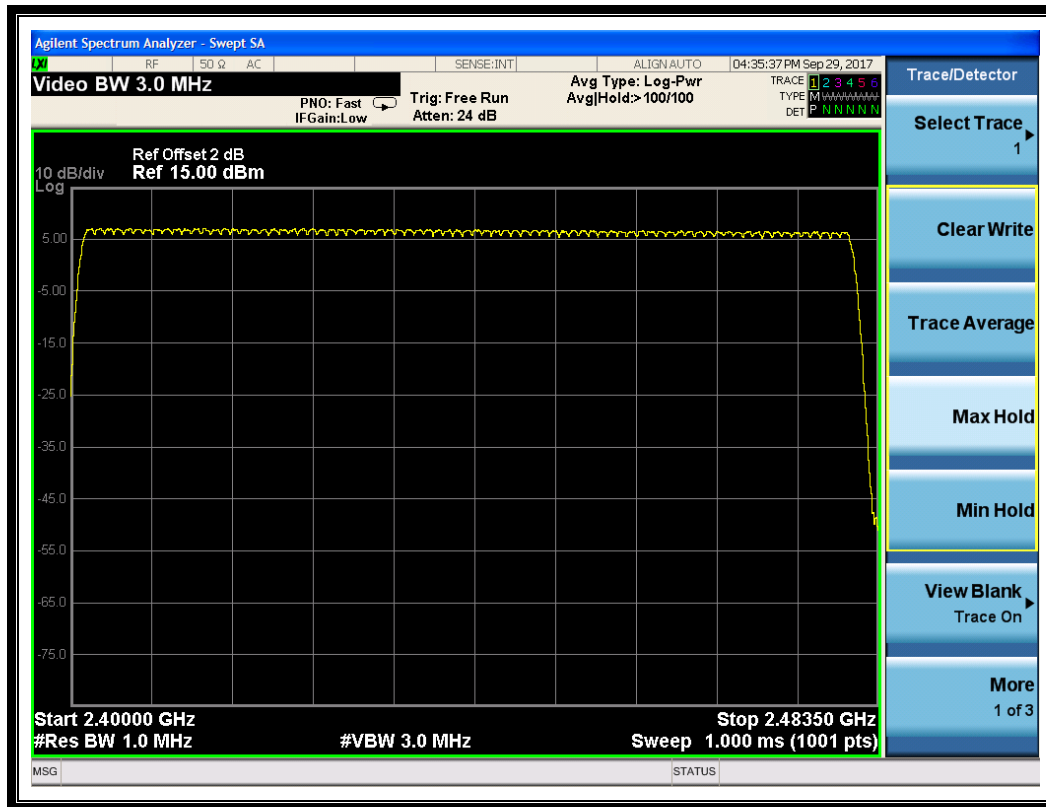

(Plot B: $\pi/4$ -DQPSK)

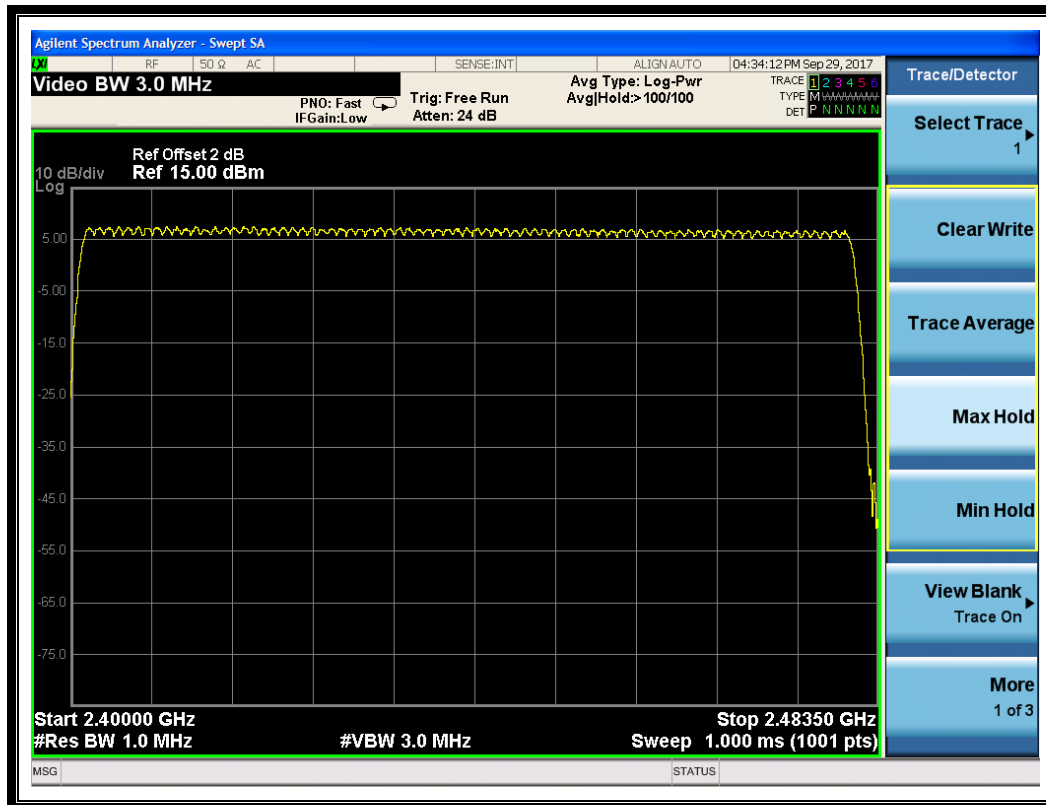

(Plot C: 8- DPSK)


2.3 Peak Output Power

2.3.1 Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.3.2 Test Description

A. Test Setup:

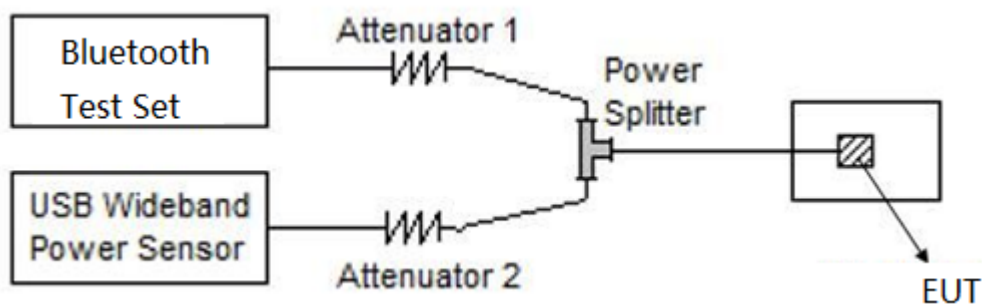

The Bluetooth Module of the EUT is coupled to the USB Wideband Power Sensor and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.3.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module. The lowest, middle and highest channel were tested by USB Wideband Power Sensor.

**2.3.3.1 GFSK Mode****A. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	8.19	0.00659	30	1	PASS
39	2441	7.68	0.00586			PASS
78	2480	6.98	0.00499			PASS

2.3.3.2 $\pi/4$ -DQPSK Mode**B. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	7.32	0.00540	20.97	0.125	PASS
39	2441	7.13	0.00516			PASS
78	2480	6.62	0.00459			PASS

2.3.3.3 8-DPSK Mode**C. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	7.71	0.00590	20.97	0.125	PASS
39	2441	7.49	0.00561			PASS
78	2480	6.95	0.00495			PASS


2.4 20dB Bandwidth

2.4.1 Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2 Test Description

A. Test Setup:

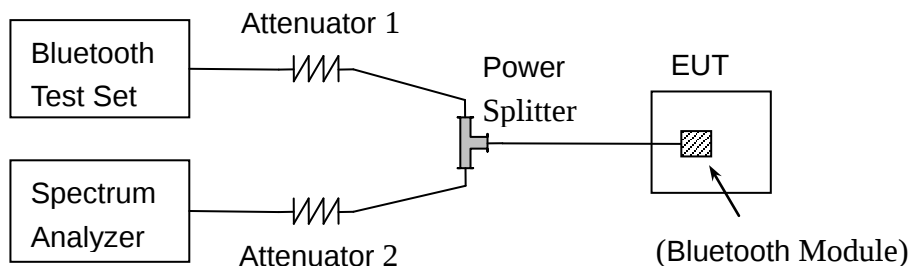

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.4.4 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.




2.4.4.1 GFSK Mode

A. Test Verdict:


The maximum 20dB bandwidth measured is 1.020 MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.020	Plot A
39	2441	1.018	Plot B
78	2480	1.015	Plot C


B. Test Plots:

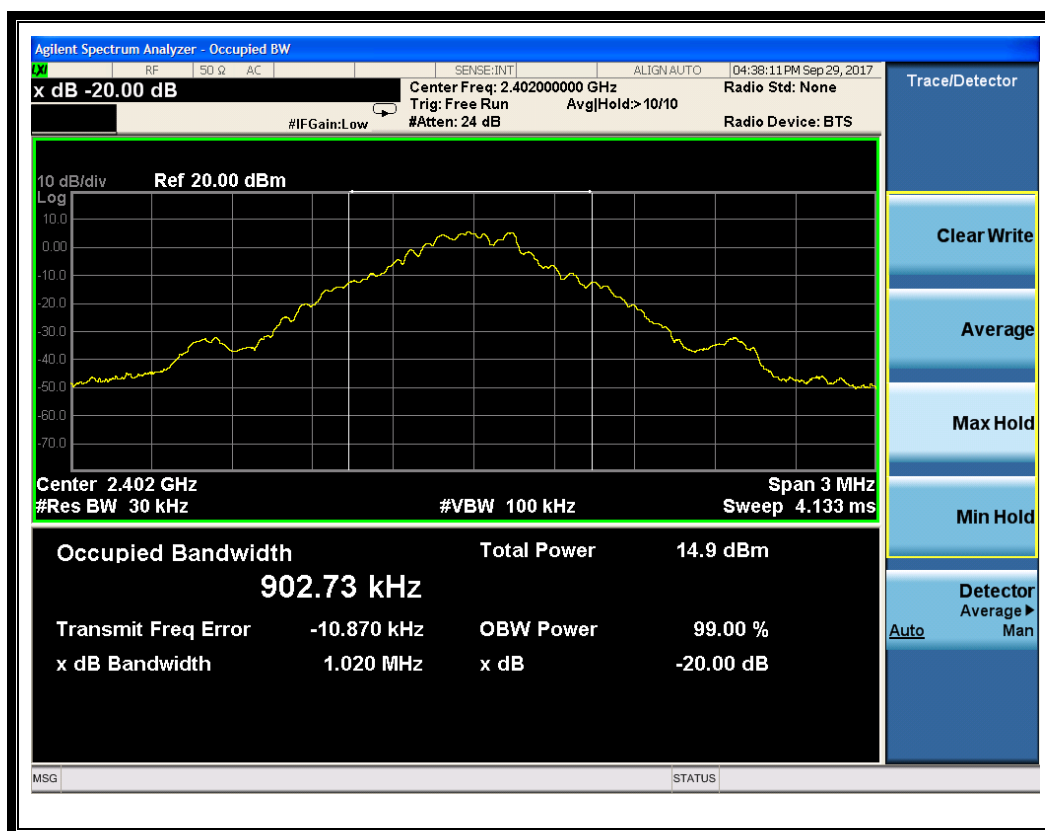

(Plot A: Channel = 2402 @ GFSK)

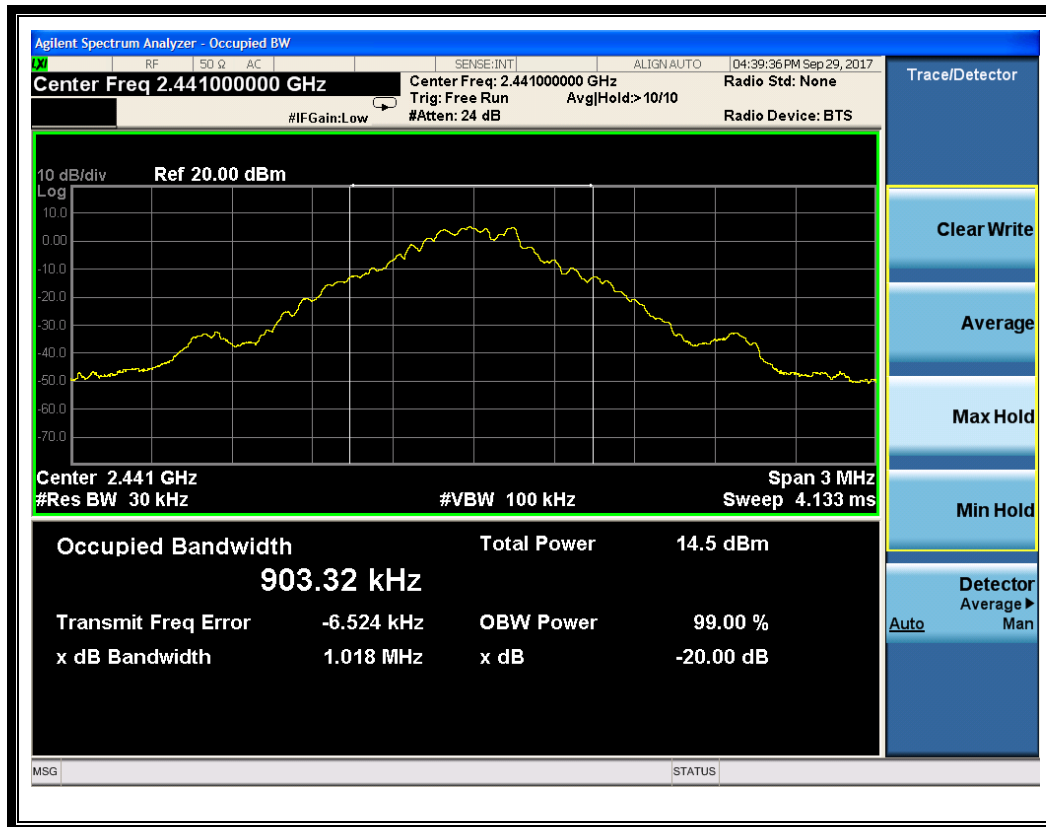

(Plot B: Channel = 2441 @ GFSK)

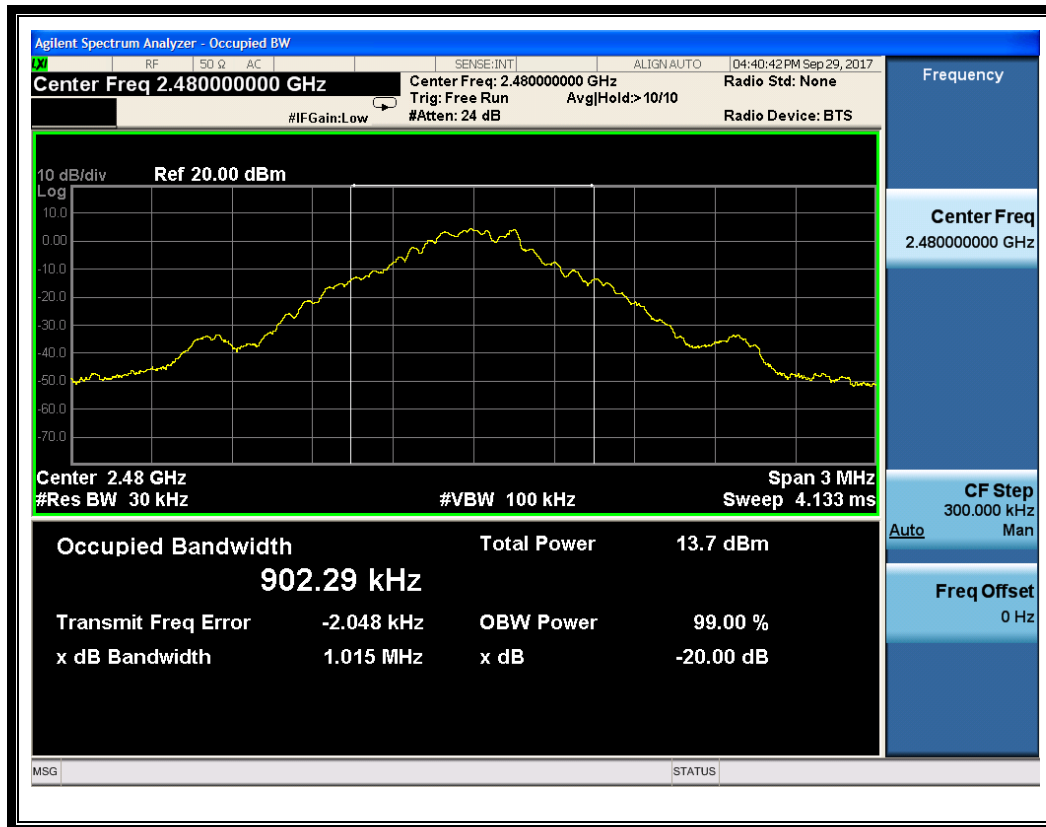

(Plot C: Channel = 2480 @ GFSK)


2.4.4.2 $\pi/4$ -DQPSK Mode


A. Test Verdict:

The maximum 20dB bandwidth measured is 1.350 MHz according to the table below.


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.349	Plot D
39	2441	1.350	Plot E
78	2480	1.350	Plot F

B. Test Plots:

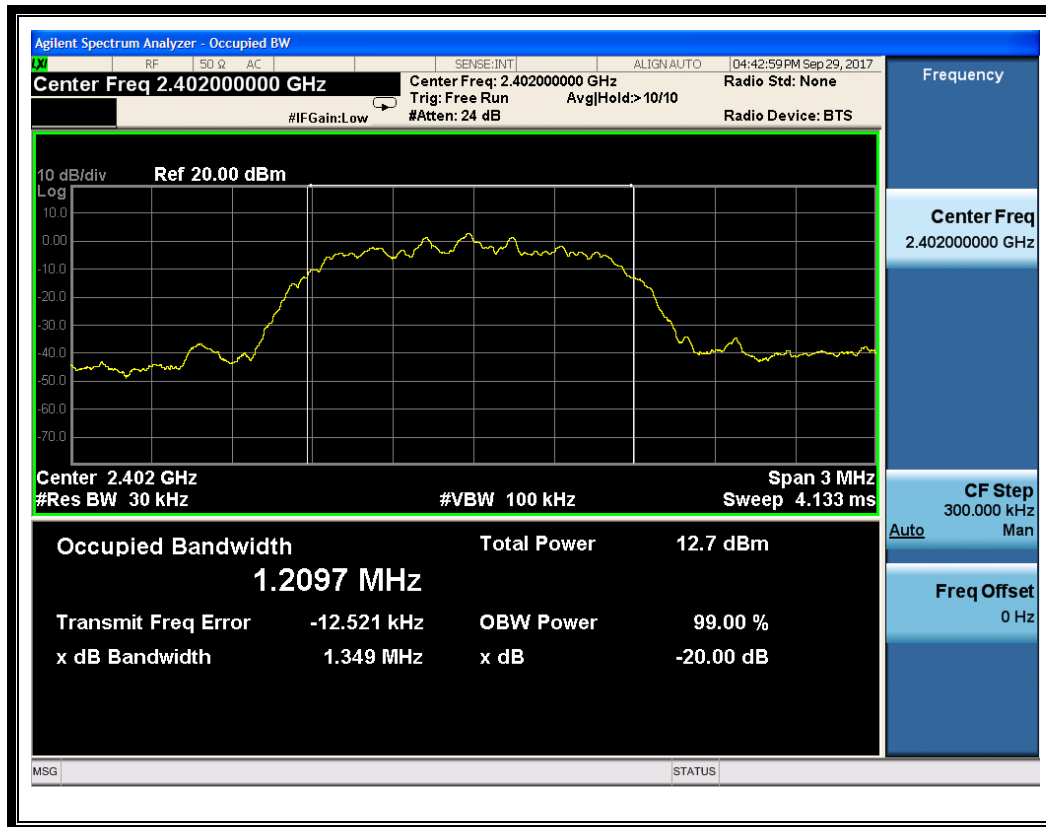(Plot D: Channel = 2402 @ $\pi/4$ -DQPSK)

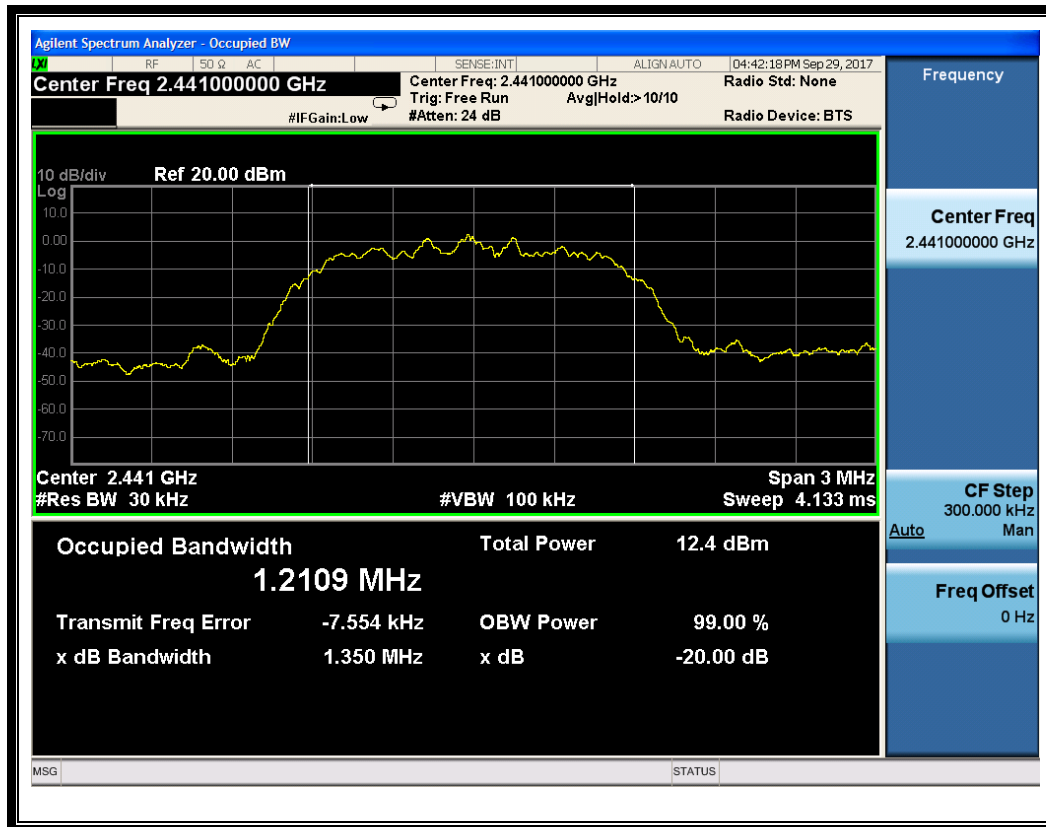

(Plot E: Channel = 2441 @ $\pi/4$ -DQPSK)

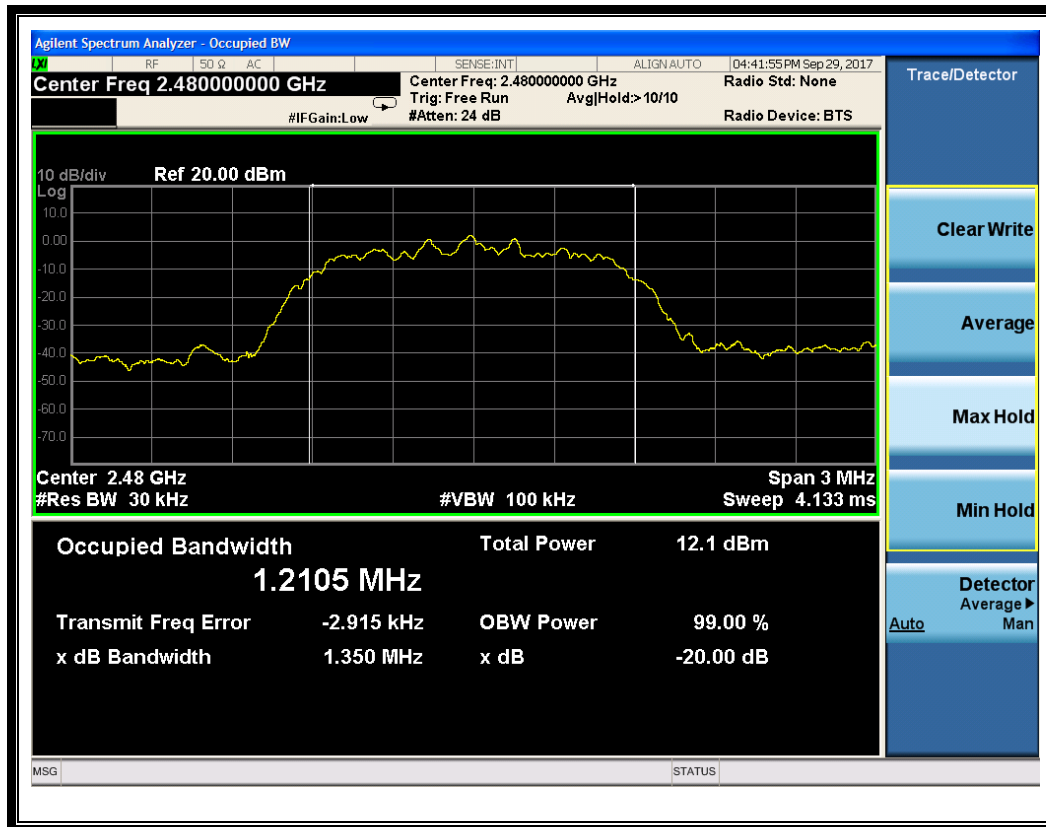

(Plot F: Channel = 2480 @ $\pi/4$ -DQPSK)


2.4.4.3 8-DPSK Mode

A. Test Verdict:


The maximum 20dB bandwidth measured is 1.333 MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.332	Plot G
39	2441	1.329	Plot H
78	2480	1.333	Plot I


B. Test Plots:

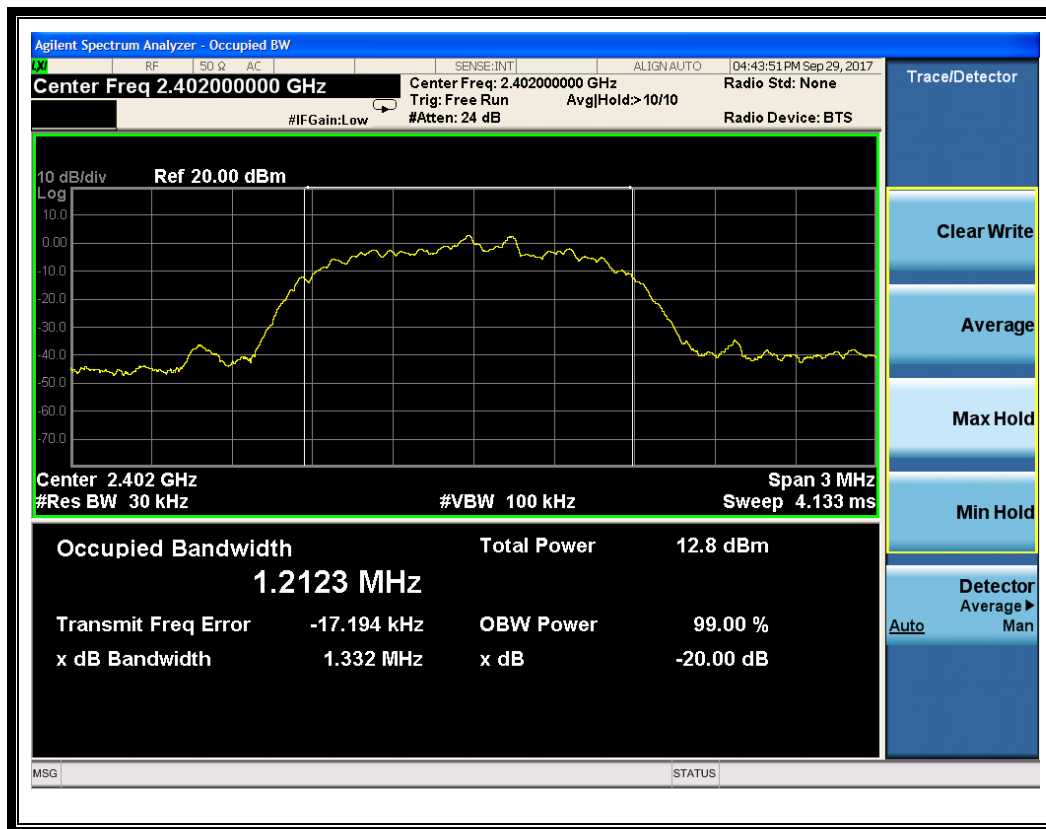

(Plot G: Channel = 2402 @ 8-DPSK)

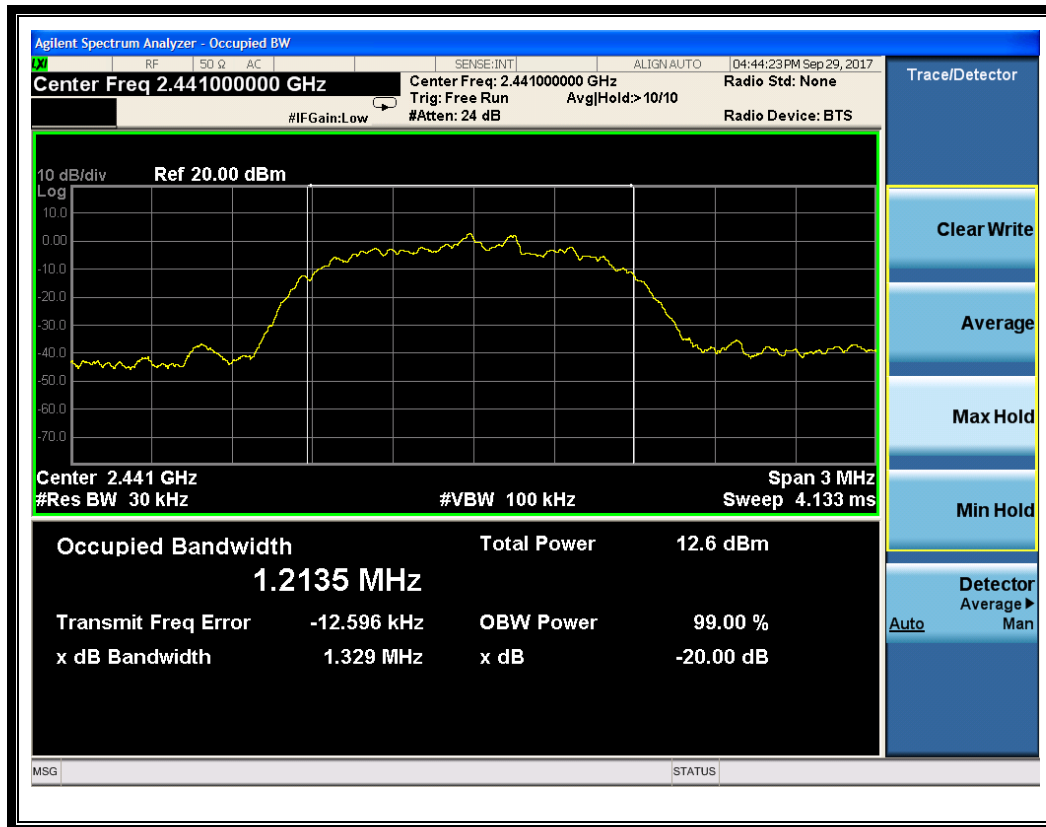

(Plot H: Channel = 2441 @ 8-DPSK)

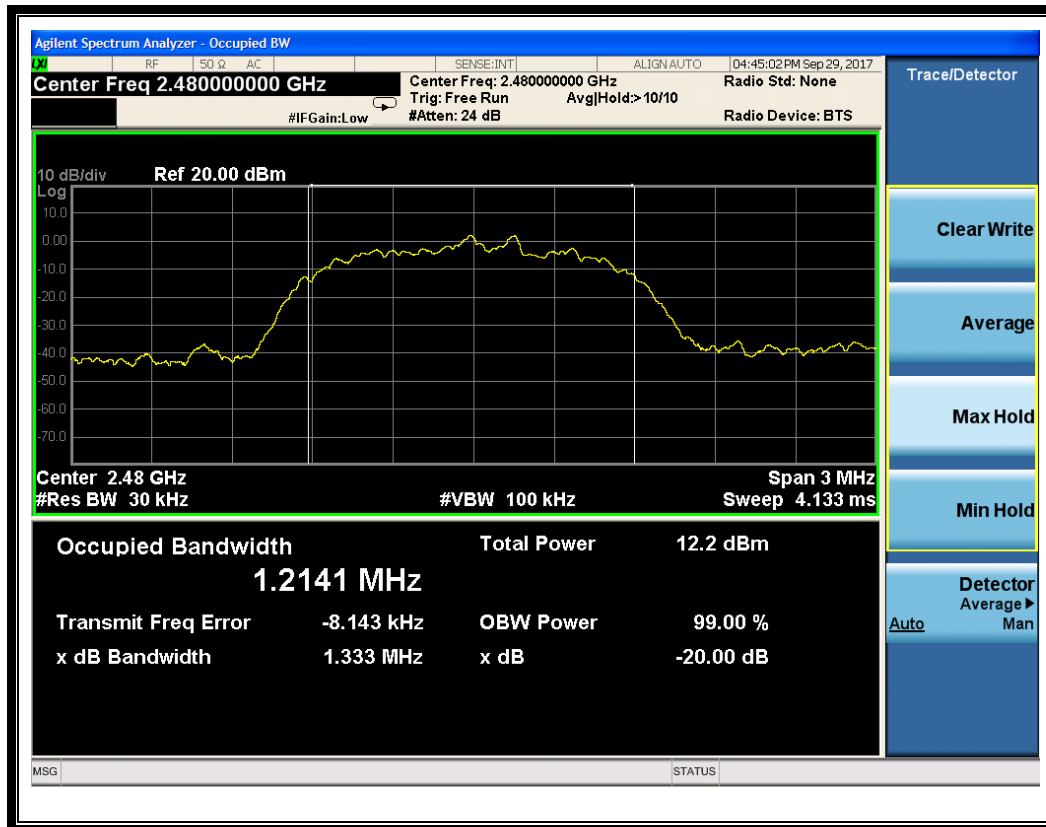

(Plot I: Channel = 2480 @ 8-DPSK)


2.5 Carried Frequency Separation

2.5.1 Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2 Test Description

A. Test Setup:

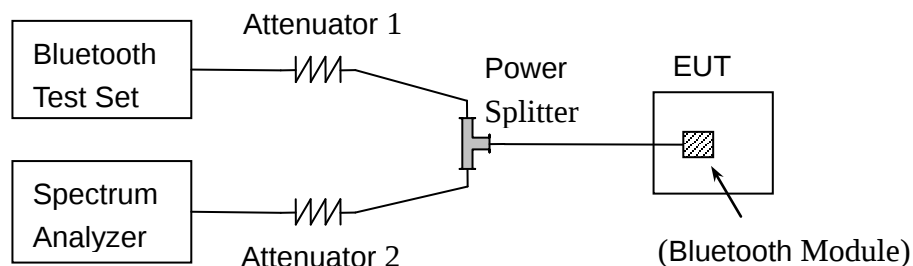

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold


Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.




2.5.4 Test Result

The Bluetooth Module operates at hopping-on test mode. For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 2.4.4), whichever is greater. So, the verdict is PASSING


Test Mode	Measured Channel Numbers	Carried Frequency Separation	Refer to Plot	20dB bandwidth (MHz)	Min. Limit	Verdict
GFSK	39 and 40	1.002	Plot A	1.020	20dB bandwidth	PASS
$\pi/4$ -DQPSK	39 and 40	1.014	Plot B	1.350	two-thirds of the 20dB bandwidth	PASS
8-DPSK	39 and 40	1.026	Plot C	1.333		PASS

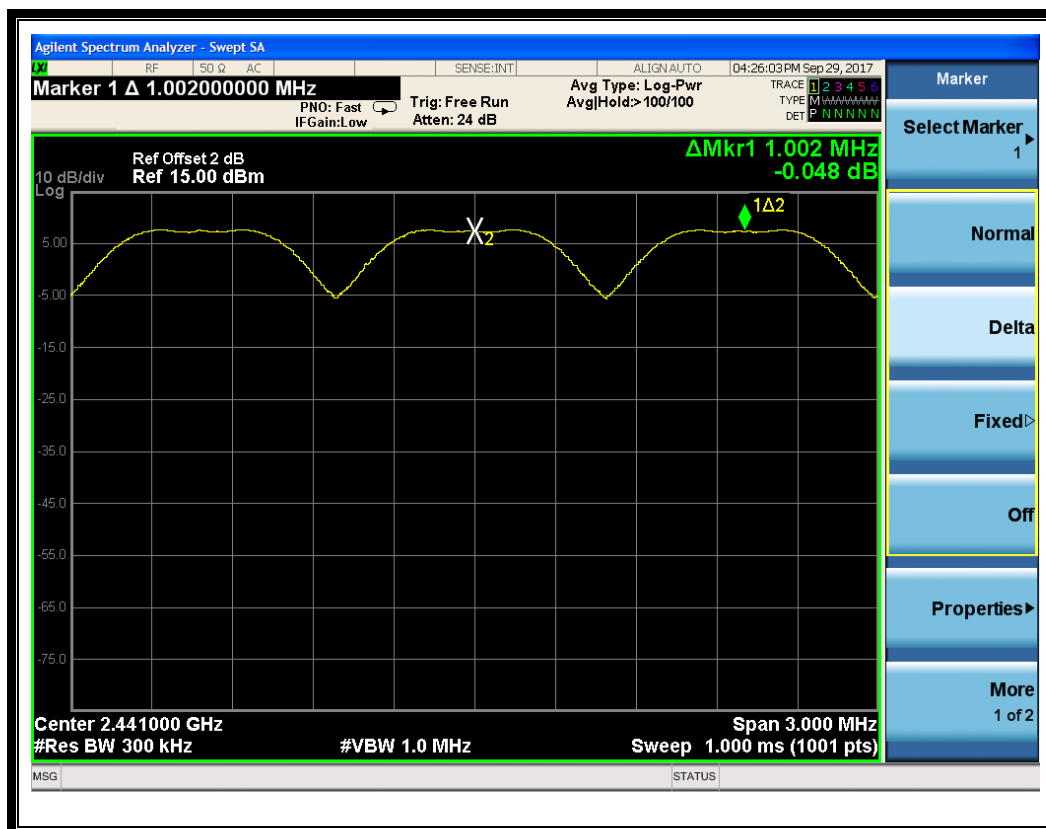

(Plot A: GFSK)

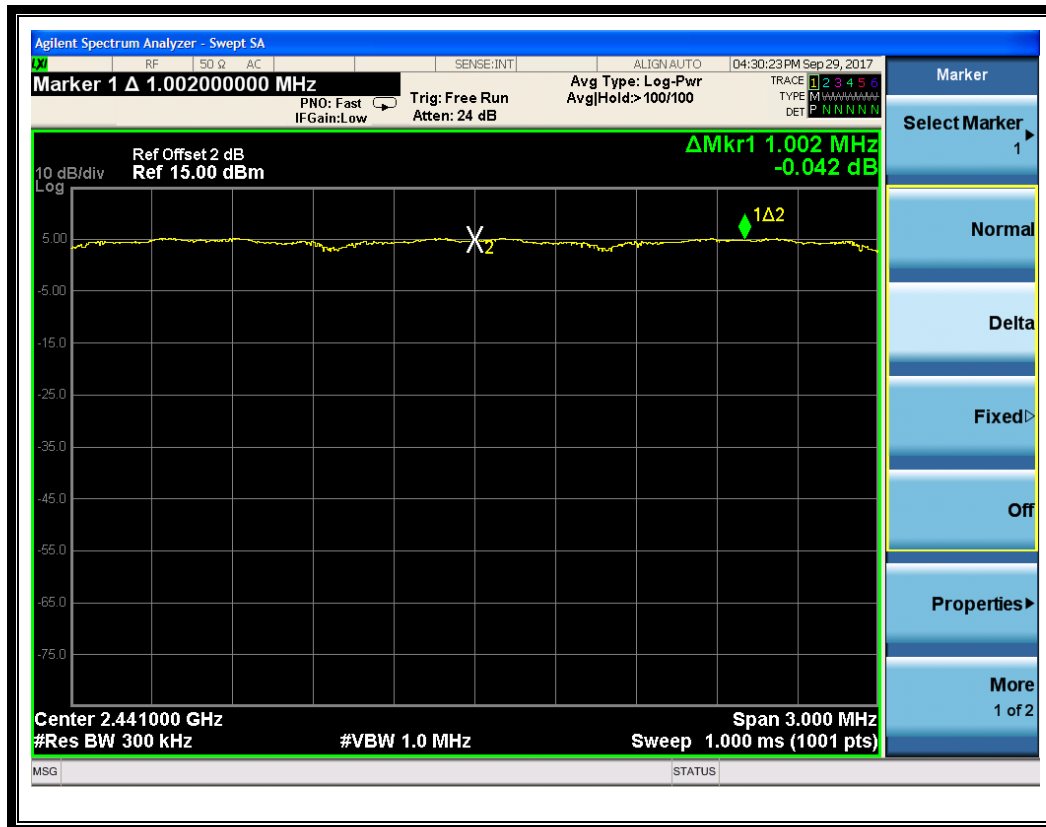

(Plot B: $\pi/4$ -DQPSK)

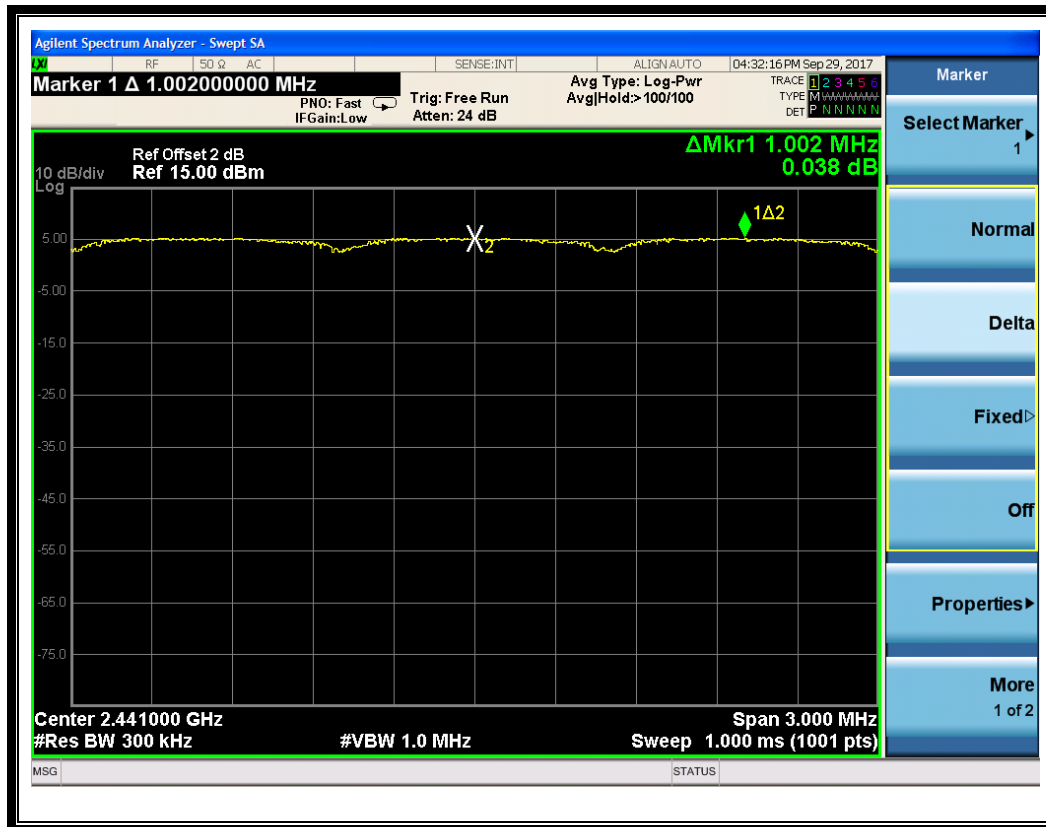

(Plot C: 8-DPSK)


2.6 Time of Occupancy (Dwell time)

2.6.1 Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.6.2 Test Description

A. Test Setup:

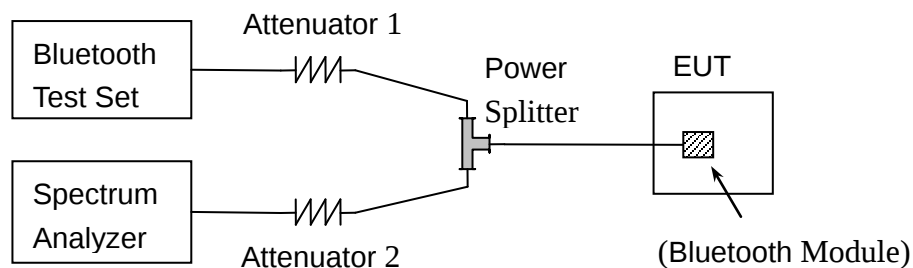

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.6.3 Test Procedure

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channel * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.




2.6.4 Test Result


2.6.4.1 GFSK Mode

A. Test Verdict:


DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Average Time of Occupancy in 3.16 seconds (sec)	Average Time of Occupancy in 31.6 seconds (sec)	Limit (sec)	Verdict
DH1	0.39	32	0.01248	0.1248	0.4	PASS
DH3	1.62	14	0.02268	0.2268		PASS
DH5	2.88	8	0.02304	0.2304		PASS

B. Test Plots:

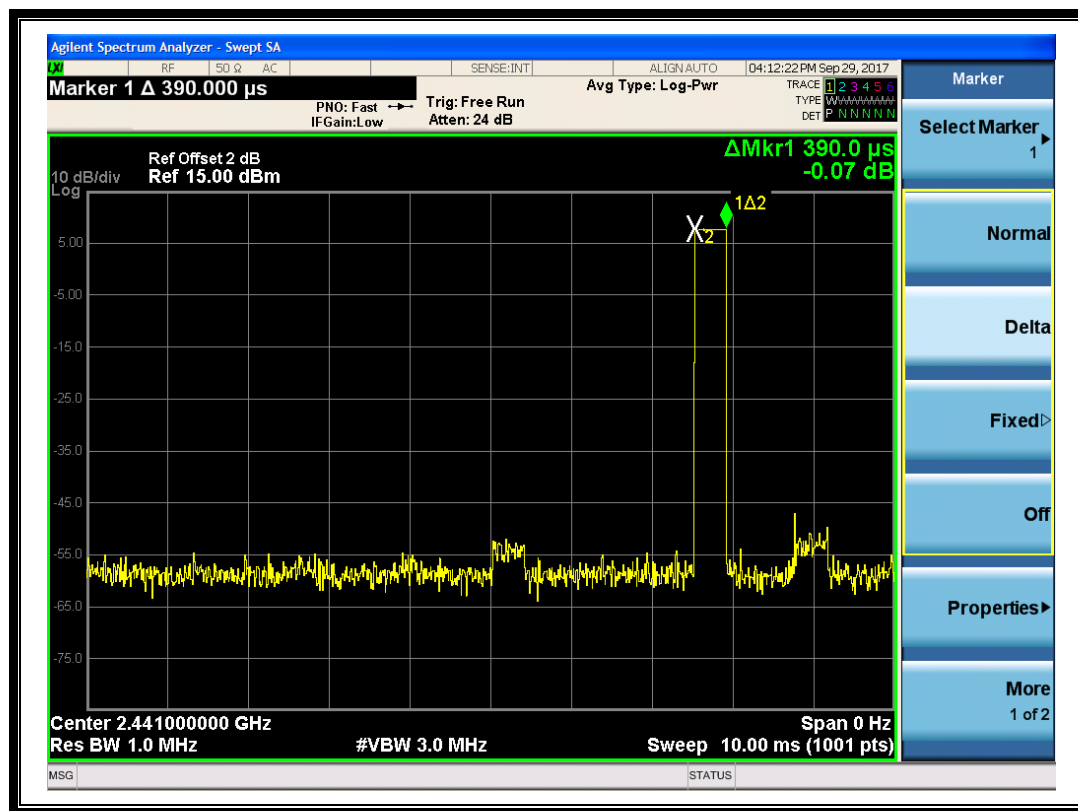

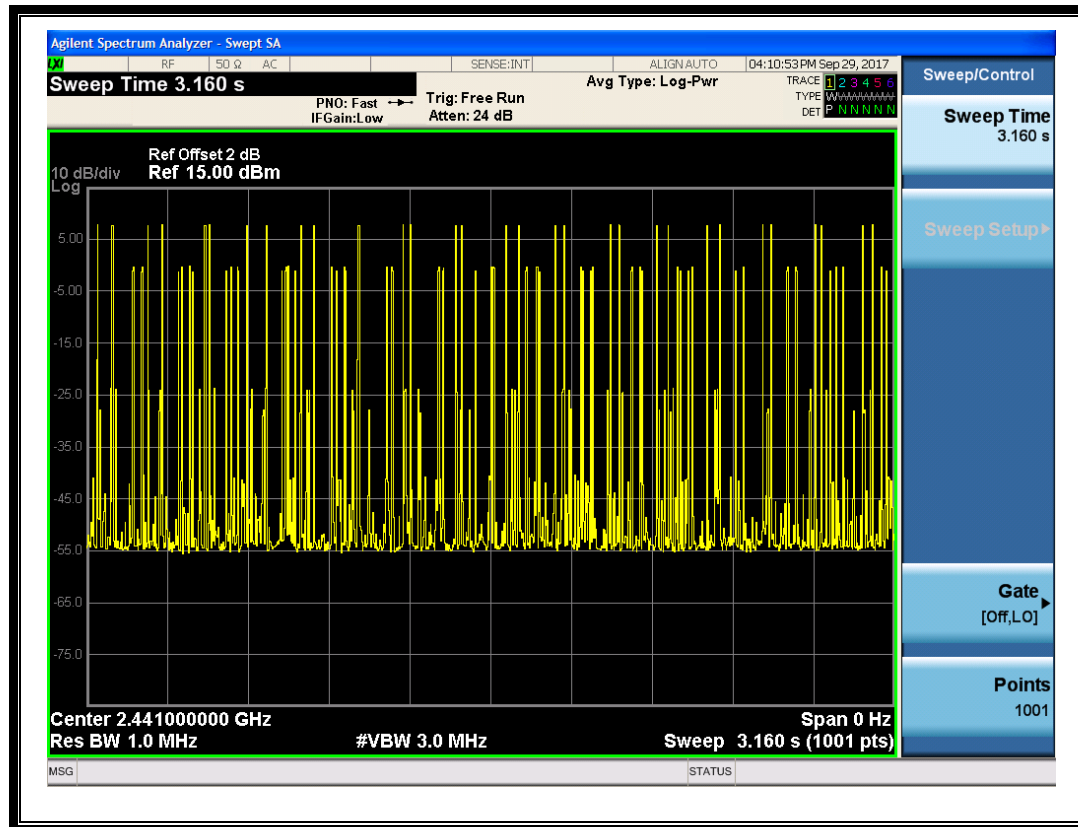

(Plot A: DH1 @ GFSK)

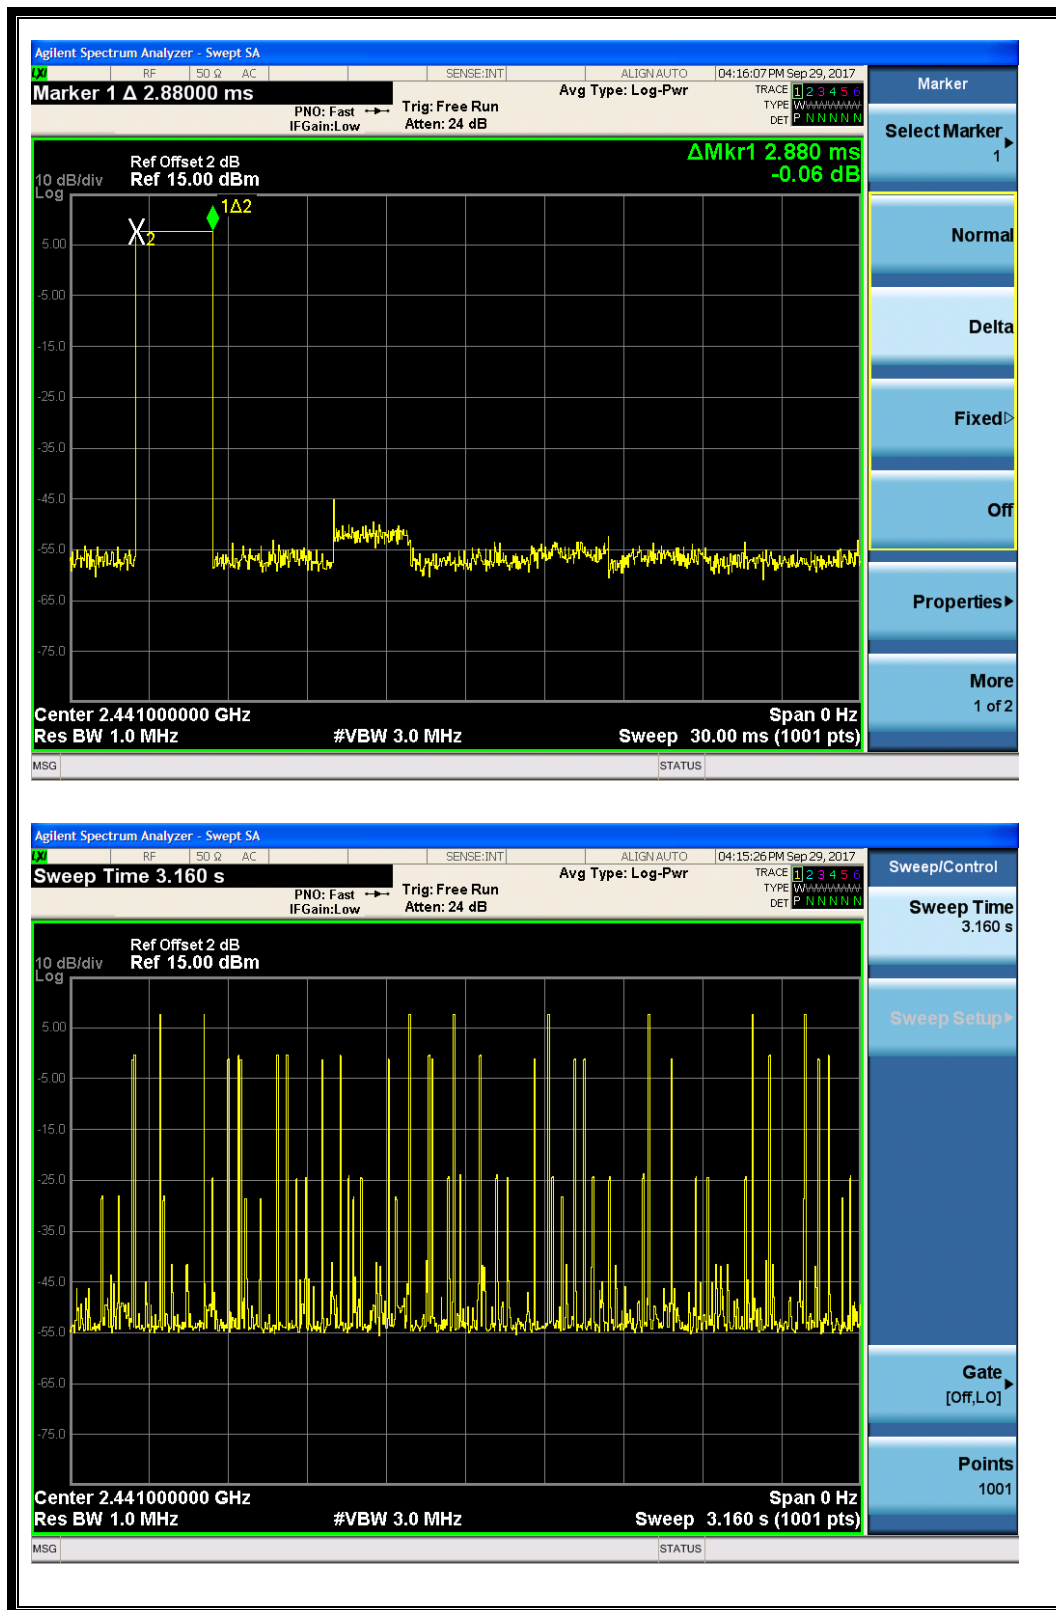

(Plot C: DH5 @ GFSK)





2.6.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:


DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Average Time of Occupancy in 3.16 seconds (sec)	Average Time of Occupancy in 31.6 seconds (sec)	Limit (sec)	Verdict
DH1	0.39	31	0.01209	0.1209	0.4	PASS
DH3	1.64	15	0.02460	0.2460		PASS
DH5	2.88	13	0.03744	0.3744		PASS

B. Test Plots:

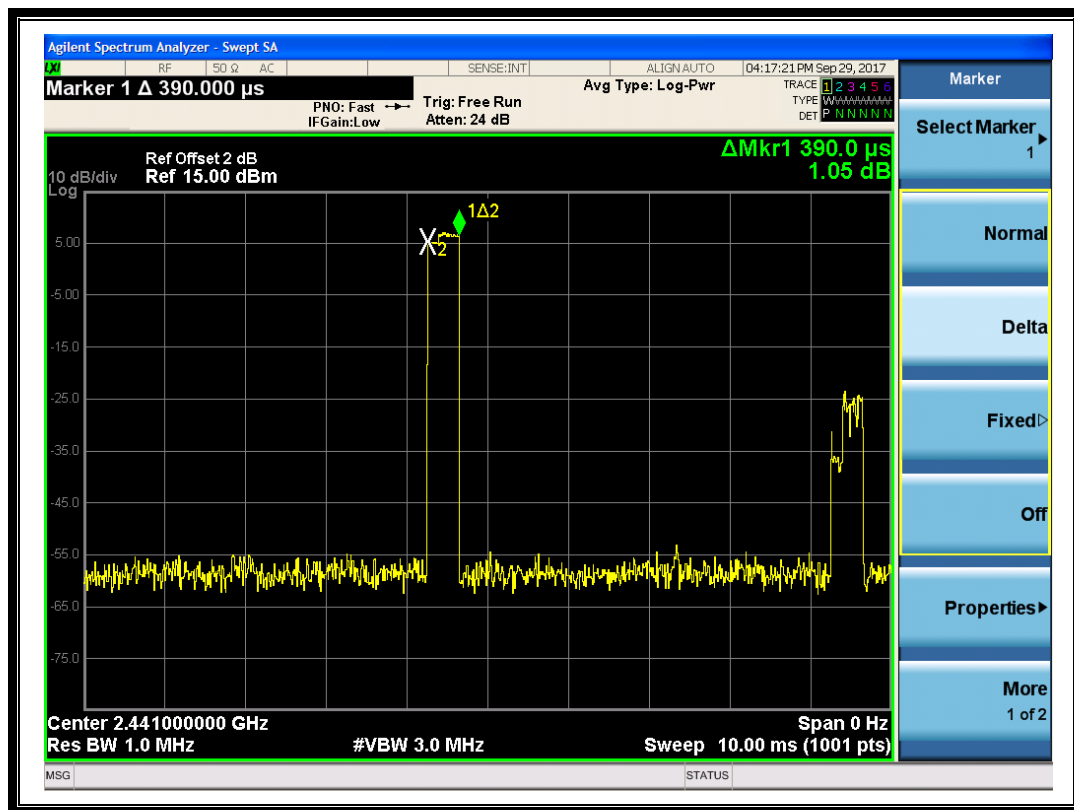

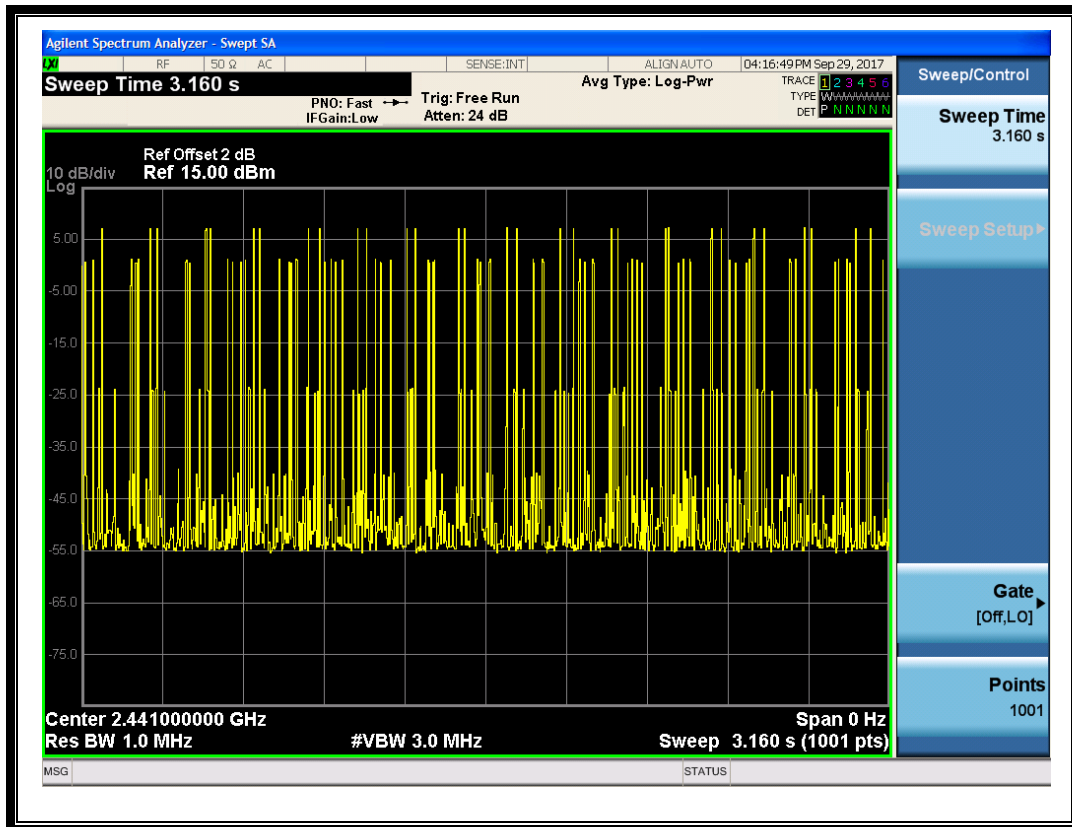

(Plot D: DH1 @ $\pi/4$ -DQPSK)

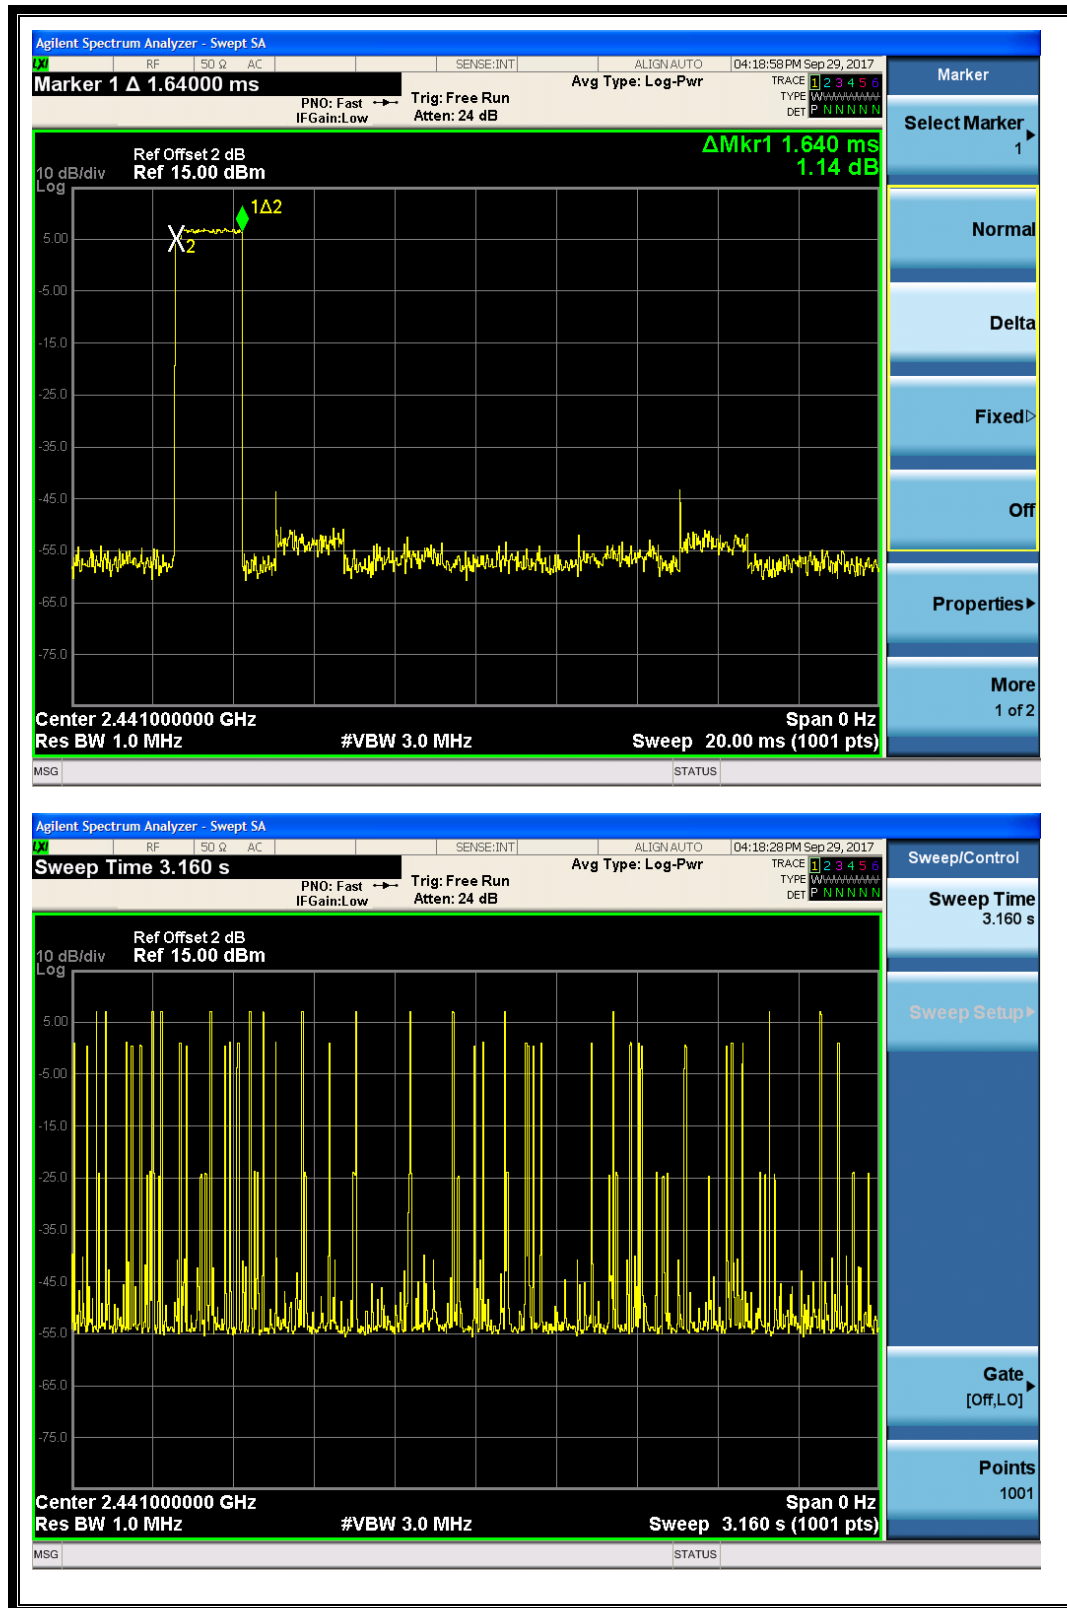(Plot E: DH3 @ $\pi/4$ -DQPSK)





2.6.4.3 8-DPSK mode

A. Test Verdict:


DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Average Time of Occupancy in 3.16 seconds (sec)	Average Time of Occupancy in 31.6 seconds (sec)	Limit (sec)	Verdict
DH1	0.39	31	0.01209	0.1209	0.4	PASS
DH3	1.64	19	0.03116	0.3116		PASS
DH5	2.91	7	0.02037	0.2037		PASS

B. Test Plots:

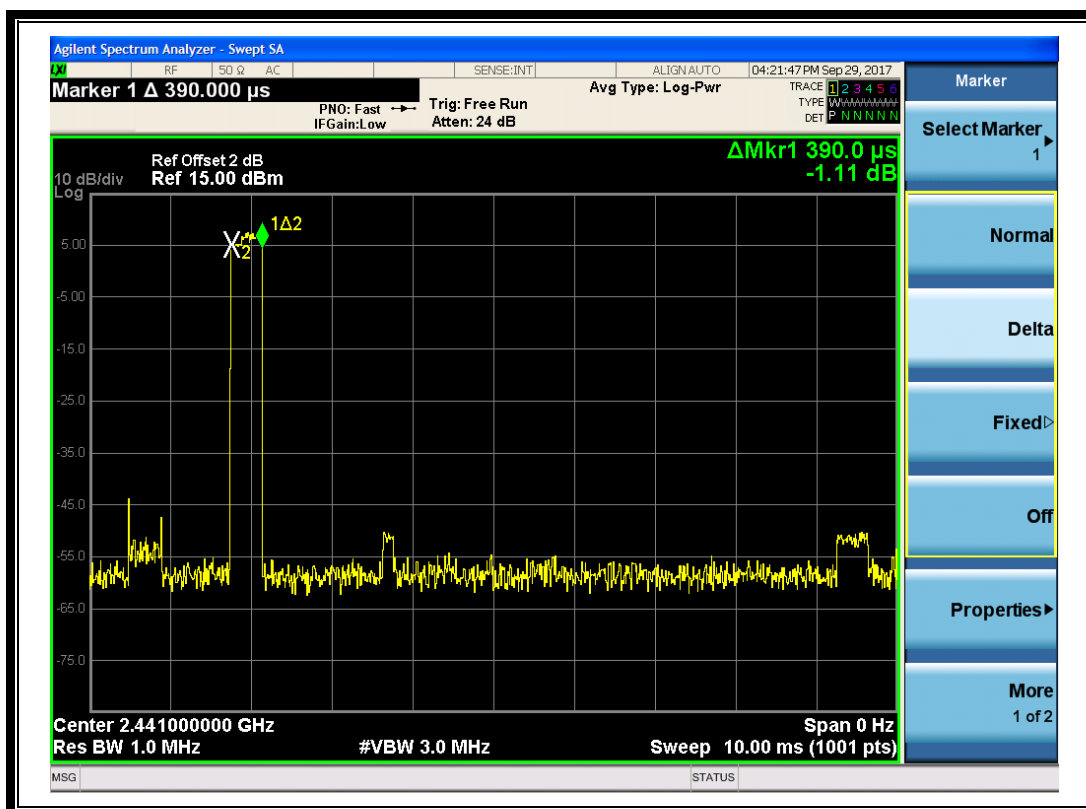


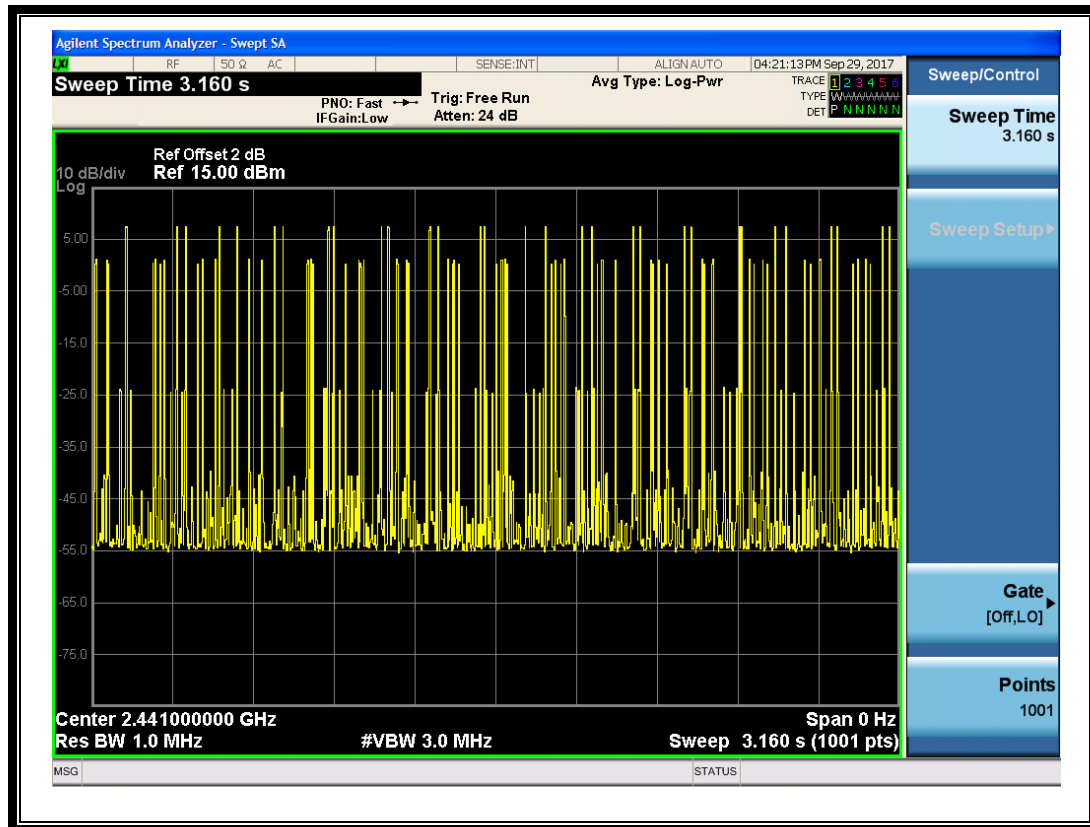

(Plot G: DH1 @ 8-DPSK)

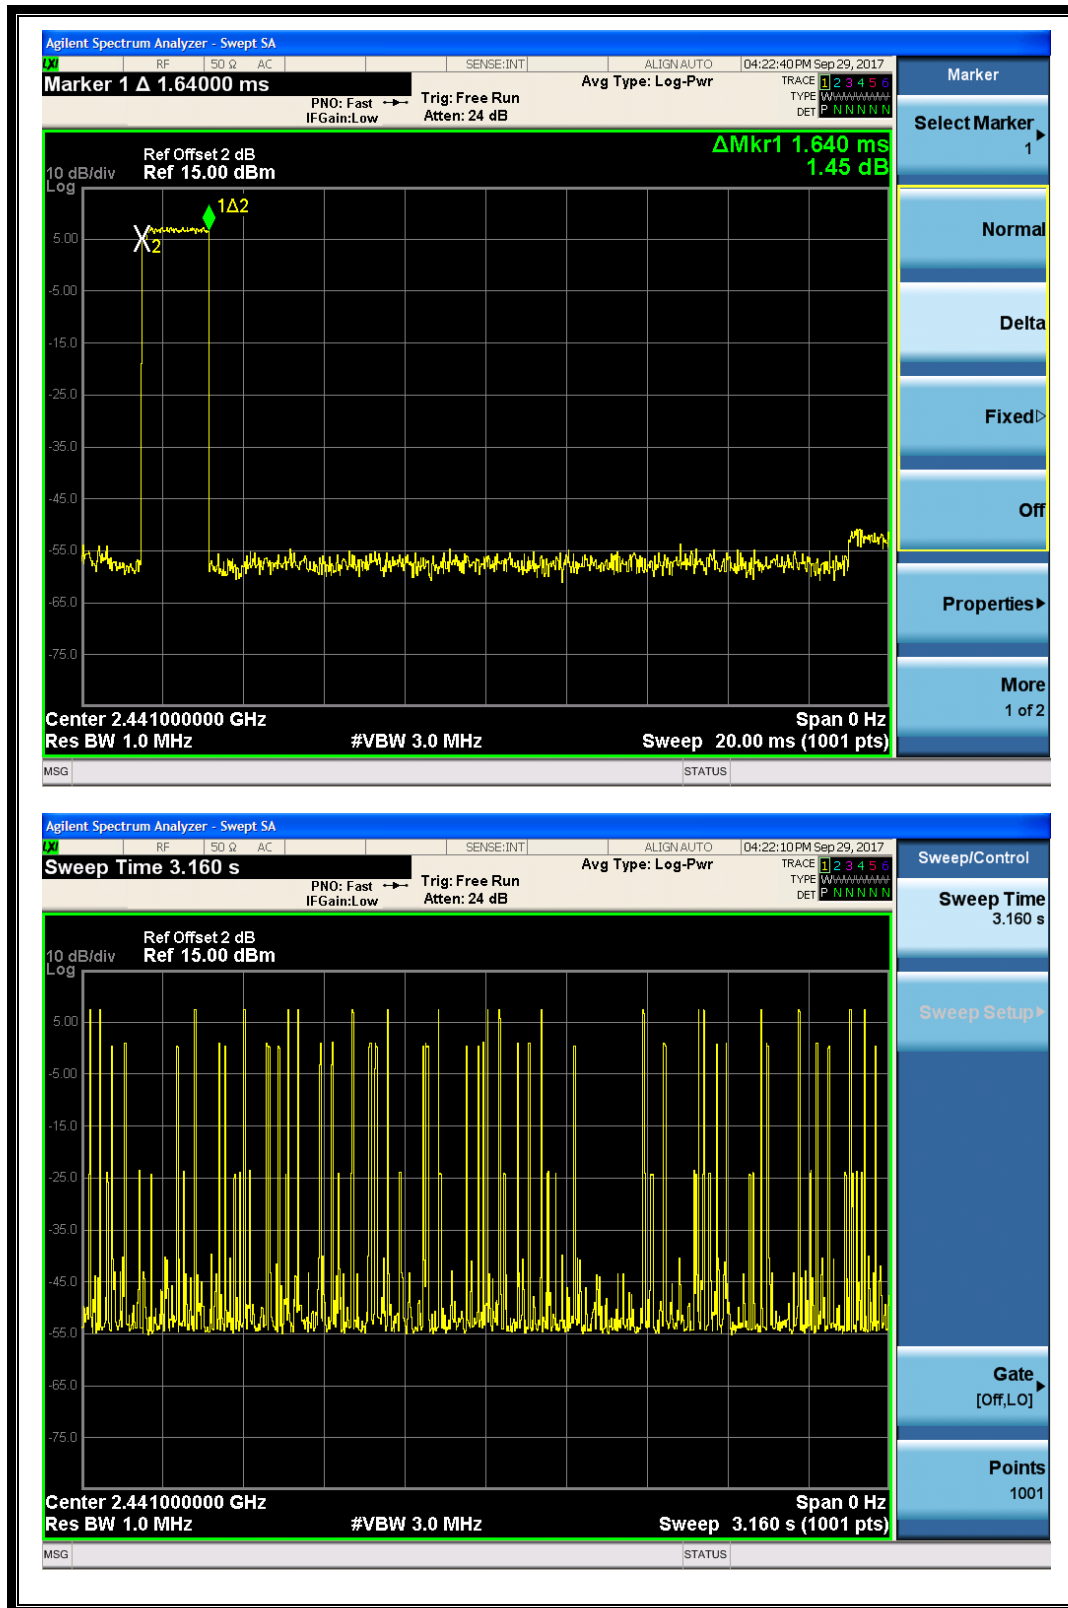

(Plot H: DH3 @ 8-DPSK)

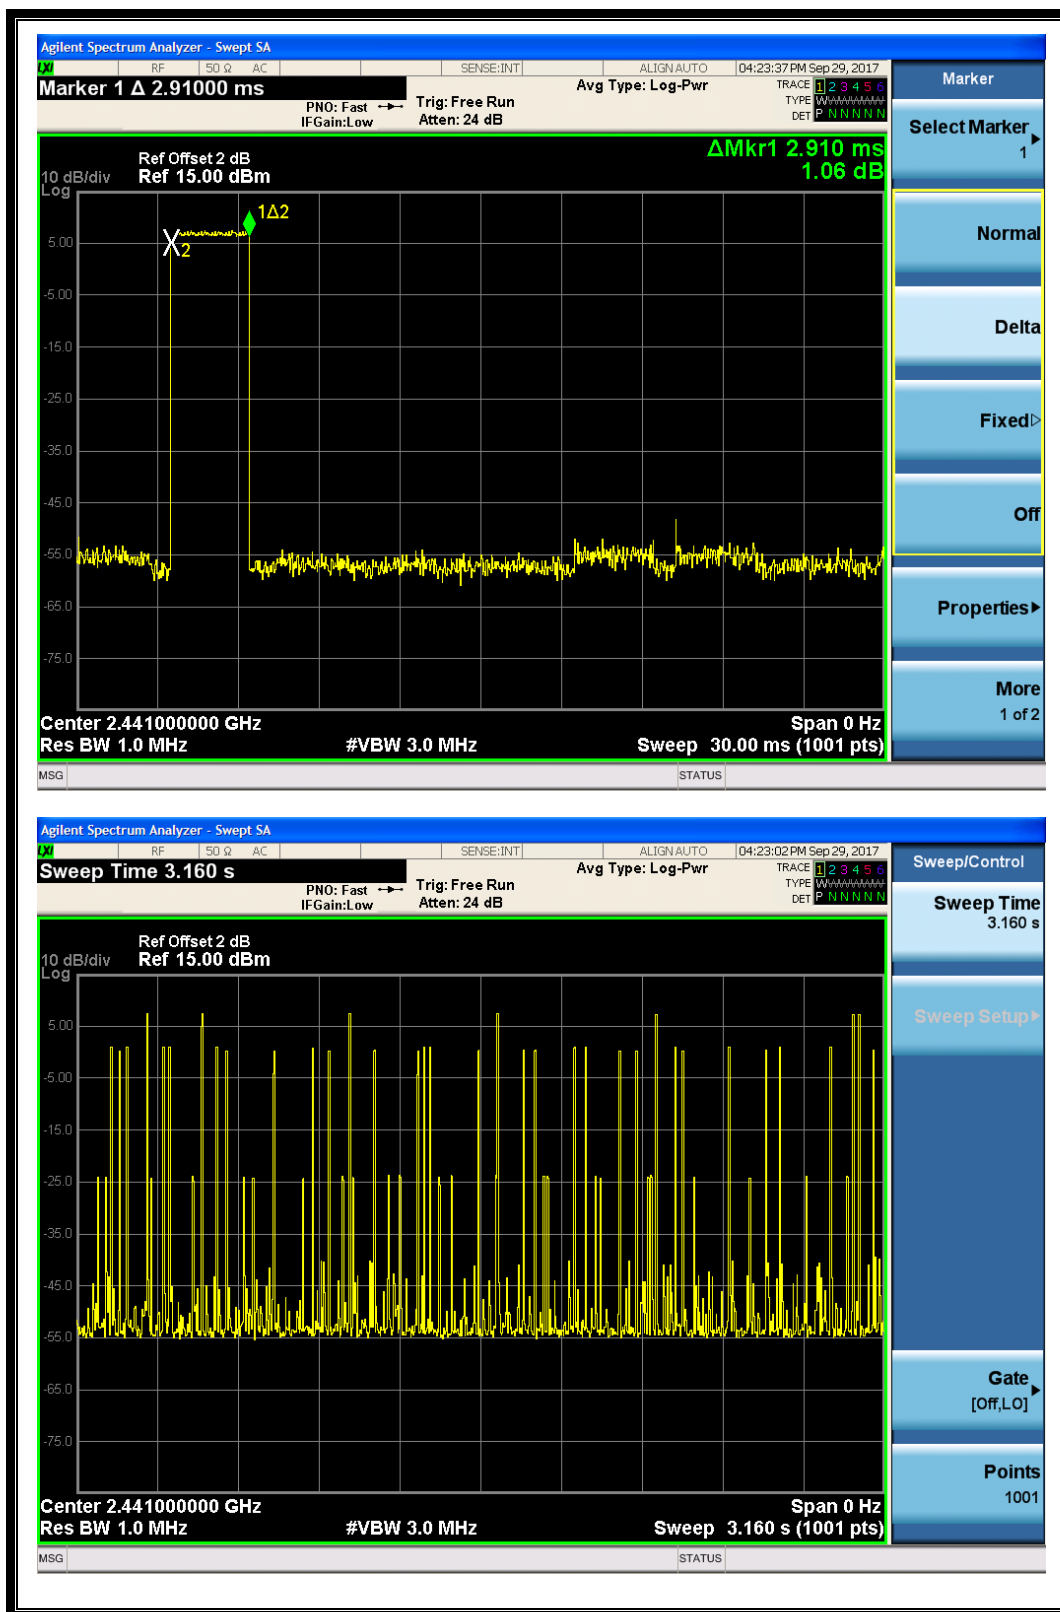

(Plot I: DH5 @ 8-DPSK)


2.7 Conducted Spurious Emissions

2.7.1 Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2 Test Description

A. Test Setup:

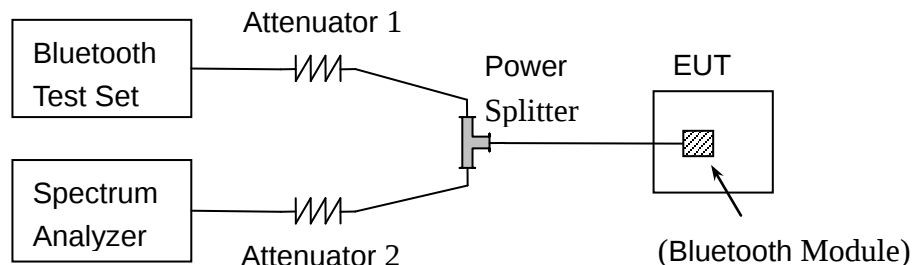

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.



2.7.4 Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


2.7.4.1 GFSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-49.25	Plot A	7.46	-12.54	PASS
39	2441	-45.99	Plot B	7.25	-12.75	PASS
78	2480	-44.95	Plot C	6.14	-13.86	PASS

B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.

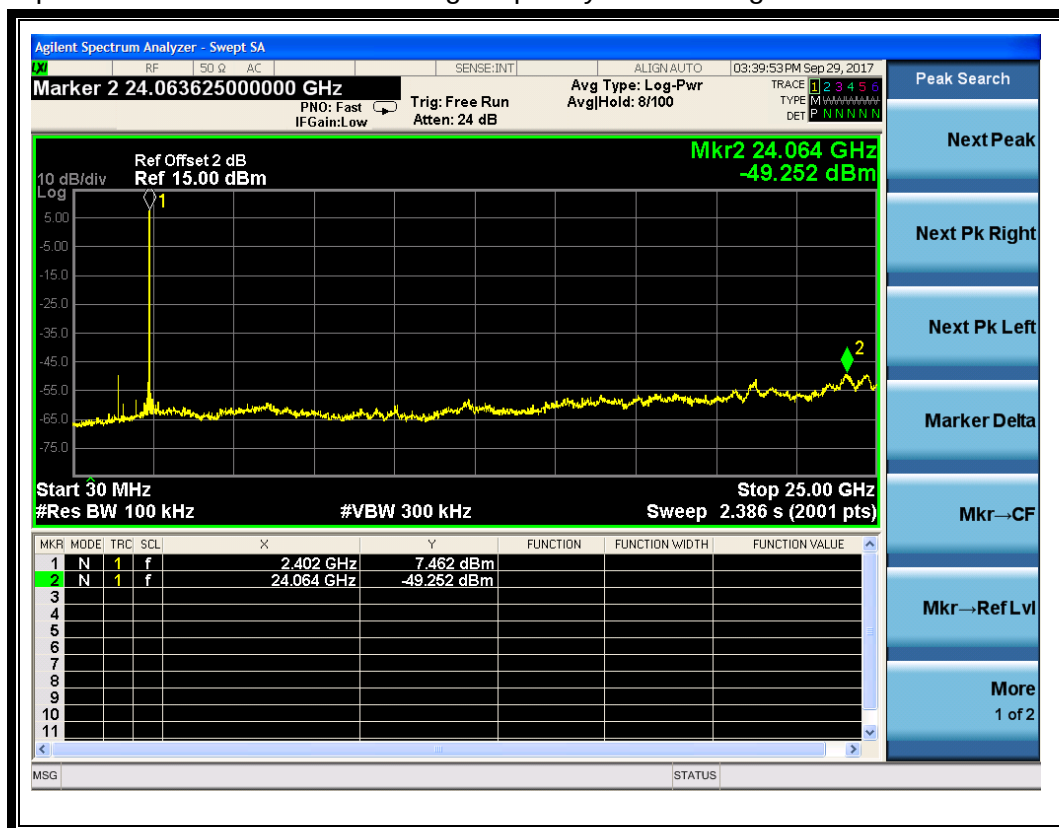


(Plot A: Channel = 0, 30MHz to 25GHz @ GFSK Mode)

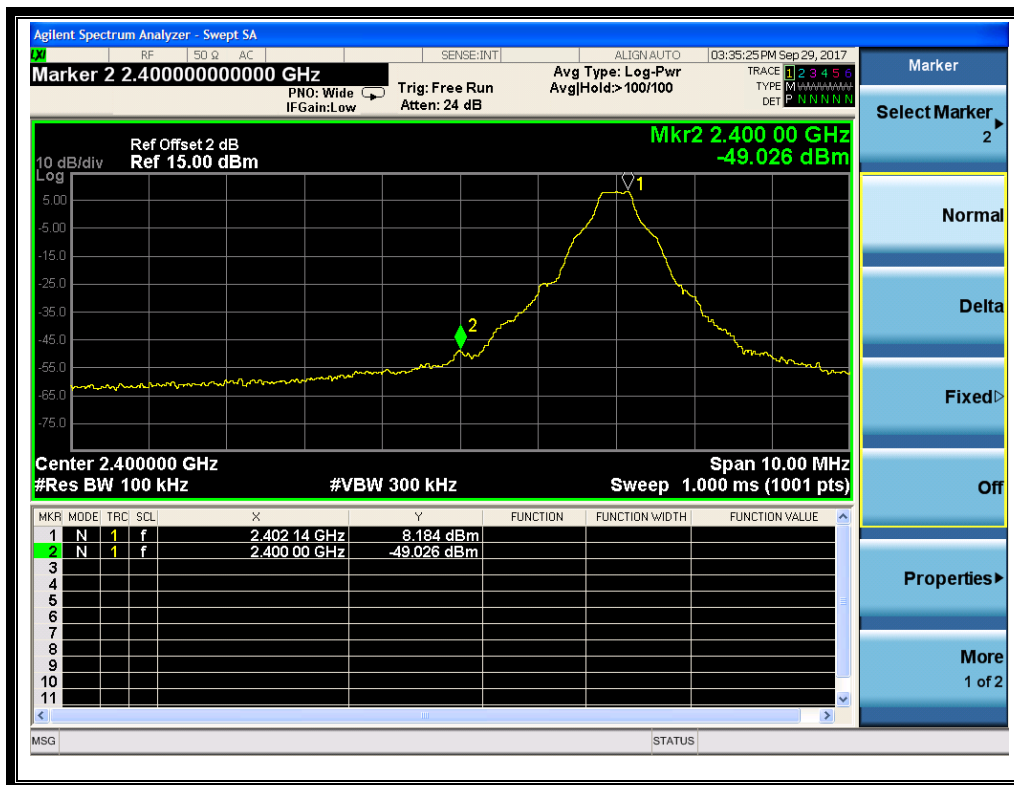


(Channel = 0, Band edge @ GFSK Mode)




(Channel = 0, Band edge with hopping on @ GFSK Mode)

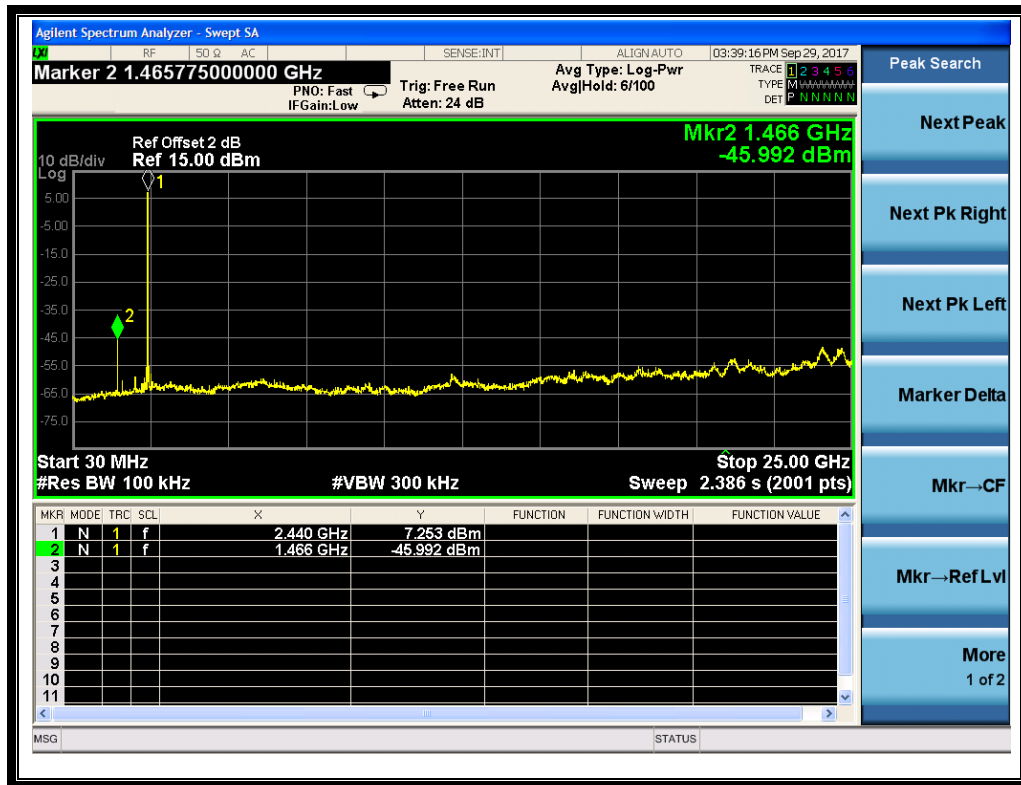

(Plot B: Channel = 39, 30MHz to 25GHz @ GFSK Mode)

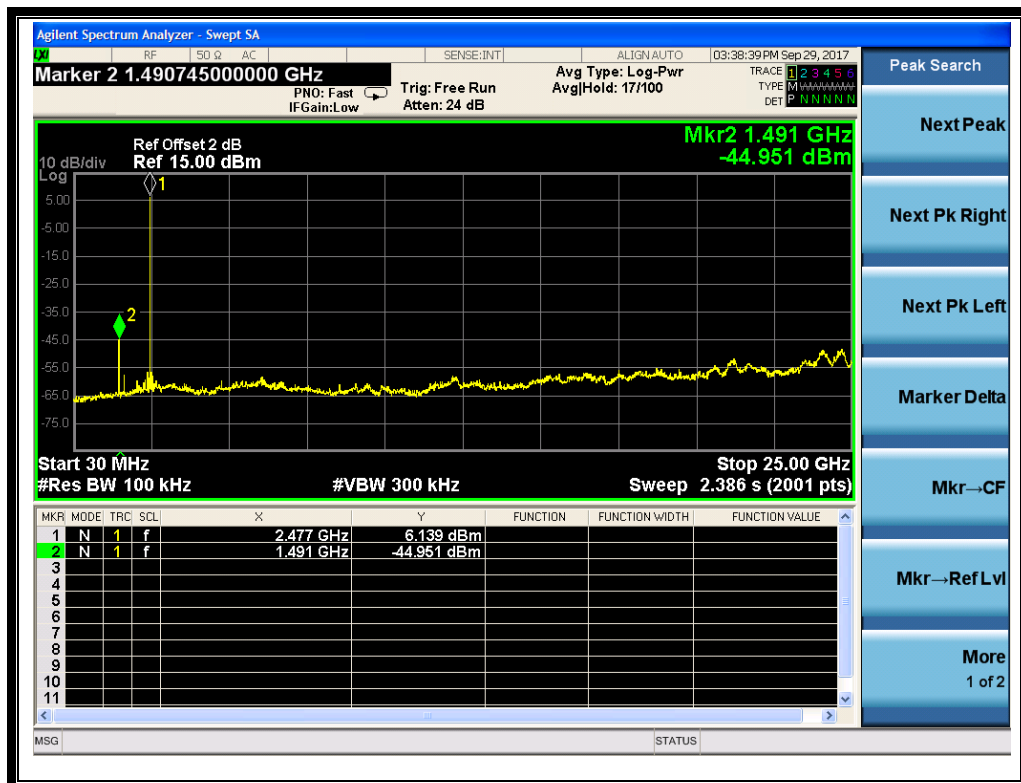

(Plot C: Channel = 78, 30MHz to 25GHz @ GFSK Mode)

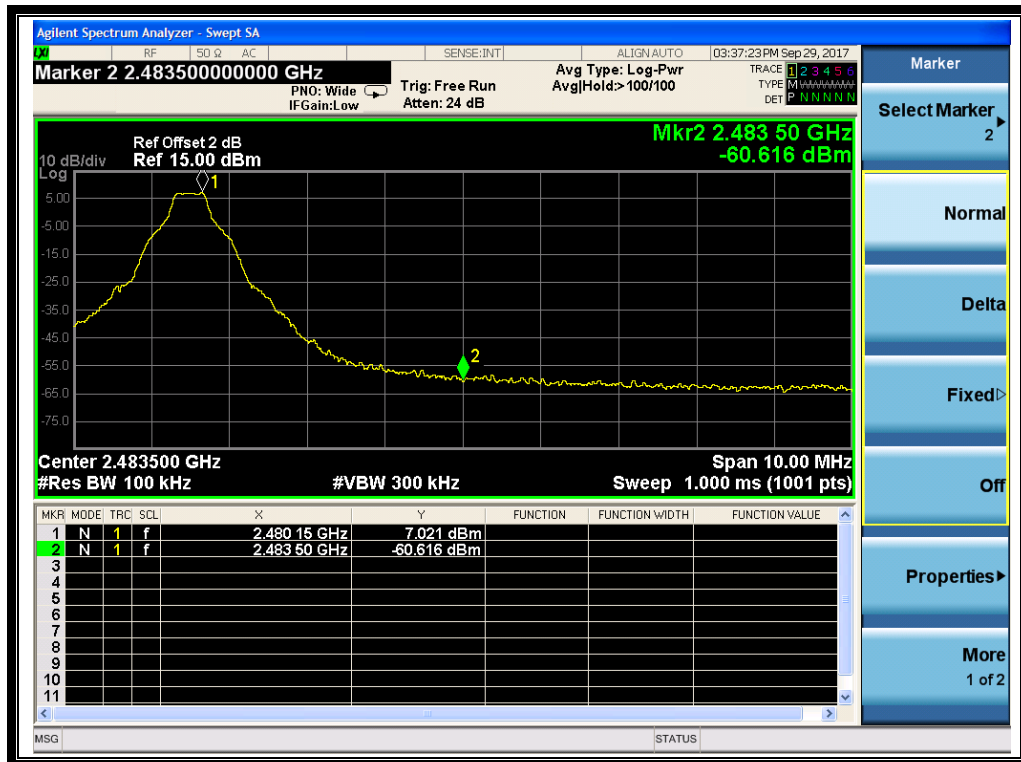

(Channel = 78, Band edge @ GFSK Mode)



(Channel = 78, Band edge with hopping on @ GFSK Mode)




2.7.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:



Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-44.26	Plot D	2.99	-17.01	PASS
39	2441	-48.60	Plot E	0.90	-19.10	PASS
78	2480	-47.92	Plot F	1.95	-18.05	PASS



B. Test Plots:



Note: the power of the Module transmitting frequency should be ignored.

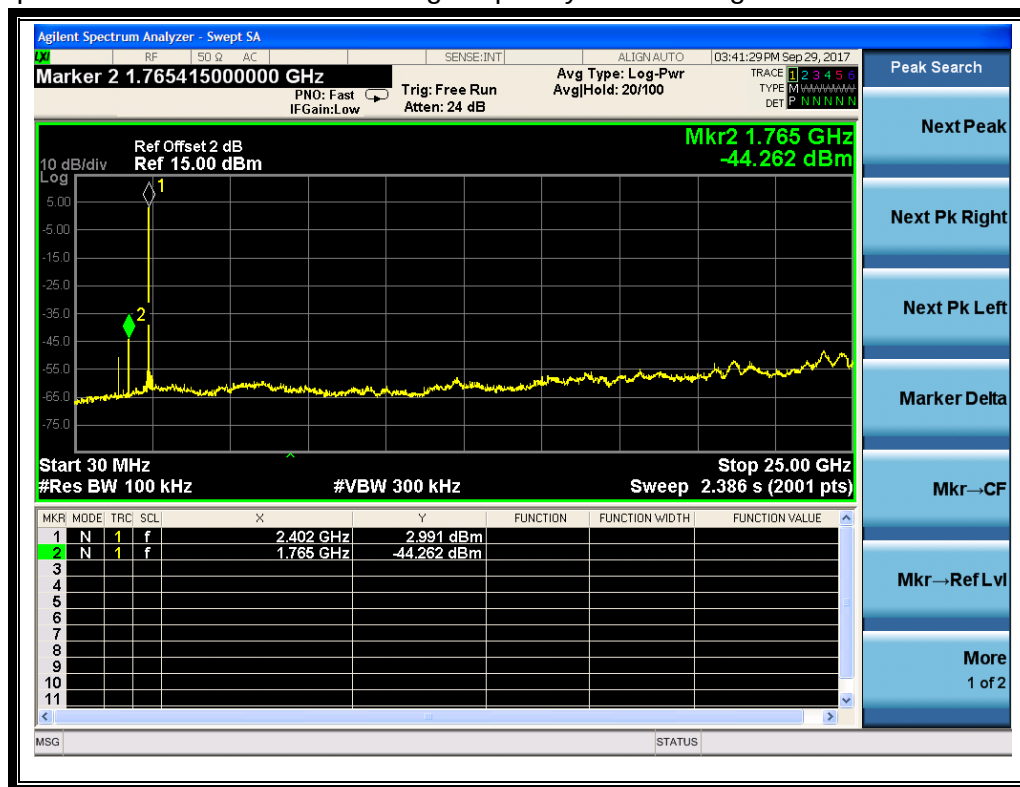

(Plot D: Channel = 0, 30MHz to 25GHz @ $\pi/4$ -DQPSK)

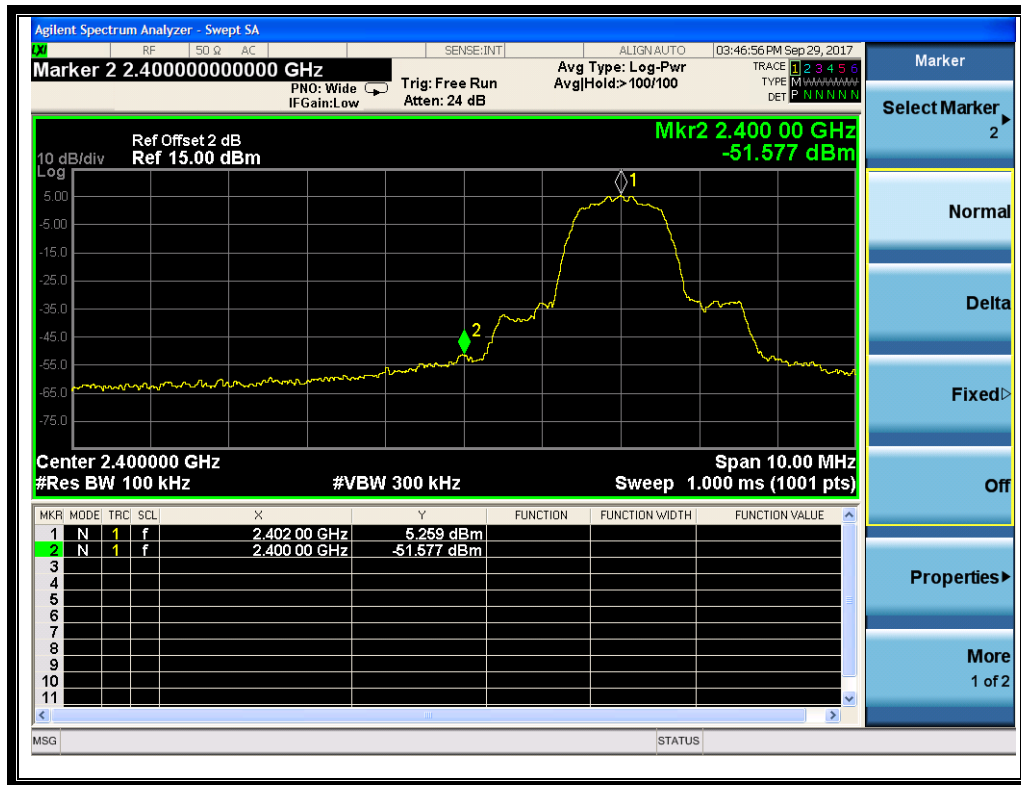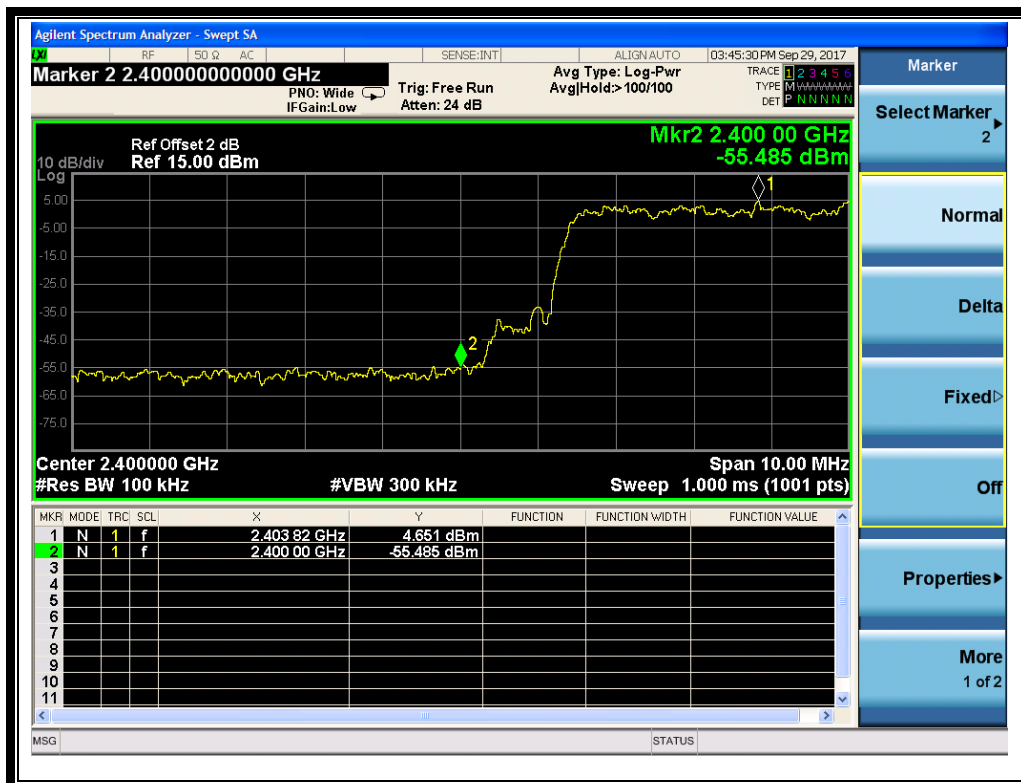(Channel = 0, Band edge @ $\pi/4$ -DQPSK)(Channel = 0, Band edge with hopping on @ $\pi/4$ -DQPSK)

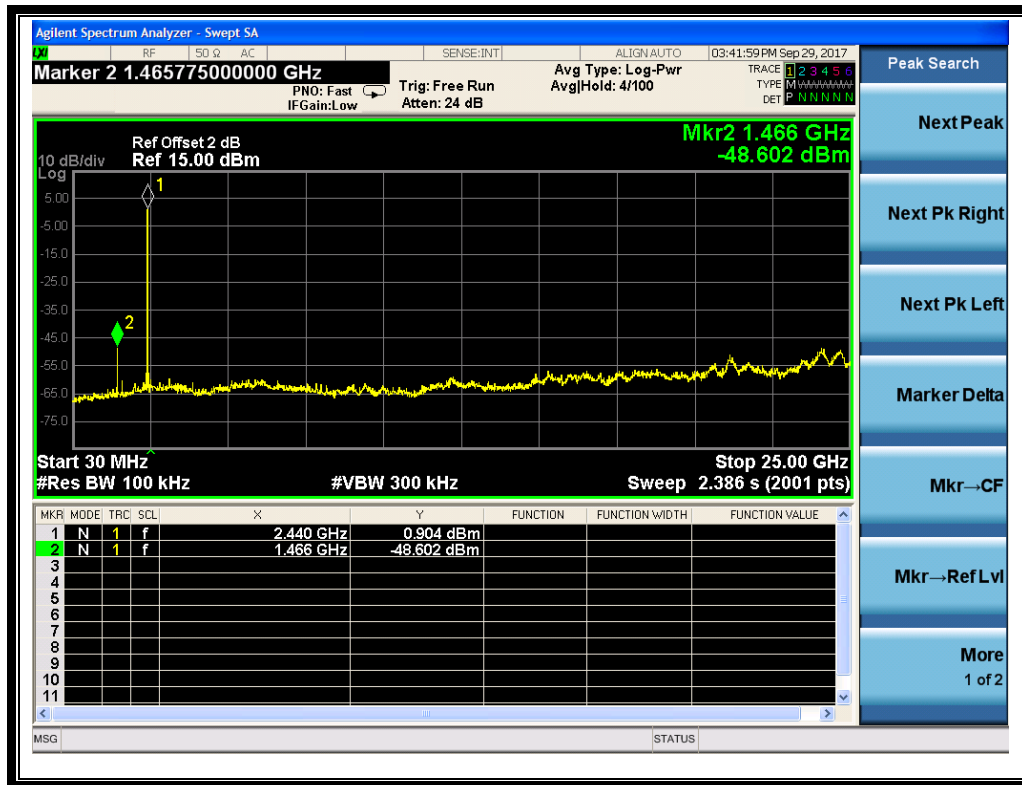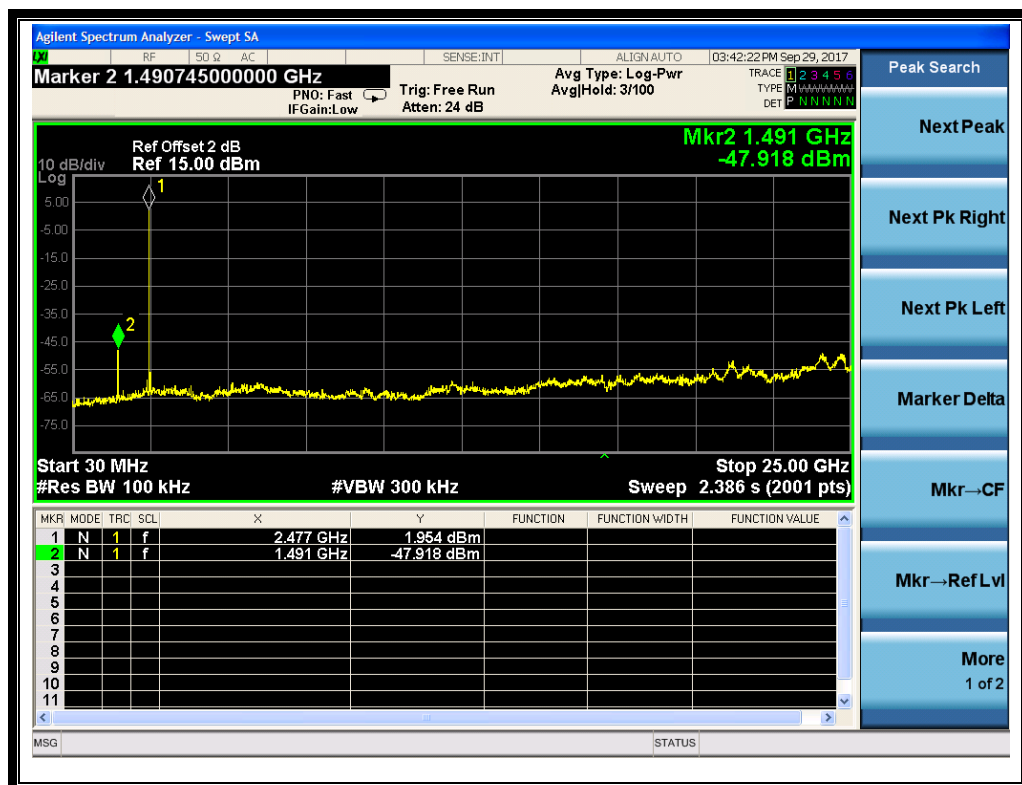(Plot E: Channel = 39, 30MHz to 25GHz @ $\pi/4$ -DQPSK)(Plot F: Channel = 78, 30MHz to 25GHz @ $\pi/4$ -DQPSK)

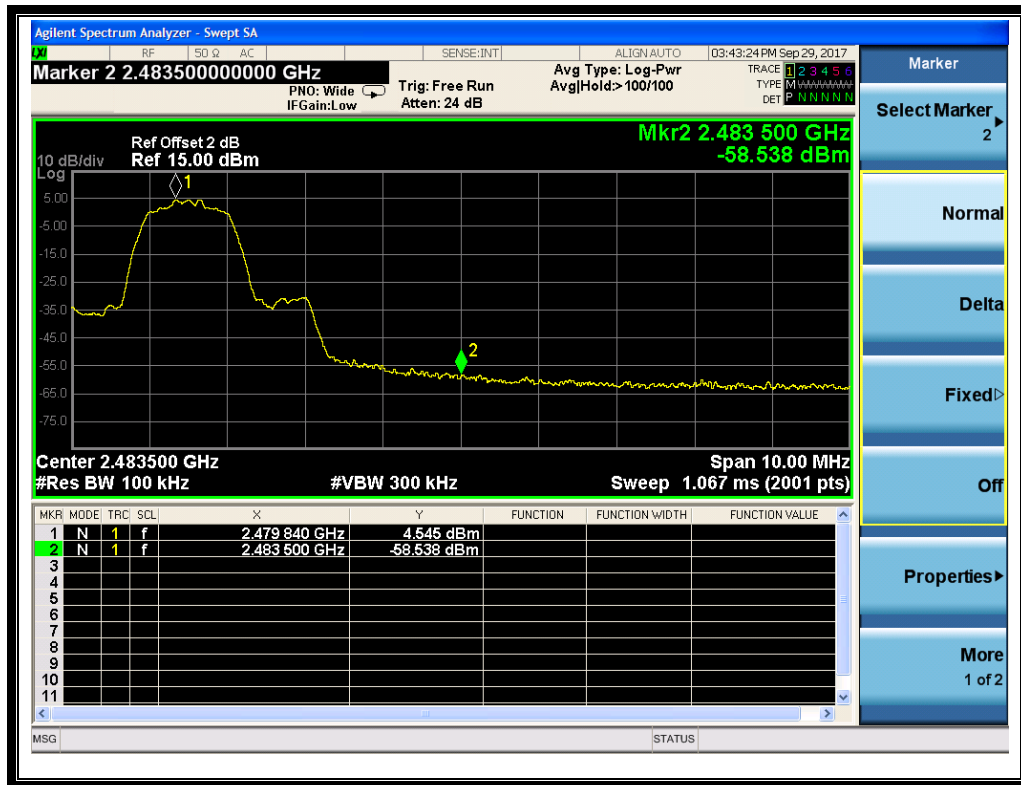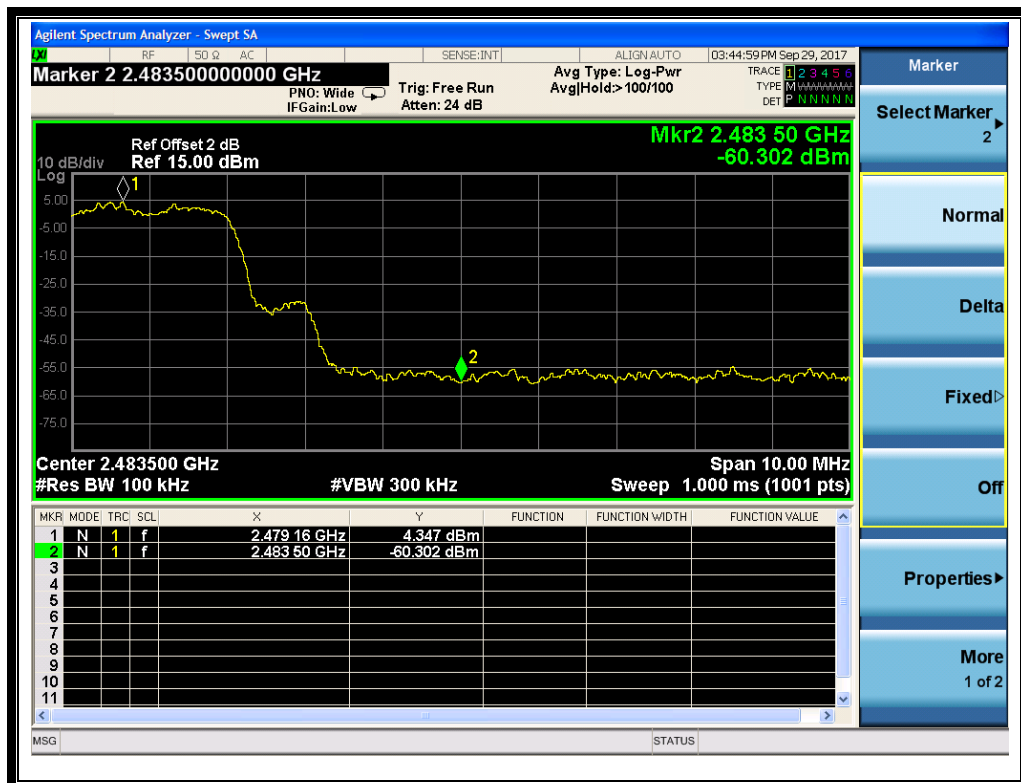(Channel = 78, Band edge @ $\pi/4$ -DQPSK)(Channel = 78, Band edge with hopping on @ $\pi/4$ -DQPSK)




2.7.4.3 8-DPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-44.59	Plot G	4.90	-15.10	PASS
39	2441	-41.85	Plot H	3.42	-16.58	PASS
78	2480	-48.01	Plot I	2.44	-17.56	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

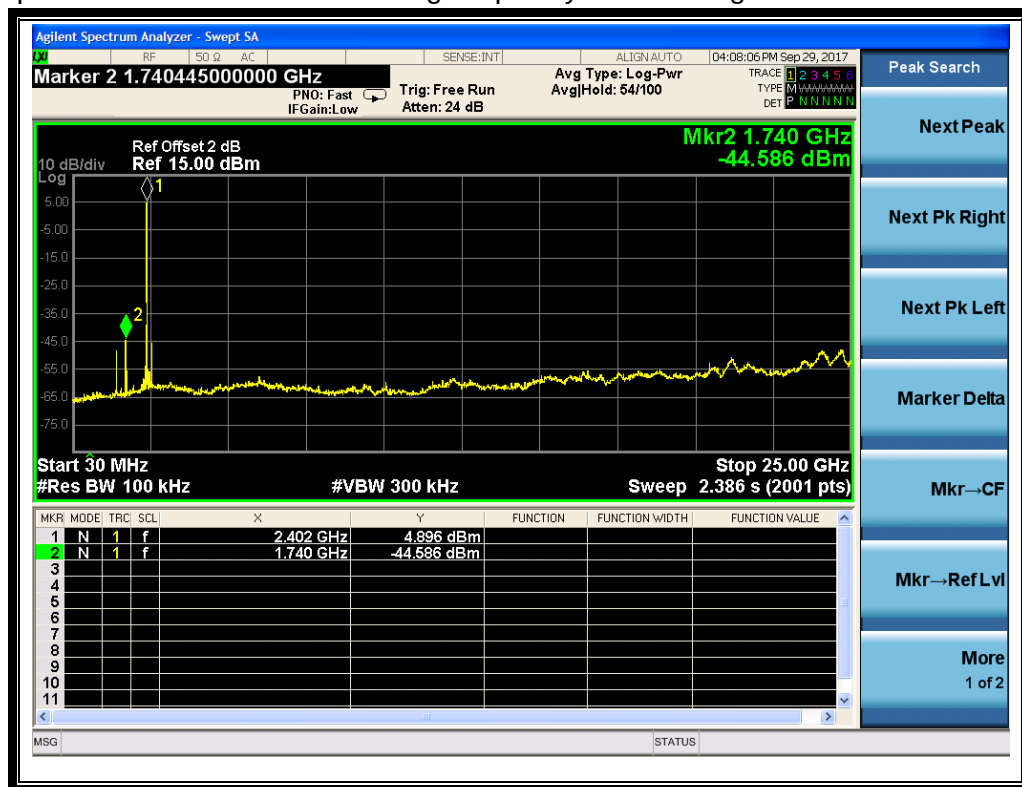


(Plot G: Channel = 0, 30MHz to 25GHz @ 8-DPSK)

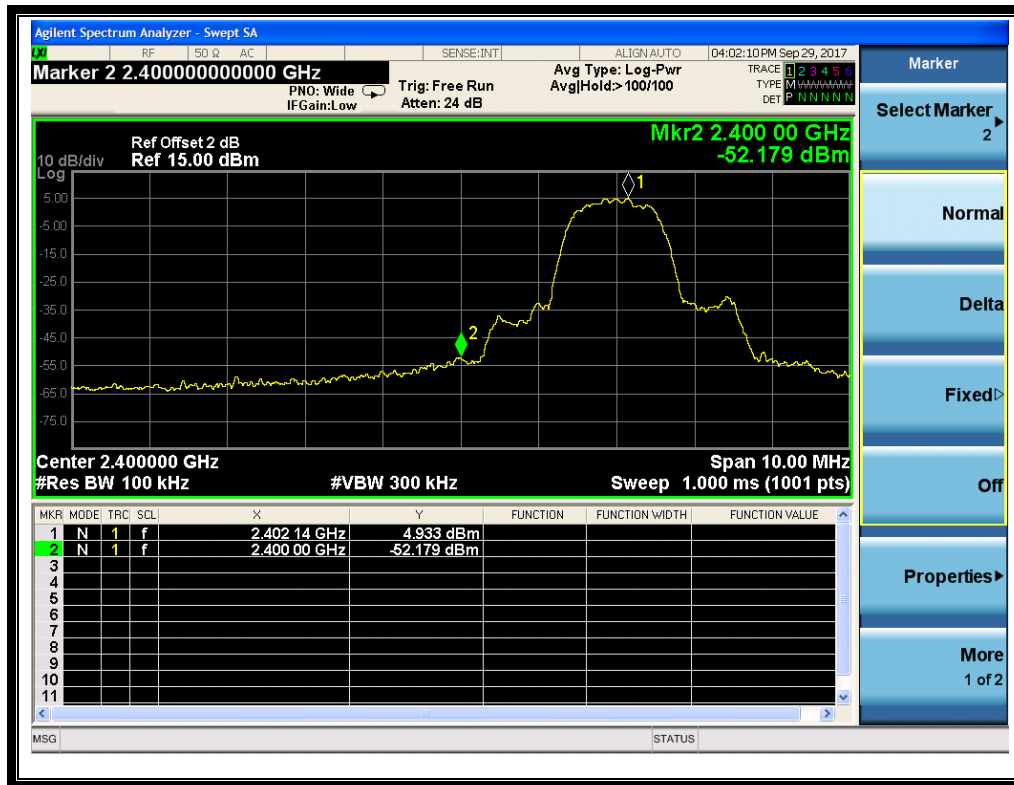


(Channel = 0, Band edge @ 8-DPSK)

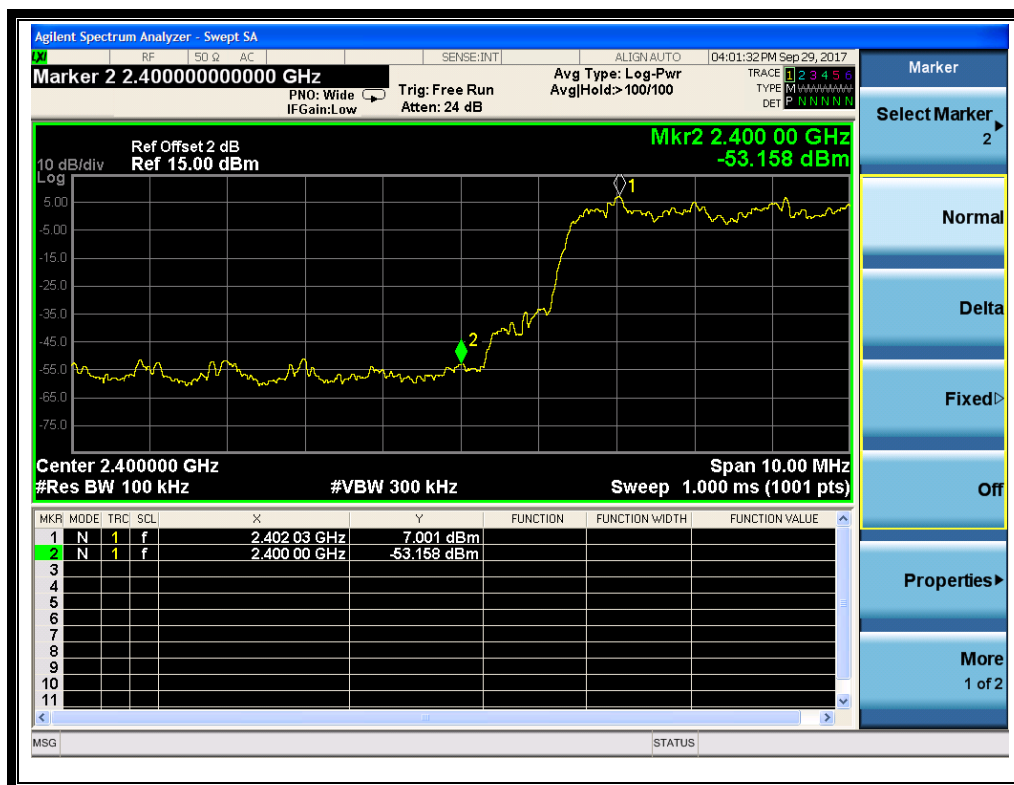


(Channel = 0, Band edge with hopping on @ 8-DPSK)

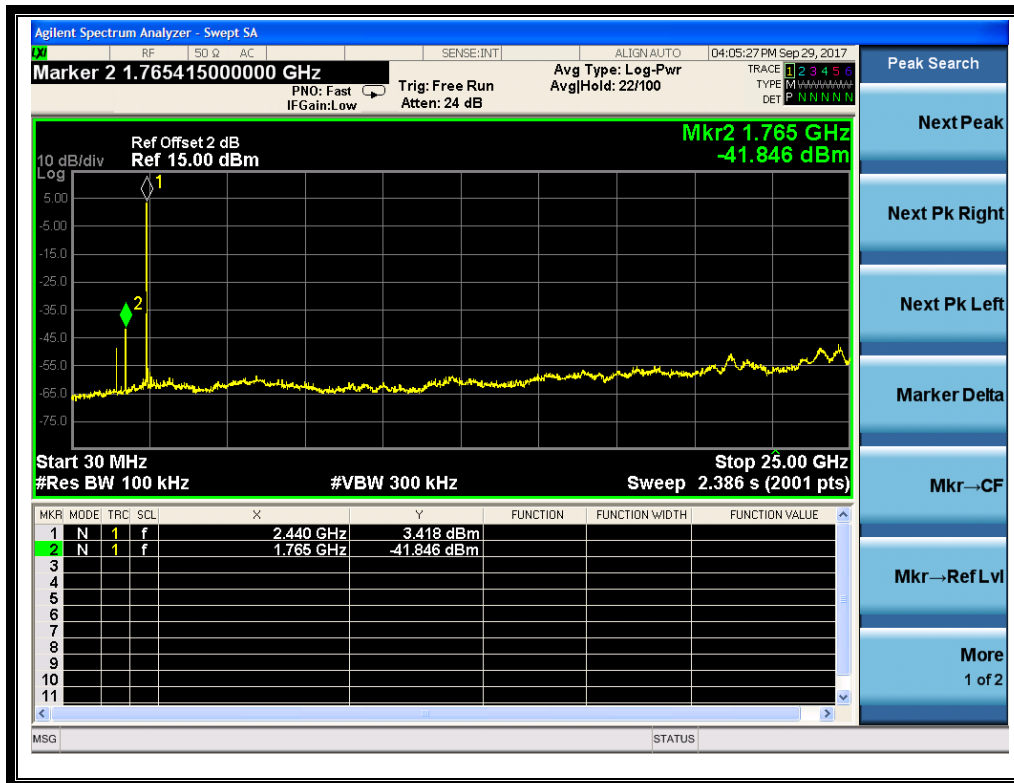


(Plot H: Channel = 39, 30MHz to 25GHz @ 8-DPSK)

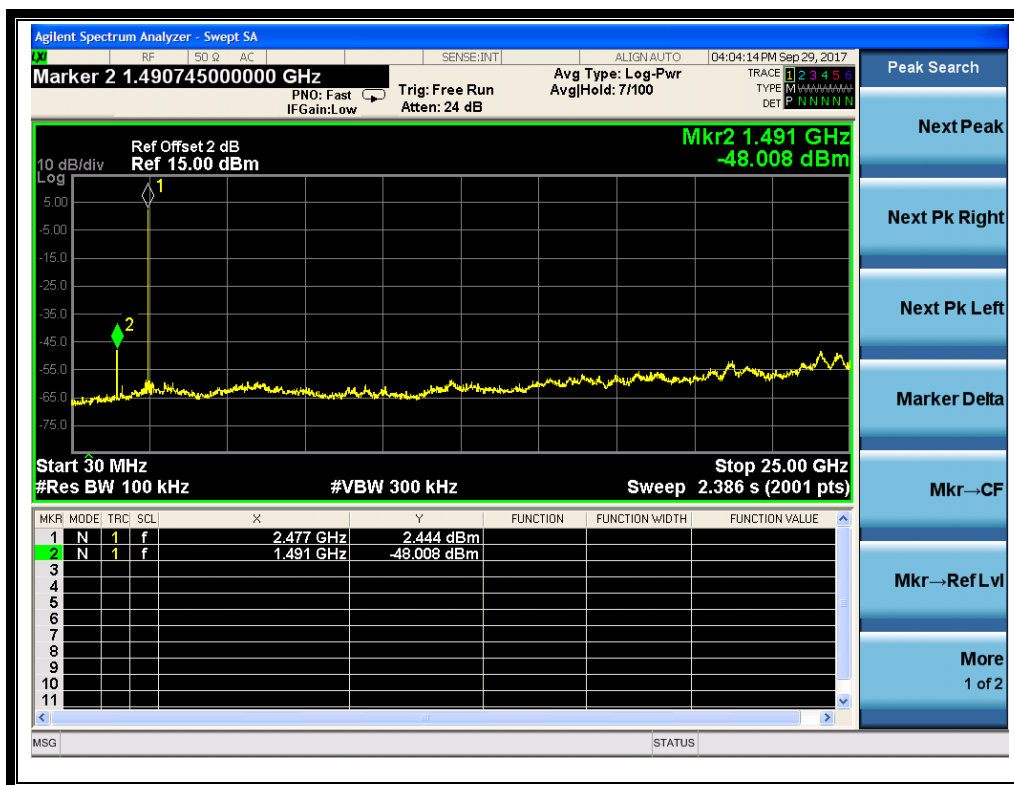

(Plot I: Channel = 78, 30MHz to 25GHz @ 8-DPSK)

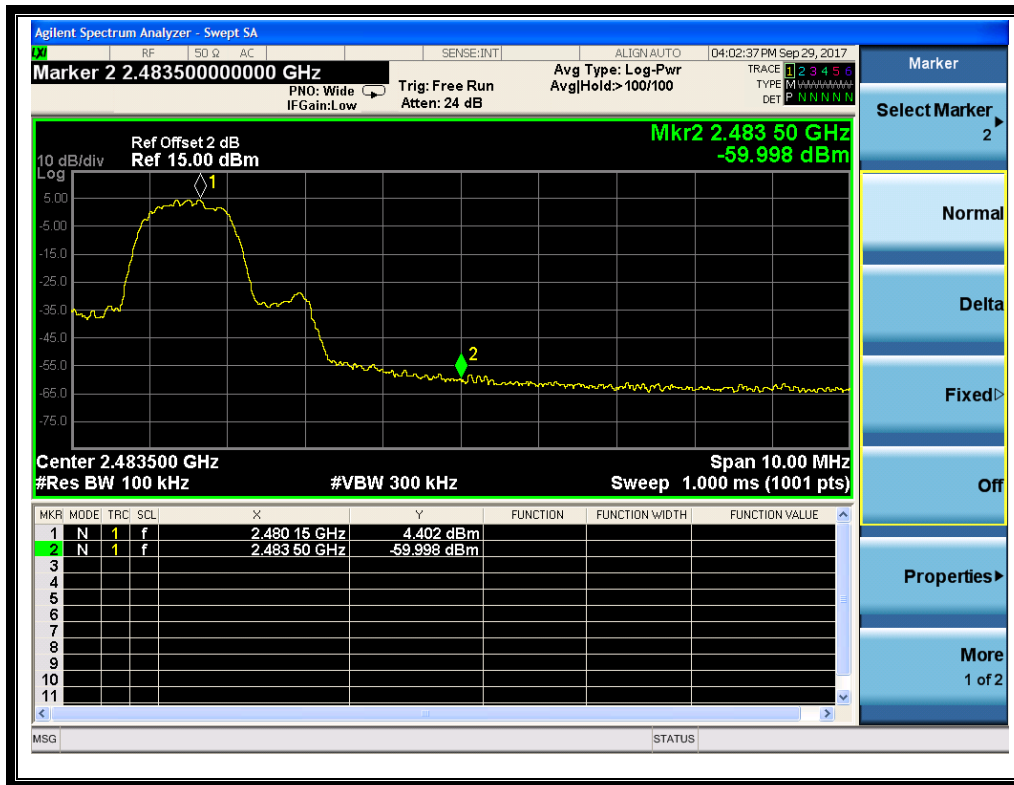

(Plot I.1: Channel = 78, Band edge @ 8-DPSK)

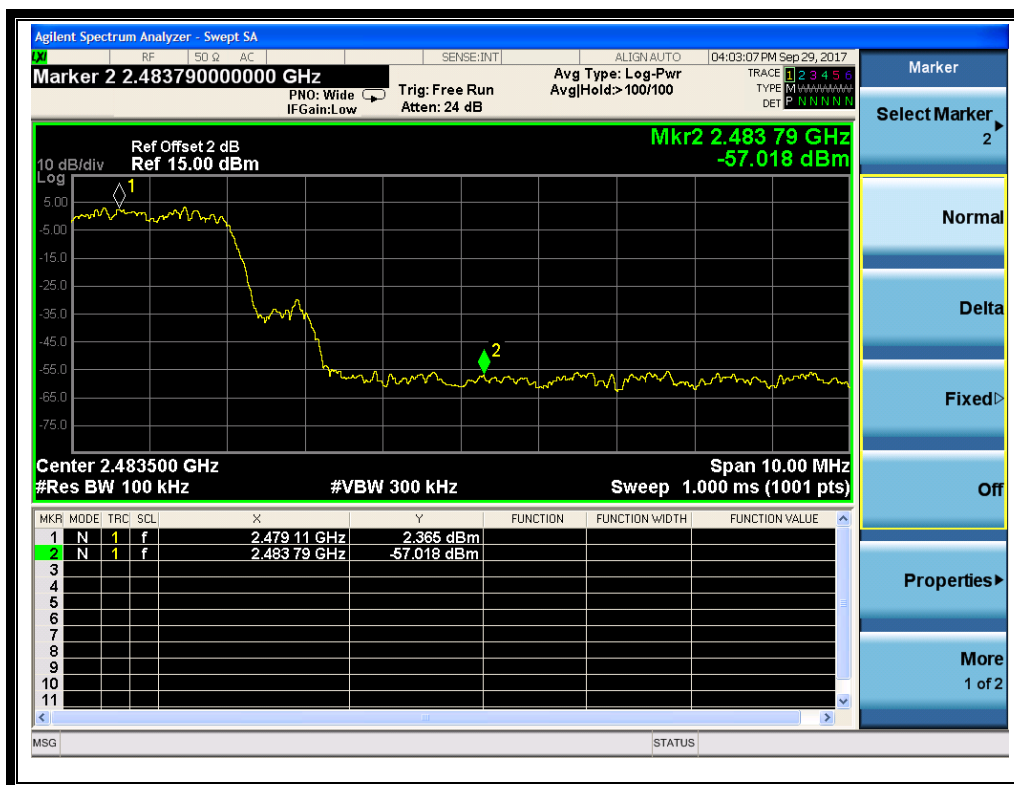

(Plot I.1: Channel = 78, Band edge with hopping on @ 8-DPSK)


2.8 Restricted Frequency Bands

2.8.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2 Test Description

A. Test Setup:

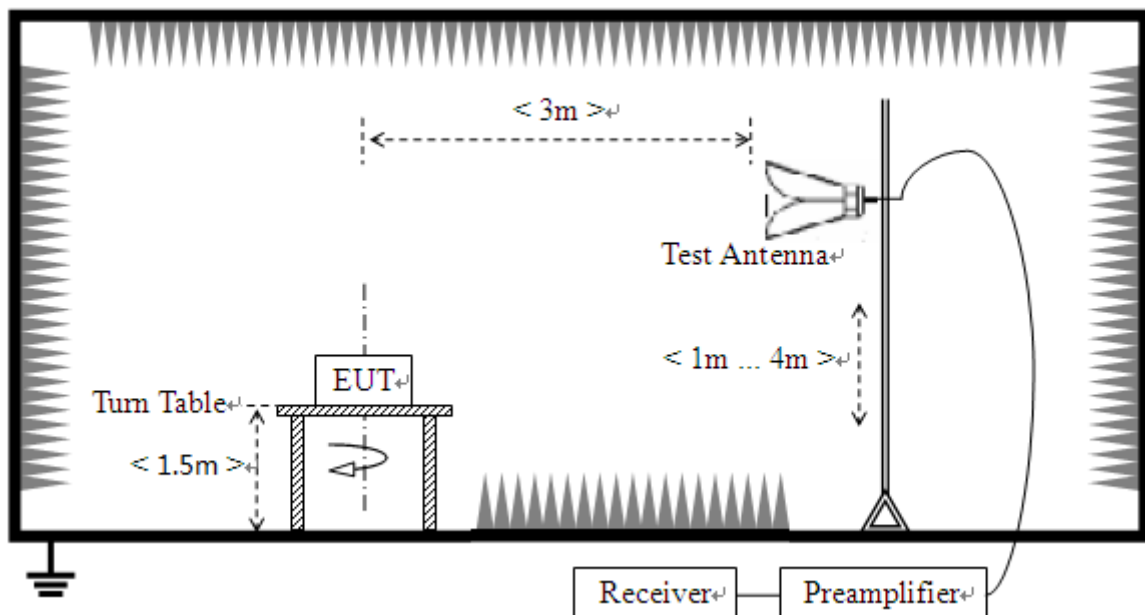

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under non hopping-on test mode transmitting 339 bytes DH5, 679 bytes 2DH5 and 1021 bytes 3DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

**B. Equipments List:**

Please reference ANNEX A(1.5).

2.8.3 Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.8.4 Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

2.8.4.1 GFSK Mode**A. Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2371.66	PK	45.48	-33.63	32.56	44.41	74	Pass
0	2387.78	AV	32.60	-33.63	32.56	31.53	54	Pass
78	2381.43	PK	45.62	-33.18	32.50	44.94	74	Pass
78	2387.15	AV	32.63	-33.18	32.50	31.95	54	Pass




B. Test Plots:

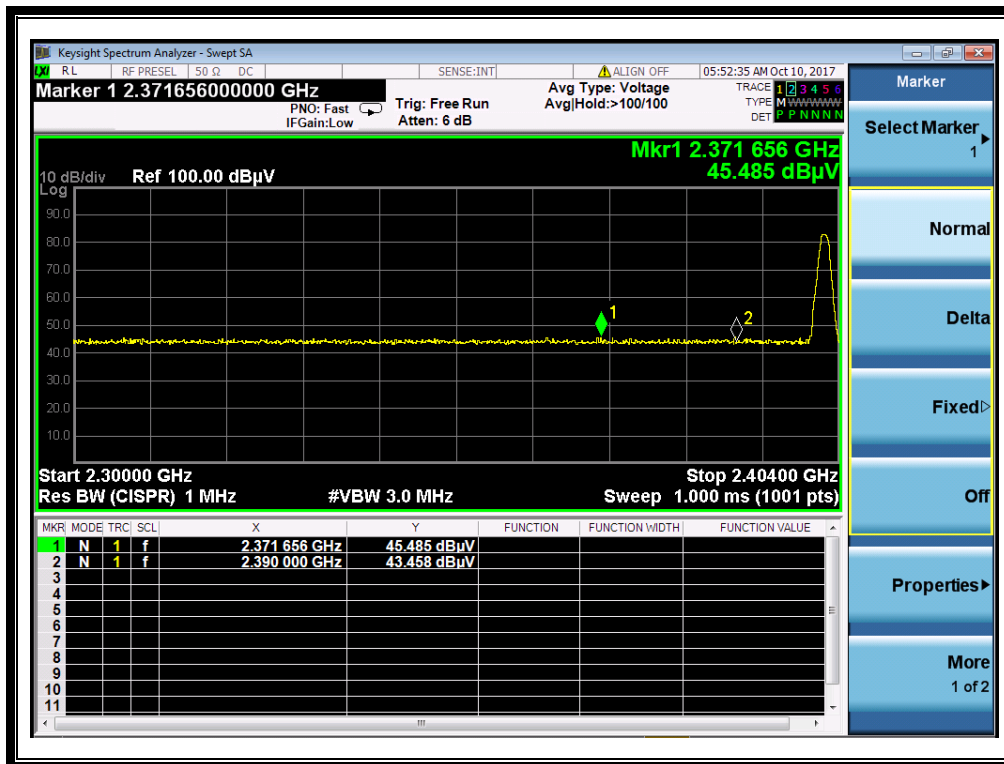


(Plot A1:Channel = 0 PEAK @ GFSK)

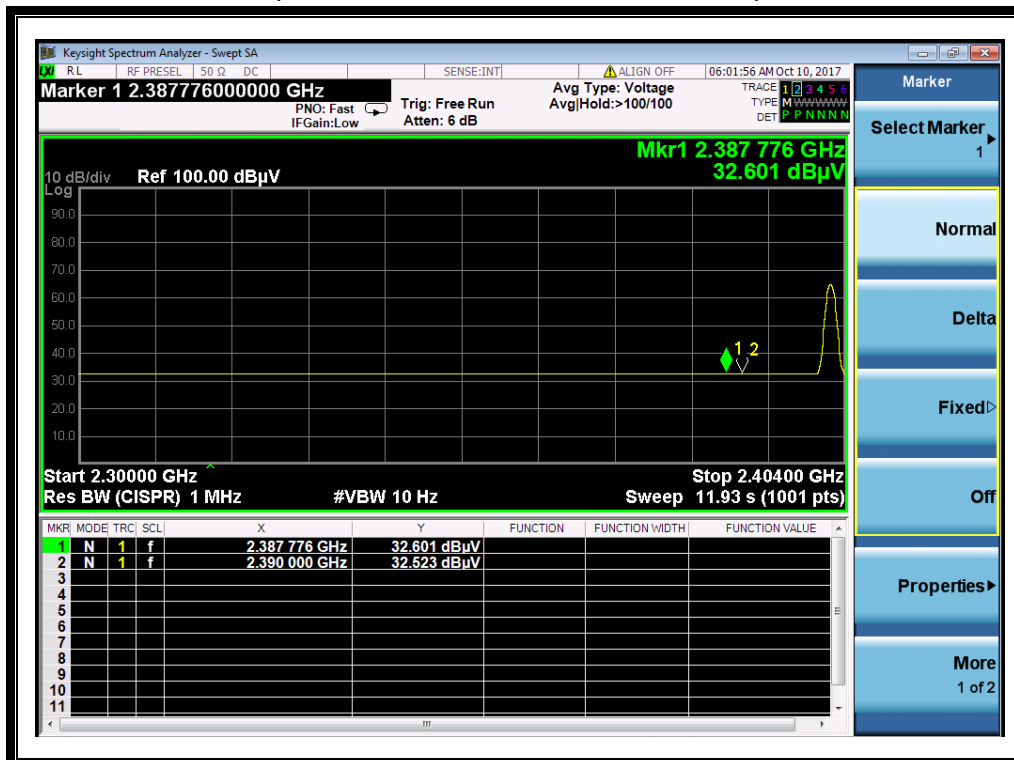

(Plot A2:Channel = 0 AVERAGE @ GFSK)

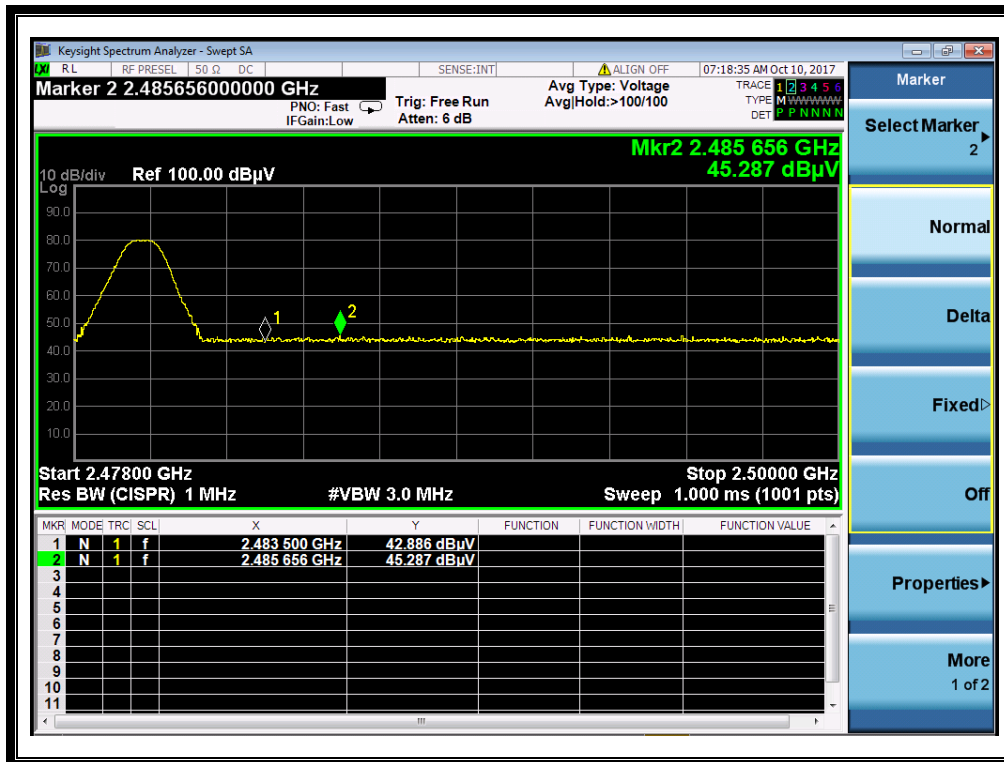

(Plot B1: Channel = 78 PEAK @ GFSK)

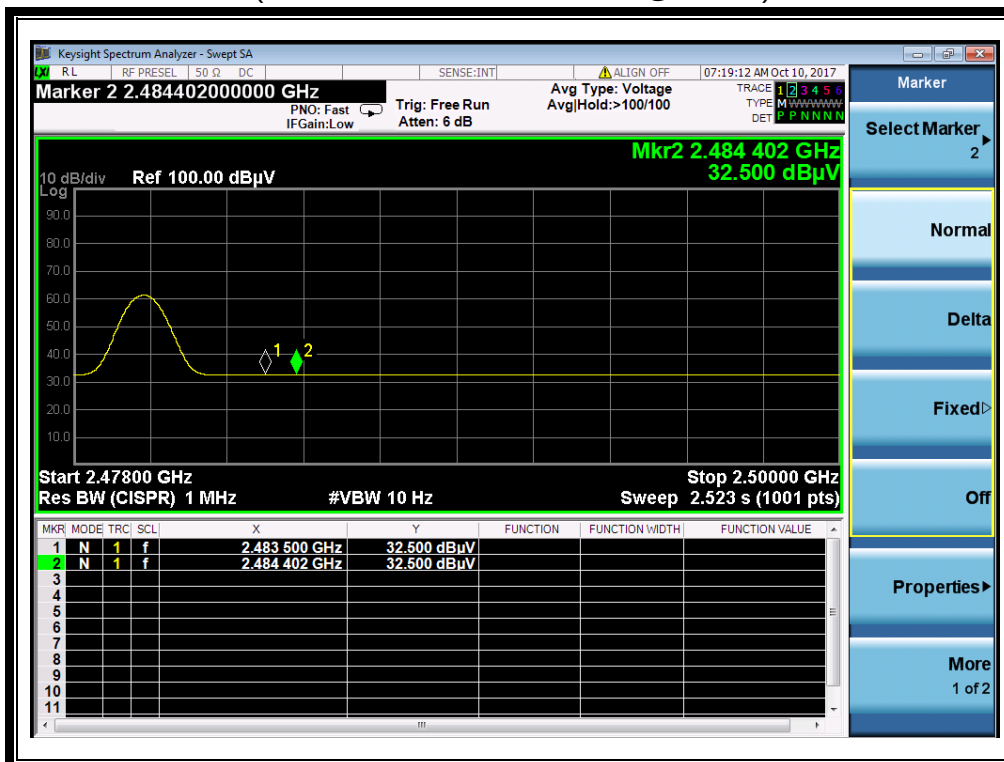

(Plot B2: Channel = 78 AVERAGE @ GFSK)




2.8.4.2 $\pi/4$ -DQPSK Mode



A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2381.43	PK	45.62	-33.63	32.56	44.55	74	Pass
0	2387.15	AV	32.63	-33.63	32.56	31.56	54	Pass
78	2485.66	PK	45.33	-33.18	32.5	44.65	74	Pass
78	2485.06	AV	32.54	-33.18	32.5	31.86	54	Pass

B. Test Plots:

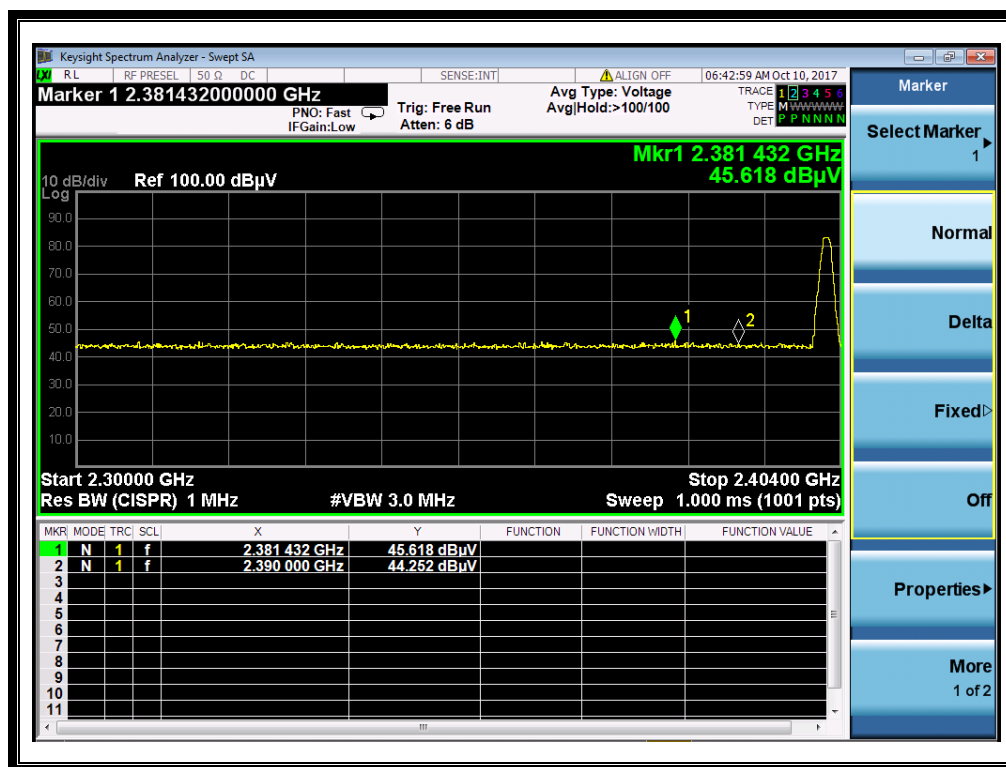

(Plot C1: Channel = 0 PEAK @ $\pi/4$ -DQPSK)

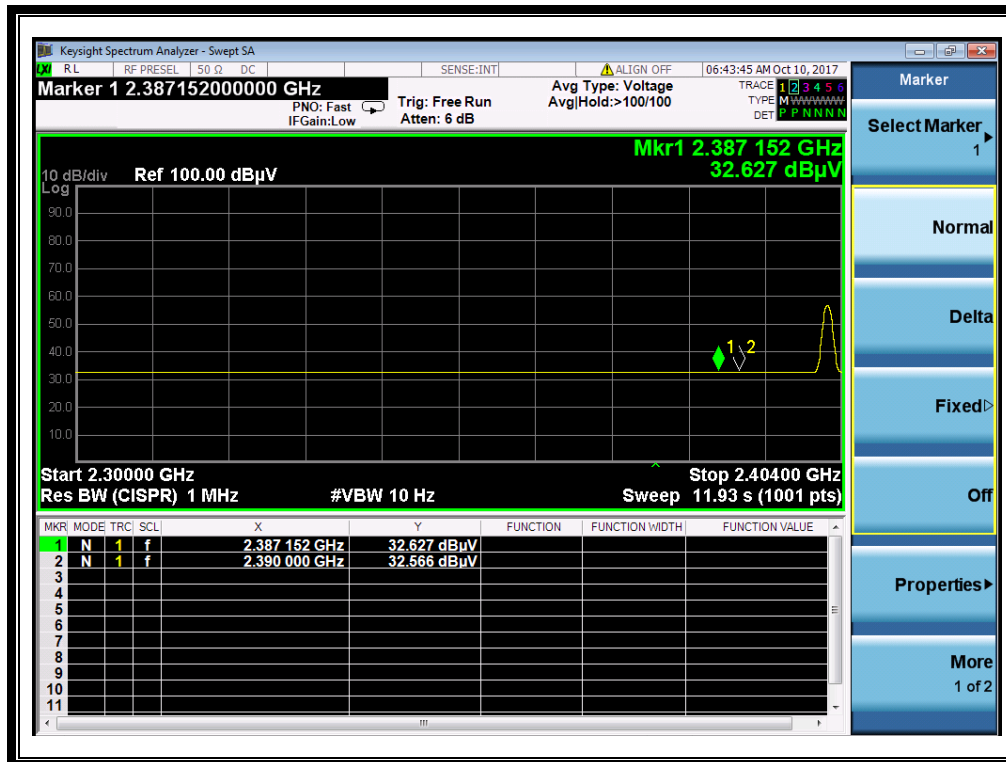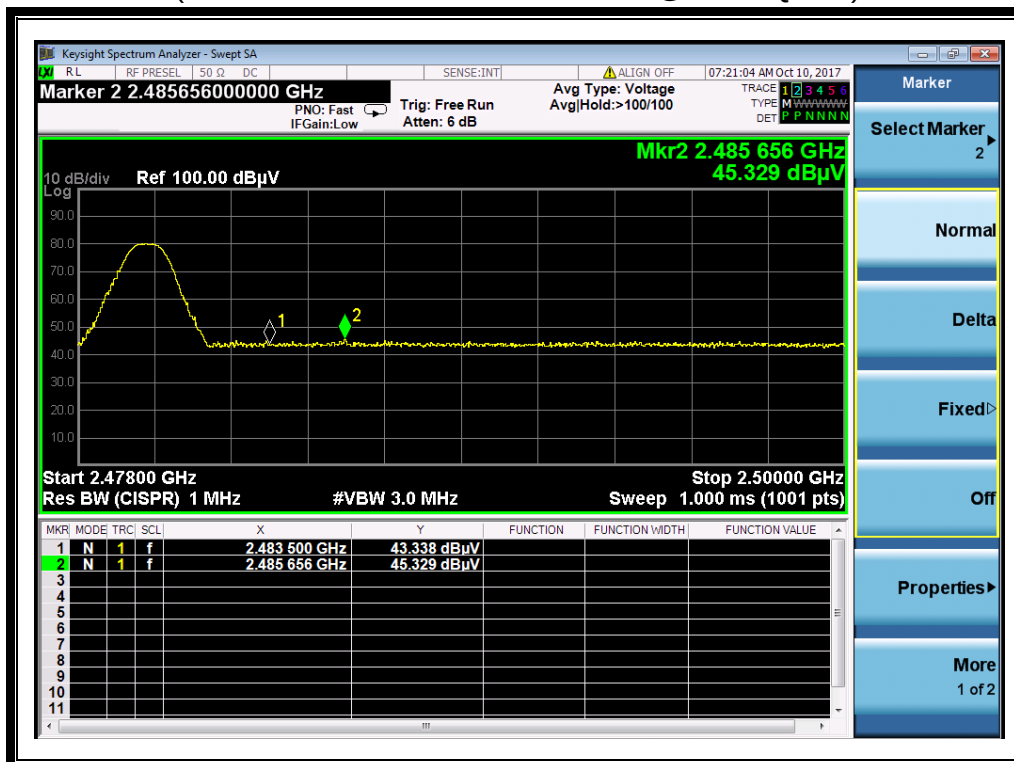(Plot C2: Channel = 0 AVERAGE @ $\pi/4$ -DQPSK)(Plot D1: Channel = 78 PEAK @ $\pi/4$ -DQPSK)

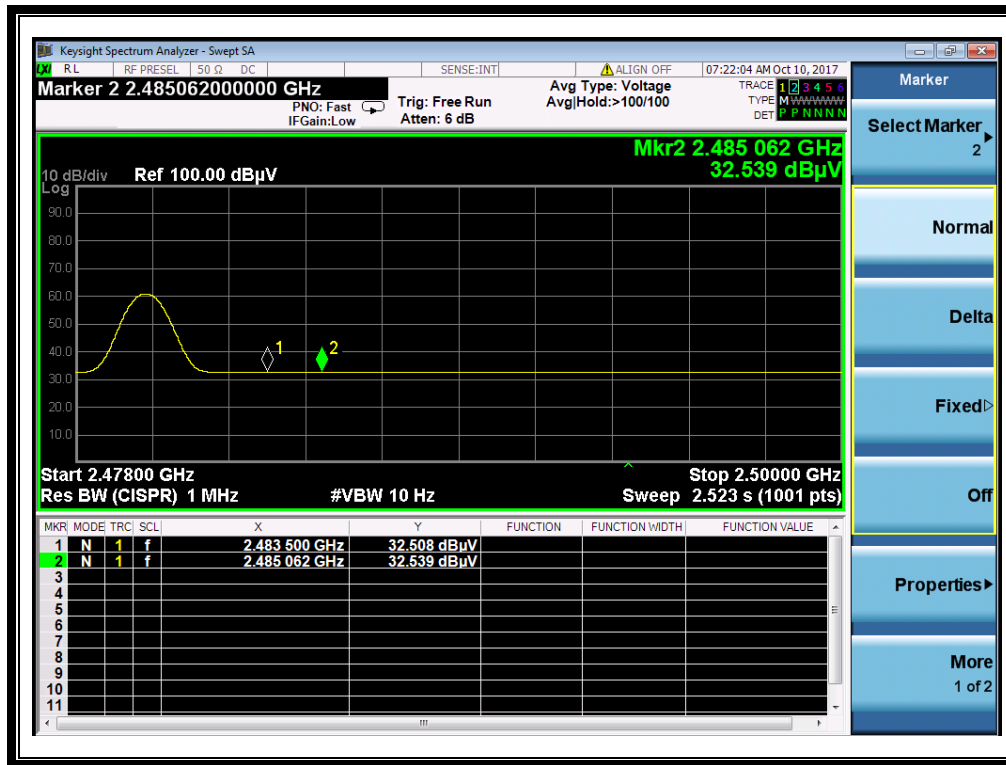

(Plot D2: Channel = 78 AVERAGE@ $\pi/4$ -DQPSK)


2.8.4.3 8-DPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2376.75	PK	44.99	-33.63	32.56	43.92	74	Pass
0	2387.36	AV	32.61	-33.63	32.56	31.54	54	Pass
78	2488.25	PK	45.33	-33.18	32.5	44.65	74	Pass
78	2485.04	AV	32.47	-33.18	32.5	31.79	54	Pass




B. Test Plots:

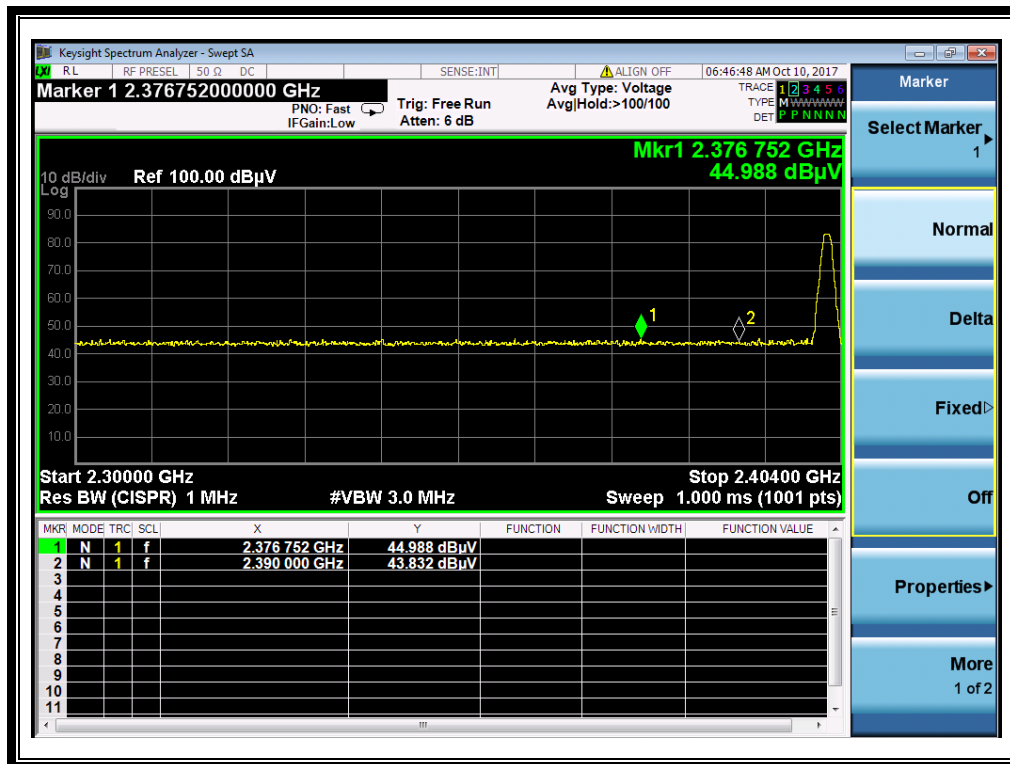


(Plot E1: Channel = 0 PEAK @ 8-DPSK Mode)

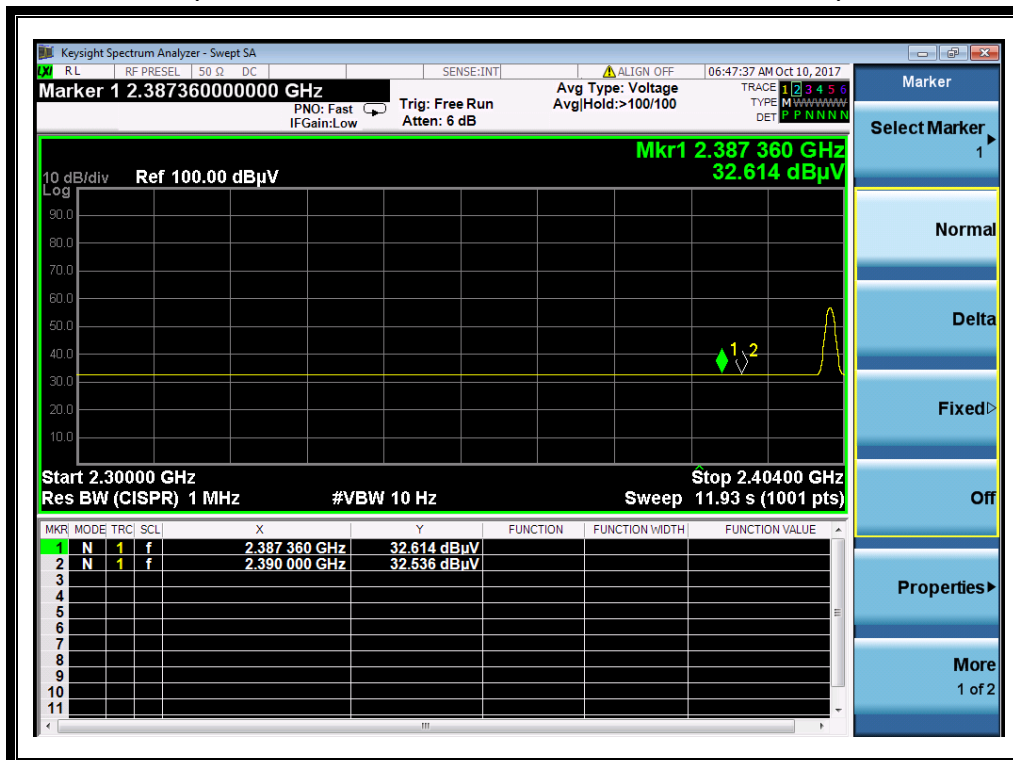

(Plot E2: Channel = 0 AVERAGE @ 8-DPSK Mode)

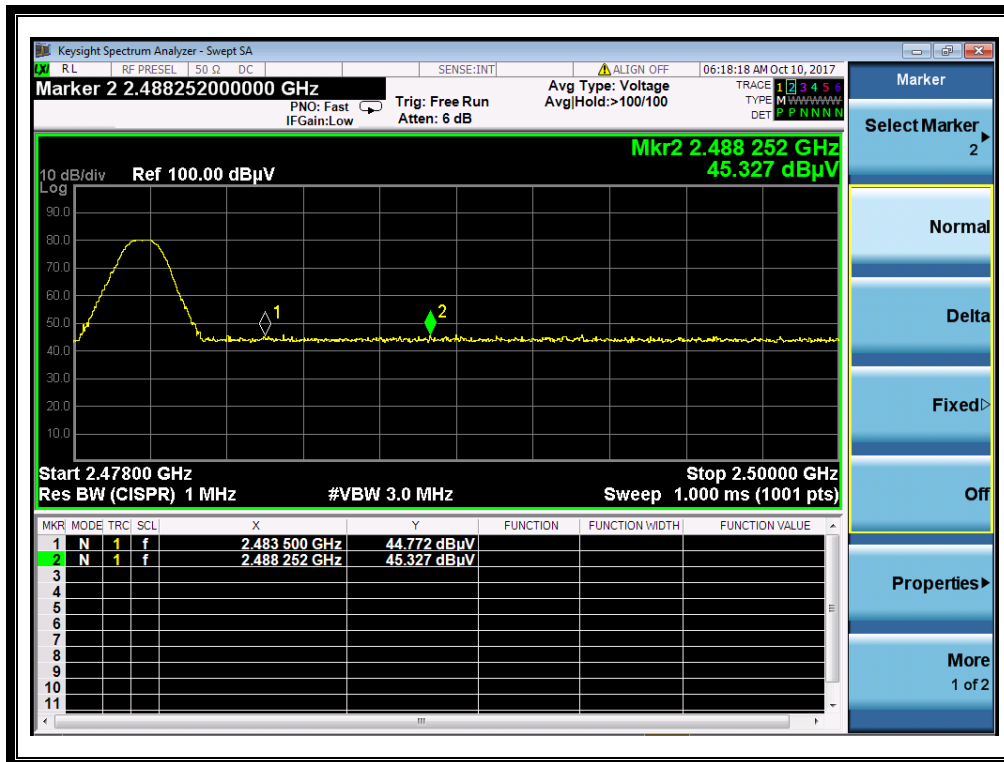

(Plot F1:Channel = 78 PEAK @ 8-DPSK Mode)

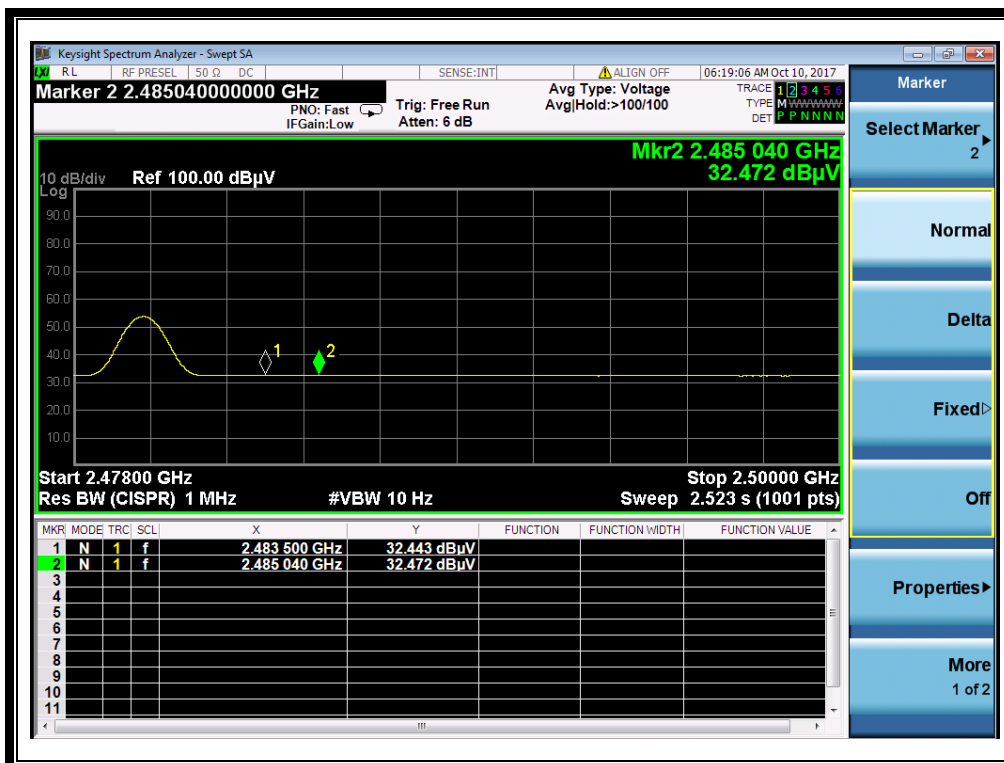

(Plot F2:Channel = 78 AVERAGE @ 8-DPSK Mode)

2.9 Conducted Emission

2.9.1 Requirement

According to RSS-GEN section 8.8, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5- 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.9.2 Test Description

A. Test Setup:

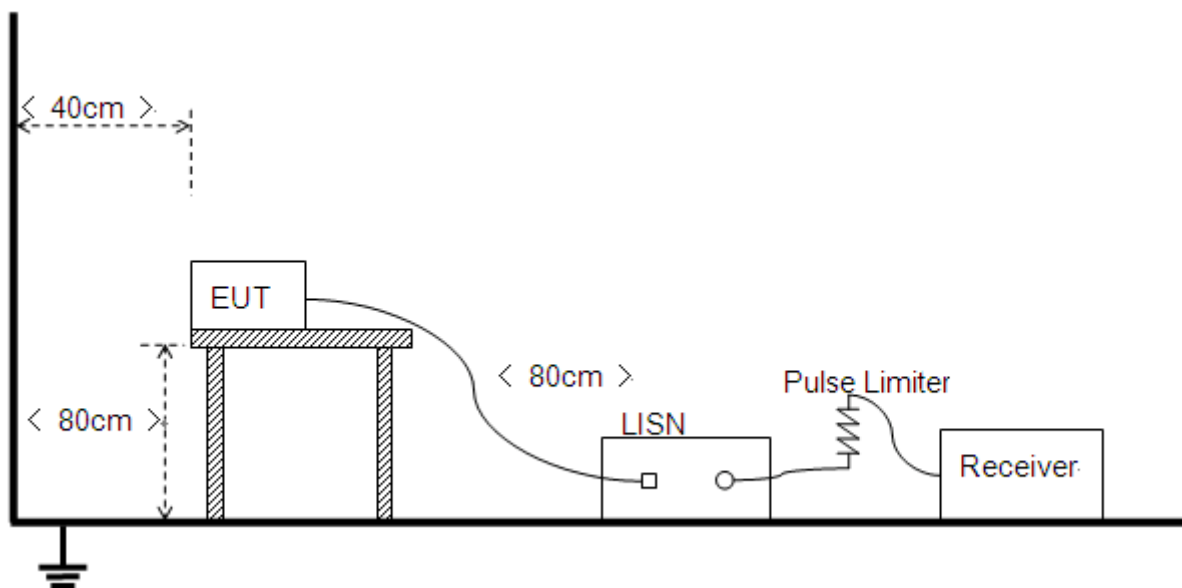

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.



B. Equipments List:

Please reference ANNEX A(1.5).

2.9.3 Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

A. Test setup:

N/A

B. Test Plots:

N/A



2.10 Radiated Emission

2.10.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.10.2 Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

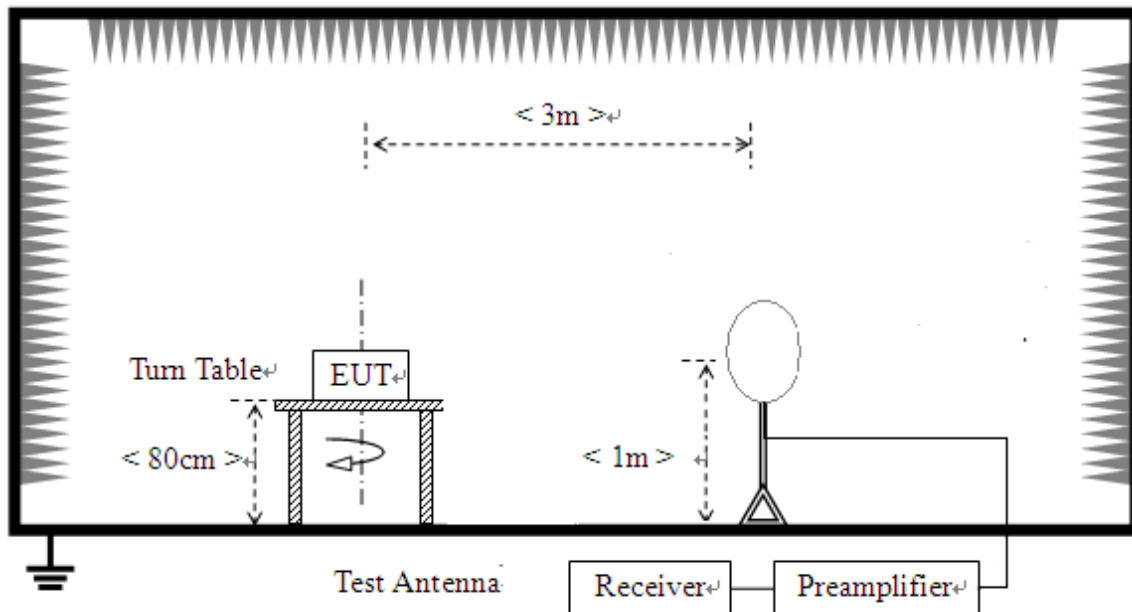

- 2) For radiated emissions from 30MHz to 1GHz

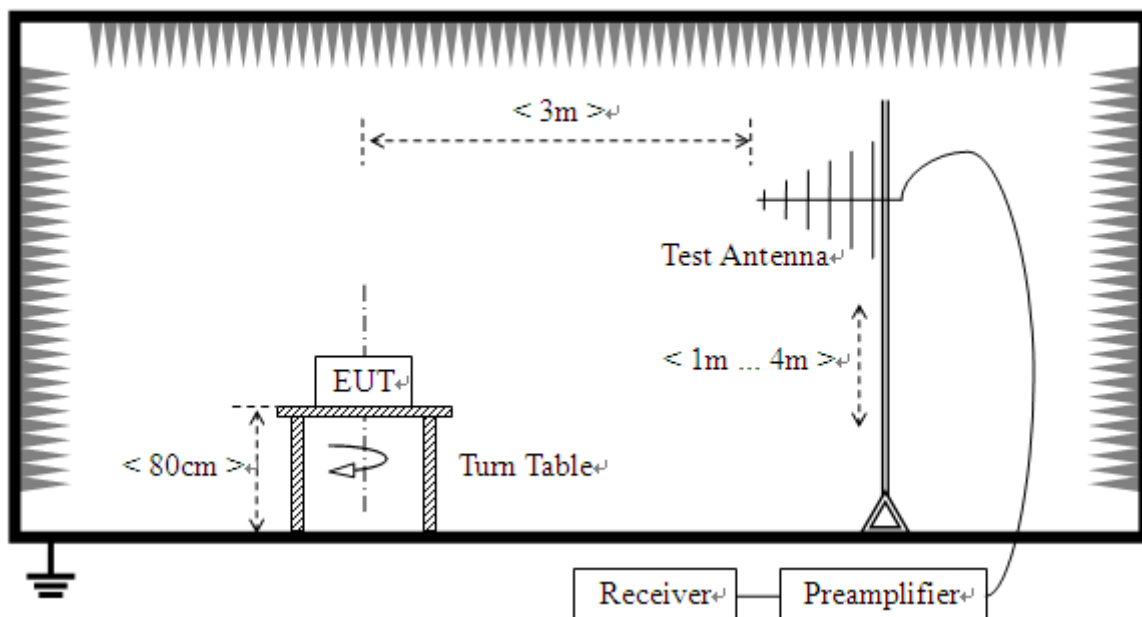

3) For radiated emissions above 1GHz

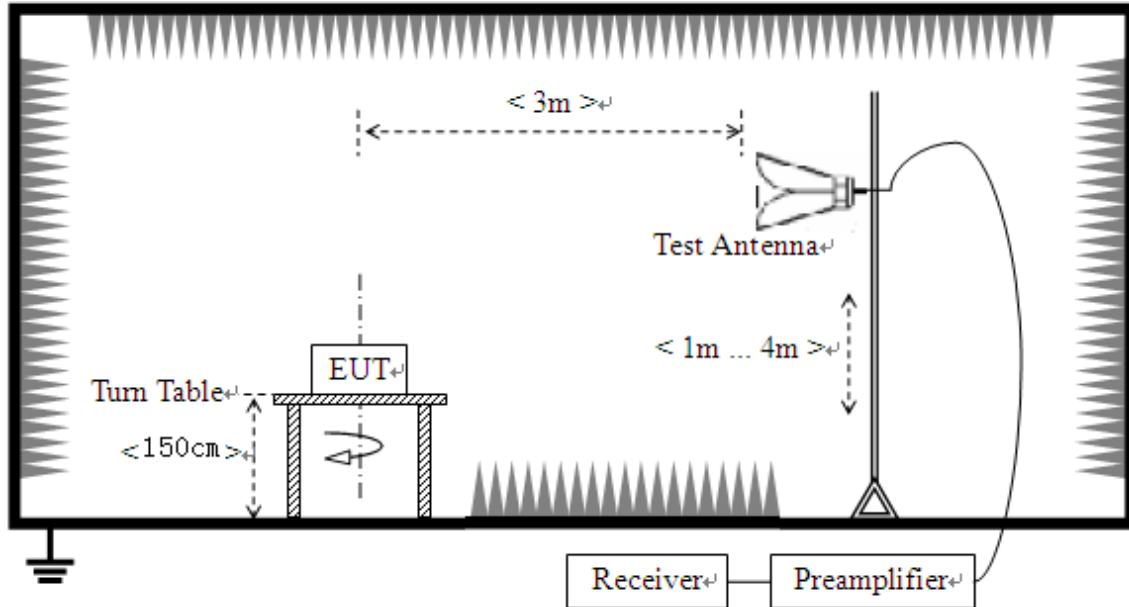

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant



emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.5).

2.10.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.10.4 Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

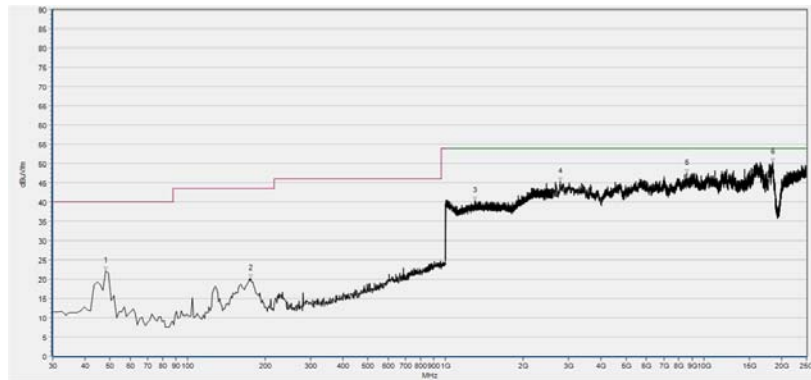**2.10.4.1 GFSK Mode:****A. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 0

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	22.11	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
175.682	20.17	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1295.158	40.42	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
2783.306	45.31	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
8583.924	47.50	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
18506.892	50.38	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 0)

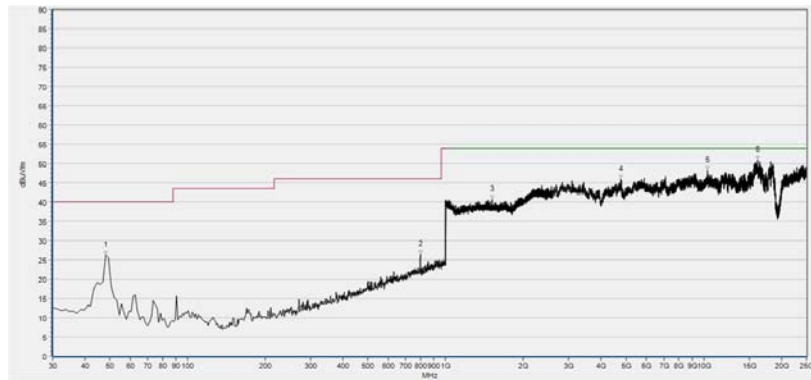


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	26.21	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
797.259	26.34	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1512.845	40.70	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
4763.011	45.89	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
10343.662	48.20	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
16132.060	50.84	N/A	N/A	74.0	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 0)




Plot for Channel = 39

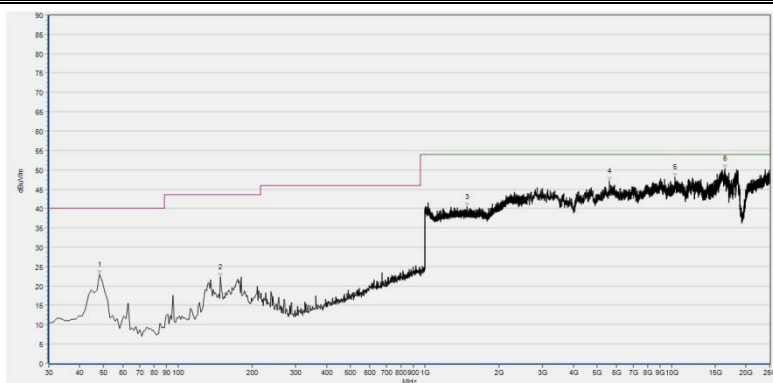

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	22.91	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
148.974	22.22	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1489.156	40.46	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
5598.072	47.15	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
10335.516	48.15	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
16441.644	50.22	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 39)

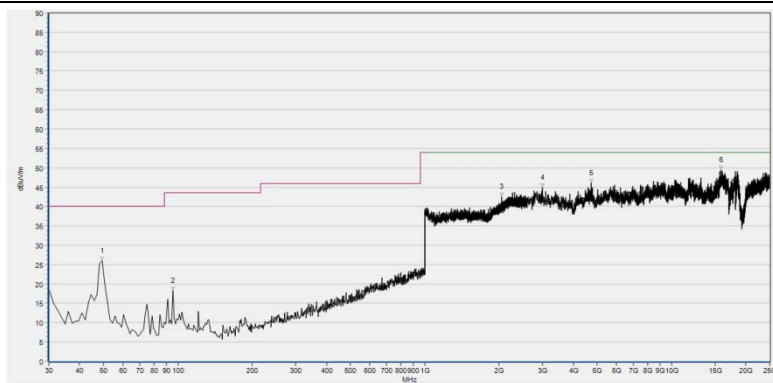


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	25.99	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
95.557	18.23	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2053.221	42.58	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
2999.200	44.99	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
4718.203	46.17	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
15895.799	49.43	N/A	N/A	74.0	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 39)




Plot for Channel = 78

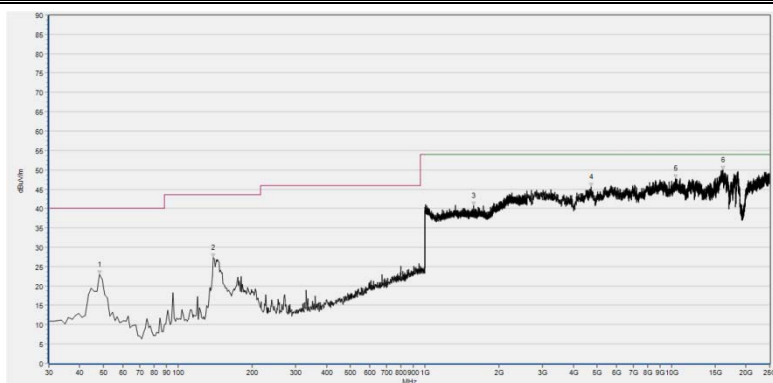

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	22.95	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
139.262	27.24	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1580.712	40.72	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
4718.203	45.63	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
10412.911	47.79	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
16197.236	49.97	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 78)

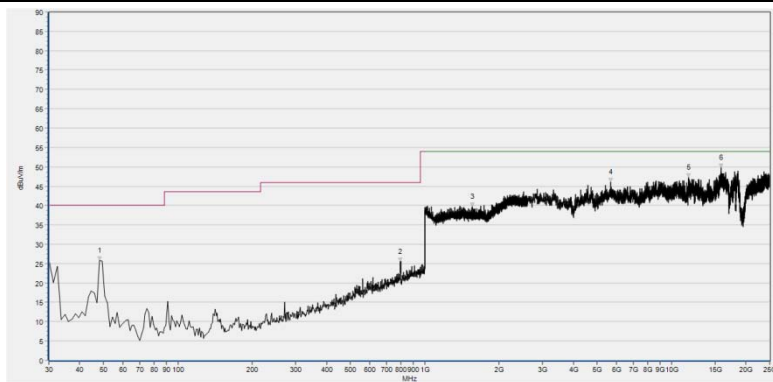

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	25.76	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
796.045	25.40	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1558.303	39.69	N/A	N/A	74.0	N/A	N/A	Vertical	PASS
5663.248	46.10	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
11736.789	47.22	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
15903.946	49.76	N/A	N/A	74.0	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 78)




2.10.4.2 $\pi/4$ -DQPSK Mode:

B. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 0

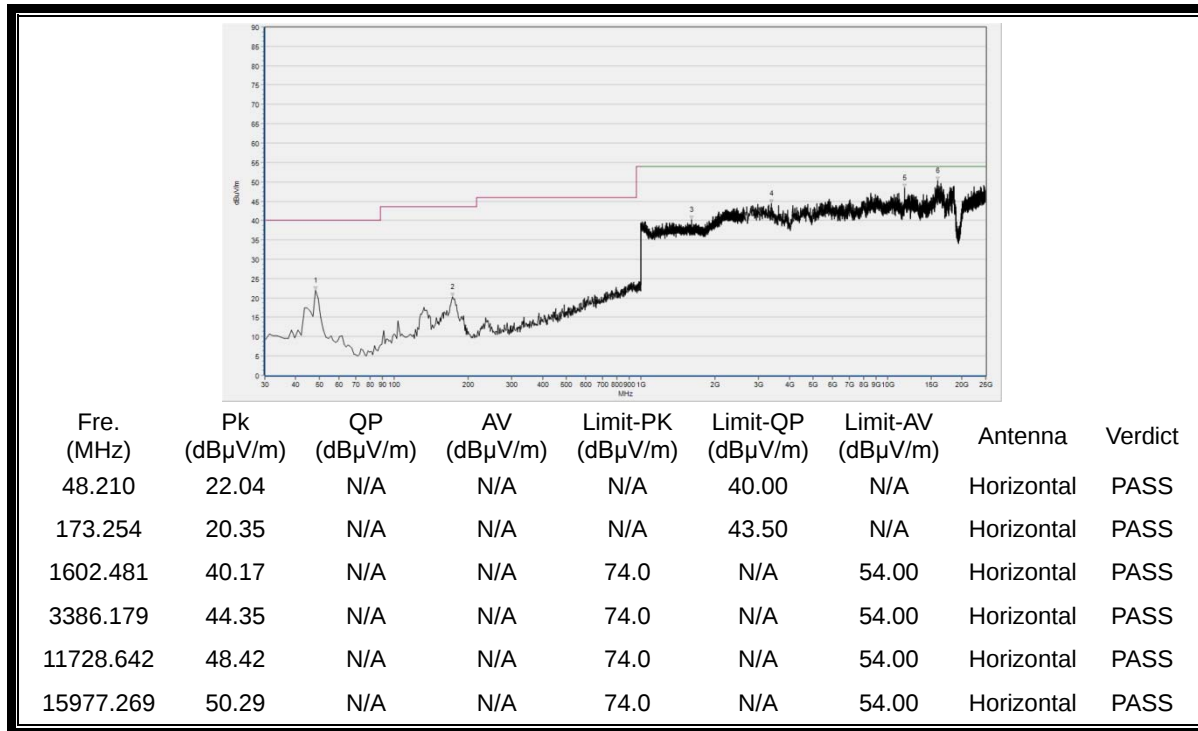


(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 0)

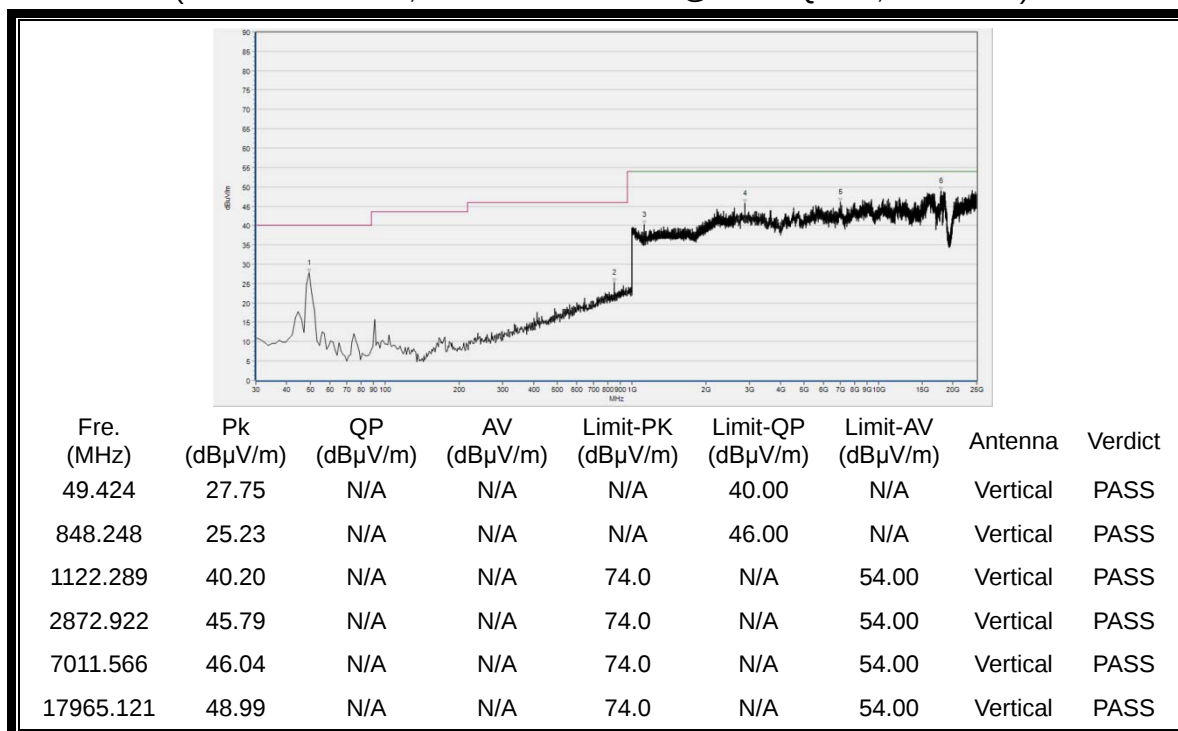

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 0)




Plot for Channel = 39

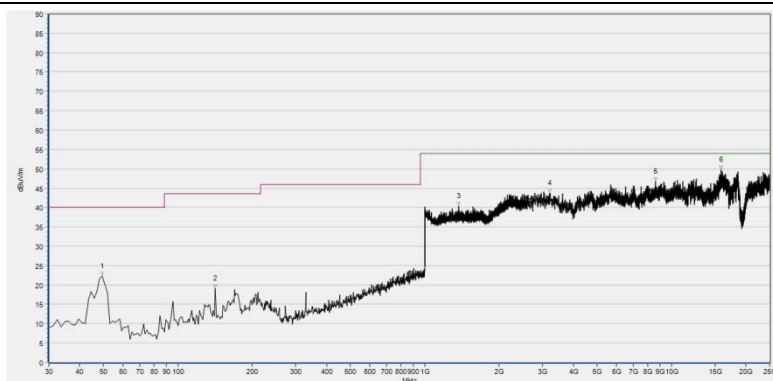

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	22.28	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
141.690	19.04	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1375.830	40.46	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
3198.800	43.67	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
8587.998	46.76	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
15879.505	49.71	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 39)

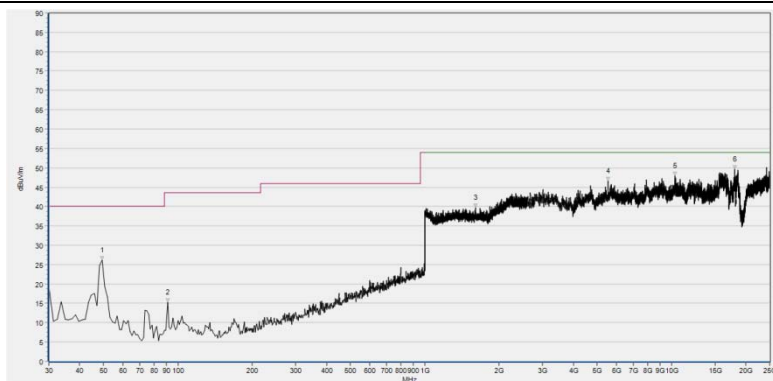


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	26.10	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
90.701	15.25	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1609.524	39.68	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
5520.676	46.58	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
10290.707	47.86	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
17985.488	49.54	N/A	N/A	74.0	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 39)



Plot for Channel = 78

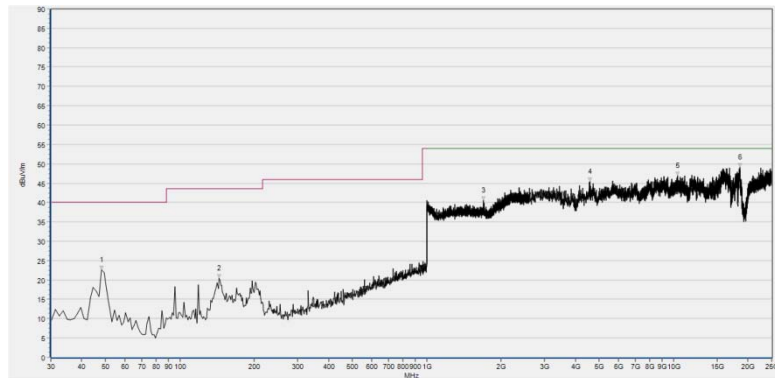


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	22.58	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
144.118	20.48	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1695.958	40.51	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
4587.852	45.42	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
10404.765	46.91	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
18567.994	49.04	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

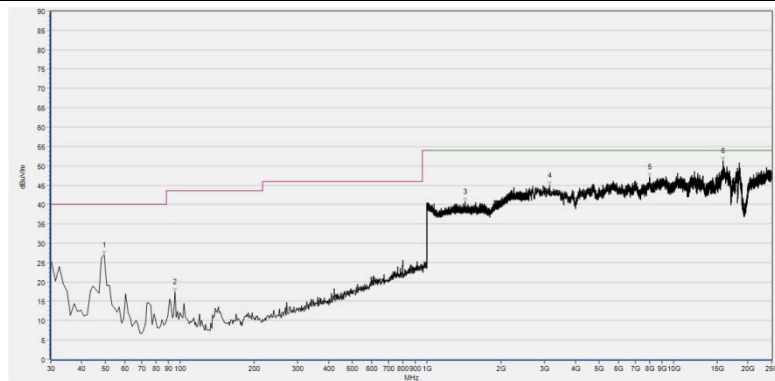(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 78)


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	27.02	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
95.557	17.45	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1433.453	40.73	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
3149.918	44.93	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
7981.051	47.14	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
15879.505	51.37	N/A	N/A	74.0	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 78)

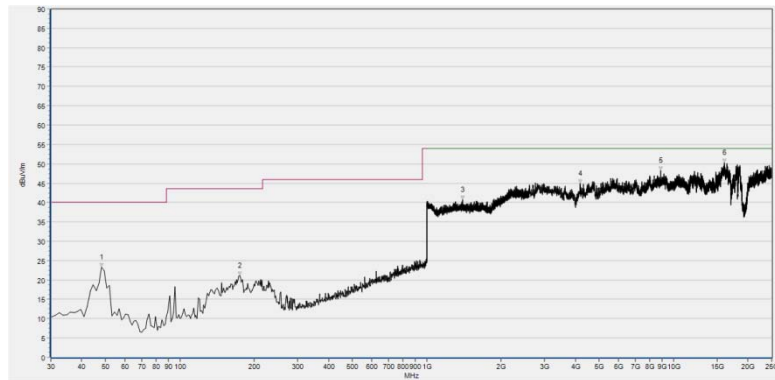**2.10.4.3 8-DPSK Mode:****C. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 0

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	23.36	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
174.468	21.03	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1395.678	40.69	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
4192.726	44.85	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
8885.361	48.28	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
16034.297	50.36	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 0)

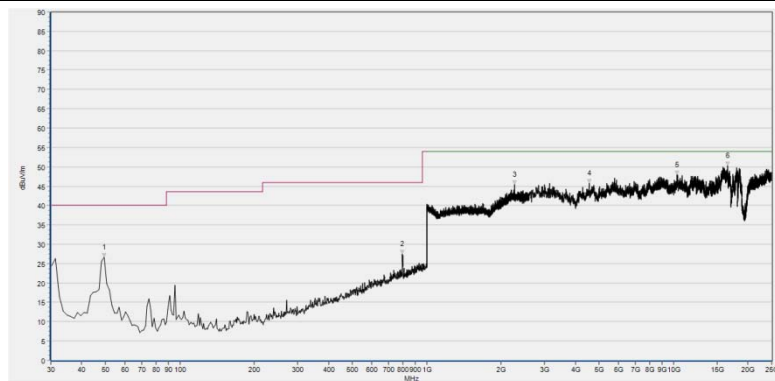


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	26.65	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
796.045	27.44	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2265.786	45.42	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
4543.044	45.76	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
10315.148	47.88	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
16559.775	50.31	N/A	N/A	74.0	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 0)



Plot for Channel = 39

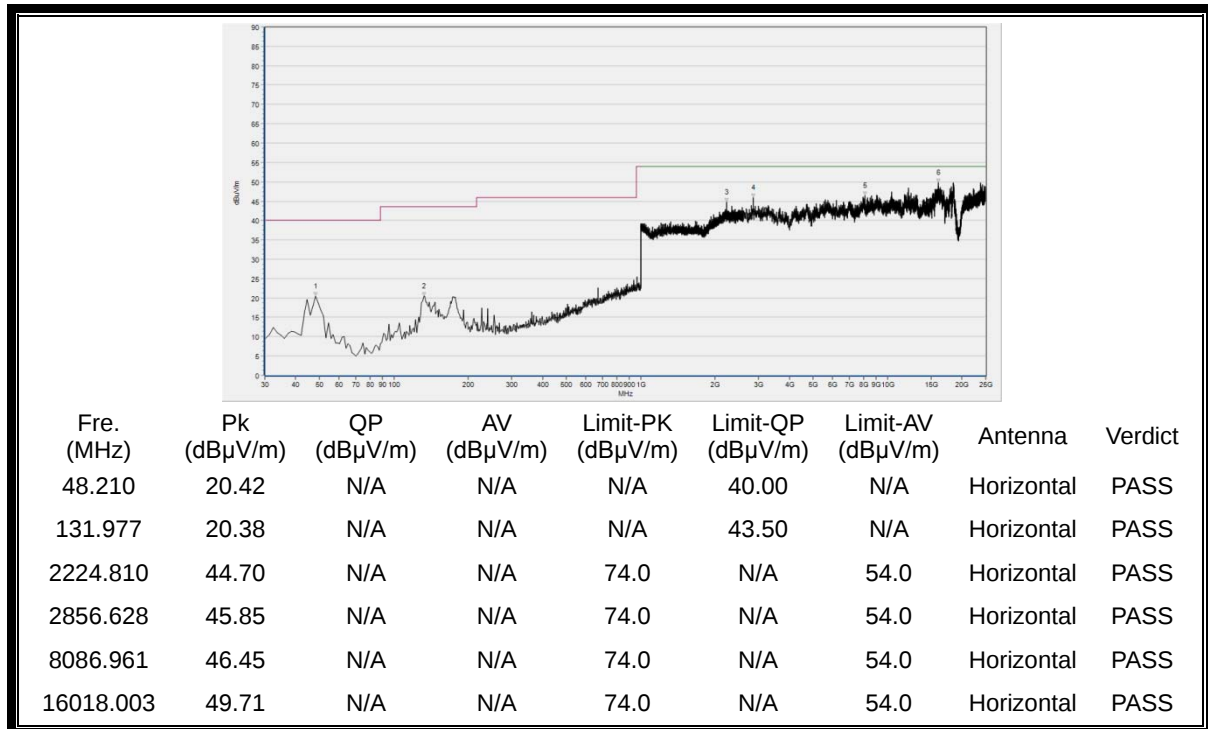

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 39)

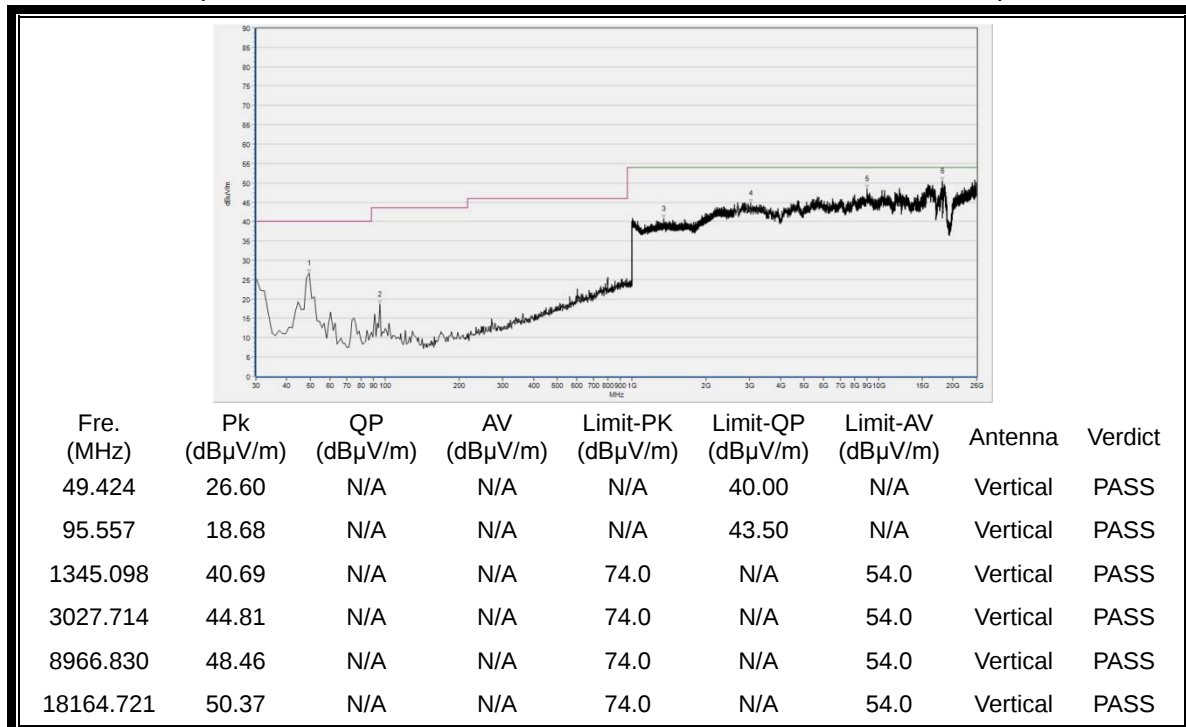

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 39)



Plot for Channel = 78



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	22.47	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
175.682	20.97	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1551.901	40.94	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
2815.894	45.09	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
8787.598	47.87	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
16796.036	50.74	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 78)



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	26.22	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
796.045	25.70	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1343.818	39.88	N/A	N/A	74.0	N/A	54.0	Vertical	PASS
4750.791	45.45	N/A	N/A	74.0	N/A	54.0	Vertical	PASS
10347.736	47.42	N/A	N/A	74.0	N/A	54.0	Vertical	PASS
18515.039	51.02	N/A	N/A	74.0	N/A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 78)



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192.

1.4 Maximum measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Number of Hopping Frequency	±5%
Peak Output Power	±2.22dB
20dB Bandwidth	±5%
Carrier Frequency Separation	±5%
Time of Occupancy (Dwell time)	±5%
Conducted Spurious Emission	±2.77 dB
Restricted Frequency Bands	±5%



REPORT No.: SZ17090131W02

Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2

1.5 Test Equipments Utilized

1.5.1 Conducted Test Equipments

Conducted Test Equipment

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2017.05.24	2018.05.23
2	Power Splitter	NW521	1506A	Weinschel	2017.05.24	2018.05.23
3	Attenuator 1	(N/A.)	10dB	Resnet	2017.05.24	2018.05.23
4	Attenuator 2	(N/A.)	3dB	Resnet	2017.05.24	2018.05.23
5	EXA Signal Analyzer	MY53470836	N9010A	Agilent	2016.12.07	2017.12.06
6	Bluetooth Test Set	6K00006210	MT8852B	Anritsu	2017.05.24	2018.05.23
7	USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2017.05.24	2018.05.23
8	RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
9	Coaxial cable	CB02	RF02	Morlab	N/A	N/A
10	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.5.2 Conducted Emission Test Equipments

Conducted Emission Test Equipments

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	US44210471	E7405A	Agilent	2017.05.24	2018.05.23
2	LISN	812744	NSLK 8127	Schwarzbeck	2017.05.24	2018.05.23
3	Service Supplier	100448	CMU200	R&S	2017.05.24	2018.05.23
4	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2017.05.24	2018.05.23
5	Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

1.5.3 Auxiliary Test Equipment

Auxiliary Test Equipment

No.	Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal.Due Date
1	Computer	T430i	Think Pad	Lenovo	N/A	N/A



REPORT No.: SZ17090131W02

1.5.4 Radiated Test Equipments

Radiated Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	System Simulator	GB45360846	8960-E5515C	Agilent	2017.05.17	2018.05.16
2	Receiver	MY54130016	N9038A	Agilent	2017.05.17	2018.05.16
3	Test Antenna - Bi-Log	N/A	VULB9163	Schwarzbeck	2016.12.09	2017.12.08
4	Test Antenna - Horn	9120C-384	BBHA 9120C	Schwarzbeck	2017.03.30	2018.03.29
5	Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2017.03.30	2018.03.29
6	Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
7	Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
8	Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
9	1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2017.05.17	2018.05.16
10	18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2017.05.17	2018.05.16

1.5.5 Climate Chamber

Climate Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2017.01.11	2018.01.10

1.5.6 Vibration Table

Vibration Table						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2017.01.11	2018.01.10

1.5.7 Anechoic Chamber

Anechoic Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Changning	2017.01.11	2018.01.10

***** END OF REPORT *****