



# FCC Test Report

**Equipment** : Label/Sign Printer  
**Brand Name** : DuraLabel  
**Model No.** : DLBRONCO  
**FCC ID** : ZKKDLB01  
**Standard** : 47 CFR FCC Part 15.225  
**Operating Band** : 13.553 – 13.567 MHz  
**Applicant** : Graphic Products, Inc.  
PO BOX 4030 Beaverton, OREGON 97076 USA  
**Manufacturer** : Graphic Products, Inc.  
9825 SW Sunshine Ct., Beaverton, OR 97005

The product sample received on Dec. 25, 2017 and completely tested on Mar. 05, 2018. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Phoenix Chen / Assistant Manager





## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Testing Applied Standards .....	7
1.3	Testing Location Information .....	7
1.4	Measurement Uncertainty .....	7
<b>2</b>	<b>TEST CONFIGURATION OF EUT.....</b>	<b>8</b>
2.1	The Worst Case Modulation Configuration .....	8
2.2	Test Channel Frequencies Configuration.....	8
2.3	The Worst Case Measurement Configuration.....	9
2.4	Accessories and Support Equipment .....	10
2.5	Test Setup Diagram .....	11
<b>3</b>	<b>TRANSMITTER TEST RESULT .....</b>	<b>12</b>
3.1	AC Power-line Conducted Emissions .....	12
3.2	Emission Bandwidth .....	16
3.3	Field Strength of Fundamental Emissions and Spectrum Mask .....	18
3.4	Transmitter Radiated Unwanted Emissions .....	20
3.5	Frequency Stability.....	29
<b>4</b>	<b>TEST EQUIPMENT AND CALIBRATION DATA.....</b>	<b>31</b>

### APPENDIX A. TEST PHOTOS

#### PHOTOGRAPHS OF EUT V01



## Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.7047MHz 37.32(Margin 18.68dB) - QP 30.11(Margin 15.89dB) - AV	FCC 15.207	Complied
3.2	15.215(c)	Emission Bandwidth	20dB Bandwidth 4.978 [kHz] $F_L$ : 13.558698 MHz $F_H$ : 13.563676 MHz	Fall in band $F_L \geq 13.553$ MHz $F_H \leq 13.567$ MHz	Complied
3.3	15.225(a)~(d)	Field Strength of Fundamental Emissions and Spectrum Mask	Fundamental Emissions peak: 87.27 dBuV/m at 3m Device complies with spectrum mask – refer to test data	124 dBuV/m at 3m	Complied
3.4	15.225(d)	Transmitter Radiated Unwanted Emissions	[dBuV/m at 3m]: 39.7MHz 39.87 (Margin 0.13dB) - QP	FCC 15.209	Complied
3.5	15.225(e)	Frequency Stability	65.63 ppm	$\pm 0.01%$ (100ppm)	Complied



## Revision History



## 1 General Description

### 1.1 Information

#### 1.1.1 RF General Information

NFC Chip	Brand Name	Model Name
	SUNION	RF-331 -GX-1

RF General Information				
Frequency Range	Modulation	Ch. Frequency (MHz)	Channel Number	Field Strength (dBuV/m)
13.553 – 13.567 MHz	ISO 14443-3A (ASK)	13.56	1	87.27

Note 1: Field strength performed peak level at 3m.

#### 1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	<input type="checkbox"/> Temporary RF connector provided
<input checked="" type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)

Antenna General Information		
No.	Ant. Cat.	Ant. Type
1	Integral	Loop

#### 1.1.3 Type of EUT

Identify EUT	
Presentation of Equipment	<input checked="" type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:
<input type="checkbox"/>	Other:



### 1.1.4 Test Signal Duty Cycle

Duty Cycle Operation Restriction			
The transmitter is used for		The transmitter is operated	
<input checked="" type="checkbox"/>	Inductive applications	<input checked="" type="checkbox"/>	Automatically triggered
<input type="checkbox"/>	Duty cycle fixed mode	<input checked="" type="checkbox"/>	Duty cycle random mode
<b>Duty cycle mode - NFC-A (ISO 14443-3A)</b>			
Declare transmitter duty cycle / 1 hour =		100%	
Duty cycle Limit			
<input type="checkbox"/>	Class 1 - < 0.1 %	<input type="checkbox"/>	Class 2 - < 1.0 %
<input type="checkbox"/>	Class 3 - < 10 %	<input type="checkbox"/>	Class 4 - Up to 100 %
<b>Duty cycle mode - NFC-B (ISO 14443-3B)</b>			
Declare transmitter duty cycle / 1 hour =		100%	
Duty cycle Limit			
<input type="checkbox"/>	Class 1 - < 0.1 %	<input type="checkbox"/>	Class 2 - < 1.0 %
<input type="checkbox"/>	Class 3 - < 10 %	<input type="checkbox"/>	Class 4 - Up to 100 %
<b>Duty cycle mode - NFC-F ( ISO 18092)</b>			
Declare transmitter duty cycle / 1 hour =		100%	
Duty cycle Limit			
<input type="checkbox"/>	Class 1 - < 0.1 %	<input type="checkbox"/>	Class 2 - < 1.0 %
<input type="checkbox"/>	Class 3 - < 10 %	<input type="checkbox"/>	Class 4 - Up to 100 %
<b>Duty cycle mode - NFC-V (ISO 15693)</b>			
Declare transmitter duty cycle / 1 hour =		100%	
Duty cycle Limit			
<input type="checkbox"/>	Class 1 - < 0.1 %	<input type="checkbox"/>	Class 2 - < 1.0 %
<input type="checkbox"/>	Class 3 - < 10 %	<input checked="" type="checkbox"/>	Class 4 - Up to 100 %

### 1.1.5 EUT Operational Condition

<b>Supply Voltage</b>	<input checked="" type="checkbox"/> AC mains	<input type="checkbox"/> DC	
<b>Type of DC Source</b>	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External AC adapter	<input type="checkbox"/> Battery
<b>Test Voltage</b>	<input checked="" type="checkbox"/> V <sub>nom</sub> (120V)	<input checked="" type="checkbox"/> V <sub>max</sub> (138V)	<input checked="" type="checkbox"/> V <sub>min</sub> (102V)
<b>Test Climatic</b>	<input checked="" type="checkbox"/> T <sub>nom</sub> (20°C)	<input checked="" type="checkbox"/> T <sub>max</sub> (55°C)	<input checked="" type="checkbox"/> T <sub>min</sub> (-20°C)



## 1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ KDB 174176 D01 v01r01

## 1.3 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.	TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test Condition		Test Site No.	Test Engineer	Test Environment
AC Conduction		CO04-HY	Eric	24.2°C / 56%
RF Conducted		TH01-HY	Tim	23.5°C / 65%
Radiated		03CH03-HY	Jeff	24.2°C / 56%

Test site Designation No. TW1190 with FCC.

## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Conducted Emission	1.3 dB	Confidence levels of 95%
Temperature	0.7 °C	Confidence levels of 95%
Humidity	4 %	Confidence levels of 95%



## 2 Test Configuration of EUT

### 2.1 The Worst Case Modulation Configuration

Modulation Used for Conformance Testing	
Modulation Mode	Field Strength (dBuV/m at 3 m)
NFC	87.27

### 2.2 Test Channel Frequencies Configuration

Modulation Mode	Test Channel Frequencies (MHz)
NFC	13.56



## 2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Adapter Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth, Frequency Stability
Test Condition	Conducted measurement

The Worst Case Mode for Following Conformance Tests							
Tests Item	Field Strength of Fundamental Emissions Spectrum Mask, Transmitter Radiated Unwanted Emissions						
Test Condition	Radiated measurement						
User Position	<input type="checkbox"/> EUT will be placed in fixed position. <input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. <input checked="" type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions.						
Pretest Mode	<input type="checkbox"/> 1. EUT Built in NFC A type <input type="checkbox"/> 2. EUT Built in NFC B type <input type="checkbox"/> 3. EUT Built in NFC F type <input checked="" type="checkbox"/> 4. EUT Built in NFC V type EUT only support mode 4 function.						
Operating Mode < 1GHz	<input checked="" type="checkbox"/> 1. Adapter Mode						
Modulation Mode	NFC						
Orthogonal Planes of EUT	<table border="1"> <thead> <tr> <th>X Plane</th> <th>Y Plane</th> <th>Z Plane</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> </tr> </tbody> </table>	X Plane	Y Plane	Z Plane			
X Plane	Y Plane	Z Plane					
Worst Planes of EUT	V						



## 2.4 Accessories and Support Equipment

Accessories Information				
AC Adapter	Brand Name	Wearnes	Model Name	WDS060240
	Power Rating	I/P: 100 - 240Vac, 1.6A, O/P: 24Vdc, 2.5A		
	Power Cord	DC output : 1.14meter, Shielded cable, with ferrite core AC input : 1.8meter, Non-Shielded cable, w/o ferrite core		

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment - AC Conduction				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Tag	-	-	-

Note: Support equipment No.1 was provided by customer.


Support Equipment - RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Tag	-	-	-
2	AC Source	GW	APS-9102	-

Note: Support equipment No.1 was provided by customer.


Support Equipment - RF Radiated Emission				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Tag	-	-	-

Note: Support equipment No.1 was provided by customer.

## 2.5 Test Setup Diagram

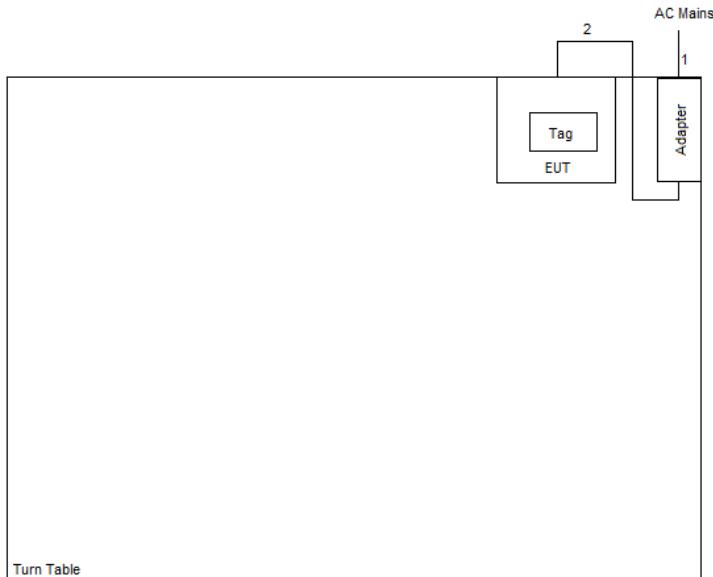**Test Setup Diagram – AC Line Conducted Emission Test**

Item	Connection	Shielded	Length
1	AC Power Line	No	1.8m
2	DC Power Line	D	1.14m

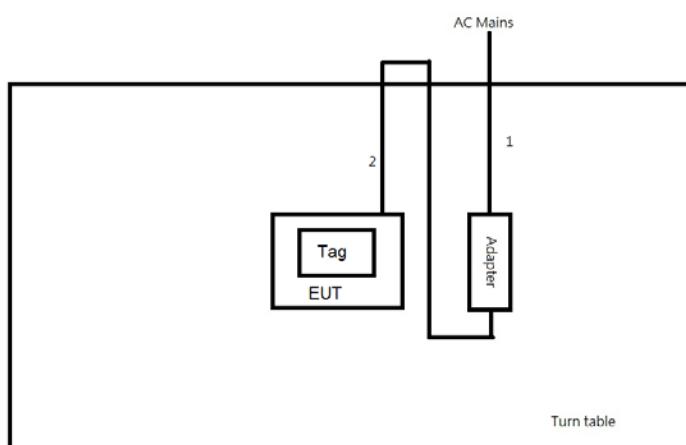**Test Setup Diagram - Radiated Test**

Item	Connection	Shielded	Length
1	AC Power Line	No	1.8m
2	DC Power Line	D	1.14m



### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

##### 3.1.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.
<input checked="" type="checkbox"/> If AC conducted emissions fall in operating band, then following below test method confirm final result.
<input type="checkbox"/> Accept measurements done with a suitable dummy load replacing the antenna under the following conditions: (1) Perform the AC line conducted tests with the antenna connected to determine compliance with FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load to determine compliance with FCC 15.207 limits within the transmitter's fundamental emission band.
<input checked="" type="checkbox"/> For a device with a permanent antenna operating at or below 30 MHz, accept measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) Perform the AC line conducted tests with the permanent antenna to determine compliance with the FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load in lieu of the permanent antenna to determine compliance with the FCC 15.207 limits within the transmitter's fundamental emission band.

### 3.1.4 Test Setup

#### AC Power-line Conducted Emissions

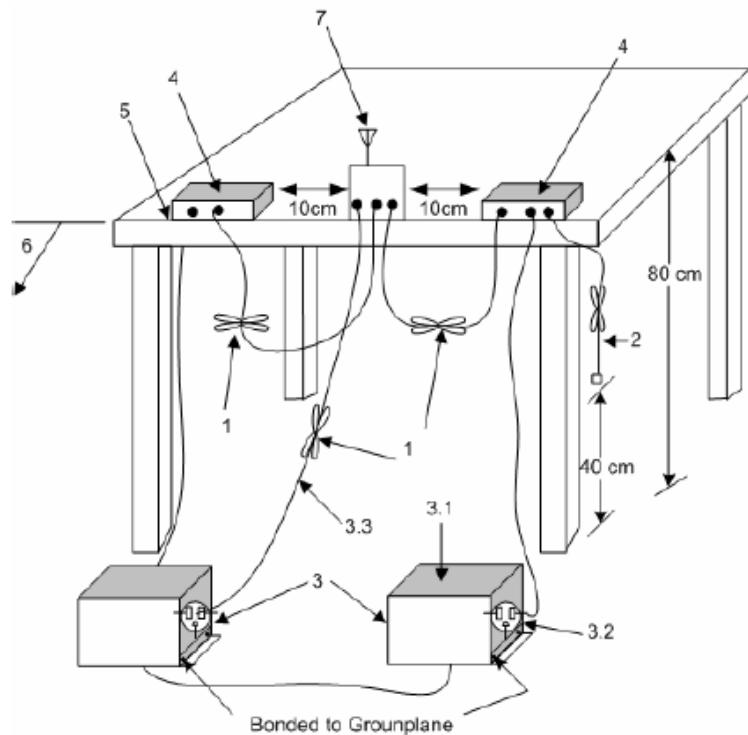




## 3.1.5 Test Result of AC Power-line Conducted Emissions

AC Power-line Conducted Emissions Result										
Operating Mode	1	Power Phase		Neutral						
Operating Function	Adapter Mode									
Date: 2018-01-17										
Emissions Data Table										
Freq		Over Limit	Limit	Read Line	LISN Level	Cable Factor	Loss			
MHz	dBuV	dB	dBuV	dBuV	dB	dB	dB	Remark		
1	0.1508	18.96	-37.00	55.96	9.29	9.63	0.04	Average		
2	0.1508	43.36	-22.60	65.96	33.69	9.63	0.04	QP		
3	0.1815	22.74	-31.68	54.42	13.11	9.62	0.01	Average		
4	0.1815	39.34	-25.08	64.42	29.71	9.62	0.01	QP		
5	0.4282	20.98	-26.31	47.29	11.28	9.61	0.09	Average		
6	0.4282	26.32	-30.97	57.29	16.62	9.61	0.09	QP		
7 MAX	0.7084	26.99	-19.01	46.00	17.33	9.62	0.04	Average		
8	0.7084	36.55	-19.45	56.00	26.89	9.62	0.04	QP		
9	2.8845	18.47	-27.53	46.00	8.78	9.64	0.05	Average		
10	2.8845	23.86	-32.14	56.00	14.17	9.64	0.05	QP		
11	24.3995	24.24	-25.76	50.00	14.52	9.70	0.02	Average		
12	24.3995	30.78	-29.22	60.00	21.06	9.70	0.02	QP		

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

Note 3: When emissions are in operating band over limits, retest with a dummy load for final in-band results.

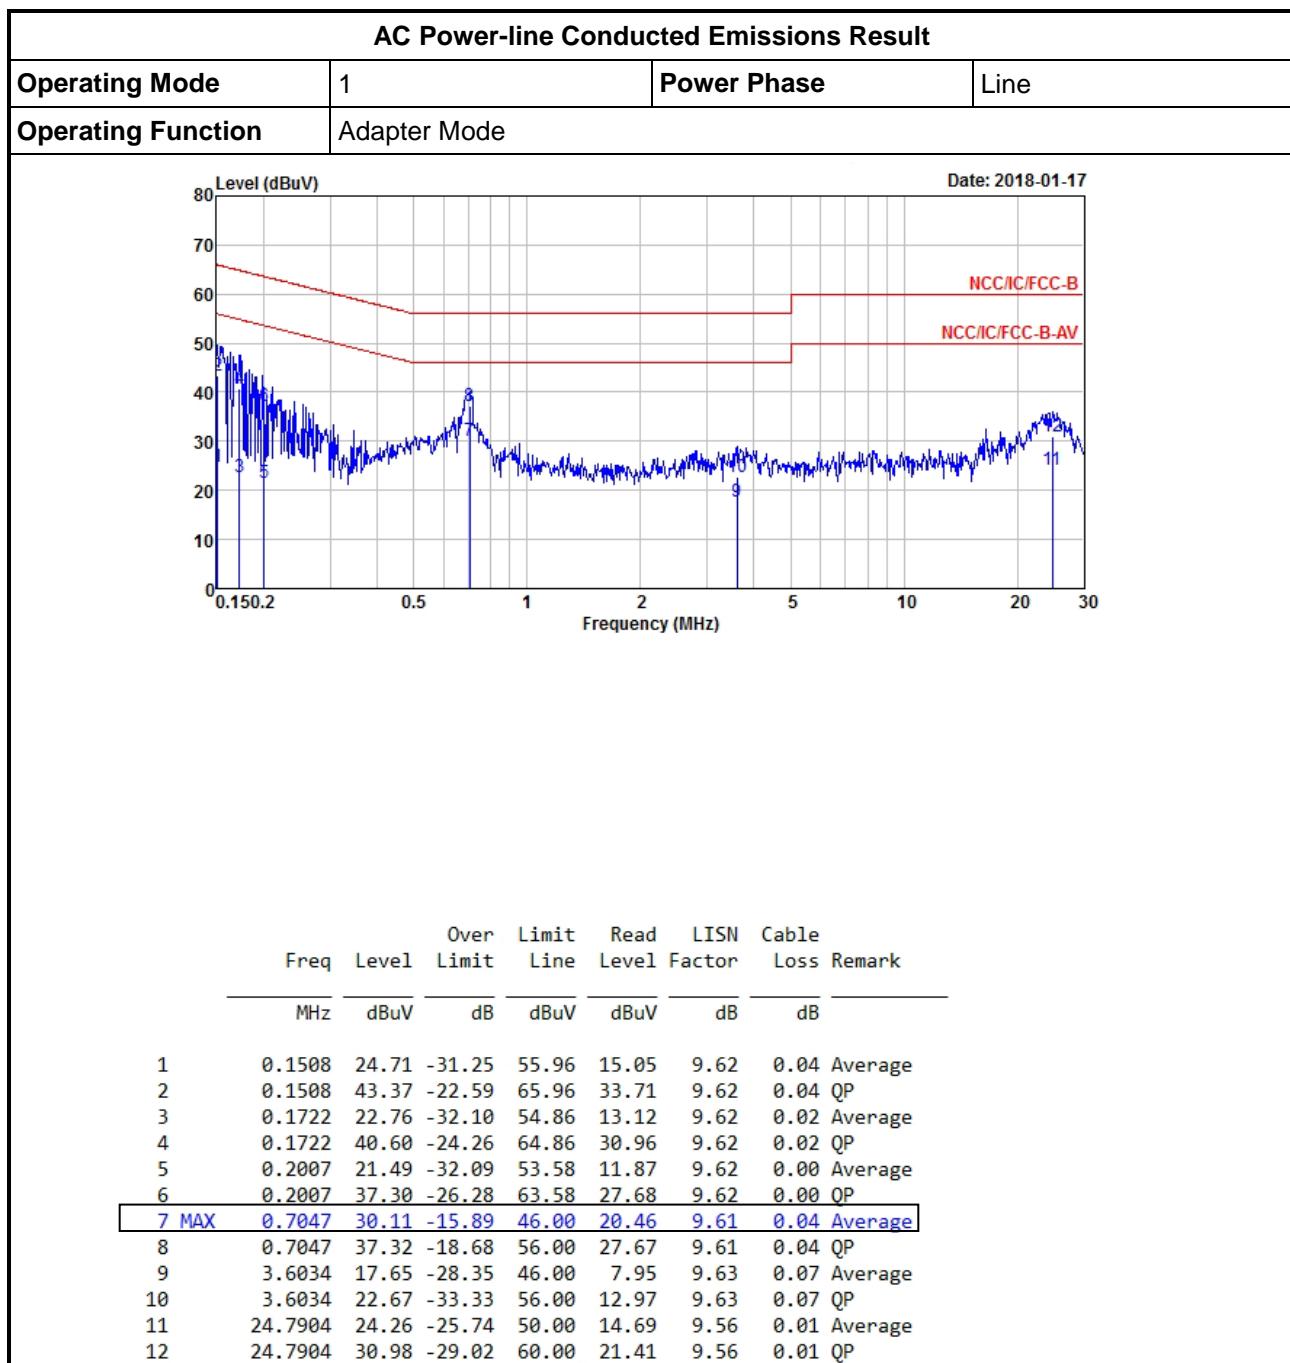

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

Note 3: When emissions are in operating band over limits, retest with a dummy load for final in-band results.

## 3.2 Emission Bandwidth

### 3.2.1 Emission Bandwidth Limit

20dB Bandwidth Limit
<input checked="" type="checkbox"/> Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 – 13.567 MHz).


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> For the emission bandwidth refer ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/> For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.


### 3.2.4 Test Setup

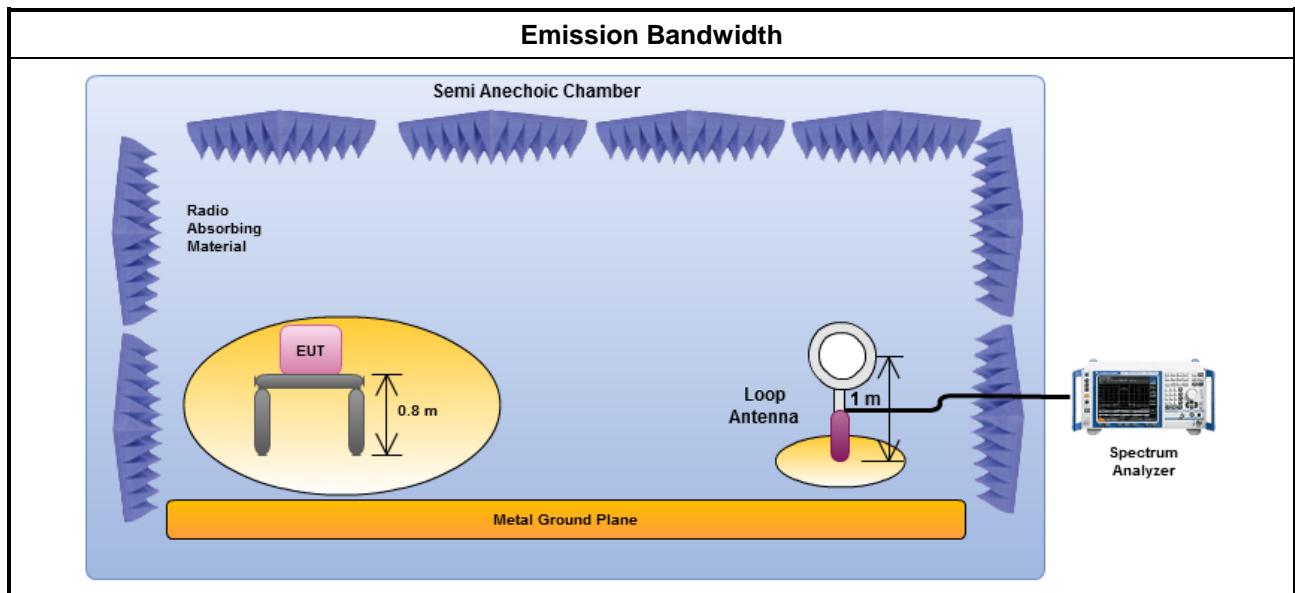



### 3.2.5 Test Result of Emission Bandwidth

Occupied Channel Bandwidth Result					
Modulation Mode	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)	$F_L$ at 20dB BW (MHz)	$F_H$ at 20dB BW (MHz)
NFC	13.56	4.97800	6.164978	13.558698	13.563676
Limit		N/A	N/A	13.553	13.567
Result	Complied				

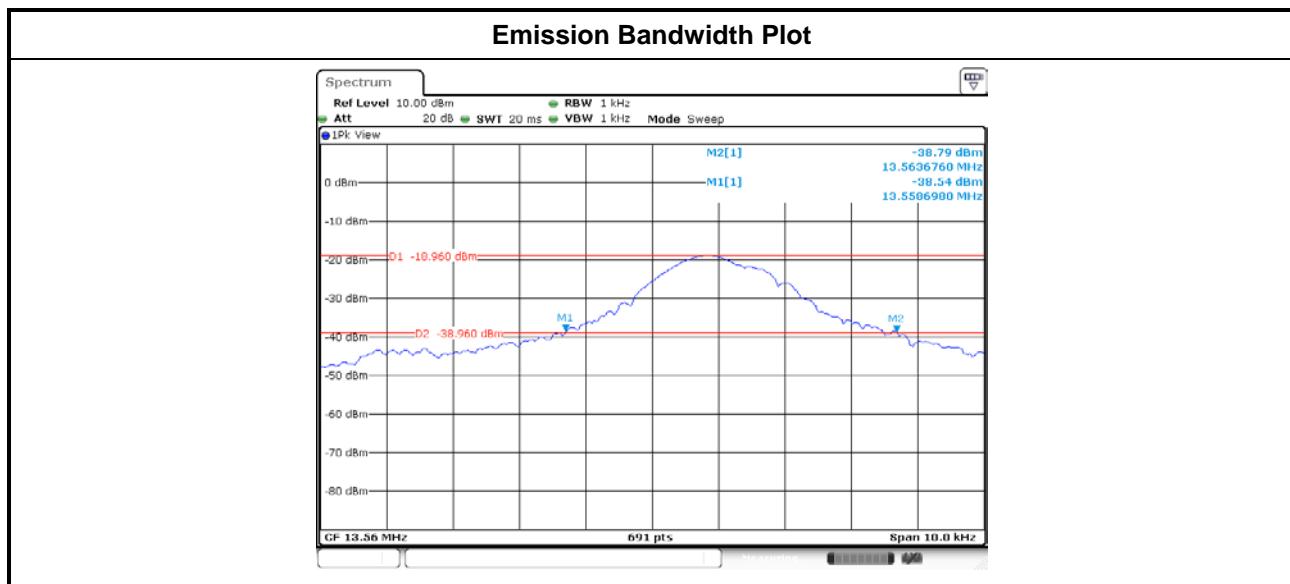



### 3.3 Field Strength of Fundamental Emissions and Spectrum Mask

#### 3.3.1 Field Strength of Fundamental Emissions and Spectrum Mask Limit

Field Strength of Fundamental Emissions For FCC					
Emissions	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
fundamental	15848	84.0	103.1	124.0	143.1
Quasi peak measurement of the fundamental.					

Spectrum Mask For FCC					
Freq. of Emission (MHz)	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
1.705~13.110	30	29.5	48.6	69.5	88.6
13.110~13.410	106	40.5	59.6	80.5	99.6
13.410~13.553	334	50.5	69.6	90.5	109.6
13.553~13.567	15848	84.0	103.1	124.0	143.1
13.567~13.710	334	50.5	69.6	90.5	109.6
13.710~14.010	106	40.5	59.6	80.5	99.6
14.010~30.000	30	29.5	48.6	69.5	88.6


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
<input type="checkbox"/>	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
<input checked="" type="checkbox"/>	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.


### 3.3.4 Test Setup

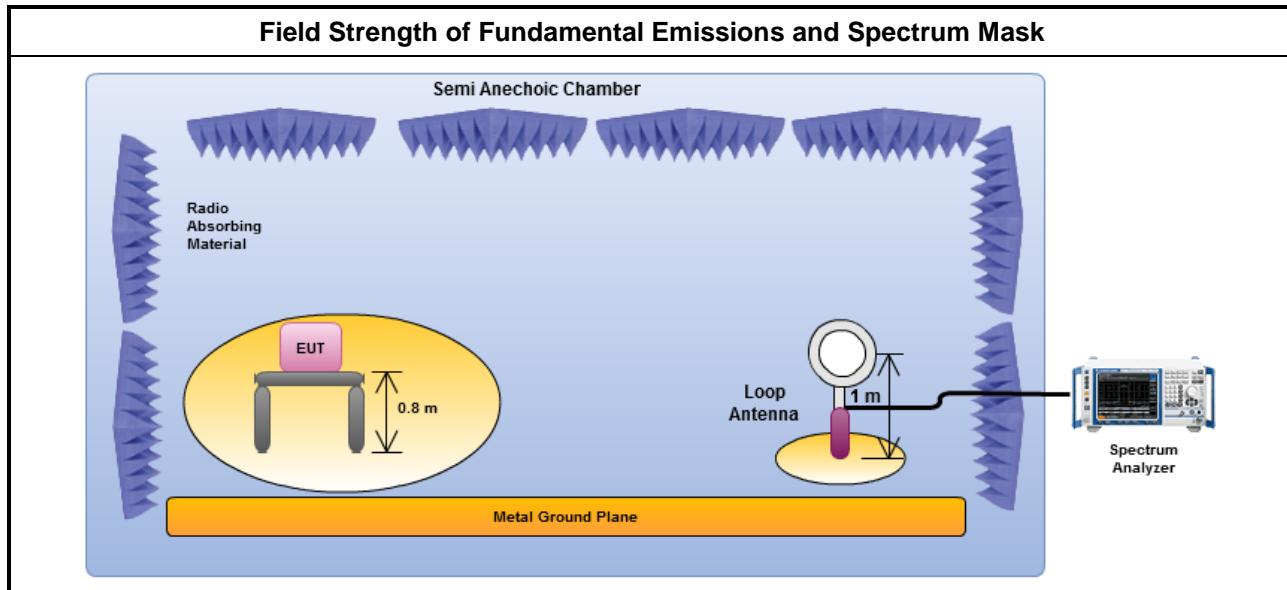

### 3.3.5 Test Result of Field Strength of Fundamental Emissions and Spectrum Mask

Field Strength of Fundamental Emissions Result					
Modulation Mode	Frequency (MHz)	Fundamental (dBuV/m)@3m	Polarization	Margin (dB)	Limit (dBuV/m)@3m
NFC	13.56	87.27	H	36.732	124.00
<b>Result</b>		<b>Complied</b>			

Note 1: Measurement worst emissions of receive antenna polarization: H(Horizontal).

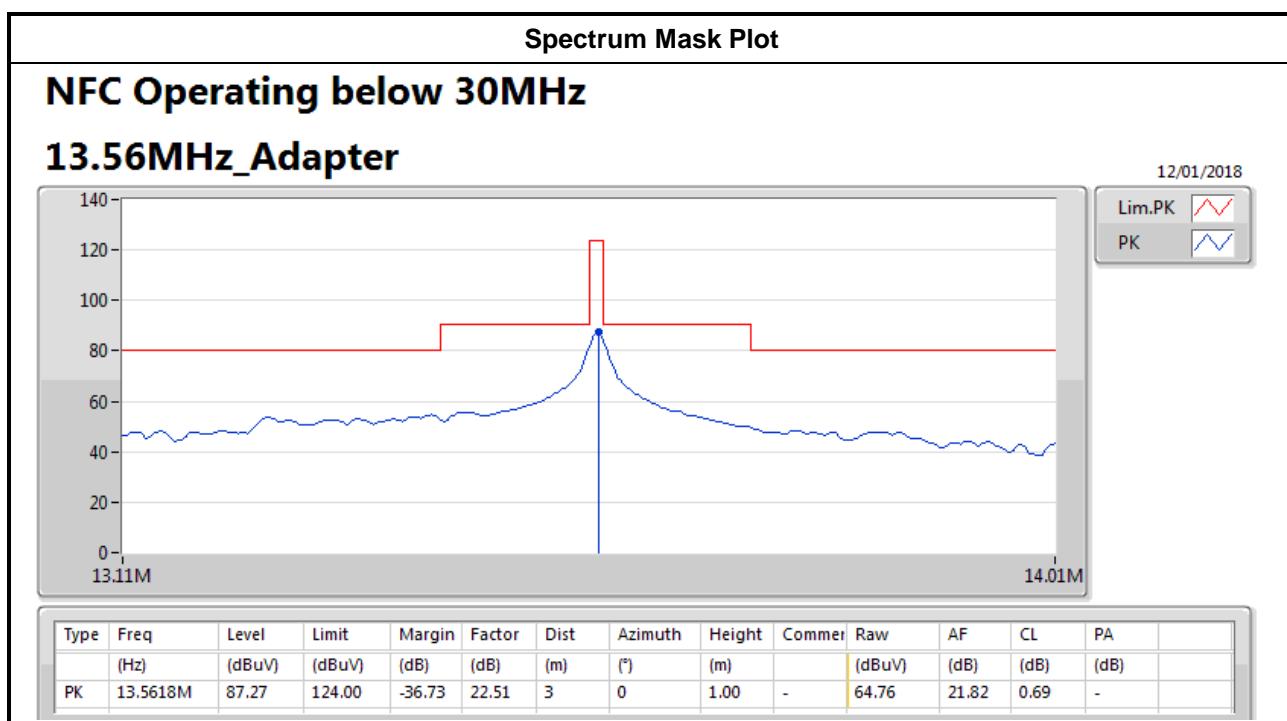



## 3.4 Transmitter Radiated Unwanted Emissions

### 3.4.1 Transmitter Radiated Unwanted Emissions Limit

Transmitter Radiated Unwanted Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




### 3.4.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/> At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods. <ul style="list-style-type: none"><li><input type="checkbox"/> The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.</li><li><input checked="" type="checkbox"/> The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).</li></ul>
<input checked="" type="checkbox"/> For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.
<input checked="" type="checkbox"/> The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/> All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


### 3.4.4 Test Setup

#### Transmitter Radiated Unwanted Emissions

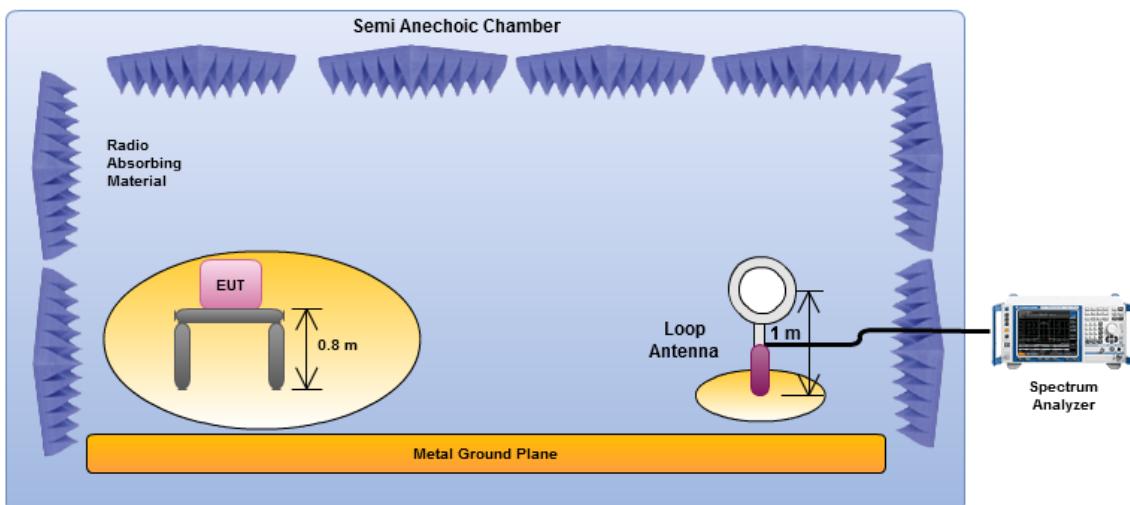

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. The center of the loop shall be 1 m above the ground.

#### Transmitter Radiated Bandedge Emissions

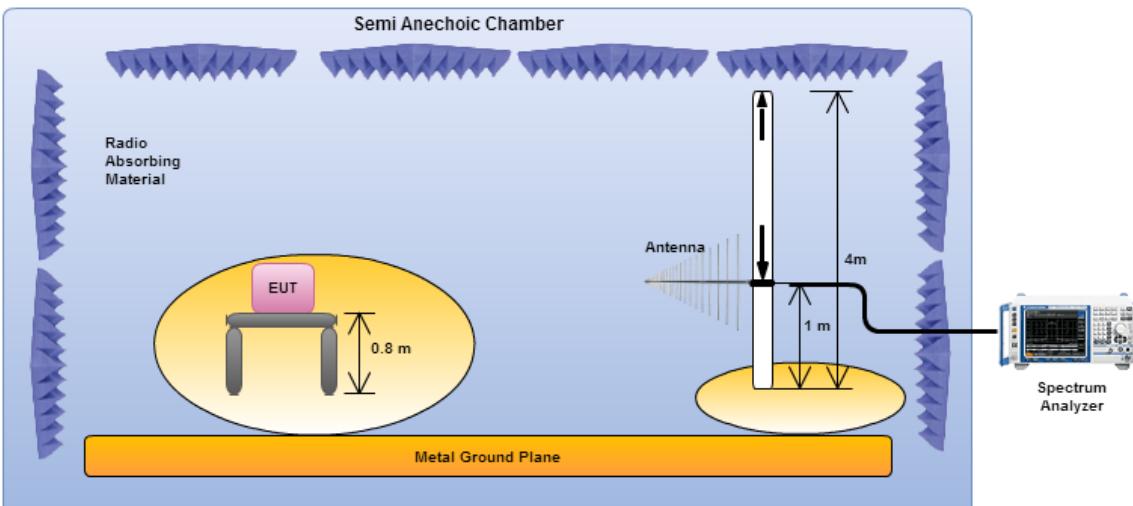

Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna. the antenna height shall be varied from 1 m to 4 m.



### 3.4.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

#### Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Dist (m)	Azimuth (°)	Height (m)	Comments
13.553-13.567MHz	-	-	-	-	-	-	-	-	-	-	-
NFC	Pass	PK	3.3738M	46.03	69.50	-23.47	20.84	3	0	1.00	-


#### Result

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Dist (m)	Azimuth (°)	Height (m)	Comments
NFC	-	-	-	-	-	-	-	-	-	-	-
13.56MHz_Adapter	Pass	PK	19.434k	70.17	121.80	-51.63	21.96	3	360	1.00	-
13.56MHz_Adapter	Pass	PK	24.228k	66.08	119.90	-53.82	22.01	3	360	1.00	-
13.56MHz_Adapter	Pass	PK	53.274k	62.91	113.05	-50.14	21.14	3	360	1.00	-
13.56MHz_Adapter	Pass	PK	2.3589M	44.92	69.50	-24.58	20.87	3	0	1.00	-
13.56MHz_Adapter	Pass	PK	3.3738M	46.03	69.50	-23.47	20.84	3	0	1.00	-
13.56MHz_Adapter	Pass	PK	4.3887M	39.61	69.50	-29.89	21.03	3	0	1.00	-
13.56MHz_Adapter	Pass	PK	13.5618M	87.27	124.00	-36.73	22.51	3	0	1.00	-



## NFC Operating below 30MHz

### 13.56MHz\_Adapter

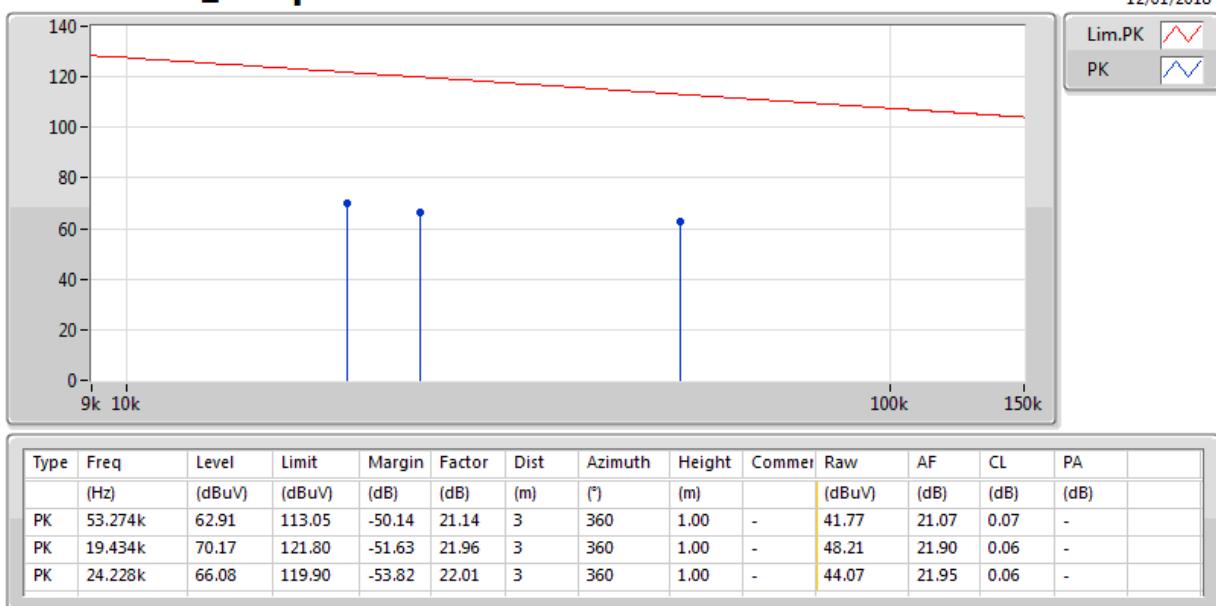




## NFC Operating below 30MHz

### 13.56MHz\_Adapter

12/01/2018

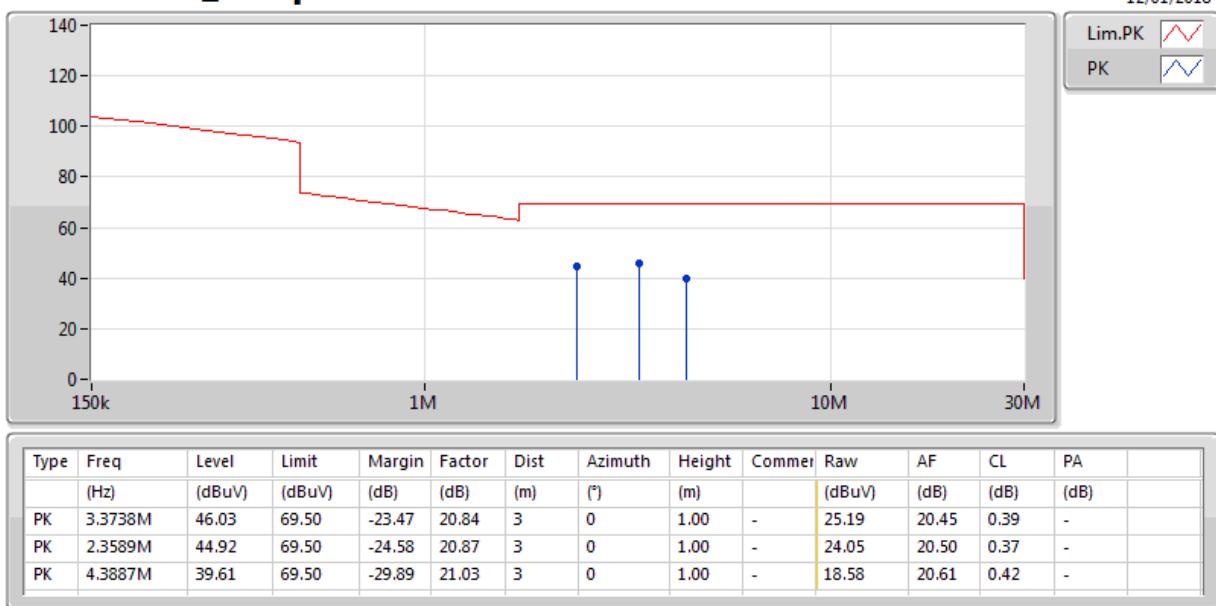



### 3.4.6 Transmitter Radiated Unwanted Emissions (Above 30MHz)

#### Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
13.553-13.567MHz	-	-	-	-	-	-	-	-	-	-	-	-
NFC	Pass	QP	39.7M	39.87	40.00	-0.13	-7.84	3	Vertical	56	1.00	-


#### Result

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
NFC	-	-	-	-	-	-	-	-	-	-	-	-
13.56MHz_Adapter	Pass	PK	130.88M	37.52	43.50	-5.98	-7.80	3	Horizontal	0	1.00	-
13.56MHz_Adapter	Pass	PK	229.82M	39.34	46.00	-6.66	-9.04	3	Horizontal	0	1.00	-
13.56MHz_Adapter	Pass	PK	406.36M	42.62	46.00	-3.38	-3.10	3	Horizontal	0	1.00	-
13.56MHz_Adapter	Pass	PK	447.1M	42.17	46.00	-3.83	-2.47	3	Horizontal	0	1.00	-
13.56MHz_Adapter	Pass	QP	175.5M	39.77	43.50	-3.73	-10.12	3	Horizontal	96	1.48	-
13.56MHz_Adapter	Pass	QP	720.64M	36.33	46.00	-9.67	0.77	3	Horizontal	124	1.30	-
13.56MHz_Adapter	Pass	PK	128.94M	35.24	43.50	-8.26	-7.73	3	Vertical	0	1.00	-
13.56MHz_Adapter	Pass	PK	229.82M	36.39	46.00	-9.61	-9.04	3	Vertical	0	1.00	-
13.56MHz_Adapter	Pass	PK	419.94M	42.79	46.00	-3.21	-2.77	3	Vertical	0	1.00	-
13.56MHz_Adapter	Pass	QP	39.7M	39.87	40.00	-0.13	-7.84	3	Vertical	56	1.00	-
13.56MHz_Adapter	Pass	QP	447.1M	44.00	46.00	-2.00	-2.47	3	Vertical	115	1.03	-
13.56MHz_Adapter	Pass	QP	716.76M	38.31	46.00	-7.69	0.64	3	Vertical	278	1.02	-



## NFC Operating above 30MHz

### 13.56MHz\_Adapter

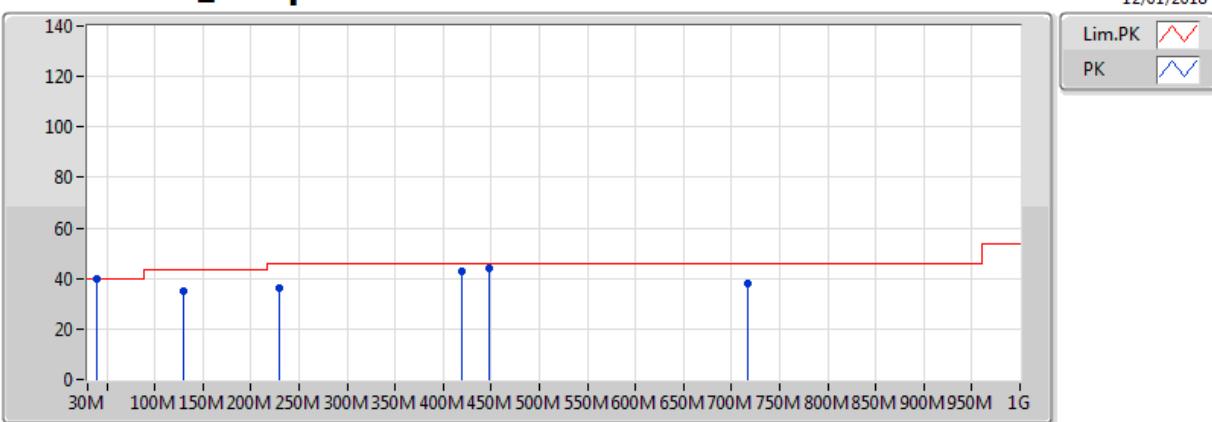


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	128.94M	35.24	43.50	-8.26	-7.73	3	Vertical	0	1.00	-	42.97	17.14	2.37	27.24
PK	229.82M	36.39	46.00	-9.61	-9.04	3	Vertical	0	1.00	-	45.43	15.29	2.51	26.84
PK	419.94M	42.79	46.00	-3.21	-2.77	3	Vertical	0	1.00	-	45.56	21.42	3.21	27.40
QP	39.7M	39.87	40.00	-0.13	-7.84	3	Vertical	56	1.00	-	47.71	17.86	1.86	27.56
QP	447.1M	44.00	46.00	-2.00	-2.47	3	Vertical	115	1.03	-	46.47	21.67	3.41	27.55
QP	716.76M	38.31	46.00	-7.69	0.64	3	Vertical	278	1.02	-	37.67	24.35	4.20	27.92



## NFC Operating above 30MHz

### 13.56MHz\_Adapter

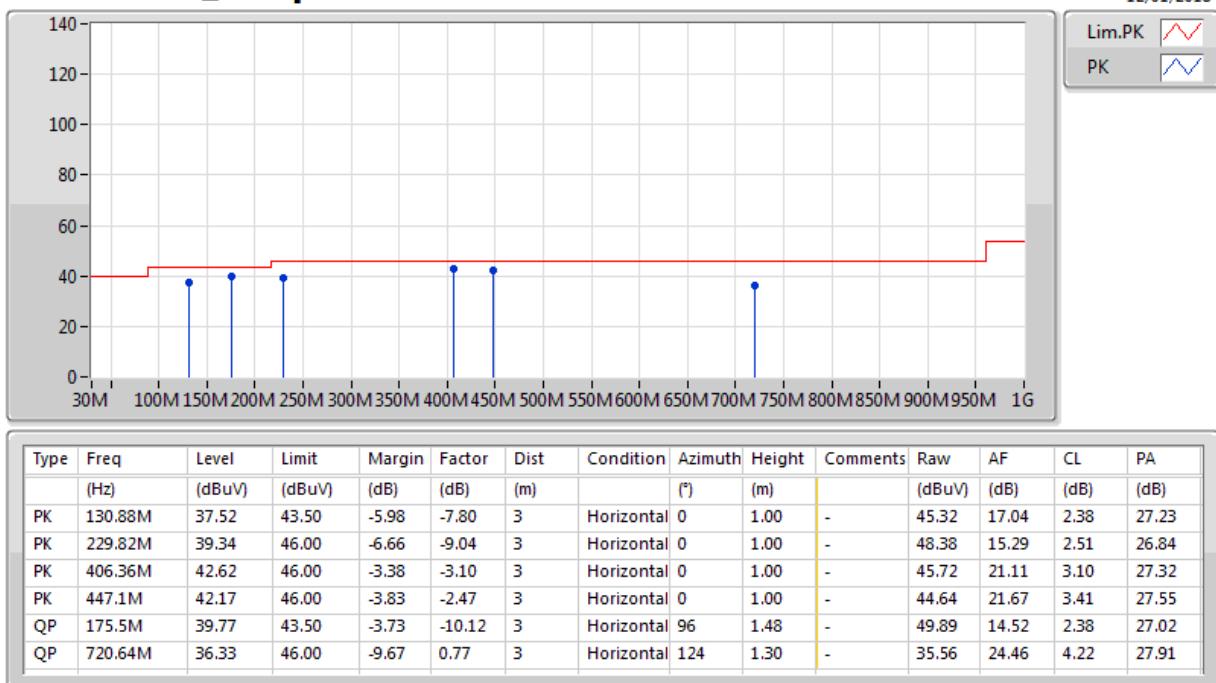

## 3.5 Frequency Stability

### 3.5.1 Frequency Stability Limit

Frequency Stability Limit
<input checked="" type="checkbox"/> Carrier frequency stability shall be maintained to $\pm 0.01\%$ ( $\pm 100$ ppm).


### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.5.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.8 for frequency stability tests
<input checked="" type="checkbox"/> Frequency stability with respect to ambient temperature
<input checked="" type="checkbox"/> Frequency stability when varying supply voltage
<input type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

### 3.5.4 Test Setup

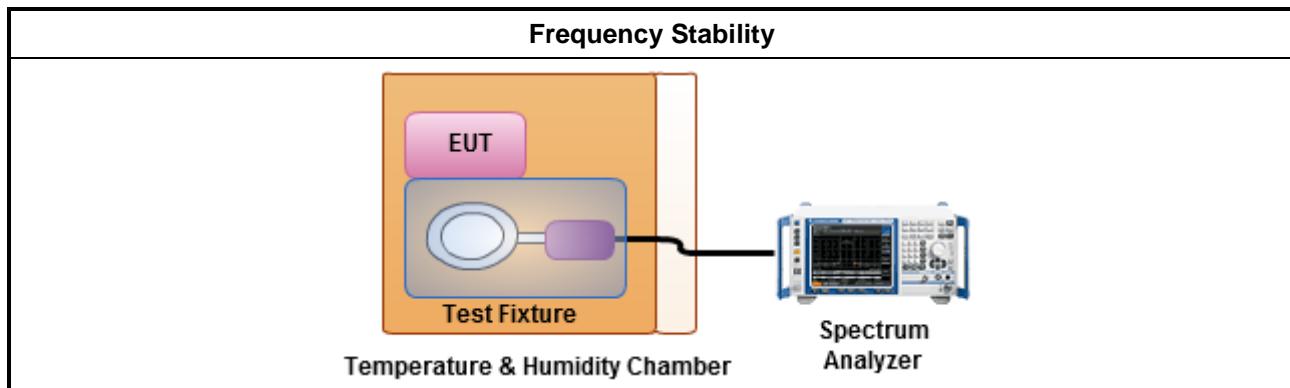



### 3.5.5 Test Result of Frequency Stability

Frequency Stability Result																	
Condition	Ch. Freq. (MHz)	Frequency Stability (ppm)															
		Test Frequency (MHz)				Frequency Stability (ppm)											
		0 min	2 min	5 min	10 min	0 min	2 min	5 min	10 min								
T <sub>20°C</sub> Vmax	13.56	13.56085	13.56086	13.56088	13.56088	62.68	63.42	64.90	64.90								
T <sub>20°C</sub> Vmin	13.56	13.56081	13.56081	13.56082	13.56084	59.73	59.73	60.47	61.95								
T <sub>55°C</sub> Vnom	13.56	13.56086	13.56087	13.56087	13.56086	63.42	64.16	64.16	63.42								
T <sub>50°C</sub> Vnom	13.56	13.56087	13.56087	13.56087	13.56086	64.16	64.16	64.16	63.42								
T <sub>40°C</sub> Vnom	13.56	13.56086	13.56086	13.56087	13.56088	63.42	63.42	64.16	64.90								
T <sub>30°C</sub> Vnom	13.56	13.56085	13.56086	13.56088	13.56088	62.68	63.42	64.90	64.90								
T <sub>20°C</sub> Vnom	13.56	13.56083	13.56088	13.56086	13.56086	61.21	64.90	63.42	63.42								
T <sub>10°C</sub> Vnom	13.56	13.56086	13.56086	13.56088	13.56088	63.42	63.42	64.90	64.90								
T <sub>0°C</sub> Vnom	13.56	13.56088	13.56088	13.56088	13.56089	64.90	64.90	64.90	65.63								
T <sub>-10°C</sub> Vnom	13.56	13.56089	13.56089	13.56089	13.56090	65.63	65.63	65.63	66.37								
T <sub>-20°C</sub> Vnom	13.56	13.56088	13.56088	13.56086	13.56086	64.90	64.90	63.42	63.42								
Limit (ppm)		100															
Result		Complied															
Note 1: Measure at 85 % [Vmin] and 115 % [Vmax] of the nominal voltage [Vnom]. The nominal voltage refer test report clause 1.1.5 for EUT operational condition.																	
Note 2: Measure maximum deviation frequency at operating frequency at startup and two, five, and ten min.																	



## 4 Test Equipment and Calibration Data

### Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR3	102052	9KHz ~ 3.6GHz	29/Apr/2017	28/Apr/2018
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	06/Oct/2017	05/Oct/2018
AC POWER	APC	AFC-11005G	F310050055	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9 kHz ~ 30 MHz	12/Oct/2017	11/Oct/2018
LISN	R&S	ENV216	101295	9kHz ~ 30MHz	17/Nov/2017	16/Nov/2018

NCR: No Calibration Require.

### Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101515	9kHz~40GHz	08/Dec/2017	07/Dec/2018
Loop Antenna	TESEQ	HLA 6120	24155	9 kHz~30 MHz	16/Mar/2016	15/Mar/2018
Temp. and Humidity Chamber	Giant Force	GTH-225-40-CP-AR	MAA1611-005	-40 ~ 100°C	21/Nov/2016	20/Nov/2018

### Instrument for Radiated Test

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	31/Oct/2017	30/Oct/2018
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	19/Apr/2017	18/Apr/2018
Spectrum	R&S	FSV40	101500	9kHz ~ 40GHz	28/Jun/2017	27/Jun/2018
Receiver	R&S	ESR3	102052	9KHz ~ 3.6GHz	29/Apr/2017	28/Apr/2018
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	26/Jan/2017	25/Jan/2018
Bilog Antenna	SCHAFFNER	CBL 6112B	22237	30MHz ~ 1GHz	08/Jul/2017	07/Jul/2018
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz~30 MHz	02/Mar/2017	01/Mar/2018