

Page: 1 of 44

# SAR TEST REPORT

<b>Equipment Under Test</b>	Smart Phone
Model Name	Grid 4
Company Name	Fusion Garage
Company Address	5 Harper Road #03-02 Singapore 369673
Date of Receipt	2011.08.01
Date of Test(s)	2011.08.11
Date of Issue	2011.09.02

Standards:

# FCC OET Bulletin 65 supplement C, IEEE/ANSI C95.1, C95.3, IEEE 1528

In the configuration tested, the EUT complied with the standards specified above. Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in writing.

**Tested by** : Ricky Huang

Asst. Supervisor

Approved by : Nick Hsu

**Supervisor** 

Date 2011.09.02

2011.09.02 Date:

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan. / 台北縣五股工業區五工路136之1號台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2299-9489



Page: 2 of 44

#### **Revision Version**

Report Number Revision Da		Date	Memo
ES/2011/40012-01	S/2011/40012-01 00 2011/09/02		Initial creation of test report.

This test repot contains a reference to the previous version test report that it replaces.



Page: 3 of 44

# **Contents**

1.	General Information	4
	1.1 Testing Laboratory	4
	1.2 Details of Applicant	4
	1.3 Description of EUT	4
	1.4 Test Environment	6
	1.5 Operation description	6
	1.6 Positioning Procedure	7
	1.7 EVALUATION PROCEDURES	8
	1.8 The SAR Measurement System	.10
	1.9 System Components	.12
	1.10 SAR System Verification	.14
	1.11 Tissue Simulant Fluid for the Frequency Band	.15
	1.12 Test Standards and Limits	.17
2.	Summary of Results	.19
3.	Instruments List	.20
4.	Measurements	.21
5.	System Verification	.25
6.	DAE & Probe Calibration certificate	.27
7.	Uncertainty Budget	.39
8.	Phantom description	.40
9.	System Validation from Original equipment supplier	.41



Page: 4 of 44

## 1. General Information

#### 1.1 Testing Laboratory

SGS Taiwan Ltd. Electronics & Communication Laboratory				
134, Wu Kung Road	, Wuku industrial zone			
Taipei county, Taiwa	Taipei county, Taiwan, R.O.C.			
Telephone	elephone +886-2-2299-3279			
Fax +886-2-2298-0488				
Internet				

#### 1.2 Details of Applicant

Company Name	Fusion Garage
Company Address	5 Harper Road #03-02 Singapore 369673
Contact Person	Marcus Mok
TEL	(65) 6383 5909

### 1.3 Description of EUT

EUT Name	Smart Phone		
Model Name	Grid 4		
Band Name Fusion Garage			
IMEI Code	354293040118419		
FCC ID	ZKN-GRID4		
Mode of Operation	GSM/GPRS/EDGE/WCDMA/HSDPA/ HSUPA/WLAN802.11 b/g/n(20M) band		

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽 造、竄改皆屬非法,違犯者將會被依法追訴。



Page: 5 of 44

Definition	Production unit							
Duty Cycle	GSM		GPRS/ EDGE		WCDMA		b/	WLAN 802.11 g/n (20M)
	1/8.3		1/2	2		1		1
TX Frequency Range (MHz)	GSM850	GSM1900		WCDMA Band II		WCDMA Band V		WLAN 802.11 b/g/n (20M)
	824.2- 848.8		350.2- 909.8	1852 190		826.4 846.6		2412- 2462
Channel Number (ARFCN)	GSM850	GS	M1900	WCE Band		WCDM/ Band \		WLAN 802.11 b/g/n (20M)
	128- 251		512- 810	92 <i>6</i> 953		4132- 4233	-	1-11
VOIP Function				No	0			



Page: 6 of 44

#### 1.4 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

#### 1.5 Operation description

#### General:

- 1. The EUT is controlled by using a Radio Communication Tester (R&S CMU200), and the communication between the EUT and the tester is established by air link.
- 2. Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s). The EUT is set to maximum power level during all tests, and at the beginning of each test the batt ery is fully charged.
- 3. During the SAR testing, the DASY4 system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.
- 4. The testing device is a mobile hotspot product, the test separation distance is **10mm** due to its dimension of testing device (121 mmx 62 mm) is bigger than 9 x 5 cm refered as test guidance of KDB941225D06. (No need to perform SAR testing with Body worn accessory (15mm separation distance) due to its hotspot mode(10mm separation distance) is conservation than Body worn accessory mode.)


#### Additional configuration(Body):

5. For highest SAR configuration in this band repeated with external earphone. (Model No.: <u>DLS-EP2015M-RR</u>, Supplier: <u>iMecury</u>).




Page: 7 of 44

#### 1.6 Positioning Procedure

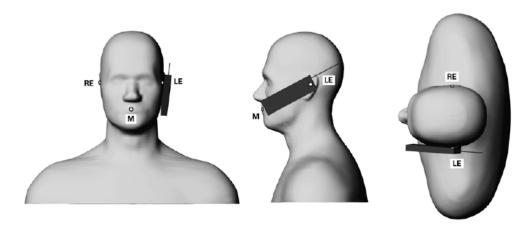

Phone position 1, "cheek" or "touch" position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning

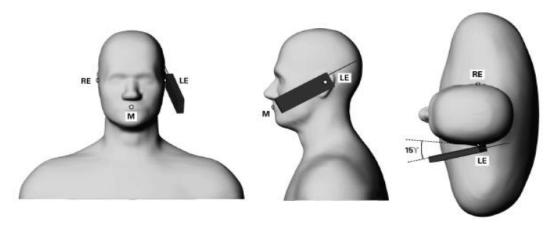

Phone position 2, "tilted position." The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning Cheek/Touch Position:

the handset was brought toward the mouth of the head phantom by pivoting against the ear reference point until any point of the mouthpiece or keypad touched the phantom. Ear/Tilt Position:

With the phone aligned in the Cheek/Touch position, the handset was tilted away from the mouth with respect to the test device reference point by 15 degrees.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan. / 台北縣五股工業區五工路136之1號台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2299-9489 www.sas.com.tw



Page: 8 of 44

#### 1.7 EVALUATION PROCEDURES

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- 3. The generation of a high-resolution mesh within the measured volume
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- 6. The calculation of the averaged SAR within masses of 1g and 10g. The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。



Page: 9 of

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans.

The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30x30x30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found.

If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.



Page: 10 of 44

#### 1.8 The SAR Measurement System

A photograph of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 4 professional system ). A Model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR=  $\sigma$  ( $|Ei|^2$ )/  $\rho$  where  $\sigma$  and ρ are the conductivity and mass density of the tissue-simulant.

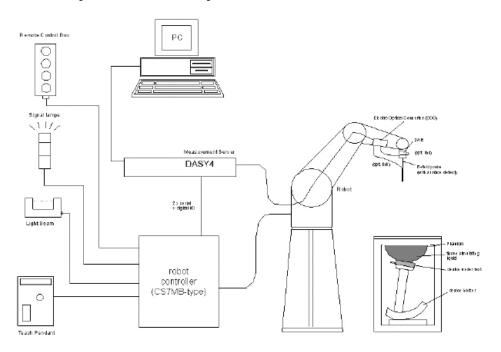


Fig.a The block diagram of SAR system

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞 造、竄改皆屬非法,違犯者將會被依法追訴。



Page: 11 of 44

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
  - A computer operating Windows 2000 or Windows XP.
  - DASY4 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
  - The SAM twin phantom enabling testing left-hand and right-hand usage.
  - The device holder for handheld mobile phones.
  - Tissue simulating liquid mixed according to the given recipes.
  - Validation dipole kits allowing to validate the proper functioning of the system.



Page: 12 of 44

#### 1.9 System Components

#### **EX3DV4 E-Field Probe**

Construction:	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)			
Calibration:	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL835/1900MHz Additional CF for other liquids and frequencies upon request			
		EX3DV4 E-Field Probe		
Frequency:	10 MHz to $>$ 6 GHz; Linearity: $\pm$ 0.2 dB (30)	MHz to 6 GHz)		
Directivity:	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)			
Dynamic Range:	: $10 \mu \text{W/g to} > 100 \text{ mW/g}$ ; Linearity: $\pm 0.2 \text{ dB (noise: typically} < 1 \mu \text{W/g})$			
Dimensions:	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm			
Application:	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.			



Page: 13 of 44

#### **SAM PHANTOM V4.0C**

Construction:	The shell corresponds to the specifications of the Specific				
	Anthropomorphic Mannequin (SAM) phantom defined in IEEE				
	1528-200X, CENELEC 50361 and IEC 62209.				
	It enables the dosimetric evaluation	•			
	usage as well as body mounted usa				
	cover prevents evaporation of the li				
	phantom allow the complete setup of all predefined phantom				
	positions and measurement grids by manually teaching three points				
	with the robot.				
Shell Thickness:	2 ± 0.2 mm				
Filling Volume:	Approx. 25 liters	The state of the s			
Dimensions:	Length: 1000 mm;				
	Width: 500 mm				

#### **DEVICE HOLDER**

Construction	In combination with the Twin SAM Phantom V4.0/V4.0C or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different	
	phantom locations (left head, right head, flat phantom).	Device Holder



Page: 14 of 44

#### 1.10 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 5% from the target SAR values.

These tests were done at 835/1900 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1. During the tests, the ambient temperature of the laboratory was in the range 22.1°C, the relative humidity was in the range 62% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.


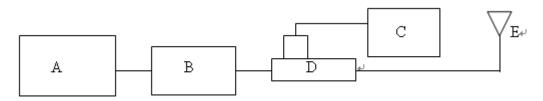


Fig.b The block diagram of system verification

- A. Agilent Model 8648D Signal Generator
- B. Mini circuits Model ZHL-42 Amplifier
- C. Agilent Model U2001B Power Sensor
- D. Agilent Model 778D Dual directional coupling
- E. Reference dipole antenna



Photograph of the dipole Antenna

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。

No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan. / 台北縣五股工業區五工路136之1號 

 SGS Taiwan Ltd.

 台灣檢驗科技股份有限公司
 No. 134, Wu Kung Rd

 t (886-2) 2299-3939

 f (886-2) 2299-9489 www.sgs.com.tw



Page: 15 of 44

Validation Kit	Frequency (MHz)	Target SAR (1g) (Pin=250mW)	Measured SAR (1g)	Measured Date
D835V2 S/N: 4d063	835 MHz (Body)	2.43 mW/g	2.41mW/g	2011-08-11
D1900V2 S/N: 5d027	1900 MHz (Body)	9.93 mW/g	9.99mW/g	2011-08-11

Table 1. System validation (follow manufacture target value)

#### 1.11 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Head-simulant fluid were measured by using the HP Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjuncation with HP 8753D Network Analyzer (30 KHz-6000MHz).

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The depth of the tissue simulant iin the flat section of the phantom was 15cm±5mm during all tests. (Appendix Fig .2)

		• 1 1				
Fraguancy		Measurement date/ Limits	Dielectric Parameters			
Frequency (MHz)	Tissue type		ρ	σ (S/m)	Simulated Tissue Temperature(° C)	
025		Measured, 2011-08-11	55.3	1.02	21.7	
835	Body	Recommended Limits	51.21-56.60	0.95-1.05	20-24	
1900	0 Body	Measured, 2011-08-11	51.4	1.59	21.7	
		Recommended Limits	48.55-53.66	1.44-1.60	20-24	

Table 2. Dielectric Parameters of Tissue Simulant Fluid



Page: 16 of 44

The composition of the brain tissue simulating liquid:

Ingredie nt	850MHz (Body)	1900MHz (Body)
DGMBE	Х	300.67g
Water	631.68 g	716.56 g
Salt	11.72 g	4.0 g
Prevento		
I	1.2 g	Х
D-7		
Cellulose	Χ	Х
Sugar	600 g	Х
Total	1 L	1 L
amount	(1.0kg)	(1.0kg)

Table 3. Recipes for tissue simulating liquid



Page: 17 of 44

#### 1.12 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1–1992, Copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.

These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter.

Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

- (1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube). Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.
- (2) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。



Page: 18 of

the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube).

Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube).

General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure.

Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section. (Table .6)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 m W/g	8.00 m W/g
Spatial Average SAR (Whole Body)	0.08 m W/g	0.40 m W/g
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 m W/g	20.00 m W/g

Table 4. RF exposure limits

#### Notes:

- 1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- 2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。



Page: 19 of 44

# 2. Summary of Results

## **GSM 850**

Hotspot mo	de_ (testi	ng in G	SM mode)_repeat	ed with earphon	е					
(Model No.: <u>[</u>	(Model No.: <u>DLS-EP2015M-RR,</u> Supplier: <u>iMecury</u> )									
Frequency Channel MHz Conducted Output Measured(W/kg) Amb. Liquid										
	Power (Average) 1g Temp[°C] Temp[°C									
850 MHz	190	836.6	24.6dBm	0.658	22.1	21.7				

## **GSM 1900**

Hotspot mo	de_ (testi	ing in G	SM mode)_repeat	ed with earphon	е				
(Model No.: <u>DLS-EP2015M-RR</u> , Supplier: <u>iMecury</u> )									
Frequency	Channel	MHz	Conducted Output	Measured(W/kg)	Amb.	Liquid			
	Power (Average) 1g Temp[°C] Temp[°								
1900 MHz	512	1850.2	18.9dBm	0.406	22.1	21.7			

# **WCDMA Band II**

Hotspot mo	de_ (test	ing in R	99 mode)_repeate	ed with earphone	<del>)</del>				
(Model No.: <u>DLS-EP2015M-RR,</u> Supplier: <u>iMecury</u> )									
Frequency	Channel	MHz	Conducted Output	Measured(W/kg)	Amb.	Liquid			
	Power (Average) 1g Temp[°C] Temp[°C								
1900 MHz	9262	1852.40	22.91dBm	0.886	22.1	21.7			

# **WCDMA Band V**

Hotspot mo	de_ (testi	ing in R	99 mode)_repeate	ed with earphone	9				
(Model No.: <u>DLS-EP2015M-RR,</u> Supplier: <u>iMecury</u> )									
Frequency	Channel	MHz	Conducted Output	Measured(W/kg)	Amb.	Liquid			
	Power (Average) 1g Temp[°C] Temp[°C								
850 MHz	4233	846.60	23.25dBm	0.711	22.1	21.7			

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽 造、竄改皆屬非法,違犯者將會被依法追訴。

\*\*\*SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan. / 台北縣五股工業區五工路136≥1號台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2299-9489 www.sgs.com.tw



Page: 20 of 44

# 3. Instruments List

Manufacturer	Device	Туре	Serial number	Date of last calibration
Schmid & Partner Engineering AG	Dosimetric E-Field Probe	EX3DV4	3770	Apr.19.2011
Schmid & Partner	835 /1900 MHz	D835V2	4d063	May.25.2011
Engineering AG	System Validation Dipole	D1900V2	5d027	Apr.19.2011
Schmid & Partner Engineering AG	Data acquisition Electronics	DAE4	547	Aug.18.2010
Schmid & Partner Engineering AG	Software	DASY 4 V4.7 Build 80	N/A	Calibration not required
Schmid & Partner Engineering AG	Phantom	SAM	N/A	Calibration not required
HP	Network Analyzer	8753D	3410A05547	Mar.16.2011
HP	Dielectric Probe Kit	85070D	US01440168	Calibration not required
Agilent	Dual-directional coupler	778D	50313	Aug.25.2010
Agilent	RF Signal Generator	8648D	3847M00432	Jun.01.2011
Agilent	Power Sensor	U2001B	MY48100169	Apr.28.2011
R&S	Radio Communication Test	CMU200	113505	May.31.2011



Page: 21 of 44

#### 4. Measurements

Date: 2011/8/11

### Hotspot mode\_ Rear side\_CH190\_repeated with earphone

(Test distance is 10mm)

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Muscle 900 MHz Medium parameters used: f = 837 MHz;  $\sigma = 1.02$  mho/m;  $\epsilon_r =$ 55.3;  $\rho = 1000 \text{ kg/m}^3$ 

- Probe: EX3DV4 SN3770; ConvF(9.3, 9.3, 9.3); Calibrated: 2011/4/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2010/8/18
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

BODY/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.671 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,

dz=5mm

Reference Value = 20.8 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 0.920 W/kg

SAR(1 g) = 0.658 mW/g; SAR(10 g) = 0.464 mW/g

Maximum value of SAR (measured) = 0.700 mW/g

BODY/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm,


dz=5mm


Reference Value = 20.8 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.623 mW/g; SAR(10 g) = 0.364 mW/g

Maximum value of SAR (measured) = 0.673 mW/g



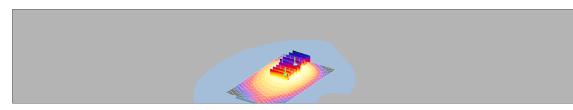

0 dB = 0.673 mW/q

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan. / 台北縣五股工業區五工路136之1號台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2299-9489 www.sgs.com.tw



Page: 22 of 44 Date: 2011/8/11

#### Hotspot mode \_Rear side\_CH512\_repeated with earphone

(Test distance is 10mm)

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: M1800 & 1900 Medium parameters used (interpolated): f = 1850.2 MHz;  $\sigma = 1.54$ 

mho/m;  $\varepsilon_r = 51.6$ ;  $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section

#### DASY4 Configuration:

Probe: EX3DV4 - SN3770; ConvF(7.51, 7.51, 7.51); Calibrated: 2011/4/19

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2010/8/18

Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

BODY/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.436 mW/g


BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,

Reference Value = 5.07 V/m: Power Drift = 0.053 dB

Peak SAR (extrapolated) = 0.672 W/kg

SAR(1 g) = 0.406 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 0.439 mW/g

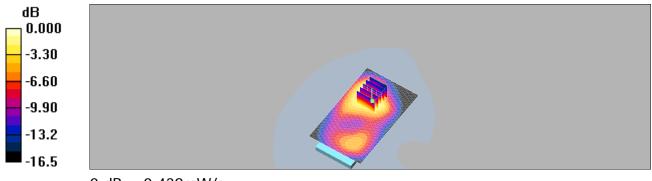

0 dB = 0.439 mW/q

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,発責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan. / 台北縣五股工業區五工路136之1號台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2299-9489 www.sas com tw



Page: 23 of 44

Date: 2011/8/11

### Hotspot mode \_ Rear side \_CH9262\_repeated with earphone

(Test distance is 10mm)

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: M1800 & 1900 Medium parameters used (interpolated): f = 1852.4 MHz;  $\sigma = 1.54$ 

mho/m;  $\varepsilon_r = 51.6$ ;  $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section

#### DASY4 Configuration:

Probe: EX3DV4 - SN3770; ConvF(7.51, 7.51, 7.51); Calibrated: 2011/4/19

Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn547; Calibrated: 2010/8/18

Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

BODY/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.964 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,


dz=5mm

Reference Value = 7.40 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.886 mW/g; SAR(10 g) = 0.533 mW/g

Maximum value of SAR (measured) = 0.960 mW/g

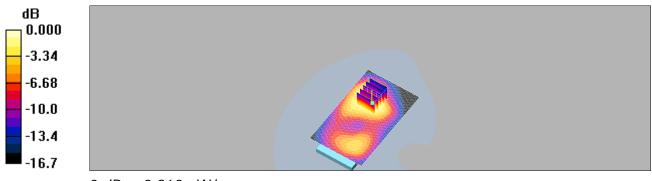

0 dB = 0.960 mW/q

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,発責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。



Page: 24 of 44

Date: 2011/8/11

### Hotspot mode \_ Rear side \_CH4233\_repeated with earphone

(Test distance is 10mm)

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1 Medium: Muscle 900 MHz Medium parameters used: f = 847 MHz;  $\sigma = 1.03$  mho/m;  $\epsilon_r =$ 55.2;  $\rho = 1000 \text{ kg/m}^3$ 

- Probe: EX3DV4 SN3770; ConvF(9.3, 9.3, 9.3); Calibrated: 2011/4/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2010/8/18
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

BODY/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.838 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,

dz=5mm

Reference Value = 21.8 V/m: Power Drift = -0.1 70 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.701 mW/g; SAR(10 g) = 0.403 mW/g

Maximum value of SAR (measured) = 0.780 mW/g


BODY/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm,

Reference Value = 21.8 V/m; Power Drift = -0.170 dB

Peak SAR (extrapolated) = 0.988 W/kg

SAR(1 g) = 0.711 mW/g; SAR(10 g) = 0.500 mW/g

Maximum value of SAR (measured) = 0.760 mW/g

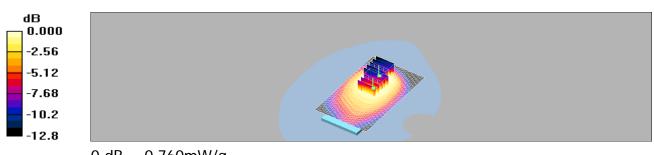

0 dB = 0.760 mW/q

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,発責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。



# 5. System Verification

Report No.: ES/2011/40012-01

Page: 25 of 44

Date: 2011/8/11

#### DUT: Dipole 835 MHz;

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Muscle 900 MHz Medium parameters used: f = 835 MHz;  $\sigma = 1.02$  mho/m;  $\varepsilon_r =$ 

55.3;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY4 Configuration:

Probe: EX3DV4 - SN3770; ConvF(9.3, 9.3, 9.3); Calibrated: 2011/4/19

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2010/8/18

Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 2.62 mW/g

#### Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 50.9 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 3.57 W/kg

SAR(1 g) = 2.41 mW/g; SAR(10 g) = 1.59 mW/g

Maximum value of SAR (measured) = 2.61 mW/g

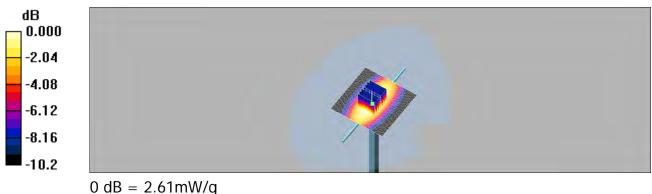

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,発責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。



Page: 26 of 44

Date: 2011/8/11

#### DUT: Dipole 1900 MHz;

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: M1800 & 1900 Medium parameters used: f = 1900 MHz;  $\sigma = 1.59$  mho/m;  $\epsilon_r = 51.4$ ;

 $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY4 Configuration:

Probe: EX3DV4 - SN3770; ConvF(7.51, 7.51, 7.51); Calibrated: 2011/4/19

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2010/8/18

Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Pin=250mW/Area Scan (51x61x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 13.2 mW/g

#### Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 83.3 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 18.7 W/kg

SAR(1 g) = 9.99 mW/g; SAR(10 g) = 5.15 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

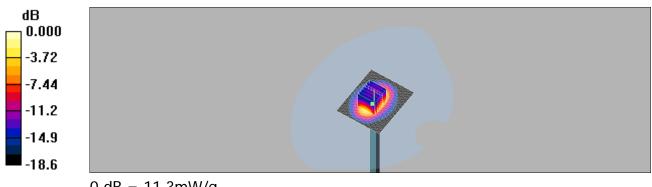

0 dB = 11.3 mW/q

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,発責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。



Page: 27 of 44

## 6. DAE & Probe Calibration certificate

Calibration Laboratory of SNISS Schweizerischer Kalibrierdienst S Schmid & Partner Service suisse d'étalonnage 0 C Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland Servizio svizzero di taratura Swiss Calibration Service Accreditation No.: SCS 108 Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates SGS-TW Certificate No: DAE4-547\_Aug10 **CALIBRATION CERTIFICATE** DAE4 - SD 000 D04 BJ - SN: 547 Object Calibration procedure(s) QA CAL-06.v22 Calibration procedure for the data acquisition electronics (DAE) August 18, 2010 Calibration date: This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%. Calibration Equipment used (M&TE critical for calibration) Primary Standards ID# Cal Date (Certificate No.) Scheduled Calibration Keithley Multimeter Type 2001 SN: 0810278 1-Oct-09 (No: 9055) Oct-10 Secondary Standards ID# Check Date (in house) Scheduled Check Calibrator Box V1.1 SE UMS 006 AB 1004 07-Jun-10 (in house check) In house check: Jun-11 Function Signature Dominique Steffen Calibrated by: Technician Approved by: Fin Bomholt R&D Director i.v. Balillio Issued: August 18, 2010 This calibration certificate shall not be reproduced except in full without written approval of the laboratory Certificate No: DAE4-547\_Aug10 Page 1 of 5

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。



Page: 28 of 44

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

SGS-TW (Auden)

Certificate No: EX3-3770 Apr11

Accreditation No.: SCS 108

#### **CALIBRATION CERTIFICATE**

EX3DV4 - SN:3770 Object

Calibration procedure(s) QA CAL-01.v7, QA CAL-14.v3, QA CAL-23.v4, QA CAL-25.v3

Calibration procedure for dosimetric E-field probes

April 19, 2011 Calibration date:

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41495277	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	23-Apr-10 (No. DAE4-654_Apr10)	Apr-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Function Calibrated by Katja Pokovic Technical Manager Fin Bomholt R&D Director Approved by: Somhall

Page 1 of 11

Issued: April 19, 2011 This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-3770\_Apr11

Robert Chang

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞 造、竄改皆屬非法,違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan. / 台北縣五股工業區五工路136之1號台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2299-9489 www.sgs.com.tw



Page: 29 of 44

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

tissue simulating liquid TSL NORMx,y,z sensitivity in free space ConvF DCP sensitivity in TSL / NORMx,y,z diode compression point

CF crest factor (1/duty\_cycle) of the RF signal A.B.C modulation dependent linearization parameters

Polarization φ o rotation around probe axis

9 rotation around an axis that is in the plane normal to probe axis (at measurement center), Polarization 9

i.e., 9 = 0 is normal to probe axis

#### Calibration is Performed According to the Following Standards:

IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement

Techniques", December 2003
IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization 9 = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- $NORM(f)x,y,z = NORMx,y,z * frequency_response$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal
- Ax,y,z; Bx,y,z; Cx,y,z are numerical linearization parameters in dB assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media.
- VR: VR is the validity range of the calibration related to the average diode voltage or DAE voltage in mV.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power standard for 1 > 5000 km/z), and inside waveguing using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm$  50 MHz to  $\pm$  100
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Certificate No: EX3-3770\_Apr11

Page 2 of 11

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。



Page: 30 of 44

EX3DV4 - SN:3770 April 19, 2011

# Probe EX3DV4

SN:3770

Manufactured: July 6, 2010 Calibrated: April 19, 2011

Calibrated for DASY/EASY Systems (Note: non-compatible with DASY2 system!)

Certificate No: EX3-3770\_Apr11 Page 3 of 11

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞 造、竄改皆屬非法,違犯者將會被依法追訴。

 SGS Taiwan Ltd.
 No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan. / 台北縣五股工業區五工路136之1號台灣檢驗科技股份有限公司

 t
 (886-2) 2299-3939
 f (886-2) 2299-9489
 www.sgs.com.tw



Page: 31 of 44

EX3DV4-SN:3770 April 19, 2011

#### DASY/EASY - Parameters of Probe: EX3DV4 - SN:3770

#### **Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (µV/(V/m) <sup>2</sup> ) <sup>A</sup>	0.32	0.62	0.40	± 10.1 %
DCP (mV) <sup>B</sup>	106.6	98.3	102.8	

#### **Modulation Calibration Parameters**

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc <sup>E</sup> (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	120.8	±2.7 %
			Y	0.00	0.00	1.00	134.3	
			Z	0.00	0.00	1.00	133.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: EX3-3770\_Apr11

Page 4 of 11

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞 造、竄改皆屬非法,違犯者將會被依法追訴。

The uncertainties of NormX, Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6). Numerical linearization parameter: uncertainty not required. Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the



Page: 32 of 44

EX3DV4-SN:3770 April 19, 2011

#### DASY/EASY - Parameters of Probe: EX3DV4 - SN:3770

#### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>c</sup>	Relative Permittivity F	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	9.58	9.58	9.58	0.80	0.70	± 12.0 %
835	41.5	0.90	9.25	9.25	9.25	0.80	0.67	± 12.0 %
900	41.5	0.97	9.06	9.06	9.06	0.76	0.71	± 12.0 %
1750	40.1	1.37	7.97	7.97	7.97	0.80	0.61	± 12.0 %
1900	40.0	1.40	7.78	7.78	7.78	0.71	0.62	± 12.0 %
2000	40.0	1.40	7.79	7.79	7.79	0.75	0.58	± 12.0 %
2450	39.2	1.80	6.99	6.99	6.99	0.80	0.56	± 12.0 %
2600	39.0	1.96	6.95	6.95	6.95	0.66	0.62	± 12.0 %

Certificate No: EX3-3770\_Apr11 Page 5 of 11

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。

 $<sup>^{\</sup>circ}$  Frequency validity of  $\pm$  100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to  $\pm$  50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.  $^{\circ}$  At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to  $\pm$  10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to  $\pm$  5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



Page: 33 of 44

EX3DV4-SN:3770 April 19, 2011

#### DASY/EASY - Parameters of Probe: EX3DV4- SN:3770

#### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>c</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	9.42	9.42	9.42	0.73	0.72	± 12.0 %
835	55.2	0.97	9.30	9.30	9.30	0.72	0.72	± 12.0 %
900	55.0	1.05	9.12	9.12	9.12	0.73	0.75	± 12.0 %
1750	53.4	1.49	7.84	7.84	7.84	0.80	0.68	± 12.0 %
1900	53.3	1.52	7.51	7.51	7.51	0.80	0.62	± 12.0 %
2000	53.3	1.52	7.44	7.44	7.44	0.80	0.66	± 12.0 %
2450	52.7	1.95	6.96	6.96	6.96	0.80	0.50	± 12.0 %
2600	52.5	2.16	6.78	6.78	6.78	0.80	0.50	± 12.0 %
5200	49.0	5.30	4.42	4.42	4.42	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.12	4.12	4.12	0.52	1.90	± 13.1 %
5600	48.5	5.77	3.54	3.54	3.54	0.60	1.90	± 13.1 %
5800	48.2	6.00	3.80	3.80	3.80	0.60	1.90	± 13.1 %

Certificate No: EX3-3770\_Apr11

Page 6 of 11

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。

<sup>&</sup>lt;sup>c</sup> Frequency validity of  $\pm$  100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to  $\pm$  50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.


<sup>7</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to  $\pm$  10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to  $\pm$  5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



Page: 34 of 44

EX3DV4-SN:3770 April 19, 2011

# Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

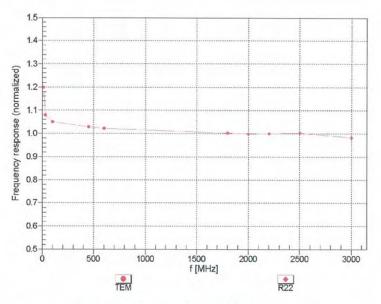

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No: EX3-3770\_Apr11 Page 7 of 11


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞 造、竄改皆屬非法,違犯者將會被依法追訴。





Page: 35 of 44

EX3DV4- SN:3770 April 19, 2011

#### Receiving Pattern ( $\phi$ ), $\vartheta = 0^{\circ}$





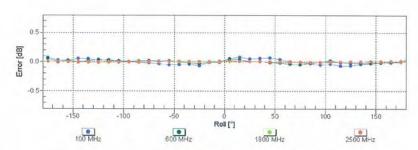

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Certificate No: EX3-3770\_Apr11

Page 8 of 11


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞 造、竄改皆屬非法,違犯者將會被依法追訴。




Page: 36 of 44

EX3DV4- SN:3770 April 19, 2011

#### Dynamic Range f(SAR<sub>head</sub>) (TEM cell, f = 900 MHz)

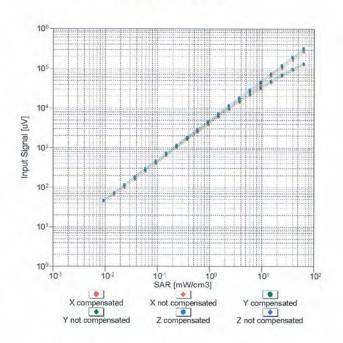

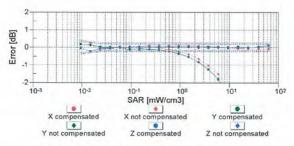

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No: EX3-3770\_Apr11

Page 9 of 11


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <a href="https://www.sgs.com">www.sgs.com</a>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。




Page: 37 of 44

EX3DV4- SN:3770 April 19, 2011

#### **Conversion Factor Assessment**

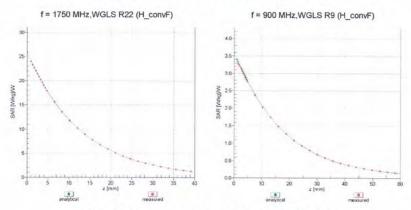

#### Deviation from Isotropy in Liquid Error (\$\phi\$, \$\text{9}\$), f = 900 MHz

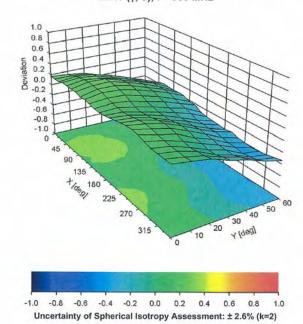

Certificate No: EX3-3770\_Apr11

Page 10 of 11

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <a href="https://www.sgs.com">www.sgs.com</a>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。



Page: 38 of 44

EX3DV4-SN:3770 April 19, 2011

#### DASY/EASY - Parameters of Probe: EX3DV4 - SN:3770

#### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm

Certificate No: EX3-3770\_Apr11 Page 11 of 11

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞 造、竄改皆屬非法,違犯者將會被依法追訴。



# 7. Uncertainty Budget

Report No.: ES/2011/40012-01

Page: 39 of 44

### DASY4 Uncertainty Budget According to IEEE P1528 [1]

Error Description	Uncertainty value	Prob. Dist.	Div.	$\begin{pmatrix} (c_i) \\ 1 \end{pmatrix}$	$\begin{pmatrix} (c_i) \\ 10g \end{pmatrix}$	Std. Unc. (1g)	Std. Unc. (10g)	$\begin{pmatrix} (v_i) \\ v_{eff} \end{pmatrix}$
Measurement System								
Probe Calibration	±4.8 %	N	1	1	1	±4.8%	±4.8 %	$\infty$
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9 %	$\infty$
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9 %	$\infty$
Boundary Effects	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6 %	$\infty$
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	$\infty$
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	$\infty$
Readout Electronics	±1.0%	N	1	1	1	±1.0%	±1.0 %	00
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5 %	$\infty$
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	$\infty$
RF Ambient Conditions	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	$\infty$
Probe Positioner	±0.4%	R	$\sqrt{3}$	1	1	±0.2%	±0.2 %	$\infty$
Probe Positioning	±2.9 %	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	$\infty$
Max. SAR Eval.	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6 %	$\infty$
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9%	±2.9 %	875
Device Holder	±3.6 %	N	1	1	1	±3.6%	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9%	±2.9 %	$\infty$
Phantom and Setup								
Phantom Uncertainty	±4.0 %	R	$\sqrt{3}$	1	1	±2.3%	±2.3 %	$\infty$
Liquid Conductivity (target)	±5.0%	R	$\sqrt{3}$	0.64	0.43	±1.8%	±1.2%	$\infty$
Liquid Conductivity (meas.)	±2.5 %	N	1	0.64	0.43	±1.6%	±1.1%	$\infty$
Liquid Permittivity (target)	±5.0 %	R	$\sqrt{3}$	0.6	0.49	±1.7%	±1.4 %	$\infty$
Liquid Permittivity (meas.)	±2.5 %	N	1	0.6	0.49	±1.5%	±1.2 %	$\infty$
Combined Std. Uncertainty						±10.3 %	±10.0 %	331
Expanded STD Uncertain	ity					±20.6 %	±20.1 %	

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽 造、竄改皆屬非法,違犯者將會被依法追訴。



Page: 40 of 44

# 8. Phantom description

Schmid & Partner Engineering AG

Zeughausstrasse 43, 6004 Zurich, Switzerlan Phone +41 1 245 9700, Fax +41 1 245 9779 info@speeg.com, http://www.speeg.com

#### Certificate of Conformity / First Article Inspection

item	SAM Twin Phantom V4.0	
Type No	QD 000 P40 C	
Series No	TP-1150 and higher	-
Manufacturer	SPEAG Zeughausstrasse 43 CH-8004 Zbrich Switzerland	

Tests
The series production process used allows the limitation to test of first articles.
Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series items (called samples) or are tested at each item.

Test	Requirement	Details	Units tested
Dimensions	Compliant with the geometry according to the CAD model.	IT'IS CAD File (*)	First article, Samples
Material thickness of shell	Compliant with the requirements according to the standards	2mm +/- 0.2mm in flat and specific areas of head section	First article, Samples, TP-1314 ff.
Material thickness at ERP	Compliant with the requirements according to the standards	6mm +/- 0.2mm at ERP	First article, All items
Material parameters	Dielectric parameters for required frequencies	300 MHz - 5 GHz: Relative permittivity < 5, Loss tangent < 0.05	Material samples
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards if handled and cleaned according to the instructions. Observe technical Note for material compatibility.	DEGMBE based simulating liquids	Pre-series, First article, Material samples
Sagging	Compliant with the requirements according to the standards. Sagging of the flat section when filled with tissue simulating liquid.	< 1% typical < 0.8% if filled with 155mm of HSL900 and without DUT below	Prototypes, Sample testing

- Standards
  [1] CENELEC EN 50361
  [2] IEEE Std 1528-2003
  [3] IEC 62208 Part I
  [4] FCC OET Bulletin 65, Supplement C, Edition 01-01
  (\*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of the other documents.

Conformity
Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standards [1] to [4].

07.07.2005

nd & Pogner Engineering AG hausstesse 43, 8054 Zurleh Switzerland e 541,1 345 9705 Family 1-745 9779

Dec No 881 - QD 000 P40 C - F

Signature / Stamp

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。



Page: 41 of 44

# 9. System Validation from Original equipment supplier

Calibration Laboratory of Schmid & Partner **Engineering AG** Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura

Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates Accreditation No.: SCS 108

SGS-TW (Auden)

Cartificate No. D835V2-4d063 May11

Object	D835V2 - SN: 4d	063	
Calibration procedure(s)	QA CAL-05.v8 Calibration proce	dure for dipole validation kits abo	ove 700 MHz
Calibration date:	May 25, 2011		
		onal standards, which realize the physical un robability are given on the following pages ar	
		y facility: environment temperature (22 ± 3)°(	C and humidity < 70%.
Calibration Equipment used (M&	TE critical for calibration)		And the second
Calibration Equipment used (M&	TE critical for calibration)	Cal Date (Certificate No.)	Scheduled Calibration
Calibration Equipment used (M& Primary Standards Power meter EPM-442A	TE critical for calibration)  ID #  GB37480704	Cal Date (Certificate No.) 06-Oct-10 (No. 217-01266)	Scheduled Calibration Oct-11
Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A	ID #  GB37480704 US37292783	Cal Date (Certificate No.) 06-Oct-10 (No. 217-01266) 06-Oct-10 (No. 217-01266)	Scheduled Calibration Oct-11 Oct-11
Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator	TE critical for calibration)  ID #  GB37480704  US37292783  SN: S5086 (20b)	Cal Date (Certificate No.) 06-Oct-10 (No. 217-01266) 06-Oct-10 (No. 217-01266) 29-Mar-11 (No. 217-01367)	Scheduled Calibration Oct-11 Oct-11 Apr-12
Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination	TE critical for calibration)  ID #  GB37480704  US37292783  SN: 55086 (20b)  SN: 5047.2 / 06327	Cal Date (Certificate No.) 06-Oct-10 (No. 217-01266) 06-Oct-10 (No. 217-01266) 29-Mar-11 (No. 217-01367) 29-Mar-11 (No. 217-01371)	Scheduled Calibration Oct-11 Oct-11 Apr-12 Apr-12
Calibration Equipment used (M&T Primary Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3	TE critical for calibration)  ID #  GB37480704  US37292783  SN: S5086 (20b)	Cal Date (Certificate No.) 06-Oct-10 (No. 217-01266) 06-Oct-10 (No. 217-01266) 29-Mar-11 (No. 217-01367)	Scheduled Calibration Oct-11 Oct-11 Apr-12
All calibrations have been conducted Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards	TE critical for calibration)  ID #  GB37480704  US37292783  SN: \$5086 (20b)  SN: 5047.2 / 06327  SN: 3205	Cal Date (Certificate No.) 06-Oct-10 (No. 217-01266) 06-Oct-10 (No. 217-01266) 29-Mar-11 (No. 217-01367) 29-Mar-11 (No. 217-01371) 29-Apr-11 (No. ES3-3205_Apr11)	Scheduled Calibration Oct-11 Oct-11 Apr-12 Apr-12 Apr-12
Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards Power sensor HP 8481A	ID #  GB37480704 US37292783 SN: S5086 (20b) SN: 5047.2 / 06327 SN: 3205 SN: 601	Cal Date (Certificate No.)  06-Oct-10 (No. 217-01266)  06-Oct-10 (No. 217-01266)  29-Mar-11 (No. 217-01367)  29-Mar-11 (No. 217-01371)  29-Apr-11 (No. ES3-3205_Apr11)  10-Jun-10 (No. DAE4-601_Jun10)	Scheduled Calibration Oct-11 Oct-11 Apr-12 Apr-12 Apr-12 Jun-11
Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards	TE critical for calibration)  ID #  GB37480704  US37292783  SN: S5086 (20b)  SN: 5047.2 / 06327  SN: 3205  SN: 601  ID #	Cal Date (Certificate No.)  06-Oct-10 (No. 217-01266)  06-Oct-10 (No. 217-01266)  29-Mar-11 (No. 217-01367)  29-Mar-11 (No. 217-01371)  29-Apr-11 (No. ES3-3205_Apr11)  10-Jun-10 (No. DAE4-601_Jun10)  Check Date (in house)	Scheduled Calibration Oct-11 Oct-11 Apr-12 Apr-12 Apr-12 Jun-11 Scheduled Check
Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards Power sensor HP 8481A	TE critical for calibration)  ID #  GB37480704  US37292783  SN: S5086 (20b)  SN: 5047.2 / 06327  SN: 3205  SN: 601  ID #  MY41092317	Cal Date (Certificate No.)  06-Oct-10 (No. 217-01266)  06-Oct-10 (No. 217-01266)  29-Mar-11 (No. 217-01367)  29-Mar-11 (No. 217-01371)  29-Apr-11 (No. ES3-3205_Apr11)  10-Jun-10 (No. DAE4-601_Jun10)  Check Date (in house)	Scheduled Calibration Oct-11 Oct-11 Apr-12 Apr-12 Apr-12 Jun-11 Scheduled Check In house check: Oct-11
Calibration Equipment used (M&Termany Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards Power sensor HP 8481A RF generator R&S SMT-06	TE critical for calibration)  ID #  GB37480704 US37292783 SN: S5086 (20b) SN: 5047.2 / 06327 SN: 3205 SN: 601  ID #  MY41092317 100005 US37390585 S4206	Cal Date (Certificate No.)  06-Oct-10 (No. 217-01266)  06-Oct-10 (No. 217-01266)  29-Mar-11 (No. 217-01367)  29-Mar-11 (No. 217-01371)  29-Apr-11 (No. ES3-3205_Apr11)  10-Jun-10 (No. DAE4-601_Jun10)  Check Date (in house)  18-Oct-02 (in house check Oct-09)  4-Aug-99 (in house check Oct-09)  18-Oct-01 (in house check Oct-10)	Scheduled Calibration Oct-11 Oct-11 Apr-12 Apr-12 Apr-12 Jun-11 Scheduled Check In house check: Oct-11 In house check: Oct-11
Calibration Equipment used (M&Termany Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards Power sensor HP 8481A RF generator R&S SMT-06 Network Analyzer HP 8753E	ID #  GB37480704 US37292783 SN: S5086 (20b) SN: 5047.2 / 06327 SN: 3205 SN: 601  ID #  MY41092317 100005 US37390585 S4206	Cal Date (Certificate No.)  06-Oct-10 (No. 217-01266)  06-Oct-10 (No. 217-01266)  29-Mar-11 (No. 217-01367)  29-Mar-11 (No. 217-01371)  29-Apr-11 (No. ES3-3205_Apr11)  10-Jun-10 (No. DAE4-601_Jun10)  Check Date (in house)  18-Oct-02 (in house check Oct-09)  4-Aug-99 (in house check Oct-09)  18-Oct-01 (in house check Oct-10)	Scheduled Calibration Oct-11 Oct-11 Apr-12 Apr-12 Apr-12 Jun-11 Scheduled Check In house check: Oct-11 In house check: Oct-11
Calibration Equipment used (M&Termany Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards Power sensor HP 8481A RF generator R&S SMT-06	TE critical for calibration)  ID #  GB37480704 US37292783 SN: S5086 (20b) SN: 5047.2 / 06327 SN: 3205 SN: 601  ID #  MY41092317 100005 US37390585 S4206	Cal Date (Certificate No.)  06-Oct-10 (No. 217-01266)  06-Oct-10 (No. 217-01266)  29-Mar-11 (No. 217-01367)  29-Mar-11 (No. 217-01371)  29-Apr-11 (No. ES3-3205_Apr11)  10-Jun-10 (No. DAE4-601_Jun10)  Check Date (in house)  18-Oct-02 (in house check Oct-09)  4-Aug-99 (in house check Oct-09)  18-Oct-01 (in house check Oct-10)	Scheduled Calibration Oct-11 Oct-11 Apr-12 Apr-12 Apr-12 Jun-11 Scheduled Check In house check: Oct-11 In house check: Oct-11

Certificate No: D835V2-4d063 May11

Page 1 of 8

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。



Page: 42 of 44

#### **DASY5 Validation Report for Body TSL**

Date: 25.05.2011

Test Laboratory: SPEAG, Zurich, Switzerland

#### DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d063

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900

Medium parameters used: f = 835 MHz;  $\sigma = 1 \text{ mho/m}$ ;  $\varepsilon_r = 53.9$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5 Configuration:

Probe: ES3DV3 - SN3205; ConvF(6.02, 6.02, 6.02); Calibrated: 29.04.2011

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 10.06.2010

Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001

Measurement SW: DASY52, V52.6.2 Build (424)


Postprocessing SW: SEMCAD X, V14.4.4 Build (2829)

#### Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 54.297 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 3.530 W/kg

SAR(1 g) = 2.43 mW/g; SAR(10 g) = 1.6 mW/gMaximum value of SAR (measured) = 2.804 mW/g

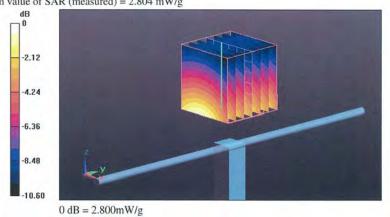

Certificate No: D835V2-4d063\_May11

Page 7 of 8

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞 造、竄改皆屬非法,違犯者將會被依法追訴。



Page: 43 of 44

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates Accreditation No.: SCS 108

S

CALIBRATION (	CERTIFICATE		
Object	D1900V2 - SN: 5	6d027	
Calibration procedure(s)	QA CAL-05.v8 Calibration proce	edure for dipole validation kits	
Calibration date:	April 19, 2011		
The measurements and the unce	ortantico mai cormacioe p	nobability are given on the following pages as	
All calibrations have been condu	cted in the closed laborato	ry facility: environment temperature $(22 \pm 3)^{\circ}$	
	cted in the closed laborato	ry facility: environment temperature $(22 \pm 3)^{\circ}$	C and humidity < 70%.
All calibrations have been condu Calibration Equipment used (M&	acted in the closed laborato		
All calibrations have been condu Calibration Equipment used (M& Primary Standards Power meter EPM-442A	acted in the closed laborato  TE critical for calibration)	ry facility: environment temperature $(22 \pm 3)^{\circ}$ .  Cal Date (Certificate No.)	C and humidity < 70%.  Scheduled Calibration
All calibrations have been condu Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A	TE critical for calibration)  ID #  GB37480704	ry facility: environment temperature (22 ± 3)%  Cal Date (Certificate No.)  06-Oct-10 (No. 217-01266)	C and humidity < 70%.  Scheduled Calibration Oct-11
All calibrations have been condu Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator	TE critical for calibration)  ID #  GB37480704 US37292783	ry facility: environment temperature (22 ± 3)°  Cal Date (Certificate No.)  06-Oct-10 (No. 217-01266)  06-Oct-10 (No. 217-01266)	C and humidity < 70%.  Scheduled Calibration Oct-11 Oct-11
All calibrations have been conducted in Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3	ID #  GB37480704 US37292783 SN: 5086 (20g) SN: 5047.2 / 06327 SN: 3205	ry facility: environment temperature (22 ± 3)%  Cal Date (Certificate No.)  06-Oct-10 (No. 217-01266)  06-Oct-10 (No. 217-01266)  29-Mar-11 (No. 217-01368)	C and humidity < 70%.  Scheduled Calibration  Oct-11  Oct-11  Apr-12
All calibrations have been conductable.  Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3	ID # GB37480704 US37292783 SN: 5086 (20g) SN: 5047.2 / 06327	ry facility: environment temperature (22 ± 3)%  Cal Date (Certificate No.)  06-Oct-10 (No. 217-01266)  06-Oct-10 (No. 217-01366)  29-Mar-11 (No. 217-01371)	C and humidity < 70%.  Scheduled Calibration  Oct-11  Oct-11  Apr-12  Apr-12
All calibrations have been condu	ID #  GB37480704 US37292783 SN: 5086 (20g) SN: 5047.2 / 06327 SN: 3205	Cal Date (Certificate No.)  06-Oct-10 (No. 217-01266)  06-Oct-10 (No. 217-01266)  29-Mar-11 (No. 217-01368)  29-Mar-11 (No. 217-01371)  30-Apr-10 (No. ES3-3205_Apr10)  10-Jun-10 (No. DAE4-601_Jun10)	Scheduled Calibration Oct-11 Oct-11 Apr-12 Apr-12 Apr-11 Jun-11
All calibrations have been condu Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4	ID #  GB37480704 US37292783 SN: 5086 (20g) SN: 5047.2 / 06327 SN: 3205 SN: 601	ry facility: environment temperature (22 ± 3) <sup>ex</sup> Cal Date (Certificate No.)  06-Oct-10 (No. 217-01266)  06-Oct-10 (No. 217-01266)  29-Mar-11 (No. 217-01371)  30-Apr-10 (No. ES3-3205_Apr10)	Scheduled Calibration Oct-11 Oct-11 Apr-12 Apr-12 Apr-11
All calibrations have been condu Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards	ID #  GB37480704 US37292783 SN: 5086 (20g) SN: 5047.2 / 06327 SN: 3205 SN: 601  ID #	Cal Date (Certificate No.)  06-Oct-10 (No. 217-01266)  06-Oct-10 (No. 217-01266)  29-Mar-11 (No. 217-01368)  29-Mar-11 (No. 217-01371)  30-Apr-10 (No. ES3-3205_Apr10)  10-Jun-10 (No. DAE4-601_Jun10)  Check Date (in house)	Scheduled Calibration Oct-11 Oct-11 Apr-12 Apr-12 Apr-11 Jun-11 Scheduled Check
All calibrations have been condu Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards Power sensor HP 8481A	ID #  GB37480704 US37292783 SN: 5086 (20g) SN: 5047.2 / 06327 SN: 3205 SN: 601  ID #  MY41092317	Cal Date (Certificate No.)  06-Oct-10 (No. 217-01266) 06-Oct-10 (No. 217-01266) 29-Mar-11 (No. 217-01368) 29-Mar-11 (No. 217-01371) 30-Apr-10 (No. ES3-3205_Apr10) 10-Jun-10 (No. DAE4-601_Jun10)  Check Date (in house)  18-Oct-02 (in house check Oct-09)	Scheduled Calibration Oct-11 Oct-11 Apr-12 Apr-12 Apr-11 Jun-11 Scheduled Check In house check: Oct-11
All calibrations have been condu Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A RF generator R&S SMT-06	ID #  GB37480704 US37292783 SN: 5086 (20g) SN: 5047.27 06327 SN: 3205 SN: 601  ID #  MY41092317 100005 US37390585 S4206	Cal Date (Certificate No.)  06-Oct-10 (No. 217-01266)  06-Oct-10 (No. 217-01266)  29-Mar-11 (No. 217-01368)  29-Mar-11 (No. 217-01368)  29-Mar-11 (No. 217-01371)  30-Apr-10 (No. ES3-3205_Apr10)  10-Jun-10 (No. DAE4-601_Jun10)  Check Date (in house)  18-Oct-02 (in house check Oct-09)  4-Aug-99 (in house check Oct-09)  18-Oct-01 (in house check Oct-10)	Scheduled Calibration Oct-11 Oct-11 Apr-12 Apr-12 Apr-11 Jun-11 Scheduled Check In house check: Oct-11 In house check: Oct-11
All calibrations have been condu Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards Power sensor HP 8481A RF generator R&S SMT-06 Network Analyzer HP 8753E	ID #  GB37480704 US37292783 SN: 5086 (20g) SN: 5047.2 / 06327 SN: 3205 SN: 601  ID #  MY41092317 100005 US37390585 S4206	Cal Date (Certificate No.) 06-Oct-10 (No. 217-01266) 06-Oct-10 (No. 217-01266) 29-Mar-11 (No. 217-01371) 30-Apr-10 (No. ES3-3205_Apr10) 10-Jun-10 (No. DAE4-601_Jun10) Check Date (in house) 18-Oct-02 (in house check Oct-09) 4-Aug-99 (in house check Oct-09) 18-Oct-01 (in house check Oct-10) Function	Scheduled Calibration Oct-11 Oct-11 Apr-12 Apr-12 Apr-11 Jun-11 Scheduled Check In house check: Oct-11 In house check: Oct-11
All calibrations have been condu Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A RF generator R&S SMT-06	ID #  GB37480704 US37292783 SN: 5086 (20g) SN: 5047.27 06327 SN: 3205 SN: 601  ID #  MY41092317 100005 US37390585 S4206	Cal Date (Certificate No.)  06-Oct-10 (No. 217-01266)  06-Oct-10 (No. 217-01266)  29-Mar-11 (No. 217-01368)  29-Mar-11 (No. 217-01368)  29-Mar-11 (No. 217-01371)  30-Apr-10 (No. ES3-3205_Apr10)  10-Jun-10 (No. DAE4-601_Jun10)  Check Date (in house)  18-Oct-02 (in house check Oct-09)  4-Aug-99 (in house check Oct-09)  18-Oct-01 (in house check Oct-10)	Scheduled Calibration Oct-11 Oct-11 Apr-12 Apr-12 Apr-11 Jun-11 Scheduled Check In house check: Oct-11 In house check: Oct-11

Certificate No: D1900V2-5d027\_Apr11

Page 1 of 9

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞 造、竄改皆屬非法,違犯者將會被依法追訴。



Page: 44 of 44

#### **DASY5 Validation Report for Body TSL**

Date/Time: 19.04.2011 12:53:51

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d027

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U12 BB

Medium parameters used: f = 1900 MHz;  $\sigma = 1.52 \text{ mho/m}$ ;  $\varepsilon_r = 51.1$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5 Configuration:

Probe: ES3DV3 - SN3205; ConvF(4.59, 4.59, 4.59); Calibrated: 30.04.2010

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 10.06.2010

Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002

Measurement SW: DASY52, V52.6.2 Build (424)

Postprocessing SW: SEMCAD X, V14.4.2 Build (2829)

#### Pin=250 mW, Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 96.170 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 17.156 W/kg

SAR(1 g) = 9.93 mW/g; SAR(10 g) = 5.18 mW/g

Maximum value of SAR (measured) = 12.615 mW/g



0 dB = 12.610 mW/g

Certificate No: D1900V2-5d027\_Apr11

Page 8 of 9

# End of 1st part of report

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆 明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、爲 造、竄改皆屬非法,違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan. / 台北縣五股工業區五工路136之1號台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2299-9489 www.sas.com tw