



W66 N220 Commerce Court • Cedarburg, WI 53012

Phone: 262.375.4400 • Fax: 262.375.4248

[www.lsr.com](http://www.lsr.com)

## TEST REPORT # DP 312142 C-1489 U-NII band 2 LSR Job #: C-1489

Compliance Testing of:

Logic PD 37x Torpedo + Wireless SOM

Prepared For:

Logic PD  
411 Washington Ave N. Suite 400  
Minneapolis, MN 55401

This Data Packet is issued under the Authority of:  
Khairul Aidi Zainal, Senior EMC Engineer.

Signature:

Date: 9/19/12

This data packet may not be reproduced, except in full, without written approval of LS Research, LLC.

## TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION .....	4
1.1 - Scope .....	4
1.2 – Normative References .....	4
1.3 - LS Research, LLC Test Facility .....	5
1.4 – Location of Testing .....	5
1.5 – Test Equipment Utilized.....	5
EXHIBIT 2. PERFORMANCE ASSESSMENT .....	6
2.1 – Client Information .....	6
2.2 - Equipment Under Test (EUT) Information .....	6
2.3 - Associated Antenna Description.....	6
2.4 - Product Description .....	6
EXHIBIT 3. EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS .....	7
3.1 - Climate Test Conditions .....	7
3.2 - Modifications Incorporated In The EUT For Compliance Purposes.....	7
3.3 - Deviations & Exclusions From Test Specifications .....	7
EXHIBIT 5. General Procedures. ....	8
5.1 Radiated measurements .....	8
5.2 Calculation of Radiated emissions limits and reported data.....	8
EXHIBIT 6. EUT Duty Cycle.....	10
6.1 Test Procedure.....	10
6.2 Data. ....	10
EXHIBIT 7. Emission Bandwidth (EBW).....	13
7.1 Test procedure. ....	13
7.2 Test Data.....	13
7.3 Screen Captures .....	17
EXHIBIT 8 Maximum Conducted Output Power And Peak Power Spectral Density .....	21
8.1 Test Procedure.....	21
8.2 Limits.....	21
8.3 Test Data.....	22
8.4 Screen Captures .....	24
EXHIBIT 9. Peak Excursion Ratio .....	33
9.1 Test Procedure.....	33
9.2 Limit .....	33

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 2 of 70

9.3 Test Data.....	33
9.4 Screen Captures .....	37
EXHIBIT 10 Spurious Emissions.....	41
10.1 Test Procedure.....	41
10.2 Limits.....	41
10.3 Test Data.....	42
APPENDIX A – Test Equipment List .....	67
APPENDIX B – Test Standards: CURRENT PUBLICATION DATES RADIO .....	69
APPENDIX C - Uncertainty Statement .....	70

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 3 of 70

## EXHIBIT 1. INTRODUCTION

### 1.1 - Scope

References:	FCC Part 15, Subpart C, Section 15.407 RSS GEN issue 3 and RSS 210 issue 8 Annex 9 RSS 102 issue 4
Title:	FCC : Telecommunication – Code of Federal Regulations, CFR 47, Part 15. IC : Low-power License-exempt Radio-communication Devices (All Frequency Bands): Category I Equipment
Test Procedures:	OET KDB 789033 D01 General UNII Test Procedure

### 1.2 – Normative References

Publication	Year	Title
FCC CFR Parts 0-15	2012	Code of Federal Regulations – Telecommunications
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
RSS-210 Annex 9	2010	Low-power License-exempt Radio communication Devices (All Frequency Bands): Category I Equipment
RSS-GEN Issue 3	2010	General Requirements and Information for the Certification of Radio Apparatus
RSS 102	2010	Radio Frequency (RF) Exposure Compliance of Radiocommunication apparatus.
ANSI C63.10	2009	American National Standard for Testing Unlicensed Wireless Devices
FCC KDB 789033 D01	2012	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices- Part 15 Subpart E.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 4 of 70

### **1.3 - LS Research, LLC Test Facility**

LS Research, LLC is accredited by A2LA (American Association for Laboratory Accreditation) as conforming to ISO/IEC 17025, 2005 "General Requirements for the Competence of Calibration and Testing Laboratories".

LS Research, LLC's scope of accreditation includes all test methods listed herein, unless otherwise noted.

### **1.4 – Location of Testing**

All testing was performed at the following location utilizing the facilities listed below, unless otherwise noted.

LS Research, LLC  
W66 N220 Commerce Court  
Cedarburg, Wisconsin, 53012 USA,

List of Facilities Located at LS Research, LLC:

Compact Chamber  
Semi-Anechoic Chamber  
Open Area Test Site (OATS)

### **1.5 – Test Equipment Utilized**

A complete list of equipment utilized in testing is provided in Appendix A of this test report. Calibration dates are indicated in Appendix A. All test equipment is calibrated by a calibration laboratory accredited to the requirements of ISO/IEC 17025, and traceable to the SI standard.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM Model #: SOMDM3730-30-2780AKCR-B	LS Research, LLC
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 5 of 70

## EXHIBIT 2. PERFORMANCE ASSESSMENT

### 2.1 - Client Information

Manufacturer Name:	Logic PD
Address:	411 Washington Ave N. Suite 4, Minneapolis, MN 55401
Contact Name:	Joe Charboneau

### 2.2 - Equipment Under Test (EUT) Information

The following information has been supplied by the applicant.

Product Name:	37x Torpedo + Wireless SOM
Model Number:	SOMDM3730-30-2780AKCR-B
Serial Number:	2012M00619/2012M01222 (Radiated) 2012M00625/2012M01201 (Radiated) 2411M00976/4511M01290 (Radiated) 4511M01221(Radiated) 2911M00065/4511M01156 (Conducted) 2012M00627/2012M01206 (Conducted) 2012M00626/2012M01208(Conducted)

### 2.3 - Associated Antenna Description

The antenna associated with the EUT is a dual band isolated Magnetic dipole (IMD) with gains:

1. 2.5dBi peak between 2.39 to 2.49 GHz.
2. 3.5dBi peak between 4.9 to 5.9 GHz.

### 2.4 - Product Description

The 37x Torpedo + wireless SOM is an ultra-compact off-the-shelf solution for applications in markets where network connectivity is required and space is a premium. The product is used by OEM integrators to gain access to 802.11 a/b/g/n, Bluetooth, and GPS capabilities.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 6 of 70

## EXHIBIT 3. EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS

### 3.1 - Climate Test Conditions

Temperature:	70 -71° F
Humidity:	32-42%
Pressure:	728-741mmHg

### 3.2 - Modifications Incorporated In The EUT For Compliance Purposes

None       Yes (explain below)

### 3.3 - Deviations & Exclusions From Test Specifications

None       Yes (explain below)

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 7 of 70

## EXHIBIT 5. General Procedures.

### 5.1 Radiated measurements

Radiated RF measurements were performed on the EUT in a 3 meter Semi-Anechoic, FCC listed Chamber. The frequency range from 30 MHz to 40000 MHz was scanned and investigated. The radiated RF emission levels were manually noted at the various fixed degree settings of azimuth on the turntable and antenna height. The EUT was placed on a non-conductive pedestal in the 3 meter Semi-Anechoic Chamber, with the antenna mast placed such that the antenna was 3 meters from the EUT. A Biconical Antenna was used to measure emissions from 30 MHz to 300 MHz, and a Log Periodic Antenna was used to measure emissions from 300 MHz to 1000 MHz. A Double-Ridged Waveguide Horn Antenna was used from 1 GHz to 18 GHz while a standard gain horn antenna was used in the 18 GHz to 40 GHz range. The maximum radiated RF emissions between 30MHz to 4 GHz were found by raising and lowering the sense antenna between 1 and 4 meters in height, using both horizontal and vertical antenna polarities. Measurements above 4 GHz are performed at 1 meter separation distance.

The EUT was positioned in 3 orthogonal orientations.

### 5.2 Calculation of Radiated emissions limits and reported data.

#### Reported data:

For both fundamental and spurious emissions measurement, the data reported includes all necessary correction factors. These correction factors are loaded onto the EMI receiver when measurements are performed.

**Reported Measurement data = Raw receiver measurement (dB $\mu$ V/m) + Antenna correction Factor + Cable factor (dB) + Miscellaneous factors when applicable (dB) – amplification factor when applicable (dB).**

#### Generic example of reported data at 200 MHz:

**Reported Measurement data = 18.2 (raw receiver measurement ) + 15.8 (antenna factor) + 1.45 (cable factor) = 35.45 (dB $\mu$ V/m).**

The following table depicts the general radiated emission limits above 30 MHz. These limits are obtained from Title 47 CFR, Part 15.209, for radiated emissions measurements. These limits were applied to any signals found in the 15.205 restricted bands. The mentioned limits correspond to those limits listed in RSS GEN.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 8 of 70

Frequency (MHz)	3 m Limit $\mu$ V/m	3 m Limit (dB $\mu$ V/m)	1 m Limit (dB $\mu$ V/m)
30-88	100	40.0	-
88-216	150	43.5	-
216-960	200	46.0	-
960-24,000	500	54.0	63.5

Sample conversion of field strength ( $\mu$ V/m to dB $\mu$ V/m):  
 $\text{dB}\mu\text{V/m} = 20 \log_{10} (100) = 40 \text{ dB}\mu\text{V/m}$  (from 30-88 MHz)

Conversion of field strength measurements to EIRP (KDB 412172).

$$E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$$

E is the field strength  
d is the measurements distance

Example:

1. Field strength to EIRP:

$$E = 105.2 \text{ [dB}\mu\text{V/m]}, d = 3 \text{ [meters]} \\ \text{EIRP} = 105.2 - 95.2 = \underline{10 \text{ dBm}}$$

2. EIRP to field strength:

$$\text{EIRP} = -30.0 \text{ dBm}, d = 3 \text{ [meters]} \\ E = -30.0 + 95.2 = 65.2 \text{ [dB}\mu\text{V/m]}$$

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 9 of 70

## EXHIBIT 6. EUT Duty Cycle

Test Engineer: Adam Alger

All measurements are to be performed with the EUT transmitting at greater than or equal to 98% percent duty cycle. If greater than or equal to 98 percent duty cycle is not available, the actual duty cycle needs to be measured so that power and peak spectral density measurements can be corrected upwards.

### **6.1 Test Procedure.**

Per KDB 789033 D01 section B, a spectrum analyzer with zero span at the frequency of interest was used to measure the on and off times of the transmitted signal.

### **6.2 Data.**

The data reported includes all necessary correction factors. These correction factors are loaded onto the EMI receiver when measurements are performed.


**Reported Measurement data = Raw receiver measurement (dBm) + Cable factor (dB) + Miscellaneous factors when applicable (dB).**

**Generic example of reported data at 2440 MHz:**

**Reported Measurement data = 8.55 (raw receiver measurement in dBm ) + 0.85 (cable factor in dB) = 9.4 (dBm).**

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 10 of 70


### 6.2.1 6MBPS.

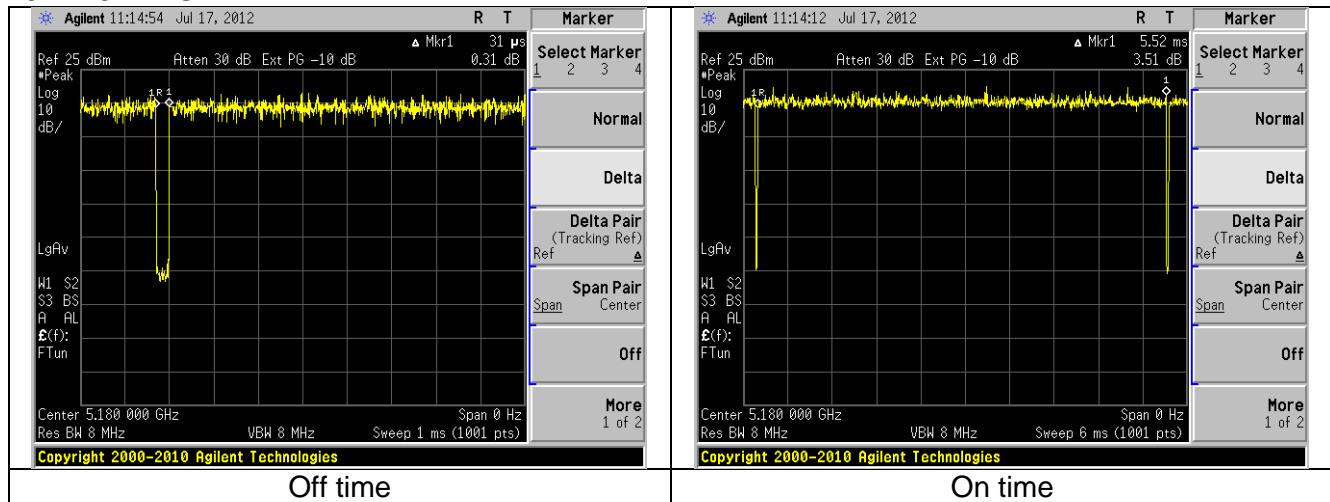

Duty Cycle = Tx On / (Tx On + TxOff)

Duty Cycle = 5.52ms / 5.56ms = .99

### 6.2.2 54MBPS

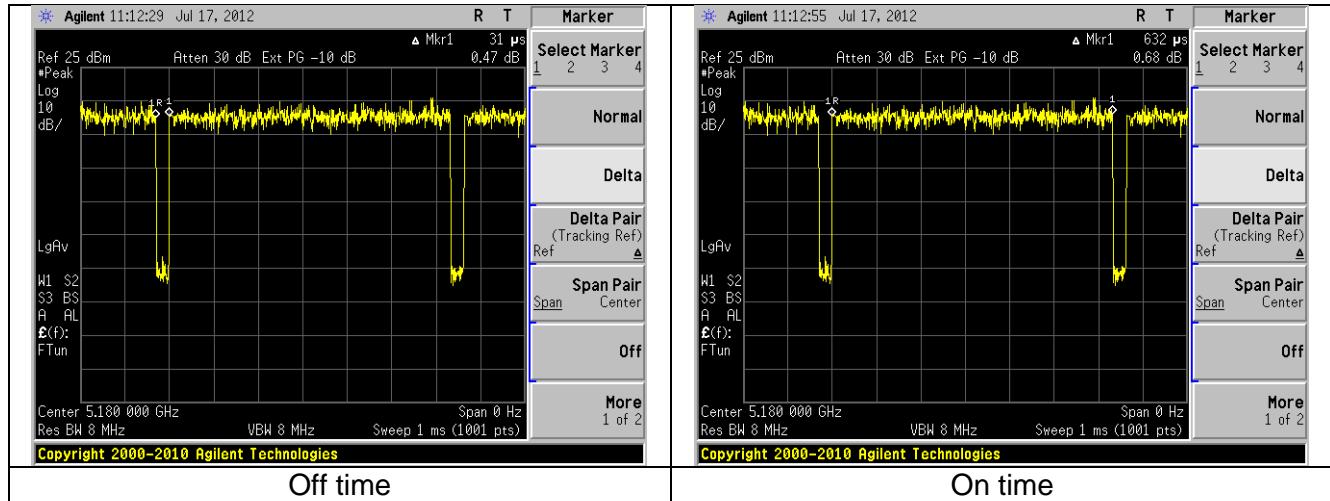


Duty Cycle = Tx On / (Tx On + TxOff)

Duty Cycle = 632 μs / 663 μs = .953

Duty Cycle Correction =  $10 \log(1/.953) = .208\text{dB}$

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 11 of 70

### 6.2.4 MCS7

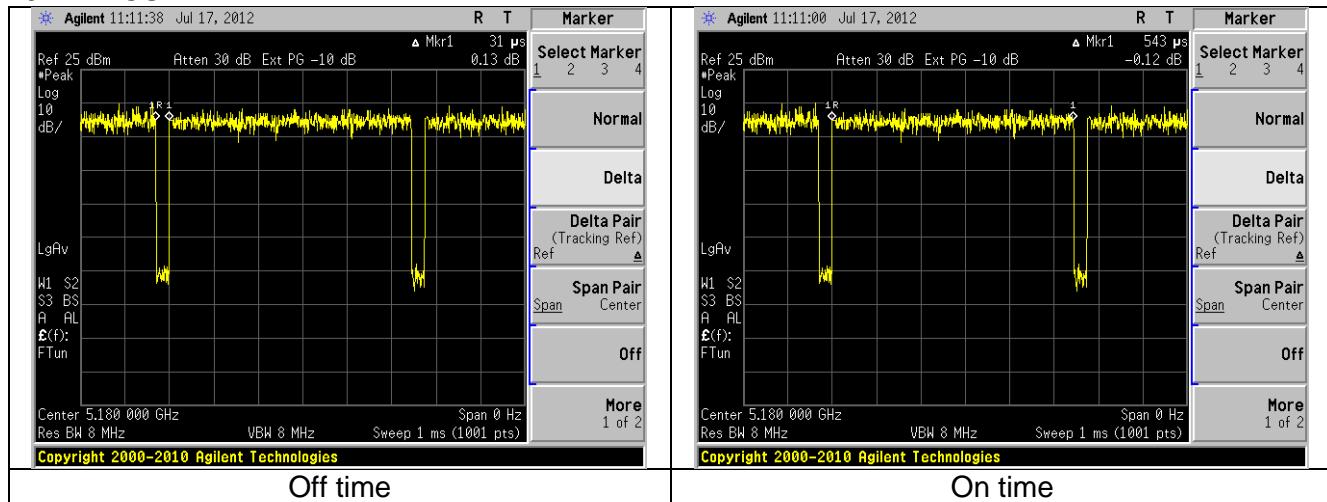

Duty Cycle = Tx On / (Tx On + TxOff)

Duty Cycle = 535 μs / 574 μs = .946

Duty Cycle Correction =  $10 \log(1/.946) = .241 \text{dB}$

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 12 of 70

## EXHIBIT 7. Emission Bandwidth (EBW)

Test Engineer: Adam Alger

The emission bandwidth is the 26dB bandwidth in MHz. This bandwidth is used to determine the maximum conducted output power measurement and the appropriate limit.

### **7.1 Test procedure.**

KDB 789033 D01 section D.

### **7.2 Test Data.**

The data reported includes all necessary correction factors. These correction factors are loaded onto the EMI receiver when measurements are performed.

**Reported Measurement data = Raw receiver measurement (dBm) + Cable factor (dB) + Miscellaneous factors when applicable (dB).**

**Generic example of reported data at 2440 MHz:**

**Reported Measurement data = 8.55 (raw receiver measurement in dBm ) + 0.85 (cable factor in dB) = 9.4 (dBm).**

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 13 of 70

## 7.2.1 Operation in the 5.15 – 5.25 GHz band

### 7.2.1.1 6MBPS

Data Rate	Channel	Frequency (MHz)	EBW 26dB (MHz)
6 Mbps	36	5180	21.8
	40	5200	22.6
	48	5240	22.2

### 7.2.1.2 54MBPS

Data Rate	Channel	Frequency (MHz)	EBW 26dB (MHz)
54 Mbps	36	5180	23.3
	40	5200	22.5
	48	5240	22.4

### 7.2.1.3 MCS7

Data Rate	Channel	Frequency (MHz)	EBW 26dB (MHz)
MCS 7 (65 Mbps)	36	5180	23.3
	40	5200	23.9
	48	5240	23.7

## 7.2.2 Operation in the 5.25 – 5.35 GHz band

### 7.2.2.1 6MBPS

Data Rate	Channel	Frequency (MHz)	EBW 26dB (MHz)
6 Mbps	56	5280	22.1
	60	5300	21.8
	64	5320	22.2

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 14 of 70

### 7.2.2.2 54MBPS

Data Rate	Channel	Frequency (MHz)	EBW 26dB (MHz)
54 Mbps	56	5280	22.6
	60	5300	22.5
	64	5320	22.5

### 7.2.2.3 MCS7

Data Rate	Channel	Frequency (MHz)	EBW 26dB (MHz)
MCS 7 (65 Mbps)	56	5280	24.4
	60	5300	24.4
	64	5320	24.6

## 7.2.3 Operation in the 5.47 – 5.725 GHz band

### 7.2.3.1 6MBPS

Data Rate	Channel	Frequency (MHz)	EBW 26dB (MHz)
6 Mbps	100	5500	21.7
	104	5520	23.3
	116	5580	23.1
	136	5680	21.8
	140	5700	21.8

### 7.2.3.2 54MBPS

Data Rate	Channel	Frequency (MHz)	EBW 26dB (MHz)
54 Mbps	100	5500	22.1
	104	5520	22.3
	116	5580	22.6
	136	5680	23.2
	140	5700	22.8

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 15 of 70

### 7.2.3.3 MCS7


Data Rate	Channel	Frequency (MHz)	EBW 26dB (MHz)
MCS 7 (65 Mbps)	100	5500	25.3
	104	5520	24.7
	116	5580	24.8
	136	5680	24.4
	140	5700	24.6

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 16 of 70


## 7.3 Screen Captures

### 7.3.1 Operation in the 5.15 – 5.25 GHz band


6MBPS

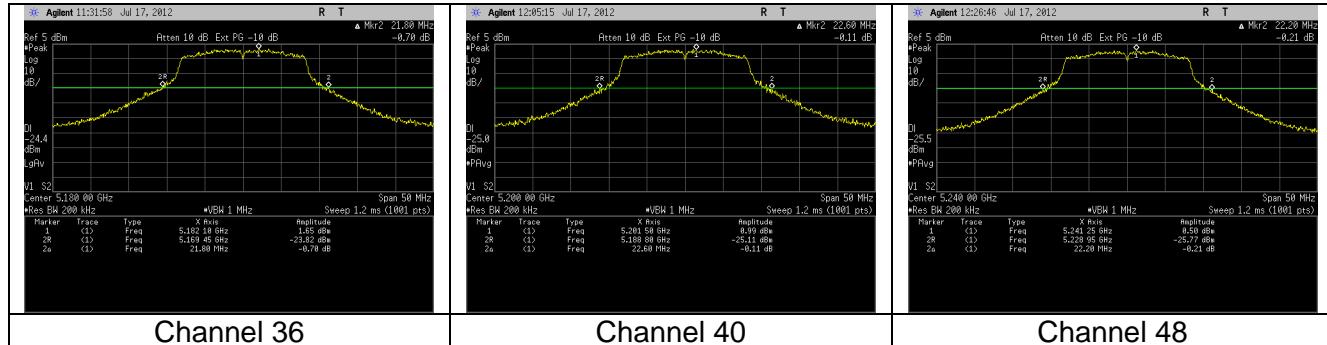

54MBPS

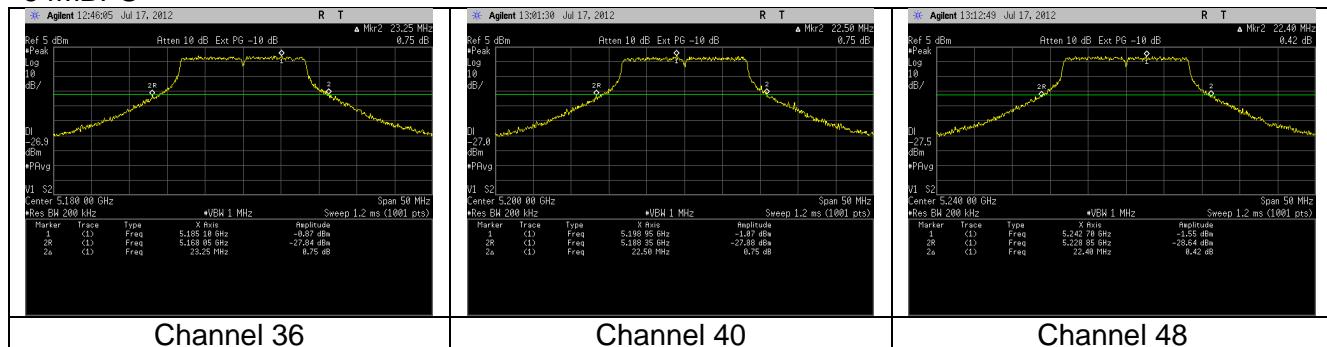


MCS7

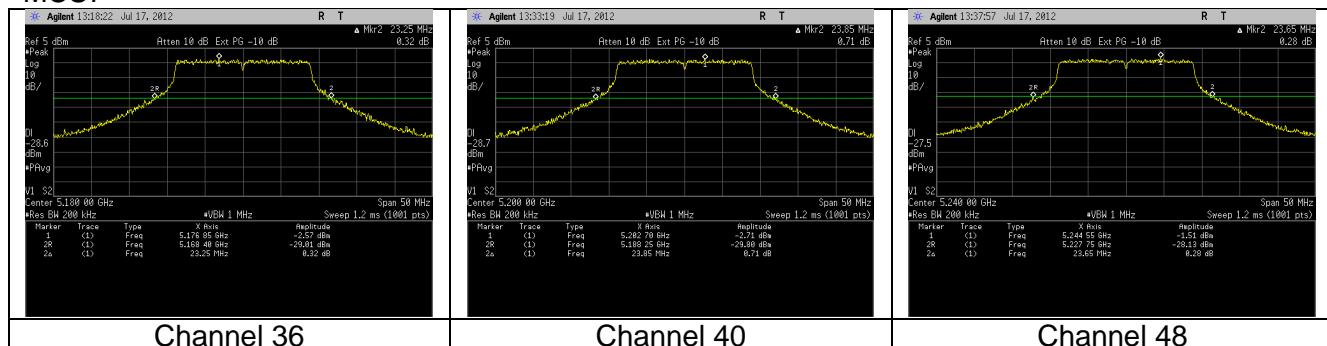


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 17 of 70

### 7.3.2 Operation in the 5.25 – 5.35 GHz band


6MBPS

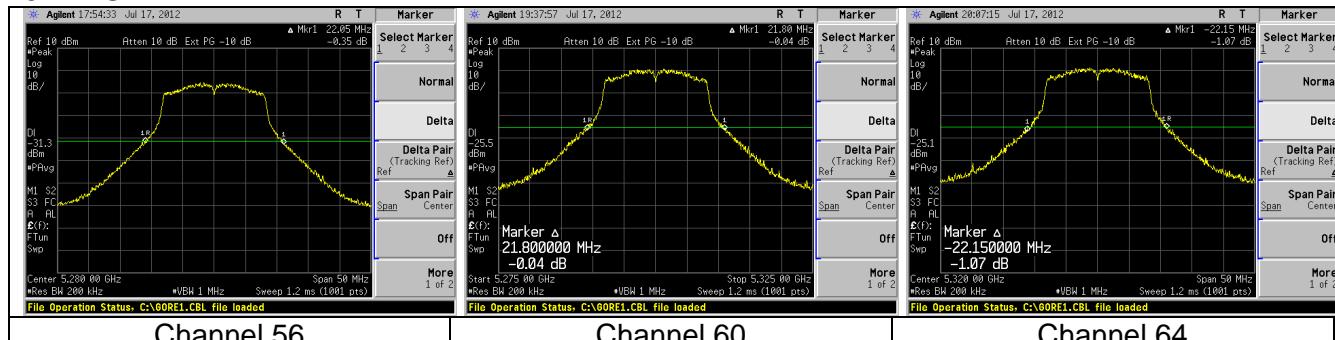

54MBPS

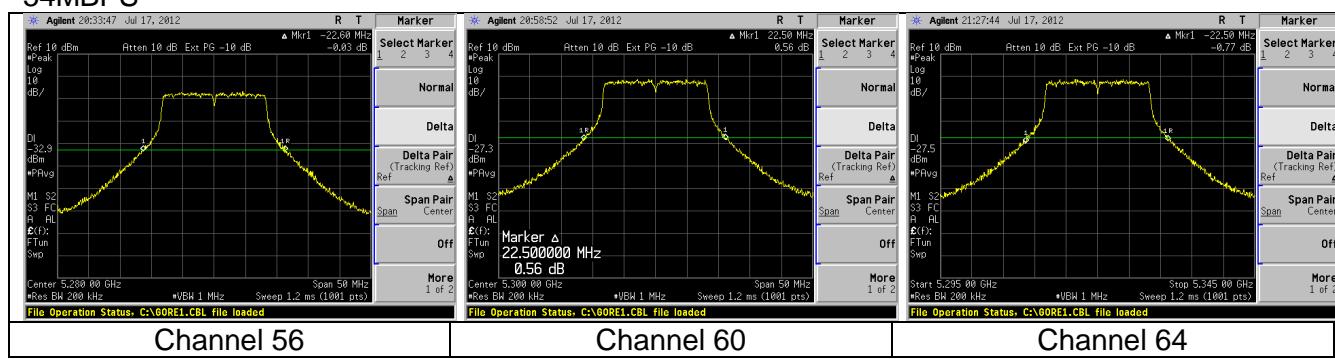


MCS7

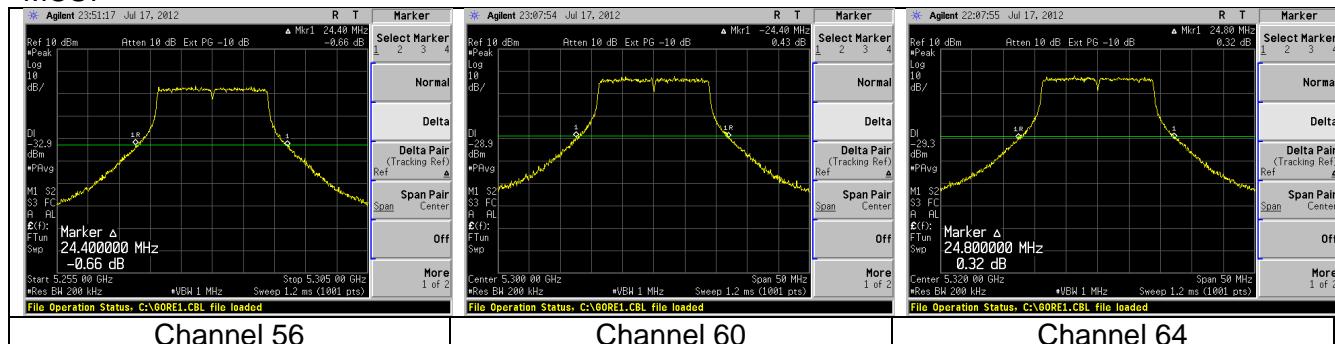


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 18 of 70

### 7.3.3 Operation in the 5.47 – 5.725 GHz band

6MBPS

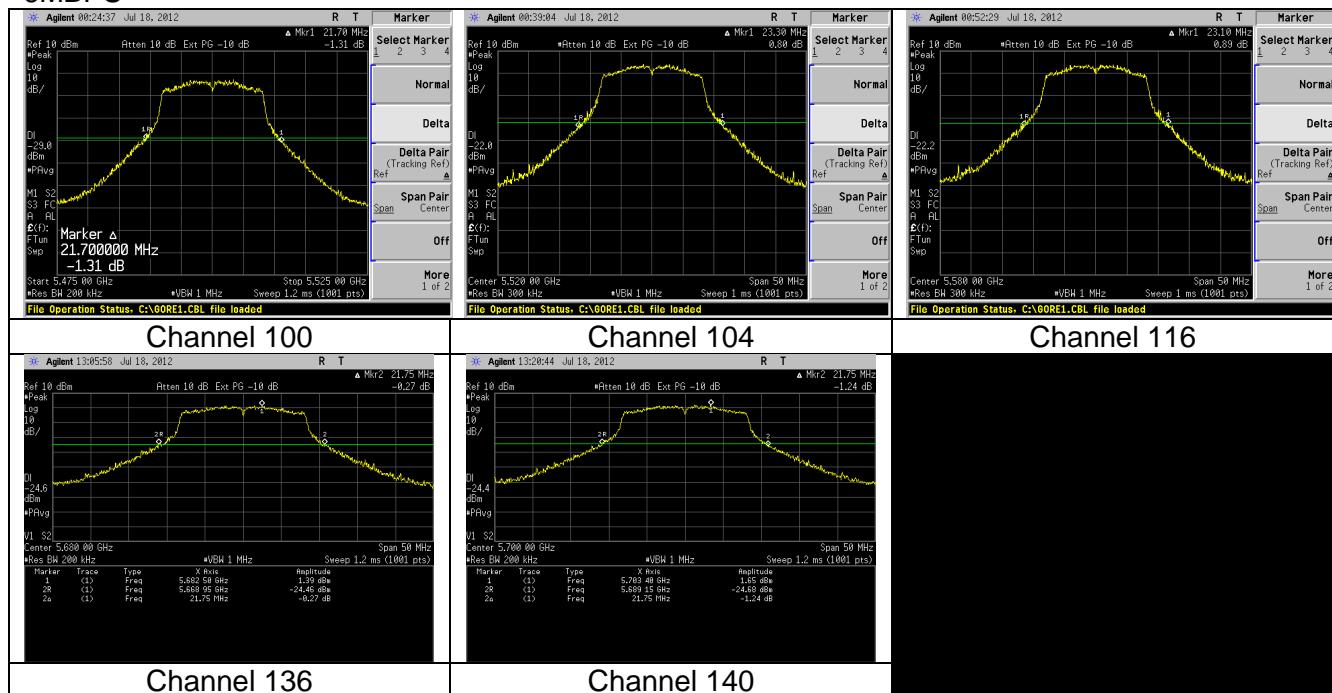


54MBPS

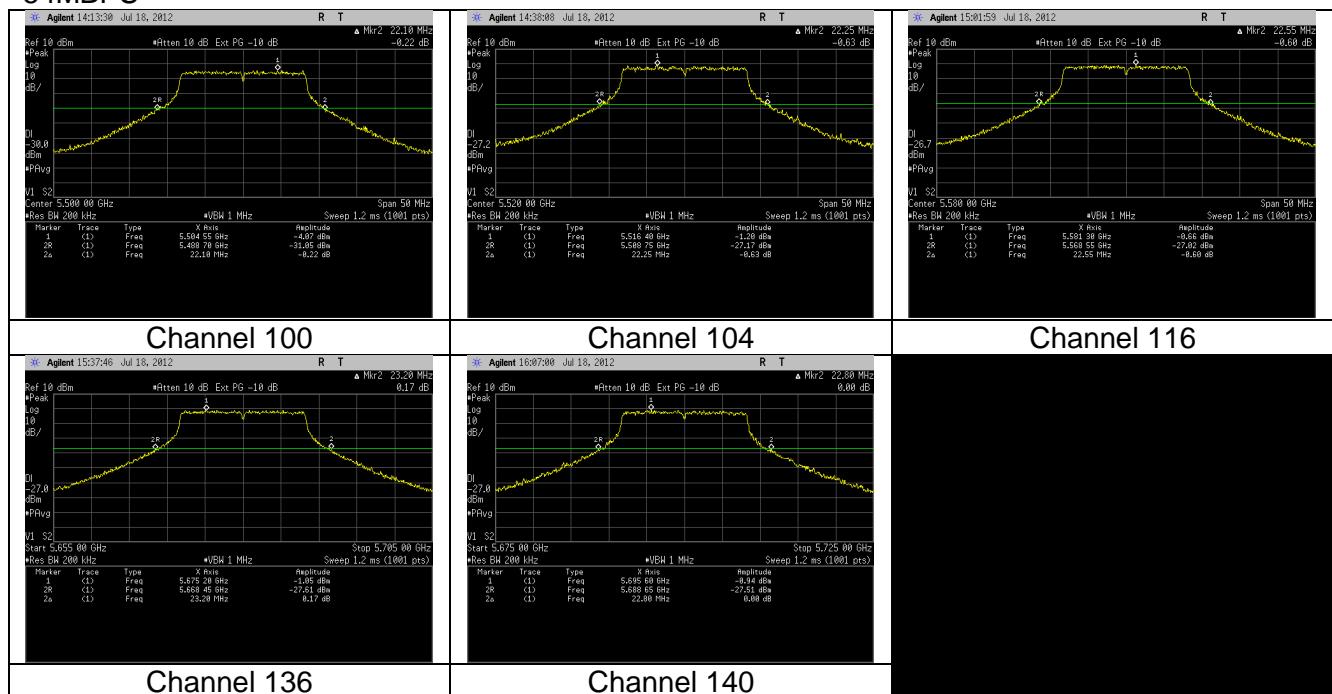

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 19 of 70


## MCS7

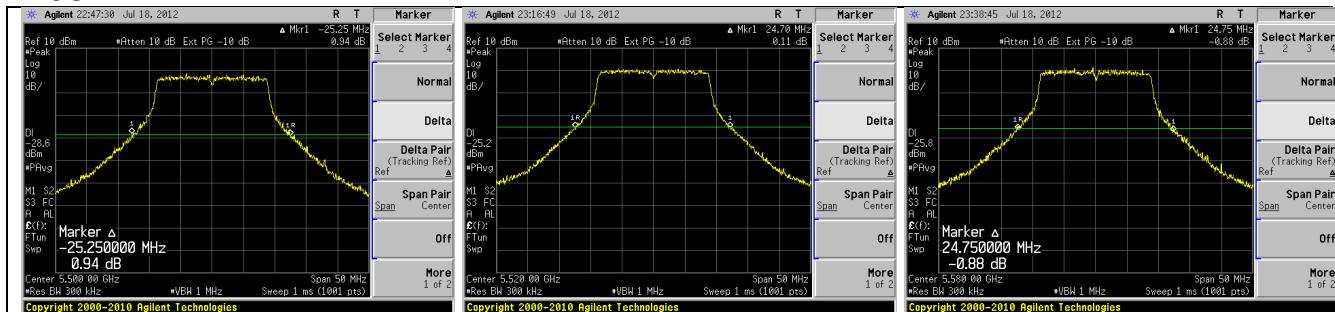

Channel 100

Channel 104

Channel 116

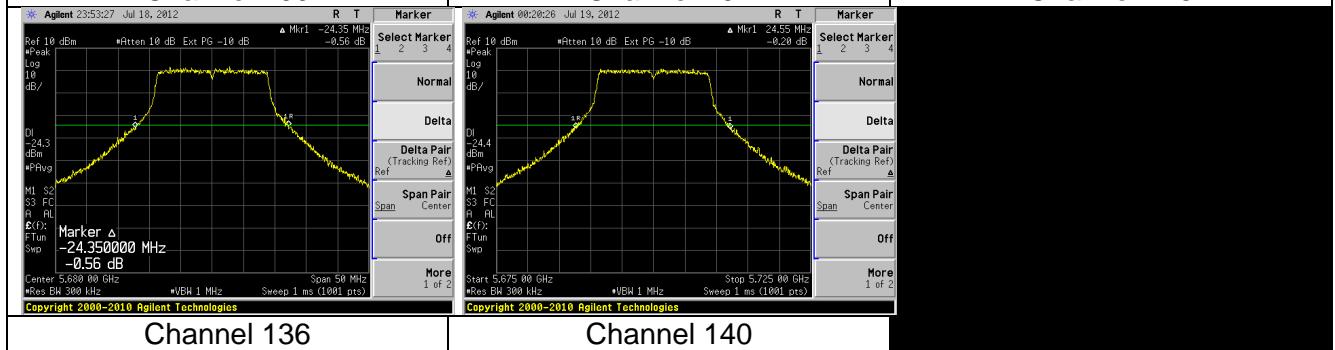

Channel 136

Channel 140

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 20 of 70

## EXHIBIT 8 Maximum Conducted Output Power And Peak Power Spectral Density

Test Engineer: Adam Alger

### **8.1 Test Procedure**

KDB 789033 D01 section C (Maximum Conducted Output Power) and E (Peak Power Spectral Density)

### **8.2 Limits**

8.2.1 Operation in the band 5.15 to 5.25 GHz

*Maximum conducted output power = Lesser of 50mW or 4dBm + 10 log EBW*

*Peak Power Spectral Density = 4 dBm/MHz*

8.2.2 Operation in the band 5.25 to 5.35 GHz

*Maximum conducted output power = Lesser of 250mW or 11dBm + 10 log EBW*

*Peak Power Spectral Density = 11 dBm/MHz*

8.2.3 Operation in the band 5.47 to 5.725 GHz

*Maximum conducted output power = Lesser of 250mW or 11dBm + 10 log EBW*

*Peak Power Spectral Density = 11 dBm/MHz*

8.2.4 Operation in the band 5.725 to 5.825 GHz

*Maximum conducted output power = Lesser of 1W or 4dBm + 17 log EBW*

*Peak Power Spectral Density = 17 dBm/MHz*

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 21 of 70

### 8.3 Test Data

The data reported includes all necessary correction factors. These correction factors are loaded onto the EMI receiver when measurements are performed.

**Reported Measurement data = Raw receiver measurement (dBm) + Cable factor (dB) + Miscellaneous factors when applicable (dB).**

**Generic example of reported data at 2440 MHz:**

**Reported Measurement data = 8.55 (raw receiver measurement in dBm ) + 0.85 (cable factor in dB) = 9.4 (dBm).**

8.3.1 Operation in the band 5.15 to 5.25 GHz

#### 8.3.1.1 6MBPS

Data Rate	Channel	Frequency (MHz)	Power *SA2 (dBm)	Power Limit (dBm)	Power Margin (dB)	*PPSD (dBm)	PKPSD Limit (dBm)	PKPSD Margin (dB)
6 Mbps	36	5180	11.1	17	5.9	1.3	4	2.7
	40	5200	10.9	17	6.1	0.9	4	3.1
	48	5240	10.6	17	6.4	1.0	4	3.1

#### 8.3.1.2 54MBPS

Data Rate	Channel	Frequency (MHz)	Power *SA2 (dBm)	Duty Cycle Correction (dB)	Power w/ D.C.C. (dBm)	Power Limit (dBm)	Power Margin (dB)	*PPSD (dBm)	Duty Cycle Correction (dB)	PPSD w/ D.C.C. (dBm)	PKPSD Limit (dBm)	PKPSD Margin (dB)
54 Mbps	36	5180	8.2	0.2	8.4	17	8.6	-2.6	0.2	-2.4	4	6.4
	40	5200	8.1	0.2	8.3	17	8.7	-2.6	0.2	-2.4	4	6.4
	48	5240	8.2	0.2	8.4	17	8.6	-2.6	0.2	-2.4	4	6.4

#### 8.3.1.3 MCS7

Data Rate	Channel	Frequency (MHz)	Power *SA2 (dBm)	Duty Cycle Correction (dB)	Power w/ D.C.C. (dBm)	Power Limit (dBm)	Power Margin (dB)	*PPSD (dBm)	Duty Cycle Correction (dB)	PPSD w/ D.C.C. (dBm)	PKPSD Limit (dBm)	PKPSD Margin (dB)
MCS 7 (65 Mbps)	36	5180	7.1	0.2	7.3	17	9.7	-4.2	0.2	-4.0	4	8.0
	40	5200	7.0	0.2	7.2	17	9.8	-3.9	0.2	-3.7	4	7.7
	48	5240	7.3	0.2	7.5	17	9.5	-3.8	0.2	-3.6	4	7.6

8.3.2 Operation in the band 5.25 to 5.35 GHz

#### 8.3.2.1 6MBPS

Data Rate	Channel	Frequency (MHz)	Power *SA2 (dBm)	Power Limit (dBm)	Power Margin (dB)	*PPSD (dBm)	PKPSD Limit (dBm)	PKPSD Margin (dB)
6 Mbps	56	5280	3.3	24	20.7	-6.7	11	17.7
	60	5300	9.9	24	14.1	0.0	11	11.0
	64	5320	10.5	24	13.5	0.9	11	10.1

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 22 of 70

### 8.3.2.2 54MBPS

Data Rate	Channel	Frequency (MHz)	Power *SA2 (dBm)	Duty Cycle Correction (dB)	Power w/ D.C.C. (dBm)	Power Limit (dBm)	Power Margin (dB)	*PPSD (dBm)	Duty Cycle Correction (dB)	PPSD w/ D.C.C. (dBm)	PKPSD Limit (dBm)
54 Mbps	56	5280	1.9	0.2	2.1	24	21.9	-9.1	0.2	-8.9	11
	60	5300	7.9	0.2	8.1	24	15.9	-2.8	0.2	-2.6	11
	64	5320	7.8	0.2	8.0	24	16.0	-2.8	0.2	-3.0	11

### 8.3.2.3 MCS7

Data Rate	Channel	Frequency (MHz)	Power *SA2 (dBm)	Duty Cycle Correction (dB)	Power w/ D.C.C. (dBm)	Power Limit (dBm)	Power Margin (dB)	*PPSD (dBm)	Duty Cycle Correction (dB)	PPSD w/ D.C.C. (dBm)	PKPSD Limit (dBm)	PKPSD Margin (dB)
MCS 7 (65 Mbps)	56	5280	2.1	0.2	2.3	24	21.7	-8.9	0.2	-8.7	11	19.7
	60	5300	6.6	0.2	6.8	24	17.2	-4.6	0.2	-4.4	11	15.4
	64	5320	6.7	0.2	6.9	24	17.1	-4.2	0.2	-4.0	11	15.0

## 8.3.3 Operation in the band 5.47 to 5.725 GHz

### 8.3.3.1 6MBPS

Data Rate	Channel	Frequency (MHz)	Power *SA2 (dBm)	Power Limit (dBm)	Power Margin (dB)	*PPSD (dBm)	PKPSD Limit (dBm)	PKPSD Margin (dB)
6 Mbps	100	5500	6.3	24	17.7	-3.6	11	14.6
	104	5520	11.7	24	12.3	1.9	11	9.1
	116	5580	12.3	24	11.7	2.5	11	8.5
	136	5680	12.7	24	11.3	2.6	11	8.4
	140	5700	12.6	24	11.4	2.7	11	8.3

### 8.3.3.2 54MBPS

Data Rate	Channel	Frequency (MHz)	Power *SA2 (dBm)	Duty Cycle Correction (dB)	Power w/ D.C.C. (dBm)	Power Limit (dBm)	Power Margin (dB)	*PPSD (dBm)	Duty Cycle Correction (dB)	PPSD w/ D.C.C. (dBm)	PKPSD Limit (dBm)
54 Mbps	100	5500	6.6	0.2	6.8	24	17.2	-4.2	0.2	-4.0	11
	104	5520	9.7	0.2	9.9	24	14.1	-1.1	0.2	-0.9	11
	116	5580	10.1	0.2	10.3	24	13.7	-0.8	0.2	-0.6	11
	136	5680	10.5	0.2	10.7	24	13.3	-0.3	0.2	-0.1	11
	140	5700	10.4	0.2	10.6	24	13.4	-0.2	0.2	0.0	11

### 8.3.3.3 MCS7


Data Rate	Channel	Frequency (MHz)	Power *SA2 (dBm)	Duty Cycle Correction (dB)	Power w/ D.C.C. (dBm)	Power Limit (dBm)	Power Margin (dB)	*PPSD (dBm)	Duty Cycle Correction (dB)	PPSD w/ D.C.C. (dBm)	PKPSD Limit (dBm)	PKPSD Margin (dB)
MCS 7 (65 Mbps)	100	5500	5.9	0.2	6.1	24	17.9	-6.5	0.2	-6.3	11	17.3
	104	5520	8.1	0.2	8.3	24	15.7	-3.0	0.2	-2.8	11	13.8
	116	5580	8.5	0.2	8.7	24	15.3	-2.4	0.2	-2.2	11	13.2
	136	5680	9.1	0.2	9.3	24	14.7	-2.3	0.2	-2.1	11	13.1
	140	5700	8.2	0.2	8.4	24	15.6	-2.8	0.2	-2.6	11	13.6

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 23 of 70

## 8.4 Screen Captures


### 8.4.1 Operation in the band 5.15 to 5.25 GHz

#### 8.4.1.1 6MBPS

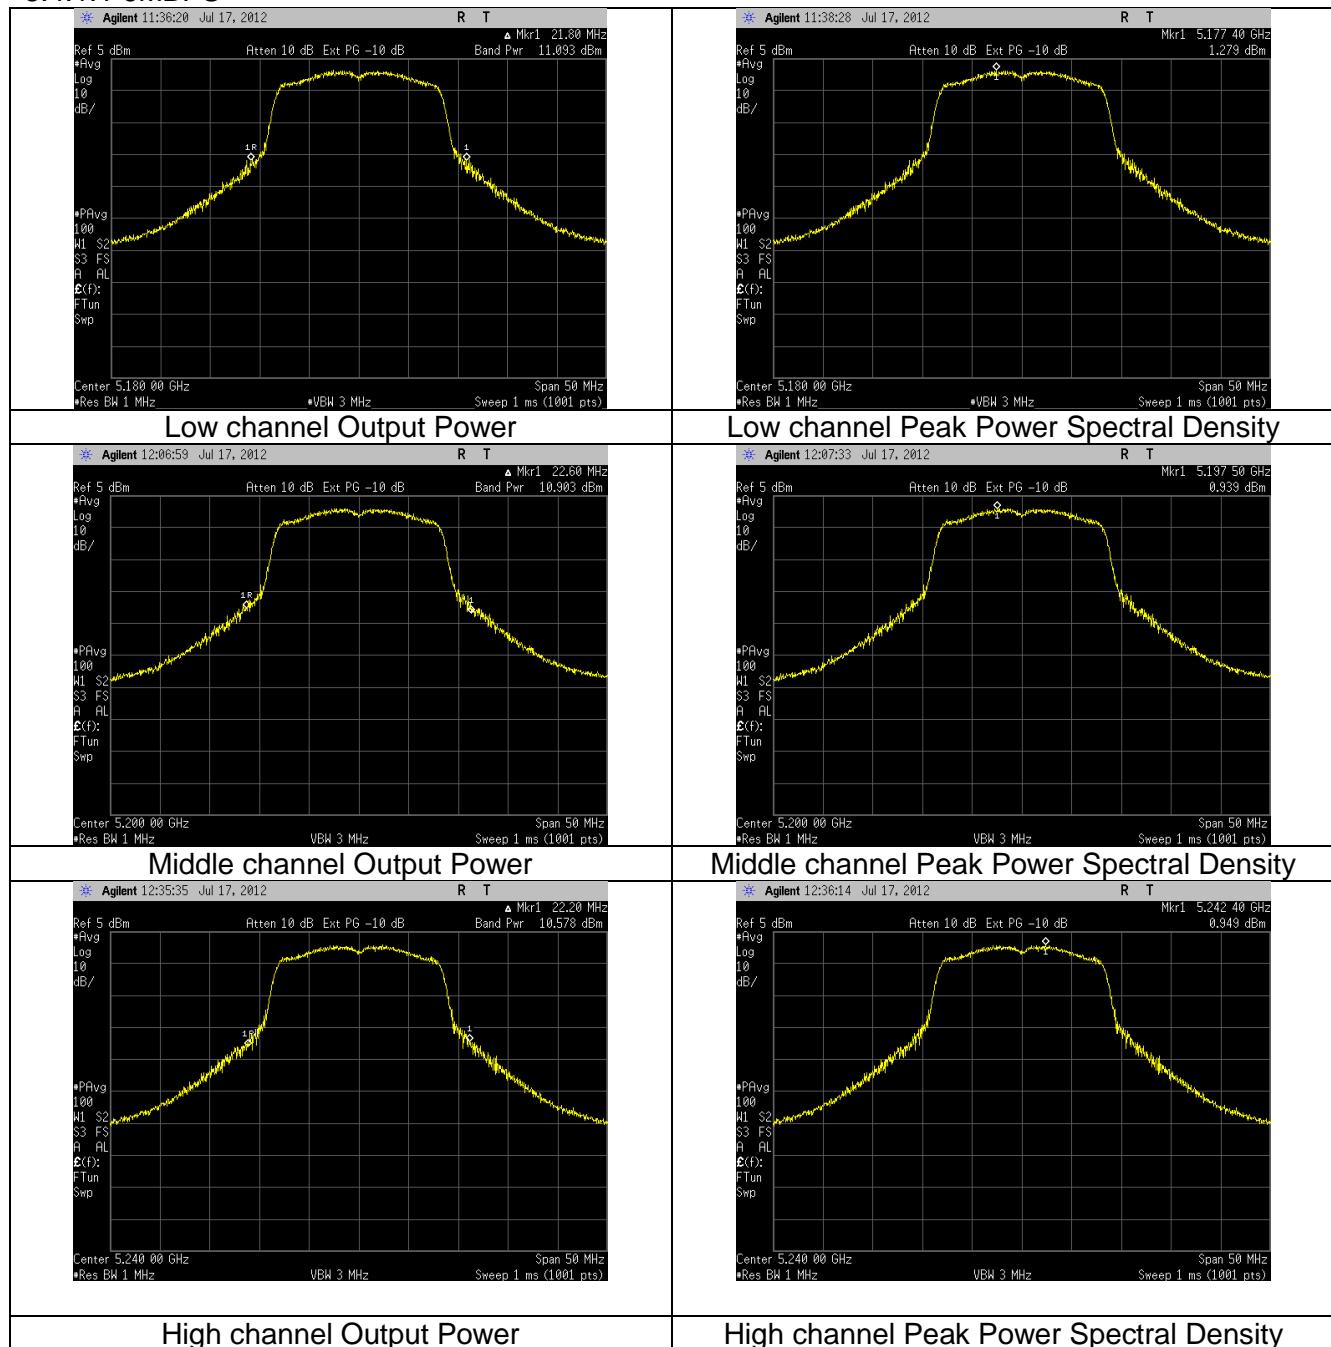


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 24 of 70

### 8.4.1.2 54MBPS

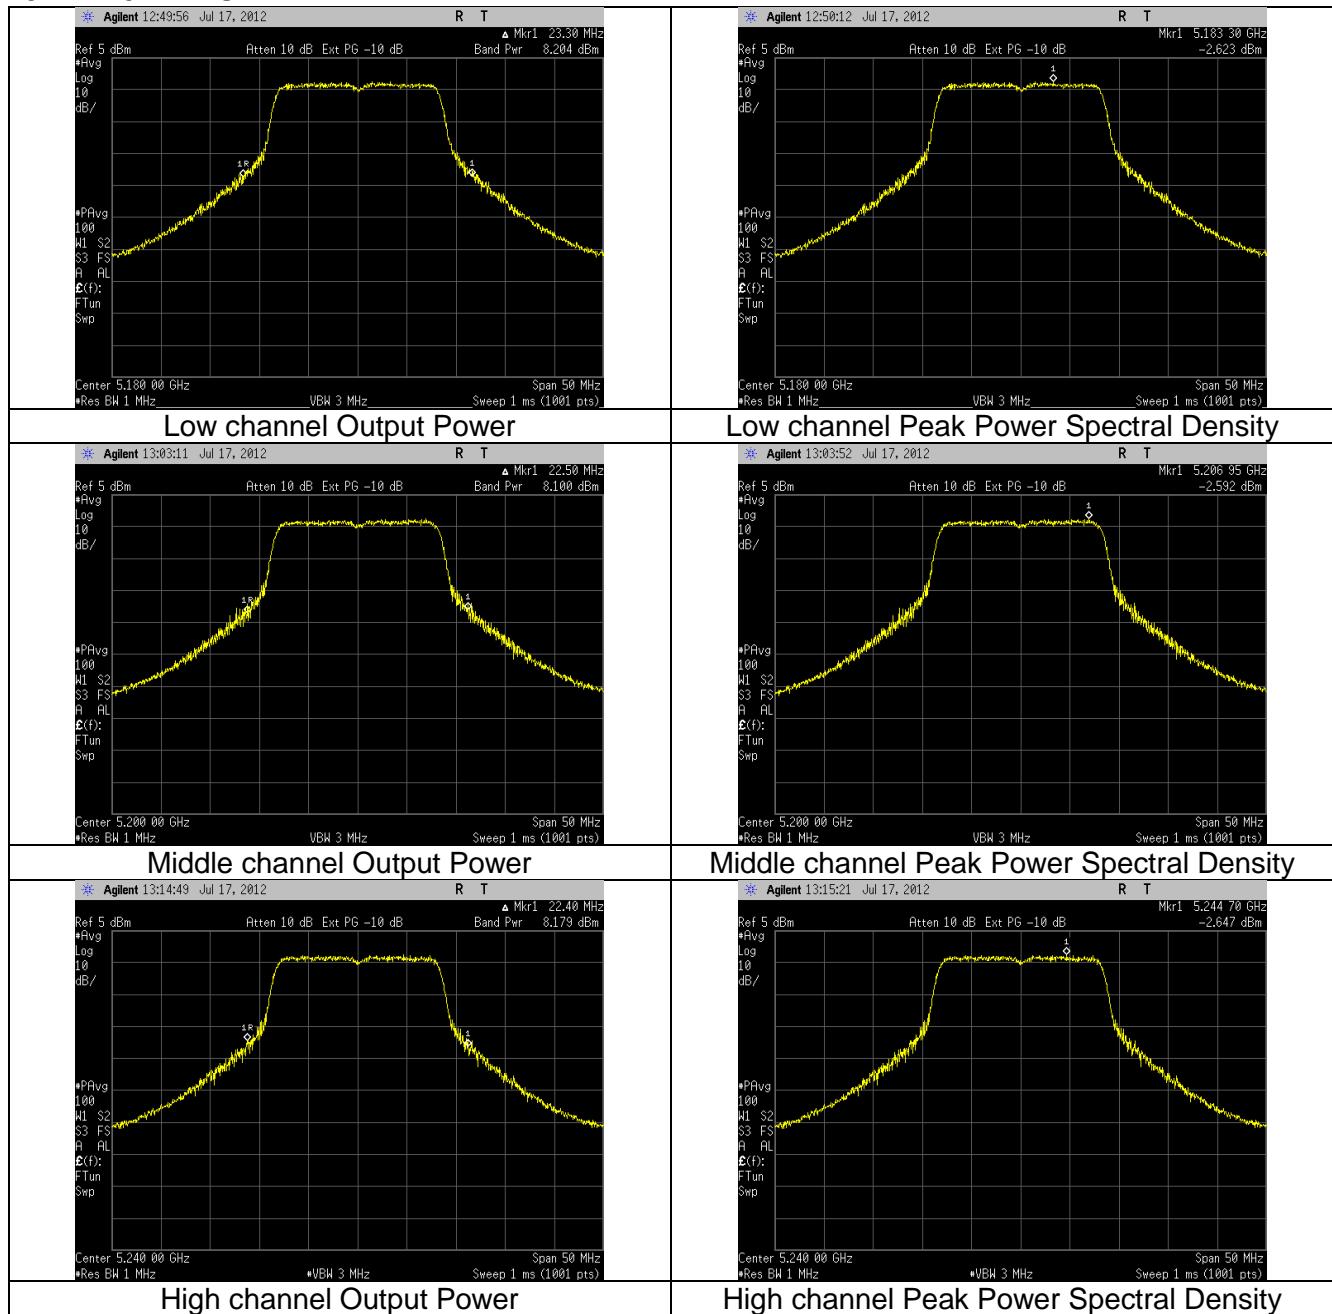

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 25 of 70


### 8.4.1.3 MCS7

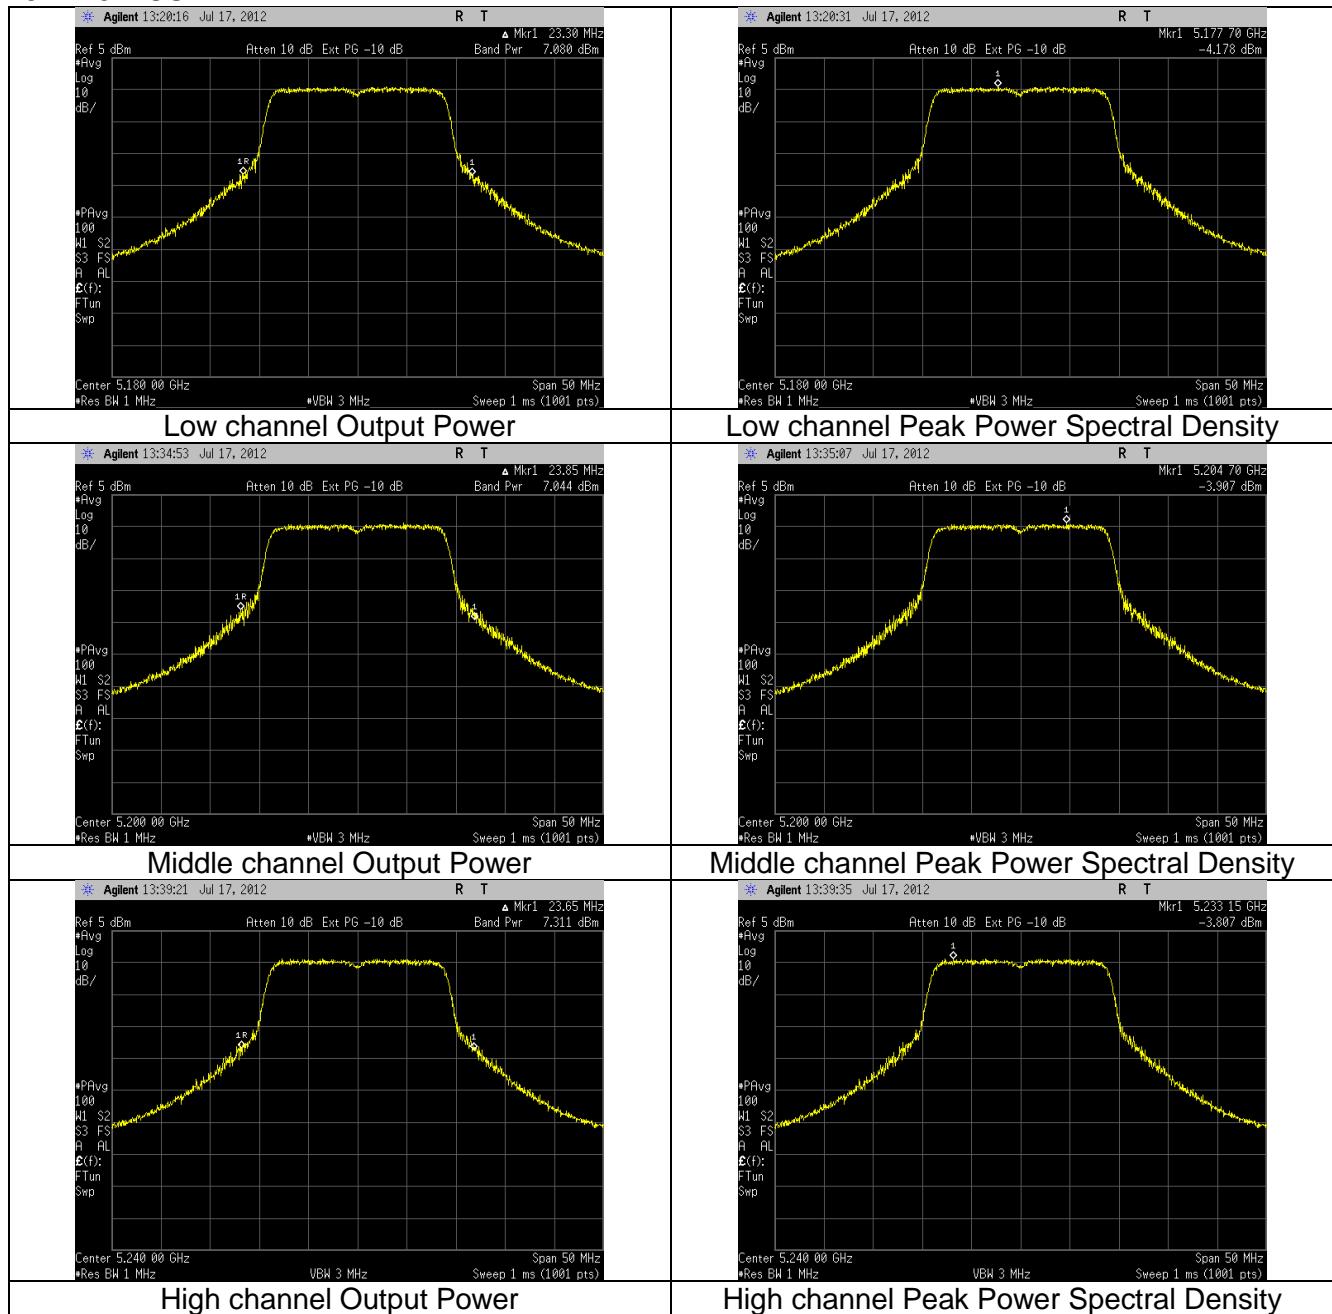

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 26 of 70


## 8.4.2 Operation in the band 5.25 to 5.35 GHz

### 8.4.2.1 6MBPS

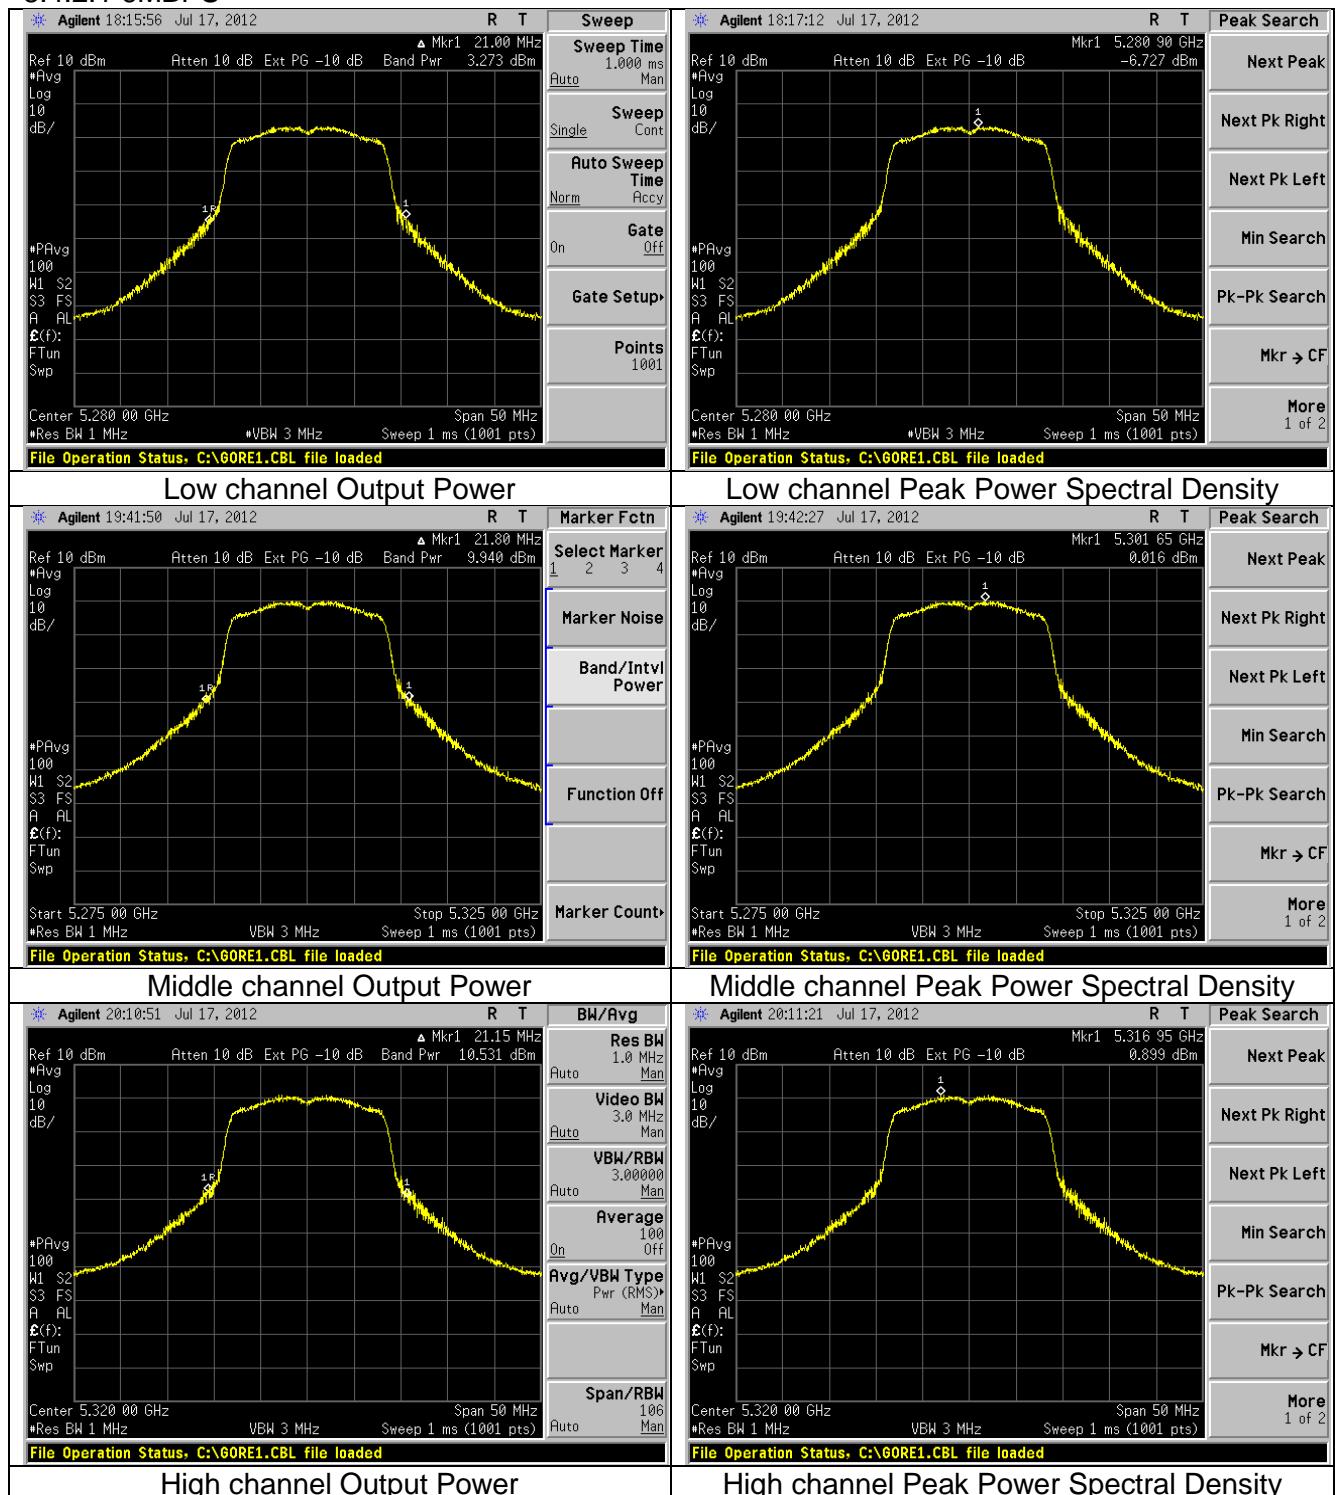


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 27 of 70

### 8.4.2.2 54MBPS

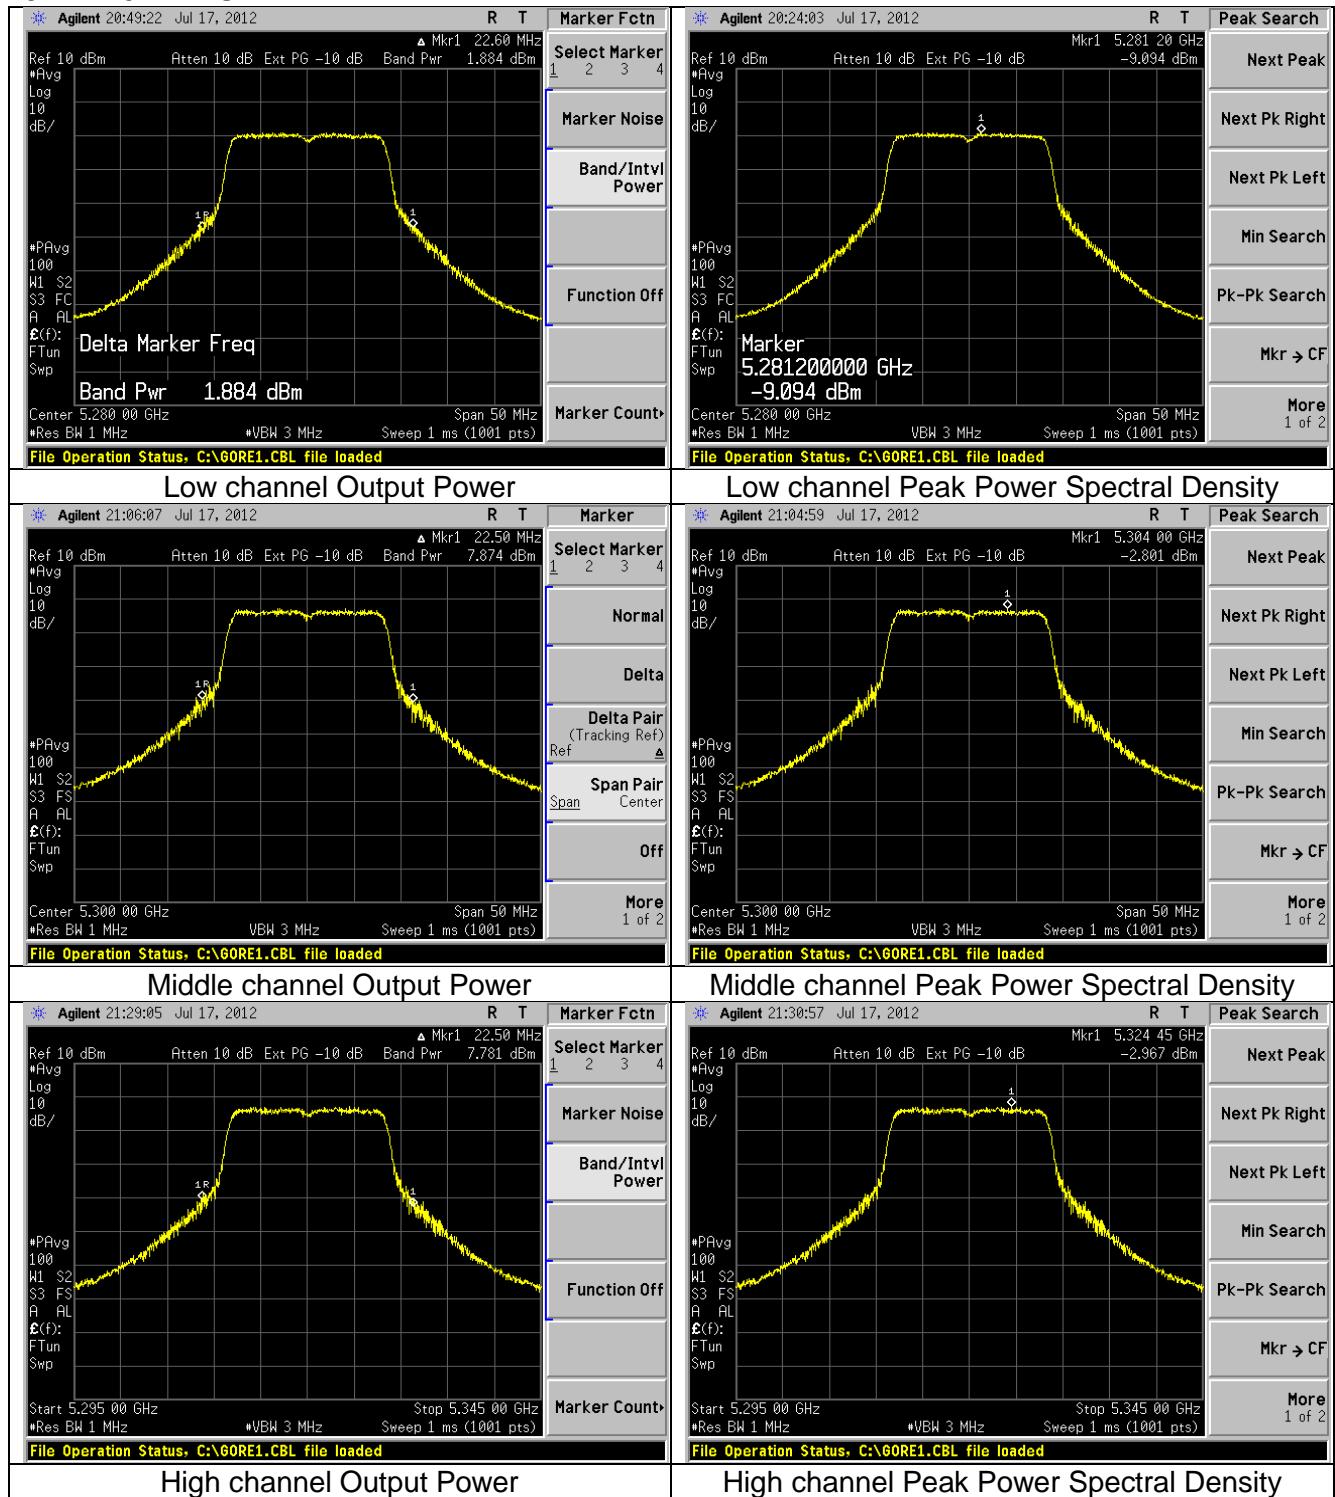

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Model #: SOMDM3730-30-2780AKCR-B		
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 28 of 70


### 8.4.2.3 MCS7

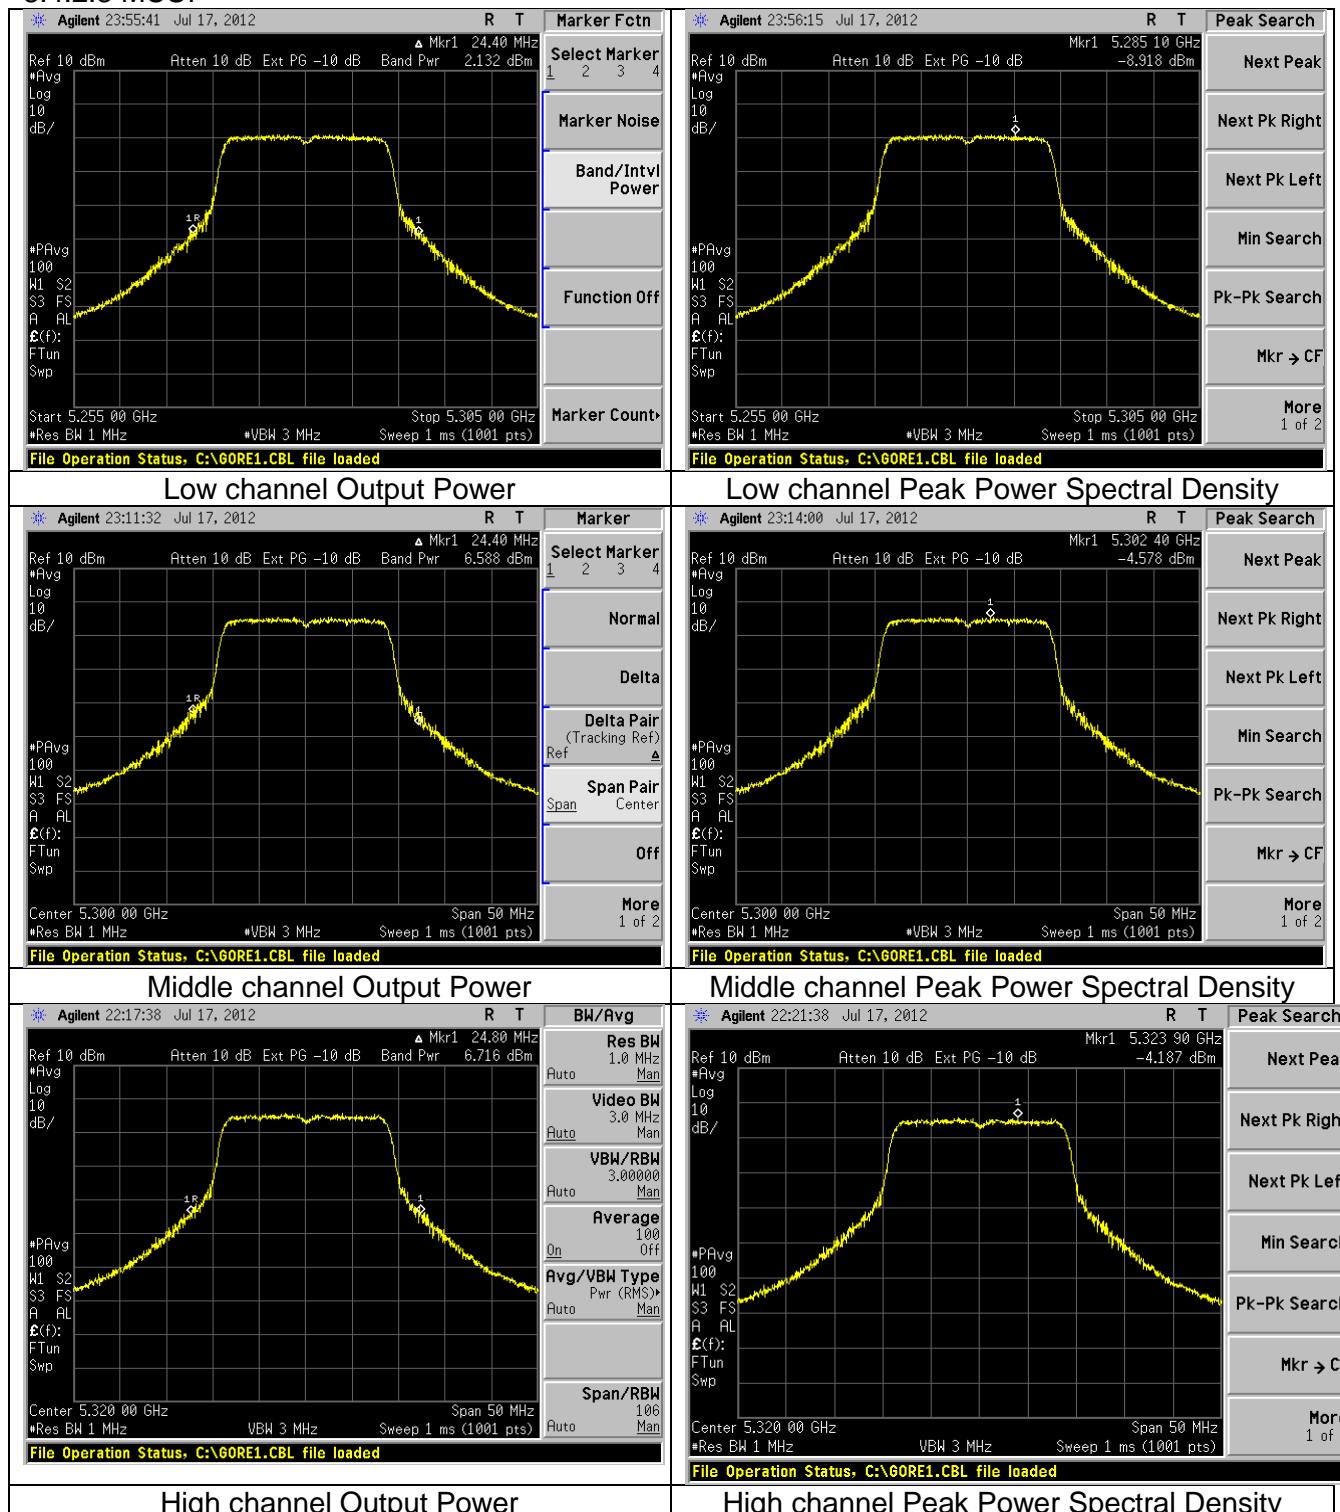

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 29 of 70


## 8.4.3 Operation in the band 5.47 to 5.725 GHz

### 8.4.3.1 6MBPS

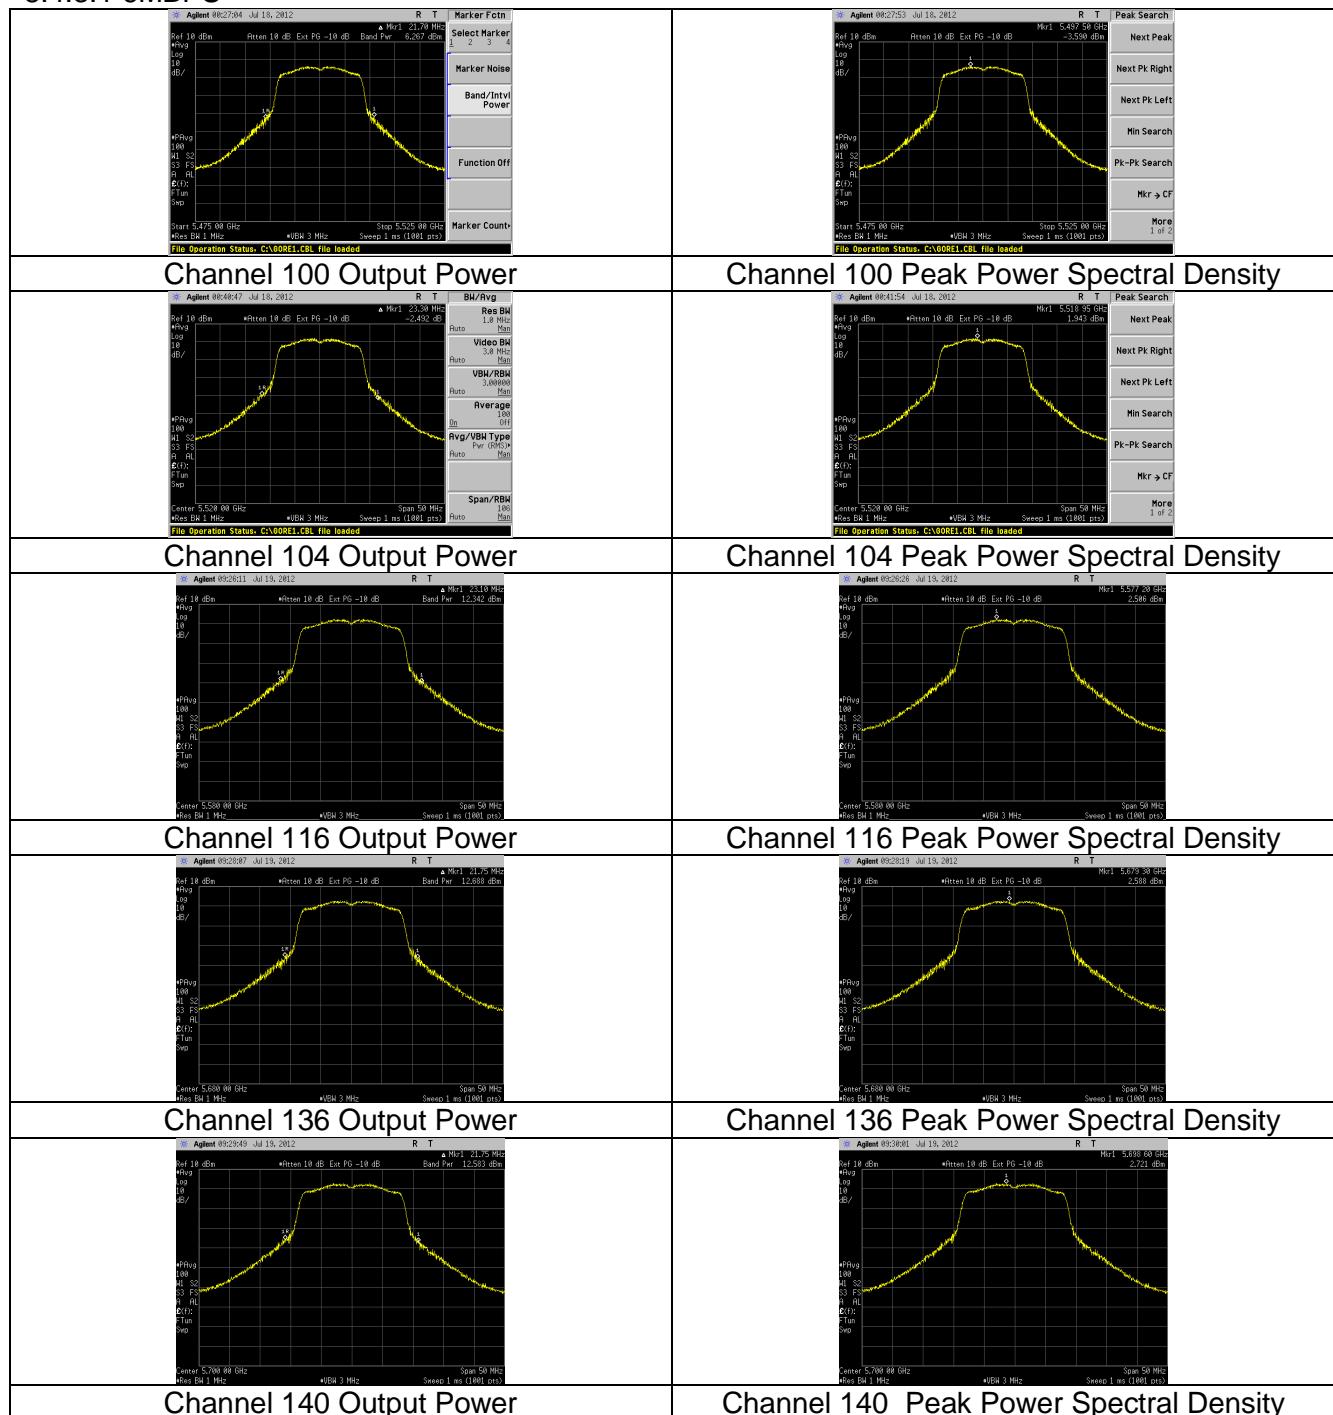


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 30 of 70

#### 8.4.3.2 54MBPS

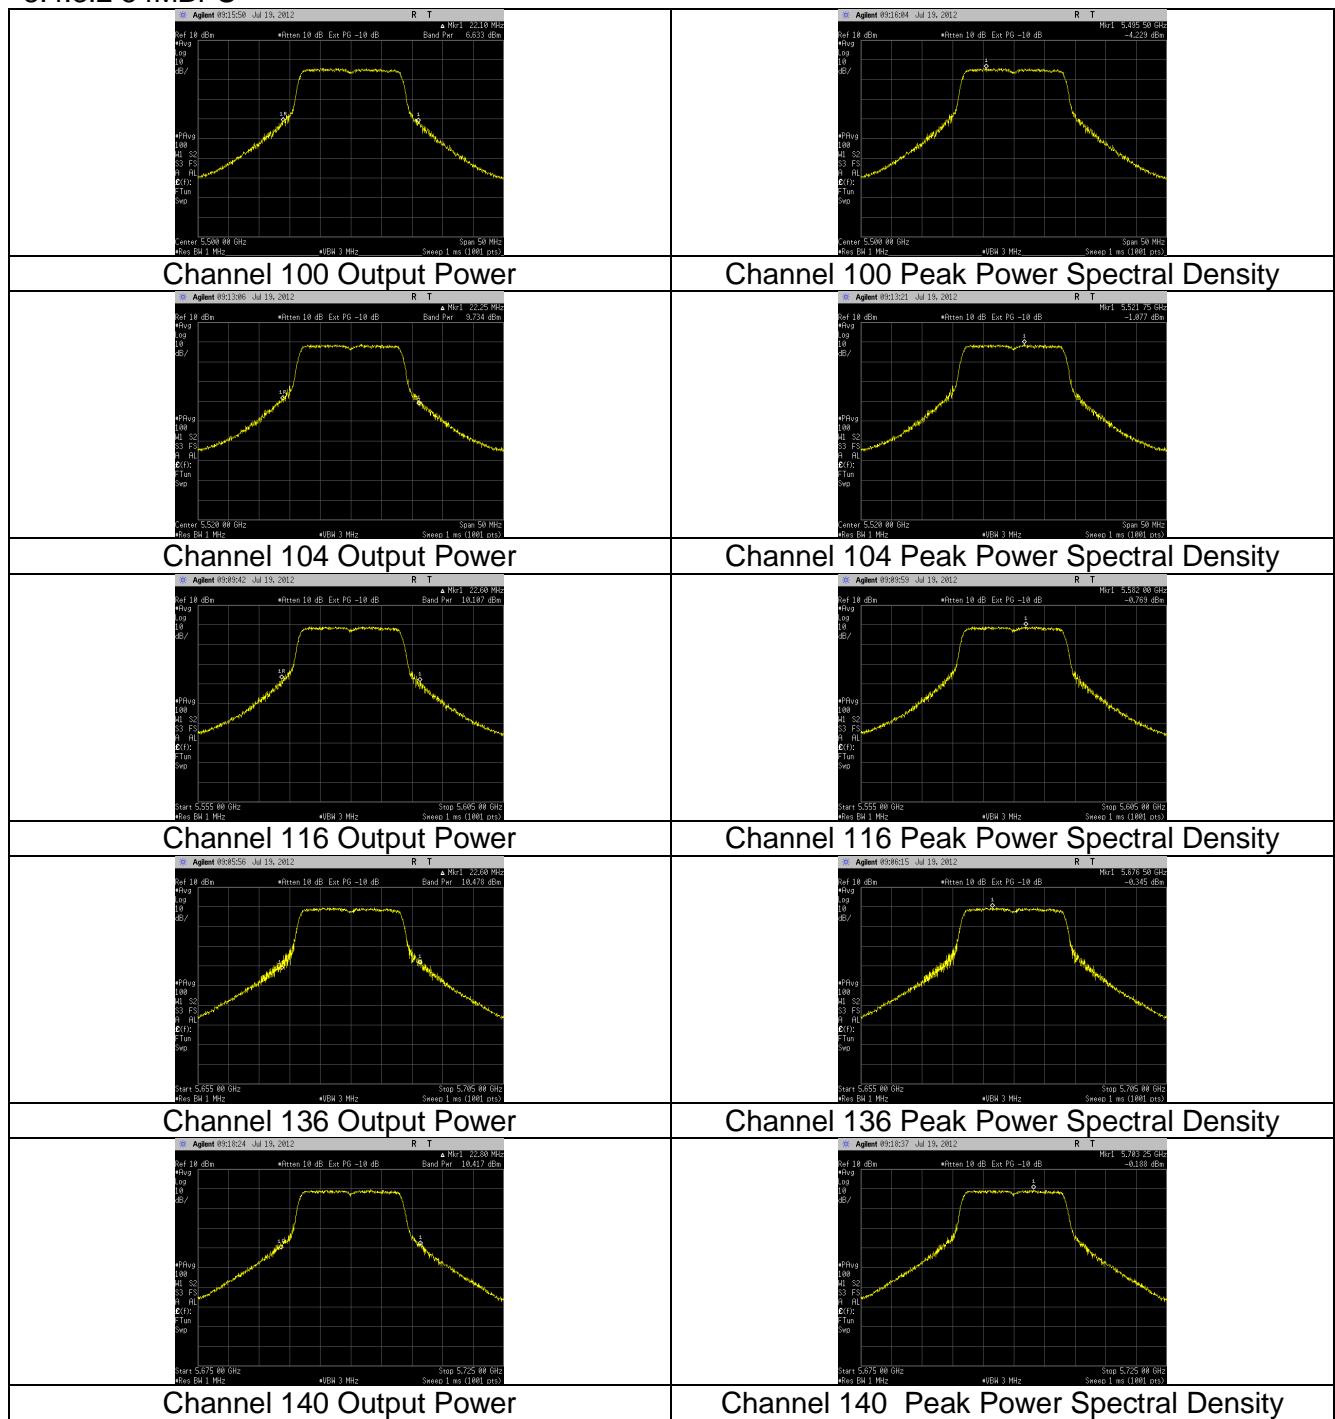

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 31 of 70

### 8.4.3.3 MCS7

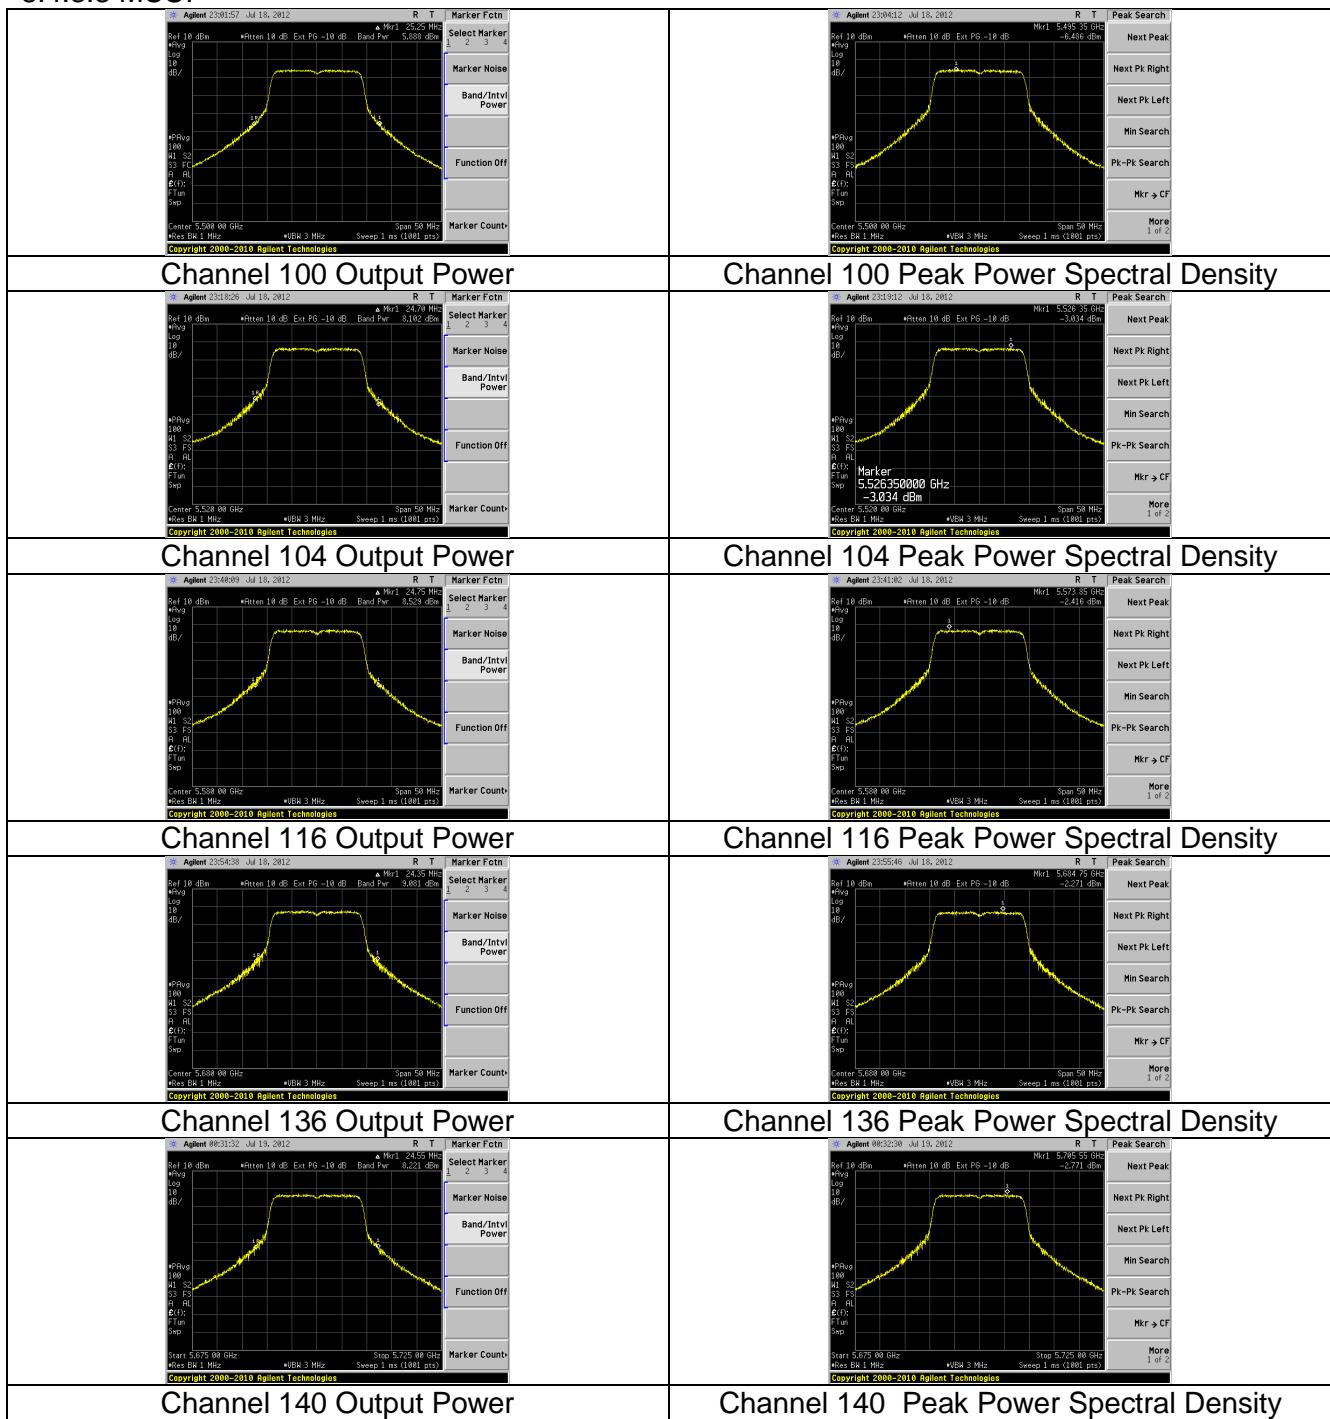

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 32 of 70

## EXHIBIT 9. Peak Excursion Ratio

Test Engineer: Adam Alger

### **9.1 Test Procedure**

KDB 789033 D01 section F

### **9.2 Limit**

The ratio of the peak excursion of the modulation envelope to the maximum conducted output power shall not exceed 13dB across any 1 MHz bandwidth or the emission bandwidth, whichever is less.

### **9.3 Test Data**

The data reported includes all necessary correction factors. These correction factors are loaded onto the EMI receiver when measurements are performed.

**Reported Measurement data = Raw receiver measurement (dBm) + Cable factor (dB) + Miscellaneous factors when applicable (dB).**

#### **Generic example of reported data at 2440 MHz:**

**Reported Measurement data = 8.55 (raw receiver measurement in dBm ) + 0.85 (cable factor in dB) = 9.4 (dBm).**

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 33 of 70

Sample calculation for peak excursion:

**Peak Excursion (Channel 48/6MBPS) = 8.3 dBm (Peak Max Hold) – 1.0dBm(PPSD) = 7.3dBm**

9.3.1 Operation in the 5.15 – 5.25 GHz band

#### 9.3.1.1 6MBPS

Data Rate	Channel	Frequency (MHz)	*PPSD (dBm)	Peak Hold Value (dBm)	Peak Excursion (dB)	Peak Excursion Limit (dB)	Peak Excursion Margin (dB)
6 Mbps	36	5180	1.3	9.0	7.7	13	5.3
	40	5200	0.9	9.1	8.2	13	4.8
	48	5240	1.0	8.3	7.3	13	5.7

#### 9.3.1.2 54MBPS

Data Rate	Channel	Frequency (MHz)	PPSD w/ D.C.C. (dBm)	Peak Hold Value (dBm)	Peak Excursion (dB)	Peak Excursion Limit (dB)	Peak Excursion Margin (dB)
54 Mbps	36	5180	-2.4	6.4	8.8	13	4.2
	40	5200	-2.4	6.3	8.7	13	4.3
	48	5240	-2.4	6.6	9.0	13	4.0

#### 9.3.1.3 MCS7

Data Rate	Channel	Frequency (MHz)	PPSD w/ D.C.C. (dBm)	Peak Hold Value (dBm)	Peak Excursion (dB)	Peak Excursion Limit (dB)	Peak Excursion Margin (dB)
MCS 7 (65 Mbps)	36	5180	-4.0	4.5	8.5	13	4.5
	40	5200	-3.7	5.1	8.8	13	4.2
	48	5240	-3.6	5.2	8.8	13	4.2

Note:

1. D.C.C : Duty Cycle Correction

9.3.2 Operation in the 5.25 – 5.35 GHz band

#### 9.3.2.1 6MBPS

Data Rate	Channel	Frequency (MHz)	*PPSD (dBm)	Peak Hold Value (dBm)	Peak Excursion (dB)	Peak Excursion Limit (dB)	Peak Excursion Margin (dB)
6 Mbps	56	5280	-6.7	1.4	8.1	13	4.9
	60	5300	0.0	7.7	7.6	13	5.4
	64	5320	0.9	8.1	7.2	13	5.8

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 34 of 70

### 9.3.2.2 54MBPS

Data Rate	Channel	Frequency (MHz)	PPSD w/ D.C.C. (dBm)	Peak Hold Value (dBm)	Peak Excursion (dB)	Peak Excursion Limit (dB)	Peak Excursion Margin (dB)
54 Mbps	56	5280	-8.9	0.9	9.8	13	3.2
	60	5300	-2.6	6.3	8.9	13	4.1
	64	5320	-3.0	6.2	9.2	13	3.8

### 9.3.2.3 MCS7

Data Rate	Channel	Frequency (MHz)	PPSD w/ D.C.C. (dBm)	Peak Hold Value (dBm)	Peak Excursion (dB)	Peak Excursion Limit (dB)	Peak Excursion Margin (dB)
MCS 7 (65 Mbps)	56	5280	-8.7	0.8	9.5	13	3.5
	60	5300	-4.4	5.1	9.4	13	3.6
	64	5320	-4.0	3.9	7.9	13	5.1

Note:

1. D.C.C : Duty Cycle Correction

### 9.3.3 Operation in the 5.47 – 5.725 GHz band

#### 9.3.3.1 6MBPS

Data Rate	Channel	Frequency (MHz)	*PPSD (dBm)	Peak Hold Value (dBm)	Peak Excursion (dB)	Peak Excursion Limit (dB)	Peak Excursion Margin (dB)
6 Mbps	100	5500	-3.6	3.6	7.2	13	5.8
	104	5520	1.9	9.2	7.2	13	5.8
	116	5580	2.5	10.0	7.5	13	5.5
	136	5680	2.6	10.4	7.8	13	5.2
	140	5700	2.7	10.6	7.9	13	5.1

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 35 of 70

### 9.3.3.2 54MBPS

Data Rate	Channel	Frequency (MHz)	PPSD w/ D.C.C. (dBm)	Peak Hold Value (dBm)	Peak Excursion (dB)	Peak Excursion Limit (dB)	Peak Excursion Margin (dB)
54 Mbps	100	5500	-4.0	4.8	8.8	13	4.2
	104	5520	-0.9	7.4	8.3	13	4.7
	116	5580	-0.6	7.8	8.4	13	4.6
	136	5680	-0.1	8.8	8.9	13	4.1
	140	5700	0.0	9.1	9.1	13	4.0

### 9.3.3.3 MCS7

Data Rate	Channel	Frequency (MHz)	PPSD w/ D.C.C. (dBm)	Peak Hold Value (dBm)	Peak Excursion (dB)	Peak Excursion Limit (dB)	Peak Excursion Margin (dB)
MCS 7 (65 Mbps)	100	5500	-6.3	4.0	10.3	13	2.7
	104	5520	-2.8	5.7	8.6	13	4.4
	116	5580	-2.2	6.3	8.5	13	4.5
	136	5680	-2.1	7.0	9.0	13	4.0
	140	5700	-2.6	6.2	8.8	13	4.2

Note:


1. D.C.C : Duty Cycle Correction

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 36 of 70


## 9.4 Screen Captures

### 9.4.1 Operation in the 5.15 – 5.25 GHz band


#### 9.4.1.1 Channel 36

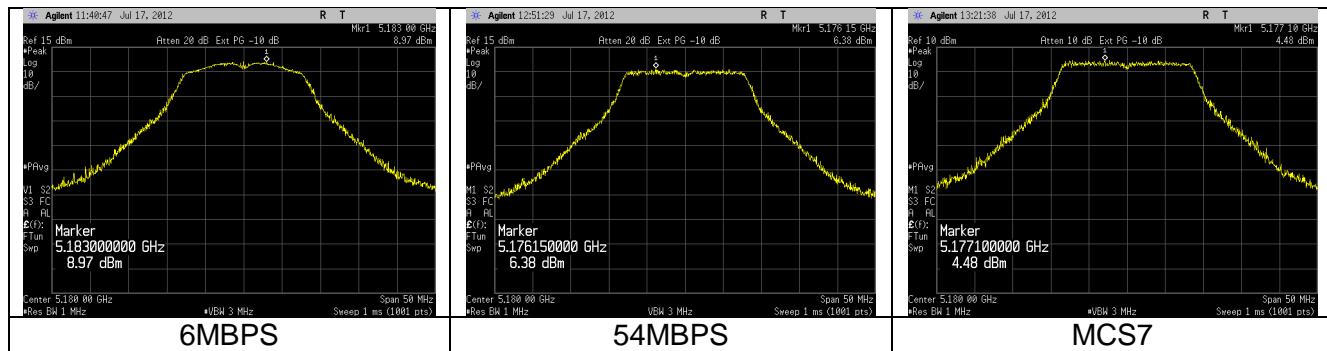

#### 9.4.1.2 Channel 40

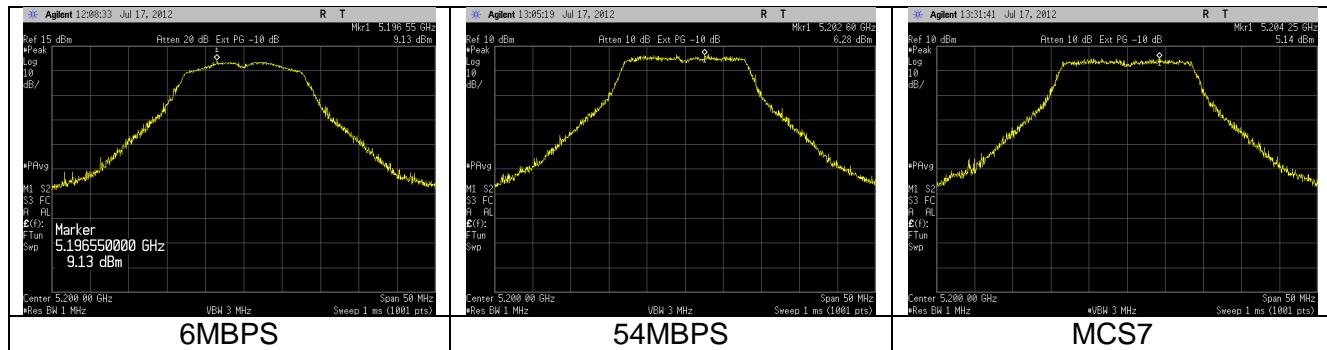


#### 9.4.1.3 Channel 48

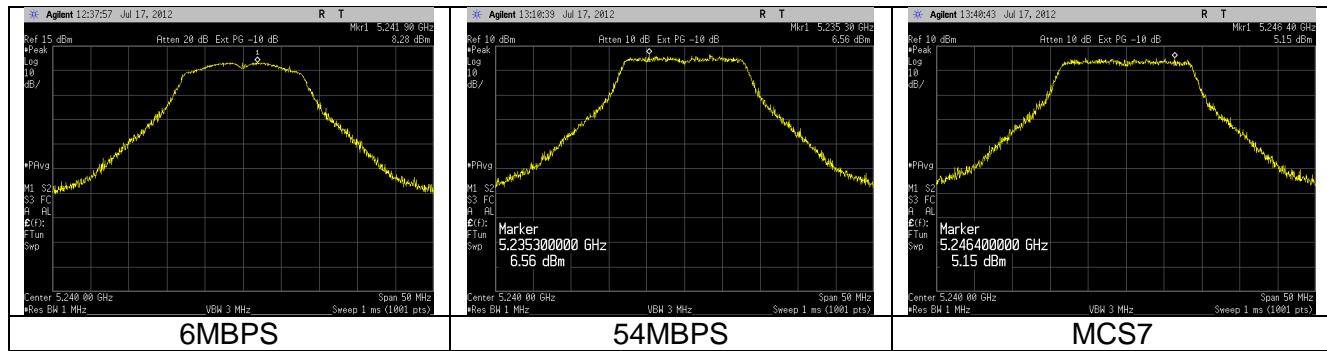


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 37 of 70

## 9.4.2 Operation in the 5.25 – 5.35 GHz band


### 9.4.2.1 Channel 56

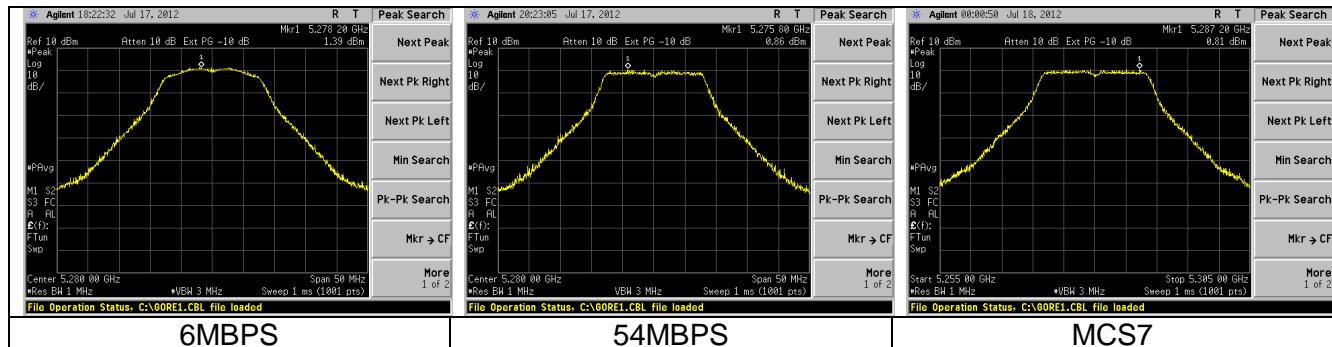

### 9.4.2.2 Channel 60

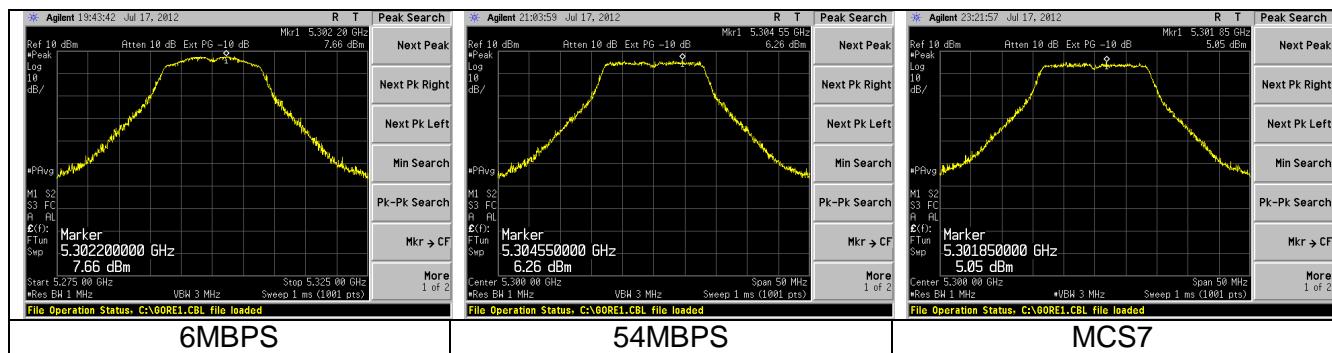


### 9.4.2.3 Channel 64

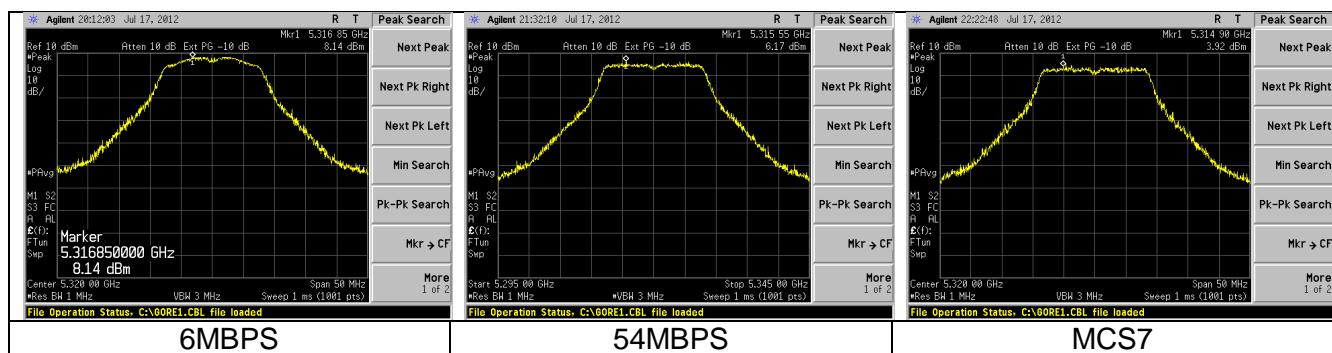


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 38 of 70

## 9.4.3 Operation in the 5.47 – 5.725 GHz band


### 9.4.3.1 Channel 100

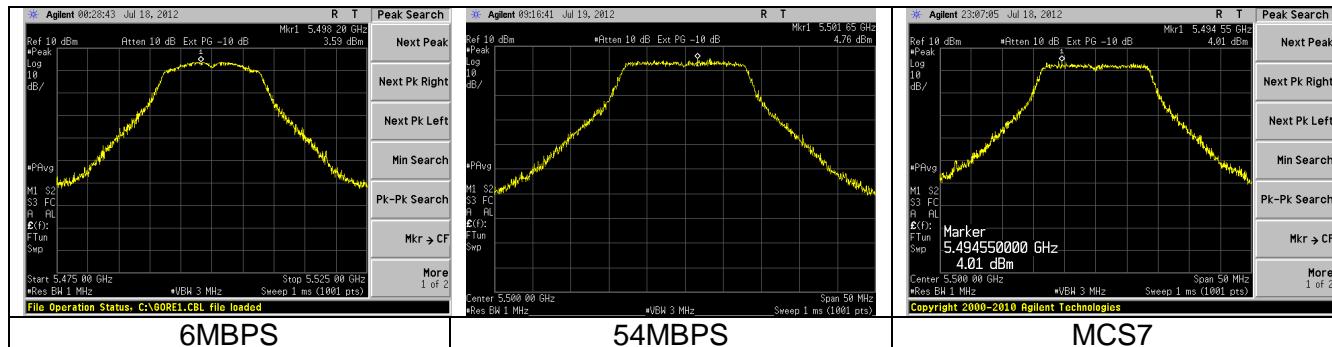

### 9.4.3.2 Channel 104

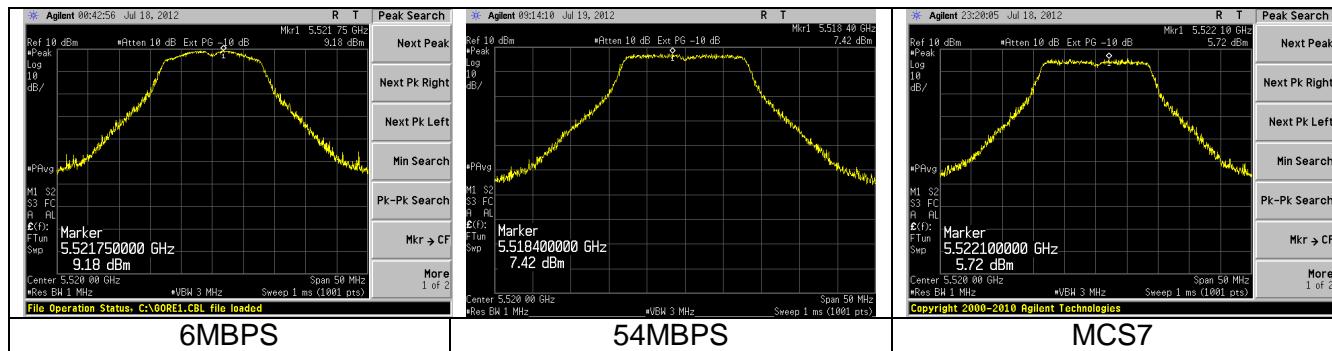


### 9.4.3.3 Channel 116

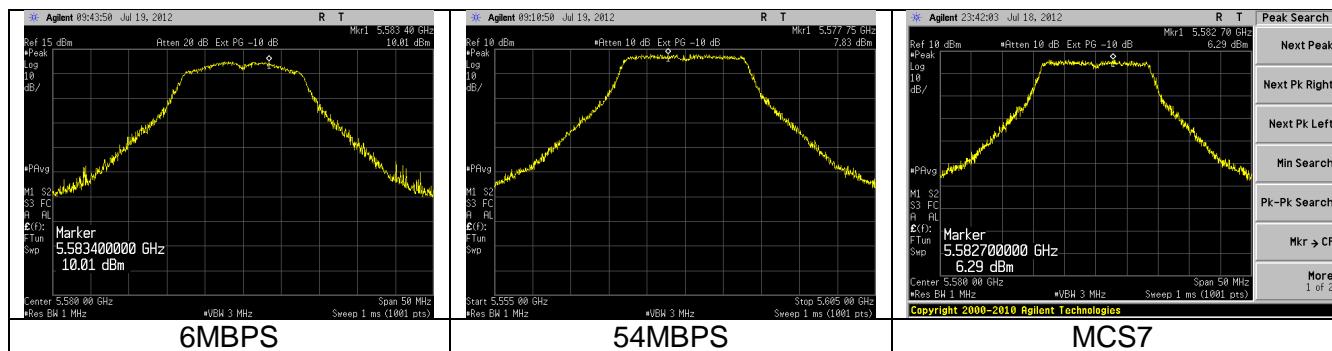


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 39 of 70

#### 9.4.3.2 Channel 136

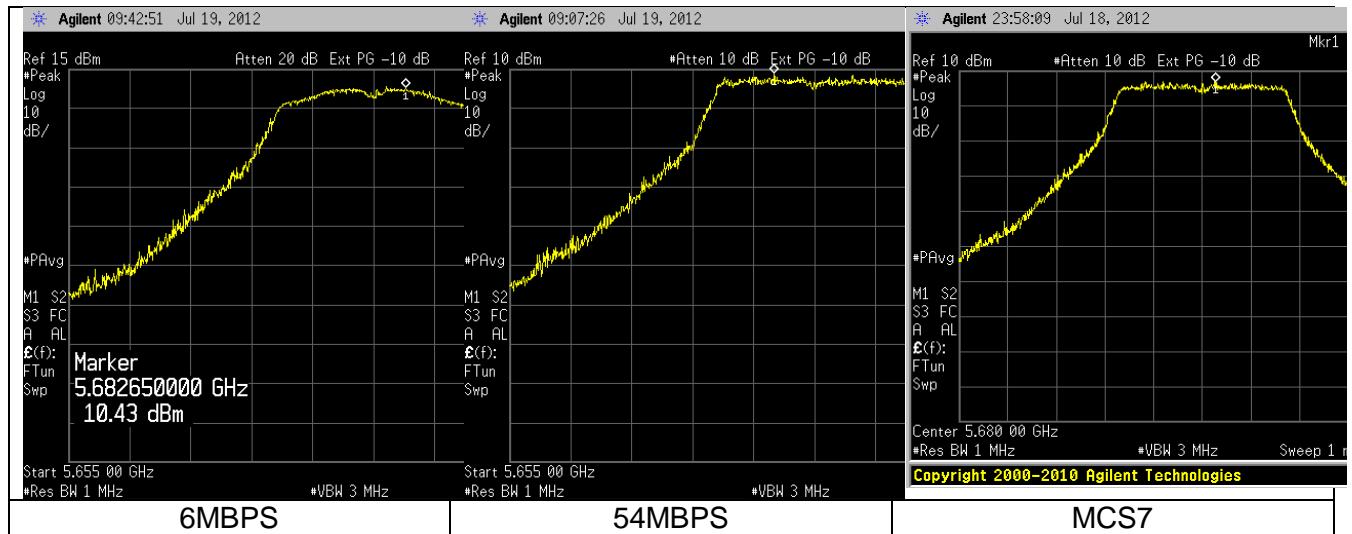

#### 9.4.3.3 Channel 140

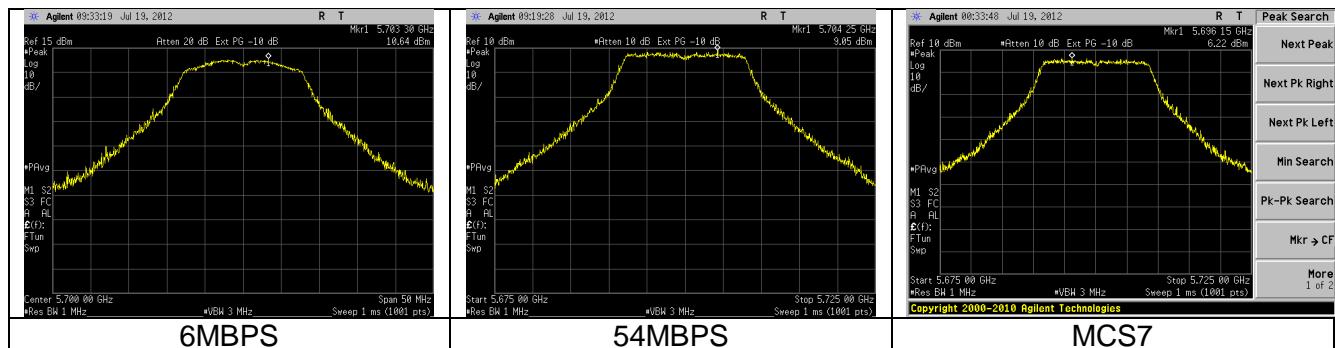

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 40 of 70

## EXHIBIT 10 Spurious Emissions

Test Engineers: Adam Alger, Khairul Aidi Zainal

### **10.1 Test Procedure**

1. KDB 789033 D01 section G.
2. ANSI C63.4-2003

The unwanted emissions measurements both in the restricted and non-restricted bands were performed via antenna-port conducted measurements in conjunction with radiated emissions test.

### **10.2 Limits**

#### 10.2.1 Operation in the 5150 to 5250 MHz band

All emissions outside of the 5150 to 5350 MHz band shall not exceed an EIRP of -27dBm.

#### 10.2.2 Operation in the 5250 to 5350 MHz band

All emissions outside of the 5150 to 5350 MHz band shall not exceed an EIRP of -27dBm.

Devices operating in the 5250 to 5350 MHz band that generate emissions in the 5150 to 5250 MHz band must meet all applicable technical requirements for operation in the 5150 to 5250 MHz band (including indoor use) or alternatively meet an out of band emission EIRP limit of -27dBm/MHz in the 5150 to 5250 MHz band.

#### 10.2.3 Operation in the 5470 to 5725 MHz band

All emissions outside of the 5150 to 5350 MHz band shall not exceed an EIRP of -27dBm

#### 10.2.4 Operation in the 5725 MHz to 5825 MHz band

All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17dBm/MHz.

For frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27dBm/MHz.


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 41 of 70

## 10.3 Test Data


10.3.1 Antenna port conducted measurements.

10.3.1.1 Operation in the 5150 to 5250 MHz band

10.3.1.1.1 Lower Band edge screen captures

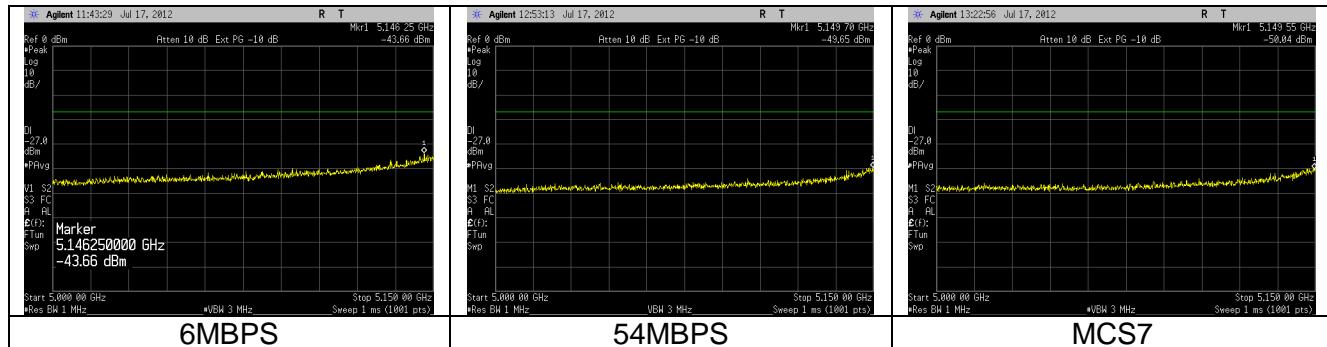


10.3.1.1.2 Upper Band edge screen captures

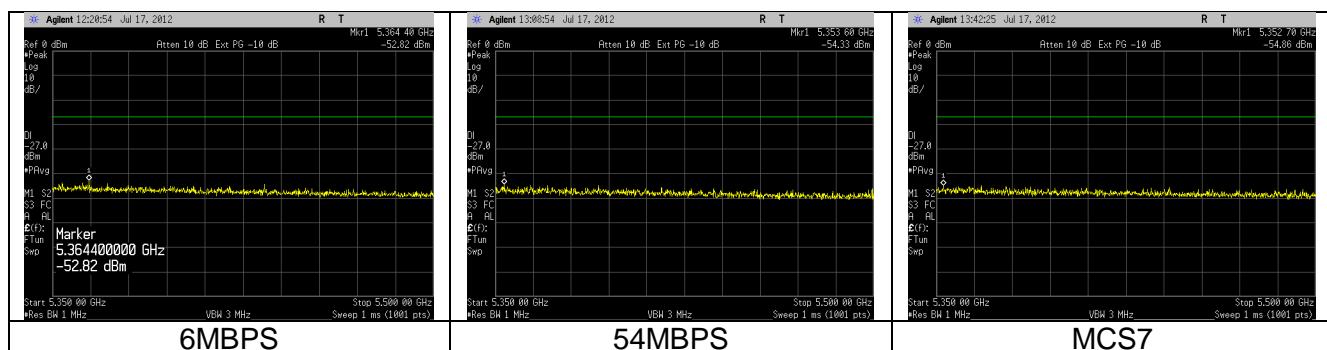

10.3.1.1.3 Unwanted Emissions


The plots below are from the 6MBPS data rate which is representative of the other data rates.

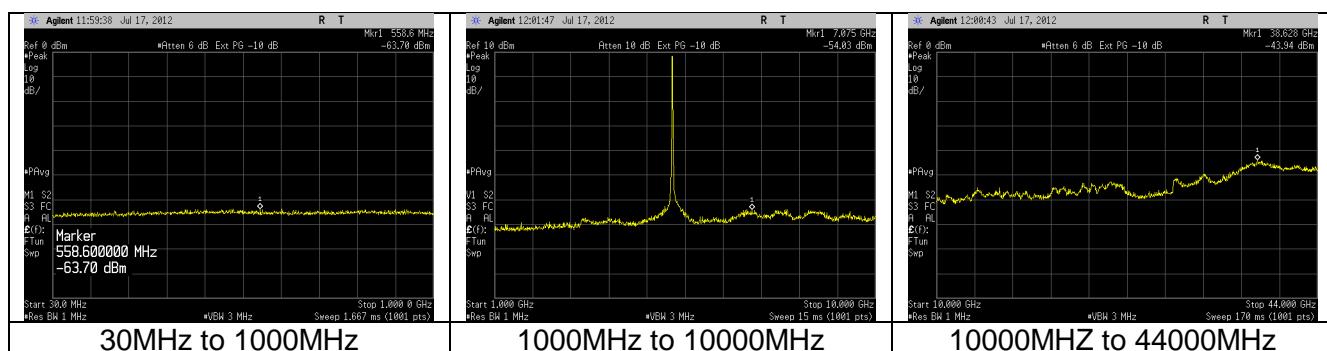


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 42 of 70

## 10.3.1.2 Operation in the 5250 to 5350 MHz band

### 10.3.1.2.1 Lower Band edge screen captures

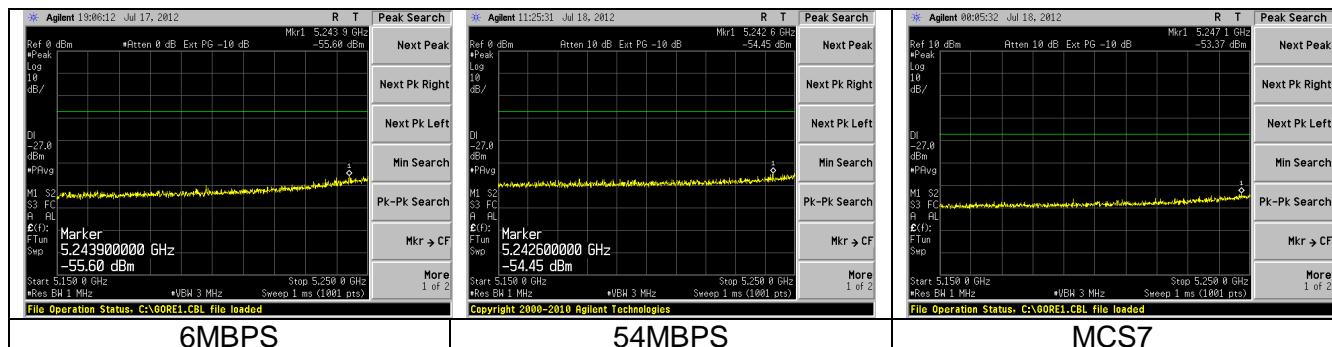


### 10.3.1.2.2 Upper Band edge screen captures

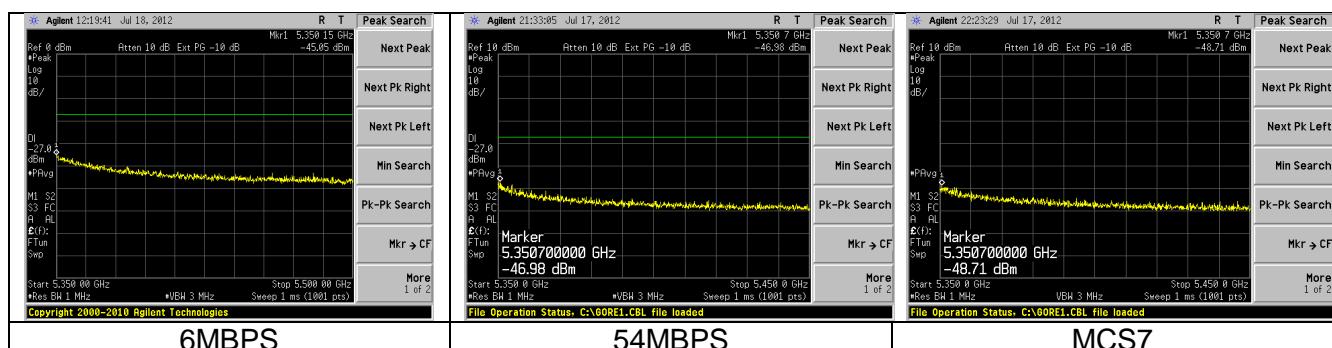

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 43 of 70

### 10.3.1.2.3 Unwanted Emissions

The plots below are from the 6MBPS data rate which is representative of the other data rates.

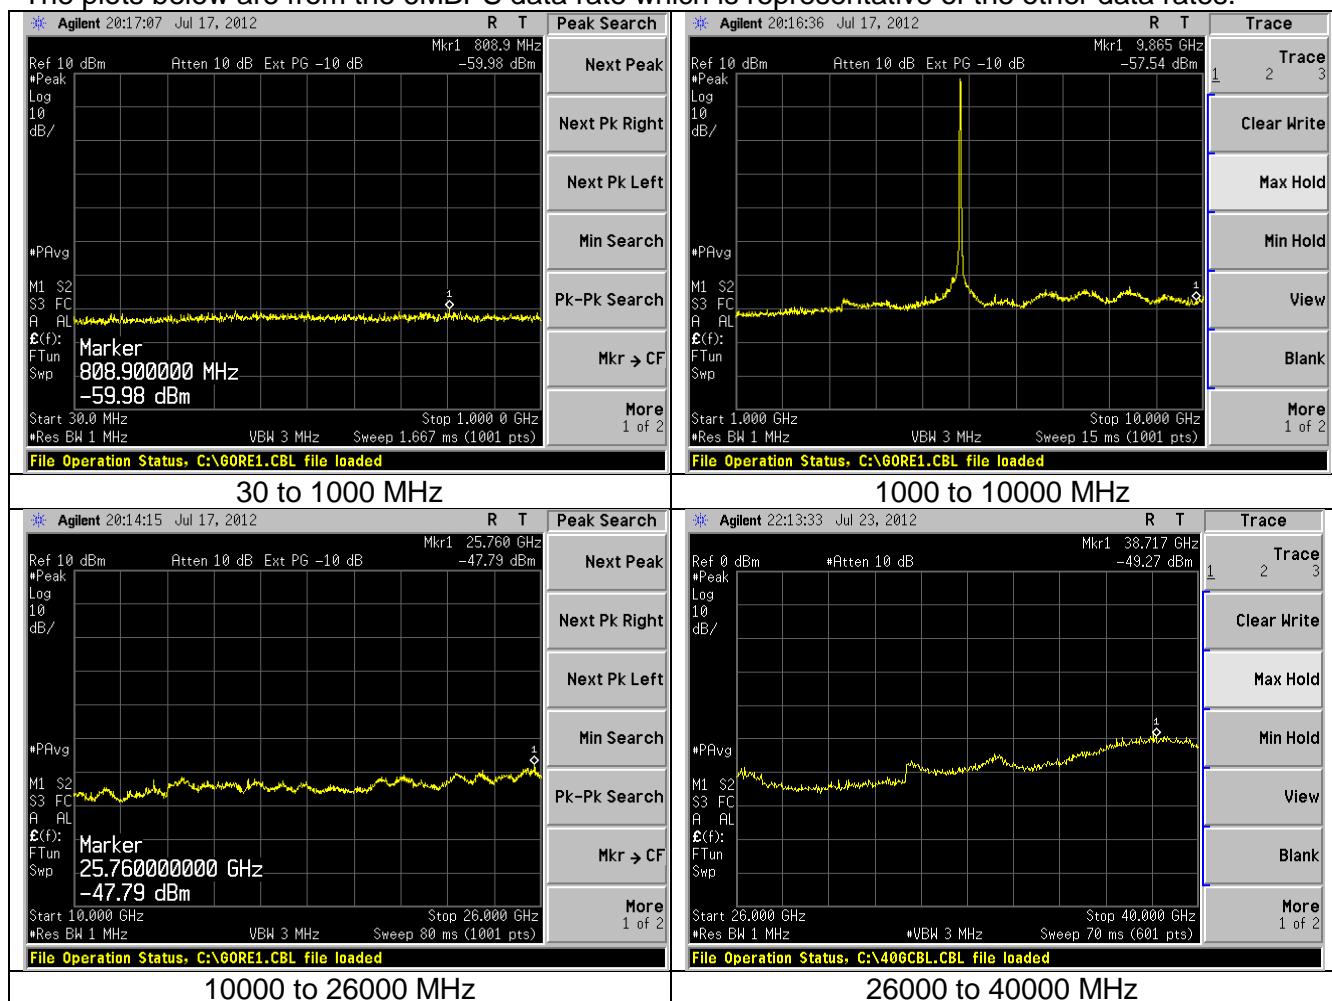


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 44 of 70


### 10.3.1.3 Operation in the 5470 to 5725 MHz band

In this range, there was power shaping performed on the lower channels (100 and 104) in order to satisfy radiated band-edge requirements.

#### 10.3.1.3.1 Lower Band edge screen captures

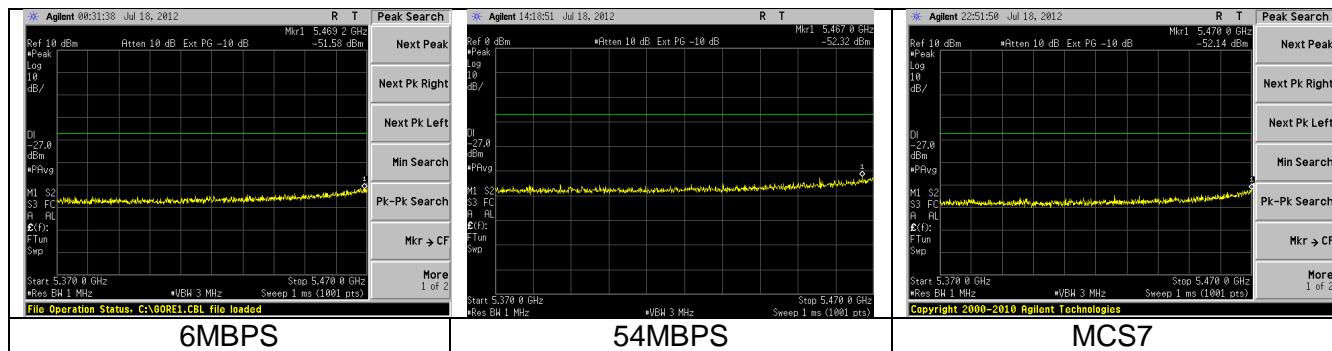


#### 10.3.1.2.2 Upper Band edge screen captures

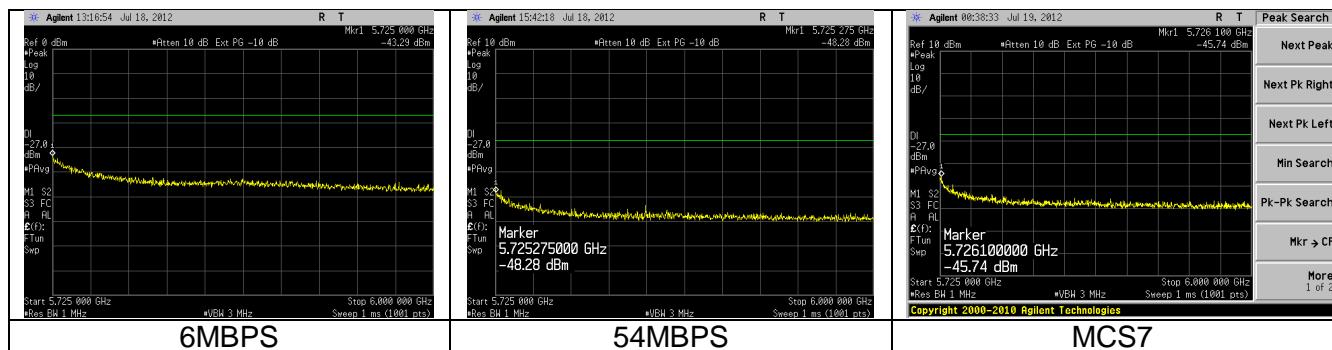

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 45 of 70

### 10.3.1.2.3 Unwanted Emissions


The plots below are from the 6MBPS data rate which is representative of the other data rates.

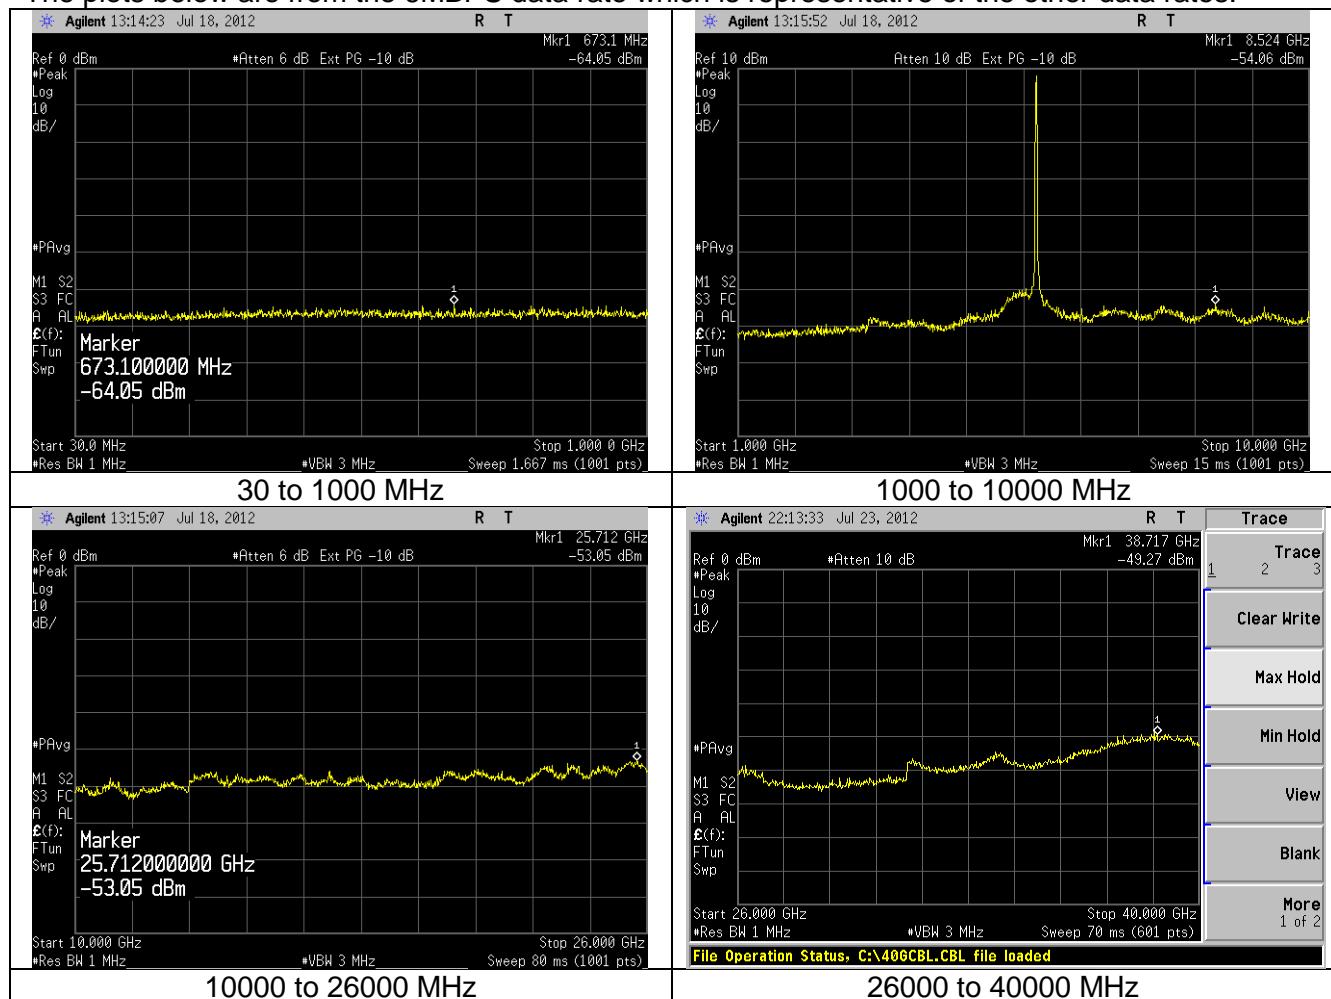

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 46 of 70

## 10.3.2 Radiated emissions measurements.

### 10.3.2.1 Emissions below 1000 MHz

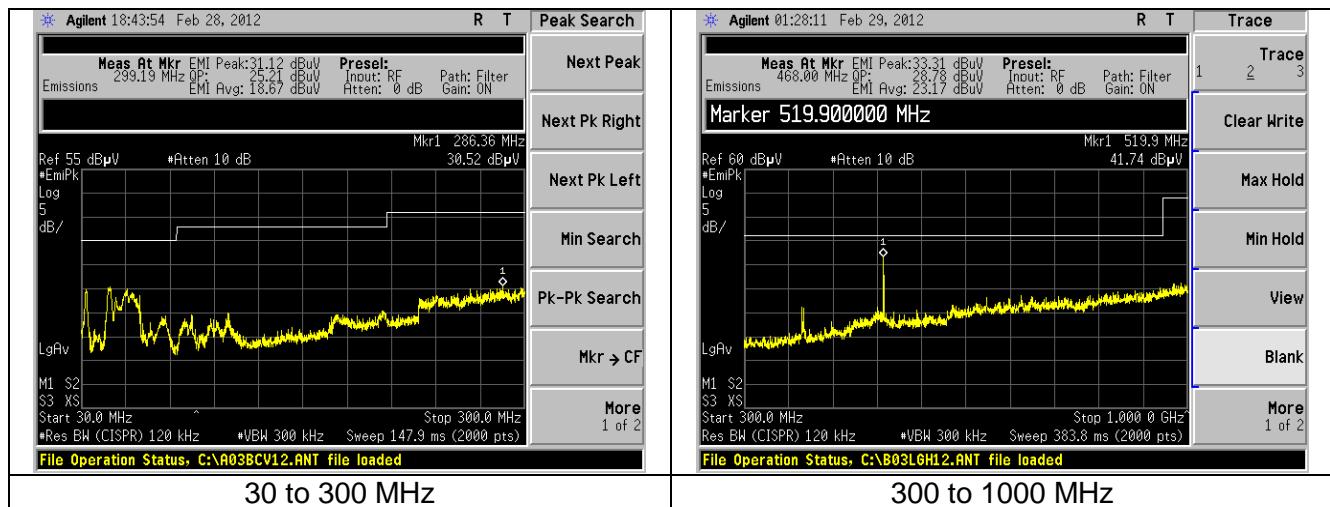

Frequency (MHz)	Height (m)	Azimuth (degree)	Quasi Peak Reading (dB $\mu$ V/m)	Quasi Peak Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Polarity	EUT orientation
185.3	1.00	3	28.9	43.5	14.6	H	S
209.6	1.52	0	27.7	43.5	15.8	H	S
296.6	1.00	0	27.0	46.0	19.0	V	S
299.2	1.00	0	25.2	46.0	20.8	H	V
46.7	1.00	101	24.9	40.0	15.1	V	V
32.9	1.00	0	25.9	40.0	14.1	V	V
100.5	1.00	76	26.4	43.5	17.1	V	F
184.0	1.00	255	30.8	43.5	12.7	H	F
520.0	1.00	238	41.6	46.0	4.4	V	S
468.0	1.00	0	28.8	46.0	17.2	H	S
520.0	1.65	198	42.8	46.0	3.2	H	V
520.0	1.00	74	37.2	46.0	8.8	V	V
380.8	1.00	212	26.3	46.0	19.7	H	F

Note:

1. The emissions seen were not a function of the EUT.
2. H: Horizontal; V: Vertical; F: Flat

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 47 of 70

### 10.3.2.2 Emissions above 1000 MHz

For the following data, measurements were performed at a separation **distance of 1 meter**. The field strength was then converted to EIRP per KDB 789033:

$$EIRP [dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$$

EIRP is the equivalent isotropically radiated power in Watts

E is the field strength

D is the measurement distance

Examples:

1. Above 960MHz Restricted band limit conversion to EIRP:

$$EIRP = 54[dB\mu V/m] + 9.54 - 104.77 = \underline{\underline{-41.27dBm}}$$

2. Spurious emission at **10360MHz (table 10.3.2.2.1.1, Channel 36)**:

$$EIRP = 52.9dB\mu V/m + 20 \log (1 \text{ meter}) - 104.77 = \underline{\underline{-51.8dBm}}$$

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 48 of 70

### 10.3.2.2.1 Operation in the 5150 to 5250 MHz band

#### 10.3.2.2.1.1 Significant emissions data table

##### Channel 36

FREQ (MHz)	ANT	EUT	HEIGHT (cm)	AZIMUTH (°)	PEAK (dB $\mu$ V/m)	QP (dB $\mu$ V/m)	AVG (dB $\mu$ V/m)	EIRP (dBm/MHz)	LIMIT (dBm/MHz)	MARGIN (dB)
10360.00	V	S	100.0	118	52.9	N/A	N/A	-51.8	-27.0	24.8
15540.00	H	F	100.0	153	55.3	N/A	46.7	-58.1	-41.2	16.8
12950.00	H	F	103.8	149	56.8	N/A	52.5	-48.0	-27.0	21.0
20720.00	H	S	100.0	103	57.7	N/A	53.9	-47.1	-27.0	20.1
18130.00	V	S	100.0	97	55.6	N/A	51.0	-53.8	-41.2	12.5

##### Channel 40

FREQ (MHz)	ANT	EUT	HEIGHT (cm)	AZIMUTH (°)	PEAK (dB $\mu$ V/m)	QP (dB $\mu$ V/m)	AVG (dB $\mu$ V/m)	EIRP (dBm/MHz)	LIMIT (dBm/MHz)	MARGIN (dB)
10400.00	H	S	100.0	145	52.3	N/A	N/A	-52.5	-27.0	25.5
15600.00	H	F	100.0	148	57.2	N/A	47.1	-57.7	-41.2	16.4
13000.00	H	F	105.2	146	58.6	N/A	54.6	-46.2	-27.0	19.2
20800.00	H	S	100.0	74	55.8	N/A	51.0	-49.0	-27.0	22.0
18200.00	V	S	100.0	98	55.2	N/A	50.3	-54.5	-41.2	13.2


##### Channel 48

FREQ (MHz)	ANT	EUT	HEIGHT (cm)	AZIMUTH (°)	PEAK (dB $\mu$ V/m)	QP (dB $\mu$ V/m)	AVG (dB $\mu$ V/m)	EIRP (dBm/MHz)	LIMIT (dBm/MHz)	MARGIN (dB)
10480.00	H	S	100.0	136	52.6	N/A	N/A	-52.2	-27.0	25.2
15720.00	H	F	100.0	149	59.2	N/A	48.8	-56.0	-41.2	14.7
13100.00	H	F	104.3	148	61.5	N/A	57.1	-43.3	-27.0	16.3
20960.00	V	S	100.6	71	56.8	N/A	49.9	-48.0	-27.0	21.0
18340.00	V	S	100.0	97	56.0	N/A	51.6	-53.2	-41.2	11.9


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 49 of 70

### 10.3.2.2.1.2 Emissions between 1000 to 8000 MHz

#### 1000 to 4500 MHz

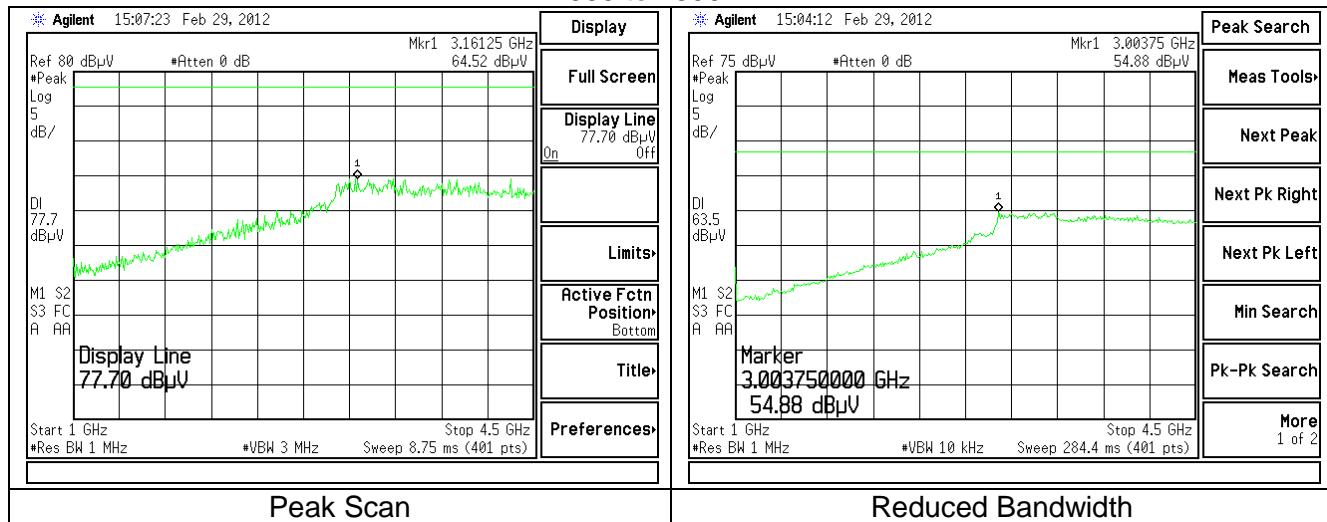


#### 4500 to 5150 MHz

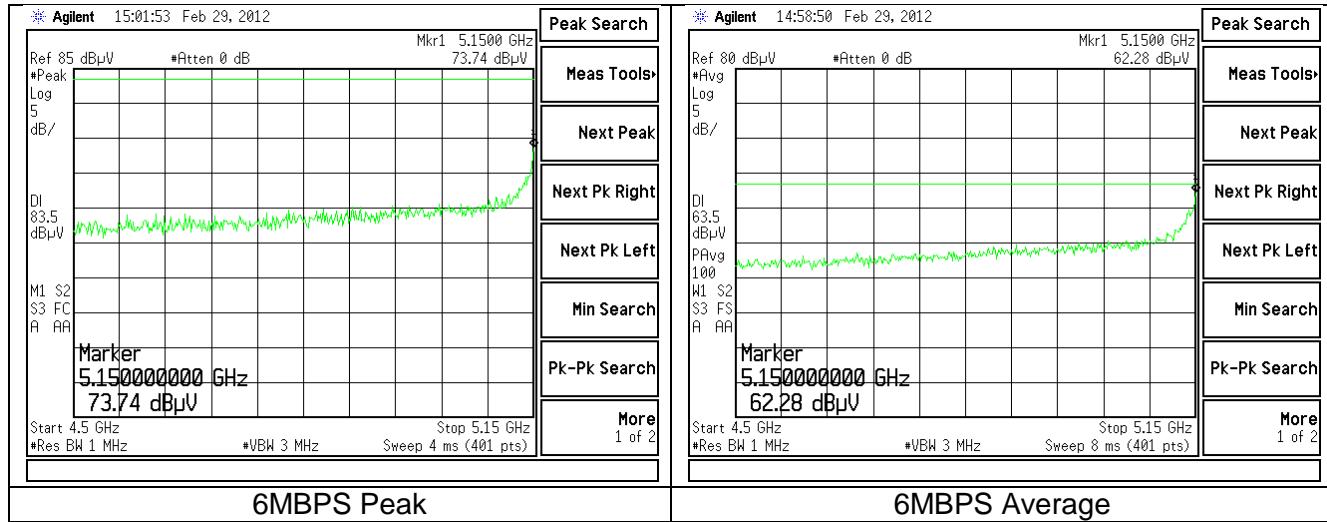


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 50 of 70

### 4500 to 5150 MHz (Continued)

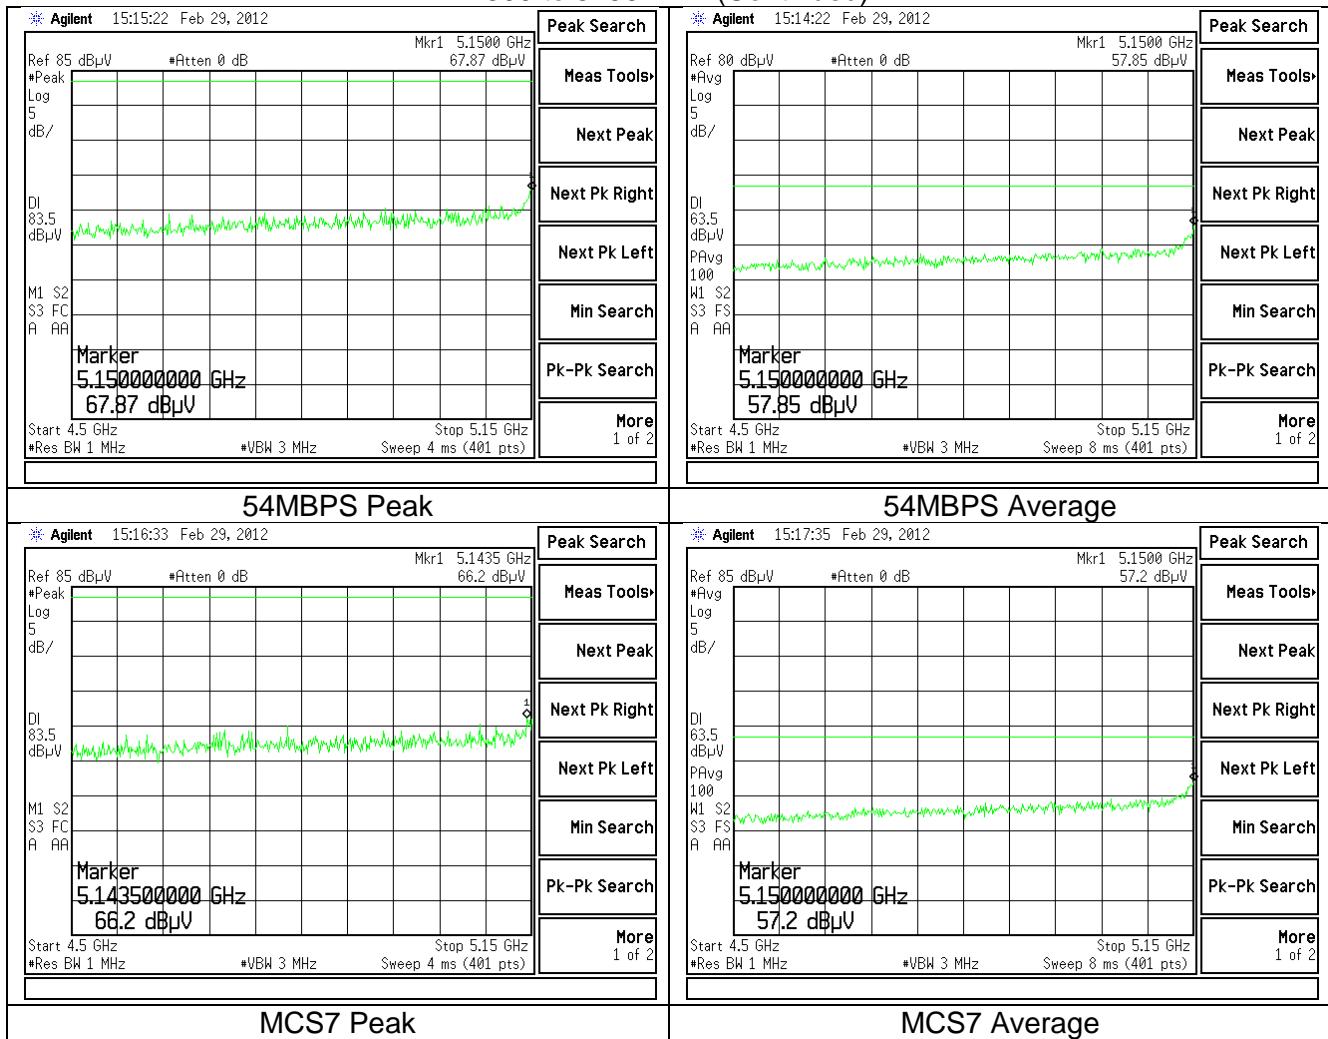


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 51 of 70


## 5350 to 5460 MHz

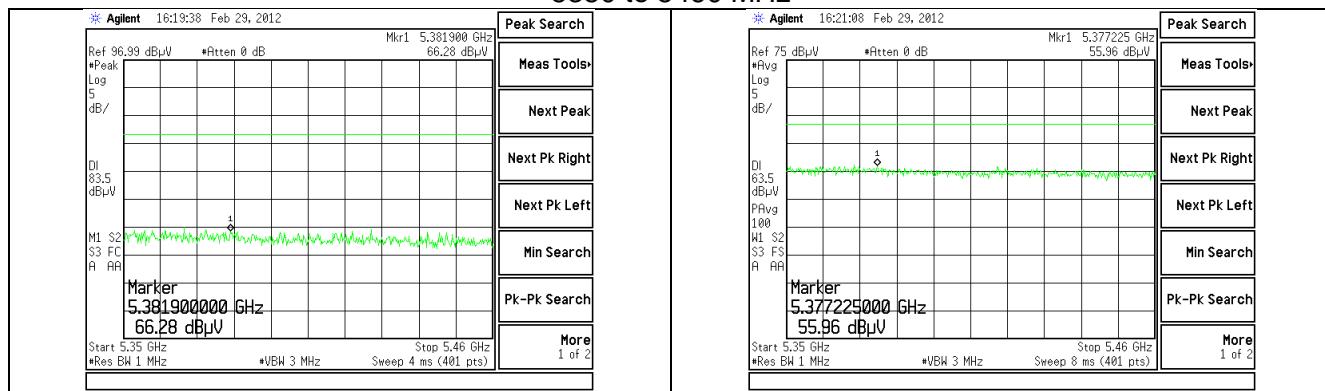


## 6MBPS Peak

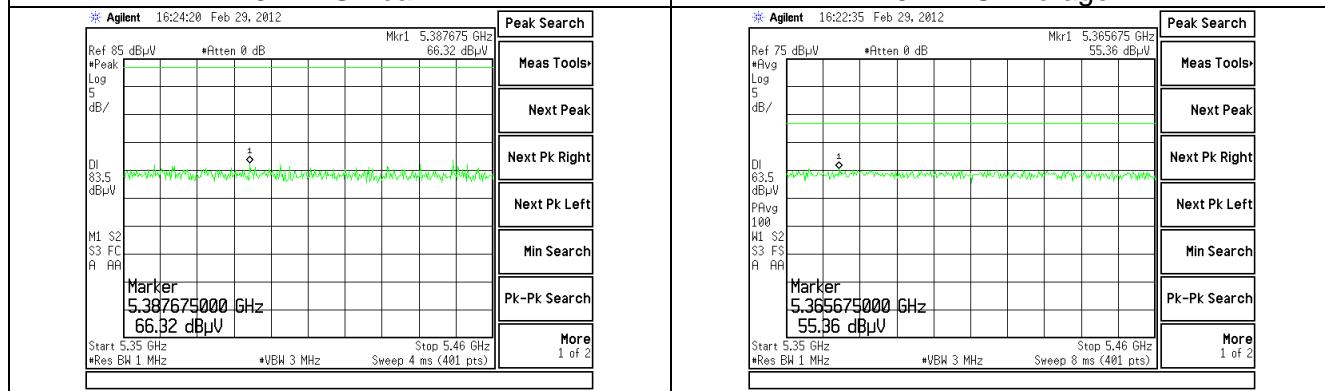

## 6MBPS Average

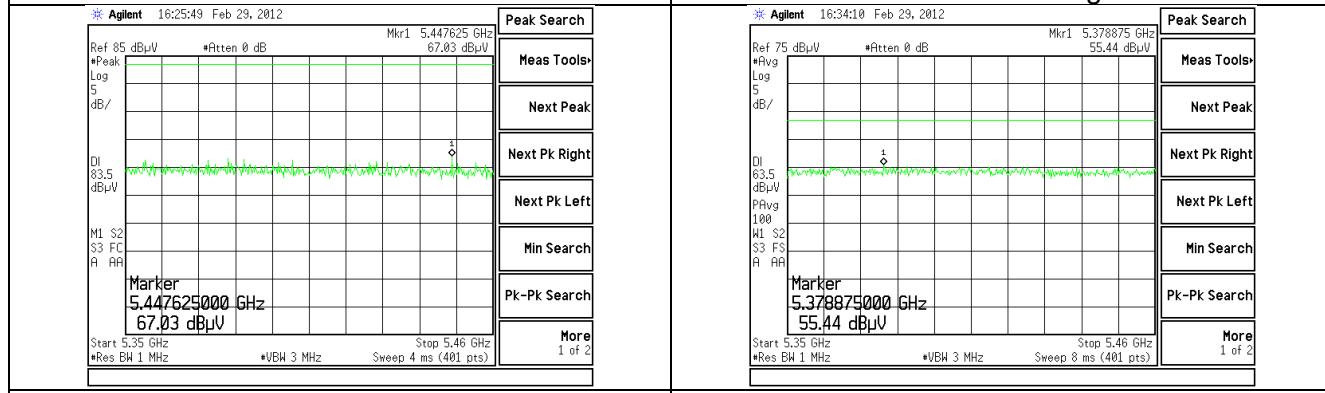


## 54MBPS Peak



Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 52 of 70


## 5460 to 8000 MHz

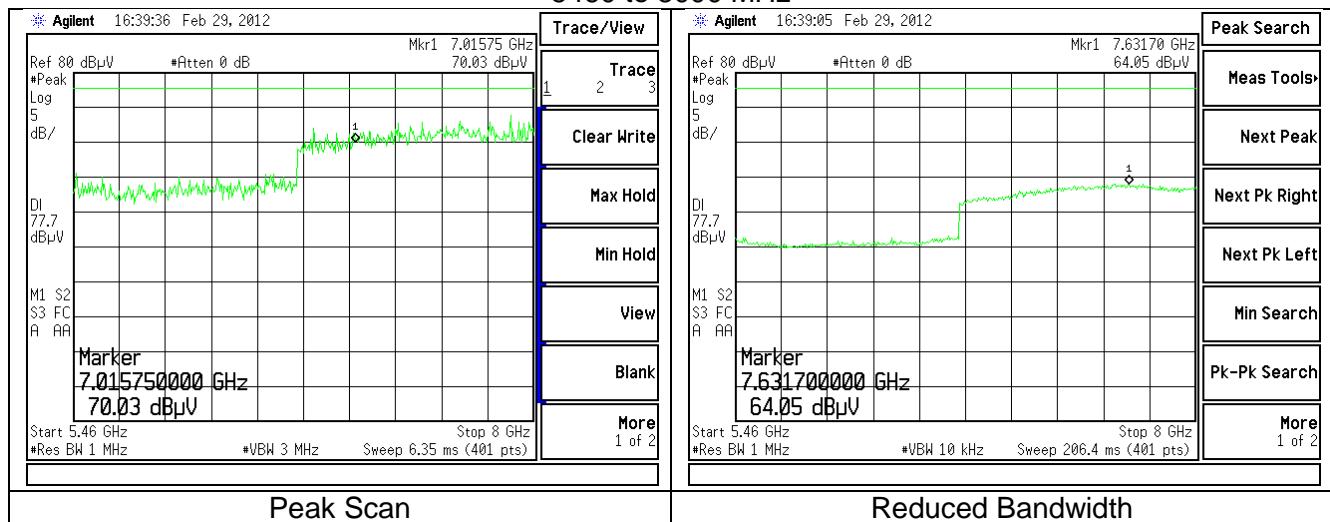

### 10.3.2.2.1.3 Emissions between 8000MHz to 40000MHz

The plots shown below are those of 6MBPS which is representative of the other data rates.


#### 8000MHz to 18000MHz

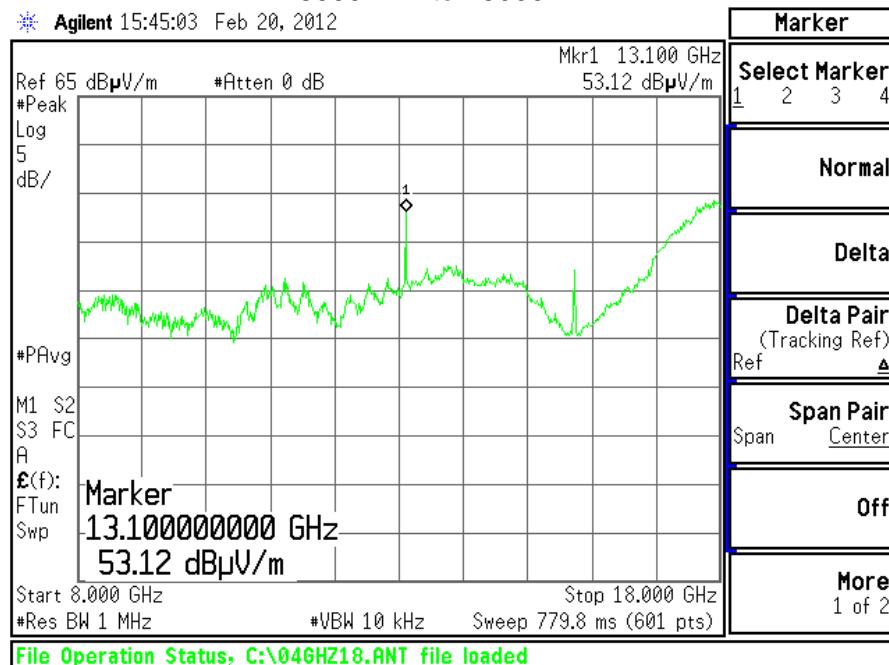

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 53 of 70


### 18000MHz to 26000MHz

\* Agilent 13:42:21 Feb 27, 2012

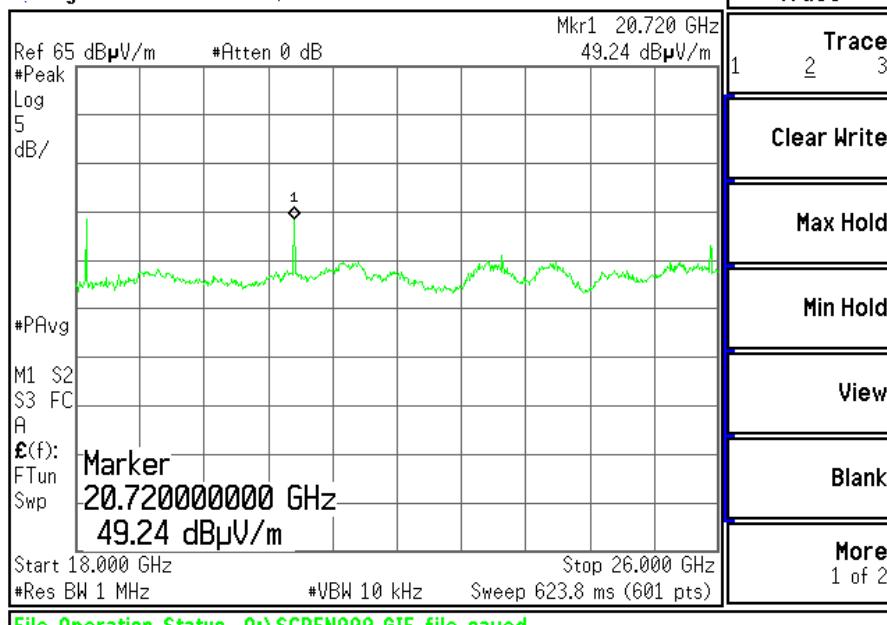

### 26000MHz to 40000MHz

\* Agilent 15:25:08 Feb 27, 2012

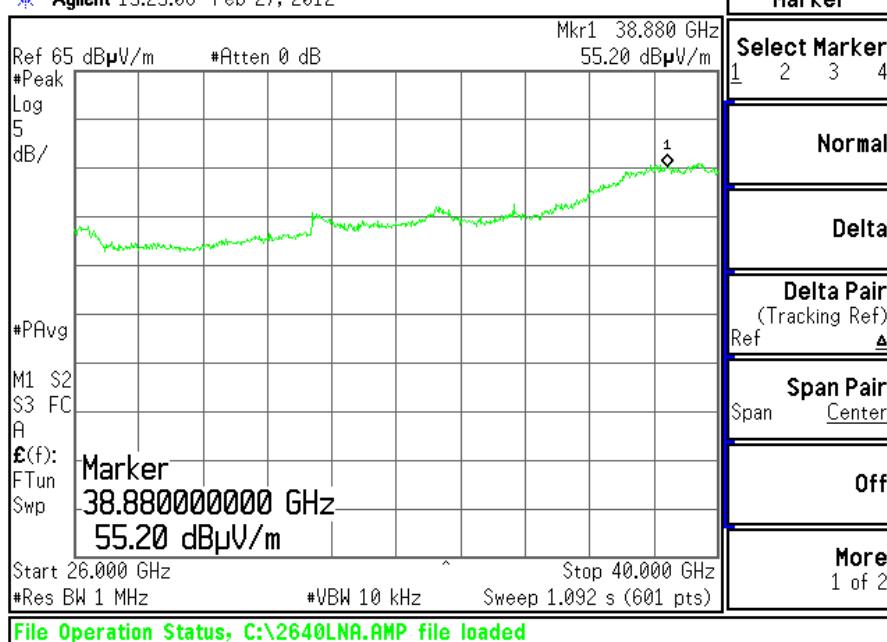

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 54 of 70

## 10.3.2.2.2 Operation in the 5250 to 5350 MHz band

### 10.3.2.2.2.1 Significant emissions data table

#### Channel 56

FREQ (MHz)	ANT	EUT	HEIGHT (cm)	AZIMUTH (°)	PEAK (dB $\mu$ V/m)	QP (dB $\mu$ V/m)	AVG (dB $\mu$ V/m)	EIRP dBm/MHz	LIMIT dBm/MHz	MARGIN (dB)
10560.00	V	S	1.0	82	53.7	-	43.7	-51.1	-27.0	24.1
15840.00	H	F	1.0	166	54.0	-	43.9	-60.9	-41.2	19.7
21120.00	V	F	1.0	207	55.8	-	47.4	-57.3	-41.2	16.1
13200.00	H	S	1.0	119	56.9	-	48.5	-47.9	-27.0	20.9

#### Channel 60

FREQ (MHz)	ANT	EUT	HEIGHT (cm)	AZIMUTH (°)	PEAK (dB $\mu$ V/m)	QP (dB $\mu$ V/m)	AVG (dB $\mu$ V/m)	EIRP dBm/MHz	LIMIT dBm/MHz	MARGIN (dB)
10600.00	V	S	100.0	136	54.7	N/A	44.3	-60.5	-41.2	19.2
15900.00	H	F	100.0	185	60.3	N/A	49.5	-55.3	-41.2	14.0
13250.00	V	S	100.0	86	58.2	N/A	52.1	-52.7	-41.2	11.4
21200.00	V	S	100.0	65	57.0	N/A	52.1	-52.7	-41.2	11.4


#### Channel 64

FREQ (MHz)	ANT	EUT	HEIGHT (cm)	AZIMUTH (°)	PEAK (dB $\mu$ V/m)	QP (dB $\mu$ V/m)	AVG (dB $\mu$ V/m)	EIRP dBm/MHz	LIMIT dBm/MHz	MARGIN (dB)
10640.00	V	S	100.0	136	55.5	N/A	46.1	-58.7	-41.2	17.4
15960.00	H	F	100.3	184	59.8	N/A	48.2	-56.6	-41.2	15.3
13300.00	V	S	100.0	63	57.7	N/A	50.8	-54.0	-41.2	12.7
21280.00	V	S	100.6	67	56.6	N/A	50.6	-54.1	-41.2	12.9


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 55 of 70

### 10.3.2.2.1.2 Emissions between 1000 to 8000 MHz

#### 1000 to 4500 MHz

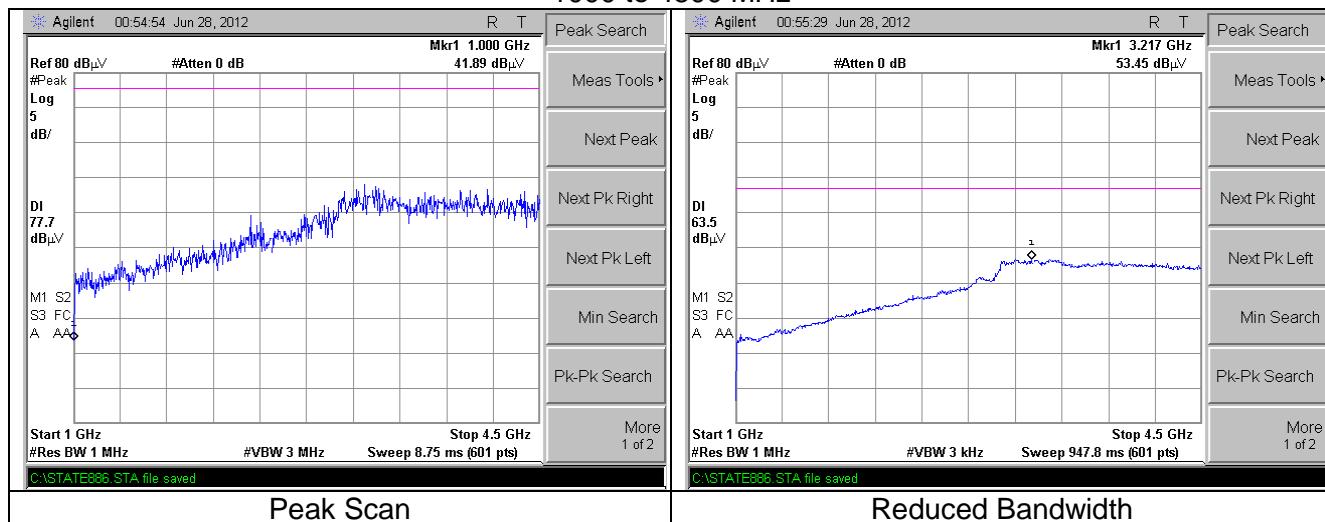


#### 4500 to 5150 MHz

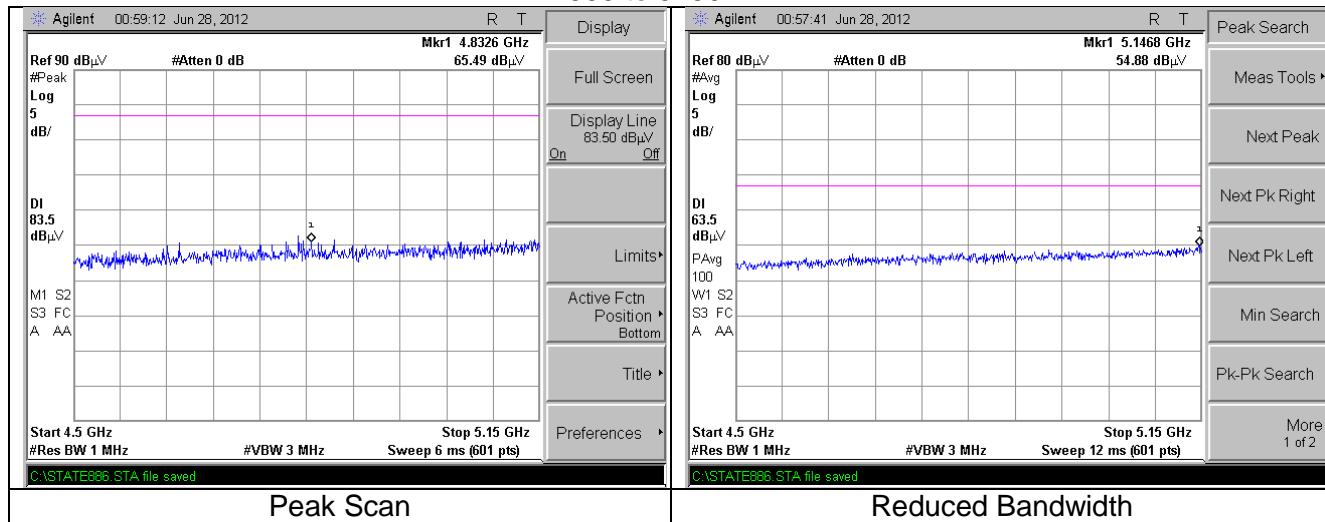


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 56 of 70

## 4500 to 5150 MHz

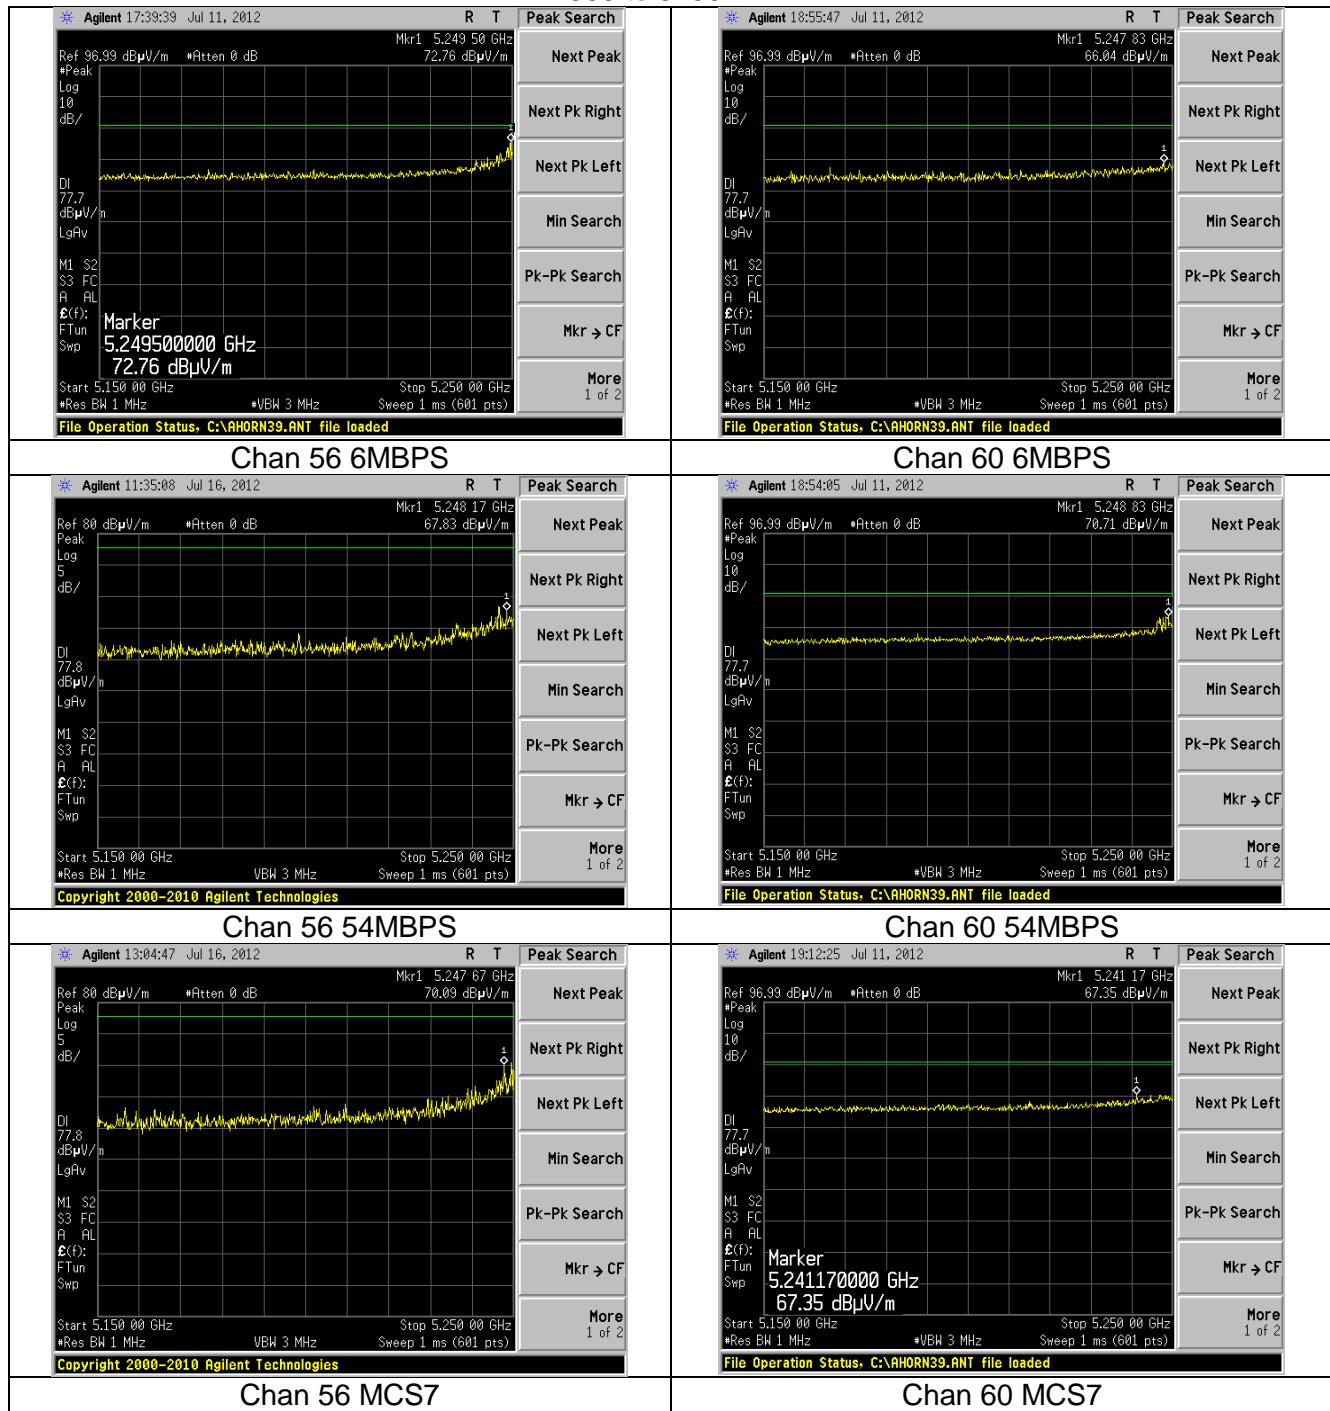


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 57 of 70

## 5350 to 5460 MHz

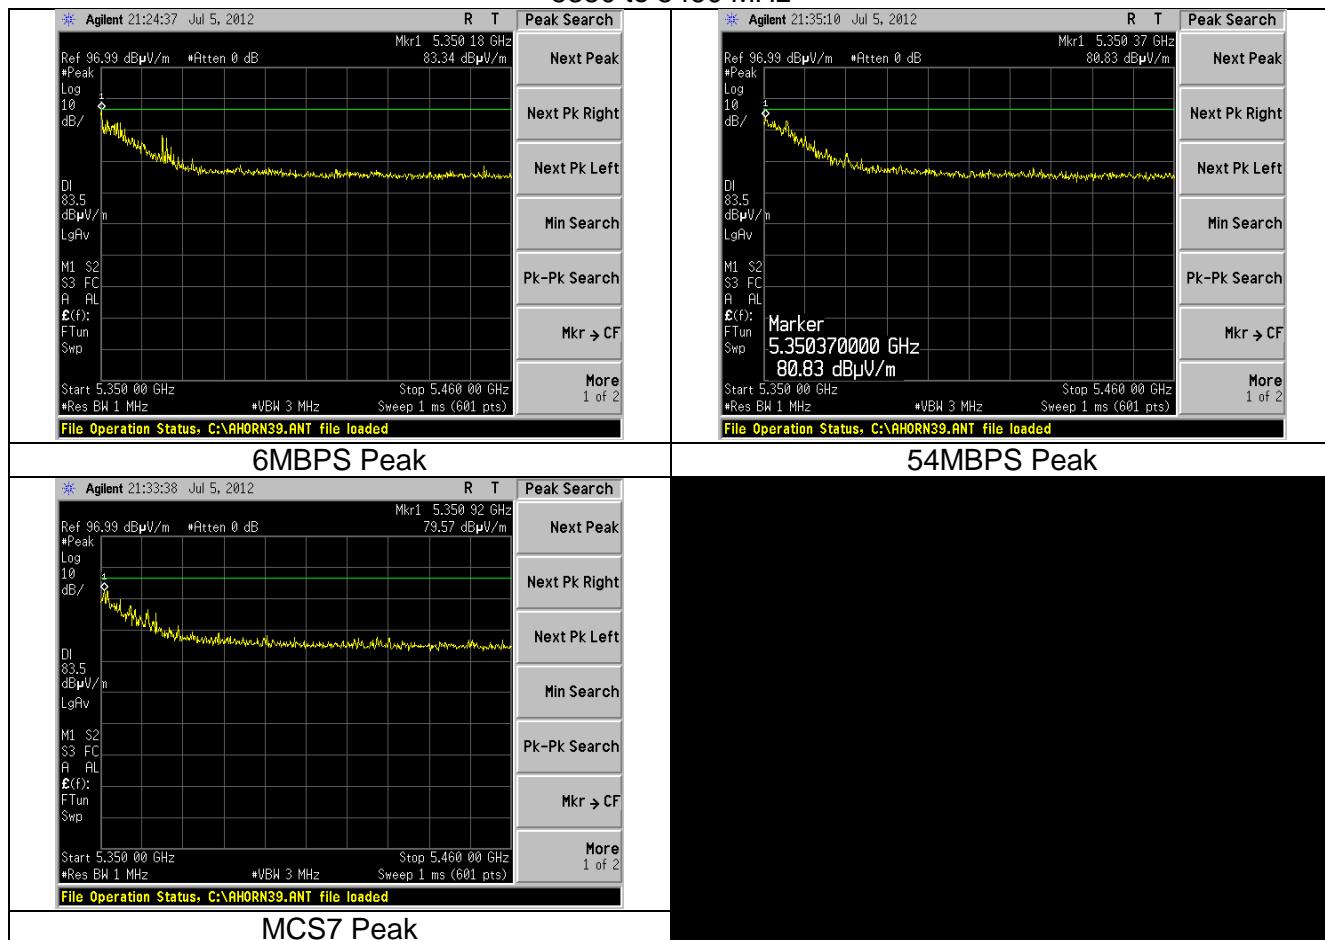

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 58 of 70


## 5460 to 8000 MHz

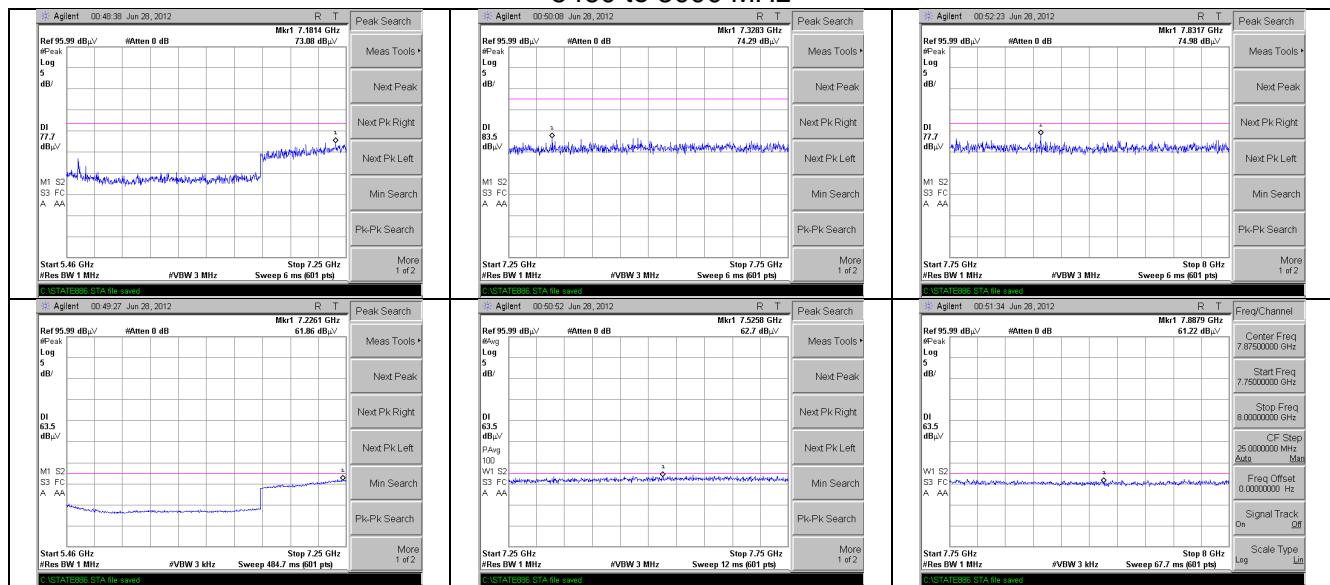



### 10.3.2.2.1.3 Emissions between 8000MHz to 40000MHz

The plots shown below are those of 6MBPS which is representative of the other data rates.

#### 8000MHz to 18000MHz

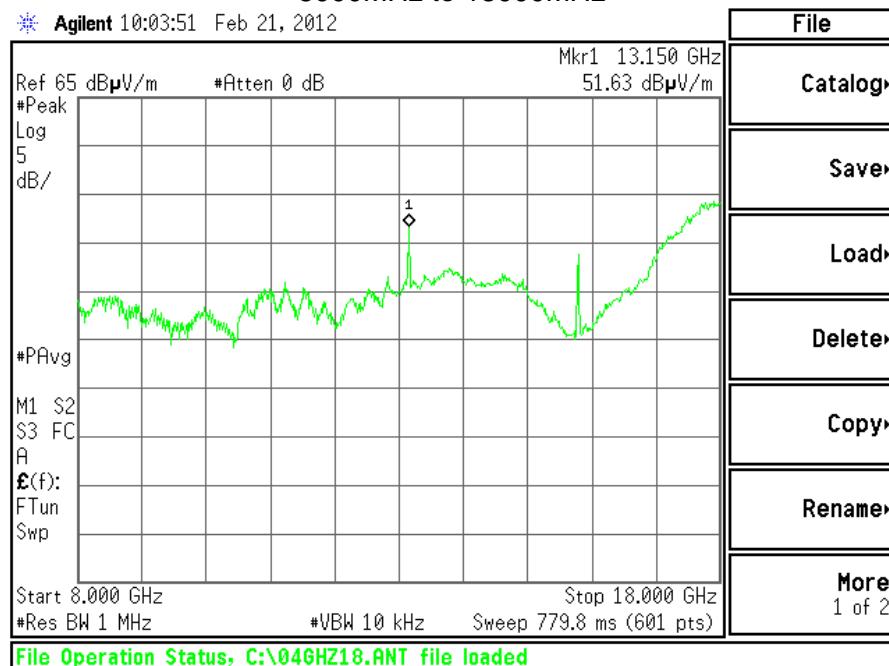

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 59 of 70

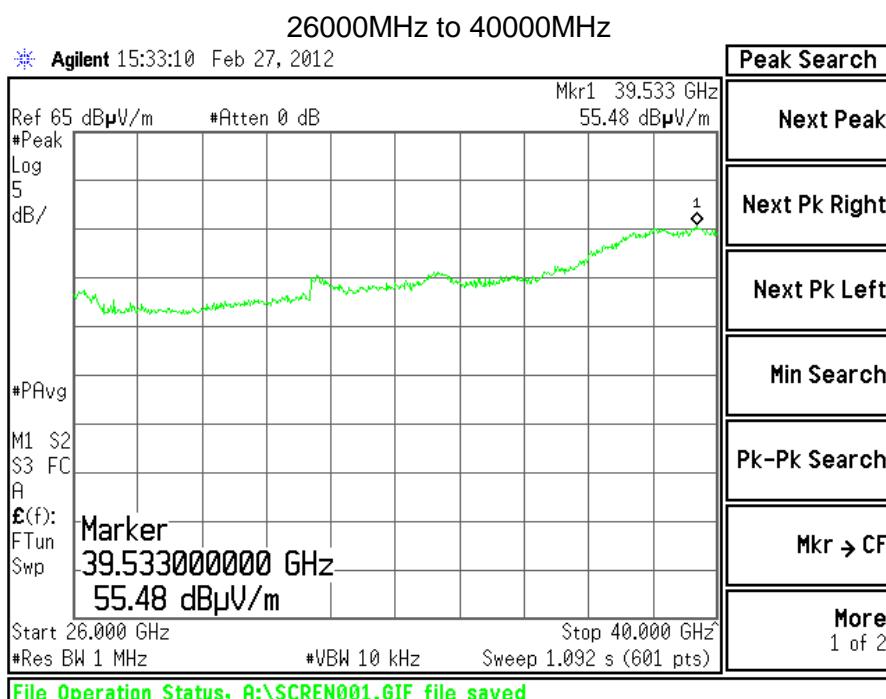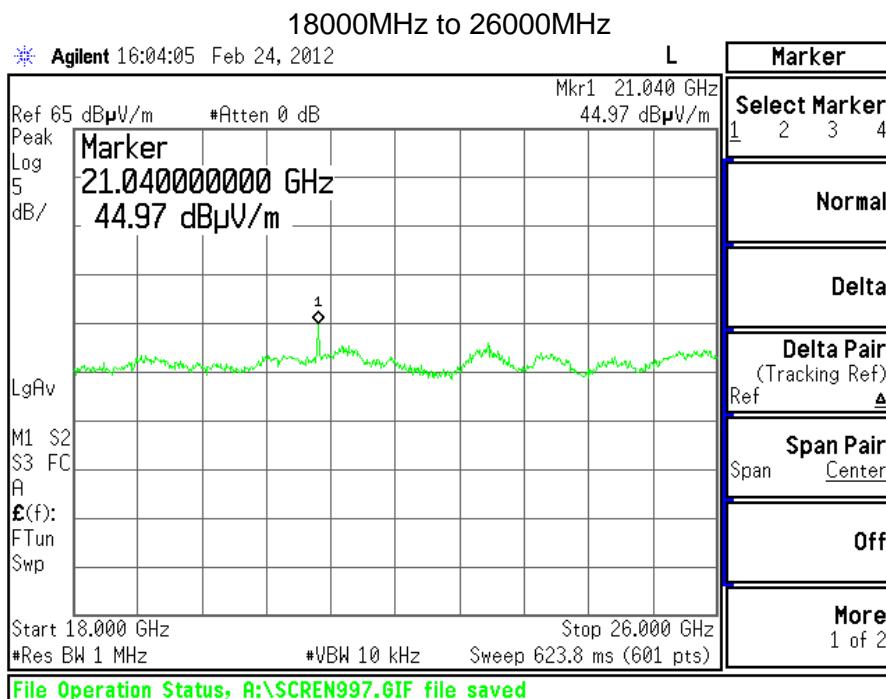

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 60 of 70

### 10.3.2.2.3 Operation in the 5250 to 5350 MHz band

#### 10.3.2.2.3.1 Significant emissions data table

##### Channel 100

FREQ (MHz)	ANT	EUT	HEIGHT (cm)	AZIMUTH (°)	PEAK (dB $\mu$ V/m)	QP (dB $\mu$ V/m)	AVG (dB $\mu$ V/m)	EIRP dBm/MHz	LIMIT dBm/MHz	MARGIN (dB)
11000.00	H	S	100.0	71	55.3	N/A	47.9	-56.9	-41.2	15.6
16500.00	H	S	100.0	343	67.4	N/A	N/A	-37.4	-27.0	10.4
13750.00	H	F	103.0	145	61.3	N/A	N/A	-43.5	-27.0	16.5
8250.00	H	S	100.9	15	57.5	N/A	51.6	-53.2	-41.2	11.9
22000.00	V	S	100.0	95	54.9	N/A	48.3	-49.8	-27.0	22.8

##### Channel 116

FREQ (MHz)	ANT	EUT	HEIGHT (cm)	AZIMUTH (°)	PEAK (dB $\mu$ V/m)	QP (dB $\mu$ V/m)	AVG (dB $\mu$ V/m)	EIRP dBm/MHz	LIMIT dBm/MHz	MARGIN (dB)
11160.00	H	S	100.0	70	56.4	N/A	47.9	-56.9	-41.2	15.6
16740.00	H	S	100.0	36	67.7	N/A	N/A	-37.1	-27.0	10.1
13950.00	H	F	101.1	146	61.0	N/A	N/A	-43.8	-27.0	16.8
8370.00	H	S	100.0	18	58.3	N/A	52.5	-52.3	-41.2	11.0
22320.00	V	S	100.0	96	55.4	N/A	48.3	-56.5	-41.2	15.2


##### Channel 140

FREQ (MHz)	ANT	EUT	HEIGHT (cm)	AZIMUTH (°)	PEAK (dB $\mu$ V/m)	QP (dB $\mu$ V/m)	AVG (dB $\mu$ V/m)	EIRP dBm/MHz	LIMIT dBm/MHz	MARGIN (dB)
11400.00	H	S	100.0	46	57.3	N/A	51.0	-53.8	-41.2	12.5
17100.00	H	S	100.0	23	71.2	N/A	N/A	-33.6	-27.0	6.6
14250.00	H	F	100.0	136	60.4	N/A	N/A	-44.4	-27.0	17.4
8550.00	H	S	100.0	164	57.3	N/A	N/A	-47.5	-27.0	20.5
22800.00	V	S	100.0	92	54.4	N/A	46.2	-58.6	-41.2	17.3


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 61 of 70

### 10.3.2.2.3.2 Emissions between 1000 to 5825 MHz

#### 1000 to 5350 MHz

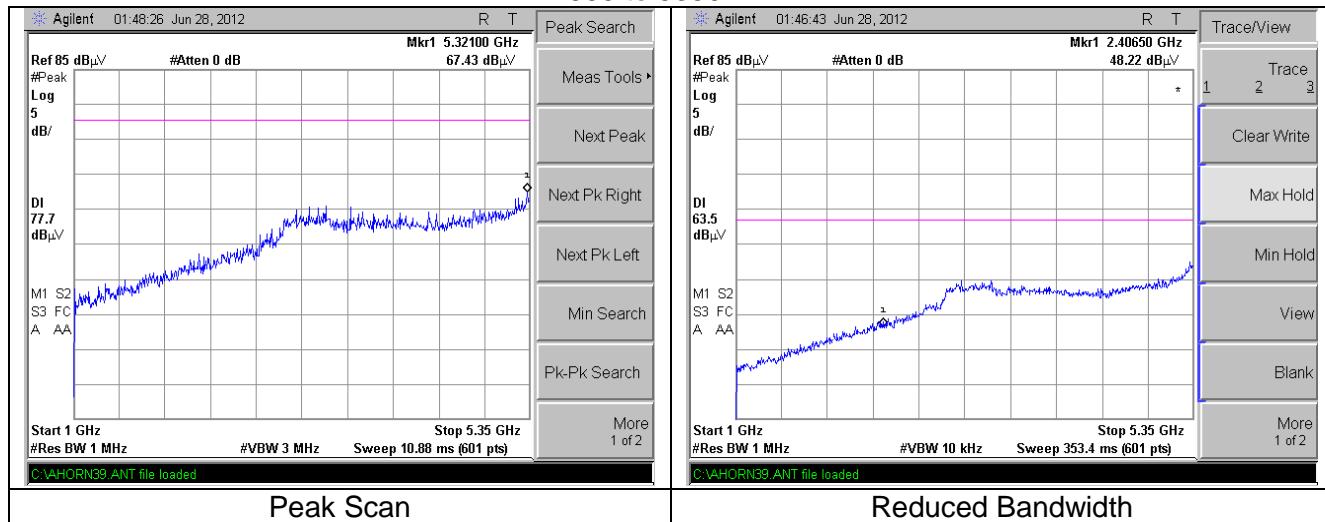


#### 5350 to 5460 MHz

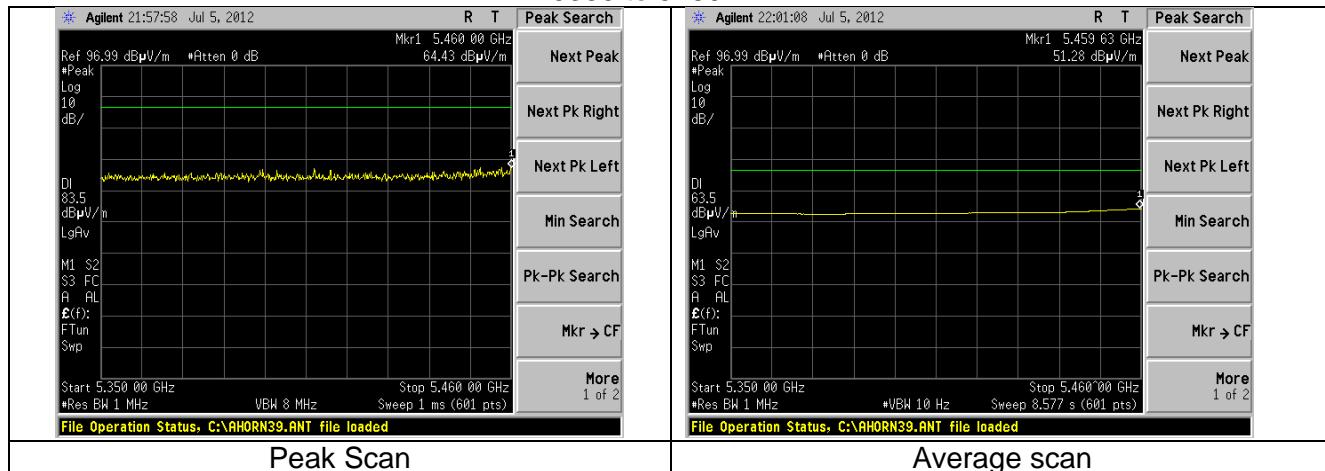


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 62 of 70

## 5460 to 5470 MHz

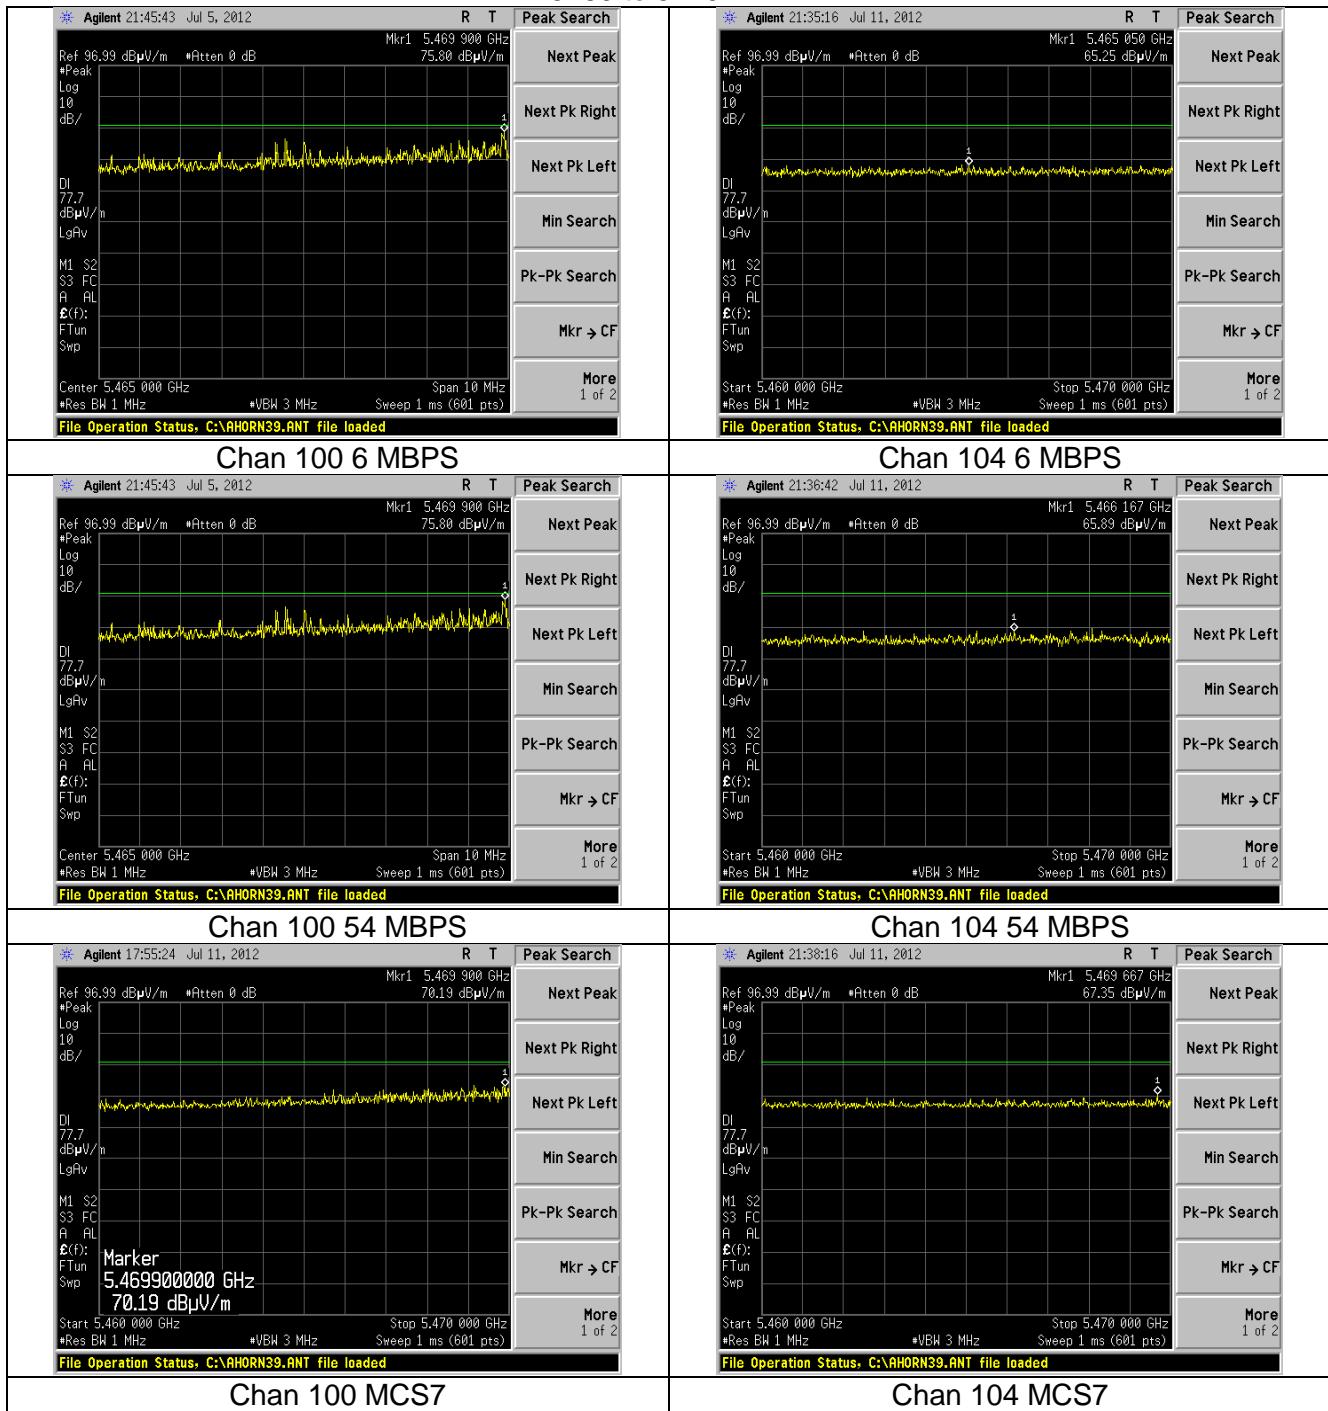

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 63 of 70


## 5725 to 5825 MHz

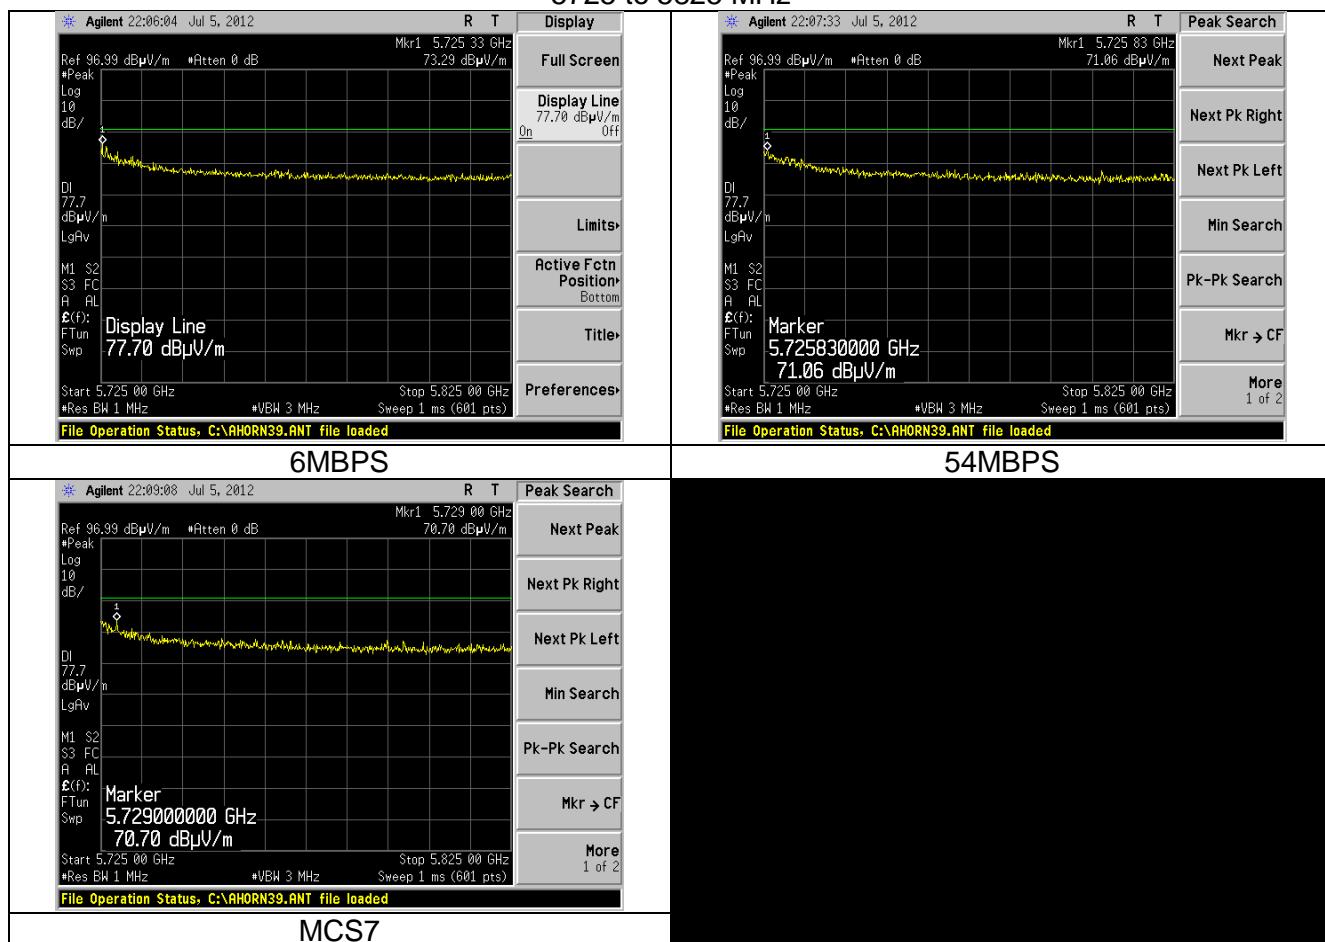



Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 64 of 70

### 10.3.2.2.3.3 Emissions between 8000MHz to 40000MHz

The plots shown below are those of 6MBPS which is representative of the other data rates.

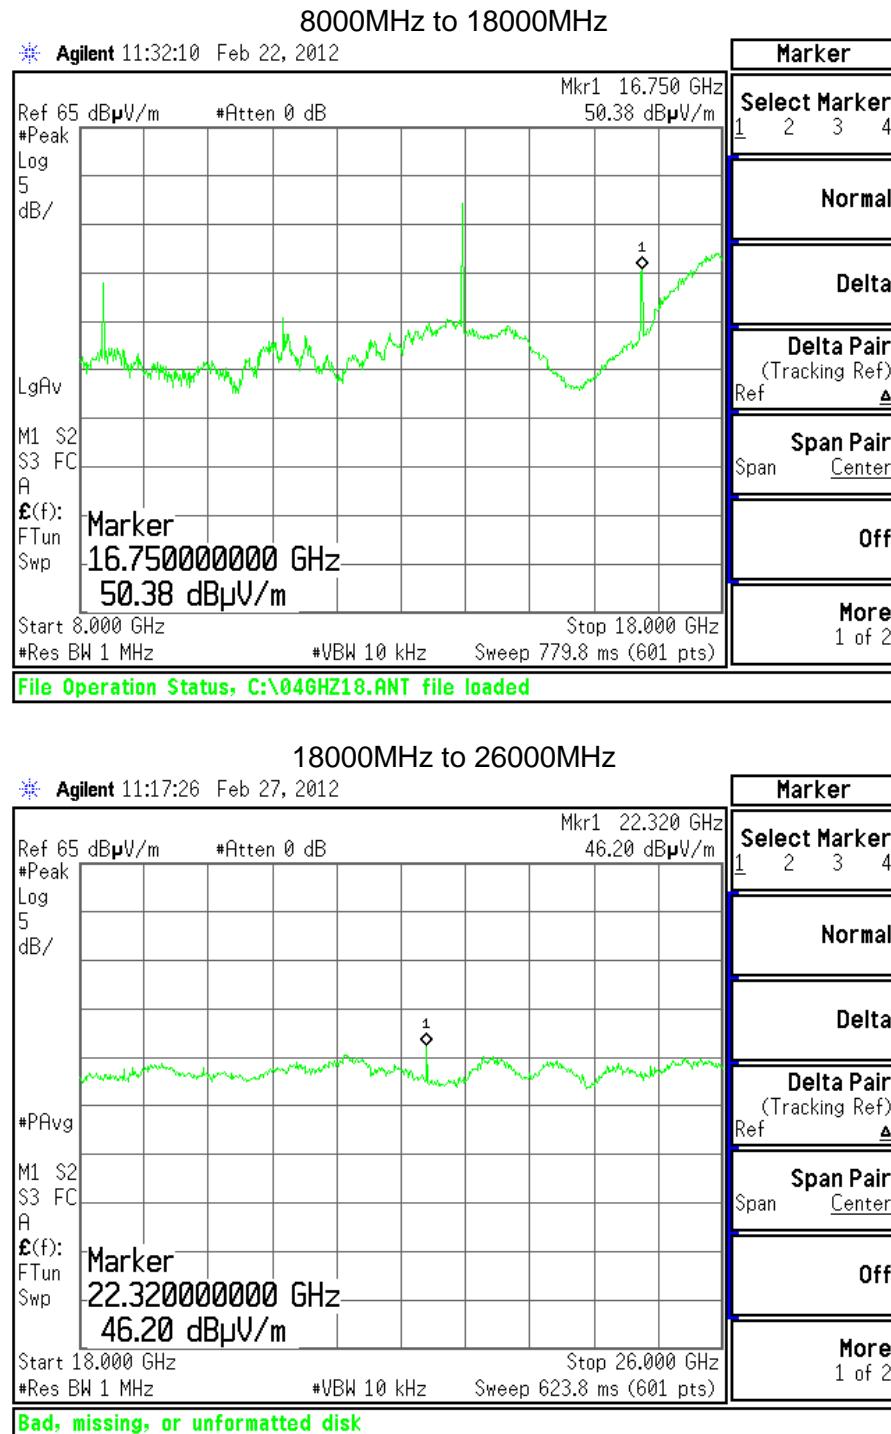

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 65 of 70

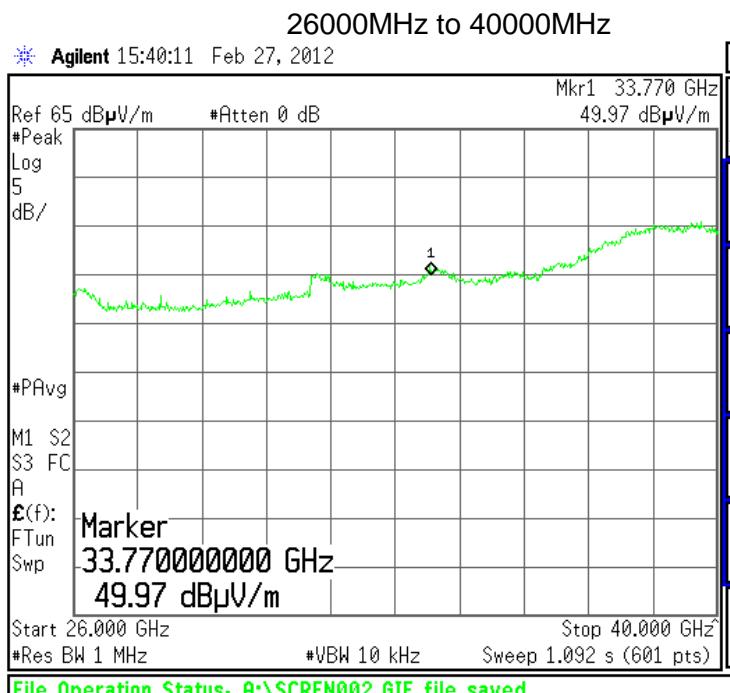

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 66 of 70

## APPENDIX A - Test Equipment List



Date : 12-Dec-2011      Type Test : AC mains      Job # : C-1333 and C-1489

Prepared By: Aidi      Customer : Logic PD      Quote #: 311310

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960013	EMI Receiver	HP	8546A System	3617A00320;3448A	11/22/2011	11/22/2012	Active Calibration
2	EE 960014	EMI Receiver-filter section	HP	85460A	3448A00296	11/22/2011	11/22/2012	Active Calibration
3	AA 960072	Transient Limiter	HP	11947A	3107A02515	11/2/2011	11/2/2012	Active Calibration
4	AA 960075	LISN	EMCO	3810/2NM	9612-1710	9/19/2011	9/19/2012	Active Calibration

Project Engineer: Aidi Zainal      Quality Assurance: Mike Hintzke



Date : 12-Dec-2011      Type Test : Conducted measurements      Job # : C-1333

Prepared By: Aidi      Customer : Logic PD      Quote #: 311310

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	AA 960143	Phaseflex	Gore	EKD01D01048.0	5546519	6/1/2011	6/1/2012	Active Calibration
2	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	4/25/2011	4/25/2012	Active Calibration
3	CC 000221C	Spectrum Analyzer	HP	E4407B	US39160256	5/4/2011	5/4/2012	Active Calibration

Project Engineer: Aidi      Quality Assurance: Peter



Date : 21-Jun-2012      Type Test : Cond Measurements      Job # : C-1489

Prepared By: Aidi      Customer : Logic PD      Quote #: 312142

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	AA 960143	Phaseflex	Gore	EKD01D01048.0	5546519	6/1/2011	6/1/2013	Active Calibration
2	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	5/9/2012	5/9/2013	Active Calibration
3	CC 000221C	Spectrum Analyzer	HP	E4407B	US39160256	6/5/2012	6/5/2013	Active Calibration

Project Engineer: Aidi Zainal      Quality Assurance: Mike Hintzke

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 67 of 70



Date : 21-Jun-2012

Type Test: Rad Band-Edge

Job #: C-1333 and C-1489

Prepared By: Adi

Customer: Logic PD

Quote #: 312142

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960157	3Hz-13.2GHz Spectrum Analyzer	Agilent	E4445A	MY48250225	6/29/2012	6/29/2013	Active Calibration
2	EE 960158	RF Reselecter	Agilent	N939A	MY46620110	6/29/2012	6/29/2013	Active Calibration
3	EE 960013	BMI Receiver	HP	8548A System	3617A-00320;3448A	11/22/2011	11/22/2012	Active Calibration
4	EE 960014	BMI Receiver-filter section	HP	85480A	3448A-00296	11/22/2011	11/22/2012	Active Calibration
5	EE 960147	Re-Amp	Adv. Micro	WLA612	123101	1/6/2012	1/6/2013	Active Calibration
6	EE 960161	26.5-40GHz LNA	Duocomm Techn	ALN-33144030	1103717-01	10/4/2011	10/4/2012	Active Calibration
7	EE 960148	Std. Gain Horn Ant. w/preamp	Adv. Micro	WLA622-4	123001	11/3/2011	11/3/2012	Active Calibration
8	AA 960144	Phas eflex	Gore	EHD01D010720	5800373	6/1/2011	6/1/2013	Active Calibration
9	AA 960005	Biconical Antenna	EMCO	93110B	9801-2280	6/26/2012	6/26/2013	Active Calibration
10	AA 960078	Log Periodic Antenna	EMCO	93146	9701-4855	11/15/2011	11/15/2012	Active Calibration
11	AA 960081	Double Ridge Horn Antenna	EMCO	3115	6907	1/6/2012	1/6/2013	Active Calibration
12	AA 960137	Standard Gain Horn Ant.	EMCO	3160-10	69259	10/4/2011	10/4/2014	Active Calibration
13	AA 960007	Double Ridge Horn Antenna	EMCO	3115	9311-4138	5/16/2012	5/16/2013	Active Calibration
14	AA 960150	Bicon Antenna	ETS	3110B	0003-3346	11/15/2011	11/15/2012	Active Calibration

Project Engineer: Adi

Quality Assurance: Shane

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 68 of 70

## APPENDIX B – Test Standards: CURRENT PUBLICATION DATES RADIO

STANDARD #	DATE	Am. 1	Am. 2
ANSI C63.4	2003		
ANSI C63.10	2009		
FCC 47 CFR, Parts 0-15, 18, 90, 95	2012		
RSS GEN	2010		
RSS 210	2010		
RSS 102	2010		

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 69 of 70

## APPENDIX C - Uncertainty Statement

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of k=2.

Table of Expanded Uncertainty Values, (K=2) for Specified Measurements

Measurement Type	Particular Configuration	Uncertainty Values
Radiated Emissions	3 – Meter chamber, Biconical Antenna	4.24 dB
Radiated Emissions	3-Meter Chamber, Log Periodic Antenna	4.8 dB
Radiated Emissions	10-Meter OATS, Biconical Antenna	4.18 dB
Radiated Emissions	10-Meter OATS, Log Periodic Antenna	3.92 dB
Conducted Emissions	Shielded Room/EMCO LISN	1.60 dB

	PARAMETER	LSR ± Uncertainty
1	Radio Frequency, from F0	$\pm 1.3 \times 10^{-7}$
2	Total RF conducted Power	$\pm 1.38$ dB
3	RF conducted power density	$\pm 1.38$ dB
4	Conducted spurious emissions	$\pm 1.38$ dB
5	Radiated emissions	$\pm 4.87$ dB
6	Temperature	$\pm 0.64$ °C
7	Humidity	$\pm 2.9$ %
8	DC voltage	$\pm 0.03$ %
9	Low frequency voltage	$\pm 0.1$ %

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
	Model #: SOMDM3730-30-2780AKCR-B	
LSR Job #: C-1489	Serial #: Refer to table in section 2.2	Page 70 of 70