

Tejet



中国认可  
国际互认  
检测  
TESTING  
CNAS L4963

# SAR TEST REPORT

Report No. 2016SAR109

FCC ID: ZKQ-PLW

Applicant: Micron Electronics LLC.

Product: WCDMA Tracker

Model: AT PLUS(3G)

HW Version: V3

SW Version: P50WV01.01B01.I02

Issue Date: 2016-03-29

Prepared by:

陈强

Chen Qiang

Reviewed by:

尹晓明

Yin Xiaoming

Approved by:

孙光旭

Sun Guangxu  
(Technical Manager)



**Remark:** This report details the results of the testing carried out on the samples specified in this report, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. The report shall not be reproduced except in full, without written approval of the Company.

## Standards

Applicable Limit Regulations	<p><b>ANSI/IEEE C95.1-2005</b> Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields. 3 kHz to 300 GHz</p> <p><b>ANSI/IEEE C95.3-2002</b> Recommended Practice For Measurements and Computations of Radio Frequency Electromagnetic Fields with Respect to Human Exposure to such Fields. 100 kHz-300 GHz</p>
Applicable Standards	<p><b>IEEE Std 1528™-2013:</b> IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques</p>
	<p><b>KDB865664 D01v01r04:</b> SAR Measurement Requirements for 100 MHz to 6 GHz</p>
	<p><b>KDB865664 D02v01r02:</b> RF Exposure Compliance Reporting and Documentation Considerations</p>
	<p><b>KDB447498 D01v06:</b> Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Polices</p>
	<p><b>KDB648474 D03v01r04:</b> SAR Evaluation Considerations for Wireless Handsets</p>
	<p><b>KDB648474 D04v01r03:</b> Review and Approval Policies for SAR Evaluation of Handsets with Multiple Transmitters and Antennas.</p>
	<p><b>KDB248227 D01v02r02:</b> SAR Measurement Procedures for IEEE 802.11 Wi-Fi Transmitters</p>
	<p><b>KDB941225 D01v03r01:</b> SAR Measurement Procedures for 3G Devices</p>

## Conclusion

Localized Specific Absorption Rate (SAR) of this equipment has been measured in all cases requested by the relevant standards above. Maximum localized SAR is below exposure limits as well.

## Change History

Version	Change Contents	Author	Date
V1.0	First edition	Chen Qiang	2016-03-29

Note: The last version will be invalid automatically while the new version is issued.

## **CONTENTS:**

<b>STANDARDS.....</b>	<b>2</b>
<b>CONCLUSION.....</b>	<b>2</b>
<b>CHANGE HISTORY.....</b>	<b>3</b>
<b>1. STATEMENT OF COMPLIANCE.....</b>	<b>6</b>
<b>2. ADMINISTRATIVE INFORMATION .....</b>	<b>7</b>
2.1 PROJECT INFORMATION.....	7
2.2 TEST LABORATORY INFORMATION .....	7
2.3 TEST ENVIRONMENT .....	7
<b>3. CLIENT INFORMATION.....</b>	<b>8</b>
3.1 APPLICANT INFORMATION .....	8
3.2 MANUFACTURER INFORMATION .....	8
<b>4. EQUIPMENT UNDER TEST (EUT) AND ACCESSORY EQUIPMENT (AE).....</b>	<b>9</b>
4.1 INFORMATION OF EUT.....	9
4.2 IDENTIFICATION OF EUT.....	10
4.3 IDENTIFICATION OF AE.....	10
<b>5. OPERATIONAL CONDITIONS DURING TEST.....</b>	<b>11</b>
5.1 GENERAL DESCRIPTION OF TEST PROCEDURES.....	11
5.2 GSM TEST CONFIGURATION .....	11
5.3 WCDMA TEST CONFIGURATION.....	11
5.4 WI-FI TEST CONFIGURATION.....	13
<b>6. SAR MEASUREMENTS SYSTEM CONFIGURATION.....</b>	<b>16</b>
6.1 SAR MEASUREMENT SET-UP .....	16
6.2 DASY5 E-FIELD PROBE SYSTEM .....	17
6.2.1 <i>Es3DV3 Probe Specification</i> .....	17
6.2.2 <i>E-field Probe Calibration</i> .....	18
6.3 OTHER TEST EQUIPMENT .....	19
6.3.1 <i>Device Holder for Transmitters</i> .....	19
6.3.2 <i>Phantom</i> .....	19
6.4 SCANNING PROCEDURE .....	20
6.5 DATA STORAGE AND EVALUATION.....	21
6.5.1 <i>Data Storage</i> .....	21
6.5.2 <i>Data Evaluation by SEMCAD</i> .....	22
6.6 SYSTEM CHECK.....	24
6.7 EQUIVALENT TISSUES.....	24
<b>7. SUMMARY OF TEST RESULTS .....</b>	<b>26</b>
<b>7.1 CONDUCTED OUTPUT POWER MEASUREMENT .....</b>	<b>26</b>

7.1.1 SUMMARY .....	26
7.1.2 CONDUCTED POWER RESULTS .....	26
<b>7.2 TEST RESULTS .....</b>	<b>29</b>
7.2.1. DIELECTRIC PERFORMANCE .....	29
7.2.2. SYSTEM CHECK RESULTS .....	29
7.2.3 TEST RESULTS.....	30
7.2.3.1 <i>Summary of Measurement Results (GSM850)</i> .....	30
7.2.3.2 <i>Summary of Measurement Results (PCS1900)</i> .....	31
7.2.3.3 <i>Summary of Measurement Results (WCDMA BAND II)</i> .....	32
7.2.3.4 <i>Summary of Measurement Results (WCDMA BAND V)</i> .....	33
7.2.3.5 <i>Summary of Measurement Results (WiFi)</i> .....	34
7.2.4 MAXIMUM SAR .....	35
<b>8. TEST EQUIPMENTS UTILIZED .....</b>	<b>36</b>
<b>9. MEASUREMENT UNCERTAINTY .....</b>	<b>37</b>
<b>ANNEX A: DETAILED TEST RESULTS.....</b>	<b>39</b>
ANNEX A.1 SYSTEM CHECK RESULTS .....	39
ANNEX A.2 GRAPH RESULT .....	42
ANNEX B: CALIBRATION CERTIFICATE .....	52
ANNEX B.1 PROBE CALIBRATION CERTIFICATE.....	52
ANNEX B.2 DAE4 CALIBRATION CERTIFICATE.....	77
ANNEX B.3 D835V2 CALIBRATION CERTIFICATE .....	87
ANNEX B.4 D1900V2 CALIBRATION CERTIFICATE .....	97
ANNEX C: TEST LAYOUT .....	117

## 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Micron Electronics LLC. WCDMA Tracker AT PLUS(3G)** are as follows.

### Highest standalone SAR Summary:

Exposure Position	Frequency Band	Maximum reported 1g SAR (W/kg)	Highest reported 1g SAR (W/kg)
Body-worn (5mm)	GSM850	1.216	1.234
	GSM1900	1.117	
	WCDMA BAND II	1.234	
	WCDMA BAND V	1.097	
	WiFi(2.45G)	0.136	0.136

Evaluation for Simultaneous SAR			
Summation BAND	Exposure Position	Maximum reported 1g SAR (W/kg)	Summation SAR(1g) (W/kg)
WWAN +WiFi	Body-worn(5mm)	1.234+0.136=1.370	<1.6

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits(1.6W/kg) specified in FCC 47 CFR part 2(2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

## 2. Administrative Information

### 2.1 Project Information

Date of start test 2016-03-22  
Date of end test: 2016-03-28

### 2.2 Test Laboratory Information

Company: Shanghai Tejet Communications Technology Co., Ltd Testing Center  
Address: Room 6205-6208, Building 6, No.399 Cailun Rd. Zhangjiang Hi-Tech Park, Shanghai, China  
Post Code: 210203  
Tel: +86-21-61650880  
Fax: +86-21-61650881  
Website: [www.tejet.cn](http://www.tejet.cn)

### 2.3 Test Environment

Temperature: 20°C~25 °C  
Relative Humidity: 20%~70%

### 3. Client Information

#### 3.1 Applicant information

Company Name: Micron Electronics LLC.  
Address: 1001 Yamato Road, Suite 400, Boca Raton, FL 33431, USA  
City: Boca Raton  
Postal Code: /  
Country: USA  
Telephone: +1 888 538 3489  
Fax: +1 888 550 1805

#### 3.2 Manufacturer Information

Company Name: Micron Electronics LLC.  
Address: 1001 Yamato Road, Suite 400, Boca Raton, FL 33431, USA  
City: Boca Raton  
Postal Code: /  
Country: USA  
Telephone: +1 888 538 3489  
Fax: +1 888 550 1805

## 4. Equipment Under Test (EUT) and Accessory Equipment (AE)

### 4.1 Information of EUT

Device Type	Portable device	
Product	WCDMA Tracker	
Model	AT PLUS(3G)	
Type	Identical Prototype	
Exposure Category	Uncontrolled environment / general population	
Device operation configuration:		
Operating Mode(s):	GSM850	
	PCS1900	
	WCDMA BAND II/V	
Test Modulation	(GSM/GPRS)GMSK, (EDGE)QPSK/8PSK (WCDMA) QPSK	
GPRS Operation Class	B	
GPRS Multislot Class	10	
EDGE Class	12	
DTM Support	N/A	
AP Support	N/A	
Rated Output Power	GSM 850:33dBm	
	PCS1900: 30dBm	
	WCDMA BAND II: 23dBm	
	WCDMA BAND V: 23.5dBm	
	802.11b: 17dBm	
	802.11g: 16dBm	
802.11n(20M/40M): 16dBm		
WCDMA category	category 6	
GSM Release version	R99	
WCDMA Release version	Release 5	
Antenna Type:	Internal antenna	
Operating Frequency Range(s):	Band	Tx(MHz)
	GSM850	824.2~848.8
	PCS1900	1850.2~1909.8
	WCDMA BAND II	1852.4~1907.6
	WCDMA BAND V	826.4~846.6
Power Class	GSM850: 4,test with power level 5	

	PCS1900: 1,test with power level 0
	WCDMA BAND II/V: 3, test with maximum output power
EUT size	length, width: 6.7cm*3.8cm      diagonal length: 7.3cm

#### 4.2 Identification of EUT

EUT ID	SN or IMEI	HW Version	SW Version	Received Date
TN19	869715020037209	V3	P50WV01.01B01.I02	2016-03-22

\*EUT ID: identify the test sample in the lab internally.

#### 4.3 Identification of AE

AE ID*	Description
AE1	Battery
AE2	Travel Adaptor

##### AE1

Model	P21-2000
Manufacturer	/
Capacitance	2000mAh
Nominal Voltage	3.7V

##### AE2

Model	/
Manufacturer	/
Length of DC line	0cm with USB adapter

\*AE ID: identify the test sample in the lab internally.

## 5. Operational Conditions during Test

### 5.1 General description of test procedures

A communication link is set up with a system simulator by air link, and a call is established. The absolute radio frequency channel is allocated to low, middle and high respectively in the case of each band. The EUT is commanded to operate at maximum transmitting power.

Connection to the EUT is established via air interface with CMU200, and the EUT is set to maximum output power by CMU200. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30dB.

To this device, 5mm is used for the separate test distance

### 5.2 GSM Test Configuration

SAR test for GSM 850/1900, a communication link is set up with a system simulator by air link. Using CMU200 the power level is set to "5" in SAR of GSM850, set to "0" in SAR of GSM 1900. The tests in the band of GSM850/1900 are performed in the mode of voice and data transfer function.

### 5.3 WCDMA Test Configuration

SAR test for WCDMA BANDII/V, a communication link is set up with a system simulator by air link. Using CMU200 the power level is set to "3" in SAR of WCDMA BAND II/V. The tests in the band of WCDMA BAND II/V are performed in the mode of RMC 12.2kbps transfer function.

SAR for body exposure configurations in voice and data modes is measured using 12.2kbps RMC with TPC bits configured to all "1's". SAR for other spreading codes and multiple DPDCHn, when supported by the DYT, are not required when the maximum average output of each RF channel, for each spreading code and DPDCHn configuration, are less than 1/4 dB higher than those measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCHn using the exposure configuration that results in the highest SAR with 12.2 kbps RMC. When more than 2 DPDCHn are supported by the DUT, it may be necessary to configure additional DPDCHn for a DUT using FTM(Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384kbps and 968 kbps RMC.

### HSDPA Test Configuration

Body SAR is also measured for HSDPA when the maximum average output of each RF channel

with HSDPA active is at least 1/4 dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR 12.2 kbps RMC is above 75% of the SAR limit. Body SAR is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to the UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set f. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DODCH gain factors ( $\beta_c, \beta_d$ ), and HS\_DPCCH power offset parameters ( $\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI}$ ) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS\_PDSCHs and modulation used in the H-set.

**Table 1: Subtest for UMTS Release 5 HSDPA**

Sub - set	$\beta_c$	$\beta_d$	B d (SF)	$B_c/\beta_d$	$\beta_{hs}$	CM (dB)
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI}=8 \Leftrightarrow A_{hs}=\beta_{hs}/\beta_c=30/15 \Leftrightarrow \beta_{hs}=30/15c$   
Note 2: CM=1 for  $\beta_c/\beta_d=12/15$ ,  $\beta_{hs}/\beta_c=24/15$   
Note 3: For subset 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1,TF0) is achieved by setting the signaled gain factor for the reference TFC (TF1,TF1) to  $\beta_c=11/15$  and  $\beta_d=15/15$ .

**Table 2: Settings of required H-set 1 QPSK in HSDPA mode**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	Kbps	534
Inter-TTI Distance	TTI's	3
Number of HARQ Processes	Processes	2
Information Bit Payload	Bitw	3202
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bots	4800
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	9600
Coding Rate	/	0.67
Number of Physical Channel Codes	Codes	5
Modulation	/	QPSK

**Table 3: HSDPA UE category**

HS-DSCH Category	Maximum HS_DSCH Codes	Minimum Inter-TTI Interval	Maximum Transport Bits/HS-DSCH	Total Channel

	Received			
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
1 2	15	1	27952	172800
1 1	5	2	3630	14400
1 2	5	1	3630	28800
1 3	15	1	34800	259200
1 4	15	1	42196	259200
1 5	15	1	23370	345600
1 6	15	1	27952	345600

## 5.4 Wi-Fi Test Configuration

The Wi-Fi is set to different data rate and channels by the software.

According to KDB648474:

1. The separation between the Wi-Fi antenna and the main antenna is 2.7cm>5cm
2. The maximum conducted output power of Wi-Fi is 15.24dBm=33.4mW>P (max) =10mW

So stand along SAR is needed.

According to FCC KDB447498v06, Appendix A

### Appendix A

#### SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and $\leq 50$ mm

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

For 2450MHz, 5mm test distance, P (max) =10mW

According to KDB248227 D01 802.11 Wi-Fi SAR v02r02

SAR is measured using the highest measured maximum output power channel for the initial test configuration (see 5.3.2 and 5.3.3). SAR measurement and test reduction for the remaining 802.11 modes and test channels are determined according to measured or specified maximum output power and reported SAR of the initial measurements. The general test reduction and SAR measurement approaches are summarized in the following:

a) The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures (see Clause 4).

b) For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, an “initial test configuration” (see 5.3.2) is first determined for each standalone and aggregated frequency band according to the maximum output power and tune-up tolerance specified for production units.

1) When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

2) SAR is measured for OFDM configurations using the initial test configuration procedures (see 5.3.3). Additional frequency band specific SAR test reduction may be considered for individual frequency bands (see 5.2.2 and 5.3.1).

3) Depending on the reported SAR of the highest maximum output power channel tested in the initial test configuration, SAR test reduction may apply to subsequent highest output channels in the initial test configuration to reduce the number of SAR measurements.

c) The Initial test configuration does not apply to DSSS. The 2.4 GHz band SAR test requirements (see 3.1) and 802.11b DSSS procedures (see 5.2.1) are used to establish the transmission configurations required for SAR measurement.


d) An “initial test position” (see 5.1) is applied to further reduce the number of SAR tests for devices operating in next to the ear, UMPC mini-tablet or hotspot mode exposure configurations that require multiple test positions.

1) SAR is measured for 802.11b according to the 2.4 GHz DSSS procedure (see 5.2.1) using the exposure condition established by the initial test position.

2) SAR is measured for 2.4 GHz and 5 GHz OFDM configurations using the initial test configuration.

e) The Initial test position does not apply to devices that require a fixed exposure test position. SAR is measured in a fixed exposure test position for these devices in 802.11b according to the 2.4 GHz DSSS procedure (see 5.2.1) or in 2.4 GHz and 5 GHz OFDM configurations using the initial test configuration procedures (see 5.3.3).

f) The “subsequent test configuration” (see 5.3.4) procedures are applied to determine if additional SAR measurements are required for the remaining OFDM transmission modes that have not been tested in the initial test configuration. SAR test exclusion is determined according to reported SAR in the initial test configuration and maximum output power specified or measured for these other OFDM configurations.

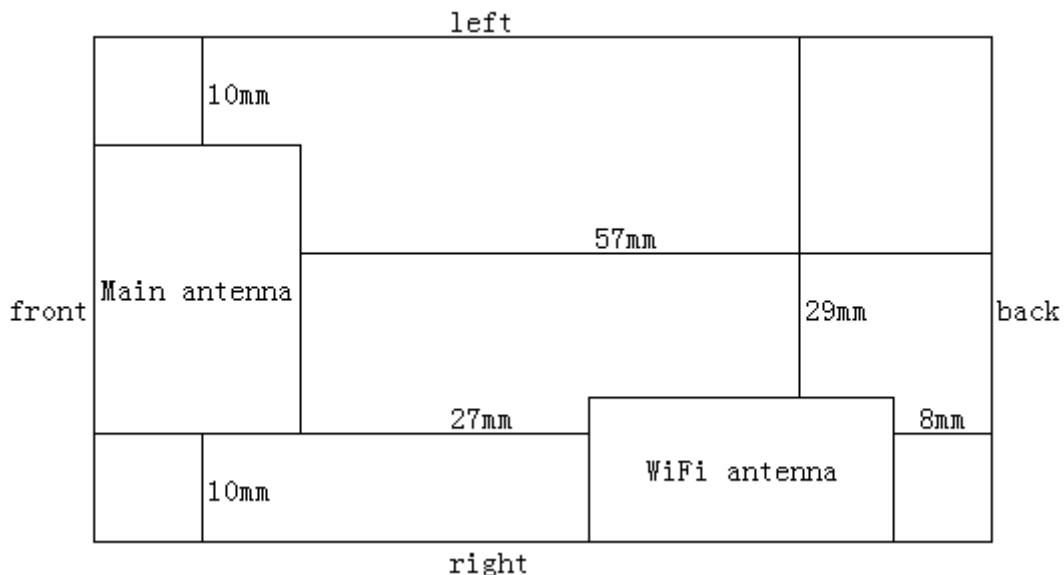

Picture of antennas

SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge.

Band	Position for test (yes or n/a)					
	Top	Bottom	Leftside	Rightside	Front	Back
WWAN	yes	yes	yes	yes	yes	n/a 5.7cm>2.5cm
WLAN	yes	yes	yes	yes	n/a 2.7cm>2.5cm	yes

Top—toward phantom


Bottom---towards ground

## 6. SAR Measurements system configuration

### 6.1 SAR Measurement set-up

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic \_field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

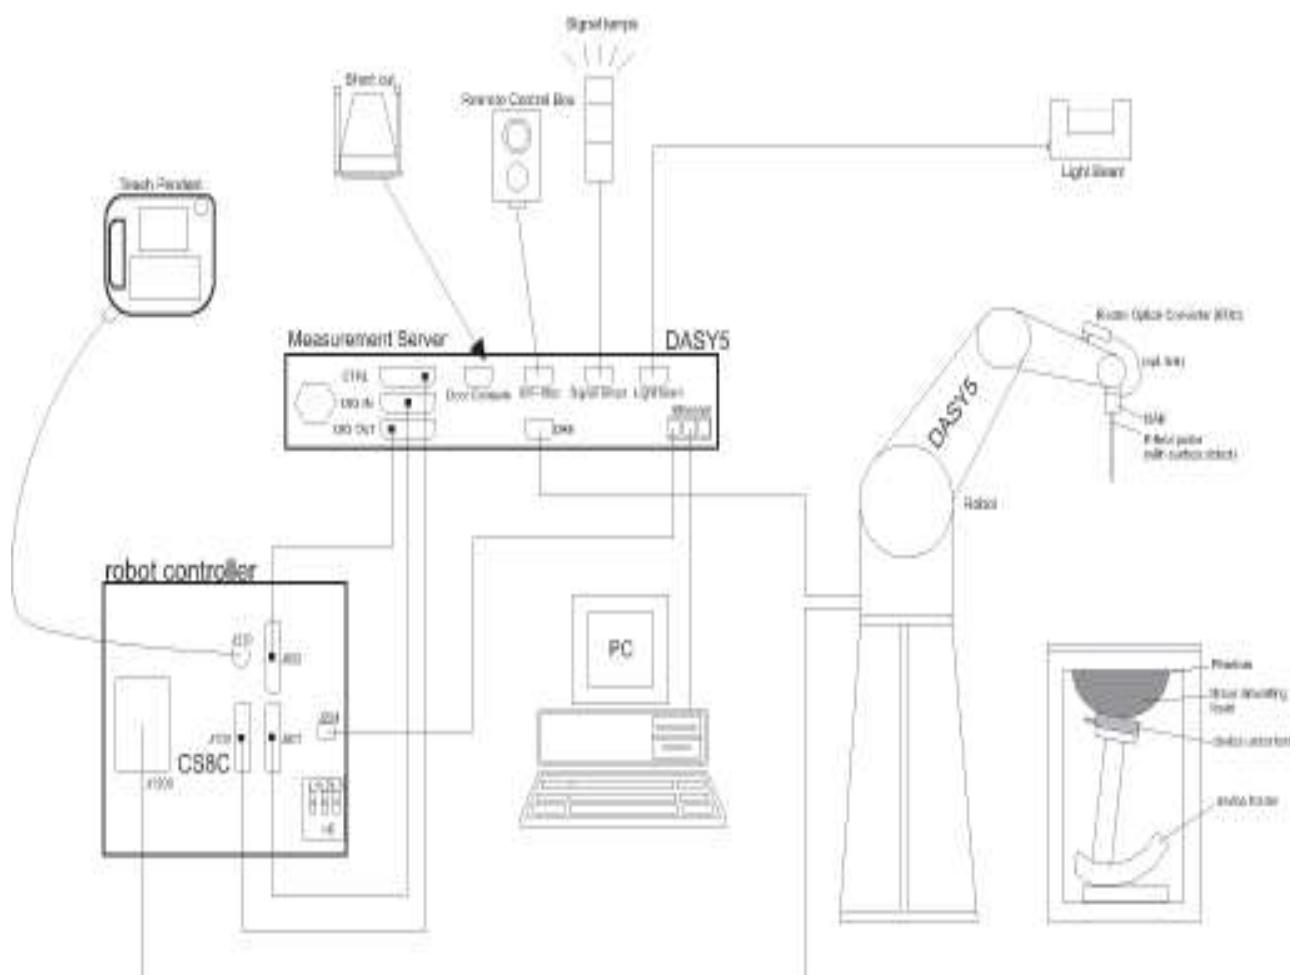

**Figure 5-1 SAR Lab Test Measurement Set-up**

## 6.2 DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

### 6.2.1 Es3DV3 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 850 and HSL 1750 Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)

Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



Figure 5-2. ES3DV3 E-field Probe



Figure 5-3. ES3DV3 E-field probe

### 6.2.2 E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),  
 $C$  = Heat capacity of tissue (brain or muscle),  
 $\Delta T$  = Temperature increase due to RF exposure.  
Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:


$\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density (kg/m<sup>3</sup>).

### 6.3 Other Test Equipment

#### 6.3.1 Device Holder for Transmitters

The DASY5 device holder is designed to cope with the die rent positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the inference of the clamp on the test results could thus be lowered.

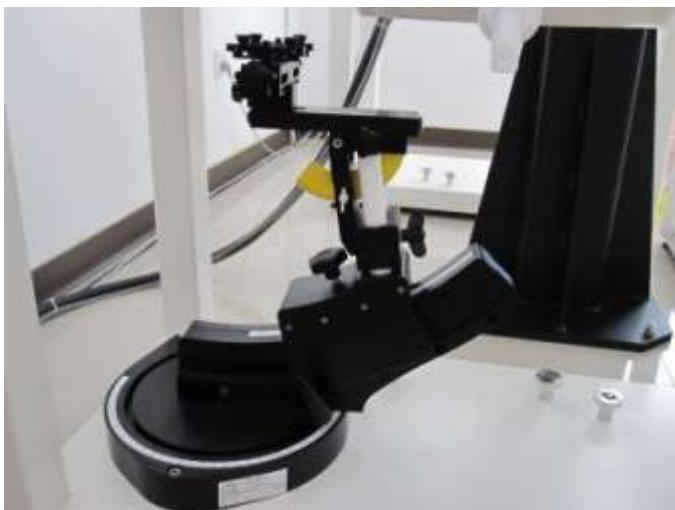

**Figure 5-4.Device Holder**

#### 6.3.2 Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness      2±0.1 mm

Filling Volume      Approx. 20 liters

Dimensions      810 x 1000 x 500 mm (H x L x W)

Available

Special



**Figure 5-5.Generic Twin Phantom**

#### 6.4 Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max.  $\pm 5\%$ .
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)

- Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space.

They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

## 6.5 Data Storage and Evaluation

### 6.5.1 Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters

for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 6.5.2 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvFi
	- Diode compression point	Dcp <sub>i</sub>
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	
	- Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$U_i$  = input signal of channel i (i = x, y, z)

**cf** = crest factor of exciting field (DASY parameter)

**dcp<sub>i</sub>** = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:  $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes:  $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

**Norm<sub>i</sub>** = sensor sensitivity of channel i (i = x, y, z)

[mV/(V/m)<sup>2</sup>] for E-field Probes

**ConvF** = sensitivity enhancement in solution

**a<sub>ij</sub>** = sensor sensitivity factors for H-field probes

**f** = carrier frequency [GHz]

**E<sub>i</sub>** = electric field strength of channel i in V/m

**H<sub>i</sub>** = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$

The primary field data are used to calculate the derived field units.

**SAR** = ( $E_{tot}^2 \cdot \sigma$ )<sup>1/2</sup> / (ρ · 1000)

with **SAR** = local specific absorption rate in mW/g

**E<sub>tot</sub>** = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$P_{pwe} = E_{tot}^2 / 3770$  or  $P_{pwe} = H_{tot}^2 \cdot 37.7$

with  $P_{pwe}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

$E_{tot}$  = total electric field strength in V/m

$H_{tot}$  = total magnetic field strength in A/m

## 6.6 System check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulates, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the 6.2.1 and 6.2.2

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System check is performed regularly on all frequency bands where tests are performed with the DASY 5 system.

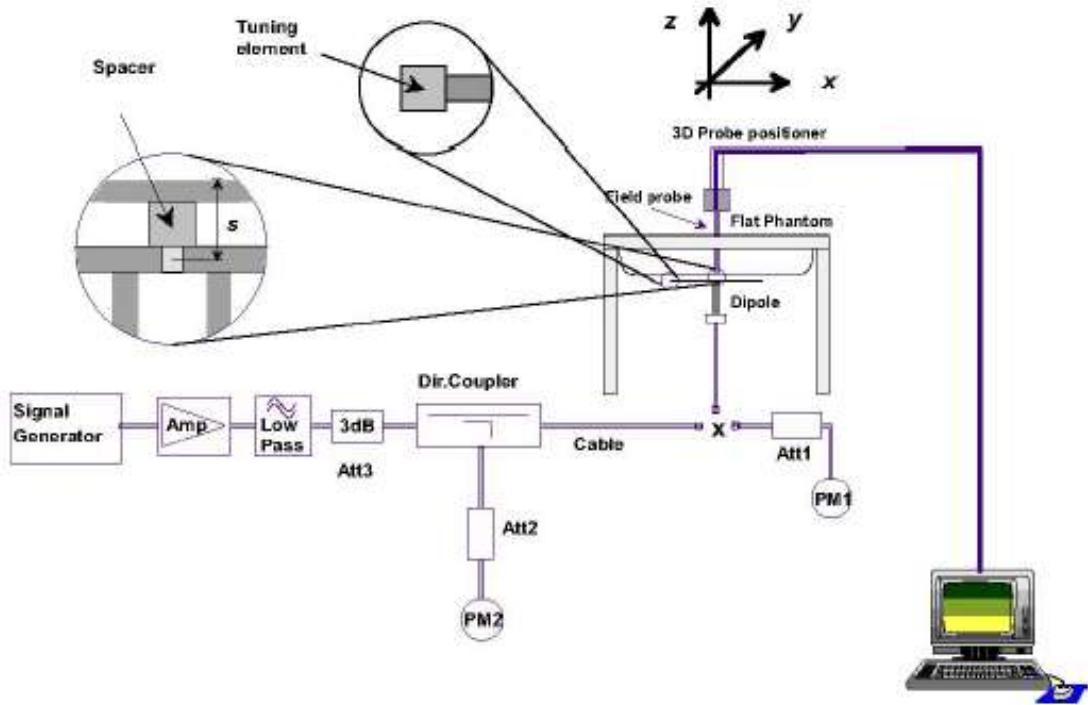


Figure 5-6. System Check Set-up

## 6.7 Equivalent Tissues

The liquid is consisted of water, salt, Glycol, Sugar, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table show the detail solution. It's

satisfying the latest tissue dielectric parameters requirements proposed by the OET 65.

MIXTURE%	FREQUENCY(body) 835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$
MIXTURE%	FREQUENCY(body)1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$
MIXTURE%	FREQUENCY(body)2450MHz
Water	70
Glycol monobutyl	30
Salt	0
Dielectric Parameters Target Value	f=2450MHz $\epsilon=52.7$ $\sigma=1.95$

## 7. Summary of Test Results

### 7.1 Conducted Output Power Measurement

#### 7.1.1 Summary

The DUT is tested using CMU200/MT8820C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted power.

Conducted output power was measured using an integrated RF connector and attached RF cable.

This result contains conducted output power for the EUT.

#### 7.1.2 Conducted Power Results

GSM850		Conducted output power(dBm)						
		low	middle	high				
		CH128	CH189	CH251				
		824.2MHz	836.6MHz	848.8MHz				
GSM		32.14	32.15	31.91	(dB)	CH128	CH189	CH251
GPRS (GMSK)	1 TX-slot result	32.12	32.1	31.87	-9.03	23.09	23.07	22.84
	2 TX-slot result	32.02	32.04	31.83	-6.02	<b>26.00</b>	<b>26.02</b>	<b>25.81</b>
EDGE (8PSK)	1 TX-slot result	27.62	27.27	27.05	-9.03	18.59	18.24	18.02
	2 TX-slot result	27.81	27.22	27.08	-6.02	21.79	21.2	21.06
	3 TX-slot result	27.47	27.13	26.96	-4.26	23.21	22.87	22.7
	4 TX-slot result	27.43	27.06	26.85	-3.01	24.42	24.05	23.84

GSM1900		Conducted output power(dBm)						
		low	middle	high				
		CH512	CH661	CH810				
		1850.2MHz	1880MHz	1909.8MHz				
GSM		29.5	28.88	28.22	(dB)	CH512	CH661	CH810
GPRS (GMSK)	1 TX-slot result	29.46	28.85	28.21	-9.03	20.43	19.82	19.18
	2 TX-slot result	28.94	28.22	27.52	-6.02	<b>22.92</b>	<b>22.2</b>	<b>21.5</b>
EDGE (8PSK)	1 TX-slot result	25.75	24.98	24.23	-9.03	16.72	15.95	15.2
	2 TX-slot result	25.65	24.94	24.19	-6.02	19.63	18.92	18.17
	3 TX-slot result	25.57	24.83	24.06	-4.26	21.31	20.57	19.8
	4 TX-slot result	24.01	24.77	24.49	-3.01	21	21.76	21.48

**Note:** To average the power, the division factor is as follows:

- 1 TX-slot =1 transmit time slot of 8 time slots  
=>conducted power divided by (8/1) =>-9.03dB
- 2 TX-slot =2 transmit time slot of 8 time slots  
=>conducted power divided by (8/2) =>-6.02dB
- 3 TX-slot =3 transmit time slot of 8 time slots  
=>conducted power divided by (8/3) =>-4.26dB
- 4 TX-slot =4 transmit time slot of 8 time slots  
=>conducted power divided by (8/4) =>-3.01dB

**Body-worn of GSM850/1900 are tested with GMSK GPRS 2 timeslots.**

WCDMA BAND II		Conducted Output power (dBm)		
		low	middle	high
		CH9262	CH9400	CH9538
		1852.4MHz	1880MHz	1907.6MHz
12.2kbps RMC		<b>21.21</b>	<b>22.87</b>	<b>22.46</b>
HSDPA	SUB-TEST 1	20.61	22.23	21.94
	SUB-TEST 2	20.14	21.65	21.61
	SUB-TEST 3	19.72	21.1	21.05
	SUB-TEST 4	18.75	19.91	20.09

WCDMA BAND V		Conducted Output power (dBm)		
		low	middle	high
		CH4132	CH4183	CH4233
		826.4 MHz	836.6MHz	846.6MHz
12.2kbps RMC		<b>23.34</b>	<b>22.67</b>	<b>23.27</b>
HSDPA	SUB-TEST 1	22.97	22.19	22.76
	SUB-TEST 2	22.2	21.55	22.04
	SUB-TEST 3	21.8	21.12	21.82
	SUB-TEST 4	20.5	19.76	20.35

**Body-worn of WCDMA BAND II/V are tested with 12.2kbps RMC.**

Testing for HSDPA are not required.

Wi-Fi

Average Conducted Power

802.11b (dBm)

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
low	2412MHz	1	13.13	13.34
middle	2437MHz	6	13.27	13.43
high	2462MHz	11	13.46	13.55

802.11g (dBm)

Channel\Data Rate			6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
low	2412MHz	1	14.4	14.42	14.56	14.29	14.81	14.83	14.96	14.76
middle	2437MHz	6	14.55	14.64	14.69	14.47	14.99	14.98	14.9	14.82
high	2462MHz	11	14.68	14.65	14.75	14.81	15.09	14.98	15.24	15.16

802.11n (20M) (dB)

Channel\Data Rate			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
low	2412MHz	1	14.28	14.46	14.44	14.81	14.8	14.66	15.12	14.66
middle	2437MHz	6	14.46	14.6	14.41	14.88	14.97	14.83	14.82	14.82
high	2462MHz	11	14.58	14.82	14.71	15.21	15	15.06	14.72	15.07

802.11n (40M) (dB)

Channel\Data Rate			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
low	2422MHz	3	14.57	14.49	14.57	14.97	14.75	14.79	14.69	14.62
middle	2437MHz	6	14.54	14.52	14.38	14.84	14.85	14.75	14.72	14.69
high	2452MHz	9	14.89	14.85	14.74	15.1	15.06	14.91	14.95	14.96

The maximum conducted output power of Wi-Fi is 15.24dBm=33.4mW&gt;P(max)=10mW..

So stand alone SAR is required.

1. Per KDB 248227D01v02r02., choose the highest output power channel to test SAR and determine further SAR exclusion.
2. Per KDB 248227D01v02r02., In the 2.4GHz band, separate SAR procedure are applied to DSSS and OFDM conditions:
  - 1) When KDB Publication 447498 SAR test exclusion applied to the OFDM configuration.
  - 2) When the highest reported SAR for DSSS is adjusted by the radio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2\text{W/kg}$ .

**SAR of WLAN should be tested on 802.11b 5.5Mbps, and check for 802.11g 48Mbps, 802.11n(20M) MCS3 , 802.11n(40M) MCS3**

band	Fre'	Duty cycle	Duty cycle factor
802.11b	2412 MHz	98.8%	1.01
	2437 MHz	98.8%	1.01
	2462 MHz	98.8%	1.01
802.11g	2412 MHz	87.9%	1.14
	2437 MHz	87.9%	1.14
	2462 MHz	87.9%	1.14
802.11n20	2412 MHz	88%	1.14
	2437 MHz	88%	1.14
	2462 MHz	88%	1.14
802.11n40	2422 MHz	83.8%	1.19
	2437 MHz	83.8%	1.19
	2452 MHz	83.8%	1.19

## 7.2 Test Results

### 7.2.1. Dielectric Performance

#### Dielectric Performance of Tissue Simulating Liquid

Frequency	Description	Dielectric Parameters $\epsilon_r$	$\sigma$ (s/m)	temp °C
835MHz (body)	Target value	55.2	0.97	/
	5% window	52.44-57.96	0.92-1.02	
	Measurement value 2016-03-23	54.66	0.95	21.9
1900MHz (body)	Target value	53.3	1.52	/
	5% window	50.63-55.96	1.44 -1.60	
	Measurement value 2016-03-24	52.55	1.50	21.8
2450MHz (body)	Target value	52.7	1.95	/
	5% window	50.06-55.33	1.85 -2.05	
	Measurement value 2016-03-28	52.23	1.94	21.8

### 7.2.2. System Check Results

#### System Check for tissue simulation liquid

Frequency	Description	SAR(W/kg)		Targeted SAR1g (W/kg)	Normalized SAR1g (W/kg)	Deviation (%)
		10g	1g			
835MHz (body)	Recommended result ±10% window	1.59 1.43-1.75	2.41 2.17-2.65	/	/	/
	Measurement value 2016-03-23 (250mW)	1.55	2.39	9.59	9.56	-0.31
1900MHz (body)	Recommended result ±10% window	5.28 4.75-5.81	10.1 9.09-11.11	/	/	/
	Measurement value 2016-03-24 (250mW)	5.35	10.1	39.6	40.4	2.02
2450MHz (body)	Recommended result ±10% window	6.06 5.45-6.67	13.0 11.7-14.3	/	/	/
	Measurement value 2016-03-28 (250mW)	5.87	12.8	51.9	51.2	-1.35

Note: 1. the graph results see ANNEX B.1.

2 .Recommended Values used derive from the calibration certificate and 250 mW is used as feeding power to the calibrated dipole.

### 7.2.3 Test Results

#### 7.2.3.1 Summary of Measurement Results (GSM850)

##### SAR Values (GSM850)

Test Case		Measurement Result(W/kg)	Power Drift(dB)	Note
Different Test Position	Channel	1 g		
		Average		
Test position of Body with GPRS(2up) (Distance 5mm)				
Towards Ground	middle	0.381	0.02	
Towards phantom	middle	0.926	0.19	
	low	0.894	-0.08	
	high	<b>0.929</b>	-0.03	<b>max</b>
Back	middle	0.156	0.06	
Front	middle	0.492	0.15	
	low	0.481	0.12	
	high	0.496	0.15	
Left side	middle	0.444	-0.12	
	low	0.425	0.05	
	high	0.453	0.08	
Right side	middle	0.507	-0.12	
	low	0.513	0.05	
	high	0.522	0.15	
Towards phantom	high	0.915	0.11	repeat

Note: 1. The value with blue color is the maximum SAR Value of test case of head and body in each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is lower than the SAR limit (< 0.4W/kg), testing at the high and low channels is optional.

4.Per KDB 865664 d01v01, for each frequency band ,repeated SAR measurement is required only when the measured SAR is  $\geq 0.8(\text{W/kg})$ .

### 7.2.3.2 Summary of Measurement Results (PCS1900)

**SAR Values (PCS1900)**

Test Case		Measurement Result(W/kg)	Power Drift(dB)	Note
Different Test Position	Channel	1 g		
		Average		
Test position of Body with GPRS(2up) (Distance 5mm)				
Towards Ground	low	0.065	0.07	
Towards phantom	low	0.341	-0.14	
Back	low	0.032	-0.12	
front	low	<b>0.809</b>	0.02	max
	middle	0.678	0.11	
	high	0.708	0.09	
Left side	low	0.109	0.06	
Right side	low	0.126	0.05	
front	low	0.788	0.06	repeat

Note: 1.The value with blue color is the maximum SAR Value of test case of head and body in each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is lower than the SAR limit ( $< 0.4\text{W/kg}$ ), testing at the high and low channels is optional.
- 4.Per KDB 865664 d01v01, for each frequency band ,repeated SAR measurement is required only when the measured SAR is  $\geq 0.8(\text{W/kg})$ .

### 7.2.3.3 Summary of Measurement Results (WCDMA BAND II)

#### SAR Values (WCDMA BANDII)

Test Case		Measurement Result(W/kg)	Power Drift(dB)	Note
Different Test Position	Channel	1 g		
		Average		
Test position of Body (Distance 5mm)				
Towards Ground	high	0.100	-0.17	
Towards phantom	high	0.351	-0.16	
Back	high	0.075	-0.13	
Front	high	<b>1.09</b>	-0.14	<b>max</b>
	low	0.668	0.17	
	mid	0.854	0.15	
Left side	high	0.169	0.17	
Right side	high	0.236	-0.15	
Front	high	0.995	0.10	<b>repeat</b>

Note: 1. The value with blue color is the maximum SAR Value of test case of head and body in each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is lower than the SAR limit (< 0.4W/kg), testing at the high and low channels is optional.
4. Per KDB 865664 d01v01, for each frequency band ,repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ (W/kg).

#### 7.2.3.4 Summary of Measurement Results (WCDMA BAND V)

##### SAR Values (WCDMA BAND V)

Test Case		Measurement Result(W/kg)	Power Drift(dB)	Note
Different Test Position	Channel	1 g		
		Average		
Test position of Body (Distance 5mm)				
Towards Ground	low	0.157	-0.04	
Towards phantom	low	0.714	0.05	
	middle	0.376	-0.12	
	high	<b>1.04</b>	-0.02	<b>max</b>
Back	low	0.0588	0.10	
Front	low	0.202	0.16	
Left side	low	0.197	0.06	
right side	middle	0.205	0.02	
Towards phantom	high	0.982	0.03	<b>repeat</b>

Note: 1. The value with blue color is the maximum SAR Value of test case of head and body in each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is lower than the SAR limit (< 0.4W/kg), testing at the high and low channels is optional.
4. Per KDB 865664 d01v01, for each frequency band ,repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ (W/kg).

### 7.2.3.5 Summary of Measurement Results (WiFi)

#### SAR Values (WiFi)

Test Case		Measurement Result(W/kg)	Power Drift(dB)	Note
Different Test Position	Channel	1 g		
		Average		
Test position of Body (Distance 5mm) 802.11b Data Rate: 5.5Mbps				
Towards Ground	middle	0.011	-0.14	
Towards phantom	middle	<b>0.057</b>	-0.12	<b>max</b>
Back	middle	0.047	0.13	
Front	middle	0.043	-0.15	
Left side	middle	0.012	-0.11	
right side	middle	0.007	-0.19	
Towards phantom	low	0.012	-0.17	
	high	0.030	-0.14	
Test worst position of Body (Distance 5mm) 802.11g/n(20M/40M)				
Towards phantom	high	0.028	-0.13	802.11g Data Rate: 48Mbps
Towards phantom	high	0.034	-0.18	802.11n(20M) Data Rate: MCS3
Towards phantom	high	0.005	0.09	802.11n(40M) Data Rate: MCS3

Note: 1. The value with blue color is the maximum SAR Value of test case of head and body in each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is lower than the SAR limit (< 0.4W/kg), testing at the high and low channels is optional.

#### 4. 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b

DSSS in that exposure configuration.

2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

#### 5. 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

#### 7.2.4 Maximum SAR

BAND	Position	CH	measuermnt SAR (W/kg)	measuermnt power (dBm)	turn-up limit (dBm)	scaled factor	D C factor	reported SAR (W/kg)
GSM850	BODY	L	0.894	32.02	33	1.148	/	1.120
		M	0.926	32.04	33	1.148	/	1.155
		H	<b>0.929</b>	31.83	33	1.148	/	<b>1.216</b>
GSM1900	BODY	L	<b>0.809</b>	28.94	29.5	1.072	/	0.920
		M	0.678	28.22	29.5	1.122	/	0.910
		H	0.708	27.52	29.5	1.023	/	<b>1.117</b>
WCDMA 2	BODY	L	0.668	21.21	23	1.033	/	1.009
		M	0.854	22.87	23	1.117	/	0.880
		H	<b>1.09</b>	22.46	23	1.153	/	<b>1.234</b>
WCDMA 5	BODY	L	0.714	23.34	23.5	1.047	/	0.741
		M	0.367	22.67	23.5	1.117	/	0.444
		H	<b>1.04</b>	23.27	23.5	1.119	/	<b>1.097</b>
WiFi	BODY	L	0.047	13.13	17	2.438	1.01	0.116
		M	<b>0.057</b>	13.27	17	2.360	1.01	<b>0.136</b>
		H	0.043	13.46	17	2.259	1.01	0.098

#### Evaluation for Simultaneous SAR

Summation BAND	Exposure Position	Maximum reported 1g SAR (W/kg)	Summation SAR(1g) (W/kg)	SAR -to-peak-location Separation Ratio	Simultaneous Measurement Required?
WWAN +WiFi	Body-worn(5mm)	1.234+0.136=1.37	<1.6	/	No

General Judgment: PASS

## 8. Test Equipments Utilized

No.	Name	Type	S/N	Calibration Date	Valid Period
01	Network analyzer	Agilent E5071C	MY46109425	Oct 27 <sup>th</sup> , 2015	One year
02	Dielectric Probe Kit	Agilent 85070E	MY44300524	No Calibration Requested	
03	Attenuator	MCL BW-S3W2+	/	No Calibration Requested	
04	Attenuator	MCL BW-S3W2+	/	No Calibration Requested	
05	Power meter	Agilent E4418B	MY50000852	Nov 03 <sup>th</sup> , 2015	One year
06	Power meter	Agilent E4416A	MY53100003	Mar 07 <sup>th</sup> , 2016	One year
07	Power sensor	Agilent E9200B	MY50300011	Nov 03 <sup>th</sup> , 2015	One year
08	Signal Generator	Agilent E4438C	MY49071248	Oct 27 <sup>th</sup> , 2015	One year
09	Amplifier	ZHL-42W	QA1020005	No Calibration Requested	
10	BTS	CMU200	121464	Nov 13 <sup>th</sup> , 2015	One year
11	E-field Probe	ES3DV3	3241	Nov 05 <sup>th</sup> , 2015	One year
12	E-field Probe	EX3DV4	3717	Oct 30 <sup>th</sup> , 2015	One year
13	DAE	DAE4	1226	Sep 09 <sup>th</sup> , 2015	One year
14	DAE	DAE4	1327	Apr 21 <sup>th</sup> , 2015	One year
15	Validation Kit 835MHz	D835V2	4d100	Sep 24 <sup>th</sup> , 2015	One year
16	Validation Kit 1900MHz	D1900V2	5d155	Apr 21 <sup>th</sup> , 2015	One year
17	Validation Kit 2450MHz	D2450V2	845	Sep 24 <sup>th</sup> , 2015	One year

## 9. Measurement Uncertainty

No	Source of Uncertainty	Type	Uncertainty value ± %	Probability Distribution	Div.	$c_i$ (1 g)	$c_i$ (10 g)	Standard Unc ± %, (1 g)	Standard Unc ± %, (10 g)	$v_i$ or $v_{eff}$
1	System repetitivity	A	2.7	N	1	1	1	2.7	2.7	9
<i>Measurement System</i>										
2	Probe Calibration	B	5.9	N	1	1	1	5.9	5.9	$\infty$
3	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	$\infty$
4	Boundary Effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
5	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	$\infty$
6	Detection Limits	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
7	Readout Electronics	B	0.3	N	1	1	1	0.3	0.3	$\infty$
8	Response Time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	$\infty$
9	Integration Time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	$\infty$
10	RF ambient conditions – noise	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
11	RF ambient conditions – reflections	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
12	Probe Positioner Mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	$\infty$
13	Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	$\infty$
14	Post-Processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
<i>Test Sample Related</i>										

15	Test Sample Positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device Holder Uncertainty	A	4.1	N	1	1	1	4.1	4.1	5
17	Drift of Output Power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	$\infty$
<i>Phantom and Set-up</i>										
18	Phantom Uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	$\infty$
19	Liquid Conductivity (target.)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	$\infty$
20	Liquid Conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.7	1.4	43
21	Liquid Permittivity (target.)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	$\infty$
22	Liquid Permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						10.54	10.34	
Expanded uncertainty (95 % confidence interval)		k=2						21.08	20.68	

## ANNEX A: Detailed Test Results

### Annex A.1 System Check Results

#### System check 835body

Date/Time: 23/03/2016 08:10:45

Communication System: UID 10000, CW; Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.946 \text{ S/m}$ ;  $\epsilon_r = 54.655$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE 1528-2013)

DASY5 Configuration:

- Probe: ES3DV3 - SN3241; ConvF(6.22, 6.22, 6.22); Calibrated: 05/11/2015;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 09/09/2015
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**835body/d=15mm, Pin=250 mW/Area Scan (7x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.55 W/kg

**835body/d=15mm, Pin=250 mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:**


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 53.557 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.69 W/kg

**SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.55 W/kg**

Maximum value of SAR (measured) = 2.82 W/kg

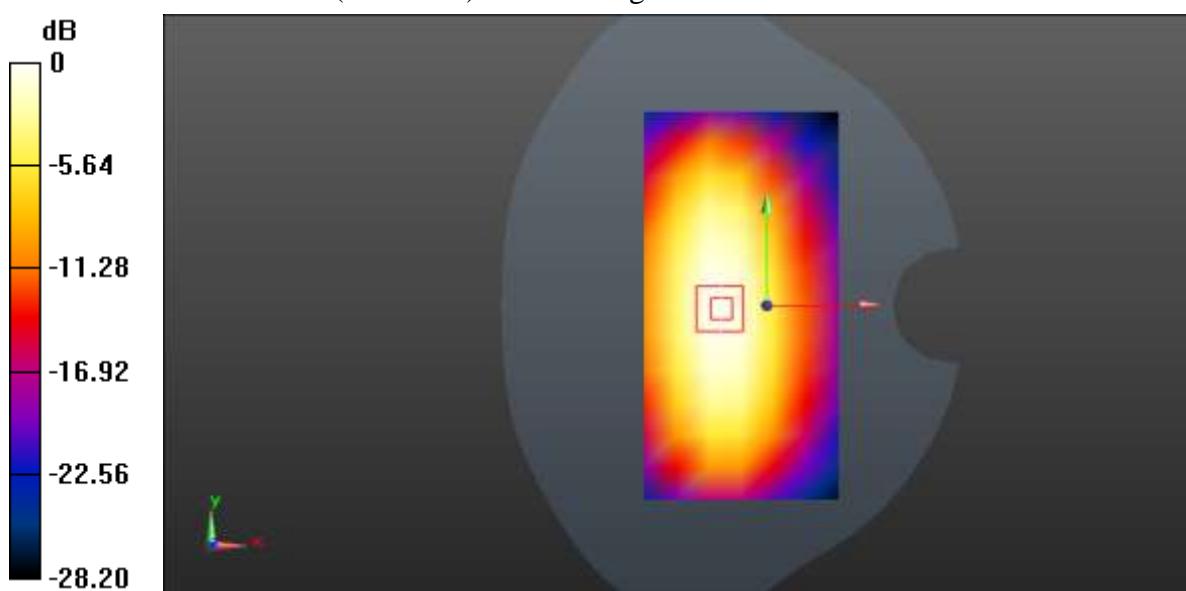

**System check 1900body**

Date/Time: 24/03/2016 09:00:03

Communication System: UID 10000, CW; Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.495$  S/m;  $\epsilon_r = 52.547$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE 1528-2013)

DASY5 Configuration:

- Probe: ES3DV3 - SN3241; ConvF(4.58, 4.58, 4.58); Calibrated: 05/11/2015;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 09/09/2015
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**1900body/d=10mm, Pin=250 mW/Area Scan (5x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.20 W/kg

**1900body/d=10mm, Pin=250 mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 85.536 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 18.2 W/kg

**SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.35 W/kg**

Maximum value of SAR (measured) = 12.9 W/kg

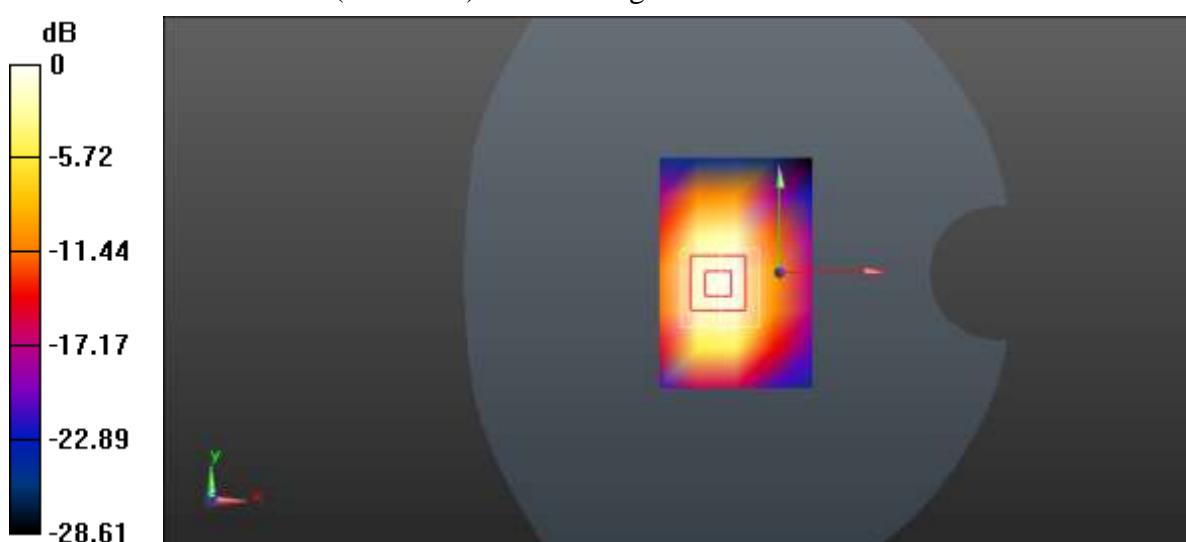

0 dB = 9.20 W/kg = 9.64 dBW/kg

**System check 2450body**

Date/Time: 28/03/2016 08:20:12

Communication System: UID 10000, CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.942$  S/m;  $\epsilon_r = 52.232$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE1528-2013)

DASY5 Configuration:

- Probe: EX3DV4 - SN3717; ConvF(6.88, 6.88, 6.88); Calibrated: 30/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 21/04/2015
- Phantom: SAM2; Type: SAM; Serial: TP:1702
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**2450body/d=10mm, Pin=250 mW/Area Scan (41x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 17.6 W/kg

**2450body/d=10mm, Pin=250 mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 71.463 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 26.2 W/kg

**SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.87 W/kg**

Maximum value of SAR (measured) = 16.8 W/kg

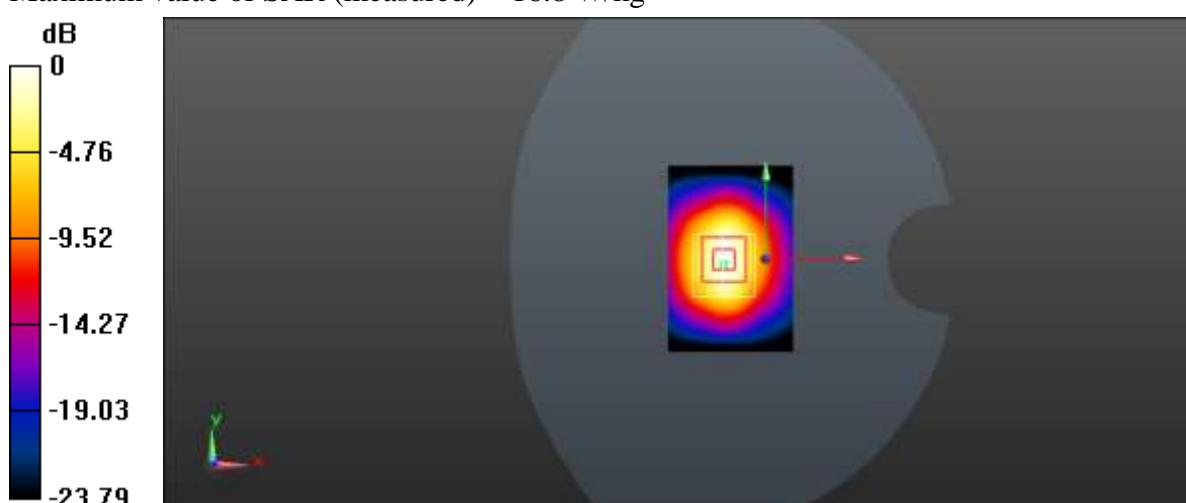

## Annex A.2 Graph Result

### GSM850 towards phantom high

Date/Time: 23/03/2016 13:13:34

Communication System: UID 0, GPRS/EGPRS(2UP) (0); Communication System Band:

GSM850; Frequency: 848.8 MHz; Communication System PAR: 6.19 dB

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.967$  S/m;  $\epsilon_r = 54.15$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE 1528-2013)

DASY5 Configuration:

- Probe: ES3DV3 - SN3241; ConvF(6.22, 6.22, 6.22); Calibrated: 05/11/2015;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 09/09/2015
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**body/towards phantom high/Area Scan (7x10x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.08 W/kg

**body/towards phantom high/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.547 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 0.929 W/kg; SAR(10 g) = 0.595 W/kg**

Maximum value of SAR (measured) = 1.10 W/kg

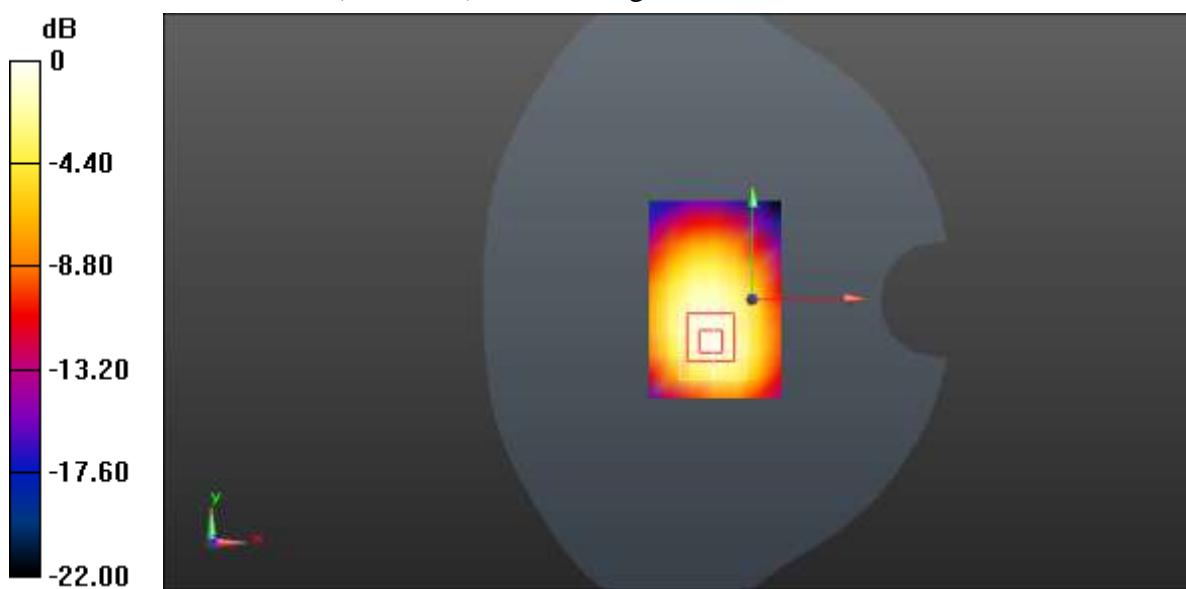

$$0 \text{ dB} = 1.08 \text{ W/kg} = 0.33 \text{ dBW/kg}$$

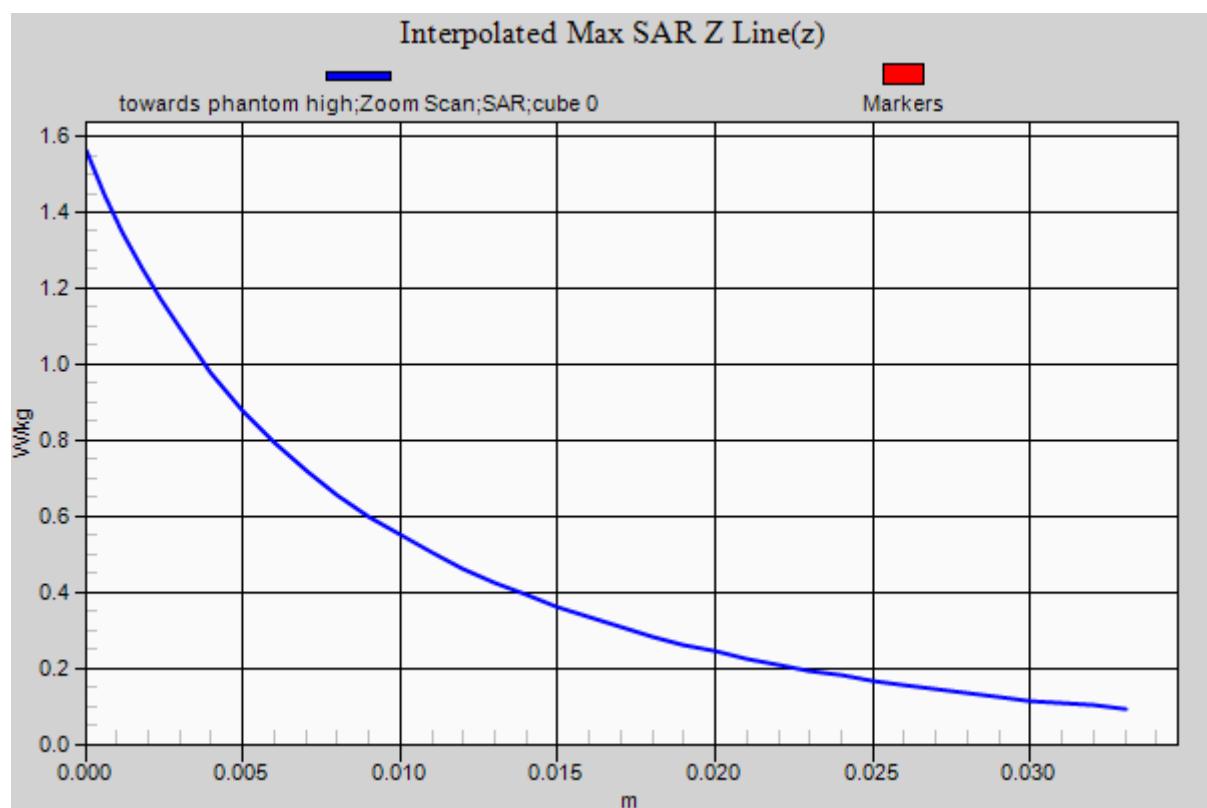

**GSM1900 front low**

Date/Time: 24/03/2016 13:33:34

Communication System: UID 0, GPRS/EGPRS(2UP) (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Communication System PAR: 6.19 dB

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.448$  S/m;  $\epsilon_r = 52.486$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE 1528-2013)

DASY5 Configuration:

- Probe: ES3DV3 - SN3241; ConvF(4.58, 4.58, 4.58); Calibrated: 05/11/2015;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 09/09/2015
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/front low/Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.971 W/kg


**Configuration/front low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 17.968 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.18 W/kg

**SAR(1 g) = 0.809 W/kg; SAR(10 g) = 0.371 W/kg**

Maximum value of SAR (measured) = 0.816 W/kg

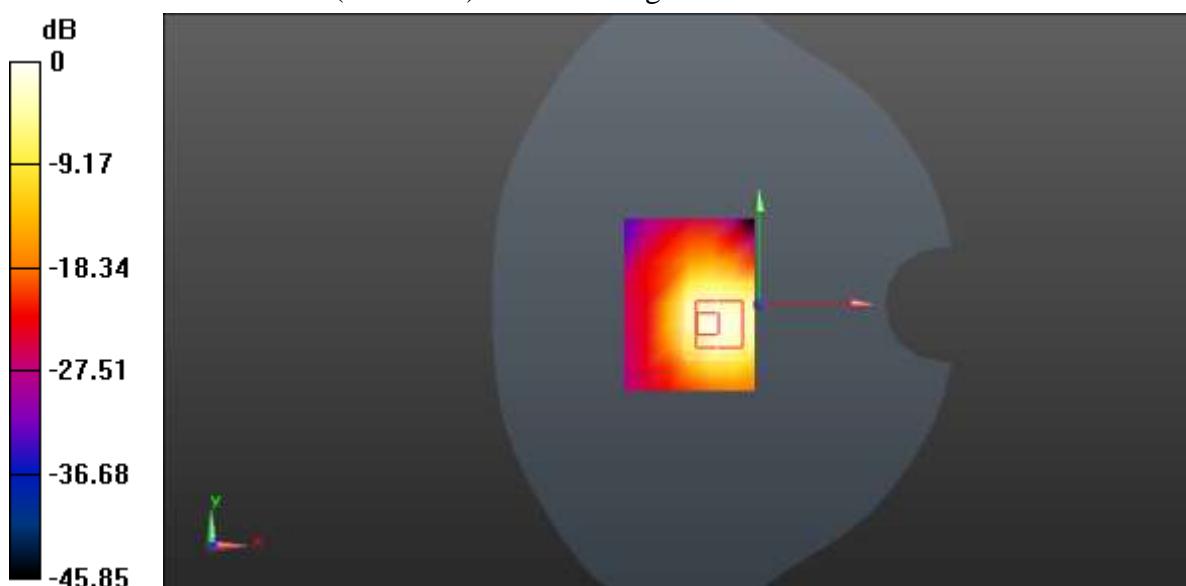

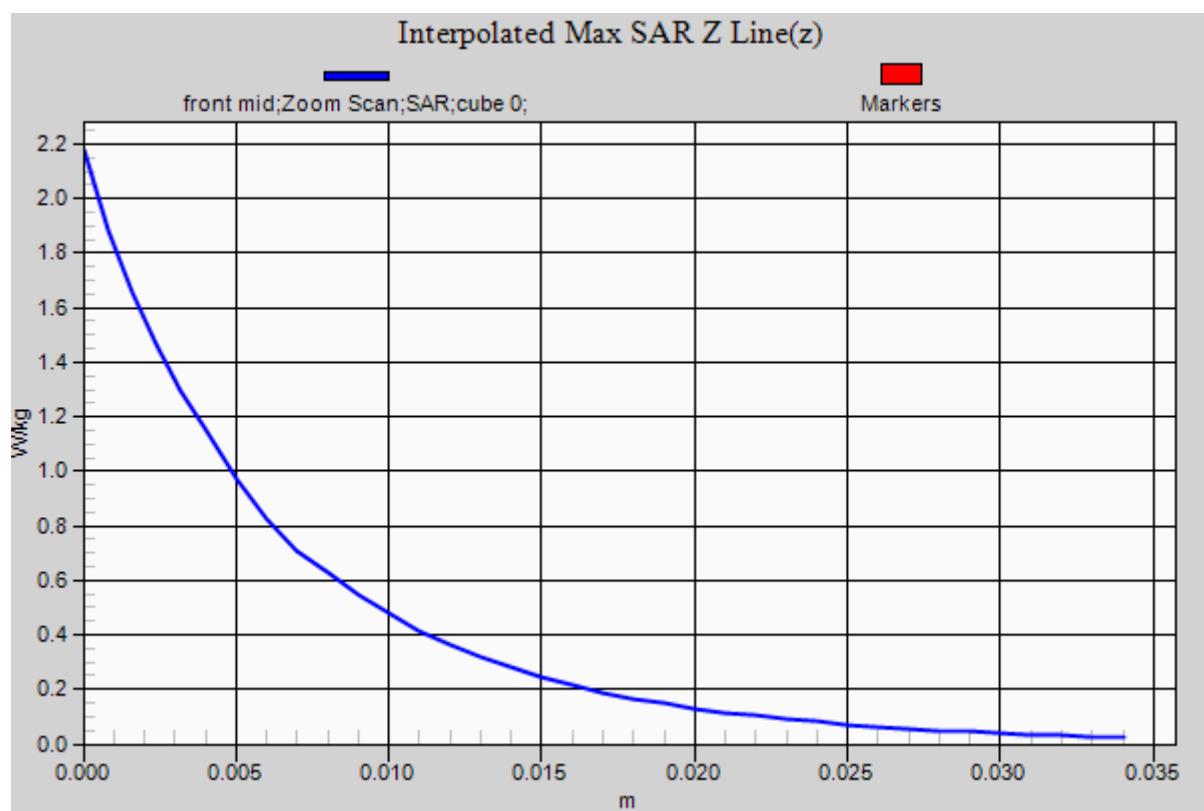

**WCDMA BAND II front high**

Date/Time: 24/03/2016 17:43:49

Communication System: UID 0, WCDMA (0); Communication System Band: BAND 2;

Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.502$  S/m;  $\epsilon_r = 52.332$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE 1528-2013)

DASY5 Configuration:

- Probe: ES3DV3 - SN3241; ConvF(4.58, 4.58, 4.58); Calibrated: 05/11/2015;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 09/09/2015
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/front high/Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.53 W/kg


**Configuration/front high/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.152 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 2.35 W/kg

**SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.526 W/kg**

Maximum value of SAR (measured) = 1.23 W/kg

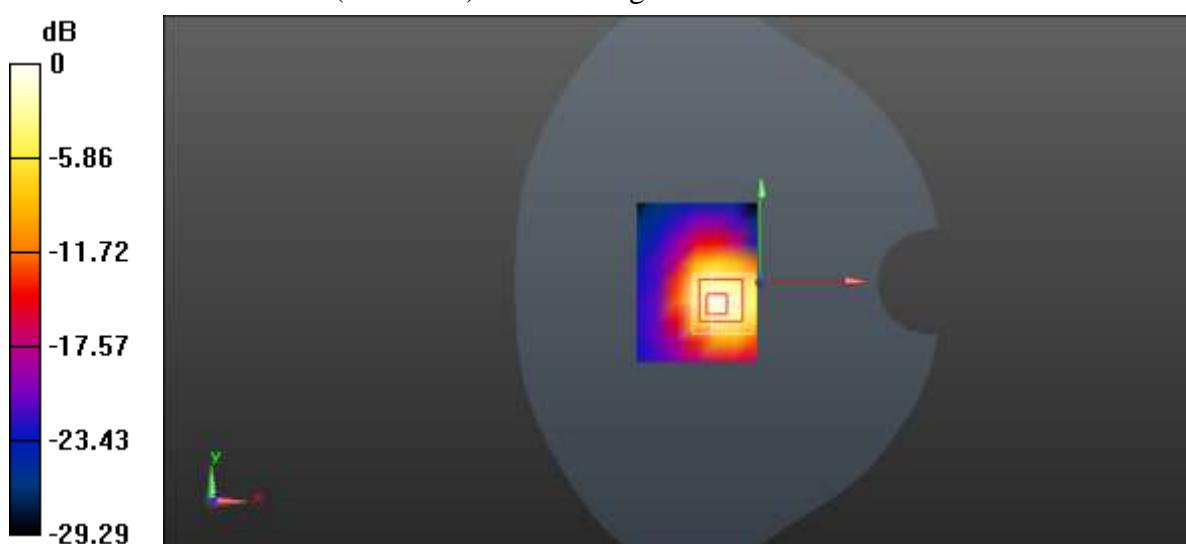

$$0 \text{ dB} = 1.53 \text{ W/kg} = 1.85 \text{ dBW/kg}$$

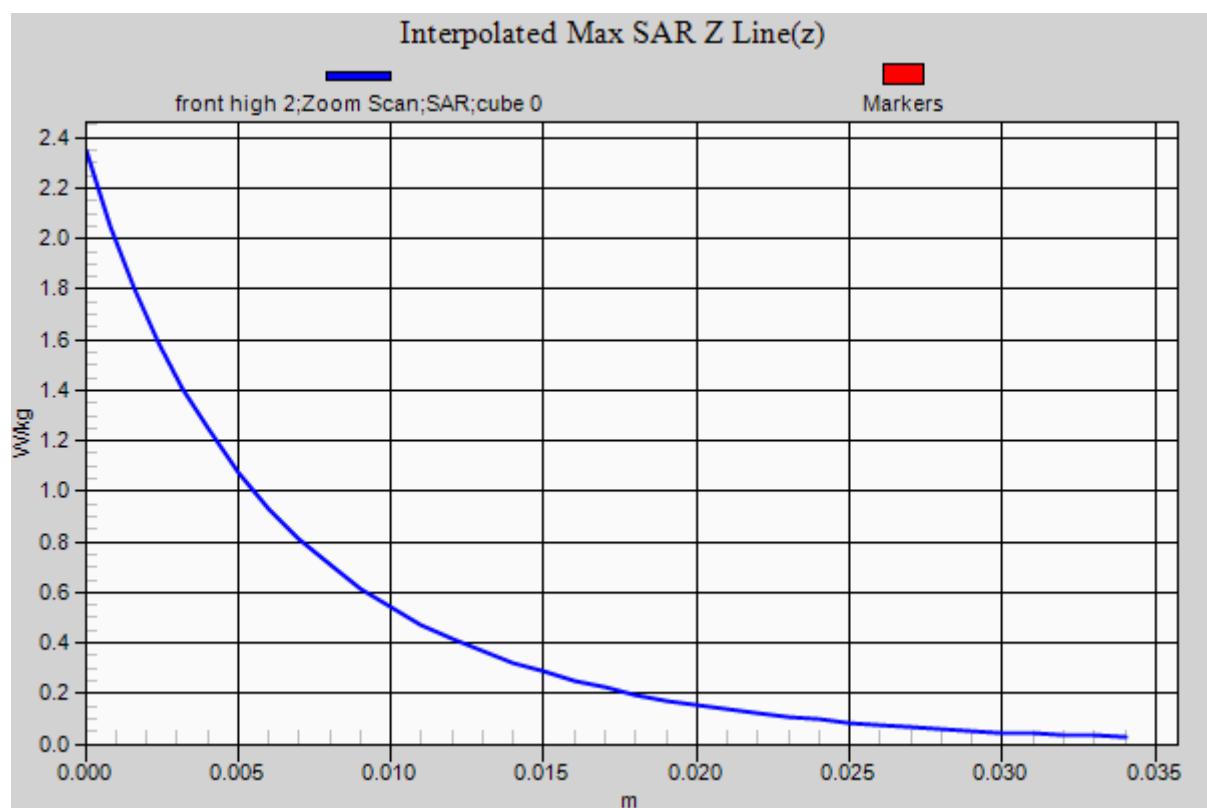

**WCDMA BAND V towards phantom high**

Date/Time: 23/03/2016 16:00:59

Communication System: UID 0, WCDMA (0); Communication System Band: BAND 5; Frequency: 846.6 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.965$  S/m;  $\epsilon_r = 54.169$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE 1528-2013)

DASY5 Configuration:

- Probe: ES3DV3 - SN3241; ConvF(6.22, 6.22, 6.22); Calibrated: 05/11/2015;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 09/09/2015
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/towards phantom high/Area Scan (7x10x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.20 W/kg

**Configuration/towards phantom high/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.224 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.62 W/kg

**SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.672 W/kg**

Maximum value of SAR (measured) = 1.19 W/kg

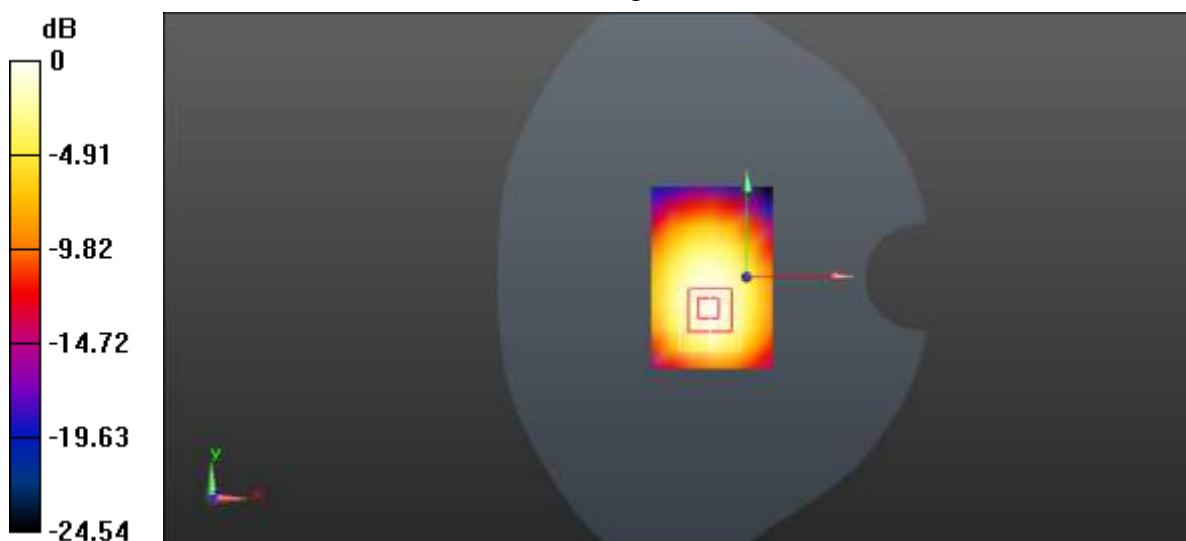

0 dB = 1.20 W/kg = 0.79 dBW/kg

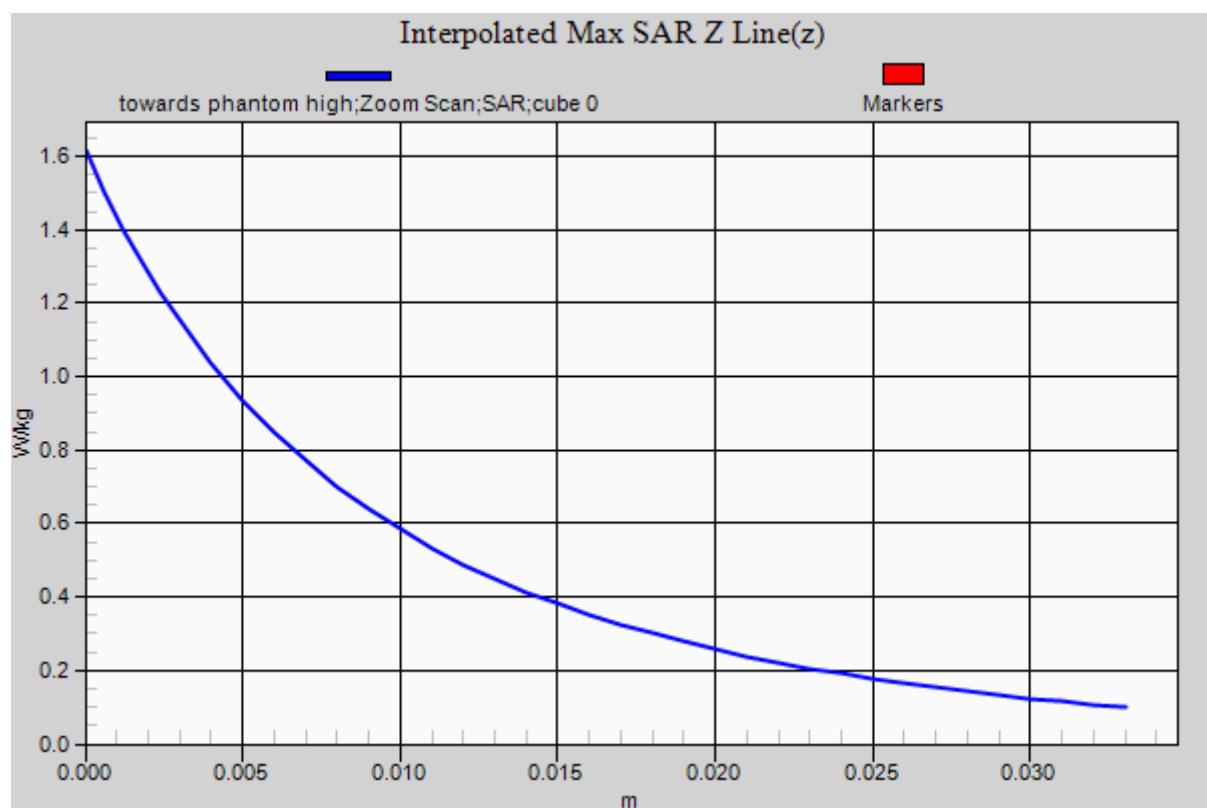

**802.11b Data Rate: 5.5 Mbps towards phantom mid**

Date/Time: 28/03/2016 12:16:53

Communication System: UID 0, 802.11b/g/n 2.45GHz (0); Communication System Band: 2.4G; Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.906$  S/m;  $\epsilon_r = 51.957$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE 1528-2013)

DASY5 Configuration:

- Probe: EX3DV4 - SN3717; ConvF(6.88, 6.88, 6.88); Calibrated: 30/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 21/04/2015
- Phantom: SAM 1; Type: SAM; Serial: TP:1702
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/towards phantom mid/Area Scan (8x10x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0749 W/kg

**Configuration/towards phantom mid/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.122 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.116 W/kg

**SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.027 W/kg**

Maximum value of SAR (measured) = 0.0738 W/kg

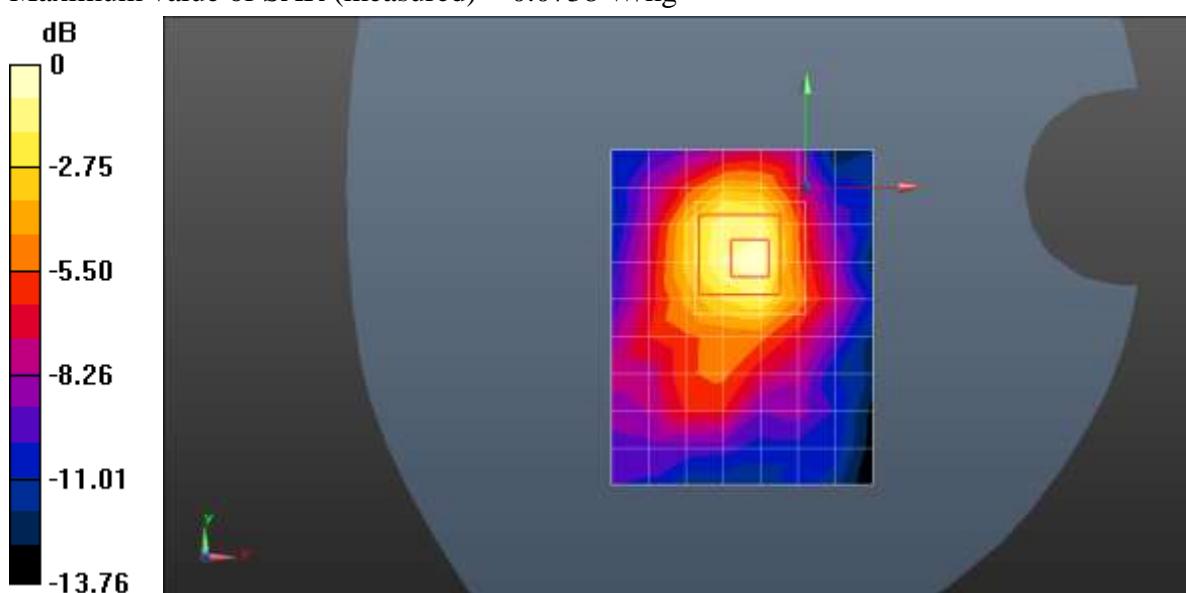

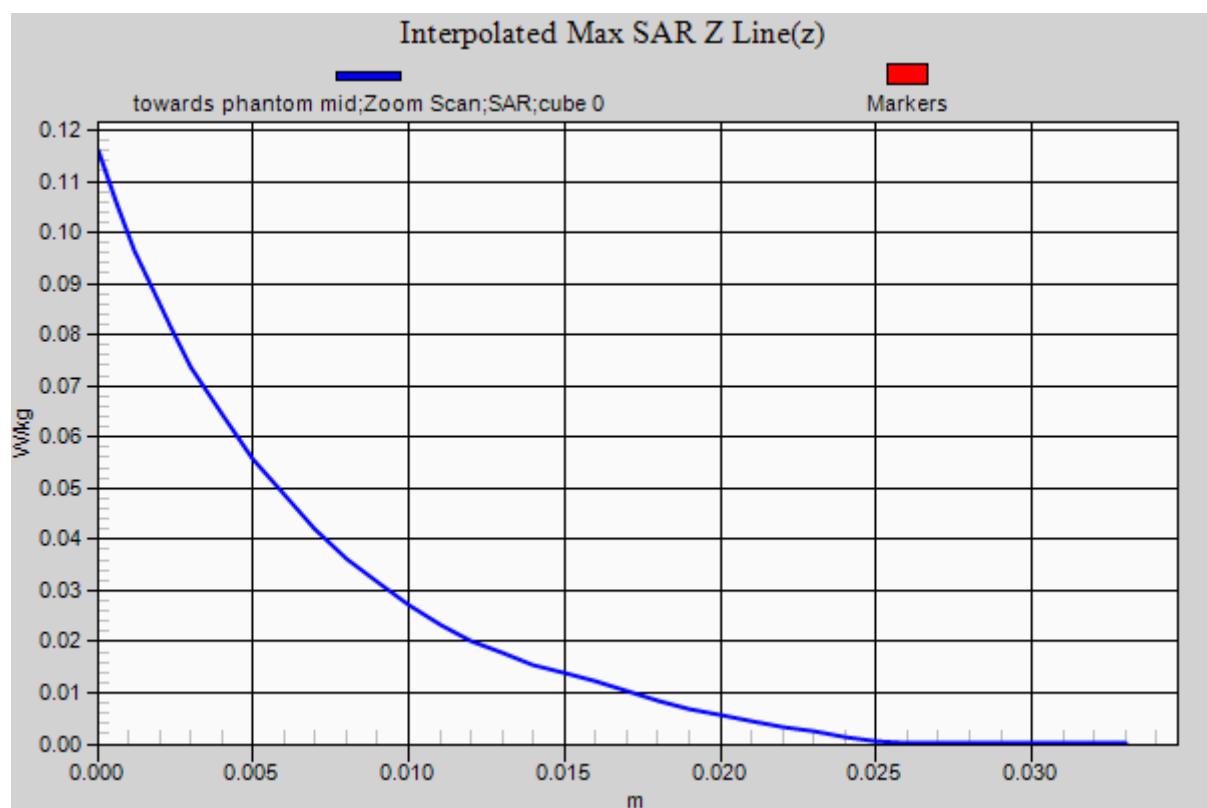



## ANNEX B: Calibration Certificate

### Annex B.1 Probe Calibration Certificate



Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: ctli@chinatl.com <http://www.chinatl.cn>



Client	Tejet	Certificate No: Z15-97164	
CALIBRATION CERTIFICATE			
Object	ES3DV3 - SN:3241		
Calibration Procedure(s)	FD-Z11-2-004-01 Calibration Procedures for Dosimetric E-field Probes		
Calibration date:	November 05, 2015		
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.			
Calibration Equipment used (M&TE critical for calibration)			
Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Power sensor NRP-Z91	101547	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Power sensor NRP-Z91	101548	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Reference10dBAttenuator	18N50W-10dB	13-Mar-14(TMC, No.JZ14-1103)	Mar-16
Reference20dBAttenuator	18N50W-20dB	13-Mar-14(TMC, No.JZ14-1104)	Mar-16
Reference Probe EX3DV4	SN 7307	27-Feb-15(SPEAG, No.EX3-7307_Feb15)	Feb-16
DAE4	SN 771	27-Jan-15(SPEAG, No.DAE4-771_Jan15)	Jan-16
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGeneratorMG3700A	6201052605	01-Jul-15 (CTTL, No.J15X04255)	Jun-16
Network Analyzer E5071C	MY46110673	03-Feb-15 (CTTL, No.J15X00728)	Feb-16
Calibrated by:	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	
Issued: November 06, 2015			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory			



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)

**Glossary:**

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization $\Phi$	$\Phi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i $\theta=0$ is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005

**Methods Applied and Interpretation of Parameters:**

- $NORM_{x,y,z}$ : Assessed for E-field polarization  $\theta=0$  (f $\leq$ 900MHz in TEM-cell; f $>$ 1800MHz: waveguide).  $NORM_{x,y,z}$  are only intermediate values, i.e., the uncertainties of  $NORM_{x,y,z}$  does not effect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- $NORM(f)x,y,z = NORM_{x,y,z} * frequency\_response$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- $DCPx,y,z$ : DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- $Ax,y,z; Bx,y,z; Cx,y,z; VRx,y,z; A,B,C$  are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:* Assessed in flat phantom using E-field (or Temperature Transfer Standard for f $\leq$ 800MHz) and inside waveguide using analytical field distributions based on power measurements for f $>$ 800MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to  $NORM_{x,y,z} * ConvF$  whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$ MHz to  $\pm 100$ MHz.
- Spherical isotropy (3D deviation from isotropy):* in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:* The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:* The angle is assessed using the information gained by determining the  $NORM_x$  (no uncertainty required).



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)

# Probe ES3DV3

SN: 3241

Calibrated: November 05, 2015

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) <http://www.chinattl.cn>

## DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3241

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm( $\mu$ V/(V/m) <sup>A</sup> )	1.17	0.85	1.04	$\pm$ 10.8%
DCP(mV) <sup>B</sup>	105.1	106.8	106.4	

### Modulation Calibration Parameters

UID	Communication System Name	A dB	B dB/ $\mu$ V	C	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	291.1
		Y	0.0	0.0	1.0		245.6
		Z	0.0	0.0	1.0		272.6

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X, Y, Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 5 and Page 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) <http://www.chinattl.cn>

## DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3241

### Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	41.9	0.89	6.32	6.32	6.32	0.50	1.20	±12%
850	41.5	0.92	6.06	6.06	6.06	0.38	1.50	±12%
900	41.5	0.97	6.22	6.22	6.22	0.39	1.50	±12%
1750	40.1	1.37	5.17	5.17	5.17	0.38	1.68	±12%
1900	40.0	1.40	5.03	5.03	5.03	0.67	1.23	±12%
2000	40.0	1.40	4.94	4.94	4.94	0.36	1.80	±12%
2450	39.2	1.80	4.59	4.59	4.59	0.56	1.47	±12%

<sup>C</sup> Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Adrl: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) <http://www.chinattl.cn>

## DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3241

### Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz] <sup>c</sup>	Relative Permittivity <sup>f</sup>	Conductivity (S/m) <sup>f</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>g</sup>	Depth <sup>g</sup> (mm)	Unct. (k=2)
750	55.5	0.96	6.37	6.37	6.37	0.50	1.25	±12%
850	55.2	0.99	6.22	6.22	6.22	0.39	1.61	±12%
900	55.0	1.05	6.08	6.08	6.08	0.44	1.47	±12%
1750	53.4	1.49	4.86	4.86	4.86	0.44	1.57	±12%
1900	53.3	1.52	4.58	4.58	4.58	0.59	1.36	±12%
2000	53.3	1.52	4.60	4.60	4.60	0.42	1.82	±12%
2450	52.7	1.95	4.32	4.32	4.32	0.53	1.62	±12%

<sup>c</sup> Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.


<sup>f</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>g</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: ctt@chinatll.com [Http://www.chinatll.com](http://www.chinatll.com)

### Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

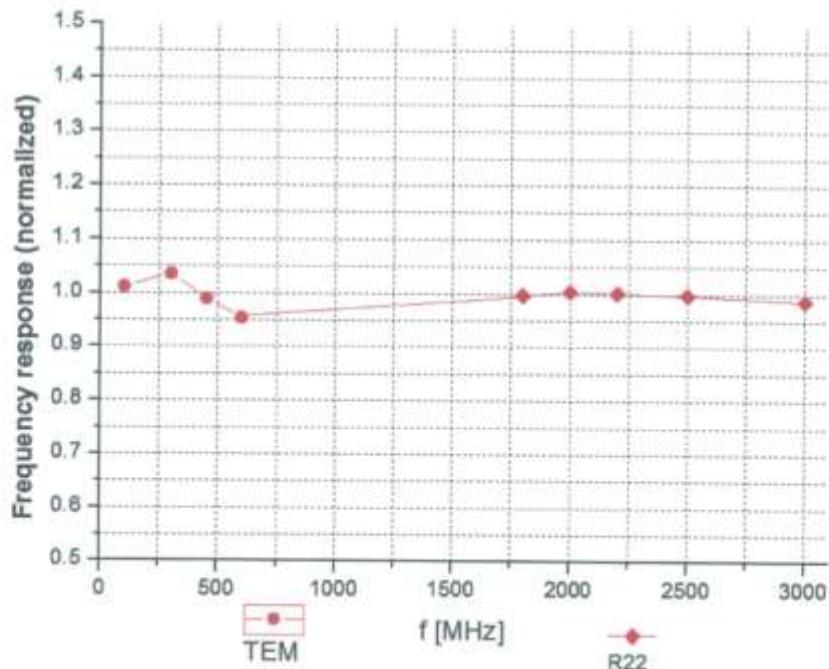


Uncertainty of Frequency Response of E-field:  $\pm 7.5\%$  ( $k=2$ )





Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.com](http://www.chinattl.com)

### Receiving Pattern ( $\Phi$ ), $\theta=0^\circ$

f=600 MHz, TEM

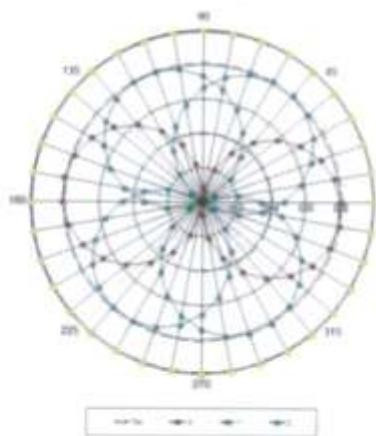


f=1800 MHz, R22

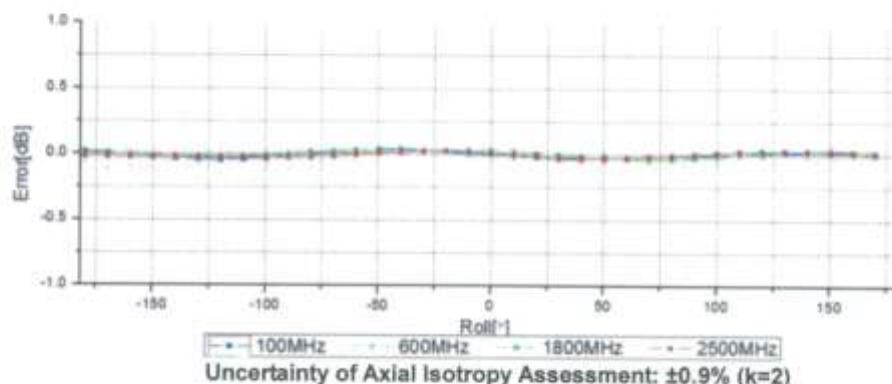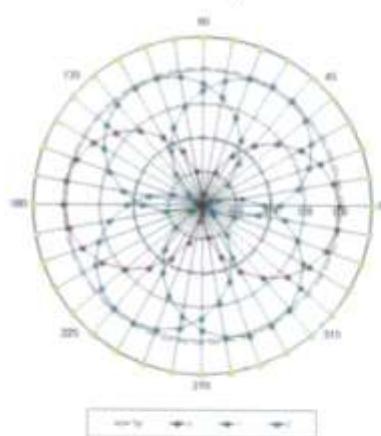



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [ctt@chinattl.com](mailto:ctt@chinattl.com) [Http://www.chinattl.com](http://www.chinattl.com)

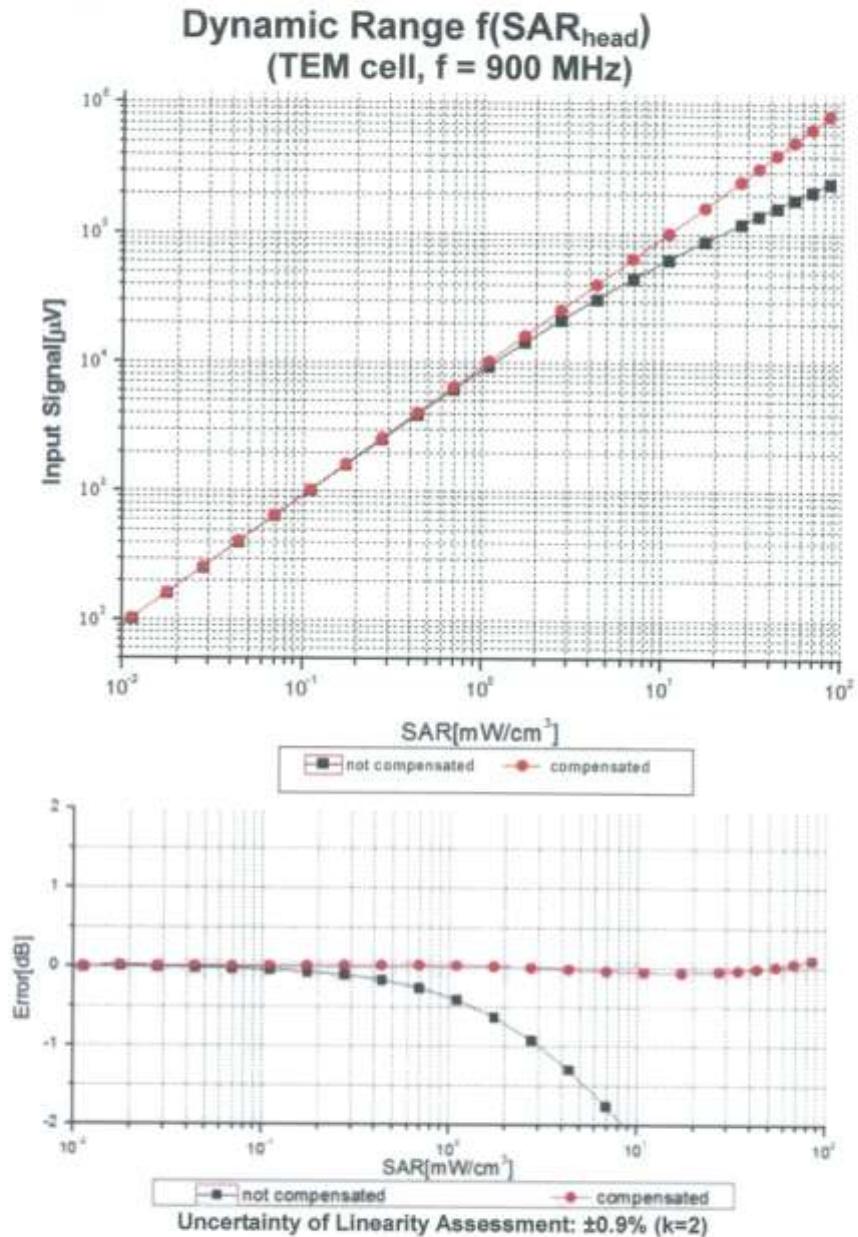





Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) <http://www.chinattl.cn>

## Conversion Factor Assessment

f=900 MHz, WGLS R9(H\_convF)      f=1750 MHz, WGLS R22(H\_convF)

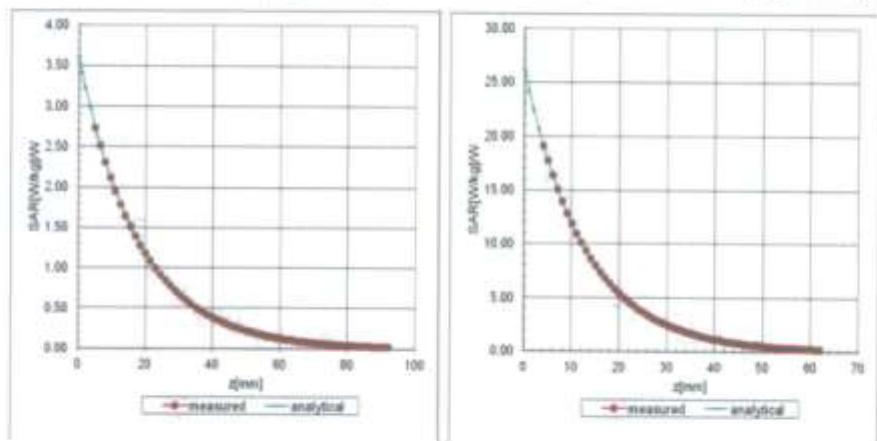

## Deviation from Isotropy in Liquid

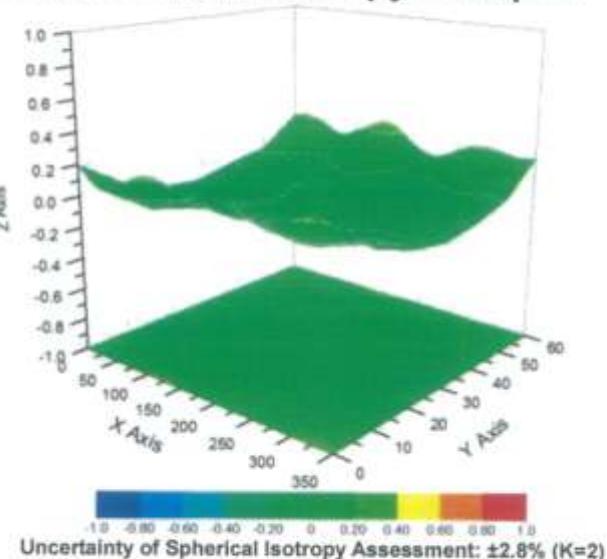




Add: No.51 Xuryuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinatl.com](mailto:cttl@chinatl.com) <http://www.chinatl.com>

## DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3241

### Other Probe Parameters


Sensor Arrangement	Triangular
Connector Angle (°)	150.2
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	10mm
Tip Diameter	4mm
Probe Tip to Sensor X Calibration Point	2mm
Probe Tip to Sensor Y Calibration Point	2mm
Probe Tip to Sensor Z Calibration Point	2mm
Recommended Measurement Distance from Surface	3mm



**Acceptable Conditions for SAR Measurements Using Probes and Dipoles  
Calibrated under the SPEAG-TMC Dual-Logo Calibration Program to  
Support FCC Equipment Certification**

The acceptable conditions for SAR measurements using probes, dipoles and DAEs calibrated by TMC (*Telecommunication Metrology Center of MITT in Beijing, China*), under the Dual-Logo Calibration Certificate program and quality assurance (QA) protocols established between SPEAG (*Schmid & Partner Engineering AG, Switzerland*) and TMC, to support FCC (*U.S. Federal Communications Commission*) equipment certification are defined and described in the following.

- 1) The agreement established between SPEAG and TMC is only applicable to calibration services performed by TMC where its clients (companies and divisions of such companies) are headquartered in the Greater China Region, including Taiwan and Hong Kong. This agreement is subject to renewal at the end of each calendar year between SPEAG and TMC. TMC shall inform the FCC of any changes or early termination to the agreement.
- 2) Only a subset of the calibration services specified in the SPEAG-TMC agreement, while it remains valid, are applicable to SAR measurements performed using such equipment for supporting FCC equipment certification. These are identified in the following.
  - a) Calibration of dosimetric (SAR) probes EX3DVx, ET3DVx and ES3DVx.
    - i) Free-space E-field and H-field probes, including those used for HAC (hearing aid compatibility) evaluation, temperature probes, other probes or equipment not identified in this document, when calibrated by TMC, are excluded and cannot be used for measurements to support FCC equipment certification.
    - ii) Signal specific and bundled probe calibrations based on PMR (probe modulation response) characteristics are handled according to the requirements of KDB 865664; that is, "Until standardized procedures are available to make such determination, the applicability of a signal specific probe calibration for testing specific wireless modes and technologies is determined on a case-by-case basis through KDB inquiries, including SAR system verification requirements."
  - b) Calibration of SAR system validation dipoles, excluding HAC dipoles.
  - c) Calibration of data acquisition electronics DAE3Vx, DAE4Vx and DAEasyVx.
  - d) For FCC equipment certification purposes, the frequency range of SAR probe and dipole calibrations is limited to 700 MHz - 6 GHz and provided it is supported by the equipment identified in the TMC QA protocol (a separate attachment to this document).
  - e) The identical system and equipment setup, measurement configurations, hardware, evaluation algorithms, calibration and QA protocols, including the format of calibration certificates and reports used by SPEAG shall be applied by TMC.
  - f) The calibrated items are only applicable to SPEAG DASY 4 and DASY 5 or higher version systems.



- 3) The SPEAG-TMC agreement includes specific protocols identified in the following to ensure the quality of calibration services provided by TMC under this SPEAG-TMC Dual-Logo calibration agreement are equivalent to the calibration services provided by SPEAG. TMC shall, upon request, provide copies of documentation to the FCC to substantiate program implementation.
  - a) The Inter-laboratory Calibration Evaluation (ILCE) stated in the TMC QA protocol shall be performed between SPEAG and TMC at least once every 12 months. The ILCE acceptance criteria defined in the TMC QA protocol shall be satisfied for the TMC, SPEAG and FCC agreements to remain valid.
  - b) Check of Calibration Certificate (CCC) shall be performed by SPEAG for all calibrations performed by TMC. Written confirmation from SPEAG is required for TMC to issue calibration certificates under the SPEAG-TMC Dual-Logo calibration program. Quarterly reports for all calibrations performed by TMC under the program are also issued by SPEAG.
  - c) The calibration equipment and measurement system used by TMC shall be verified before each calibration service according to the specific reference SAR probes, dipoles, and DAE calibrated by SPEAG. The results shall be reproducible and within the defined acceptance criteria specified in the TMC QA protocol before each actual calibration can commence. TMC shall maintain records of the measurement and calibration system verification results for all calibrations.
  - d) Quality Check of Calibration (QCC) certificates shall be performed by SPEAG at least once every 12 months. SPEAG shall visit TMC facilities to verify the laboratory, equipment, applied procedures and plausibility of randomly selected certificates.
- 4) A copy of this document, to be updated annually, shall be provided to TMC clients that accept calibration services according to the SPEAG-TMC Dual-Logo calibration program, which should be presented to a TCB (*Telecommunication Certification Body*), to facilitate FCC equipment approval.
- 5) TMC shall address any questions raised by its clients or TCBs relating to the SPEAG-TMC Dual-Logo calibration program and inform the FCC and SPEAG of any critical issues.

Change Note: Revised on June 26 to clarify the applicability of PMR and Bundled probe calibrations according to the requirements of KDB 865664.



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) <http://www.chinattl.cn>



CALIBRATION  
No. L0579

Client

Tejet

Certificate No: Z15-97107

## CALIBRATION CERTIFICATE

Object EX3DV4 - SN:3717

Calibration Procedure(s) FD-Z11-2-004-01  
Calibration Procedures for Dosimetric E-field Probes

Calibration date October 30, 2015

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature( $22\pm3$ )°C and humidity<70%.

### Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Power sensor NRP-Z91	101547	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Power sensor NRP-Z91	101548	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Reference10dBAttenuator	18N50W-10dB	13-Mar-14(TMC, No.JZ14-1103)	Mar-16
Reference20dBAttenuator	18N50W-20dB	13-Mar-14(TMC, No.JZ14-1104)	Mar-16
Reference Probe EX3DV4	SN 7307	27-Feb-15(SPEAG, No.EX3-7307_Feb15)	Feb-16
DAE4	SN 771	27-Jan-15(SPEAG, No.DAE4-771_Jan15)	Jan-16
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGeneratorMG3700A	6201052605	01-Jul-15 (CTTL, No.J15X04255)	Jun-16
Network Analyzer E5071C	MY46110673	03-Feb-15 (CTTL, No.J15X00728)	Feb-16

Calibrated by:	Name	Function	Signature
	Yu Zongying	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	

Issued: October 31, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) <http://www.chinattl.com>

**Glossary:**

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization $\Phi$	$\Phi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i $\theta=0$ is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005

**Methods Applied and Interpretation of Parameters:**

- $NORM_{x,y,z}$ : Assessed for E-field polarization  $\theta=0$  ( $f \leq 900$ MHz in TEM-cell;  $f > 1800$ MHz: waveguide).  $NORM_{x,y,z}$  are only intermediate values, i.e., the uncertainties of  $NORM_{x,y,z}$  does not effect the  $E^3$ -field uncertainty inside TSL (see below ConvF).
- $NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency\_response$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- $DCP_{x,y,z}$ : DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- $A_{x,y,z}$ ;  $B_{x,y,z}$ ;  $C_{x,y,z}$ ;  $VR_{x,y,z}$ ; A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to  $NORM_{x,y,z}$  ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$ MHz to  $\pm 100$ MHz.
- Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle*: The angle is assessed using the information gained by determining the  $NORM_x$  (no uncertainty required).



Add: No.51 Xucyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)

# Probe EX3DV4

SN: 3717

Calibrated: October 30, 2015

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) <http://www.chinattl.com>

## DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3717

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm( $\mu$ V/(V/m) <sup>2</sup> ) <sup>A</sup>	0.51	0.47	0.56	$\pm$ 10.8%
DCP(mV) <sup>B</sup>	100.9	104.6	101.1	

### Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB/ $\mu$ V	C	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	188.8	$\pm$ 2.0%
		Y	0.0	0.0	1.0		183.0	
		Z	0.0	0.0	1.0		202.1	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X, Y, Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 5 and Page 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) <http://www.chinattl.cn>

## DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3717

### Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
850	41.5	0.92	8.81	8.81	8.81	0.14	1.40	±12%
900	41.5	0.97	8.86	8.86	8.86	0.12	1.66	±12%
1750	40.1	1.37	7.62	7.62	7.62	0.22	1.07	±12%
1900	40.0	1.40	7.51	7.51	7.51	0.14	1.58	±12%
2300	39.5	1.67	7.27	7.27	7.27	0.42	0.72	±12%
2450	39.2	1.80	7.02	7.02	7.02	0.31	0.96	±12%
2600	39.0	1.96	6.81	6.81	6.81	0.39	0.81	±12%
5200	36.0	4.66	5.39	5.39	5.39	0.50	0.92	±13%
5300	35.9	4.76	5.13	5.13	5.13	0.50	0.90	±13%
5600	35.5	5.07	4.51	4.51	4.51	0.55	0.92	±13%
5800	35.3	5.27	4.55	4.55	4.55	0.55	0.92	±13%

<sup>C</sup> Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Add: No.51 Xueyuan Rond, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) <http://www.chinattl.cn>

## DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3717

### Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz] <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>D</sup> (mm)	Unct. (k=2)
2300	52.9	1.81	7.00	7.00	7.00	0.38	0.86	±12%
2450	52.7	1.95	6.88	6.88	6.88	0.30	1.07	±12%
2600	52.5	2.16	6.61	6.61	6.61	0.36	0.95	±12%
5200	49.0	5.30	4.51	4.51	4.51	0.55	0.99	±13%
5300	48.9	5.42	4.24	4.24	4.24	0.57	0.99	±13%
5600	48.5	5.77	3.77	3.77	3.77	0.59	0.97	±13%
5800	48.2	6.00	3.93	3.93	3.93	0.58	1.05	±13%

<sup>C</sup> Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.


<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [ctl@chinatll.com](mailto:ctl@chinatll.com) <http://www.chinatll.com>

### Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

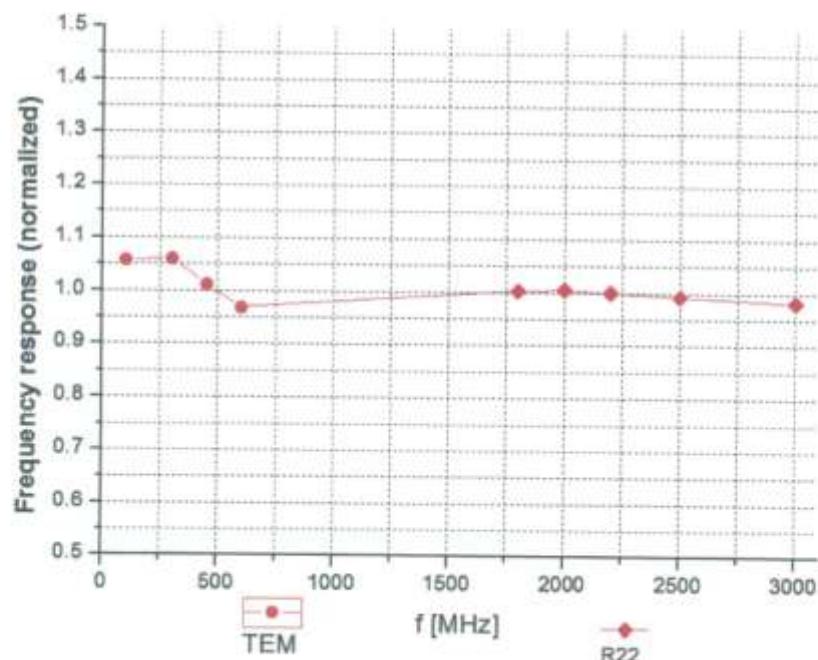


Uncertainty of Frequency Response of E-field:  $\pm 7.5\%$  ( $k=2$ )





Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [ctli@chinattl.com](mailto:ctli@chinattl.com) <http://www.chinattl.cn>

### Receiving Pattern ( $\Phi$ ), $\theta=0^\circ$

f=600 MHz, TEM

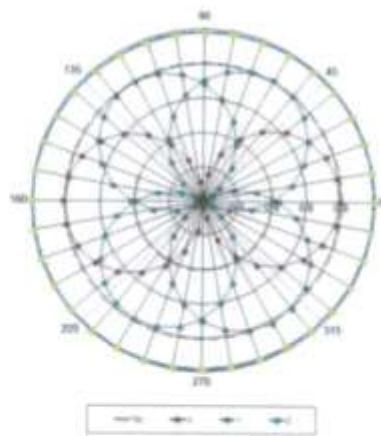

f=1800 MHz, R22

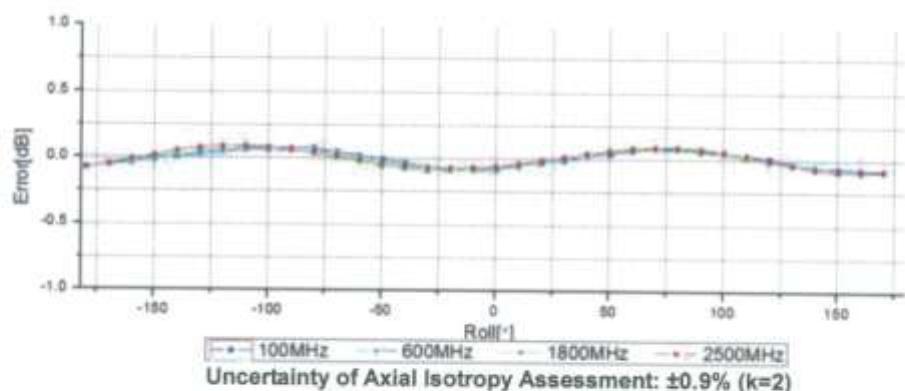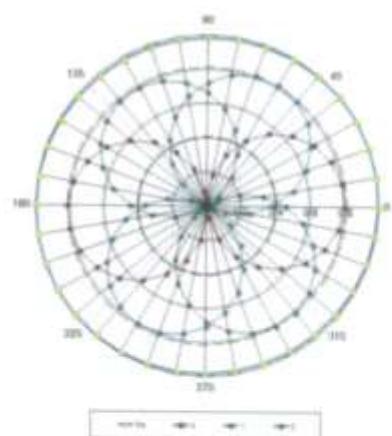





Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) <http://www.chinattl.com>

### Conversion Factor Assessment

$f=900$  MHz, WGLS R9(H\_convF)       $f=1750$  MHz, WGLS R22(H\_convF)

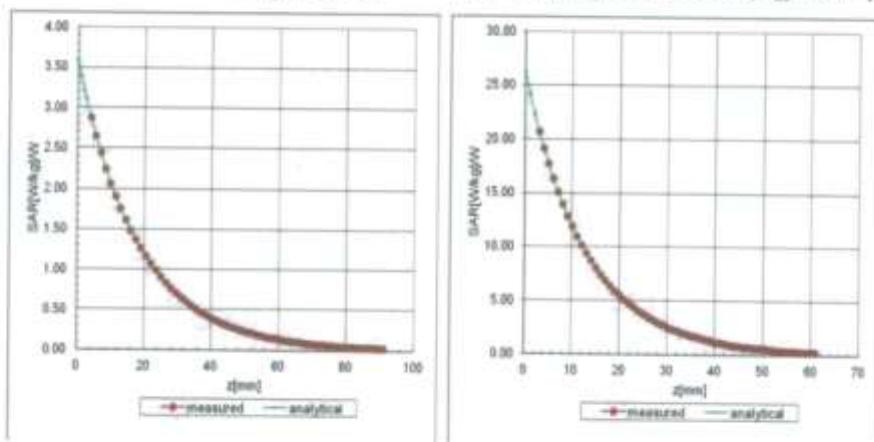

### Deviation from Isotropy in Liquid

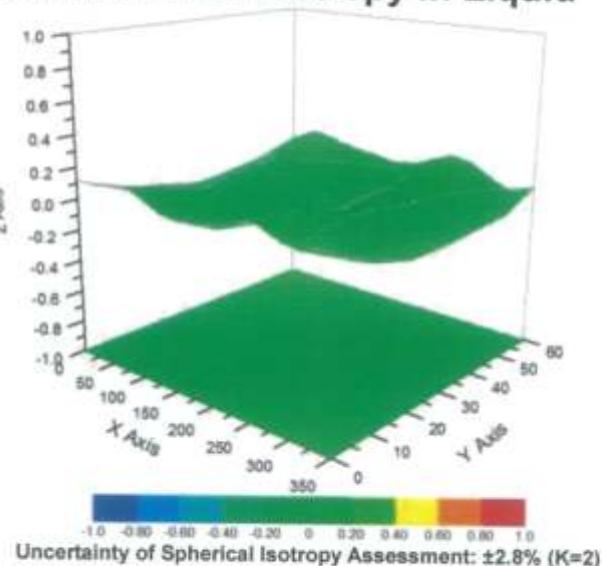




Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) <http://www.chinattl.cn>

## DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3717

### Other Probe Parameters


Sensor Arrangement	Triangular
Connector Angle (°)	156.7
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm



**Acceptable Conditions for SAR Measurements Using Probes and Dipoles  
Calibrated under the SPEAG-TMC Dual-Logo Calibration Program to  
Support FCC Equipment Certification**

The acceptable conditions for SAR measurements using probes, dipoles and DAEs calibrated by TMC (*Telecommunication Metrology Center of MITT in Beijing, China*), under the Dual-Logo Calibration Certificate program and quality assurance (QA) protocols established between SPEAG (*Schmid & Partner Engineering AG, Switzerland*) and TMC, to support FCC (*U.S. Federal Communications Commission*) equipment certification are defined and described in the following.

- 1) The agreement established between SPEAG and TMC is only applicable to calibration services performed by TMC where its clients (companies and divisions of such companies) are headquartered in the Greater China Region, including Taiwan and Hong Kong. This agreement is subject to renewal at the end of each calendar year between SPEAG and TMC. TMC shall inform the FCC of any changes or early termination to the agreement.
- 2) Only a subset of the calibration services specified in the SPEAG-TMC agreement, while it remains valid, are applicable to SAR measurements performed using such equipment for supporting FCC equipment certification. These are identified in the following.
  - a) Calibration of dosimetric (SAR) probes EX3DVx, ET3DVx and ES3DVx.
    - i) Free-space E-field and H-field probes, including those used for HAC (hearing aid compatibility) evaluation, temperature probes, other probes or equipment not identified in this document, when calibrated by TMC, are excluded and cannot be used for measurements to support FCC equipment certification.
    - ii) Signal specific and bundled probe calibrations based on PMR (probe modulation response) characteristics are handled according to the requirements of KDB 865664; that is, "Until standardized procedures are available to make such determination, the applicability of a signal specific probe calibration for testing specific wireless modes and technologies is determined on a case-by-case basis through KDB inquiries, including SAR system verification requirements."
  - b) Calibration of SAR system validation dipoles, excluding HAC dipoles.
  - c) Calibration of data acquisition electronics DAE3Vx, DAE4Vx and DAEasyVx.
  - d) For FCC equipment certification purposes, the frequency range of SAR probe and dipole calibrations is limited to 700 MHz - 6 GHz and provided it is supported by the equipment identified in the TMC QA protocol (a separate attachment to this document).
  - e) The identical system and equipment setup, measurement configurations, hardware, evaluation algorithms, calibration and QA protocols, including the format of calibration certificates and reports used by SPEAG shall be applied by TMC.
  - f) The calibrated items are only applicable to SPEAG DASY 4 and DASY 5 or higher version systems.



- 3) The SPEAG-TMC agreement includes specific protocols identified in the following to ensure the quality of calibration services provided by TMC under this SPEAG-TMC Dual-Logo calibration agreement are equivalent to the calibration services provided by SPEAG. TMC shall, upon request, provide copies of documentation to the FCC to substantiate program implementation.
  - a) The Inter-laboratory Calibration Evaluation (ILCE) stated in the TMC QA protocol shall be performed between SPEAG and TMC at least once every 12 months. The ILCE acceptance criteria defined in the TMC QA protocol shall be satisfied for the TMC, SPEAG and FCC agreements to remain valid.
  - b) Check of Calibration Certificate (CCC) shall be performed by SPEAG for all calibrations performed by TMC. Written confirmation from SPEAG is required for TMC to issue calibration certificates under the SPEAG-TMC Dual-Logo calibration program. Quarterly reports for all calibrations performed by TMC under the program are also issued by SPEAG.
  - c) The calibration equipment and measurement system used by TMC shall be verified before each calibration service according to the specific reference SAR probes, dipoles, and DAE calibrated by SPEAG. The results shall be reproducible and within the defined acceptance criteria specified in the TMC QA protocol before each actual calibration can commence. TMC shall maintain records of the measurement and calibration system verification results for all calibrations.
  - d) Quality Check of Calibration (QCC) certificates shall be performed by SPEAG at least once every 12 months. SPEAG shall visit TMC facilities to verify the laboratory, equipment, applied procedures and plausibility of randomly selected certificates.
- 4) A copy of this document, to be updated annually, shall be provided to TMC clients that accept calibration services according to the SPEAG-TMC Dual-Logo calibration program, which should be presented to a TCB (*Telecommunication Certification Body*), to facilitate FCC equipment approval.
- 5) TMC shall address any questions raised by its clients or TCBs relating to the SPEAG-TMC Dual-Logo calibration program and inform the FCC and SPEAG of any critical issues.

Change Note: Revised on June 26 to clarify the applicability of PMR and Bundled probe calibrations according to the requirements of KDB 865664.

## Annex B.2 DAE4 Calibration Certificate




Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: cmt@chinaitl.com <http://www.chinaitl.com>



Client : Tejet

Certificate No: Z15-97106

## CALIBRATION CERTIFICATE

Object	DAE4 - SN: 1226		
Calibration Procedure(s)	FD-Z11-2-002-01 Calibration Procedure for the Data Acquisition Electronics (DAEx)		
Calibration date:	September 09, 2015		
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.			
Calibration Equipment used (M&TE critical for calibration)			
Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Process Calibrator 753	1971018	06-July-15 (CTTL, No.J15X04257)	July-16
Calibrated by:	Name	Function	Signature
	Yu Zongying	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	
Issued: September 10, 2015			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			



Add: No.51 Xacyum Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.com](http://www.chinattl.com)

**Glossary:**

DAE	data acquisition electronics
Connector angle	information used in DASY system to align probe sensor X to the robot coordinate system.

**Methods Applied and Interpretation of Parameters:**

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: cct@chinattl.com Http://www.chinattl.com

#### DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 8.1 $\mu$ V, full range = -100...+300 mV


Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	$404.627 \pm 0.15\% (k=2)$	$404.396 \pm 0.15\% (k=2)$	$404.125 \pm 0.15\% (k=2)$
Low Range	$3.97987 \pm 0.7\% (k=2)$	$4.00452 \pm 0.7\% (k=2)$	$3.98817 \pm 0.7\% (k=2)$

#### Connector Angle

Connector Angle to be used in DASY system	$114.5^\circ \pm 1^\circ$
---	---------------------------



June 26, 2013

**Acceptable Conditions for SAR Measurements Using Probes and Dipoles  
Calibrated under the SPEAG-TMC Dual-Logo Calibration Program to  
Support FCC Equipment Certification**

The acceptable conditions for SAR measurements using probes, dipoles and DAEs calibrated by TMC (*Telecommunication Metrology Center of MITT in Beijing, China*), under the Dual-Logo Calibration Certificate program and quality assurance (QA) protocols established between SPEAG (*Schmid & Partner Engineering AG, Switzerland*) and TMC, to support FCC (*U.S. Federal Communications Commission*) equipment certification are defined and described in the following.

- 1) The agreement established between SPEAG and TMC is only applicable to calibration services performed by TMC where its clients (companies and divisions of such companies) are headquartered in the Greater China Region, including Taiwan and Hong Kong. This agreement is subject to renewal at the end of each calendar year between SPEAG and TMC. TMC shall inform the FCC of any changes or early termination to the agreement.
- 2) Only a subset of the calibration services specified in the SPEAG-TMC agreement, while it remains valid, are applicable to SAR measurements performed using such equipment for supporting FCC equipment certification. These are identified in the following.
  - a) Calibration of dosimetric (SAR) probes EX3DVx, ET3DVx and ES3DVx.
    - i) Free-space E-field and H-field probes, including those used for HAC (hearing aid compatibility) evaluation, temperature probes, other probes or equipment not identified in this document, when calibrated by TMC, are excluded and cannot be used for measurements to support FCC equipment certification.
    - ii) Signal specific and bundled probe calibrations based on PMR (probe modulation response) characteristics are handled according to the requirements of KDB 865664; that is, "Until standardized procedures are available to make such determination, the applicability of a signal specific probe calibration for testing specific wireless modes and technologies is determined on a case-by-case basis through KDB inquiries, including SAR system verification requirements."
  - b) Calibration of SAR system validation dipoles, excluding HAC dipoles.
  - c) Calibration of data acquisition electronics DAE3Vx, DAE4Vx and DAEasyVx.
  - d) For FCC equipment certification purposes, the frequency range of SAR probe and dipole calibrations is limited to 700 MHz - 6 GHz and provided it is supported by the equipment identified in the TMC QA protocol (a separate attachment to this document).
  - e) The identical system and equipment setup, measurement configurations, hardware, evaluation algorithms, calibration and QA protocols, including the format of calibration certificates and reports used by SPEAG shall be applied by TMC.
  - f) The calibrated items are only applicable to SPEAG DASY 4 and DASY 5 or higher version systems.

- 3) The SPEAG-TMC agreement includes specific protocols identified in the following to ensure the quality of calibration services provided by TMC under this SPEAG-TMC Dual-Logo calibration agreement are equivalent to the calibration services provided by SPEAG. TMC shall, upon request, provide copies of documentation to the FCC to substantiate program implementation.
  - a) The Inter-laboratory Calibration Evaluation (ILCE) stated in the TMC QA protocol shall be performed between SPEAG and TMC at least once every 12 months. The ILCE acceptance criteria defined in the TMC QA protocol shall be satisfied for the TMC, SPEAG and FCC agreements to remain valid.
  - b) Check of Calibration Certificate (CCC) shall be performed by SPEAG for all calibrations performed by TMC. Written confirmation from SPEAG is required for TMC to issue calibration certificates under the SPEAG-TMC Dual-Logo calibration program. Quarterly reports for all calibrations performed by TMC under the program are also issued by SPEAG.
  - c) The calibration equipment and measurement system used by TMC shall be verified before each calibration service according to the specific reference SAR probes, dipoles, and DAE calibrated by SPEAG. The results shall be reproducible and within the defined acceptance criteria specified in the TMC QA protocol before each actual calibration can commence. TMC shall maintain records of the measurement and calibration system verification results for all calibrations.
  - d) Quality Check of Calibration (QCC) certificates shall be performed by SPEAG at least once every 12 months. SPEAG shall visit TMC facilities to verify the laboratory, equipment, applied procedures and plausibility of randomly selected certificates.
- 4) A copy of this document, to be updated annually, shall be provided to TMC clients that accept calibration services according to the SPEAG-TMC Dual-Logo calibration program, which should be presented to a TCB (*Telecommunication Certification Body*), to facilitate FCC equipment approval.
- 5) TMC shall address any questions raised by its clients or TCBs relating to the SPEAG-TMC Dual-Logo calibration program and inform the FCC and SPEAG of any critical issues.

Change Note: Revised on June 26 to clarify the applicability of PMR and Bundled probe calibrations according to the requirements of KDB 865664.





Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: ctcl@chinatll.com <http://www.chinatll.com>



Client : Tejet

Certificate No: Z15-97067

## CALIBRATION CERTIFICATE

Object	DAE4 - SN: 1327					
Calibration Procedure(s)	FD-Z11-2-002-01 Calibration Procedure for the Data Acquisition Electronics (DAEx)					
Calibration date:	April 21, 2015					
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.						
All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.						
Calibration Equipment used (M&TE critical for calibration)						
Primary Standards	ID #	Cali Date(Calibrated by, Certificate No.)	Scheduled Calibration			
Process Calibrator 753	1971018	01-July-14 (CTTL, No.J14X02147)	July-15			
Calibrated by:	Name: Yu Zongying	Function: SAR Test Engineer				
Reviewed by:	Name: Qi Dianyuan	Function: SAR Project Leader				
Approved by:	Name: Lu Bingsong	Function: Deputy Director of the laboratory				
Issued: April 22, 2015						
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.						



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) <http://www.chinattl.cn>

**Glossary:**

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

**Methods Applied and Interpretation of Parameters:**

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: ctli@chinatll.com Http://www.chinatll.com

#### DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 $\mu$ V, full range = -100...+300 mV


Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.882 $\pm$ 0.15% (k=2)	404.733 $\pm$ 0.15% (k=2)	404.933 $\pm$ 0.15% (k=2)
Low Range	3.99271 $\pm$ 0.7% (k=2)	3.99137 $\pm$ 0.7% (k=2)	3.99735 $\pm$ 0.7% (k=2)

#### Connector Angle


Connector Angle to be used in DASY system	188.5° $\pm$ 1°
---	-----------------



**Acceptable Conditions for SAR Measurements Using Probes and Dipoles  
Calibrated under the SPEAG-TMC Dual-Logo Calibration Program to  
Support FCC Equipment Certification**

The acceptable conditions for SAR measurements using probes, dipoles and DAEs calibrated by TMC (*Telecommunication Metrology Center of MITT in Beijing, China*), under the Dual-Logo Calibration Certificate program and quality assurance (QA) protocols established between SPEAG (*Schmid & Partner Engineering AG, Switzerland*) and TMC, to support FCC (*U.S. Federal Communications Commission*) equipment certification are defined and described in the following.

- 1) The agreement established between SPEAG and TMC is only applicable to calibration services performed by TMC where its clients (companies and divisions of such companies) are headquartered in the Greater China Region, including Taiwan and Hong Kong. This agreement is subject to renewal at the end of each calendar year between SPEAG and TMC. TMC shall inform the FCC of any changes or early termination to the agreement.
- 2) Only a subset of the calibration services specified in the SPEAG-TMC agreement, while it remains valid, are applicable to SAR measurements performed using such equipment for supporting FCC equipment certification. These are identified in the following.
  - a) Calibration of dosimetric (SAR) probes EX3DVx, ET3DVx and ES3DVx.
    - i) Free-space E-field and H-field probes, including those used for HAC (hearing aid compatibility) evaluation, temperature probes, other probes or equipment not identified in this document, when calibrated by TMC, are excluded and cannot be used for measurements to support FCC equipment certification.
    - ii) Signal specific and bundled probe calibrations based on PMR (probe modulation response) characteristics are handled according to the requirements of KDB 865664; that is, "Until standardized procedures are available to make such determination, the applicability of a signal specific probe calibration for testing specific wireless modes and technologies is determined on a case-by-case basis through KDB inquiries, including SAR system verification requirements."
  - b) Calibration of SAR system validation dipoles, excluding HAC dipoles.
  - c) Calibration of data acquisition electronics DAE3Vx, DAE4Vx and DAEasyVx.
  - d) For FCC equipment certification purposes, the frequency range of SAR probe and dipole calibrations is limited to 700 MHz - 6 GHz and provided it is supported by the equipment identified in the TMC QA protocol (a separate attachment to this document).
  - e) The identical system and equipment setup, measurement configurations, hardware, evaluation algorithms, calibration and QA protocols, including the format of calibration certificates and reports used by SPEAG shall be applied by TMC.
  - f) The calibrated items are only applicable to SPEAG DASY 4 and DASY 5 or higher version systems.



- 3) The SPEAG-TMC agreement includes specific protocols identified in the following to ensure the quality of calibration services provided by TMC under this SPEAG-TMC Dual-Logo calibration agreement are equivalent to the calibration services provided by SPEAG. TMC shall, upon request, provide copies of documentation to the FCC to substantiate program implementation.
  - a) The Inter-laboratory Calibration Evaluation (ILCE) stated in the TMC QA protocol shall be performed between SPEAG and TMC at least once every 12 months. The ILCE acceptance criteria defined in the TMC QA protocol shall be satisfied for the TMC, SPEAG and FCC agreements to remain valid.
  - b) Check of Calibration Certificate (CCC) shall be performed by SPEAG for all calibrations performed by TMC. Written confirmation from SPEAG is required for TMC to issue calibration certificates under the SPEAG-TMC Dual-Logo calibration program. Quarterly reports for all calibrations performed by TMC under the program are also issued by SPEAG.
  - c) The calibration equipment and measurement system used by TMC shall be verified before each calibration service according to the specific reference SAR probes, dipoles, and DAE calibrated by SPEAG. The results shall be reproducible and within the defined acceptance criteria specified in the TMC QA protocol before each actual calibration can commence. TMC shall maintain records of the measurement and calibration system verification results for all calibrations.
  - d) Quality Check of Calibration (QCC) certificates shall be performed by SPEAG at least once every 12 months. SPEAG shall visit TMC facilities to verify the laboratory, equipment, applied procedures and plausibility of randomly selected certificates.
- 4) A copy of this document, to be updated annually, shall be provided to TMC clients that accept calibration services according to the SPEAG-TMC Dual-Logo calibration program, which should be presented to a TCB (*Telecommunication Certification Body*), to facilitate FCC equipment approval.
- 5) TMC shall address any questions raised by its clients or TCBs relating to the SPEAG-TMC Dual-Logo calibration program and inform the FCC and SPEAG of any critical issues.

Change Note: Revised on June 26 to clarify the applicability of PMR and Bundled probe calibrations according to the requirements of KDB 865664.

## Annex B.3 D835V2 Calibration Certificate



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cctl@chinatcl.com Http://www.chinatcl.com



CALIBRATION  
No. L0570

Client

Tejet

Certificate No: Z15-97109

**CALIBRATION CERTIFICATE**

Object D835V2 - SN: 4d100

Calibration Procedure(s) FD-Z11-2-003-01  
Calibration Procedures for dipole validation kits


Calibration date: September 24, 2015

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.


Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Power sensor NRP-Z91	101547	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Reference Probe EX3DV4	SN 3848	24-Sep-14(SPEAG No EX3-3848_Sep14)	Sep-15
DAE4	SN 910	16-Jun-15(SPEAG No DAE4-910_Jun15)	Jun-16
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	02-Feb-15 (CTTL, No.J15X00729)	Feb-16
Network Analyzer E5071C	MY46110673	03-Feb-15 (CTTL, No.J15X00728)	Feb-16

Calibrated by:	Name	Function	Signature
	Zhao Jing	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	

Issued: September 30, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Add: No.51 Xuryuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORMx,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- c) KDB865684, SAR Measurement Requirements for 100 MHz to 6 GHz


**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-3079 Fax: +86-10-62304633-2504  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)

#### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.8.8.1222
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

#### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.0 ± 6 %	0.89 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	—	—

#### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.38 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	9.57 mW /g ± 20.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.54 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	6.23 mW /g ± 20.4 % (k=2)

#### Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	56.0 ± 6 %	0.98 mho/m ± 6 %
Body TSL temperature change during test	<1.0 °C	—	—

#### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.41 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	9.59 mW /g ± 20.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	1.59 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	6.33 mW /g ± 20.4 % (k=2)



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: ctt@chinattl.com Http://www.chinattl.cn

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.0Ω- 3.03jΩ
Return Loss	- 30.4dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.6Ω- 2.06jΩ
Return Loss	- 29.7dB

### General Antenna Parameters and Design


Electrical Delay (one direction)	1.444 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: ctli@chinattl.com Http://www.chinattl.cn

**DASY5 Validation Report for Head TSL**

Date: 09.18.2015

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d100**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.886$  S/m;  $\epsilon_r = 41.95$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3846; ConvF(9.18, 9.18, 9.18); Calibrated: 9/24/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/16/2015
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.16 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.51 W/kg

SAR(1 g) = 2.36 W/kg; SAR(10 g) = 1.54 W/kg

Maximum value of SAR (measured) = 2.99 W/kg

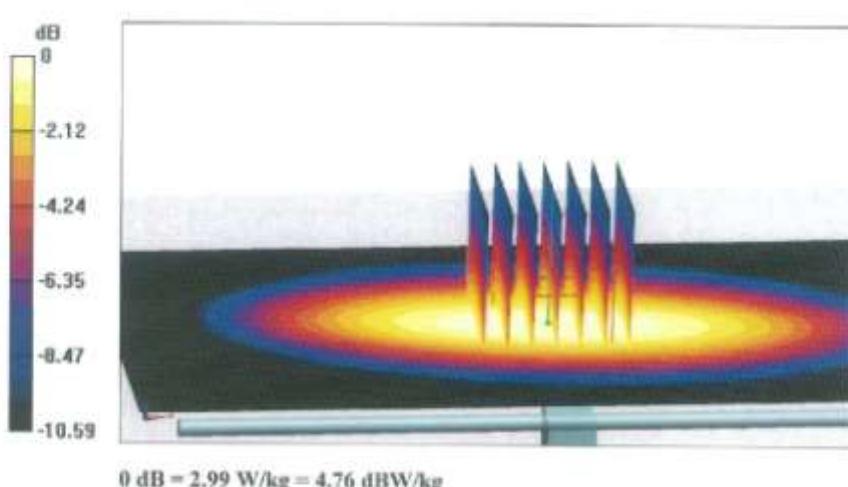


0 dB = 2.99 W/kg = 4.76 dBW/kg




Add: No.51 Xucyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [cti@chinattl.com](mailto:cti@chinattl.com) [Http://www.chinattl.com](http://www.chinattl.com)

### Impedance Measurement Plot for Head TSL

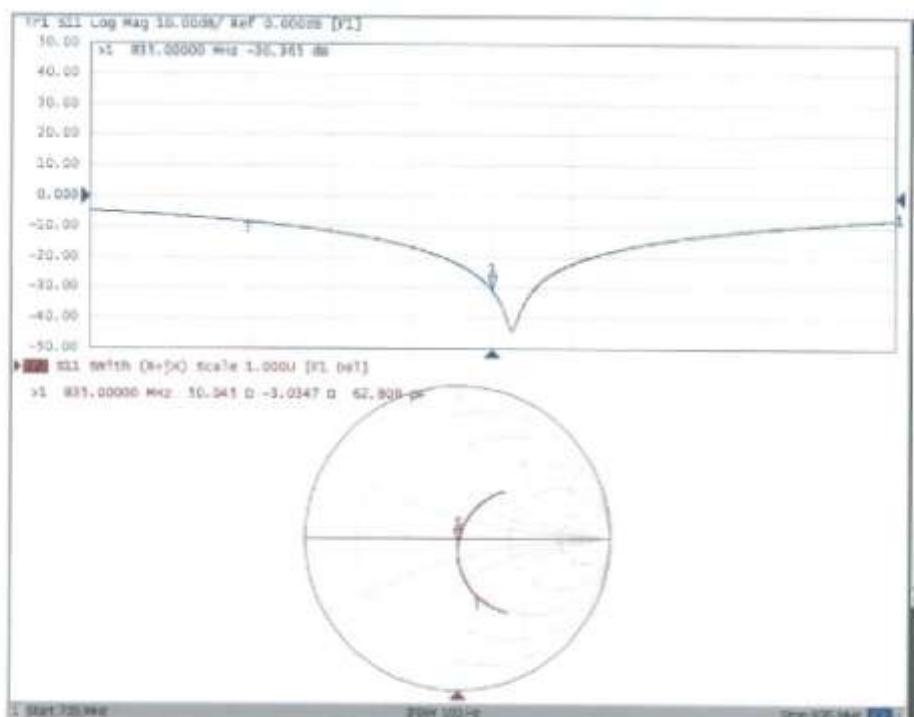

Certificate No: Z15-97109

Page 6 of 8



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.co

**DASY5 Validation Report for Body TSL**

Date: 09.18.2015

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d100**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.981$  S/m;  $\epsilon_r = 55.99$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3846; ConvF(9.09,9.09, 9.09); Calibrated: 9/24/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/16/2015
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.44 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.60 W/kg


SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 3.06 W/kg

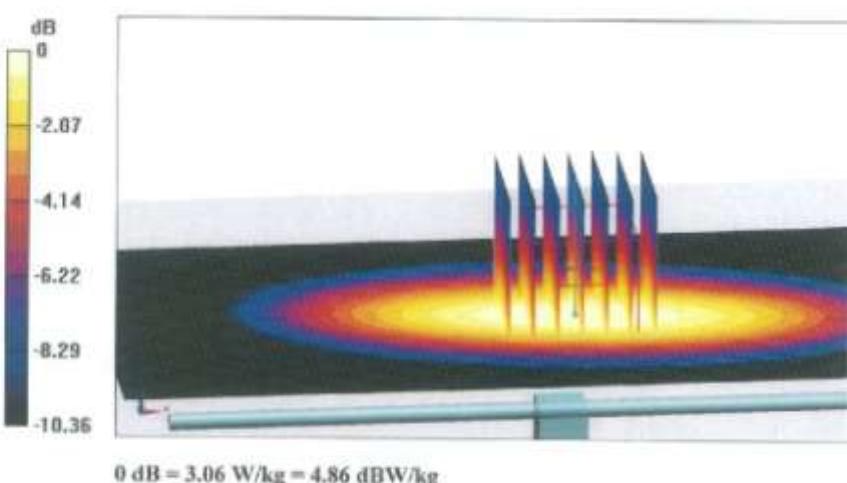


Certificate No: Z15-97109


Page 7 of 8



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: ctli@chinattl.com Http://www.chinattl.cn

#### Impedance Measurement Plot for Body TSL

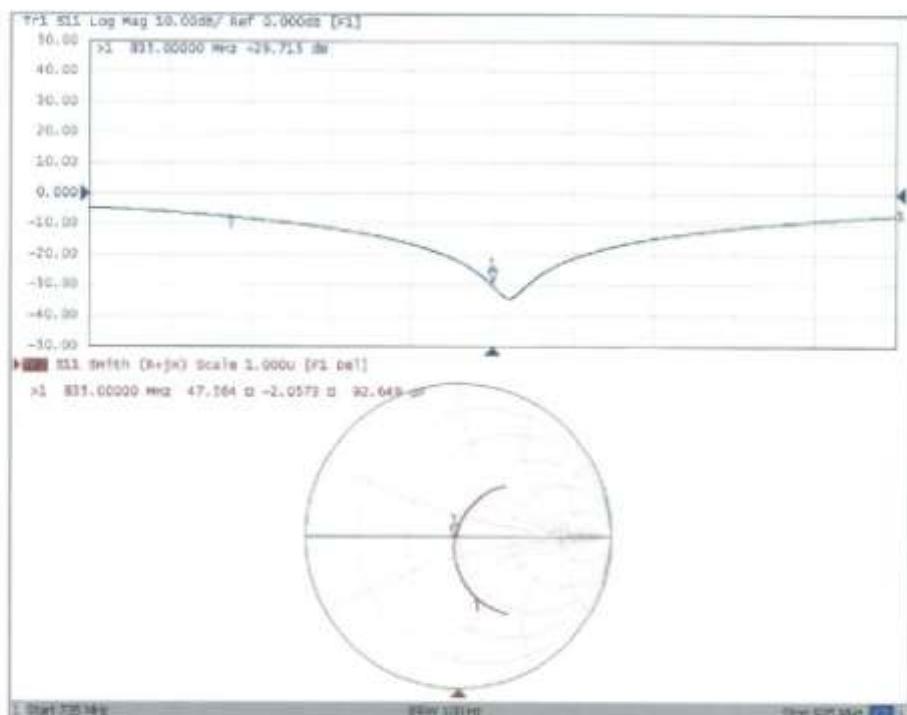




**Acceptable Conditions for SAR Measurements Using Probes and Dipoles  
Calibrated under the SPEAG-TMC Dual-Logo Calibration Program to  
Support FCC Equipment Certification**

The acceptable conditions for SAR measurements using probes, dipoles and DAEs calibrated by TMC (*Telecommunication Metrology Center of MITT in Beijing, China*), under the Dual-Logo Calibration Certificate program and quality assurance (QA) protocols established between SPEAG (*Schmid & Partner Engineering AG, Switzerland*) and TMC, to support FCC (*U.S. Federal Communications Commission*) equipment certification are defined and described in the following.

- 1) The agreement established between SPEAG and TMC is only applicable to calibration services performed by TMC where its clients (companies and divisions of such companies) are headquartered in the Greater China Region, including Taiwan and Hong Kong. This agreement is subject to renewal at the end of each calendar year between SPEAG and TMC. TMC shall inform the FCC of any changes or early termination to the agreement.
- 2) Only a subset of the calibration services specified in the SPEAG-TMC agreement, while it remains valid, are applicable to SAR measurements performed using such equipment for supporting FCC equipment certification. These are identified in the following.
  - a) Calibration of dosimetric (SAR) probes EX3DVx, ET3DVx and ES3DVx.
    - i) Free-space E-field and H-field probes, including those used for HAC (hearing aid compatibility) evaluation, temperature probes, other probes or equipment not identified in this document, when calibrated by TMC, are excluded and cannot be used for measurements to support FCC equipment certification.
    - ii) Signal specific and bundled probe calibrations based on PMR (probe modulation response) characteristics are handled according to the requirements of KDB 865664; that is, "Until standardized procedures are available to make such determination, the applicability of a signal specific probe calibration for testing specific wireless modes and technologies is determined on a case-by-case basis through KDB inquiries, including SAR system verification requirements."
  - b) Calibration of SAR system validation dipoles, excluding HAC dipoles.
  - c) Calibration of data acquisition electronics DAE3Vx, DAE4Vx and DAEasyVx.
  - d) For FCC equipment certification purposes, the frequency range of SAR probe and dipole calibrations is limited to 700 MHz - 6 GHz and provided it is supported by the equipment identified in the TMC QA protocol (a separate attachment to this document).
  - e) The identical system and equipment setup, measurement configurations, hardware, evaluation algorithms, calibration and QA protocols, including the format of calibration certificates and reports used by SPEAG shall be applied by TMC.
  - f) The calibrated items are only applicable to SPEAG DASY 4 and DASY 5 or higher version systems.



- 3) The SPEAG-TMC agreement includes specific protocols identified in the following to ensure the quality of calibration services provided by TMC under this SPEAG-TMC Dual-Logo calibration agreement are equivalent to the calibration services provided by SPEAG. TMC shall, upon request, provide copies of documentation to the FCC to substantiate program implementation.
  - a) The Inter-laboratory Calibration Evaluation (ILCE) stated in the TMC QA protocol shall be performed between SPEAG and TMC at least once every 12 months. The ILCE acceptance criteria defined in the TMC QA protocol shall be satisfied for the TMC, SPEAG and FCC agreements to remain valid.
  - b) Check of Calibration Certificate (CCC) shall be performed by SPEAG for all calibrations performed by TMC. Written confirmation from SPEAG is required for TMC to issue calibration certificates under the SPEAG-TMC Dual-Logo calibration program. Quarterly reports for all calibrations performed by TMC under the program are also issued by SPEAG.
  - c) The calibration equipment and measurement system used by TMC shall be verified before each calibration service according to the specific reference SAR probes, dipoles, and DAE calibrated by SPEAG. The results shall be reproducible and within the defined acceptance criteria specified in the TMC QA protocol before each actual calibration can commence. TMC shall maintain records of the measurement and calibration system verification results for all calibrations.
  - d) Quality Check of Calibration (QCC) certificates shall be performed by SPEAG at least once every 12 months. SPEAG shall visit TMC facilities to verify the laboratory, equipment, applied procedures and plausibility of randomly selected certificates.
- 4) A copy of this document, to be updated annually, shall be provided to TMC clients that accept calibration services according to the SPEAG-TMC Dual-Logo calibration program, which should be presented to a TCB (*Telecommunication Certification Body*), to facilitate FCC equipment approval.
- 5) TMC shall address any questions raised by its clients or TCBs relating to the SPEAG-TMC Dual-Logo calibration program and inform the FCC and SPEAG of any critical issues.

Change Note: Revised on June 26 to clarify the applicability of PMR and Bundled probe calibrations according to the requirements of KDB 865664.

## Annex B.4 D1900V2 Calibration Certificate



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.com](http://www.chinattl.com)



CALIBRATION  
No. L0570

Client

Tejet

Certificate No: Z15-97069

**CALIBRATION CERTIFICATE**

Object D1900V2 - SN: 5d155

Calibration Procedure(s) FD-Z11-2-003-01  
Calibration Procedures for dipole validation kits


Calibration date: April 21, 2015

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	01-Jul-14 (CTTL, No.J14X02146)	Jun-15
Power sensor NRP-Z91	101547	01-Jul-14 (CTTL, No.J14X02146)	Jun-15
Reference Probe EX3DV4	SN 3846	24-Sep-14(SPEAG No EX3-3846_Sep14)	Sep-15
DAE4	SN 1331	20-Jan-15(CTTL-SPEAG No. Z15-97011)	Jan-16
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	02-Feb-15(CTTL, No.J15X00729)	Feb-16
Network Analyzer E5071C	MY48110873	03-Feb-15(CTTL, No.J15X00728)	Feb-16

Calibrated by:	Name	Function	Signature
	Zhao Jing	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	

Issued: April 24, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [ttl@chinatimes.com](mailto:ttl@chinatimes.com) [Http://www.chinatimes.com](http://www.chinatimes.com)

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORMx,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- c) KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- **Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- **Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- **Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- **Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- **SAR measured:** SAR measured at the stated antenna input power.
- **SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- **SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [cttl@chinatl.com](mailto:cttl@chinatl.com) Http://www.chinatl.com

#### Measurement Conditions

DASY system configuration, as far as not given on page 1

DASY Version	DASY52	52.8.8.1222
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

#### Head TSL parameters

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.2 ± 6 %	1.37 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	—	—

#### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.70 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	39.4 mW /g ± 20.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	0.04 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	20.3 mW /g ± 20.4 % (k=2)

#### Body TSL parameters

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.8 ± 6 %	1.55 mho/m ± 6 %
Body TSL temperature change during test	<1.0 °C	—	—

#### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.1 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	39.6 mW /g ± 20.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	5.25 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	20.9 mW /g ± 20.4 % (k=2)



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China.  
Tel: +86-10-62364633-2079 Fax: +86-10-62364633-2304  
E-mail: cn@chinattl.com Http://www.chinattl.com

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.3Ω + 5.4jΩ
Return Loss	-24.2dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.2Ω + 7.2jΩ
Return Loss	-22.7dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.126 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China.  
Tel: +86-10-62364633-2979 Fax: +86-10-62304633-2504  
E-mail: enli@chinatrl.com Http://www.chinatrl.com

**DASY5 Validation Report for Head TSL**

Date: 04.21.2015

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d155**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.37$  S/m;  $\epsilon_r = 40.22$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3846; ConvF(7.26, 7.26, 7.26); Calibrated: 9/24/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 2015-01-20
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:**


dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.8V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 17.7W/kg

SAR(1 g) = 9.7 W/kg; SAR(10 g) = 5.04 W/kg


Maximum value of SAR (measured) = 14.0 W/kg

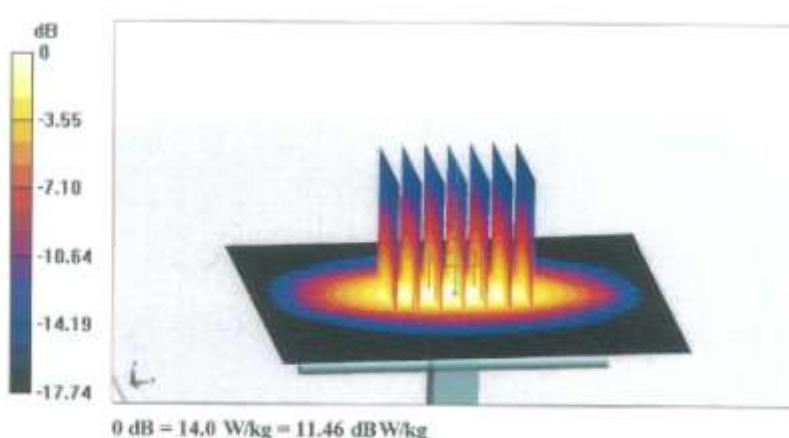



Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2579 Fax: +86-10-62304633-2504  
E-mail: [ttl@chinatll.com](mailto:ttl@chinatll.com) <http://www.chinatll.com>

#### Impedance Measurement Plot for Head TSL

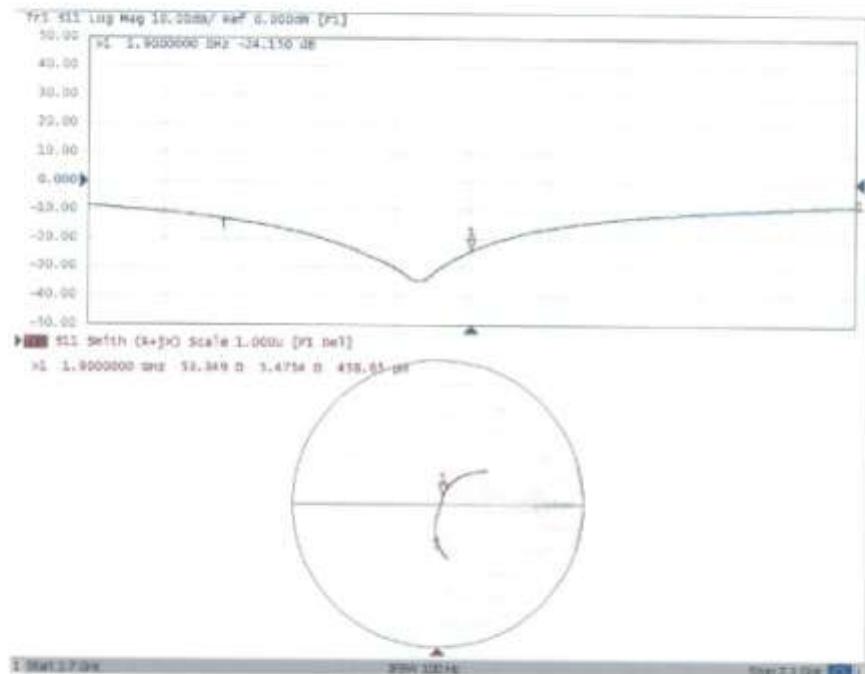

Certificate No: Z15-97069

Page 6 of 8



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: ttl@chinattl.com Http://www.chinattl.com

**DASY5 Validation Report for Body TSL.**

Date: 04.21.2015

Test Laboratory: C TTL, Beijing, China

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d155**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $\epsilon = 1.553 \text{ S/m}$ ;  $\epsilon_r = 51.76$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3846; ConvF(7.15, 7.15, 7.15); Calibrated: 9/24/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 2015-01-20
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


**System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:  
dx=5mm, dy=5mm, dz=5mm**

Reference Value = 98.03 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.28 W/kg

Maximum value of SAR (measured) = 14.3 W/kg

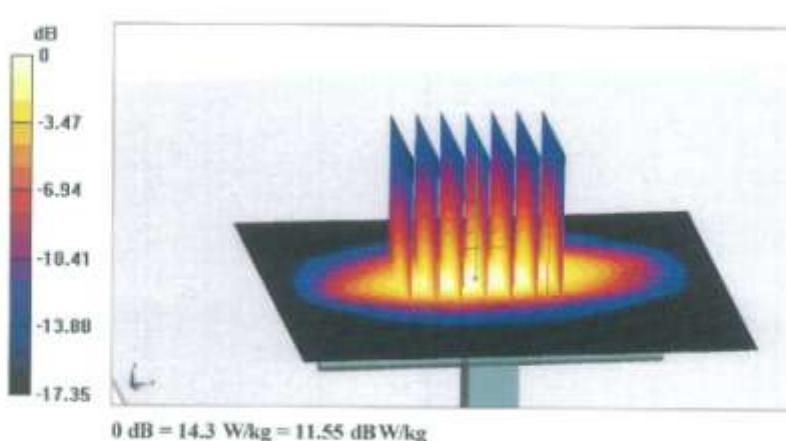





In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Addr: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) <http://www.chinattl.com>

#### Impedance Measurement Plot for Body TSL

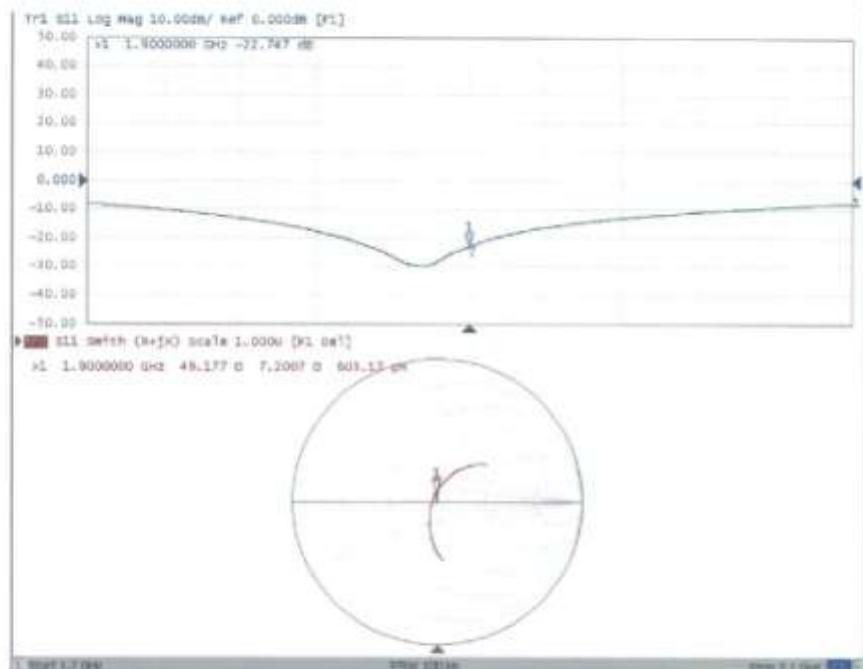




**Acceptable Conditions for SAR Measurements Using Probes and Dipoles  
Calibrated under the SPEAG-TMC Dual-Logo Calibration Program to  
Support FCC Equipment Certification**

The acceptable conditions for SAR measurements using probes, dipoles and DAEs calibrated by TMC (*Telecommunication Metrology Center of MITT in Beijing, China*), under the Dual-Logo Calibration Certificate program and quality assurance (QA) protocols established between SPEAG (*Schmid & Partner Engineering AG, Switzerland*) and TMC, to support FCC (*U.S. Federal Communications Commission*) equipment certification are defined and described in the following.

- 1) The agreement established between SPEAG and TMC is only applicable to calibration services performed by TMC where its clients (companies and divisions of such companies) are headquartered in the Greater China Region, including Taiwan and Hong Kong. This agreement is subject to renewal at the end of each calendar year between SPEAG and TMC. TMC shall inform the FCC of any changes or early termination to the agreement.
- 2) Only a subset of the calibration services specified in the SPEAG-TMC agreement, while it remains valid, are applicable to SAR measurements performed using such equipment for supporting FCC equipment certification. These are identified in the following.
  - a) Calibration of dosimetric (SAR) probes EX3DVx, ET3DVx and ES3DVx.
    - i) Free-space E-field and H-field probes, including those used for HAC (hearing aid compatibility) evaluation, temperature probes, other probes or equipment not identified in this document, when calibrated by TMC, are excluded and cannot be used for measurements to support FCC equipment certification.
    - ii) Signal specific and bundled probe calibrations based on PMR (probe modulation response) characteristics are handled according to the requirements of KDB 865664; that is, "Until standardized procedures are available to make such determination, the applicability of a signal specific probe calibration for testing specific wireless modes and technologies is determined on a case-by-case basis through KDB inquiries, including SAR system verification requirements."
  - b) Calibration of SAR system validation dipoles, excluding HAC dipoles.
  - c) Calibration of data acquisition electronics DAE3Vx, DAE4Vx and DAEasyVx.
  - d) For FCC equipment certification purposes, the frequency range of SAR probe and dipole calibrations is limited to 700 MHz - 6 GHz and provided it is supported by the equipment identified in the TMC QA protocol (a separate attachment to this document).
  - e) The identical system and equipment setup, measurement configurations, hardware, evaluation algorithms, calibration and QA protocols, including the format of calibration certificates and reports used by SPEAG shall be applied by TMC.
  - f) The calibrated items are only applicable to SPEAG DASY 4 and DASY 5 or higher version systems.



- 3) The SPEAG-TMC agreement includes specific protocols identified in the following to ensure the quality of calibration services provided by TMC under this SPEAG-TMC Dual-Logo calibration agreement are equivalent to the calibration services provided by SPEAG. TMC shall, upon request, provide copies of documentation to the FCC to substantiate program implementation.
  - a) The Inter-laboratory Calibration Evaluation (ILCE) stated in the TMC QA protocol shall be performed between SPEAG and TMC at least once every 12 months. The ILCE acceptance criteria defined in the TMC QA protocol shall be satisfied for the TMC, SPEAG and FCC agreements to remain valid.
  - b) Check of Calibration Certificate (CCC) shall be performed by SPEAG for all calibrations performed by TMC. Written confirmation from SPEAG is required for TMC to issue calibration certificates under the SPEAG-TMC Dual-Logo calibration program. Quarterly reports for all calibrations performed by TMC under the program are also issued by SPEAG.
  - c) The calibration equipment and measurement system used by TMC shall be verified before each calibration service according to the specific reference SAR probes, dipoles, and DAE calibrated by SPEAG. The results shall be reproducible and within the defined acceptance criteria specified in the TMC QA protocol before each actual calibration can commence. TMC shall maintain records of the measurement and calibration system verification results for all calibrations.
  - d) Quality Check of Calibration (QCC) certificates shall be performed by SPEAG at least once every 12 months. SPEAG shall visit TMC facilities to verify the laboratory, equipment, applied procedures and plausibility of randomly selected certificates.
- 4) A copy of this document, to be updated annually, shall be provided to TMC clients that accept calibration services according to the SPEAG-TMC Dual-Logo calibration program, which should be presented to a TCB (*Telecommunication Certification Body*), to facilitate FCC equipment approval.
- 5) TMC shall address any questions raised by its clients or TCBs relating to the SPEAG-TMC Dual-Logo calibration program and inform the FCC and SPEAG of any critical issues.

Change Note: Revised on June 26 to clarify the applicability of PMR and Bundled probe calibrations according to the requirements of KDB 865664.



In Collaboration with  
**S p e a g**  
CALIBRATION LABORATORY



Address: No.51 Xizhimen South Street, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2204  
E-mail: cnig@chinatl.com <http://www.chinatl.com>

Client

Tejet

Certificate No: Z15-97113

## CALIBRATION CERTIFICATE

Object D2450V2 - SN: 845

Calibration Procedure(s) FD-Z11-2-003-01  
Calibration Procedures for dipole validation kits


Calibration date: September 14, 2015

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Power sensor NRP-Z91	101547	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Reference Probe EX3DV4	SN 3846	24-Sep-14(SPEAG, No.EX3-3846_Sep14)	Sep-15
DAE4	SN 910	16-Jun-15(SPEAG, No.DAE4-910_Jun15)	Jun-16
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY48071430	02-Feb-15 (CTTL, No.J15X00728)	Feb-16
Network Analyzer E5071C	MY46110673	03-Feb-15 (CTTL, No.J15X00728)	Feb-16

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	

Issued: September 23, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z15-97113

Page 1 of 8



Add: No.31 Xiangyun Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2204  
E-mail: [cn@chinatei.com](mailto:cn@chinatei.com) <http://www.chinatei.cn>

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORMx,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- c) KDB885664, SAR Measurement Requirements for 100 MHz to 6 GHz

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: ctli@chinatl.com Http://www.chinatl.com

#### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.8.8.1222
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

#### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.0 ± 6 %	1.83 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	—	—

#### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.6 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	53.9 mW / g ± 20.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	6.31 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	25.1 mW / g ± 20.4 % (k=2)

#### Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.9 ± 6 %	1.94 mho/m ± 6 %
Body TSL temperature change during test	<1.0 °C	—	—

#### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.0 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	51.9 mW / g ± 20.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	6.06 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	24.2 mW / g ± 20.4 % (k=2)



Add: No.31 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2204  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) <http://www.chinattl.com>

#### Appendix

##### Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.8Ω+ 4.8ΩjΩ
Return Loss	-26.1dB

##### Antenna Parameters with Body TSL

Impedance, transformed to feed point	51.1Ω+ 7.32jΩ
Return Loss	-22.7dB

##### General Antenna Parameters and Design


Electrical Delay (one direction)	1.284 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

##### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.31 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2208  
E-mail: ctt@chinattl.com http://www.chinattl.com

**DASY5 Validation Report for Head TSL**

Date: 09.14.2015

Test Laboratory: CTTI, Beijing, China

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 845**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.831$  S/m;  $\epsilon_r = 39.04$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3846; ConvF(6.56, 6.56, 6.56); Calibrated: 9/24/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/16/2015
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 109.5 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 27.5 W/kg

SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.31 W/kg

Maximum value of SAR (measured) = 20.8 W/kg

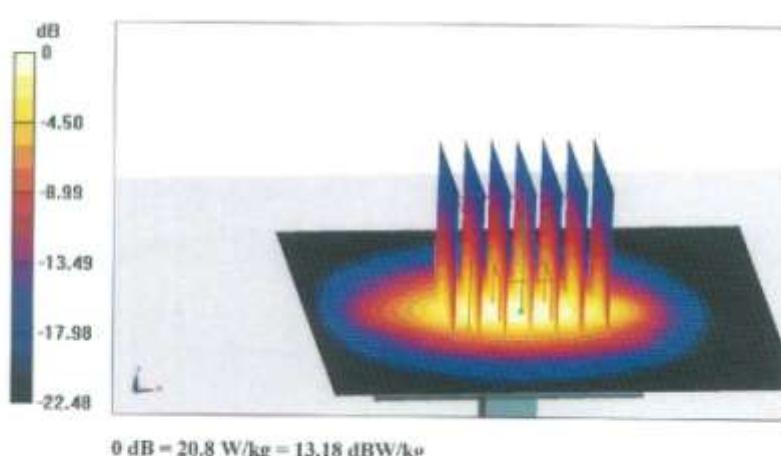


Certificate No: Z15-97113

Page 5 of 8



Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [ctti@chinattl.com](mailto:ctti@chinattl.com) <http://www.chinattl.com>

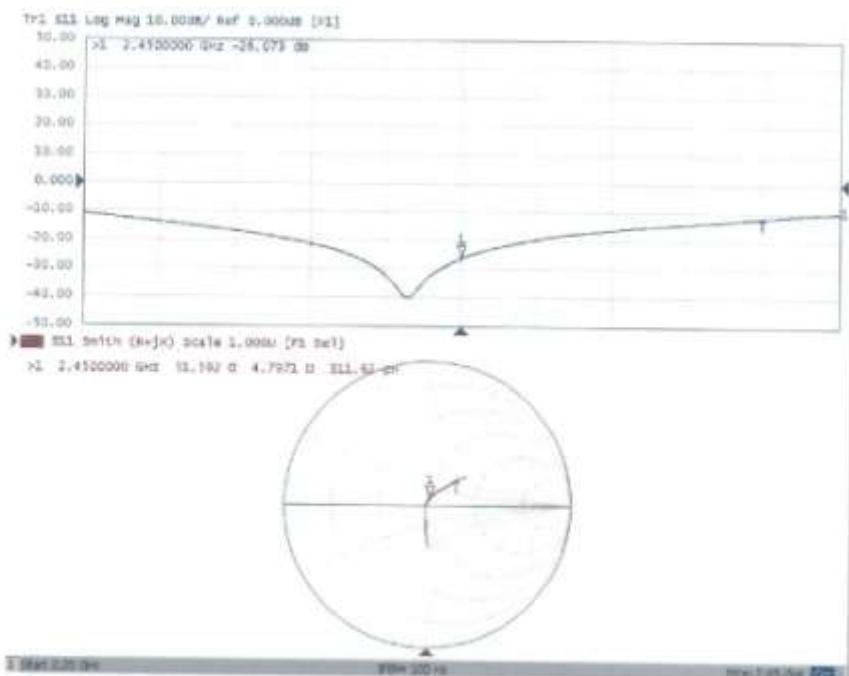**Impedance Measurement Plot for Head TSL**

Certificate No: Z15-97113

Page 6 of 8



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: ctll@chinattl.com Http://www.chinattl.com

**DASY5 Validation Report for Body TSL**

Date: 09.14.2015

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 845**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $\epsilon = 2450$  MHz;  $\sigma = 1.944$  S/m;  $\epsilon_r = 51.85$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3846; ConvF(6.9, 6.9, 6.9); Calibrated: 9/24/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/16/2015
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm**

Reference Value = 94.81 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 27.0 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 6.06 W/kg

Maximum value of SAR (measured) = 19.7 W/kg

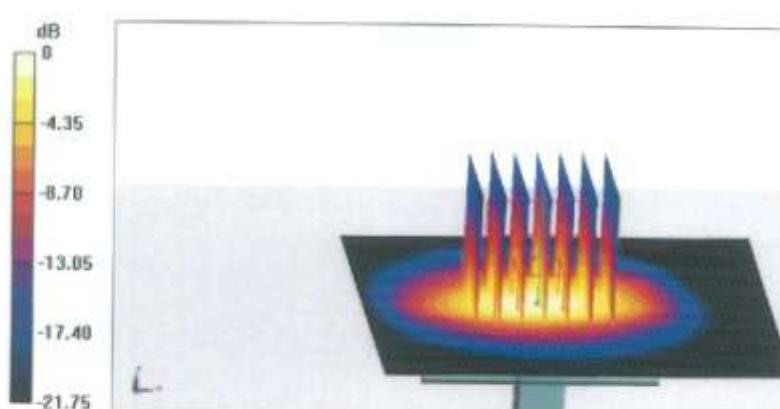

0 dB = 19.7 W/kg = 12.94 dBW/kg


Certificate No: Z15-97113


Page 7 of 8



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cni@chinatll.com Http://www.chinatll.com

#### Impedance Measurement Plot for Body TSL

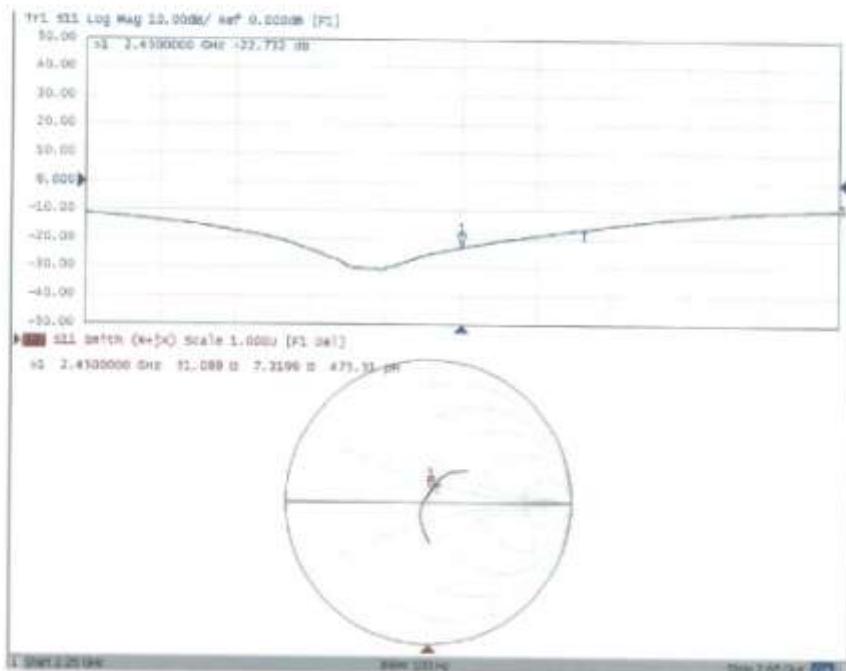




**Acceptable Conditions for SAR Measurements Using Probes and Dipoles  
Calibrated under the SPEAG-TMC Dual-Logo Calibration Program to  
Support FCC Equipment Certification**

The acceptable conditions for SAR measurements using probes, dipoles and DAEs calibrated by TMC (*Telecommunication Metrology Center of MITT in Beijing, China*), under the Dual-Logo Calibration Certificate program and quality assurance (QA) protocols established between SPEAG (*Schmid & Partner Engineering AG, Switzerland*) and TMC, to support FCC (*U.S. Federal Communications Commission*) equipment certification are defined and described in the following.

- 1) The agreement established between SPEAG and TMC is only applicable to calibration services performed by TMC where its clients (companies and divisions of such companies) are headquartered in the Greater China Region, including Taiwan and Hong Kong. This agreement is subject to renewal at the end of each calendar year between SPEAG and TMC. TMC shall inform the FCC of any changes or early termination to the agreement.
- 2) Only a subset of the calibration services specified in the SPEAG-TMC agreement, while it remains valid, are applicable to SAR measurements performed using such equipment for supporting FCC equipment certification. These are identified in the following.
  - a) Calibration of dosimetric (SAR) probes EX3DVx, ET3DVx and ES3DVx.
    - i) Free-space E-field and H-field probes, including those used for HAC (hearing aid compatibility) evaluation, temperature probes, other probes or equipment not identified in this document, when calibrated by TMC, are excluded and cannot be used for measurements to support FCC equipment certification.
    - ii) Signal specific and bundled probe calibrations based on PMR (probe modulation response) characteristics are handled according to the requirements of KDB 865664; that is, "Until standardized procedures are available to make such determination, the applicability of a signal specific probe calibration for testing specific wireless modes and technologies is determined on a case-by-case basis through KDB inquiries, including SAR system verification requirements."
  - b) Calibration of SAR system validation dipoles, excluding HAC dipoles.
  - c) Calibration of data acquisition electronics DAE3Vx, DAE4Vx and DAEasyVx.
  - d) For FCC equipment certification purposes, the frequency range of SAR probe and dipole calibrations is limited to 700 MHz - 6 GHz and provided it is supported by the equipment identified in the TMC QA protocol (a separate attachment to this document).
  - e) The identical system and equipment setup, measurement configurations, hardware, evaluation algorithms, calibration and QA protocols, including the format of calibration certificates and reports used by SPEAG shall be applied by TMC.
  - f) The calibrated items are only applicable to SPEAG DASY 4 and DASY 5 or higher version systems.



- 3) The SPEAG-TMC agreement includes specific protocols identified in the following to ensure the quality of calibration services provided by TMC under this SPEAG-TMC Dual-Logo calibration agreement are equivalent to the calibration services provided by SPEAG. TMC shall, upon request, provide copies of documentation to the FCC to substantiate program implementation.
  - a) The Inter-laboratory Calibration Evaluation (ILCE) stated in the TMC QA protocol shall be performed between SPEAG and TMC at least once every 12 months. The ILCE acceptance criteria defined in the TMC QA protocol shall be satisfied for the TMC, SPEAG and FCC agreements to remain valid.
  - b) Check of Calibration Certificate (CCC) shall be performed by SPEAG for all calibrations performed by TMC. Written confirmation from SPEAG is required for TMC to issue calibration certificates under the SPEAG-TMC Dual-Logo calibration program. Quarterly reports for all calibrations performed by TMC under the program are also issued by SPEAG.
  - c) The calibration equipment and measurement system used by TMC shall be verified before each calibration service according to the specific reference SAR probes, dipoles, and DAE calibrated by SPEAG. The results shall be reproducible and within the defined acceptance criteria specified in the TMC QA protocol before each actual calibration can commence. TMC shall maintain records of the measurement and calibration system verification results for all calibrations.
  - d) Quality Check of Calibration (QCC) certificates shall be performed by SPEAG at least once every 12 months. SPEAG shall visit TMC facilities to verify the laboratory, equipment, applied procedures and plausibility of randomly selected certificates.
- 4) A copy of this document, to be updated annually, shall be provided to TMC clients that accept calibration services according to the SPEAG-TMC Dual-Logo calibration program, which should be presented to a TCB (*Telecommunication Certification Body*), to facilitate FCC equipment approval.
- 5) TMC shall address any questions raised by its clients or TCBs relating to the SPEAG-TMC Dual-Logo calibration program and inform the FCC and SPEAG of any critical issues.

Change Note: Revised on June 26 to clarify the applicability of PMR and Bundled probe calibrations according to the requirements of KDB 865664.

## ANNEX C: Test Layout



Picture C.1: Specific Absorption Rate Test Layout



Picture C.2: Liquid depth in the flat Phantom (835MHz) (15.2cm deep)



Picture C.3: Liquid depth in the flat Phantom (1900 MHz) (15.1cm deep)



Picture C.4: Liquid depth in the flat Phantom (2450 MHz) (15.2cm deep)

-----END OF REPORT-----