

Test Report of FCC CFR 47 Part 15 Subpart C

On Behalf of

Graupner GmbH & Co. KG.

FCC ID: ZKZ-MC-20

Product Description: Computer System Graupner/SJ HoTT

Model No.: MC-20

Supplementary Model: N/A

Prepared for: Graupner GmbH & Co. KG.

Henriettenstr. 94-96 D-73230 Kirchheim/Teck GERMANY

Prepared by: Bontek Compliance Testing Laboratory Ltd

1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East

Road, Nanshan, Shenzhen, China

Tel: 86-755-86337020

Fax: 86-755-86337028

Report No.: BCT12GR214E-1

Issue Date: August 14, 2012

Test Date: July 20~ August 13, 2012

Test by:

Reviewed By:



Vincent Jiang



Kevin Chi

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 RELATED SUBMITTAL(S) / GRANT (S) AND TEST METHODOLOGY.....	4
1.3 TEST FACILITY.....	5
2. SYSTEM TEST CONFIGURATION.....	6
2.1 EUT CONFIGURATION.....	6
2.2 EUT EXERCISE	6
2.3 GENERAL TEST PROCEDURES.....	6
2.4 MEASUREMENT UNCERTAINTY	6
2.5 TEST EQUIPMENT LIST AND DETAILS	7
3. SUMMARY OF TEST RESULTS.....	9
4. TEST OF AC POWER LINE CONDUCTED EMISSION	10
4.1 APPLICABLE STANDARD.....	10
4.2 TEST SETUP DIAGRAM.....	10
4.3 TEST RESULT	10
5. TEST OF HOPPING CHANNEL BANDWIDTH.....	15
5.1 APPLICABLE STANDARD.....	15
5.2 EUT SETUP.....	15
5.3 TEST EQUIPMENT LIST AND DETAILS	15
5.4 TEST PROCEDURE	15
5.5 TEST RESULT	15
6. TEST OF HOPPING CHANNEL SEPARATION.....	18
6.1 APPLICABLE STANDARD.....	18
6.2 EUT SETUP.....	18
6.3 TEST EQUIPMENT LIST AND DETAILS	18
6.4 TEST PROCEDURE	18
6.5 TEST RESULT	18
7. TEST OF NUMBER OF HOPPING FREQUENCY.....	19
7.1 APPLICABLE STANDARD.....	19
7.2 EUT SETUP.....	19
7.3 TEST EQUIPMENT LIST AND DETAILS	19
7.4 TEST PROCEDURE	19
7.5 TEST RESULT	19
8. TEST OF DWELL TIME OF EACH FREQUENCY	20
8.1 APPLICABLE STANDARD.....	20
8.2 EUT SETUP.....	20
8.3 TEST EQUIPMENT LIST AND DETAILS	20
8.4 TEST PROCEDURE	20
8.5 TEST RESULT	20
9. TEST OF MAXIMUM PEAK OUTPUT POWER.....	25
9.1 APPLICABLE STANDARD.....	25
9.2 EUT SETUP.....	25
9.3 TEST EQUIPMENT LIST AND DETAILS	25
9.4 TEST PROCEDURE	25
9.5 TEST RESULT	25
10. TEST OF BAND EDGES EMISSION.....	29
10.1 APPLICABLE STANDARD.....	29
10.2 EUT SETUP	29
10.3 TEST EQUIPMENT LIST AND DETAILS	29
10.4 TEST PROCEDURE	30
10.5 TEST RESULT	30
11. TEST OF SPURIOUS RADIATED EMISSION	32

11.1 APPLICABLE STANDARD.....	32
11.2 EUT SETUP	32
11.3 TEST EQUIPMENT LIST AND DETAILS	33
11.4 TEST PROCEDURE	33
11.5 TEST RESULT	34
12. ANTENNA REQUIREMENT	47
12.1 STANDARD APPLICABLE.....	47
12.2 ANTENNA CONNECTED CONSTRUCTION.....	47

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: **Graupner GmbH & Co. KG**
Address of applicant: Henriettenstr. 94-96 D-73230 Kirchheim/Teck GERMANY
Manufacturer: **SJ TECHNOLOGY(SHENZHEN) CO.,LTD**
Address of manufacturer: F6, 1 BLDG, A AREA, YINTIANXIFA INDUSTRIAL AREA, XIXIANG TOWN, BAOAN DISTRICT SHENZHEN, GUANGDONG PROVINCE, CHINA

General Description of E.U.T

Items	Description
EUT Description:	Computer System Graupner/SJ HoTT
Model No.:	MC-20
Trade Name:	N/A
Supplementary Model:	N/A
Frequency Band:	2404 MHz ~ 2479 MHz
Channel Spacing:	1 MHz
Number of Channels:	75
Type of Modulation:	FHSS
Antenna Type:	Built-in Antenna
Rated Voltage:	Input: 4.2VDC 500mA from AC/DC adapter
Adapter description:	Model: Graupner/SJ/ 33032.4 Input:100-240V~, 50/60Hz, MAX 0.5A Output: 4.2V DC/500mA

Remark: * The test data gathered are from the production sample provided by the manufacturer.

1.2 Related Submittal(s) / Grant (s) and Test Methodology

The tests were performed based on the Electromagnetic Interference (EMI) tests performed on the EUT. Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003 Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, 15.209 and 15.247 rules. Test was carried out according to the above mentioned FCC rules and the FCC publication notice DA 00-705: Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

1.3 Test Facility

All measurement required was performed at laboratory of Bontek Compliance Testing Laboratory Ltd at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China and Centre Testing International (ShenZhen) Corporation ,Location at Hongwei Industrial Zone, Baoan 70 District, Shenzhen, Guangdong.

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 338263

BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 03, 2011.

IC Registration No.: 7631A

The 3m alternate test site of BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on January 25, 2011.

CNAS - Registration No.: L3923

BONTEK COMPLIANCE TESTING LABORATORY LTD. to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. The acceptance letter from the CNAS is maintained in our files: Registration: L3923, March 22, 2012.

TUV - Registration No.: UA 50203122-0001

BONTEK COMPLIANCE TESTING LABORATORY LTD. An assessment of the laboratory was conducted according to the "Procedures and Conditions for EMC Test Laboratories" with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO. 17010783-002.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions: The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions: The EUT is placed on the turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

2.5 Test Equipment List and Details

Test equipments list of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd .

No.	Equipment	Manufacturer	Model No.	S/N	Calculator date	Calculator due date
1	EMI Test Receiver	R&S	ESCI	100687	2012-4-6	2013-4-5
2	EMI Test Receiver	R&S	ESPI	100097	2011-7-25	2012-7-24
3	Amplifier	HP	8447D	1937A02492	2012-4-6	2013-4-5
4	Horn Antenna	R/S	CH14-H052	1091698	2012-4-6	2013-4-5
5	Horn Antenna	SCHWARZBECK	BBHA9120A	0499	2011-11-28	2012-11-27
6	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07101	2012-4-6	2013-4-5
7	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07102	2012-4-6	2013-4-5
8	Power Clamp	SCHWARZBECK	MDS-21	3812	2012-4-6	2013-4-5
9	Positioning Controller	C&C	CC-C-1F	MF7802113	N/A	N/A
10	Electrostatic Discharge Simulator	TESEQ	NSG437	125	2011-4-11	2012-4-10
11	Fast Transient Burst Generator	SCHAFFNER	MODULA6150	34572	2012-4-6	2013-4-5
12	Fast Transient Noise Simulator	Noiseken	FNS-105AX	10501	2011-6-16	2012-6-15
14	Color TV Pattern Generator	PHILIPS	PM5418	TM209947	N/A	N/A
15	Power Frequency Magnetic Field Generator	EVERFINE	EMS61000-8K	608002	2012-4-6	2013-4-5
16	Capacitive Coupling Clamp	TESEQ	CDN8014	25096	2012-4-6	2013-4-5
17	High Field Biconical Antenna	ELECTRO-METRICS	EM-6913	166	2011-11-28	2012-11-27
18	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	811	2011-11-28	2012-11-27
19	Remote Active Vertical Antenna	ELECTRO-METRICS	EM-6892	304	2011-11-28	2012-11-27
20	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	N/A	N/A
21	Teo Line Single Phase Module	SCHWARZBECK	NSLK8128	8128247	2011-10-24	2012-10-23
22	Triple-Loop Antenna	EVERFINE	LLA-2	711002	2012-4-6	2013-4-5
23	Electric bridge	Jhai	JK2812C	803024	N/A	N/A
24	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2012-4-6	2013-4-5
25	CDN	FRANKONIA	CDN M2+M3	A3027019	2012-4-6	2013-4-5
26	6DB Attenuator	FRANKONIA	N/A	1001698	2012-4-6	2013-4-5
27	EM Injection clamp	FCC	F-203I-23mm	091536	2012-4-6	2013-4-5
28	9kHz-2.4GHz signal generator 2024	MARCONI	10S/6625-99-457-8730	112260/042	2012-4-6	2013-4-5

29	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2012-4-6	2013-4-5
30	ISN	TESEQ	ISN-T800	30301	2011-6-23	2012-6-22
31	10KV surge generator	SANKI	SKS-0510M	048110003E 321	2011-11-14	2012-11-13
32	HRMONICS&FLICK RE ANALYSER	VOLTECH	PM6000	200006700433	2011-6-27	2012-6-26
33	Spectrum Analyzer	R&S	FSP	100397	2011-11-2	2012-11-1
34	Broadband preamplifier	SCH WARZBECK	BBV9718	9718-182	2012-4-6	2013-4-5
35	Temperature & Humidity Chamber	TOPSTAT	TOS-831A	3438A05208	2012-4-6	2013-4-5

18~24.6GHz Radiation Test equipments list of Centre Testing International (ShenZhen)

10M Semi-anechoic Chamber - Radiated disturbance Test				
Equipment	Manufacturer	Model	Serial No.	Due Date
Receiver	R&S	ESCI	100435	07/06/2012
Spectrum Analyzer	R&S	FSP40	100416	07/06/2012
Biconilog Antenna	schwarzbeck	VULB9136	9136-401	07/06/2012
Horn Antenna	ETS-LINGREN	3117	00044562	07/06/2012
Microwave Preamplifier	Agilent	8449B	3008A02425	07/06/2012
Microwave Preamplifier	Agilent	11909A	186871	07/06/2012

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207	AC Power Line Conducted Emission	Pass
FCC §15.247(a)(1)	Hopping Channel Bandwidth	Pass
FCC §15.247(a)(1)	Hopping Channel Separation	Pass
FCC §15.247(a)(1)	Number of Hopping Frequency Used	Pass
FCC §15.247(a)(1)(iii)	Dwell Time of Each Frequency	Pass
FCC §15.247(b)(1)	Maximum Peak Output Power	Pass
FCC §15.247(d)	Band Edges Emission	Pass
FCC §15.247(d)	Spurious Radiated Emission	Pass
FCC §15.203/15.247(b)/(c)	Antenna Requirement	Pass

4. TEST OF AC POWER LINE CONDUCTED EMISSION


4.1 Applicable Standard

Refer to FCC §15.207.

For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 Test Setup Diagram

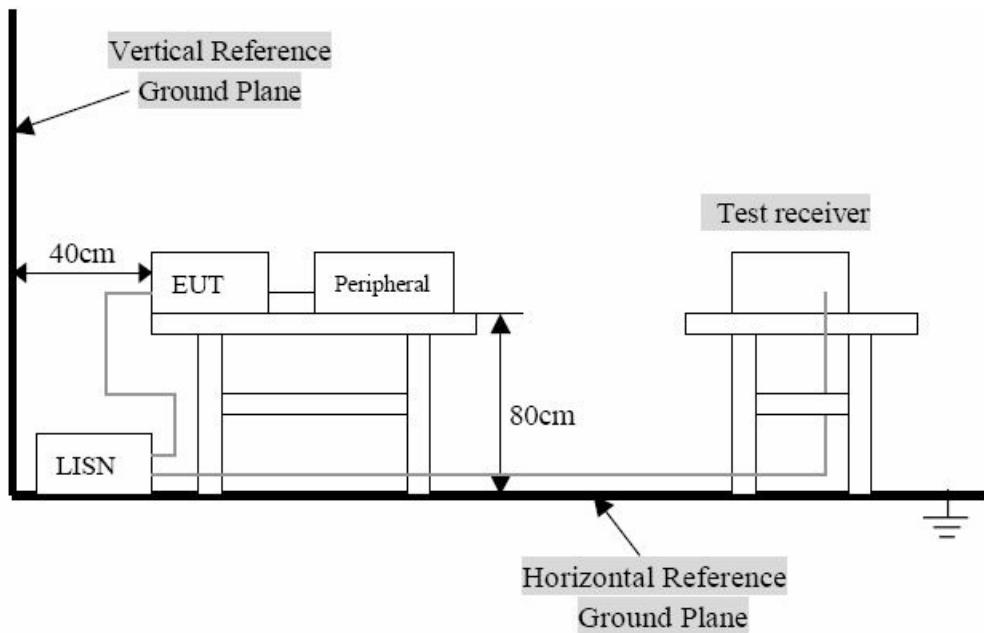

Remark: The EUT was connected to a 120VAC/ 60Hz power source.


4.3 Test Result

Temperature (°C) : 23~25	EUT: Computer System Graupner/SJ HoTT
Humidity (%RH) : 45~58	M/N: MC-20
Barometric Pressure (mbar) : 950~1000	Operation Condition: Normal Operation

Conducted Emission Test Data

EUT: Computer System Graupner/SJ HoTT
M/N: MC-20
Operating Condition: Normal Operation
Test Site: Cheng
Operator: Yang
Test Specification: AC 120V/60Hz
Comment: N Line
Start of Test: 7/19/12/21:36 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

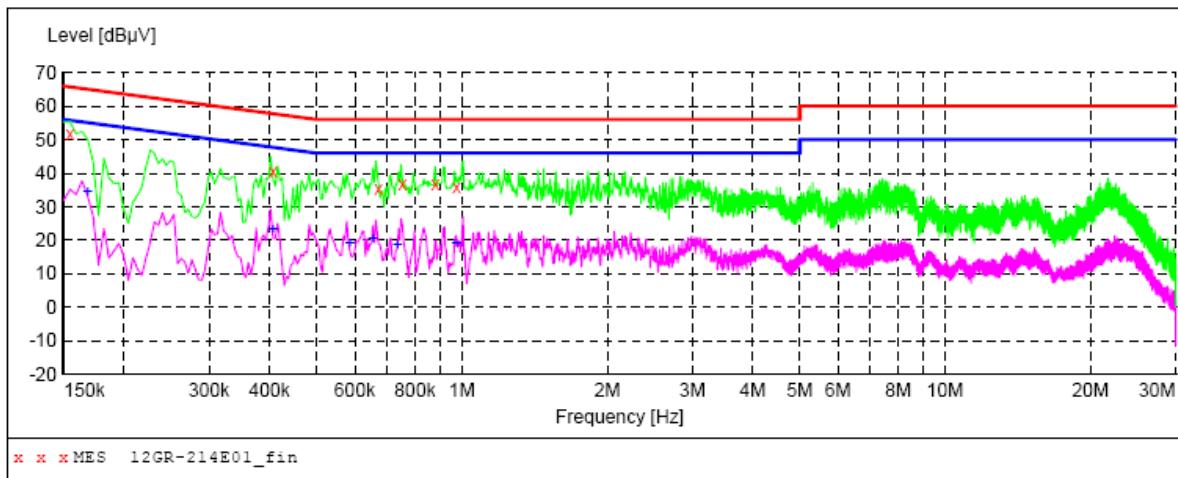

MEASUREMENT RESULT: "12GR-214E01_fin"

7/19/2012 9:36PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.154500	51.80	11.4	66	14.0	QP	N	GND
0.406500	40.50	10.4	58	17.2	QP	N	GND
0.672000	35.60	10.2	56	20.4	QP	N	GND
0.753000	36.90	10.2	56	19.1	QP	N	GND
0.879000	36.80	10.2	56	19.2	QP	N	GND
0.973500	36.00	10.3	56	20.0	QP	N	GND

MEASUREMENT RESULT: "12GR-214E01_fin2"


7/19/2012 9:36PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.168000	34.20	11.2	55	20.9	AV	N	GND
0.406500	23.20	10.4	48	24.5	AV	N	GND
0.586500	19.10	10.2	46	26.9	AV	N	GND
0.654000	20.60	10.2	46	25.4	AV	N	GND
0.735000	18.90	10.2	46	27.1	AV	N	GND
0.973500	19.10	10.3	46	26.9	AV	N	GND

Conducted Emission Test Data

EUT: Computer System Graupner/SJ HoTT
 M/N: MC-20
 Operating Condition: Normal Operation
 Test Site: Cheng
 Operator: Yang
 Test Specification: AC 120V/60Hz
 Comment: L Line
 Start of Test: 7/19/12/9:36 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

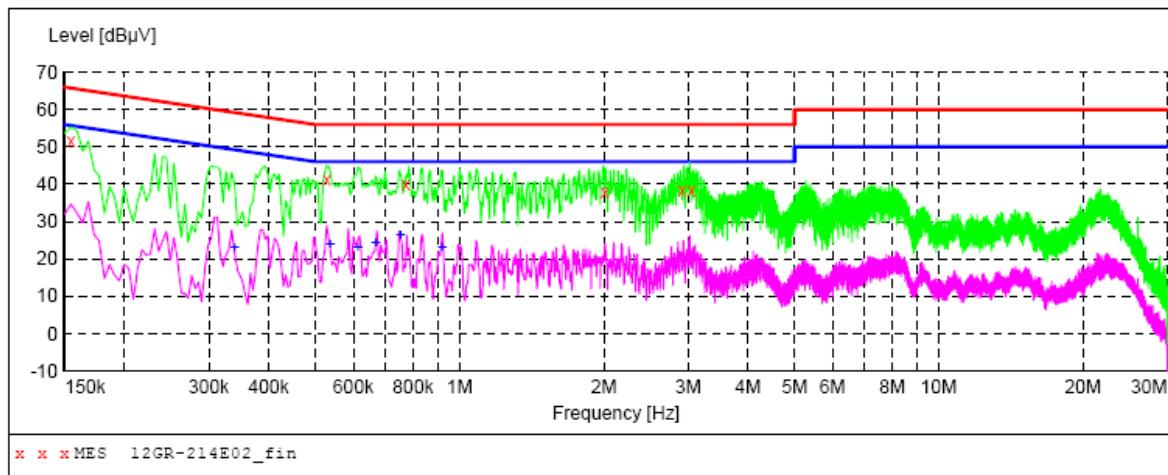

MEASUREMENT RESULT: "12GR-214E02_fin"

7/19/2012 9:39PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.154500	51.80	11.4	66	14.0	QP	L1	GND
0.528000	41.20	10.2	56	14.8	QP	L1	GND
0.771000	40.30	10.2	56	15.7	QP	L1	GND
2.004000	37.90	10.2	56	18.1	QP	L1	GND
2.908500	38.40	10.2	56	17.6	QP	L1	GND
3.043500	38.40	10.3	56	17.6	QP	L1	GND

MEASUREMENT RESULT: "12GR-214E02_fin2"


7/19/2012 9:39PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.339000	23.30	10.5	49	25.9	AV	L1	GND
0.537000	23.90	10.2	46	22.1	AV	L1	GND
0.613500	23.10	10.2	46	22.9	AV	L1	GND
0.667500	24.20	10.2	46	21.8	AV	L1	GND
0.753000	26.30	10.2	46	19.7	AV	L1	GND
0.919500	23.20	10.2	46	22.8	AV	L1	GND

Conducted Emission Test Data

EUT: Computer System Graupner/SJ HoTT
 M/N: MC-20
 Operating Condition: MP3 Playing
 Test Site: Cheng
 Operator: Yang
 Test Specification: AC 120V/60Hz
 Comment: N Line
 Start of Test: 7/31/12/15: 39 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

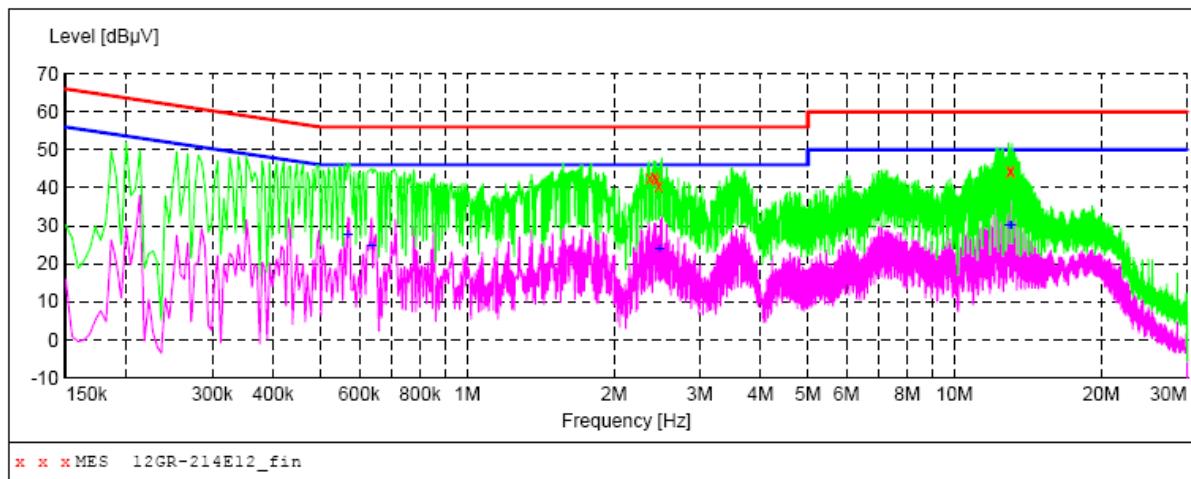

MEASUREMENT RESULT: "12GR-214E12_fin"

7/31/2012 3:34PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
2.368500	42.40	10.2	56	13.6	QP	N	GND
2.422500	43.10	10.2	56	12.9	QP	N	GND
2.440500	42.20	10.2	56	13.8	QP	N	GND
2.467500	40.70	10.2	56	15.3	QP	N	GND
13.006500	44.80	10.5	60	15.2	QP	N	GND
13.015500	44.30	10.5	60	15.7	QP	N	GND

MEASUREMENT RESULT: "12GR-214E12_fin2"


7/31/2012 3:34PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.568500	27.70	10.2	46	18.3	AV	N	GND
0.636000	24.80	10.2	46	21.2	AV	N	GND
2.476500	24.00	10.2	46	22.0	AV	N	GND
12.925500	30.10	10.5	50	19.9	AV	N	GND
13.038000	30.30	10.5	50	19.7	AV	N	GND
13.060500	30.30	10.5	50	19.7	AV	N	GND

Conducted Emission Test Data

EUT: Computer System Graupner/SJ HoTT
 M/N: MC-20
 Operating Condition: MP3 Playing
 Test Site: Cheng
 Operator: Yang
 Test Specification: AC 120V/60Hz
 Comment: L Line
 Start of Test: 7/31/12/15:32 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

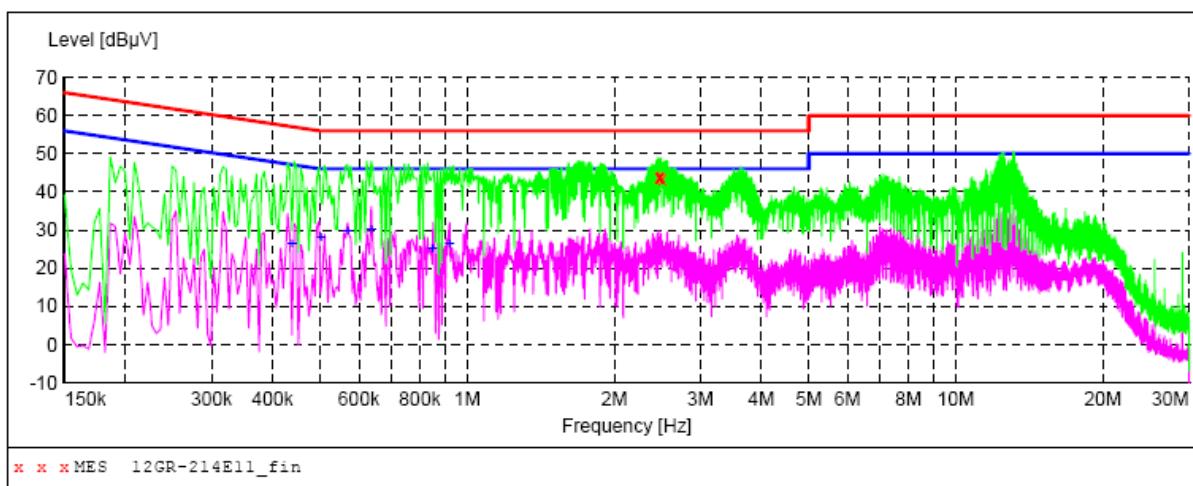

MEASUREMENT RESULT: "12GR-214E11_fin"

7/31/2012 3:32PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
2.463000	43.80	10.2	56	12.2	QP	L1	GND
2.467500	43.90	10.2	56	12.1	QP	L1	GND
2.476500	43.90	10.2	56	12.1	QP	L1	GND
2.481000	44.20	10.2	56	11.8	QP	L1	GND
2.485500	43.90	10.2	56	12.1	QP	L1	GND
2.508000	43.60	10.2	56	12.4	QP	L1	GND

MEASUREMENT RESULT: "12GR-214E11_fin2"

7/31/2012 3:32PM


Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.438000	26.60	10.3	47	20.5	AV	L1	GND
0.501000	28.00	10.2	46	18.0	AV	L1	GND
0.568500	29.90	10.2	46	16.1	AV	L1	GND
0.636000	30.00	10.2	46	16.0	AV	L1	GND
0.847500	25.30	10.2	46	20.7	AV	L1	GND
0.919500	26.40	10.2	46	19.6	AV	L1	GND

5. Test of Hopping Channel Bandwidth

5.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.2 EUT Setup

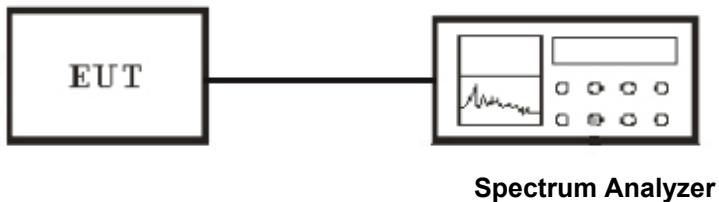

5.3 Test Equipment List and Details

See section 2.5.

5.4 Test Procedure


1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 30KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The spectrum width with level higher than 20dB below the peak level.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

5.5 Test Result


Temperature (°C) : 22~23	EUT: Computer System Graupner/SJ HoTT
Humidity (%RH): 50~54	M/N: MC-20
Barometric Pressure (mbar): 950~1000	Operation Condition: Tx Mode

Modulation Type	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	Min. Limit (kHz)
FHSS	Low	2404.00	88	>25
FHSS	Middle	2440.00	86	>25
FHSS	High	2479.00	87	>25


Channel Low :

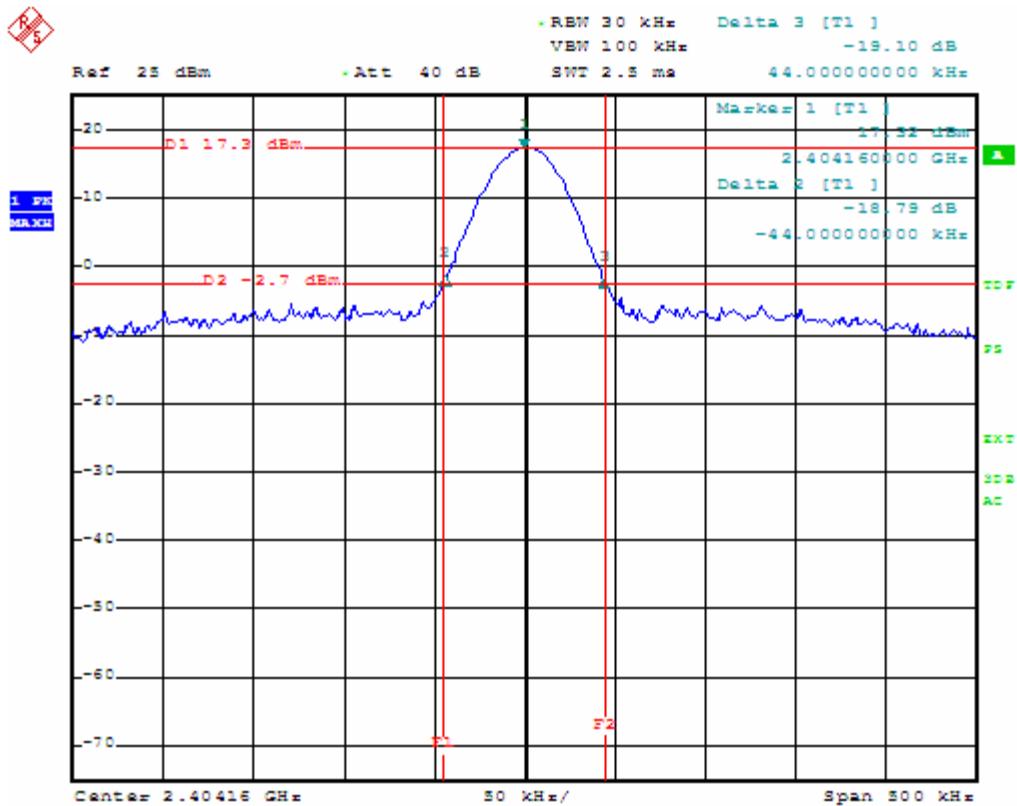

Channel Middle :

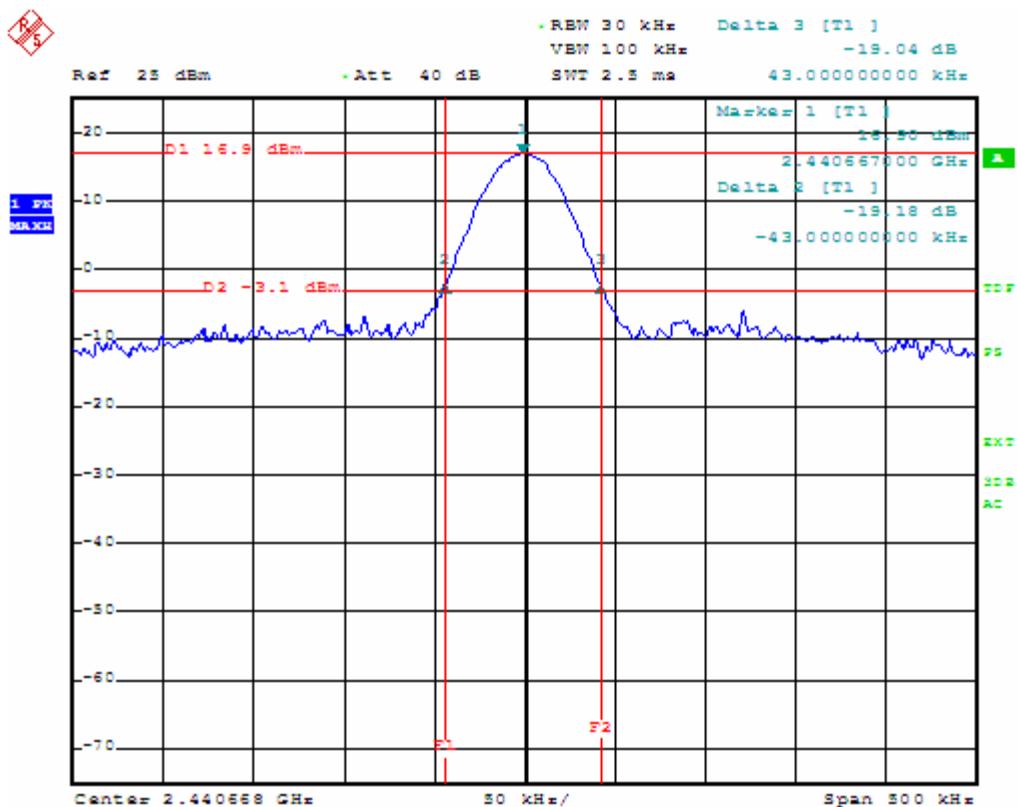

Channel High :

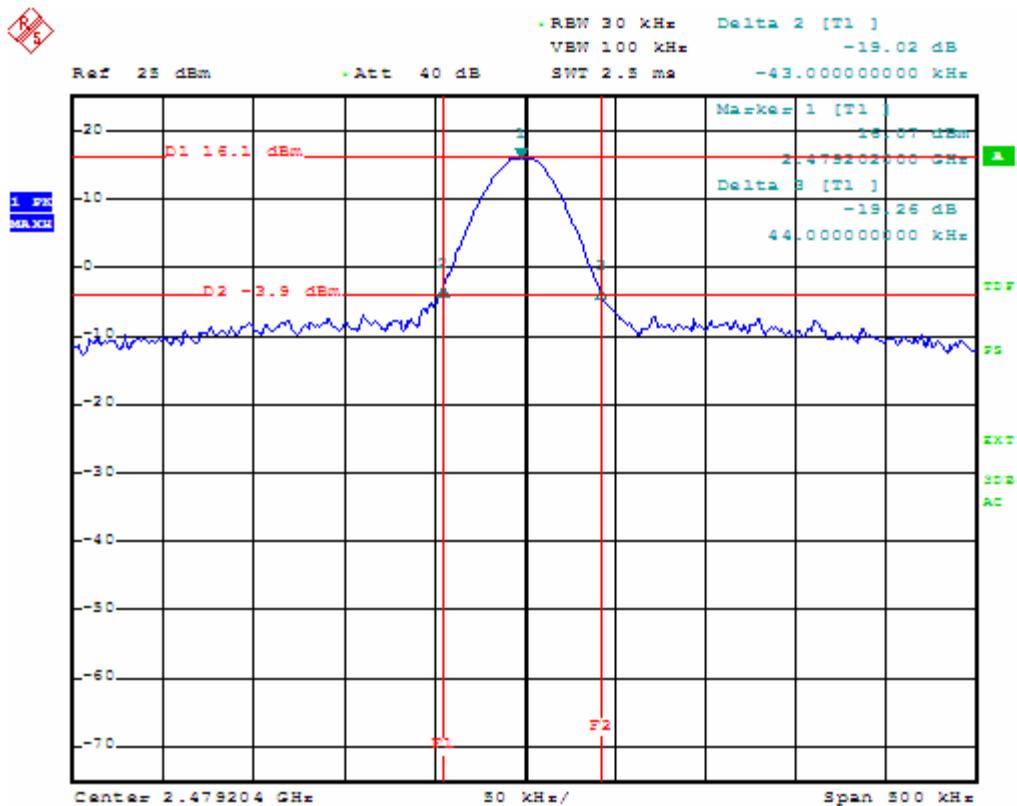


6. Test of Hopping Channel Separation

6.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

6.2 EUT Setup

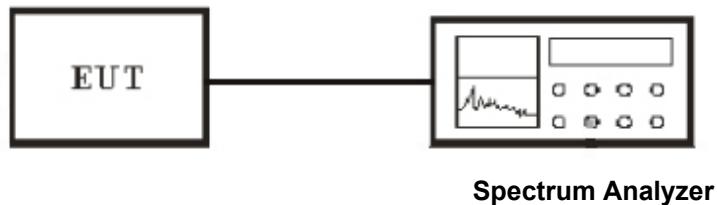

6.3 Test Equipment List and Details

See section 2.5.

6.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

6.5 Test Result

Temperature (°C) : 22~23	EUT: Computer System Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: MC-20
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode


Modulation Type	Frequency (MHz)	Channel Separation (MHz)	Min. Limit (kHz)
FHSS	2404.0~2479.0	1	>25

7. Test of Number of Hopping Frequency

7.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 15 non-overlapping hopping channels. Frequency hopping system which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping system may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

7.2 EUT Setup

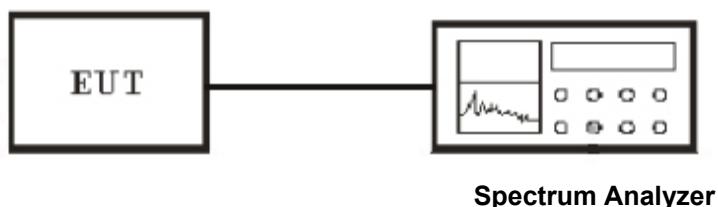

7.3 Test Equipment List and Details

See section 2.5.

7.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 32 non-overlapping channels.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

7.5 Test Result


Temperature (°C) : 22~23	EUT: Computer System Graupner/SJ HoTT		
Humidity (%RH) : 50~54	M/N: MC-20		
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode		
Modulation Type	Frequency (MHz)	Number of Hopping Channels	Min. Limit
FHSS	2404.0~2479.0	75	>15

8. Test of Dwell Time of Each Frequency

8.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band
The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.2 EUT Setup

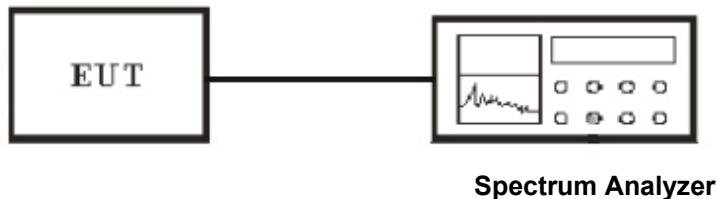

8.3 Test Equipment List and Details

See section 2.5.

8.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is more than once pulse time.
4. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
5. Measure the maximum time duration of one single pulse.

8.5 Test Result

Temperature (°C) : 22~23	EUT: Computer System Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: MC-20
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Modulation Type	Channel No.	Frequency (MHz)	Dwell Time (ms)	Limit (ms)
FHSS	Low	2404.00	113	400
FHSS	Middle	2440.00	113	400
FHSS	High	2479.00	113	400

A period time = 0.4 (ms) * 79 = 31.6 (s)

CH Low:

Time slot = 3.72 (ms)

Dwell time=31.6 (s)/(75*3.72 (ms))= 113 (ms)

CH Mid:

Time slot = 3.72 (ms)


Dwell time=31.6 (s)/(75*3.72 (ms))= 113 (ms)

CH High:


Time slot = 3.72 (ms)

Dwell time=31.6 (s)/(75*3.72 (ms))= 113 (ms)


Channel Low :

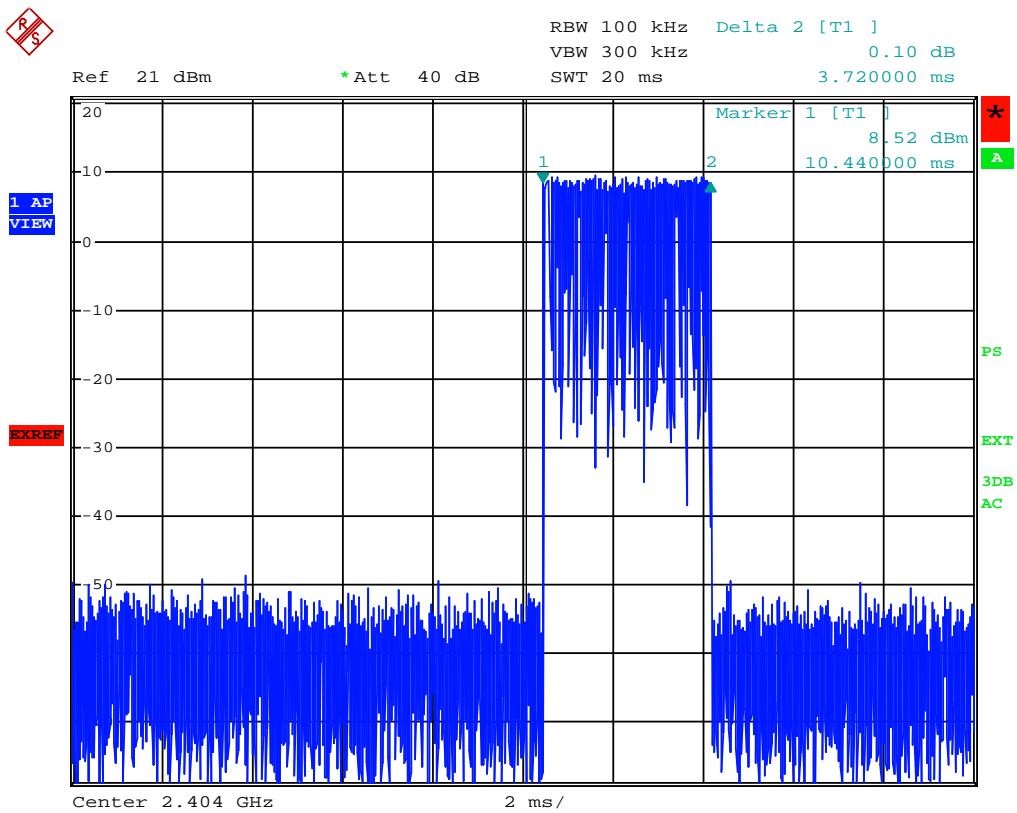

Channel Middle :

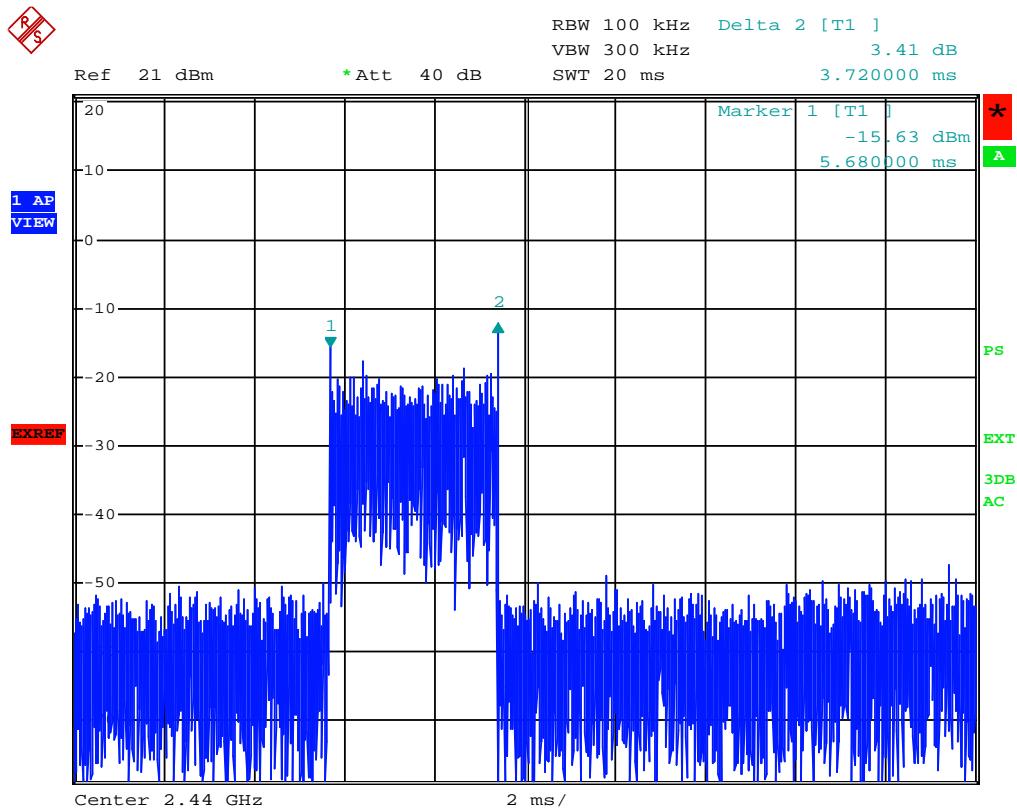

Channel High :

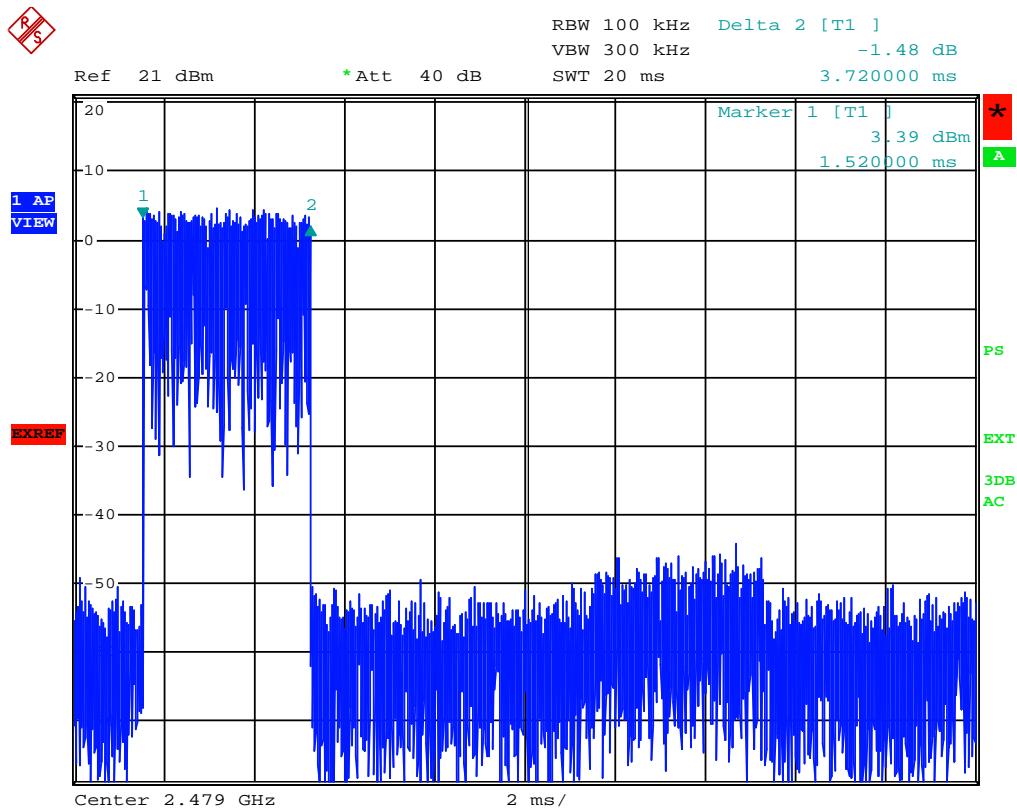


9. Test of Maximum Peak Output Power

9.1 Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels and The maximum peak output power shall not exceed 1 watt. For all other frequency hopping systems in this frequency band, The maximum peak output power shall not exceed 0.125 watt.

9.2 EUT Setup

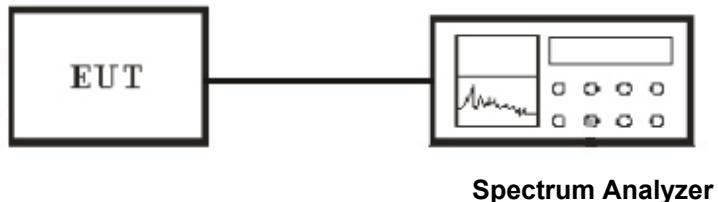

9.3 Test Equipment List and Details

See section 2.5.

9.4 Test Procedure


1. The transmitter output was connected to the peak power meter and recorded the peak value.
2. Peak power meter parameter set to auto attenuator and filter is the same as.
3. Repeated the 1 for the middle and highest channel of the EUT.

9.5 Test Result


Temperature (°C) : 22~23	EUT: Computer System Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: MC-20
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)	Margin (dB)
FHSS	Low	2404.00	19.38	30	10.62
FHSS	Middle	2440.00	19.11	30	10.89
FHSS	High	2479.00	18.64	30	11.36


Channel Low :

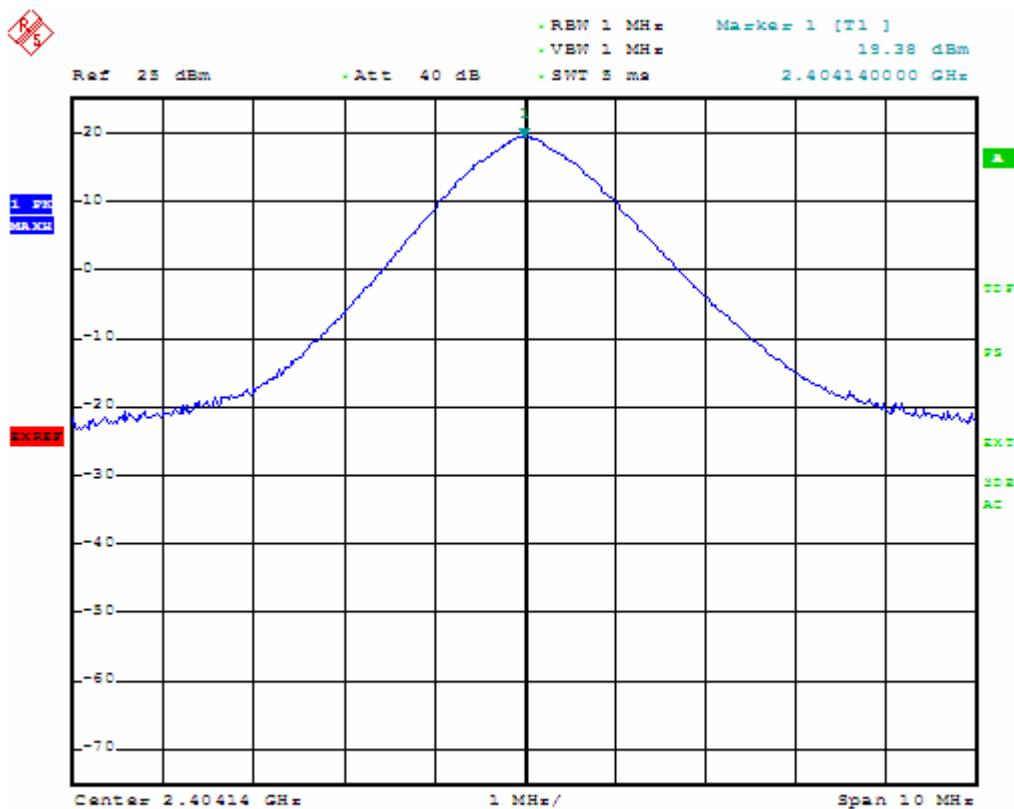

Channel Middle :

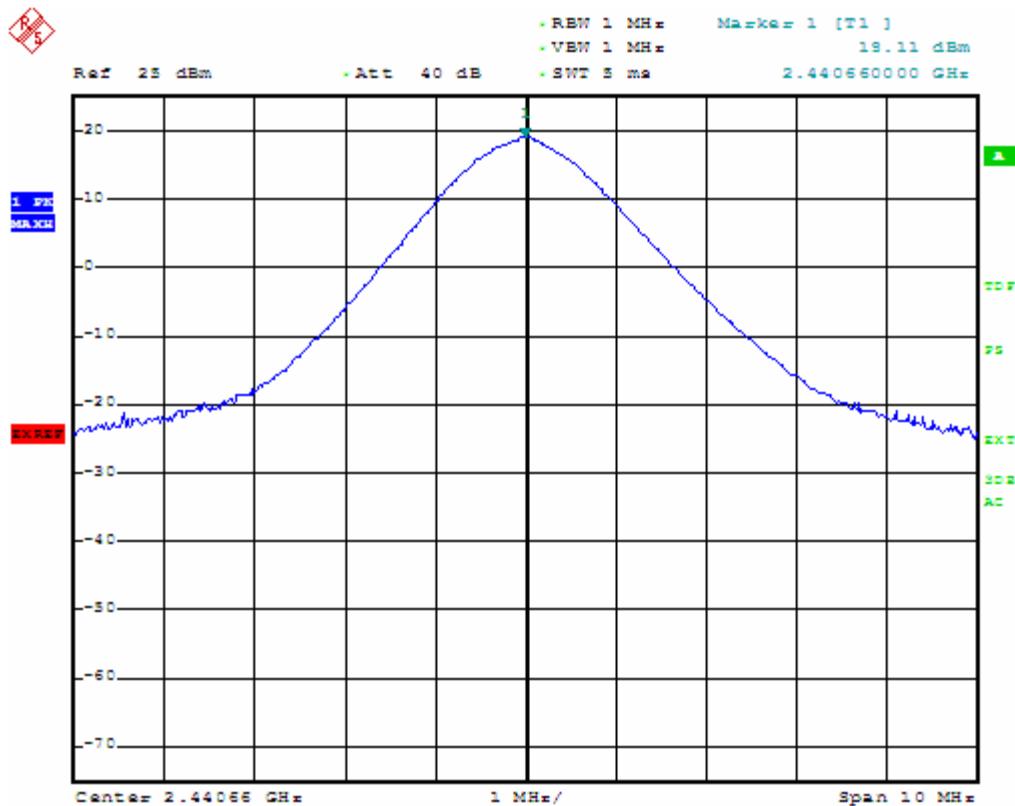

Channel High :

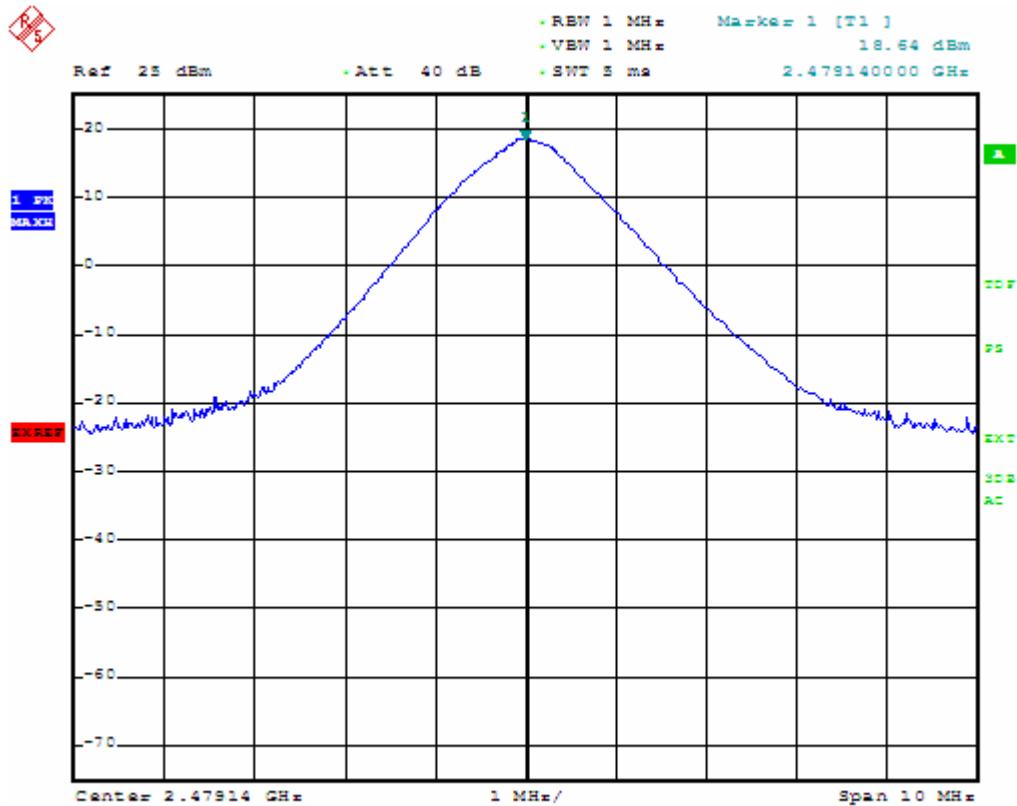


10. Test of Band Edges Emission

10.1 Applicable Standard


Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

10.2 EUT Setup

Radiated Measurement Setup

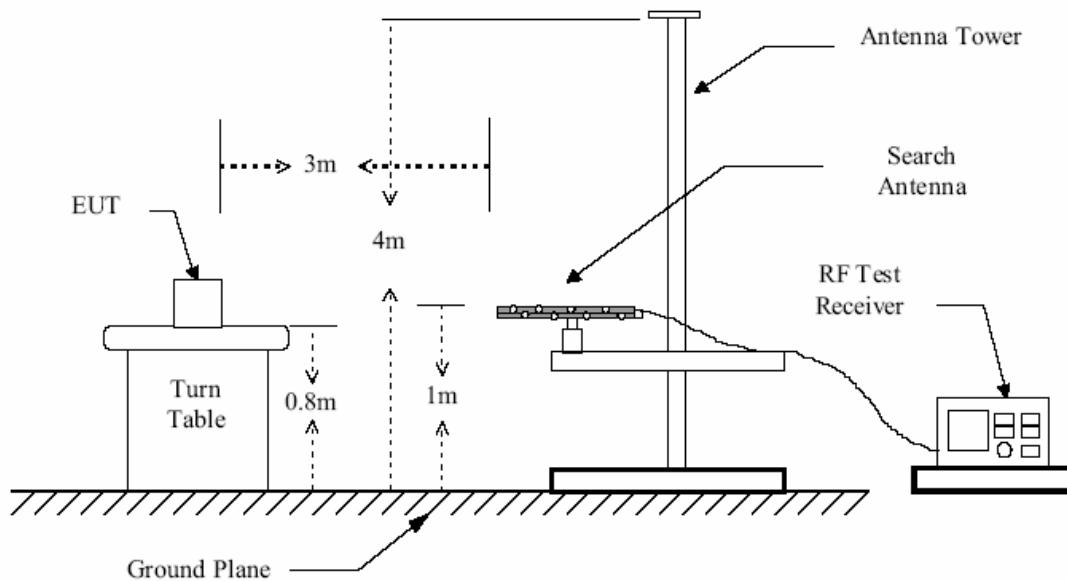

Conducted Measurement Setup

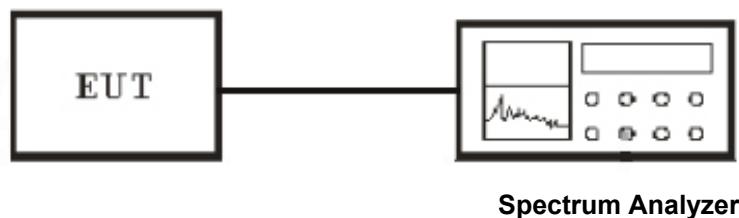

10.3 Test Equipment List and Details

See section 2.5.

10.4 Test Procedure

Conducted Measurement

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

Radiated Measurement

1. Configure the EUT according to ANSI C63.4-2003
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For band edge emission, use 1MHz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1MHz RBW for reading under PK.

10.5 Test Result


Temperature (°C) : 22~23	EUT: Computer System Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: MC-20
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Radiated Test Result


Frequency (MHz)	Antenna Polarization	Emission Read Value (dB μ V/m)	Limits (dB μ V/m)
<2400	H	38.23	54
>2483.5	H	34.68	54

Conducted Test Result

The worst frequency range of Low Channel

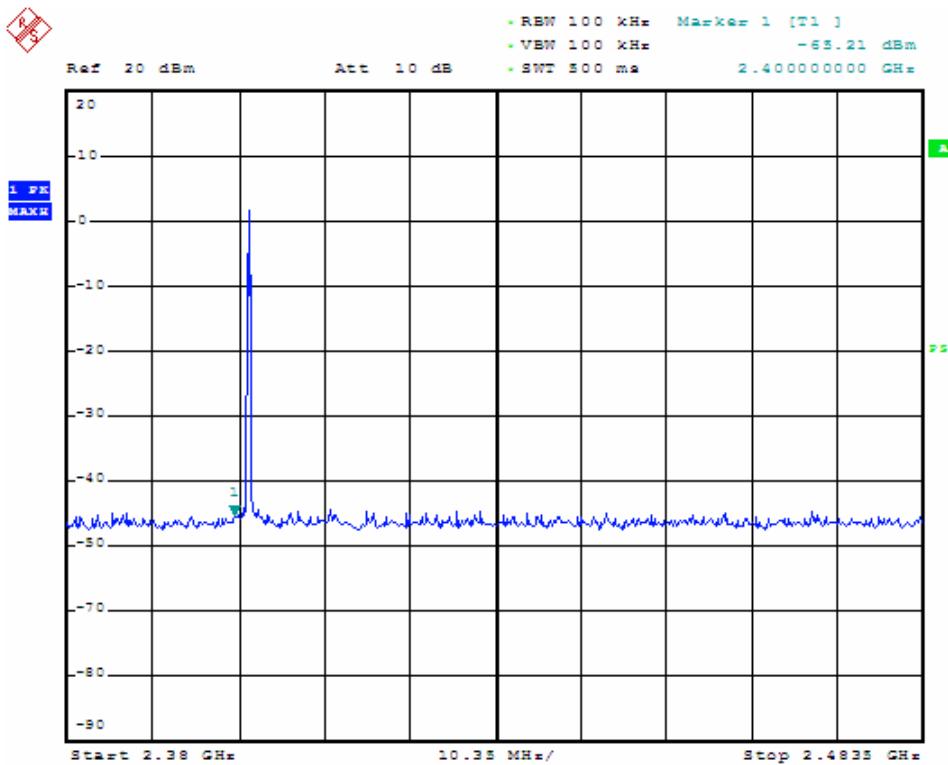

The worst frequency range of High Channel

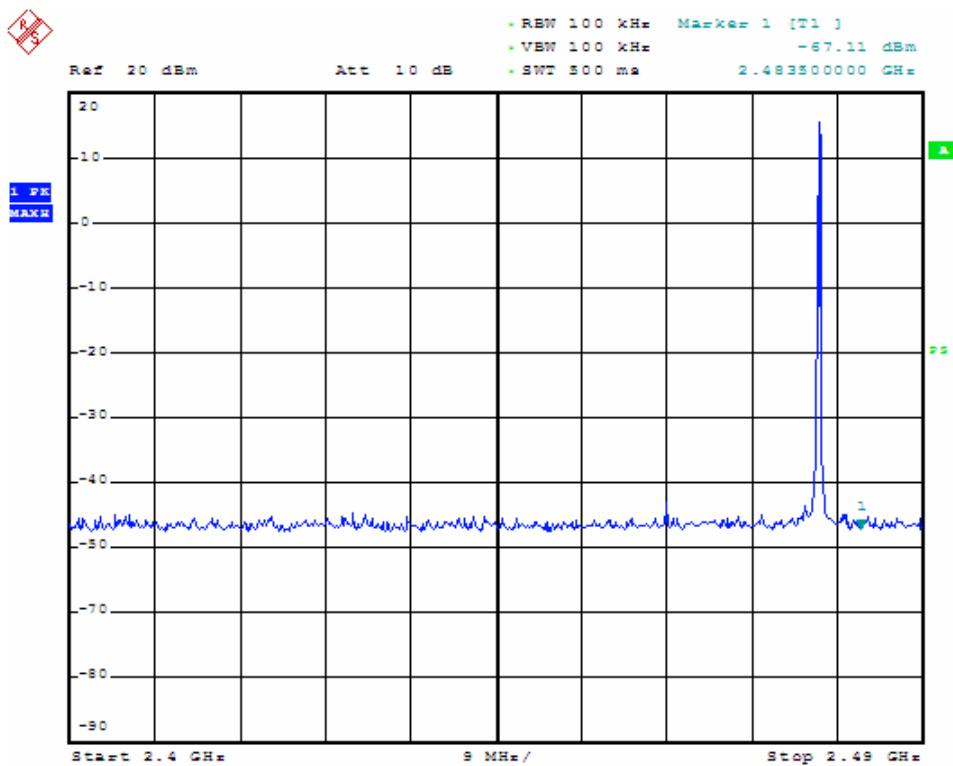

11. Test of Spurious Radiated Emission

11.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

11.2 EUT Setup

Radiated Measurement Setup

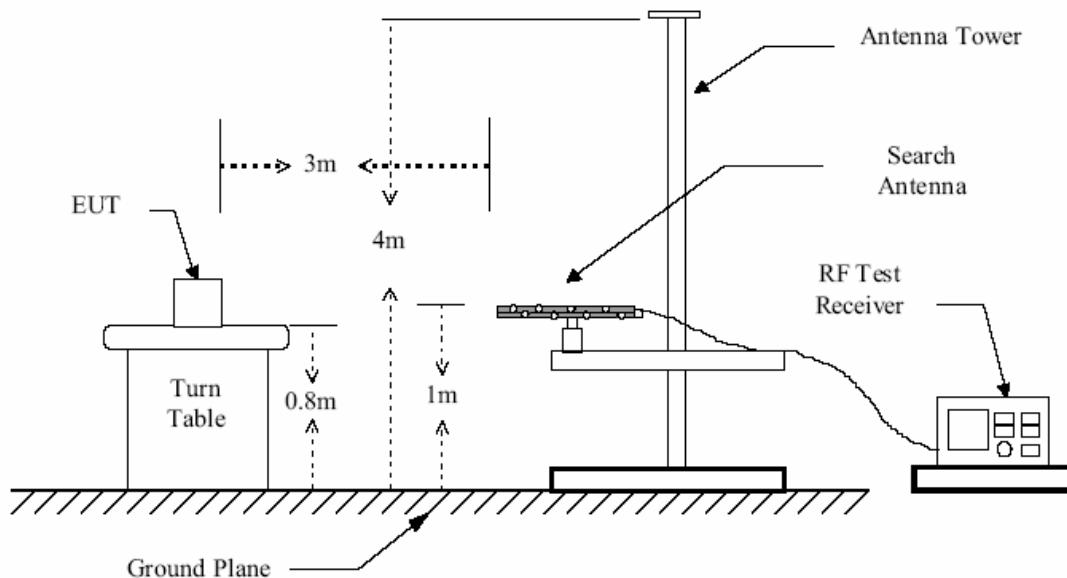


Figure 1 : Frequencies measured below 1 GHz configuration


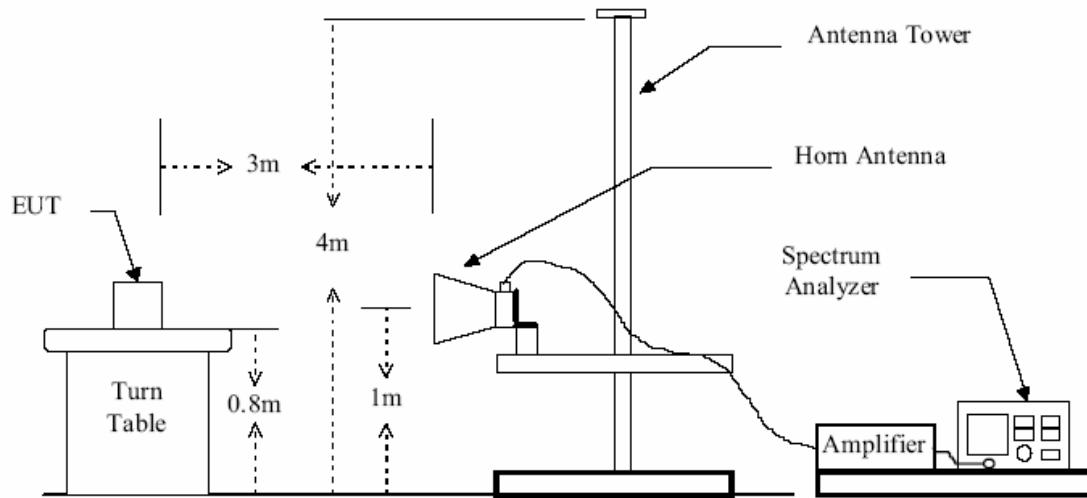


Figure 2 : Frequencies measured above 1 GHz configuration

Conducted Measurement Setup

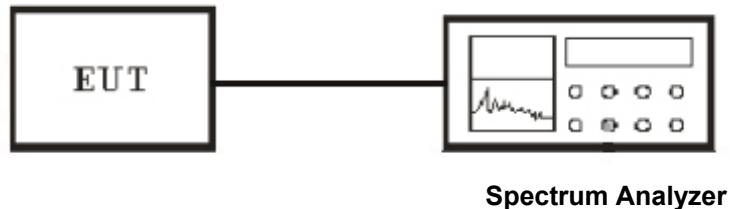

11.3 Test Equipment List and Details

See section 2.5.

11.4 Test Procedure

Radiated Measurement

1. Configure the EUT according to ANSI C63.4-2003
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
4. Power on the EUT and all the supporting units.
5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters

above ground to find the maximum emission field strength of both horizontal and vertical polarization.

7. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. According to the characteristic of the EUT crystals, the range of frequencies was investigated from 9KHz to 30MHz, 30MHz to 1GHz and 1GHz to 24.8GHz.
9. For emission below 1GHz, Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
10. For emission above 1GHz, Set the RBW=1MHz, VBW=3MHz for Peak Detector while the RBW=1MHz, VBW=10Hz for Average Detector, Readings are both peak and average values.
11. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report. All emission not reported are much lower than the prescribed limits.

Conducted Measurement

1. For emission above 1GHz, conducted measurement method also should be used.
2. The transmitter is set to the lowest channel.
3. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
4. Set RBW to 1 MHz and VBW to 3 MHz, Then detector set to peak and max hold this trace.
5. The lowest band edges emission was measured and recorded.
6. The transmitter set to the highest channel and repeated 2~4.

11.5 Test Result


Temperature (°C) : 22~23	EUT: Computer System Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: MC-20
Barometric Pressure (mbar): 950~1000	Operation Condition: Normal Operation/MP3

Radiated Emission Test Data Below 1G:

EUT: Computer System Graupner/SJ HoTT
 M/N: MC-20
 Operating Condition: Normal Operation
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: AC 120V/60Hz
 Comment: Polarization: Horizontal

SWEET TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

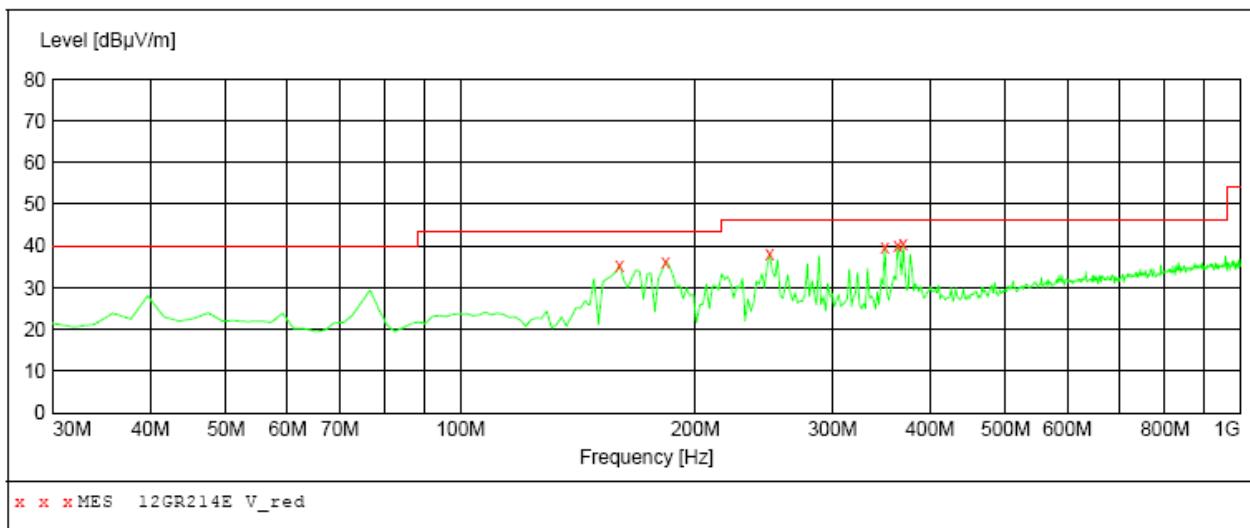

MEASUREMENT RESULT: "12GR214E H_red"

7/25/2012 05:18


Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization
MHz	dB μ V/m	dB	dB μ V/m	dB		cm	deg	
159.980000	35.50	12.8	43.5	8.0	QP	100.0	0.00	HORIZONTAL
183.260000	36.30	14.2	43.5	7.2	QP	300.0	0.00	HORIZONTAL
249.220000	38.10	17.2	46.0	7.9	QP	100.0	0.00	HORIZONTAL
350.100000	39.80	20.4	46.0	6.2	QP	100.0	0.00	HORIZONTAL
363.680000	40.30	20.7	46.0	5.7	QP	100.0	0.00	HORIZONTAL
369.500000	40.40	20.8	46.0	5.6	QP	100.0	0.00	HORIZONTAL

Radiated Emission Test Data Below 1G:

EUT: Computer System Graupner/SJ HoTT
 M/N: MC-20
 Operating Condition: Normal Operation
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: AC 120V/60Hz
 Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

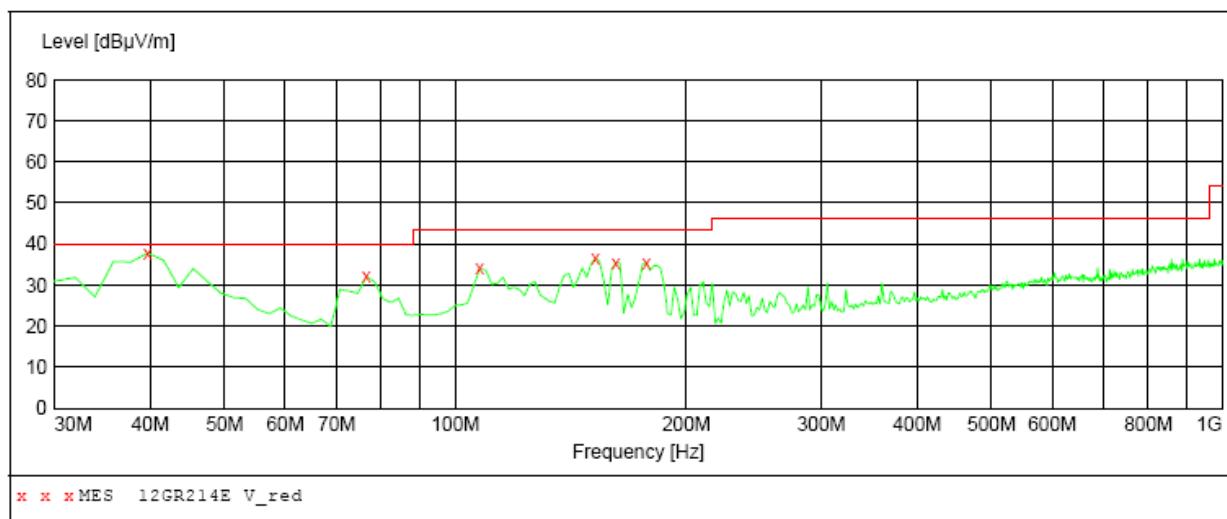

MEASUREMENT RESULT: "12GR214E V_red"

7/25/2012 05:21


Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
39.700000	37.80	15.8	40.0	3.2	QP	100.0	0.00	VERTICAL
76.560000	32.10	12.0	40.0	7.9	QP	100.0	0.00	VERTICAL
107.600000	34.00	16.8	43.5	9.5	QP	100.0	0.00	VERTICAL
152.220000	36.50	12.4	43.5	7.0	QP	100.0	0.00	VERTICAL
161.920000	35.40	12.8	43.5	8.1	QP	100.0	0.00	VERTICAL
177.440000	35.60	13.7	43.5	7.9	QP	100.0	0.00	VERTICAL

Radiated Emission Test Data Below 1G:

EUT: Computer System Graupner/SJ HoTT
 M/N: MC-20
 Operating Condition: MP3 Playing
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: AC 120V/60Hz for PC
 Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

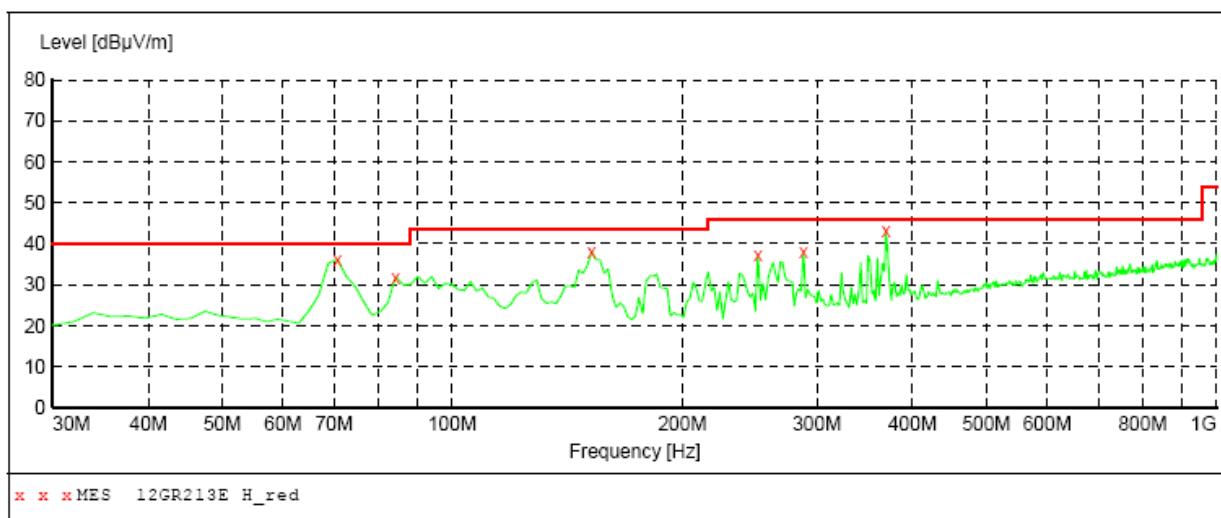

MEASUREMENT RESULT: "12GR213E H_red"

7/31/2012 09:17


Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
70.740000	36.30	12.4	40.0	3.7	QP	300.0	0.00	HORIZONTAL
84.320000	31.90	14.1	40.0	8.1	QP	300.0	0.00	HORIZONTAL
152.220000	37.90	12.4	43.5	5.6	QP	300.0	0.00	HORIZONTAL
251.160000	37.20	17.3	46.0	8.8	QP	100.0	0.00	HORIZONTAL
288.020000	38.00	18.4	46.0	8.0	QP	100.0	0.00	HORIZONTAL
369.500000	43.40	20.8	46.0	2.6	QP	100.0	0.00	HORIZONTAL

Radiated Spurious Emission Test Data Below 1G:

EUT: Computer System Graupner/SJ HoTT
 M/N: MC-20
 Operating Condition: MP3 Playing
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: AC 120V/60Hz
 Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:			Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

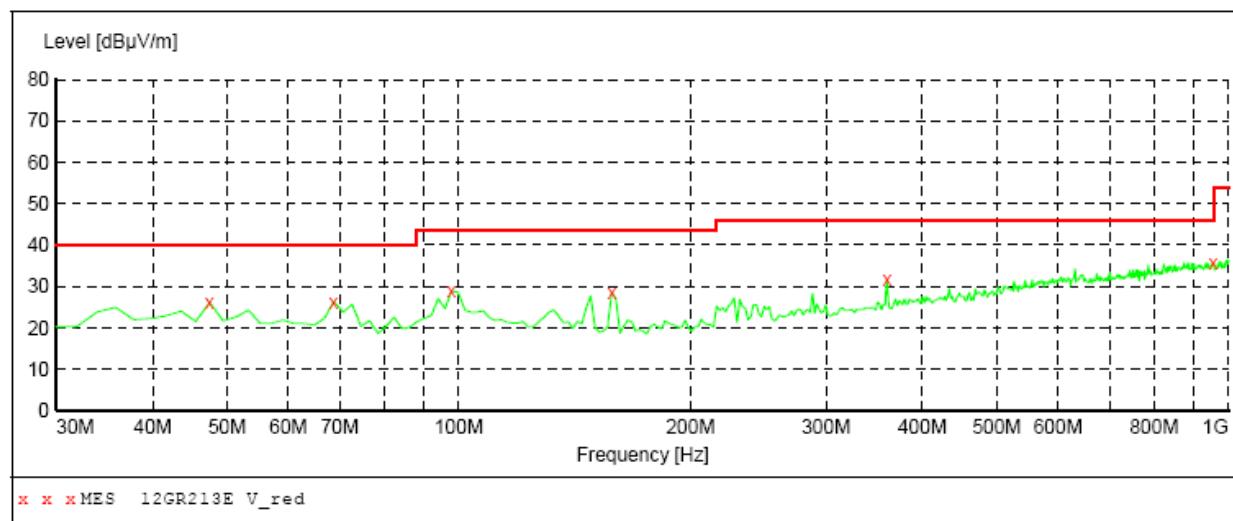

MEASUREMENT RESULT: "12GR213E V_red"

7/31/2012 09:19

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
47.460000	26.10	15.8	40.0	13.9	QP	100.0	0.00	VERTICAL
68.800000	26.30	12.7	40.0	13.7	QP	100.0	0.00	VERTICAL
97.900000	28.90	17.4	43.5	14.6	QP	100.0	0.00	VERTICAL
158.040000	28.60	12.7	43.5	14.9	QP	100.0	0.00	VERTICAL
359.800000	31.90	20.6	46.0	14.1	QP	100.0	0.00	VERTICAL
955.380000	35.80	29.6	46.0	10.2	QP	100.0	0.00	VERTICAL

Radiated Spurious Emission Test Data Above 1G

Channel Low (Polarity: Horizontal)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifie r (dB)	Correction Factor (dB/m)
1	*2404.00	79.21	PK			82.61	28.3	4.90	36.6	-3.40
1	*2404.00	67.45	AV			70.85	28.3	4.90	36.6	-3.40
2	4808.00	47.25	PK	74.00	26.75	44.05	32.7	7.00	36.5	3.20
2	4808.00	36.96	AV	54.00	17.04	33.76	32.7	7.00	36.5	3.20
3	7212.00	43.62	PK	74.00	30.38	34.22	35.8	8.90	35.3	9.40
3	7212.00	34.21	AV	54.00	19.79	24.81	35.8	8.90	35.3	9.40
4	11360.72	46.25	PK	74.00	27.75	29.65	38.0	11.30	32.7	16.6
4	11360.72	35.85	AV	54.00	18.15	19.25	38.0	11.30	32.7	16.6

Channel Low (Polarity: Vertical)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifie r (dB)	Correction Factor (dB/m)
1	*2404.00	80.13	PK			83.53	28.3	4.90	36.6	-3.40
1	*2404.00	68.25	AV			71.65	28.3	4.90	36.6	-3.40
2	4808.00	46.35	PK	74.00	27.65	43.15	32.7	7.00	36.5	3.20
2	4808.00	35.68	AV	54.00	18.32	32.48	32.7	7.00	36.5	3.20
3	7212.00	45.21	PK	74.00	28.79	35.81	35.8	8.90	35.3	9.40
3	7212.00	32.52	AV	54.00	21.48	23.12	35.8	8.90	35.3	9.40
4	11360.72	46.35	PK	74.00	27.65	29.75	38.0	11.30	32.7	16.6
4	11360.72	34.05	AV	54.00	19.95	17.45	38.0	11.30	32.7	16.6

Note:

1. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report.
2. Emission level (dBuV/m) =Raw Value (dBuV) + Correction Factor (dB/m)
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) -Pre-amplifier Factor
4. The other emission levels were very low against the limit.
5. Margin value = Limit value- Emission level.
6. The limit value is defined as per 15.247
7. “ * ” : Fundamental frequency

Channel Mid (Polarity: Horizontal)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2440.00	86.94	PK			90.14	28.3	5.10	36.6	-3.20
1	*2440.00	77.24	AV			80.44	28.3	5.10	36.6	-3.20
2	4880.00	44.12	PK	74.00	29.88	40.72	32.3	7.60	36.5	3.40
2	4880.00	36.48	AV	54.00	17.52	33.08	32.3	7.60	36.5	3.40
3	7320.00	43.45	PK	74.00	30.55	34.05	36.1	8.60	35.3	9.40
3	7320.00	34.58	AV	54.00	19.42	25.18	36.1	8.60	35.3	9.40
4	11360.72	49.73	PK	74.00	24.27	33.13	38.0	11.30	32.7	16.6
4	11360.72	40.14	AV	54.00	13.86	23.54	38.0	11.30	32.7	16.6

Channel Mid (Polarity: Vertical)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2440.00	85.59	PK			88.79	28.3	5.10	36.6	-3.20
1	*2440.00	67.54	AV			70.74	28.3	5.10	36.6	-3.20
2	4880.00	45.99	PK	74.00	28.01	42.59	32.3	7.60	36.5	3.40
2	4880.00	36.45	AV	54.00	17.55	33.05	32.3	7.60	36.5	3.40
3	7320.00	44.06	PK	74.00	29.94	34.66	36.1	8.60	35.3	9.40
3	7320.00	35.15	AV	54.00	18.85	25.75	36.1	8.60	35.3	9.40
4	11360.72	49.01	PK	74.00	24.99	32.41	38.0	11.30	32.7	16.6
4	11360.72	39.54	AV	54.00	14.46	22.94	38.0	11.30	32.7	16.6

Note:

1. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report.
2. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
4. The other emission levels were very low against the limit.
5. Margin value = Limit value - Emission level.
6. The limit value is defined as per 15.247
7. “*”: Fundamental frequency

Channel Hig (Polarity: Horizontal)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifie r (dB)	Correction Factor (dB/m)
1	*2479.00	94.15	PK			97.45	28.2	5.10	36.6	-3.30
1	*2479.00	84.15	AV			87.45	28.2	5.10	36.6	-3.30
2	4958.00	51.25	PK	74.00	22.75	47.45	33.0	7.00	36.2	3.80
2	4958.00	42.14	AV	54.00	11.86	38.34	33.0	7.00	36.2	3.80
3	7337.00	50.12	PK	74.00	23.88	40.72	36.2	8.50	35.3	9.40
3	7337.00	40.52	AV	54.00	13.48	31.12	36.2	8.50	35.3	9.40
4	11360.72	57.77	PK	74.00	16.23	41.17	38.0	11.30	32.7	16.6
4	11360.72	46.52	AV	54.00	7.48	29.92	38.0	11.30	32.7	16.6

Channel Hig (Polarity: Vertical)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifie r (dB)	Correction Factor (dB/m)
1	*2479.00	96.46	PK			99.76	28.2	5.10	36.6	-3.30
1	*2479.00	86.53	AV			89.83	28.2	5.10	36.6	-3.30
2	4958.00	54.56	PK	74.00	19.44	50.76	36.2	8.50	35.3	3.80
2	4958.00	45.52	AV	54.00	8.48	41.72	36.2	8.50	35.3	3.80
3	7337.00	52.35	PK	74.00	21.65	42.95	37.4	10.10	34.8	9.40
3	7337.00	43.51	AV	54.00	10.49	34.11	37.4	10.10	34.8	9.40
4	11360.72	55.69	PK	74.00	18.31	39.09	38.0	11.30	32.7	16.6
4	11360.72	45.10	AV	54.00	8.90	28.5	38.0	11.30	32.7	16.6

Note:

1. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report.
2. Emission level (dBuV/m) =Raw Value (dBuV) + Correction Factor (dB/m)
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) -Pre-amplifier Factor
4. The other emission levels were very low against the limit.
5. Margin value = Limit value- Emission level.
6. The limit value is defined as per 15.247
7. “*”: Fundamental frequency

Radiated Emission Below 30 MHz


No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)
1	0.490	29.23	QP	65.3	-36.10	19.30	7.89	1.02
2	13.90	24.84	QP	49.5	-25.06	18.87	8.76	1.21
3	19.70	27.67	QP	49.5	-22.32	17.90	8.63	1.14
4	23.50	30.63	QP	49.5	-18.65	19.90	8.06	1.67

Note:


1. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report.
2. Emission level (dBuV/m) =Raw Value (dBuV) + Correction Factor (dB/m)
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
4. The other emission levels were very low against the limit.
5. Margin value = Limit value- Emission level.

Conducted Spurious Emission Test Data Above 1G


Channel Low

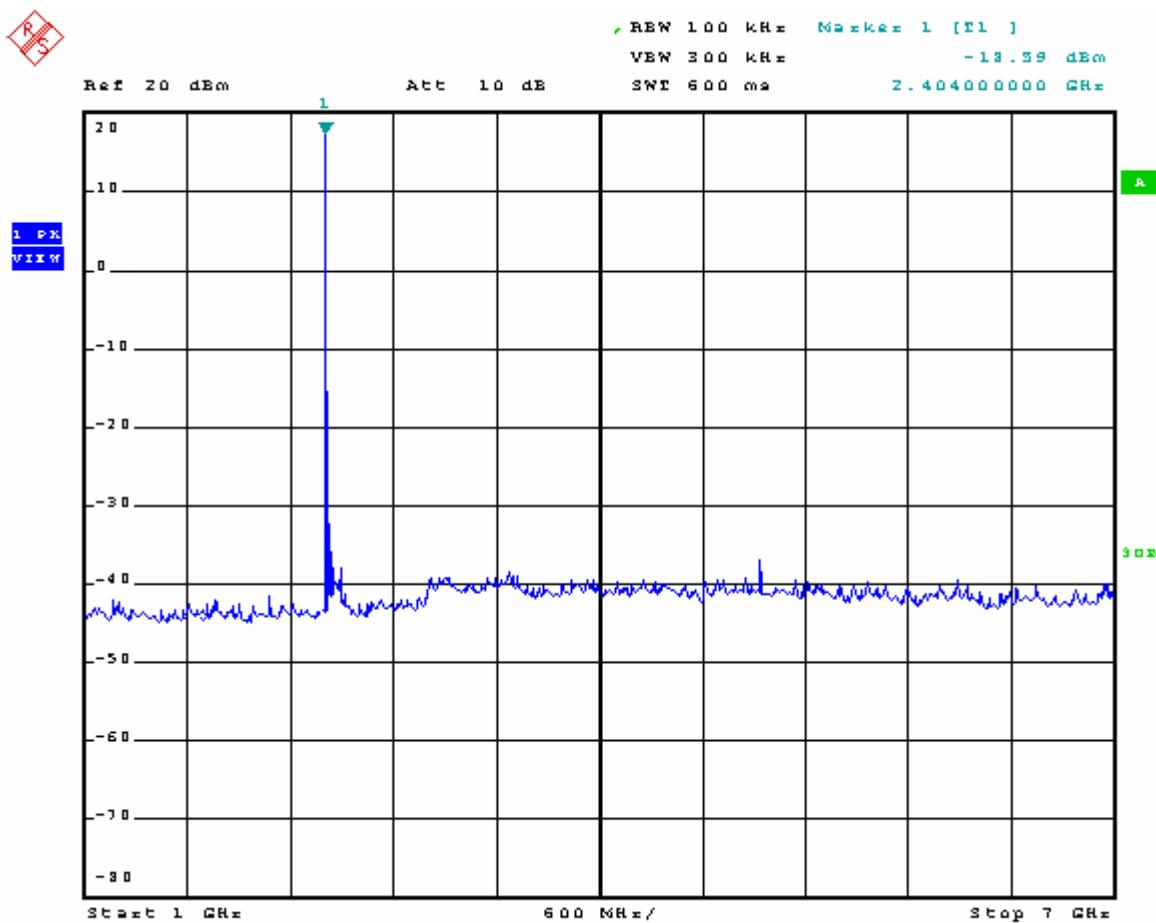


Channel Mid

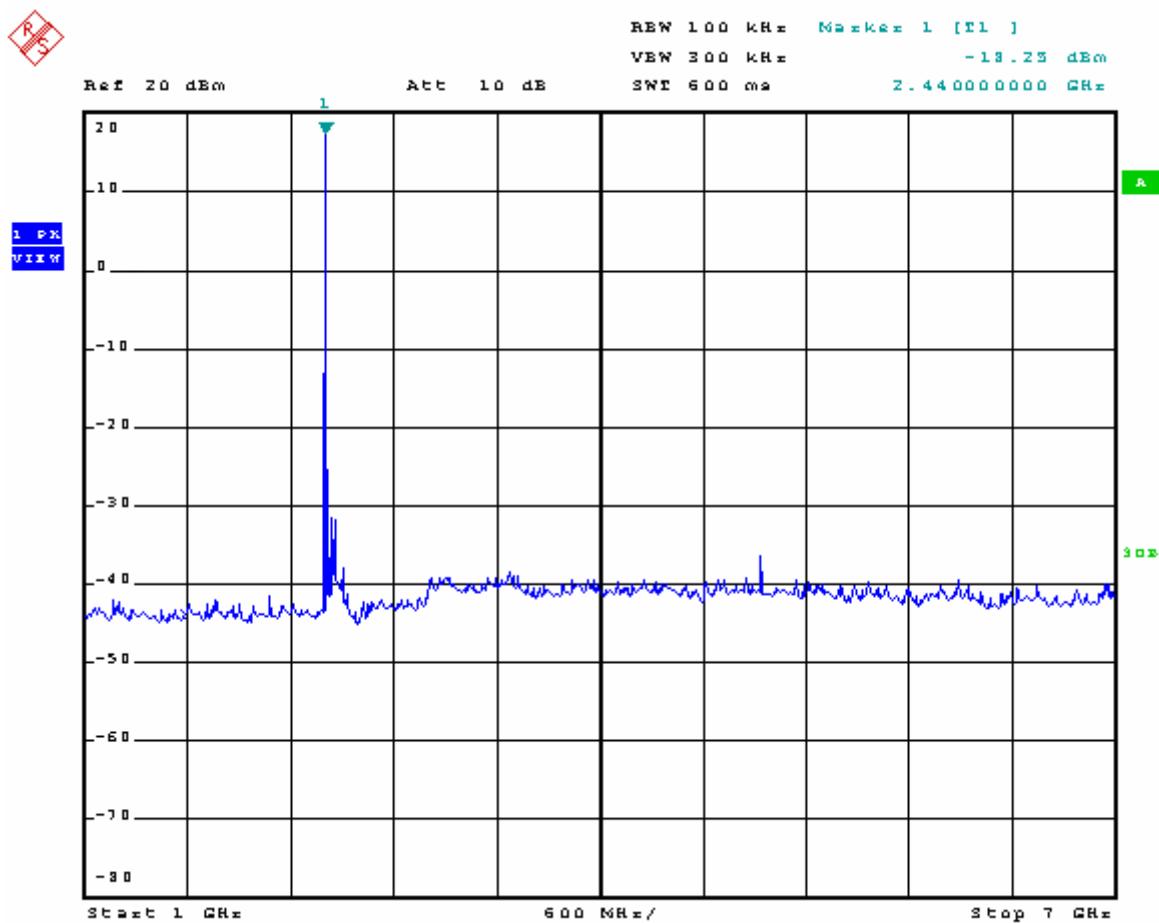

Channel Hig

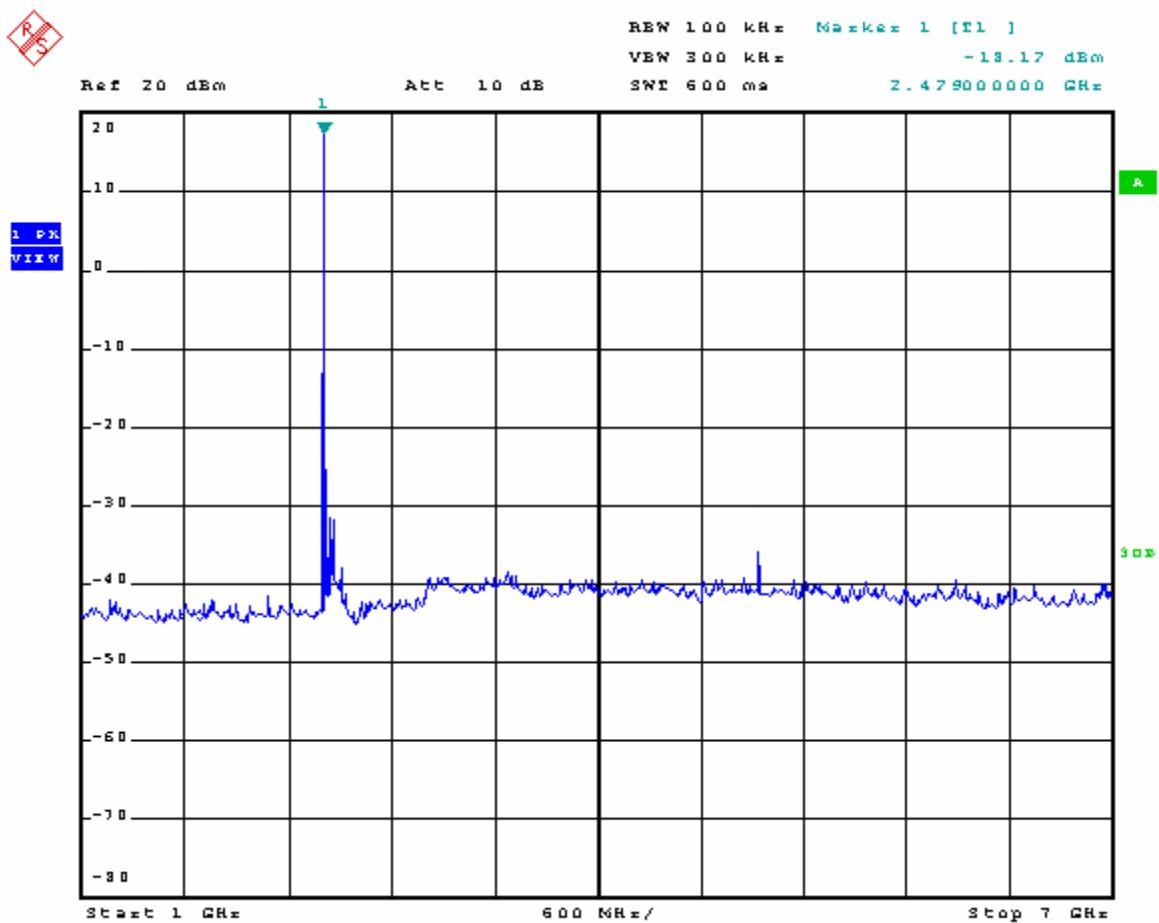

RS

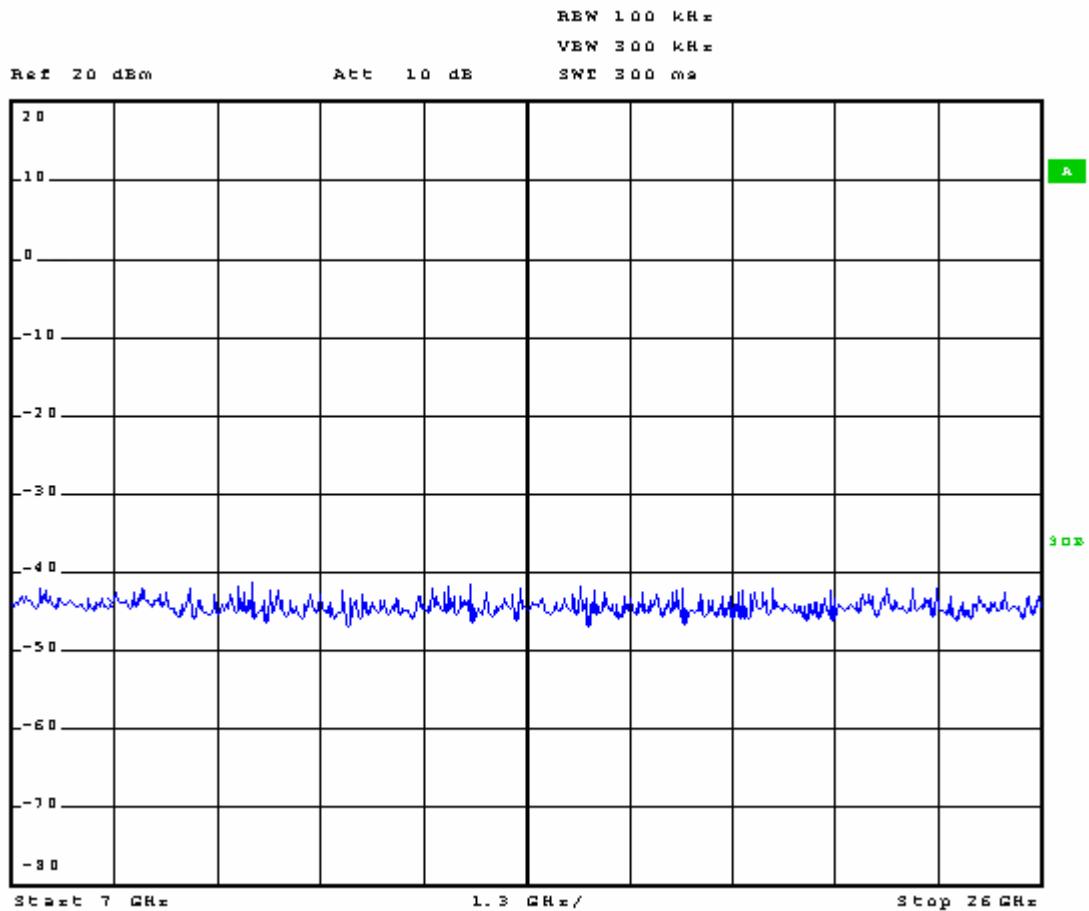

12. ANTENNA REQUIREMENT

12.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

12.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement. The antenna used in this product is complied with Standard. The maximum Gain of the antenna lower than 6.0dBi and have the definite antenna Specification.