Radio Test Report

Report No.: AGC19C120201-1F2B

FCC ID : ZL5B10

PRODUCT DESIGNATION : 3G Mobile Phone

BRAND NAME : CAT

TEST MODEL : B10

CLIENT : Bullitt Group

DATE OF ISSUE : Mar. 03, 2012

STANDARD(S) : FCC Part 15 Rules

Attestation of Global Compliance Co., Ltd.

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 1 of 43

VERIFICATION OF COMPLIANCE

Andread	Bullitt Group
Applicant	No. 4, The Aquarium, King Street, United Kingdom RG1 2AN
	Leadsky International Development Limited
Manufacturer	Room 401, Huahan Building A, Langshan North Road, Science and Technology Park, Nanshan District, Shenzhen, P.R.China
Product Designation	3G Mobile Phone
Brand Name	CAT
Model Name	B10
Report Number	AGC19C120201-1F2B
Date of Test	Feb. 29,2012 to Mar. 02 , 2012

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 15 requirements.

Tested By:

Curoky Chen Mar. 03, 2012

Reviewed By:

Forrest Lei Mar. 03, 2012

Approved By:

Solger Zhang

Mar. 03, 2012

TABLE OF CONTENTS

1 GENERAL INFORMATION	4
1.1PRODUCT DESCRIPTION	
1.10EQUIPMENT MODIFICATIONS	
2.1CONFIGURATION OF TESTED SYSTEM	7
3 SUMMARY OF TEST RESULTS	8
4. DESCRIPTION OF TEST MODES	9
5 PEAK OUTPUT POWER	
5.1 MEASUREMENT PROCEDURE 5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 5.3 MEASUREMENT EQUIPMENT USED 5.4 LIMITS AND MEASUREMENT RESULT	10
6 20 DB BANDWIDTH	
6.1 MEASUREMENT PROCEDURE 6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 6.3 MEASUREMENT EQUIPMENT USED 6.4 LIMITS AND MEASUREMENT RESULTS	
7. CONDUCTED SPURIOUS EMISSION	
7.1 MEASUREMENT PROCEDURE	12
8. RADIATED EMISSION	16
8.1 MEASUREMENT PROCEDURE 8.2 TEST SETUP 8.2 TEST EQUIMENT LIST 8.3 TEST RESULT	18
9 BAND EDGES EMISSION	23
9.1 MEASUREMENT PROCEDURE	
9.2 TEST SET-UP 9.3 TEST RESULT	
10. NUMBER OF HOPPING FREQUENCY	
10.1 MEASUREMENT PROCEDURE	
10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	27
10.3 MEASUREMENT EQUIPMENT USED	

Page 3 of 43

11. TIME OF OCCUPANCY (DWELL TIME)	28
11.1 MEASUREMENT PROCEDURE 11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	28
11.3 MEASUREMENT EQUIPMENT USED	28
12. FREQUENCY SEPARATION	
12.1 MEASUREMENT PROCEDURE	
12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
12.3 MEASUREMENT EQUIPMENT USED	31
13 FCC LINE CONDUCTED EMISSION TEST	32
13.1 LIMITS OF LINE CONDUCTED EMISSION TEST	32
13.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	
13.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
13.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST	34
APPENDIX I	
PHOTOGRAPHS OF THE EUT	
APPENDIX II	40
PHOTOGRAPHS OF THE TEST SETUP	43

Page 4 of 43

1 GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT is a **3G Mobile Phone** designed as an "Communication Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz	
Rated Output Power	0.08 dBm(max) for GFSK modulation	
Bluetooth Version	V3.0 + EDR	
Modulation	GFSK, π /4-DQPSK, 8-DPSK	
Number of channels	79	
Antenna Designation	Integrated Antenna	
Antenna Gain	1.2dBi	
Power Supply	DC 7.4V by battery(charged by adapter) or supplied by adapter	

1.2 TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402MHZ
	1	2403MHZ
2400~2483.5MHZ	:	:
2400~2463.3WITZ	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

1.3 RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.2MHZ,In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both Devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single of multi-slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

Page 5 of 43

1.4 EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode: 40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67 56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59 72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75 09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06 01,51,03,55,05,04

1.5 EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values: 1 LAP/UAP of the master of the connection

2 Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and Is never turned off. For synchronization with other units only offset are used. It has no relation to the time Of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about One day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire.

LAP(24 bits),4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures(permutations, additions, XOR-operations) are performed to generate te Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two Devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter)than the minimum resolution of the clock(312.5us). The hopping sequence will always Differ from the first one.

1.6 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: ZL5B10**, filing to comply with the FCC Part 15 requirements.

1.7 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

.

Page 6 of 43

1.8 TEST FACILITY

The test site used to collect the radiated data is located on the address of Attestation of Global Compliance Co., Ltd. 2F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei, Xixiang, Baoan District, Shenzhen. The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 . FCC register No.: 259865

1.9 SPECIAL ACCESSORIES

Refer to section 2.2.

1.10 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 7 of 43

2 SYSTEM TEST CONFIGURATION

2.1 CONFIGURATION OF EUT SYSTEM Configure 1:



2.2 EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	3G Mobile Phone	CAT	B10	EUT
2	Power supply	Aquilstar / GangQi	ASUC30e-050050 /GQ07-050050-BGU	Accessory
3	battery	B&K, Sinca	B10, TP909	Accessory

Note: All the accessories have been used during the test. the EUT in test setup diagram means "EUT system".

Page 8 of 43

3 SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Frequency Separation	Compliant
§15.207	Line Conduction Emission	Compliant

Page 9 of 43

4. DESCRIPTION OF TEST MODES

The EUT has been operated in three modulations: GFSK, π /4-DQPSK, 8-DPSK independently. The following operating modes were applied for the related test items. For Radiated Emission, 3 axis were chosen for testing for each applicable modes.

No.	TEST MODES
1	Low Channel(TX)
2	Middle Channel(TX)
3	High Channel(TX)
4	Normal Hopping

Note: All test modes were performed during the testing with configure in section 2.1, only the result of the worst case was recorded in the report.


Page 10 of 43

5 PEAK OUTPUT POWER

5.1 MEASUREMENT PROCEDURE

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set Span = approximately 5 times the 20 dB bandwidth, centered on a hoping channel RBW > the 20 dB bandwidth of the emission being measured VBW ≥ RBW; Sweep = auto; Detector function = peak
- 5. Set SPA Trace 1 Max hold, then View.

5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

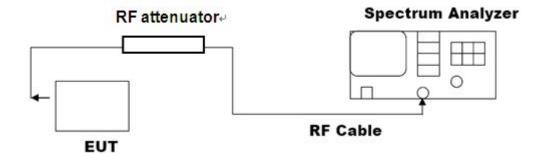

Page 11 of 43

5.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	06/27/2011	06/26/2012
RF attenuator	N/A	RFA20db	N/A	N/A	N/A

5.4 LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MODULATION				
Frequency (GHz)	Result (dBm)	Applicable Limits (dBm)	Pass or Fail	
2.402	0.08	30	Pass	
2.441	-0.05	30	Pass	
2.480	-0.07	30	Pass	

PEAK OUTPUT POWER MEASUREMENT RESULT FOR Π /4-DQPSK, 8-DPSK MODULATION				
Frequency (GHz) Test Result Test Result Applicable (GHz) 2 Mbps (dBm) 3 Mbps (dBm) Limits (dBm) Pass o				
2.402	-1.45	-1.49	30	Pass
2.441	-1.65	-1.68	30	Pass
2.480	-1.78	-1.81	30	Pass

Page 12 of 43

6 20 DB BANDWIDTH

6.1 MEASUREMENT PROCEDURE

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
- 5. Set SPA Trace 1 Max hold, then View.

6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in Section 5.2


6.3 MEASUREMENT EQUIPMENT USED

The same as described in Section 5.3

6.4 LIMITS AND MEASUREMENT RESULTS

THE MEASUREMENT RESULT WITH THE WORST CASE OF 3MBPS FOR 8-DPSK MODULATION					
Applicable Limite		Measurement Result			
Applicable Limits	Test Data (MHz)		Criteria		
	Low Channel	1.209	PASS		
	Middle Channel	1.211	PASS		
	High Channel	1.211	PASS		



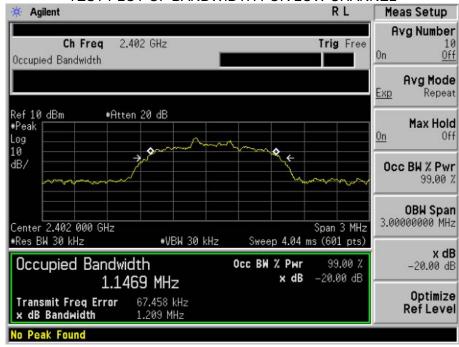


Report No.: AGC19C120201-1F2B Page 13 of 43

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

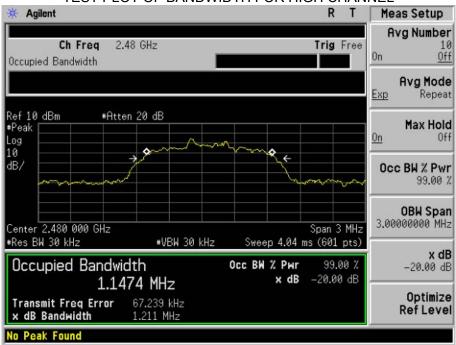

Page 14 of 43

7. CONDUCTED SPURIOUS EMISSION

7.1 MEASUREMENT PROCEDURE

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
 - RBW = 100 kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak.
- 5. Set SPA Trace 1 Max hold, then View.

7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The Same as described in section 5.2

7.3 MEASUREMENT EQUIPMENT USED


The Same as described in section 5.3


7.4 LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT								
Applicable Limite	Measurement Result							
Applicable Limits	Test Data	Criteria						
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS						
level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a)/ RSS-210, must also comply with the radiated emission limits specified in§15.209(a))/ RSS-210	At least -20dBc than the limit Specified on the TOP Channel	PASS						

Report No.: AGC19C120201-1F2B Page 15 of 43

TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 1 MBPS FOR GFSK MODULATION IN LOW CHANNEL

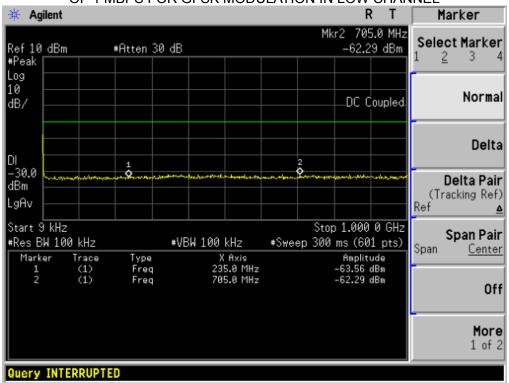

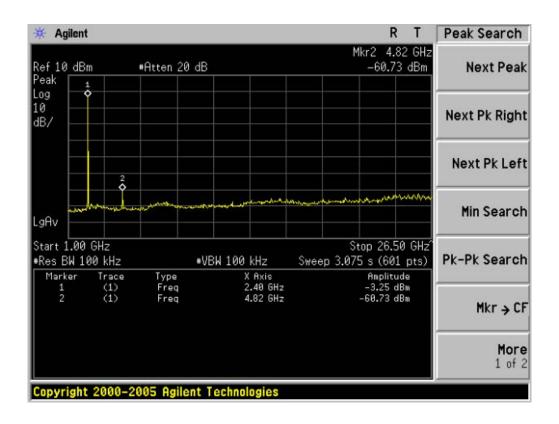

Page 16 of 43

8. RADIATED EMISSION

8.1 MEASUREMENT PROCEDURE

 Configure the EUT according to ANSI C63.4: 2003 and RS212. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

Page 17 of 43


The following table is the setting of spectrum analyzer and receiver.'

Spectrum Parameter	Setting
Start Frequency	1GHz
Stop Frequency	26.5GHz
RB/VB(Emission in restricted band)	1MHz/1MHz for Peak, 1MHz/10Hz for Average
RB/VB(Emission in non-restricted band)	1MHz/1MHz for Peak

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


8.2 TEST SETUP

RADIATED EMISSION TEST SETUP BELOW 30MHz

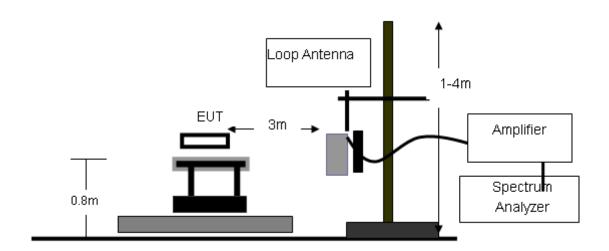


Page 18 of 43

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

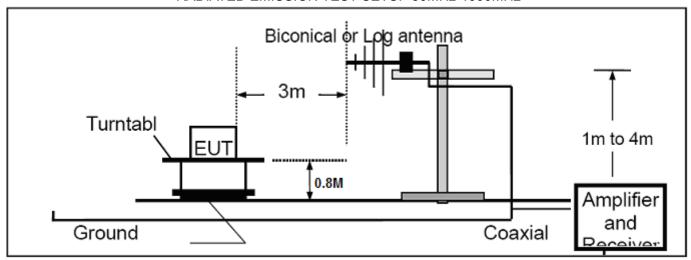

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

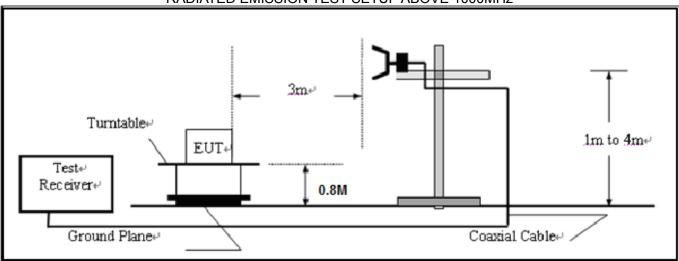

8.3 TEST EQUIMENT LIST

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	06/27/2011	06/26/2012
Amplifier	EM	EM30180	0607030	06/27/2011	06/26/2012
Horn Antenna	EM	EM-AH-10180	N/A	06/27/2011	06/26/2012
EMI Test Receiver	Rohde & Schwarz	ESCI	N/A	06/27/2011	06/26/2012
Amplifier	EM	EM30180	N/A	06/27/2011	06/26/2012
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	N/A	06/27/2011	06/26/2012
Loop Antenna	Daze	ZN30900N	SEL0097	06/27/2011	06/26/2012
Isolation Transformer	LETEAC	LTBK		06/27/2011	06/26/2012

Page 19 of 43

8.4 TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ



Site: site#1

Limit: FCC Class B 3M Radiation

EUT: 3G Mobile Phone

M/N: B10

Mode: Normal Hopping

Note:


Polarization: *Horizontal* Temperature: 26
Power: Humidity: 60 %

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1		42.3517	25.33	7.00	32.33	40.00	-7.67	peak			
2		52.6332	27.81	0.31	28.12	40.00	-11.88	peak			
3		60.7167	24.12	4.06	28.18	40.00	-11.82	peak			
4	*	80.1166	21.06	11.92	32.98	40.00	-7.02	peak			
5		114.3808	15.91	12.15	28.06	43.50	-15.44	peak			
6		838.3333	0.78	31.08	31.86	46.00	-14.14	peak			

Report No.: AGC19C120201-1F2B Page 20 of 43

Humidity: 60 %

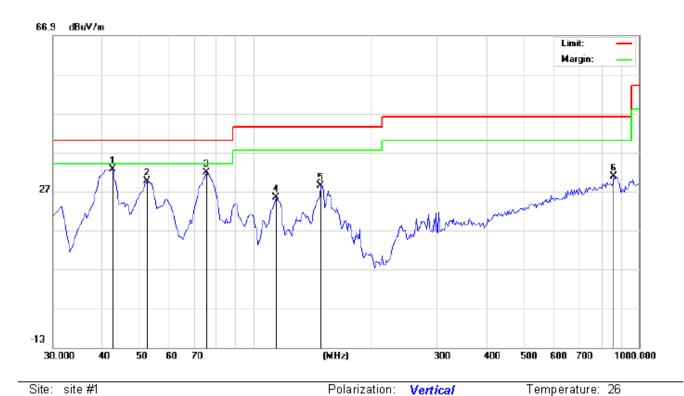

Site: site #1 Limit: FCC Class B 3M Radiation

.. - - - · · · · · - ·

EUT: 3G Mobile Phone

M/N: B10

Mode: Normal Hopping

Note:


							1				
No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1	*	42.9333	27.79	4.74	32.53	40.00	-7.47	peak			
2		52.6332	25.66	3.99	29.65	40.00	-10.35	peak			
3		75.2667	26.00	5.75	31.75	40.00	-8.25	peak			
4		114.0666	17.12	8.26	25.38	43.50	-18.12	peak			
5		149.6332	9.58	18.89	28.47	43.50	-15.03	peak		·	
6		860.9666	1.63	29.17	30.80	46.00	-15.20	peak			

Power:

Distance: 3m

Page 21 of 43

RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)

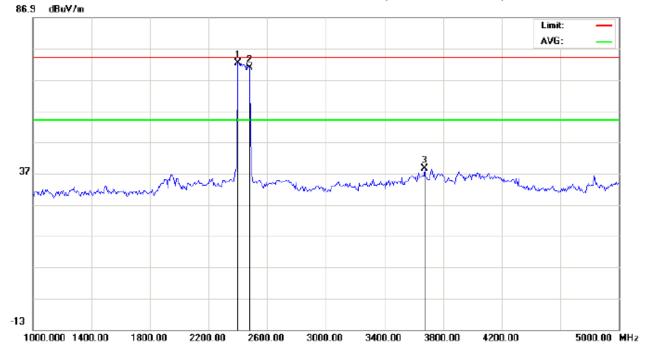

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: Humidity: 60 %


EUT: 3G Mobile Phone Distance: 3m

M/N: B10

Mode: Normal Hopping

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dΒ		cm	degree	
1	*	2402.000	71.85	0.32	72.17	74.00	-1.83	peak			
2		2480.000	70.32	0.41	70.73	74.00	-3.27	peak			
3		3673.333	35.44	3.18	38.62	74.00	-35.38	peak			

Page 22 of 43

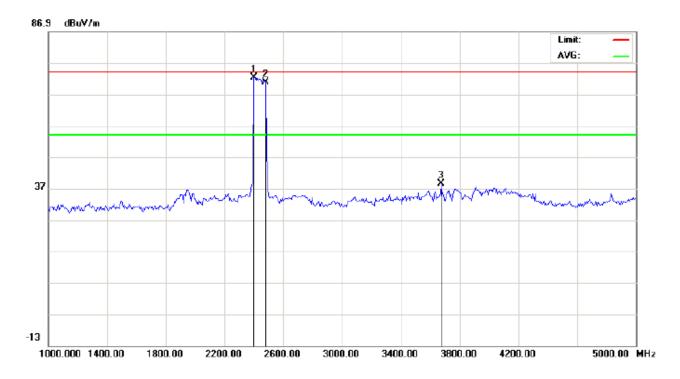

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: Humidity: 60 %

EUT: 3G Mobile Phone Distance: 3m

M/N: B10

Mode: Normal Hopping

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBuV/m	dΒ		cm	degree	
1	*	2402.000	71.85	0.32	72.17	74.00	-1.83	peak			
2		2480.000	70.32	0.41	70.73	74.00	-3.27	peak			
3		3673.333	35.44	3.18	38.62	74.00	-35.38	peak			

Note: 5~25GHz at least have 20dB margin. no recording in the test report. Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

Page 23 of 43

9 BAND EDGES EMISSION

9.1 MEASUREMENT PROCEDURE


- 1, Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency = Operation Frequency, RBW>=1%span, VBW>=RBW
- 3. The band edges was measured and recorded.

9.2 TEST SET-UP

The Same as described in section 8.2

9.3 TEST RESULT

TEST PLOT OF BAND EDGE FOR LOW CHANNEL (3Mbps)

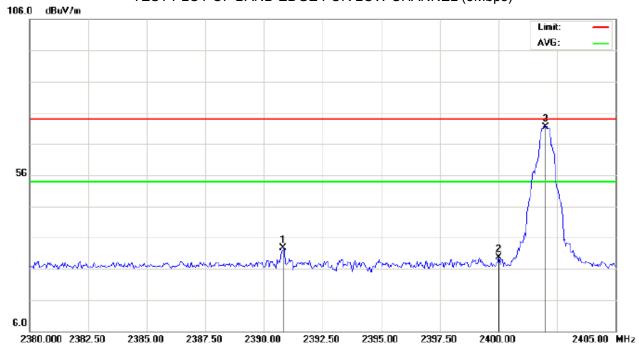


Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: Humidity: 60 %

EUT: 3G Mobile Phone Distance: 3m

M/N: B10 Mode: 2402TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2390.833	32.42	0.31	32.73	74.00	-41.27	peak			
2		2400.000	29.27	0.32	29.59	74.00	-44.41	peak			
3	*	2402.000	71.09	0.32	71.41	74.00	-2.59	peak			

Page 24 of 43

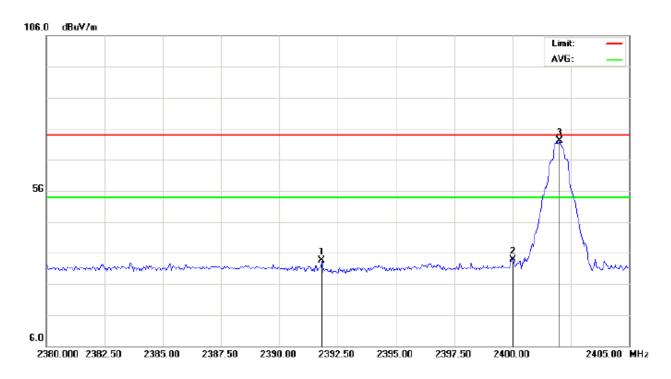

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: Humidity: 60 %


EUT: 3G Mobile Phone Distance: 3m

M/N: B10 Mode: 2402TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2391.833	33.25	0.31	33.56	74.00	-40.44	peak			
2		2400.000	33.62	0.32	33.94	74.00	-40.06	peak			
3	*	2402.000	71.92	0.32	72.24	74.00	-1.76	peak			

Page 25 of 43

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (3Mbps)

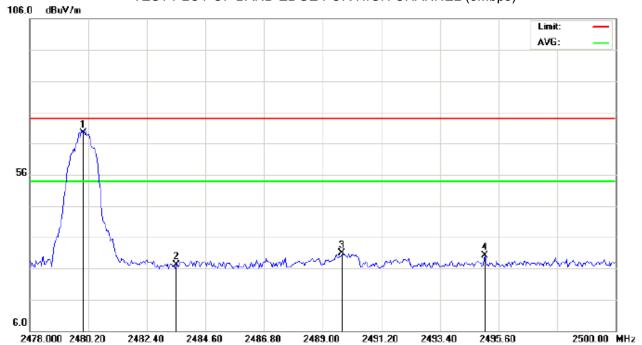


Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: Humidity: 60 %

EUT: 3G Mobile Phone Distance: 3m

M/N: B10 Mode: 2480TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	.	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dΒ		cm	degree	
1	*	2480.000	69.01	0.41	69.42	74.00	-4.58	peak			
2		2483.500	26.80	0.41	27.21	74.00	-46.79	peak			
3		2489.733	30.50	0.42	30.92	74.00	-43.08	peak			
4		2495.087	29.64	0.42	30.06	74.00	-43.94	peak			

Page 26 of 43

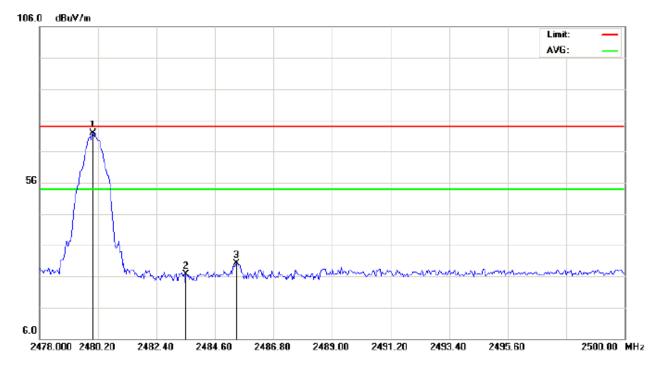

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: Humidity: 60 %

EUT: 3G Mobile Phone Distance: 3m

M/N: B10 Mode: 2480TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dΒ		cm	degree	
1	*	2480.000	71.51	0.41	71.92	74.00	-2.08	peak			
2		2483.500	26.10	0.41	26.51	74.00	-47.49	peak			
3		2485.407	29.81	0.41	30.22	74.00	-43.78	peak			

Page 27 of 43

10. NUMBER OF HOPPING FREQUENCY

10.1 MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz.
- 4. Set the Spectrum Analyzer as RBW>=1%span, VBW>=RBW.

Copyright 2000-2005 Agilent Technologies

10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)


Same as described in section 5.2 Conducted Method.

10.3 MEASUREMENT EQUIPMENT USED

The Same as described in section 5.3

10.4 LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT		
HOPPING CHANNEL	>=15	79	PASS		

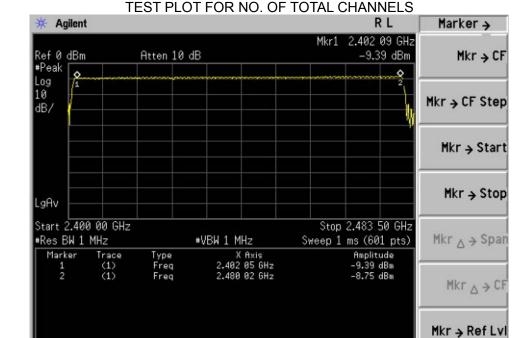

Page 28 of 43

11. TIME OF OCCUPANCY (DWELL TIME)

11.1 MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set Span = zero span, centered on a hoping channel
- 4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz,.

11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2 Conducted Method

11.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3

11.4 LIMITS AND MEASUREMENT RESULT


Bluetooth 3Mbps Test Result

Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)
Low	2.9	31.6	309.33	400
Middle	2.9	31.6	309.33	400
High	2.9	31.6	309.33	400


Low Channel Time 2.9*(1600/6)/79*31.6=309.33ms Middle Channel Time 2.9*(1600/6)/79*31.6=309.33ms High Channel Time 2.9*(1600/6)/79*31.6=309.33ms

Report No.: AGC19C120201-1F2B Page 29 of 43

TEST PLOT OF LOW CHANNEL

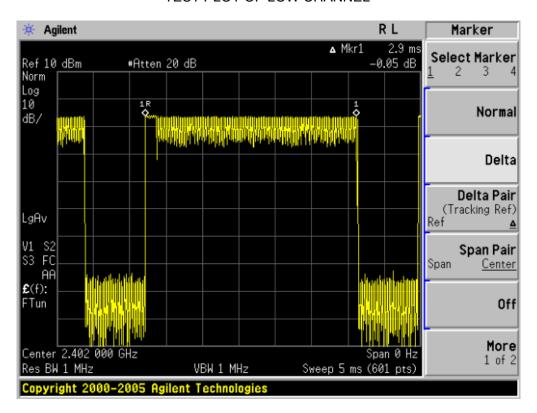


TEST PLOT OF MIDDLE CHANNEL

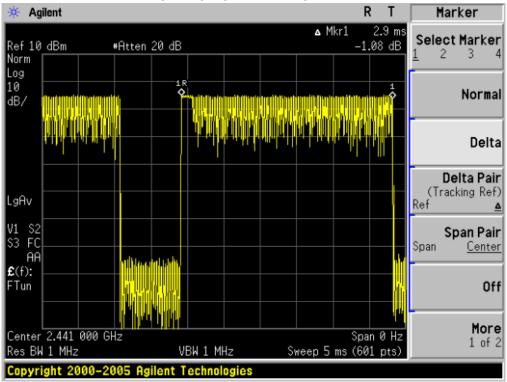

Page 30 of 43

TEST PLOT OF HIGH CHANNEL

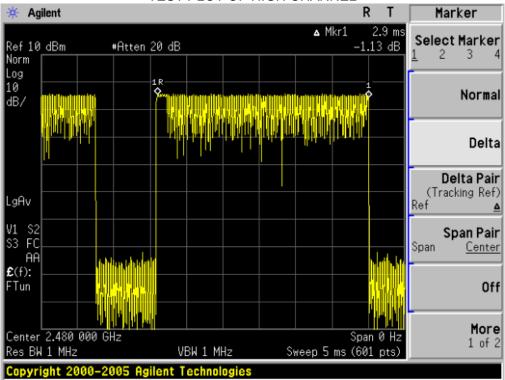

Page 31 of 43

12. FREQUENCY SEPARATION 12.1 MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold.

12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2

12.3 MEASUREMENT EQUIPMENT USED


The same as described in section 5.3

12.4 LIMITS AND MEASUREMENT RESULT

BLUETOOTH 3MBPS TEST RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT
OHAMMEL	KHz	KHz	
CH00-CH01	1001	>=25 KHz or 2/3 20 dB BW	Pass

TEST PLOT FOR FREQUENCY SEPARATION

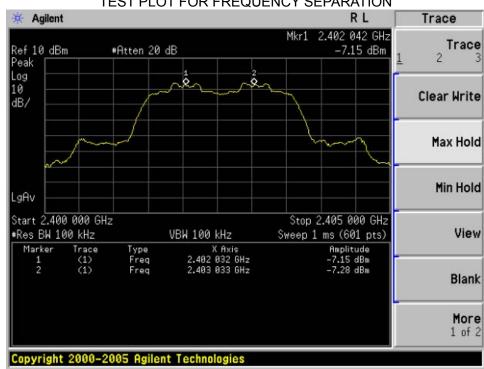


Page 32 of 43

13 FCC LINE CONDUCTED EMISSION TEST

13.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Fraguency	Maximum RF Line Voltage								
Frequency	Q.P.(dBuV)	Average(dBuV)							
150kHz~500kHz	66-56	56-46							
500kHz~5MHz	56	46							
5MHz~30MHz	60	50							

13.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

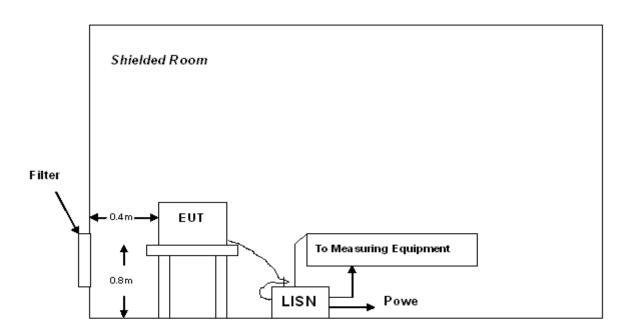

A: Powered through filter

^{**}Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

Page 33 of 43

13.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT charged by adapter which received power from a LISN..
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The test mode(s) were scanned during the preliminary test.

 Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

13.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3) The test data of the worst case condition(s) was reported on the Summary Data page.

Humidity: 60 %

Page 34 of 43

13.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

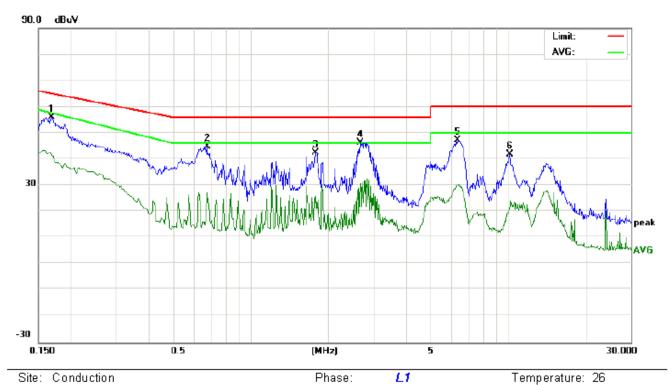

Limit: FCC Class B Conduction(QP)

EUT: 3G Mobile phone

M/N: B10

Mode: Normal Hopping

Note:


No.	No. Freq.		Reading_Level (dBu√)		Correct Measurement Factor (dBuV)		Limit (dBu√)		Margin (dB)		P/F	Comment		
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1685	45.70		31.66	10.18	55.88		41.84	65.03	57.74	-9.15	-15.90	Р	
2	0.6780	34.36		15.03	10.34	44.70		25.37	56.00	46.00	-11.30	-20.63	Р	
3	1.7820	32.24		15.76	10.29	42.53		26.05	56.00	46.00	-13.47	-19.95	Р	
4	2.6739	35.75		20.14	10.47	46.22		30.61	56.00	46.00	-9.78	-15.39	Р	
5	6.3539	36.92		19.97	10.29	47.21		30.26	60.00	50.00	-12.79	-19.74	Р	
6	10.1416	31.82		10.67	10.09	41.91		20.76	60.00	50.00	-18.09	-29.24	Р	

Power:

AC 120V/60Hz

Page 35 of 43

Line Conducted Emission Test Line 2-N

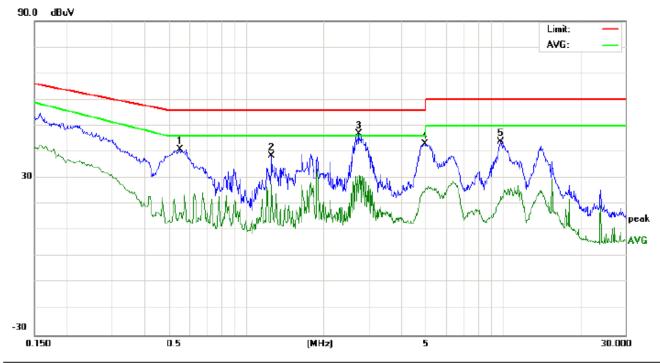

Site: Conduction Phase: N Temperature: 26
Limit: EN55014 Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %

EUT: 3G Mobile Phone

M/N: B10

Mode: Normal Hopping

No.	No. Freq.		, , (404,)		Correct Measurement Factor (dBuV)		Limit Margin (dBuV) (dB)			P/F	Comment			
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.5540	30.67		6.51	10.35	41.02		16.86	56.00	46.00	-14.98	-29.14	Р	
2	1.2579	28.06		17.29	10.37	38.43		27.66	56.00	46.00	-17.57	-18.34	Р	
3	2.7620	36.46		13.96	10.49	46.95		24.45	56.00	46.00	-9.05	-21.55	Р	
4	4.9579	32.80		15.47	10.24	43.04		25.71	56.00	46.00	-12.96	-20.29	Р	
5	9.8178	33.84		12.61	10.20	44.04		22.81	60.00	50.00	-15.96	-27.19	Р	

Page 36 of 43

APPENDIX I PHOTOGRAPHS OF THE EUT

TOTAL VIEW OF EUT







Report No.: AGC19C120201-1F2B Page 37 of 43














Report No.: AGC19C120201-1F2B Page 39 of 43










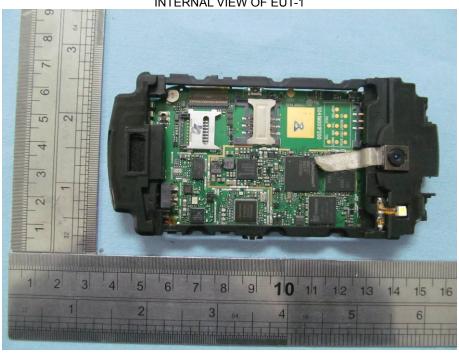









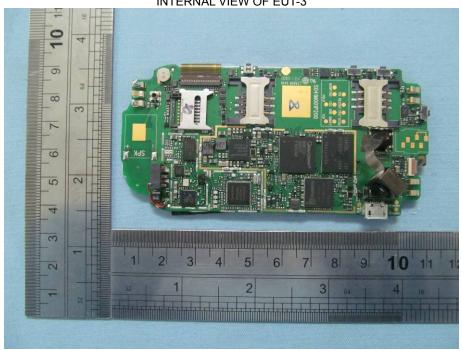




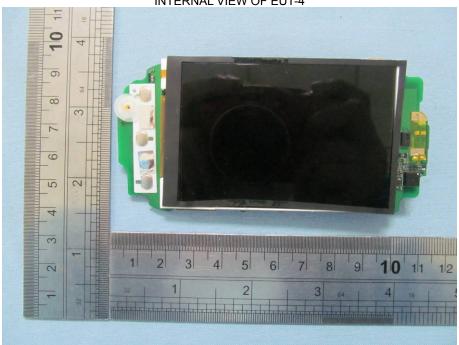

Page 42 of 43

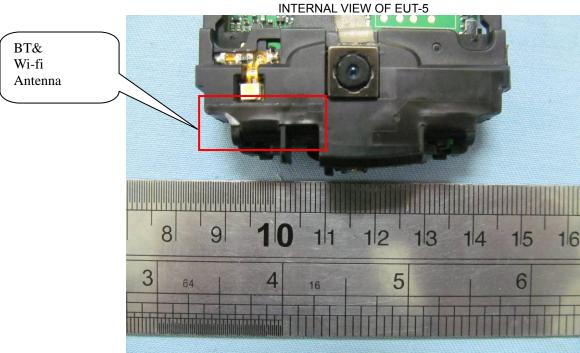

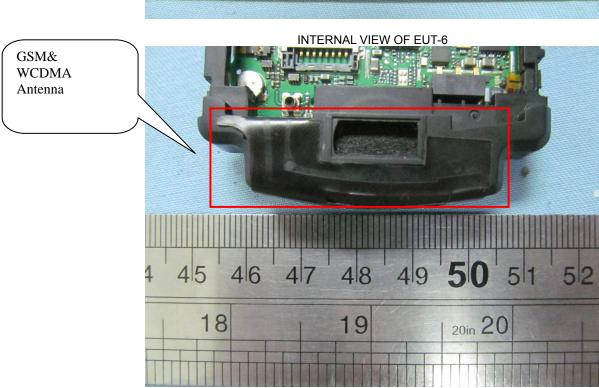


Report No.: AGC19C120201-1F2B Page 43 of 43

APPENDIX II

PHOTOGRAPHS OF THE TEST SETUP
FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

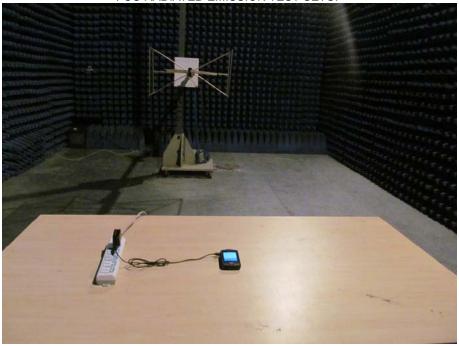

----END OF REPORT----