



# FCC Test Report

**APPLICANT** : Bullitt Group  
**EQUIPMENT** : Rugged Smart Phone  
**BRAND NAME** : CAT  
**MODEL NAME** : S41  
**MARKETING NAME** : S41  
**FCC ID** : ZL5S41  
**STANDARD** : FCC 47 CFR FCC Part 15 Subpart B  
**CLASSIFICATION** : Certification

The product was received on Jun. 09, 2017 and testing was completed on Aug. 06, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Louis Wu / Manager

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL INC.**  
No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1. GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1. Applicant.....	5
1.2. Manufacturer .....	5
1.3. Product Feature of Equipment Under Test .....	5
1.4. Modification of EUT .....	5
1.5. Test Location.....	6
1.6. Applicable Standards .....	6
<b>2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
2.1. Test Mode .....	7
2.2. Connection Diagram of Test System .....	8
2.3. Support Unit used in test configuration and system.....	8
2.4. EUT Operation Test Setup .....	9
<b>3. TEST RESULT.....</b>	<b>10</b>
3.1. Test of AC Conducted Emission Measurement .....	10
3.2. Test of Radiated Emission Measurement .....	14
<b>4. LIST OF MEASURING EQUIPMENT .....</b>	<b>29</b>
<b>5. UNCERTAINTY OF EVALUATION.....</b>	<b>30</b>

### APPENDIX A. SETUP PHOTOGRAPHS



# REVISION HISTORY



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 10.70 dB at 0.614 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 3.04 dB at 41.300 MHz for Quasi-Peak



## 1. General Description

### 1.1. Applicant

**Bullitt Group**

One Valpy, Valpy Street, Reading, Berkshire, England RG1 1AR

### 1.2. Manufacturer

**Compal Electronics, INC.**

No. 385, Yangguang St. Neihu District, Taipei City 11491, Taiwan, R.O.C

### 1.3. Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n, FM Receiver, NFC, and GPS.

Product Specification subjective to this standard	
Antenna Type	WWAN: PIFA + Coupling type (LDS) Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna GPS / Glonass : PIFA Antenna NFC: Loop Antenna FM: Integral Antenna (Earphone acting as FM antenna deemed as an integral antenna)

**<Sample Information>**

S41 has 2 different Variant	
Sample 1	Dual SIM
Sample 2	Single SIM
For Dual-SIM or Single-SIM control by SW, The HW difference is SIM holder.	

**Remark:** All test items were performed with Sample 1.

### 1.4. Modification of EUT

No modifications are made to the EUT during all test items.



## 1.5. Test Location

Sportun Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1093/TW1095 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sportun Site No.</b>	
	CO05-HY	03CH06-HY

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No. 30-2, Dingfu Tsuen, Linkou District, New Taipei City, Taiwan 244, R.O.C. TEL: +886-2-2603-5367 / +886-2-2601-1640 FAX: +886-2-2601-1695	
<b>Test Site No.</b>	<b>Sportun Site No.</b>	
	OS03-LK	

## 1.6. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN Idle + NFC on + MPEG4 + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 1 Mode 2: WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + NFC on + Camera (Front) + Earphone + Battery + Battery + USB Cable (Charging from Adapter) + SIM 1 Mode 3: LTE Band 12 Idle + Bluetooth Idle + WLAN Idle + NFC on + Camera (Rear) + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 1 Mode 4: LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + NFC on + FM Rx (98MHz) + Earphone + Battery + Battery + USB Cable (Charging from Adapter) + SIM 1 Mode 5: Flight mode + Earphone + Battery + USB Cable (Data Link with Notebook) + SIM 1 Mode 6: LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + NFC on + FM Rx (98MHz) + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 2
Radiated Emissions	Mode 1: GSM 850 Idle + Bluetooth Idle + WLAN Idle + NFC on + Earphone + MPEG4 + Battery + USB Cable (Charging from Adapter) + SIM 1 Mode 2: WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + NFC on + Earphone + Camera (Front) + Battery + USB Cable (Charging from Adapter) + SIM 1 Mode 3: LTE Band 12 Idle + Bluetooth Idle + WLAN Idle + NFC on + Earphone + Camera (Rear) + Battery + USB Cable (Charging from Adapter) + SIM 1 Mode 4: LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + NFC on + Earphone + FM Rx (98MHz) + Battery + USB Cable (Charging from Adapter) + SIM 1 Mode 5: Flight mode + Earphone + Battery + USB Cable (Data Link with Notebook) + SIM 1 Mode 6: Flight mode + Earphone + Battery + OTG Cable (Data Link with USB storage devices) + SIM 1 Mode 7: GSM850 Idle + Bluetooth Idle + WLAN Idle + NFC on + Earphone + MPEG4 + Battery + USB Cable (Charging from Adapter) + SIM 2

**Remark:**

1. The worst case of AC is mode 4; only the test data of this mode was reported.
2. The worst case of RE is mode 7; the mode 5 and mode 7 test data were reported.
3. Data Link with Notebook means data application transferred mode between EUT and Notebook.

## 2.2. Connection Diagram of Test System

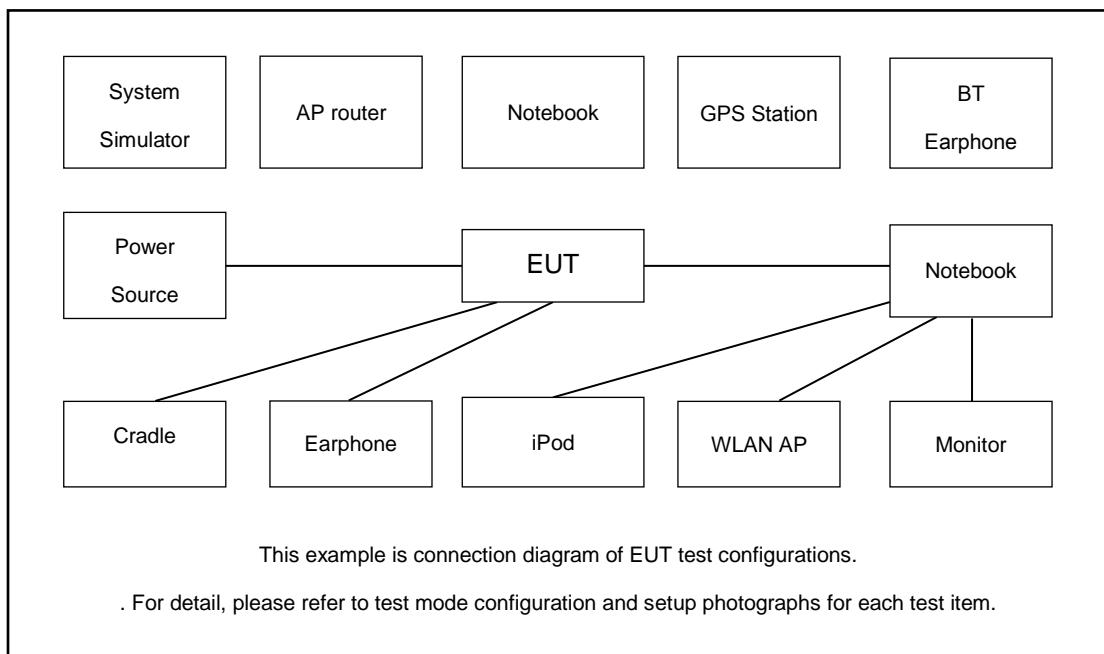

## 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
4.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
5.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
6.	USB Dongle	Kingston	DataTraveler 100	FCC Doc	N/A	N/A
7.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
8.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A
9.	SD Card	SanDisk	microSDHC 16GB Class 10 UHS-I	FCC DoC	N/A	N/A



## 2.4. EUT Operation Test Setup

The EUT was in GSM, WCDMA, LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between Laptop and EUT via USB cable.
2. Execute "Video Player" to play MPEG4 files.
3. Turn on camera to capture images.
4. Turn on NFC function.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


##### 3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.1.4 Test Setup

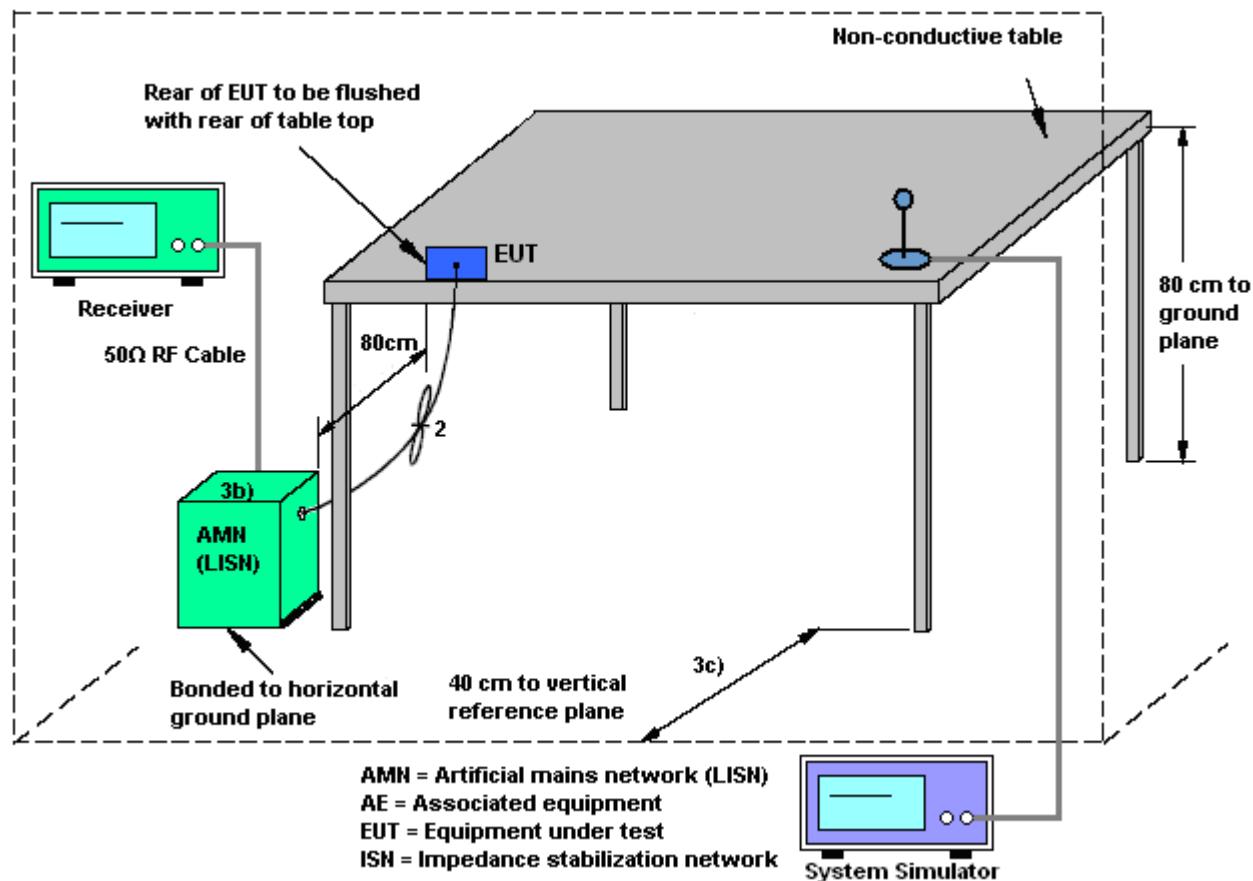

## 3.1.5 Test Result of AC Conducted Emission

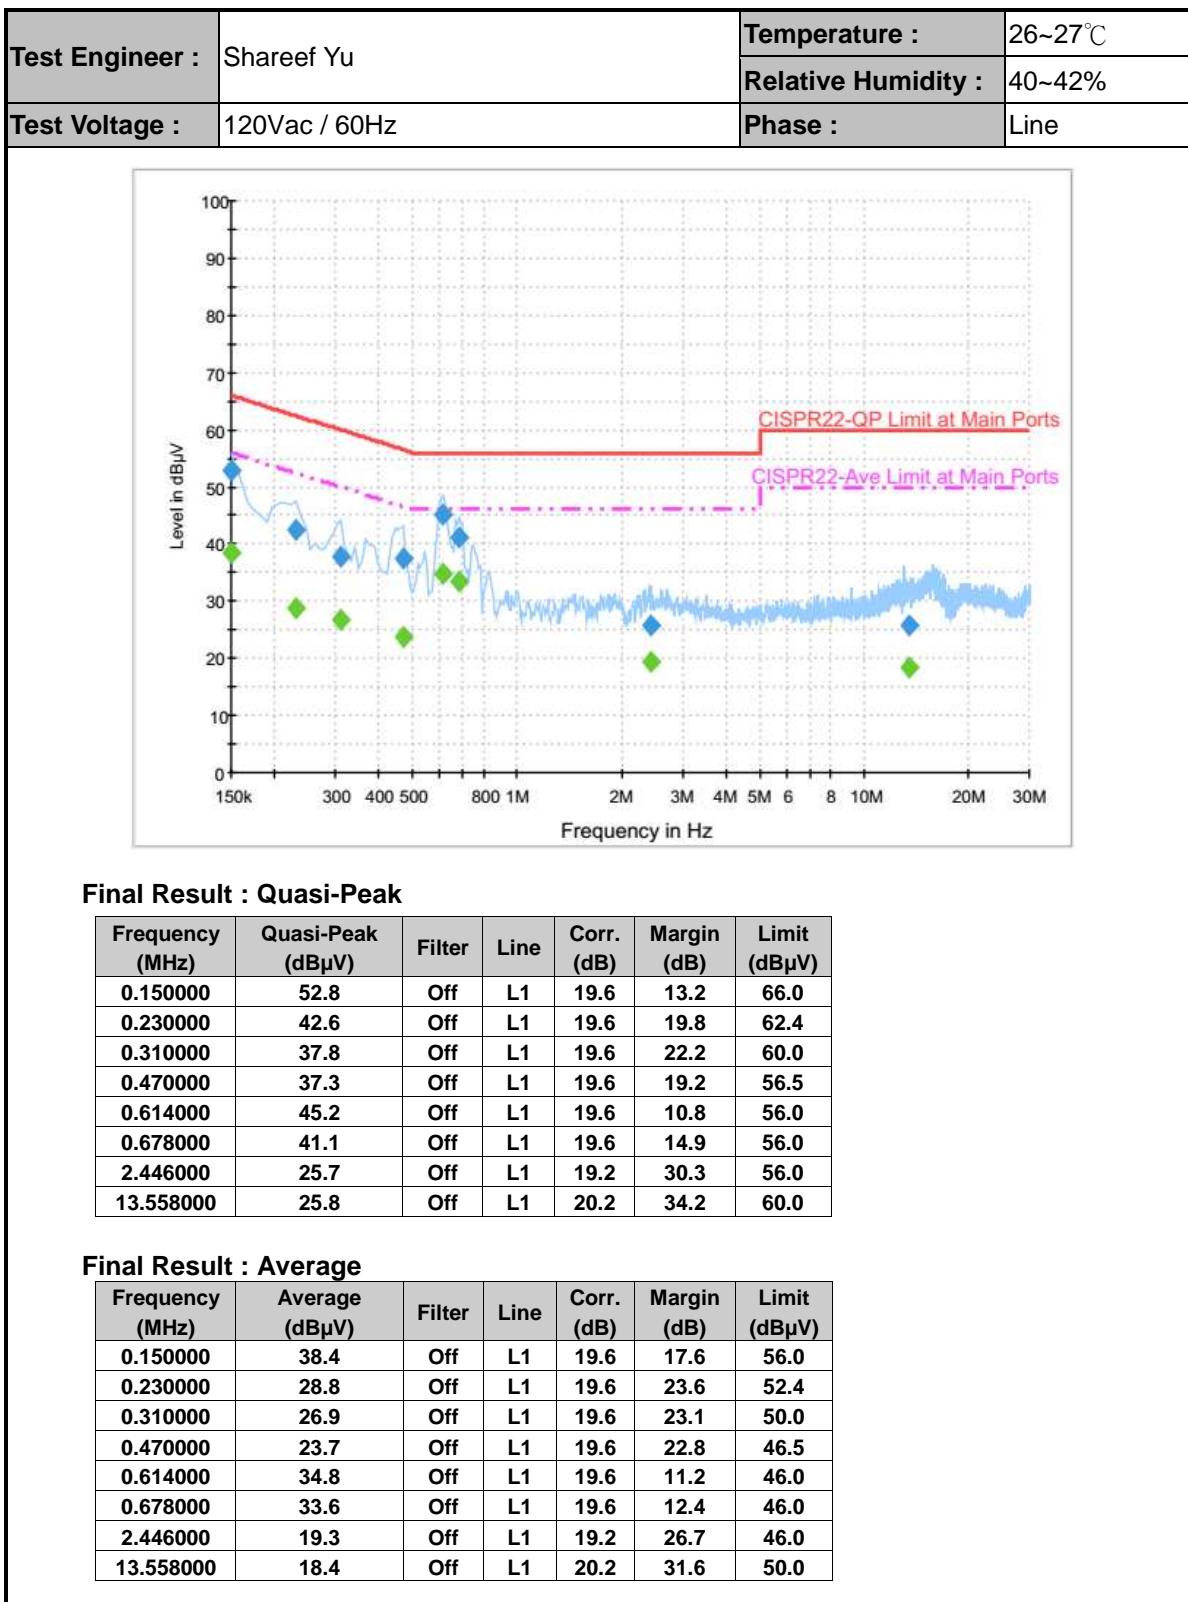

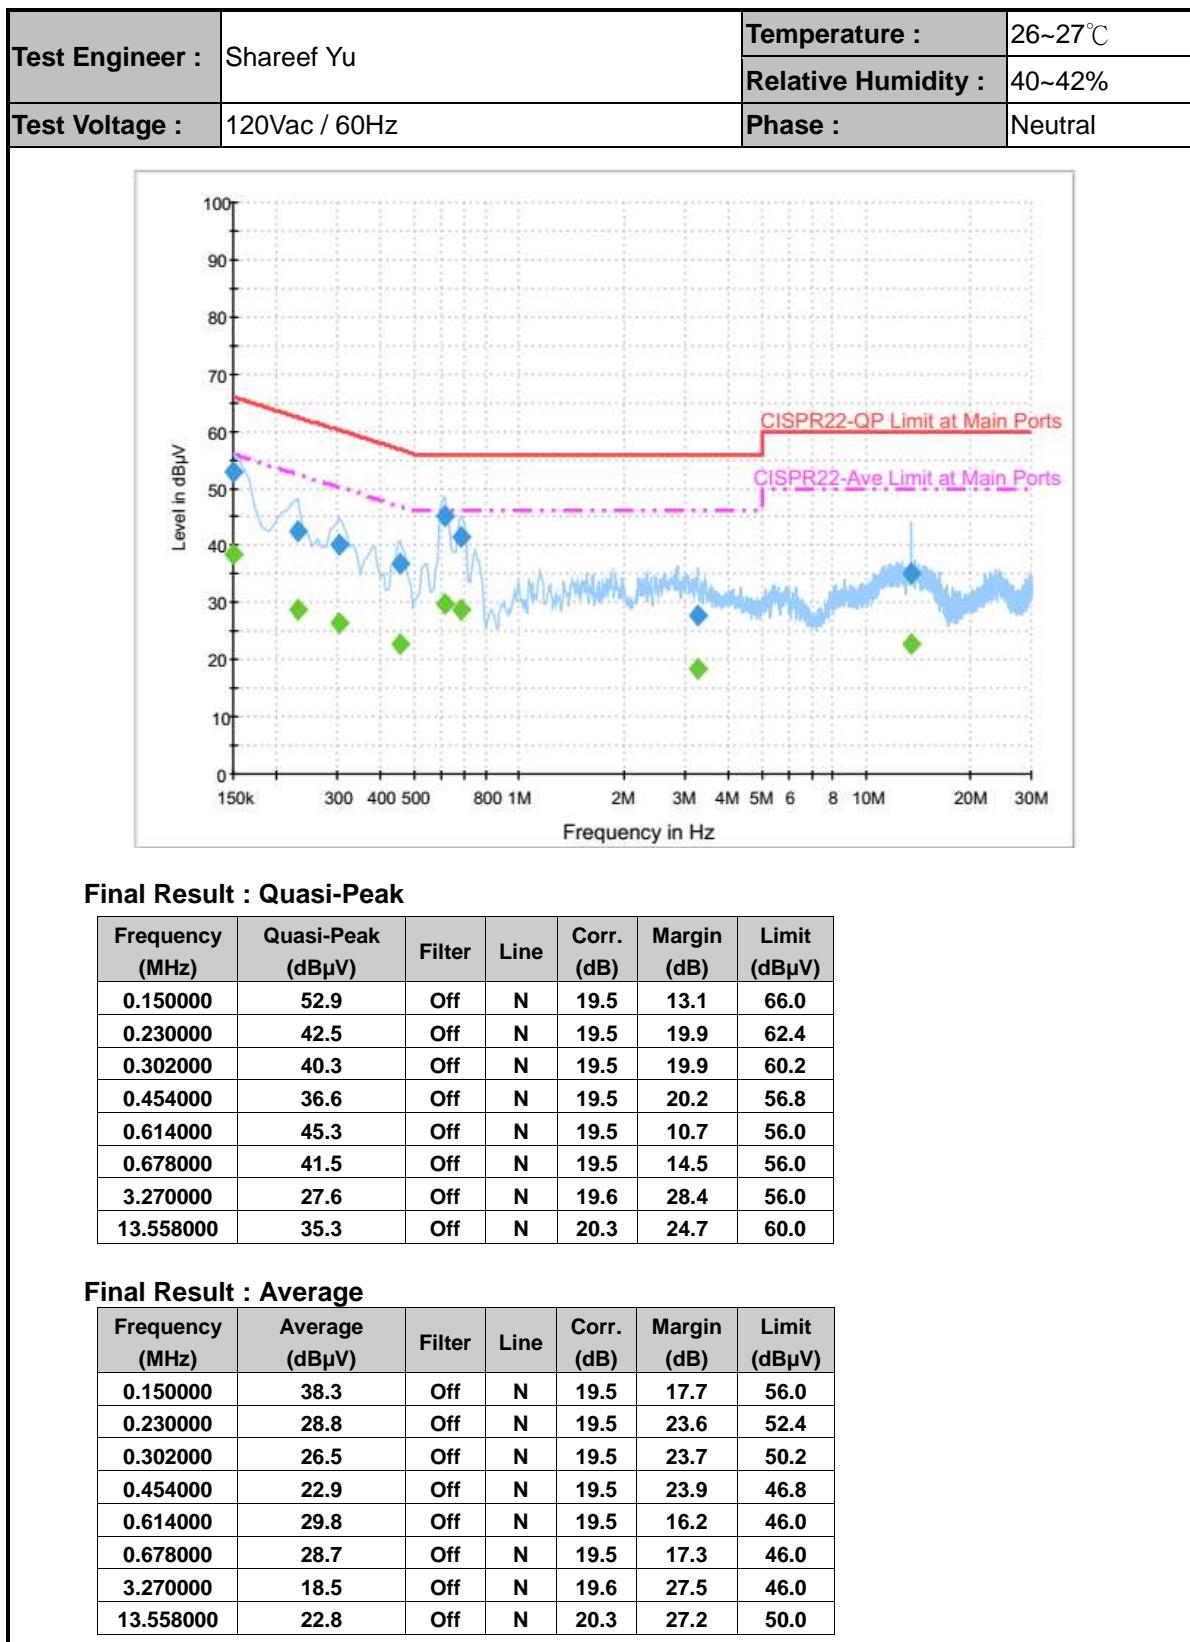



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

**Note:** Measurement below 1GHz follows the CISPR 22 limit line as below :

15.109 (g) As an alternative to the radiated emission limits shown in paragraphs (a) and (b) of this section, digital devices may be shown to comply with the standards contained in Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement"

Frequency (MHz)	Field Strength (dBuV/meter)	Measurement Distance (meters)
30 – 230	30	10
230 – 1000	37	10

#### 3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 10 meters (30M~1G) and 3 meters (1G~ 13G) from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

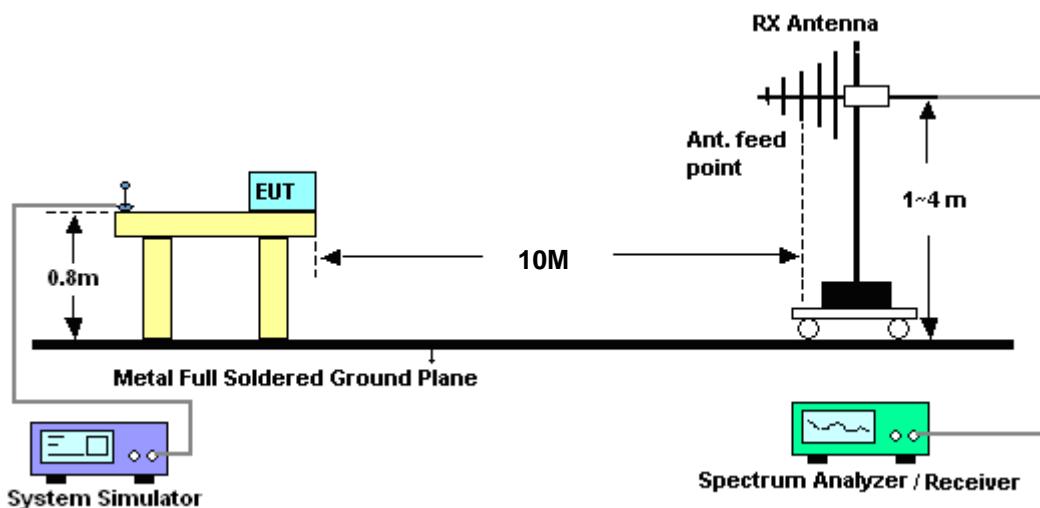


For radiated emissions above 1GHz

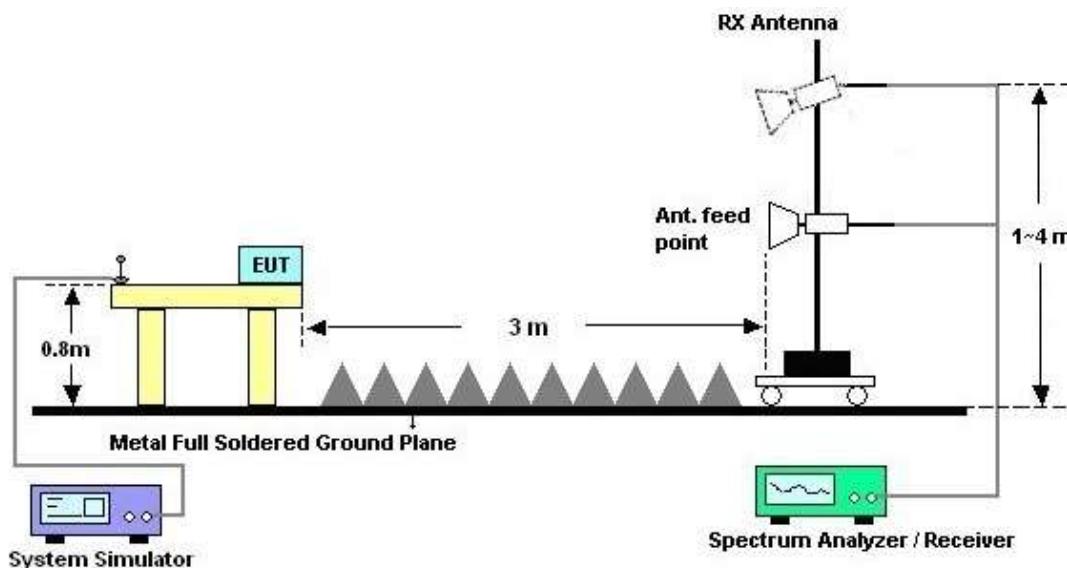





## 3.2.5. Test Result of Radiated Emission

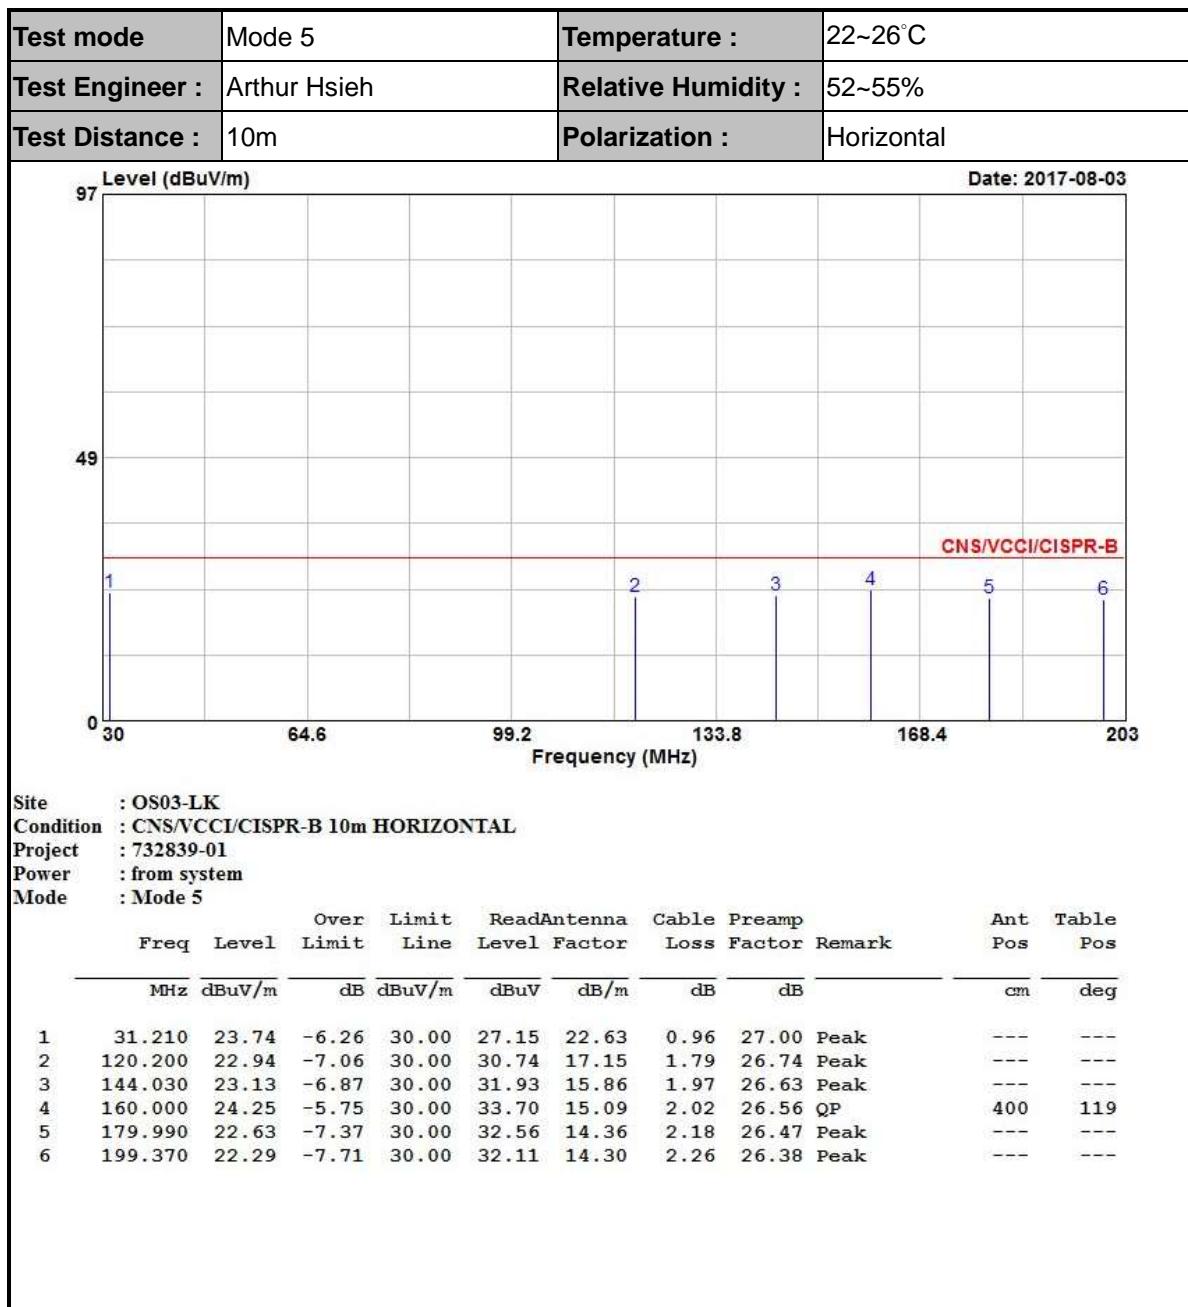



Site : OS03-LK  
Condition : CNS/VCCI/CISPR-B 10m HORIZONTAL  
Project : 732839-01  
Power : from system  
Mode : Mode 5


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table
		Line	Limit	Level	Factor	Cable	Preamp		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	31.210	23.74	-6.26	30.00	27.15	22.63	0.96	27.00	Peak
2	120.200	22.94	-7.06	30.00	30.74	17.15	1.79	26.74	Peak
3	144.030	23.13	-6.87	30.00	31.93	15.86	1.97	26.63	Peak
4	160.000	24.25	-5.75	30.00	33.70	15.09	2.02	26.56	QP
5	179.990	22.63	-7.37	30.00	32.56	14.36	2.18	26.47	Peak
6	199.370	22.29	-7.71	30.00	32.11	14.30	2.26	26.38	Peak

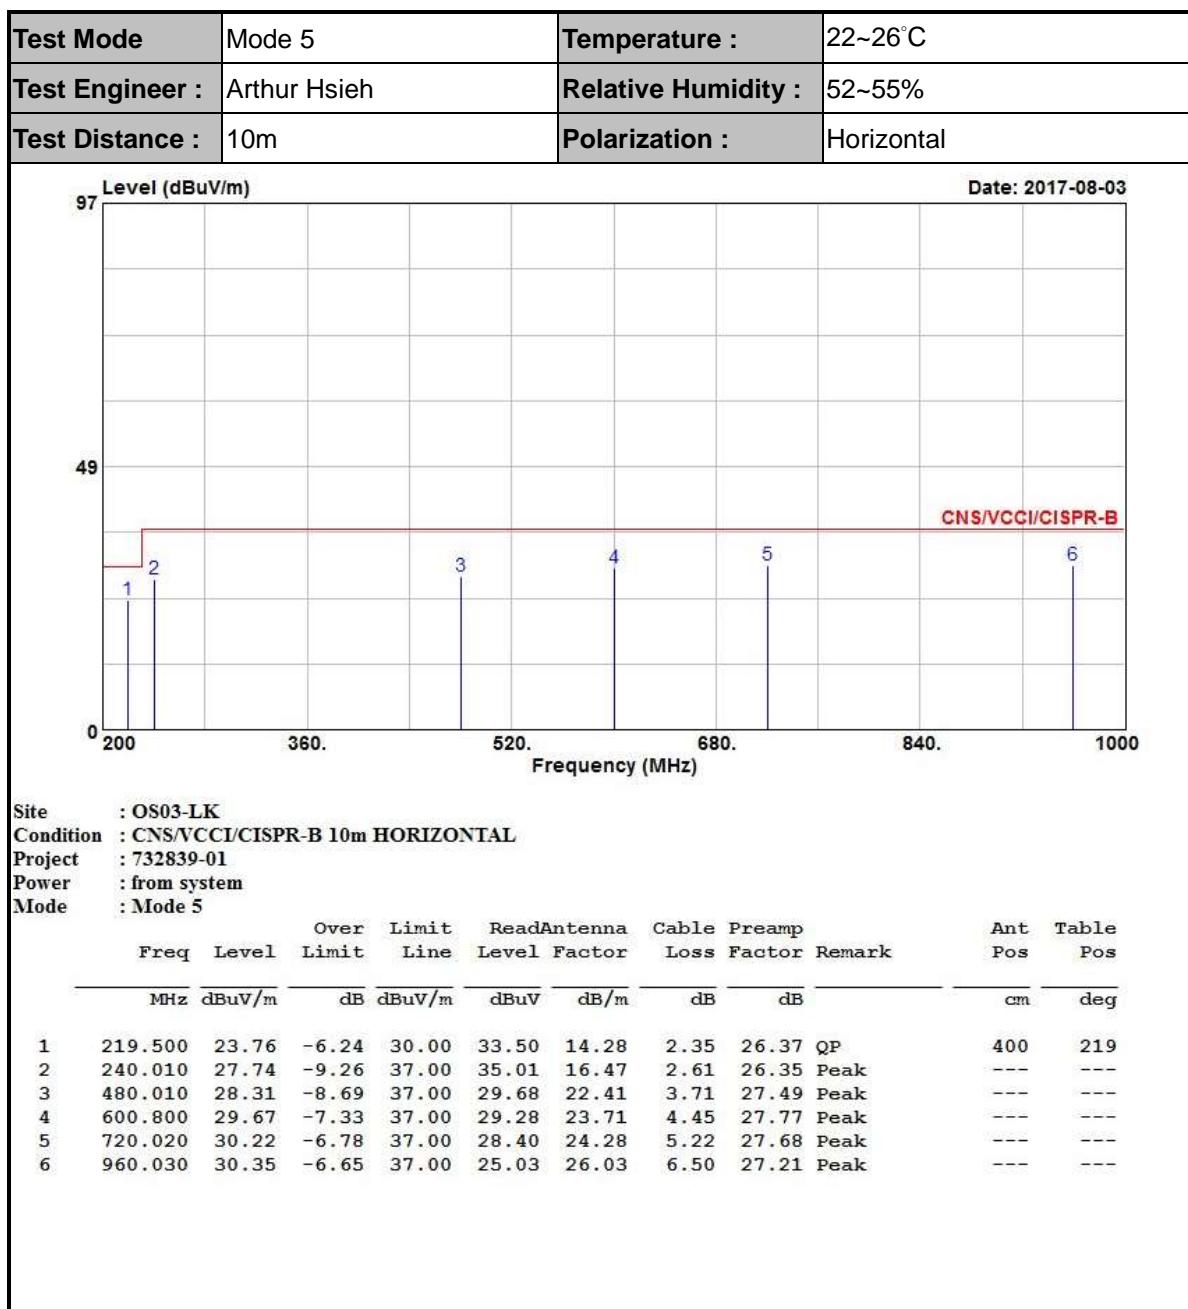


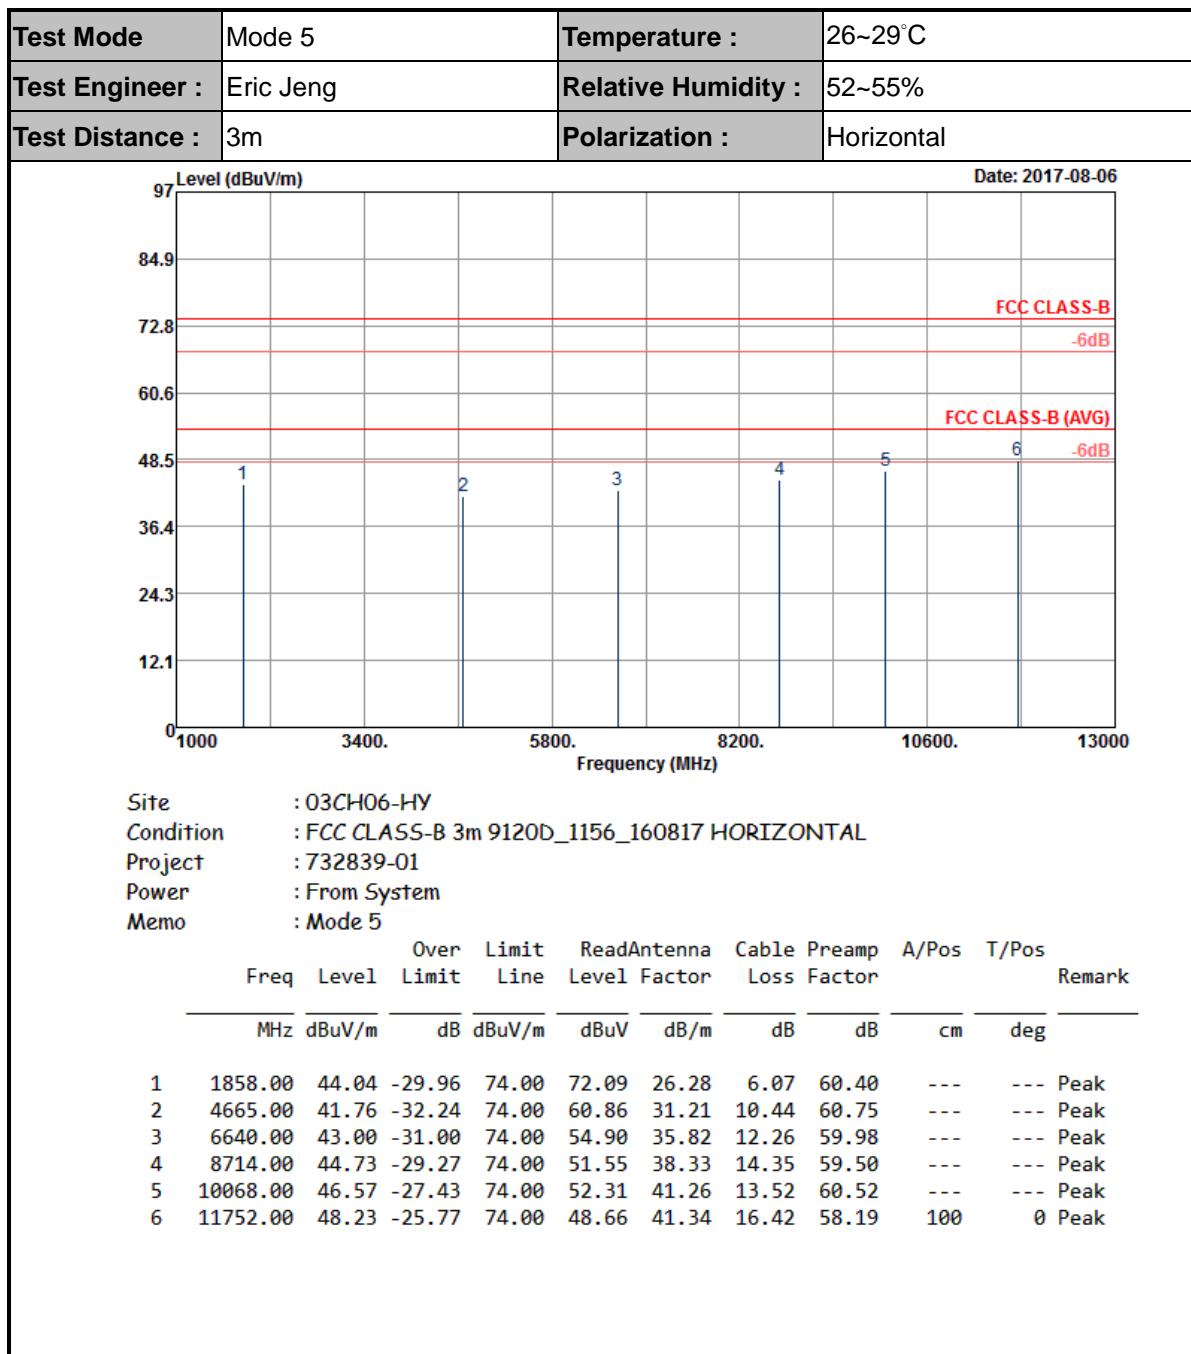


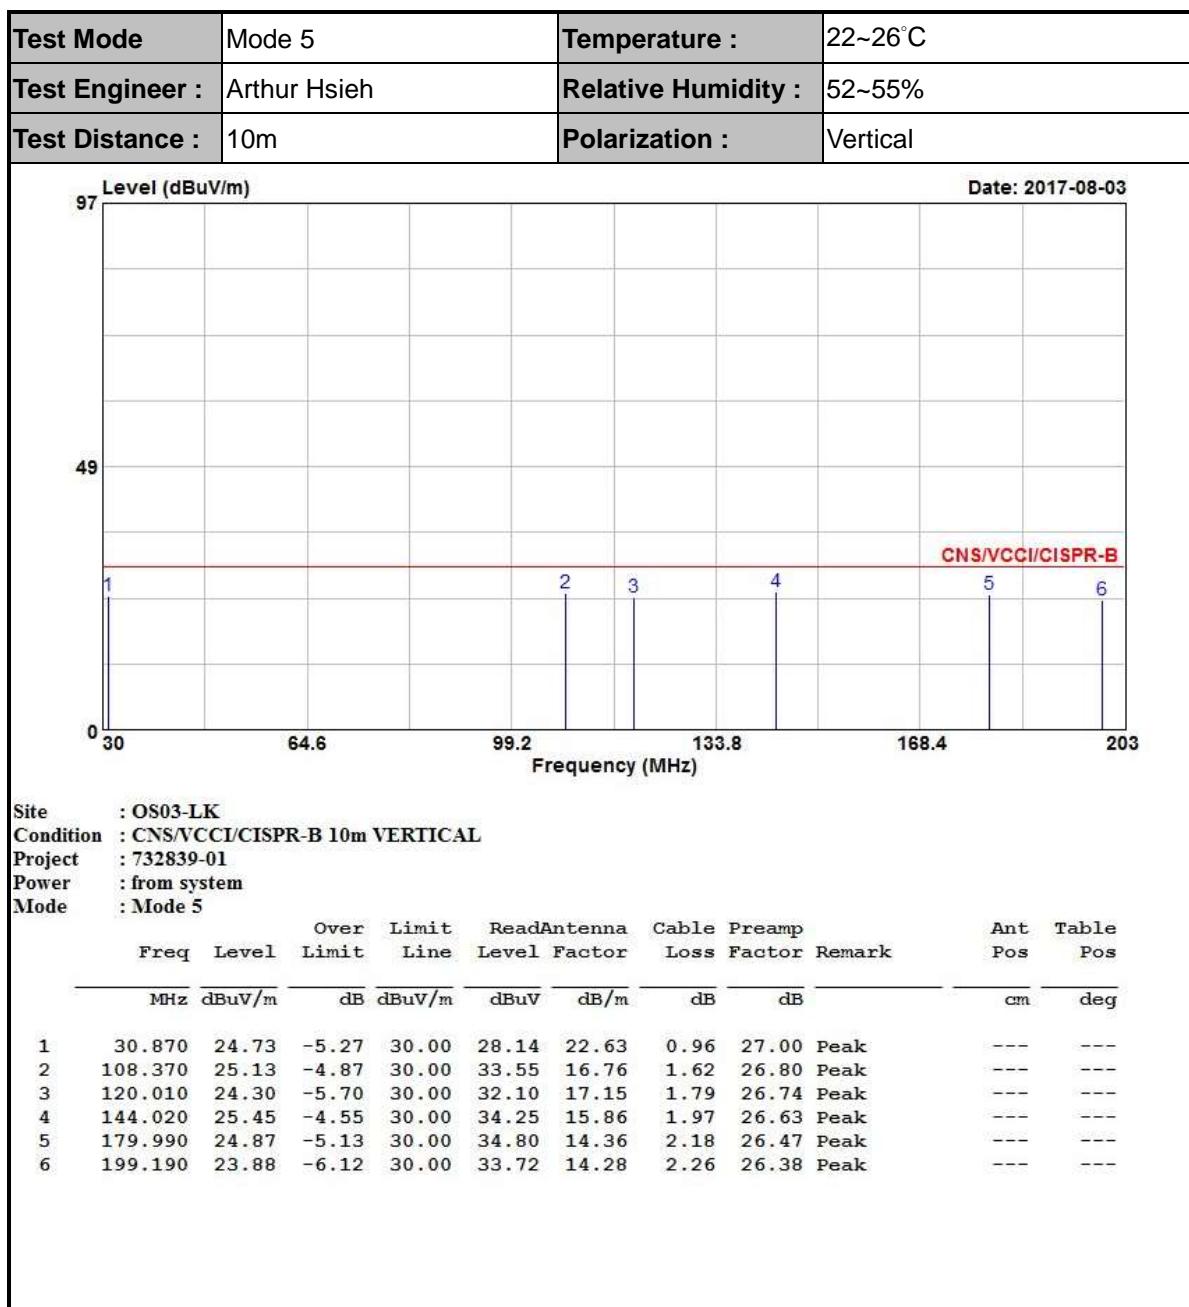


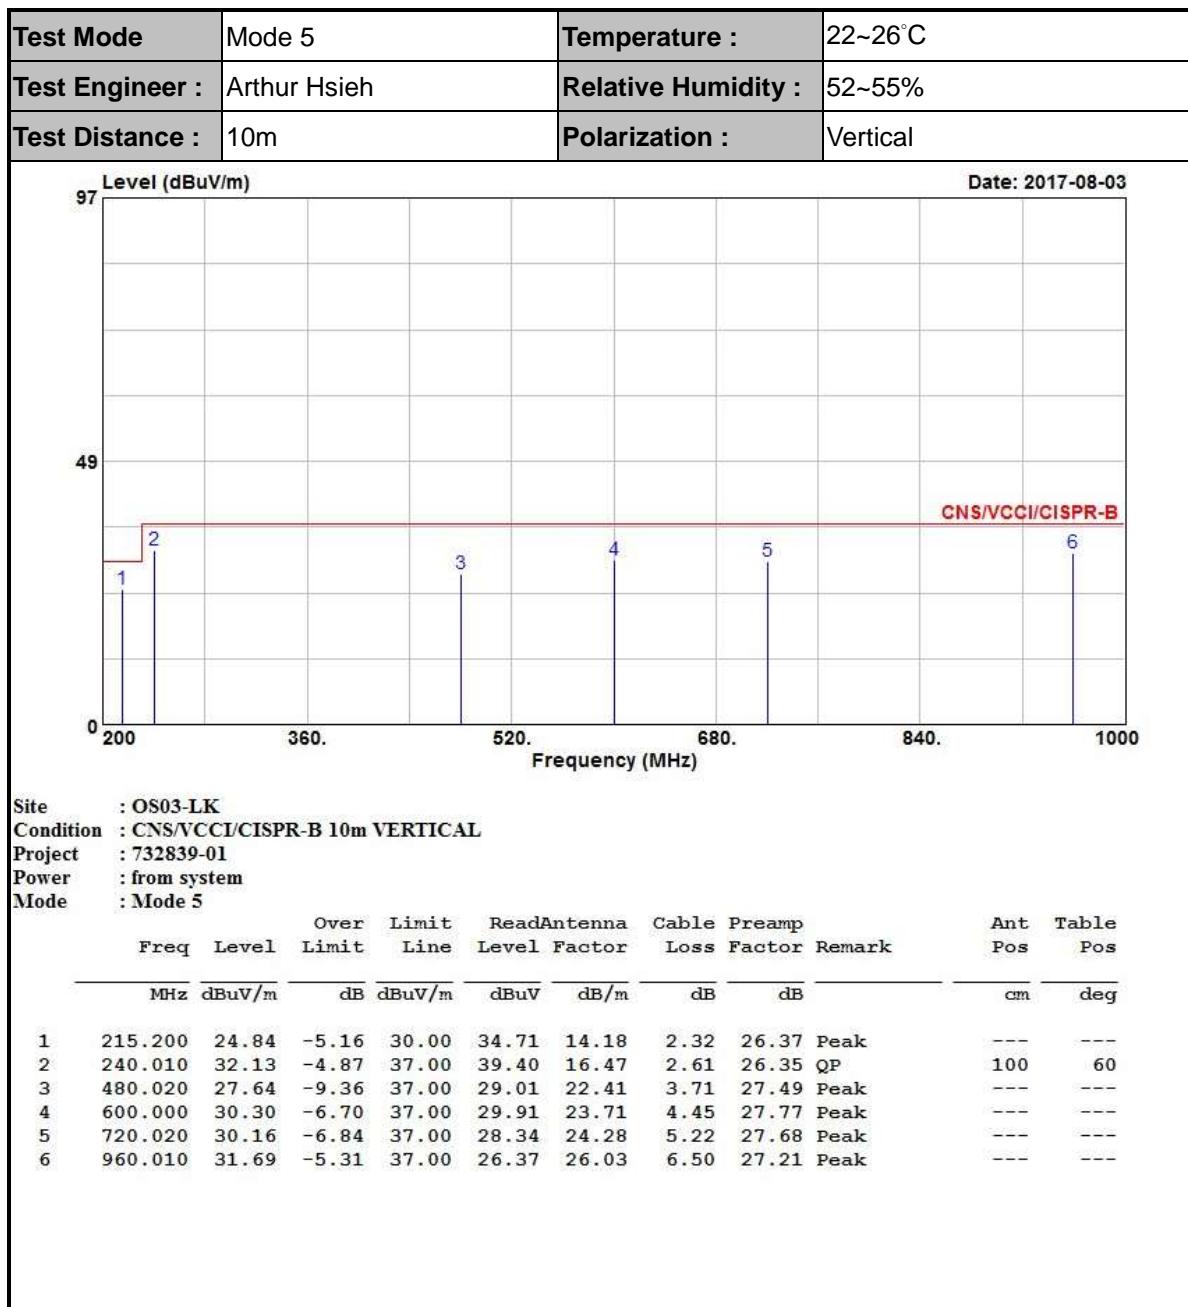


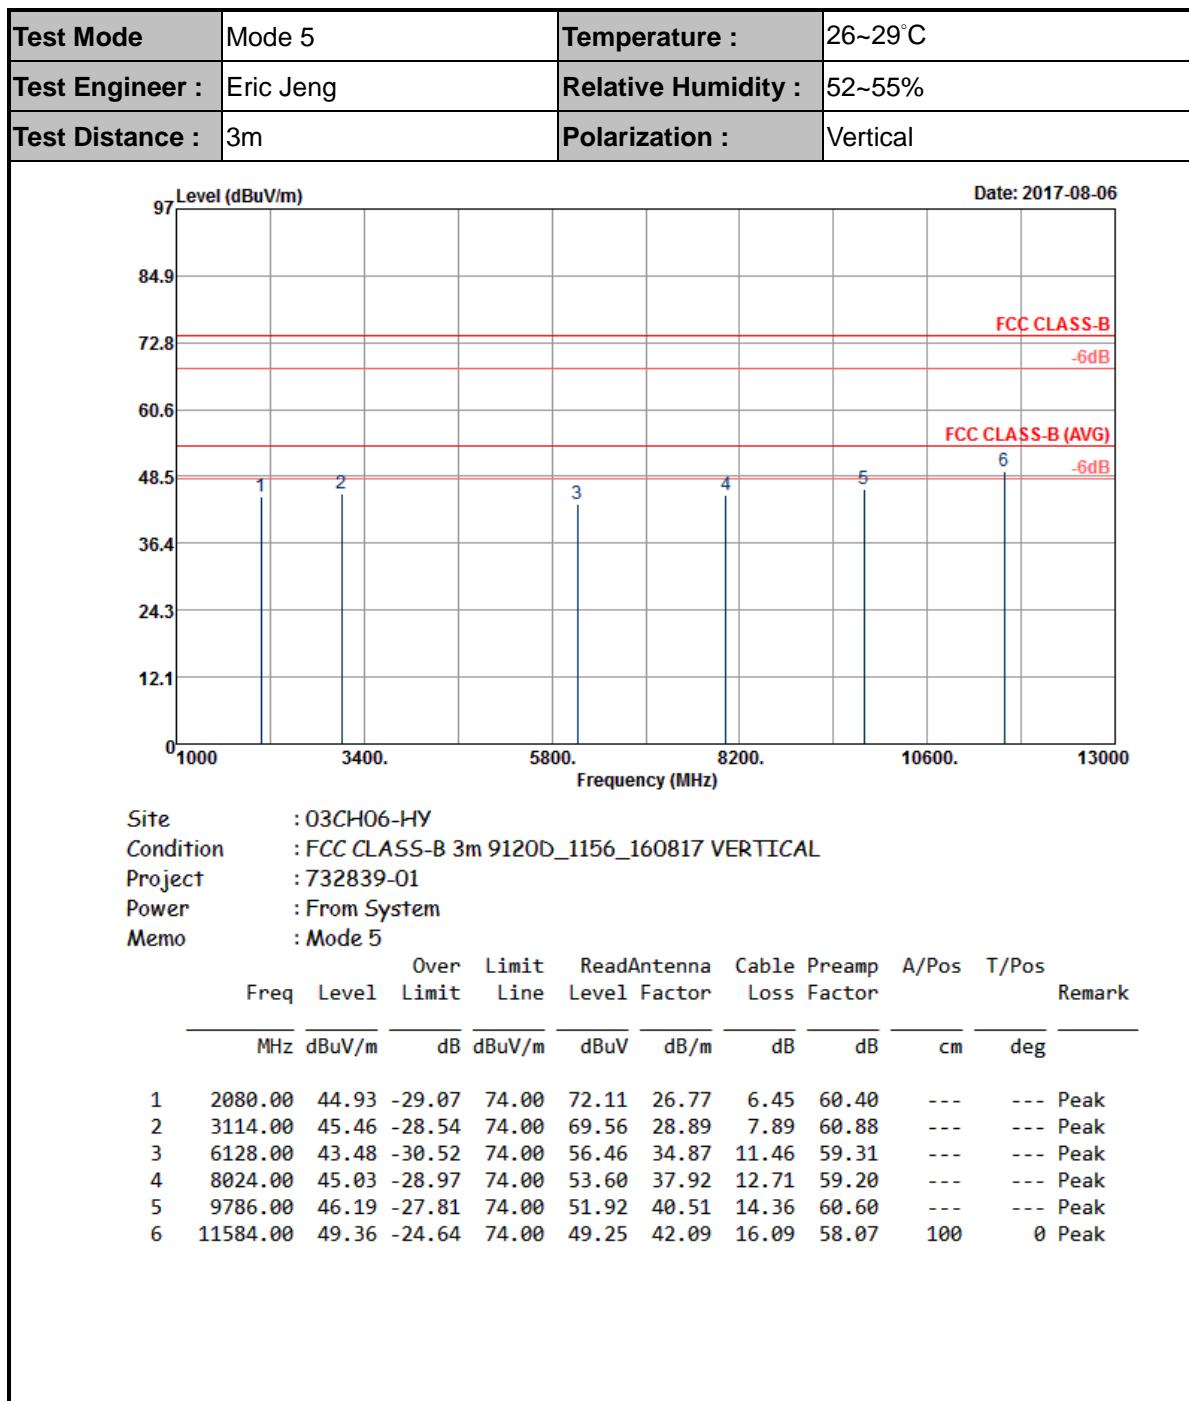

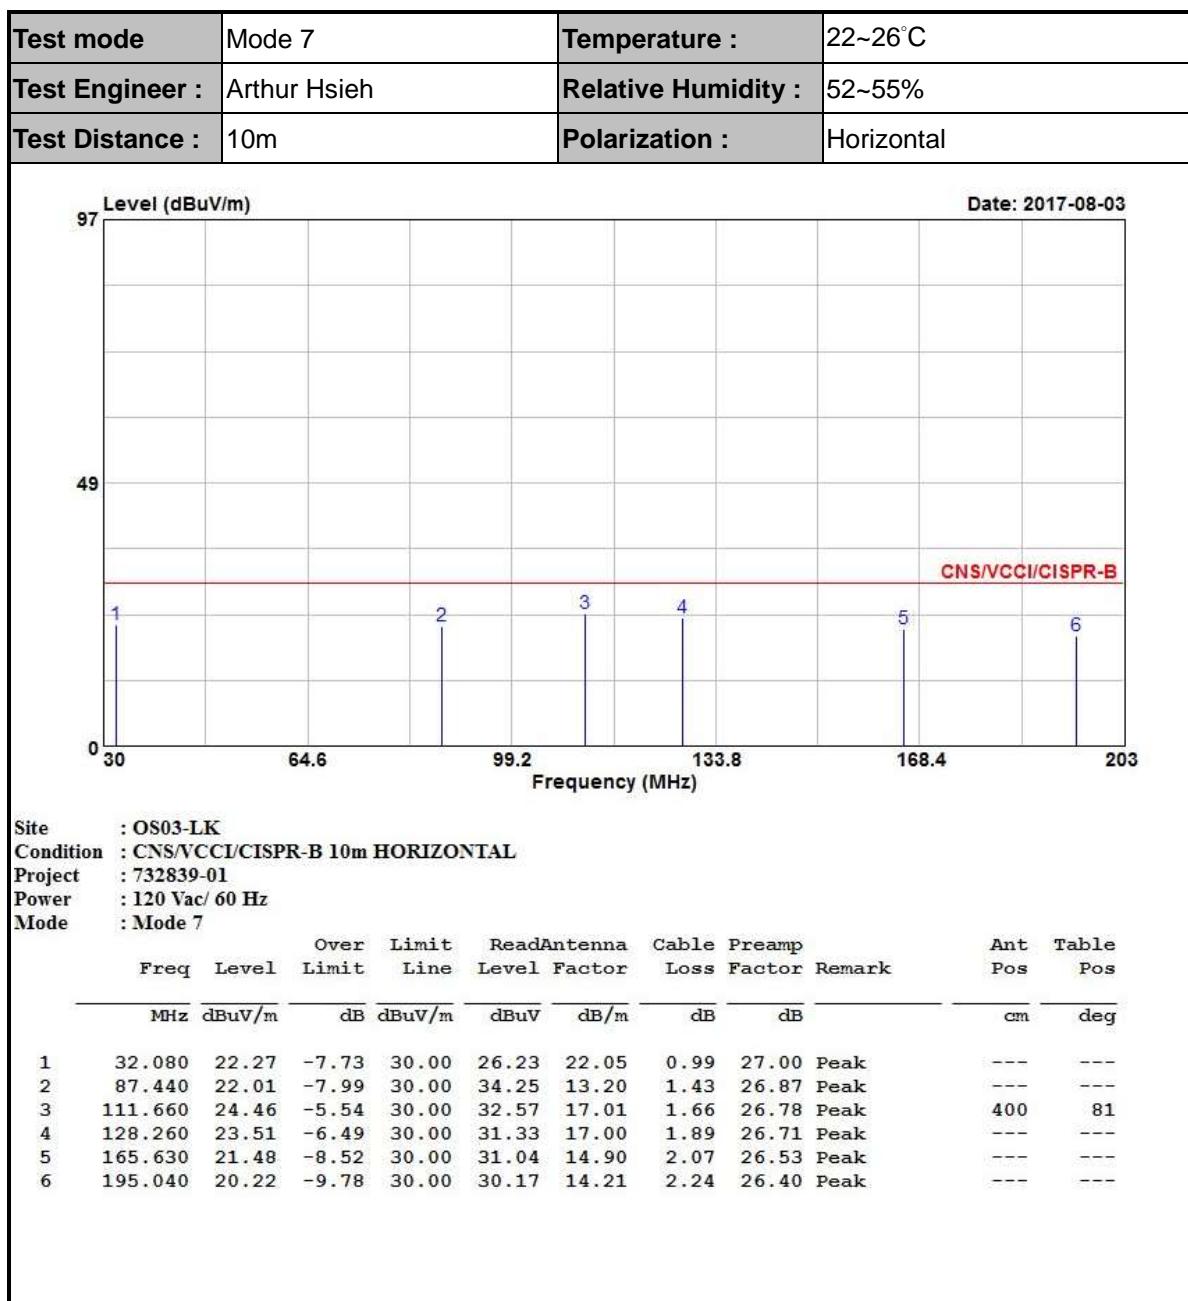

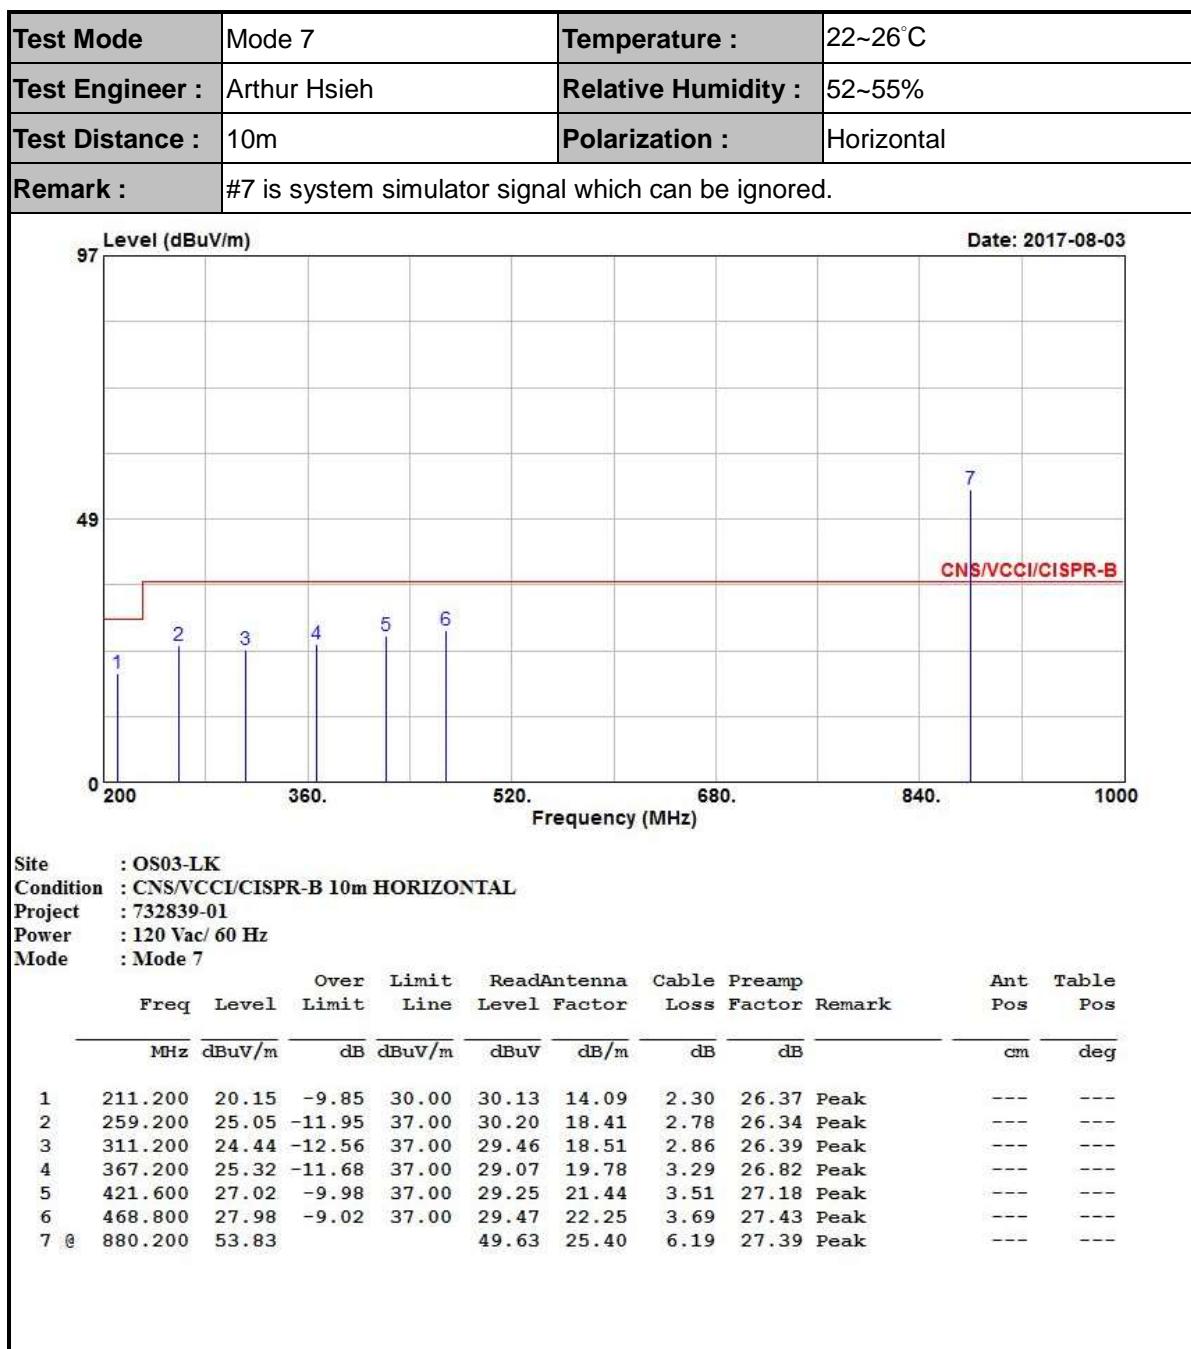


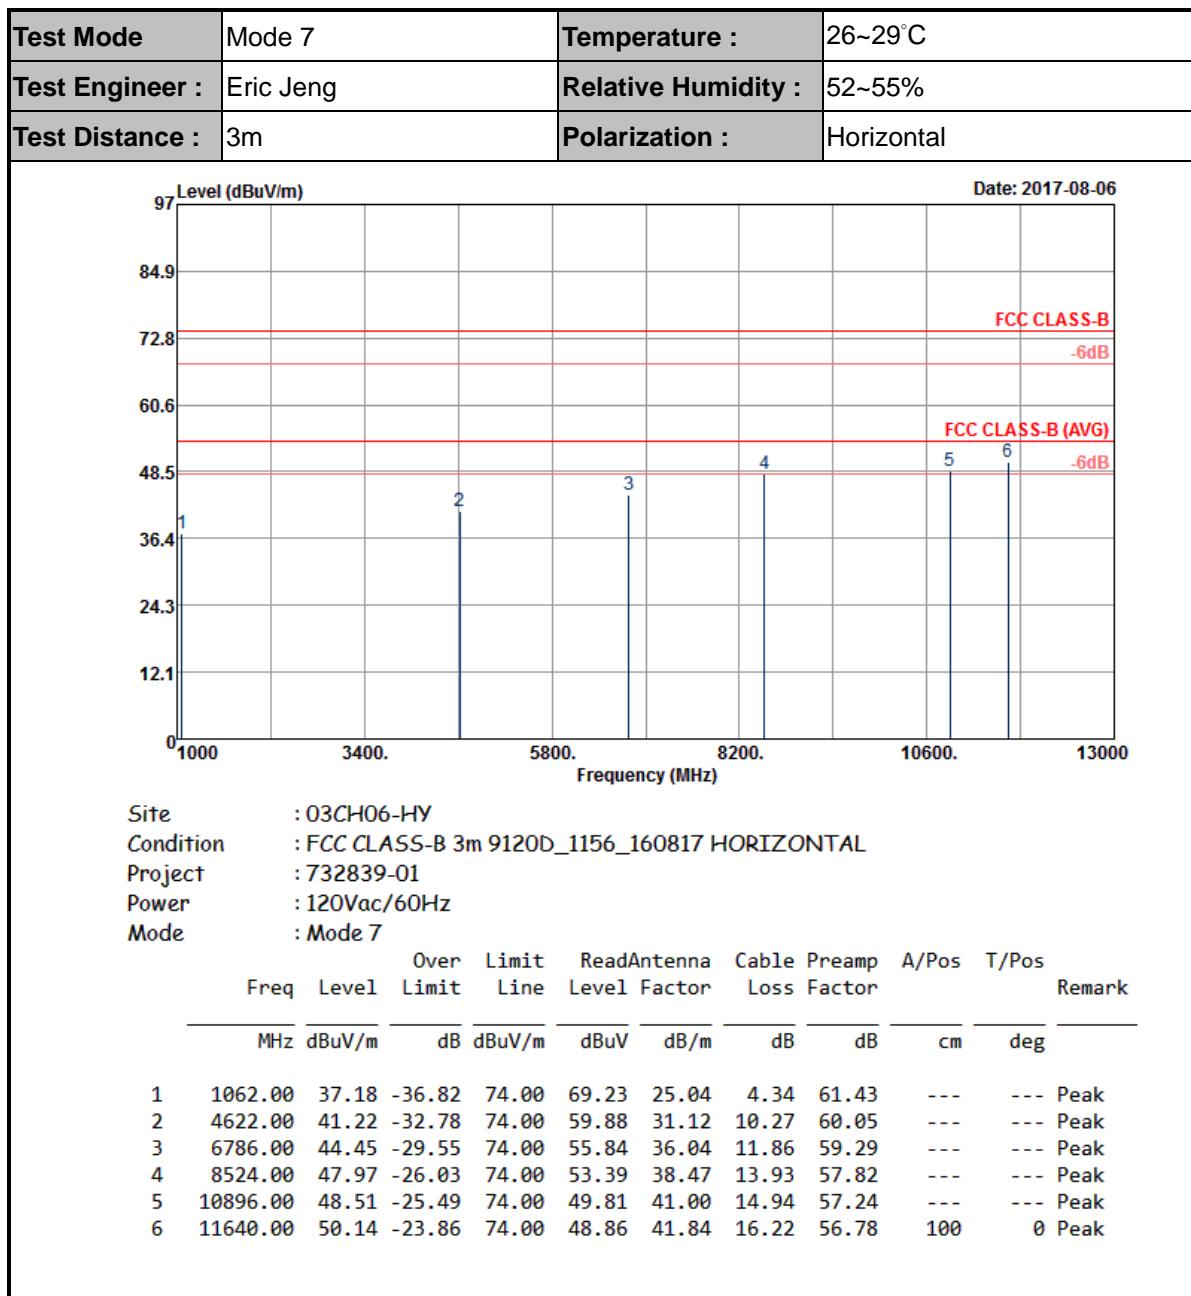

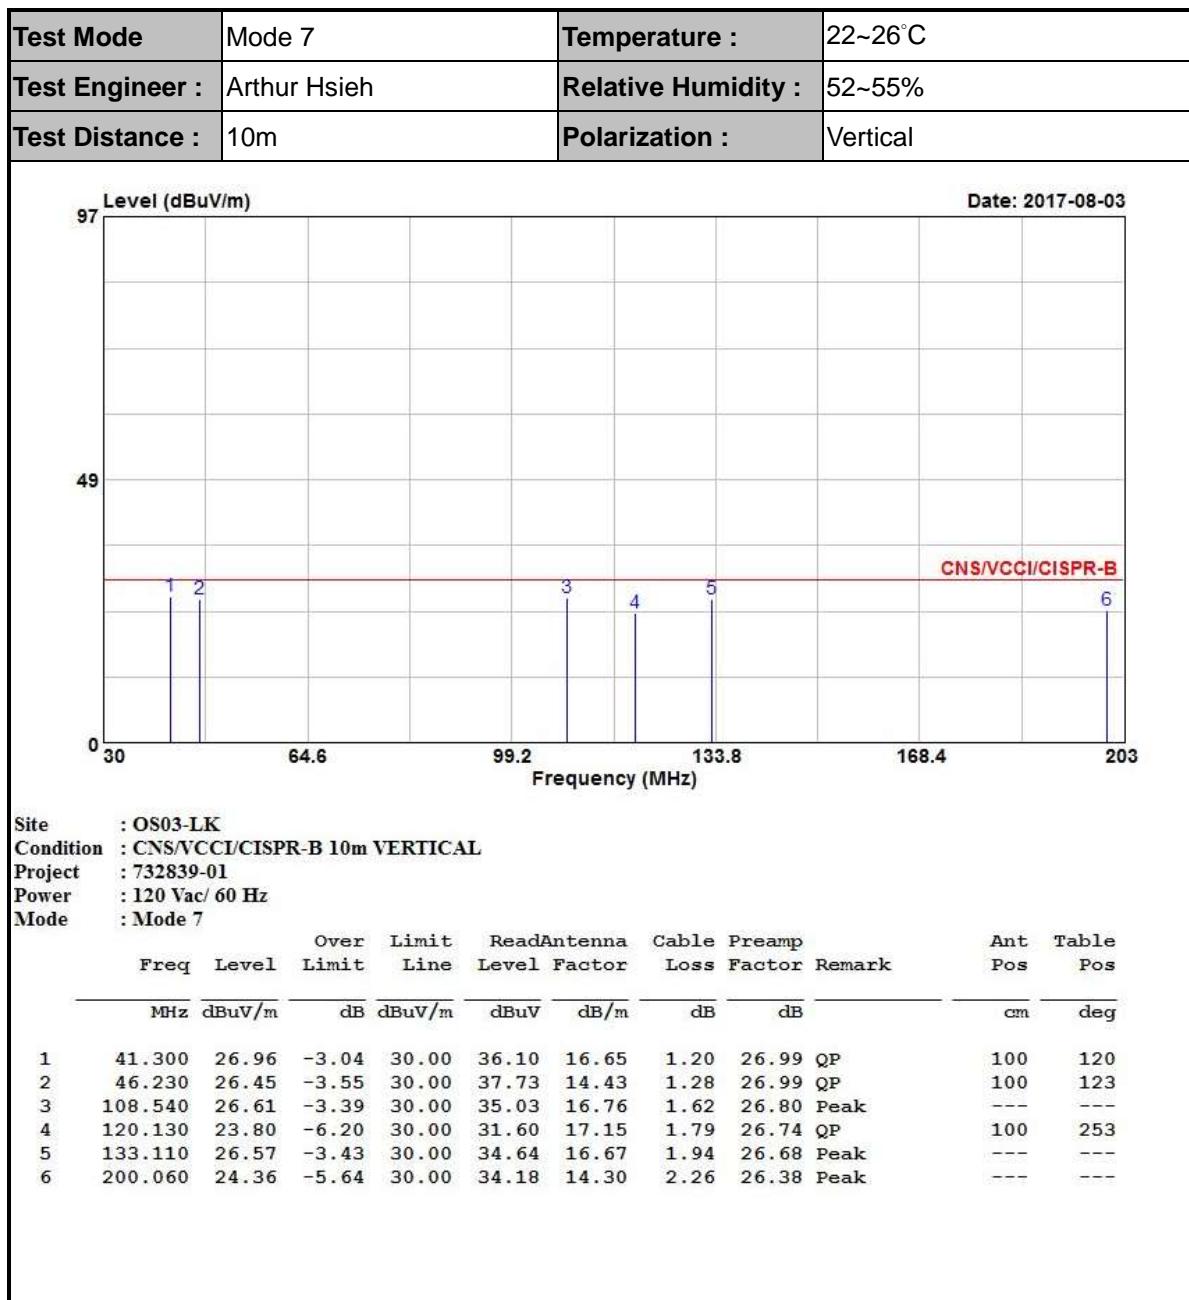




<b>Test Mode</b>	Mode 7	<b>Temperature :</b>	22~26°C
<b>Test Engineer :</b>	Arthur Hsieh	<b>Relative Humidity :</b>	52~55%
<b>Test Distance :</b>	10m	<b>Polarization :</b>	Vertical
<b>Remark :</b>	#7 is system simulator signal which can be ignored.		

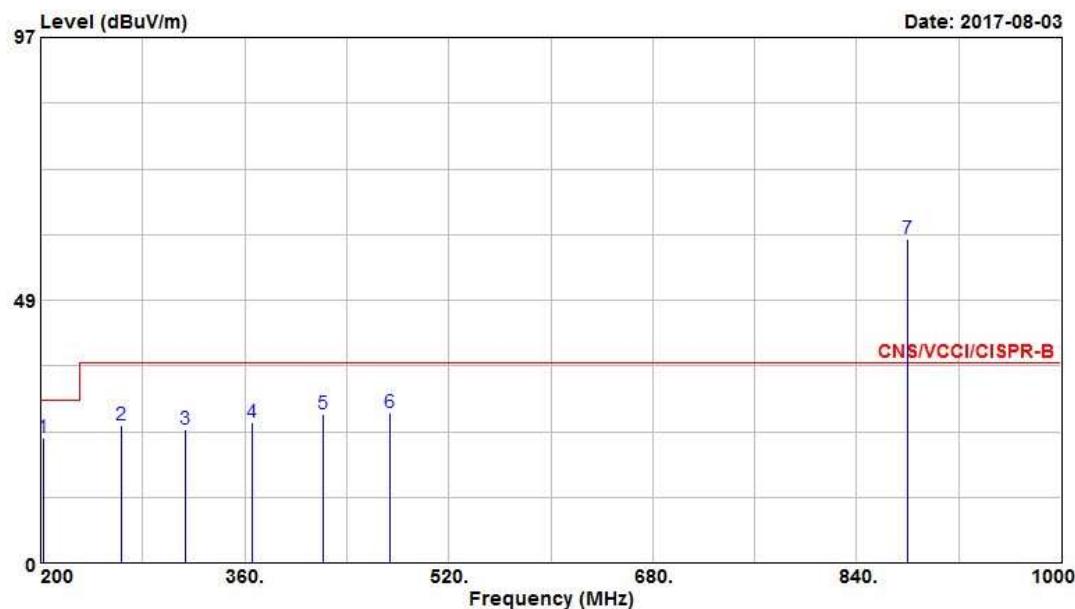

Site : OS03-LK  
Condition : CNS/VCCI/CISPR-B 10m VERTICAL  
Project : 732839-01  
Power : 120 Vac/ 60 Hz  
Mode : Mode 7

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		MHz	dBuV/m	dB	Line	Level	Factor		Pos	Pos
1	202.400	23.10	-6.90	30.00	32.97	14.24	2.27	26.38 Peak	---	---
2	263.200	25.49	-11.51	37.00	30.74	18.30	2.79	26.34 Peak	---	---
3	313.600	24.55	-12.45	37.00	29.56	18.53	2.88	26.42 Peak	---	---
4	365.600	25.82	-11.18	37.00	29.58	19.76	3.28	26.80 Peak	---	---
5	421.600	27.43	-9.57	37.00	29.66	21.44	3.51	27.18 Peak	---	---
6	473.600	27.83	-9.17	37.00	29.25	22.33	3.70	27.45 Peak	---	---
7 @	880.200	59.68			55.48	25.40	6.19	27.39 Peak	---	---

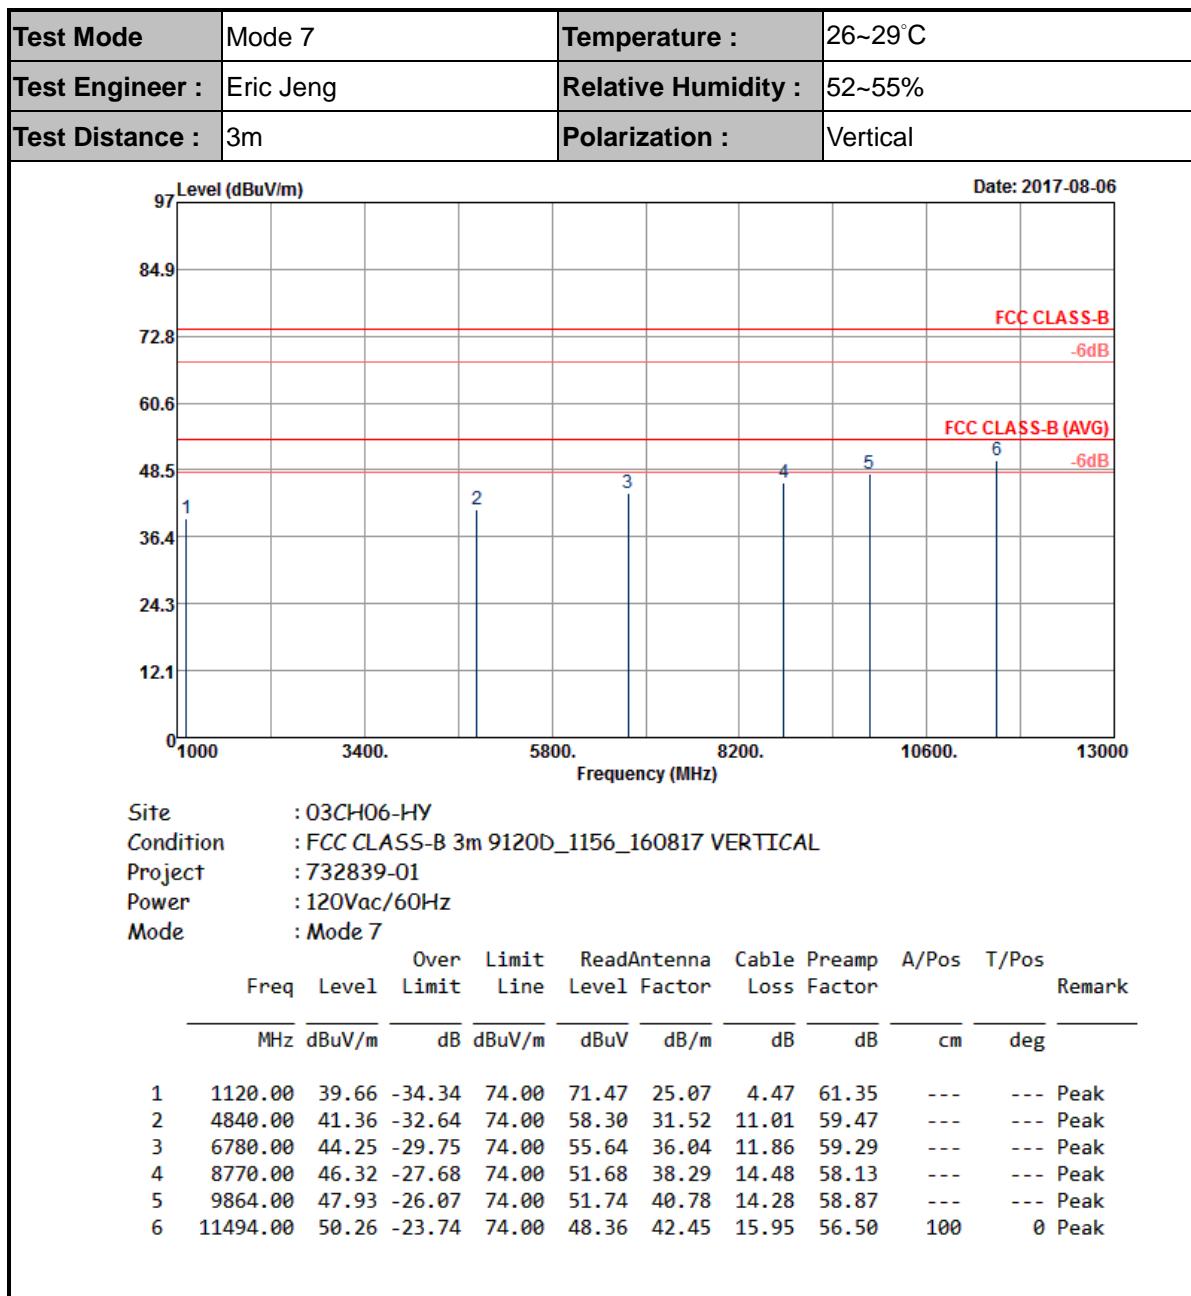



## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristic s	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Aug. 04, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Aug. 04, 2017	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Aug. 04, 2017	Nov. 28, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Dec. 06, 2016	Aug. 04, 2017	Dec. 05, 2017	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100472	20Hz~26.5GHz	Dec. 29, 2016	Aug. 06, 2017	Dec. 28, 2017	Radiation (03CH06-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1325	1GHz ~ 18GHz	Sep. 30, 2016	Aug. 06, 2017	Sep. 29, 2017	Radiation (03CH06-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1850117	1GHz ~ 18GHz	May 22, 2017	Aug. 06, 2017	May 21, 2018	Radiation (03CH06-HY)
Antenna Mast	MF	MF-7802	MF780208212	1m~4m	N/A	Aug. 06, 2017	N/A	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/00	0-360 degree	N/A	Aug. 06, 2017	N/A	Radiation (03CH06-HY)
Amplifier	HP	8447D	2944A09068	0.1MHz ~ 1.3GHz	Dec. 12, 2016	Aug. 02, 2017~ Aug. 03, 2017	Dec. 11, 2017	Radiation (OS03-LK)
Test Receiver	R&S	ESR3	102052	9 kHz ~ 3.6 GHz	Apr. 05, 2017	Aug. 02, 2017~ Aug. 03, 2017	Apr. 04, 2018	Radiation (OS03-LK)
Bilog Antenna with 5dB Attenuator	TESEQ & WOKEN	CBL6112D & 00800N1D01N-05	25236 & 007	30 MHz ~ 1 GHz	Jul. 08, 2017	Aug. 02, 2017~ Aug. 03, 2017	Jul. 07, 2018	Radiation (OS03-LK)
Turn Table	EMCO	2080	9711-2021	0 ~ 360 degree	NCR	Aug. 02, 2017~ Aug. 03, 2017	NCR	Radiation (OS03-LK)
Antenna Mast	EMCO	2075	9711-2115	1 m ~ 4 m	NCR	Aug. 02, 2017~ Aug. 03, 2017	NCR	Radiation (OS03-LK)



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.70
--	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.10
--	------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.70
--	------