



# FCC RF Test Report

**APPLICANT** : Bullitt Group  
**EQUIPMENT** : Rugged Smart Phone  
**BRAND NAME** : CAT  
**MODEL NAME** : S48c  
**FCC ID** : ZL5S48C  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Jun. 06, 2018 and testing was completed on Jun. 24, 2018. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.

Approved by: Eric Shih / Manager



**Sportun International (Shenzhen) Inc.**  
1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City  
Guangdong Province 518055 China



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1 Applicant .....	5
1.2 Product Feature of Equipment Under Test.....	5
1.3 Product Specification of Equipment Under Test.....	5
1.4 Modification of EUT .....	5
1.5 Testing Location .....	6
1.6 Applicable Standards.....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
2.1 Carrier Frequency Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system .....	9
2.5 EUT Operation Test Setup .....	10
2.6 Measurement Results Explanation Example.....	10
<b>3 TEST RESULT .....</b>	<b>11</b>
3.1 6dB Bandwidth Measurement .....	11
3.2 Output Power Measurement.....	15
3.3 Power Spectral Density Measurement .....	16
3.4 Conducted Band Edges and Spurious Emission Measurement .....	23
3.5 Radiated Band Edges and Spurious Emission Measurement .....	32
3.6 AC Conducted Emission Measurement.....	36
3.7 Antenna Requirements .....	38
<b>4 LIST OF MEASURING EQUIPMENT.....</b>	<b>39</b>
<b>5 UNCERTAINTY OF EVALUATION.....</b>	<b>40</b>
<b>APPENDIX A. CONDUCTED TEST RESULTS</b>	
<b>APPENDIX B. AC CONDUCTED EMISSION TEST RESULT</b>	
<b>APPENDIX C. RADIATED SPURIOUS EMISSION</b>	
<b>APPENDIX D. DUTY CYCLE PLOTS</b>	
<b>APPENDIX E. SETUP PHOTOGRAPHS</b>	



# REVISION HISTORY



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm/3kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 7.49 dB at 40.670 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 19.20 dB at 0.630 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



## 1 General Description

### 1.1 Applicant

**Bullitt Group**

One Valpy, Valpy Street, Reading, Berkshire, England RG1 1AR

### 1.2 Product Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Rugged Smart Phone
<b>Brand Name</b>	CAT
<b>Model Name</b>	S48c
<b>FCC ID</b>	ZL5S48C
<b>EUT supports Radios application</b>	CDMA/EVDO/GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
<b>IMEI Code</b>	Conducted: N/A Conduction: 358016090005806 Radiation: 358016090009337
<b>EUT Stage</b>	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Frequency Range</b>	2402 MHz ~ 2480 MHz
<b>Number of Channels</b>	40
<b>Carrier Frequency of Each Channel</b>	40 Channel(37 hopping + 3 advertising channel)
<b>Maximum Output Power to Antenna</b>	Bluetooth LE v4.0 -0.05 dBm (0.0010 W) Bluetooth LE v5.0 0.01 dBm (0.0010 W)
<b>Antenna Type / Gain</b>	IFA Antenna type with gain 0.50 dBi
<b>Type of Modulation</b>	Bluetooth LE : GFSK

### 1.4 Modification of EUT

No modifications are made to the EUT during all test items.



## 1.5 Testing Location

Sportun International (Shenzhen) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0) and the FCC designation No. are CN5018 and CN5019.

<b>Test Site</b>	Sportun International (Shenzhen) Inc.	
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City Guangdong Province 518055 China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
<b>Test Site No.</b>	<b>Sportun Site No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-SZ	CO01-SZ
<b>Test Site</b>	Sportun International (Shenzhen) Inc.	
<b>Test Site Location</b>	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District Shenzhen City Guangdong Province 518055 China TEL: +86-755-3320-2398	
<b>Test Site No.</b>	<b>Sportun Site No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH02-SZ	577730

**Note:** The test site complies with ANSI C63.4 2014 requirement.

## 1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-



## 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: GSM 1900 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable (Charging from Adapter) + Earphone

**Remark:** For Radiated Test Cases, The tests were performance with Adapter, Earphone and USB Cable.

## 2.3 Connection Diagram of Test System

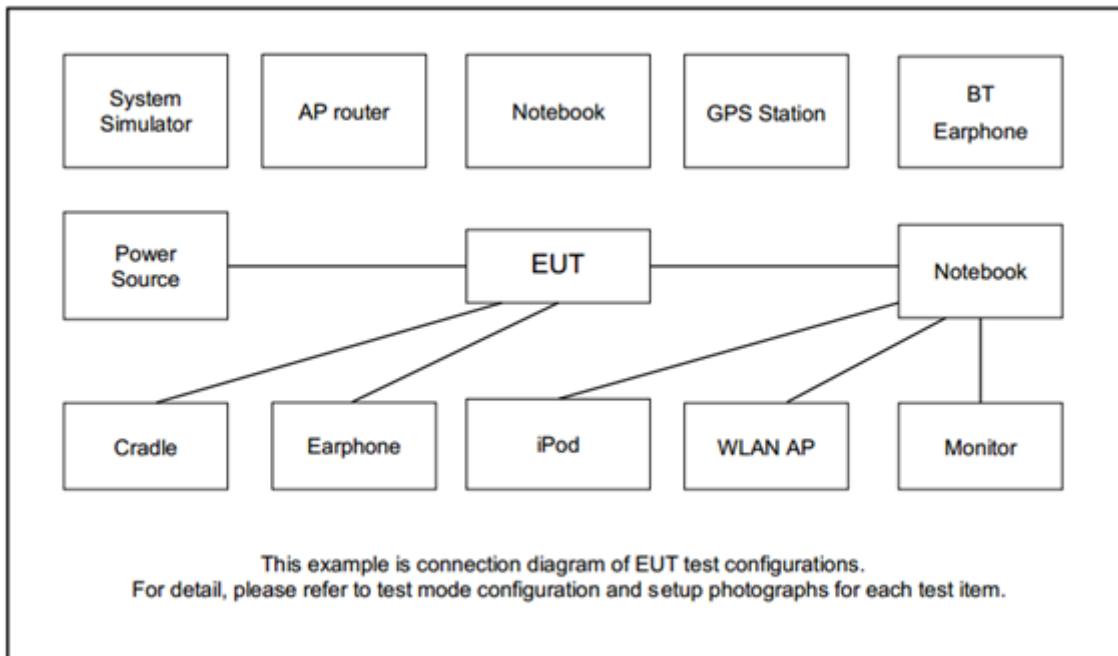

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
5.	Earphone	Apple	DCAY1V-A9007ZJW3-000	N/A	N/A	Unshielded, 1.8m
6.	SD Card	N/A	MicroSD HC	FCC DoC	N/A	N/A
7.	iPod	Apple	MC69029/A	N/A	N/A	N/A



## 2.5 EUT Operation Test Setup

For Bluetooth LE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 5.0 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.0 + 10 = 15.0 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

##### 3.1.4 Test Setup

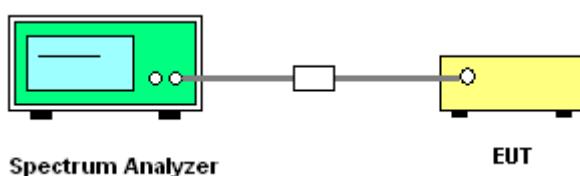


### 3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

For Bluetooth LE v4.0

#### 6 dB Bandwidth Plot on Channel 00

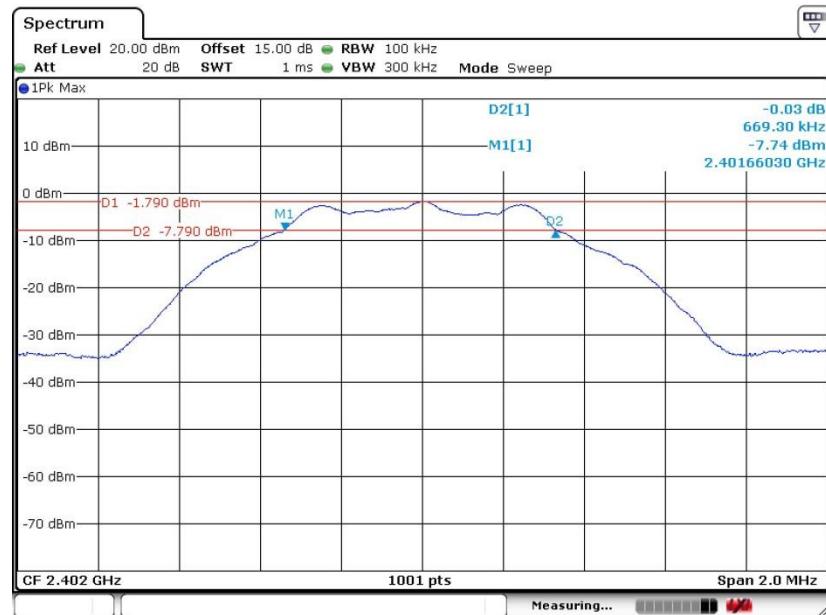

#### 6 dB Bandwidth Plot on Channel 19

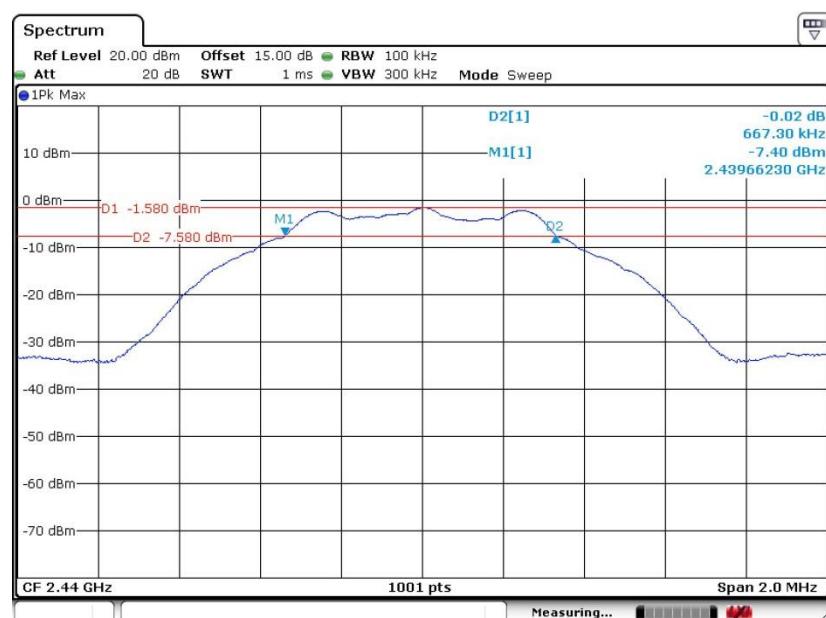



## 6 dB Bandwidth Plot on Channel 39



Date: 24.JUN.2018 13:34:46

## For Bluetooth LE v5.0

## 6 dB Bandwidth Plot on Channel 00



Date: 24.JUN.2018 14:13:36




## 6 dB Bandwidth Plot on Channel 19



Date: 24 JUN 2018 14:05:55

## 6 dB Bandwidth Plot on Channel 39

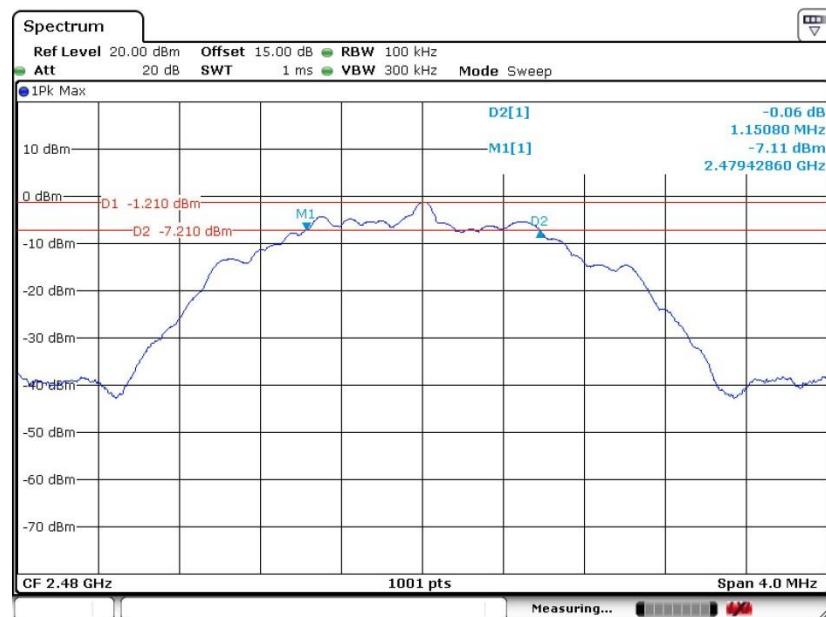

Date: 24 JUN 2018 14:00:02

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.3 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

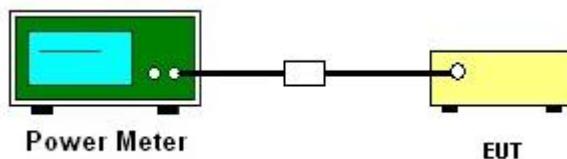

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

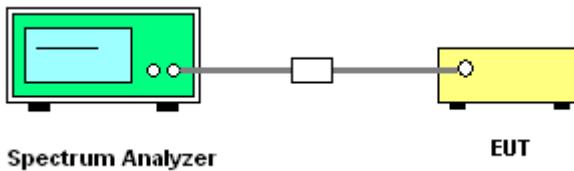

#### 3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.




### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)

For Bluetooth LE v4.0

#### PSD 100kHz Plot on Channel 00

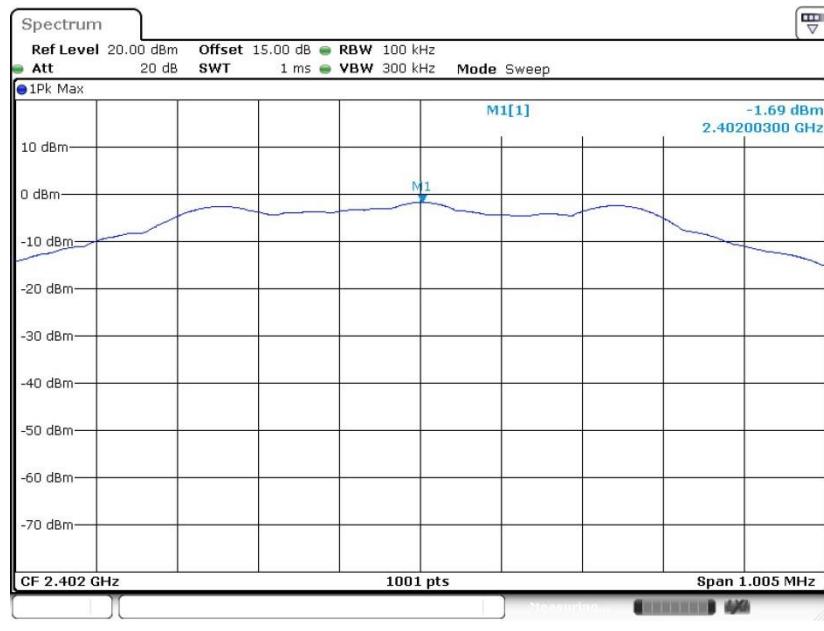


#### PSD 100kHz Plot on Channel 19

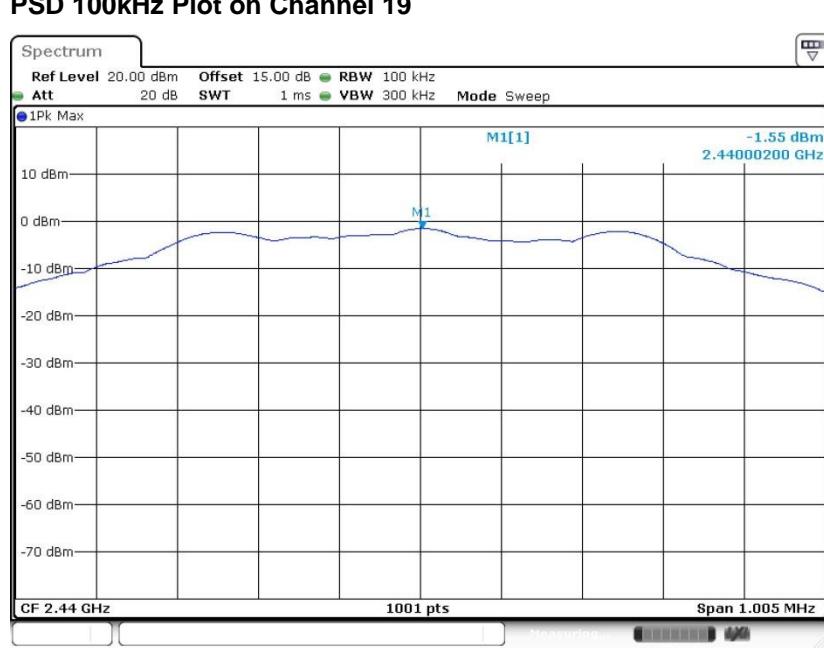




## PSD 100kHz Plot on Channel 39

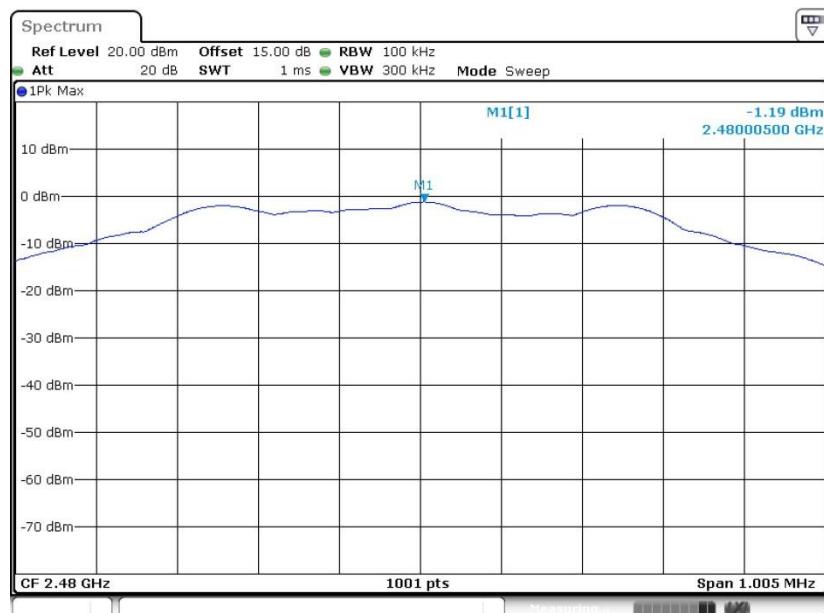


## For Bluetooth LE v5.0

## PSD 100kHz Plot on Channel 00

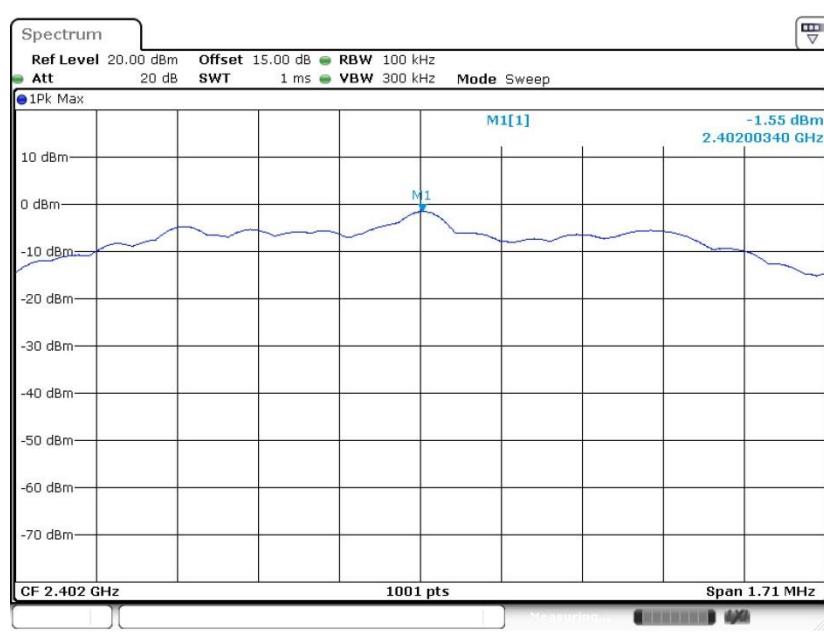




## PSD 100kHz Plot on Channel 19

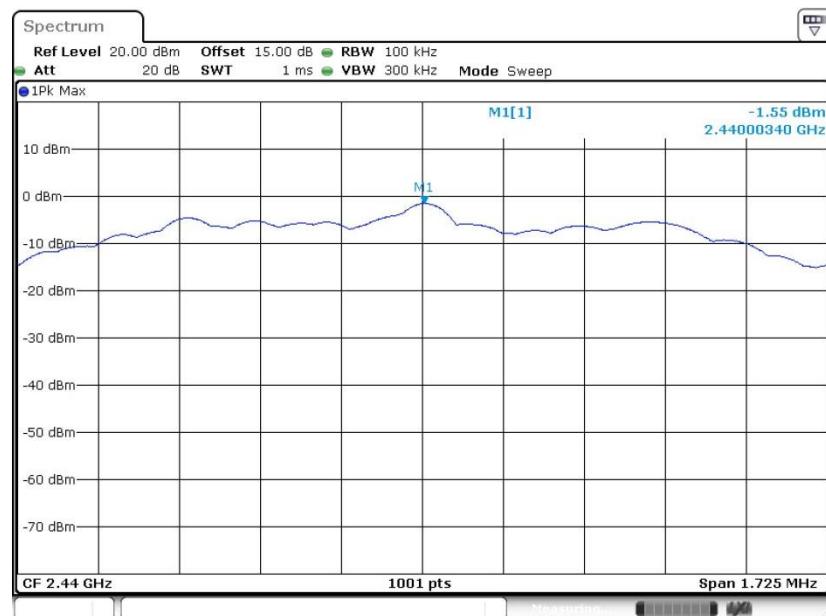

Date: 24.JUN.2018 14:07:37

## PSD 100kHz Plot on Channel 39

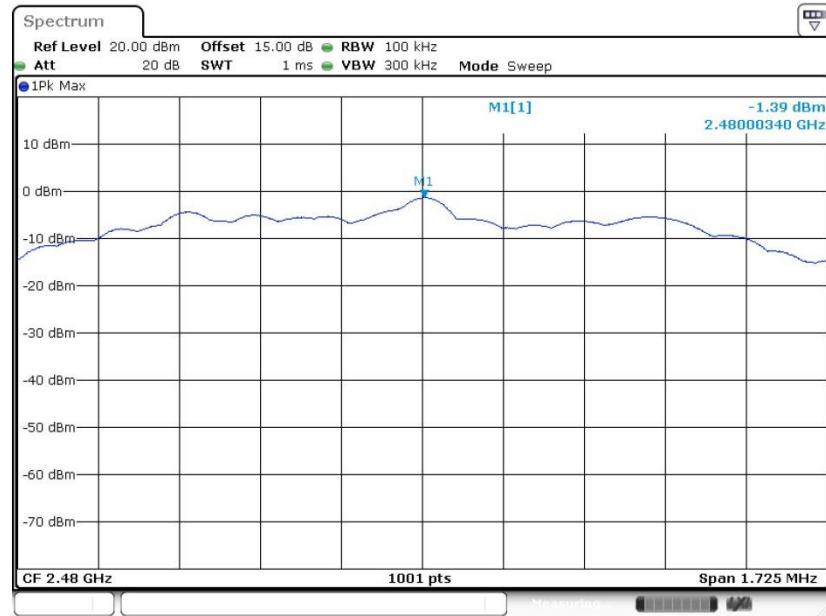


Date: 24.JUN.2018 14:01:08



### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


For Bluetooth LE v4.0

#### PSD 3kHz Plot on Channel 00

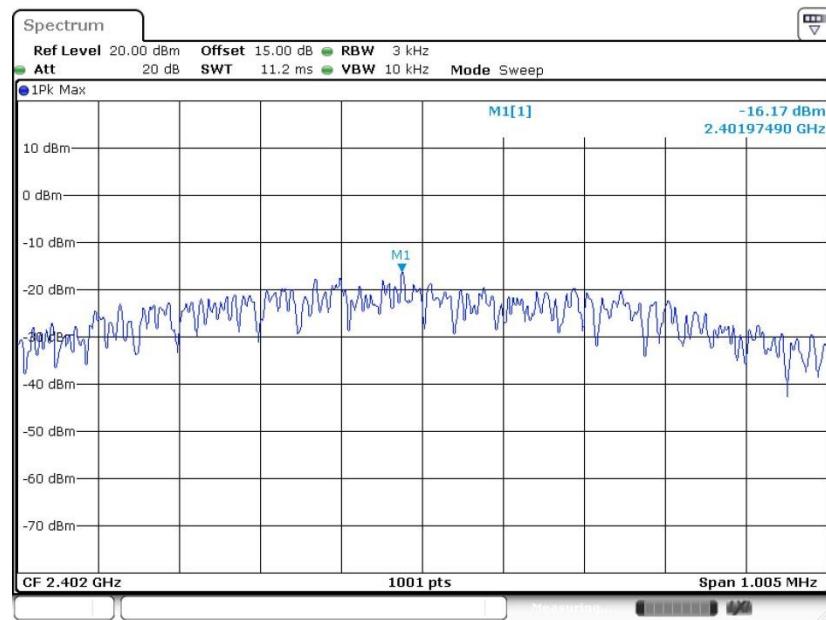

Date: 24 JUN 2018 13:05:07


#### PSD 3kHz Plot on Channel 19

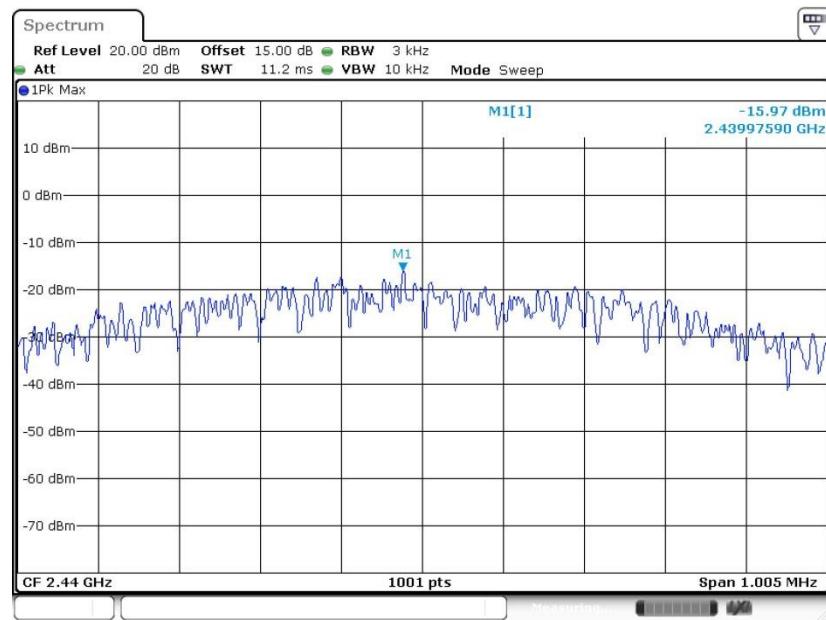

Date: 24 JUN 2018 13:22:28




## PSD 3kHz Plot on Channel 39

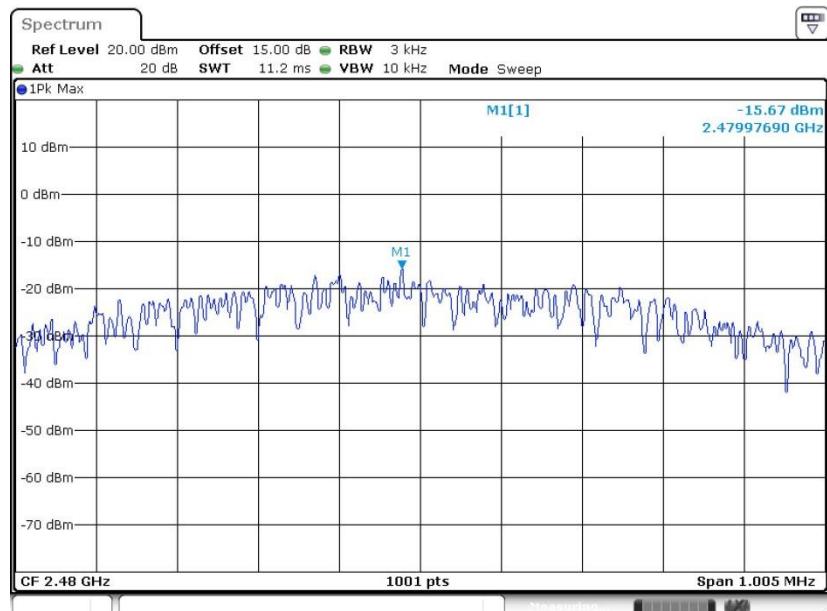


## For Bluetooth LE v5.0

## PSD 3kHz Plot on Channel 00

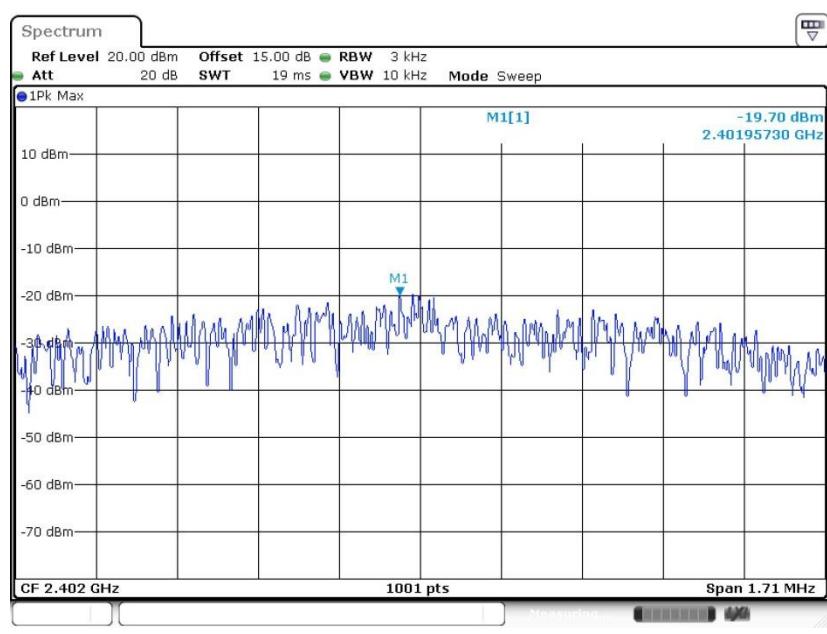




## PSD 3kHz Plot on Channel 19

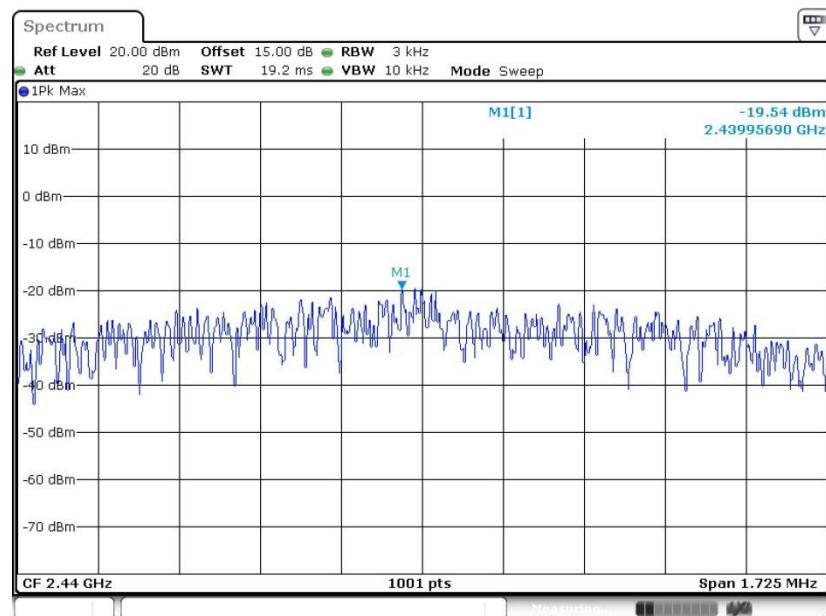

Date: 24.JUN.2018 14:06:57

## PSD 3kHz Plot on Channel 39

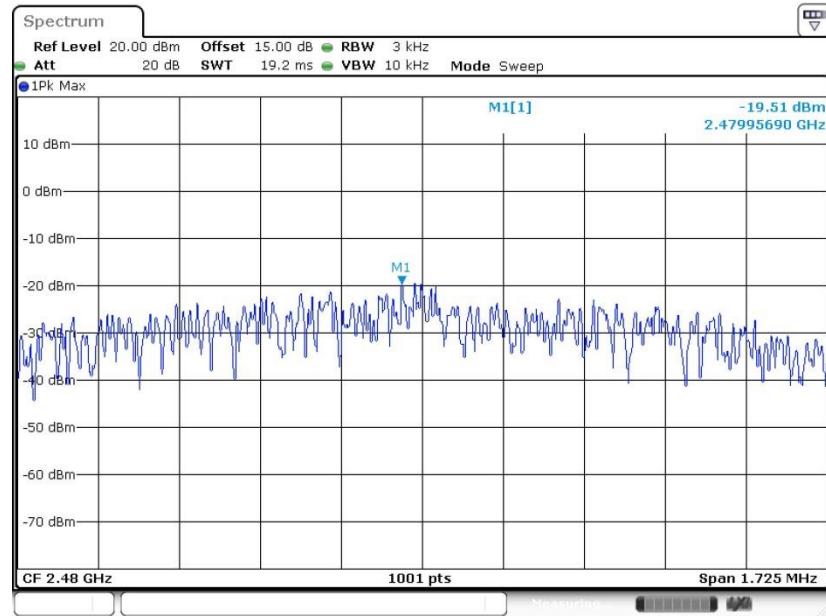

Date: 24.JUN.2018 14:00:34

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

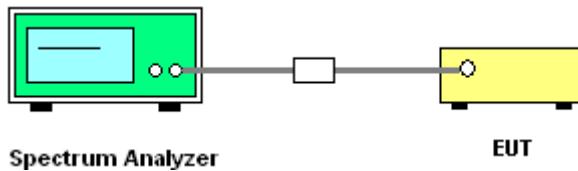

### 3.4.5 Test Result of Conducted Band Edges Plots


For Bluetooth LE v4.0

#### Low Band Edge Plot on Channel 00

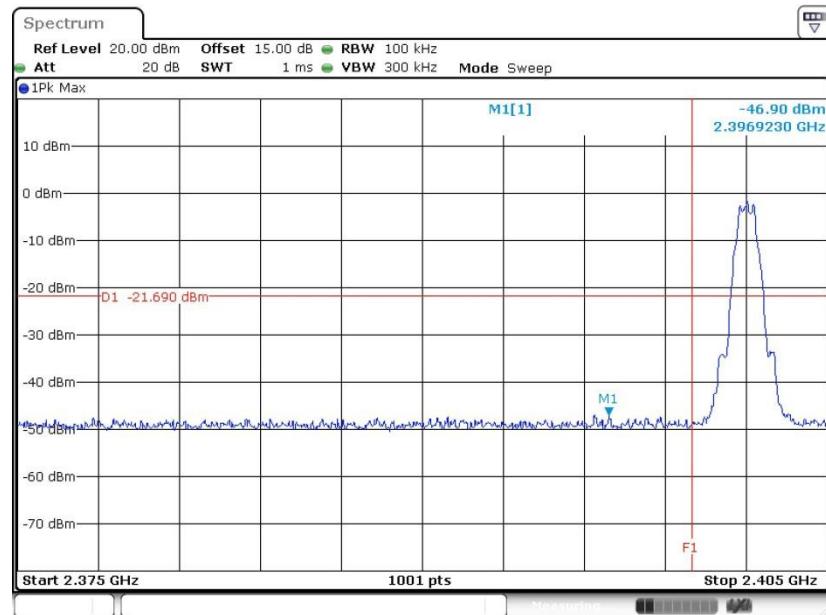

Date: 24 JUN 2018 13:08:21

#### High Band Edge Plot on Channel 39

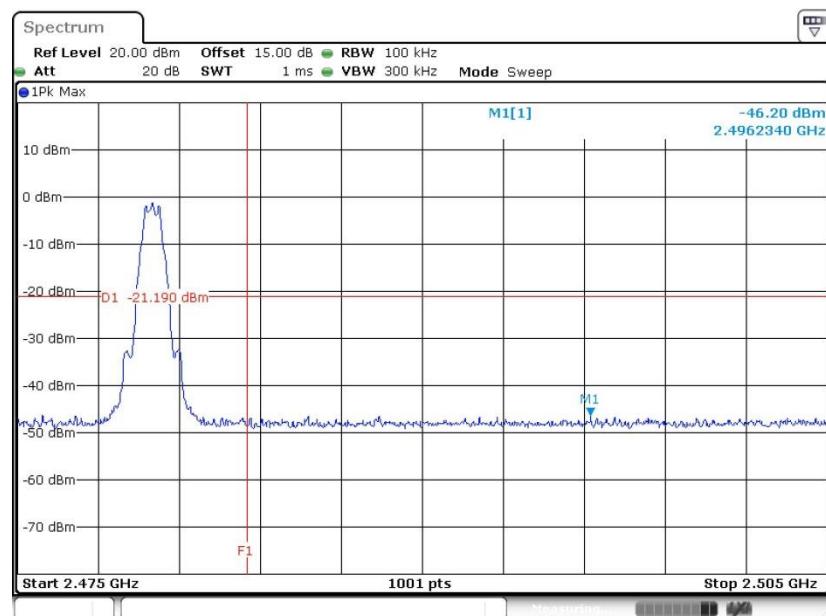


Date: 24 JUN 2018 13:42:28




## For Bluetooth LE v5.0

## Low Band Edge Plot on Channel 00

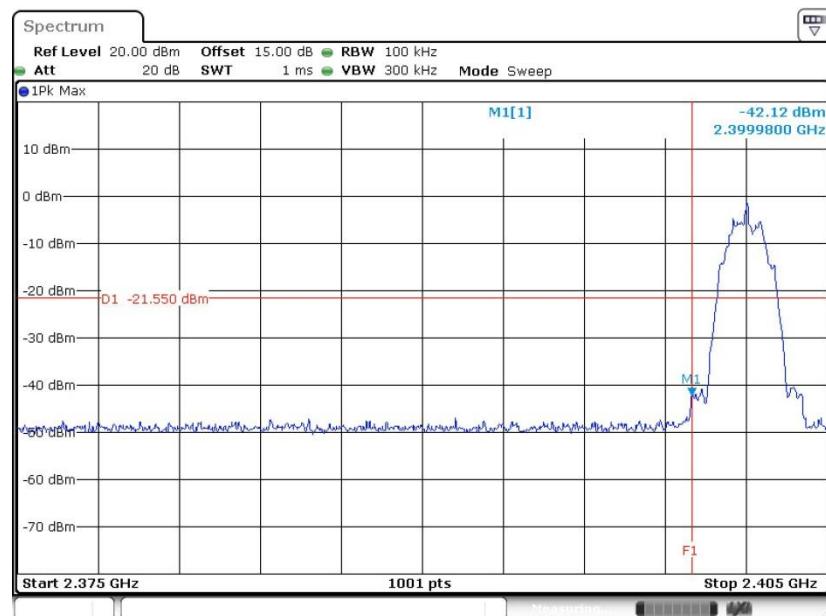

Date: 24.JUN.2018 14:19:29

## High Band Edge Plot on Channel 39

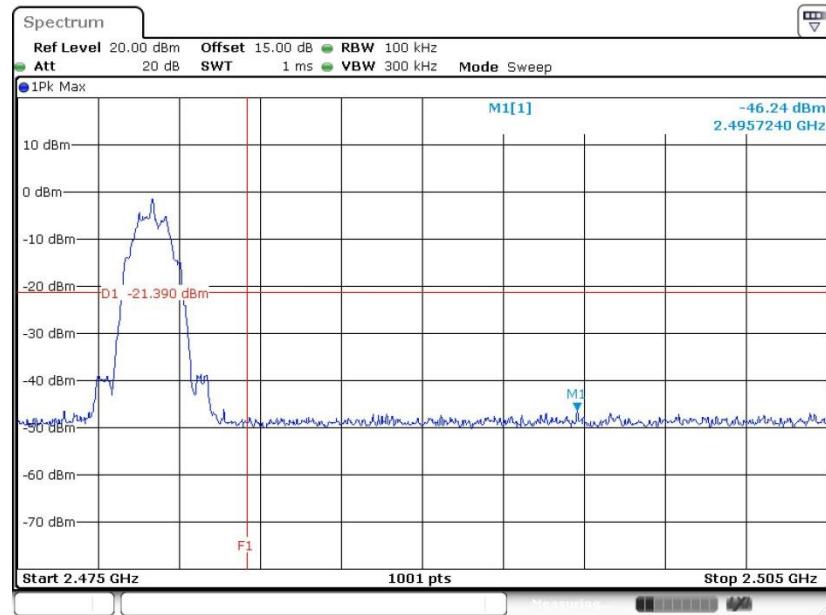

Date: 24.JUN.2018 14:01:43




### 3.4.6 Test Result of Conducted Spurious Emission Plots

For Bluetooth LE v4.0


#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

##### GFSK Channel 00

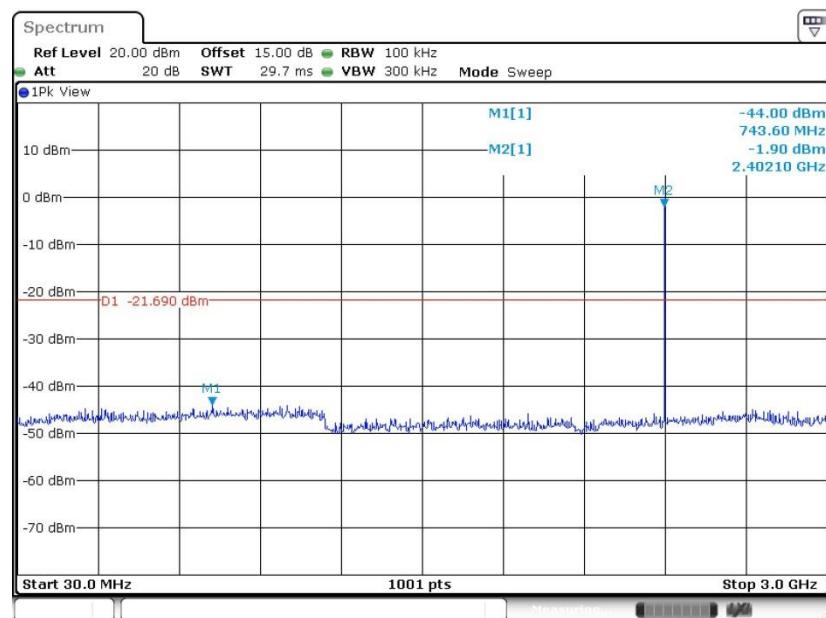

#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


##### GFSK Channel 00

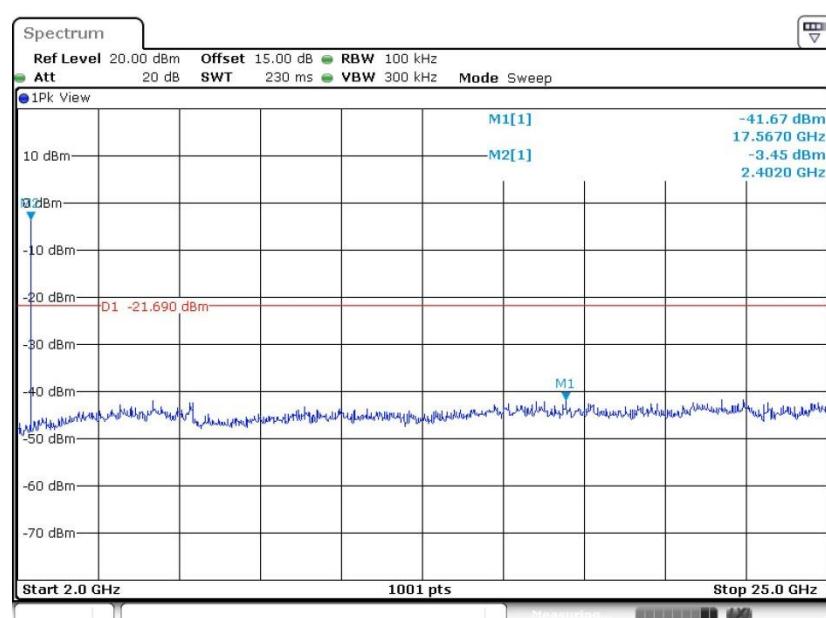



## Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


## GFSK Channel 19

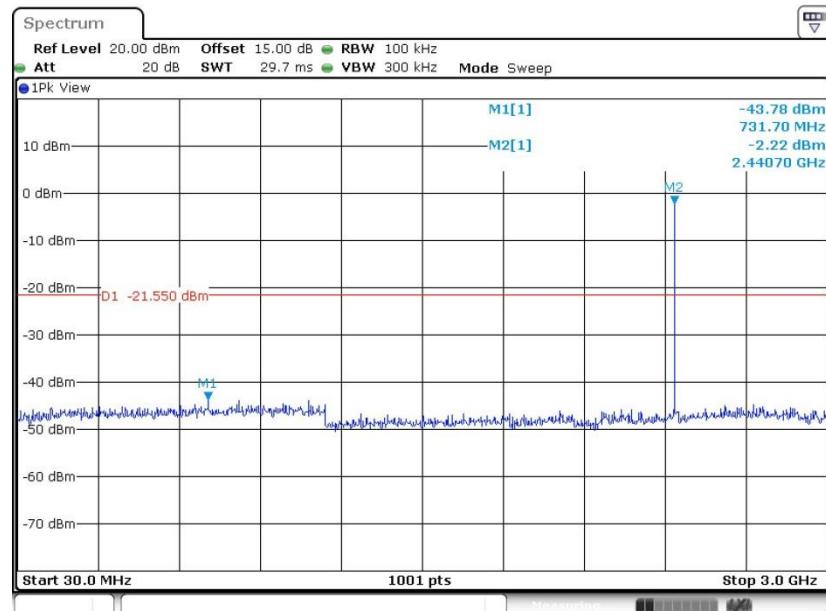

Date: 24.JUN.2018 13:23:57

## Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

## GFSK Channel 19

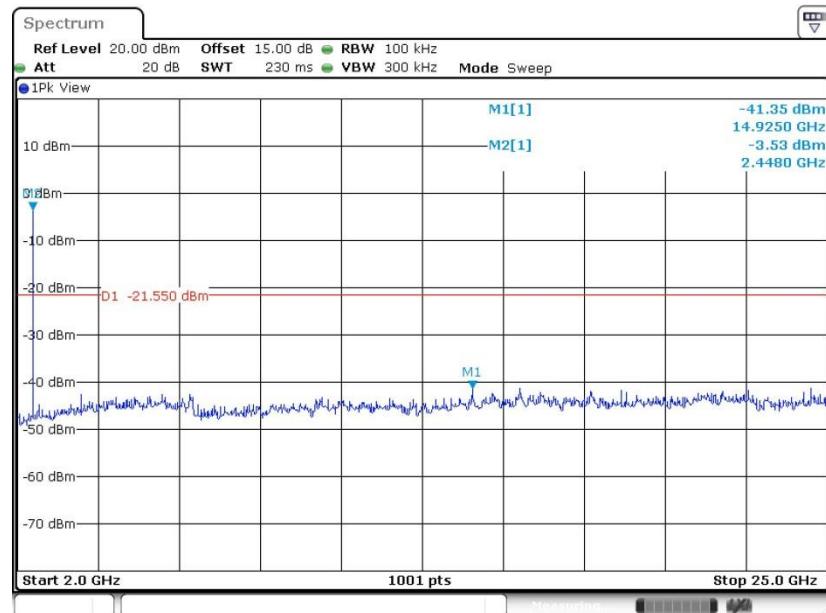


Date: 24.JUN.2018 13:24:05



## Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


## GFSK Channel 39

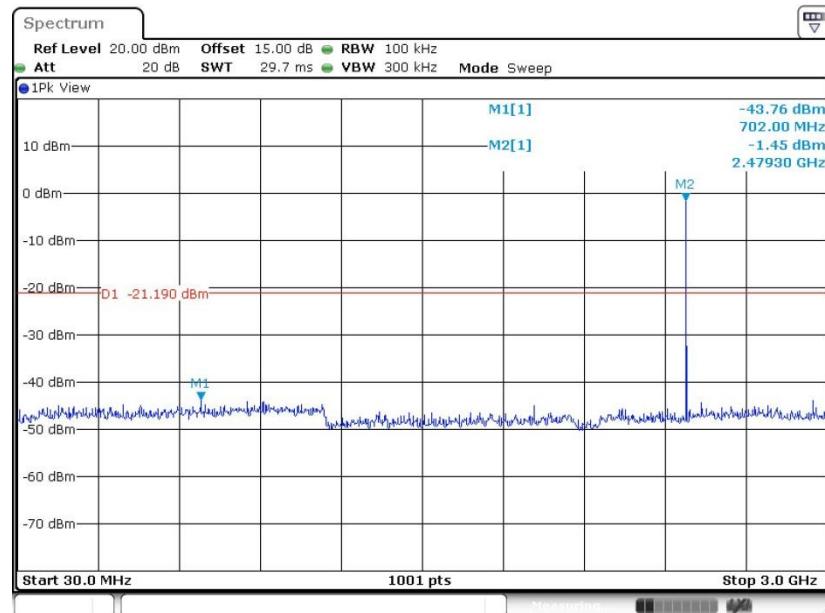

Date: 24.JUN.2018 13:43:13

## Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

## GFSK Channel 39

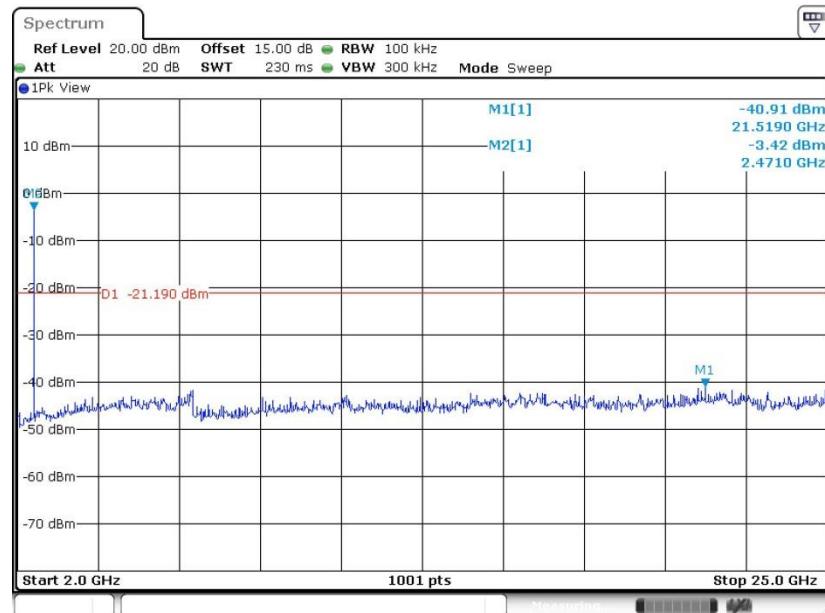


Date: 24.JUN.2018 13:43:21



For Bluetooth LE v5.0

## Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


## GFSK Channel 00

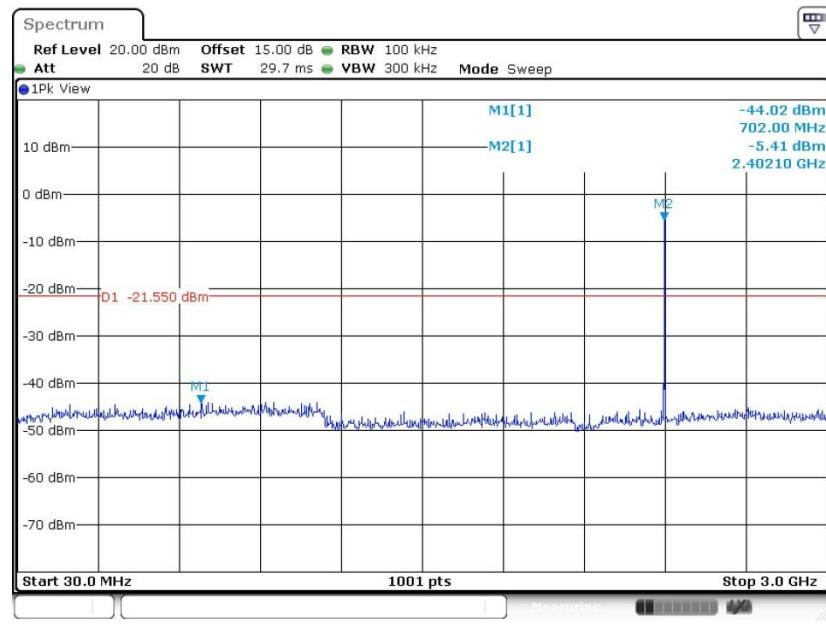

Date: 24.JUN.2018 14:19:39

## Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

## GFSK Channel 00

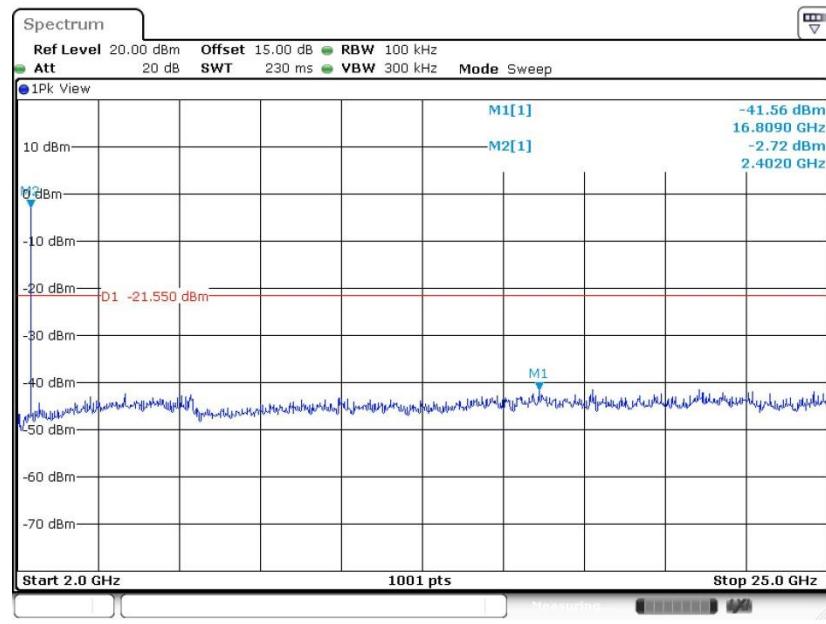


Date: 24.JUN.2018 14:19:47



## Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


## GFSK Channel 19

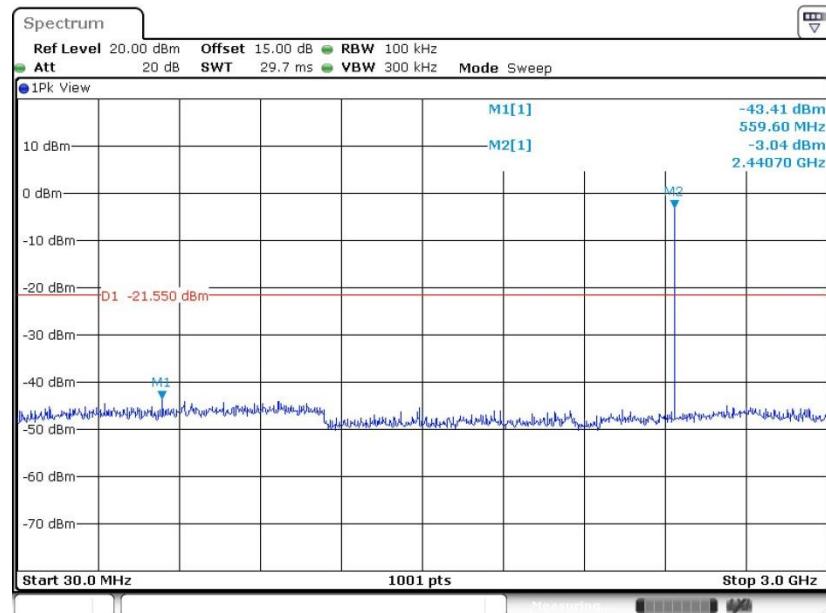

Date: 24.JUN.2018 14:07:48

## Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

## GFSK Channel 19

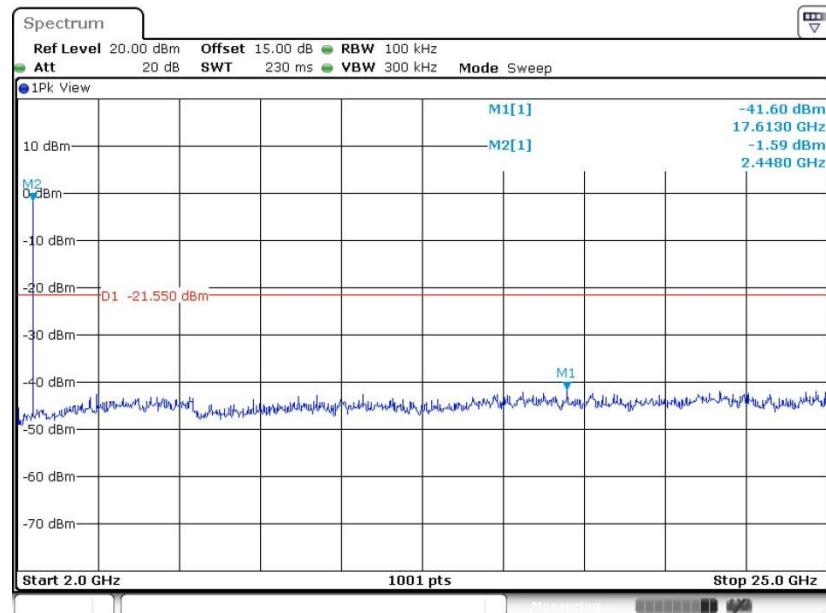


Date: 24.JUN.2018 14:07:56



## Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


## GFSK Channel 39

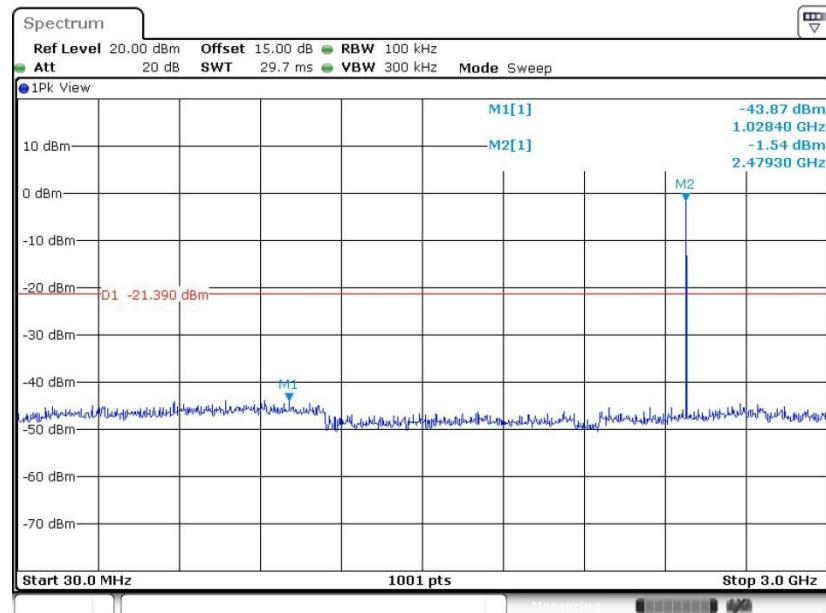

Date: 24.JUN.2018 14:01:54

## Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

## GFSK Channel 39

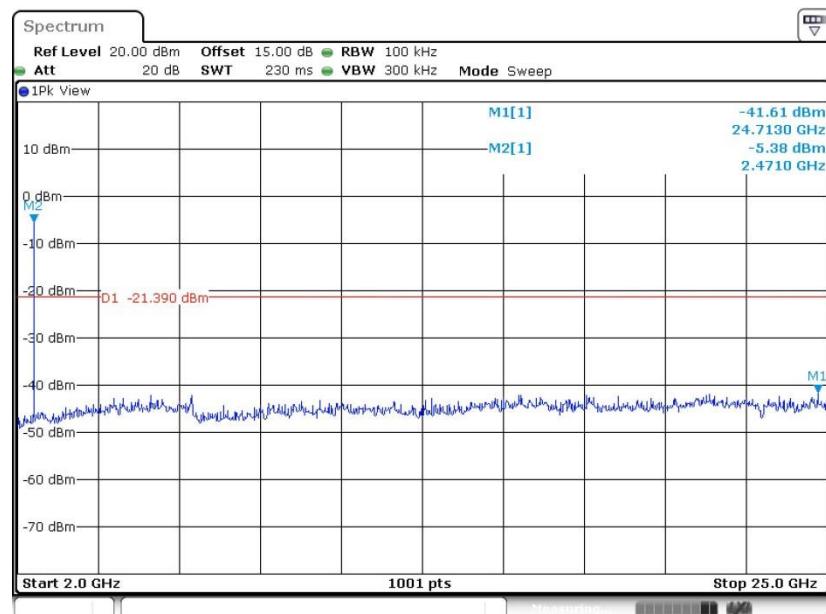

Date: 24.JUN.2018 14:02:03



## 3.5 Radiated Band Edges and Spurious Emission Measurement

### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.



### 3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:


- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

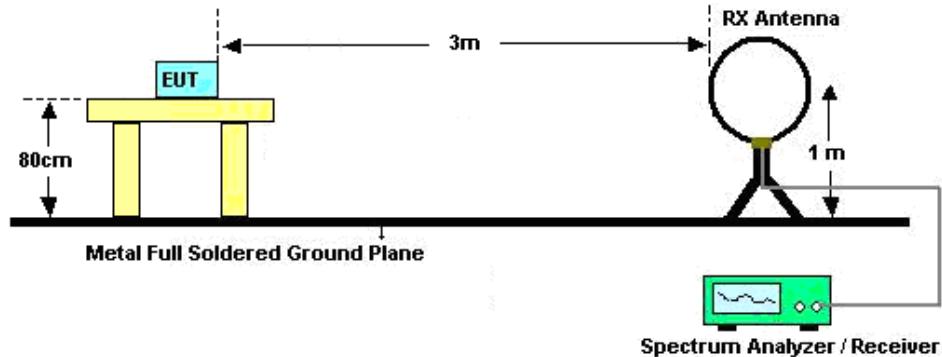

For radiated emissions from 30MHz to 1GHz

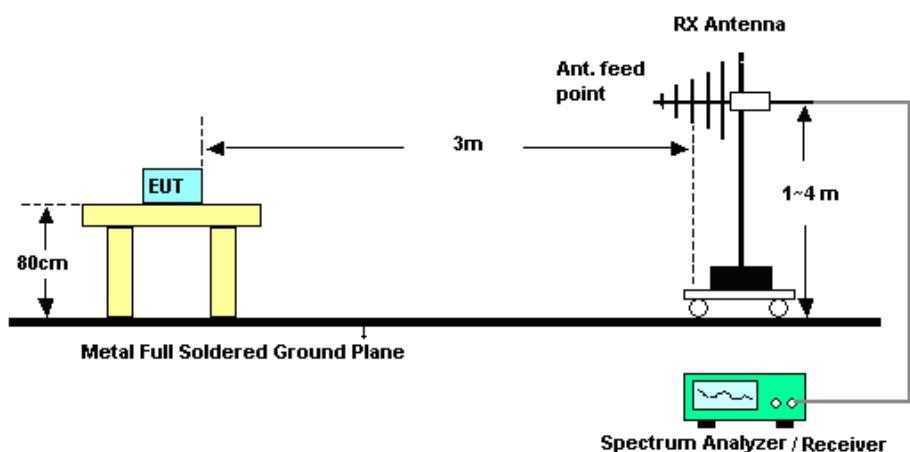

For radiated emissions above 1GHz

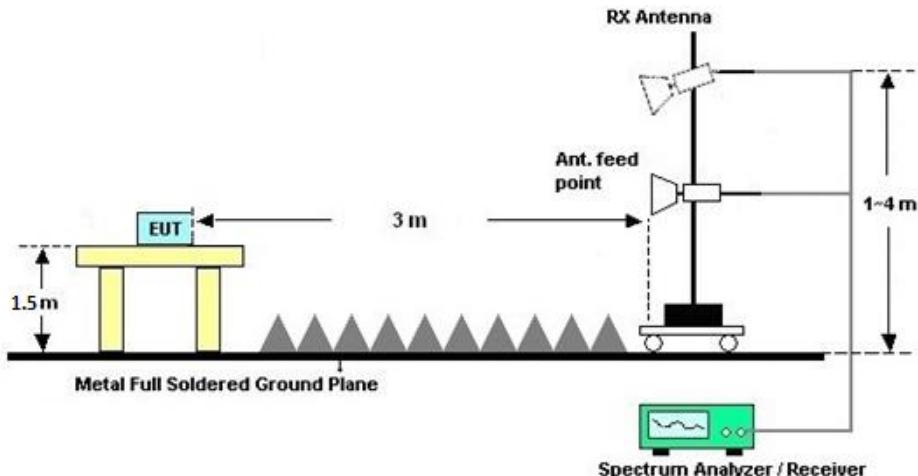



### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

### 3.5.7 Duty Cycle

Please refer to Appendix D.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

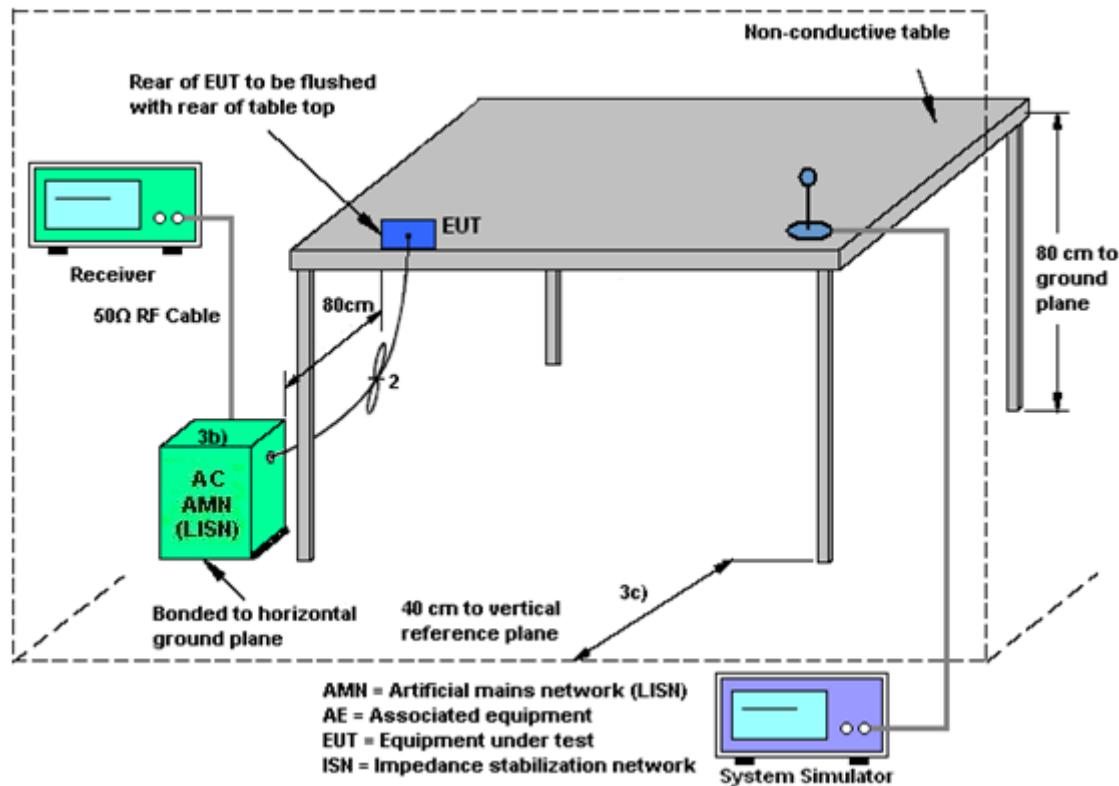

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## 3.7 Antenna Requirements

### 3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

### 3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Dec. 26, 2017	Jun. 24, 2018	Dec. 25, 2018	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	Apr. 19, 2018	Jun. 24, 2018	Apr. 18, 2019	Conducted (TH01-SZ)
Pulse Power Senor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 26, 2017	Jun. 24, 2018	Dec. 25, 2018	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 26, 2017	Jun. 24, 2018	Dec. 25, 2018	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSV40	101041	10kHz~40GHz; Max 30dBm	Oct. 19, 2017	Jun. 11, 2018~Jun. 13, 2018~	Oct. 18, 2018	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 14, 2018	Jun. 11, 2018~Jun. 13, 2018~	May 13, 2019	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	May 10, 2018	Jun. 11, 2018~Jun. 13, 2018~	May 09, 2019	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1285	1GHz~18GHz	Dec. 13, 2017	Jun. 11, 2018~Jun. 13, 2018~	Dec. 12, 2018	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Mar. 30, 2018	Jun. 11, 2018~Jun. 13, 2018~	Mar. 29, 2019	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 19, 2017	Jun. 11, 2018~Jun. 13, 2018~	Oct. 18, 2018	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1707137	1GHz~18GHz	Oct. 19, 2017	Jun. 11, 2018~Jun. 13, 2018~	Oct. 18, 2018	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 21, 2017	Jun. 11, 2018~Jun. 13, 2018~	Jul. 20, 2018	Radiation (03CH02-SZ)
Amplifier	Agilent	8449B	3008A010 23	1GHz~26.5GHz	Oct. 19, 2017	Jun. 11, 2018~Jun. 13, 2018~	Oct. 18, 2018	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002 470	N/A	NCR	Jun. 11, 2018~Jun. 13, 2018~	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Jun. 11, 2018~Jun. 13, 2018~	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Jun. 11, 2018~Jun. 13, 2018~	NCR	Radiation (03CH02-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 26, 2017	Jun. 19, 2018	Dec. 25, 2018	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Dec. 26, 2017	Jun. 19, 2018	Dec. 25, 2018	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	3816/2SH	00103892	9kHz~30MHz	Nov. 01, 2017	Jun. 19, 2018	Oct. 31, 2018	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000 891	100Vac~250Vac	Jul. 19, 2017	Jun. 19, 2018	Jul. 18, 2018	Conduction (CO01-SZ)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	2.6dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	4.4dB
---	-------



## **Appendix A. Conducted Test Results**

**Bluetooth LE v4.0 Low Energy**

Test Engineer:	Sam Zheng	Temperature:	21~25	°C
Test Date:	2018/6/24	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.03	0.67	0.50	Pass
BLE	1Mbps	1	19	2440	1.03	0.67	0.50	Pass
BLE	1Mbps	1	39	2480	1.03	0.67	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	-0.17	30.00	0.50	0.33	36.00	Pass
BLE	1Mbps	1	19	2440	-0.19	30.00	0.50	0.31	36.00	Pass
BLE	1Mbps	1	39	2480	-0.05	30.00	0.50	0.45	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.04	-1.05
BLE	1Mbps	1	19	2440	2.04	-1.12
BLE	1Mbps	1	39	2480	2.04	-0.92

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	-1.69	-16.17	0.50	8.00	Pass
BLE	1Mbps	1	19	2440	-1.55	-15.97	0.50	8.00	Pass
BLE	1Mbps	1	39	2480	-1.19	-15.67	0.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

**Bluetooth LE v5.0 Low Energy**

Test Engineer:	Sam Zheng	Temperature:	21~25	°C
Test Date:	2018/6/24	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	2.03	1.14	0.50	Pass
BLE	1Mbps	1	19	2440	2.03	1.15	0.50	Pass
BLE	1Mbps	1	39	2480	2.03	1.15	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	-0.12	30.00	0.50	0.38	36.00	Pass
BLE	1Mbps	1	19	2440	-0.08	30.00	0.50	0.42	36.00	Pass
BLE	1Mbps	1	39	2480	0.01	30.00	0.50	0.51	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	4.83	-0.95
BLE	1Mbps	1	19	2440	4.83	-1.02
BLE	1Mbps	1	39	2480	4.83	-0.84


**TEST RESULTS DATA**  
**Peak Power Density**


Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	-1.55	-19.70	0.50	8.00	Pass
BLE	1Mbps	1	19	2440	-1.55	-19.54	0.50	8.00	Pass
BLE	1Mbps	1	39	2480	-1.39	-19.51	0.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



## Appendix B. AC Conducted Emission Test Results

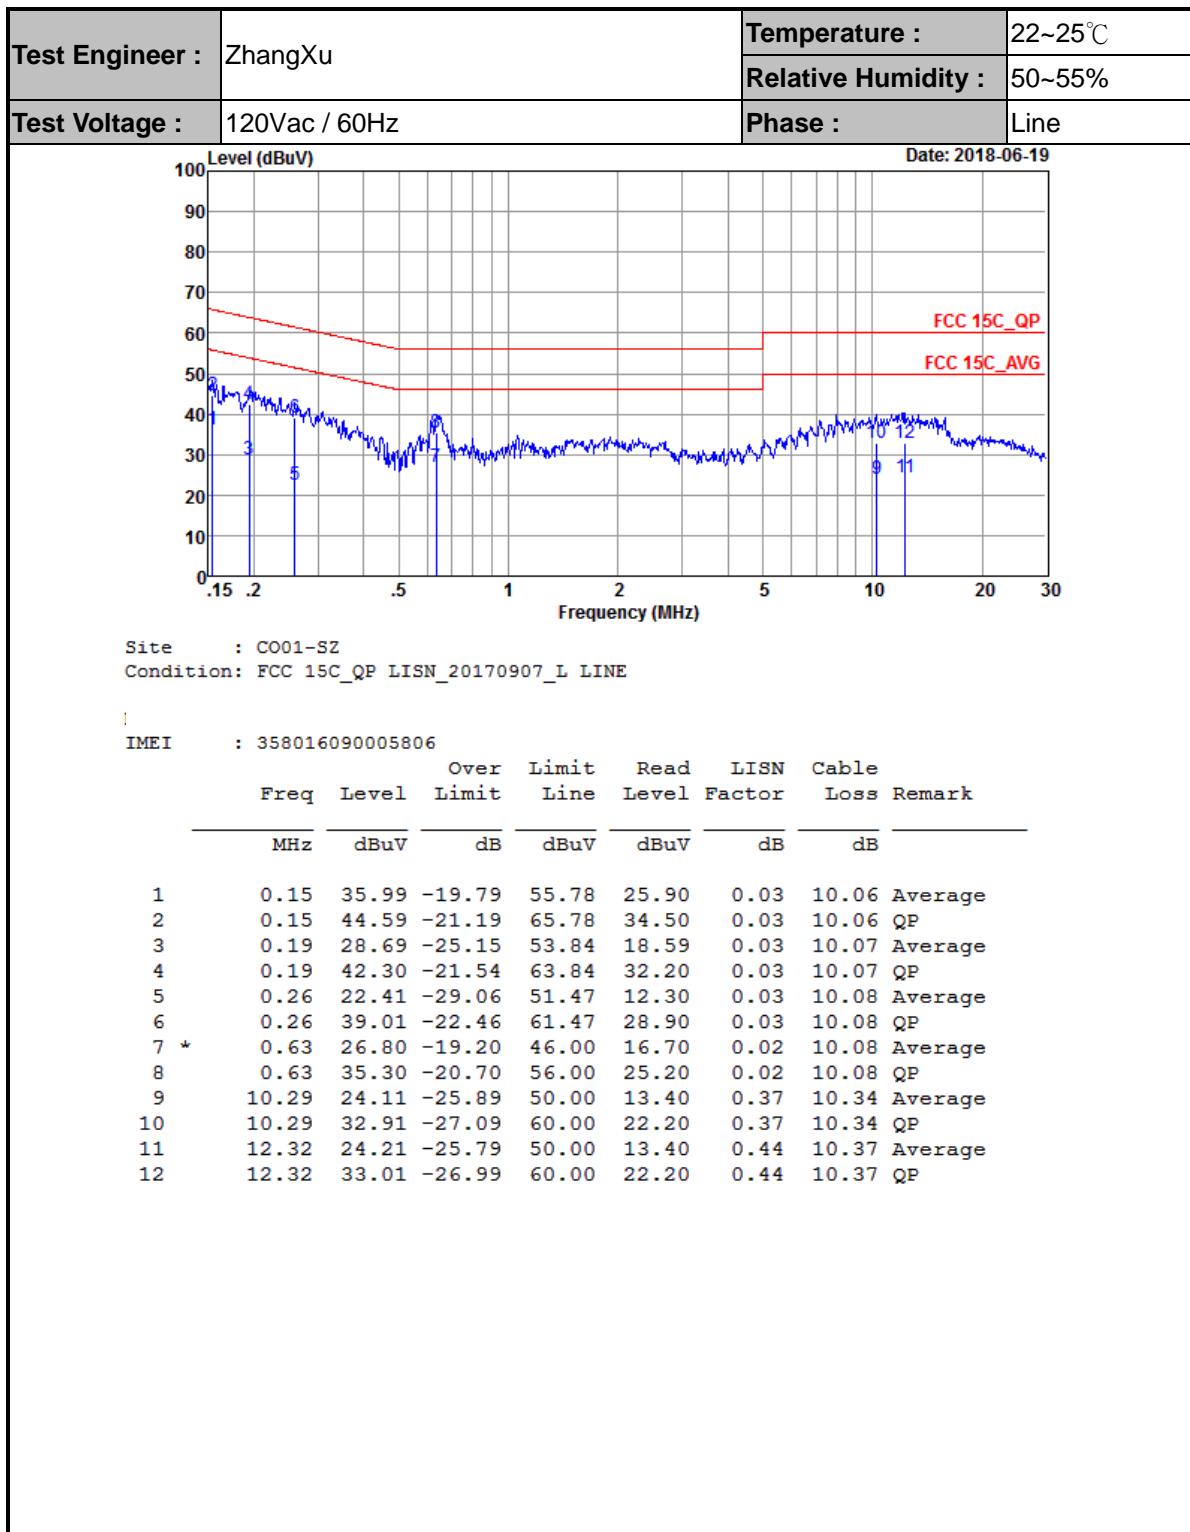

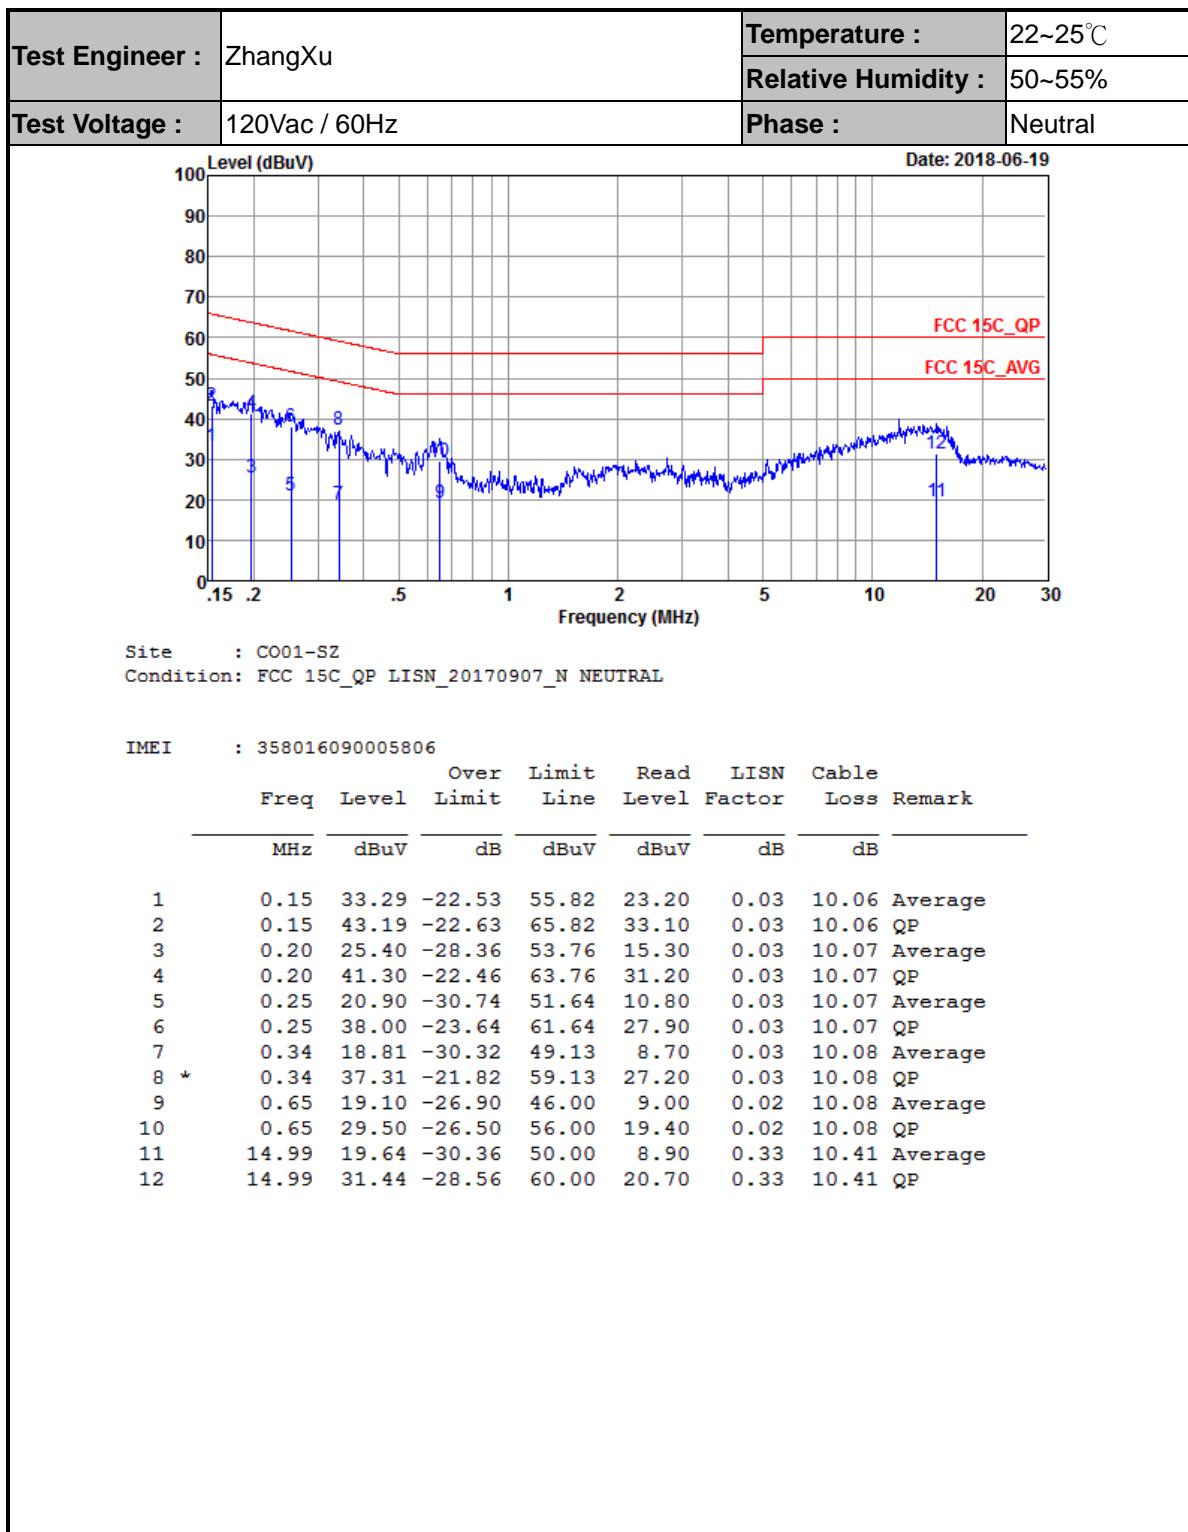



## Appendix C. Radiated Spurious Emission

For Bluetooth LE v4.0

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
BLE CH 00 2402MHz		2374.05	40.68	-33.32	74	38.34	27.04	6.61	31.31	189	309	P	H
		2387.07	31.75	-22.25	54	29.29	27.09	6.65	31.28	189	309	A	H
	*	2402	90.6	-	-	88.11	27.09	6.68	31.28	189	309	P	H
	*	2402	89.72	-	-	87.23	27.09	6.68	31.28	189	309	A	H
		2345.39	40.97	-33.03	74	38.79	26.93	6.58	31.33	128	294	P	V
		2389.7	31.94	-22.06	54	29.48	27.09	6.65	31.28	128	294	A	V
	*	2402	92.37	-	-	89.88	27.09	6.68	31.28	128	294	P	V
	*	2402	90.42	-	-	87.93	27.09	6.68	31.28	128	294	A	V
BLE CH 19 2440MHz		2355.5	41.16	-32.84	74	38.92	26.99	6.58	31.33	189	309	P	H
		2375.52	31.82	-22.18	54	29.44	27.04	6.65	31.31	189	309	A	H
	*	2440	90.08	-	-	87.45	27.24	6.63	31.24	189	309	P	H
	*	2440	89.1	-	-	86.47	27.24	6.63	31.24	189	309	A	H
		2494.68	41.8	-32.2	74	39.02	27.4	6.58	31.2	189	309	P	H
		2499.16	32.12	-21.88	54	29.34	27.4	6.58	31.2	189	309	A	H
		2389.52	44	-30	74	41.54	27.09	6.65	31.28	131	278	P	V
		2389.94	35.5	-18.5	54	33.04	27.09	6.65	31.28	131	278	A	V
	*	2440	93.56	-	-	90.93	27.24	6.63	31.24	131	278	P	V
	*	2440	92.47	-	-	89.84	27.24	6.63	31.24	131	278	A	V
		2484.74	41.41	-32.59	74	38.7	27.35	6.58	31.22	131	278	P	V
		2498.74	32.61	-21.39	54	29.83	27.4	6.58	31.2	131	278	A	V



BLE CH 39 2480MHz	*	2480	90.22	-	-	87.49	27.35	6.6	31.22	189	305	P	H
	*	2480	89.1	-	-	86.37	27.35	6.6	31.22	189	305	A	H
		2489.96	41.17	-32.83	74	38.39	27.4	6.58	31.2	189	305	P	H
		2484.52	32.54	-21.46	54	29.83	27.35	6.58	31.22	189	305	A	H
	*	2480	93.45	-	-	90.72	27.35	6.6	31.22	131	278	P	V
	*	2480	92.46	-	-	89.73	27.35	6.6	31.22	131	278	A	V
		2484.08	42.32	-31.68	74	39.61	27.35	6.58	31.22	131	278	P	V
		2483.52	32.43	-21.57	54	29.72	27.35	6.58	31.22	131	278	A	V
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											



## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
<b>BLE CH 00 2402MHz</b>		4804	39.64	-34.36	74	57	31.4	9.46	58.22	160	360	P	H
		4804	39.46	-34.54	74	56.82	31.4	9.46	58.22	160	360	P	V
<b>BLE CH 19 2440MHz</b>		4880	38.83	-35.17	74	56.02	31.51	9.4	58.1	160	360	P	H
		7320	46.95	-27.05	74	56.41	36.41	12	57.87	160	360	P	H
		4880	39.08	-34.92	74	56.27	31.51	9.4	58.1	160	360	P	V
		7320	45.96	-28.04	74	55.42	36.41	12	57.87	160	360	P	V
<b>BLE CH 39 2480MHz</b>		4960	39.88	-34.12	74	56.63	31.64	9.57	57.96	160	360	P	H
		7440	45.89	-28.11	74	54.51	36.82	12.05	57.49	160	360	P	H
		4960	39.74	-34.26	74	56.49	31.64	9.57	57.96	160	360	P	V
		7440	45.93	-28.07	74	54.55	36.82	12.05	57.49	160	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## Emission below 1GHz

## 2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
2.4GHz BLE LF		89.17	23.82	-19.68	43.5	37.08	-13.26	0.76	31.5	-	-	P	H	
		159.98	28.84	-14.66	43.5	40.52	-11.68	1.38	31.35	-	-	P	H	
		262.8	26.92	-19.08	46	38.02	-11.1	1.91	31.02	-	-	P	H	
		399.57	26.49	-19.51	46	31	-4.51	2.39	31.1	-	-	P	H	
		581.93	28.77	-17.23	46	31.99	-3.22	2.95	31.2	-	-	P	H	
		766.23	32.23	-13.77	46	31.46	0.77	3.51	31.3	120	180	P	H	
		40.67	32.51	-7.49	40	41.64	-9.13	0.39	31.7	100	120	P	V	
		88.2	29.54	-13.96	43.5	43.03	-13.49	0.75	31.5	-	-	P	V	
		159.98	28.31	-15.19	43.5	39.99	-11.68	1.38	31.35	-	-	P	V	
		263.77	26.16	-19.84	46	37.24	-11.08	1.91	31.03	-	-	P	V	
		402.48	26.55	-19.45	46	30.99	-4.44	2.4	31.1	-	-	P	V	
		799.21	32.34	-13.66	46	30.95	1.39	3.61	31.3	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



## For Bluetooth LE v5.0

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2375.42	46.97	-27.03	74	44.59	27.04	6.65	31.31	270	20	P	H
		2390	39.17	-14.83	54	36.71	27.09	6.65	31.28	270	20	A	H
	*	2402	98.75	-	-	96.26	27.09	6.68	31.28	270	20	P	H
	*	2402	96.67	-	-	94.18	27.09	6.68	31.28	270	20	A	H
		2390	48.5	-25.5	74	46.04	27.09	6.65	31.28	100	310	P	V
		2389.91	41.39	-12.61	54	38.93	27.09	6.65	31.28	100	310	A	V
	*	2402	98.25	-	-	95.76	27.09	6.68	31.28	100	310	P	V
	*	2402	96.3	-	-	93.81	27.09	6.68	31.28	100	310	A	V
BLE CH 19 2440MHz		2360.12	46.98	-27.02	74	44.69	26.99	6.61	31.31	321	225	P	H
		2389.1	39.46	-14.54	54	37	27.09	6.65	31.28	321	225	A	H
	*	2440	98.22	-	-	95.59	27.24	6.63	31.24	321	225	P	H
	*	2440	96.14	-	-	93.51	27.24	6.63	31.24	321	225	A	H
		2486.28	47.04	-26.96	74	44.33	27.35	6.58	31.22	321	225	P	H
		2499.3	40.28	-13.72	54	37.5	27.4	6.58	31.2	321	225	A	H
		2389.38	48.49	-25.51	74	46.03	27.09	6.65	31.28	221	191	P	V
		2389.66	40.82	-13.18	54	38.36	27.09	6.65	31.28	221	191	A	V
	*	2440	96.1	-	-	93.47	27.24	6.63	31.24	221	191	P	V
	*	2440	96.03	-	-	93.4	27.24	6.63	31.24	221	191	A	V
		2497.55	46.73	-27.27	74	43.95	27.4	6.58	31.2	221	191	P	V
		2494.47	39.77	-14.23	54	36.99	27.4	6.58	31.2	221	191	A	V



BLE CH 39 2480MHz	*	2480	96.71	-	-	93.98	27.35	6.6	31.22	290	302	P	H
	*	2480	94.62	-	-	91.89	27.35	6.6	31.22	290	302	A	H
		2483.72	48.74	-25.26	74	46.03	27.35	6.58	31.22	290	302	P	H
		2496.76	39.94	-14.06	54	37.16	27.4	6.58	31.2	290	302	A	H
	*	2480	98.65	-	-	95.92	27.35	6.6	31.22	258	63	P	V
	*	2480	95.44	-	-	92.71	27.35	6.6	31.22	258	63	A	V
		2484.2	49.16	-24.84	74	46.45	27.35	6.58	31.22	258	63	P	V
		2483.52	40.58	-13.42	54	37.87	27.35	6.58	31.22	258	63	A	V
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											



## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
<b>BLE CH 00 2402MHz</b>		4804	40.02	-33.98	74	57.38	31.4	9.46	58.22	160	360	P	H
		4804	39.22	-34.78	74	56.58	31.4	9.46	58.22	160	360	P	V
<b>BLE CH 19 2440MHz</b>		4880	39.75	-34.25	74	56.94	31.51	9.4	58.1	160	360	P	H
		7320	46.05	-27.95	74	55.51	36.41	12	57.87	160	360	P	H
		4880	38.96	-35.04	74	56.15	31.51	9.4	58.1	160	360	P	V
		7320	47.47	-26.53	74	56.93	36.41	12	57.87	160	360	P	V
<b>BLE CH 39 2480MHz</b>		4960	40.36	-33.64	74	57.11	31.64	9.57	57.96	160	360	P	H
		7440	46.05	-27.95	74	54.67	36.82	12.05	57.49	160	360	P	H
		4960	39.42	-34.58	74	56.17	31.64	9.57	57.96	160	360	P	V
		7440	46.42	-27.58	74	55.04	36.82	12.05	57.49	160	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## Emission below 1GHz

## 2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
2.4GHz BLE LF		31.94	24.85	-15.15	40	29.8	-4.95	0.27	31.6	100	0	P	H	
		89.17	21.57	-21.93	43.5	34.83	-13.26	0.76	31.5	-	-	P	H	
		160.95	27.86	-15.64	43.5	39.58	-11.72	1.38	31.35	-	-	P	H	
		260.86	27.04	-18.96	46	38.21	-11.17	1.9	31.02	-	-	P	H	
		439.34	25.81	-20.19	46	29.31	-3.5	2.53	31.1	-	-	P	H	
		993.21	32.76	-21.24	54	29.82	2.94	4.17	31.46	-	-	P	H	
		40.67	31.56	-8.44	40	40.69	-9.13	0.39	31.7	100	360	P	V	
		55.22	27.18	-12.82	40	42.98	-15.8	0.5	31.6	-	-	P	V	
		89.17	27.08	-16.42	43.5	40.34	-13.26	0.76	31.5	-	-	P	V	
		159.01	25.98	-17.52	43.5	37.65	-11.67	1.37	31.36	-	-	P	V	
		262.8	25.33	-20.67	46	36.43	-11.1	1.91	31.02	-	-	P	V	
		796.3	31.52	-14.48	46	30.18	1.34	3.6	31.3	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													

**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak or Average</b>
H/V	<b>Horizontal or Vertical</b>

**A calculation example for radiated spurious emission is shown as below:**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

$$1. \text{ Level(dB}\mu\text{V/m)} =$$

$$= \text{Antenna Factor(dB/m)} + \text{Cable Loss(dB)} + \text{Read Level(dB}\mu\text{V)} - \text{Preamp Factor(dB)}$$

$$2. \text{ Over Limit(dB)} = \text{Level(dB}\mu\text{V/m)} - \text{Limit Line(dB}\mu\text{V/m)}$$

**For Peak Limit @ 2390MHz:**

$$1. \text{ Level(dB}\mu\text{V/m)}$$

$$= \text{Antenna Factor(dB/m)} + \text{Cable Loss(dB)} + \text{Read Level(dB}\mu\text{V)} - \text{Preamp Factor(dB)}$$

$$= 32.22(\text{dB/m}) + 4.58(\text{dB}) + 54.51(\text{dB}\mu\text{V}) - 35.86 (\text{dB})$$

$$= 55.45 (\text{dB}\mu\text{V/m})$$

$$2. \text{ Over Limit(dB)}$$

$$= \text{Level(dB}\mu\text{V/m)} - \text{Limit Line(dB}\mu\text{V/m)}$$

$$= 55.45(\text{dB}\mu\text{V/m}) - 74(\text{dB}\mu\text{V/m})$$

$$= -18.55(\text{dB})$$

**For Average Limit @ 2390MHz:**

$$1. \text{ Level(dB}\mu\text{V/m)}$$

$$= \text{Antenna Factor(dB/m)} + \text{Cable Loss(dB)} + \text{Read Level(dB}\mu\text{V)} - \text{Preamp Factor(dB)}$$

$$= 32.22(\text{dB/m}) + 4.58(\text{dB}) + 42.6(\text{dB}\mu\text{V}) - 35.86 (\text{dB})$$

$$= 43.54 (\text{dB}\mu\text{V/m})$$

$$2. \text{ Over Limit(dB)}$$

$$= \text{Level(dB}\mu\text{V/m)} - \text{Limit Line(dB}\mu\text{V/m)}$$

$$= 43.54(\text{dB}\mu\text{V/m}) - 54(\text{dB}\mu\text{V/m})$$


$$= -10.46(\text{dB})$$

**Both peak and average measured complies with the limit line, so test result is “PASS”.**

## Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE v4.0	62.50	0.391	2.556	3KHz
Bluetooth LE v5.0	32.87	0.206	4.859	10KHZ

### Bluetooth LE v4.0

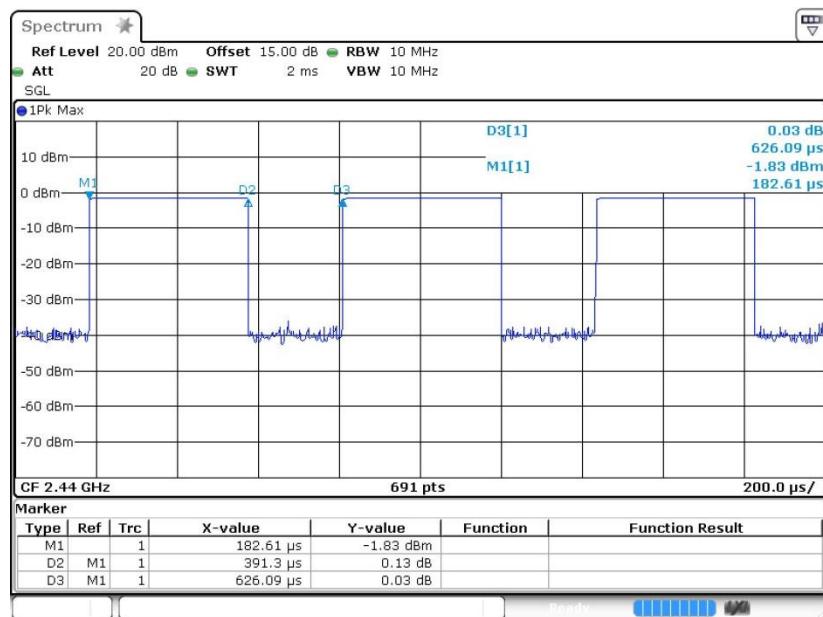



## Bluetooth LE v5.0

