




FCC SAR TEST REPORT

FCC ID : ZL5S62PROE
Equipment : Rugged Smart Phone
Brand Name : CAT
Model Name : S62 Pro
Applicant : Bullitt Group
One Valpy, Valpy Street, Reading,
Berkshire, England RG1 1AR
Standard : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on May 07, 2020 and testing was started from May 17, 2020 and completed on Jun. 26, 2020. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	4
3. Equipment Under Test (EUT) Information.....	5
3.1 General Information	5
3.2 General LTE SAR Test and Reporting Considerations	6
4. RF Exposure Limits.....	8
4.1 Uncontrolled Environment.....	8
4.2 Controlled Environment.....	8
5. Specific Absorption Rate (SAR).....	9
5.1 Introduction	9
5.2 SAR Definition.....	9
6. System Description and Setup	10
6.1 Test Side Location.....	10
6.2 E-Field Probe	11
6.3 Data Acquisition Electronics (DAE)	11
6.4 Phantom.....	12
6.5 Device Holder.....	13
7. Measurement Procedures	14
7.1 Spatial Peak SAR Evaluation.....	14
7.2 Power Reference Measurement.....	15
7.3 Area Scan	15
7.4 Zoom Scan.....	16
7.5 Volume Scan Procedures.....	16
7.6 Power Drift Monitoring.....	16
8. Test Equipment List.....	17
9. System Verification	18
9.1 Tissue Simulating Liquids.....	18
9.2 Tissue Verification	19
9.3 System Performance Check Results.....	20
10. RF Exposure Positions	21
10.1 Ear and handset reference point.....	21
10.2 Definition of the cheek position	22
10.3 Definition of the tilt position	23
10.4 Body Worn Accessory	23
10.5 Product Specific Exposure	24
10.6 Wireless Router.....	24
11. GSM/UMTS/CDMA/LTE Output Power (Unit: dBm).....	25
12. WiFi/Bluetooth Output Power (Unit: dBm)	65
13. Antenna Location	70
14. SAR Test Results	71
14.1 Head SAR	73
14.2 Hotspot SAR	76
14.3 Body Worn Accessory SAR.....	80
14.4 Product Specific SAR.....	82
14.5 Repeated SAR Measurement	83
15. Simultaneous Transmission Analysis	84
15.1 Head Exposure Conditions	85
15.2 Hotspot Exposure Conditions.....	86
15.3 Body-Worn Accessory Exposure Conditions.....	88
15.4 Product Specific Exposure Conditions	89
16. Uncertainty Assessment	90
17. References.....	90
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

History of this test report

Report No.	Version	Description	Issued Date
FA042406-02	01	Initial issue of report	Jul. 13, 2020

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Bullitt Group, Rugged Smart Phone, S62 Pro, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary				Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 10mm)	Hotspot (Separation 10mm)	Product Specific (Separation 0mm)	
		1g SAR (W/kg)			10g SAR (W/kg)	
Licensed	GSM850	0.11	0.26	0.26		1.59
	GSM1900	0.22	0.88	1.17	1.45	
	WCDMA II	0.30	0.90	0.89	1.69	
	WCDMA IV	0.20	1.10	1.04	2.84	
	WCDMA V	0.27	0.31	0.31		
	LTE Band 2	0.25	0.89	1.12	1.62	
	LTE Band 4	0.14	0.78	1.19	2.13	
	LTE Band 5	0.28	0.44	0.44		
	LTE Band 7	0.87	0.56	0.61		
	LTE Band 38	0.14	0.37	0.37		
DTS	2.4GHz WLAN	0.52	0.11	0.15		1.29
NII	5GHz WLAN	0.56	0.21	0.25	0.35	1.59
DSS	Bluetooth	0.30	0.07	0.07		1.59
Date of Testing:		2020/5/17 ~ 2020/6/26				

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

Reviewed by: Jason Wang

Report Producer: Wan Liu

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 941225 D07 UMPC Mini Tablet v01r02

3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Rugged Smart Phone
Brand Name	CAT
Model Name	S62 Pro
FCC ID	ZL5S62PROE
Sample 1	Dual SIM
Sample 2	Single SIM
IMEI Code	IMEI1: 355417110003446 IMEI2: 355417110003453
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 38: 2570 MHz ~ 2620 MHz WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5825 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC: 13.56 MHz
Mode	GSM/GPRS/EGPRS/DTM RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM, 64QAM WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC:ASK
GSM / (E)GPRS Dual Transfer mode	Class A – EUT can support Packet Switched and Circuit Switched Network simultaneously.
EUT Stage	Identical Prototype
Remark:	
1. This device WLAN 2.4GHz / 5.2GHz / 5.8GHz supports Hotspot operation and Bluetooth support tethering applications. 2. The device implements the power management and sensor detection for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity) and the device will manage to ensure the power level not exceeding the associated power table. Details about the power management decision and sensor detection are provided in the operational description 3. The samples have same layout, circuit and components but different SIM tray. The phone software will identify the loaded sim card combinations whether with single sim card or dual sim cards.	



3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																										
FCC ID		ZL5S62PROE																																																																								
Equipment Name		Rugged Smart Phone																																																																								
Operating Frequency Range of each LTE transmission band		LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 38: 2570 MHz ~ 2620 MHz																																																																								
Channel Bandwidth		LTE Band 02:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz																																																																								
uplink modulations used		QPSK / 16QAM / 64QAM																																																																								
LTE Voice / Data requirements		Voice and Data																																																																								
LTE MPR permanently built-in by design		<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>			Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																										
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																			
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																				
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																			
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																			
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																			
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																			
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																			
256 QAM	≥ 1						≤ 5																																																																			
LTE A-MPR		In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																								
Spectrum plots for RB configuration		A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																								
Power reduction applied to satisfy SAR compliance		The device implements the power management and sensor detection for SAR compliance at different exposure conditions (head, body-worn, Hotspot, extremity); power selection is determined by the device's positioning and usage scenarios.																																																																								
LTE Carrier Aggregation Combinations		Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to section 12.																																																																								
LTE Carrier Aggregation Additional Information		1. This device supports LTE Carrier Aggregation (CA) in the uplink for LTE B5/B7/B38 with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 2 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																																								

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:



- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Side Location

Sporton Lab and below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 0007) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Side	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory			
Test Site Location	TW1190 No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, CHINESE TAIPEI		TW0007 No. 58, Aly. 75, Ln. 564, Wehnuia 3rd, Rd., Guishan Dist., Taoyuan City, CHINESE TAIPEI	
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY
	SAR06-HY	SAR10-HY		

6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d167	Nov. 25, 2019	Nov. 24, 2020
SPEAG	1750MHz System Validation Kit	D1750V2	1112	Mar. 07, 2019	Mar. 05, 2021
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 11, 2018	Sep. 09, 2020
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 31, 2018	Aug. 29, 2020
SPEAG	2600MHz System Validation Kit	D2600V2	1078	Mar. 06, 2019	Mar. 04, 2021
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 27, 2018	Sep. 25, 2020
SPEAG	Data Acquisition Electronics	DAE4	376	Dec. 06, 2019	Dec. 05, 2020
SPEAG	Data Acquisition Electronics	DAE4	699	Feb. 26, 2020	Feb. 25, 2021
SPEAG	Data Acquisition Electronics	DAE4	853	Jul. 18, 2019	Jul. 17, 2020
SPEAG	Data Acquisition Electronics	DAE4	916	Dec. 17, 2019	Dec. 16, 2020
SPEAG	Dosimetric E-Field Probe	ES3DV3	3184	Sep. 25, 2019	Sep. 24, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	7515	Oct. 22, 2019	Oct. 21, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	3728	Feb. 04, 2020	Feb. 03, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	Sep. 20, 2019	Sep. 19, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Sep. 26, 2019	Sep. 25, 2020
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 12, 2019	Nov. 11, 2020
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 12, 2019	Nov. 11, 2020
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Oct. 31, 2019	Oct. 30, 2020
Agilent	Wireless Communication Test Set	E5515C	MY50267236	Mar. 18, 2020	Mar. 17, 2021
R&S	BT Base Station	CBT	100815	Feb. 15, 2020	Feb. 14, 2021
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 20, 2019	Nov. 19, 2020
Agilent	ENA Network Analyzer	E5071C	MY46104758	Sep. 06, 2019	Sep. 05, 2020
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 18, 2019	Sep. 17, 2020
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3169	Sep. 10, 2019	Sep. 09, 2020
Anritsu	Power Meter	ML2495A	1036004	Aug. 08, 2019	Aug. 07, 2020
Anritsu	Power Sensor	MA2411B	1027253	Aug. 08, 2019	Aug. 07, 2020
Anritsu	Power Meter	ML2495A	1218006	Oct. 14, 2019	Oct. 13, 2020
Anritsu	Power Sensor	MA2411B	1207363	Oct. 14, 2019	Oct. 13, 2020
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 27, 2019	Aug. 26, 2020
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Mar. 12, 2020	Mar. 11, 2021
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 16, 2019	Oct. 15, 2020
Mini-Circuits	Power Amplifier	ZVE-8G+	6382	Aug. 12, 2019	Aug. 11, 2020
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D1750V2, SN: 1112, D1900V2, SN: 5d041, D2450V2, SN: 736, D2600V2, SN: 1078, D5GHzV2, SN: 1006 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

9. System Verification

9.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR

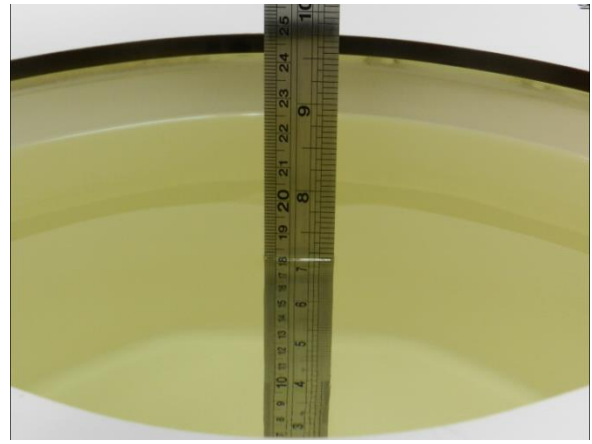


Fig 10.2 Photo of Liquid Height for Body SAR

9.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	22.6	0.935	42.261	0.90	41.50	3.89	1.83	±5	2020/5/18
1750	22.4	1.394	41.422	1.37	40.10	1.75	3.30	±5	2020/5/19
1750	22.5	1.401	41.146	1.37	40.10	2.26	2.61	±5	2020/5/29
1750	22.7	1.392	40.335	1.37	40.10	1.61	0.59	±5	2020/6/19
1900	22.4	1.421	39.521	1.40	40.00	1.50	-1.20	±5	2020/5/19
1900	22.6	1.404	40.306	1.40	40.00	0.29	0.76	±5	2020/5/30
1900	22.7	1.383	39.565	1.40	40.00	-1.21	-1.09	±5	2020/6/18
2450	22.6	1.838	38.778	1.80	39.20	2.11	-1.08	±5	2020/6/26
2600	22.9	2.021	39.276	1.96	39.00	3.11	0.71	±5	2020/5/17
2600	22.6	2.046	38.564	1.96	39.00	4.39	-1.12	±5	2020/5/18
2600	22.2	2.009	38.551	1.96	39.00	2.50	-1.15	±5	2020/5/21
2600	22.3	1.965	39.831	1.96	39.00	0.26	2.13	±5	2020/6/19
5250	22.5	4.662	36.506	4.71	35.95	-1.02	1.55	±5	2020/6/25
5600	22.5	5.025	36.024	5.07	35.50	-0.89	1.48	±5	2020/6/25
5750	22.5	5.176	35.748	5.22	35.35	-0.84	1.13	±5	2020/6/25

9.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/5/18	835	250	D835V2-4d167	ES3DV3 - SN3184	DAE4 Sn916	2.30	9.55	9.2	-3.66
2020/5/19	1750	250	D1750V2-1112	ES3DV3 - SN3184	DAE4 Sn916	8.96	36.70	35.84	-2.34
2020/5/29	1750	250	D1750V2-1112	EX3DV4 - SN3728	DAE4 Sn699	8.79	36.70	35.16	-4.20
2020/6/19	1750	250	D1750V2-1112	ES3DV3 - SN3184	DAE4 Sn916	8.95	36.70	35.8	-2.45
2020/5/19	1900	250	D1900V2-5d041	ES3DV3 - SN3184	DAE4 Sn916	9.64	40.20	38.56	-4.08
2020/5/30	1900	250	D1900V2-5d041	EX3DV4 - SN3728	DAE4 Sn699	9.85	40.20	39.4	-1.99
2020/6/18	1900	250	D1900V2-5d041	ES3DV3 - SN3184	DAE4 Sn916	9.38	40.20	37.52	-6.67
2020/6/26	2450	250	D2450V2-736	EX3DV4 - SN3925	DAE4 Sn376	12.70	52.70	50.8	-3.61
2020/5/17	2600	250	D2600V2-1078	EX3DV4 - SN3931	DAE4 Sn376	14.80	57.60	59.2	2.78
2020/5/18	2600	250	D2600V2-1078	ES3DV3 - SN3184	DAE4 Sn916	14.20	57.60	56.8	-1.39
2020/5/21	2600	250	D2600V2-1078	EX3DV4 - SN7515	DAE4 Sn853	14.40	57.60	57.6	0.00
2020/6/19	2600	250	D2600V2-1078	ES3DV3 - SN3184	DAE4 Sn916	13.50	57.60	54	-6.25
2020/6/25	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN3925	DAE4 Sn376	7.69	80.70	76.9	-4.71
2020/6/25	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN3925	DAE4 Sn376	8.68	83.30	86.8	4.20
2020/6/25	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN3925	DAE4 Sn376	7.41	80.40	74.1	-7.84

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2020/5/19	1750	250	D1750V2-1112	ES3DV3 - SN3184	DAE4 Sn916	4.77	19.40	19.08	-1.65
2020/5/29	1750	250	D1750V2-1112	EX3DV4 - SN3728	DAE4 Sn699	4.66	19.40	18.64	-3.92
2020/5/30	1900	250	D1900V2-5d041	EX3DV4 - SN3728	DAE4 Sn699	5.11	21.20	20.44	-3.58
2020/6/18	1900	250	D1900V2-5d041	ES3DV3 - SN3184	DAE4 Sn916	5.01	21.20	20.04	-5.47
2020/6/25	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN3925	DAE4 Sn376	2.21	23.20	22.1	-4.74
2020/6/25	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN3925	DAE4 Sn376	2.47	23.80	24.7	3.78

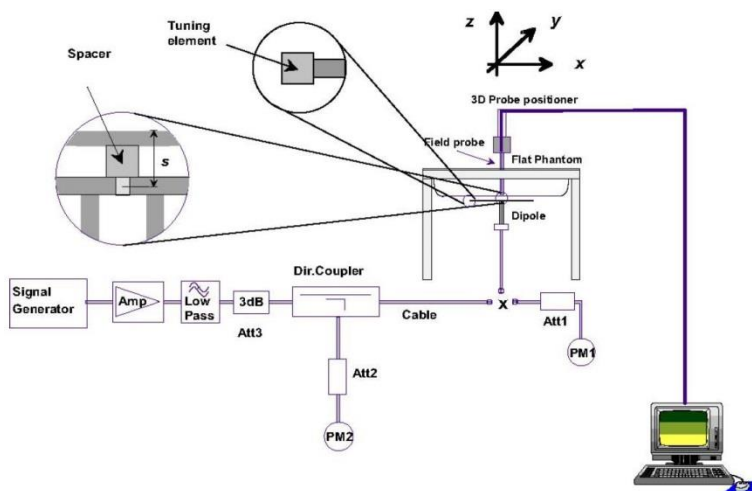


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

10. RF Exposure Positions

10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

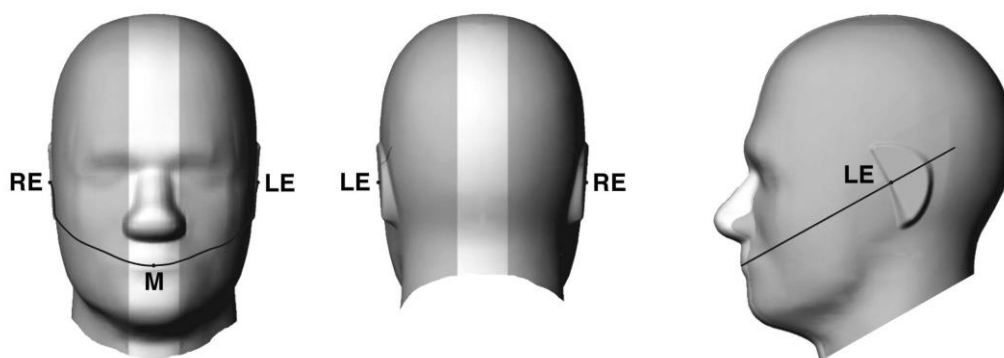


Fig 9.1.1 Front, back, and side views of SAM twin phantom



Fig 9.1.2 Close-up side view of phantom showing the ear region.

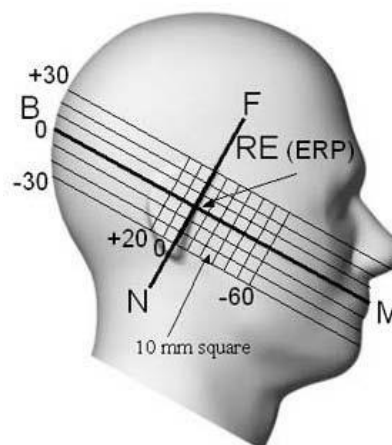


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

10.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.



Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

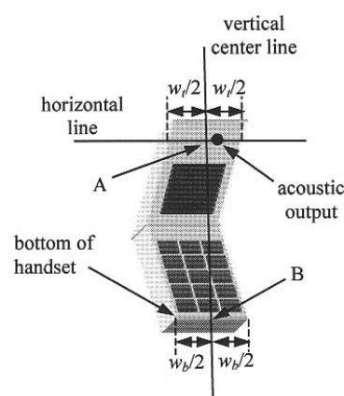


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

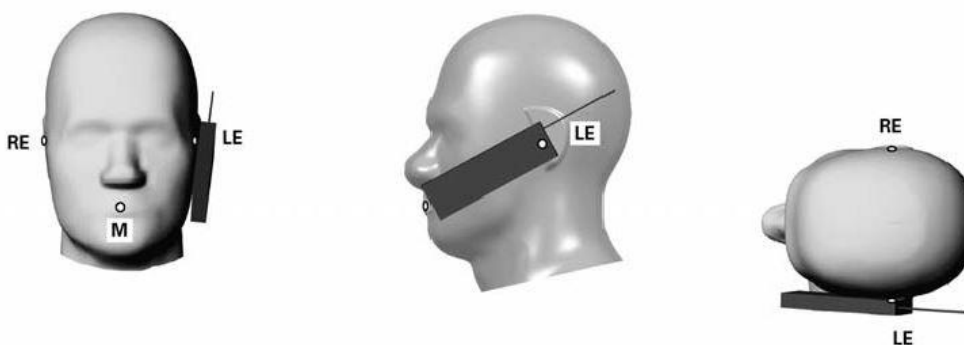


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

10.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point



Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

10.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

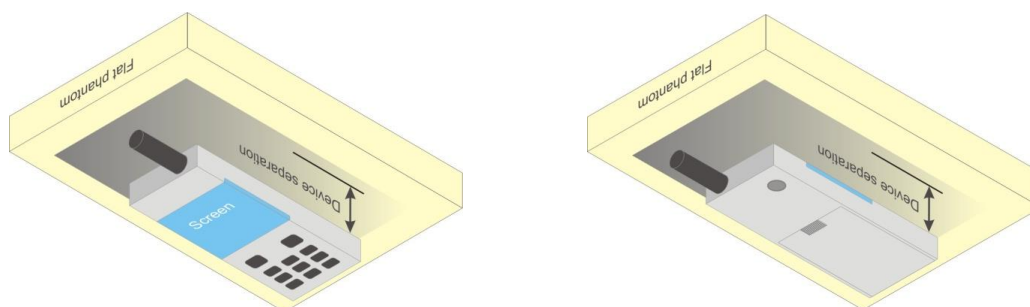


Fig 9.4 Body Worn Position



10.5 Product Specific Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

10.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

11. GSM/UMTS/CDMA/LTE Output Power (Unit: dBm)

<GSM Conducted Power>

1. For DTM multi-slot class mode, the device was linked with base station simulator (Agilent E5515C) and transmit maximum power on maximum number of TX slots, i.e. one CS timeslot, and additional PS timeslots (1 for DTM class 5 and 9, 2 for DTM class 11) in one TDMA frame.
2. Agilent E5515C was used to setup the device operated under DTM mode for power measurement and SAR testing. For conducted power, the power of the burst for voice and the power of the bursts for data was reported separately in the table below, and the frame-average power is derived below to determine SAR testing.

$$DTM \text{ frame average power (dBm)} = 10 * \log [\sum(\text{power of each slot, in mW})/8]$$

3. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
4. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
5. Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode
6. Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 4Tx slot due to its highest frame-average power.

<Default Power Mode>

GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		128	189	251		128	189	251	
Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot		32.84	32.81	32.62	33.00	23.84	23.81	23.62	24.00
GPRS 1 Tx slot		32.94	32.89	32.64	33.00	23.94	23.89	23.64	24.00
GPRS 2 Tx slots		29.58	29.61	29.36	30.00	23.58	23.61	23.36	24.00
GPRS 3 Tx slots		27.57	27.58	27.38	28.00	23.31	23.32	23.12	23.74
GPRS 4 Tx slots		26.84	26.50	26.24	27.00	23.84	23.50	23.24	24.00
EDGE 1 Tx slot		26.86	26.71	26.52	27.00	17.86	17.71	17.52	18.00
EDGE 2 Tx slots		26.76	26.55	26.35	27.00	20.76	20.55	20.35	21.00
EDGE 3 Tx slots		26.50	26.27	26.03	27.00	22.24	22.01	21.77	22.74
EDGE 4 Tx slots		26.11	25.93	25.79	27.00	23.11	22.93	22.79	24.00
DTM Multi-slot class 5	GSM 1 Tx slot	29.31	29.60	29.40	30.00	23.03	23.33	23.13	23.98
	GPRS 1 Tx slot	28.78	29.09	28.88	30.00				
DTM Multi-slot class 9	GSM 1 Tx slot	29.17	29.52	29.37	30.00	22.88	23.25	23.10	23.98
	GPRS 1 Tx slot	28.62	29.00	28.86	30.00				
DTM Multi-slot class 11	GSM 1 Tx slot	27.01	27.37	27.25	28.00	22.43	22.75	22.68	23.74
	GPRS 2 Tx slots	26.52	26.81	26.77	28.00				
DTM Multi-slot class 5	GSM 1 Tx slot	29.25	29.48	29.07	30.00	22.02	22.19	21.96	22.73
	EDGE 1 Tx slot	26.37	26.42	26.52	27.00				
DTM Multi-slot class 9	GSM 1 Tx slot	29.72	29.81	29.46	30.00	22.19	22.27	21.80	22.73
	EDGE 1 Tx slot	25.88	25.95	25.16	27.00				
DTM Multi-slot class 11	GSM 1 Tx slot	26.52	26.80	27.18	28.00	22.06	22.21	22.34	23.10
	EDGE 2 Tx slots	26.21	26.29	26.28	27.00				

GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot		29.80	29.74	29.68	30.00	20.80	20.74	20.68	21.00
GPRS 1 Tx slot		29.87	29.77	29.77	30.00	20.87	20.77	20.77	21.00
GPRS 2 Tx slots		26.47	26.57	26.44	27.00	20.47	20.57	20.44	21.00
GPRS 3 Tx slots		24.34	24.36	24.49	25.00	20.08	20.10	20.23	20.74
GPRS 4 Tx slots		22.80	23.39	23.35	24.00	19.80	20.39	20.35	21.00
EDGE 1 Tx slot		25.60	25.61	25.56	26.00	16.60	16.61	16.56	17.00
EDGE 2 Tx slots		25.39	25.40	25.38	26.00	19.39	19.40	19.38	20.00
EDGE 3 Tx slots		25.21	25.17	25.08	26.00	20.95	20.91	20.82	21.74
EDGE 4 Tx slots		24.81	24.83	24.79	26.00	21.81	21.83	21.79	23.00
DTM Multi-slot class 5	GSM 1 Tx slot	26.42	26.37	26.40	27.00	20.08	20.00	20.02	20.98
	GPRS 1 Tx slot	25.75	25.65	25.65	27.00				
DTM Multi-slot class 9	GSM 1 Tx slot	26.32	26.32	26.36	27.00	19.98	19.95	19.99	20.98
	GPRS 1 Tx slot	25.65	25.60	25.62	27.00				
DTM Multi-slot class 11	GSM 1 Tx slot	24.44	24.17	24.24	25.00	19.75	19.45	19.51	20.74
	GPRS 2 Tx slots	23.78	23.46	23.51	25.00				
DTM Multi-slot class 5	GSM 1 Tx slot	25.59	25.52	25.54	27.00	19.70	19.62	19.39	20.51
	EDGE 1 Tx slot	25.84	25.76	25.28	26.00				
DTM Multi-slot class 9	GSM 1 Tx slot	26.18	26.17	26.21	27.00	19.67	19.61	19.42	20.51
	EDGE 1 Tx slot	25.14	25.02	24.50	26.00				
DTM Multi-slot class 11	GSM 1 Tx slot	23.61	23.41	23.47	25.00	20.77	20.69	20.34	21.43
	EDGE 2 Tx slots	25.60	25.55	25.07	26.00				

<For Hotspot>

GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot		26.69	26.85	26.84	28.00	17.69	17.85	17.84	19.00
GPRS 1 Tx slot		26.77	26.90	26.90	28.00	17.77	17.90	17.90	19.00
GPRS 2 Tx slots		24.04	24.24	24.12	25.00	18.04	18.24	18.12	19.00
GPRS 3 Tx slots		22.03	22.24	22.19	23.50	17.77	17.98	17.93	19.24
GPRS 4 Tx slots		21.16	21.39	21.32	22.00	18.16	18.39	18.32	19.00
EDGE 1 Tx slot		24.08	23.86	23.97	25.50	15.08	14.86	14.97	16.50
EDGE 2 Tx slots		24.50	24.01	24.26	25.00	18.50	18.01	18.26	19.00
EDGE 3 Tx slots		23.50	22.76	23.12	23.50	19.24	18.50	18.86	19.24
EDGE 4 Tx slots		22.43	21.38	21.64	22.50	19.43	18.38	18.64	19.50
DTM Multi-slot class 5	GSM 1 Tx slot	23.97	24.14	24.08	25.00	17.97	18.16	18.07	18.98
	GPRS 1 Tx slot	24.01	24.23	24.11	25.00				
DTM Multi-slot class 9	GSM 1 Tx slot	23.95	24.22	24.09	25.00	17.94	18.16	18.07	18.98
	GPRS 1 Tx slot	23.97	24.14	24.10	25.00				
DTM Multi-slot class 11	GSM 1 Tx slot	21.97	22.14	22.11	23.50	17.73	17.92	17.84	19.24
	GPRS 2 Tx slots	22.00	22.20	22.10	23.50				
DTM Multi-slot class 5	GSM 1 Tx slot	23.97	24.19	24.03	25.00	18.22	17.94	18.02	18.98
	EDGE 1 Tx slot	24.50	23.72	24.05	25.00				
DTM Multi-slot class 9	GSM 1 Tx slot	23.97	24.18	24.02	25.00	18.19	17.94	17.98	18.98
	EDGE 1 Tx slot	24.43	23.72	23.98	25.00				
DTM Multi-slot class 11	GSM 1 Tx slot	21.97	22.19	22.18	23.50	18.79	18.11	18.39	19.24
	EDGE 2 Tx slots	23.50	22.46	22.86	23.50				

<For Body-worn & Product Specific>

GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot		28.23	28.40	28.39	29.50	19.23	19.40	19.39	20.50
GPRS 1 Tx slot		28.24	28.41	28.41	29.50	19.24	19.41	19.41	20.50
GPRS 2 Tx slots		25.56	25.84	25.83	26.50	19.56	19.84	19.83	20.50
GPRS 3 Tx slots		23.52	23.63	23.57	24.50	19.26	19.37	19.31	20.24
GPRS 4 Tx slots		22.37	22.28	22.23	23.50	19.37	19.28	19.23	20.50
EDGE 1 Tx slot		24.41	24.64	24.31	25.50	15.41	15.64	15.31	16.50
EDGE 2 Tx slots		25.02	24.23	24.36	25.50	19.02	18.23	18.36	19.50
EDGE 3 Tx slots		24.90	24.40	24.48	25.50	20.64	20.14	20.22	21.24
EDGE 4 Tx slots		24.53	24.02	24.02	25.50	21.53	21.02	21.02	22.50
DTM Multi-slot class 5	GSM 1 Tx slot	25.56	25.77	25.76	26.50	19.52	19.78	19.73	20.48
	GPRS 1 Tx slot	25.53	25.84	25.74	26.50				
DTM Multi-slot class 9	GSM 1 Tx slot	25.49	25.77	25.83	26.50	19.50	19.77	19.80	20.48
	GPRS 1 Tx slot	25.56	25.82	25.81	26.50				
DTM Multi-slot class 11	GSM 1 Tx slot	23.48	23.60	23.54	24.50	19.21	19.33	19.29	20.24
	GPRS 2 Tx slots	23.46	23.58	23.55	24.50				
DTM Multi-slot class 5	GSM 1 Tx slot	25.47	25.77	25.83	26.50	19.19	19.02	19.13	20.01
	EDGE 1 Tx slot	24.94	24.16	24.34	25.50				
DTM Multi-slot class 9	GSM 1 Tx slot	25.55	25.76	25.73	26.50	19.24	19.01	19.07	20.01
	EDGE 1 Tx slot	24.94	24.15	24.34	25.50				
DTM Multi-slot class 11	GSM 1 Tx slot	23.45	23.53	23.47	24.50	20.20	19.81	19.89	20.93
	EDGE 2 Tx slots	24.89	24.32	24.45	25.50				

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Cycle to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

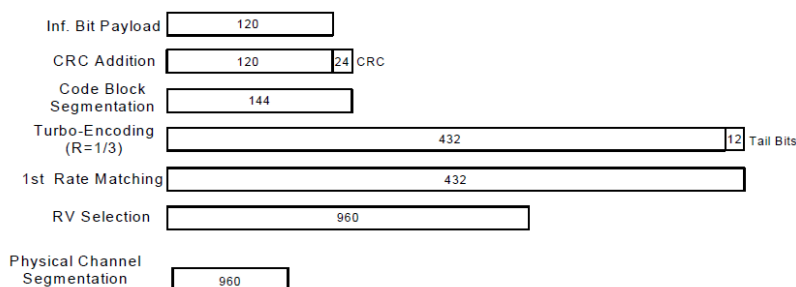
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<Default Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.18	23.20	23.34	24.00	23.24	23.36	23.37	24.00	23.60	23.49	23.49	24.00
3GPP Rel 99	RMC 12.2Kbps	23.19	23.23	23.35	24.00	23.24	23.37	23.39	24.00	23.62	23.50	23.49	24.00
3GPP Rel 6	HSDPA Subtest-1	22.08	22.17	22.28	23.00	22.22	22.38	22.44	23.00	22.66	22.55	22.48	23.00
3GPP Rel 6	HSDPA Subtest-2	22.14	22.25	22.28	23.00	22.24	22.45	22.43	23.00	22.67	22.53	22.51	23.00
3GPP Rel 6	HSDPA Subtest-3	21.61	21.73	21.78	22.50	21.78	21.95	21.94	22.50	22.19	22.06	22.05	22.50
3GPP Rel 6	HSDPA Subtest-4	21.60	21.71	21.82	22.50	21.72	21.93	21.91	22.50	22.19	22.03	22.04	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.05	22.15	22.28	23.00	22.19	22.37	22.38	23.00	22.58	22.54	22.47	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.09	22.15	22.24	23.00	22.16	22.43	22.40	23.00	22.63	22.48	22.46	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.61	21.70	21.74	22.50	21.76	21.85	21.91	22.50	22.15	22.02	22.04	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.58	21.67	21.82	22.50	21.63	21.85	21.82	22.50	22.13	22.03	21.95	22.50
3GPP Rel 6	HSUPA Subtest-1	22.14	22.20	22.39	22.50	22.27	22.39	22.43	22.50	22.47	22.41	22.48	22.50
3GPP Rel 6	HSUPA Subtest-2	20.15	20.18	20.27	21.00	20.26	20.40	20.40	21.00	20.68	20.50	20.53	21.00
3GPP Rel 6	HSUPA Subtest-3	21.02	21.20	21.34	22.00	21.24	21.37	21.44	22.00	21.60	21.54	21.50	22.00
3GPP Rel 6	HSUPA Subtest-4	20.10	20.15	20.28	20.50	20.23	20.44	20.43	20.50	20.50	20.44	20.48	20.50
3GPP Rel 6	HSUPA Subtest-5	22.20	22.20	22.30	22.50	22.30	22.40	22.40	22.50	22.46	22.50	22.50	22.50

<For Hotspot>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	18.28	18.32	18.32	18.50	21.91	21.95	21.90	22.00
3GPP Rel 99	RMC 12.2Kbps	18.29	18.34	18.33	18.50	21.93	21.97	21.91	22.00
3GPP Rel 6	HSDPA Subtest-1	17.14	17.22	17.34	17.50	20.82	20.88	20.94	21.00
3GPP Rel 6	HSDPA Subtest-2	17.24	17.28	17.28	17.50	20.84	20.95	20.93	21.00
3GPP Rel 6	HSDPA Subtest-3	16.66	16.81	16.85	17.00	20.38	20.45	20.44	20.50
3GPP Rel 6	HSDPA Subtest-4	16.63	16.77	16.87	17.00	20.32	20.43	20.41	20.50
3GPP Rel 8	DC-HSDPA Subtest-1	17.08	17.17	17.35	17.50	20.79	20.87	20.88	21.00
3GPP Rel 8	DC-HSDPA Subtest-2	17.15	17.20	17.29	17.50	20.76	20.93	20.90	21.00
3GPP Rel 8	DC-HSDPA Subtest-3	16.65	16.76	16.83	17.00	20.36	20.35	20.41	20.50
3GPP Rel 8	DC-HSDPA Subtest-4	16.59	16.77	16.84	17.00	20.23	20.35	20.32	20.50
3GPP Rel 6	HSUPA Subtest-1	17.15	17.26	17.39	17.50	20.87	20.89	20.93	21.00
3GPP Rel 6	HSUPA Subtest-2	15.15	15.19	15.37	16.00	18.86	18.90	18.90	19.50
3GPP Rel 6	HSUPA Subtest-3	16.05	16.26	16.35	17.00	19.84	19.87	19.94	20.50
3GPP Rel 6	HSUPA Subtest-4	15.16	15.25	15.36	15.50	18.83	18.94	18.93	19.00
3GPP Rel 6	HSUPA Subtest-5	17.20	17.24	17.31	17.50	20.90	20.90	20.90	21.00



<For Body-worn & Product Specific>

Band		WCDMA II			Tune-up Limit (dBm)
TX Channel		9262	9400	9538	
Rx Channel		9662	9800	9938	
Frequency (MHz)		1852.4	1880	1907.6	
3GPP Rel 99	AMR 12.2Kbps	21.31	21.35	21.33	21.50
3GPP Rel 99	RMC 12.2Kbps	21.32	21.36	21.35	21.50
3GPP Rel 6	HSDPA Subtest-1	19.58	19.67	19.78	20.50
3GPP Rel 6	HSDPA Subtest-2	19.64	19.75	19.78	20.50
3GPP Rel 6	HSDPA Subtest-3	19.11	19.23	19.28	20.00
3GPP Rel 6	HSDPA Subtest-4	19.10	19.21	19.32	20.00
3GPP Rel 8	DC-HSDPA Subtest-1	19.55	19.65	19.78	20.50
3GPP Rel 8	DC-HSDPA Subtest-2	19.59	19.65	19.74	20.50
3GPP Rel 8	DC-HSDPA Subtest-3	19.11	19.20	19.24	20.00
3GPP Rel 8	DC-HSDPA Subtest-4	19.08	19.17	19.32	20.00
3GPP Rel 6	HSUPA Subtest-1	19.64	19.70	19.89	20.50
3GPP Rel 6	HSUPA Subtest-2	17.65	17.68	17.77	19.00
3GPP Rel 6	HSUPA Subtest-3	18.52	18.70	18.84	20.00
3GPP Rel 6	HSUPA Subtest-4	17.60	17.65	17.78	18.50
3GPP Rel 6	HSUPA Subtest-5	19.70	19.70	19.80	20.50


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.



64QAM

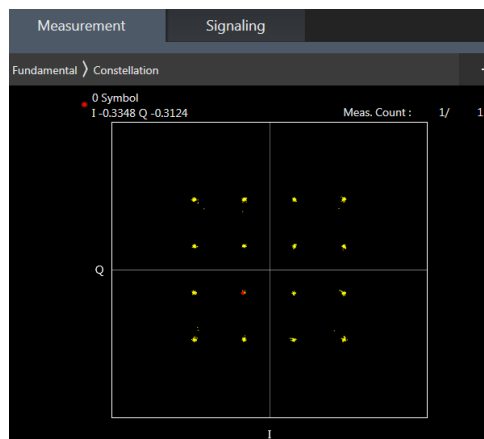

16QAM



<Default Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18700	18900	19100	
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	23.52	23.50	22.07	24
20	QPSK	1	49	23.28	23.57	23.21	
20	QPSK	1	99	22.78	22.04	22.08	
20	QPSK	50	0	22.62	22.58	22.30	23
20	QPSK	50	24	22.62	22.63	22.30	
20	QPSK	50	50	22.61	22.58	22.29	
20	QPSK	100	0	22.59	22.58	22.27	23
20	16QAM	1	0	22.81	22.79	21.35	
20	16QAM	1	49	22.62	22.84	22.51	
20	16QAM	1	99	22.15	21.43	21.40	22
20	16QAM	50	0	21.74	21.74	21.44	
20	16QAM	50	24	21.75	21.74	21.44	
20	16QAM	50	50	21.72	21.71	21.40	22
20	16QAM	100	0	21.71	21.72	21.44	
20	64QAM	1	0	21.84	21.76	20.25	
20	64QAM	1	49	21.67	21.87	21.42	22
20	64QAM	1	99	21.07	20.43	20.38	
20	64QAM	50	0	20.79	20.74	20.47	
20	64QAM	50	24	20.80	20.78	20.49	21
20	64QAM	50	50	20.75	20.71	20.43	
20	64QAM	100	0	20.77	20.78	20.50	
Channel				18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	23.55	23.56	22.72	24
15	QPSK	1	37	23.53	23.54	23.31	
15	QPSK	1	74	23.10	23.09	22.71	
15	QPSK	36	0	22.61	22.60	22.38	23
15	QPSK	36	20	22.65	22.60	22.40	
15	QPSK	36	39	22.60	22.56	22.35	
15	QPSK	75	0	22.62	22.57	22.36	23
15	16QAM	1	0	22.82	22.90	22.00	
15	16QAM	1	37	22.81	22.86	22.63	
15	16QAM	1	74	22.51	22.45	22.03	22
15	16QAM	36	0	21.75	21.79	21.55	
15	16QAM	36	20	21.76	21.78	21.54	
15	16QAM	36	39	21.74	21.74	21.47	22
15	16QAM	75	0	21.76	21.72	21.49	
15	64QAM	1	0	21.86	21.92	20.94	
15	64QAM	1	37	21.82	21.83	21.63	22
15	64QAM	1	74	21.52	21.47	21.07	
15	64QAM	36	0	20.84	20.83	20.64	
15	64QAM	36	20	20.85	20.85	20.67	21
15	64QAM	36	39	20.83	20.81	20.57	
15	64QAM	75	0	20.79	20.78	20.60	
Channel				18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	23.52	23.52	23.41	24
10	QPSK	1	25	23.56	23.55	23.43	
10	QPSK	1	49	23.54	23.50	23.34	
10	QPSK	25	0	22.66	22.60	22.43	23



FCC SAR TEST REPORT

Report No. : FA042406-02

10	QPSK	25	12	22.63	22.58	22.44	
10	QPSK	25	25	22.59	22.58	22.42	
10	QPSK	50	0	22.60	22.54	22.46	
10	16QAM	1	0	22.81	22.85	22.60	23
10	16QAM	1	25	22.82	22.86	22.61	
10	16QAM	1	49	22.78	22.78	22.55	
10	16QAM	25	0	21.77	21.76	21.53	22
10	16QAM	25	12	21.76	21.75	21.55	
10	16QAM	25	25	21.71	21.73	21.50	
10	16QAM	50	0	21.70	21.68	21.51	22
10	64QAM	1	0	21.85	21.89	21.62	
10	64QAM	1	25	21.84	21.88	21.59	
10	64QAM	1	49	21.77	21.82	21.56	21
10	64QAM	25	0	20.85	20.84	20.62	
10	64QAM	25	12	20.86	20.85	20.66	
10	64QAM	25	25	20.79	20.81	20.61	
10	64QAM	50	0	20.74	20.71	20.57	
Channel				18625	18900	19175	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1907.5	
5	QPSK	1	0	23.19	23.22	23.10	24
5	QPSK	1	12	23.17	23.24	22.49	
5	QPSK	1	24	23.13	23.14	22.33	
5	QPSK	12	0	22.22	22.17	22.13	23
5	QPSK	12	7	22.25	22.20	22.17	
5	QPSK	12	13	22.22	22.16	22.11	
5	QPSK	25	0	22.20	22.14	22.17	23
5	16QAM	1	0	22.41	22.39	22.17	
5	16QAM	1	12	22.38	22.35	21.77	
5	16QAM	1	24	22.32	22.36	21.61	22
5	16QAM	12	0	21.35	21.35	21.15	
5	16QAM	12	7	21.32	21.38	21.17	
5	16QAM	12	13	21.31	21.36	21.15	22
5	16QAM	25	0	21.30	21.34	21.16	
5	64QAM	1	0	21.39	21.49	21.20	
5	64QAM	1	12	21.41	21.46	20.90	22
5	64QAM	1	24	21.32	21.39	20.67	
5	64QAM	12	0	20.40	20.50	20.25	
5	64QAM	12	7	20.43	20.50	20.28	21
5	64QAM	12	13	20.36	20.46	20.25	
5	64QAM	25	0	20.32	20.38	20.21	
Channel				18615	18900	19185	Tune-up limit (dBm)
Frequency (MHz)				1851.5	1880	1908.5	
3	QPSK	1	0	23.52	23.53	23.41	24
3	QPSK	1	8	23.55	23.54	23.30	
3	QPSK	1	14	23.56	23.52	23.17	
3	QPSK	8	0	22.63	22.56	22.42	23
3	QPSK	8	4	22.66	22.59	22.46	
3	QPSK	8	7	22.60	22.58	22.41	
3	QPSK	15	0	22.63	22.57	22.50	23
3	16QAM	1	0	22.80	22.84	22.55	
3	16QAM	1	8	22.82	22.85	22.57	
3	16QAM	1	14	22.76	22.80	22.47	22
3	16QAM	8	0	21.78	21.76	21.51	
3	16QAM	8	4	21.78	21.80	21.55	
3	16QAM	8	7	21.76	21.75	21.52	22
3	16QAM	15	0	21.75	21.72	21.56	



FCC SAR TEST REPORT

Report No. : FA042406-02

3	64QAM	1	0	21.80	21.82	21.57	22
3	64QAM	1	8	21.84	21.84	21.61	
3	64QAM	1	14	21.82	21.80	21.55	
3	64QAM	8	0	20.84	20.82	20.59	21
3	64QAM	8	4	20.86	20.87	20.64	
3	64QAM	8	7	20.81	20.82	20.60	
3	64QAM	15	0	20.74	20.72	20.60	
Channel				18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1909.3	
1.4	QPSK	1	0	23.52	23.47	23.16	24
1.4	QPSK	1	3	23.50	23.54	23.06	
1.4	QPSK	1	5	23.51	23.46	22.94	
1.4	QPSK	3	0	23.56	23.50	23.06	
1.4	QPSK	3	1	23.51	23.55	23.05	
1.4	QPSK	3	3	23.56	23.52	22.95	
1.4	QPSK	6	0	22.59	22.53	22.30	23
1.4	16QAM	1	0	22.76	22.76	22.42	23
1.4	16QAM	1	3	22.82	22.84	22.36	
1.4	16QAM	1	5	22.74	22.75	22.26	
1.4	16QAM	3	0	22.59	22.57	22.21	
1.4	16QAM	3	1	22.64	22.62	22.21	
1.4	16QAM	3	3	22.57	22.57	22.10	
1.4	16QAM	6	0	21.74	21.72	21.44	22
1.4	64QAM	1	0	21.79	21.80	21.43	22
1.4	64QAM	1	3	21.84	21.84	21.44	
1.4	64QAM	1	5	21.76	21.79	21.32	
1.4	64QAM	3	0	21.80	21.79	21.48	
1.4	64QAM	3	1	21.83	21.84	21.50	
1.4	64QAM	3	3	21.77	21.78	21.37	
1.4	64QAM	6	0	20.70	20.67	20.42	21



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20050	20175	20300	
Frequency (MHz)				1720	1732.5	1745	
20	QPSK	1	0	22.92	23.29	22.81	24
20	QPSK	1	49	23.18	23.31	23.40	
20	QPSK	1	99	22.78	22.47	23.28	
20	QPSK	50	0	22.12	22.21	22.30	23
20	QPSK	50	24	22.21	22.22	22.29	
20	QPSK	50	50	22.15	22.25	22.33	
20	QPSK	100	0	22.18	22.18	22.28	23
20	16QAM	1	0	21.99	22.30	21.81	
20	16QAM	1	49	22.23	22.22	22.48	
20	16QAM	1	99	21.90	21.59	22.25	22
20	16QAM	50	0	21.19	21.26	21.37	
20	16QAM	50	24	21.29	21.25	21.38	
20	16QAM	50	50	21.21	21.20	21.42	22
20	16QAM	100	0	21.24	21.20	21.34	
20	64QAM	1	0	21.02	21.29	20.79	
20	64QAM	1	49	21.27	21.25	21.44	22
20	64QAM	1	99	21.01	20.54	21.21	
20	64QAM	50	0	20.23	20.27	20.39	
20	64QAM	50	24	20.31	20.30	20.42	21
20	64QAM	50	50	20.23	20.24	20.43	
20	64QAM	100	0	20.29	20.26	20.40	
Channel				20025	20175	20325	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1732.5	1747.5	
15	QPSK	1	0	22.78	23.09	22.82	24
15	QPSK	1	37	22.97	22.95	23.27	
15	QPSK	1	74	22.99	22.35	23.18	
15	QPSK	36	0	22.09	22.15	22.25	23
15	QPSK	36	20	22.21	22.18	22.38	
15	QPSK	36	39	22.13	22.13	22.34	
15	QPSK	75	0	22.14	22.14	22.33	23
15	16QAM	1	0	21.99	22.25	22.03	
15	16QAM	1	37	22.22	22.20	22.53	
15	16QAM	1	74	22.21	21.65	22.44	22
15	16QAM	36	0	21.20	21.21	21.38	
15	16QAM	36	20	21.27	21.22	21.51	
15	16QAM	36	39	21.21	21.22	21.43	22
15	16QAM	75	0	21.23	21.19	21.44	
15	64QAM	1	0	21.04	21.28	21.01	
15	64QAM	1	37	21.23	21.23	21.54	22
15	64QAM	1	74	21.21	20.65	21.47	
15	64QAM	36	0	20.26	20.27	20.46	
15	64QAM	36	20	20.34	20.32	20.58	21
15	64QAM	36	39	20.30	20.26	20.52	
15	64QAM	75	0	20.28	20.25	20.49	
Channel				20000	20175	20350	Tune-up limit (dBm)
Frequency (MHz)				1715	1732.5	1750	
10	QPSK	1	0	23.16	23.25	23.33	24
10	QPSK	1	25	23.10	23.12	23.31	
10	QPSK	1	49	22.97	22.90	23.33	
10	QPSK	25	0	22.13	22.22	22.40	23
10	QPSK	25	12	22.14	22.21	22.38	



FCC SAR TEST REPORT

Report No. : FA042406-02

10	QPSK	25	25	22.11	22.23	22.33	
10	QPSK	50	0	22.12	22.19	22.38	
10	16QAM	1	0	22.22	22.35	22.58	
10	16QAM	1	25	22.25	22.33	22.58	23
10	16QAM	1	49	22.23	22.20	22.54	
10	16QAM	25	0	21.21	21.33	21.48	
10	16QAM	25	12	21.21	21.35	21.48	22
10	16QAM	25	25	21.15	21.32	21.42	
10	16QAM	50	0	21.24	21.33	21.47	
10	64QAM	1	0	21.24	21.38	21.60	22
10	64QAM	1	25	21.28	21.33	21.60	
10	64QAM	1	49	21.23	21.27	21.58	
10	64QAM	25	0	20.26	20.36	20.54	21
10	64QAM	25	12	20.32	20.36	20.51	
10	64QAM	25	25	20.28	20.33	20.45	
10	64QAM	50	0	20.33	20.37	20.52	
Channel				19975	20175	20375	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1732.5	1752.5	
5	QPSK	1	0	23.09	23.08	23.24	24
5	QPSK	1	12	23.00	23.09	23.34	
5	QPSK	1	24	22.95	23.02	23.29	
5	QPSK	12	0	22.12	22.16	22.35	23
5	QPSK	12	7	22.13	22.18	22.46	
5	QPSK	12	13	22.08	22.11	22.39	
5	QPSK	25	0	22.09	22.16	22.35	23
5	16QAM	1	0	22.16	22.20	22.51	
5	16QAM	1	12	22.22	22.21	22.56	
5	16QAM	1	24	22.18	22.18	22.50	22
5	16QAM	12	0	21.14	21.21	21.44	
5	16QAM	12	7	21.19	21.20	21.55	
5	16QAM	12	13	21.16	21.21	21.48	22
5	16QAM	25	0	21.14	21.19	21.42	
5	64QAM	1	0	21.15	21.21	21.53	
5	64QAM	1	12	21.20	21.22	21.58	21
5	64QAM	1	24	21.18	21.19	21.52	
5	64QAM	12	0	20.26	20.28	20.53	
5	64QAM	12	7	20.30	20.29	20.61	21
5	64QAM	12	13	20.23	20.27	20.57	
5	64QAM	25	0	20.19	20.25	20.44	
Channel				19965	20175	20385	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1732.5	1753.5	
3	QPSK	1	0	23.09	23.08	23.36	24
3	QPSK	1	8	23.09	23.10	23.33	
3	QPSK	1	14	22.95	23.02	23.32	
3	QPSK	8	0	22.08	22.12	22.42	23
3	QPSK	8	4	22.12	22.16	22.46	
3	QPSK	8	7	22.05	22.11	22.41	
3	QPSK	15	0	22.11	22.20	22.44	23
3	16QAM	1	0	22.15	22.19	22.59	
3	16QAM	1	8	22.20	22.22	22.59	
3	16QAM	1	14	22.17	22.20	22.52	22
3	16QAM	8	0	21.15	21.20	21.52	
3	16QAM	8	4	21.19	21.23	21.57	
3	16QAM	8	7	21.14	21.18	21.51	22
3	16QAM	15	0	21.18	21.25	21.53	
3	64QAM	1	0	21.16	21.21	21.61	22



FCC SAR TEST REPORT

Report No. : FA042406-02

3	64QAM	1	8	21.23	21.25	21.60	
3	64QAM	1	14	21.18	21.20	21.56	
3	64QAM	8	0	20.23	20.26	20.59	
3	64QAM	8	4	20.24	20.29	20.60	21
3	64QAM	8	7	20.22	20.25	20.57	
3	64QAM	15	0	20.20	20.25	20.55	
Channel				19957	20175	20393	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1732.5	1754.3	
1.4	QPSK	1	0	22.92	23.02	23.31	24
1.4	QPSK	1	3	23.00	23.05	23.39	
1.4	QPSK	1	5	22.92	22.97	23.28	
1.4	QPSK	3	0	22.98	23.01	23.37	
1.4	QPSK	3	1	23.03	23.03	23.22	
1.4	QPSK	3	3	22.99	22.96	23.38	
1.4	QPSK	6	0	22.03	22.10	22.39	23
1.4	16QAM	1	0	22.08	22.13	22.49	23
1.4	16QAM	1	3	22.16	22.20	22.58	
1.4	16QAM	1	5	22.10	22.14	22.47	
1.4	16QAM	3	0	21.97	22.02	22.33	
1.4	16QAM	3	1	21.99	22.05	22.38	
1.4	16QAM	3	3	21.94	22.03	22.34	
1.4	16QAM	6	0	21.17	21.21	21.55	22
1.4	64QAM	1	0	21.10	21.14	21.53	22
1.4	64QAM	1	3	21.19	21.22	21.56	
1.4	64QAM	1	5	21.10	21.14	21.50	
1.4	64QAM	3	0	21.17	21.20	21.54	
1.4	64QAM	3	1	21.18	21.26	21.56	
1.4	64QAM	3	3	21.14	21.17	21.53	
1.4	64QAM	6	0	20.11	20.18	20.48	21



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20450	20525	20600	
Frequency (MHz)				829	836.5	844	
10	QPSK	1	0	23.48	23.45	23.51	24
10	QPSK	1	25	23.42	23.43	23.54	
10	QPSK	1	49	23.44	23.46	23.58	
10	QPSK	25	0	22.46	22.51	22.51	23
10	QPSK	25	12	22.60	22.52	22.62	
10	QPSK	25	25	22.53	22.46	22.56	
10	QPSK	50	0	22.56	22.48	22.61	23
10	16QAM	1	0	22.82	22.68	22.77	
10	16QAM	1	25	22.67	22.63	22.74	
10	16QAM	1	49	22.64	22.72	22.66	22
10	16QAM	25	0	21.58	21.56	21.57	
10	16QAM	25	12	21.65	21.56	21.65	
10	16QAM	25	25	21.57	21.51	21.59	22
10	16QAM	50	0	21.61	21.55	21.67	
10	64QAM	1	0	21.76	21.60	21.72	
10	64QAM	1	25	21.66	21.59	21.70	22
10	64QAM	1	49	21.60	21.65	21.69	
10	64QAM	25	0	20.59	20.58	20.60	21
10	64QAM	25	12	20.68	20.55	20.71	
10	64QAM	25	25	20.58	20.54	20.60	
10	64QAM	50	0	20.62	20.54	20.67	
Channel				20425	20525	20625	Tune-up limit (dBm)
Frequency (MHz)				826.5	836.5	846.5	
5	QPSK	1	0	23.46	23.44	23.48	24
5	QPSK	1	12	23.44	23.43	23.50	
5	QPSK	1	24	23.39	23.48	23.55	
5	QPSK	12	0	22.47	22.47	22.55	23
5	QPSK	12	7	22.50	22.49	22.54	
5	QPSK	12	13	22.45	22.43	22.60	
5	QPSK	25	0	22.44	22.46	22.57	23
5	16QAM	1	0	22.80	22.64	22.69	
5	16QAM	1	12	22.78	22.62	22.73	
5	16QAM	1	24	22.66	22.71	22.64	22
5	16QAM	12	0	21.59	21.48	21.58	
5	16QAM	12	7	21.60	21.53	21.56	
5	16QAM	12	13	21.53	21.49	21.64	22
5	16QAM	25	0	21.55	21.49	21.57	
5	64QAM	1	0	21.73	21.60	21.68	
5	64QAM	1	12	21.68	21.58	21.72	22
5	64QAM	1	24	21.60	21.66	21.65	
5	64QAM	12	0	20.64	20.53	20.64	21
5	64QAM	12	7	20.62	20.57	20.64	
5	64QAM	12	13	20.57	20.52	20.70	
5	64QAM	25	0	20.56	20.49	20.62	
Channel				20415	20525	20635	Tune-up limit (dBm)
Frequency (MHz)				825.5	836.5	847.5	
3	QPSK	1	0	23.46	23.43	23.51	24
3	QPSK	1	8	23.46	23.41	23.58	
3	QPSK	1	14	23.42	23.49	23.50	
3	QPSK	8	0	22.47	22.45	22.62	23
3	QPSK	8	4	22.51	22.46	22.66	



FCC SAR TEST REPORT

Report No. : FA042406-02

3	QPSK	8	7	22.46	22.44	22.60	
3	QPSK	15	0	22.47	22.50	22.67	
3	16QAM	1	0	22.79	22.60	22.73	
3	16QAM	1	8	22.78	22.62	22.74	23
3	16QAM	1	14	22.74	22.70	22.66	
3	16QAM	8	0	21.63	21.53	21.67	
3	16QAM	8	4	21.66	21.56	21.68	22
3	16QAM	8	7	21.60	21.53	21.67	
3	16QAM	15	0	21.58	21.54	21.71	
3	64QAM	1	0	21.74	21.59	21.71	22
3	64QAM	1	8	21.74	21.60	21.71	
3	64QAM	1	14	21.72	21.69	21.68	
3	64QAM	8	0	20.63	20.54	20.71	21
3	64QAM	8	4	20.67	20.56	20.75	
3	64QAM	8	7	20.60	20.54	20.72	
3	64QAM	15	0	20.59	20.53	20.74	
Channel				20407	20525	20643	Tune-up limit (dBm)
Frequency (MHz)				824.7	836.5	848.3	
1.4	QPSK	1	0	23.38	23.35	23.53	24
1.4	QPSK	1	3	23.45	23.44	23.51	
1.4	QPSK	1	5	23.36	23.35	23.52	
1.4	QPSK	3	0	23.42	23.41	23.55	
1.4	QPSK	3	1	23.48	23.47	23.55	
1.4	QPSK	3	3	23.45	23.41	23.55	
1.4	QPSK	6	0	22.44	22.43	22.59	23
1.4	16QAM	1	0	22.74	22.56	22.61	23
1.4	16QAM	1	3	22.80	22.64	22.66	
1.4	16QAM	1	5	22.73	22.56	22.60	
1.4	16QAM	3	0	22.52	22.41	22.50	
1.4	16QAM	3	1	22.55	22.44	22.54	
1.4	16QAM	3	3	22.53	22.39	22.46	
1.4	16QAM	6	0	21.60	21.52	21.67	22
1.4	64QAM	1	0	21.71	21.53	21.63	22
1.4	64QAM	1	3	21.76	21.59	21.70	
1.4	64QAM	1	5	21.64	21.51	21.60	
1.4	64QAM	3	0	21.67	21.53	21.66	
1.4	64QAM	3	1	21.73	21.58	21.71	
1.4	64QAM	3	3	21.67	21.54	21.66	
1.4	64QAM	6	0	20.50	20.45	20.64	21



<LTE Band 7 LAT>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20850	21100	21350	
Frequency (MHz)				2510	2535	2560	
20	QPSK	1	0	23.51	23.43	23.60	
20	QPSK	1	49	23.55	23.47	23.62	24
20	QPSK	1	99	23.73	23.65	23.81	
20	QPSK	50	0	22.56	22.49	22.62	
20	QPSK	50	24	22.59	22.50	22.66	23
20	QPSK	50	50	22.67	22.52	22.68	
20	QPSK	100	0	22.70	22.51	22.68	
20	16QAM	1	0	22.89	22.82	22.85	23
20	16QAM	1	49	22.95	22.94	22.86	
20	16QAM	1	99	22.89	22.96	23.00	
20	16QAM	50	0	21.67	21.61	21.75	22
20	16QAM	50	24	21.70	21.66	21.78	
20	16QAM	50	50	21.80	21.65	21.80	
20	16QAM	100	0	21.80	21.62	21.81	22
20	64QAM	1	0	21.87	21.68	21.89	
20	64QAM	1	49	21.83	21.82	21.92	
20	64QAM	1	99	21.92	21.91	22.00	21
20	64QAM	50	0	20.69	20.59	20.75	
20	64QAM	50	24	20.73	20.63	20.79	
20	64QAM	50	50	20.80	20.67	20.80	21
20	64QAM	100	0	20.77	20.64	20.78	
Channel				20825	21100	21375	Tune-up limit (dBm)
Frequency (MHz)				2507.5	2535	2562.5	
15	QPSK	1	0	23.57	23.47	23.61	
15	QPSK	1	37	23.57	23.50	23.70	24
15	QPSK	1	74	23.68	23.69	23.80	
15	QPSK	36	0	22.63	22.53	22.65	23
15	QPSK	36	20	22.67	22.55	22.71	
15	QPSK	36	39	22.63	22.57	22.78	
15	QPSK	75	0	22.63	22.54	22.67	23
15	16QAM	1	0	22.93	22.91	22.91	
15	16QAM	1	37	22.97	22.94	22.90	
15	16QAM	1	74	22.94	22.96	23.00	22
15	16QAM	36	0	21.76	21.63	21.77	
15	16QAM	36	20	21.74	21.67	21.80	
15	16QAM	36	39	21.71	21.69	21.91	22
15	16QAM	75	0	21.70	21.65	21.77	
15	64QAM	1	0	21.88	21.78	21.89	
15	64QAM	1	37	21.91	21.87	21.97	22
15	64QAM	1	74	21.92	21.91	22.00	
15	64QAM	36	0	20.77	20.64	20.78	21
15	64QAM	36	20	20.74	20.71	20.82	
15	64QAM	36	39	20.76	20.71	20.93	
15	64QAM	75	0	20.71	20.65	20.75	Tune-up limit (dBm)
Channel				20800	21100	21400	
Frequency (MHz)				2505	2535	2565	
10	QPSK	1	0	23.52	23.44	23.55	24
10	QPSK	1	25	23.54	23.44	23.67	
10	QPSK	1	49	23.60	23.50	23.69	
10	QPSK	25	0	22.56	22.47	22.59	23
10	QPSK	25	12	22.60	22.49	22.72	



FCC SAR TEST REPORT

Report No. : FA042406-02

10	QPSK	25	25	22.62	22.50	22.71	
10	QPSK	50	0	22.59	22.51	22.61	
10	16QAM	1	0	22.87	22.84	22.99	
10	16QAM	1	25	22.94	22.93	22.99	23
10	16QAM	1	49	22.89	22.99	23.00	
10	16QAM	25	0	21.70	21.59	21.71	
10	16QAM	25	12	21.73	21.62	21.84	22
10	16QAM	25	25	21.69	21.63	21.86	
10	16QAM	50	0	21.70	21.61	21.73	
10	64QAM	1	0	21.82	21.76	21.88	22
10	64QAM	1	25	21.90	21.83	21.96	
10	64QAM	1	49	21.93	21.94	22.00	
10	64QAM	25	0	20.73	20.59	20.69	21
10	64QAM	25	12	20.73	20.61	20.82	
10	64QAM	25	25	20.68	20.64	20.85	
10	64QAM	50	0	20.71	20.61	20.72	
Channel				20775	21100	21425	Tune-up limit (dBm)
Frequency (MHz)				2502.5	2535	2567.5	
5	QPSK	1	0	23.50	23.42	23.60	24
5	QPSK	1	12	23.51	23.42	23.63	
5	QPSK	1	24	23.53	23.46	23.65	
5	QPSK	12	0	22.58	22.48	22.69	23
5	QPSK	12	7	22.62	22.53	22.73	
5	QPSK	12	13	22.61	22.53	22.72	
5	QPSK	25	0	22.58	22.48	22.67	23
5	16QAM	1	0	22.85	22.89	22.98	
5	16QAM	1	12	22.92	22.90	22.94	
5	16QAM	1	24	22.98	22.92	23.00	22
5	16QAM	12	0	21.73	21.60	21.84	
5	16QAM	12	7	21.77	21.66	21.89	
5	16QAM	12	13	21.75	21.62	21.93	22
5	16QAM	25	0	21.71	21.60	21.82	
5	64QAM	1	0	21.85	21.79	21.95	
5	64QAM	1	12	21.88	21.82	21.99	22
5	64QAM	1	24	21.88	21.86	22.00	
5	64QAM	12	0	20.78	20.62	20.86	
5	64QAM	12	7	20.83	20.68	20.94	21
5	64QAM	12	13	20.81	20.68	20.93	
5	64QAM	25	0	20.72	20.61	20.82	



<LTE Band 7 UAT>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20850	21100	21350	
Frequency (MHz)				2510	2535	2560	
20	QPSK	1	0	21.56	21.38	21.54	22
20	QPSK	1	49	21.58	21.41	21.53	
20	QPSK	1	99	21.60	21.56	21.79	
20	QPSK	50	0	20.63	20.42	20.58	21
20	QPSK	50	24	20.64	20.49	20.65	
20	QPSK	50	50	20.61	20.48	20.62	
20	QPSK	100	0	20.62	20.44	20.63	21
20	16QAM	1	0	20.91	20.81	20.97	
20	16QAM	1	49	20.92	20.97	20.96	
20	16QAM	1	99	20.90	20.99	20.95	20
20	16QAM	50	0	19.73	19.61	19.74	
20	16QAM	50	24	19.75	19.63	19.75	
20	16QAM	50	50	19.75	19.63	19.82	20
20	16QAM	100	0	19.74	19.65	19.76	
20	64QAM	1	0	19.87	19.76	19.92	20
20	64QAM	1	49	19.84	19.89	19.98	
20	64QAM	1	99	19.80	19.91	20.00	
20	64QAM	50	0	18.74	18.60	18.74	19
20	64QAM	50	24	18.74	18.68	18.81	
20	64QAM	50	50	18.74	18.66	18.81	
20	64QAM	100	0	18.75	18.60	18.80	
Channel				20825	21100	21375	Tune-up limit (dBm)
Frequency (MHz)				2507.5	2535	2562.5	
15	QPSK	1	0	21.47	21.42	21.54	22
15	QPSK	1	37	21.46	21.39	21.67	
15	QPSK	1	74	21.55	21.61	21.78	
15	QPSK	36	0	20.54	20.45	20.60	21
15	QPSK	36	20	20.56	20.51	20.68	
15	QPSK	36	39	20.54	20.52	20.74	
15	QPSK	75	0	20.51	20.48	20.64	21
15	16QAM	1	0	20.85	20.84	20.99	
15	16QAM	1	37	20.84	20.93	20.98	
15	16QAM	1	74	20.89	20.94	21.00	20
15	16QAM	36	0	19.68	19.65	19.79	
15	16QAM	36	20	19.67	19.71	19.82	
15	16QAM	36	39	19.65	19.69	19.94	20
15	16QAM	75	0	19.65	19.67	19.80	
15	64QAM	1	0	19.82	19.79	19.94	
15	64QAM	1	37	19.76	19.87	19.95	20
15	64QAM	1	74	19.82	19.93	19.99	
15	64QAM	36	0	18.71	18.68	18.81	19
15	64QAM	36	20	18.71	18.73	18.86	
15	64QAM	36	39	18.67	18.71	18.98	
15	64QAM	75	0	18.65	18.63	18.82	
Channel				20800	21100	21400	Tune-up limit (dBm)
Frequency (MHz)				2505	2535	2565	
10	QPSK	1	0	21.43	21.33	21.46	22
10	QPSK	1	25	21.45	21.38	21.61	
10	QPSK	1	49	21.48	21.40	21.68	
10	QPSK	25	0	20.48	20.36	20.53	21
10	QPSK	25	12	20.50	20.38	20.63	



FCC SAR TEST REPORT

Report No. : FA042406-02

10	QPSK	25	25	20.50	20.39	20.65	
10	QPSK	50	0	20.47	20.42	20.56	
10	16QAM	1	0	20.75	20.79	20.93	
10	16QAM	1	25	20.84	20.90	20.94	21
10	16QAM	1	49	20.85	20.96	21.00	
10	16QAM	25	0	19.59	19.53	19.70	
10	16QAM	25	12	19.64	19.62	19.84	20
10	16QAM	25	25	19.62	19.60	19.85	
10	16QAM	50	0	19.61	19.57	19.74	
10	64QAM	1	0	19.77	19.75	19.88	20
10	64QAM	1	25	19.79	19.83	20.00	
10	64QAM	1	49	19.79	19.87	19.99	
10	64QAM	25	0	18.63	18.57	18.72	19
10	64QAM	25	12	18.64	18.64	18.86	
10	64QAM	25	25	18.62	18.62	18.88	
10	64QAM	50	0	18.62	18.57	18.76	
Channel				20775	21100	21425	Tune-up limit (dBm)
Frequency (MHz)				2502.5	2535	2567.5	
5	QPSK	1	0	21.42	21.34	21.57	22
5	QPSK	1	12	21.42	21.35	21.57	
5	QPSK	1	24	21.47	21.38	21.62	
5	QPSK	12	0	20.48	20.43	20.61	21
5	QPSK	12	7	20.54	20.47	20.64	
5	QPSK	12	13	20.53	20.46	20.65	
5	QPSK	25	0	20.48	20.37	20.60	
5	16QAM	1	0	20.76	20.84	20.96	21
5	16QAM	1	12	20.83	20.90	20.95	
5	16QAM	1	24	20.87	20.92	20.93	
5	16QAM	12	0	19.66	19.63	19.84	20
5	16QAM	12	7	19.71	19.68	19.87	
5	16QAM	12	13	19.66	19.65	19.87	
5	16QAM	25	0	19.63	19.56	19.79	
5	64QAM	1	0	19.77	19.79	19.98	20
5	64QAM	1	12	19.78	19.84	19.98	
5	64QAM	1	24	19.82	19.83	19.97	
5	64QAM	12	0	18.70	18.66	18.92	19
5	64QAM	12	7	18.75	18.73	18.98	
5	64QAM	12	13	18.74	18.73	18.98	
5	64QAM	25	0	18.65	18.61	18.83	



<For Head>

<LTE Band 7 UAT>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20850	21100	21350	
Frequency (MHz)				2510	2535	2560	
20	QPSK	1	0	16.96	17.03	17.16	18
20	QPSK	1	49	16.97	17.05	17.18	
20	QPSK	1	99	17.15	17.22	17.39	
20	QPSK	50	0	16.05	16.07	16.21	17
20	QPSK	50	24	16.09	16.10	16.27	
20	QPSK	50	50	16.17	16.13	16.30	
20	QPSK	100	0	16.16	16.08	16.26	
20	16QAM	1	0	16.36	16.37	16.51	17
20	16QAM	1	49	16.31	16.41	16.52	
20	16QAM	1	99	16.50	16.59	16.82	
20	16QAM	50	0	15.10	15.14	15.28	16
20	16QAM	50	24	15.14	15.20	15.36	
20	16QAM	50	50	15.26	15.21	15.38	
20	16QAM	100	0	15.20	15.17	15.31	
20	64QAM	1	0	15.28	15.28	15.38	16
20	64QAM	1	49	15.22	15.28	15.40	
20	64QAM	1	99	15.41	15.50	15.67	
20	64QAM	50	0	14.14	14.16	14.30	15
20	64QAM	50	24	14.16	14.22	14.35	
20	64QAM	50	50	14.28	14.22	14.36	
20	64QAM	100	0	14.25	14.20	14.31	
Channel				20825	21100	21375	Tune-up limit (dBm)
Frequency (MHz)				2507.5	2535	2562.5	
15	QPSK	1	0	17.02	17.04	17.16	18
15	QPSK	1	37	17.00	17.05	17.31	
15	QPSK	1	74	17.12	17.26	17.44	
15	QPSK	36	0	16.05	16.07	16.19	17
15	QPSK	36	20	16.09	16.15	16.28	
15	QPSK	36	39	16.07	16.15	16.35	
15	QPSK	75	0	16.08	16.09	16.24	
15	16QAM	1	0	16.41	16.41	16.51	17
15	16QAM	1	37	16.35	16.45	16.68	
15	16QAM	1	74	16.45	16.63	16.86	
15	16QAM	36	0	15.11	15.13	15.27	16
15	16QAM	36	20	15.14	15.22	15.32	
15	16QAM	36	39	15.15	15.19	15.47	
15	16QAM	75	0	15.14	15.17	15.32	
15	64QAM	1	0	15.32	15.34	15.42	16
15	64QAM	1	37	15.26	15.37	15.56	
15	64QAM	1	74	15.33	15.52	15.71	
15	64QAM	36	0	14.15	14.16	14.31	15
15	64QAM	36	20	14.18	14.24	14.36	
15	64QAM	36	39	14.19	14.24	14.44	
15	64QAM	75	0	14.13	14.16	14.31	
Channel				20800	21100	21400	Tune-up limit (dBm)
Frequency (MHz)				2505	2535	2565	
10	QPSK	1	0	16.99	17.04	17.18	18
10	QPSK	1	25	16.98	17.03	17.28	
10	QPSK	1	49	17.05	17.11	17.36	
10	QPSK	25	0	16.01	16.03	16.18	17



FCC SAR TEST REPORT

Report No. : FA042406-02

10	QPSK	25	12	16.07	16.06	16.28	
10	QPSK	25	25	16.07	16.11	16.32	
10	QPSK	50	0	16.07	16.10	16.20	
10	16QAM	1	0	16.41	16.46	16.52	17
10	16QAM	1	25	16.35	16.43	16.67	
10	16QAM	1	49	16.38	16.51	16.79	
10	16QAM	25	0	15.11	15.13	15.27	16
10	16QAM	25	12	15.16	15.16	15.38	
10	16QAM	25	25	15.16	15.21	15.44	
10	16QAM	50	0	15.15	15.16	15.31	16
10	64QAM	1	0	15.31	15.31	15.40	
10	64QAM	1	25	15.24	15.31	15.54	
10	64QAM	1	49	15.30	15.38	15.67	15
10	64QAM	25	0	14.11	14.13	14.26	
10	64QAM	25	12	14.15	14.16	14.42	
10	64QAM	25	25	14.16	14.20	14.41	15
10	64QAM	50	0	14.16	14.16	14.30	
Channel				20775	21100	21425	Tune-up limit (dBm)
Frequency (MHz)				2502.5	2535	2567.5	
5	QPSK	1	0	17.00	17.02	17.26	18
5	QPSK	1	12	17.01	17.04	17.30	
5	QPSK	1	24	17.02	17.06	17.31	
5	QPSK	12	0	16.05	16.07	16.28	17
5	QPSK	12	7	16.08	16.11	16.33	
5	QPSK	12	13	16.06	16.08	16.33	
5	QPSK	25	0	16.07	16.07	16.31	17
5	16QAM	1	0	16.52	16.41	16.66	
5	16QAM	1	12	16.50	16.44	16.72	
5	16QAM	1	24	16.52	16.44	16.77	16
5	16QAM	12	0	15.23	15.15	15.38	
5	16QAM	12	7	15.23	15.20	15.43	
5	16QAM	12	13	15.15	15.19	15.45	16
5	16QAM	25	0	15.14	15.16	15.39	
5	64QAM	1	0	15.33	15.34	15.56	
5	64QAM	1	12	15.30	15.34	15.59	16
5	64QAM	1	24	15.31	15.34	15.64	
5	64QAM	12	0	14.17	14.17	14.41	
5	64QAM	12	7	14.21	14.24	14.45	15
5	64QAM	12	13	14.19	14.23	14.46	
5	64QAM	25	0	14.12	14.15	14.39	



<For Hotspot>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18700	18900	19100	
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	17.26	17.18	16.88	18
20	QPSK	1	49	17.16	17.11	16.82	
20	QPSK	1	99	17.13	17.10	16.76	
20	QPSK	50	0	16.16	16.18	15.84	17
20	QPSK	50	24	16.17	16.17	15.84	
20	QPSK	50	50	16.17	16.11	15.80	
20	QPSK	100	0	16.17	16.14	15.82	
20	16QAM	1	0	16.59	16.57	16.32	17
20	16QAM	1	49	16.56	16.54	16.33	
20	16QAM	1	99	16.60	16.58	16.17	
20	16QAM	50	0	15.30	15.27	14.95	16
20	16QAM	50	24	15.34	15.32	14.97	
20	16QAM	50	50	15.25	15.27	14.87	
20	16QAM	100	0	15.30	15.25	14.92	
20	64QAM	1	0	15.51	15.49	15.17	16
20	64QAM	1	49	15.42	15.39	15.15	
20	64QAM	1	99	15.49	15.46	15.07	
20	64QAM	50	0	14.31	14.27	13.97	15
20	64QAM	50	24	14.31	14.28	13.94	
20	64QAM	50	50	14.29	14.23	13.91	
20	64QAM	100	0	14.27	14.28	13.93	
Channel				18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	17.18	17.13	16.83	18
15	QPSK	1	37	17.16	17.13	16.75	
15	QPSK	1	74	17.13	17.09	16.64	
15	QPSK	36	0	16.21	16.18	15.69	17
15	QPSK	36	20	16.21	16.21	15.74	
15	QPSK	36	39	16.20	16.12	15.79	
15	QPSK	75	0	16.20	16.16	15.82	
15	16QAM	1	0	16.58	16.53	16.26	17
15	16QAM	1	37	16.57	16.52	16.16	
15	16QAM	1	74	16.59	16.57	16.09	
15	16QAM	36	0	15.29	15.29	14.81	16
15	16QAM	36	20	15.35	15.28	14.93	
15	16QAM	36	39	15.28	15.26	14.78	
15	16QAM	75	0	15.30	15.30	14.88	
15	64QAM	1	0	15.49	15.44	15.24	16
15	64QAM	1	37	15.47	15.42	15.08	
15	64QAM	1	74	15.47	15.42	15.03	
15	64QAM	36	0	14.35	14.28	13.95	15
15	64QAM	36	20	14.34	14.34	13.99	
15	64QAM	36	39	14.31	14.29	13.91	
15	64QAM	75	0	14.29	14.25	13.89	
Channel				18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	17.26	17.25	16.82	18
10	QPSK	1	25	17.18	17.13	16.79	
10	QPSK	1	49	17.21	17.17	16.76	
10	QPSK	25	0	16.23	16.17	15.79	17



FCC SAR TEST REPORT

Report No. : FA042406-02

10	QPSK	25	12	16.22	16.17	15.81	
10	QPSK	25	25	16.17	16.15	15.80	
10	QPSK	50	0	16.20	16.16	15.77	
10	16QAM	1	0	16.67	16.66	16.31	17
10	16QAM	1	25	16.58	16.54	16.24	
10	16QAM	1	49	16.64	16.62	16.18	
10	16QAM	25	0	15.32	15.28	14.91	16
10	16QAM	25	12	15.32	15.28	14.94	
10	16QAM	25	25	15.29	15.25	14.84	
10	16QAM	50	0	15.33	15.28	14.90	16
10	64QAM	1	0	15.57	15.56	15.19	
10	64QAM	1	25	15.47	15.42	15.13	
10	64QAM	1	49	15.50	15.50	15.05	15
10	64QAM	25	0	14.34	14.29	13.93	
10	64QAM	25	12	14.36	14.32	13.90	
10	64QAM	25	25	14.30	14.27	13.90	
10	64QAM	50	0	14.30	14.26	13.91	
Channel				18625	18900	19175	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1907.5	
5	QPSK	1	0	17.17	17.14	16.75	18
5	QPSK	1	12	17.17	17.14	16.78	
5	QPSK	1	24	17.15	17.10	16.72	
5	QPSK	12	0	16.21	16.16	15.80	17
5	QPSK	12	7	16.22	16.19	15.80	
5	QPSK	12	13	16.20	16.17	15.75	
5	QPSK	25	0	16.18	16.15	15.75	17
5	16QAM	1	0	16.57	16.52	16.15	
5	16QAM	1	12	16.58	16.54	16.15	
5	16QAM	1	24	16.54	16.48	16.16	16
5	16QAM	12	0	15.33	15.29	14.86	
5	16QAM	12	7	15.34	15.29	14.92	
5	16QAM	12	13	15.33	15.25	14.86	16
5	16QAM	25	0	15.29	15.25	14.88	
5	64QAM	1	0	15.46	15.41	15.04	
5	64QAM	1	12	15.48	15.42	15.05	16
5	64QAM	1	24	15.42	15.34	14.99	
5	64QAM	12	0	14.34	14.32	13.88	15
5	64QAM	12	7	14.39	14.31	13.94	
5	64QAM	12	13	14.35	14.27	13.87	
5	64QAM	25	0	14.30	14.21	13.86	
Channel				18615	18900	19185	Tune-up limit (dBm)
Frequency (MHz)				1851.5	1880	1908.5	
3	QPSK	1	0	17.13	17.11	16.75	18
3	QPSK	1	8	17.17	17.14	16.73	
3	QPSK	1	14	17.12	17.09	16.69	
3	QPSK	8	0	16.20	16.16	15.74	17
3	QPSK	8	4	16.23	16.21	15.80	
3	QPSK	8	7	16.20	16.17	15.77	
3	QPSK	15	0	16.16	16.12	15.75	17
3	16QAM	1	0	16.55	16.47	16.11	
3	16QAM	1	8	16.58	16.52	16.14	
3	16QAM	1	14	16.50	16.45	16.09	16
3	16QAM	8	0	15.37	15.32	14.91	
3	16QAM	8	4	15.38	15.34	14.93	
3	16QAM	8	7	15.36	15.32	14.89	16
3	16QAM	15	0	15.30	15.25	14.87	



FCC SAR TEST REPORT

Report No. : FA042406-02

3	64QAM	1	0	15.45	15.41	15.01	16
3	64QAM	1	8	15.48	15.42	15.07	
3	64QAM	1	14	15.45	15.41	15.00	
3	64QAM	8	0	14.38	14.30	13.87	15
3	64QAM	8	4	14.40	14.32	13.93	
3	64QAM	8	7	14.32	14.29	13.87	
3	64QAM	15	0	14.28	14.25	13.84	
Channel				18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1909.3	
1.4	QPSK	1	0	17.08	17.07	16.66	18
1.4	QPSK	1	3	17.18	17.14	16.77	
1.4	QPSK	1	5	17.08	17.08	16.68	
1.4	QPSK	3	0	17.14	17.08	16.72	
1.4	QPSK	3	1	17.16	17.13	16.74	
1.4	QPSK	3	3	17.13	17.11	16.71	
1.4	QPSK	6	0	16.12	16.10	15.70	17
1.4	16QAM	1	0	16.49	16.45	16.08	17
1.4	16QAM	1	3	16.56	16.52	16.19	
1.4	16QAM	1	5	16.52	16.44	16.10	
1.4	16QAM	3	0	16.25	16.22	15.89	
1.4	16QAM	3	1	16.32	16.25	15.90	
1.4	16QAM	3	3	16.26	16.20	15.84	
1.4	16QAM	6	0	15.32	15.27	14.87	16
1.4	64QAM	1	0	15.41	15.37	14.95	16
1.4	64QAM	1	3	15.48	15.41	15.05	
1.4	64QAM	1	5	15.42	15.33	14.97	
1.4	64QAM	3	0	15.38	15.34	14.95	
1.4	64QAM	3	1	15.45	15.38	15.03	
1.4	64QAM	3	3	15.39	15.31	14.98	
1.4	64QAM	6	0	14.25	14.19	13.79	15



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20050	20175	20300	
Frequency (MHz)				1720	1732.5	1745	
20	QPSK	1	0	22.06	22.05	22.00	22.5
20	QPSK	1	49	21.94	21.95	22.05	
20	QPSK	1	99	21.90	21.54	22.03	
20	QPSK	50	0	20.97	21.07	21.08	21.5
20	QPSK	50	24	21.12	21.09	21.14	
20	QPSK	50	50	21.07	21.03	21.07	
20	QPSK	100	0	21.10	21.06	21.12	21.5
20	16QAM	1	0	21.32	21.39	21.30	
20	16QAM	1	49	21.35	21.30	21.52	
20	16QAM	1	99	21.23	20.85	21.46	20.5
20	16QAM	50	0	20.12	20.22	20.23	
20	16QAM	50	24	20.25	20.23	20.32	
20	16QAM	50	50	20.19	20.18	20.23	20.5
20	16QAM	100	0	20.20	20.18	20.26	
20	64QAM	1	0	20.28	20.32	20.22	
20	64QAM	1	49	20.32	20.31	20.47	20.5
20	64QAM	1	99	20.18	19.69	20.40	
20	64QAM	50	0	19.14	19.23	19.25	
20	64QAM	50	24	19.28	19.24	19.36	19.5
20	64QAM	50	50	19.22	19.19	19.28	
20	64QAM	100	0	19.28	19.24	19.31	
Channel				20025	20175	20325	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1732.5	1747.5	
15	QPSK	1	0	21.98	21.95	22.00	22.5
15	QPSK	1	37	21.94	21.91	22.05	
15	QPSK	1	74	21.82	21.54	21.98	
15	QPSK	36	0	20.87	21.02	21.07	21.5
15	QPSK	36	20	21.09	20.99	21.04	
15	QPSK	36	39	21.04	21.01	21.05	
15	QPSK	75	0	21.10	21.02	21.05	21.5
15	16QAM	1	0	21.28	21.37	21.24	
15	16QAM	1	37	21.26	21.28	21.47	
15	16QAM	1	74	21.15	20.80	21.46	20.5
15	16QAM	36	0	20.11	20.20	20.13	
15	16QAM	36	20	20.19	20.20	20.25	
15	16QAM	36	39	20.13	20.18	20.22	20.5
15	16QAM	75	0	20.19	20.11	20.24	
15	64QAM	1	0	20.28	20.31	20.22	
15	64QAM	1	37	20.28	20.26	20.46	20.5
15	64QAM	1	74	20.18	19.62	20.37	
15	64QAM	36	0	19.12	19.16	19.15	
15	64QAM	36	20	19.18	19.22	19.32	19.5
15	64QAM	36	39	19.17	19.09	19.24	
15	64QAM	75	0	19.27	19.16	19.23	
Channel				20000	20175	20350	Tune-up limit (dBm)
Frequency (MHz)				1715	1732.5	1750	
10	QPSK	1	0	21.96	22.02	21.95	22.5
10	QPSK	1	25	21.93	21.87	21.98	
10	QPSK	1	49	21.85	21.49	21.96	
10	QPSK	25	0	20.97	21.01	21.03	21.5
10	QPSK	25	12	21.06	21.01	21.14	



FCC SAR TEST REPORT

Report No. : FA042406-02

10	QPSK	25	25	21.06	21.03	21.02	
10	QPSK	50	0	21.01	21.04	21.04	
10	16QAM	1	0	21.32	21.30	21.22	
10	16QAM	1	25	21.29	21.28	21.42	21.5
10	16QAM	1	49	21.19	20.75	21.45	
10	16QAM	25	0	20.02	20.12	20.14	
10	16QAM	25	12	20.20	20.16	20.31	20.5
10	16QAM	25	25	20.12	20.17	20.15	
10	16QAM	50	0	20.20	20.13	20.16	
10	64QAM	1	0	20.27	20.23	20.22	20.5
10	64QAM	1	25	20.30	20.23	20.37	
10	64QAM	1	49	20.18	19.62	20.30	
10	64QAM	25	0	19.09	19.18	19.19	19.5
10	64QAM	25	12	19.23	19.17	19.27	
10	64QAM	25	25	19.22	19.15	19.26	
10	64QAM	50	0	19.22	19.18	19.28	
Channel				19975	20175	20375	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1732.5	1752.5	
5	QPSK	1	0	22.00	21.99	21.96	22.5
5	QPSK	1	12	21.86	21.87	22.00	
5	QPSK	1	24	21.90	21.53	22.00	
5	QPSK	12	0	20.90	21.05	20.98	21.5
5	QPSK	12	7	21.08	21.04	21.10	
5	QPSK	12	13	21.07	20.95	21.07	
5	QPSK	25	0	21.01	20.98	21.03	21.5
5	16QAM	1	0	21.32	21.38	21.25	
5	16QAM	1	12	21.27	21.26	21.44	
5	16QAM	1	24	21.23	20.78	21.45	20.5
5	16QAM	12	0	20.05	20.17	20.21	
5	16QAM	12	7	20.18	20.14	20.26	
5	16QAM	12	13	20.15	20.16	20.20	20.5
5	16QAM	25	0	20.14	20.10	20.24	
5	64QAM	1	0	20.20	20.24	20.16	
5	64QAM	1	12	20.32	20.29	20.42	20.5
5	64QAM	1	24	20.15	19.65	20.40	
5	64QAM	12	0	19.04	19.20	19.15	
5	64QAM	12	7	19.24	19.24	19.31	19.5
5	64QAM	12	13	19.13	19.14	19.24	
5	64QAM	25	0	19.26	19.16	19.30	
Channel				19965	20175	20385	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1732.5	1753.5	
3	QPSK	1	0	21.97	22.05	21.90	22.5
3	QPSK	1	8	21.94	21.89	21.99	
3	QPSK	1	14	21.85	21.52	21.94	
3	QPSK	8	0	20.93	21.10	21.02	21.5
3	QPSK	8	4	21.06	21.01	21.05	
3	QPSK	8	7	21.07	20.95	21.05	
3	QPSK	15	0	21.02	21.06	21.11	21.5
3	16QAM	1	0	21.25	21.37	21.30	
3	16QAM	1	8	21.28	21.21	21.50	
3	16QAM	1	14	21.14	20.84	21.46	20.5
3	16QAM	8	0	20.09	20.17	20.15	
3	16QAM	8	4	20.21	20.18	20.25	
3	16QAM	8	7	20.14	20.17	20.13	20.5
3	16QAM	15	0	20.15	20.16	20.20	
3	64QAM	1	0	20.20	20.30	20.13	20.5



FCC SAR TEST REPORT

Report No. : FA042406-02

3	64QAM	1	8	20.30	20.30	20.37	
3	64QAM	1	14	20.09	19.68	20.30	
3	64QAM	8	0	19.07	19.19	19.21	
3	64QAM	8	4	19.22	19.23	19.36	19.5
3	64QAM	8	7	19.16	19.10	19.21	
3	64QAM	15	0	19.26	19.18	19.21	
Channel				19957	20175	20393	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1732.5	1754.3	
1.4	QPSK	1	0	21.94	21.88	21.99	22.5
1.4	QPSK	1	3	22.02	21.95	22.09	
1.4	QPSK	1	5	21.91	21.85	21.99	
1.4	QPSK	3	0	22.02	21.92	22.08	
1.4	QPSK	3	1	22.04	21.99	22.11	
1.4	QPSK	3	3	22.01	21.92	22.08	
1.4	QPSK	6	0	21.07	21.00	21.09	21.5
1.4	16QAM	1	0	21.27	21.17	21.42	21.5
1.4	16QAM	1	3	21.34	21.26	21.46	
1.4	16QAM	1	5	21.18	21.13	21.39	
1.4	16QAM	3	0	21.02	20.97	21.20	
1.4	16QAM	3	1	21.07	21.01	21.22	
1.4	16QAM	3	3	20.99	20.96	21.17	
1.4	16QAM	6	0	20.09	20.16	20.32	20.5
1.4	64QAM	1	0	20.17	20.19	20.39	20.5
1.4	64QAM	1	3	20.30	20.28	20.43	
1.4	64QAM	1	5	20.19	20.23	20.36	
1.4	64QAM	3	0	20.28	20.27	20.38	
1.4	64QAM	3	1	20.22	20.30	20.41	
1.4	64QAM	3	3	20.18	20.24	20.38	
1.4	64QAM	6	0	19.14	19.19	19.24	19.5

<For Body-worn & Product Specific>
<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18700	18900	19100	
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	19.34	19.31	18.99	20.5
20	QPSK	1	49	19.30	19.26	18.95	
20	QPSK	1	99	19.28	19.25	18.88	
20	QPSK	50	0	18.30	18.27	17.93	19.5
20	QPSK	50	24	18.33	18.29	17.94	
20	QPSK	50	50	18.26	18.25	17.87	
20	QPSK	100	0	18.28	18.25	17.94	
20	16QAM	1	0	18.85	18.83	18.56	19.5
20	16QAM	1	49	18.81	18.79	18.55	
20	16QAM	1	99	18.84	18.87	18.41	
20	16QAM	50	0	17.46	17.41	17.11	18.5
20	16QAM	50	24	17.50	17.45	17.12	
20	16QAM	50	50	17.44	17.42	17.06	
20	16QAM	100	0	17.47	17.44	17.11	
20	64QAM	1	0	17.73	17.72	17.46	18.5
20	64QAM	1	49	17.67	17.67	17.44	
20	64QAM	1	99	17.68	17.68	17.25	
20	64QAM	50	0	16.47	16.42	16.11	
20	64QAM	50	24	16.49	16.45	16.14	17.5
20	64QAM	50	50	16.46	16.41	16.07	
20	64QAM	100	0	16.48	16.40	16.12	
Channel				18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	19.33	19.26	18.87	20.5
15	QPSK	1	37	19.30	19.24	18.85	
15	QPSK	1	74	19.24	19.23	18.77	
15	QPSK	36	0	18.34	18.31	17.89	19.5
15	QPSK	36	20	18.36	18.33	17.88	
15	QPSK	36	39	18.31	18.31	17.81	
15	QPSK	75	0	18.33	18.30	17.82	
15	16QAM	1	0	18.80	18.82	18.44	19.5
15	16QAM	1	37	18.80	18.77	18.39	
15	16QAM	1	74	18.81	18.78	18.29	
15	16QAM	36	0	17.50	17.46	17.05	18.5
15	16QAM	36	20	17.54	17.48	17.04	
15	16QAM	36	39	17.46	17.48	16.98	
15	16QAM	75	0	17.50	17.49	17.01	
15	64QAM	1	0	17.68	17.70	17.32	18.5
15	64QAM	1	37	17.67	17.66	17.25	
15	64QAM	1	74	17.67	17.65	17.16	
15	64QAM	36	0	16.52	16.50	16.10	
15	64QAM	36	20	16.54	16.52	16.06	17.5
15	64QAM	36	39	16.49	16.45	16.00	
15	64QAM	75	0	16.46	16.43	16.01	
Channel				18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	19.30	19.30	18.87	20.5
10	QPSK	1	25	19.30	19.30	18.82	
10	QPSK	1	49	19.30	19.32	18.81	
10	QPSK	25	0	18.32	18.31	17.82	19.5



FCC SAR TEST REPORT

Report No. : FA042406-02

10	QPSK	25	12	18.33	18.30	17.81	
10	QPSK	25	25	18.29	18.24	17.79	
10	QPSK	50	0	18.33	18.30	17.82	
10	16QAM	1	0	18.90	18.92	18.46	19.5
10	16QAM	1	25	18.82	18.82	18.36	
10	16QAM	1	49	18.87	18.90	18.33	
10	16QAM	25	0	17.49	17.46	16.96	18.5
10	16QAM	25	12	17.48	17.47	16.98	
10	16QAM	25	25	17.44	17.44	16.94	
10	16QAM	50	0	17.47	17.45	16.99	
10	64QAM	1	0	17.82	17.79	17.31	18.5
10	64QAM	1	25	17.74	17.69	17.26	
10	64QAM	1	49	17.76	17.72	17.22	
10	64QAM	25	0	16.51	16.49	15.99	17.5
10	64QAM	25	12	16.51	16.47	15.99	
10	64QAM	25	25	16.46	16.44	15.97	
10	64QAM	50	0	16.48	16.44	15.98	
Channel				18625	18900	19175	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1907.5	
5	QPSK	1	0	19.28	19.27	18.78	20.5
5	QPSK	1	12	19.26	19.27	18.75	
5	QPSK	1	24	19.26	19.23	18.77	
5	QPSK	12	0	18.35	18.31	17.82	19.5
5	QPSK	12	7	18.34	18.32	17.85	
5	QPSK	12	13	18.34	18.29	17.81	
5	QPSK	25	0	18.29	18.24	17.79	
5	16QAM	1	0	18.80	18.77	18.32	19.5
5	16QAM	1	12	18.81	18.82	18.30	
5	16QAM	1	24	18.75	18.75	18.28	
5	16QAM	12	0	17.53	17.50	16.97	18.5
5	16QAM	12	7	17.53	17.51	16.99	
5	16QAM	12	13	17.49	17.50	16.96	
5	16QAM	25	0	17.45	17.42	16.92	
5	64QAM	1	0	17.74	17.66	17.20	18.5
5	64QAM	1	12	17.68	17.69	17.19	
5	64QAM	1	24	17.66	17.66	17.15	
5	64QAM	12	0	16.59	16.54	16.02	17.5
5	64QAM	12	7	16.58	16.54	16.05	
5	64QAM	12	13	16.51	16.50	16.00	
5	64QAM	25	0	16.45	16.42	15.94	
Channel				18615	18900	19185	Tune-up limit (dBm)
Frequency (MHz)				1851.5	1880	1908.5	
3	QPSK	1	0	19.25	19.22	18.79	20.5
3	QPSK	1	8	19.29	19.25	18.78	
3	QPSK	1	14	19.24	19.19	18.69	
3	QPSK	8	0	18.32	18.31	17.79	19.5
3	QPSK	8	4	18.36	18.32	17.82	
3	QPSK	8	7	18.32	18.30	17.79	
3	QPSK	15	0	18.27	18.23	17.78	
3	16QAM	1	0	18.80	18.77	18.29	19.5
3	16QAM	1	8	18.79	18.81	18.30	
3	16QAM	1	14	18.75	18.73	18.26	
3	16QAM	8	0	17.55	17.52	17.03	18.5
3	16QAM	8	4	17.60	17.57	17.06	
3	16QAM	8	7	17.55	17.54	17.03	
3	16QAM	15	0	17.43	17.35	16.93	



FCC SAR TEST REPORT

Report No. : FA042406-02

3	64QAM	1	0	17.69	17.65	17.16	18.5
3	64QAM	1	8	17.71	17.67	17.17	
3	64QAM	1	14	17.63	17.63	17.17	
3	64QAM	8	0	16.54	16.51	15.98	17.5
3	64QAM	8	4	16.60	16.54	16.03	
3	64QAM	8	7	16.53	16.50	16.03	
3	64QAM	15	0	16.44	16.38	15.90	
Channel				18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1909.3	
1.4	QPSK	1	0	19.20	19.20	18.71	20.5
1.4	QPSK	1	3	19.28	19.22	18.76	
1.4	QPSK	1	5	19.20	19.18	18.69	
1.4	QPSK	3	0	19.24	19.21	18.72	
1.4	QPSK	3	1	19.29	19.23	18.76	
1.4	QPSK	3	3	19.26	19.21	18.73	
1.4	QPSK	6	0	18.24	18.18	17.70	19.5
1.4	16QAM	1	0	18.71	18.72	18.22	19.5
1.4	16QAM	1	3	18.81	18.80	18.28	
1.4	16QAM	1	5	18.70	18.70	18.23	
1.4	16QAM	3	0	18.45	18.45	17.95	
1.4	16QAM	3	1	18.52	18.47	17.97	
1.4	16QAM	3	3	18.45	18.45	17.93	
1.4	16QAM	6	0	17.46	17.43	16.91	18.5
1.4	64QAM	1	0	17.65	17.63	17.06	18.5
1.4	64QAM	1	3	17.69	17.64	17.16	
1.4	64QAM	1	5	17.60	17.57	17.14	
1.4	64QAM	3	0	17.58	17.56	17.04	
1.4	64QAM	3	1	17.66	17.60	17.12	
1.4	64QAM	3	3	17.58	17.56	17.05	
1.4	64QAM	6	0	16.40	16.33	15.86	17.5

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

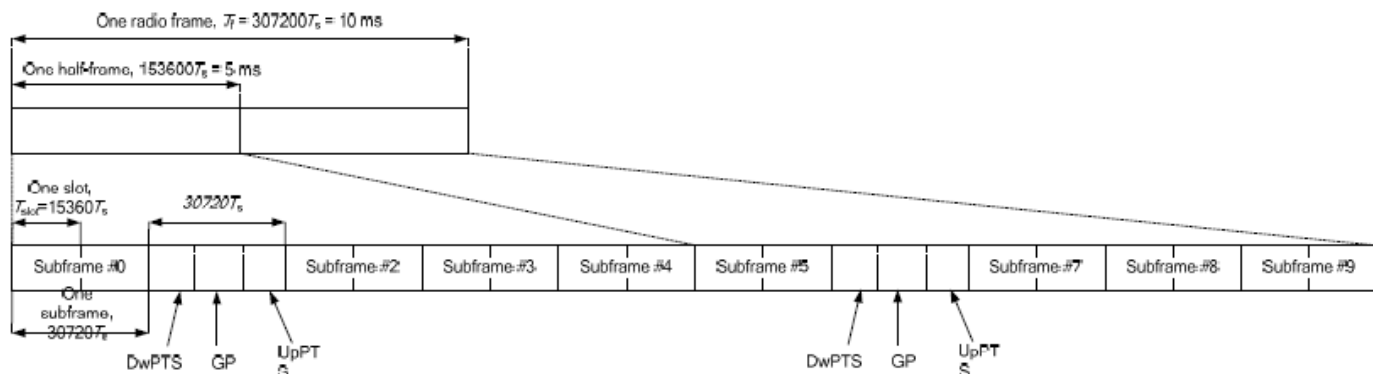


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<Default Power Mode>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				37850	38000	38150	
Frequency (MHz)				2580	2595	2610	
20	QPSK	1	0	23.57	23.78	23.83	24
20	QPSK	1	49	23.57	23.83	23.89	
20	QPSK	1	99	23.78	23.91	23.99	
20	QPSK	50	0	22.61	22.79	22.85	23
20	QPSK	50	24	22.74	22.80	22.87	
20	QPSK	50	50	22.76	22.81	22.97	
20	QPSK	100	0	22.69	22.80	22.85	
20	16QAM	1	0	22.82	22.95	22.99	23
20	16QAM	1	49	22.93	22.94	23.00	
20	16QAM	1	99	22.98	22.87	22.92	
20	16QAM	50	0	21.76	21.92	21.95	22
20	16QAM	50	24	21.90	21.93	21.94	
20	16QAM	50	50	21.86	21.94	21.86	
20	16QAM	100	0	21.87	21.88	21.94	
20	64QAM	1	0	21.48	21.59	21.81	22
20	64QAM	1	49	21.58	21.73	21.72	
20	64QAM	1	99	21.72	21.78	21.86	
20	64QAM	50	0	20.78	20.92	20.91	21
20	64QAM	50	24	20.87	20.95	20.94	
20	64QAM	50	50	20.88	20.92	20.92	
20	64QAM	100	0	20.92	20.92	20.92	
Channel				37825	38000	38175	Tune-up limit (dBm)
Frequency (MHz)				2577.5	2595	2612.5	
15	QPSK	1	0	23.53	23.66	23.81	24
15	QPSK	1	37	23.56	23.77	23.90	
15	QPSK	1	74	23.78	23.97	23.95	
15	QPSK	36	0	22.57	22.80	22.78	23
15	QPSK	36	20	22.61	22.81	22.95	
15	QPSK	36	39	22.74	22.79	22.88	
15	QPSK	75	0	22.51	22.77	22.94	
15	16QAM	1	0	22.73	22.93	22.92	23
15	16QAM	1	37	22.82	22.88	22.97	
15	16QAM	1	74	22.82	22.90	22.97	
15	16QAM	36	0	21.72	21.85	21.85	22
15	16QAM	36	20	21.71	21.88	21.97	
15	16QAM	36	39	21.83	21.83	21.96	
15	16QAM	75	0	21.76	21.90	21.98	
15	64QAM	1	0	21.49	21.67	21.69	22
15	64QAM	1	37	21.58	21.66	21.74	
15	64QAM	1	74	21.75	21.81	21.91	
15	64QAM	36	0	20.77	20.90	20.89	21
15	64QAM	36	20	20.80	20.93	20.98	
15	64QAM	36	39	20.90	20.90	20.98	
15	64QAM	75	0	20.70	20.91	20.98	
Channel				37800	38000	38200	Tune-up limit (dBm)
Frequency (MHz)				2575	2595	2615	
10	QPSK	1	0	23.40	23.71	23.86	24
10	QPSK	1	25	23.62	23.74	23.86	
10	QPSK	1	49	23.60	23.90	23.91	
10	QPSK	25	0	22.54	22.72	22.85	23



FCC SAR TEST REPORT

Report No. : FA042406-02

10	QPSK	25	12	22.62	22.77	22.91	
10	QPSK	25	25	22.56	22.77	22.87	
10	QPSK	50	0	22.57	22.77	22.92	
10	16QAM	1	0	22.69	22.99	22.96	23
10	16QAM	1	25	22.83	22.93	22.95	
10	16QAM	1	49	22.79	22.93	22.96	
10	16QAM	25	0	21.72	21.87	21.94	22
10	16QAM	25	12	21.76	21.90	21.99	
10	16QAM	25	25	21.74	21.86	21.97	
10	16QAM	50	0	21.72	21.87	22.00	
10	64QAM	1	0	21.45	21.64	21.74	22
10	64QAM	1	25	21.53	21.66	21.72	
10	64QAM	1	49	21.53	21.76	21.82	
10	64QAM	25	0	20.84	20.91	20.97	21
10	64QAM	25	12	20.89	20.95	20.99	
10	64QAM	25	25	20.79	20.93	20.98	
10	64QAM	50	0	20.75	20.85	21.00	
Channel				37775	38000	38225	Tune-up limit (dBm)
Frequency (MHz)				2572.5	2595	2617.5	
5	QPSK	1	0	23.45	23.72	23.94	24
5	QPSK	1	12	23.49	23.75	23.98	
5	QPSK	1	24	23.53	23.72	23.93	
5	QPSK	12	0	22.51	22.74	22.97	23
5	QPSK	12	7	22.50	22.79	22.92	
5	QPSK	12	13	22.57	22.77	22.98	
5	QPSK	25	0	22.58	22.73	22.96	
5	16QAM	1	0	22.69	22.90	22.92	23
5	16QAM	1	12	22.69	22.92	22.86	
5	16QAM	1	24	22.85	22.94	22.98	
5	16QAM	12	0	21.59	21.82	21.98	22
5	16QAM	12	7	21.66	21.87	21.93	
5	16QAM	12	13	21.69	21.86	21.91	
5	16QAM	25	0	21.75	21.91	21.95	
5	64QAM	1	0	21.44	21.67	21.78	22
5	64QAM	1	12	21.42	21.64	21.77	
5	64QAM	1	24	21.58	21.65	21.84	
5	64QAM	12	0	20.64	20.88	20.95	21
5	64QAM	12	7	20.71	20.94	20.99	
5	64QAM	12	13	20.76	20.92	20.95	
5	64QAM	25	0	20.79	20.92	20.98	

<LTE Carrier Aggregation combinations>
General Note:

1. This device supports Carrier Aggregation on downlink only for inter and intra band, Uplink CA as well. For the device supports combination bands and configurations are according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.

2CC Downlink Carrier Aggregation	
Number	Combination
1	CA_2A-4A
2	CA_2A-5A
3	CA_2A-7A
4	CA_4A-7A
5	CA_5A-7A
6	CA_2A-2A
7	CA_5A-5A
8	CA_7A-7A
9	CA_2C
10	CA_5B
11	CA_7C
12	CA_7B
13	CA_38C

<Power verification when LTE Carrier Aggregation Active>
General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Carrier power verification>

Configure		PCC							SCC				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band		2	20	1880	18900	QPSK	1	49	4	20	2132.50	2175	23.55	23.57
		2	20	1880	18900	QPSK	1	49	5	10	881.50	2525	23.52	23.57
		2	20	1880	18900	QPSK	1	49	7	20	2655.00	3100	23.47	23.57
		4	20	1745	20300	QPSK	1	49	7	20	2655.00	3100	23.38	23.40
		5	10	844	20600	QPSK	1	49	7	20	2655.00	3100	23.49	23.58
		2	20	1880	18900	QPSK	1	49	7	20	2655.00	3100	23.47	23.57
		4	20	1745	20300	QPSK	1	49	7	20	2655.00	3100	23.38	23.40
		5	10	844	20600	QPSK	1	49	7	20	2655.00	3100	23.48	23.58
Intra-Band	Non-Contiguous	2	20	1880	18900	QPSK	1	49	2	5	1932.50	625	23.53	23.57
		5	10	844	20600	QPSK	1	49	5	5	871.50	2425	23.51	23.58
		7	20	2560	21350	QPSK	1	99	7	5	2622.50	2775	21.77	21.79
		7	20	2560	21350	QPSK	1	99	7	5	2622.50	2775	23.71	23.81
	Contiguous	2	20	1880	18900	QPSK	1	49	2	20	1979.80	1098	23.54	23.57
		5	10	844	20600	QPSK	1	49	5	5	881.80	2528	23.51	23.58
		7	15	2562.5	21375	QPSK	1	74	7	5	2673.20	3282	21.76	21.78
		7	20	2560	21350	QPSK	1	99	7	20	2660.20	3152	21.69	21.79
		7	15	2562.5	21375	QPSK	1	74	7	5	2673.20	3282	23.76	23.80
		7	20	2560	21350	QPSK	1	99	7	20	2660.20	3152	23.74	23.81
	38	20	2610	38150	QPSK	1	99	38	20	2590.20	37952	23.91	23.99	

<LTE Uplink carrier aggregation>

2CC Uplink Carrier Aggregation	
Number	Combination
1	CA_5B
2	CA_7C
3	CA_38C

<Intra-band>
General Note:

- i. The device supports intra-band uplink carrier aggregation for LTE B5/B7/B38 with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- ii. The device supports uplink carrier aggregation with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- iii. According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- iv. According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- v. Additional SAR measurement for LTE UL CA whit other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.

<Default power>

CA_5B										
Combination 10MHz+10MHz (50RB+50RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20450	20549	QPSK	1	0	0	0	1	0	23.52	24
20575	20476	QPSK	1	0	1	49	2	0	23.77	24
20600	20501	QPSK	1	0	1	49	2	0	23.76	24

CA_7C_LAT										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	23.22	24
21100	20902	QPSK	1	0	1	99	2	0	23.2	24
21350	21152	QPSK	1	0	1	99	2	0	23.28	24

CA_7C_UAT										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	21.25	22
21100	20902	QPSK	1	0	1	99	2	0	21.28	22
21350	21152	QPSK	1	0	1	99	2	0	21.42	22

CA_38C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	0	0	0	1	0	23.59	24
37901	38099	QPSK	1	0	0	0	1	0	23.72	24
38150	37952	QPSK	1	0	1	99	2	0	23.79	24

<For Head>

CA_7C_UAT										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	17.27	18
21100	20902	QPSK	1	0	1	99	2	0	17.01	18
21350	21152	QPSK	1	0	1	99	2	0	17.22	18

12. WiFi/Bluetooth Output Power (Unit: dBm)

General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	15.80	16.00	99.20
		6	2437	15.80	16.00	
		11	2462	15.50	16.00	
	802.11g 6Mbps	1	2412	18.80	19.00	97.97
		6	2437	18.90	19.00	
		11	2462	18.70	19.00	
	802.11n-HT20 MCS0	1	2412	14.80	15.00	97.57
		6	2437	14.90	15.00	
		11	2462	14.80	15.00	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	14.20	15.00	98.34
		40	5200	14.40	15.00	
		44	5220	14.80	15.00	
		48	5240	14.90	15.00	
	802.11n-HT20 MCS0	36	5180	12.80	13.00	97.97
		40	5200	12.80	13.00	
		44	5220	12.90	13.00	
		48	5240	12.50	13.00	
	802.11n-HT40 MCS0	38	5190	12.80	13.00	96.10
		46	5230	12.70	13.00	
	802.11ac-VHT20 MCS0	36	5180	12.70	13.00	97.98
		40	5200	12.30	13.00	
		44	5220	12.90	13.00	
		48	5240	12.70	13.00	
	802.11ac-VHT40 MCS0	38	5190	12.70	13.00	96.08
		46	5230	12.70	13.00	
	802.11ac-VHT80 MCS0	42	5210	12.90	13.00	92.13

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	15.30	15.50	98.34
		56	5280	14.50	15.00	
		60	5300	14.20	15.00	
		64	5320	14.50	15.00	
	802.11n-HT20 MCS0	52	5260	12.90	13.00	97.97
		56	5280	12.80	13.00	
		60	5300	12.90	13.00	
		64	5320	12.80	13.00	
	802.11n-HT40 MCS0	54	5270	12.90	13.00	96.10
		62	5310	12.90	13.00	
	802.11ac-VHT20 MCS0	52	5260	12.90	13.00	97.98
		56	5280	12.50	13.00	
		60	5300	12.90	13.00	
		64	5320	12.70	13.00	
	802.11ac-VHT40 MCS0	54	5270	12.90	13.00	96.08
		62	5310	12.80	13.00	
	802.11ac-VHT80 MCS0	58	5290	12.70	13.00	92.13

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	17.30	17.50	98.34
		116	5580	16.90	17.00	
		124	5620	15.20	15.50	
		132	5660	15.10	15.50	
		144	5720	14.70	15.00	
	802.11n-HT20 MCS0	100	5500	12.80	13.00	97.97
		116	5580	12.60	13.00	
		124	5620	12.60	13.00	
		132	5660	12.50	13.00	
		140	5700	12.90	13.00	
		144	5720	12.60	13.00	
	802.11n-HT40 MCS0	102	5510	12.90	13.00	96.10
		110	5550	12.80	13.00	
		126	5630	12.40	13.00	
		134	5670	12.80	13.00	
		142	5710	12.80	13.00	
	802.11ac-VHT20 MCS0	100	5500	12.70	13.00	97.98
		116	5580	12.70	13.00	
		124	5620	12.60	13.00	
		132	5660	12.50	13.00	
		140	5700	12.80	13.00	
		144	5720	12.90	13.00	
	802.11ac-VHT40 MCS0	102	5510	12.80	13.00	96.08
		110	5550	12.70	13.00	
		126	5630	12.40	13.00	
		134	5670	12.70	13.00	
		142	5710	12.70	13.00	
	802.11ac-VHT80 MCS0	106	5530	12.70	13.00	92.13
		122	5610	12.70	13.00	
		138	5690	12.70	13.00	

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	15.10	15.50	98.34
		157	5785	14.30	15.50	
		165	5825	14.60	15.50	
	802.11n-HT20 MCS0	149	5745	12.80	13.00	97.97
		157	5785	12.70	13.00	
		165	5825	12.80	13.00	
	802.11n-HT40 MCS0	151	5755	12.90	13.00	96.10
		159	5795	12.90	13.00	
	802.11ac-VHT20 MCS0	149	5745	12.70	13.00	97.98
		157	5785	12.60	13.00	
		165	5825	12.70	13.00	
	802.11ac-VHT40 MCS0	151	5755	12.80	13.00	96.08
		159	5795	12.80	13.00	
	802.11ac-VHT80 MCS0	155	5775	12.80	13.00	92.13


<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	10.96	8.22	8.23
	CH 39	2441	11.04	7.94	7.89
	CH 78	2480	11.41	8.80	8.82
Tune-up Limit			13.00	10.00	10.00


Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	-1.05	-1.05
	CH 19	2440	-0.65	-0.65
	CH 39	2480	1.05	1.05
Tune-up Limit			1.50	1.50

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 77.13% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

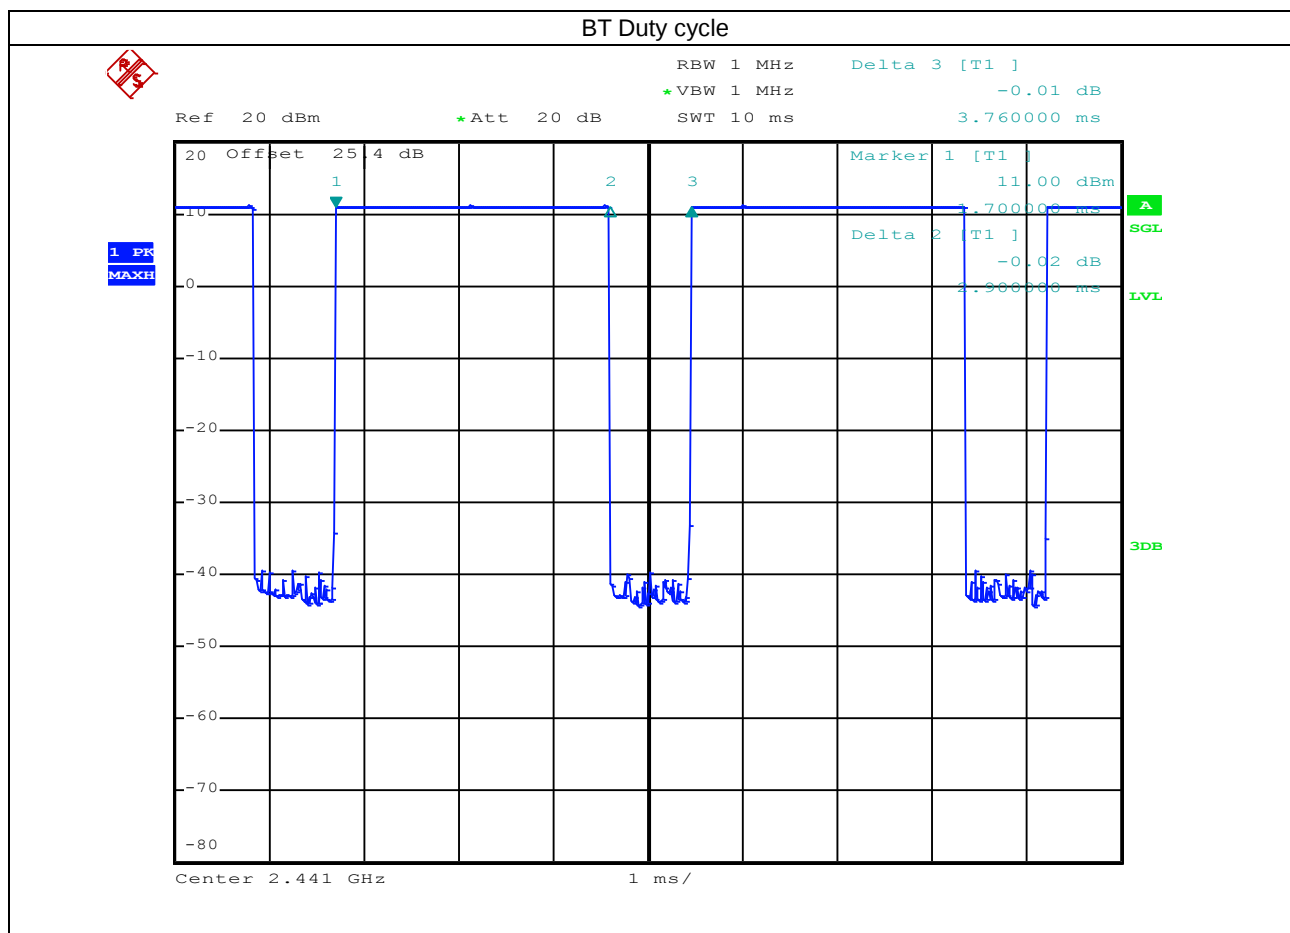

13. Antenna Location

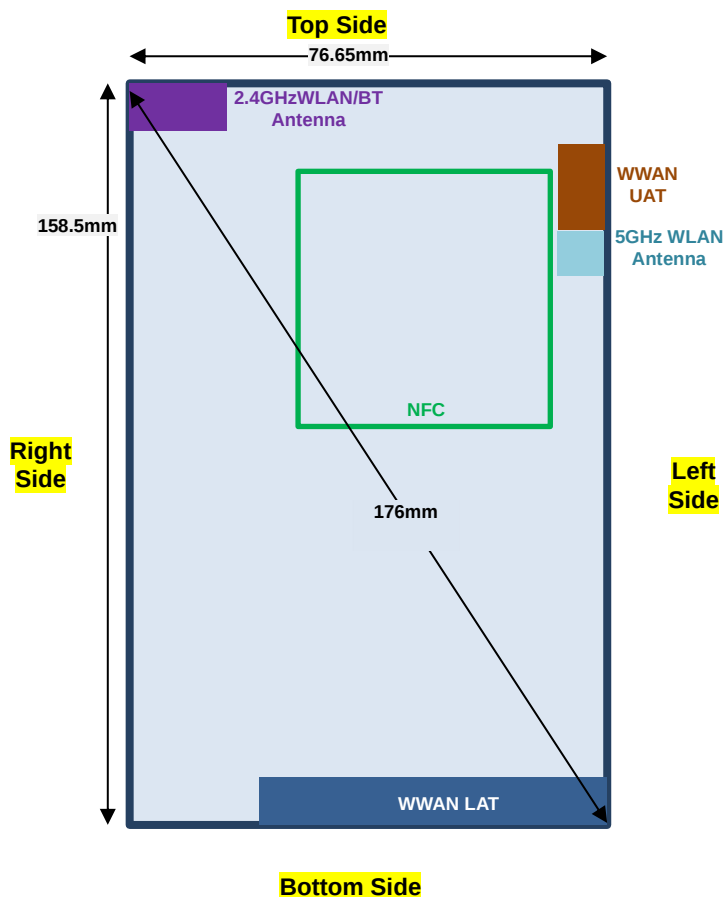

WWAN Antennas	Support Bands
WWAN LAT	GSM850/GSM1900, WCDMA B2/B4/B5, LTE B2/B4/B5/B7/B38
WWAN UAT	LTE B7

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN LAT	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WWAN UAT	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
BT&2.4GHz WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
5GHz WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN LAT	Yes	Yes	No	Yes	Yes	Yes
WWAN UAT	Yes	Yes	Yes	No	Yes	Yes
BT&2.4GHz WLAN	Yes	Yes	Yes	No	Yes	No
5GHz WLAN	Yes	Yes	Yes	No	No	Yes

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB 648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g product specific SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold, for this device only bottom side SAR for WWAN transmitter scaled to maximum output power is higher than 1.2W/kg of GSM1900, WCDMA B2/B4, and LTE B2/B4, therefore product specific SAR is necessary.
6. For 5.3GHz / 5.5GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is > 16 cm.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
3. Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 4Tx slot due to its highest frame-average power.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
6. Since the same RF amplifier and antenna is used for WiFi / Bluetooth transmitter and the Bluetooth output power is least 2 dB below the output power of WiFi, therefore, for Bluetooth SAR testing is selected worst position from each exposure condition to be tested.

14.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850_LAT	GPRS (4 Tx slots)	Right Cheek	0mm	128	824.2	26.84	27.00	1.038	-0.11	0.104	0.108
	GSM850_LAT	GPRS (4 Tx slots)	Right Tilted	0mm	128	824.2	26.84	27.00	1.038	0.03	0.072	0.075
	GSM850_LAT	GPRS (4 Tx slots)	Left Cheek	0mm	128	824.2	26.84	27.00	1.038	0.07	0.079	0.082
	GSM850_LAT	GPRS (4 Tx slots)	Left Tilted	0mm	128	824.2	26.84	27.00	1.038	0.06	0.072	0.074
	GSM1900_LAT	EDGE (4 Tx slots)	Right Cheek	0mm	661	1880	24.83	26.00	1.309	-0.08	0.101	0.133
	GSM1900_LAT	EDGE (4 Tx slots)	Right Tilted	0mm	661	1880	24.83	26.00	1.309	-0.12	0.137	0.180
02	GSM1900_LAT	EDGE (4 Tx slots)	Left Cheek	0mm	661	1880	24.83	26.00	1.309	-0.08	0.170	0.223
	GSM1900_LAT	EDGE (4 Tx slots)	Left Tilted	0mm	661	1880	24.83	26.00	1.309	0	0.077	0.101

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_LAT	RMC 12.2Kbps	Right Cheek	0mm	9538	1907.6	23.35	24.00	1.161	-0.06	0.143	0.166
	WCDMA II_LAT	RMC 12.2Kbps	Right Tilted	0mm	9538	1907.6	23.35	24.00	1.161	0.07	0.173	0.201
03	WCDMA II_LAT	RMC 12.2Kbps	Left Cheek	0mm	9538	1907.6	23.35	24.00	1.161	-0.09	0.262	0.304
	WCDMA II_LAT	RMC 12.2Kbps	Left Tilted	0mm	9538	1907.6	23.35	24.00	1.161	0.01	0.130	0.151
	WCDMA IV_LAT	RMC 12.2Kbps	Right Cheek	0mm	1513	1752.6	23.39	24.00	1.151	0.06	0.107	0.124
	WCDMA IV_LAT	RMC 12.2Kbps	Right Tilted	0mm	1513	1752.6	23.39	24.00	1.151	0.04	0.138	0.159
04	WCDMA IV_LAT	RMC 12.2Kbps	Left Cheek	0mm	1513	1752.6	23.39	24.00	1.151	0.1	0.171	0.197
	WCDMA IV_LAT	RMC 12.2Kbps	Left Tilted	0mm	1513	1752.6	23.39	24.00	1.151	0.01	0.098	0.113
05	WCDMA V_LAT	RMC 12.2Kbps	Right Cheek	0mm	4132	826.4	23.62	24.00	1.091	-0.12	0.247	0.270
	WCDMA V_LAT	RMC 12.2Kbps	Right Tilted	0mm	4132	826.4	23.62	24.00	1.091	0.02	0.150	0.164
	WCDMA V_LAT	RMC 12.2Kbps	Left Cheek	0mm	4132	826.4	23.62	24.00	1.091	0.01	0.182	0.199
	WCDMA V_LAT	RMC 12.2Kbps	Left Tilted	0mm	4132	826.4	23.62	24.00	1.091	0.03	0.145	0.158

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_LAT	20M	QPSK	1	49	Right Cheek	0mm	18900	1880	23.57	24.00	1.104	0.04	0.128	0.141
	LTE Band 2_LAT	20M	QPSK	50	24	Right Cheek	0mm	18900	1880	22.63	23.00	1.089	-0.06	0.101	0.110
	LTE Band 2_LAT	20M	QPSK	1	49	Right Tilted	0mm	18900	1880	23.57	24.00	1.104	0.08	0.156	0.172
	LTE Band 2_LAT	20M	QPSK	50	24	Right Tilted	0mm	18900	1880	22.63	23.00	1.089	-0.02	0.131	0.143
06	LTE Band 2_LAT	20M	QPSK	1	49	Left Cheek	0mm	18900	1880	23.57	24.00	1.104	-0.14	0.226	0.250
	LTE Band 2_LAT	20M	QPSK	50	24	Left Cheek	0mm	18900	1880	22.63	23.00	1.089	-0.16	0.206	0.225
	LTE Band 2_LAT	20M	QPSK	1	49	Left Tilted	0mm	18900	1880	23.57	24.00	1.104	-0.11	0.091	0.101
	LTE Band 2_LAT	20M	QPSK	50	24	Left Tilted	0mm	18900	1880	22.63	23.00	1.089	-0.1	0.064	0.070
	LTE Band 4_LAT	20M	QPSK	1	49	Right Cheek	0mm	20175	1732.5	23.31	24.00	1.172	0.1	0.091	0.107
	LTE Band 4_LAT	20M	QPSK	50	50	Right Cheek	0mm	20175	1732.5	22.25	23.00	1.189	0.03	0.069	0.082
	LTE Band 4_LAT	20M	QPSK	1	49	Right Tilted	0mm	20175	1732.5	23.31	24.00	1.172	0.05	0.120	0.141
	LTE Band 4_LAT	20M	QPSK	50	50	Right Tilted	0mm	20175	1732.5	22.25	23.00	1.189	0.07	0.093	0.110
07	LTE Band 4_LAT	20M	QPSK	1	49	Left Cheek	0mm	20175	1732.5	23.31	24.00	1.172	0.12	0.122	0.143
	LTE Band 4_LAT	20M	QPSK	50	50	Left Cheek	0mm	20175	1732.5	22.25	23.00	1.189	0.06	0.091	0.108
	LTE Band 4_LAT	20M	QPSK	1	49	Left Tilted	0mm	20175	1732.5	23.31	24.00	1.172	0	0.072	0.084
	LTE Band 4_LAT	20M	QPSK	50	50	Left Tilted	0mm	20175	1732.5	22.25	23.00	1.189	0.08	0.058	0.068

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
08	LTE Band 5_LAT	10M	QPSK	1	49	Right Cheek	0mm	20525	836.5	23.46	24.00	1.132	-0.15	0.244	0.276
	LTE Band 5_LAT	10M	QPSK	25	12	Right Cheek	0mm	20525	836.5	22.52	23.00	1.117	0.09	0.197	0.220
	LTE Band 5_LAT	10M	QPSK	1	49	Right Tilted	0mm	20525	836.5	23.46	24.00	1.132	0.03	0.127	0.144
	LTE Band 5_LAT	10M	QPSK	25	12	Right Tilted	0mm	20525	836.5	22.52	23.00	1.117	0.04	0.101	0.113
	LTE Band 5_LAT	10M	QPSK	1	49	Left Cheek	0mm	20525	836.5	23.46	24.00	1.132	0.12	0.178	0.202
	LTE Band 5_LAT	10M	QPSK	25	12	Left Cheek	0mm	20525	836.5	22.52	23.00	1.117	0.08	0.156	0.174
	LTE Band 5_LAT	10M	QPSK	1	49	Left Tilted	0mm	20525	836.5	23.46	24.00	1.132	0.18	0.165	0.187
	LTE Band 5_LAT	10M	QPSK	25	12	Left Tilted	0mm	20525	836.5	22.52	23.00	1.117	0.09	0.142	0.159
	LTE Band 5B_LAT	10M	QPSK	1	0	Right Cheek	0mm	20575+20476	841.5	23.77	24.00	1.054	0.06	0.229	0.241
	LTE Band 7_LAT	20M	QPSK	1	99	Right Cheek	0mm	21350	2560	23.81	24.00	1.045	0.06	0.111	0.116
	LTE Band 7_LAT	20M	QPSK	50	50	Right Cheek	0mm	21350	2560	22.68	23.00	1.076	0.07	0.096	0.103
	LTE Band 7_LAT	20M	QPSK	1	99	Right Tilted	0mm	21350	2560	23.81	24.00	1.045	0.15	0.102	0.107
	LTE Band 7_LAT	20M	QPSK	50	50	Right Tilted	0mm	21350	2560	22.68	23.00	1.076	0.16	0.085	0.091
	LTE Band 7_LAT	20M	QPSK	1	99	Left Cheek	0mm	21350	2560	23.81	24.00	1.045	0.16	0.207	0.216
	LTE Band 7_LAT	20M	QPSK	50	50	Left Cheek	0mm	21350	2560	22.68	23.00	1.076	-0.04	0.173	0.186
	LTE Band 7_LAT	20M	QPSK	1	99	Left Tilted	0mm	21350	2560	23.81	24.00	1.045	-0.05	0.076	0.079
	LTE Band 7_LAT	20M	QPSK	50	50	Left Tilted	0mm	21350	2560	22.68	23.00	1.076	-0.09	0.063	0.068
	LTE Band 7C_LAT	20M	QPSK	1	0	Left Cheek	0mm	21350+21152	2560	23.28	24.00	1.180	0.04	0.174	0.205
	LTE Band 7_UAT	20M	QPSK	1	99	Right Cheek	0mm	21350	2560	17.39	18.00	1.151	-0.12	0.649	0.747
09	LTE Band 7_UAT	20M	QPSK	1	99	Right Cheek	0mm	20850	2510	17.15	18.00	1.216	-0.01	0.719	0.874
	LTE Band 7_UAT	20M	QPSK	1	99	Right Cheek	0mm	21100	2535	17.22	18.00	1.197	-0.14	0.691	0.827
	LTE Band 7_UAT	20M	QPSK	50	50	Right Cheek	0mm	21350	2560	16.30	17.00	1.175	-0.09	0.535	0.629
	LTE Band 7_UAT	20M	QPSK	100	0	Right Cheek	0mm	21350	2560	16.26	17.00	1.186	-0.11	0.546	0.647
	LTE Band 7_UAT	20M	QPSK	1	99	Right Tilted	0mm	21350	2560	17.39	18.00	1.151	-0.14	0.355	0.409
	LTE Band 7_UAT	20M	QPSK	50	50	Right Tilted	0mm	21350	2560	16.30	17.00	1.175	-0.15	0.282	0.331
	LTE Band 7_UAT	20M	QPSK	1	99	Left Cheek	0mm	21350	2560	17.39	18.00	1.151	-0.12	0.271	0.312
	LTE Band 7_UAT	20M	QPSK	50	50	Left Cheek	0mm	21350	2560	16.30	17.00	1.175	-0.15	0.217	0.255
	LTE Band 7_UAT	20M	QPSK	1	99	Left Tilted	0mm	21350	2560	17.39	18.00	1.151	-0.1	0.198	0.228
	LTE Band 7_UAT	20M	QPSK	50	50	Left Tilted	0mm	21350	2560	16.30	17.00	1.175	-0.11	0.154	0.181
	LTE Band 7C_UAT	20M	QPSK	1	0	Right Cheek	0mm	20850+20148	2510	17.27	18.00	1.183	0.03	0.691	0.817

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38_LAT	20M	QPSK	1	99	Right Cheek	0mm	38000	2595	23.91	24.00	1.021	62.9	1.006	-0.06	0.071	0.073
	LTE Band 38_LAT	20M	QPSK	50	50	Right Cheek	0mm	38000	2595	22.81	23.00	1.045	62.9	1.006	0.05	0.055	0.058
	LTE Band 38_LAT	20M	QPSK	1	99	Right Tilted	0mm	38000	2595	23.91	24.00	1.021	62.9	1.006	-0.08	0.064	0.066
	LTE Band 38_LAT	20M	QPSK	50	50	Right Tilted	0mm	38000	2595	22.81	23.00	1.045	62.9	1.006	0.07	0.051	0.054
10	LTE Band 38_LAT	20M	QPSK	1	99	Left Cheek	0mm	38000	2595	23.91	24.00	1.021	62.9	1.006	0.02	0.134	0.138
	LTE Band 38_LAT	20M	QPSK	50	50	Left Cheek	0mm	38000	2595	22.81	23.00	1.045	62.9	1.006	0.09	0.111	0.117
	LTE Band 38_LAT	20M	QPSK	1	99	Left Tilted	0mm	38000	2595	23.91	24.00	1.021	62.9	1.006	-0.16	0.046	0.047
	LTE Band 38_LAT	20M	QPSK	50	50	Left Tilted	0mm	38000	2595	22.81	23.00	1.045	62.9	1.006	-0.12	0.031	0.033
	LTE Band 38C_LAT	20M	QPSK	1	0	Left Cheek	0mm	38150+37952	2610	23.79	24.00	1.050	62.9	1.006	0.08	0.119	0.126

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	6	2437	15.80	16.00	1.047	99.2	1.008	-0.09	0.250	0.264
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	6	2437	15.80	16.00	1.047	99.2	1.008	-0.08	0.195	0.206
11	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	6	2437	15.80	16.00	1.047	99.2	1.008	-0.11	0.491	0.518
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	6	2437	15.80	16.00	1.047	99.2	1.008	-0.09	0.345	0.364
12	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	52	5260	15.30	15.50	1.047	98.34	1.017	0.17	0.195	0.208
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	52	5260	15.30	15.50	1.047	98.34	1.017	0.17	0.119	0.127
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	52	5260	15.30	15.50	1.047	98.34	1.017	-0.15	0.069	0.073
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	52	5260	15.30	15.50	1.047	98.34	1.017	0.14	0.045	0.048
13	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	100	5500	17.30	17.50	1.047	98.34	1.017	-0.18	0.522	0.556
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	100	5500	17.30	17.50	1.047	98.34	1.017	-0.12	0.275	0.293
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	100	5500	17.30	17.50	1.047	98.34	1.017	0.04	0.242	0.258
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	100	5500	17.30	17.50	1.047	98.34	1.017	-0.18	0.146	0.155
14	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	149	5745	15.10	15.50	1.096	98.34	1.017	-0.11	0.337	0.376
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	149	5745	15.10	15.50	1.096	98.34	1.017	-0.18	0.183	0.204
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	149	5745	15.10	15.50	1.096	98.34	1.017	0.09	0.113	0.126
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	149	5745	15.10	15.50	1.096	98.34	1.017	0.1	0.060	0.067

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	78	2480	11.41	13.00	1.442	77.13	1.080	-0.1	0.100	0.156
	Bluetooth	1Mbps	Right Tilted	0mm	78	2480	11.41	13.00	1.442	77.13	1.080	-0.13	0.075	0.117
15	Bluetooth	1Mbps	Left Cheek	0mm	78	2480	11.41	13.00	1.442	77.13	1.080	-0.08	0.191	0.297
	Bluetooth	1Mbps	Left Tilted	0mm	78	2480	11.41	13.00	1.442	77.13	1.080	-0.1	0.133	0.207

14.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
16	GSM850_LAT	GPRS (4 Tx slots)	Front	10mm	128	824.2	26.84	27.00	1.038	0.13	0.247	0.256
	GSM850_LAT	GPRS (4 Tx slots)	Back	10mm	128	824.2	26.84	27.00	1.038	0.01	0.242	0.251
	GSM850_LAT	GPRS (4 Tx slots)	Left Side	10mm	128	824.2	26.84	27.00	1.038	0.05	0.087	0.090
	GSM850_LAT	GPRS (4 Tx slots)	Right Side	10mm	128	824.2	26.84	27.00	1.038	0.09	0.157	0.162
	GSM850_LAT	GPRS (4 Tx slots)	Bottom Side	10mm	128	824.2	26.84	27.00	1.038	-0.11	0.100	0.104
	GSM1900_LAT	EDGE (4 Tx slots)	Front	10mm	512	1850.2	22.43	22.50	1.016	-0.18	0.266	0.270
	GSM1900_LAT	EDGE (4 Tx slots)	Back	10mm	512	1850.2	22.43	22.50	1.016	-0.18	0.269	0.273
	GSM1900_LAT	EDGE (4 Tx slots)	Left Side	10mm	512	1850.2	22.43	22.50	1.016	0.01	0.042	0.043
	GSM1900_LAT	EDGE (4 Tx slots)	Right Side	10mm	512	1850.2	22.43	22.50	1.016	0.16	0.027	0.027
	GSM1900_LAT	EDGE (4 Tx slots)	Bottom Side	10mm	512	1850.2	22.43	22.50	1.016	-0.09	0.790	0.803
17	GSM1900_LAT	EDGE (4 Tx slots)	Bottom Side	10mm	661	1880	21.38	22.50	1.294	-0.18	0.905	1.171
	GSM1900_LAT	EDGE (4 Tx slots)	Bottom Side	10mm	810	1909.8	21.64	22.50	1.219	-0.13	0.793	0.967

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_LAT	RMC 12.2Kbps	Front	10mm	9400	1880	18.34	18.50	1.038	0	0.326	0.338
	WCDMA II_LAT	RMC 12.2Kbps	Back	10mm	9400	1880	18.34	18.50	1.038	-0.07	0.349	0.362
	WCDMA II_LAT	RMC 12.2Kbps	Left Side	10mm	9400	1880	18.34	18.50	1.038	-0.03	0.064	0.067
	WCDMA II_LAT	RMC 12.2Kbps	Right Side	10mm	9400	1880	18.34	18.50	1.038	-0.12	0.037	0.038
	WCDMA II_LAT	RMC 12.2Kbps	Bottom Side	10mm	9400	1880	18.34	18.50	1.038	-0.15	0.852	0.884
18	WCDMA II_LAT	RMC 12.2Kbps	Bottom Side	10mm	9262	1852.4	18.29	18.50	1.050	-0.07	0.849	0.891
	WCDMA II_LAT	RMC 12.2Kbps	Bottom Side	10mm	9538	1907.6	18.33	18.50	1.040	0.13	0.844	0.877
	WCDMA IV_LAT	RMC 12.2Kbps	Front	10mm	1413	1732.6	21.97	22.00	1.007	0.04	0.528	0.532
	WCDMA IV_LAT	RMC 12.2Kbps	Back	10mm	1413	1732.6	21.97	22.00	1.007	-0.02	0.605	0.610
	WCDMA IV_LAT	RMC 12.2Kbps	Left Side	10mm	1413	1732.6	21.97	22.00	1.007	0.14	0.104	0.105
	WCDMA IV_LAT	RMC 12.2Kbps	Right Side	10mm	1413	1732.6	21.97	22.00	1.007	0.03	0.040	0.040
19	WCDMA IV_LAT	RMC 12.2Kbps	Bottom Side	10mm	1413	1732.6	21.97	22.00	1.007	-0.05	1.030	1.037
	WCDMA IV_LAT	RMC 12.2Kbps	Bottom Side	10mm	1312	1712.4	21.93	22.00	1.016	-0.1	0.925	0.940
	WCDMA IV_LAT	RMC 12.2Kbps	Bottom Side	10mm	1513	1752.6	21.91	22.00	1.021	0.14	1.010	1.031
20	WCDMA V_LAT	RMC 12.2Kbps	Front	10mm	4132	826.4	23.62	24.00	1.091	-0.16	0.281	0.307
	WCDMA V_LAT	RMC 12.2Kbps	Back	10mm	4132	826.4	23.62	24.00	1.091	0.06	0.266	0.290
	WCDMA V_LAT	RMC 12.2Kbps	Left Side	10mm	4132	826.4	23.62	24.00	1.091	-0.08	0.107	0.117
	WCDMA V_LAT	RMC 12.2Kbps	Right Side	10mm	4132	826.4	23.62	24.00	1.091	-0.17	0.260	0.284
	WCDMA V_LAT	RMC 12.2Kbps	Bottom Side	10mm	4132	826.4	23.62	24.00	1.091	0.06	0.186	0.204

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_LAT	20M	QPSK	1	0	Front	10mm	18700	1860	17.26	18.00	1.186	-0.16	0.433	0.513
	LTE Band 2_LAT	20M	QPSK	50	0	Front	10mm	18900	1880	16.18	17.00	1.208	-0.17	0.359	0.434
	LTE Band 2_LAT	20M	QPSK	1	0	Back	10mm	18700	1860	17.26	18.00	1.186	-0.17	0.405	0.480
	LTE Band 2_LAT	20M	QPSK	50	0	Back	10mm	18900	1880	16.18	17.00	1.208	-0.16	0.328	0.396
	LTE Band 2_LAT	20M	QPSK	1	0	Left Side	10mm	18700	1860	17.26	18.00	1.186	-0.12	0.066	0.078
	LTE Band 2_LAT	20M	QPSK	50	0	Left Side	10mm	18900	1880	16.18	17.00	1.208	-0.09	0.048	0.058
	LTE Band 2_LAT	20M	QPSK	1	0	Right Side	10mm	18700	1860	17.26	18.00	1.186	-0.15	0.037	0.044
	LTE Band 2_LAT	20M	QPSK	50	0	Right Side	10mm	18900	1880	16.18	17.00	1.208	-0.1	0.027	0.033
	LTE Band 2_LAT	20M	QPSK	1	0	Bottom Side	10mm	18700	1860	17.26	18.00	1.186	-0.17	0.819	0.971
	LTE Band 2_LAT	20M	QPSK	1	0	Bottom Side	10mm	18900	1880	17.18	18.00	1.208	-0.1	0.874	1.056
21	LTE Band 2_LAT	20M	QPSK	1	0	Bottom Side	10mm	19100	1900	16.88	18.00	1.294	-0.12	0.862	1.116
	LTE Band 2_LAT	20M	QPSK	50	0	Bottom Side	10mm	18900	1880	16.18	17.00	1.208	-0.1	0.688	0.831
	LTE Band 2_LAT	20M	QPSK	50	0	Bottom Side	10mm	18700	1860	16.16	17.00	1.213	-0.16	0.657	0.797
	LTE Band 2_LAT	20M	QPSK	50	0	Bottom Side	10mm	19100	1900	15.84	17.00	1.306	-0.14	0.688	0.899
	LTE Band 2_LAT	20M	QPSK	100	0	Bottom Side	10mm	18700	1860	16.17	17.00	1.211	-0.12	0.697	0.844
	LTE Band 4_LAT	20M	QPSK	1	0	Front	10mm	20175	1732.5	22.05	22.50	1.109	0.08	0.655	0.727
	LTE Band 4_LAT	20M	QPSK	50	24	Front	10mm	20175	1732.5	21.09	21.50	1.099	-0.16	0.488	0.536
	LTE Band 4_LAT	20M	QPSK	1	0	Back	10mm	20175	1732.5	22.05	22.50	1.109	0.04	0.694	0.770
	LTE Band 4_LAT	20M	QPSK	50	24	Back	10mm	20175	1732.5	21.09	21.50	1.099	0.13	0.556	0.611
	LTE Band 4_LAT	20M	QPSK	1	0	Left Side	10mm	20175	1732.5	22.05	22.50	1.109	0.12	0.123	0.136
	LTE Band 4_LAT	20M	QPSK	50	24	Left Side	10mm	20175	1732.5	21.09	21.50	1.099	0.15	0.091	0.100
	LTE Band 4_LAT	20M	QPSK	1	0	Right Side	10mm	20175	1732.5	22.05	22.50	1.109	0.02	0.046	0.051
	LTE Band 4_LAT	20M	QPSK	50	24	Right Side	10mm	20175	1732.5	21.09	21.50	1.099	-0.03	0.027	0.030
22	LTE Band 4_LAT	20M	QPSK	1	0	Bottom Side	10mm	20175	1732.5	22.05	22.50	1.109	-0.11	1.070	1.187
	LTE Band 4_LAT	20M	QPSK	50	24	Bottom Side	10mm	20175	1732.5	21.09	21.50	1.099	-0.17	0.909	0.999
	LTE Band 4_LAT	20M	QPSK	100	0	Bottom Side	10mm	20175	1732.5	21.06	21.50	1.107	-0.1	0.898	0.994
23	LTE Band 5_LAT	10M	QPSK	1	49	Front	10mm	20525	836.5	23.46	24.00	1.132	-0.11	0.386	0.437
	LTE Band 5_LAT	10M	QPSK	25	12	Front	10mm	20525	836.5	22.52	23.00	1.117	0.08	0.313	0.350
	LTE Band 5_LAT	10M	QPSK	1	49	Back	10mm	20525	836.5	23.46	24.00	1.132	0.07	0.354	0.401
	LTE Band 5_LAT	10M	QPSK	25	12	Back	10mm	20525	836.5	22.52	23.00	1.117	-0.04	0.297	0.332
	LTE Band 5_LAT	10M	QPSK	1	49	Left Side	10mm	20525	836.5	23.46	24.00	1.132	-0.01	0.091	0.103
	LTE Band 5_LAT	10M	QPSK	25	12	Left Side	10mm	20525	836.5	22.52	23.00	1.117	0.08	0.061	0.068
	LTE Band 5_LAT	10M	QPSK	1	49	Right Side	10mm	20525	836.5	23.46	24.00	1.132	-0.04	0.188	0.213
	LTE Band 5_LAT	10M	QPSK	25	12	Right Side	10mm	20525	836.5	22.52	23.00	1.117	-0.09	0.139	0.155
	LTE Band 5_LAT	10M	QPSK	1	49	Bottom Side	10mm	20525	836.5	23.46	24.00	1.132	-0.11	0.164	0.186
	LTE Band 5_LAT	10M	QPSK	25	12	Bottom Side	10mm	20525	836.5	22.52	23.00	1.117	0.05	0.111	0.124
	LTE Band 5B_LAT	10M	QPSK	1	0	Front	10mm	20575+20476	841.5	23.77	24.00	1.054	0.12	0.363	0.383

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7_LAT	20M	QPSK	1	99	Front	10mm	21350	2560	23.81	24.00	1.045	-0.1	0.535	0.559
	LTE Band 7_LAT	20M	QPSK	50	50	Front	10mm	21350	2560	22.68	23.00	1.076	-0.06	0.415	0.447
	LTE Band 7_LAT	20M	QPSK	1	99	Back	10mm	21350	2560	23.81	24.00	1.045	0.11	0.490	0.512
	LTE Band 7_LAT	20M	QPSK	50	50	Back	10mm	21350	2560	22.68	23.00	1.076	0.04	0.401	0.432
24	LTE Band 7_LAT	20M	QPSK	1	99	Left Side	10mm	21350	2560	23.81	24.00	1.045	-0.16	0.580	0.606
	LTE Band 7_LAT	20M	QPSK	50	50	Left Side	10mm	21350	2560	22.68	23.00	1.076	-0.07	0.463	0.499
	LTE Band 7_LAT	20M	QPSK	1	99	Right Side	10mm	21350	2560	23.81	24.00	1.045	-0.01	0.001	0.001
	LTE Band 7_LAT	20M	QPSK	50	50	Right Side	10mm	21350	2560	22.68	23.00	1.076	-0.08	0.001	0.001
	LTE Band 7_LAT	20M	QPSK	1	99	Bottom Side	10mm	21350	2560	23.81	24.00	1.045	0.01	0.219	0.228
	LTE Band 7_LAT	20M	QPSK	50	50	Bottom Side	10mm	21350	2560	22.68	23.00	1.076	0.04	0.176	0.189
	LTE Band 7C_LAT	20M	QPSK	1	0	Left Side	10mm	21350+21152	2560	23.28	24.00	1.180	0.06	0.503	0.594
	LTE Band 7_UAT	20M	QPSK	1	99	Front	10mm	21350	2560	21.79	22.00	1.050	0.1	0.424	0.445
	LTE Band 7_UAT	20M	QPSK	50	24	Front	10mm	21350	2560	20.65	21.00	1.084	-0.13	0.320	0.347
	LTE Band 7_UAT	20M	QPSK	1	99	Back	10mm	21350	2560	21.79	22.00	1.050	-0.13	0.402	0.422
	LTE Band 7_UAT	20M	QPSK	50	24	Back	10mm	21350	2560	20.65	21.00	1.084	-0.16	0.360	0.390
	LTE Band 7_UAT	20M	QPSK	1	99	Left Side	10mm	21350	2560	21.79	22.00	1.050	-0.01	0.085	0.089
	LTE Band 7_UAT	20M	QPSK	50	24	Left Side	10mm	21350	2560	20.65	21.00	1.084	-0.13	0.078	0.085
	LTE Band 7_UAT	20M	QPSK	1	99	Top Side	10mm	21350	2560	21.79	22.00	1.050	0.05	0.200	0.210
	LTE Band 7_UAT	20M	QPSK	50	24	Top Side	10mm	21350	2560	20.65	21.00	1.084	-0.11	0.187	0.203
	LTE Band 7C_UAT	20M	QPSK	1	0	Front	10mm	21350+21152	2560	21.42	22.00	1.143	0.06	0.384	0.439

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
25	LTE Band 38_LAT	20M	QPSK	1	99	Front	10mm	38000	2595	23.91	24.00	1.021	62.9	1.006	-0.07	0.358	0.368
	LTE Band 38_LAT	20M	QPSK	50	50	Front	10mm	38000	2595	22.81	23.00	1.045	62.9	1.006	-0.01	0.280	0.294
	LTE Band 38_LAT	20M	QPSK	1	99	Back	10mm	38000	2595	23.91	24.00	1.021	62.9	1.006	-0.06	0.329	0.338
	LTE Band 38_LAT	20M	QPSK	50	50	Back	10mm	38000	2595	22.81	23.00	1.045	62.9	1.006	-0.18	0.247	0.260
	LTE Band 38_LAT	20M	QPSK	1	99	Left Side	10mm	38000	2595	23.91	24.00	1.021	62.9	1.006	-0.15	0.351	0.360
	LTE Band 38_LAT	20M	QPSK	50	50	Left Side	10mm	38000	2595	22.81	23.00	1.045	62.9	1.006	-0.08	0.270	0.284
	LTE Band 38_LAT	20M	QPSK	1	99	Right Side	10mm	38000	2595	23.91	24.00	1.021	62.9	1.006	-0.1	0.001	0.001
	LTE Band 38_LAT	20M	QPSK	50	50	Right Side	10mm	38000	2595	22.81	23.00	1.045	62.9	1.006	0.06	0.001	0.001
	LTE Band 38_LAT	20M	QPSK	1	99	Bottom Side	10mm	38000	2595	23.91	24.00	1.021	62.9	1.006	-0.01	0.126	0.129
	LTE Band 38_LAT	20M	QPSK	50	50	Bottom Side	10mm	38000	2595	22.81	23.00	1.045	62.9	1.006	-0.12	0.096	0.101
	LTE Band 38C_LAT	20M	QPSK	1	0	Front	10mm	38150+37952	2610	23.79	24.00	1.050	62.9	1.006	0.03	0.321	0.339

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	6	2437	15.80	16.00	1.047	99.2	1.008	-0.14	0.099	0.104
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	6	2437	15.80	16.00	1.047	99.2	1.008	0.11	0.108	0.114
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	6	2437	15.80	16.00	1.047	99.2	1.008	-0.14	0.093	0.098
26	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	6	2437	15.80	16.00	1.047	99.2	1.008	-0.08	0.140	0.148
	WLAN5GHz	802.11a 6Mbps	Front	10mm	48	5240	14.90	15.00	1.023	98.34	1.017	-0.08	0.028	0.029
	WLAN5GHz	802.11a 6Mbps	Back	10mm	48	5240	14.90	15.00	1.023	98.34	1.017	-0.14	0.133	0.139
27	WLAN5GHz	802.11a 6Mbps	Left Side	10mm	48	5240	14.90	15.00	1.023	98.34	1.017	-0.11	0.147	0.153
	WLAN5GHz	802.11a 6Mbps	Top Side	10mm	48	5240	14.90	15.00	1.023	98.34	1.017	0.08	0.052	0.055
	WLAN5GHz	802.11a 6Mbps	Front	10mm	149	5745	15.10	15.50	1.096	98.34	1.017	-0.15	0.064	0.071
	WLAN5GHz	802.11a 6Mbps	Back	10mm	149	5745	15.10	15.50	1.096	98.34	1.017	-0.12	0.112	0.125
28	WLAN5GHz	802.11a 6Mbps	Left Side	10mm	149	5745	15.10	15.50	1.096	98.34	1.017	-0.14	0.222	0.248
	WLAN5GHz	802.11a 6Mbps	Top Side	10mm	149	5745	15.10	15.50	1.096	98.34	1.017	0.11	0.036	0.040

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	78	2480	11.41	13.00	1.442	77.13	1.080	-0.14	0.035	0.055
29	Bluetooth	1Mbps	Back	10mm	78	2480	11.41	13.00	1.442	77.13	1.080	-0.11	0.042	0.065
	Bluetooth	1Mbps	Right Side	10mm	78	2480	11.41	13.00	1.442	77.13	1.080	-0.17	0.033	0.051
	Bluetooth	1Mbps	Top Side	10mm	78	2480	11.41	13.00	1.442	77.13	1.080	-0.09	0.038	0.059

14.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
30	GSM850_LAT	GPRS (4 Tx slots)	Front	10mm	128	824.2	26.84	27.00	1.038	0.13	0.247	0.256
	GSM850_LAT	GPRS (4 Tx slots)	Back	10mm	128	824.2	26.84	27.00	1.038	0.01	0.242	0.251
	GSM1900_LAT	EDGE (4 Tx slots)	Front	10mm	512	1850.2	24.53	25.50	1.250	-0.04	0.466	0.582
	GSM1900_LAT	EDGE (4 Tx slots)	Back	10mm	512	1850.2	24.53	25.50	1.250	-0.04	0.642	0.803
31	GSM1900_LAT	EDGE (4 Tx slots)	Back	10mm	661	1880	24.02	25.50	1.406	-0.18	0.629	0.884
	GSM1900_LAT	EDGE (4 Tx slots)	Back	10mm	810	1909.8	24.02	25.50	1.406	-0.14	0.539	0.758

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_LAT	RMC 12.2Kbps	Front	10mm	9400	1880	21.36	21.50	1.033	0.01	0.791	0.817
	WCDMA II_LAT	RMC 12.2Kbps	Front	10mm	9262	1852.4	21.32	21.50	1.042	0.17	0.837	0.873
	WCDMA II_LAT	RMC 12.2Kbps	Front	10mm	9538	1907.6	21.35	21.50	1.035	-0.16	0.694	0.718
	WCDMA II_LAT	RMC 12.2Kbps	Back	10mm	9400	1880	21.36	21.50	1.033	-0.08	0.864	0.892
32	WCDMA II_LAT	RMC 12.2Kbps	Back	10mm	9262	1852.4	21.32	21.50	1.042	-0.1	0.866	0.902
	WCDMA II_LAT	RMC 12.2Kbps	Back	10mm	9538	1907.6	21.35	21.50	1.035	-0.1	0.774	0.801
	WCDMA IV_LAT	RMC 12.2Kbps	Front	10mm	1513	1752.6	23.39	24.00	1.151	0.01	0.691	0.795
	WCDMA IV_LAT	RMC 12.2Kbps	Back	10mm	1513	1752.6	23.39	24.00	1.151	0.08	0.828	0.953
33	WCDMA IV_LAT	RMC 12.2Kbps	Back	10mm	1312	1712.4	23.24	24.00	1.191	-0.19	0.921	1.097
	WCDMA IV_LAT	RMC 12.2Kbps	Back	10mm	1413	1732.6	23.37	24.00	1.156	-0.15	0.856	0.990
34	WCDMA V_LAT	RMC 12.2Kbps	Front	10mm	4132	826.4	23.62	24.00	1.091	-0.16	0.281	0.307
	WCDMA V_LAT	RMC 12.2Kbps	Back	10mm	4132	826.4	23.62	24.00	1.091	0.06	0.266	0.290

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_LAT	20M	QPSK	1	0	Front	10mm	18700	1860	19.34	20.50	1.306	-0.17	0.623	0.814
	LTE Band 2_LAT	20M	QPSK	1	0	Front	10mm	18900	1880	19.31	20.50	1.315	-0.11	0.665	0.875
35	LTE Band 2_LAT	20M	QPSK	1	0	Front	10mm	19100	1900	18.99	20.50	1.416	-0.14	0.630	0.892
	LTE Band 2_LAT	20M	QPSK	50	24	Front	10mm	18700	1860	18.33	19.50	1.309	-0.12	0.465	0.609
	LTE Band 2_LAT	20M	QPSK	100	0	Front	10mm	18700	1860	18.28	19.50	1.324	-0.15	0.472	0.625
	LTE Band 2_LAT	20M	QPSK	1	0	Back	10mm	18700	1860	19.34	20.50	1.306	-0.1	0.631	0.824
	LTE Band 2_LAT	20M	QPSK	1	0	Back	10mm	18900	1880	19.31	20.50	1.315	-0.18	0.644	0.847
	LTE Band 2_LAT	20M	QPSK	1	0	Back	10mm	19100	1900	18.99	20.50	1.416	-0.12	0.605	0.857
	LTE Band 2_LAT	20M	QPSK	50	24	Back	10mm	18700	1860	18.33	19.50	1.309	-0.08	0.469	0.614
	LTE Band 2_LAT	20M	QPSK	100	0	Back	10mm	18700	1860	18.28	19.50	1.324	-0.14	0.466	0.617
36	LTE Band 4_LAT	20M	QPSK	1	49	Front	10mm	20175	1732.5	23.31	24.00	1.172	-0.11	0.666	0.781
	LTE Band 4_LAT	20M	QPSK	50	50	Front	10mm	20175	1732.5	22.25	23.00	1.189	-0.16	0.544	0.647
	LTE Band 4_LAT	20M	QPSK	1	49	Back	10mm	20175	1732.5	23.31	24.00	1.172	-0.17	0.652	0.764
	LTE Band 4_LAT	20M	QPSK	50	50	Back	10mm	20175	1732.5	22.25	23.00	1.189	-0.12	0.540	0.642
37	LTE Band 5_LAT	10M	QPSK	1	49	Front	10mm	20525	836.5	23.46	24.00	1.132	-0.11	0.386	0.437
	LTE Band 5_LAT	10M	QPSK	25	12	Front	10mm	20525	836.5	22.52	23.00	1.117	0.08	0.313	0.350
	LTE Band 5_LAT	10M	QPSK	1	49	Back	10mm	20525	836.5	23.46	24.00	1.132	0.07	0.354	0.401
	LTE Band 5_LAT	10M	QPSK	25	12	Back	10mm	20525	836.5	22.52	23.00	1.117	-0.04	0.297	0.332
	LTE Band 5B_LAT	10M	QPSK	1	0	Front	10mm	20575+20476	841.5	23.77	24.00	1.054	0.12	0.363	0.383

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
38	LTE Band 7_LAT	20M	QPSK	1	99	Front	10mm	21350	2560	23.81	24.00	1.045	-0.1	0.535	0.559
	LTE Band 7_LAT	20M	QPSK	50	50	Front	10mm	21350	2560	22.68	23.00	1.076	-0.06	0.415	0.447
	LTE Band 7_LAT	20M	QPSK	1	99	Back	10mm	21350	2560	23.81	24.00	1.045	0.11	0.490	0.512
	LTE Band 7_LAT	20M	QPSK	50	50	Back	10mm	21350	2560	22.68	23.00	1.076	0.04	0.401	0.432
	LTE Band 7C_LAT	20M	QPSK	1	0	Front	10mm	21350+21152	2560	23.28	24.00	1.180	0.04	0.463	0.546
	LTE Band 7_UAT	20M	QPSK	1	99	Front	10mm	21350	2560	21.79	22.00	1.050	0.1	0.424	0.445
	LTE Band 7_UAT	20M	QPSK	50	24	Front	10mm	21350	2560	20.65	21.00	1.084	-0.13	0.320	0.347
	LTE Band 7_UAT	20M	QPSK	1	99	Back	10mm	21350	2560	21.79	22.00	1.050	-0.13	0.402	0.422
	LTE Band 7_UAT	20M	QPSK	50	24	Back	10mm	21350	2560	20.65	21.00	1.084	-0.16	0.360	0.390
	LTE Band 7C_UAT	20M	QPSK	1	0	Front	10mm	21350+21152	2560	21.42	22.00	1.143	0.06	0.384	0.439

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
39	LTE Band 38_LAT	20M	QPSK	1	99	Front	10mm	38000	2595	23.91	24.00	1.021	62.9	1.006	-0.07	0.358	0.368
	LTE Band 38_LAT	20M	QPSK	50	50	Front	10mm	38000	2595	22.81	23.00	1.045	62.9	1.006	-0.01	0.280	0.294
	LTE Band 38_LAT	20M	QPSK	1	99	Back	10mm	38000	2595	23.91	24.00	1.021	62.9	1.006	-0.06	0.329	0.338
	LTE Band 38_LAT	20M	QPSK	50	50	Back	10mm	38000	2595	22.81	23.00	1.045	62.9	1.006	-0.18	0.247	0.260
	LTE Band 38C_LAT	20M	QPSK	1	0	Front	10mm	38150+37952	2610	23.79	24.00	1.050	62.9	1.006	0.03	0.321	0.339

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	6	2437	15.80	16.00	1.047	99.2	1.008	-0.14	0.099	0.104
40	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	6	2437	15.80	16.00	1.047	99.2	1.008	0.11	0.108	0.114
	WLAN5GHz	802.11a 6Mbps	Front	10mm	52	5260	15.30	15.50	1.047	98.34	1.017	0.02	0.032	0.034
41	WLAN5GHz	802.11a 6Mbps	Back	10mm	52	5260	15.30	15.50	1.047	98.34	1.017	-0.11	0.145	0.154
	WLAN5GHz	802.11a 6Mbps	Front	10mm	100	5500	17.30	17.50	1.047	98.34	1.017	-0.13	0.065	0.069
42	WLAN5GHz	802.11a 6Mbps	Back	10mm	100	5500	17.30	17.50	1.047	98.34	1.017	-0.04	0.201	0.214
	WLAN5GHz	802.11a 6Mbps	Front	10mm	149	5745	15.10	15.50	1.096	98.34	1.017	-0.15	0.064	0.071
43	WLAN5GHz	802.11a 6Mbps	Back	10mm	149	5745	15.10	15.50	1.096	98.34	1.017	-0.12	0.112	0.125

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	78	2480	11.41	13.00	1.442	77.13	1.080	-0.14	0.035	0.055
44	Bluetooth	1Mbps	Back	10mm	78	2480	11.41	13.00	1.442	77.13	1.080	-0.11	0.042	0.065

14.4 Product Specific SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM1900_LAT	EDGE (4 Tx slots)	Bottom Side	0mm	ON	512	1850.2	24.53	25.50	1.250	0.1	1.010	1.263
45	GSM1900_LAT	EDGE (4 Tx slots)	Bottom Side	0mm	ON	661	1880	24.02	25.50	1.406	-0.14	1.030	1.448
	GSM1900_LAT	EDGE (4 Tx slots)	Bottom Side	0mm	ON	810	1909.8	24.02	25.50	1.406	0.03	0.942	1.324

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
46	WCDMA II_LAT	RMC 12.2Kbps	Bottom Side	0mm	ON	9400	1880	21.36	21.50	1.033	0.11	1.640	1.694
	WCDMA II_LAT	RMC 12.2Kbps	Bottom Side	0mm	ON	9262	1852.4	21.32	21.50	1.042	0.03	1.510	1.574
	WCDMA II_LAT	RMC 12.2Kbps	Bottom Side	0mm	ON	9538	1907.6	21.35	21.50	1.035	0.12	1.530	1.584
	WCDMA IV_LAT	RMC 12.2Kbps	Bottom Side	0mm	OFF	1513	1752.6	23.39	24.00	1.151	0.09	2.250	2.589
47	WCDMA IV_LAT	RMC 12.2Kbps	Bottom Side	0mm	OFF	1312	1712.4	23.24	24.00	1.191	0.13	2.380	2.835
	WCDMA IV_LAT	RMC 12.2Kbps	Bottom Side	0mm	OFF	1413	1732.6	23.37	24.00	1.156	0.14	2.240	2.590

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
48	LTE Band 2_LAT	20M	QPSK	1	0	Bottom Side	0mm	ON	18700	1860	19.34	20.50	1.306	0.16	1.240	1.620
	LTE Band 2_LAT	20M	QPSK	1	0	Bottom Side	0mm	ON	18900	1880	19.31	20.50	1.315	0.03	1.210	1.591
	LTE Band 2_LAT	20M	QPSK	1	0	Bottom Side	0mm	ON	19100	1900	18.99	20.50	1.416	-0.07	1.090	1.543
	LTE Band 2_LAT	20M	QPSK	50	24	Bottom Side	0mm	ON	18700	1860	18.33	19.50	1.309	0.15	0.976	1.278
49	LTE Band 4_LAT	20M	QPSK	1	49	Bottom Side	0mm	OFF	20175	1732.5	23.31	24.00	1.172	0.01	1.820	2.133
	LTE Band 4_LAT	20M	QPSK	50	50	Bottom Side	0mm	OFF	20175	1732.5	22.25	23.00	1.189	0.04	1.600	1.902
	LTE Band 4_LAT	20M	QPSK	100	0	Bottom Side	0mm	OFF	20175	1732.5	22.18	23.00	1.208	0.09	1.450	1.751

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Front	0mm	52	5260	15.30	15.50	1.047	98.34	1.017	-0.07	0.088	0.094
50	WLAN5GHz	802.11a 6Mbps	Back	0mm	52	5260	15.30	15.50	1.047	98.34	1.017	0	0.321	0.342
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	52	5260	15.30	15.50	1.047	98.34	1.017	-0.04	0.244	0.260
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	52	5260	15.30	15.50	1.047	98.34	1.017	-0.1	0.064	0.068
	WLAN5GHz	802.11a 6Mbps	Front	0mm	100	5500	17.30	17.50	1.047	98.34	1.017	0.15	0.277	0.295
51	WLAN5GHz	802.11a 6Mbps	Back	0mm	100	5500	17.30	17.50	1.047	98.34	1.017	0.08	0.330	0.351
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	100	5500	17.30	17.50	1.047	98.34	1.017	-0.11	0.094	0.100
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	100	5500	17.30	17.50	1.047	98.34	1.017	0.14	0.028	0.030

14.5 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM1900_LAT	EDGE (4 Tx slots)	Bottom Side	10mm	ON	661	1880	21.38	22.50	1.294	-0.18	0.905	-	1.171
2nd	GSM1900_LAT	EDGE (4 Tx slots)	Bottom Side	10mm	ON	661	1880	21.38	22.50	1.294	-0.12	0.869	1.04	1.125
1st	LTE Band 4_LAT	20M_QPSK_1_0	Bottom Side	10mm	ON	20175	1732.5	22.05	22.50	1.109	-0.11	1.070	-	1.187
2nd	LTE Band 4_LAT	20M_QPSK_1_0	Bottom Side	10mm	ON	20175	1732.5	22.05	22.50	1.109	-0.05	1.030	1.04	1.142

No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WCDMA IV_LAT	RMC 12.2Kbps	Bottom Side	0mm	OFF	1312	1712.4	23.24	24.00	1.191	0.13	2.380	-	2.835
2nd	WCDMA IV_LAT	RMC 12.2Kbps	Bottom Side	0mm	OFF	1312	1712.4	23.24	24.00	1.191	0.03	2.320	1.03	2.764

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product Specific
1.	WWAN + WLAN2.4GHz	Yes	Yes	Yes	Yes
2.	WWAN + Bluetooth	Yes	Yes	Yes	Yes
3.	WWAN + WLAN5GHz	Yes	Yes	Yes	Yes
4.	WWAN + WLAN2.4GHz + Bluetooth	Yes	Yes	Yes	Yes
5.	WWAN + WLAN5GHz + Bluetooth	Yes	Yes	Yes	Yes

General Note:

1. This device WLAN 2.4GHz / 5.2GHz / 5.8GHz supports Hotspot operation and Bluetooth support tethering applications.
2. All licensed modes share the same antenna part and cannot transmit simultaneously
3. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
4. The Scaled SAR summation is calculated based on the same configuration and test position.
5. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

15.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2+4 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM850_LAT	Right Cheek	0.108	0.264	0.556	0.156	0.528	0.820
	Right Tilted	0.075	0.206	0.293	0.117	0.398	0.485
	Left Cheek	0.082	0.518	0.258	0.297	0.897	0.637
	Left Tilted	0.074	0.364	0.155	0.207	0.645	0.436
GSM1900_LAT	Right Cheek	0.133	0.264	0.556	0.156	0.553	0.845
	Right Tilted	0.180	0.206	0.293	0.117	0.503	0.590
	Left Cheek	0.223	0.518	0.258	0.297	1.038	0.778
	Left Tilted	0.101	0.364	0.155	0.207	0.672	0.463
WCDMA II_LAT	Right Cheek	0.166	0.264	0.556	0.156	0.586	0.878
	Right Tilted	0.201	0.206	0.293	0.117	0.524	0.611
	Left Cheek	0.304	0.518	0.258	0.297	1.119	0.859
	Left Tilted	0.151	0.364	0.155	0.207	0.722	0.513
WCDMA IV_LAT	Right Cheek	0.124	0.264	0.556	0.156	0.544	0.836
	Right Tilted	0.159	0.206	0.293	0.117	0.482	0.569
	Left Cheek	0.197	0.518	0.258	0.297	1.012	0.752
	Left Tilted	0.113	0.364	0.155	0.207	0.684	0.475
WCDMA V_LAT	Right Cheek	0.270	0.264	0.556	0.156	0.690	0.982
	Right Tilted	0.164	0.206	0.293	0.117	0.487	0.574
	Left Cheek	0.199	0.518	0.258	0.297	1.014	0.754
	Left Tilted	0.158	0.364	0.155	0.207	0.729	0.520
LTE Band 2_LAT	Right Cheek	0.141	0.264	0.556	0.156	0.561	0.853
	Right Tilted	0.172	0.206	0.293	0.117	0.495	0.582
	Left Cheek	0.250	0.518	0.258	0.297	1.065	0.805
	Left Tilted	0.101	0.364	0.155	0.207	0.672	0.463
LTE Band 4_LAT	Right Cheek	0.107	0.264	0.556	0.156	0.527	0.819
	Right Tilted	0.141	0.206	0.293	0.117	0.464	0.551
	Left Cheek	0.143	0.518	0.258	0.297	0.958	0.698
	Left Tilted	0.084	0.364	0.155	0.207	0.655	0.446
LTE Band 5_LAT	Right Cheek	0.276	0.264	0.556	0.156	0.696	0.988
	Right Tilted	0.144	0.206	0.293	0.117	0.467	0.554
	Left Cheek	0.202	0.518	0.258	0.297	1.017	0.757
	Left Tilted	0.187	0.364	0.155	0.207	0.758	0.549
LTE Band 7_LAT	Right Cheek	0.116	0.264	0.556	0.156	0.536	0.828
	Right Tilted	0.107	0.206	0.293	0.117	0.430	0.517
	Left Cheek	0.216	0.518	0.258	0.297	1.031	0.771
	Left Tilted	0.079	0.364	0.155	0.207	0.650	0.441
LTE Band 7_UAT	Right Cheek	0.874	0.264	0.556	0.156	1.294	1.586
	Right Tilted	0.409	0.206	0.293	0.117	0.732	0.819
	Left Cheek	0.312	0.518	0.258	0.297	1.127	0.867
	Left Tilted	0.228	0.364	0.155	0.207	0.799	0.590
LTE Band 38_LAT	Right Cheek	0.073	0.264	0.556	0.156	0.493	0.785
	Right Tilted	0.066	0.206	0.293	0.117	0.389	0.476
	Left Cheek	0.138	0.518	0.258	0.297	0.953	0.693
	Left Tilted	0.047	0.364	0.155	0.207	0.618	0.409

15.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2+4 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM850_LAT	Front	0.256	0.104	0.071	0.055	0.415	0.382
	Back	0.251	0.114	0.139	0.065	0.430	0.455
	Left side	0.090		0.248		0.090	0.338
	Right side	0.162	0.098		0.051	0.311	0.213
	Top side		0.148	0.055	0.059	0.207	0.114
	Bottom side	0.104				0.104	0.104
GSM1900_LAT	Front	0.270	0.104	0.071	0.055	0.429	0.396
	Back	0.273	0.114	0.139	0.065	0.452	0.477
	Left side	0.043		0.248		0.043	0.291
	Right side	0.027	0.098		0.051	0.176	0.078
	Top side		0.148	0.055	0.059	0.207	0.114
	Bottom side	1.171				1.171	1.171
WCDMA II_LAT	Front	0.338	0.104	0.071	0.055	0.497	0.464
	Back	0.362	0.114	0.139	0.065	0.541	0.566
	Left side	0.067		0.248		0.067	0.315
	Right side	0.038	0.098		0.051	0.187	0.089
	Top side		0.148	0.055	0.059	0.207	0.114
	Bottom side	0.891				0.891	0.891
WCDMA IV_LAT	Front	0.532	0.104	0.071	0.055	0.691	0.658
	Back	0.610	0.114	0.139	0.065	0.789	0.814
	Left side	0.105		0.248		0.105	0.353
	Right side	0.040	0.098		0.051	0.189	0.091
	Top side		0.148	0.055	0.059	0.207	0.114
	Bottom side	1.037				1.037	1.037
WCDMA V_LAT	Front	0.307	0.104	0.071	0.055	0.466	0.433
	Back	0.290	0.114	0.139	0.065	0.469	0.494
	Left side	0.117		0.248		0.117	0.365
	Right side	0.284	0.098		0.051	0.433	0.335
	Top side		0.148	0.055	0.059	0.207	0.114
	Bottom side	0.204				0.204	0.204
LTE Band 2_LAT	Front	0.513	0.104	0.071	0.055	0.672	0.639
	Back	0.480	0.114	0.139	0.065	0.659	0.684
	Left side	0.078		0.248		0.078	0.326
	Right side	0.044	0.098		0.051	0.193	0.095
	Top side		0.148	0.055	0.059	0.207	0.114
	Bottom side	1.116				1.116	1.116
LTE Band 4_LAT	Front	0.727	0.104	0.071	0.055	0.886	0.853
	Back	0.770	0.114	0.139	0.065	0.949	0.974
	Left side	0.136		0.248		0.136	0.384
	Right side	0.051	0.098		0.051	0.200	0.102
	Top side		0.148	0.055	0.059	0.207	0.114
	Bottom side	1.187				1.187	1.187

WWAN Band	Exposure Position	1	2	3	4	1+2+4 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE Band 5_LAT	Front	0.437	0.104	0.071	0.055	0.596	0.563
	Back	0.401	0.114	0.139	0.065	0.580	0.605
	Left side	0.103		0.248		0.103	0.351
	Right side	0.213	0.098		0.051	0.362	0.264
	Top side		0.148	0.055	0.059	0.207	0.114
	Bottom side	0.186				0.186	0.186
LTE Band 7_LAT	Front	0.559	0.104	0.071	0.055	0.718	0.685
	Back	0.512	0.114	0.139	0.065	0.691	0.716
	Left side	0.606		0.248		0.606	0.854
	Right side	0.001	0.098		0.051	0.150	0.052
	Top side		0.148	0.055	0.059	0.207	0.114
	Bottom side	0.228				0.228	0.228
LTE Band 7_UAT	Front	0.445	0.104	0.071	0.055	0.604	0.571
	Back	0.422	0.114	0.139	0.065	0.601	0.626
	Left side	0.089		0.248		0.089	0.337
	Right side		0.098		0.051	0.149	0.051
	Top side	0.210	0.148	0.055	0.059	0.417	0.324
	Bottom side					0.000	0.000
LTE Band 38_LAT	Front	0.368	0.104	0.071	0.055	0.527	0.494
	Back	0.338	0.114	0.139	0.065	0.517	0.542
	Left side	0.360		0.248		0.360	0.608
	Right side	0.001	0.098		0.051	0.150	0.052
	Top side		0.148	0.055	0.059	0.207	0.114
	Bottom side	0.129				0.129	0.129

15.3 Body-Worn Accessory Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2+4 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM850_LAT	Front	0.256	0.104	0.071	0.055	0.415	0.382
	Back	0.251	0.114	0.214	0.065	0.430	0.530
GSM1900_LAT	Front	0.582	0.104	0.071	0.055	0.741	0.708
	Back	0.884	0.114	0.214	0.065	1.063	1.163
WCDMA II_LAT	Front	0.873	0.104	0.071	0.055	1.032	0.999
	Back	0.902	0.114	0.214	0.065	1.081	1.181
WCDMA IV_LAT	Front	0.795	0.104	0.071	0.055	0.954	0.921
	Back	1.097	0.114	0.214	0.065	1.276	1.376
WCDMA V_LAT	Front	0.307	0.104	0.071	0.055	0.466	0.433
	Back	0.290	0.114	0.214	0.065	0.469	0.569
LTE Band 2_LAT	Front	0.892	0.104	0.071	0.055	1.051	1.018
	Back	0.857	0.114	0.214	0.065	1.036	1.136
LTE Band 4_LAT	Front	0.781	0.104	0.071	0.055	0.940	0.907
	Back	0.764	0.114	0.214	0.065	0.943	1.043
LTE Band 5_LAT	Front	0.437	0.104	0.071	0.055	0.596	0.563
	Back	0.401	0.114	0.214	0.065	0.580	0.680
LTE Band 7_LAT	Front	0.559	0.104	0.071	0.055	0.718	0.685
	Back	0.512	0.114	0.214	0.065	0.691	0.791
LTE Band 7_UAT	Front	0.445	0.104	0.071	0.055	0.604	0.571
	Back	0.422	0.114	0.214	0.065	0.601	0.701
LTE Band 38_LAT	Front	0.368	0.104	0.071	0.055	0.527	0.494
	Back	0.338	0.114	0.214	0.065	0.517	0.617

15.4 Product Specific Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2+4 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
GSM1900_LAT	Front			0.295		0.000	0.295
	Back			0.351		0.000	0.351
	Left side			0.260		0.000	0.260
	Right side					0.000	0.000
	Top side			0.068		0.000	0.068
	Bottom side	1.448				1.448	1.448
WCDMA II_LAT	Front			0.295		0.000	0.295
	Back			0.351		0.000	0.351
	Left side			0.260		0.000	0.260
	Right side					0.000	0.000
	Top side			0.068		0.000	0.068
	Bottom side	1.694				1.694	1.694
WCDMA IV_LAT	Front			0.295		0.000	0.295
	Back			0.351		0.000	0.351
	Left side			0.260		0.000	0.260
	Right side					0.000	0.000
	Top side			0.068		0.000	0.068
	Bottom side	2.835				2.835	2.835
LTE Band 2_LAT	Front			0.295		0.000	0.295
	Back			0.351		0.000	0.351
	Left side			0.260		0.000	0.260
	Right side					0.000	0.000
	Top side			0.068		0.000	0.068
	Bottom side	1.620				1.620	1.620
LTE Band 4_LAT	Front			0.295		0.000	0.295
	Back			0.351		0.000	0.351
	Left side			0.260		0.000	0.260
	Right side					0.000	0.000
	Top side			0.068		0.000	0.068
	Bottom side	2.133				2.133	2.133

Test Engineer : Jordar Jhuang Terry Chou Jeff Tsao Bob Cheng and Andy Chen

16. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 941225 D07 v01r02, " SAR Evaluation Procedures for UMPC Mini-Tablet Devices", Oct 2015.
- [13] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [14] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.