

FCC SAR Measurement and Test Report

For

ELECTRONICS TECHNOLOGY(DONG GUAN) COMPANY LIMITED

No. 161, Xin Min Road, Tong Luo Wei Industrial Zone, Dong Guan, China

FCC ID: ZL9-M71DP3

FCC 47 CFR Part 2 (2.1093)

ANSI/IEEE C95.1-1992

IEEE 1528-2003

FCC Rules: OET Bulletin 65, Supplement C Cross-Reference

Product Description: MID

Tested Model: MDT7A9-WBR

Report No.: STR14078187H

Max. SAR Values: Body: **0.1288 W/kg(1g)**

Tested Date: 2014-07-28 to 2014-08-04

Issued Date: <u>2014-08-04</u>

Silim chep Lahm peny Jamelyso Silin Chen / Engineer **Tested By:**

Reviewed By: Lahm Peng / EMC Manager

Approved & Authorized By: Jandy So / PSQ Manager

Prepared By:

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,

Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM. Test Technology Co., Ltd.



TABLE OF CONTENTS

1. General Information	
1.1 Product Description for Equipment Under Test (EUT)	3
1.2 Test Standards	
1.3 Test Methodology	
1.4 Test Facility	
2. Summary of Test Results	
3. Specific Absorption Rate (SAR)	
3.1 Introduction	
3.2 SAR Definition	
4. SAR Measurement System	
4.1 The Measurement System	
4.2 Probe	
4.3 Probe Calibration Process	
4.4 Phantom	
4.6 Test Equipment List	
5. Tissue Simulating Liquids	
5.1 Composition of Tissue Simulating Liquid	
5.2 Tissue Dielectric Parameters for Head and Body Phantoms	14
5.3 Tissue Calibration Result	
6. SAR Measurement Evaluation	
6.1 Purpose of System Performance Check	
6.2 System Setup	
6.3 Validation Results	
7. EUT Testing Position	
7.1 Body Position	
7.2 EUT Antenna Position	
7.3 EUT Testing Position	
8. SAR Measurement Procedures	20
8.1 Measurement Procedures	20
8.2 Spatial Peak SAR Evaluation	
8.3 Area & Zoom Scan Procedures	21
8.4 Volume Scan Procedures	
8.5 SAR Averaged Methods	
8.6 Power Drift Monitoring	
9. SAR Test Result	
9.1 Conducted RF Output Power	
9.2 Test Results for Standalone SAR Test	
10. Measurement Uncertainty	
10.1 Uncertainty for EUT SAR Test	
10.2 Uncertainty for System Performance Check	
Annex A. Plots of System Performance Check	
Annex B. Plots of SAR Measurement	
Annex C. EUT Photos	
Annex D. Test Setup Photos	41
Annex E. Calibration Certificate	43



1. General Information

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: ELECTRONICS TECHNOLOGY(DONG GUAN)

COMPANY LIMITED

Address of applicant: No. 161, Xin Min Road, Tong Luo Wei Industrial

Zone, Dong Guan, China

Manufacturer: ELECTRONICS TECHNOLOGY(DONG GUAN)

COMPANY LIMITED

Address of manufacturer: No. 161, Xin Min Road, Tong Luo Wei Industrial

Zone, Dong Guan, China

General Description of EUT	
Product Name:	MID
Trade Name:	1
Model No.:	MDT7A9-WBR
Adding Model(s):	M71DP3, MDT7-D1
Rated Voltage:	Adapter: DC 5V, Battery: DC 3.7V

Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model MDT7A9-WBR, but the circuit and the electronic construction do not change, declared by the manufacturer.

Report No.: STR14078187H Page 3 of 43 SAR Report





Technical Characteristics of	EUT
WIFI	
Support Standards:	802.11b, 802.11g, 802.11n
Fraguency Pange:	2412-2472MHz for 11b/g/n(HT20)
Frequency Range:	2422-2462MHz for 11n(HT40)
RF Output Power:	14.94dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	13 for 11b/g/n(HT20), 9 for 11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	0dBi
Bluetooth	
Bluetooth Version:	V3.0
Frequency Range:	2402-2480MHz
RF Output Power:	1.499dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, Pi/4 QDPSK, 8DPSK
Quantity of Channels:	79
Channel Separation:	1MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	0dBi



1.2 Test Standards

The following report is prepared on behalf of the ELECTRONICS TECHNOLOGY(DONG GUAN) COMPANY LIMITED in accordance with FCC 47 CFR Part 2.1093, ANSI/IEEE C95.1-1992, IEEE 1528-2003 and KDB 865664 D01 v01r03 and KDB 865664 D02 v01r01

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r03 and KDB 865664 D02 v01r01. The public notice KDB 447498 D01 v05r02 for Mobile and Portable Devices RF Exposure Procedure also.

1.4 Test Facility

• FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

• Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

• CNAS Registration No.: L4062

Shenzhen SEM. Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101)

Report No.: STR14078187H Page 5 of 43 SAR Report



2. Summary of Test Results

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Position	SAR _{1g} (W/kg)	Scaled SAR _{1g} (W/kg)
WLAN 2.4GHz	Body (0mm Gap)	0.1270	0.1288

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedure specified in IEEE 1528-2003 and KDB 865664 D01 v01r03 and KDB 865664 D02 v01r01

Report No.: STR14078187H Page 6 of 43 SAR Report



3. Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techiques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C\left(\frac{\delta T}{\delta t}\right)$$

Where: C is the specific heat capacity, δ T is the temperature rise and δ t is the exposure duration, or related to the

electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

Report No.: STR14078187H Page 7 of 43 SAR Report





4. SAR Measurement System

4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

4.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SSE5 SN 09/13 EP168 with following specifications is used

- Dynamic range: 0.01-100 W/kg

- Probe Length: 330 mm

Length of Individual Dipoles: 4.5 mmMaximum external diameter: 8 mmProbe Tip External Diameter: 5 mm

- Distance between dipoles / probe extremity: 2.7mm

Report No.: STR14078187H Page 8 of 43 SAR Report




- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.50 dB

- Calibration range: 700 to 3000MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and suface normal line:1ess than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 62209-1 annexe technique using reference guide at the five frequencies.

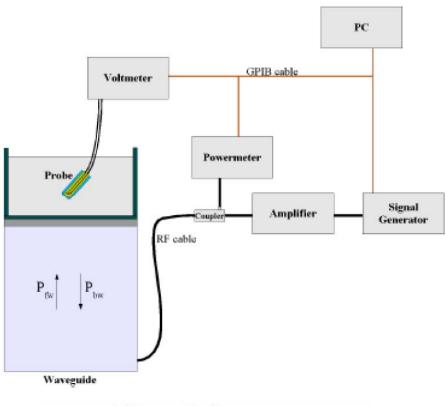

$$SAR = \frac{4\left(P_{fw} - P_{bw}\right)}{ab\delta}\cos^2\left(\pi \frac{y}{a}\right)e^{-(2z/\delta)}$$

Where:

Pfw = Forward Power Pbw = Backward Power

a and b = Waveguide dimensions

I = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

Report No.: STR14078187H Page 9 of 43 SAR Report

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/Vlin(N)$$
 (N=1,2,3)

The linearised output voltage Vlin(N) is obtained from the displayed output voltage V(N) using

$$Vlin(N)=V(N)*(1+V(N)/DCP(N))$$
 (N=1,2,3)

where DCP is the diode compression point in mV.

4.3 Probe Calibration Process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm2) using an with CALISAR, Antenna proprietary calibration system.

Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm2.

Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:
$$\Delta t = \text{exposure time (30 seconds)},$$

$$C = \text{heat capacity of tissue (brain or muscle)},$$

$$\Delta T = \text{temperature increase due to RF exposure}.$$

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

Report No.: STR14078187H Page 10 of 43 SAR Report



$$SAR = \frac{\left| \mathbf{E} \right|^2 \cdot \sigma}{\rho}$$

Where:

 $\sigma = \text{simulated tissue conductivity},$


 ρ = Tissue density (1.25 g/cm3 for brain tissue)

4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.



System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

Report No.: STR14078187H Page 11 of 43 SAR Report





4.6 Test Equipment List

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
E-Field Probe	SATIMO	SSE5	SN 09/13 EP168	2014-03-21	2015-03-20
2450MHz Dipole	SATIMO	SID2450	SN 47/12 DIP 2G450-209	2013-11-26	2014-11-25
Dielectric Probe	SATIMO	SCLMP	SN 47/12 OCPG49	2013-11-26	2014-11-25
SAM Phantom	SATIMO	SAM	SN/ 47/12 SAM95	N/A	N/A
Multi Meter	Keithley	Keithley 2000	4006367	2014-05-28	2015-05-27
Signal Generator	Rohde & Schwarz	SMR20	100047	2014-05-28	2015-05-27
Universal Tester	Rohde & Schwarz	CMU200	112012	2014-05-28	2015-05-27
Network Analyzer	HP	8753C	2901A00831	2014-05-28	2015-05-27



5. Tissue Simulating Liquids

5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.



Liquid Height for Body SAR

The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	Triton (%)	HEC (%)	Preventol (%)	DGBE (%)	
Body							
2450	55.44	0.32	30.50	0.00	0.00	13.74	

Report No.: STR14078187H Page 13 of 43 SAR Report

5.2 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

To 4 E	Не	ead	Во	ody
Target Frequency	Conductivity	Permittivity	Conductivity	Permittivity
(MHz)	(σ)	(E _r)	(σ)	(E r)
150	0.76	52.3	0.80	61.9
300	0.87	45.3	0.92	58.2
450	0.87	43.5	0.94	56.7
835	0.90	41.5	0.97	55.2
900	0.97	41.5	1.05	55.0
915	0.98	41.5	1.06	55.0
1450	1.20	40.5	1.30	54.0
1610	1.29	40.3	1.40	53.8
1800-2000	1.40	40.0	1.52	53.3
2450	1.80	39.2	1.95	52.7
3000	2.40	38.5	2.73	52.0
5800	5.27	35.3	6.00	48.2

Report No.: STR14078187H Page 14 of 43 SAR Report

5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Body Tissue Simulating Liquid									
T	Т	Conductivity Permittivity				T ::4			
Freq. MHz.	Temp. (°C)	Reading	Target	Delta	Reading	Target	Delta	Limit (%)	Date
MITIZ.	(0)	(σ)	(σ)	(%)	$(\mathcal{E}\mathbf{r})$	$(\mathcal{E}\mathbf{r})$	(%)	(70)	
2450	21.3	1.90	1.95	-2.56	51.9	52.7	-1.52	±5	2014-07-28

Report No.: STR14078187H Page 15 of 43 SAR Report




6. SAR Measurement Evaluation

6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835 MHz and 1900 MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

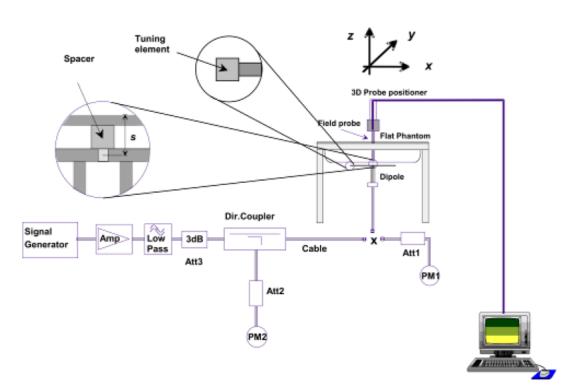

System Verification Setup Block Diagram

Report No.: STR14078187H Page 16 of 43 SAR Report





Setup Photo of Dipole Antenna

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected.

6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency	Targeted SAR _{1g}	Measured SAR _{1g}	Normalized SAR _{1g}	Tolerance	
MHz	(W/kg)	(W/kg)	(W/kg)	(%)	
Body					
2450	51.80	12.54	50.15	-3.19	

Targeted and Measurement SAR

Please refer to Annex A for the plots of system performance check.



7. EUT Testing Position

7.1 Body Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 0 mm.

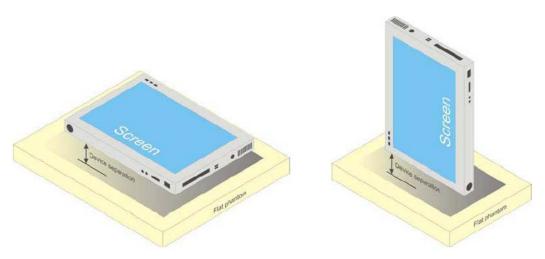


Illustration for Body Position

7.2 EUT Antenna Position



Block Diagram for EUT Antenna Position

Report No.: STR14078187H Page 18 of 43 SAR Report



7.3 EUT Testing Position

Exclusion Distance Calculation						
Frequency Bands Service Maximum Tune-up Power Average Power Exclusion Distance						
WLAN 802.11b 15.0dBm 15.0dBm 20mm						
Note: Refer to Chapter 9.1 Conducted RF Output Power						

Remark:

1. Referring to KDB 447498 D01 v05r02 and KDB616217 D04 v01r01, the distance of the antennas to all adjacent edges SAR test exclusion for adjacent edges.

Body-worn mode SAR assessments are required for this device. This EUT was tested in different positions for different SAR test modes, more information as below:

Body SAR tests, Test distance: 0mm						
Antennas Front Back Right Side Left Side Top Side Bottom Sid					Bottom Side	
WLAN	Yes	Yes	No	No	Yes	No

Remark:

1. Referring to KDB 616217 D04 v01r01, KDB 248227 D01 v01r02 and KDB 447498 D01 v05r02, this device is an overall diagonal dimension(>20cm) tablet, tested in direct contact (no gap) with flat phantom.

Please refer to Annex D for the EUT test setup photos.

Report No.: STR14078187H Page 19 of 43 SAR Report



8. SAR Measurement Procedures

8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex E demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

Report No.: STR14078187H Page 20 of 43 SAR Report



8.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

8.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.5 SAR Averaged Methods

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

Report No.: STR14078187H Page 21 of 43 SAR Report

9. SAR Test Result

9.1 Conducted RF Output Power

	WLAN - Maximum Average Power									
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)						
802.11b		CH 01	2412	14.89						
	1Mbps	CH 07	2442	14.94						
		CH 13	2472	14.68						
		CH 01	2412	10.46						
802.11g	54Mbps	CH 07	2442	10.94						
		CH 13	2472	10.62						
		CH 01	2412	10.32						
802.11n (20MHz)	MCS7	CH 07	2442	10.53						
		CH 13	2472	10.35						
		CH 03	2422	9.19						
802.11n (40MHz)	MCS7	CH 07	2442	9.44						
		CH 11	2462	9.53						

Remark:

- 1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
- 2. Per KDB 248227 D01 v01r02, if 11g and 11n average output power is higher than 1/4 dB higher than 11b mode, SAR will be verified.
- 3. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4 dB higher than those measured at the lowest data rate. For 802.11n mode, SAR test according to the highest power channel with correspondence data rates.

Report No.: STR14078187H Page 22 of 43 SAR Report



Bluetooth - Maximum Average Power								
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)				
	1Mbps	CH 00	2402	1.499				
GFSK		CH 39	2441	0.712				
		CH 78	2480	0.855				
		CH 00	2402	0.557				
8DPSK	3Mbps	CH 39	2441	-0.388				
		CH 78	2480	-0.062				

Remark:

Bluetooth maximum output power (including tune-up tolerance) is 6.0 dBm. Per KDB 648474 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances $\leq 50 mm$ are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [$\sqrt{f(GHz)}$] \leq 3.0 for 1-g SAR and \leq 7.5 for 10-g extremity SAR,16 where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation17
- The result is rounded to one decimal place for comparison

Max. Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	Result	Limit
1.50	1.41	5	2.402	0.44	3

The exclusion thresholds is 0.44 < 3, therefore, the RF exposure evaluation is not required.



9.2 Test Results for Standalone SAR Test

Body SAR

	WLAN 2.4GHz –Body SAR Test(Gap: 0mm)										
Plot		Test Postion Body	Frequ	Frequency		Rated	Scaling	SAR1g	Scaled		
No.	Mode		СН.	MHz	Power	Limit	Factor	(W/kg)	SAR1g		
NO.			CII.	WIIIZ	(dBm)	(dBm)	ractor	(W/Kg)	(W/kg)		
1	802.11b	Back Side	07	2442	14.94	15.0	1.01	<mark>0.1270</mark>	0.1288		
2	802.11b	Front Side	07	2442	14.94	15.0	1.01	0.0704	0.0714		
3	802.11b	Top side	07	2442	14.94	15.0	1.01	0.0465	0.0471		
4	802.11b	Back	07	2442	14.94	15.0	1.01	0.1245	0.1262		
4		(Body-worn)	07						0.1202		

Remark: Per KDB 447498 D01 v05r02, if the highest output channel SAR for each exposure position \leq 0.8 W/kg other channels SAR tests are not necessary.

Report No.: STR14078187H Page 24 of 43 SAR Report



10. Measurement Uncertainty

10.1 Uncertainty for EUT SAR Test

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol	Prob.	Div.	Ci (1g)	Ci (10g)	1g Ui	10g Ui	Vi
		(+- %)	Dist.				(+-%)	(+-%)	
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	8
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	(1_Cp)^1/2	(1_Cp)^1/2	1.02	1.02	×
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	(Cp)^1/2	(Cp)^1/2	1.63	1.63	×
Boundary effect	E.2.3	1.0	R	√3	1	1	0.58	0.58	œ
Linearity	E.2.4	5.0	R	√3	1	1	2.89	2.89	œ
System detection limits	E.2.5	1.0	R	√3	1	1	0.58	0.58	œ
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	œ
Reponse Time	E.2.7	3.0	R	√3	1	1	1.73	1.73	œ
Integration Time	E.2.8	2.0	R	√3	1	1	1.15	1.15	œ
RF ambient Conditions	E.6.1	3.0	R	√3	1	1	1.73	1.73	œ
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	×
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	√3	1	1	0.03	0.03	œ
Extrapolation, interpolation and integration Algoritms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	&
Test Sample Related			•						
Test sample positioning	E.4.2.1	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1.1	5.00	N	1	1	1	5.00	5.00	
Output power Variation - SAR	6.6.2	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	œ
drift measurement									
Phantom and Tissue Parameters			1		1			1	T
Phantom Uncertainty (Shape and	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞c
thickness tolerances)	E 2 2	<i>E</i> 00	D	./2	0.64	0.42	1.07	1.04	
Liquid conductivity - deviation	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	
from target value	E 2 2	<i>5</i> 00	NT	1	0.64	0.42	2.20	2.15	
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	
Liquid permittivity - deviation from target value	E.3.2	0.37	R	√3	0.6	0.49	0.13	0.10	
Liquid permittivity -	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M



measurement uncertainty						
Combined Standard Uncertainty		RSS		12.98	12.53	
Expanded Uncertainty		K=2		25.32	24.43	
(95% Confidence interval)						

10.2 Uncertainty for System Performance Check

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol	Prob.	Div.	Ci (1g)	Ci (10g)	1g Ui	10g Ui	Vi
		(+- %)	Dist.				(+-%)	(+-%)	
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	∞
Axial Isotropy	E.2.2	2.5	R	√3	(1_Cp)^1/2	(1_Cp)^1/2	1.02	1.02	œ
Hemispherical Isotropy	E.2.2	4.0	R	√3	(Cp)^1/2	(Cp)^1/2	1.63	1.63	∞
Boundary effect	E.2.3	1.0	R	√3	1	1	0.58	0.58	8
Linearity	E.2.4	5.0	R	√3	1	1	2.89	2.89	8
System detection limits	E.2.5	1.0	R	√3	1	1	0.58	0.58	8
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	√3	1	1	1.73	1.73	8
Integration Time	E.2.8	2.0	R	√3	1	1	1.15	1.15	8
RF ambient Conditions	E.6.1	3.0	R	√3	1	1	1.73	1.73	∞
Probe positioner Mechanical	E.6.2	2.0	R	√3	1	1	1.15	1.15	oc
Tolerance									
Probe positioning with respect to	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Phantom Shell				,					
Extrapolation, interpolation and	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
integration Algoritms for Max.									
SAR Evaluation									
Dipole									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	N-1
Input power and SAR drift	8,6.6.2	12.02	R	√3	1	1	6.94	6.94	œ
measurement									
Phantom and Tissue Parameters				I					
Phantom Uncertainty (Shape and	E.3.1	0.05	R	√3	1	1	0.03	0.03	œ
thickness tolerances)									
Liquid conductivity - deviation	E.3.2	5.00	R	√3	0.64	0.43	1.85	1.24	
from target value									

Report No.: STR14078187H Page 26 of 43 SAR Report



Liquid conductivity -	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	
measurement uncertainty									
Liquid permittivity - deviation	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	
from target value									
Liquid permittivity -	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
measurement uncertainty									
Combined Standard Uncertainty			RSS				12.00	11.50	
Expanded Uncertainty			K=2				23.39	22.43	
(95% Confidence interval)									



Annex A. Plots of System Performance Check

MEASUREMENT 1

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 21 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 03/21/2014


A. Experimental conditions

Area Scan	dx=8mm dy=8mm			
Phantom	Validation plane			
Device Position	Dipole			
Band	CW2450			
Channels	Middle			
Signal	CW (Crest factor: 1.0)			

B. SAR Measurement Results

Middle Band SAR

Frequency (MHz)	2450.000000			
Relative Permittivity (real part)	51.954511			
Conductivity (S/m)	1.900545			
Power Variation (%)	0.550015			
Ambient Temperature	21.1			
Liquid Temperature	21.2			

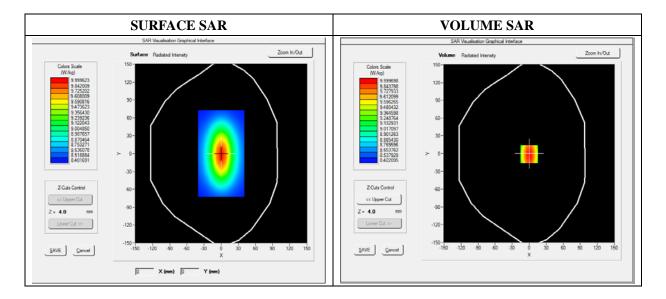




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	6.001025			
SAR 1g (W/Kg)	12.540255			

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR	0.0000	13.1250	7.0514	5.1214	3.5260	3.1520	2.4612
(W/Kg)							
	13.27 12.25 7.60 WW 6.17 4.50 3.05 2.03	7	7.5 10.0 12.5 15.	0 17.520.0 22.5 Z (mm)	25.0 27.5 30.0 3	2.5 35.0	

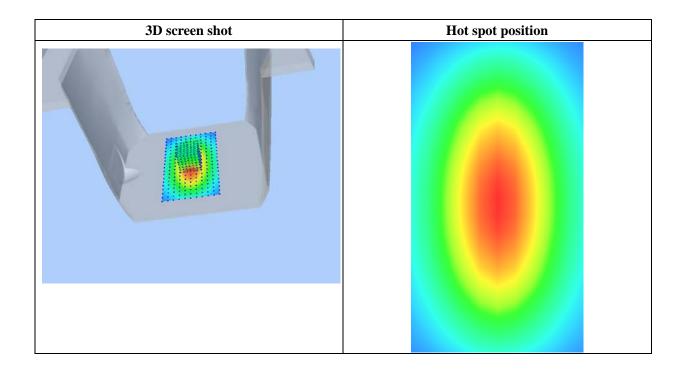

Report No.: STR14078187H Page 29 of 43 SAR Report



Annex B. Plots of SAR Measurement

TYPE	BAND	<u>PARAMETERS</u>
Tablet	WiFi_802.11b	Measurement 1: Flat Plane with Back side device position on Middle Channel in WIFI mode
Tablet	WiFi_802.11b	Measurement 2: Flat Plane with Front side device position on Middle Channel in WIFI mode
Tablet	WiFi_802.11b	Measurement 3: Flat Plane with Top side device position on Middle Channel in WIFI mode
Tablet	WiFi_802.11b	Measurement 4: Flat Plane with Back(Body-worn) side device position on Middle Channel in WIFI mode



MEASUREMENT 1

Type: Phone measurement (Complete)
Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 2014/03/21


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt	
Phantom	Flat Plane	
Device Position	Back	
Band	WiFi_802.11b	
Channels	Middle	
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)	

B. SAR Measurement Results

Middle Band SAR (Channel 07)

Frequency (MHz)	2442.000000
Relative Permittivity (real part)	51.954511
Conductivity (S/m)	1.900545
Power Variation (%)	0.550015
Ambient Temperature	21.1
Liquid Temperature	21.2

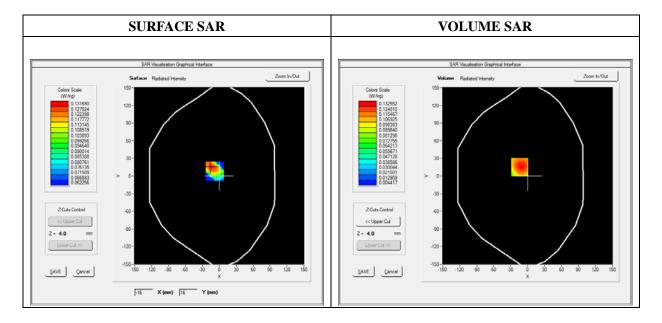




Maximum location: X=-14.00, Y=15.00

SAR 10g (W/Kg)	0.068388	
SAR 1g (W/Kg)	0.126976	

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1324	0.0636	0.0297	0.0144
	0.13- 0.12- 0.10- 0.08- W 0.06- 0.04- 0.02- 0.01- 0.0 2.5	5 5.0 7.5 10.0	12.5 15.0 17.5 Z (mm)	20.0 22.5 25.0	

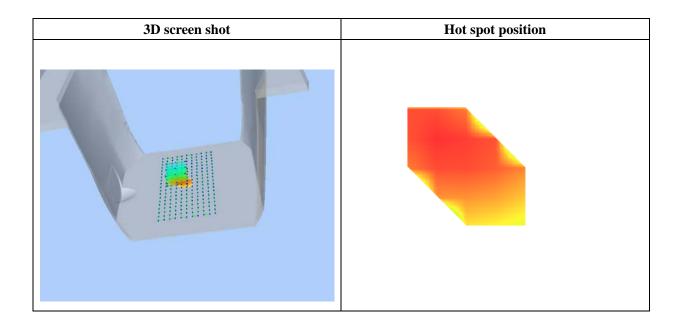

Report No.: STR14078187H Page 32 of 43 SAR Report



MEASUREMENT 2

Type: Phone measurement (Complete)
Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 2014/03/21


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt	
Phantom	Flat Plane	
Device Position	Front	
Band	WiFi_802.11b	
Channels	Middle	
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)	

B. SAR Measurement Results

Middle Band SAR (Channel 07)

Frequency (MHz)	2442.000000
Relative Permittivity (real part)	51.954511
Conductivity (S/m)	1.900545
Power Variation (%)	0.550015
Ambient Temperature	21.1
Liquid Temperature	21.2

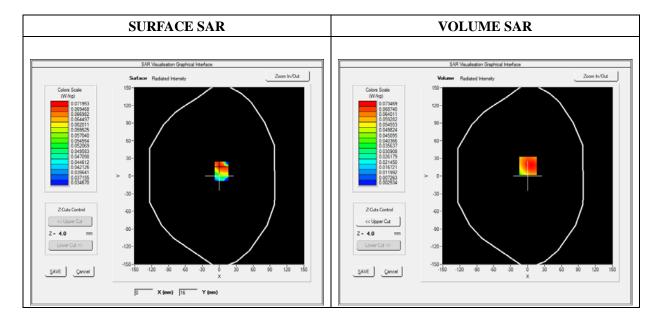




Maximum location: X=1.00, Y=17.00

SAR 10g (W/Kg)	0.038550	
SAR 1g (W/Kg)	0.070407	

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0722	0.0351	0.0167	0.0084
	0.07-				
	0.06-				
	= 0.05				
	0.05- W) 0.04- W) 0.03-				
	₹ 0.03-		+		
	0.02-				
	0.01-	-			
	0.00-	5 5.0 7.5 10.0	12.5 15.0 17.5	20.0 22.5 25.0	
	U.U 2.s	7.5 7.5 10.0	Z (mm)	20.0 22.3 23.0	

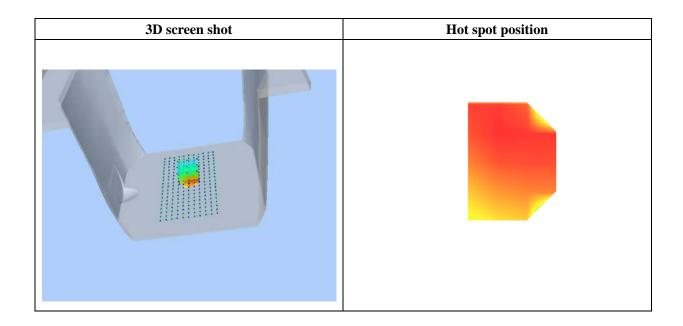

Report No.: STR14078187H Page 34 of 43 SAR Report



MEASUREMENT 3

Type: Phone measurement (Complete)
Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 2014/03/21


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt	
Phantom	Flat Plane	
Device Position	Top Side	
Band	WiFi_802.11b	
Channels	Middle	
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)	

B. SAR Measurement Results

Middle Band SAR (Channel 07)

Frequency (MHz)	2442.000000
Relative Permittivity (real part)	51.954511
Conductivity (S/m)	1.900545
Power Variation (%)	0.550015
Ambient Temperature	21.1
Liquid Temperature	21.2

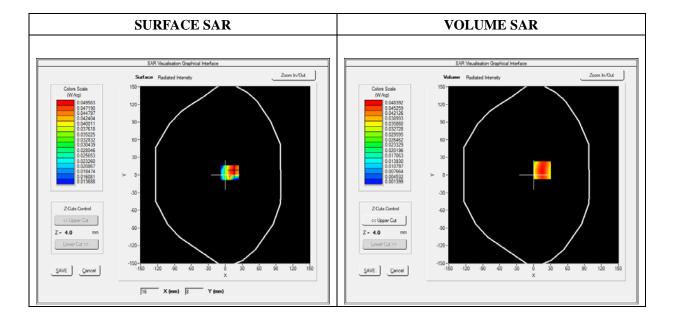




Maximum location: X=15.00, Y=8.00

SAR 10g (W/Kg)	0.023305
SAR 1g (W/Kg)	0.046453

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0484	0.0193	0.0073	0.0031
	0.05- 0.04- 0.03- WW 0.02- 0.01- 0.00- 0.0 2.9		12.5 15.0 17.5 Z (mm)	20.0 22.5 25.0	

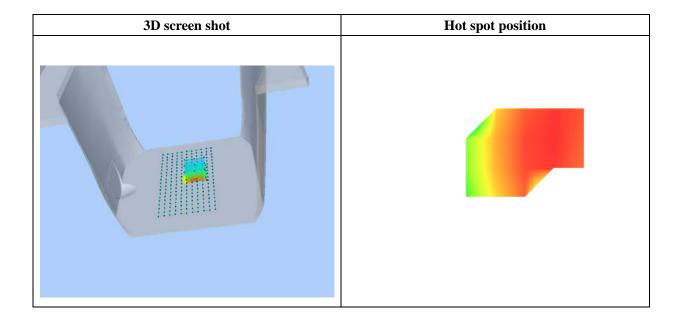

Report No.: STR14078187H Page 36 of 43 SAR Report



MEASUREMENT 4

Type: Phone measurement (Complete)
Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 2014/03/21


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt		
Phantom	Flat Plane		
Device Position	Back(Body-worn)		
Band	WiFi_802.11b		
Channels	Middle		
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)		

B. SAR Measurement Results

Middle Band SAR (Channel 07)

Frequency (MHz)	2442.000000		
Relative Permittivity (real part)	51.954511		
Conductivity (S/m)	1.900545		
Power Variation (%)	0.550015		
Ambient Temperature	21.1		
Liquid Temperature	21.2		

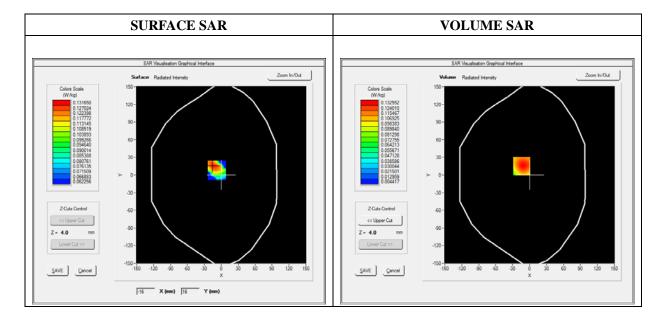




Maximum location: X=-14.00, Y=15.00

SAR 10g (W/Kg)	0.067425		
SAR 1g (W/Kg)	0.124511		

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1310	0.0619	0.0289	0.0140
	0.13 - 0.12 - 0.10 - 0.08 - 0.08 - 0.04 - 0.04 - 0.02 - 0.01 - 0.00 - 0.01 -		12.5 15.0 17.5 Z (mm)	20.0 22.5 25.0	

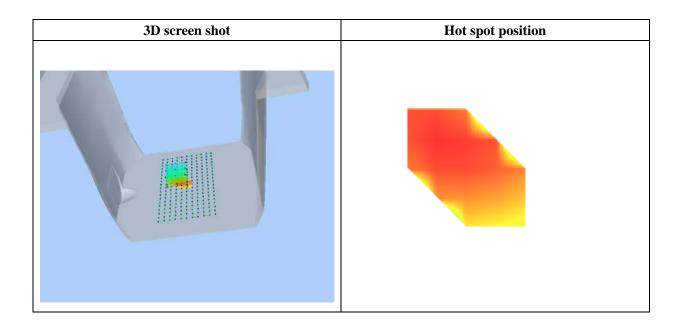


Report No.: STR14078187H Page 38 of 43 SAR Report



Annex C. EUT Photos

EUT View 1

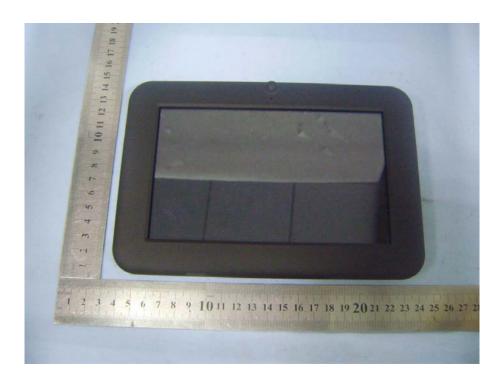

EUT View 2






EUT View 3



Antenna View

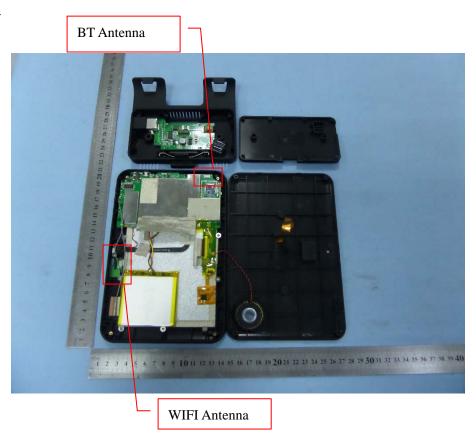



Annex D. Test Setup Photos

Test View





Back Side











Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

***** END OF REPORT *****